


System Validation - D2450V2 S/N:706

(Antenna input power: 250 mW)

SAM-2; Flat
Probe: ET3DV6 - SN1578; ConvF(4.50,4.50,4.50); Crest factor: 1.0
Head 2450MHz: $\sigma = 1.96 \text{ mho/m}$ $\epsilon_r = 38.0$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: Peak: 28.9 mW/g, SAR (1g): 13.9 mW/g, SAR (10g): 6.33 mW/g, (Worst-case extrapolation)
Penetration depth: 6.3 (6.1, 6.8) [mm]
Powerdrift: 0.00 dB

Ambient Temperature (degree C): 22.0
Liquid Temperature (degree C): 20.4

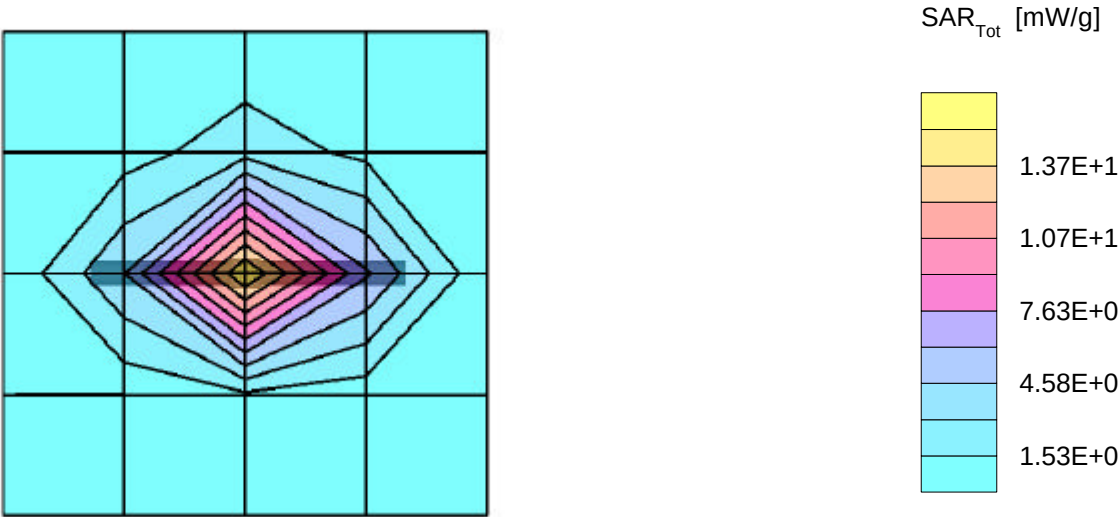

System Validation - D2450V2 S/N:706

(Antenna input power: 250 mW)

SAM-2;
Probe: ET3DV6 - SN1578; ConvF(4.50,4.50,4.50); Crest factor: 1.0
Head 2450MHz: $\sigma = 1.96 \text{ mho/m}$ $\epsilon_r = 38.0$ $\rho = 1.00 \text{ g/cm}^3$
: , , ()
Penetration depth: 6.3 (6.0, 6.9) [mm]

Ambient Temperature (degree C): 22.0
Liquid Temperature (degree C): 20.4

