



FCC RF Test Report

APPLICANT : Facebook Technologies, LLC
EQUIPMENT : Media Receiver Remote
BRAND NAME : facebook
MODEL NAME : KP98DF
FCC ID : 2AG0Z-K3JH
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on May 13, 2019 and testing was completed on Jul 17, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Product Feature of Equipment Under Test.....	5
1.3 Product Specification of Equipment Under Test.....	5
1.4 Modification of EUT	5
1.5 Testing Location	6
1.6 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 EUT Operation Test Setup	9
2.5 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	19
3.3 Power Spectral Density Measurement	20
3.4 Conducted Band Edges and Spurious Emission Measurement	29
3.5 Radiated Band Edges and Spurious Emission Measurement	38
3.6 Antenna Requirements.....	42
4 LIST OF MEASURING EQUIPMENT.....	43
5 UNCERTAINTY OF EVALUATION.....	44
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR951309	Rev. 01	Initial issue of report	Jun. 26, 2019
FR951309	Rev. 02	Update KDB 558074 version and 99% OBW plots	Jul. 17, 2019
FR951309	Rev. 03	Update the brand name	Aug. 05, 2019

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.04 dB at 2483.50 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Required	
3.6	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-
Remark: Not required means after assessing, test items are not necessary to carry out.					



1 General Description

1.1 Applicant

Facebook Technologies, LLC

1601 Willow Road by 1 Hacker Way, Menlo Park, CA 94025, United States Of America.

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Media Receiver Remote
Brand Name	facebook
Model Name	KP98DF
FCC ID	2AGOZ-K3JH
EUT supports Radios application	Bluetooth LE
HW Version	309000121329R5
SW Version	V4.6.2
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth v5.0 LE(1Mbps): 3.76 dBm (0.0024 W) Bluetooth v5.0 LE(2Mbps): 3.75 dBm (0.0024 W)
99% Occupied Bandwidth	Bluetooth v5.0 LE(1Mbps): 1.04MHz Bluetooth v5.0 LE(2Mbps): 2.03MHz
Antenna Type / Gain	Chip Antenna with gain 2.57 dBi
Type of Modulation	Bluetooth LE : GFSK

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH06KS TH01-KS	CN1257	314309

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps / 2Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps / 2Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps / 2Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps / 2Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps / 2Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps / 2Mbps

2.3 Connection Diagram of Test System



2.4 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.50dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.50(\text{dB})\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

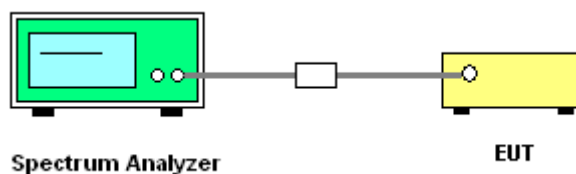




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

Bluetooth v5.0 LE (1Mbps)


6 dB Bandwidth Plot on Channel 00

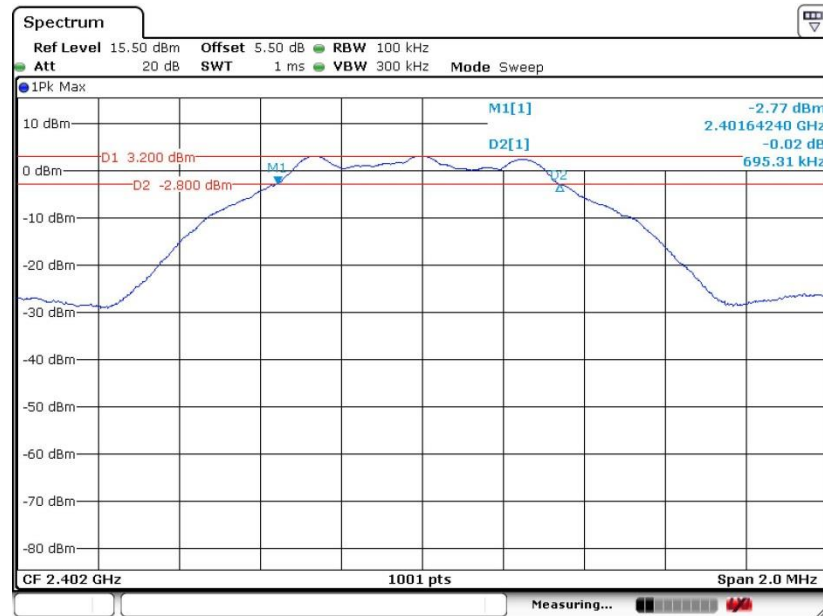

Date: 20.MAY.2019 14:04:16




6 dB Bandwidth Plot on Channel 19

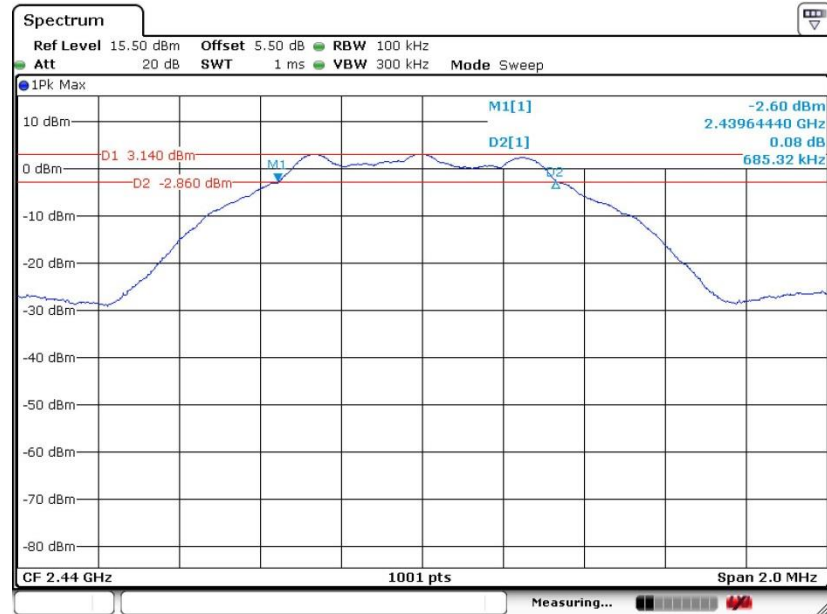

Date: 20.MAY.2019 14:16:15


6 dB Bandwidth Plot on Channel 39

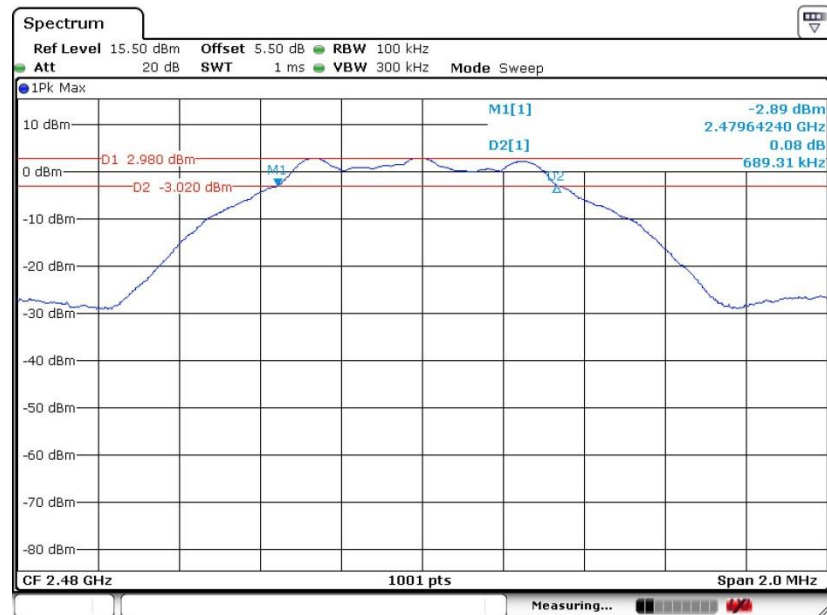

Date: 20.MAY.2019 14:22:34

Bluetooth v5.0 LE (2Mbps)


6 dB Bandwidth Plot on Channel 00

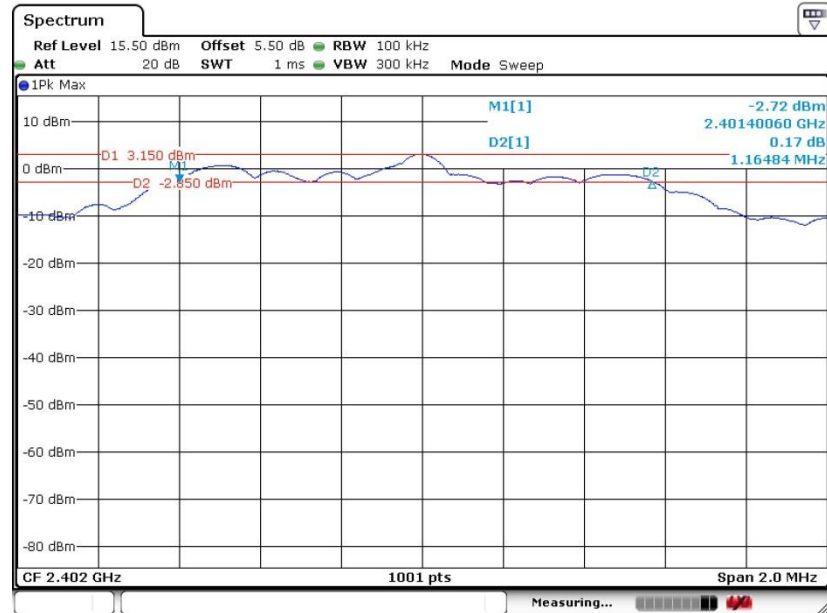

Date: 20.MAY.2019 14:28:28




6 dB Bandwidth Plot on Channel 19

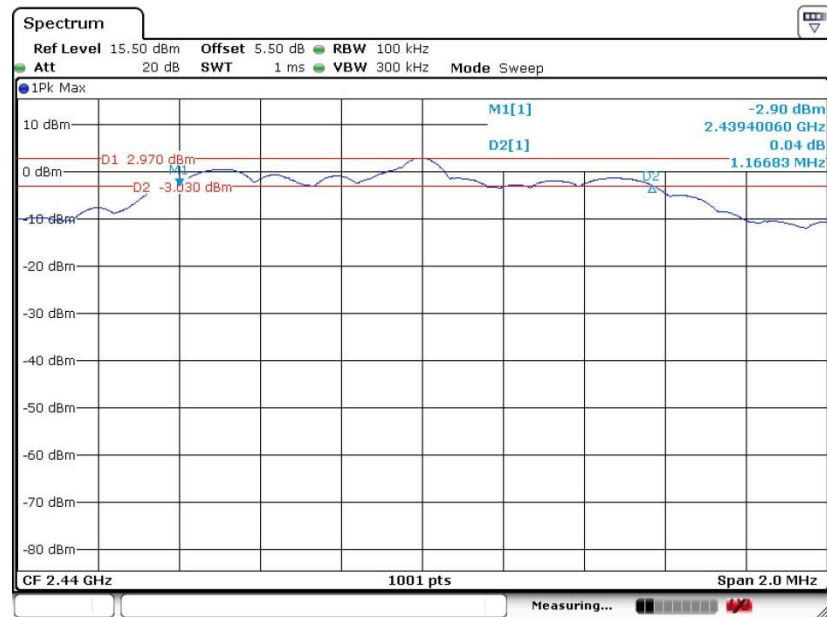

Date: 20.MAY.2019 14:33:11

6 dB Bandwidth Plot on Channel 39

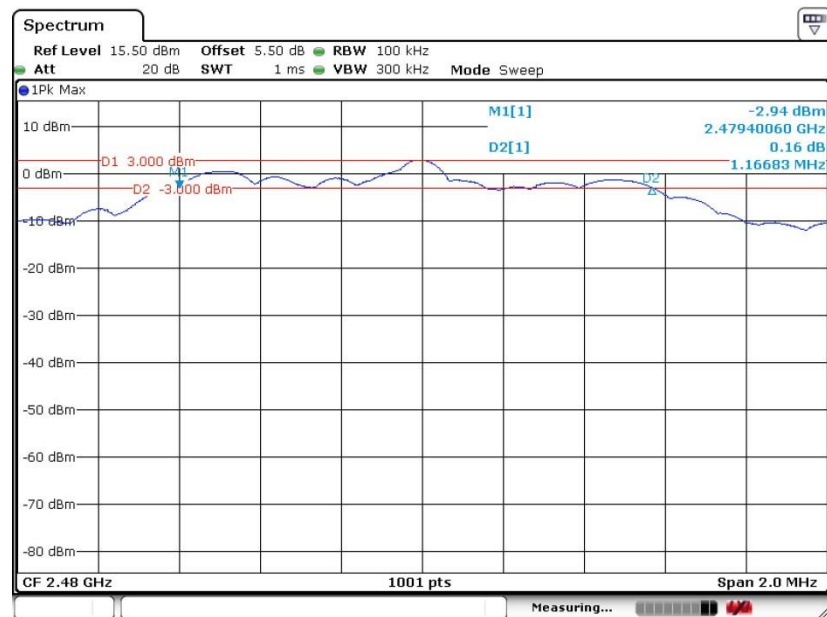

Date: 20.MAY.2019 14:36:50




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


Bluetooth v5.0 LE (1Mbps)

99% Bandwidth Plot on Channel 00

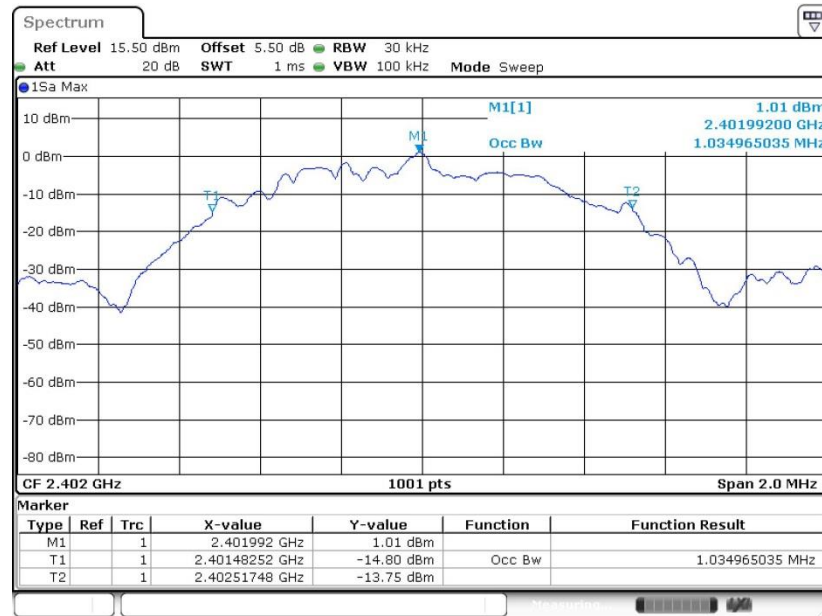




99% Occupied Bandwidth Plot on Channel 19

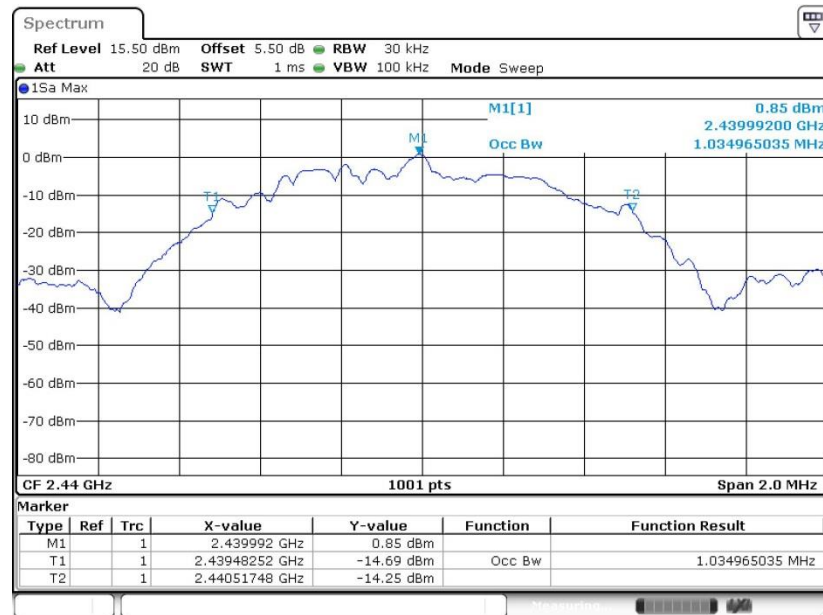

Date: 20.MAY.2019 14:20:56

99% Occupied Bandwidth Plot on Channel 39

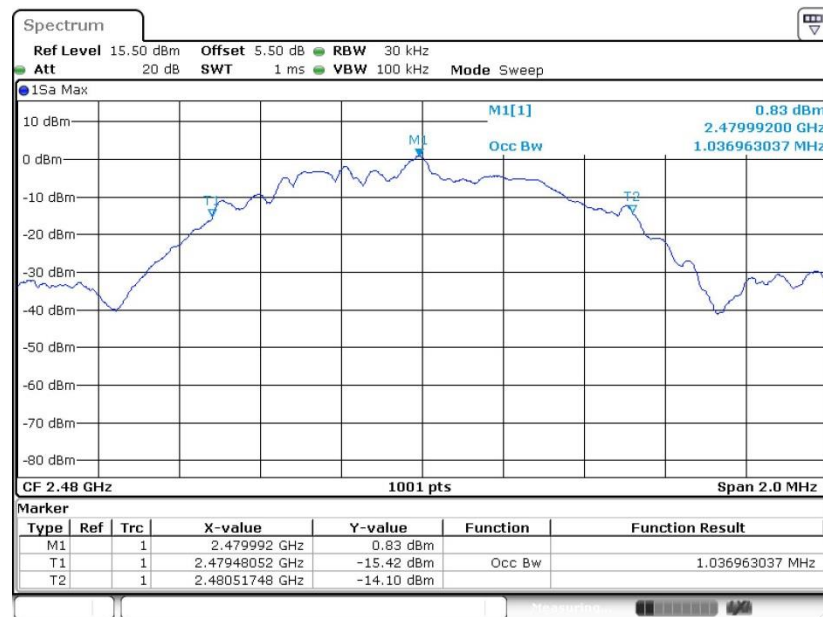


Date: 20.MAY.2019 14:25:09

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



Bluetooth v5.0 LE (2Mbps)


99% Bandwidth Plot on Channel 00

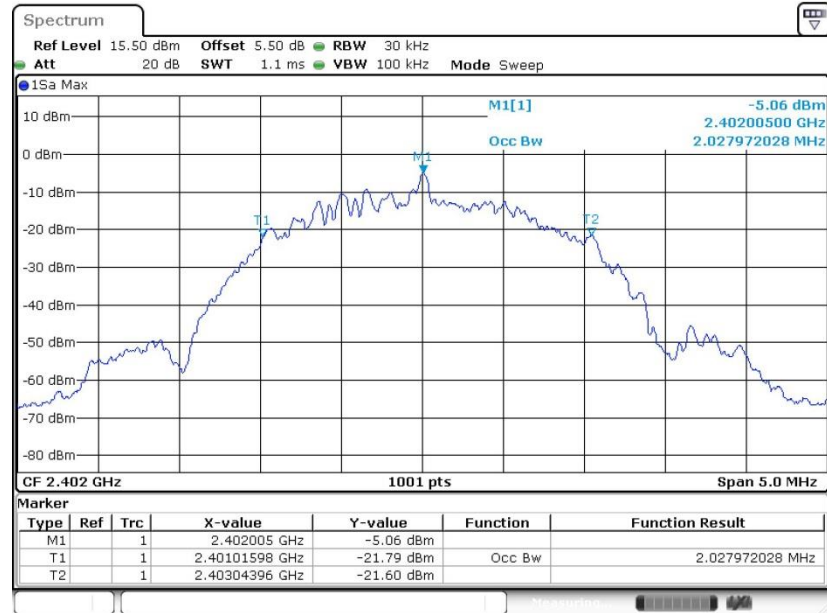


Date: 17.JUL.2019 10:02:13



99% Occupied Bandwidth Plot on Channel 19

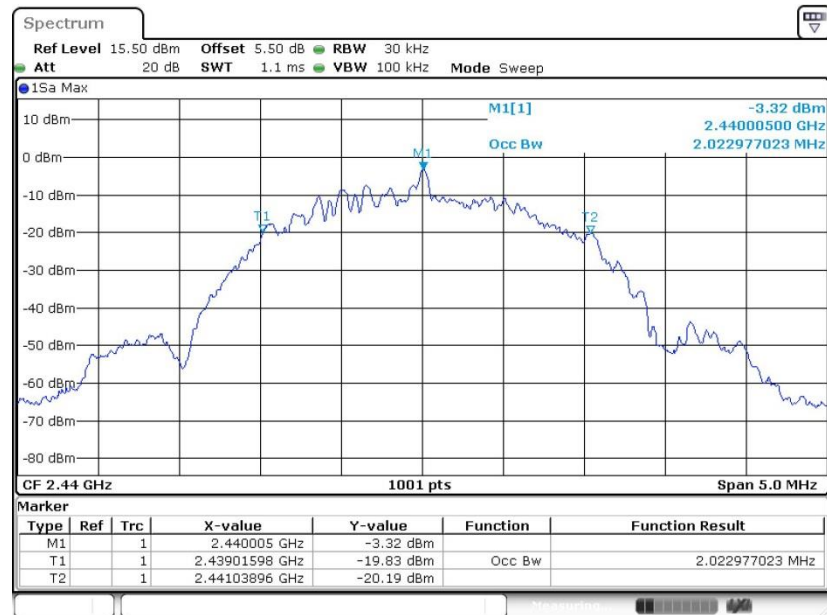

99% Occupied Bandwidth Plot on Channel 39

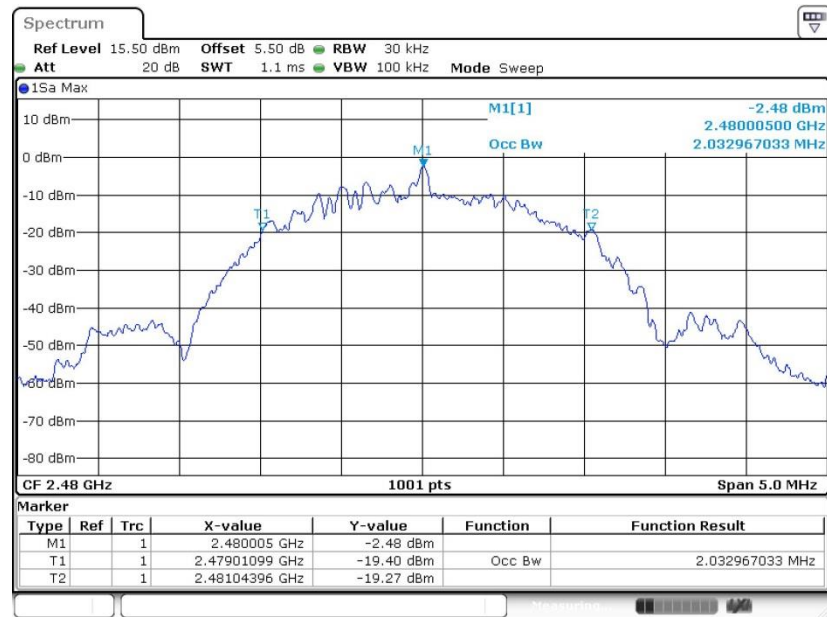

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

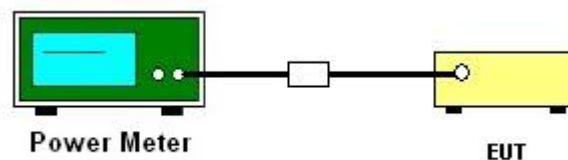

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

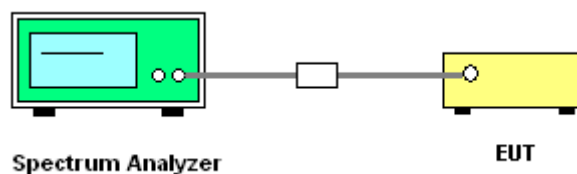

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)


Bluetooth v5.0 LE (1Mbps)

PSD 100kHz Plot on Channel 00

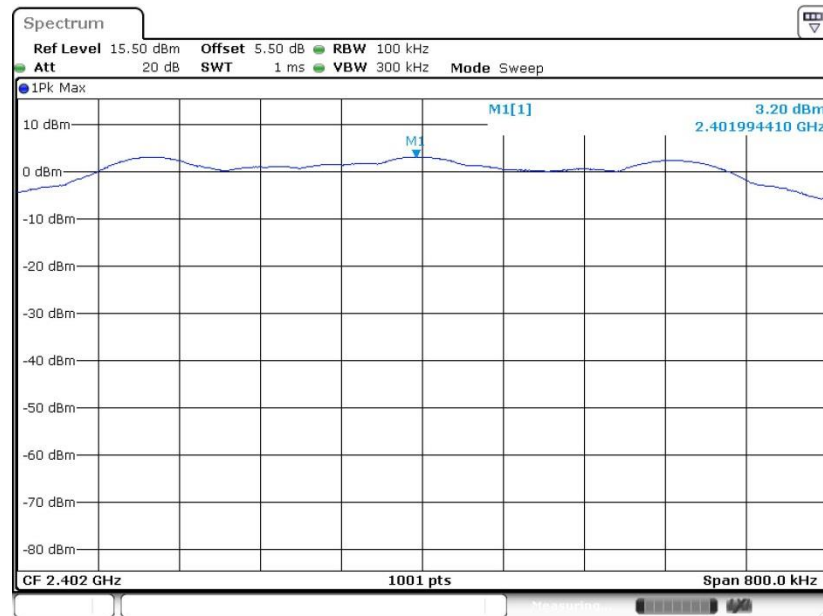

Date: 20.MAY.2019 14:05:22


PSD 100kHz Plot on Channel 19

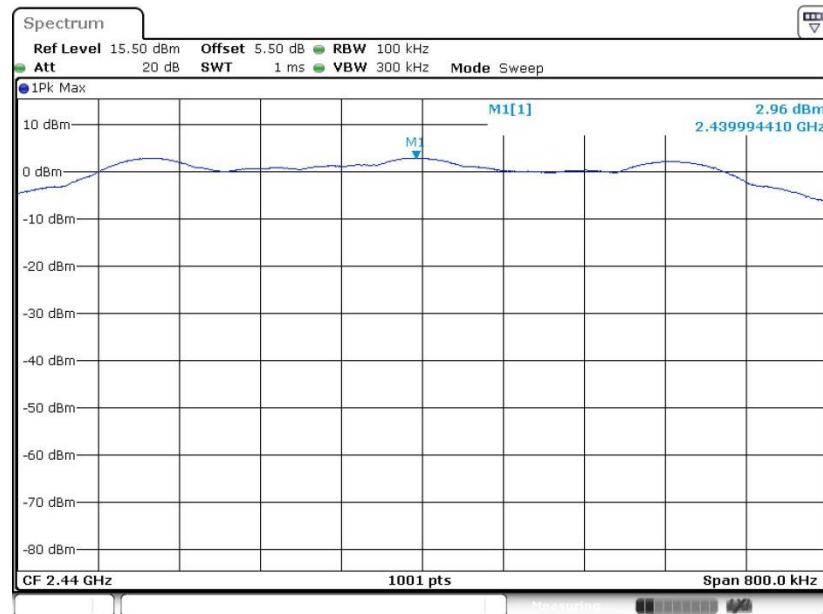

Date: 20.MAY.2019 14:19:54



PSD 100kHz Plot on Channel 39

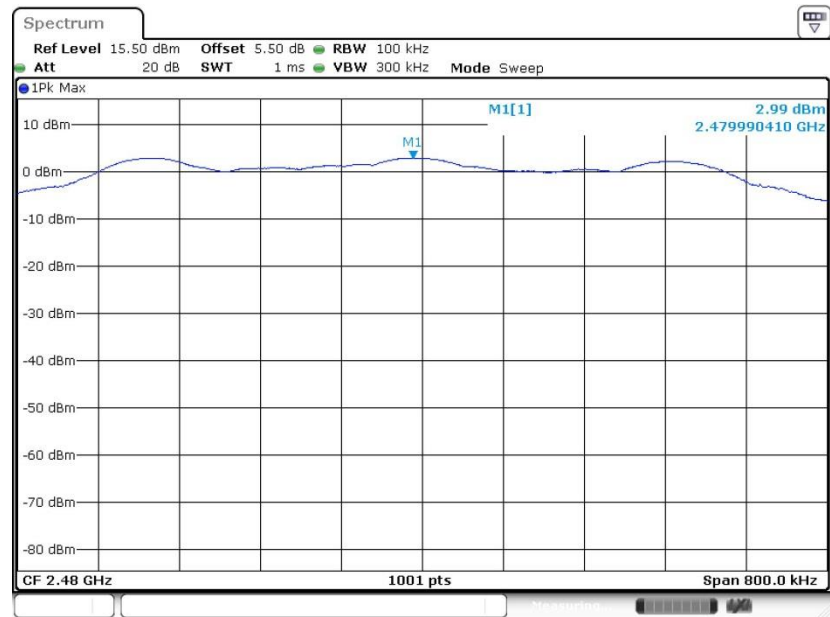


Date: 20.MAY.2019 14:23:34




Bluetooth v5.0 LE (2Mbps)

PSD 100kHz Plot on Channel 00

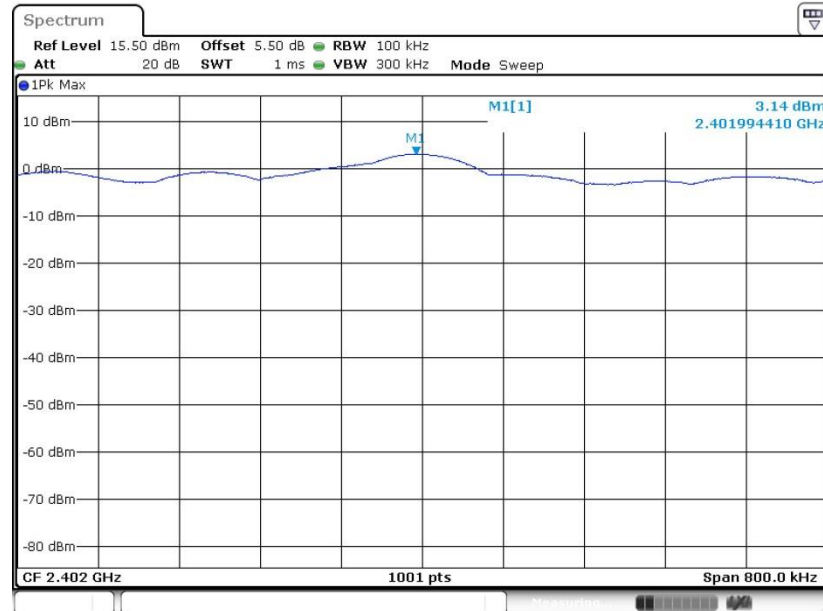

Date: 20.MAY.2019 14:29:30


PSD 100kHz Plot on Channel 19

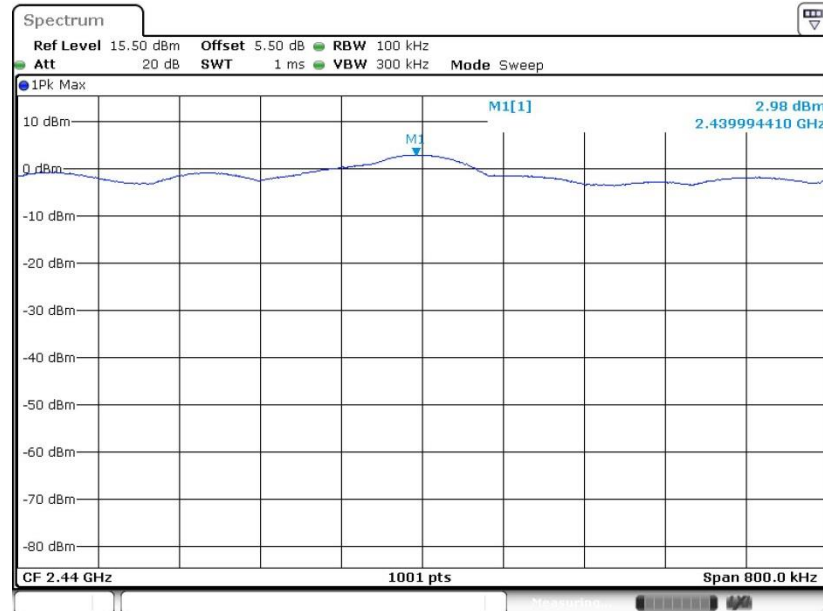

Date: 20.MAY.2019 14:34:32



PSD 100kHz Plot on Channel 39

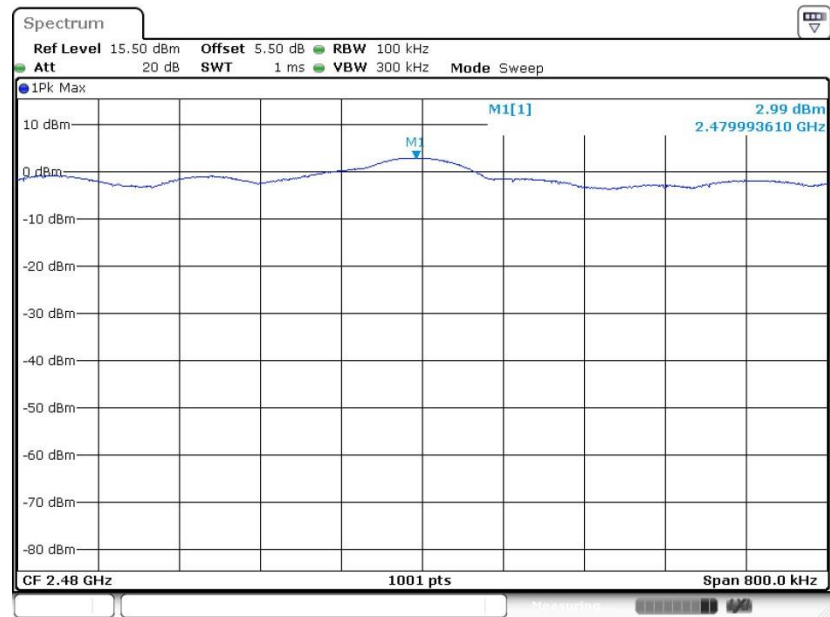


Date: 20.MAY.2019 14:44:14

3.3.7 Test Result of Power Spectral Density Plots (3kHz)


Bluetooth v5.0 LE (1Mbps)

PSD 3kHz Plot on Channel 00

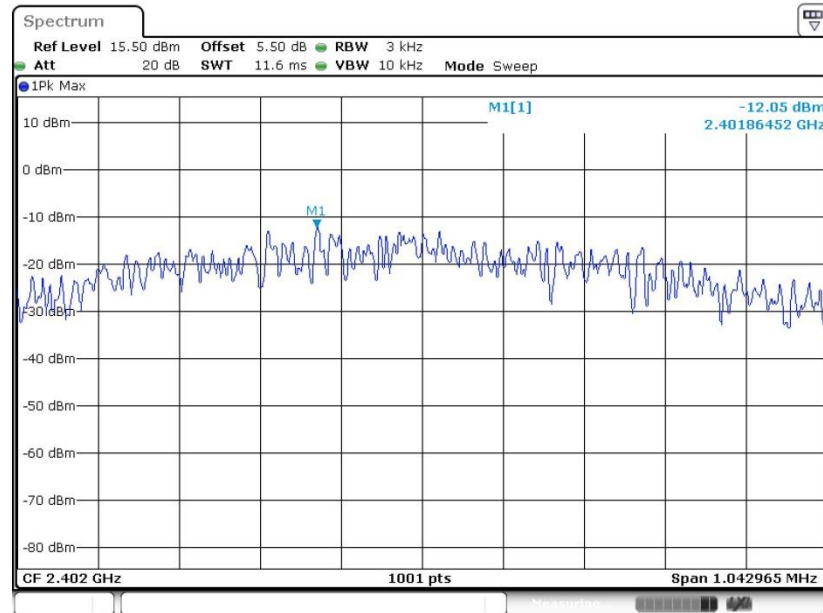

Date: 20.MAY.2019 14:04:58


PSD 3kHz Plot on Channel 19

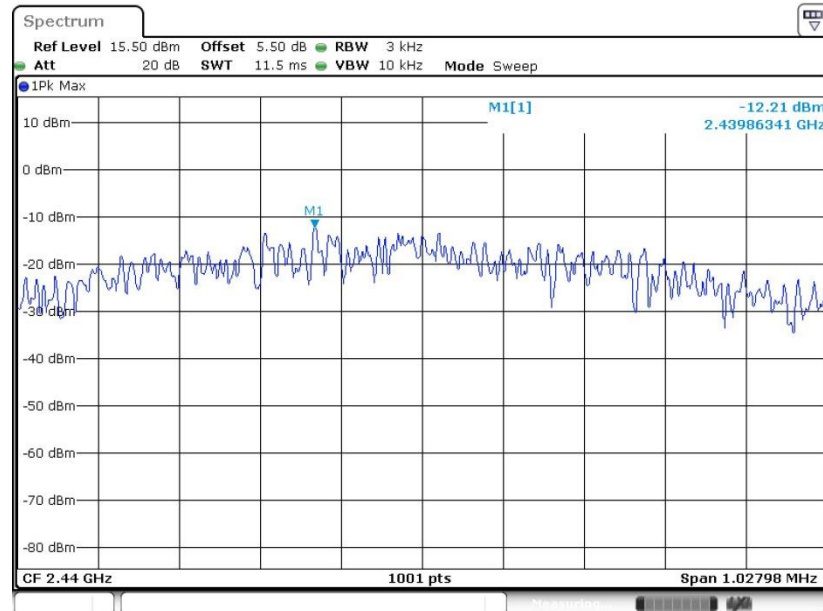

Date: 20.MAY.2019 14:19:36



PSD 3kHz Plot on Channel 39

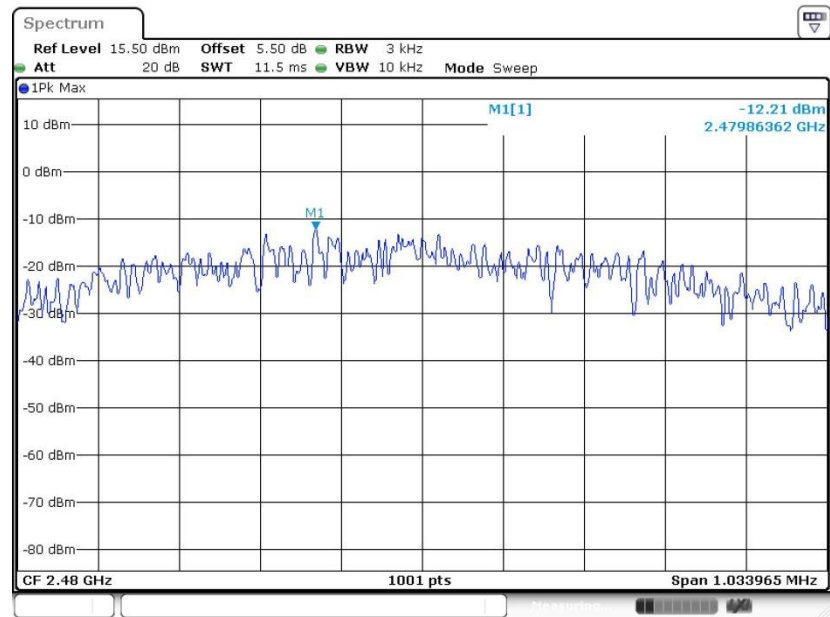


Date: 20.MAY.2019 14:23:17




Bluetooth v5.0 LE (2Mbps)

PSD 3kHz Plot on Channel 00

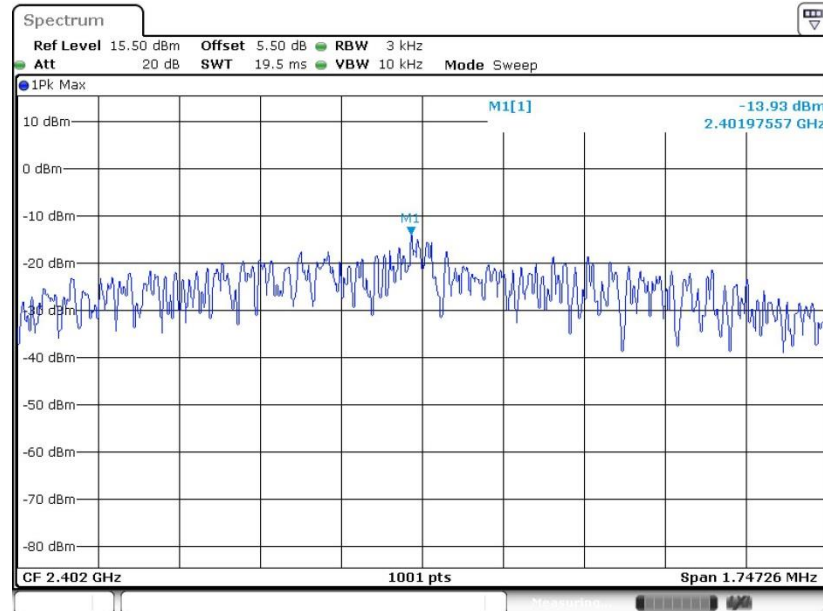

Date: 20.MAY.2019 14:29:09


PSD 3kHz Plot on Channel 19

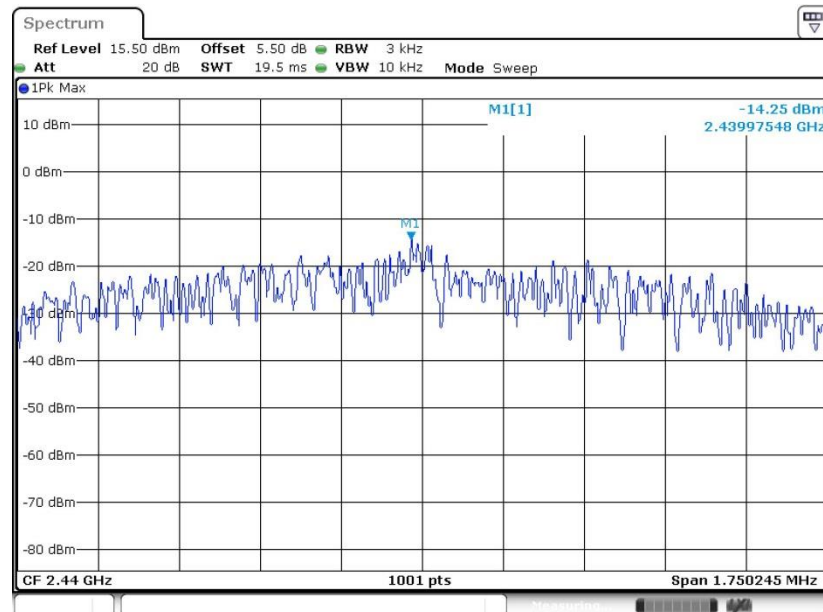

Date: 20.MAY.2019 14:33:56



PSD 3kHz Plot on Channel 39

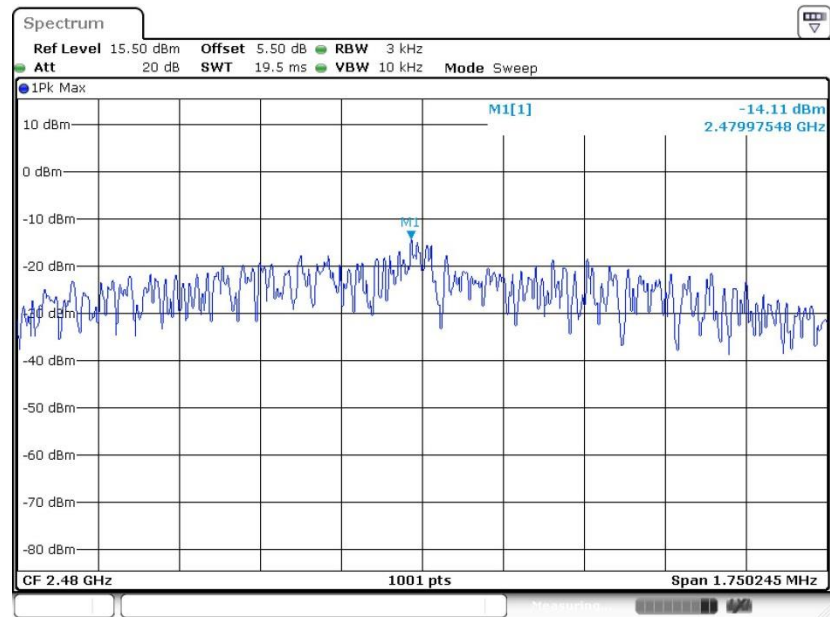

Date: 20.MAY.2019 14:38:19

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cabler. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

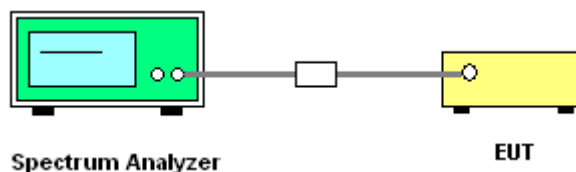




3.4.5 Test Result of Conducted Band Edges Plots


Bluetooth v5.0 LE (1Mbps)

Low Band Edge Plot on Channel 00

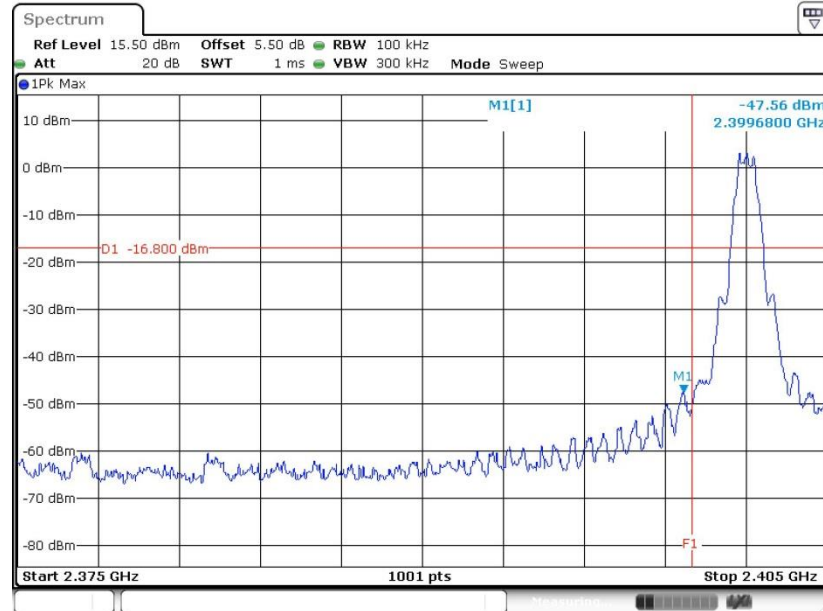

Date: 20.MAY.2019 14:05:43

High Band Edge Plot on Channel 39

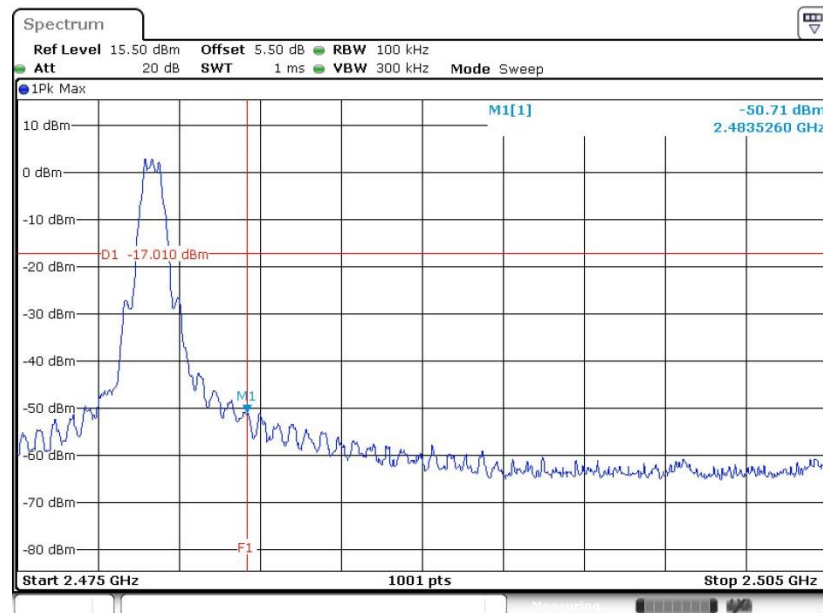


Date: 20.MAY.2019 14:24:31




Bluetooth v5.0 LE (2Mbps)

Low Band Edge Plot on Channel 00

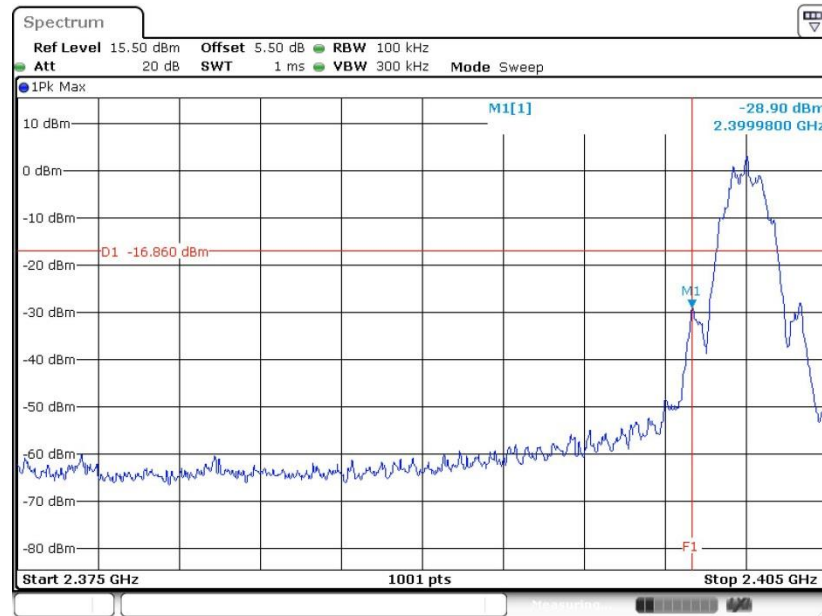

Date: 20.MAY.2019 14:30:27

High Band Edge Plot on Channel 39

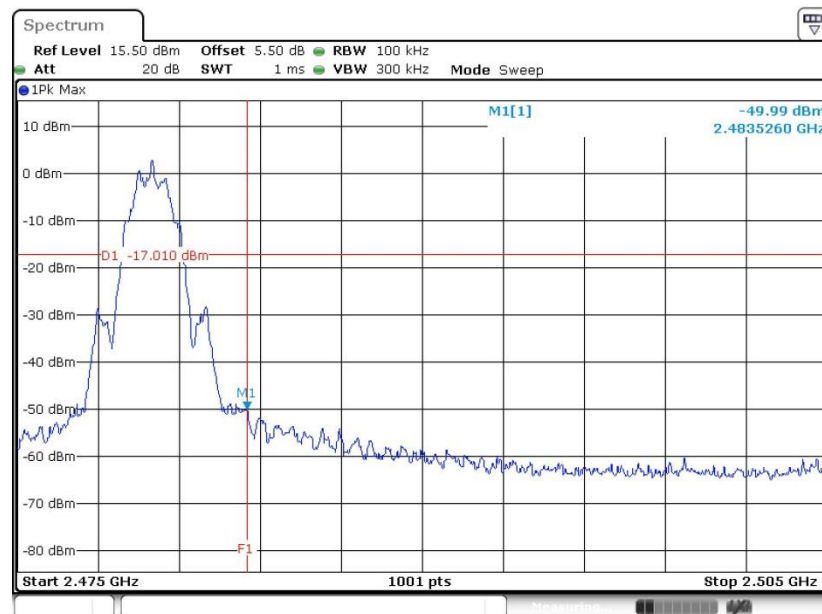


Date: 20.MAY.2019 14:47:00

3.4.6 Test Result of Conducted Spurious Emission Plots


Bluetooth v5.0 LE (1Mbps)

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

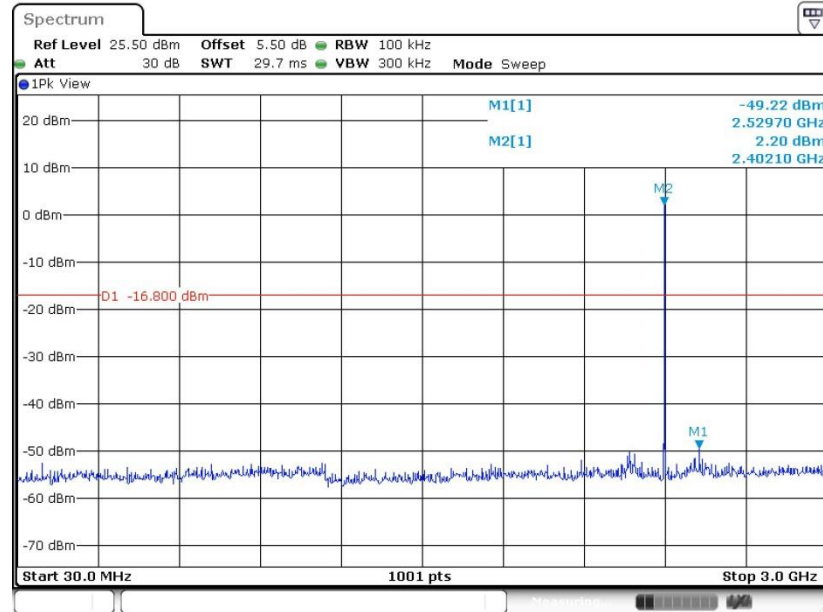


Date: 20.MAY.2019 14:12:56

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

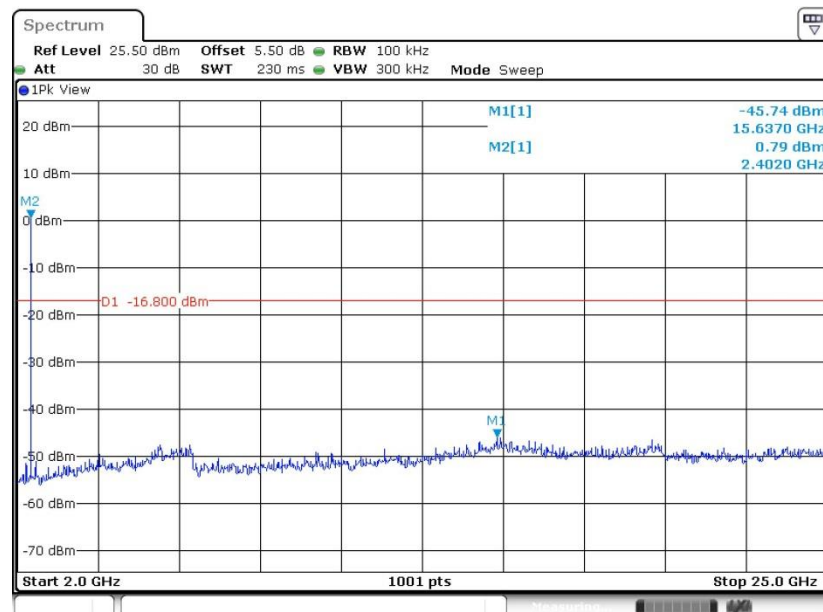


Date: 20.MAY.2019 14:13:04

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

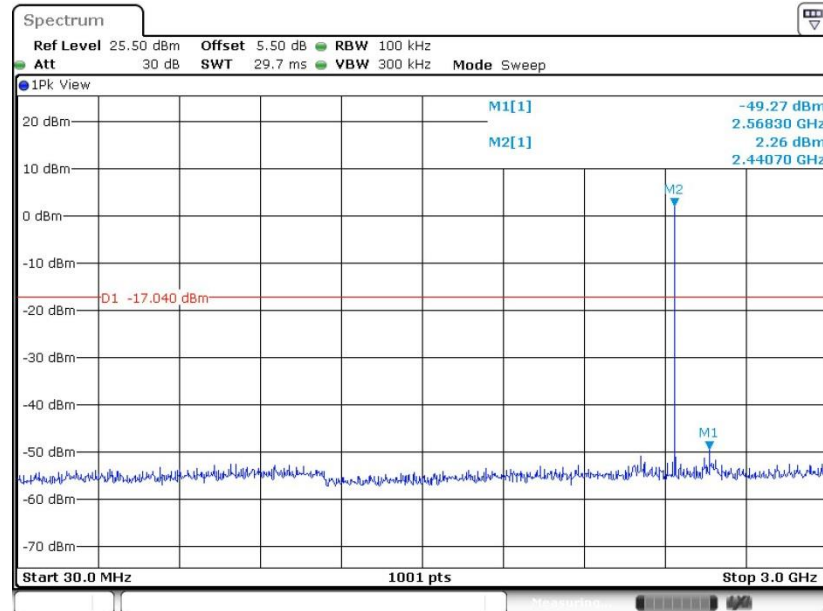

Date: 20.MAY.2019 14:20:39


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

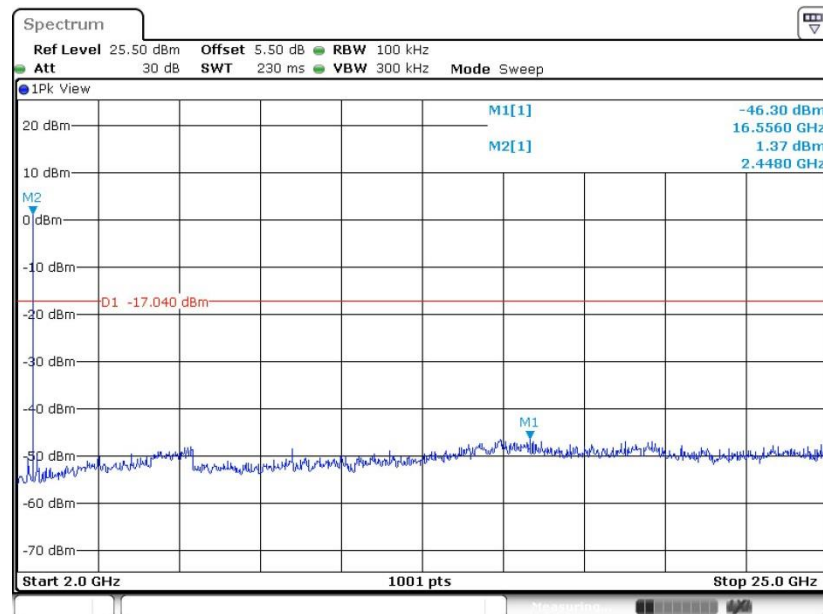

Date: 20.MAY.2019 14:20:47




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

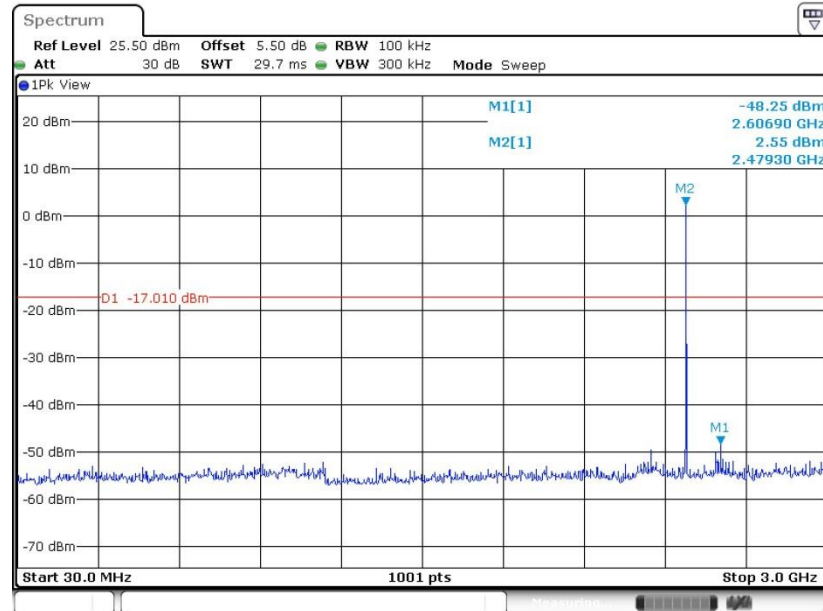

Date: 20.MAY.2019 14:24:43

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

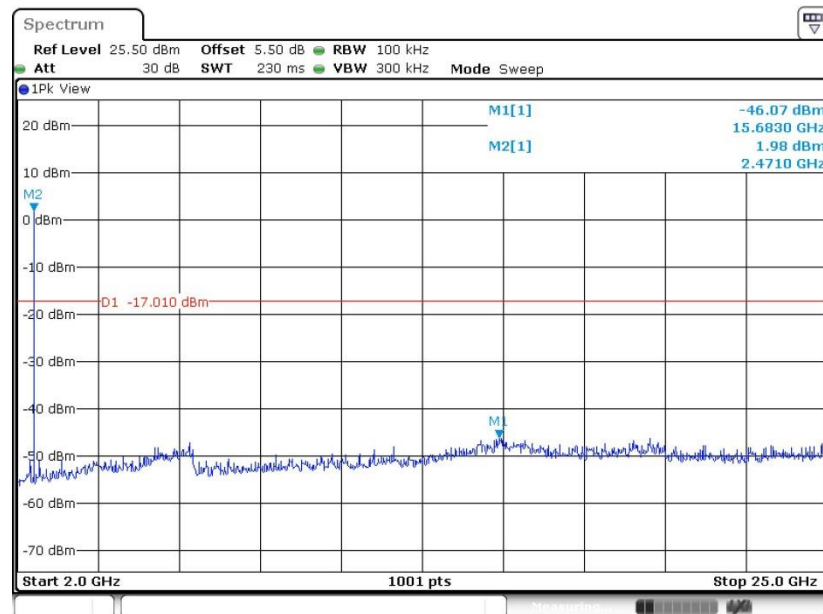


Date: 20.MAY.2019 14:24:52

Bluetooth v5.0 LE (2Mbps)


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 00

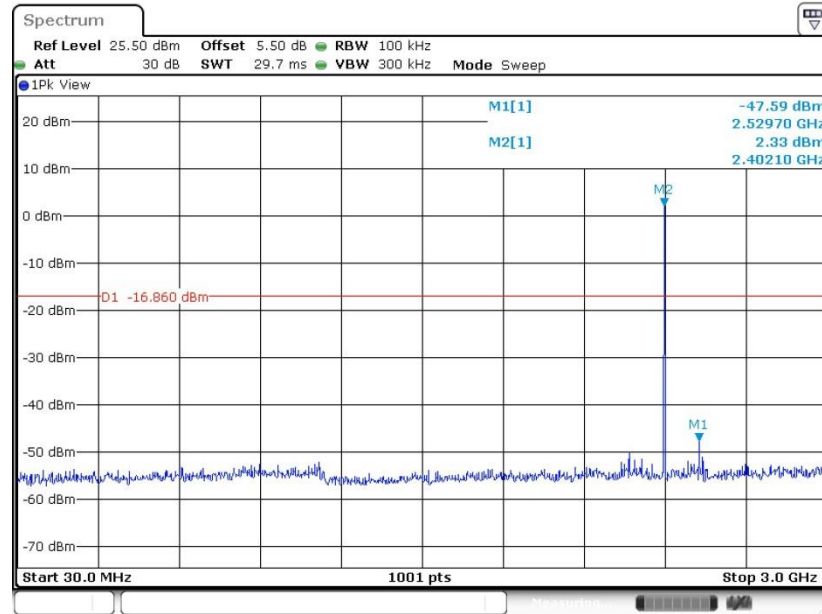


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 00

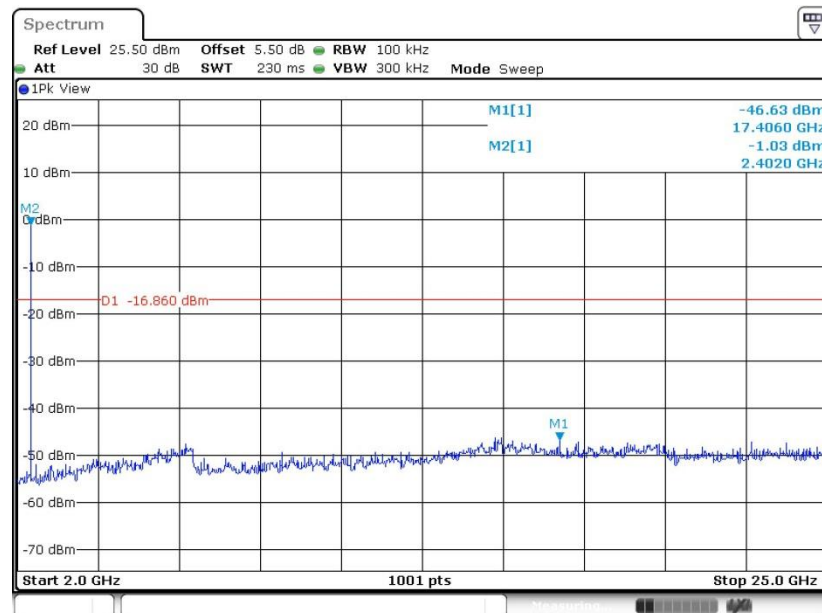




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

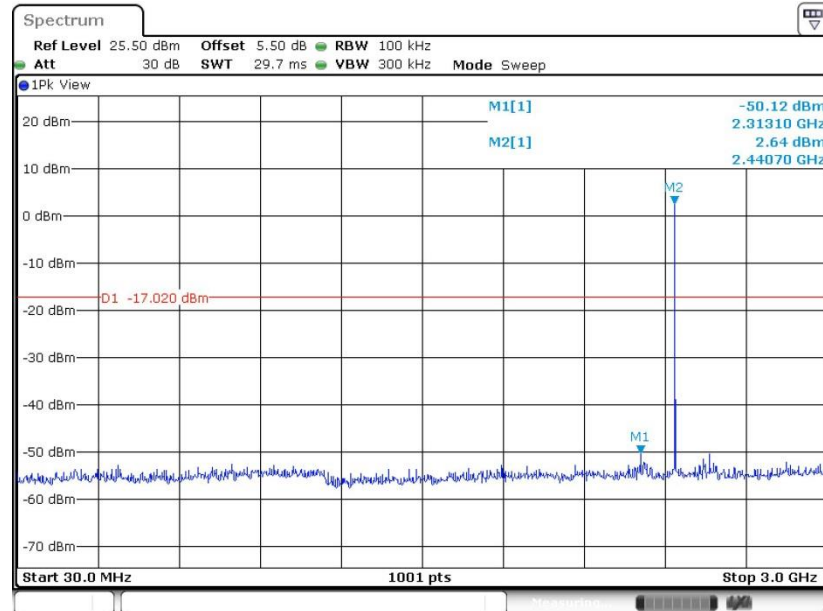

Date: 20.MAY.2019 14:35:03


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

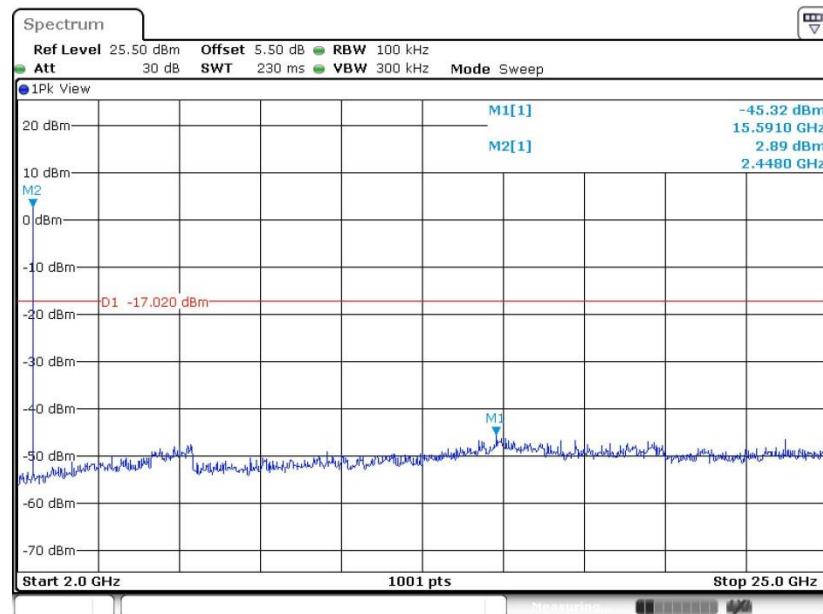

Date: 20.MAY.2019 14:35:12




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

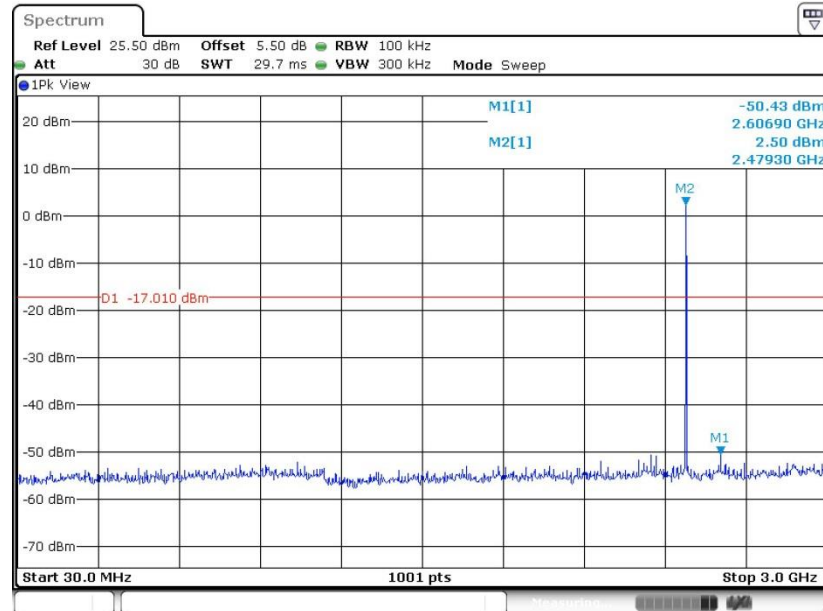

Date: 20.MAY.2019 14:47:12

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

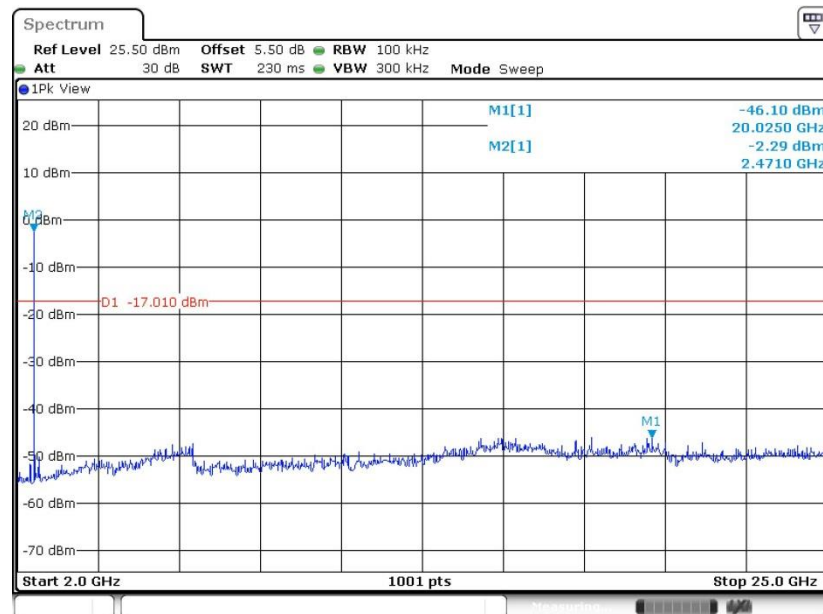

Date: 20.MAY.2019 14:47:20

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

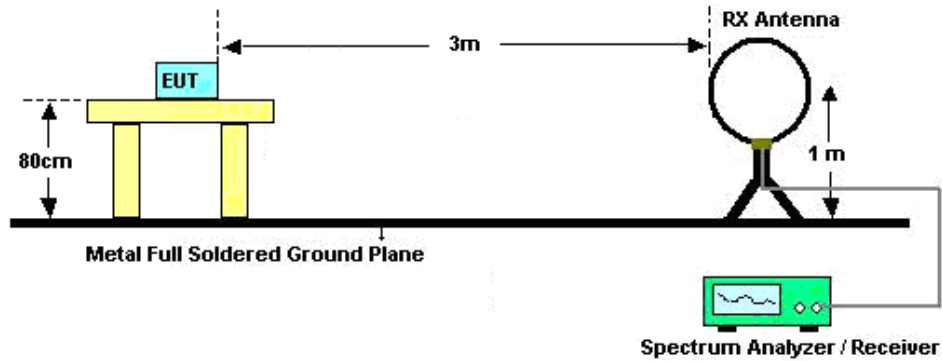

For radiated emissions from 30MHz to 1GHz

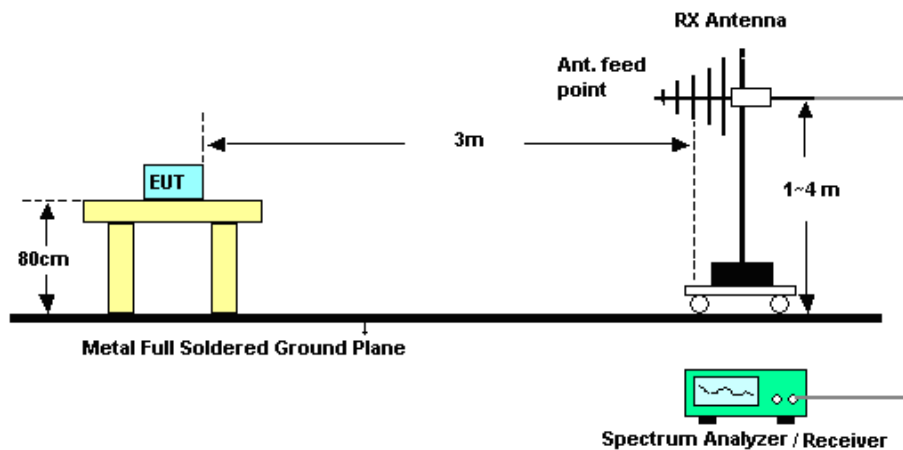

For radiated emissions above 1GHz

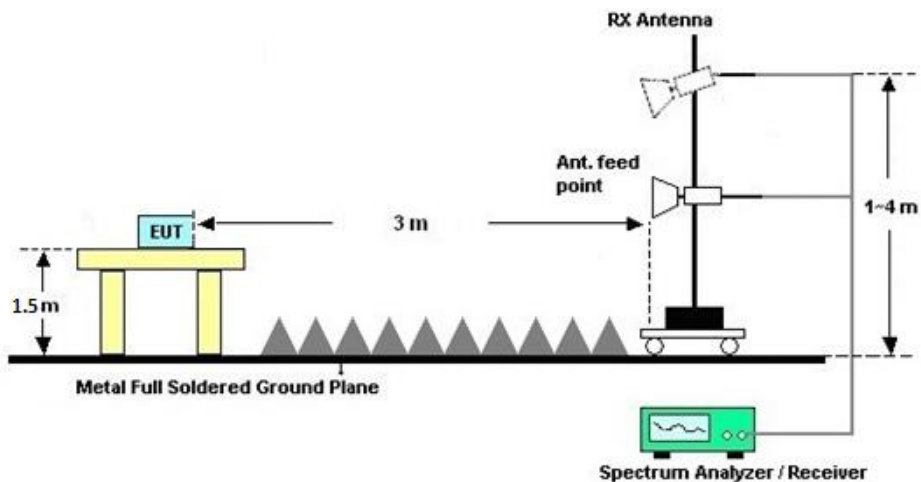



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	May 20, 2019~ Jul. 17, 2019	Aug. 06, 2019	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 14, 2019	May 20, 2019~ Jul. 17, 2019	Jan. 13, 2020	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 14, 2019	May 20, 2019~ Jul. 17, 2019	Jan. 13, 2020	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz; Max 30dBm	Oct. 12, 2018	May 16, 2019	Oct. 11, 2019	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jun. 25, 2018	May 16, 2019	Jun. 24, 2019	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	May 16, 2019	Oct. 18, 2019	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 28, 2018	May 16, 2019	Dec. 27, 2019	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 20, 2018	May 16, 2019	Oct. 19, 2019	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2019	May 16, 2019	Jan. 04, 2020	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Aug 6, 2018	May 16, 2019	Aug 5, 2019	Radiation (03CH06-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Jan. 14, 2019	May 16, 2019	Jan. 13, 2020	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Apr. 17, 2019	May 16, 2019	Apr. 16, 2020	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 15, 2019	May 16, 2019	Apr. 14, 2020	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	May 16, 2019	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 16, 2019	NCR	Radiation (03CH06-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

Bluetooth v5.0 (1Mbps)

Test Engineer:	Lion Ran	Temperature:	21~25	°C
Test Date:	2019/5/20	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.03	0.70	0.50	Pass
BLE	1Mbps	1	19	2440	1.03	0.69	0.50	Pass
BLE	1Mbps	1	39	2480	1.04	0.69	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	3.60	30.00	2.57	6.17	36.00	Pass
BLE	1Mbps	1	19	2440	3.48	30.00	2.57	6.05	36.00	Pass
BLE	1Mbps	1	39	2480	3.76	30.00	2.57	6.33	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.49	3.29
BLE	1Mbps	1	19	2440	2.49	3.16
BLE	1Mbps	1	39	2480	2.49	3.33

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	3.20	-12.05	2.57	8.00	Pass
BLE	1Mbps	1	19	2440	2.96	-12.21	2.57	8.00	Pass
BLE	1Mbps	1	39	2480	2.99	-12.21	2.57	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Bluetooth v5.0 (2Mbps)

Test Engineer:	Lion Ran	Temperature:	21~25	°C
Test Date:	2019/5/20~2019/7/17	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.03	1.16	0.50	Pass
BLE	2Mbps	1	19	2440	2.02	1.17	0.50	Pass
BLE	2Mbps	1	39	2480	2.03	1.17	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	3.75	30.00	2.57	6.32	36.00	Pass
BLE	2Mbps	1	19	2440	3.66	30.00	2.57	6.23	36.00	Pass
BLE	2Mbps	1	39	2480	3.54	30.00	2.57	6.11	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	5.20	3.44
BLE	2Mbps	1	19	2440	5.20	3.41
BLE	2Mbps	1	39	2480	5.20	3.60

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	3.14	-13.93	2.57	8.00	Pass
BLE	2Mbps	1	19	2440	2.98	-14.25	2.57	8.00	Pass
BLE	2Mbps	1	39	2480	2.99	-14.11	2.57	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. Radiated Spurious Emission

Bluetooth v5.0 LE (1Mbps)

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2362	55.23	-18.77	74	49.2	32.1	5.36	31.43	383	83	P	H
		2353.81	44.88	-9.12	54	38.85	32.1	5.36	31.43	383	83	A	H
	*	2402	98.64	-	-	92.54	32.1	5.41	31.41	383	83	P	H
	*	2402	98.13	-	-	92.03	32.1	5.41	31.41	383	83	A	H
		2353.81	55.03	-18.97	74	49	32.1	5.36	31.43	158	40	P	V
		2353.94	47.97	-6.03	54	41.94	32.1	5.36	31.43	158	40	A	V
	*	2402	102.85	-	-	96.75	32.1	5.41	31.41	158	40	P	V
	*	2402	102.35	-	-	96.25	32.1	5.41	31.41	158	40	A	V
BLE CH 39 2480MHz	*	2483.56	63.5	-10.5	74	57.07	32.37	5.45	31.39	164	40	P	H
	*	2483.5	49.31	-4.69	54	42.88	32.37	5.45	31.39	164	40	A	H
		2480	102.78	-	-	96.35	32.37	5.45	31.39	164	40	P	H
		2480	102.27	-	-	95.84	32.37	5.45	31.39	164	40	A	H
	*	2483.56	59.44	-14.56	74	53.01	32.37	5.45	31.39	360	79	P	V
	*	2483.5	46.79	-7.21	54	40.36	32.37	5.45	31.39	360	79	A	V
		2480	98.25	-	-	91.82	32.37	5.45	31.39	360	79	P	V
		2480	97.73	-	-	91.3	32.37	5.45	31.39	360	79	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4806	43.38	-30.62	74	62.82	34.2	7.95	61.59	100	0	P	H
		4806	42.89	-31.11	74	62.33	34.2	7.95	61.59	100	360	P	V
BLE CH 19 2440MHz		4878	42.8	-31.2	74	62.39	34.03	7.99	61.61	100	0	P	H
		7320	45.96	-28.04	74	62.75	35.7	9.85	62.34	100	0	P	H
		4878	40.76	-33.24	74	60.35	34.03	7.99	61.61	100	360	P	V
		7320	45.34	-28.66	74	62.13	35.7	9.85	62.34	100	360	P	V
BLE CH 39 2480MHz		4962	42.02	-31.98	74	61.56	34	8.1	61.64	228	360	P	H
		7440	45.23	-28.77	74	61.83	35.8	10	62.4	228	360	P	H
		4962	41.38	-32.62	74	60.92	34	8.1	61.64	100	0	P	V
		7440	47.14	-26.86	74	63.74	35.8	10	62.4	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Bluetooth v5.0 LE (2Mbps)

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2322.61	55.09	-18.91	74	49.22	32	5.31	31.44	150	220	P	H
		2353.81	47.3	-6.7	54	41.27	32.1	5.36	31.43	150	220	A	H
	*	2402	103.09	-	-	96.99	32.1	5.41	31.41	150	220	P	H
	*	2402	101.68	-	-	95.58	32.1	5.41	31.41	150	220	A	H
		2317.67	54.37	-19.63	74	48.5	32	5.31	31.44	381	255	P	V
		2353.81	44.55	-9.45	54	38.52	32.1	5.36	31.43	381	255	A	V
	*	2402	96.89	-	-	90.79	32.1	5.41	31.41	381	255	P	V
	*	2402	95.47	-	-	89.37	32.1	5.41	31.41	381	255	A	V
BLE CH 39 2480MHz	*	2483.5	62.95	-11.05	74	56.52	32.37	5.45	31.39	105	222	P	H
	*	2483.5	52.82	-1.18	54	46.39	32.37	5.45	31.39	105	222	A	H
		2480	102.42	-	-	95.99	32.37	5.45	31.39	105	222	P	H
		2480	101.25	-	-	94.82	32.37	5.45	31.39	105	222	A	H
	*	2483.62	58.52	-15.48	74	52.09	32.37	5.45	31.39	370	267	P	V
	*	2483.5	47.87	-6.13	54	41.44	32.37	5.45	31.39	370	267	A	V
		2480	97.08	-	-	90.65	32.37	5.45	31.39	370	267	P	V
		2480	95.69	-	-	89.26	32.37	5.45	31.39	370	267	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4806	42.14	-31.86	74	61.58	34.2	7.95	61.59	100	0	P	H
		4806	42.07	-31.93	74	61.51	34.2	7.95	61.59	100	360	P	V
BLE CH 19 2440MHz		4878	39.8	-34.2	74	59.39	34.03	7.99	61.61	100	360	P	H
		7320	43.78	-30.22	74	60.57	35.7	9.85	62.34	100	360	P	H
		4878	39.46	-34.54	74	59.05	34.03	7.99	61.61	100	240	P	V
		7320	45.04	-28.96	74	61.83	35.7	9.85	62.34	100	240	P	V
BLE CH 39 2480MHz		4962	42.33	-31.67	74	61.87	34	8.1	61.64	100	360	P	H
		7440	44.7	-29.3	74	61.3	35.8	10	62.4	100	360	P	H
		4962	38.17	-35.83	74	57.71	34	8.1	61.64	100	182	P	V
		7440	41.78	-32.22	74	58.38	35.8	10	62.4	100	182	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30	20.9	-19.1	40	28.11	24.2	0.57	31.98	-	-	P	H
		129.91	15.38	-28.12	43.5	28.56	17.6	1.16	31.94	-	-	P	H
		309.36	17.68	-28.32	46	28.41	19.43	1.86	32.02	-	-	P	H
		472.32	21.84	-24.16	46	28.88	22.9	2.3	32.24	-	-	P	H
		687.66	24.99	-21.01	46	29.68	24.86	2.79	32.34	-	-	P	H
		893.3	27.62	-18.38	46	29.44	26.47	3.22	31.51	100	360	P	H
		30	21.93	-18.07	40	29.14	24.2	0.57	31.98	-	-	P	V
		256.01	18.62	-27.38	46	29.25	19.6	1.74	31.97	-	-	P	V
		512.09	24.86	-21.14	46	31.19	23.54	2.41	32.28	-	-	P	V
		621.7	26.75	-19.25	46	31.82	24.66	2.66	32.39	-	-	P	V
		787.57	28.95	-17.05	46	32.1	25.95	3.05	32.15	-	-	P	V
		948.59	30.21	-15.79	46	30.92	26.94	3.35	31	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.







Appendix C. Radiated Spurious Emission

Note symbol

-L	Low channel location
-R	High channel location



Bluetooth v5.0 LE (1Mbps)
2.4GHz 2400~2483.5MHz
BLE (Band Edge @ 3m)

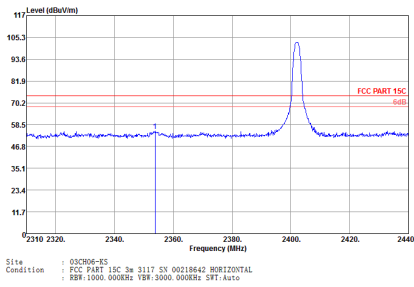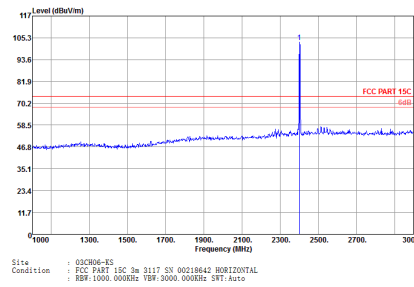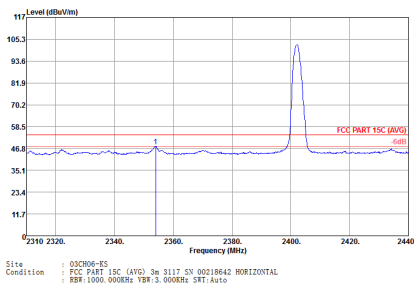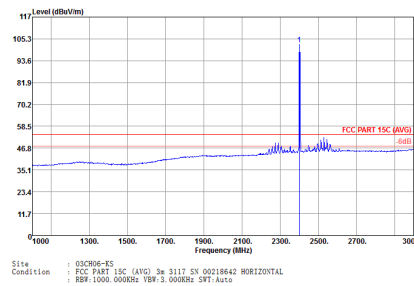BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 Site : 03C906-ES Condition : FCC PART 15C 3m 3117 SV 00218642 HORIZONTAL REF:1000.000KHz YBF:3000.000KHz SFT:Auto	 Site : 03C906-ES Condition : FCC PART 15C 3m 3117 SV 00218642 HORIZONTAL REF:1000.000KHz YBF:3000.000KHz SFT:Auto
Avg	 Site : 03C906-ES Condition : FCC PART 15C (AVG) 3m 3117 SV 00218642 HORIZONTAL REF:1000.000KHz YBF:3.000KHz SFT:Auto	 Site : 03C906-ES Condition : FCC PART 15C (AVG) 3m 3117 SV 00218642 HORIZONTAL REF:1000.000KHz YBF:3.000KHz SFT:Auto
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	



1	Vertical	Fundamental
Peak	Site : 03CR06-ES Condition : FCC PART 15C 3m 3117 SV 00218642 VERTICAL RFR:1000.000MHz YBR:3000.000MHz SFT:Auto	Site : 03CR06-ES Condition : FCC PART 15C 3m 3117 SV 00218642 VERTICAL RFR:1000.000MHz YBR:3000.000MHz SFT:Auto
Avg.	Site : 03CR06-ES Condition : FCC PART 15C (AVG) 3m 3117 SV 00218642 VERTICAL RFR:1000.000MHz YBR:3.000MHz SFT:Auto	Site : 03CR06-ES Condition : FCC PART 15C (AVG) 3m 3117 SV 00218642 VERTICAL RFR:1000.000MHz YBR:3.000MHz SFT:Auto



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Fundamental
Peak	Site : 03C806-ES Condition : FCC PART 15C 3m 3117 SV 00218642 HORIZONTAL RFR:1000.000KHz YBR:3000.000KHz SPT:Auto	Site : 03C806-ES Condition : FCC PART 15C 3m 3117 SV 00218642 HORIZONTAL RFR:1000.000KHz YBR:3000.000KHz SPT:Auto
Avg.	Site : 03C806-ES Condition : FCC PART 15C (AVG) 3m 3117 SV 00218642 HORIZONTAL RFR:1000.000KHz YBR:3.000KHz SPT:Auto	Site : 03C806-ES Condition : FCC PART 15C (AVG) 3m 3117 SV 00218642 HORIZONTAL RFR:1000.000KHz YBR:3.000KHz SPT:Auto





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Vertical	Fundamental
Peak	Site : 03C906-ES Condition : FCC PART 15C 3m 3117.5V 00218642 VERTICAL RBF:1000.000KHz YBF:3000.000KHz SFT:Auto	Site : 03C906-ES Condition : FCC PART 15C 3m 3117.5V 00218642 VERTICAL RBF:1000.000KHz YBF:3000.000KHz SFT:Auto
Avg.	Site : 03C906-ES Condition : FCC PART 15C (AVG) 3m 3117.5V 00218642 VERTICAL RBF:1000.000KHz YBF:3.000KHz SFT:Auto	Date: 8 Site : 03C906-ES Condition : FCC PART 15C (AVG) 3m 3117.5V 00218642 VERTICAL RBF:1000.000KHz YBF:3.000KHz SFT:Auto



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

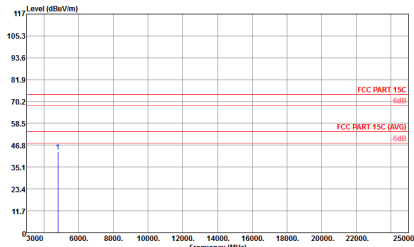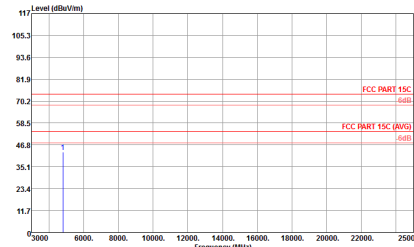BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
Peak	 Site : 02CH06-ES Condition : FCC PART 15C 3e 3117.5V 00218642 ROR120VITAL RBF:1000.000Hz YBF:3000.000Hz SFT:Auto	 Site : 02CH06-ES Condition : FCC PART 15C 3e 3117.5V 00218642 VERTICAL RBF:1000.000Hz YBF:3000.000Hz SFT:Auto



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
1	Horizontal	Vertical
Peak		







BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak		







Bluetooth v5.0 LE (2Mbps)
2.4GHz 2400~2483.5MHz
BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Fundamental
Peak	Site : 03CR06-ES Condition : FCC PART 15C 3m 3117 SV 00218642 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SFT:Auto	Site : 03CR06-ES Condition : FCC PART 15C 3m 3117 SV 00218642 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SFT:Auto
Avg.	Site : 03CR06-ES Condition : FCC PART 15C (AVG) 3m 3117 SV 00218642 HORIZONTAL RBW:1000.000kHz VBW:5.600kHz SFT:Auto	Site : 03CR06-ES Condition : FCC PART 15C (AVG) 3m 3117 SV 00218642 HORIZONTAL RBW:1000.000kHz VBW:5.600kHz SFT:Auto

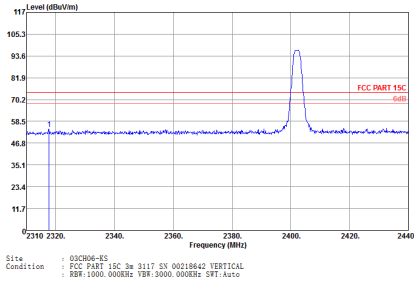
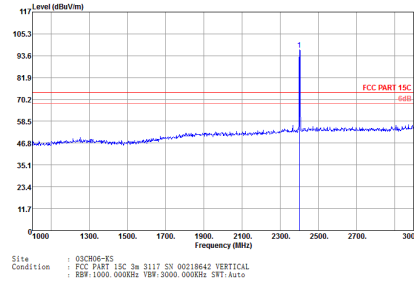
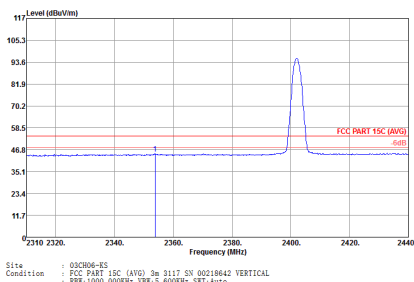
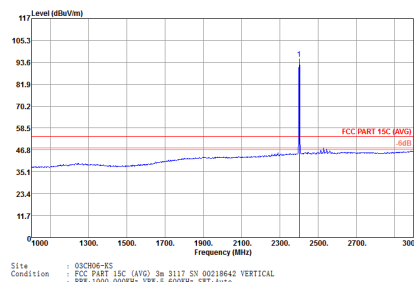


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Vertical	Fundamental
Peak	 Site : 03C906-ES Condition : FCC PART 15C 3m 3117 SV 00218642 VERTICAL RFR:1000.000KHz YBR:3000.000KHz SMT:Auto	 Site : 03C906-ES Condition : FCC PART 15C 3m 3117 SV 00218642 VERTICAL RFR:1000.000KHz YBR:3000.000KHz SMT:Auto
Avg	 Site : 03C906-ES Condition : FCC PART 15C (AVG) 3m 3117 SV 00218642 VERTICAL RFR:1000.000KHz YBR:3.600KHz SMT:Auto	 Site : 03C906-ES Condition : FCC PART 15C (AVG) 3m 3117 SV 00218642 VERTICAL RFR:1000.000KHz YBR:3.600KHz SMT:Auto

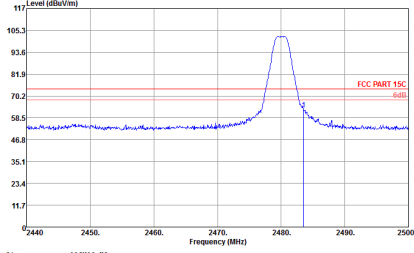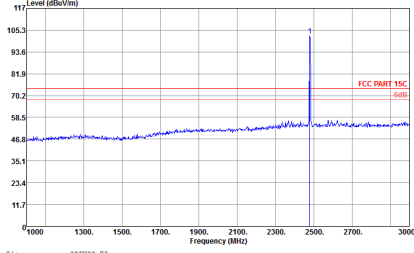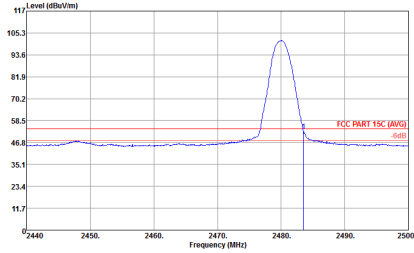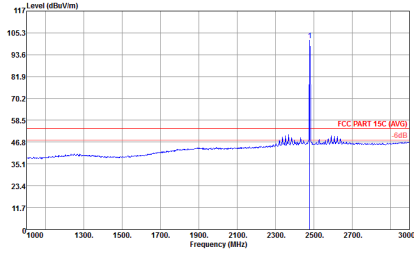

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Fundamental
Peak	 Site : 03C906-ES Condition : FCC PART 15C 3m 3117 SV 00218642 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SFT:Auto	 Site : 03C906-ES Condition : FCC PART 15C 3m 3117 SV 00218642 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SFT:Auto
Avg.	 Site : 03C906-ES Condition : FCC PART 15C (AUG) 3m 3117 SV 00218642 HORIZONTAL RBW:1000.000KHz VBW:3.600KHz SFT:Auto	 Site : 03C906-ES Condition : FCC PART 15C (AUG) 3m 3117 SV 00218642 HORIZONTAL RBW:1000.000KHz VBW:3.600KHz SFT:Auto

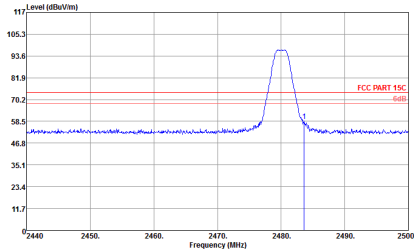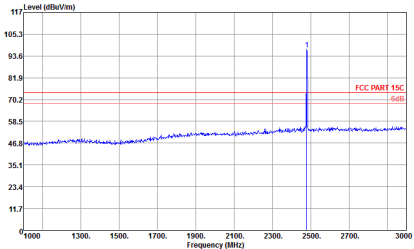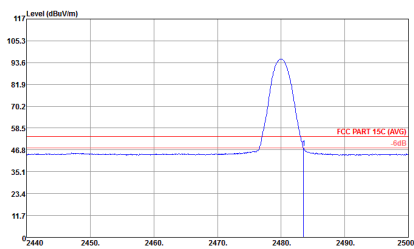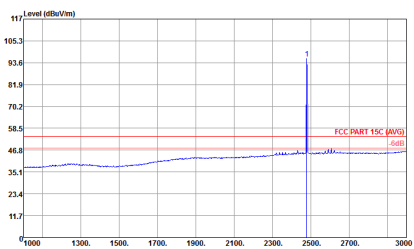

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Vertical	Fundamental
Peak	 Site : 03C906-ES Condition : FCC PART 15C 3m 3117 SV 00218642 VERTICAL REF:1000.000KHz YBR:3000.000KHz SWT:Auto	 Site : 03C906-ES Condition : FCC PART 15C 3m 3117 SV 00218642 VERTICAL REF:1000.000KHz YBR:3000.000KHz SWT:Auto
Avg.	 Site : 03C906-ES Condition : FCC PART 15C (AVG) 3m 3117 SV 00218642 VERTICAL REF:1000.000KHz YBR:3.600KHz SWT:Auto	 Site : 03C906-ES Condition : FCC PART 15C (AVG) 3m 3117 SV 00218642 VERTICAL REF:1000.000KHz YBR:3.600KHz SWT:Auto



2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
Peak	Site : 02C906-ES Condition : FCC PART 15C 3e 3117 SV 00218642 HORIZONTAL RBW:1000.000Hz YBR:3000.000Hz SFT:Auto	Site : 02C906-ES Condition : FCC PART 15C 3e 3117 SV 00218642 VERTICAL RBW:1000.000Hz YBR:3000.000Hz SFT:Auto



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
1	Horizontal	Vertical
Peak	Site : 002806-ES Condition : FCC PART 15C 3m 3117 SV 00218642 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SFT:Auto	Site : 002806-ES Condition : FCC PART 15C 3m 3117 SV 00218642 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SFT:Auto

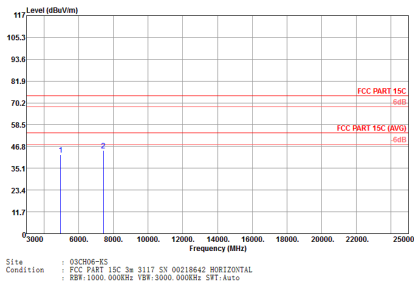
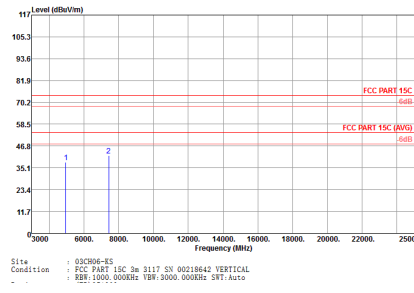


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak		



Emission below 1GHz


2.4GHz BLE (LF)

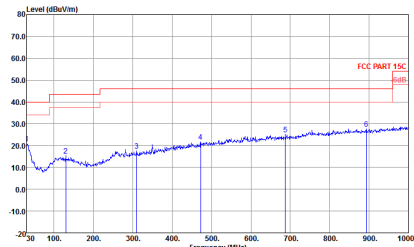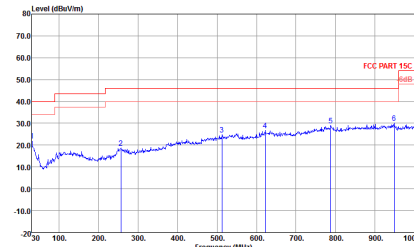BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE LF	
1	Horizontal	Vertical
Peak	 Site : 02CH02-ES Condition : FCC PART 15C 3e LF CBL6112D SN:35406 HORIZONTAL RBW:100.000Hz VBW:300.000Hz SWT:Auto	 Site : 02CH02-ES Condition : FCC PART 15C 3e LF CBL6112D SN:35406 VERTICAL RBW:100.000Hz VBW:300.000Hz SWT:Auto

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE v5.0 (1Mbps)	56.32	0.355	2.816	3.0KHz
Bluetooth LE v5.0 (2Mbps)	30.23	0.188	5.308	5.6KHz

Bluetooth LE v5.0 (1Mbps)

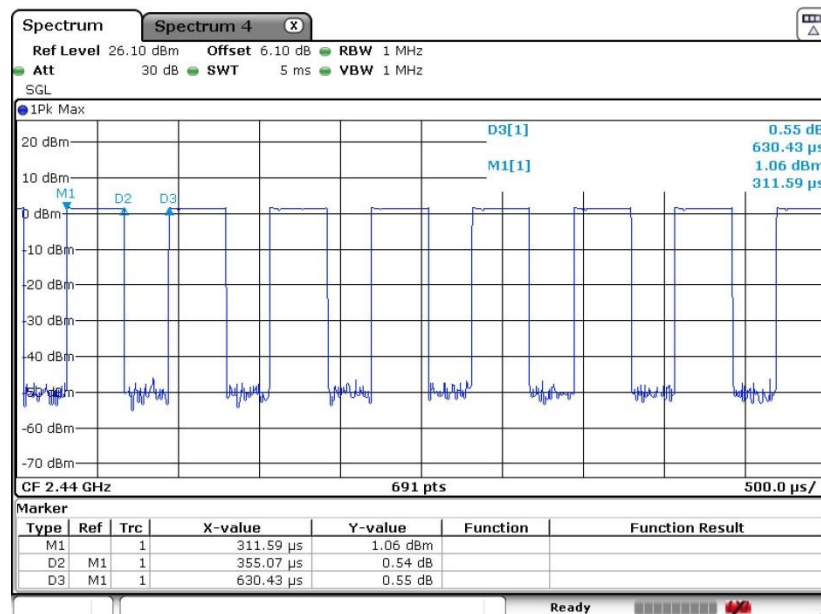

Bluetooth LE v5.0 (2Mbps)

