



MEASUREMENT REPORT

FCC PART 15.247 WLAN 802.11b/g/n/ax

Report No.: S20241118761701E06

Issue Date: **xx-xx-2025**

Applicant: Wallys Communications Technologies Co.,Ltd
Address: Room 2723,Le Jia building,Jia Rui Xiang No.8, Suzhou
Industrial Park, Suzhou, P.R
FCC ID: 2AG7VDR5018S
Product: Wireless Router Module
Model No.: DR5018S, DR5018S-DB, DR5018S-5G
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (15.247)
Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v05r02
Result: Pass
Receipt date: Nov 21, 2024
Test Date: Nov 26 2024 ~ Jan 07, 2025

Compiled By

K_主检”、“K_审核”、“K_批准

(Stone Zhang)
Senior Test Engineer

Approved By

(Line Chen)
Engineer Manager

The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of Fanguang Inspection & Testing Co., Ltd. Wuxi Branch

The test report must not be used by the client to claim product certifications, approval, or endorsement by NVLAP, NIST or any agency of U.S. Government.

Revision History

Report No.	Version	Description	Issue Date
S20241118761701E06	Rev. 01	/	xx-xx-2025

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. Fangguang Test Location	6
2. PRODUCT INFORMATION	6
2.1. Equipment Description	7
2.2. Product Specification Subjective to this Report	7
2.3. Operation Frequency / Channel List	8
2.4. Description of Available Antennas	8
2.5. Device Capabilities	9
2.6. Description of Test Software	48
2.7. Test Mode	48
2.8. Test Configuration	48
2.9. EMI Suppression Device(s)/Modifications	49
2.10. Labeling Requirements	49
3. DESCRIPTION OF TEST	50
3.1. Evaluation Procedure	50
3.2. AC Line Conducted Emissions	50
3.3. Radiated Emissions	51
4. ANTENNA REQUIREMENTS	52
5. TEST EQUIPMENT CALIBRATION DATE	53
6. MEASUREMENT UNCERTAINTY	54
7. TEST RESULT	55
7.1. Summary	55
7.2. 6dB Bandwidth Measurement	56
7.2.1. Test Limit	56
7.2.2. Test Procedure used	56
7.2.3. Test Setting	56
7.2.4. Test Setup	56
7.2.5. Test Result	57
7.3. Output Power Measurement	132
7.3.1. Test Limit	132

7.3.2.	Test Procedure Used	132
7.3.3.	Test Setting	132
7.3.4.	Test Setup	133
7.3.5.	Test Result of Output Power	134
7.4.	Power Spectral Density Measurement	175
7.4.1.	Test Limit	175
7.4.2.	Test Procedure Used	175
7.4.3.	Test Setting	175
7.4.4.	Test Setup	176
7.4.5.	Test Result	177
7.5.	Conducted Band Edge and Out-of-Band Emissions	216
7.5.1.	Test Limit	216
7.5.2.	Test Procedure Used	216
7.5.3.	Test Setting	216
7.5.4.	Test Setup	216
7.5.5.	Test Result	217
7.6.	Radiated Spurious Emission Measurement	357
7.6.1.	Test Limit	357
7.6.2.	Test Procedure Used	357
7.6.3.	Test Setting	357
7.6.4.	Test Setup	359
7.6.5.	Test Result	361
7.7.	Restricted Band Edge Measurement	399
7.7.1.	Test Limit	399
7.7.2.	Test Procedure Used	400
7.7.3.	Test Setting	400
7.7.4.	Test Setup	401
7.7.5.	Test Result	403
7.8.	AC Conducted Emissions Measurement	534
7.8.1.	Test Limit	534
7.8.2.	Test Setup	534
7.8.3.	Test Result	534
8.	CONCLUSION	535

§2.1033 General Information

Applicant:	Wallys Communications Technologies Co.,Ltd
Applicant Address:	Room 2723,Le Jia building,Jia Rui Xiang No.8, Suzhou Industrial Park, Suzhou, P.R
Manufacturer:	Wallys Communications Technologies Co.,Ltd
Manufacturer Address:	Room 2723,Le Jia building,Jia Rui Xiang No.8, Suzhou Industrial Park, Suzhou, P.R
Test Site:	Fanguang Inspection & Testing Co. Ltd
LAB ID:	CN5037
Test Site Address:	No.8 Ningyun Rd., Xinwu District Wuxi, Jiangsu 214000 China
FCC Rule Part(s):	Part 15 Subpart C (15.247)
FCC ID:	2AG7VDR5018S
Test Device Serial No.:	S/N.: / ☐ Production ☒ Pre-Production ☐ Engineering
FCC Classification:	Digital Transmission System (DTS)

1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2. Fangguang Test Location

These measurement tests were performed at the Fangguang Inspection and testing Co.,LTD located at No.8 Ningyun Rd., Xinwu District Wuxi, Jiangsu 214000 China. The detailed description of the measurement facility was found to be in compliance with the requirements of ANSI C63.4-2014.

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	Wireless Router Module			
Model Name:	DR5018S			
Additional Model:	DR5018S-DB, DR5018S-5G			
Model Description:		P/N	Radio	Frequency
	1	DR5018S-5G	5Ghz	1G Ethernet & POE
	2	DR5018S	2.4Ghz 5Ghz	2.5G+1G Ethernet & POE
	3	DR5018S-DB	2.4Ghz 5Ghz	1G Ethernet & POE
	DR5018S-5G has 5G radio and 1x1G ethernet port and support PD feature DR5018S has 2.4G,5G radio and 1x2.5G+1x1G ethernet ports and all support PD feature DR5018S-DB has 2.4G,5G radio and 1x1G ethernet port and support PD feature			
Trade Mark:	/			
Input Voltage Range:	DC 48V			
Wi-Fi Specification:	802.11b/g/n-HT20/ax-HE20/n-HT40/ax-HE40			

Note:

1. There are two types of antennas for the Wireless Router Module. The antennas are DRA25 and DRA2G5G5D-A-B.
2. This information is provided by the Customer and its authenticity is the responsibility of the Customer.

2.2. Product Specification Subjective to this Report

Frequency Range:	802.11b/g/n-HT20/ax-HE20: 2412 ~ 2462MHz 802.11n-HT40/ax-HE40:2422 ~ 2452MHz
Channel Number:	802.11b/g/n-HT20/ax-HE20: 11 802.11n-HT40/ax-HE40: 7
Type of Modulation:	802.11b: DSSS 802.11g/n: OFDM 802.11ax: OFDMA
Data Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: MCS0~MCS7 802.11ax: MCS0~MCS11
Antenna Type:	Dipole Antenna
Antenna Gain:	DRA25 Antenna: Ant1 4.9dBi, Ant2 4.9dBi DRA2G5G5D-A-B: Ant1 4.2dBi, Ant2 4.2dBi

Note:

1. The maximum Antenna Gain was declared by the manufacturer.
2. For other features of this EUT, test report will be issued separately.

2.3. Operation Frequency / Channel List

802.11b/g/n-HT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

EUT was tested with Channel 1, 6 and 11.

802.11n-HT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

EUT was tested with Channel 3, 6 and 9.

2.4. Description of Available Antennas

1) For Antenna DRA25

Antenna	Frequency Band (GHz)	Product Number	Tx Paths	Antenna
FPC dipole	2.4	WiFi module	2	Ant 1+Ant 2

Antenna	Frequency Band (MHz)	Tx Paths	Per Chain Max Antenna Gain (dBi)		Beam Forming Directional Gain (dBi)	Directional Gain (dBi)
			Ant 0	Ant 1		
WIFI Ant 1+Ant 2	2412 ~2462	2	4.90	4.90	Nonsupport	7.91

2) For Antenna DRA2G5G5D-A-B

Antenna	Frequency Band (GHz)	Product Number	Tx Paths	Antenna
FPC dipole	2.4	WiFi module	2	Ant 1+Ant 2

Antenna	Frequency Band (MHz)	Tx Paths	Per Chain Max Antenna Gain (dBi)		Beam Forming Directional Gain (dBi)	Directional Gain (dBi)
			Ant 0	Ant 1		
WIFI Ant 1+Ant 2	2412 ~2462	2	4.20	4.20	Nonsupport	7.21

Note:

Unequal Antenna gains, with equal transmit powers. For Antenna gains given by $G_1, G_2, \dots, G_N$ dBi transmit signals are correlated, then

- Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi [Note the “20”s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]
- Directional Gain(2.4G) = $10 \cdot \log[(10^{4.9/20} + 10^{4.9/20})^2 / 2] = 7.91$ dBi
- Directional Gain(2.4G) = $10 \cdot \log[(10^{4.2/20} + 10^{4.2/20})^2 / 2] = 7.21$ dBi

2.5. Device Capabilities

This device contains the following capabilities: 2.4GHz WLAN (DTS)&5GHz WLAN (UNII).

Note: 2.4GHz WLAN (DTS) operation is possible in 20MHz/40MHz channel bandwidths. The maximum achievable duty cycle was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 8MHz. The RBW and VBW were both greater than $50/T$, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles:

Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2412	19.00	19.00	100.00
	Ant2	2412	19.00	19.00	100.00
	Ant1	2437	19.00	19.00	100.00
	Ant2	2437	19.00	19.00	100.00
	Ant1	2462	19.00	19.00	100.00
	Ant2	2462	19.00	19.00	100.00
11G	Ant1	2412	2.10	2.12	99.06
	Ant2	2412	2.10	2.12	99.06
	Ant1	2437	2.10	2.11	99.53
	Ant2	2437	2.09	2.11	99.05
	Ant1	2462	2.10	2.12	99.06
	Ant2	2462	2.10	2.11	99.53

11N20SISO	Ant1	2412	5.43	5.45	99.63
	Ant2	2412	5.43	5.45	99.63
	Ant1	2437	5.43	5.45	99.63
	Ant2	2437	5.43	5.45	99.63
	Ant1	2462	19.00	19.00	100.00
	Ant2	2462	5.43	5.45	99.63
11N40SISO	Ant1	2422	5.43	5.45	99.63
	Ant2	2422	19.00	19.00	100.00
	Ant1	2437	5.43	5.45	99.63
	Ant2	2437	5.43	5.45	99.63
	Ant1	2452	5.43	5.45	99.63
	Ant2	2452	5.42	5.45	99.45
11AX20SISO	Ant1	2412	5.45	5.47	99.63
	Ant2	2412	5.44	5.46	99.63
	Ant1	2437	5.45	5.47	99.63
	Ant2	2437	5.45	5.47	99.63
	Ant1	2462	5.44	5.46	99.63
	Ant2	2462	5.44	5.46	99.63
11AX40SISO	Ant1	2422	5.44	5.46	99.63
	Ant2	2422	19.00	19.00	100.00
	Ant1	2437	5.45	5.47	99.63
	Ant2	2437	5.44	5.46	99.63
	Ant1	2452	19.00	19.00	100.00
	Ant2	2452	19.00	19.00	100.00
11B-CDD	Ant1	2412	19.00	19.00	100.00
	Ant2	2412	19.00	19.00	100.00
	Ant1	2437	19.00	19.00	100.00
	Ant2	2437	19.00	19.00	100.00
	Ant1	2462	19.00	19.00	100.00
	Ant2	2462	19.00	19.00	100.00
11G-CDD	Ant1	2412	2.10	2.11	99.53
	Ant2	2412	2.10	2.11	99.53
	Ant1	2437	2.09	2.11	99.05
	Ant2	2437	2.10	2.11	99.53
	Ant1	2462	2.09	2.11	99.05
	Ant2	2462	2.09	2.11	99.05

11N20MIMO	Ant1	2412	5.43	5.44	99.82
	Ant2	2412	19.00	19.00	100.00
	Ant1	2437	5.42	5.44	99.63
	Ant2	2437	5.43	5.44	99.82
	Ant1	2462	17.00	17.00	100.00
	Ant2	2462	5.42	5.44	99.63
11N40MIMO	Ant1	2422	19.00	19.00	100.00
	Ant2	2422	5.43	5.44	99.82
	Ant1	2437	5.43	5.44	99.82
	Ant2	2437	5.43	5.45	99.63
	Ant1	2452	5.43	5.44	99.82
	Ant2	2452	5.43	5.44	99.82
11AX20MIMO	Ant1	2412	5.44	5.46	99.63
	Ant2	2412	19.00	19.00	100.00
	Ant1	2437	19.00	19.00	100.00
	Ant2	2437	5.44	5.46	99.63
	Ant1	2462	5.45	5.46	99.82
	Ant2	2462	5.44	5.45	99.82
11AX40MIMO	Ant1	2422	5.45	5.47	99.63
	Ant2	2422	19.00	19.00	100.00
	Ant1	2437	5.44	5.46	99.63
	Ant2	2437	19.00	19.00	100.00
	Ant1	2452	5.43	5.46	99.45
	Ant2	2452	5.44	5.46	99.63

Test Graphs

11B_Ant1_2412



11B_Ant2_2412



11B_Ant1_2437



11B_Ant2_2437



11B_Ant1_2462



11B_Ant2_2462



11G_Ant1_2412



11G_Ant2_2412



11G_Ant1_2437



11G_Ant2_2437



11G_Ant1_2462



11G_Ant2_2462



11N20SISO_Ant1_2412



11N20SISO_Ant2_2412



11N20SISO_Ant1_2437



11N20SISO_Ant2_2437



11N20SISO_Ant1_2462



11N20SISO_Ant2_2462



11N40SISO_Ant1_2422



11N40SISO_Ant2_2422



11N40SISO_Ant1_2437



11N40SISO_Ant2_2437



11N40SISO_Ant1_2452



11N40SISO_Ant2_2452



11AX20SISO_Ant1_2412



11AX20SISO_Ant2_2412



11AX20SISO_Ant1_2437



11AX20SISO_Ant2_2437



11AX20SISO_Ant1_2462



11AX20SISO Ant2 2462



11AX40SISO_Ant1_2422



11AX40SISO_Ant2_2422



11AX40SISO_Ant1_2437



11AX40SISO_Ant2_2437



11AX40SISO_Ant1_2452



11AX40SISO_Ant2_2452



11B-CDD_Ant1_2412



11B-CDD_Ant2_2412



11B-CDD_Ant1_2437



11B-CDD_Ant2_2437



11B-CDD_Ant1_2462



11B-CDD_Ant2_2462



11G-CDD_Ant1_2412



11G-CDD_Ant2_2412



11G-CDD_Ant1_2437



11G-CDD_Ant2_2437



11G-CDD_Ant1_2462



11G-CDD_Ant2_2462



11N20MIMO_Ant1_2412



11N20MIMO_Ant2_2412



11N20MIMO_Ant1_2437



11N20MIMO_Ant2_2437



11N20MIMO_Ant1_2462



11N20MIMO_Ant2_2462



11N40MIMO_Ant1_2422



11N40MIMO_Ant2_2422



11N40MIMO_Ant1_2437



11N40MIMO_Ant2_2437



11N40MIMO_Ant1_2452



11N40MIMO_Ant2_2452



11AX20MIMO_Ant1_2412



11AX20MIMO_Ant2_2412



11AX20MIMO_Ant1_2437



11AX20MIMO_Ant2_2437



11AX20MIMO_Ant1_2462



11AX20MIMO_Ant2_2462



11AX40MIMO_Ant1_2422



11AX40MIMO_Ant2_2422



11AX40MIMO_Ant1_2437



11AX40MIMO_Ant2_2437



11AX40MIMO_Ant1_2452



11AX40MIMO_Ant2_2452



2.6. Description of Test Software

The test utility software used during testing was "Putty.exe", Power Parameter Value:

Test Mode	Ant 1	Ant 2	CDD/MIMO
802.11b	17	17	15
802.11g	17	17	14
802.11n-HT20	17	17	14
802.11n-HT40	17	17	14
802.11ax-HE20	17	17	14
802.11ax-HE40	17	17	14

2.7. Test Mode

The EUT not support partial RU's and channel puncturing mode.

Test Mode
Mode 1: Transmit by 802.11b Antenna1
Mode 2: Transmit by 802.11g Antenna1
Mode 3: Transmit by 802.11n-HT20 Antenna1
Mode 4: Transmit by 802.11n-HT40 Antenna1
Mode 5: Transmit by 802.11ax-HE20 Antenna1
Mode 6: Transmit by 802.11ax-HE40 Antenna1
Mode 7: Transmit by 802.11b Antenna2
Mode 8: Transmit by 802.11g Antenna2
Mode 9: Transmit by 802.11n-HT20 Antenna2
Mode 10: Transmit by 802.11n-HT40 Antenna2
Mode 11: Transmit by 802.11ax-HE20 Antenna2
Mode 12: Transmit by 802.11ax-HE40 Antenna2
Mode 13: Transmit by 802.11b-CDD
Mode 14: Transmit by 802.11g-CDD
Mode 15: Transmit by 802.11n-HT20 MIMO
Mode 16: Transmit by 802.11n-HT40 MIMO
Mode 17: Transmit by 802.11ax-HE20 MIMO
Mode 18: Transmit by 802.11ax-HE40 MIMO

2.8. Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted

testing.

2.9. EUT Photo

The EUT external photo, internal photo and test setup photo, please refer to the plots in the S20241118761701-A1/A2/A3.

2.10. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.11. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. The turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- Use a unique coupling to the intentional radiator.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	FWXGJC-2016-181	1 year	2025/03/07
Two-Line V-Network	R&S	ENV 216	FWXGJC-2016-182	1 year	2025/04/28
Thermohygrometer	Yuhuaze	HTC-1	FWXDA-2016-385	1 year	2025/09/03

Radiated Emission

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Loop Antenna	Schwarzbeck	FMZB 1519B	FWXGJC-2018-015	1 year	2025/03/16
Bi-Log Antenna	R&S	HL562E	FWXGJC-2016-267-06	1 year	2025/07/26
Broadband Horn Antenna	R&S	HF907	FWXGJC-2016-267-07	1 year	2025/03/01
Broadband Horn Antenna	Schwarzbeck	BBHA9170	FWXGJC-2018-016	1 year	2025/07/26
EMI Receiver	R&S	ESR26	FWXGJC-2016-267-01	1 year	2025/07/26
Pre-Amplifier	R&S	SCU-18D	FWXGJC-2016-267-05	1 year	2025/07/23
Pre-Amplifier	R&S	EMC184055SE	FWXGJC-2018-018	1 year	2025/04/13
Thermohygrometer	Yuhuaze	HTC-1	FWXDA-2016-386	1 year	2025/09/03
Anechoic Chamber	Aimuke	EMCCT-3	FWXGJC-2016-270	3 year	2026/04/05

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Keysight	N9010B	FWXGJC-2018-010	1 year	2025/03/02
RF Control Unit	Tonscend	JS0806-2	FWXGJC-2018-013	1 year	2025/05/19
Thermohygrometer	Yuhuaze	HTC-1	FWXDA-2016-385	1 year	2025/09/03

Test Software	Manufacturer	Version	Asset No.	Function
EMI Test Software	tonscend	V3.3.10	/	/
JS32	tonscend	V2.5.2.4	/	/

Auxiliary Equipment

Instrument	Manufacturer	Type No.	Asset No.	Function
Filter	Tonscend	ZBSF6	07247867	/
Filter	Tonscend	ZHPF6	07233297	/
Attenuator	Tonscend	10dB	/	/
RF Cable	Tonscend	T-1	/	/

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.68dB
Radiated Emission Measurement (Below 1GHz)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 4.01dB
Radiated Emission Measurement (1-18GHz)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 4.97dB
Radiated Emission Measurement (Above 18-40GHz)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 5.32dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 30MHz-1GHz: 1.00 dB 1GHz-12.75GHz: 1.30 dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.60dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.80dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.20MHz
Frequency Stability
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.1×10^{-6} MHz

7. TEST RESULT

7.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Band Edge	$\geq 30\text{dBc}$		Pass	Section 7.5
15.247(d)	Out-of-Band Emissions	$\geq 30\text{dBc}$		Pass	Section 7.6
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS GEN [8.9])	Radiated	Pass	Section 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits (RSS GEN [8.8])	Line Conducted	Not Applicable	Section 7.8

Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.2.2. Test Procedure used


ANSI C63.10-2013 Section 11.8.2 Option 1

KDB 558074 D01 v05r02 – Section 8.2

7.2.3. Test Setting

1. Set RBW = 100 kHz
2. VBW $\geq 3 \times$ RBW
3. Detector = peak
4. Trace mode = max hold
5. Sweep = auto couple
6. Allow the trace was allowed to stabilize
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.2.4. Test Setup

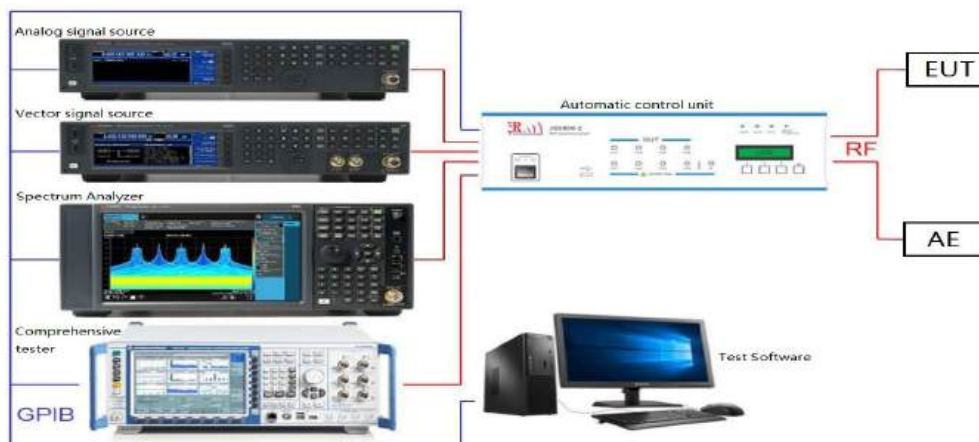

7.2.5. Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	99%BW	Verdict
11B	Ant1	2412	7.560	2408.440	2416.000	0.5	12.927	PASS
	Ant2	2412	7.760	2408.240	2416.000	0.5	12.985	PASS
	Ant1	2437	8.040	2433.000	2441.040	0.5	12.950	PASS
	Ant2	2437	7.760	2433.280	2441.040	0.5	12.992	PASS
	Ant1	2462	7.120	2458.440	2465.560	0.5	12.971	PASS
	Ant2	2462	8.040	2457.960	2466.000	0.5	12.982	PASS
11G	Ant1	2412	15.080	2404.480	2419.560	0.5	16.253	PASS
	Ant2	2412	15.040	2404.480	2419.520	0.5	16.272	PASS
	Ant1	2437	15.040	2429.480	2444.520	0.5	16.246	PASS
	Ant2	2437	15.040	2429.480	2444.520	0.5	16.248	PASS
	Ant1	2462	13.840	2455.680	2469.520	0.5	16.245	PASS
	Ant2	2462	13.800	2455.720	2469.520	0.5	16.262	PASS
11N20SISO	Ant1	2412	12.280	2407.280	2419.560	0.5	17.405	PASS
	Ant2	2412	14.920	2404.600	2419.520	0.5	17.451	PASS
	Ant1	2437	14.960	2429.520	2444.480	0.5	17.405	PASS
	Ant2	2437	15.040	2429.480	2444.520	0.5	17.407	PASS
	Ant1	2462	15.320	2454.200	2469.520	0.5	17.404	PASS
	Ant2	2462	15.080	2454.480	2469.560	0.5	17.392	PASS
11N40SISO	Ant1	2422	34.960	2404.560	2439.520	0.5	35.669	PASS
	Ant2	2422	35.040	2404.480	2439.520	0.5	35.651	PASS
	Ant1	2437	28.800	2421.960	2450.760	0.5	35.566	PASS
	Ant2	2437	32.560	2419.480	2452.040	0.5	35.588	PASS
	Ant1	2452	30.000	2436.960	2466.960	0.5	35.601	PASS
	Ant2	2452	26.000	2439.760	2465.760	0.5	35.609	PASS
11AX20SISO	Ant1	2412	12.920	2404.560	2417.480	0.5	18.706	PASS
	Ant2	2412	13.800	2404.440	2418.240	0.5	18.676	PASS
	Ant1	2437	11.320	2431.960	2443.280	0.5	18.680	PASS
	Ant2	2437	15.560	2429.160	2444.720	0.5	18.705	PASS
	Ant1	2462	15.480	2454.080	2469.560	0.5	18.680	PASS
	Ant2	2462	15.000	2454.480	2469.480	0.5	18.714	PASS
11AX40SISO	Ant1	2422	30.400	2405.760	2436.160	0.5	37.261	PASS
	Ant2	2422	31.360	2406.960	2438.320	0.5	37.315	PASS

	Ant1	2437	31.280	2421.960	2453.240	0.5	37.342	PASS
	Ant2	2437	31.280	2423.240	2454.520	0.5	37.365	PASS
	Ant1	2452	32.560	2435.680	2468.240	0.5	37.236	PASS
	Ant2	2452	32.560	2434.480	2467.040	0.5	37.265	PASS
11B-CDD	Ant1	2412	7.120	2408.440	2415.560	0.5	13.071	PASS
	Ant2	2412	7.560	2408.000	2415.560	0.5	13.037	PASS
	Ant1	2437	7.560	2433.440	2441.000	0.5	13.040	PASS
	Ant2	2437	7.600	2433.400	2441.000	0.5	13.009	PASS
	Ant1	2462	7.560	2458.440	2466.000	0.5	13.012	PASS
	Ant2	2462	8.080	2457.960	2466.040	0.5	12.986	PASS
11G-CDD	Ant1	2412	14.960	2404.520	2419.480	0.5	16.216	PASS
	Ant2	2412	15.040	2404.480	2419.520	0.5	16.255	PASS
	Ant1	2437	15.000	2429.520	2444.520	0.5	16.236	PASS
	Ant2	2437	15.040	2429.480	2444.520	0.5	16.243	PASS
	Ant1	2462	15.040	2454.520	2469.560	0.5	16.256	PASS
	Ant2	2462	12.920	2454.480	2467.400	0.5	16.244	PASS
11N20MIMO	Ant1	2412	13.760	2404.520	2418.280	0.5	17.392	PASS
	Ant2	2412	13.720	2405.760	2419.480	0.5	17.416	PASS
	Ant1	2437	11.280	2430.720	2442.000	0.5	17.368	PASS
	Ant2	2437	10.120	2433.200	2443.320	0.5	17.393	PASS
	Ant1	2462	15.080	2454.480	2469.560	0.5	17.398	PASS
	Ant2	2462	15.000	2454.520	2469.520	0.5	17.399	PASS
11N40MIMO	Ant1	2422	32.560	2404.480	2437.040	0.5	35.678	PASS
	Ant2	2422	33.760	2404.480	2438.240	0.5	35.672	PASS
	Ant1	2437	20.160	2425.640	2445.800	0.5	35.587	PASS
	Ant2	2437	34.960	2419.560	2454.520	0.5	35.623	PASS
	Ant1	2452	30.080	2436.960	2467.040	0.5	35.576	PASS
	Ant2	2452	29.360	2435.760	2465.120	0.5	35.584	PASS
11AX20MIMO	Ant1	2412	11.320	2406.960	2418.280	0.5	18.730	PASS
	Ant2	2412	12.520	2404.520	2417.040	0.5	18.686	PASS
	Ant1	2437	8.840	2431.960	2440.800	0.5	18.705	PASS
	Ant2	2437	15.000	2429.520	2444.520	0.5	18.686	PASS
	Ant1	2462	13.840	2454.480	2468.320	0.5	18.693	PASS
	Ant2	2462	15.040	2454.480	2469.520	0.5	18.649	PASS
11AX40MIMO	Ant1	2422	32.160	2404.480	2436.640	0.5	37.332	PASS
	Ant2	2422	30.000	2405.760	2435.760	0.5	37.401	PASS

	Ant1	2437	32.400	2419.560	2451.960	0.5	37.290	PASS
	Ant2	2437	31.280	2419.480	2450.760	0.5	37.285	PASS
	Ant1	2452	29.200	2436.560	2465.760	0.5	37.211	PASS
	Ant2	2452	31.760	2437.760	2469.520	0.5	37.197	PASS

Test Graphs of 6dB Bandwidth

11B_Ant1_2412



11B_Ant2_2412



11B_Ant1_2437



11B_Ant2_2437



11B_Ant1_2462



11B_Ant2_2462



11G_Ant1_2412



11G_Ant2_2412



11G_Ant1_2437



11G_Ant2_2437



11G_Ant1_2462



11G_Ant2_2462



11N20SISO_Ant1_2412



11N20SISO_Ant2_2412



11N20SISO_Ant1_2437



11N20SISO_Ant2_2437



11N20SISO_Ant1_2462



11N20SISO_Ant2_2462



11N40SISO_Ant1_2422



11N40SISO_Ant2_2422



11N40SISO_Ant1_2437



11N40SISO_Ant2_2437



11N40SISO_Ant1_2452



11N40SISO_Ant2_2452



11AX20SISO_Ant1_2412



11AX20SISO_Ant2_2412



11AX20SISO_Ant1_2437



11AX20SISO_Ant2_2437



11AX20SISO_Ant1_2462



11AX20SISO_Ant2_2462



11AX40SISO_Ant1_2422



11AX40SISO_Ant2_2422



11AX40SISO_Ant1_2437



11AX40SISO_Ant2_2437



11AX40SISO_Ant1_2452



11AX40SISO_Ant2_2452



11B-CDD_Ant1_2412



11B-CDD_Ant2_2412



11B-CDD_Ant1_2437



11B-CDD_Ant2_2437



11B-CDD_Ant1_2462



11B-CDD_Ant2_2462



11G-CDD_Ant1_2412



11G-CDD_Ant2_2412



11G-CDD_Ant1_2437



11G-CDD_Ant2_2437



11G-CDD_Ant1_2462



11G-CDD_Ant2_2462



11N20MIMO_Ant1_2412



11N20MIMO_Ant2_2412



11N20MIMO_Ant1_2437



11N20MIMO_Ant2_2437



11N20MIMO_Ant1_2462



11N20MIMO_Ant2_2462



11N40MIMO_Ant1_2422



11N40MIMO_Ant2_2422



11N40MIMO_Ant1_2437



11N40MIMO_Ant2_2437



11N40MIMO_Ant1_2452



11N40MIMO_Ant2_2452



11AX20MIMO_Ant1_2412



11AX20MIMO_Ant2_2412



11AX20MIMO_Ant1_2437



11AX20MIMO_Ant2_2437



11AX20MIMO_Ant1_2462



11AX20MIMO_Ant2_2462



11AX40MIMO_Ant1_2422



11AX40MIMO_Ant2_2422



11AX40MIMO_Ant1_2437



11AX40MIMO_Ant2_2437



11AX40MIMO_Ant1_2452



11AX40MIMO_Ant2_2452



Test Graphs of Occupied Channel Bandwidth

11B_Ant1_2412




11B_Ant2_2412




11B_Ant1_2437




11B_Ant2_2437

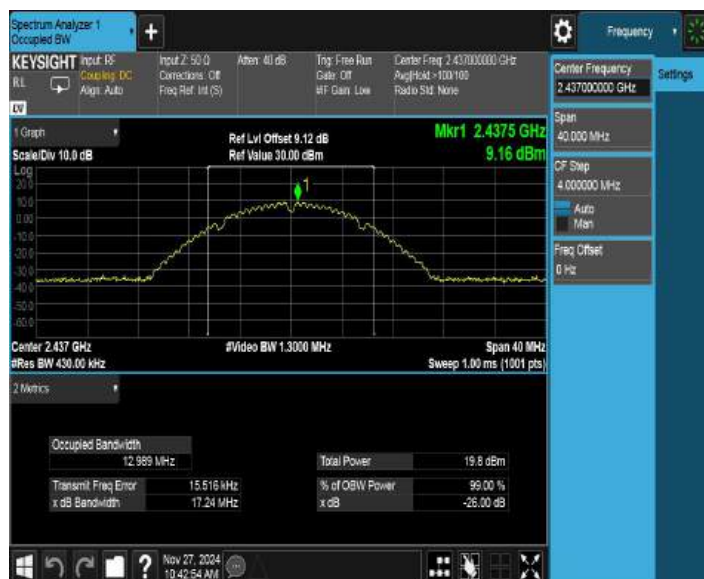


11B_Ant1_2462

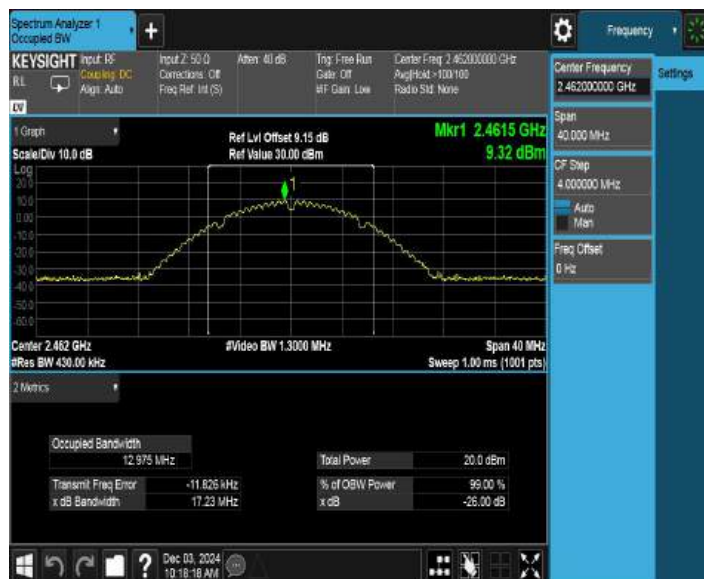

11B_Ant2_2462

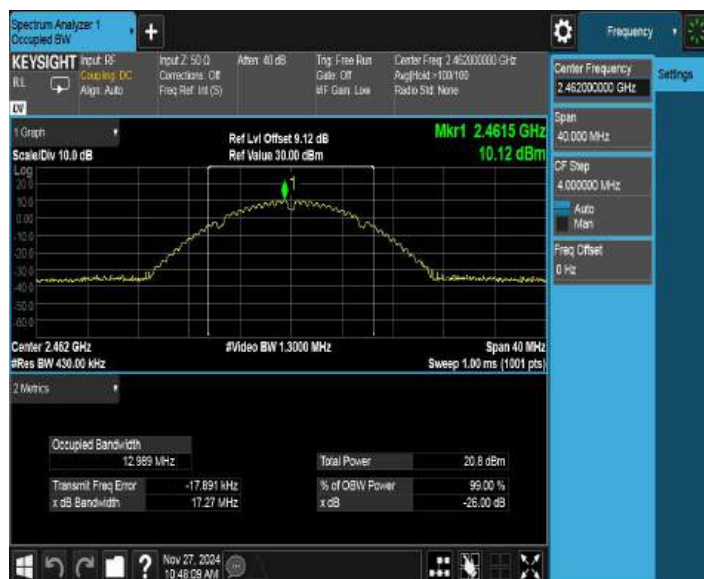


11G_Ant1_2412

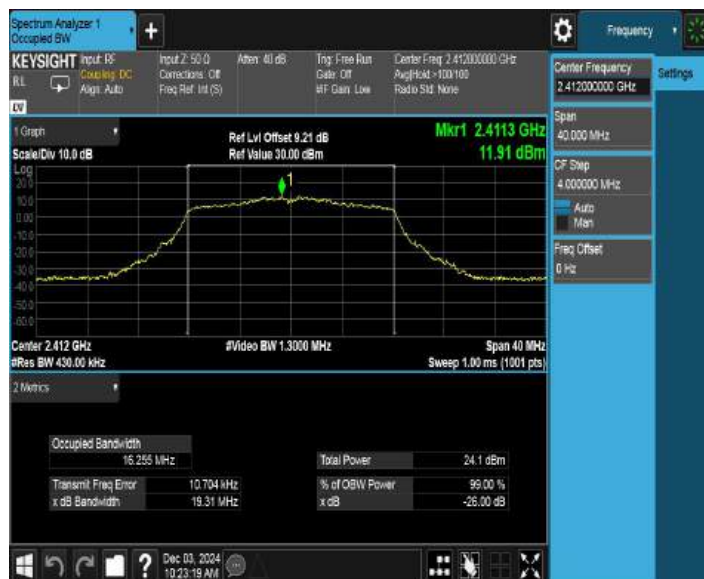


11G_Ant2_2412



11G_Ant1_2437

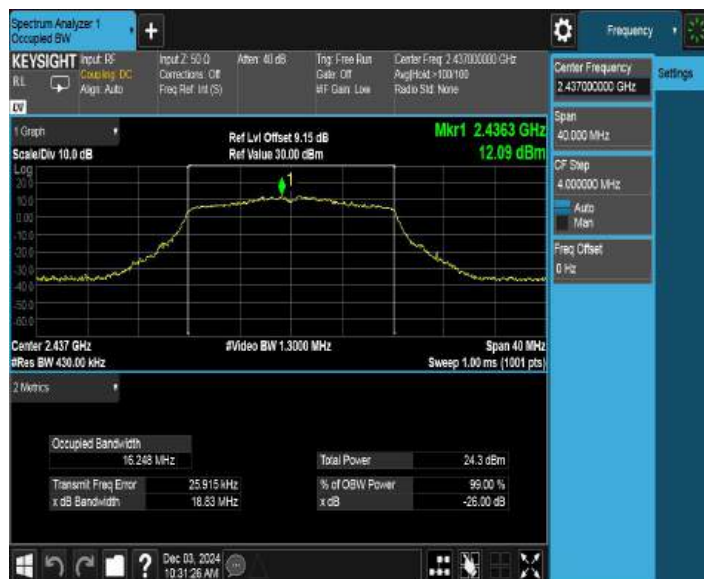

11G_Ant2_2437

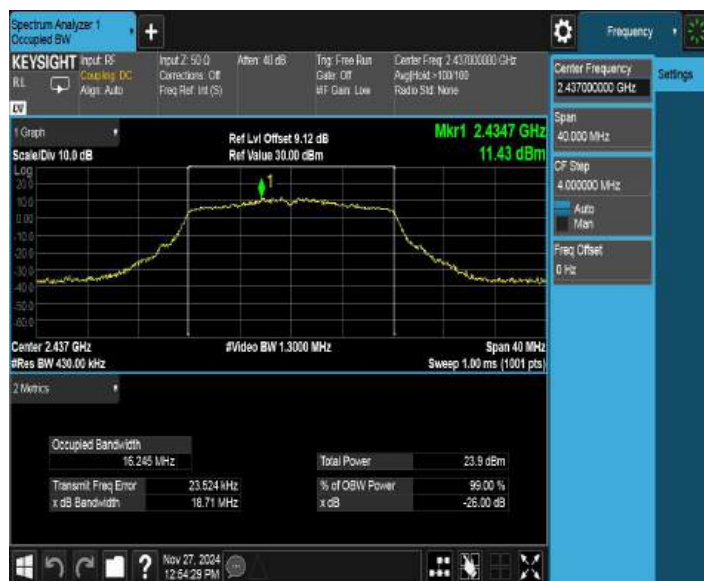

11G_Ant1_2462



11G_Ant2_2462



11N20SISO_Ant1_2412



11N20SISO_Ant2_2412



11N20SISO_Ant1_2437




11N20SISO_Ant2_2437



11N20SISO_Ant1_2462



11N20SISO_Ant2_2462

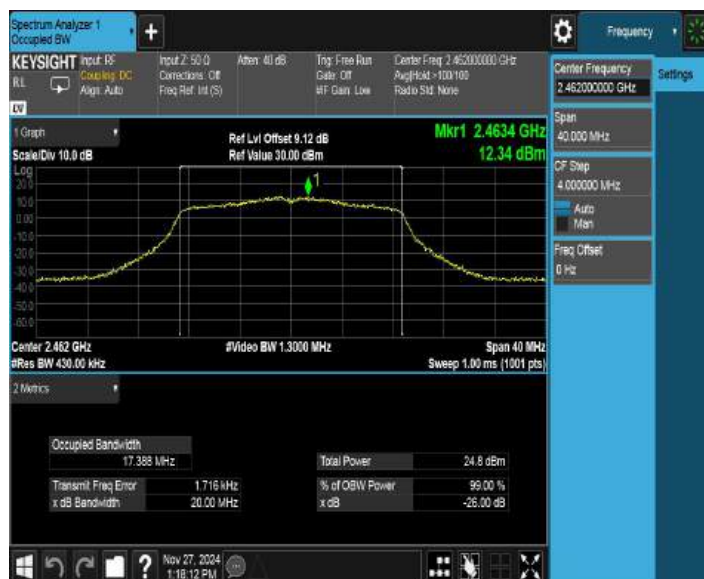

11N40SISO_Ant1_2422



11N40SISO_Ant2_2422



11N40SISO_Ant1_2437



11N40SISO_Ant2_2437



11N40SISO_Ant1_2452



11N40SISO_Ant2_2452



11AX20SISO_Ant1_2412



11AX20SISO_Ant2_2412



11AX20SISO_Ant1_2437



11AX20SISO_Ant2_2437

