




802.11n40 (MIMO), HT8 – Chain B, CH9F

Cond Spur, 30MHz – 9GHz

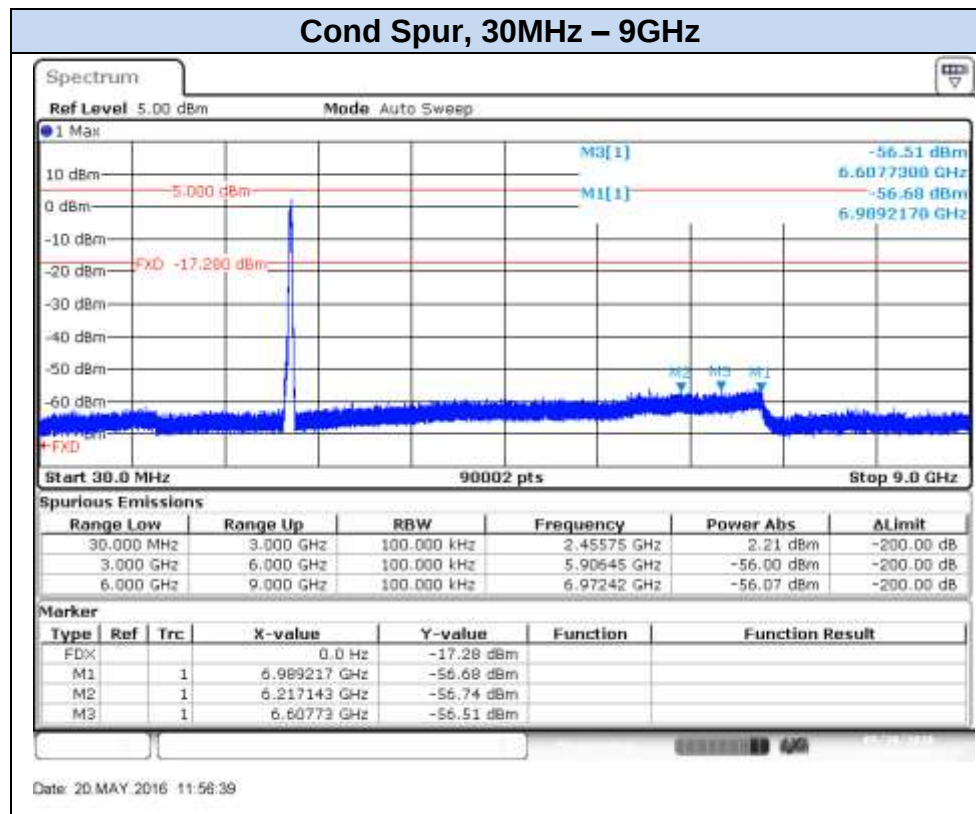


Cond Spur, 9GHz – 18GHz

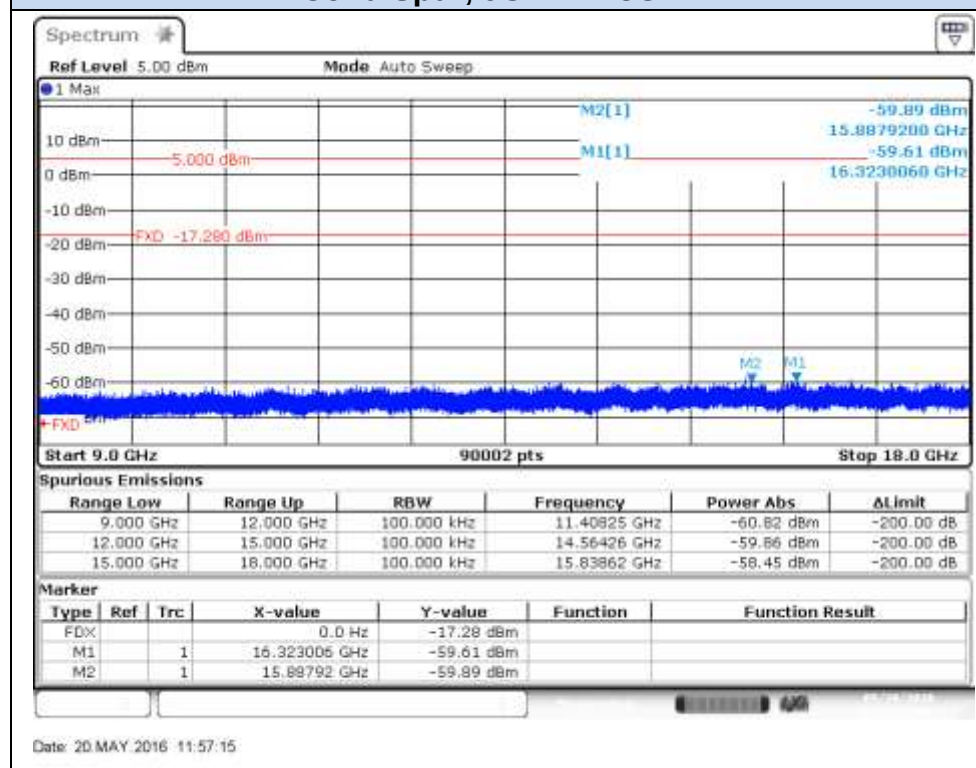

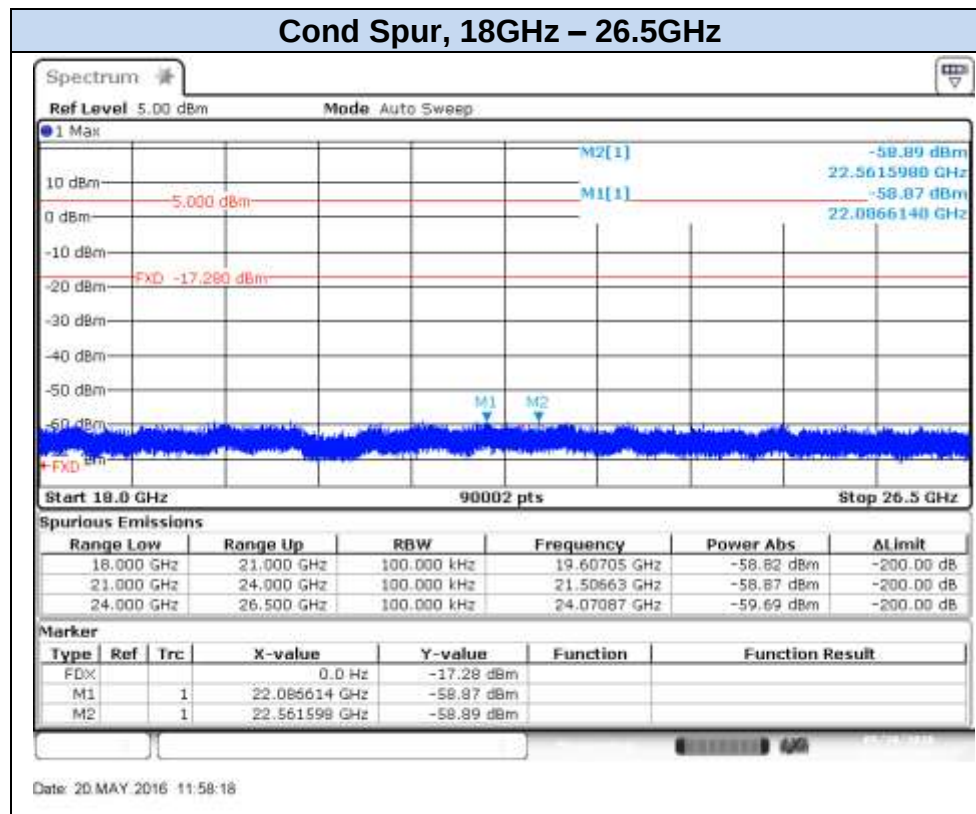



802.11n40 (MIMO), HT8 – Chain B, CH10F

Cond Spur, 30MHz – 9GHz

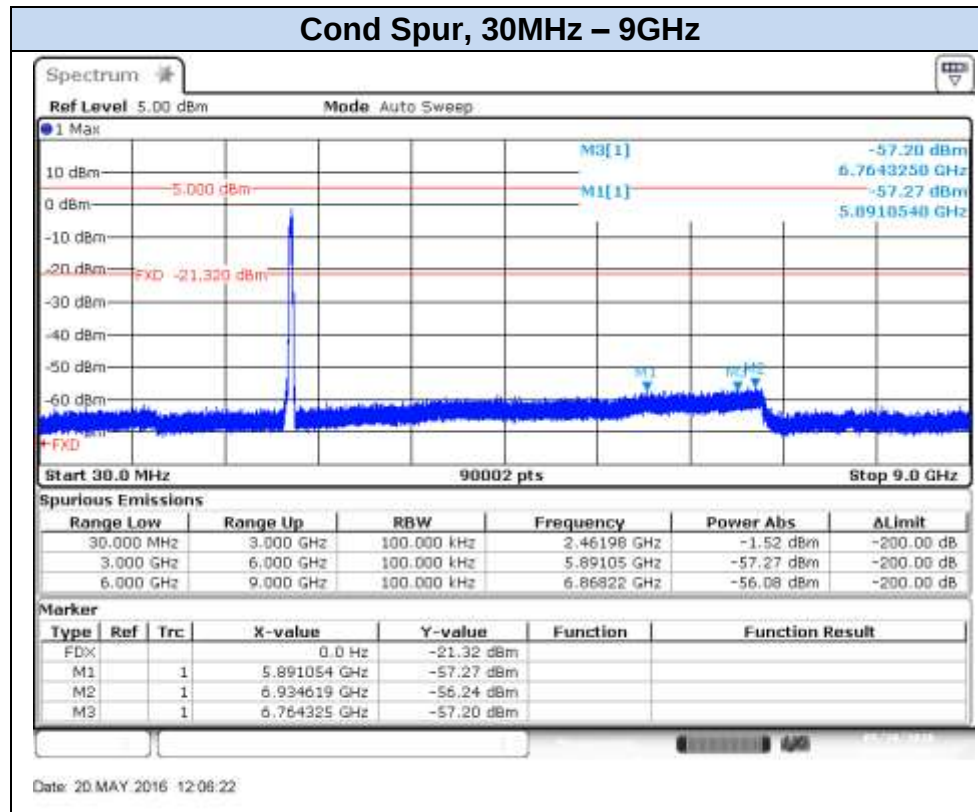


Cond Spur, 9GHz – 18GHz

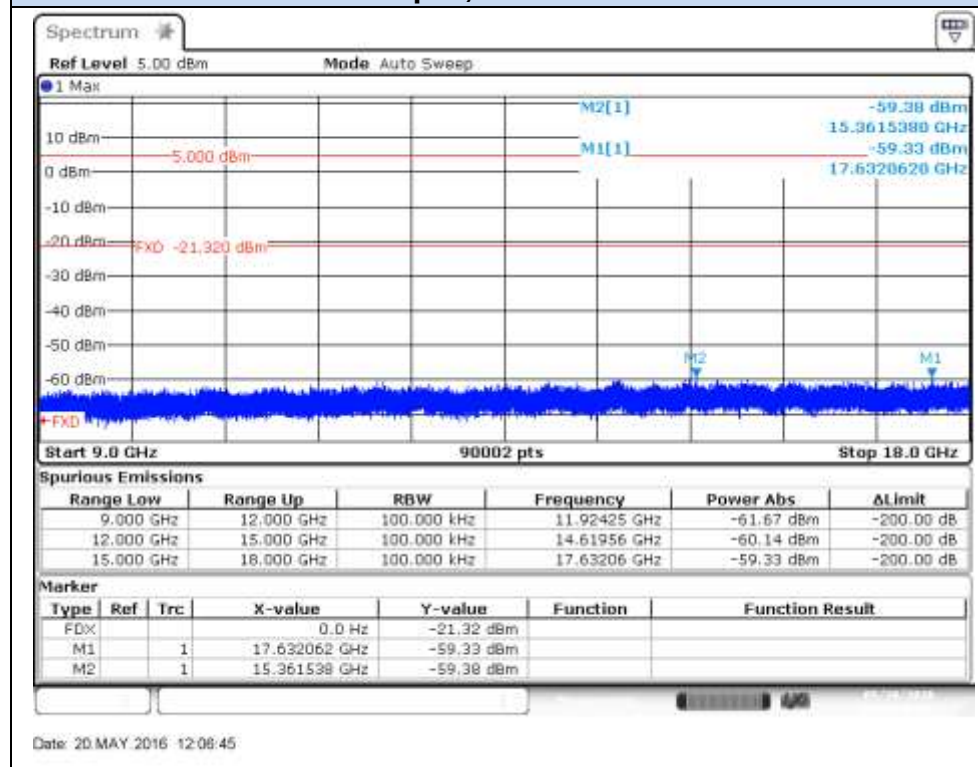

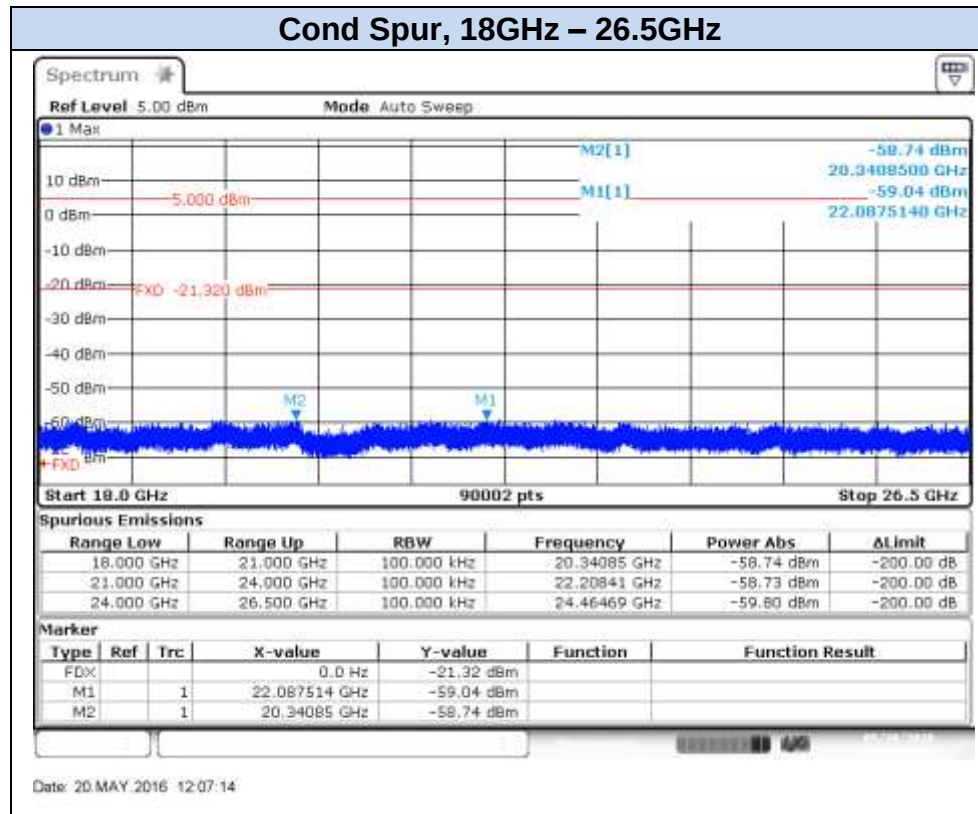



802.11n40 (MIMO), HT8 – Chain B, CH11F

Cond Spur, 30MHz – 9GHz

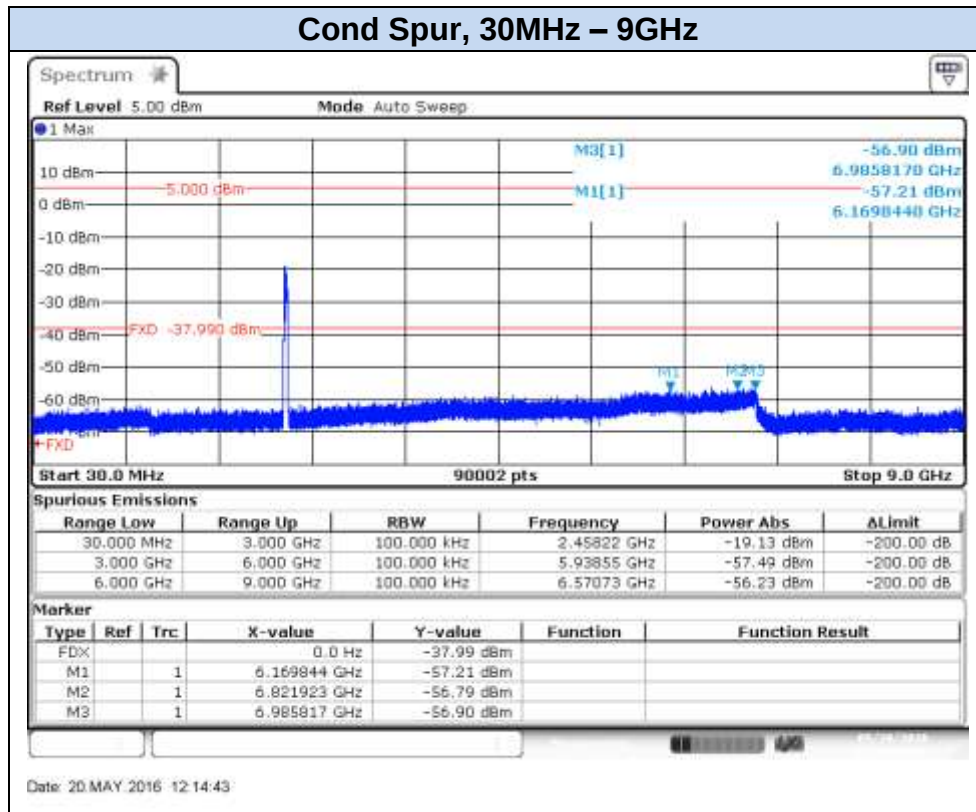

Cond Spur, 9GHz – 18GHz

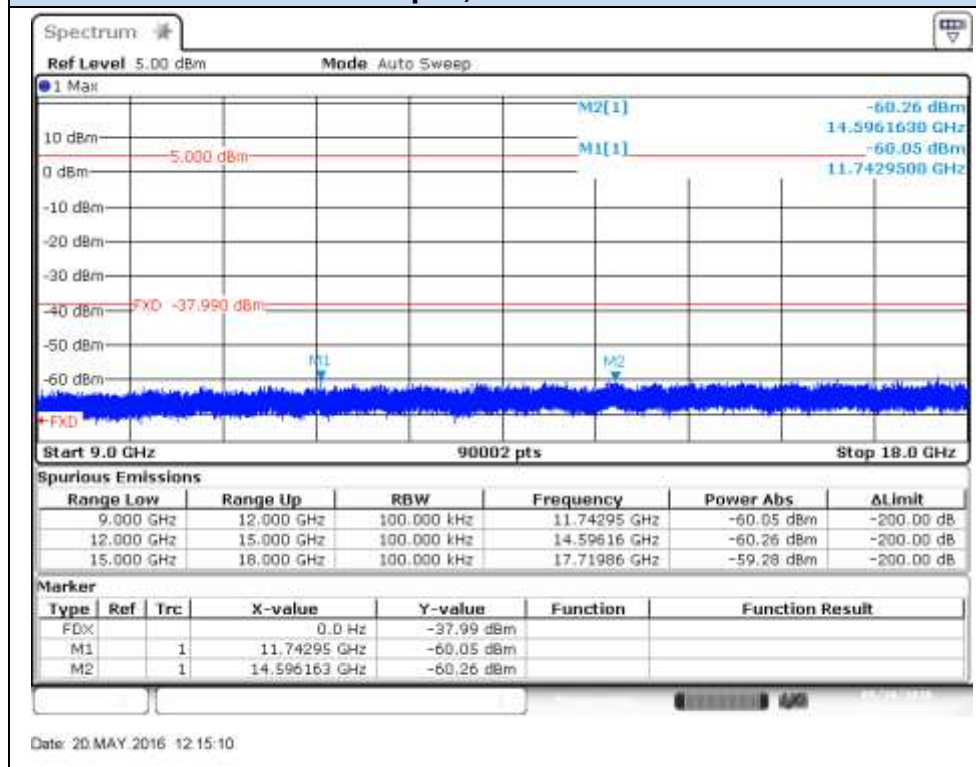

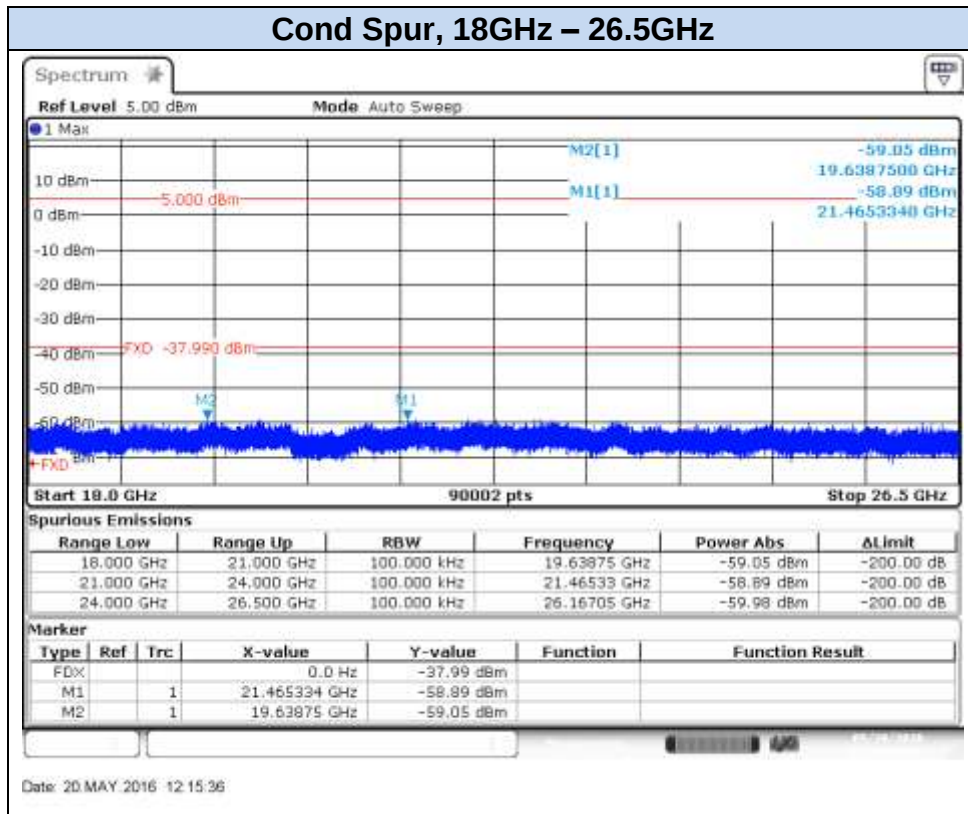

B.4 Power Spectral Density

Test limits:

FCC part	RSS part	Limits
15.247 (e)	RSS-247 Clause 5.2 (2)	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


Test procedure:

The peak power spectral density level in the fundamental emission was measured using the *Method PKPSD (peak PSD)* according to point 10.2 of KDB 558074 D01 DTS Meas Guidance. This method was used for 802.11b, 802.11g, 802.11n20 and 802.11n40 modes.

For MIMO mode, the *Measure and add $10 \log(N_{ANT})$ dB*, (where N_{ANT} is the number of outputs) technique was used according to the Guidance for Emission Testing of Transmitters with Multiple Outputs in the Same Band 662911 D01 Multiple Transmitter Output v02r01.

With this technique, spectrum measurements are performed at each output of the device, and the quantity $10 \log(N_{ANT})$ dB is added to each spectrum value before comparing to the emission limit. Number of outputs = 2.

The setup below was used to measure the power spectral density. The antenna terminal of the EUT is connected to the spectrum through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

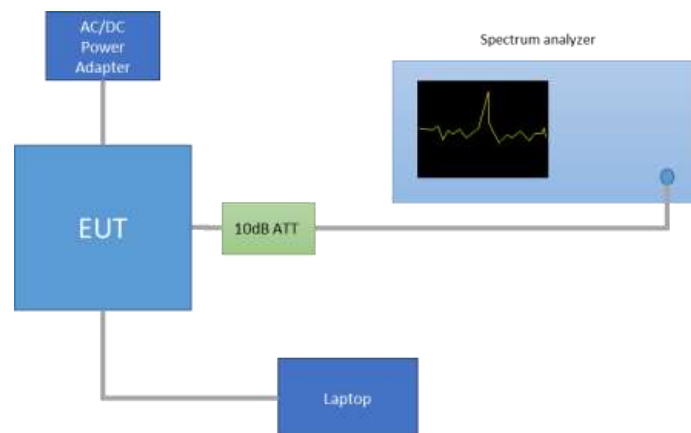


Results tables:



Mode	Rate	Channel	Frequency [MHz]	Antenna	PSD Peak [dBm]
802.11b	1Mbps	1	2412	SISO CHAIN A	-4.08
				SISO CHAIN B	-4.00
		7	2442	SISO CHAIN A	-4.38
				SISO CHAIN B	-4.39
		11	2462	SISO CHAIN A	-4.23
				SISO CHAIN B	-6.05
		12	2467	SISO CHAIN A	-7.99
				SISO CHAIN B	-8.29
802.11g	6Mbps	1	2412	SISO CHAIN A	-16.09
				SISO CHAIN B	-16.06
		7	2442	SISO CHAIN A	-3.12
				SISO CHAIN B	-3.51
		11	2462	SISO CHAIN A	-5.65
				SISO CHAIN B	-7.22
		12	2467	SISO CHAIN A	-12.12
				SISO CHAIN B	-13.54
802.11n20	HT0	1	2412	SISO CHAIN A	-28.42
				SISO CHAIN B	-26.88
		7	2442	SISO CHAIN A	-4.78
				SISO CHAIN B	-5.24
		11	2462	SISO CHAIN A	-3.05
				SISO CHAIN B	-3.40
		12	2467	SISO CHAIN A	-5.50
				SISO CHAIN B	-6.91
802.11n40	HT0	3F	2422	SISO CHAIN A	-12.15
				SISO CHAIN B	-12.54
		7F	2442	SISO CHAIN A	-26.65
				SISO CHAIN B	-26.76
		9F	2452	SISO CHAIN A	-2.19
				SISO CHAIN B	-4.43
		10F	2457	SISO CHAIN A	-4.23
				SISO CHAIN B	-4.37
802.11n40	HT0	11F	2462	SISO CHAIN A	-4.70
				SISO CHAIN B	-5.55
		10F	2457	SISO CHAIN A	-8.57
				SISO CHAIN B	-8.54
		11F	2462	SISO CHAIN A	-23.98
				SISO CHAIN B	-24.21


MIMO modes					PSD Peak [dBm]	
Mode	Rate	CH	Freq. [MHz]	Antenna	Measured Conducted	MIMO Compensated $+10 \cdot \log(N_{ant})$
802.11n20	HT8	1	2412	CHAIN A	-5.99	-2.99
				CHAIN B	-6.39	-3.39
		7	2442	CHAIN A	-4.87	-1.66
				CHAIN B	-5.55	-2.55
		11	2462	CHAIN A	-7.59	-4.59
				CHAIN B	-7.83	-4.83
		12	2467	CHAIN A	-12.92	-9.92
				CHAIN B	-13.99	-10.99
		13	2472	CHAIN A	-30.55	-27.55
				CHAIN B	-30.09	-27.09
802.11n40	HT8	3F	2422	CHAIN A	-5.50	-2.50
				CHAIN B	-4.64	-1.64
		7F	2442	CHAIN A	-5.25	-2.25
				CHAIN B	-4.96	-1.96
		9F	2452	CHAIN A	-6.51	-3.51
				CHAIN B	-5.19	-2.19
		10F	2457	CHAIN A	-9.50	-6.50
				CHAIN B	-9.61	-6.61
		11F	2462	CHAIN A	-25.18	-22.18
				CHAIN B	-26.50	-23.50



Results screenshot:



802.11b, 1Mbps

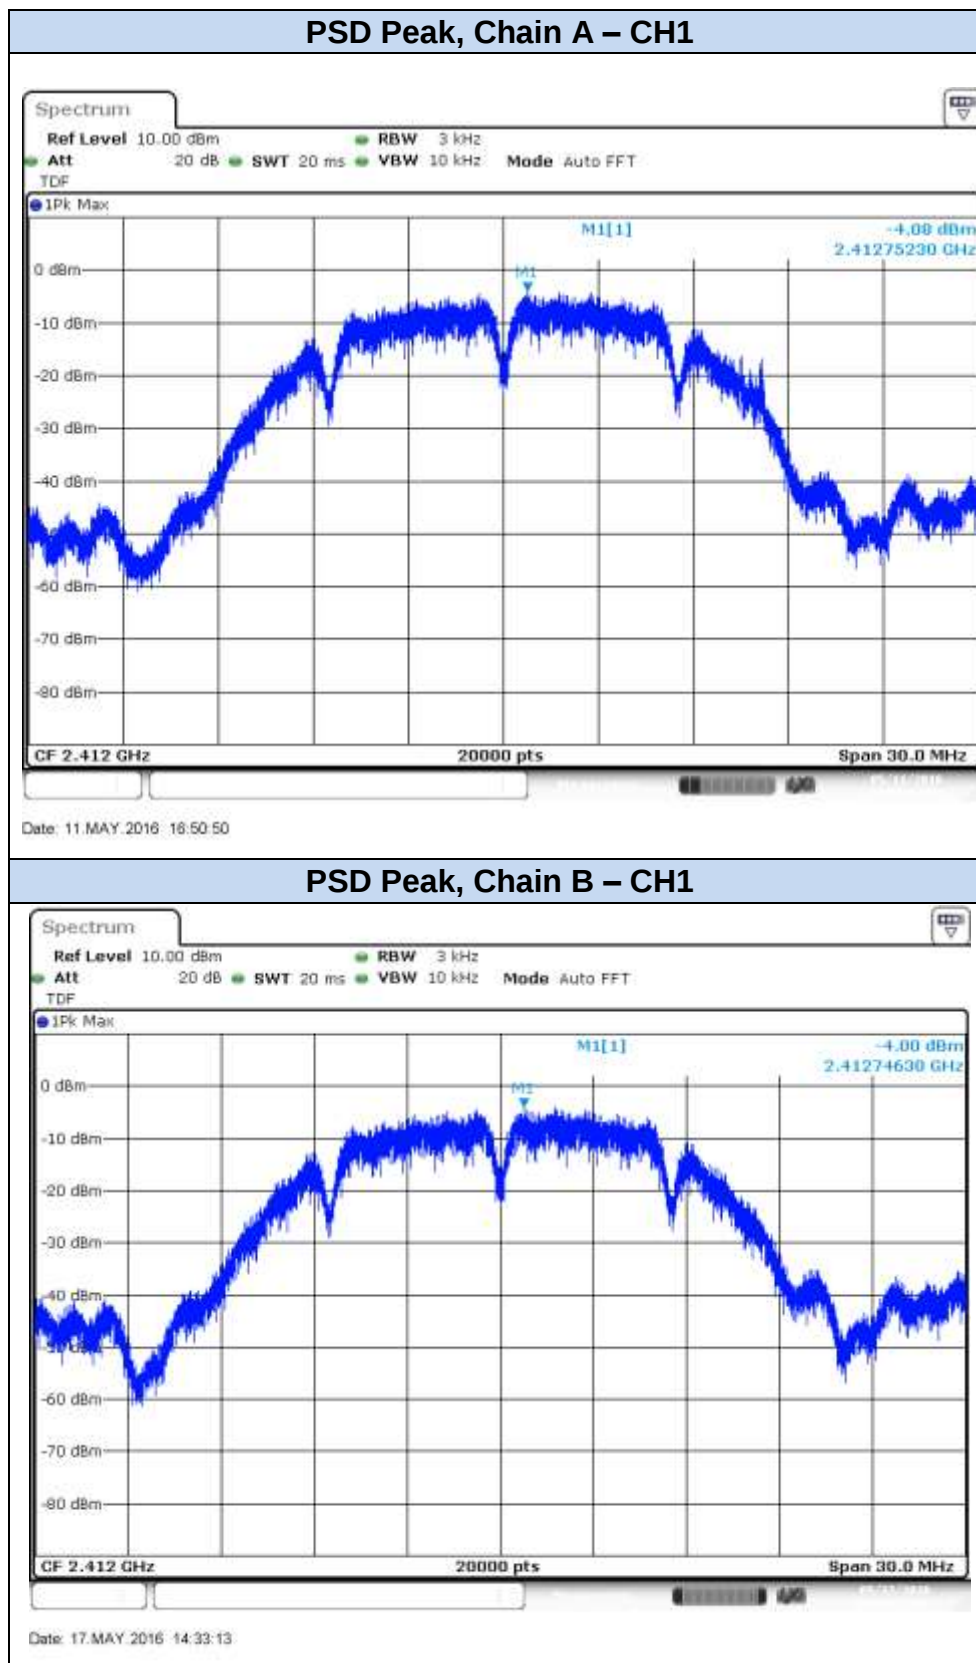

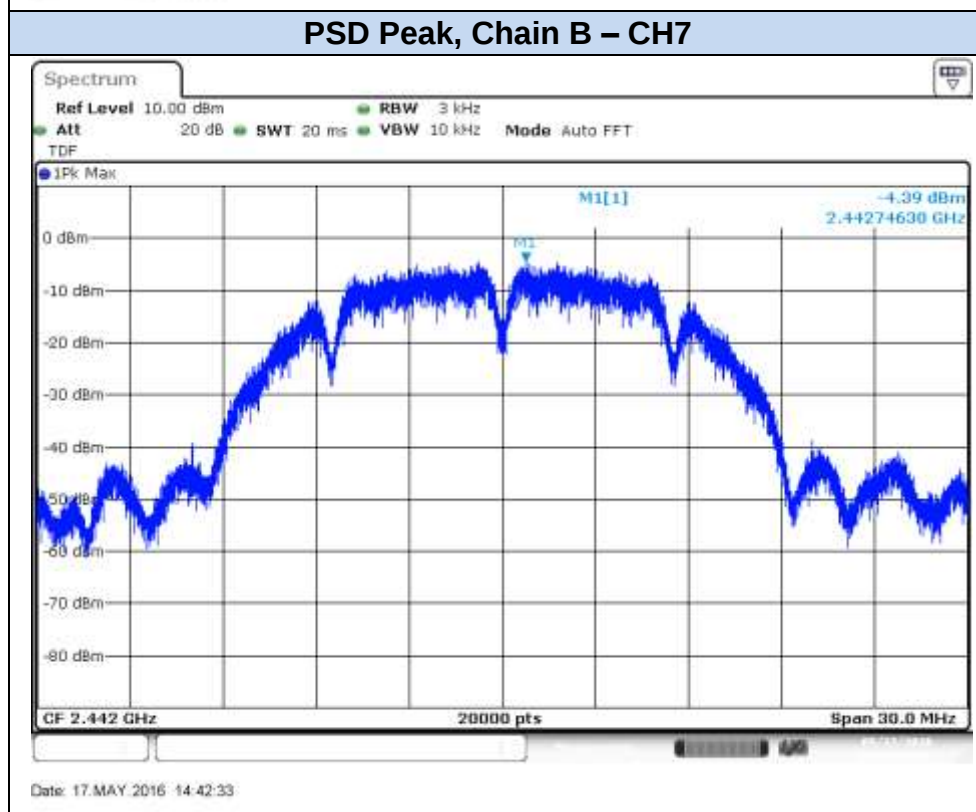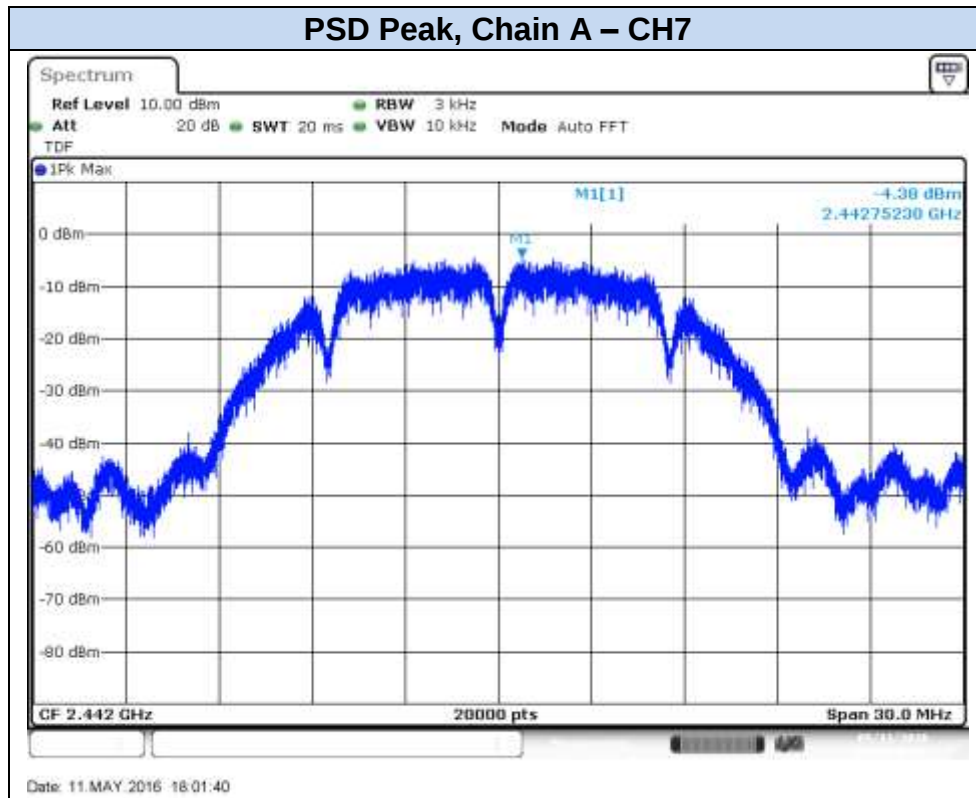

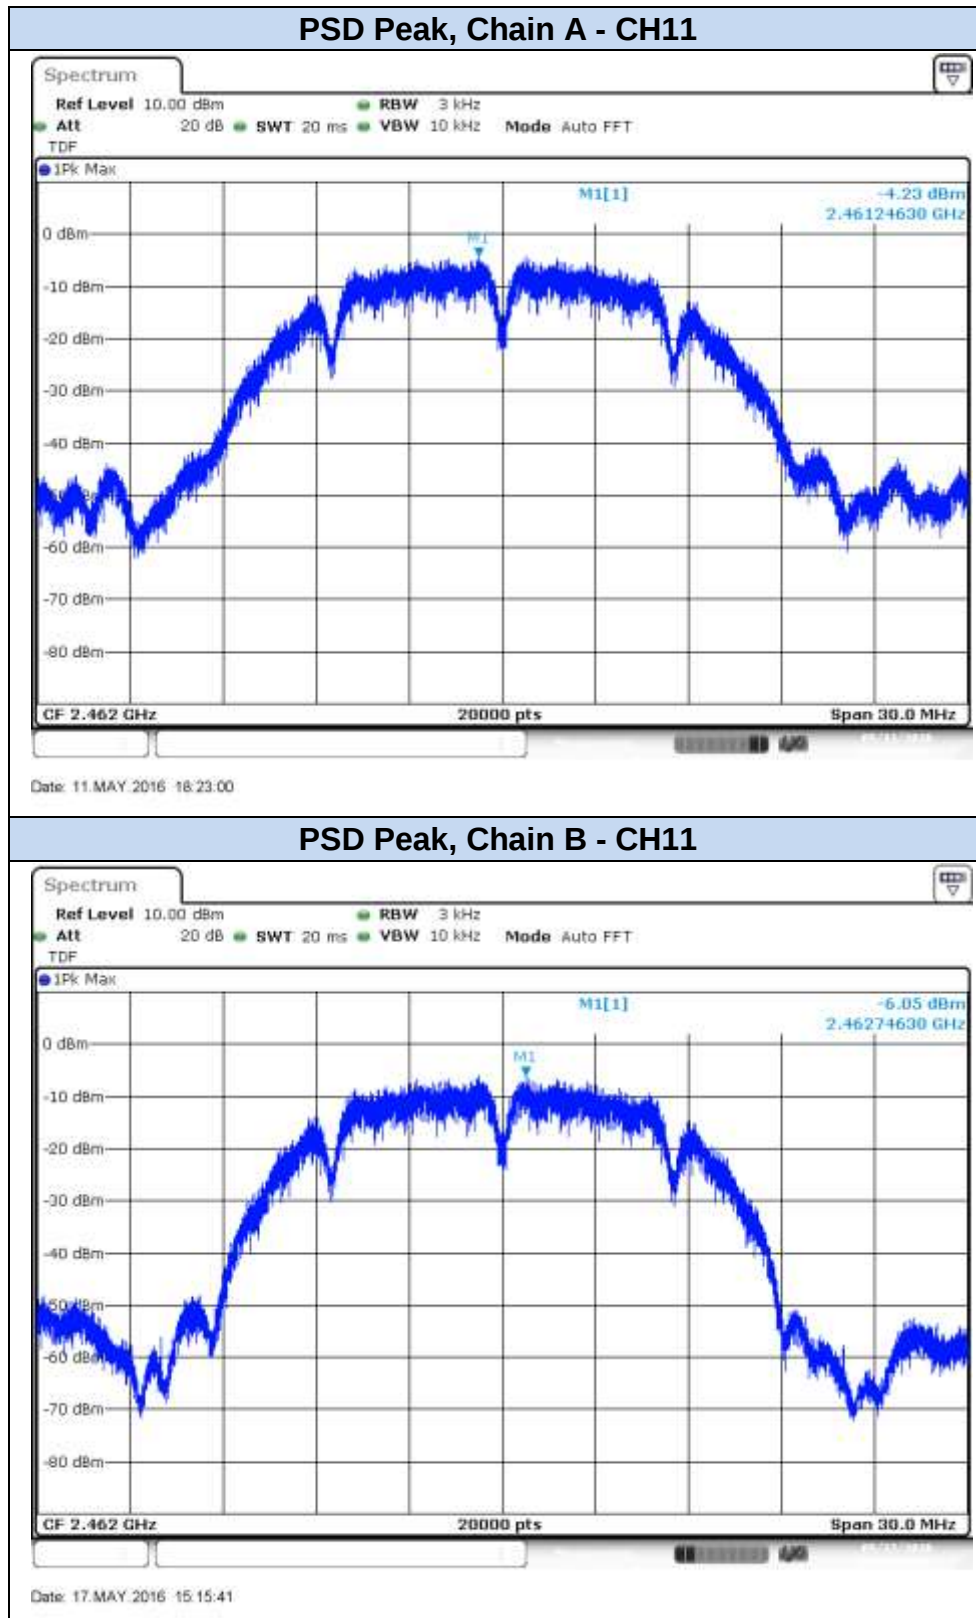


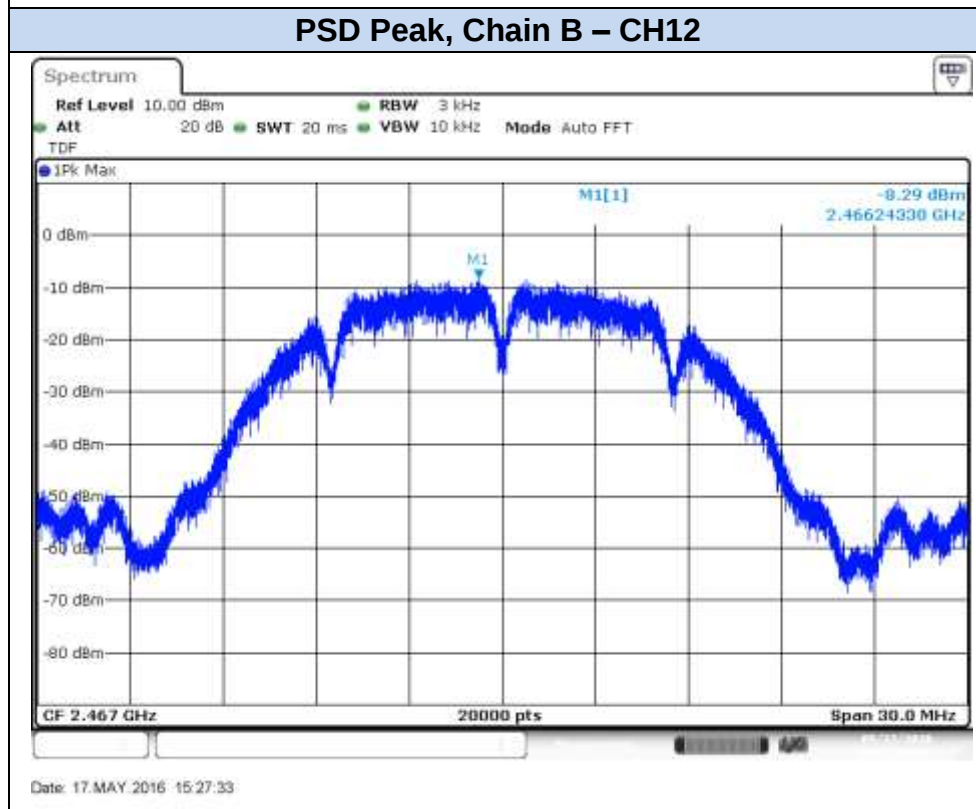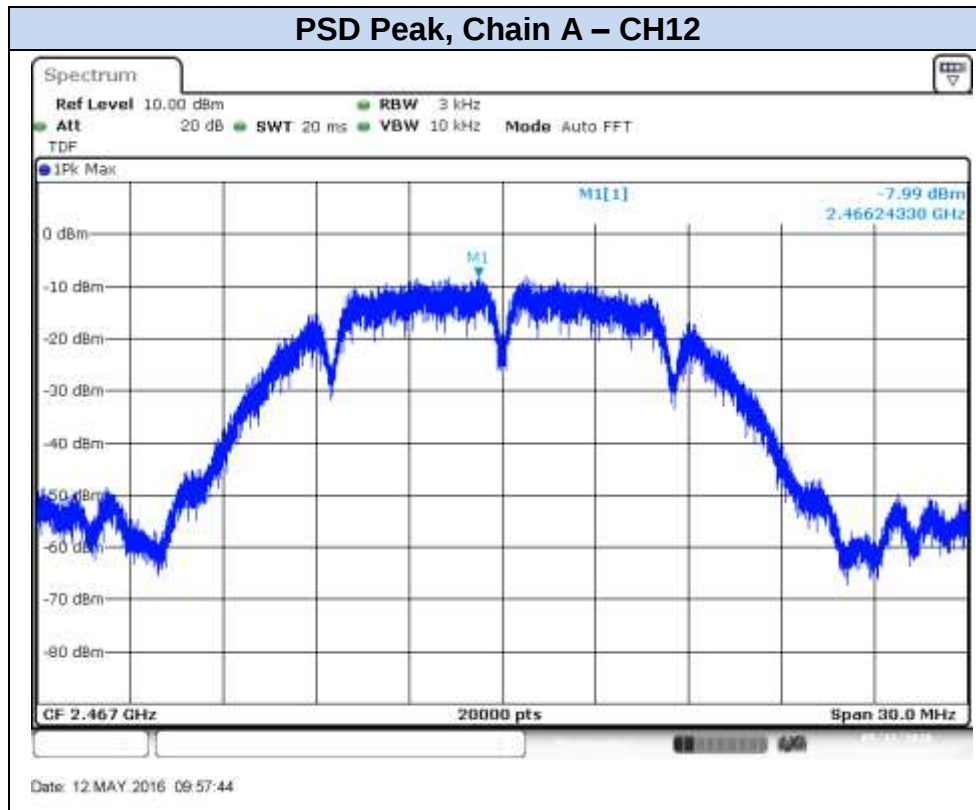

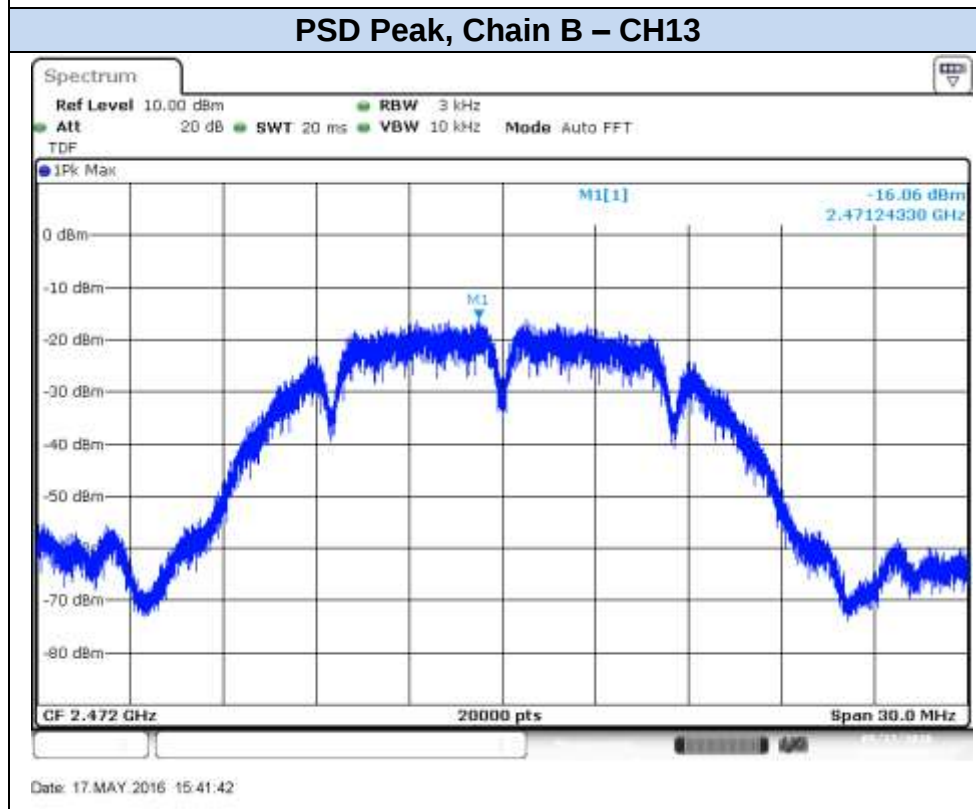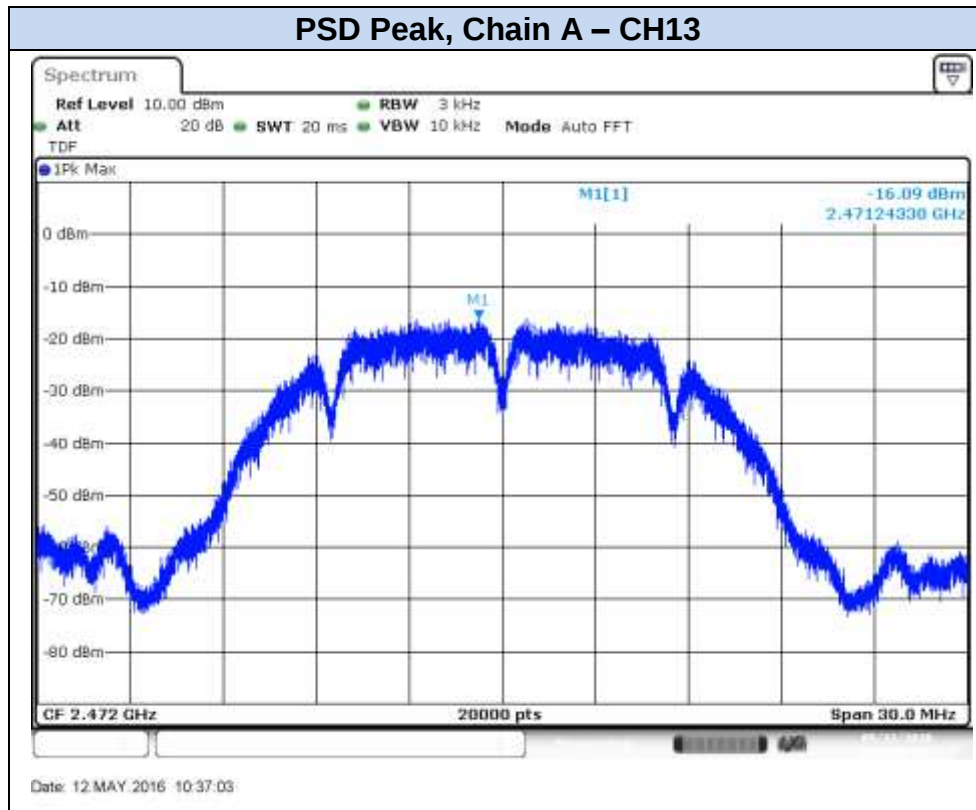



802.11g, 6Mbps



PSD Peak, Chain A – CH1


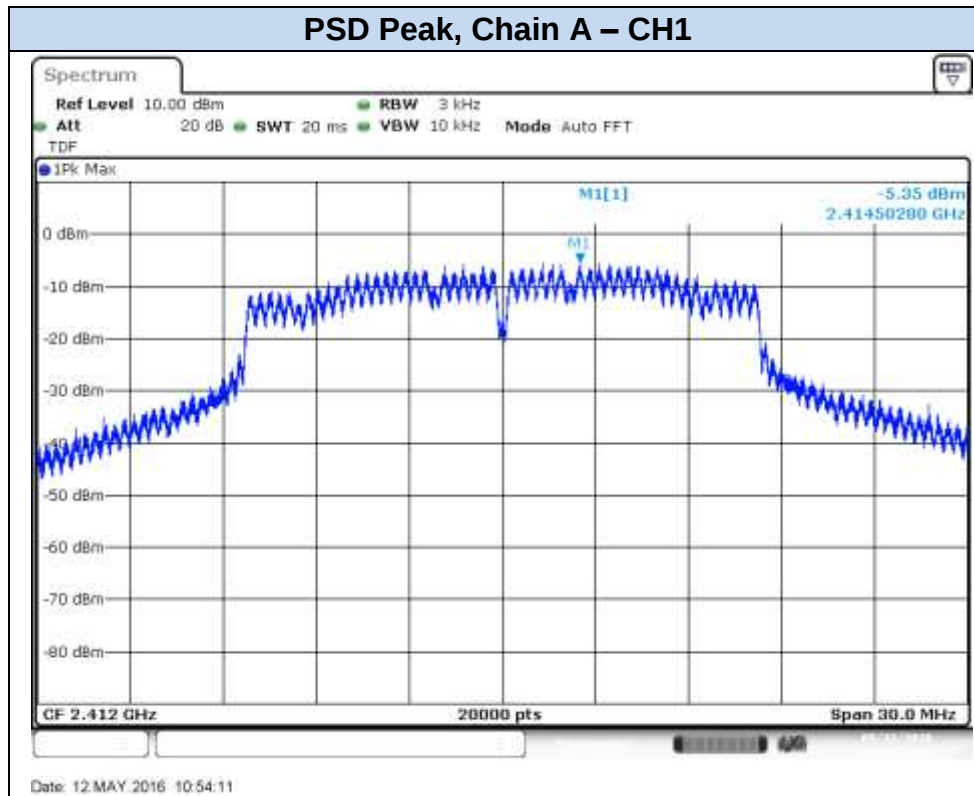



PSD Peak, Chain B – CH1

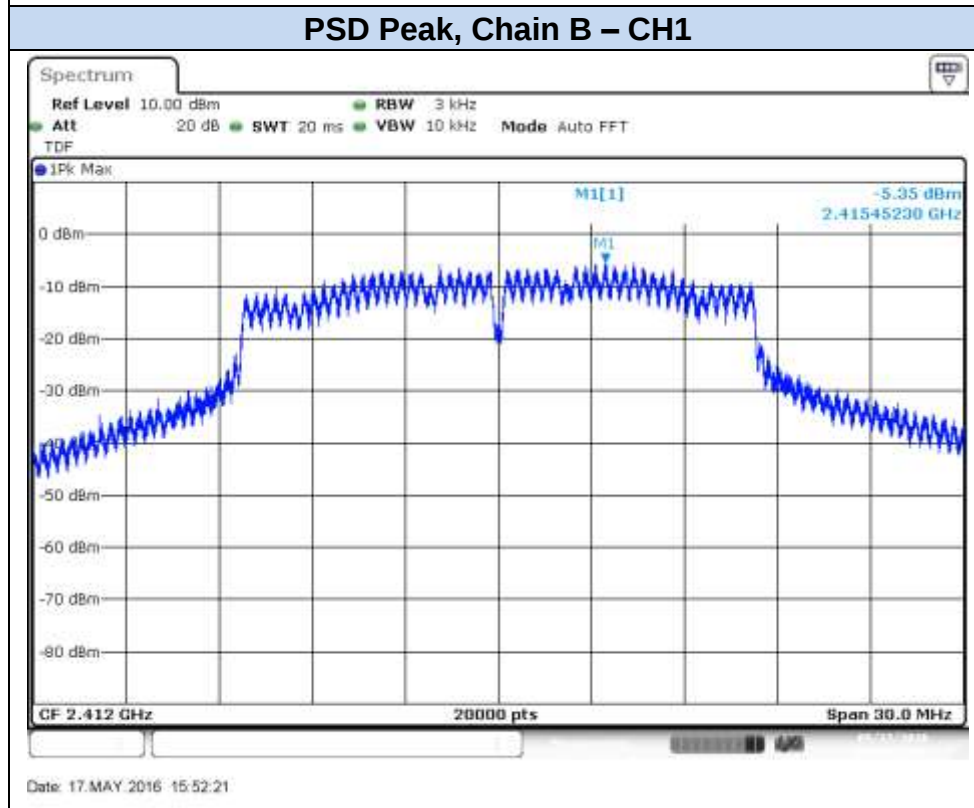

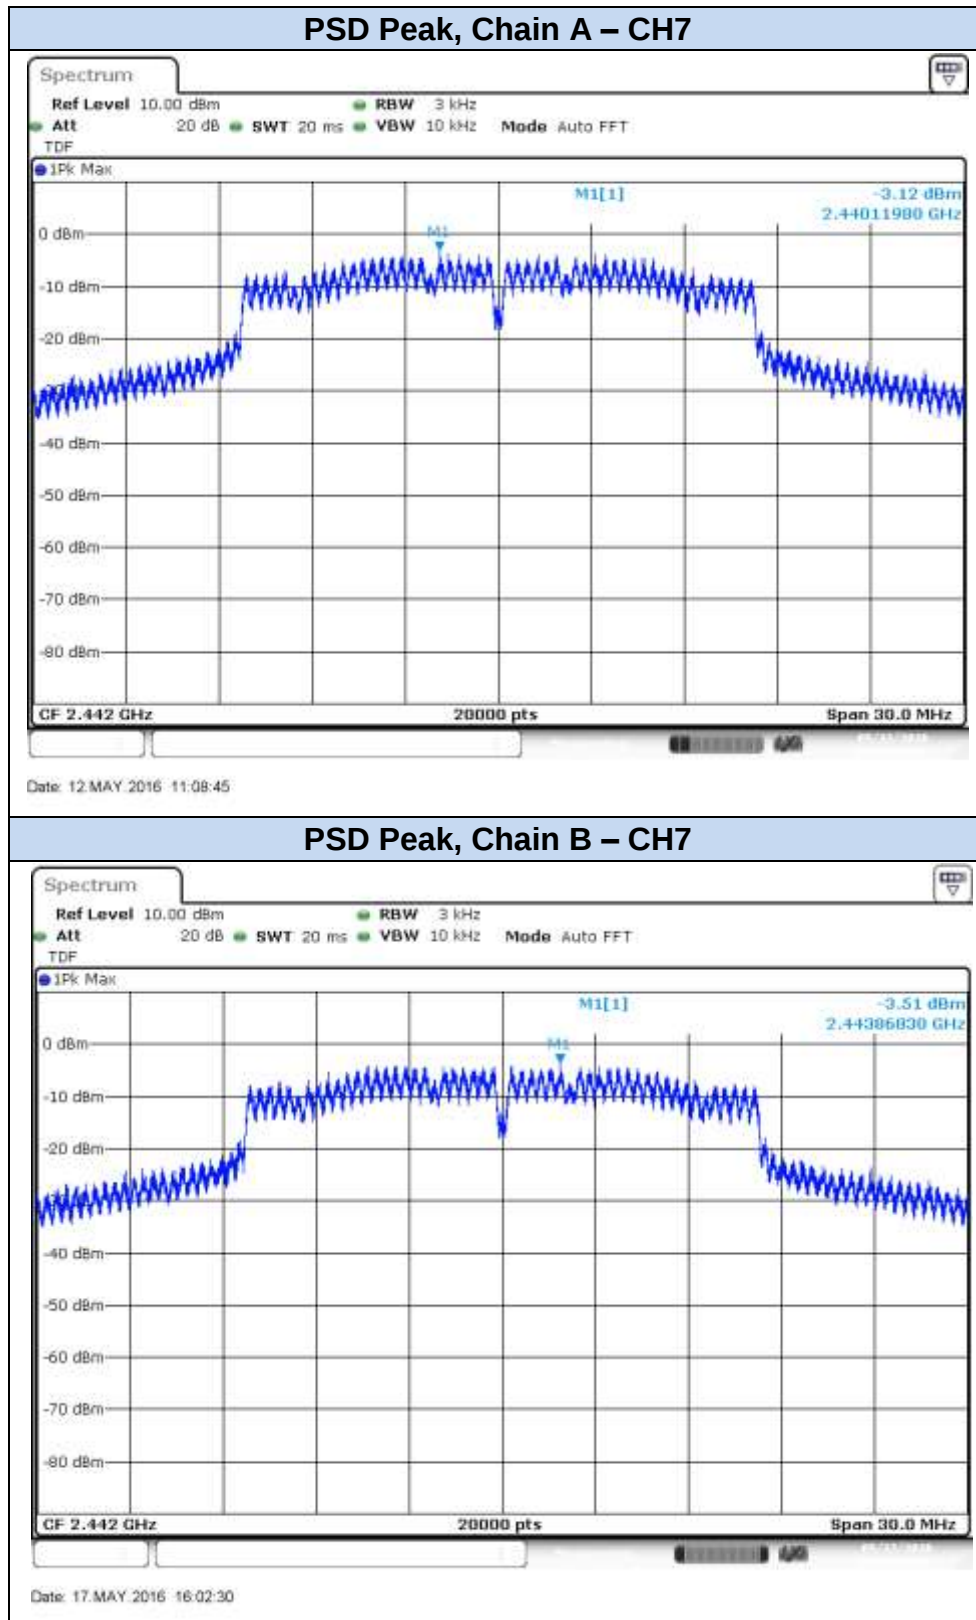

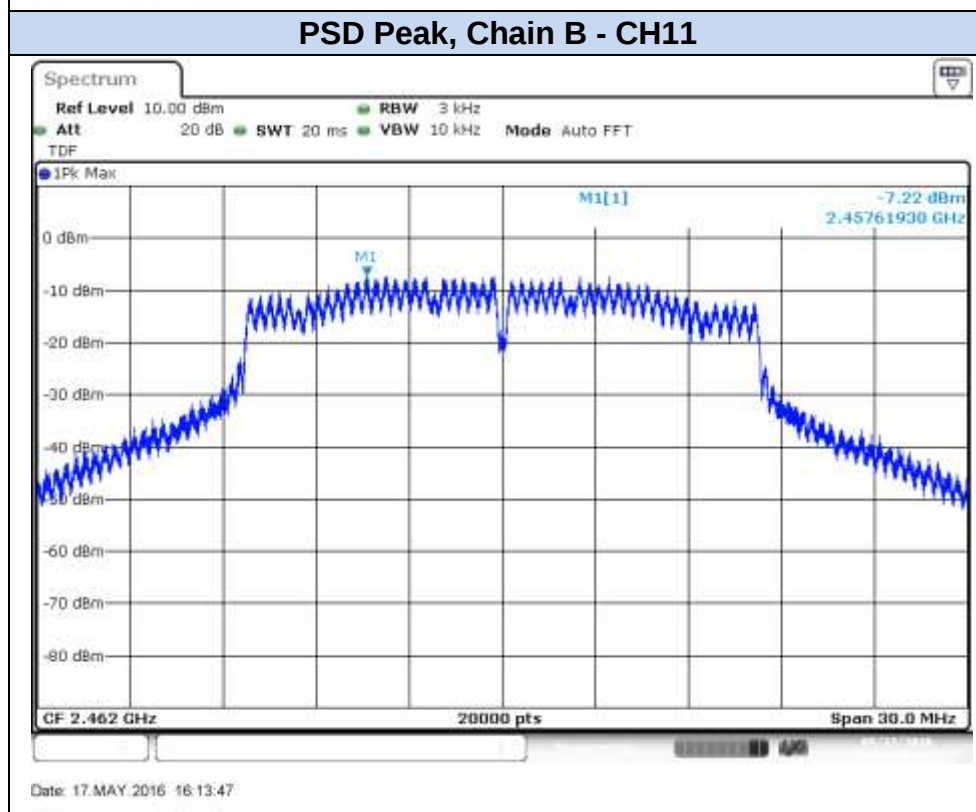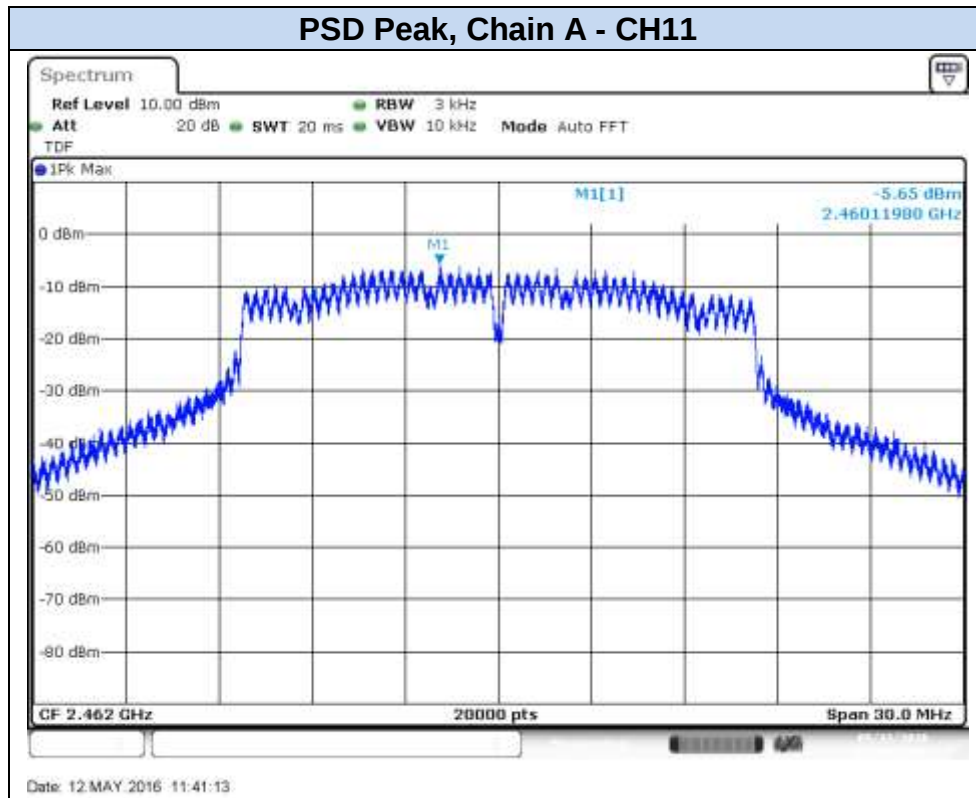


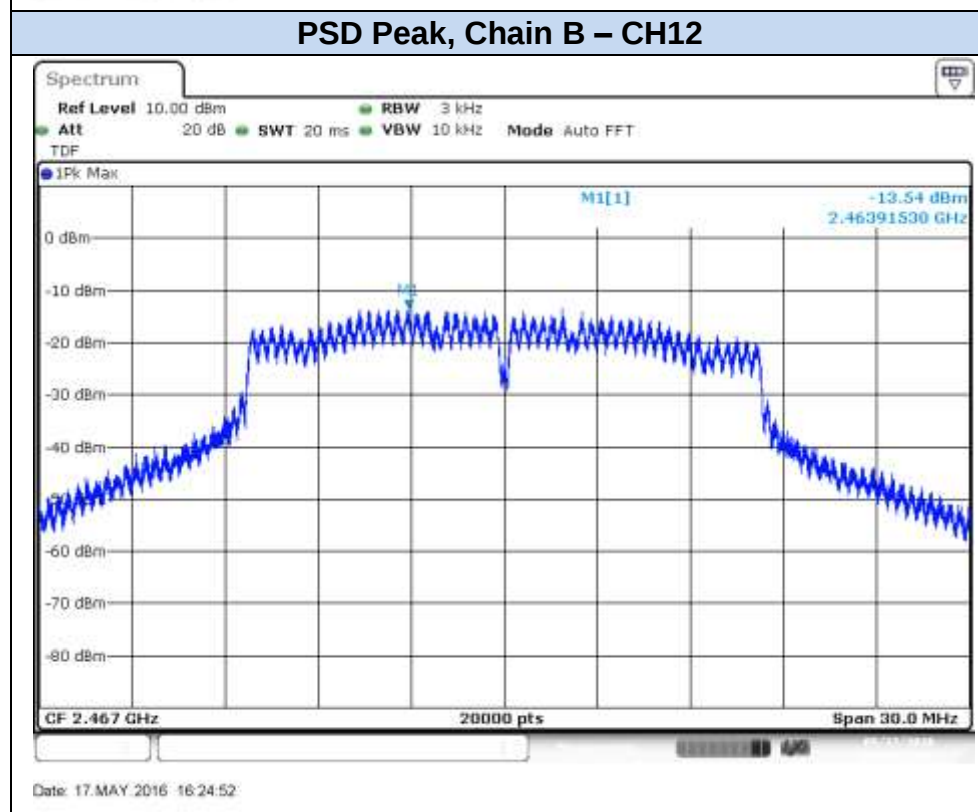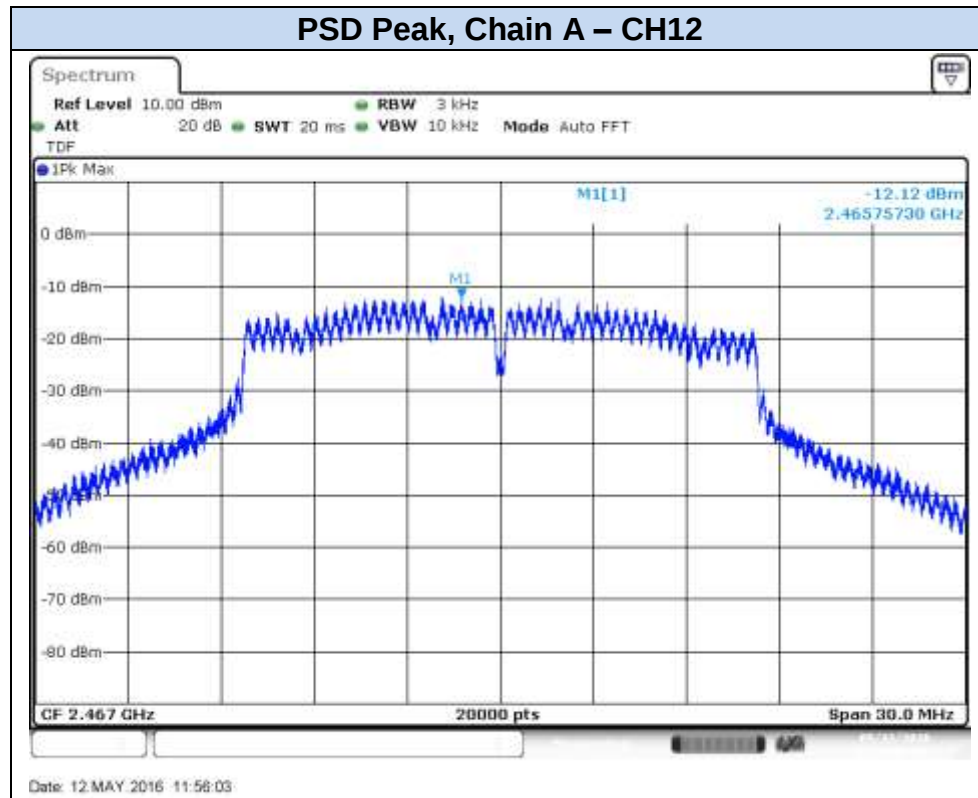

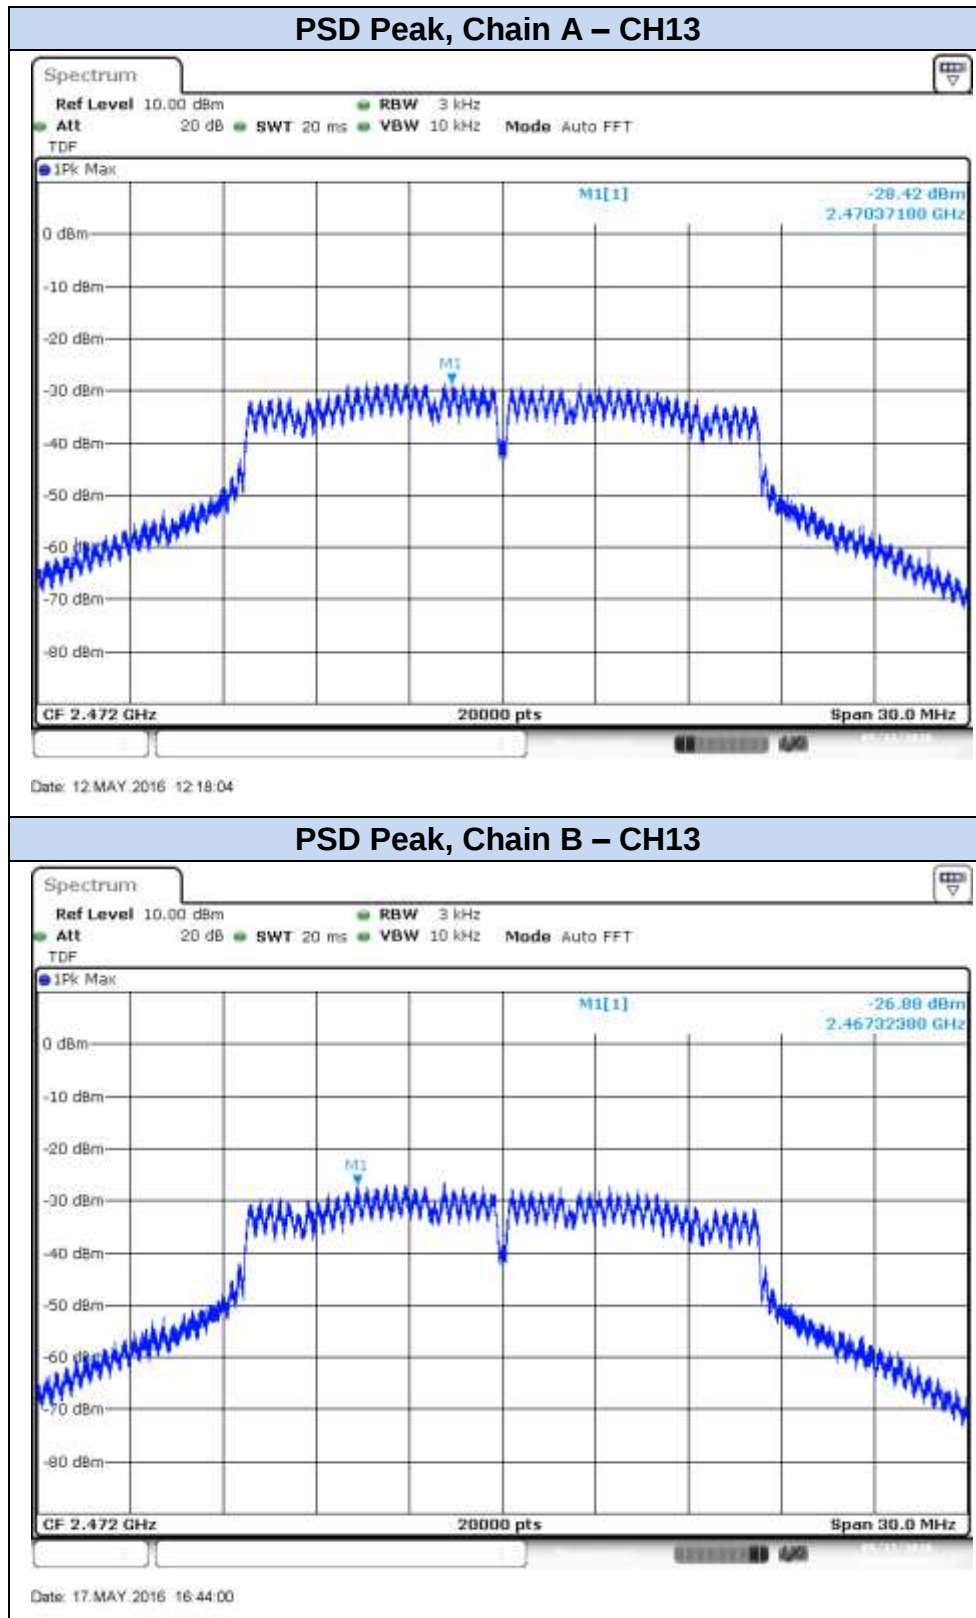




802.11n20, HT0 (SISO)



PSD Peak, Chain A – CH1


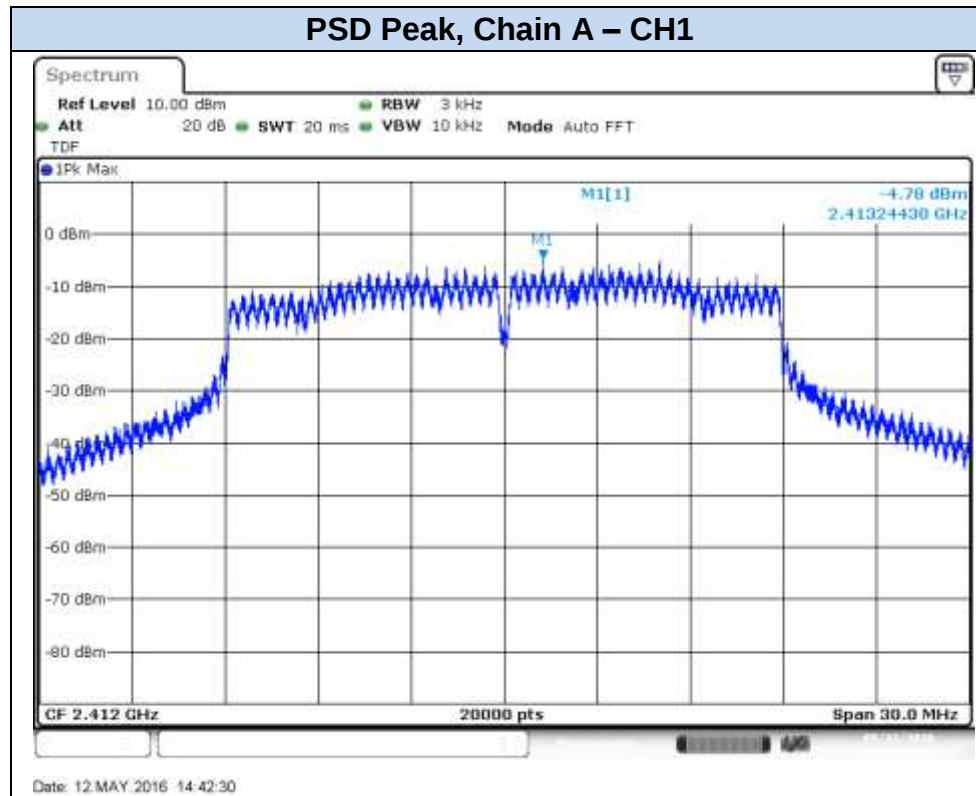




PSD Peak, Chain B – CH1

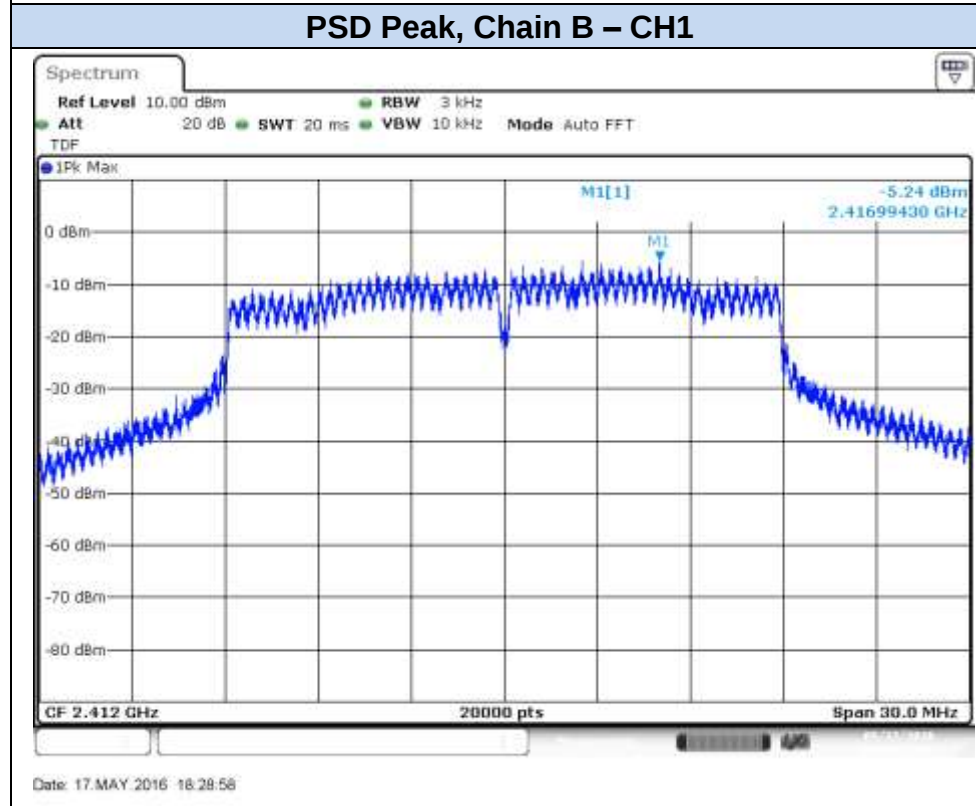

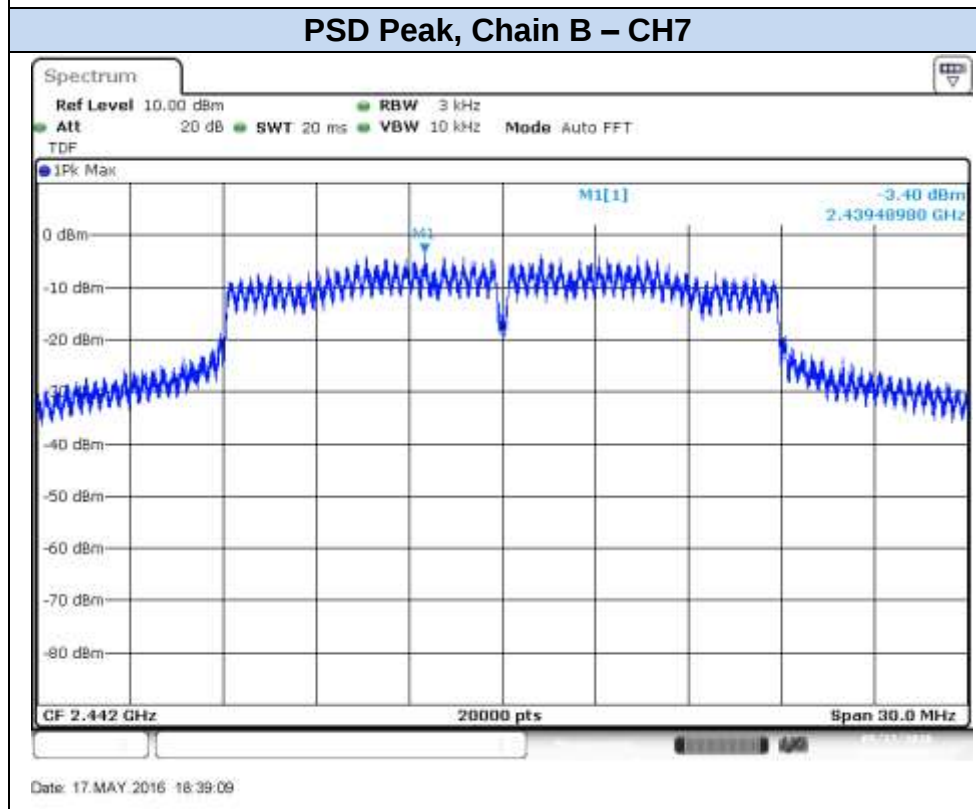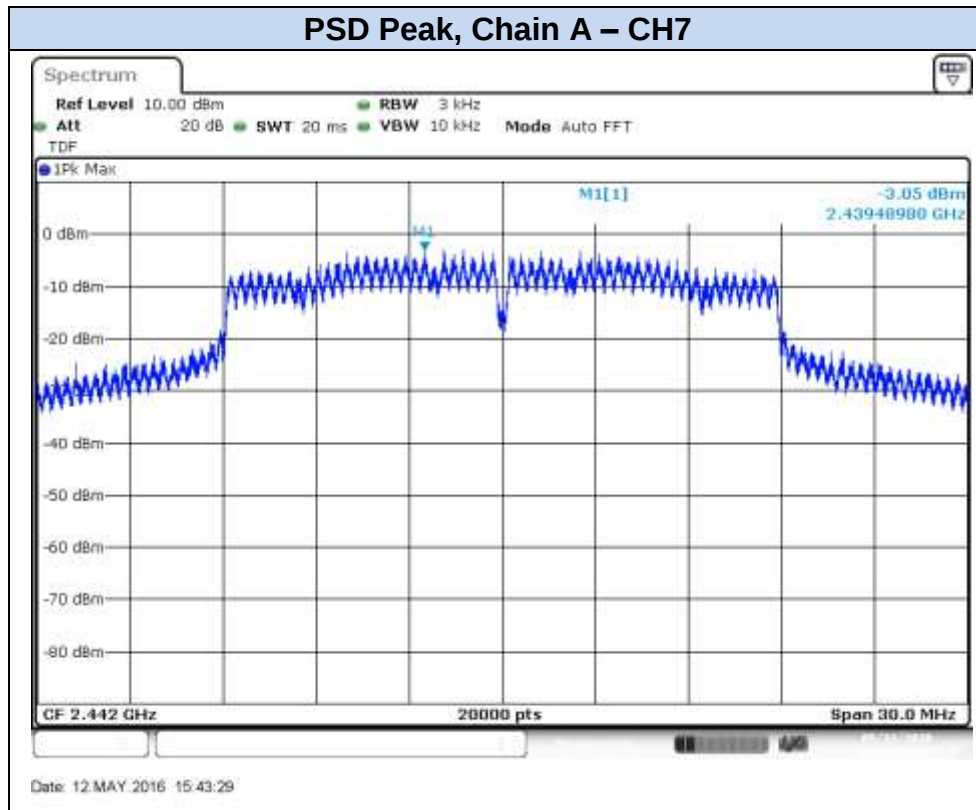

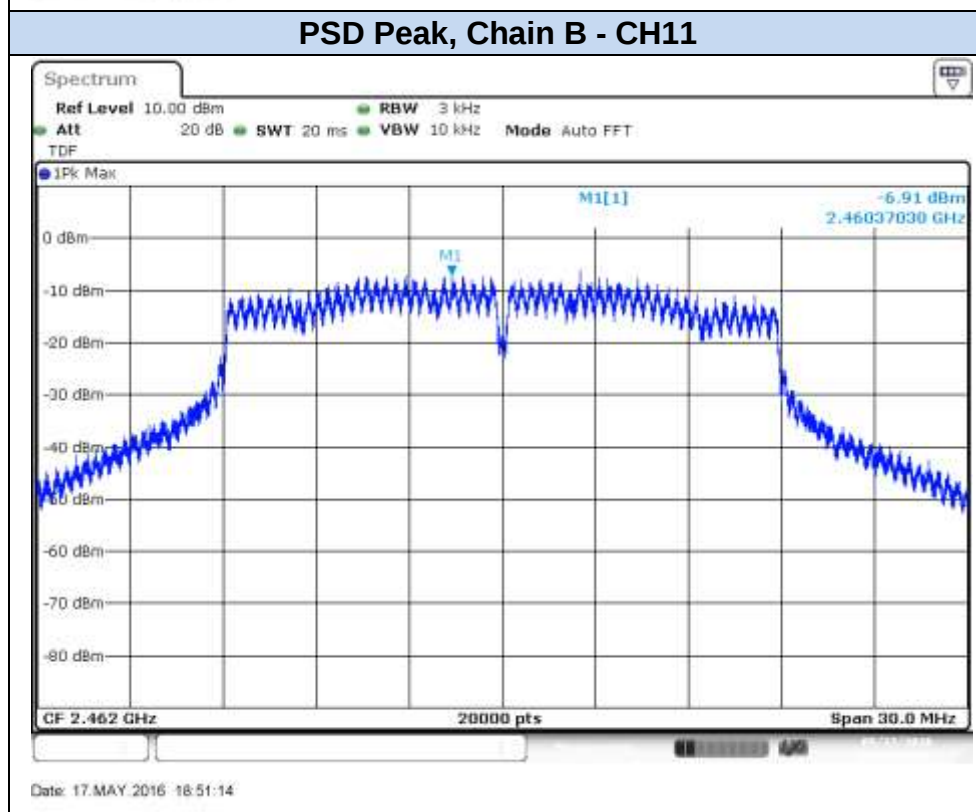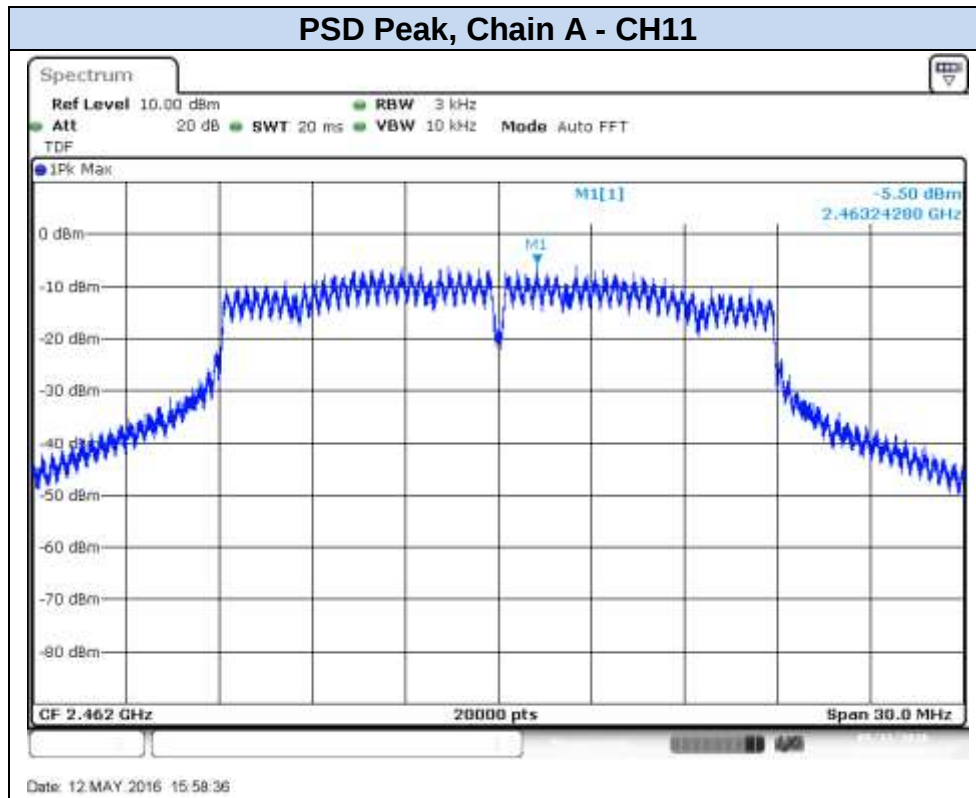


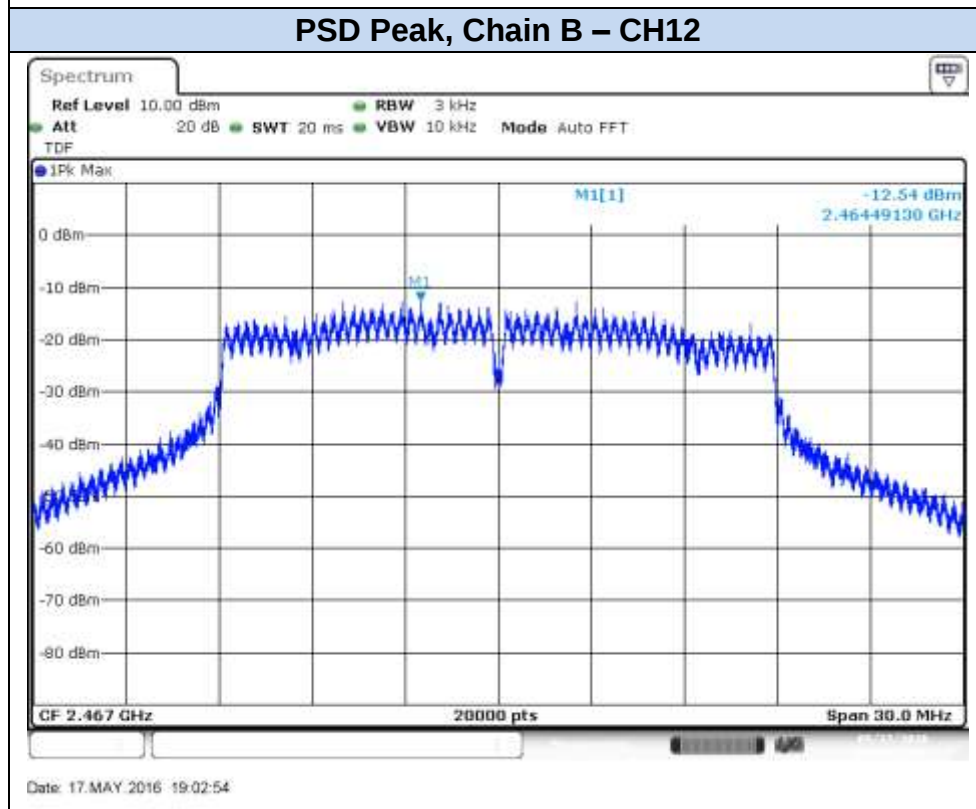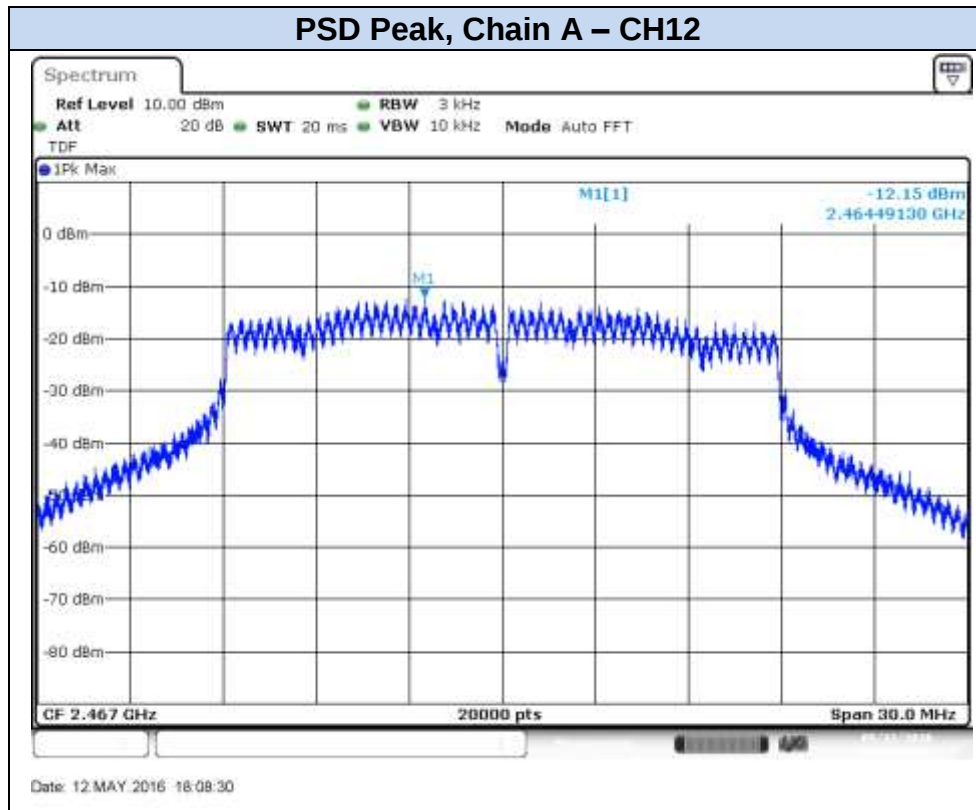

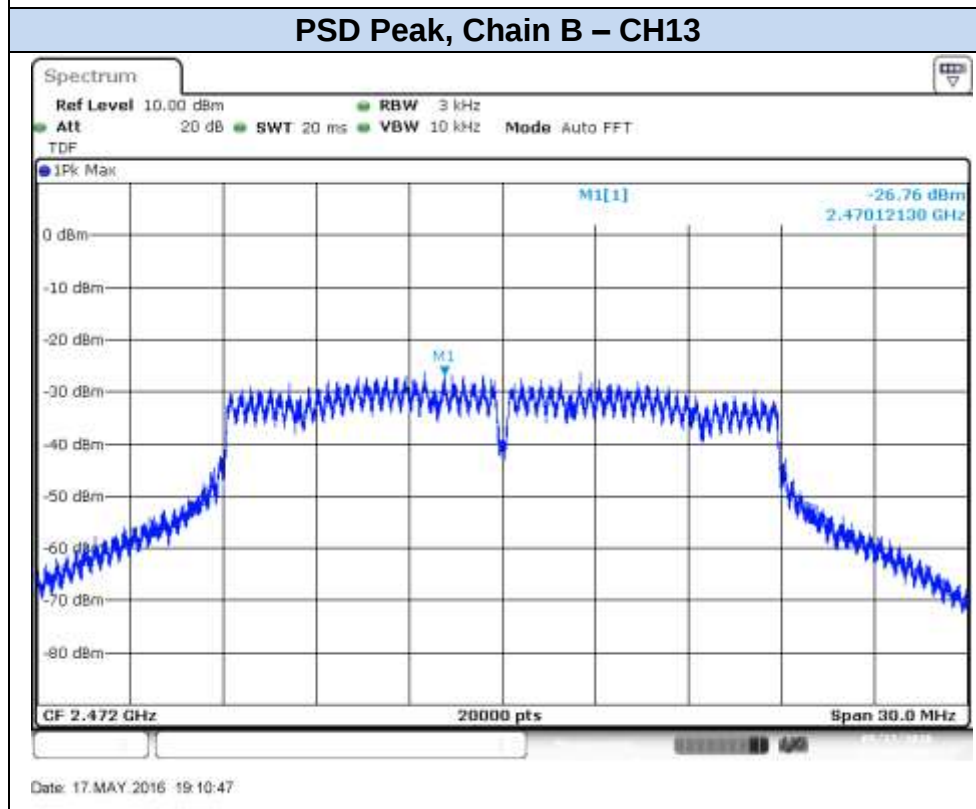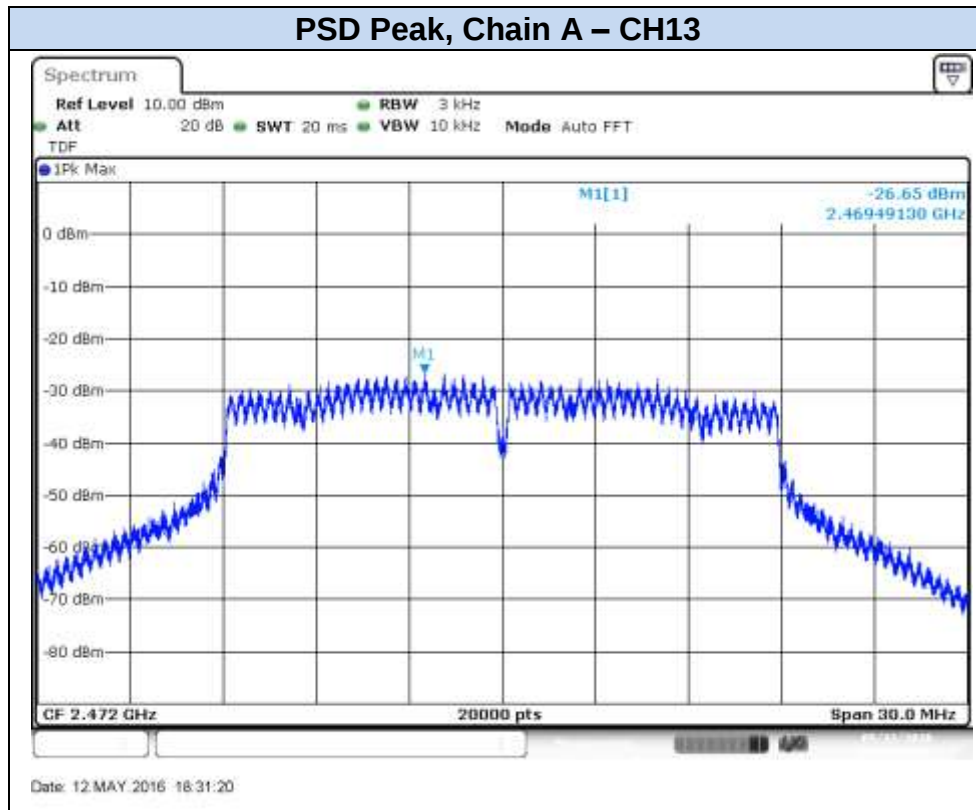



802.11n20, HT8 (MIMO)



PSD Peak, Chain A – CH1


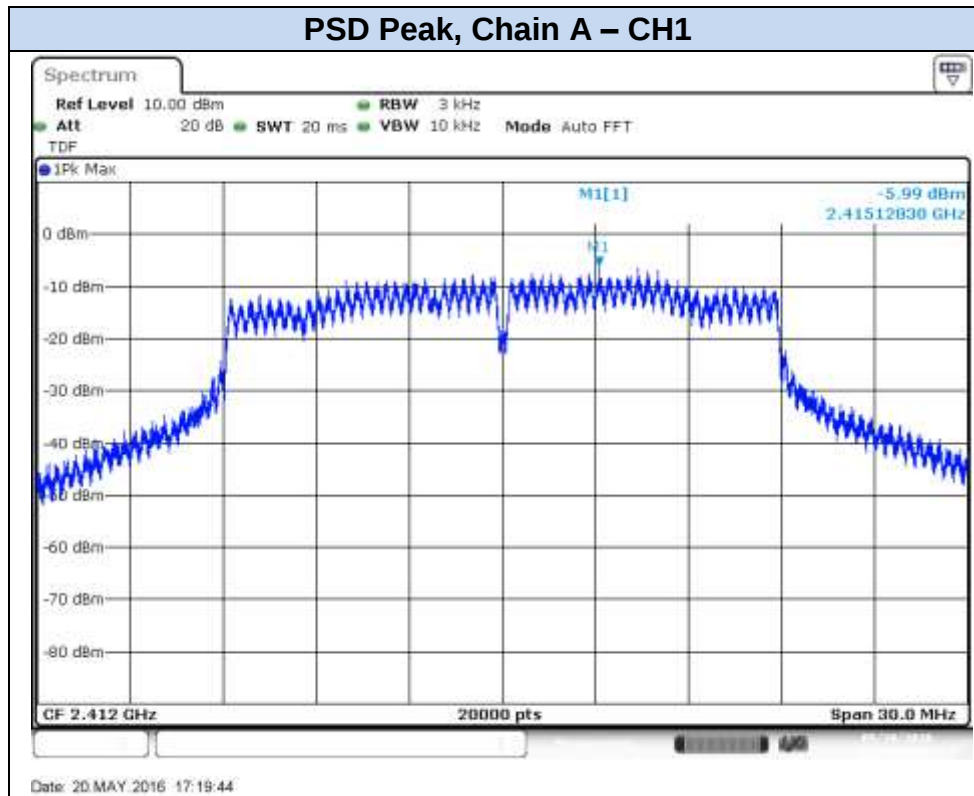




PSD Peak, Chain B – CH1

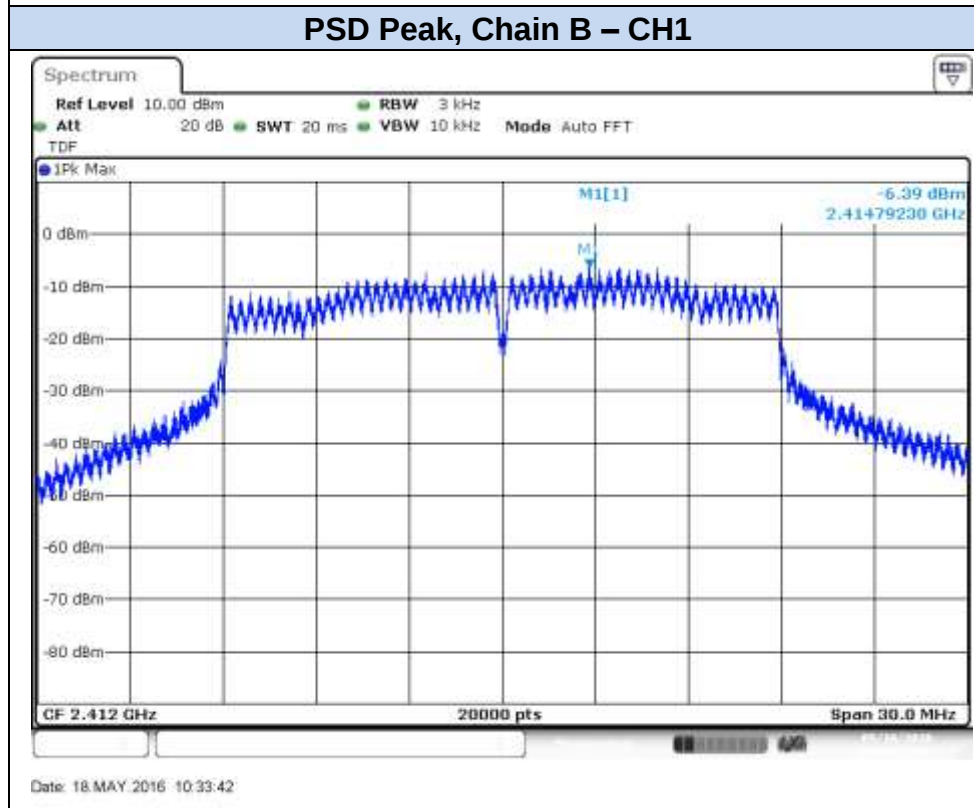

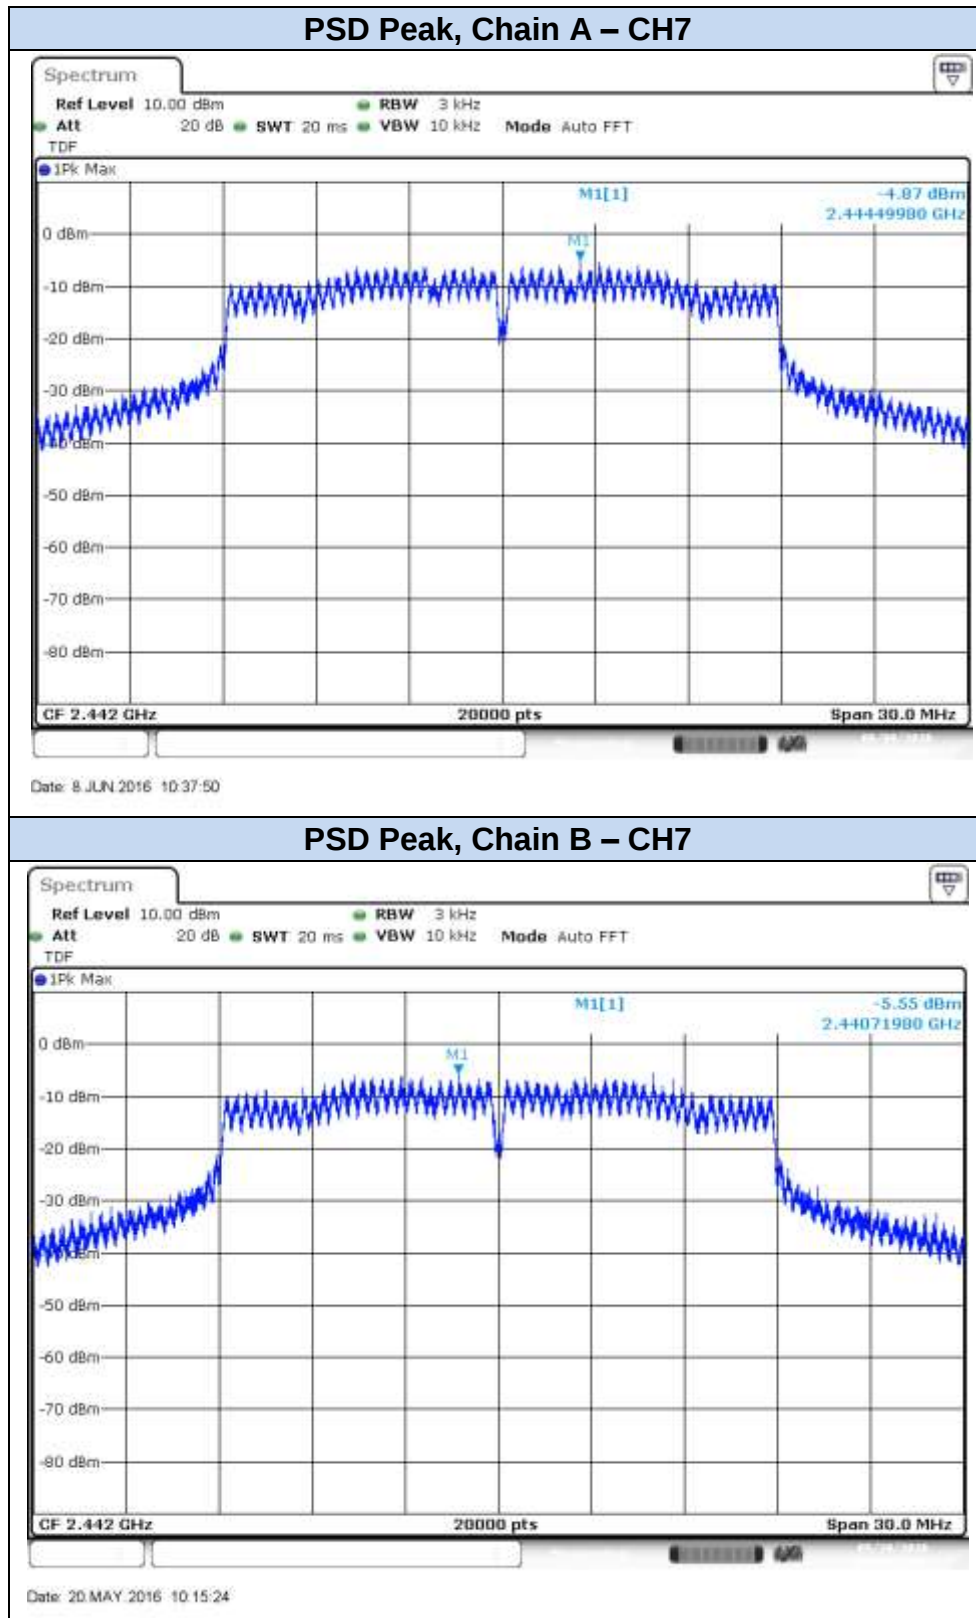

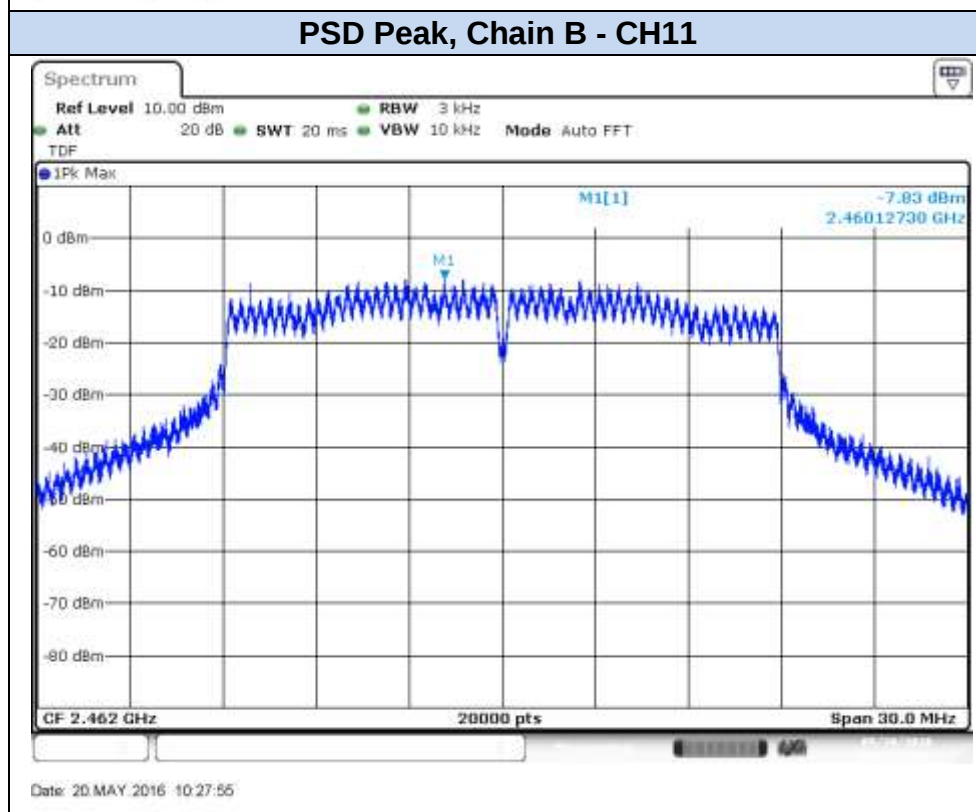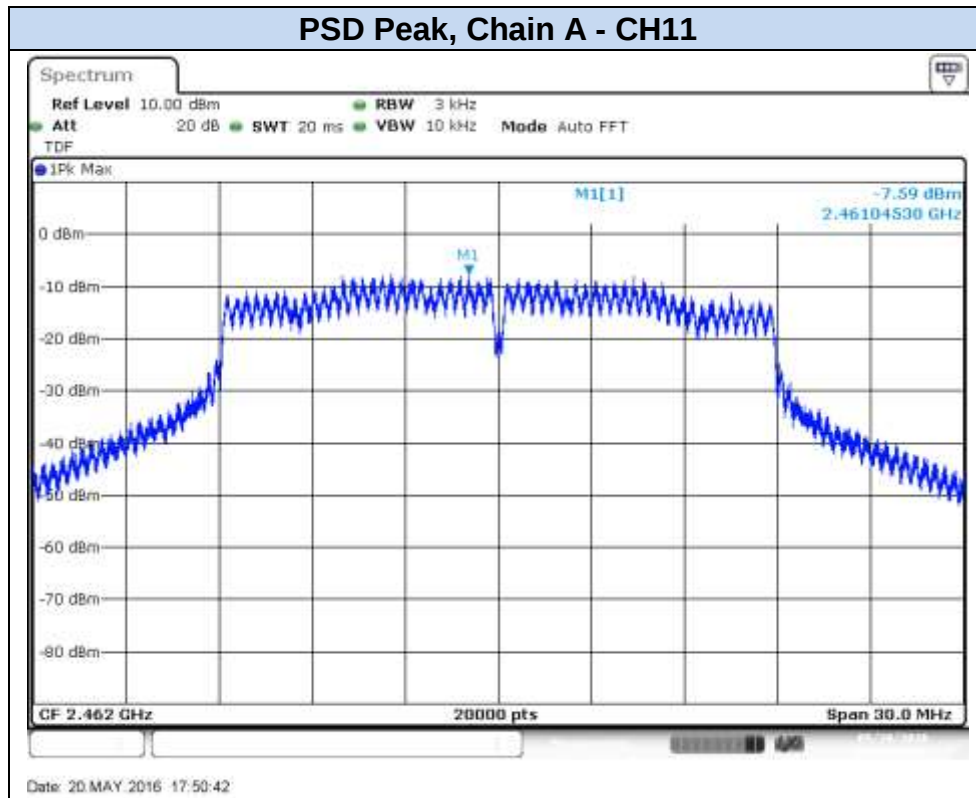


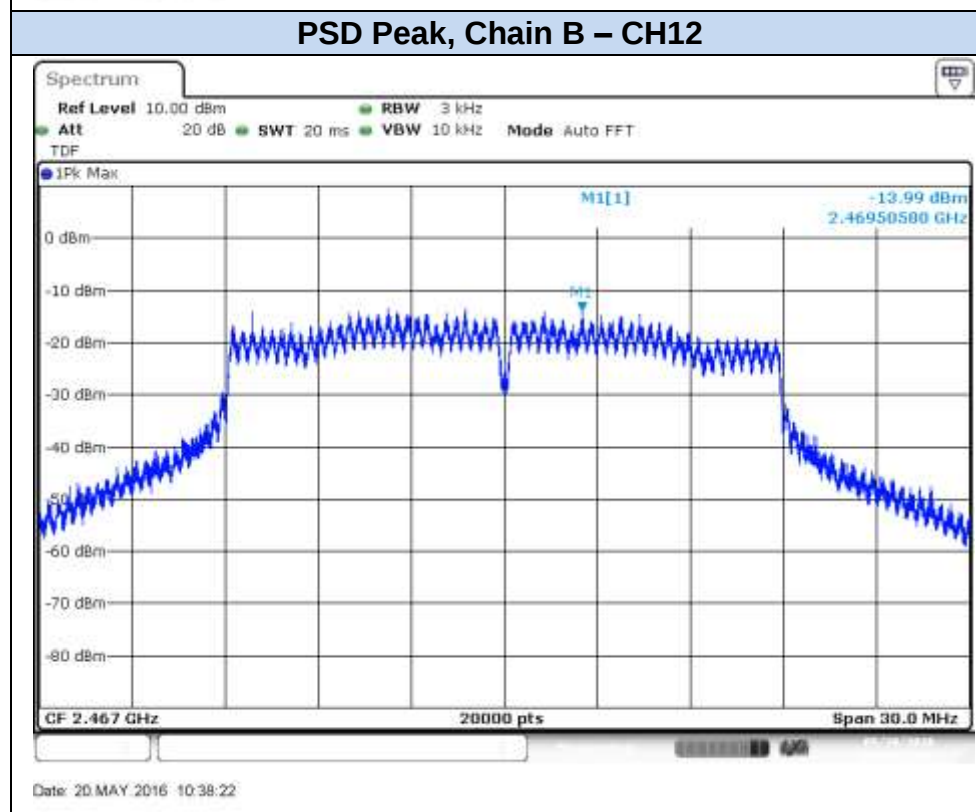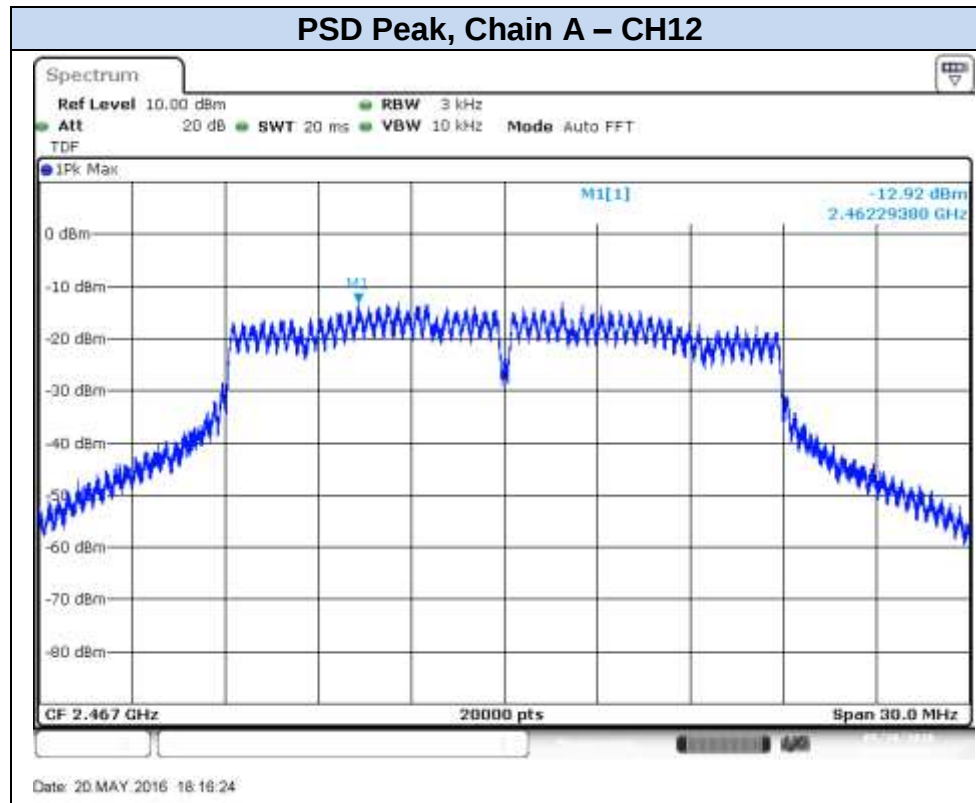

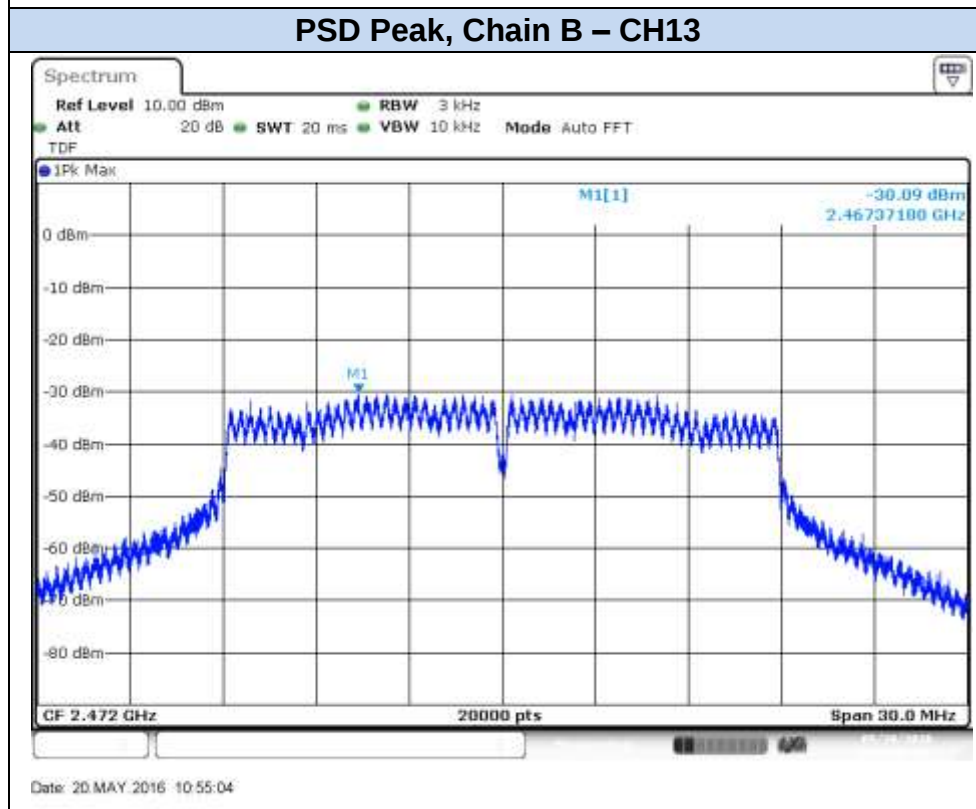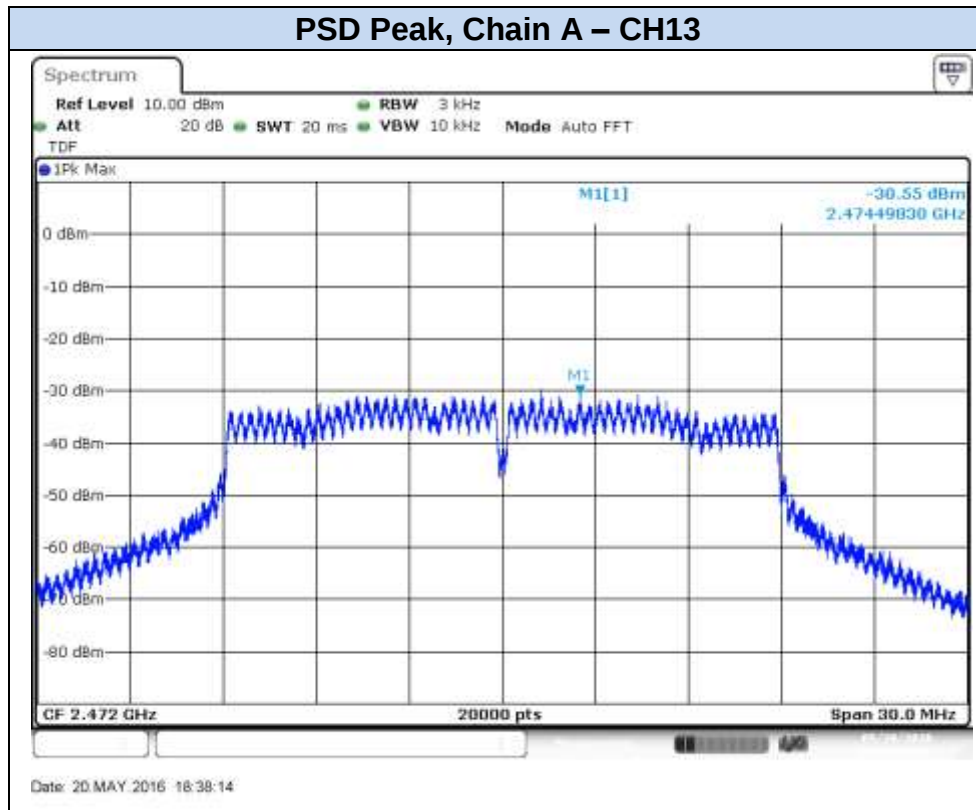




802.11n40, HT0 (SISO)



PSD Peak, Chain A – CH3F


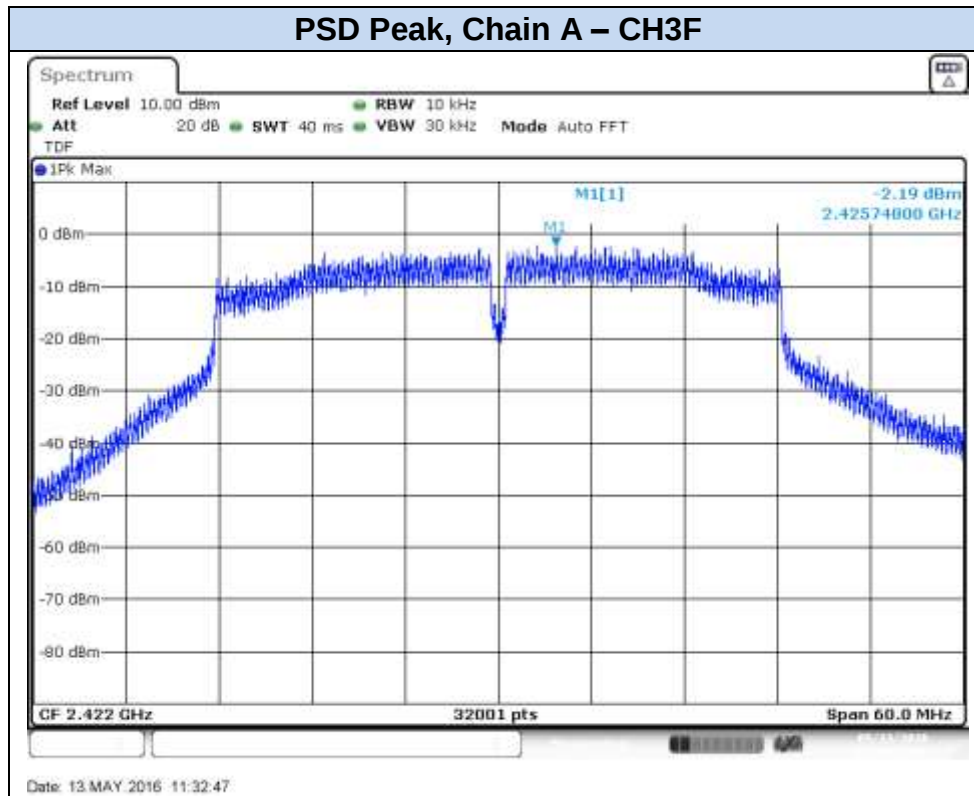




PSD Peak, Chain B – CH3F

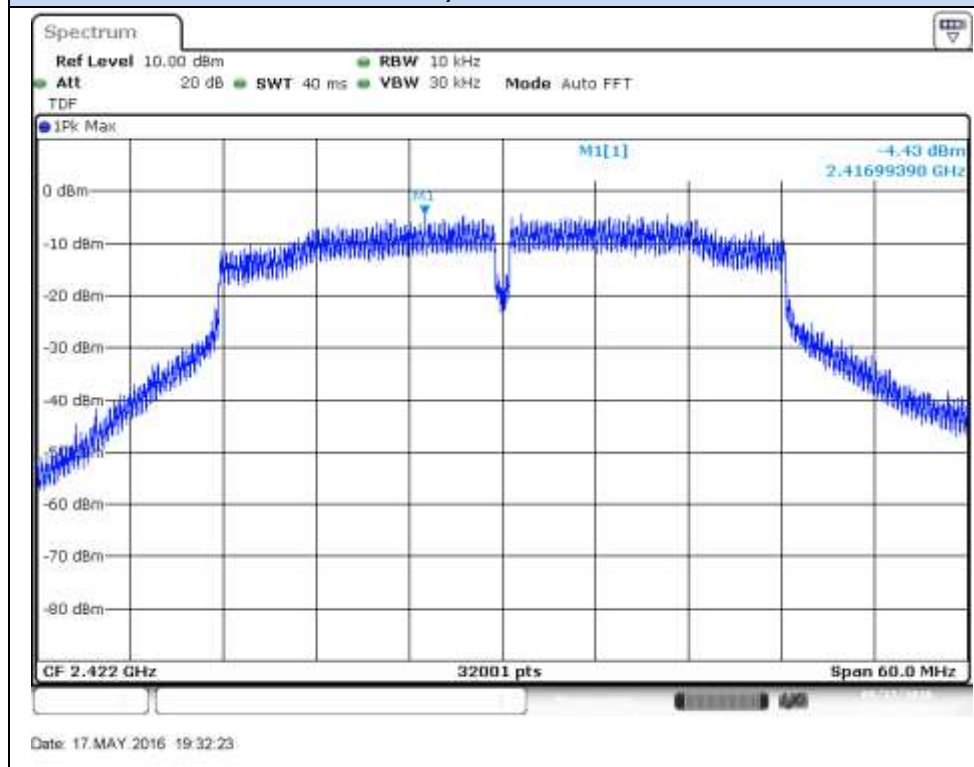

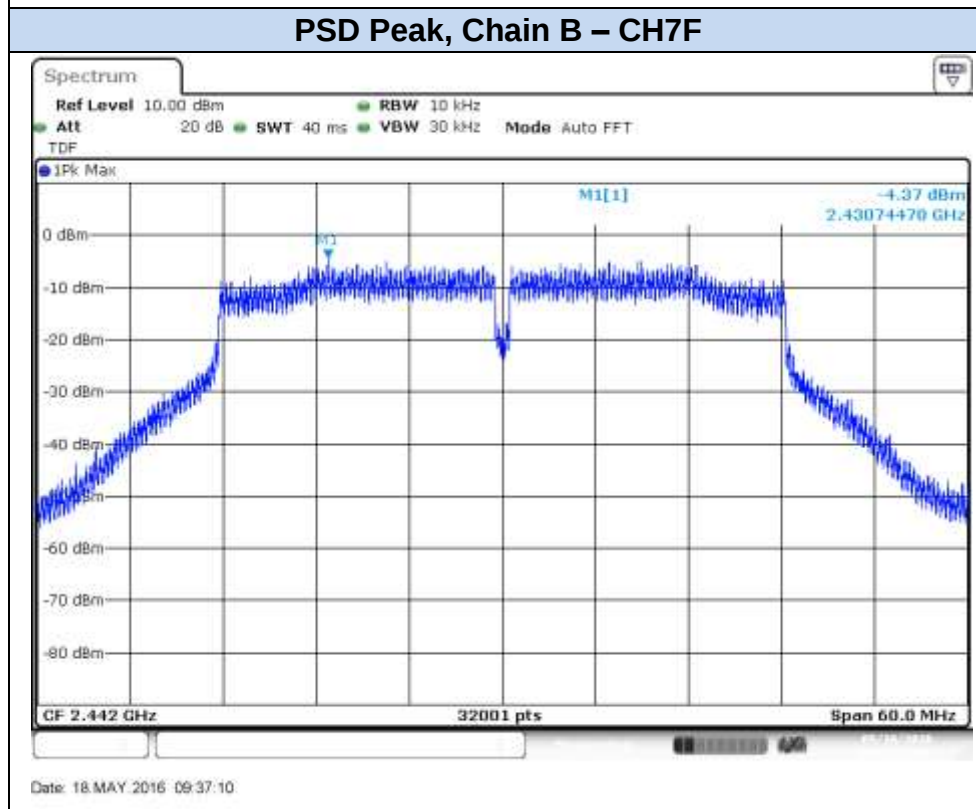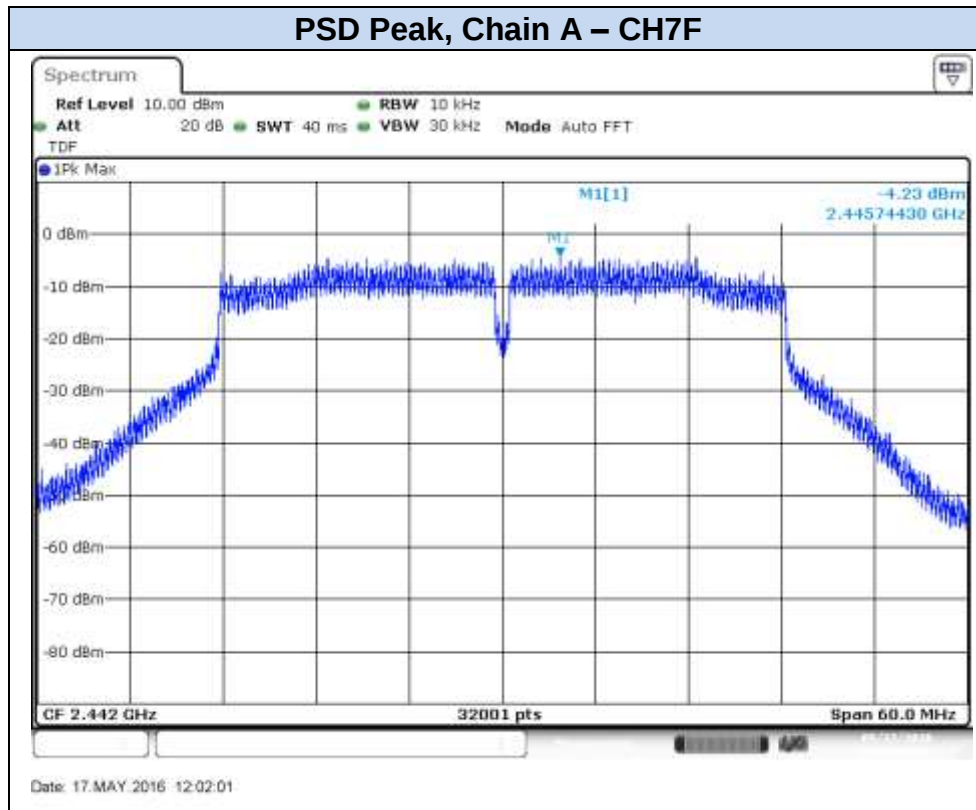

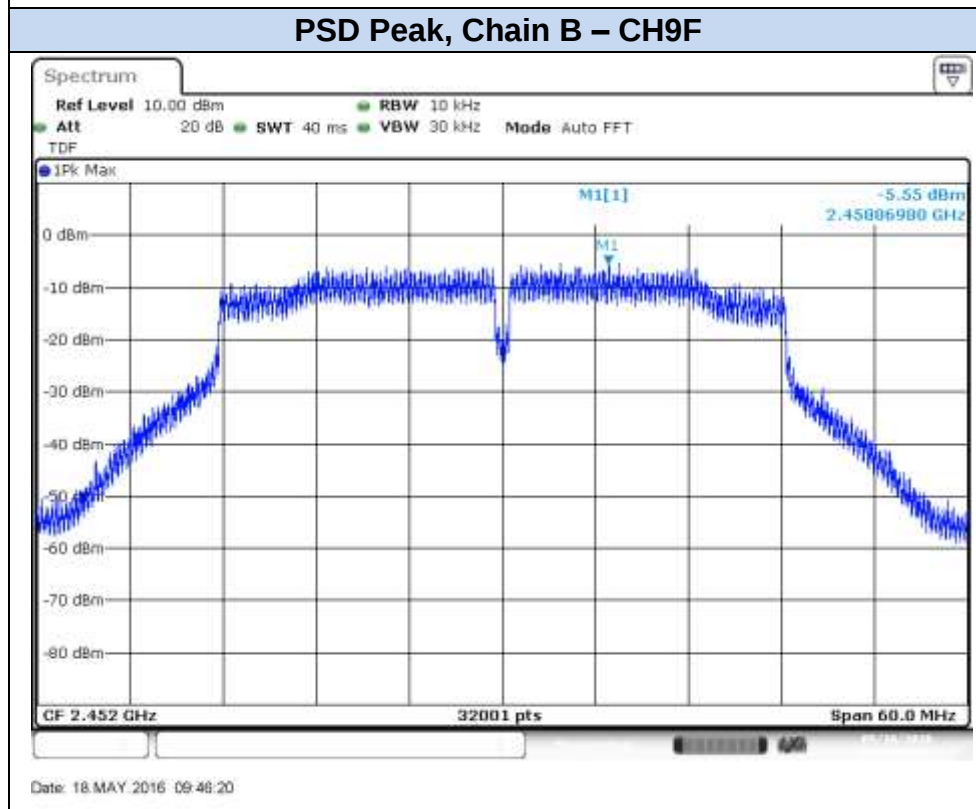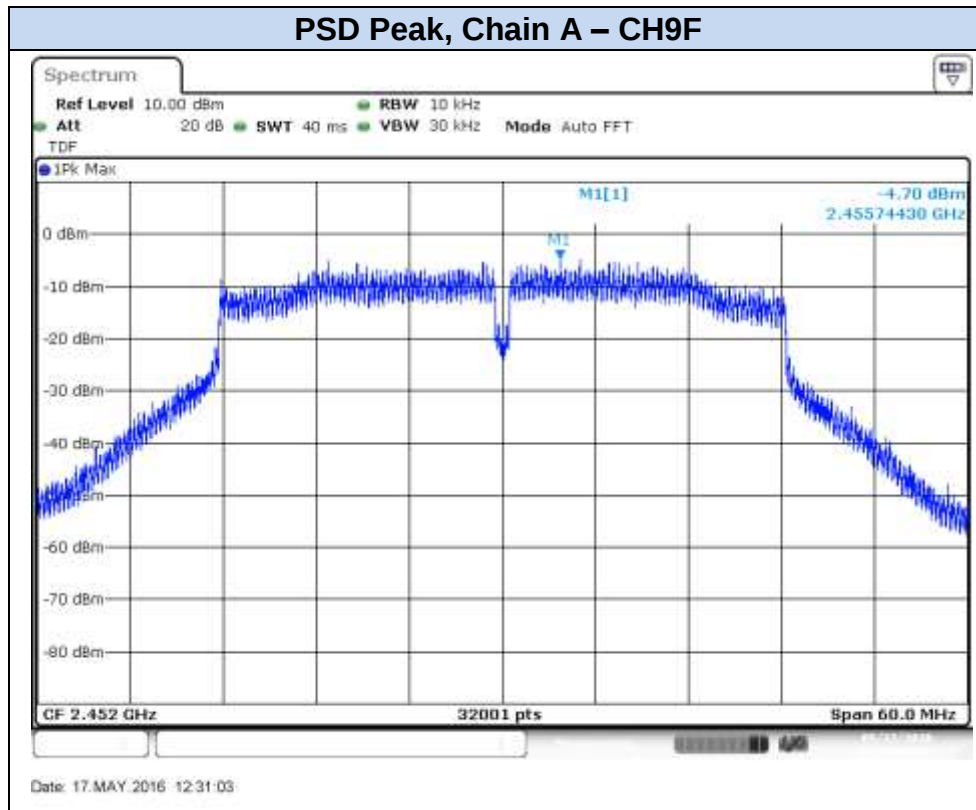


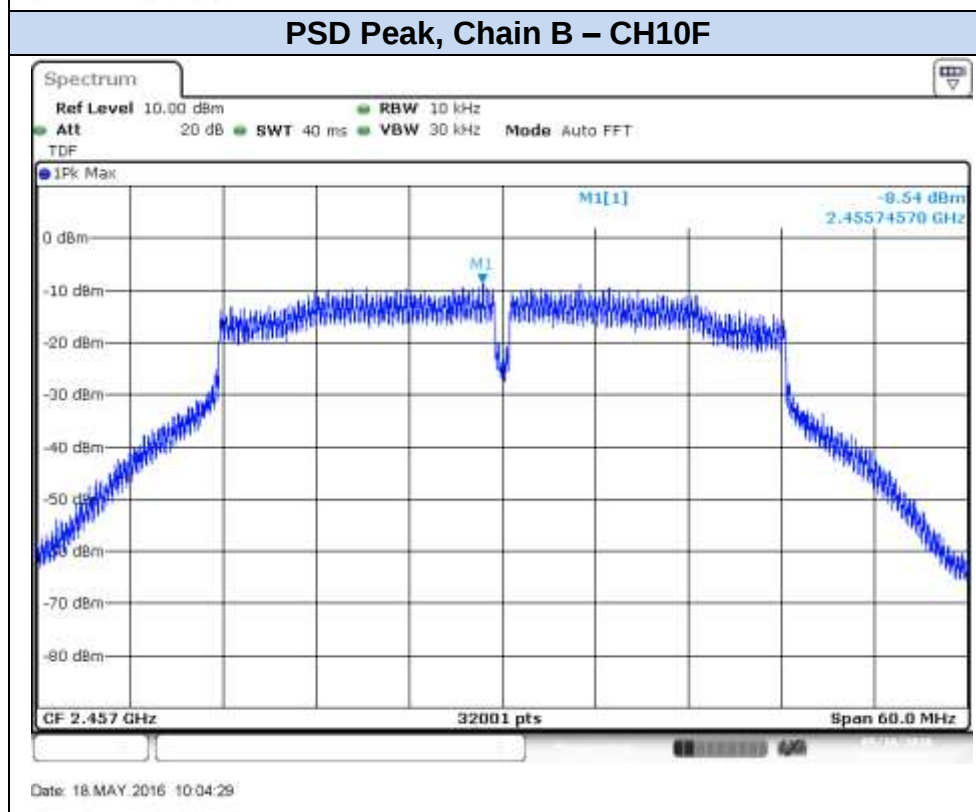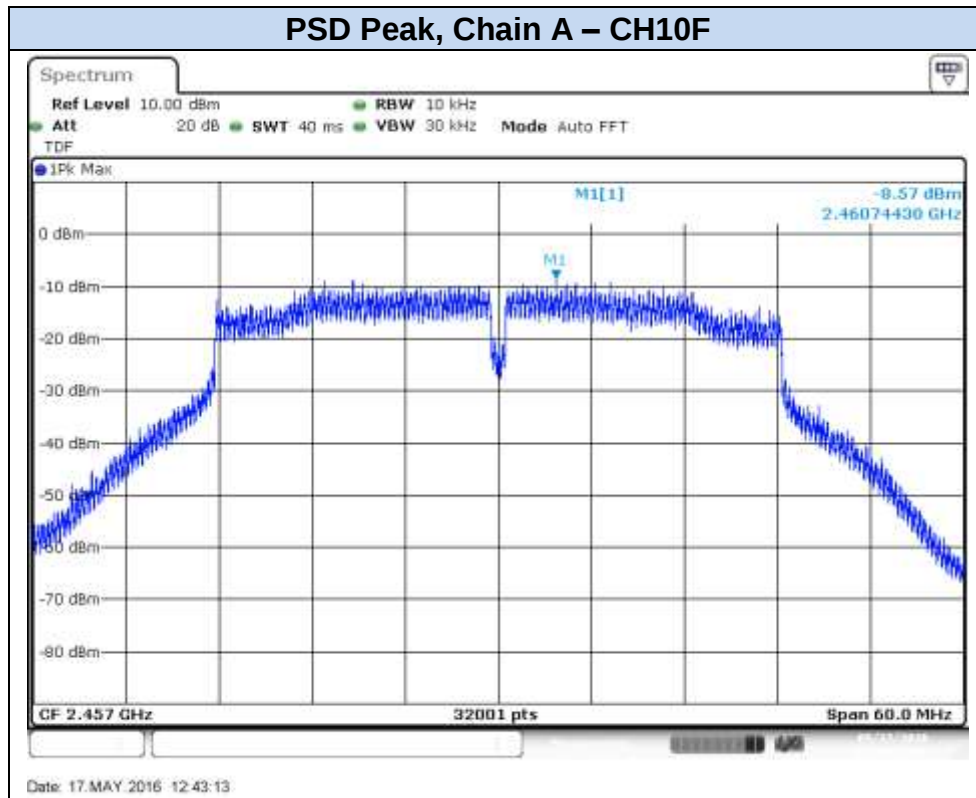

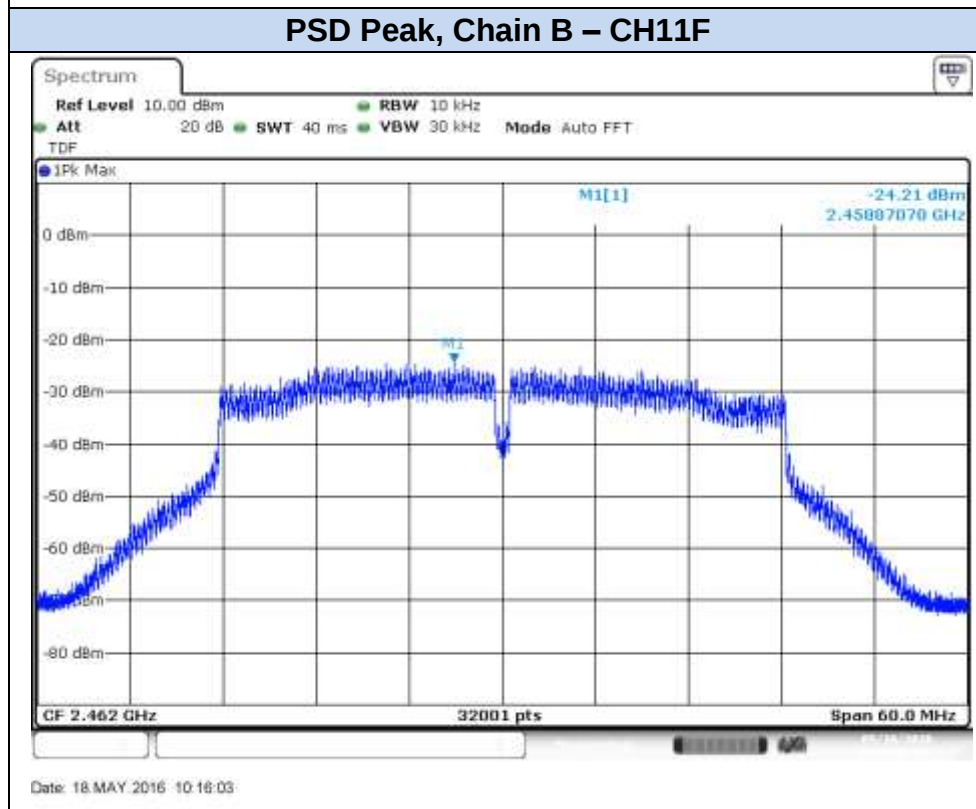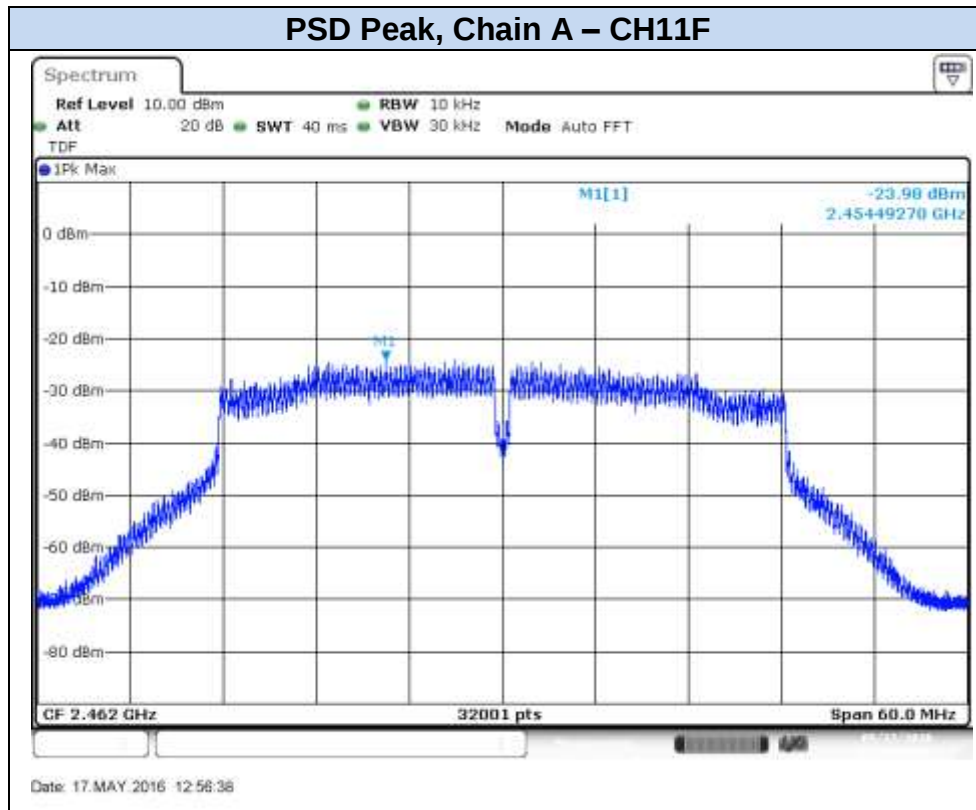




802.11n40, HT8 (MIMO)



PSD Peak, Chain A – CH3F


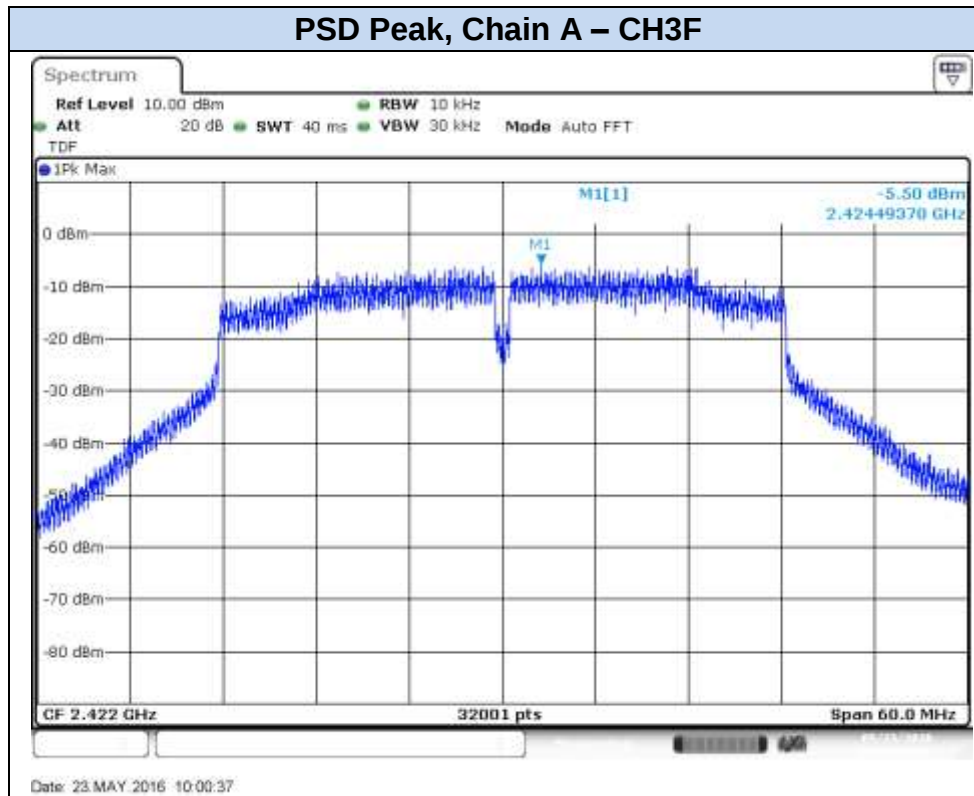




PSD Peak, Chain B – CH3F

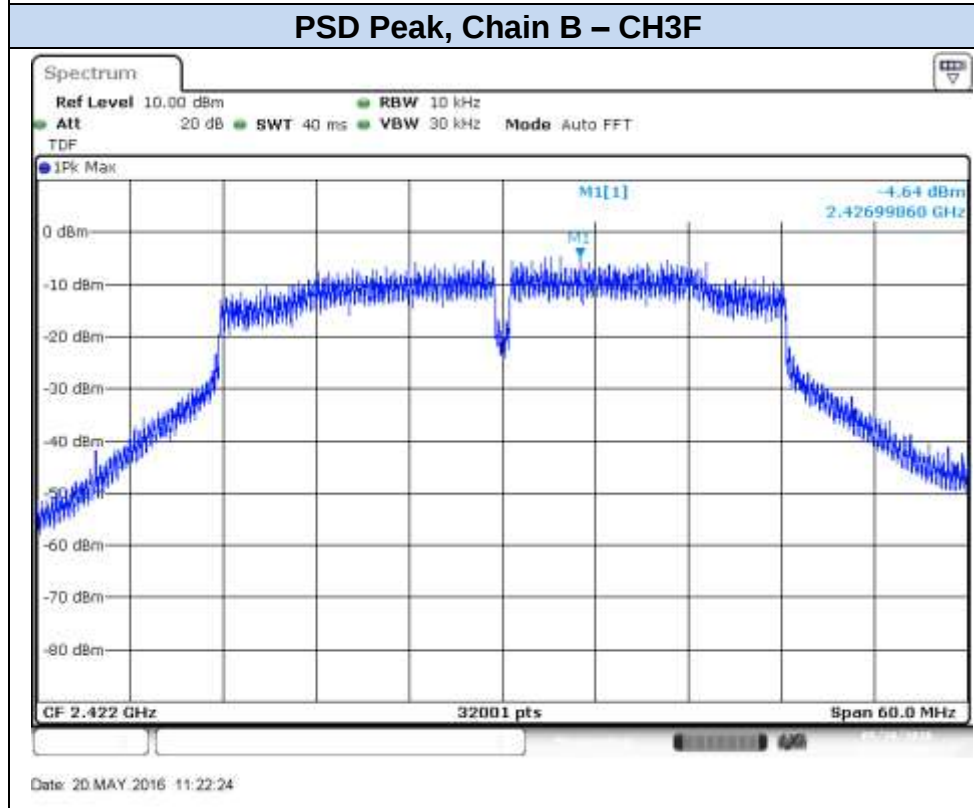

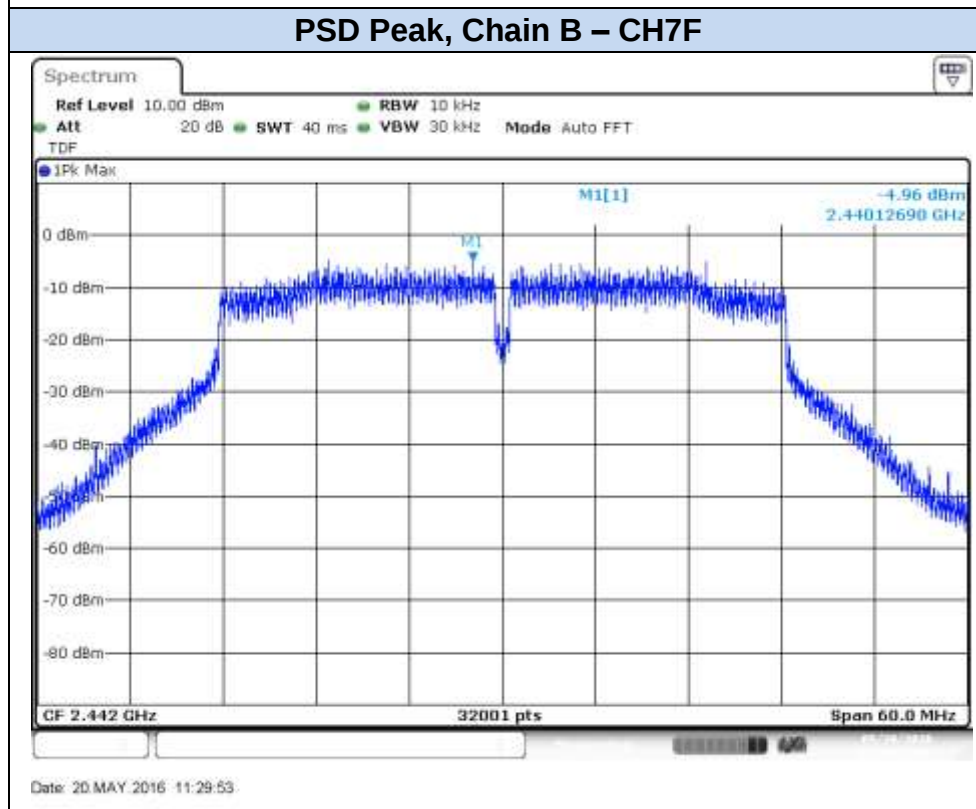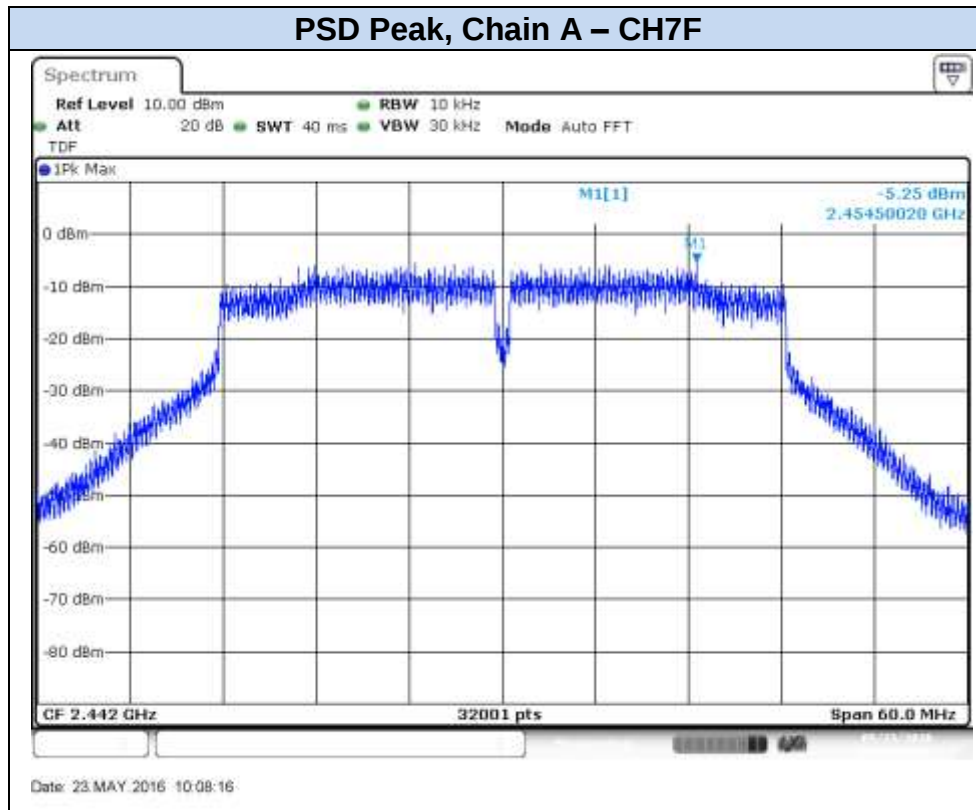

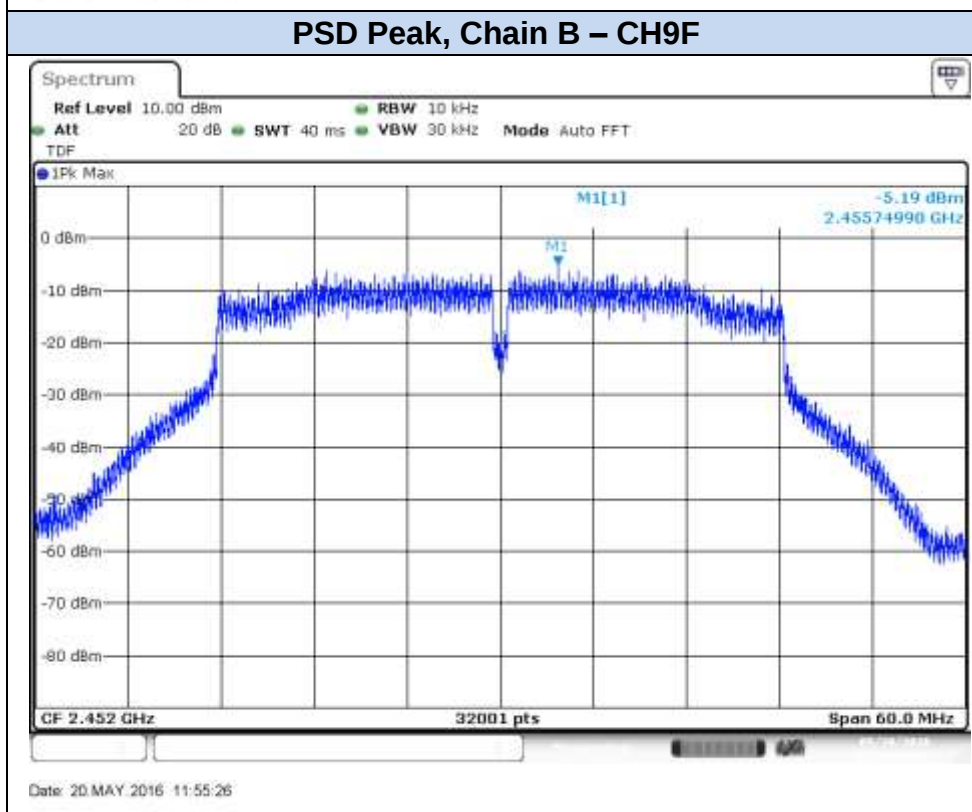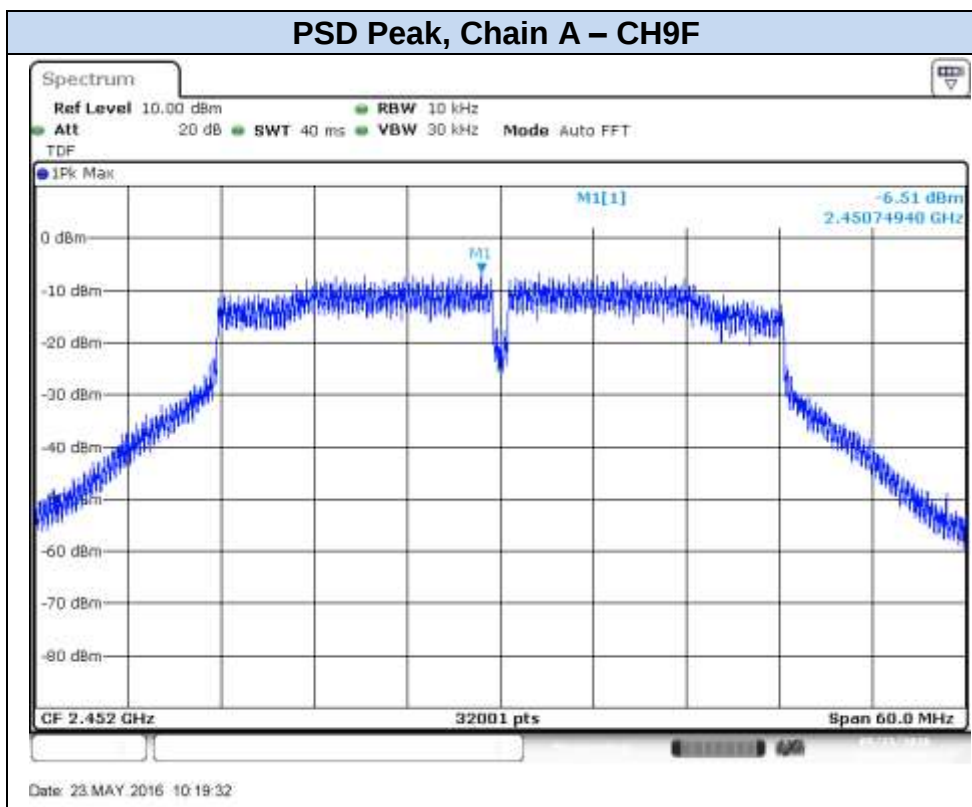

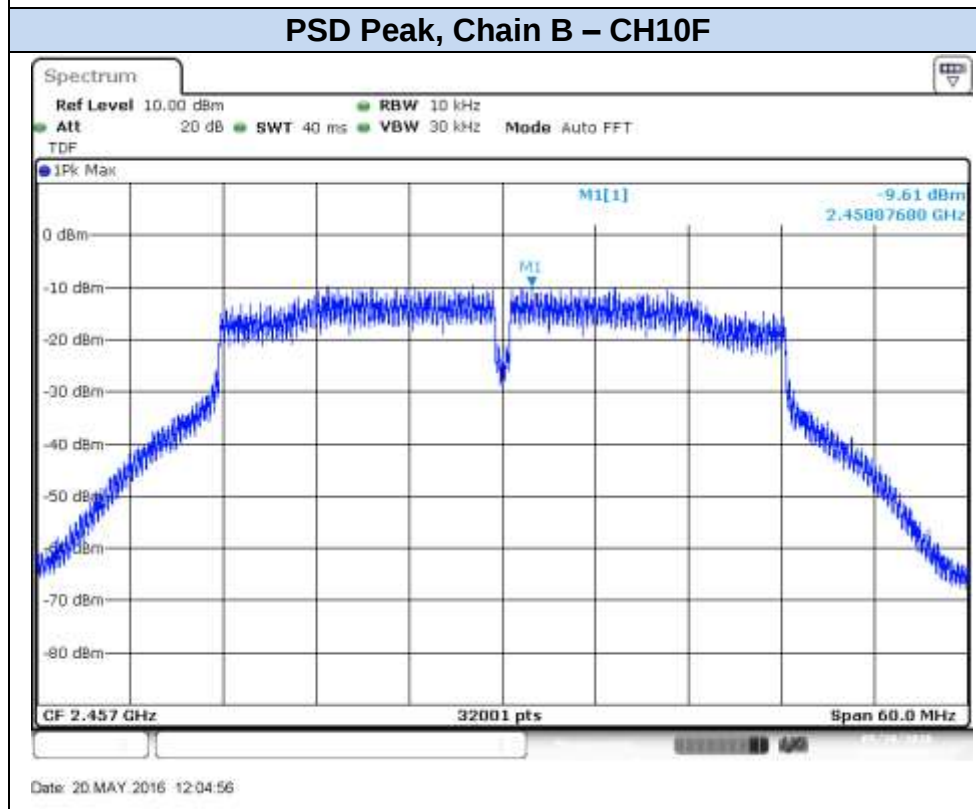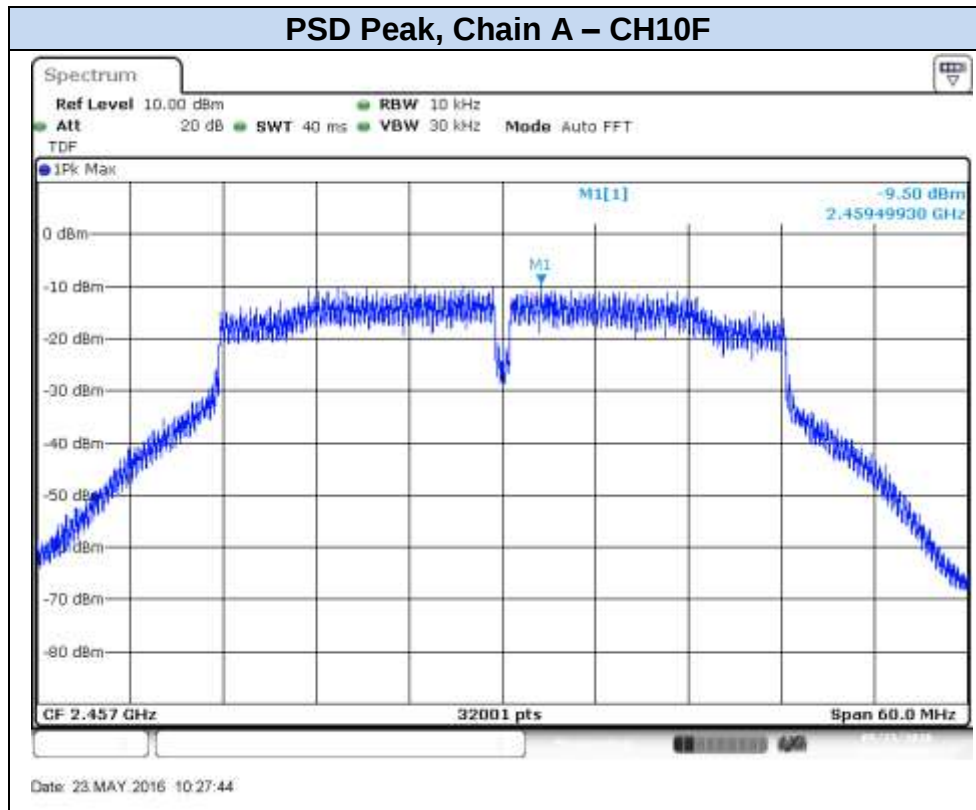

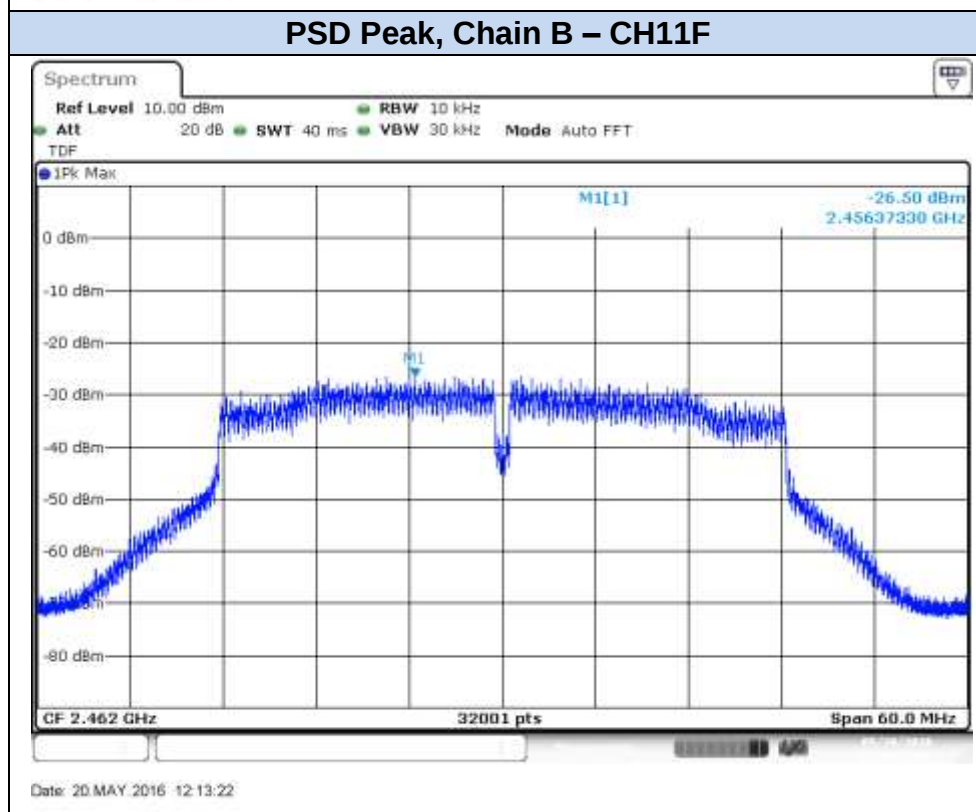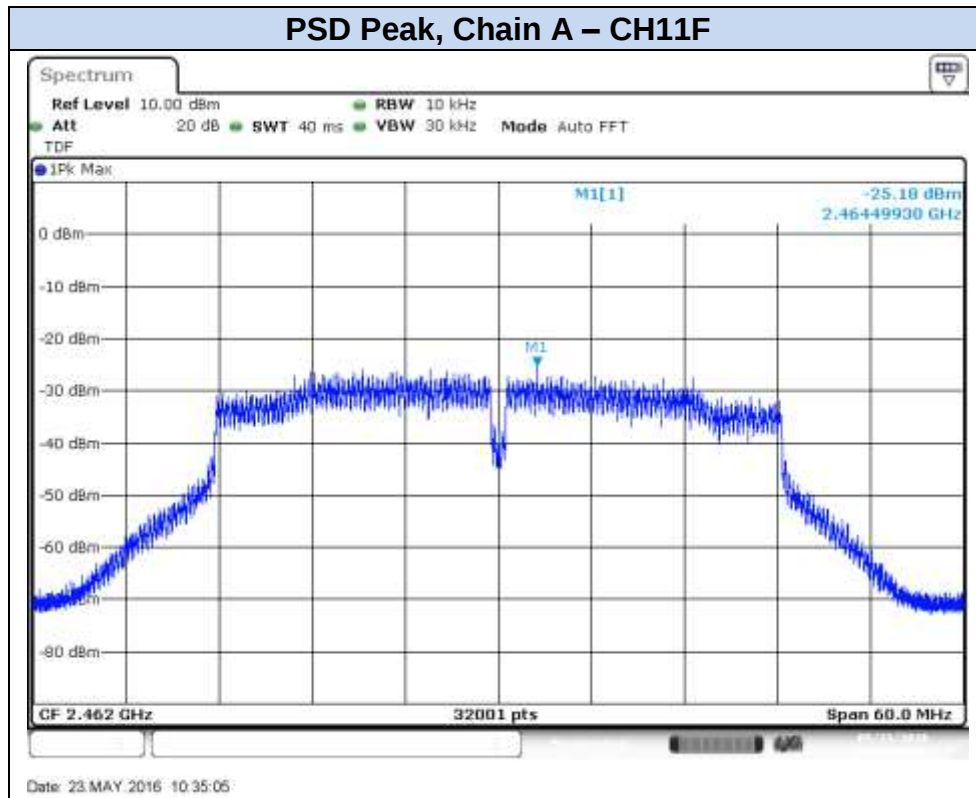

B.5 Radiated spurious emission

Standard references:

FCC part	RSS part	Limits																																
15.247 (d)	RSS-247 Clause 5.5	Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):																																
		<table><tr><th>Freq Range (MHz)</th><th>Field Strength (dBμV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>0.009-0.490</td><td>2400/f(kHz)</td><td>-</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/f(kHz)</td><td>-</td><td>300</td></tr><tr><td>1.705-30.0</td><td>30</td><td>-</td><td>30</td></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table>	Freq Range (MHz)	Field Strength (dBμV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	0.009-0.490	2400/f(kHz)	-	300	0.490-1.705	24000/f(kHz)	-	300	1.705-30.0	30	-	30	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
		Freq Range (MHz)	Field Strength (dBμV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																													
		0.009-0.490	2400/f(kHz)	-	300																													
		0.490-1.705	24000/f(kHz)	-	300																													
		1.705-30.0	30	-	30																													
		30-88	100	40	3																													
		88-216	150	43.5	3																													
		216-960	200	46	3																													
		Above 960	500	54	3																													
The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz. 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.																																		
For average radiated emission measurements above 1000 MHz. there is also a limit specified when measuring with peak detector function corresponding to 20 dB above the indicated values in the table.																																		

Test procedure:


The setups below were used to measure the radiated spurious emissions.

Depending of the frequency range and bands being tested, different antennas and filters were used.


The final measurement is done by varying the antenna height from 1 to 4 meters, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

The radiated spurious emissions were measured on the worst case configuration selected from the chapter *B.2 Maximum Output Power and antenna gain* and using the lowest, middle and highest channels.


Radiated Setup < 1GHz

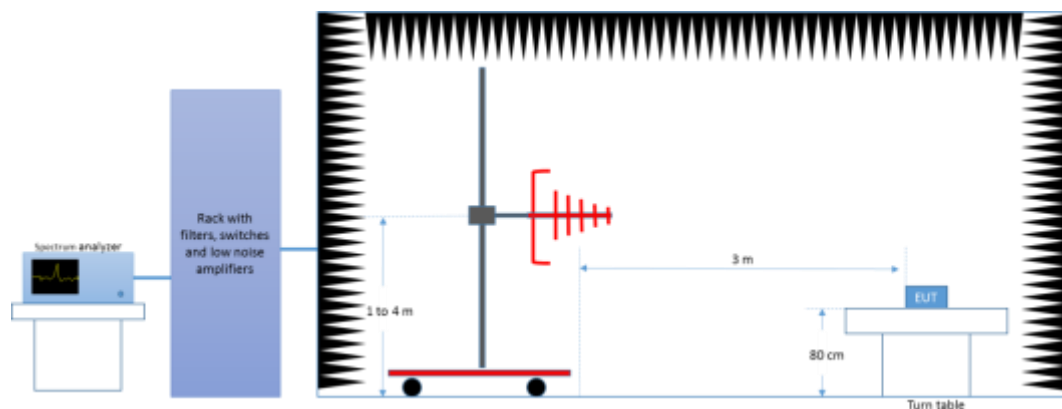


Radiated Setup 1GHz - 18GHz

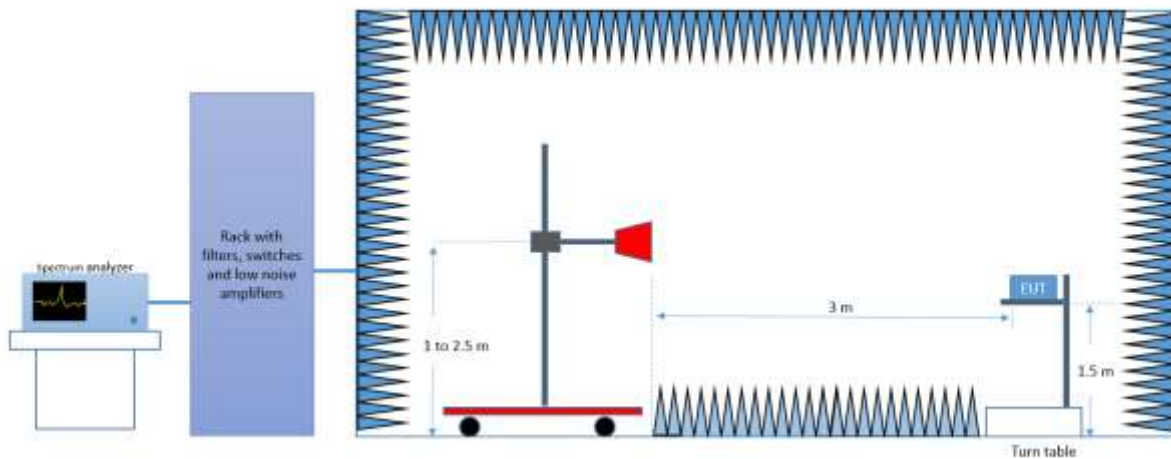

Radiated Setup 18 GHz - 25 GHz

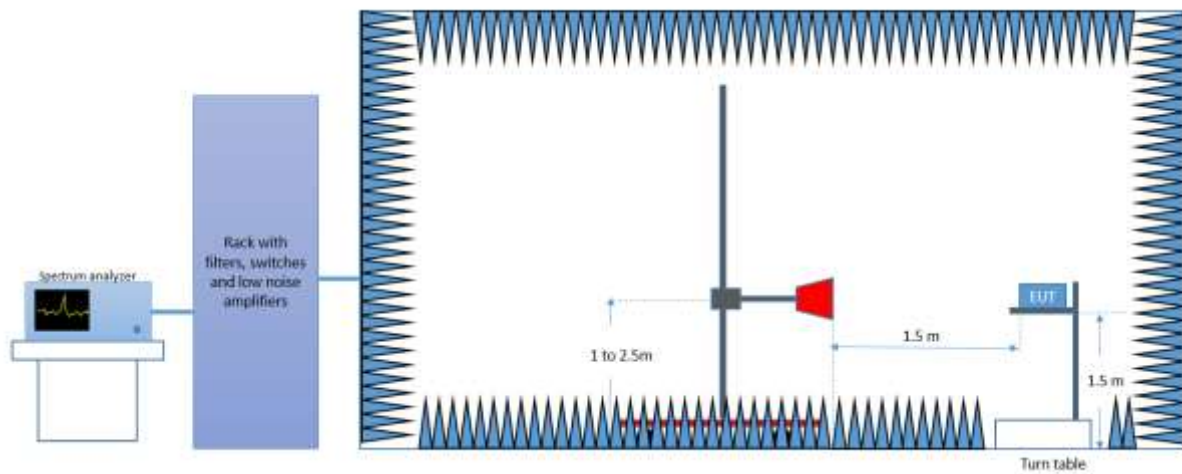

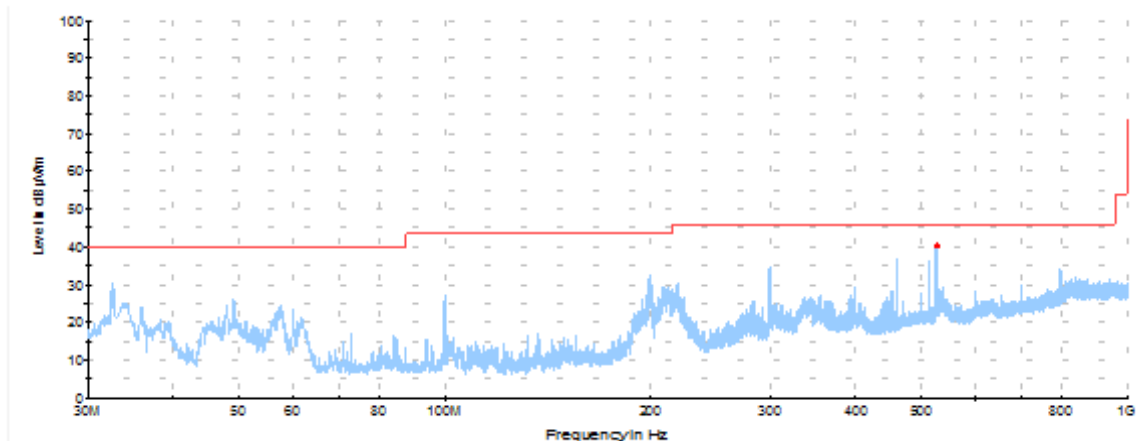Test Results:**Radiated Spurious – 30MHz – 1GHz****Radiated Spurious – All Modes**



— Peak measurements — Limit FCC Peak

Frequency	Max Peak	Limit	Margin
MHz	dBuV/m	dBuV/m	dB
526	40.2	46	5.9

Note 1: The spurious signals detected do not depend on either the operating channel or the modulation mode.

Radiated Spurious – 1 GHz to 18GHz 802.11b, 1Mbps, Chain A



Radiated Spurious – Ch1

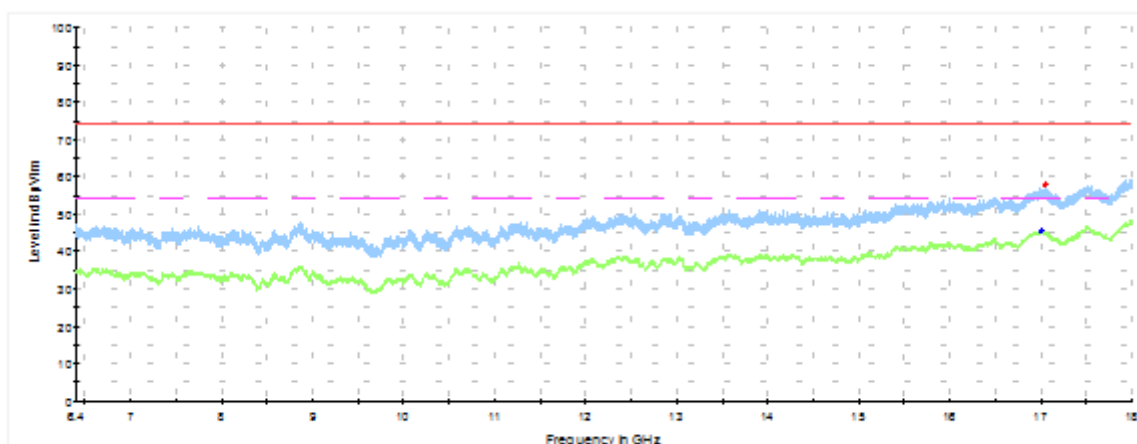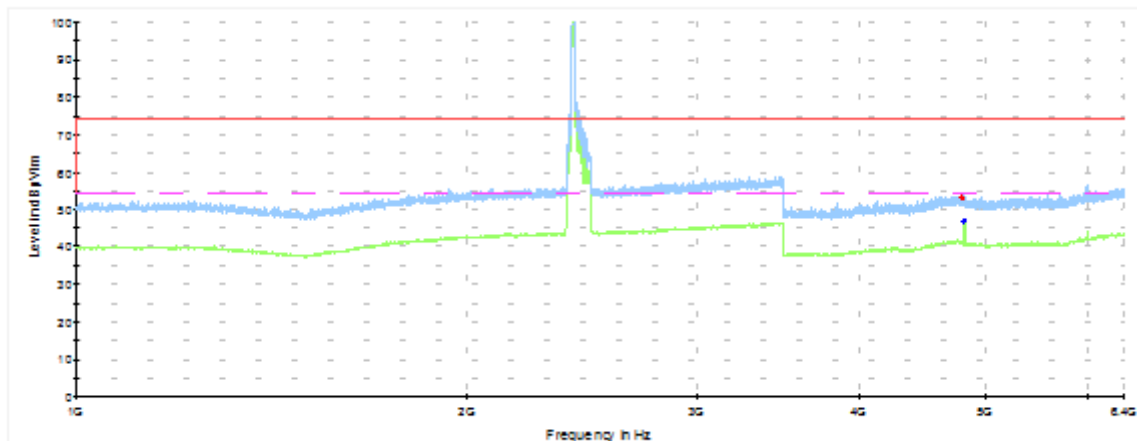

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
4800	53.2	-	74	20.8
4823	-	46.8	54	7.2
17005	57.7	-	74	16.3
17043	-	45.6	54	8.4



Radiated Spurious – Ch7

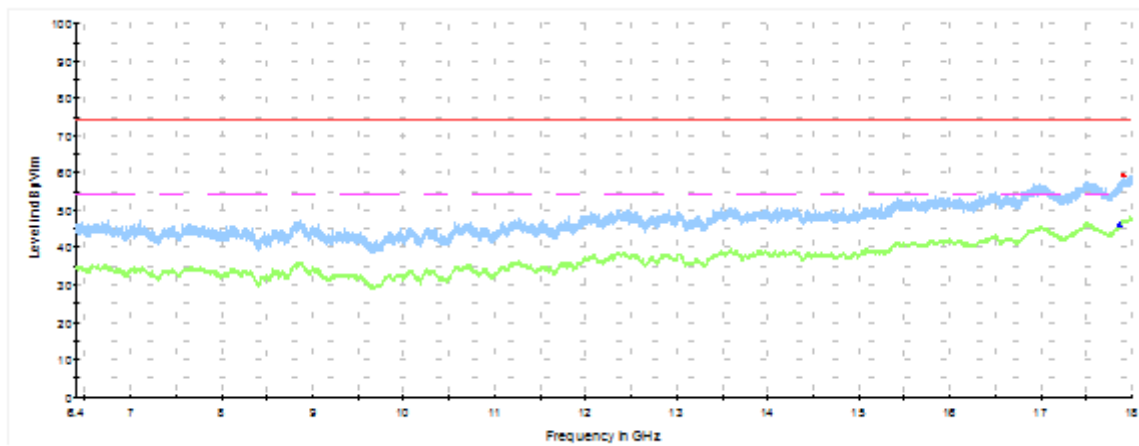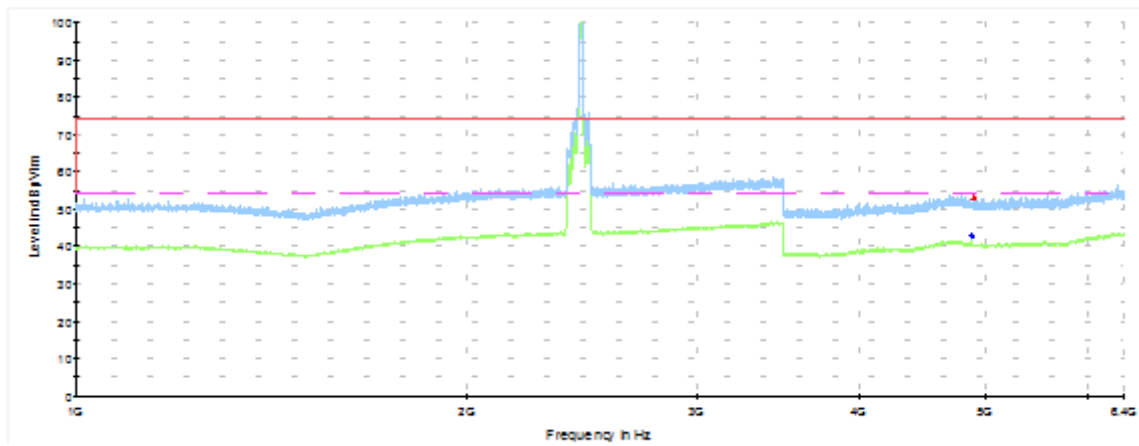

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency		Max Peak	Avg	Limit	Margin
MHz		dBuV/m	dBuV/m	dBuV/m	dB
4884		52.9	-	74	21.1
4903		-	43.0	54	11.0
17858		59.3	-	74	14.7
17858		-	46.0	54	8.0

Radiated Spurious – Ch11

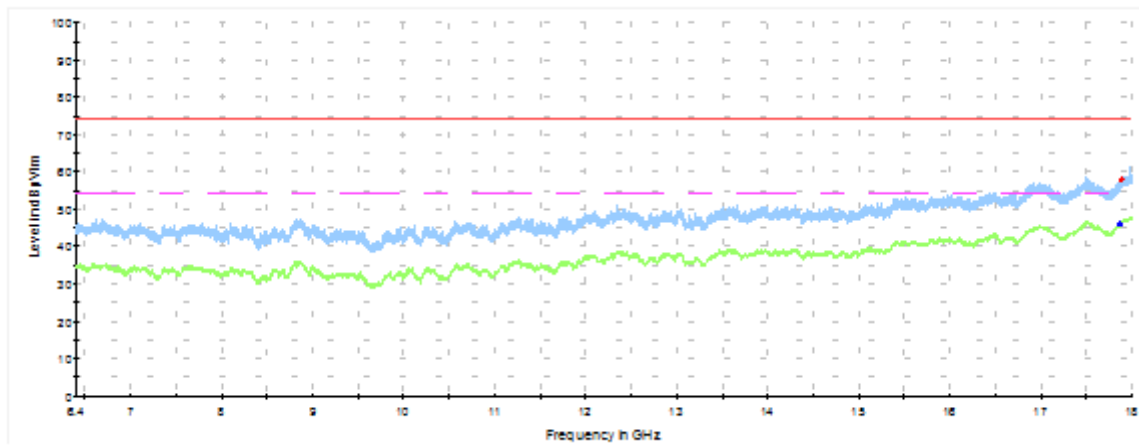
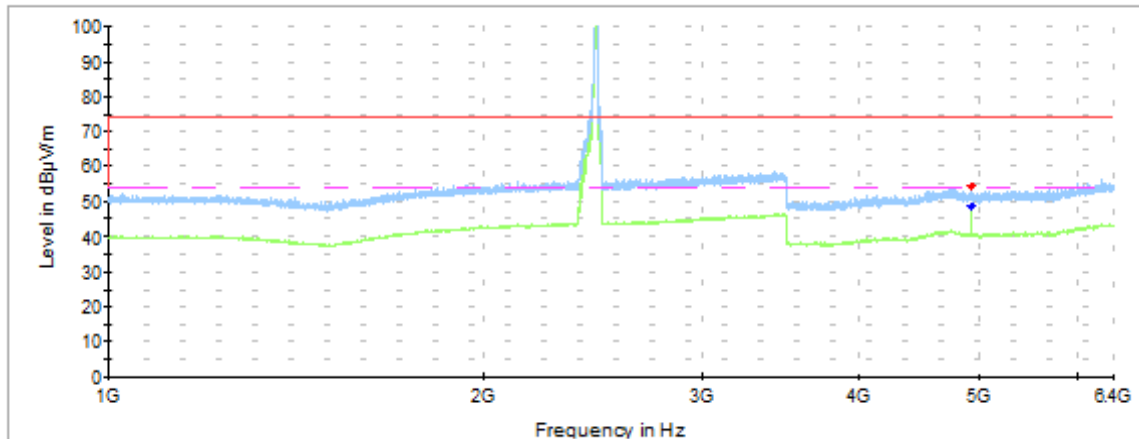


— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 — Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
4923	56.9	-	74	17.1
4923	-	50.9	54	3.1
17865	57.8	-	74	16.2
17865	-	46.1	54	7.9

Radiated Spurious – 1 GHz to 18GHz 802.11b, 1Mbps, Chain B



Radiated Spurious – Ch1

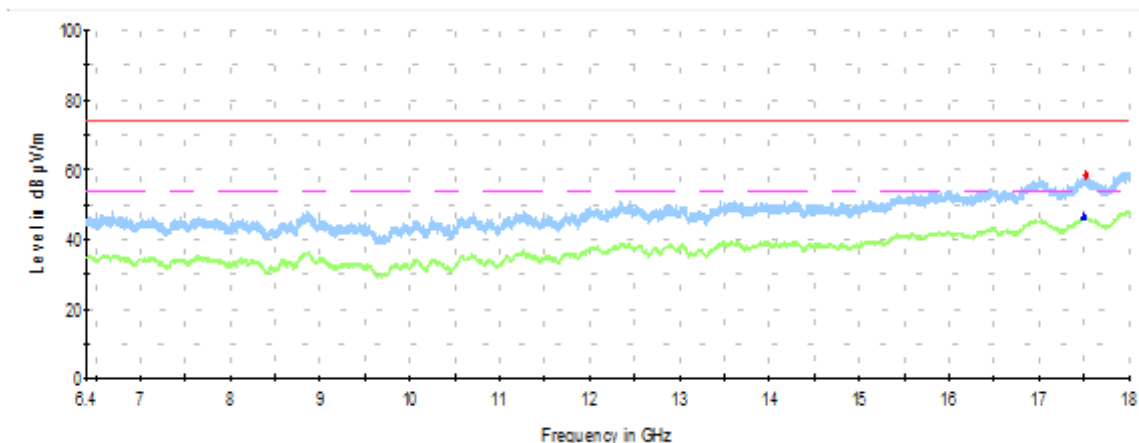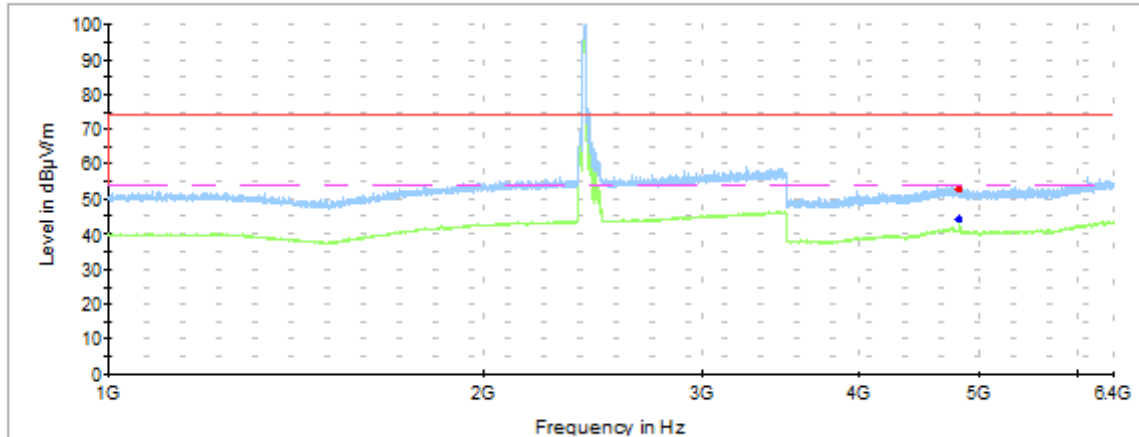

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - Limit FCC Avg

Frequency		Max Peak	Avg	Limit	Margin
MHz		dBuV/m	dBuV/m	dBuV/m	dB
4823		54.2	-	74	19.8
4823		-	44.5	54	9.5
17502		58.3	-	74	15.7
17531		-	46.4	54	7.6



Radiated Spurious – Ch7

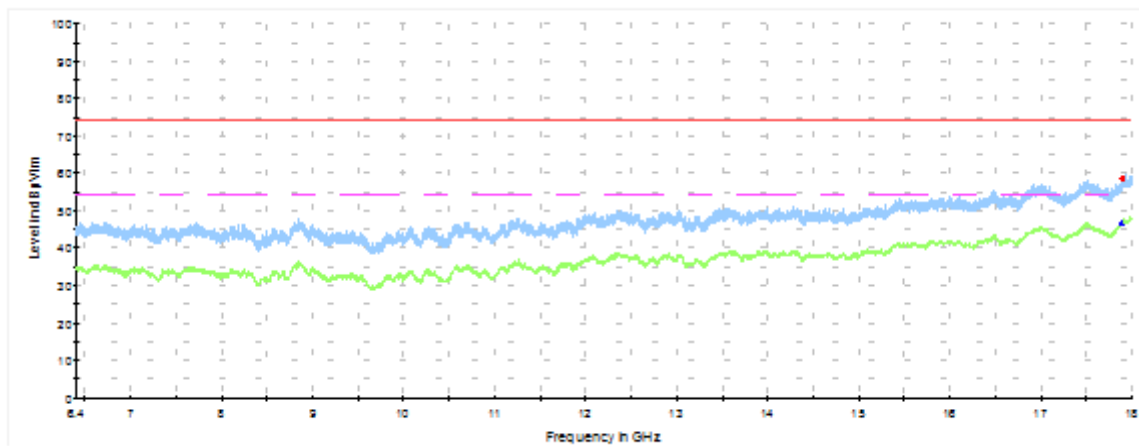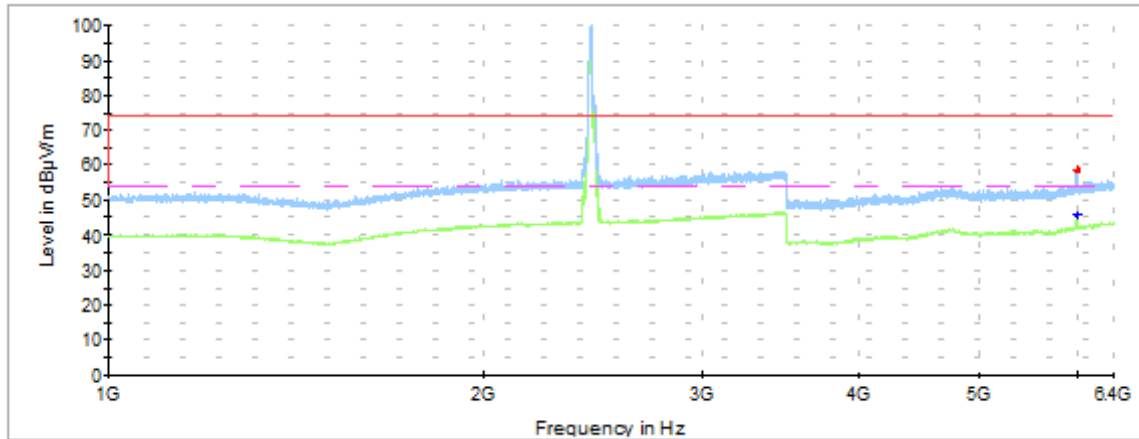

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - Limit FCC Avg

Frequency		Max Peak	Avg	Limit	Margin
MHz		dBuV/m	dBuV/m	dBuV/m	dB
5998		53.3	-	74	20.7
5998		-	41.9	54	12.1
17888		58.6	-	74	15.4
17901		-	46.4	54	7.6

Radiated Spurious – Ch11

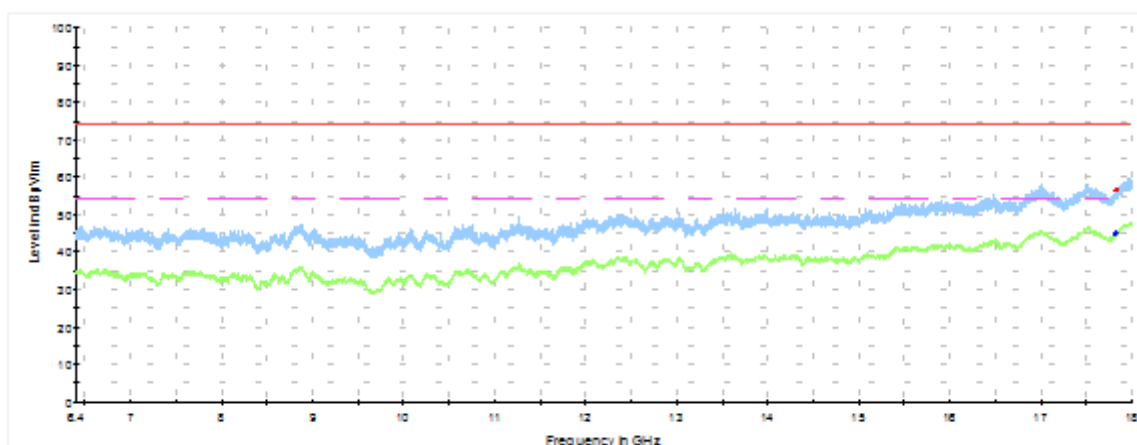
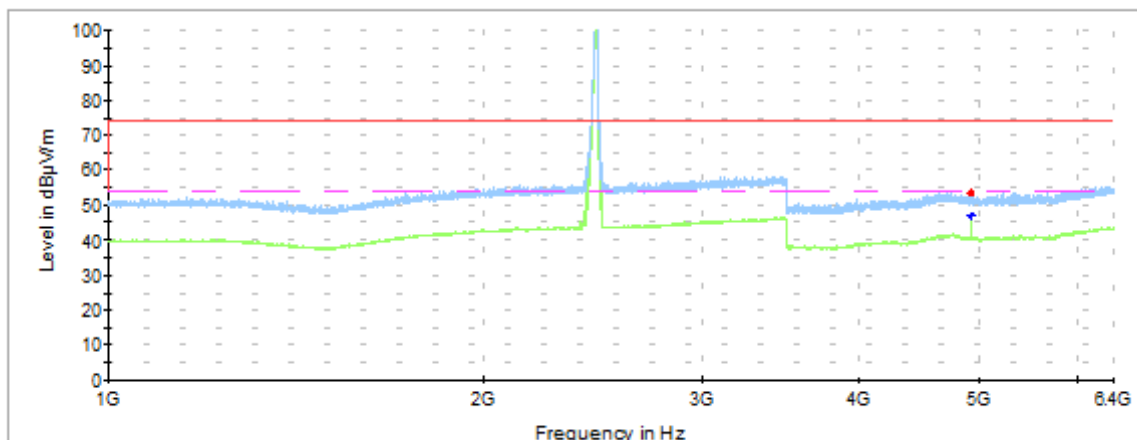


— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 — Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
4923	55.2	-	74	18.8
4923	-	48.9	54	5.1
17818	56.6	-	74	17.4
17824	-	45.0	54	9.0

Radiated Spurious – 1 GHz to 18GHz 802.11g, 6Mbps, Chain A



Radiated Spurious – Ch1

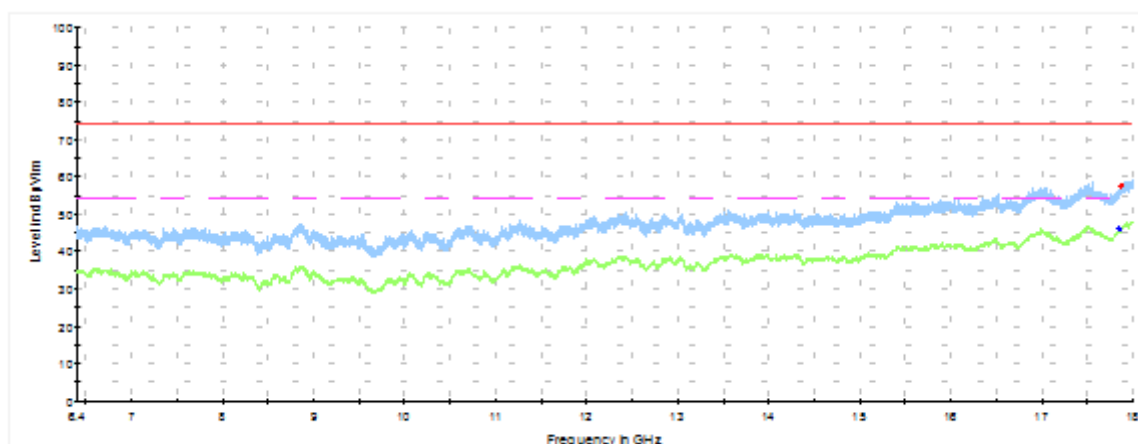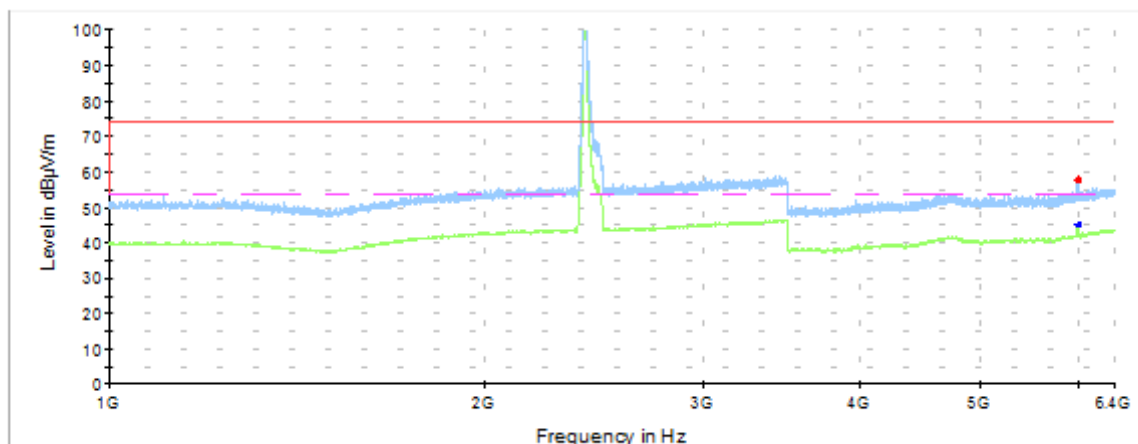

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
5994	53.9	-	74	20.1
5990	-	42.4	54	11.6
17856	57.6	-	74	16.4
17856	-	46.0	54	8.0



Radiated Spurious – Ch7

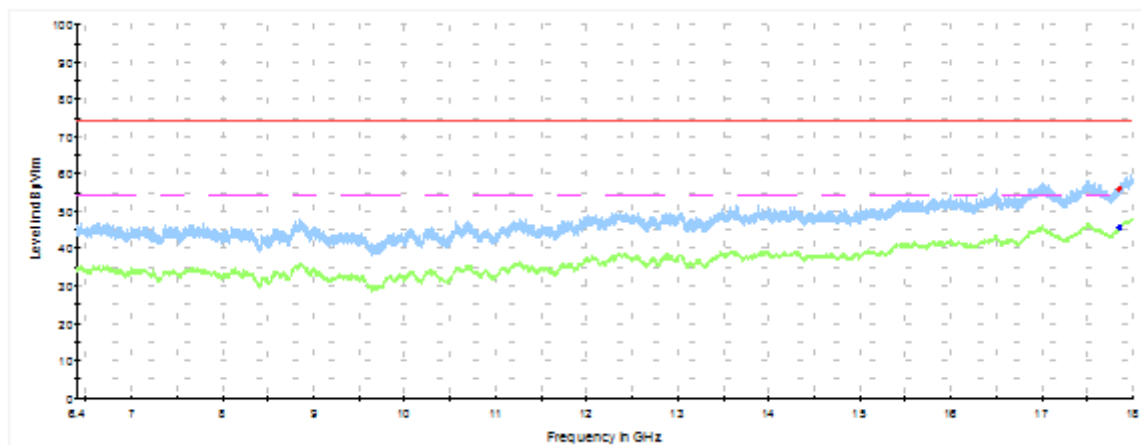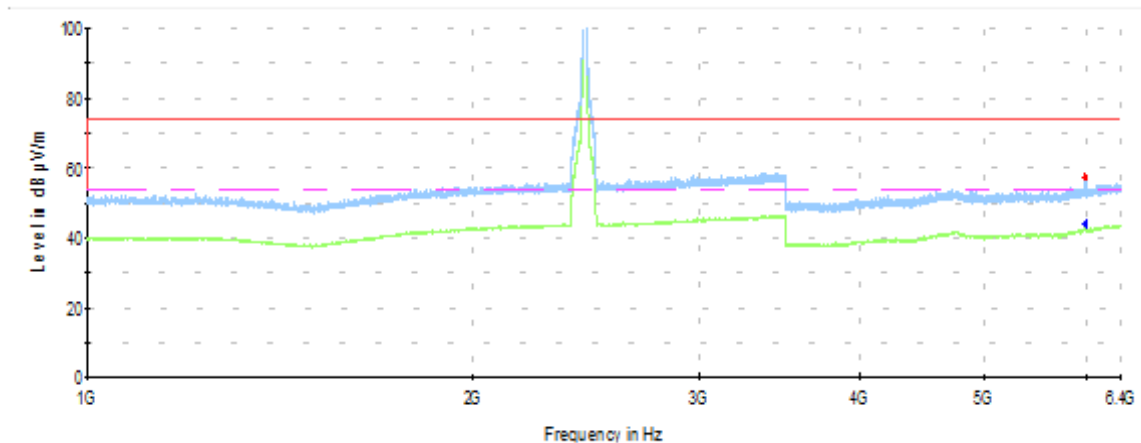

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
5991	57.4	-	74	16.6
5991	-	44.1	54	9.9
17856	56.0	-	74	18.0
17863	-	45.8	54	8.3

Radiated Spurious – Ch11

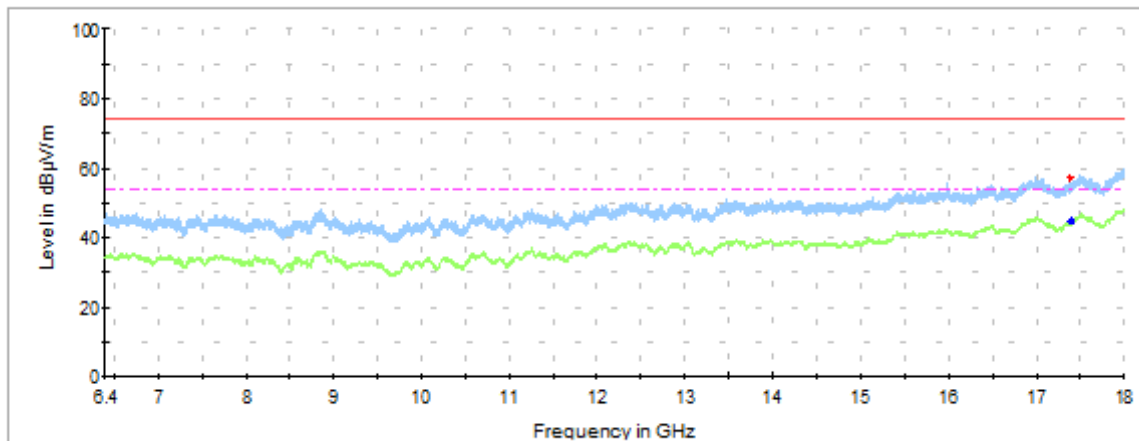
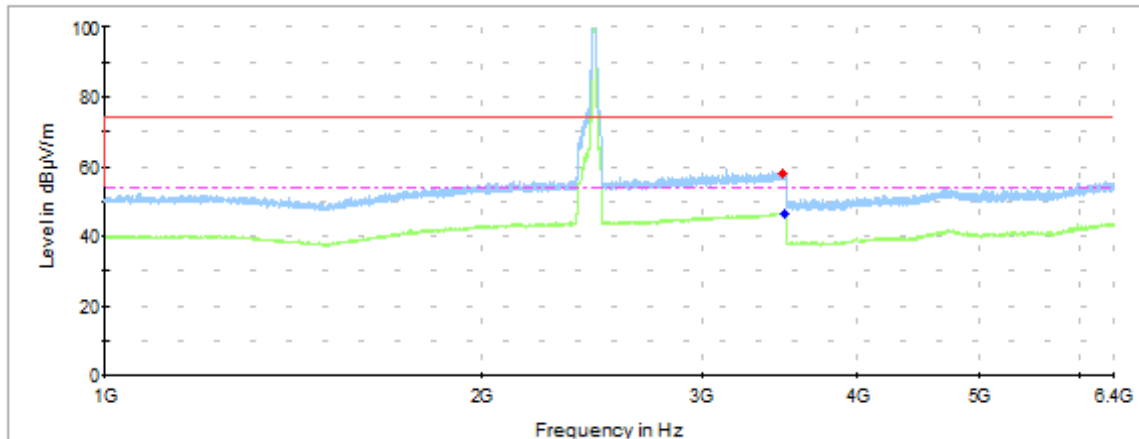


— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency		Max Peak	Avg	Limit	Margin
MHz		dBuV/m	dBuV/m	dBuV/m	dB
3484		57.8	-	74	16.2
3484		-	46.2	54	7.8
17400		57.3	-	74	16.7
17400		-	44.5	54	9.5

Radiated Spurious – 1 GHz to 18 GHz 802.11g, 6Mbps, Chain B



Radiated Spurious – Ch1

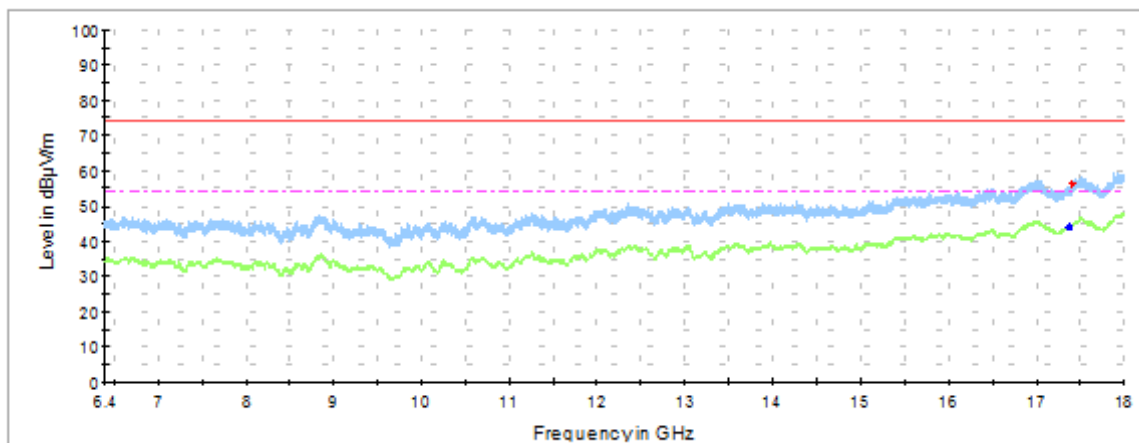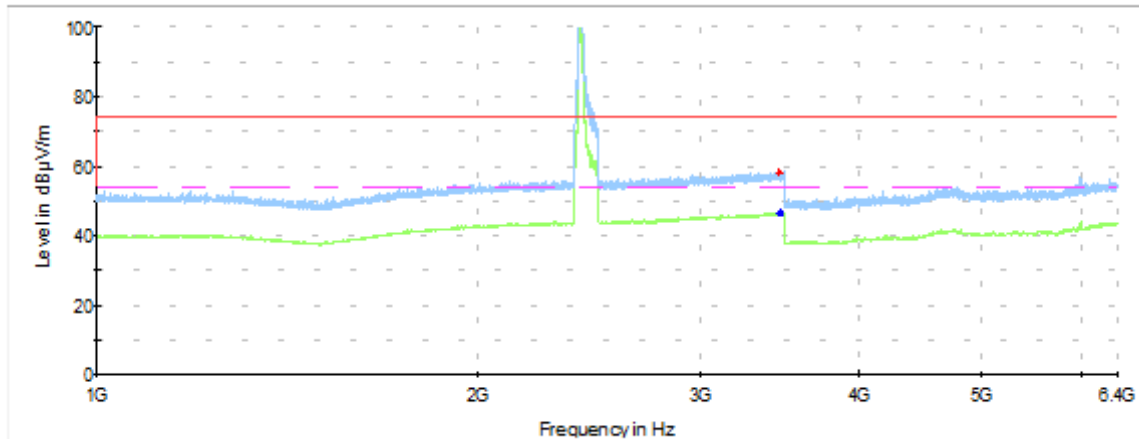

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
3461	58.1	-	74	15.9
3461	-	46.4	54	7.6
17374	56.1	-	74	17.9
17414	-	44.0	54	10.0



Radiated Spurious – Ch7

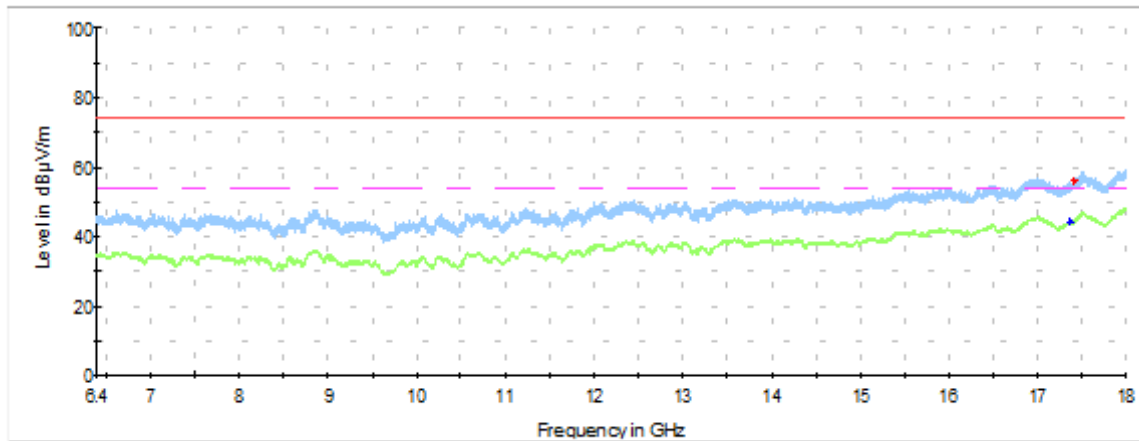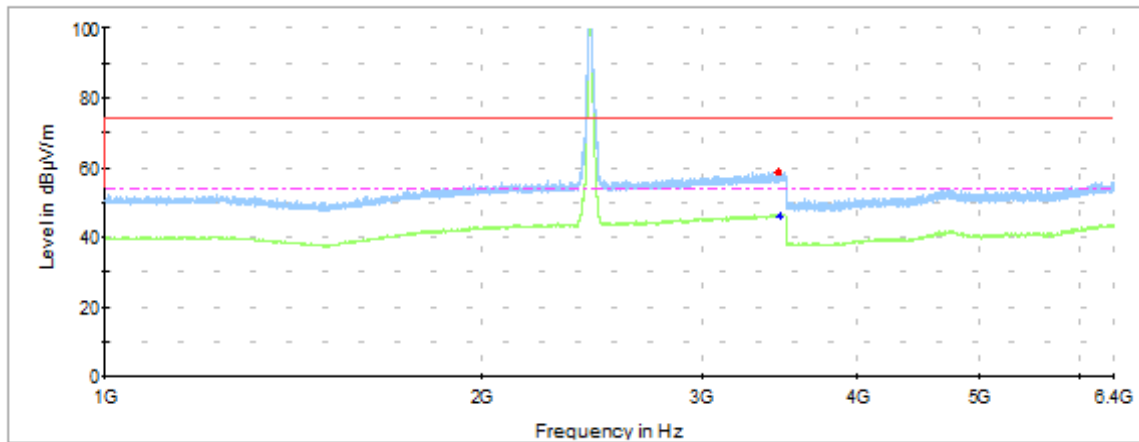

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
3457	58.4	-	74	15.6
3460	-	46.1	54	7.9
17365	56.1	-	74	17.9
17410	-	44.2	54	9.8

Radiated Spurious – Ch11

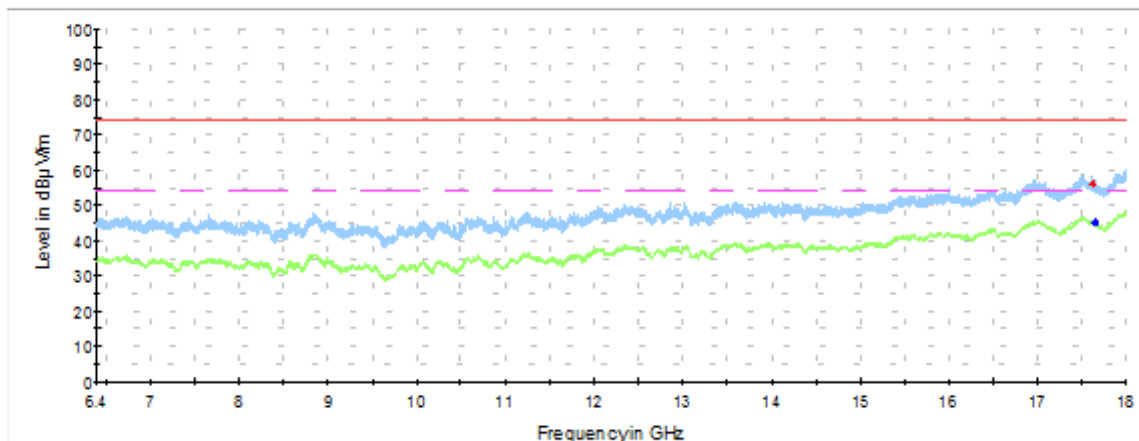
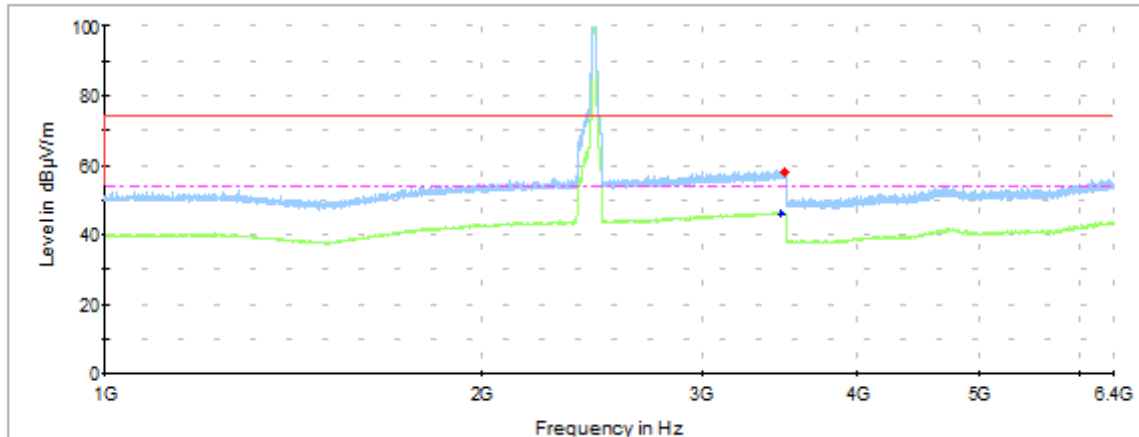


— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
3469	57.8	-	74	16.2
3493	-	46.0	54	8.0
17620	56.1	-	74	17.9
17646	-	45.0	54	9.0

Radiated Spurious – 1 GHz to 18GHz 802.11n20, HT0, Chain A



Radiated Spurious – Ch1

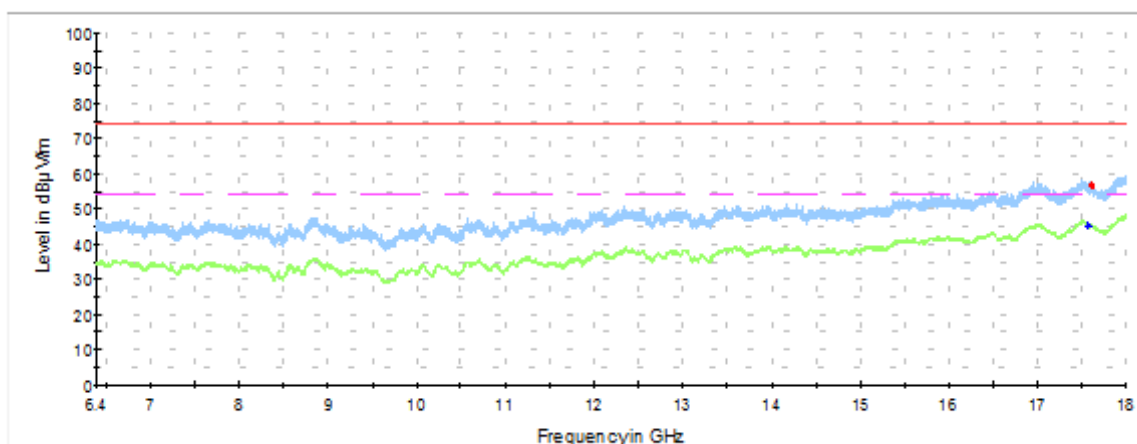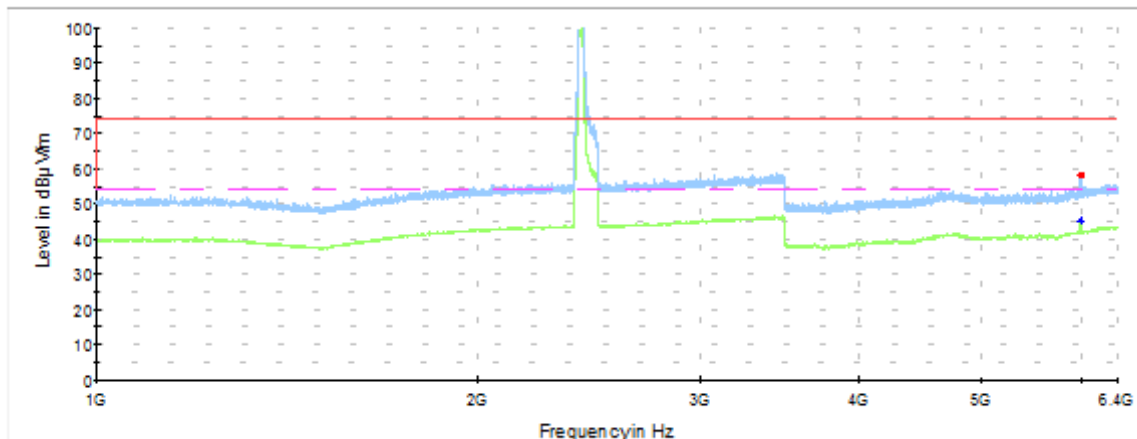

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency		Max Peak	Avg	Limit	Margin
MHz		dBuV/m	dBuV/m	dBuV/m	dB
5993		58.0	-	74	16.0
5997		-	45.2	54	8.8
17563		56.7	-	74	17.3
17610		-	45.4	54	8.6



Radiated Spurious – Ch7

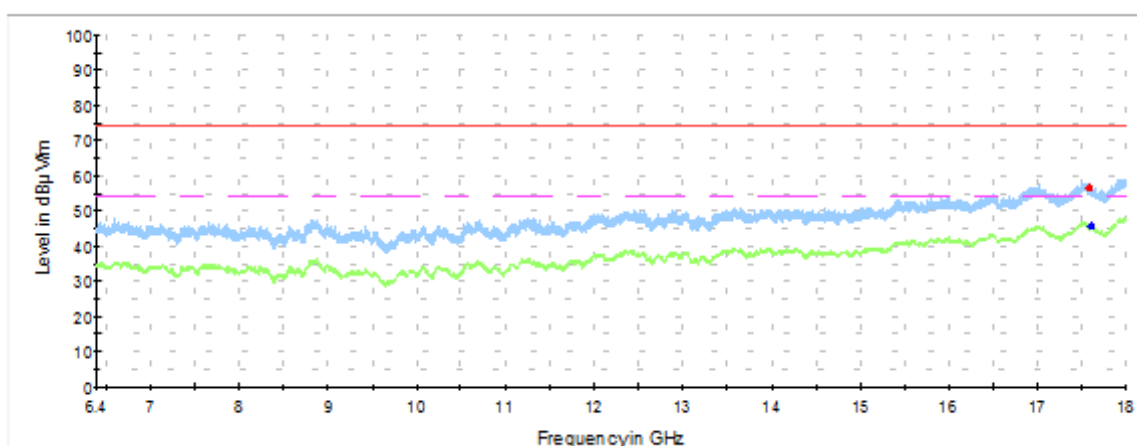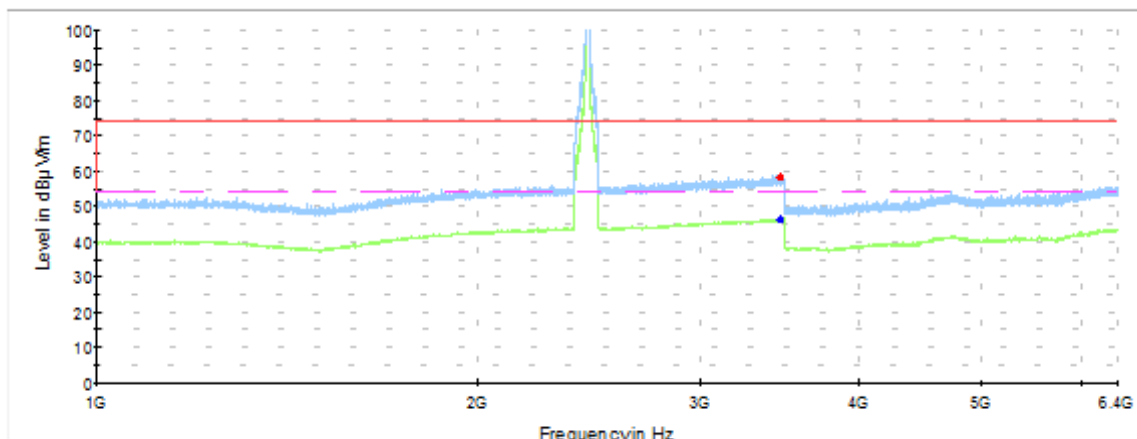

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 — Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
3466	58.2	-	74	15.8
3468	-	46.1	54	7.9
17590	56.5	-	74	17.5
17590	-	45.7	54	8.3

Radiated Spurious – Ch11

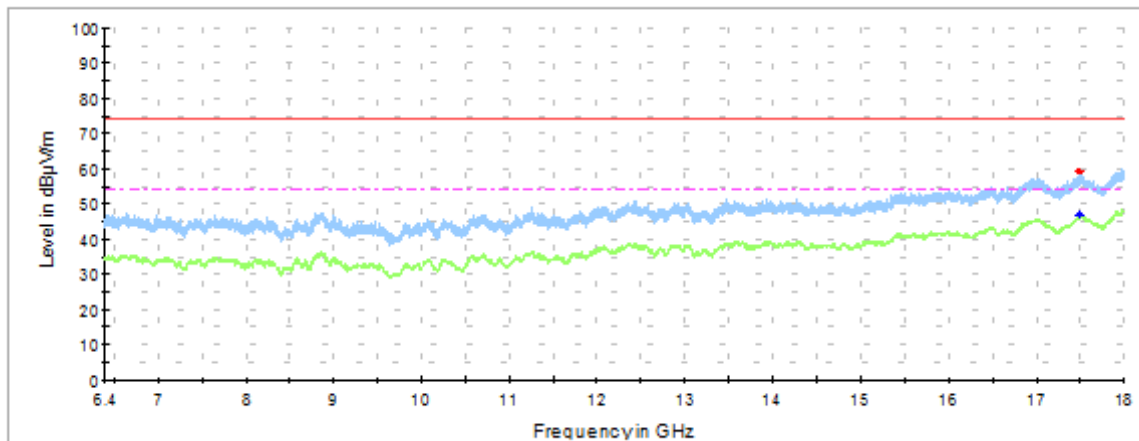
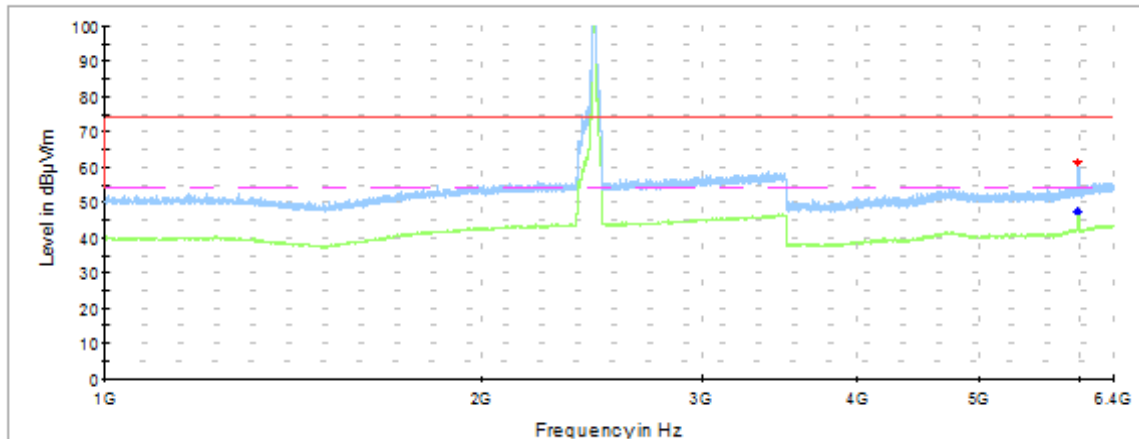


— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
5988	53.7	-	74	20.3
5988	-	42.2	54	11.8
17500	59.2	-	74	14.8
17500	-	46.9	54	7.1

Radiated Spurious – 1 GHz to 18GHz 802.11n20, HT0, Chain B



Radiated Spurious – Ch1

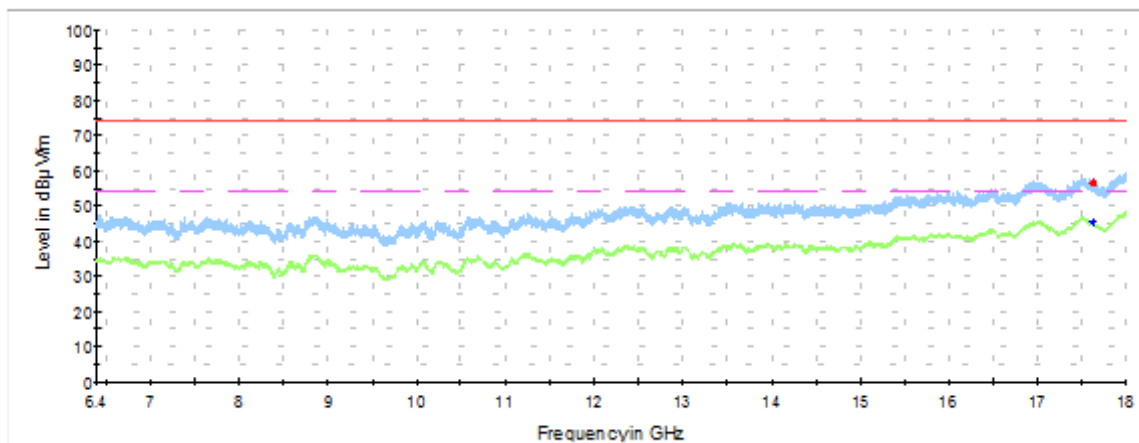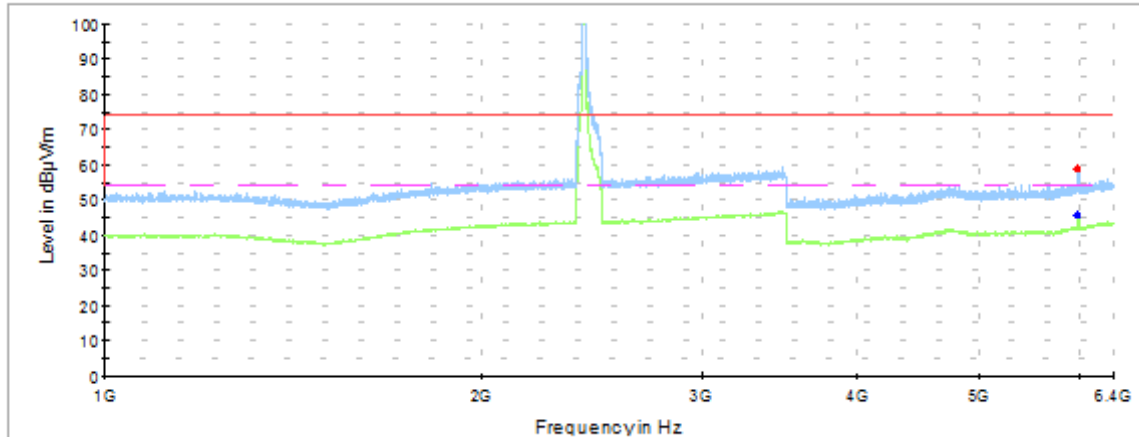

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 — Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
5995	53.3	-	74	20.7
5995	-	49.9	54	4.1
17618	56.5	-	74	17.5
17631	-	45.7	54	8.3



Radiated Spurious – Ch7

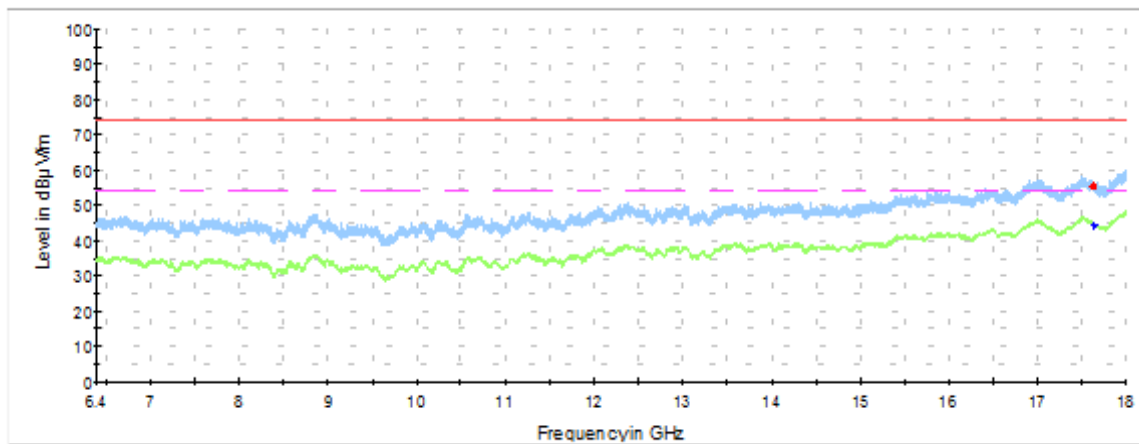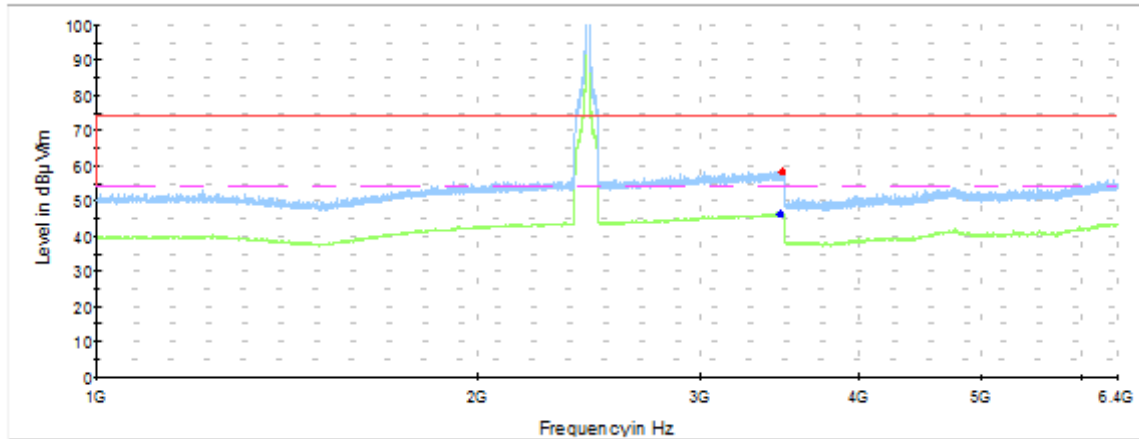

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
3469	58.1	-	74	15.9
3469	-	46.1	54	7.9
17628	55.3	-	74	18.7
17628	-	44.1	54	9.9

Radiated Spurious – Ch11

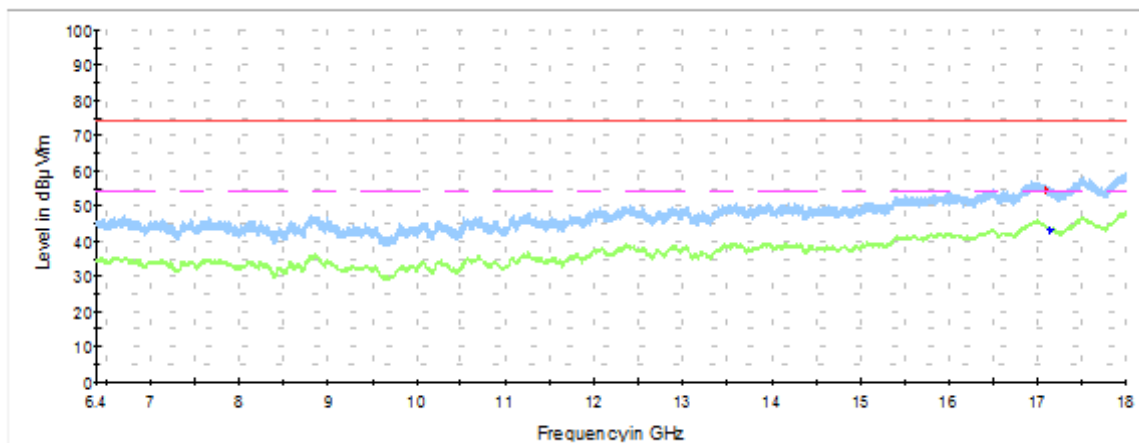
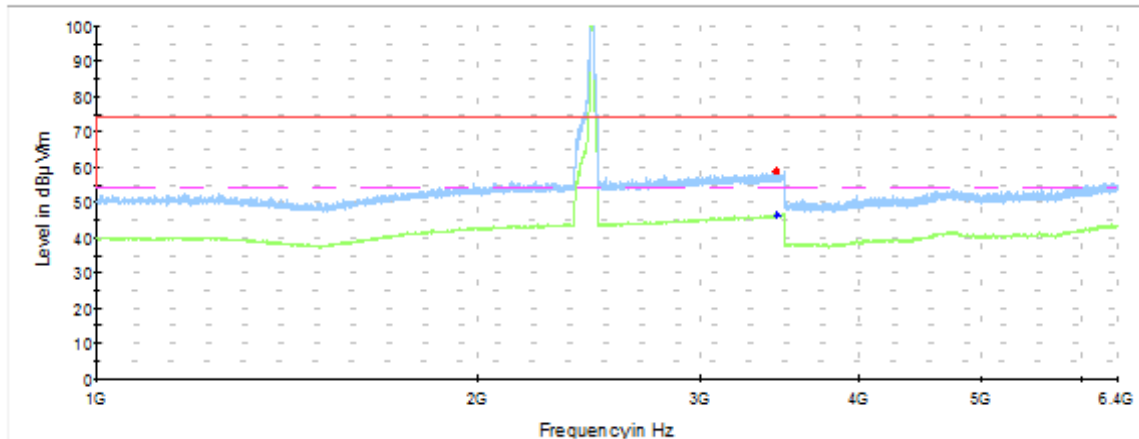


— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
3443	58.6	-	74	15.4
3453	-	46.3	54	7.7
17098	54.4	-	74	19.6
17135	-	43.0	54	11.0

Radiated Spurious – 1 GHz to 18GHz 802.11n20, HT8 Chain A+B



Radiated Spurious – Ch1

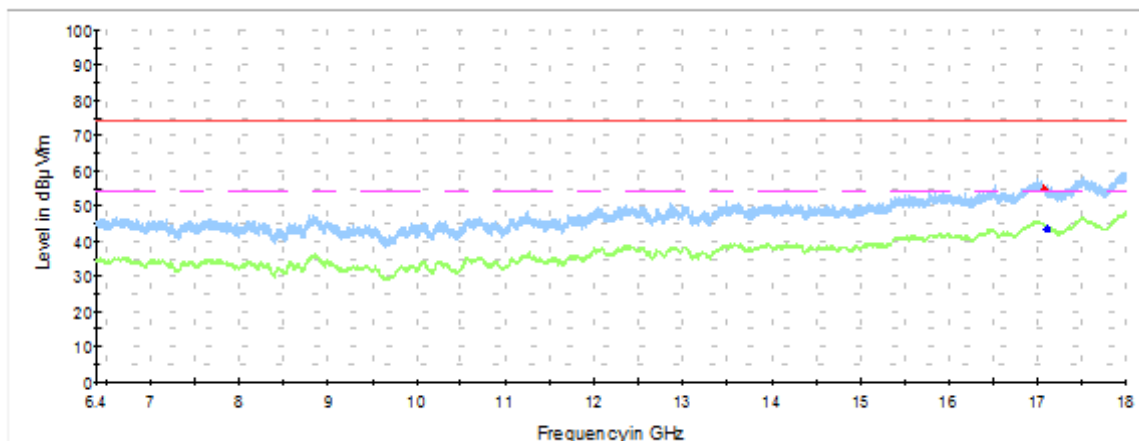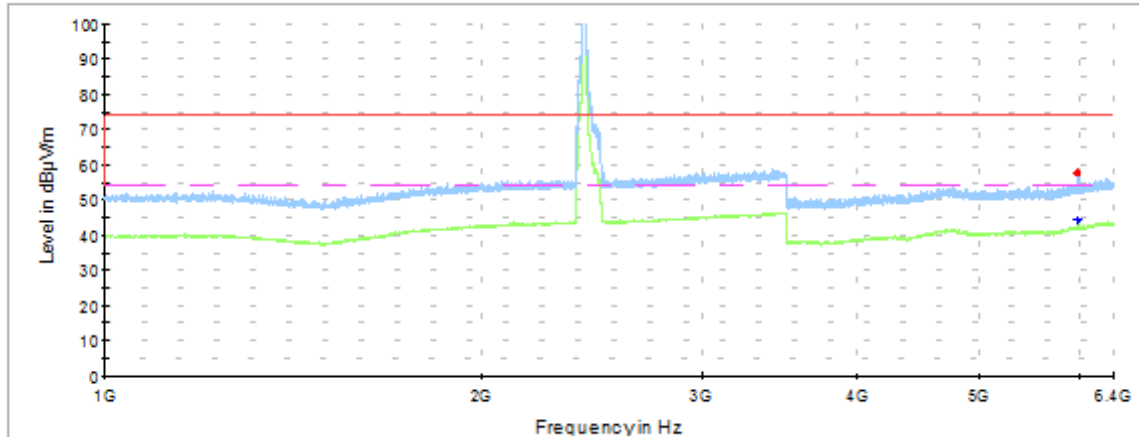

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
5995	54.0	-	74	20.0
5995	-	42.1	54	11.9
17107	55.1	-	74	18.9
17070	-	43.5	54	10.5



Radiated Spurious – Ch7

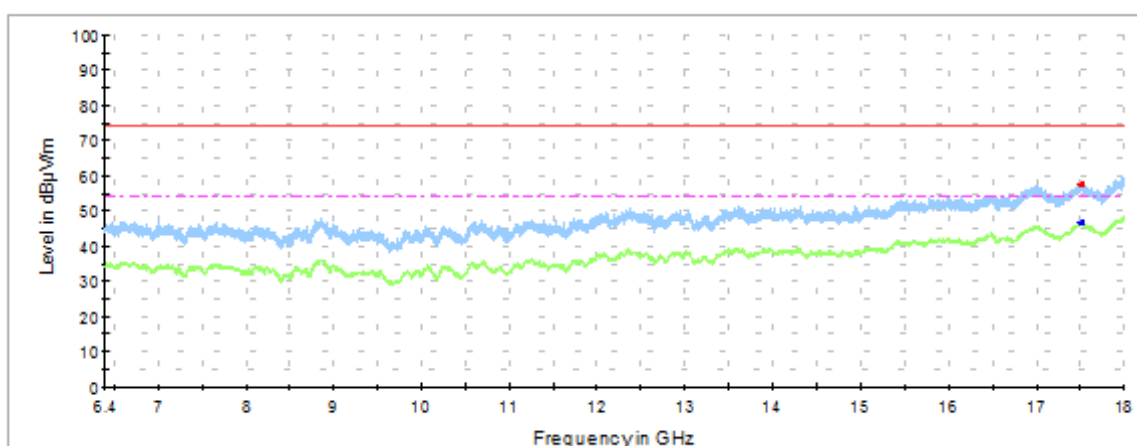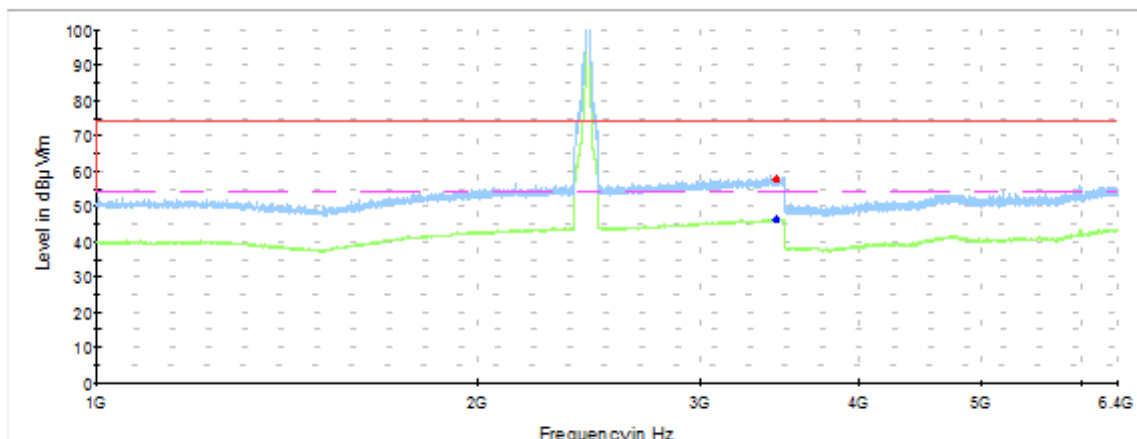

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 — Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
3444	57.5	-	74	16.5
3445	-	46.1	54	7.9
17507	57.4	-	74	16.6
17509	-	46.8	54	7.2

Radiated Spurious – Ch11

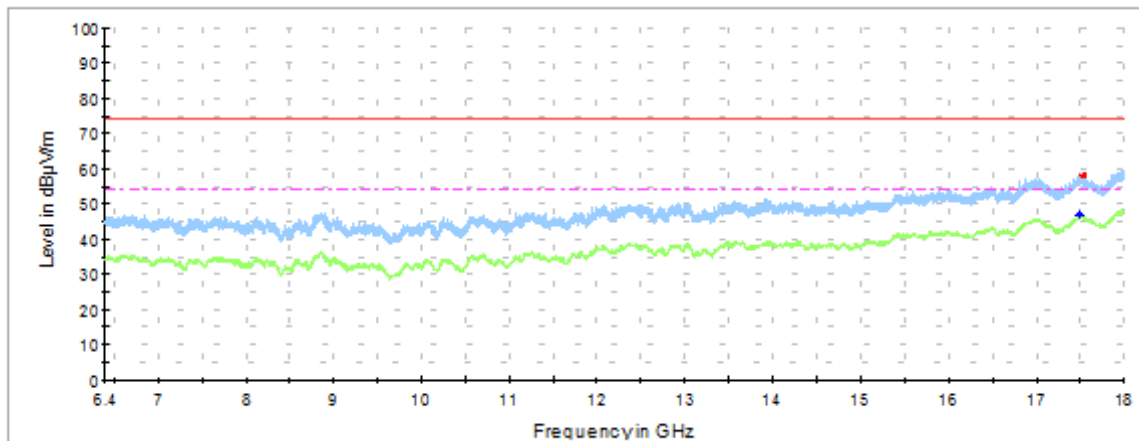
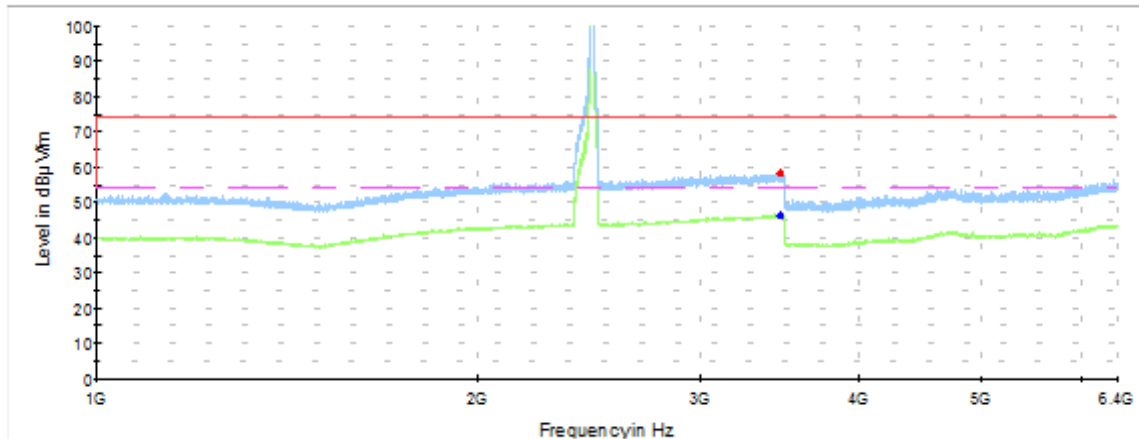


— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
3468	58.4	-	74	15.6
3468	-	46.2	54	7.8
17495	58.1	-	74	15.9
17533	-	46.8	54	7.2

Radiated Spurious – 1 GHz to 18GHz 802.11n40, HT0, Chain A


Radiated Spurious – Ch3F

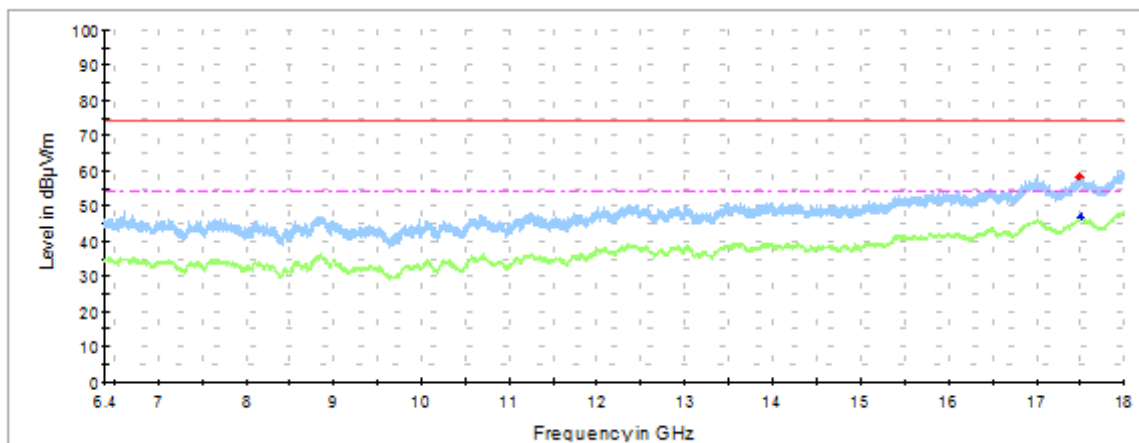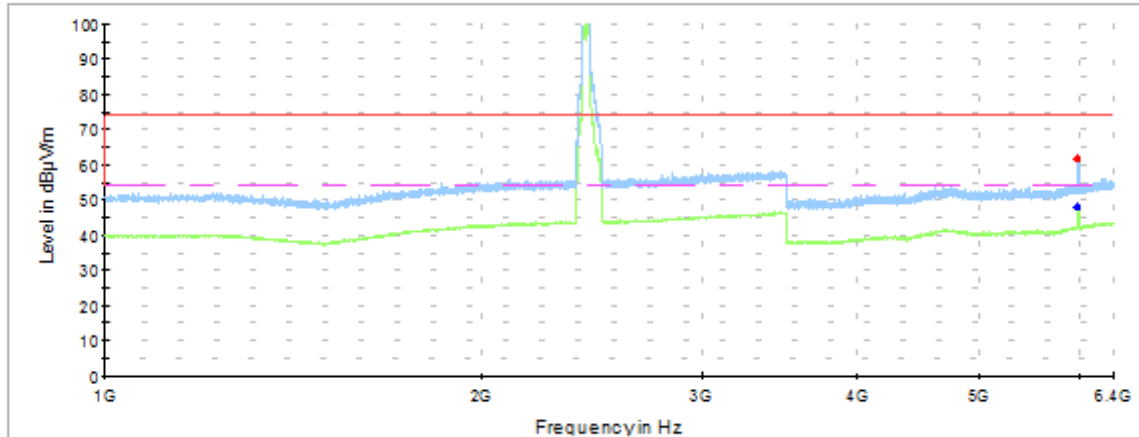

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
5989	53.7	-	74	20.3
5992	-	42.6	54	11.4
17493	58.3	-	74	15.7
17510	-	46.9	54	7.1



Radiated Spurious – Ch6F

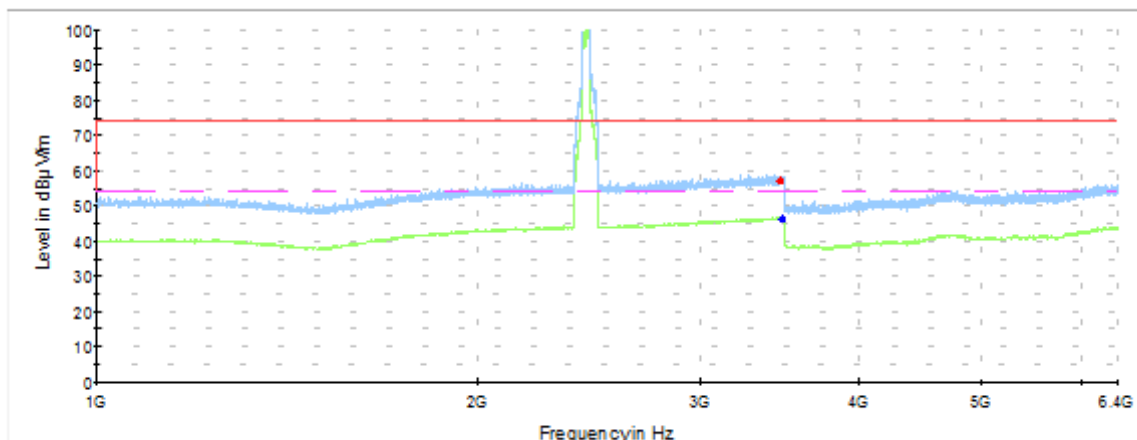

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 — Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
3468	57.2	-	74	16.8
3468	-	46.2	54	7.8
17500	58.4	-	74	15.6
17500	-	47.0	54	7.0

Radiated Spurious – Ch9F

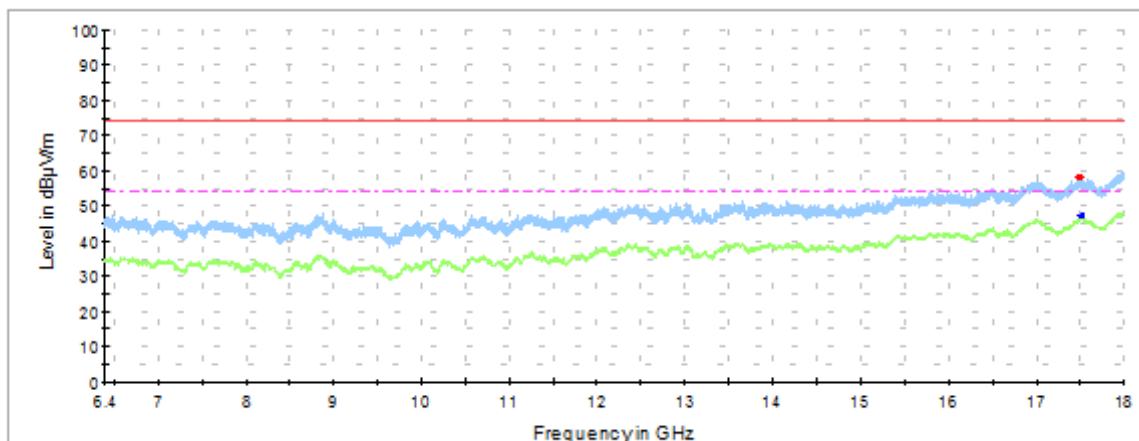
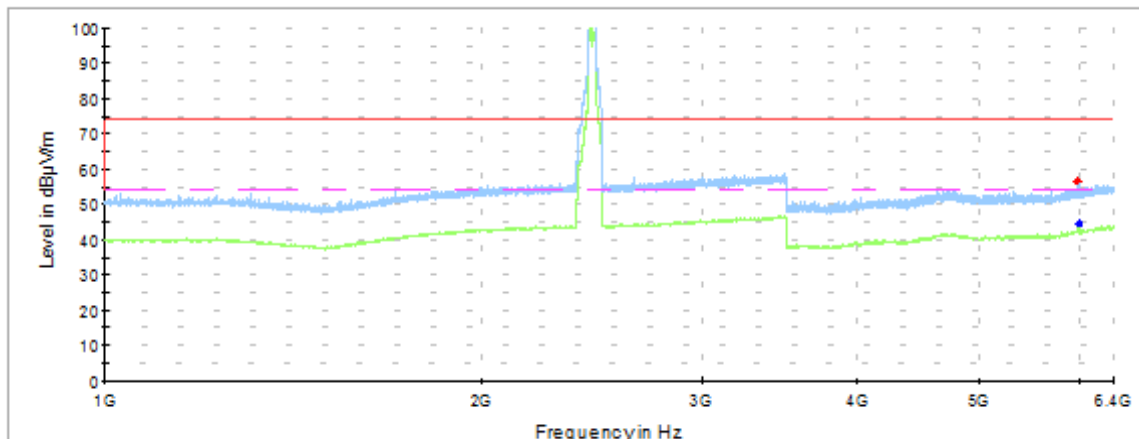


— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
5995	53.4	-	74	20.6
5998	-	42.2	54	11.8
17491	58.1	-	74	15.9
17511	-	47.0	54	7.0

Radiated Spurious – 1 GHz to 18GHz 802.11n40, HT0, Chain B



Radiated Spurious – Ch3F

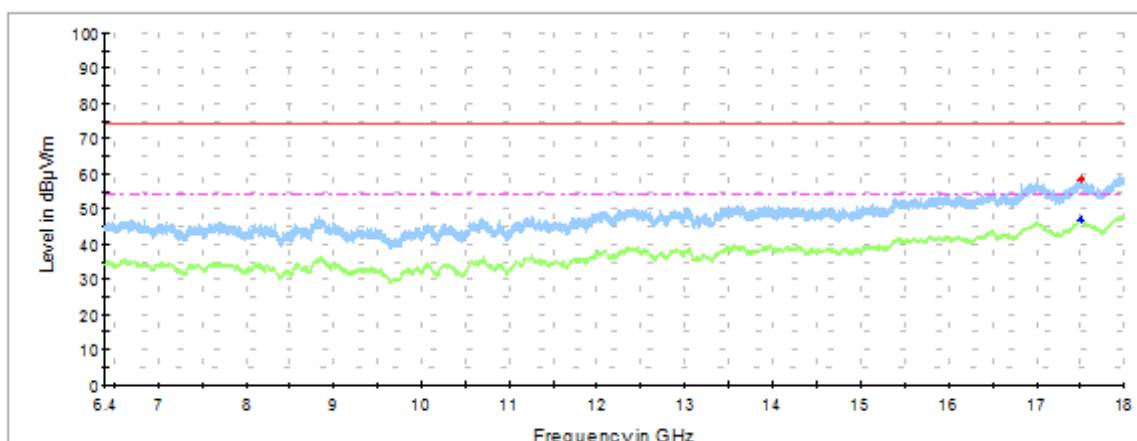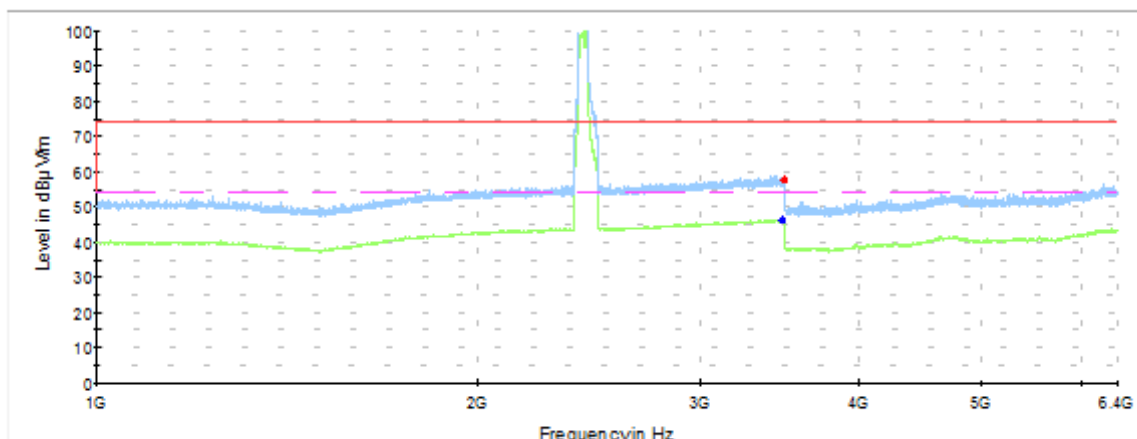

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
3482	57.7	-	74	16.3
3482	-	46.0	54	8.0
17508	58.4	-	74	15.6
17512	-	47.0	54	7.0



Radiated Spurious – Ch6F

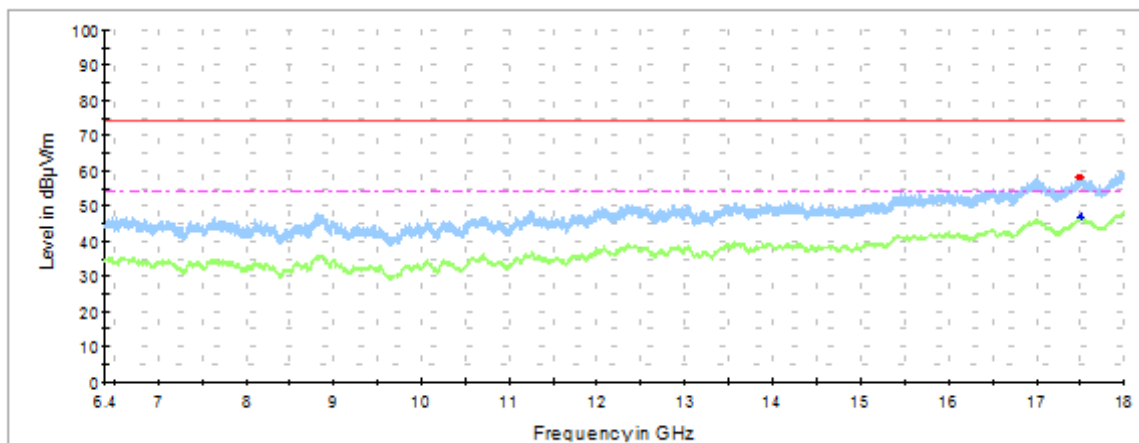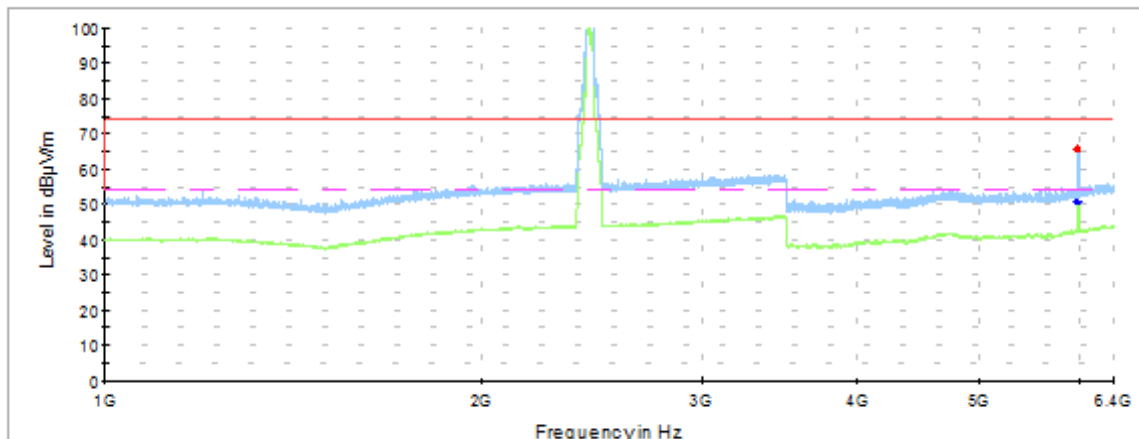

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
5991	59.6	-	74	14.4
5996	-	42.4	54	11.6
17497	58.0	-	74	16.0
17505	-	46.9	54	7.1

Radiated Spurious – Ch9F

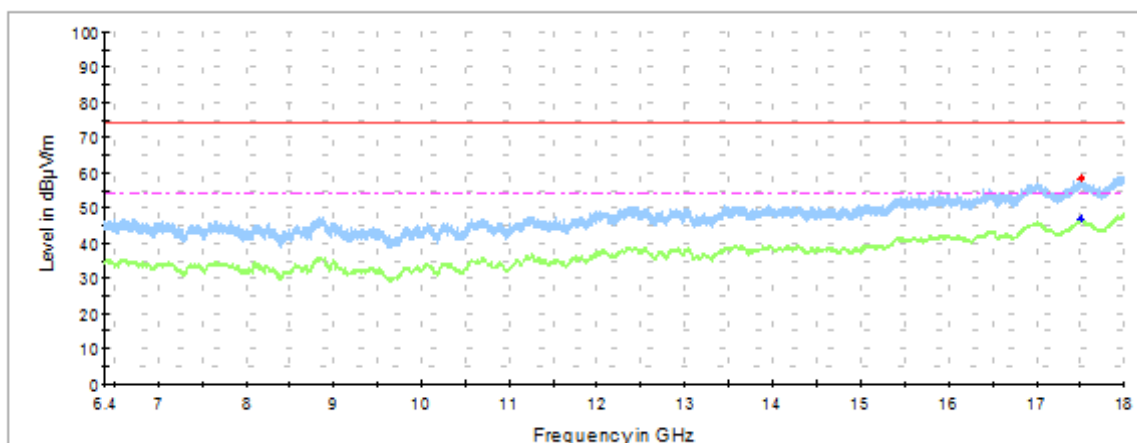
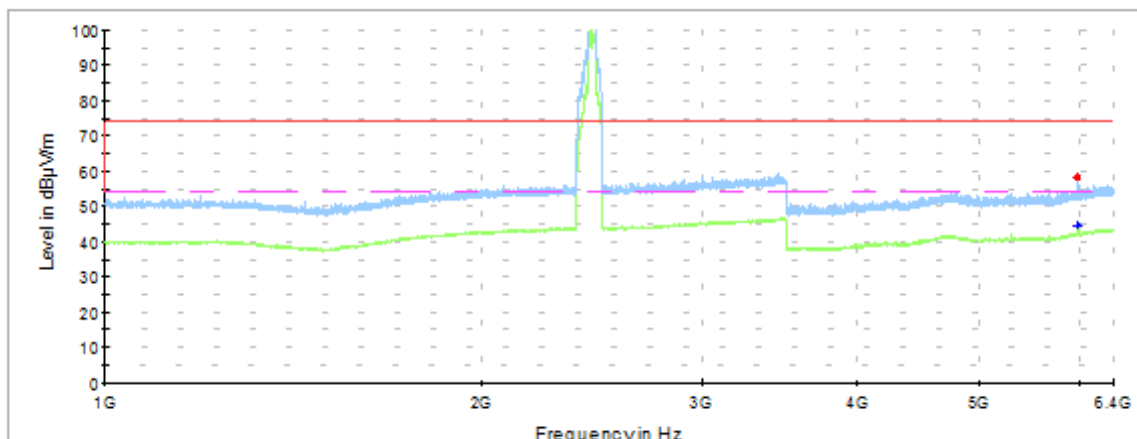


— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
5994	54.5	-	74	19.5
5994	-	42.2	54	11.8
17508	58.4	-	74	15.6
17510	-	46.9	54	7.1

Radiated Spurious – 1 GHz to 18GHz 802.11n40, HT8, Chain A+B



Radiated Spurious – Ch3F

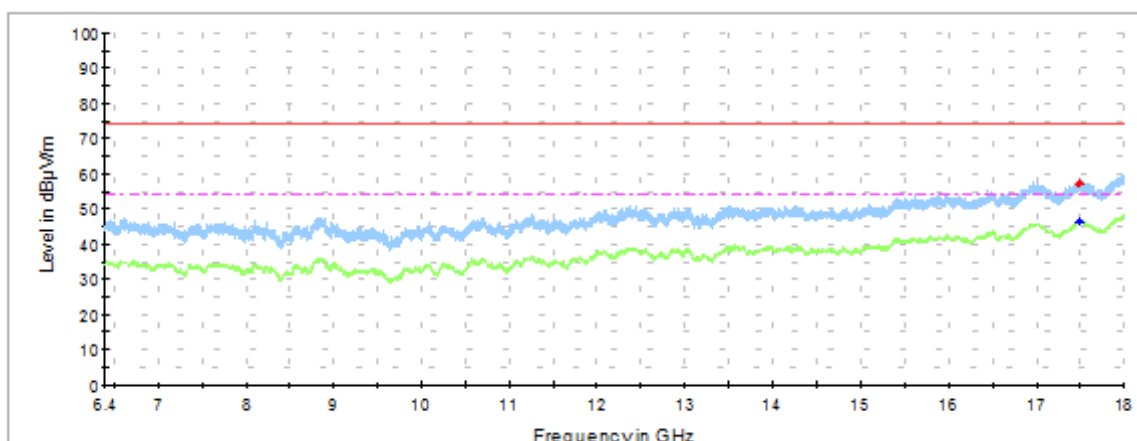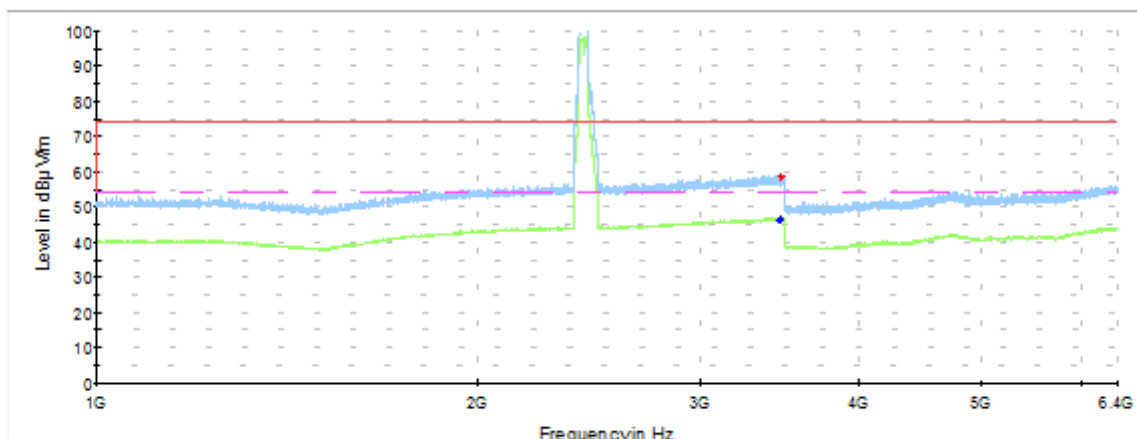

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 — Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
3468	58.6	-	74	15.4
3476	-	46.5	54	7.5
17498	57.1	-	74	16.9
17501	-	46.4	54	7.6



Radiated Spurious – Ch6F

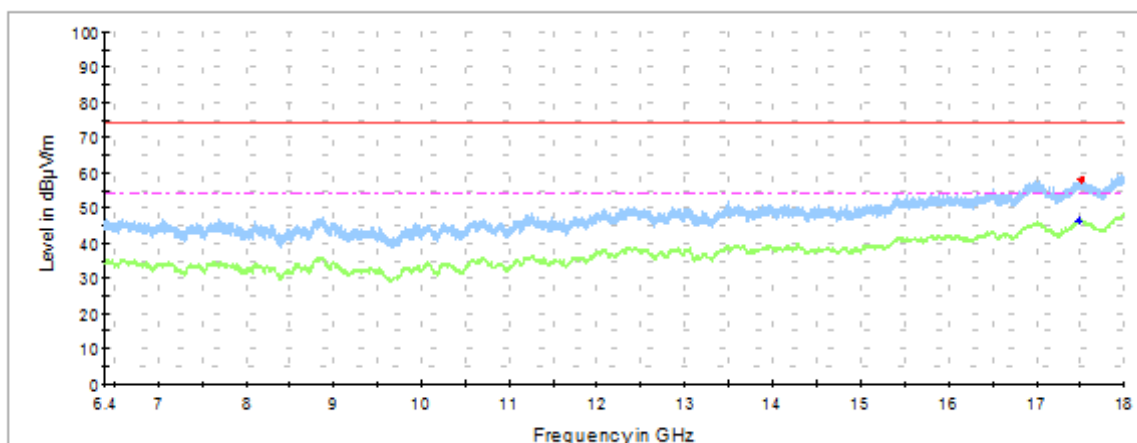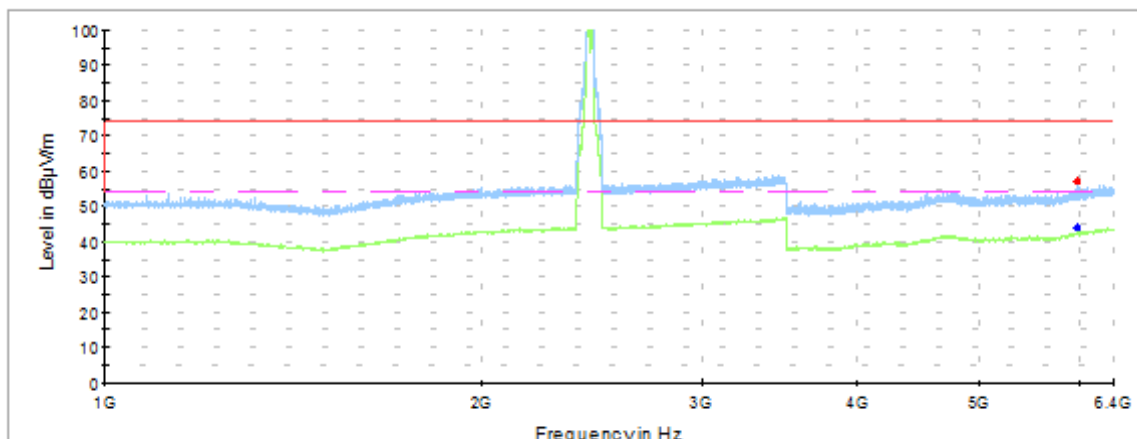

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 — Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
5992	53.9	-	74	20.1
5992	-	42.3	54	11.7
17487	57.9	-	74	16.1
17508	-	46.5	54	7.5

Radiated Spurious – Ch9F

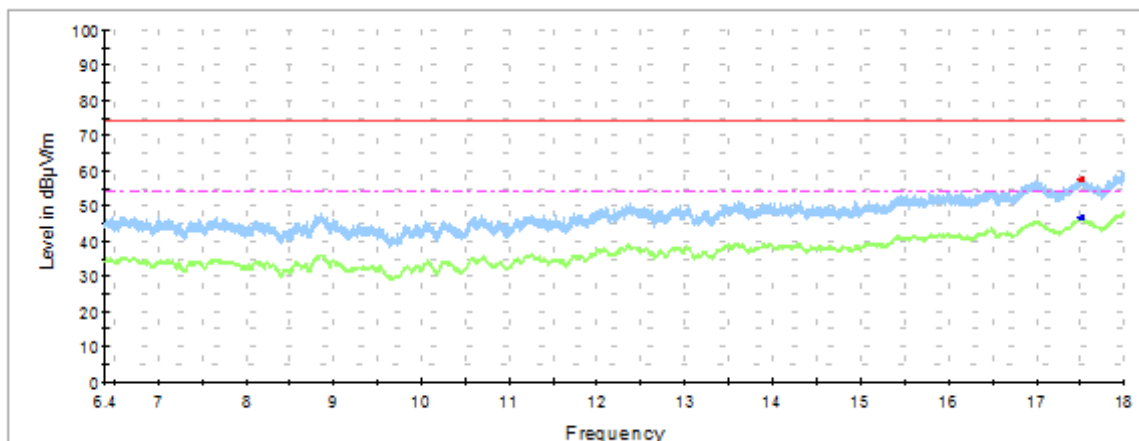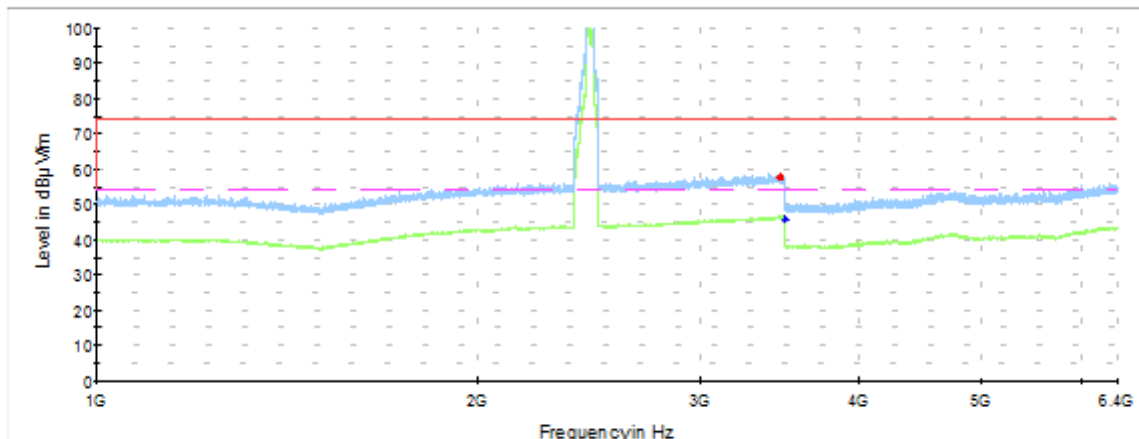


— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
3468	57.5	-	74	16.5
3468	-	46.0	54	8.0
17507	57.4	-	74	16.6
17509	-	46.8	54	7.2

Radiated Spurious – 18 GHz – 25 GHz

Radiated Spurious – All Modes

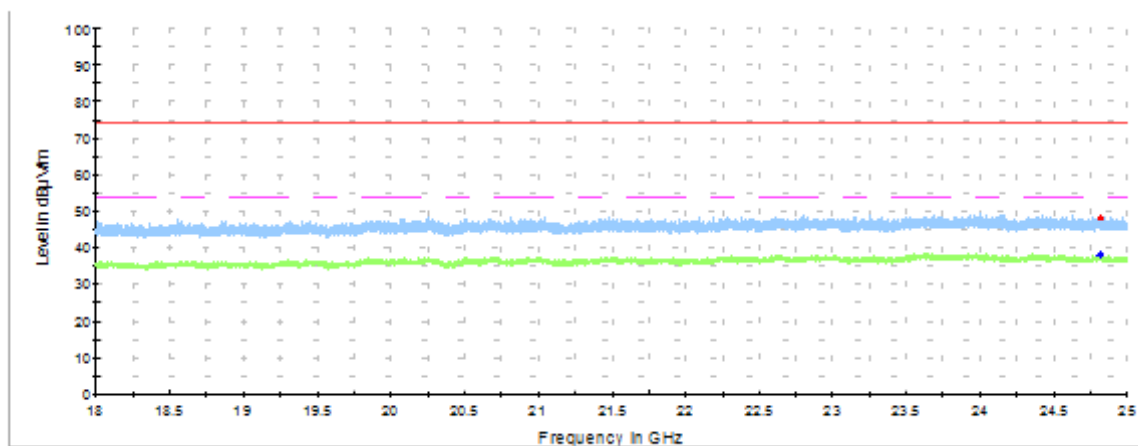

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 — Limit FCC Avg

Frequency MHz	Max Peak dBuV/m	Avg dBuV/m	Limit dBuV/m	Margin dB
24811	48.2	-	74	25.8
24811	-	38.0	54	16.0

Note 1: The spurious signals detected do not depend on either the operating channel or the modulation mode.

Annex C. Test Results BLE


C.1 6dB & 99% Bandwidth

Test limits:

FCC part	RSS part	Limits
15.247 (a) (2)	RSS-247 Clause 5.2 (1)	Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test procedure:

The setup below was used to measure the 6dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

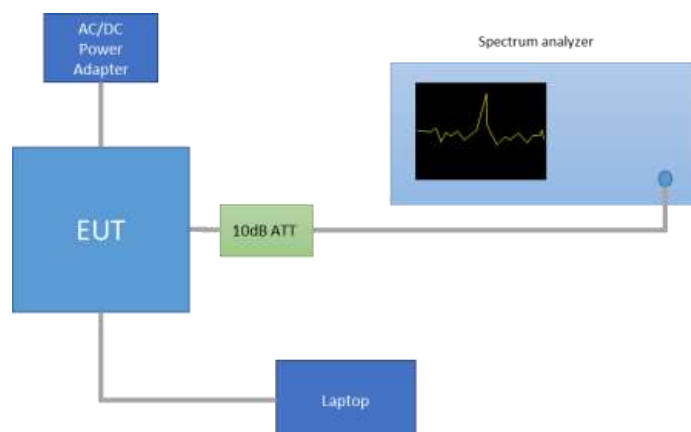


Results tables:


Mode	Channel	Frequency [MHz]	6dB BW [MHz]	99% BW [MHz]
BLE	0	2402	0.650	1.14
	19	2440	0.662	1.13
	39	2480	0.668	1.14

Results screenshot:

BLE



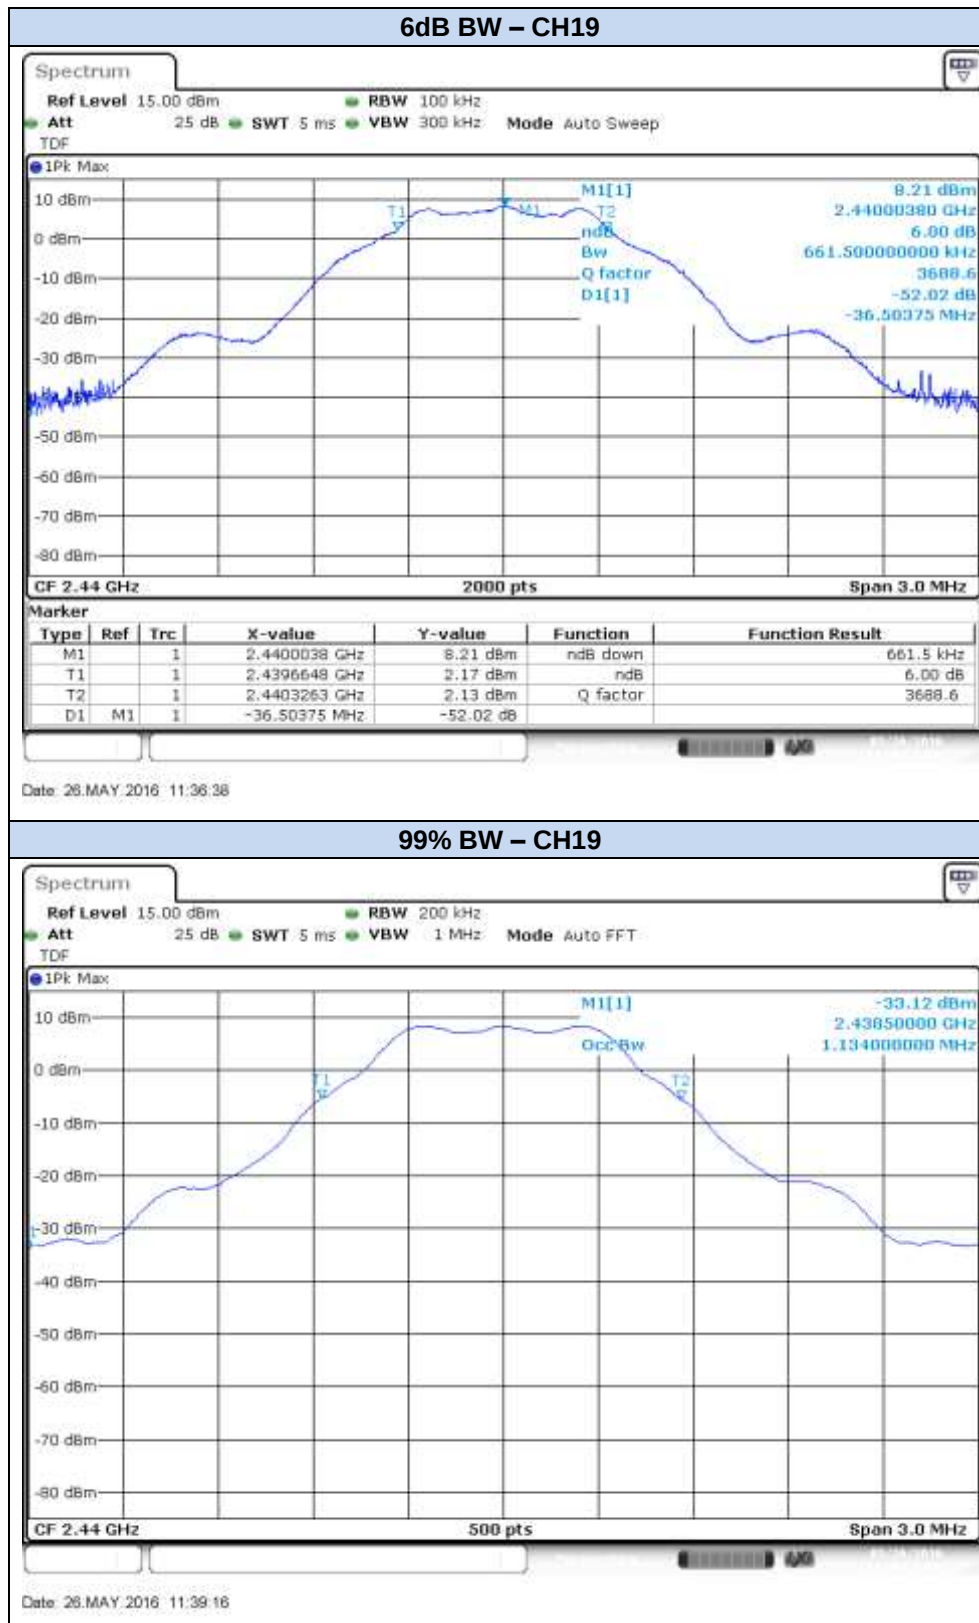

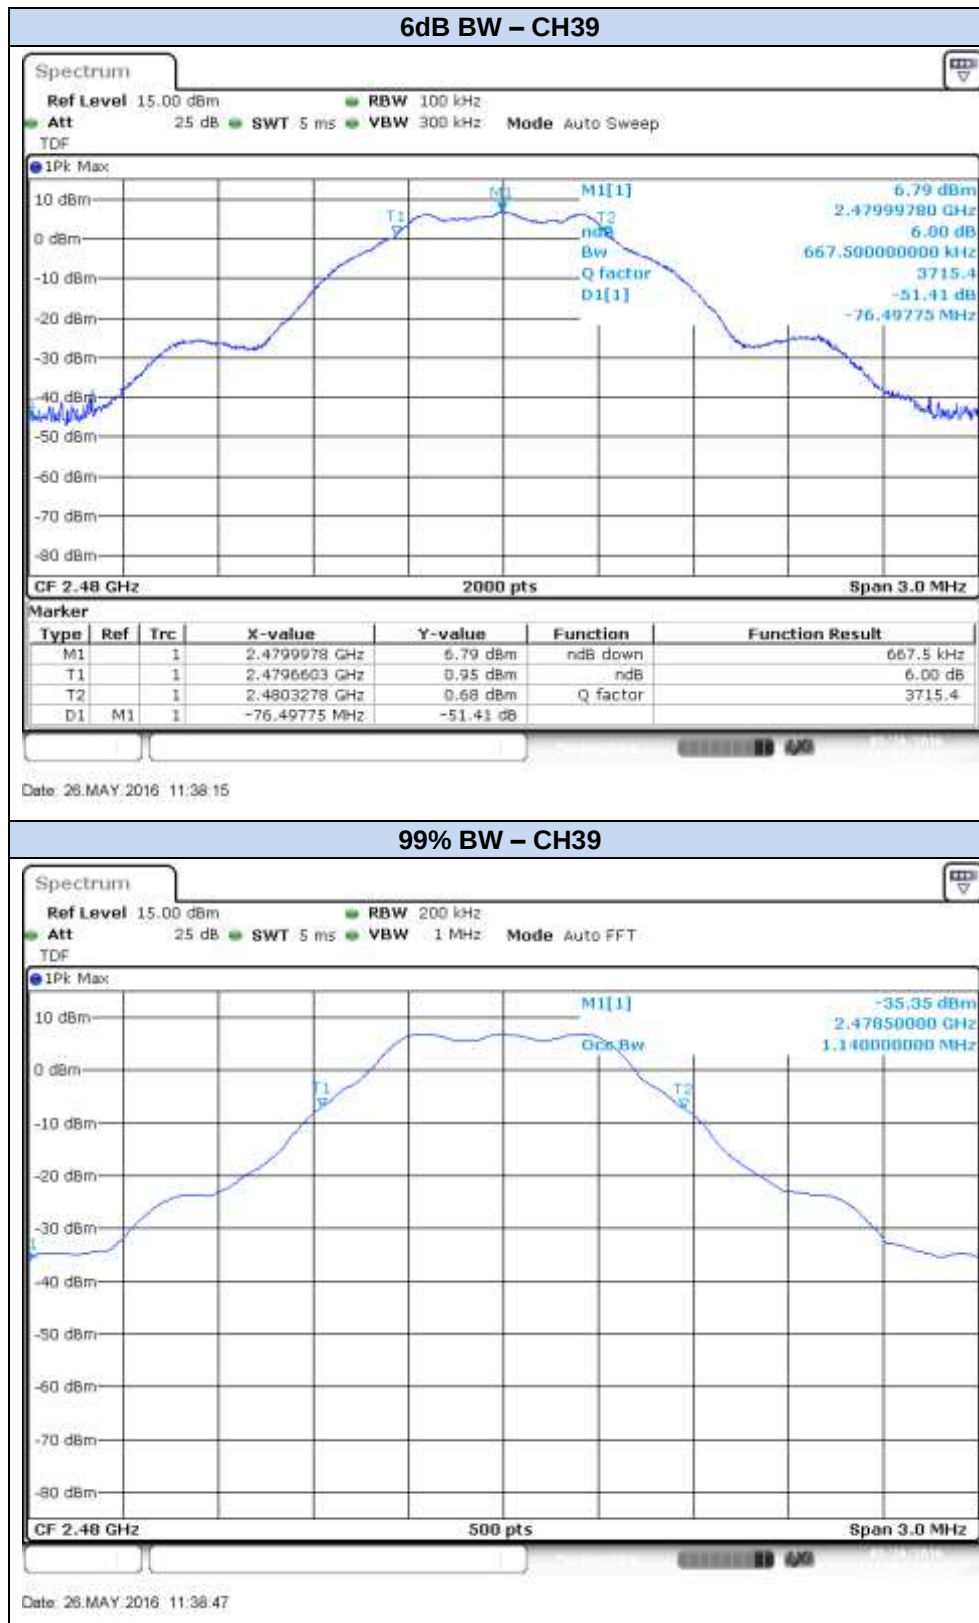

C.2 Maximum Output Power and antenna gain

Test limits:

FCC part	RSS part	Limits
15.247 (b) (3)	RSS-247 Clause 5.4 (4)	(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.


Test procedure:

The Maximum peak conducted output power was measured using the *RBW ≥ DTS bandwidth* method defined in paragraph 9.1.1 of FCC KDB 558074 D01 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

The Maximum conducted average output power was measured using the channel integration method according to Method AVGSA-2, defined in paragraph 9.2.2.4 of FCC KDB 558074 D01 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power. The declared maximum antenna gain is 3.24dBi.

The setup below was used to measure the maximum conducted output power. The antenna terminal of the EUT is connected to the spectrum through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

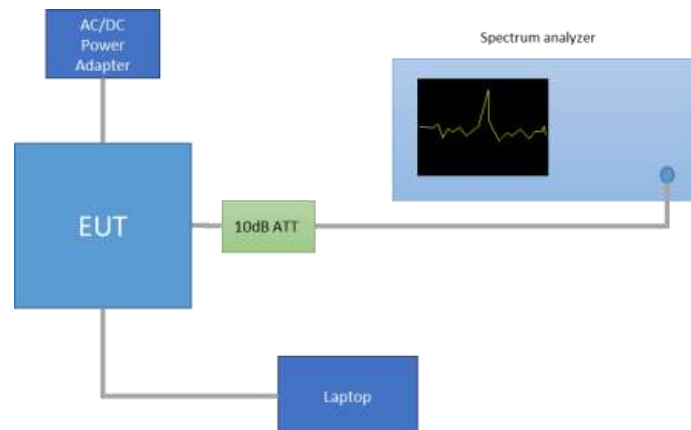

Results tables:

			Peak Power [dBm]		
Mode	CH	Frequency [MHz]	Measured Conducted Output Power	EIRP	Peak Output Power [mW]
BLE	0	2402	7.75	10.99	5.96
	19	2440	8.33	11.57	6.81
	39	2480	6.92	10.16	4.92

				Average Output Power* [dBm]			
Mode	Meas. Duty Cycle [%]	CH	Frequency [MHz]	Maximum Conducted Output Power	Maximum Conducted Output Power Duty cycle Compensated	EIRP	Average Output Power [mW]
BLE	63.2	0	2402	5.67	7.66	10.90	5.84
		19	2440	6.27	8.26	11.50	6.70
		39	2480	4.85	6.84	10.08	4.83


Max Value


Min Value

* Output Power RMS values are shown for indicative purpose only

Results screenshot:

BLE

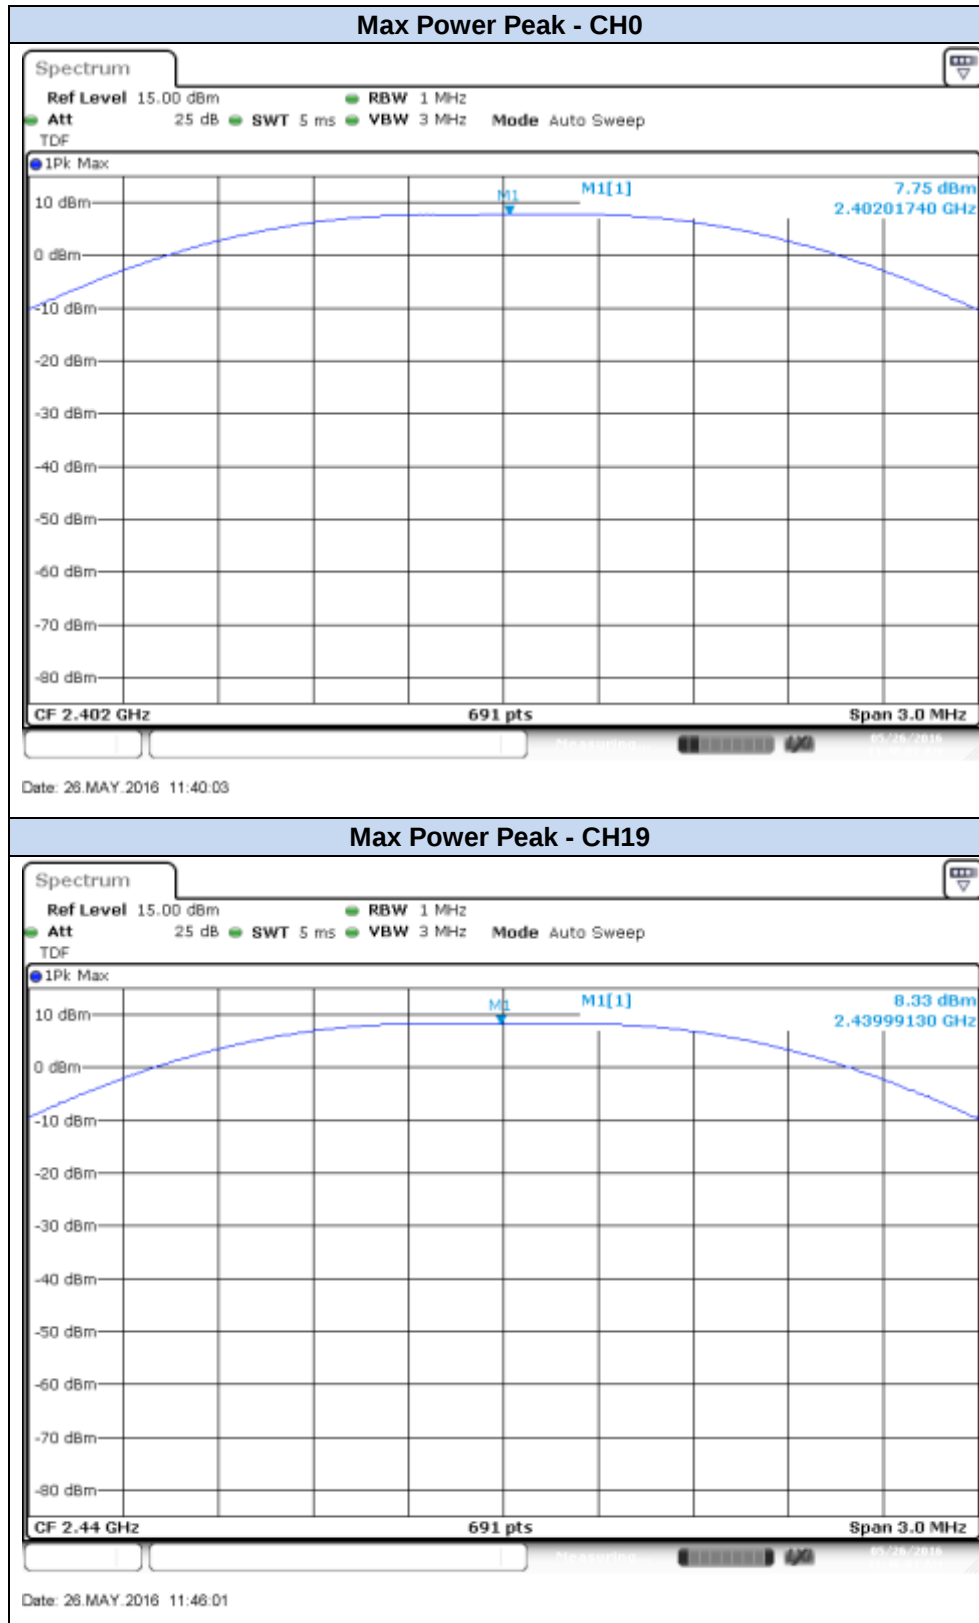

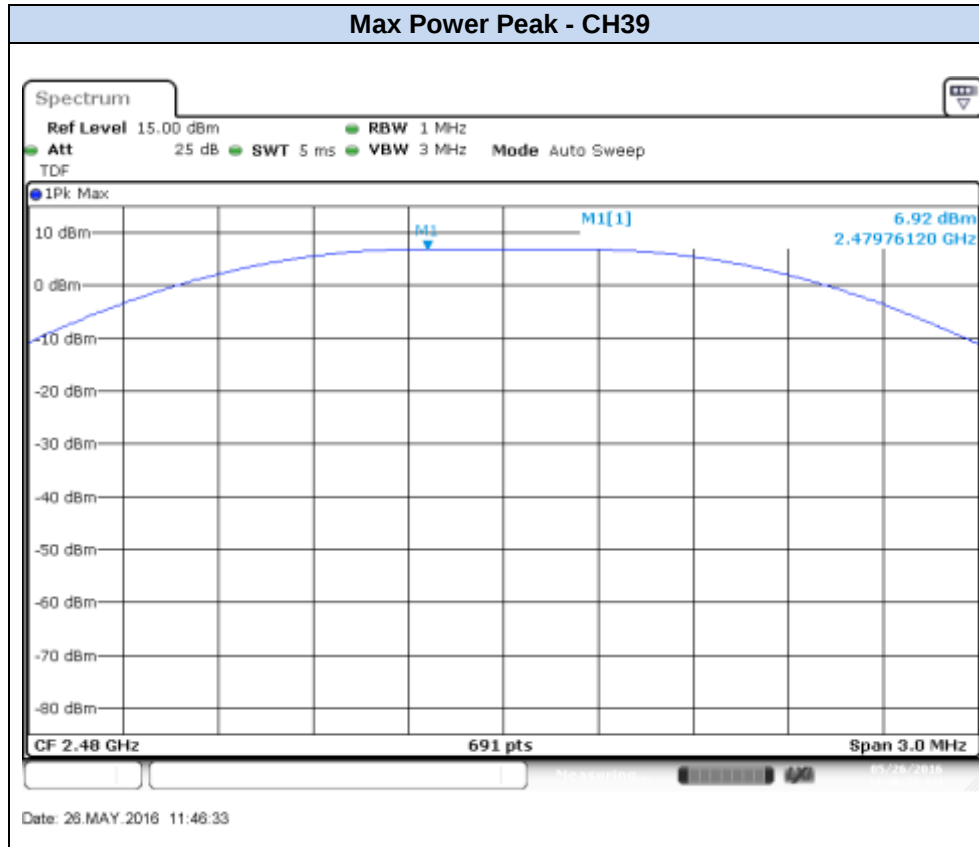


C.3 Out-of-band emissions (conducted)

Test limits:

FCC part	RSS part	Limits																																
15.247 (d)	RSS-247 Clause 5.5	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.																																
15.209	RSS-247 Clause 6.2.2 (2)	Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a): <table><tr><th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>0.009-0.490</td><td>2400/f(kHz)</td><td>-</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/f(kHz)</td><td>-</td><td>300</td></tr><tr><td>1.705-30.0</td><td>30</td><td>-</td><td>30</td></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table> The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	0.009-0.490	2400/f(kHz)	-	300	0.490-1.705	24000/f(kHz)	-	300	1.705-30.0	30	-	30	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																															
0.009-0.490	2400/f(kHz)	-	300																															
0.490-1.705	24000/f(kHz)	-	300																															
1.705-30.0	30	-	30																															
30-88	100	40	3																															
88-216	150	43.5	3																															
216-960	200	46	3																															
Above 960	500	54	3																															

Test procedure:

The setup below was used to measure the out-of-band emissions. The antenna terminal of the EUT is connected to the spectrum through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

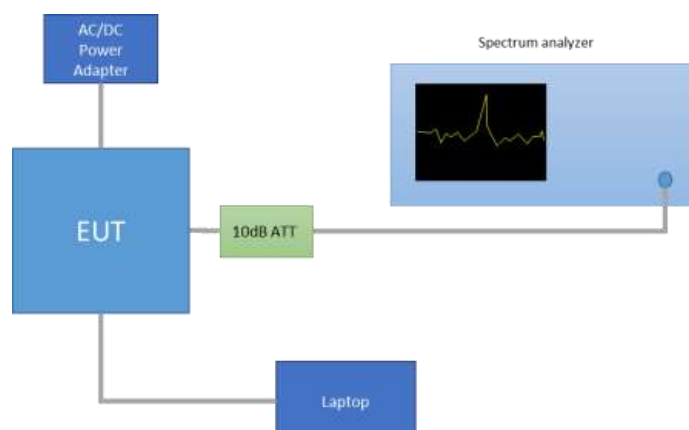

In case of Band Edge measurements falling in restricted bands, the declared Antenna Gain is also compensated in the graph. The declared maximum antenna gain is 3.24dBi.

For Band Edge measurements falling in restricted bands, the following limits in dBm were applied for the average detector after the conversion from the limits detailed above in dBμV/m, according to FCC 47 CFR part 15 - Subpart C – §15.209(a). The limits in dBm for peak detector are 20dB above the indicated values in the table.


§15.209(a)			Converted values	
Freq Range (MHz)	Distance (m)	Field strength (microvolts/meter)	Field strength (dB microvolts/meter)	Power (dBm)
Above 960	3	500	54.0	-41.2


Note: these PSD_{Peak} values are shown just as a reference for the compliance of the Out-of-band Measurements. Thus the RBW used for these measurements was 100kHz.

Mode	CH	Frequency [MHz]	PSD Peak [dBm]
BLE	0	2402	7.93
	19	2440	8.25
	39	2480	6.78

Band Edge results Screenshot:


BLE

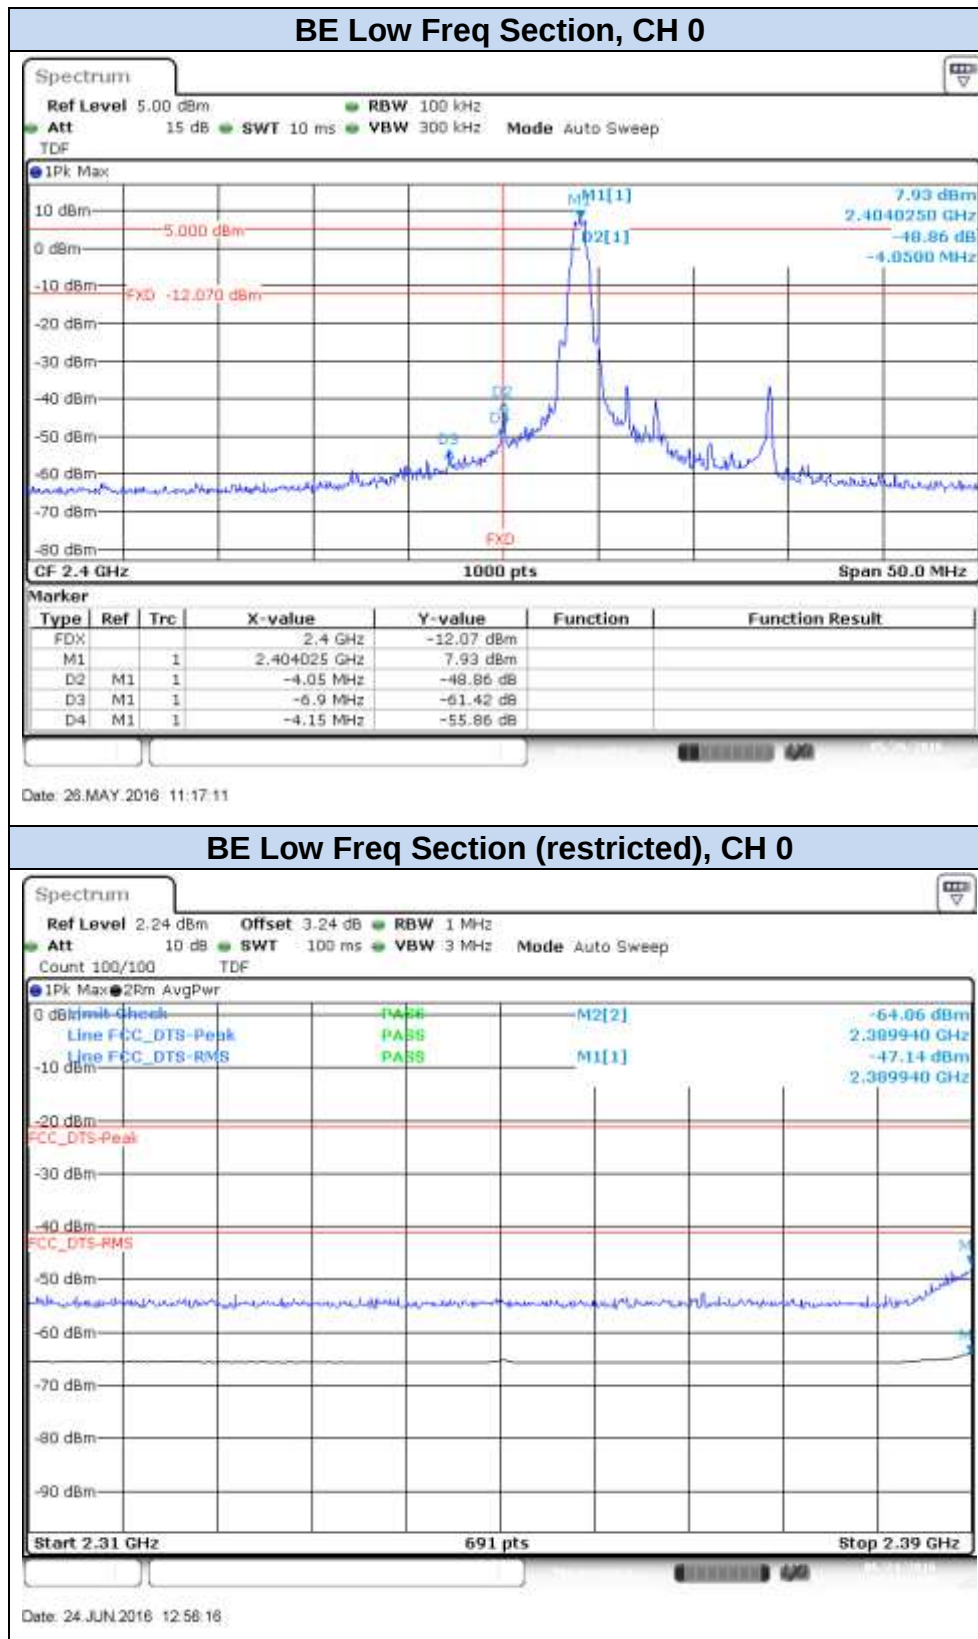


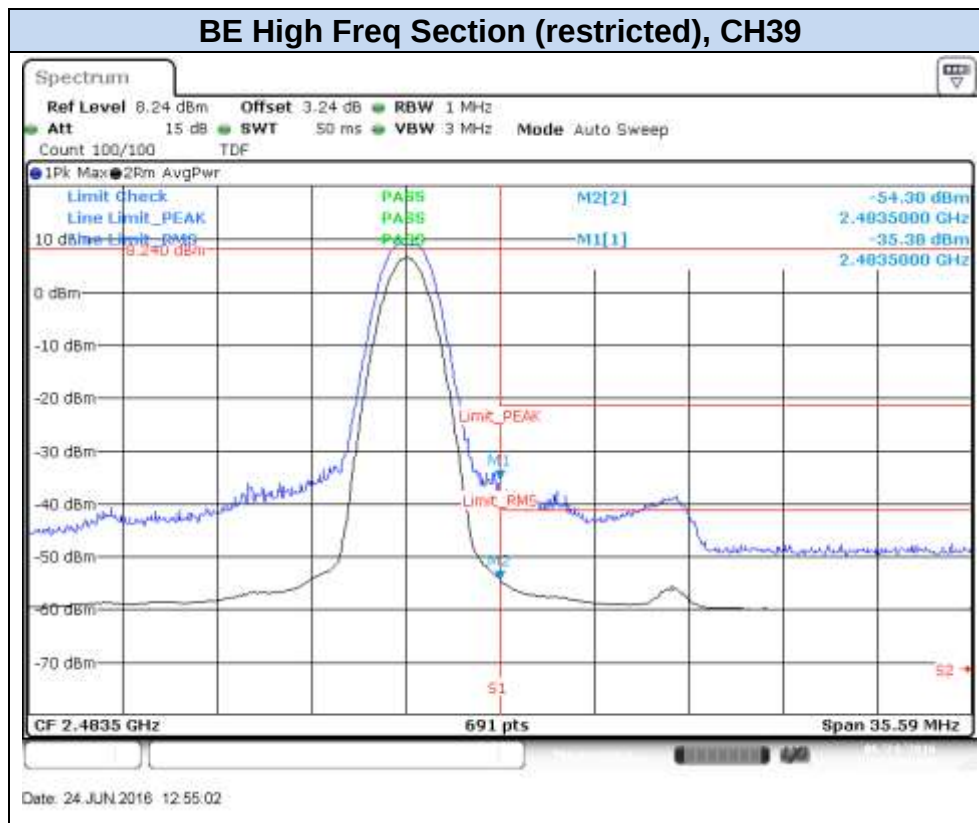

Spurious results Screenshot:


BLE, CH0

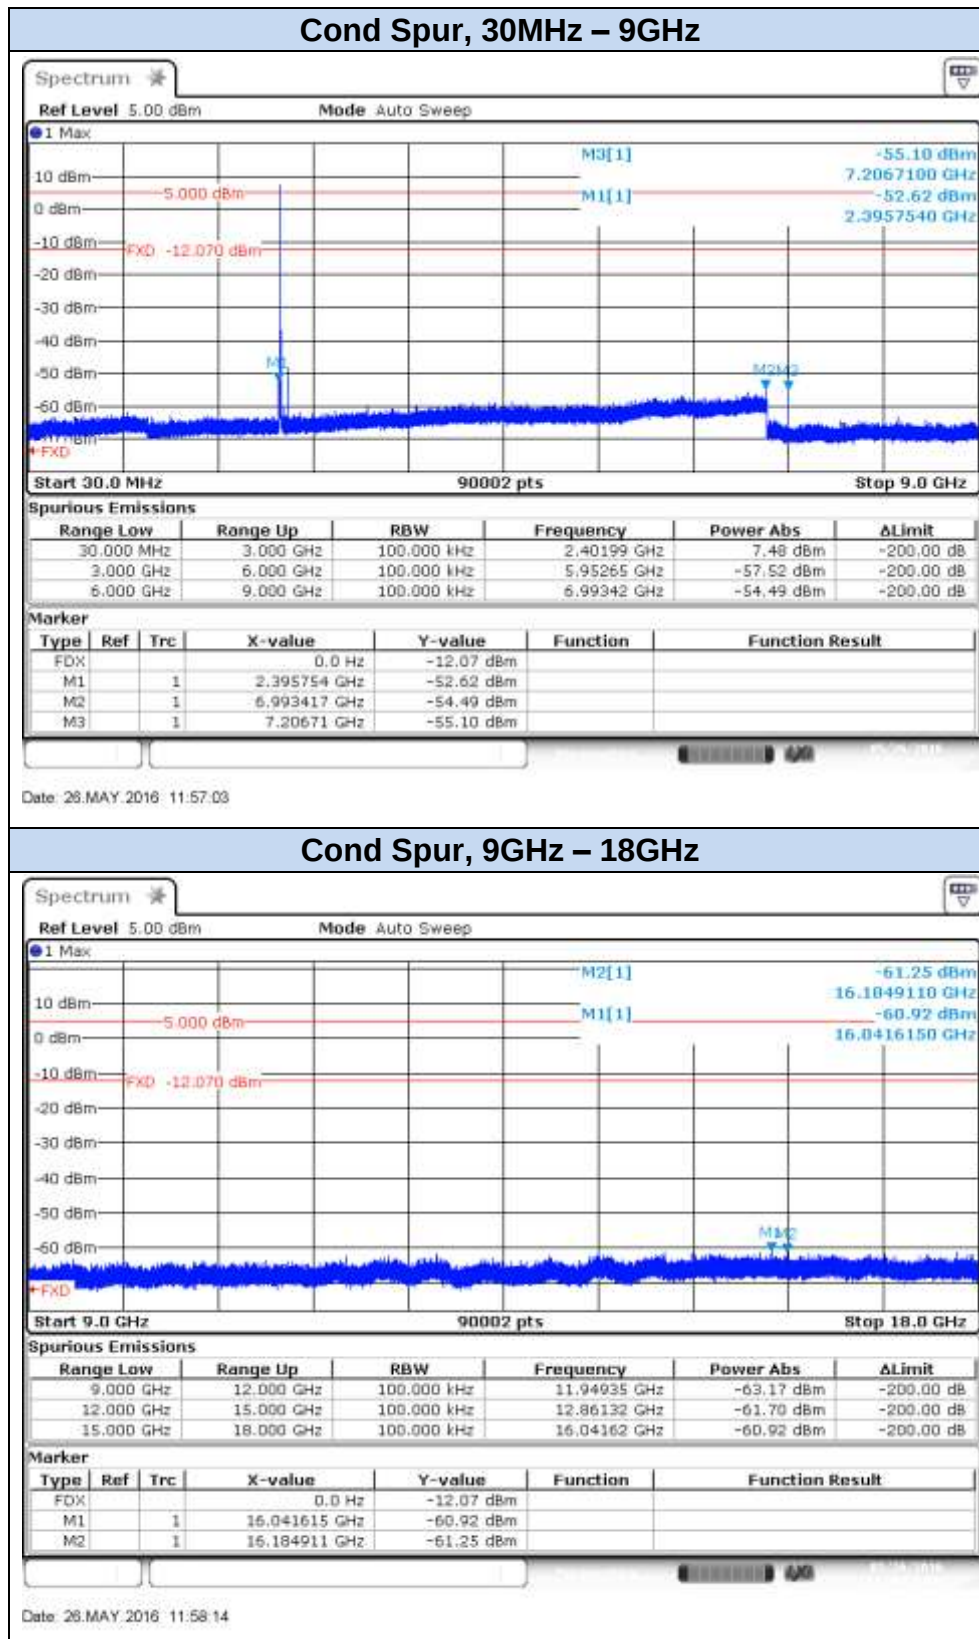

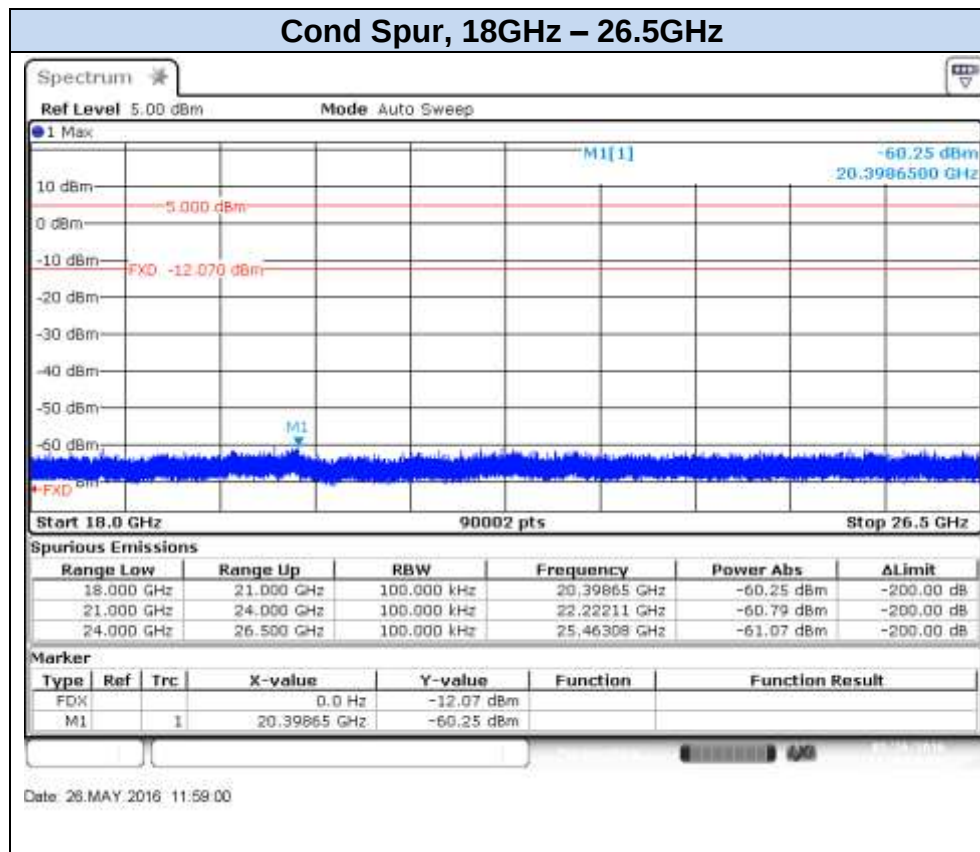



BLE, CH19

Cond Spur, 30MHz – 9GHz

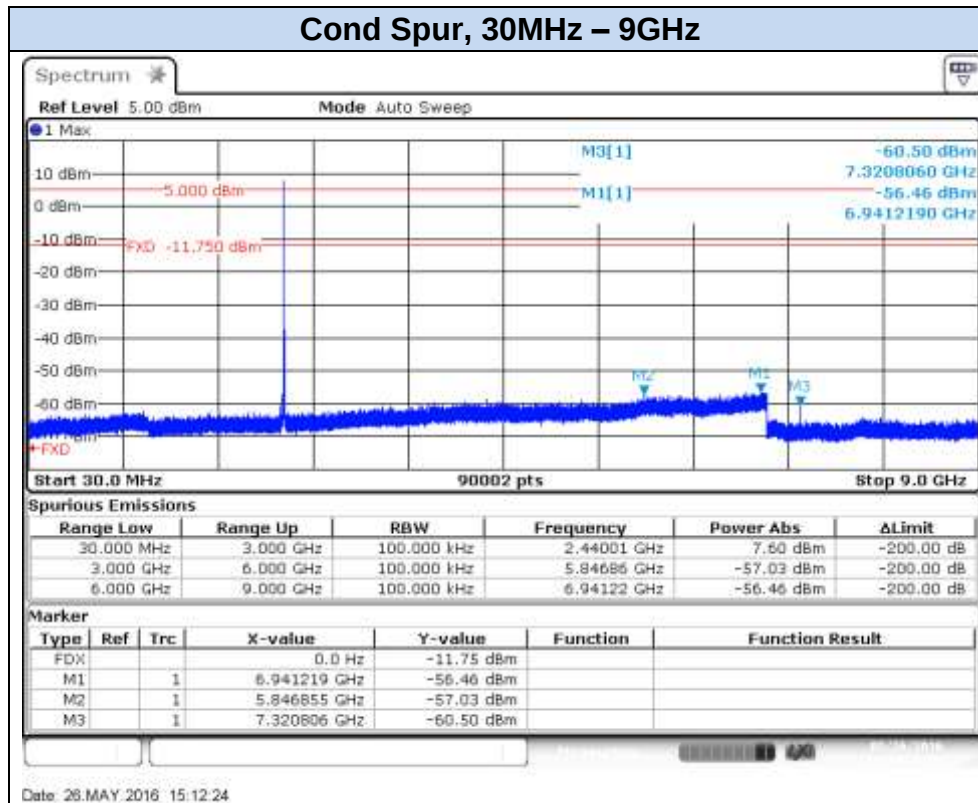


Cond Spur, 9GHz – 18GHz

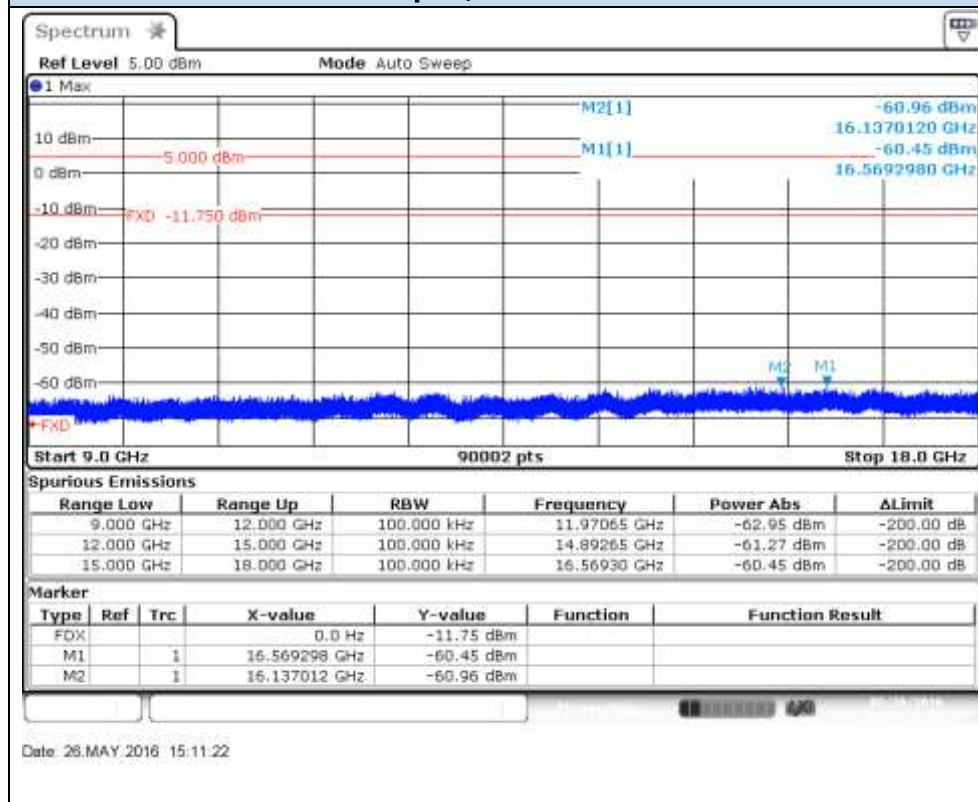

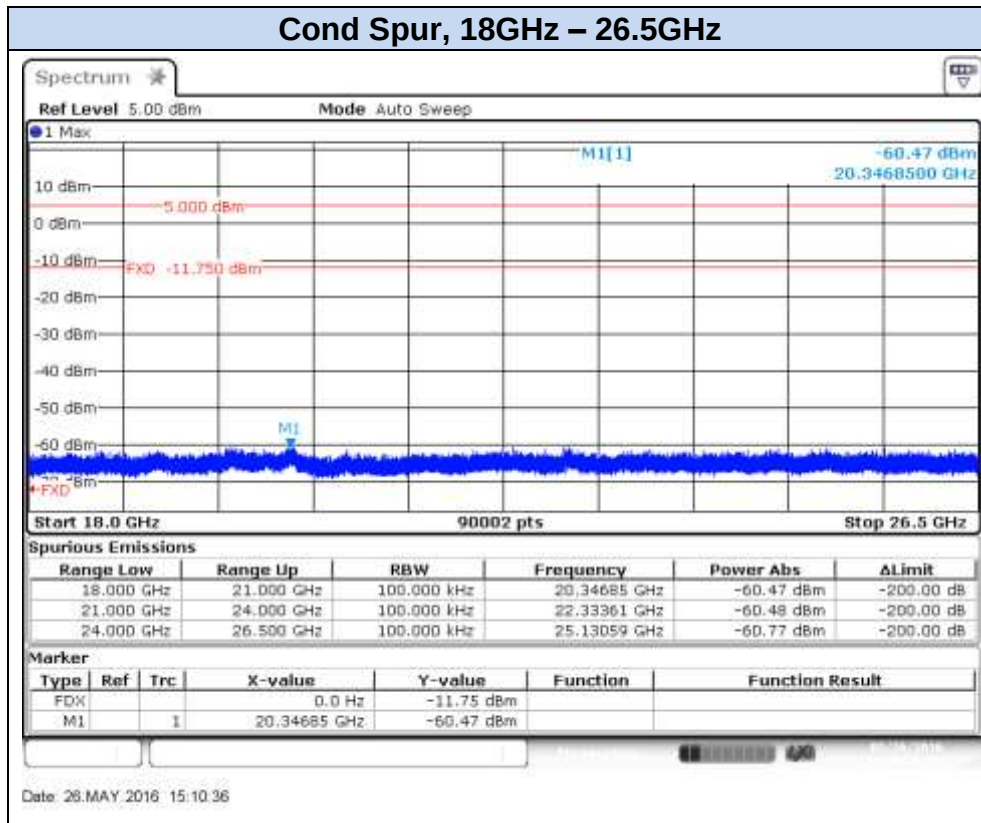



BLE, CH39

Cond Spur, 30MHz – 9GHz

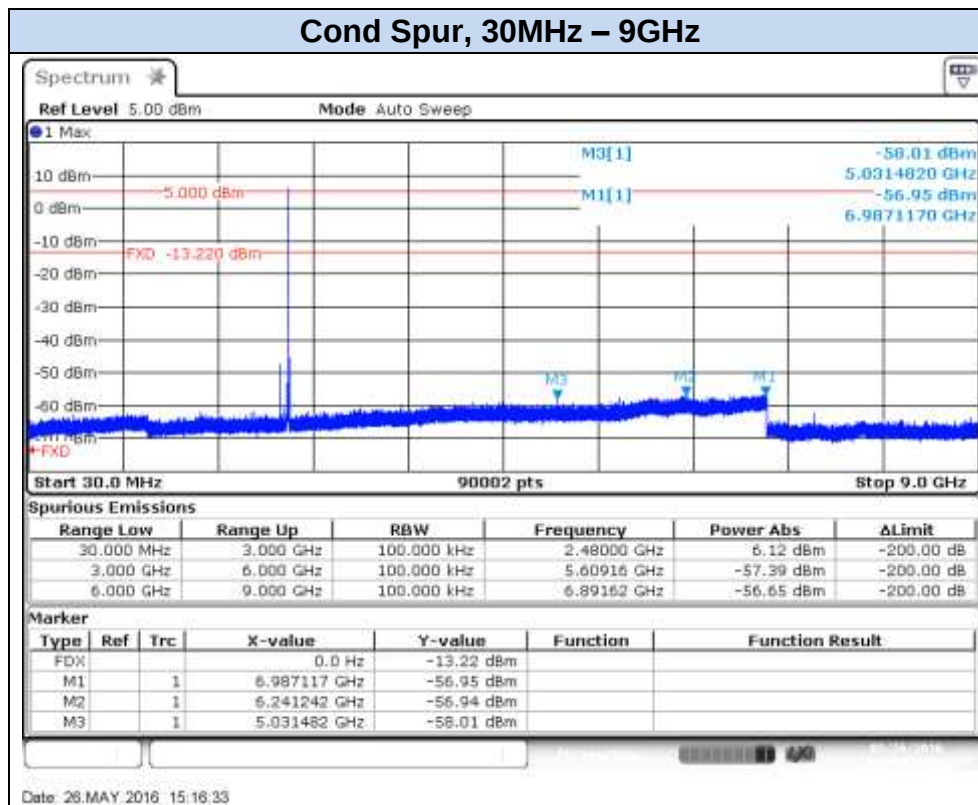

Cond Spur, 9GHz – 18GHz

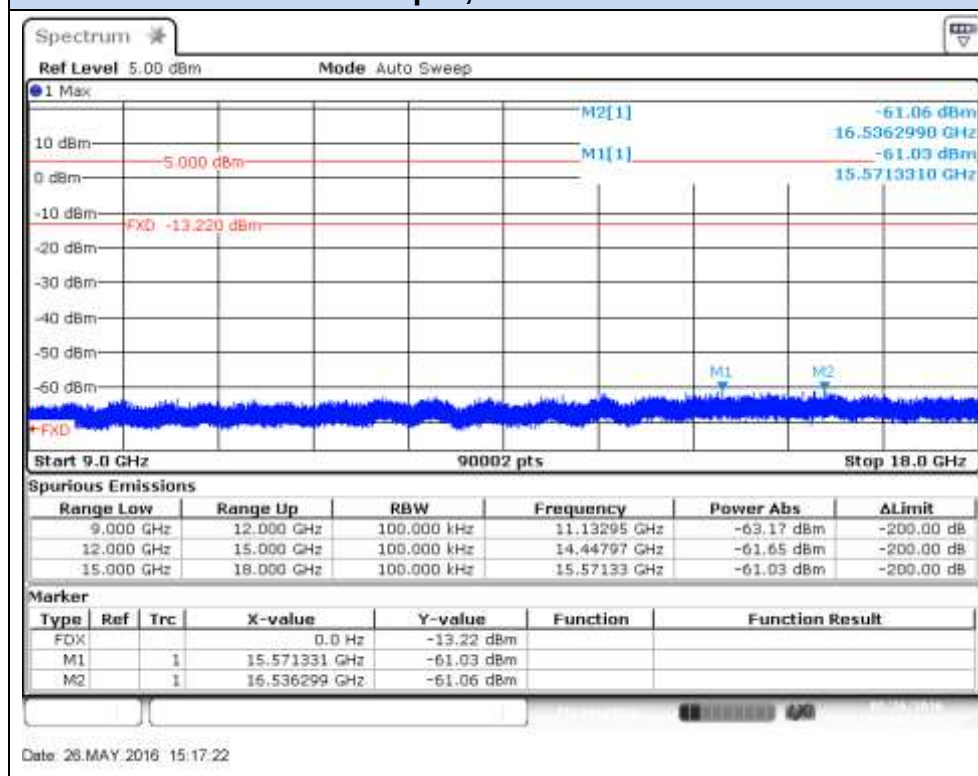

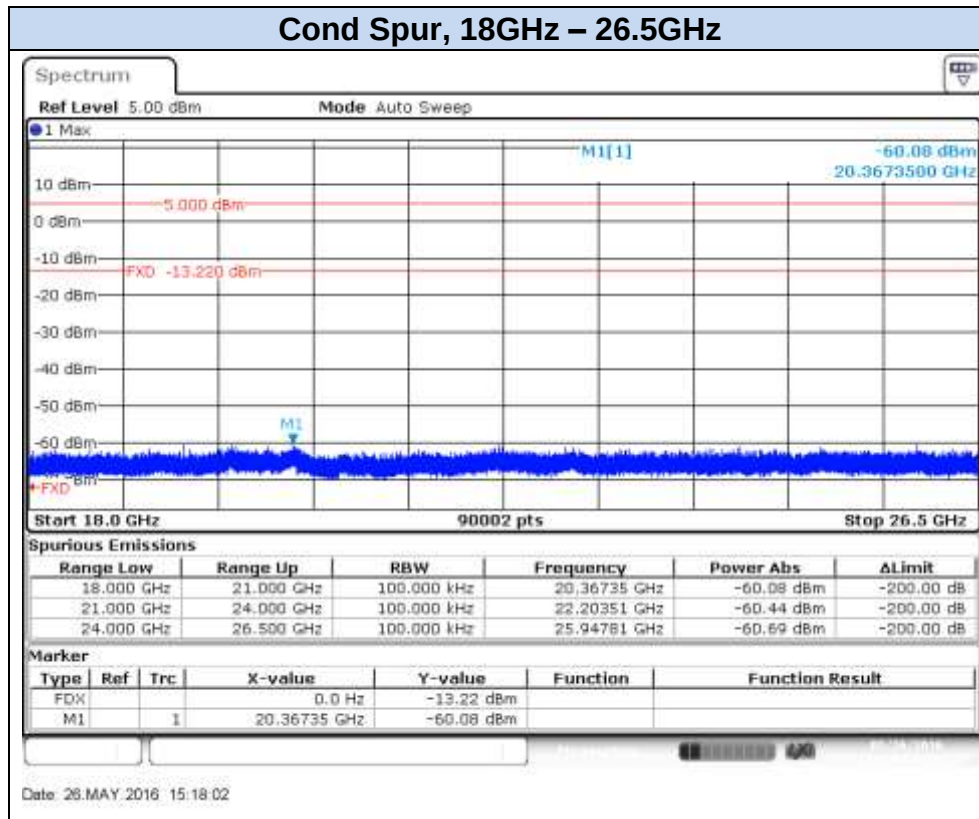

C.4 Power Spectral Density

Test limits:


FCC part	RSS part	Limits
15.247 (e)	RSS-247 Clause 5.2 (2)	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test procedure:

The maximum peak power spectral density level of the fundamental emission was measured using the method PKPSD, defined in paragraph 10.2 of FCC KDB 558074 D01 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

The setup below was used to measure the power spectral density. The antenna terminal of the EUT is connected to the spectrum through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

The declared maximum antenna gain is 3.24dBi.

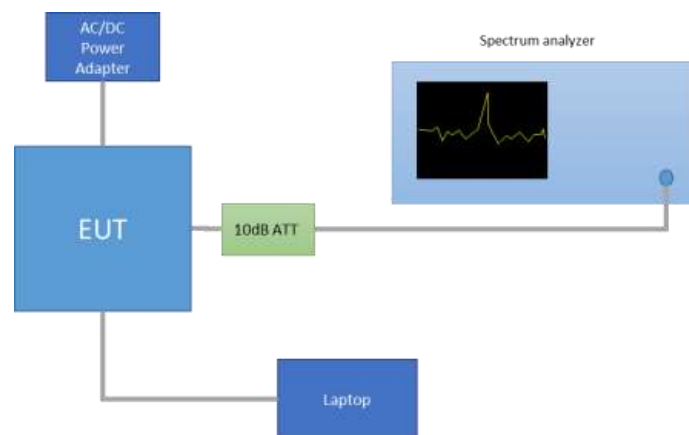



Results tables:

Mode	CH	Frequency [MHz]	PSD Peak [dBm]
BLE	0	2402	-7.64
	19	2440	-6.88
	39	2480	-8.30

Results screenshot:

BLE

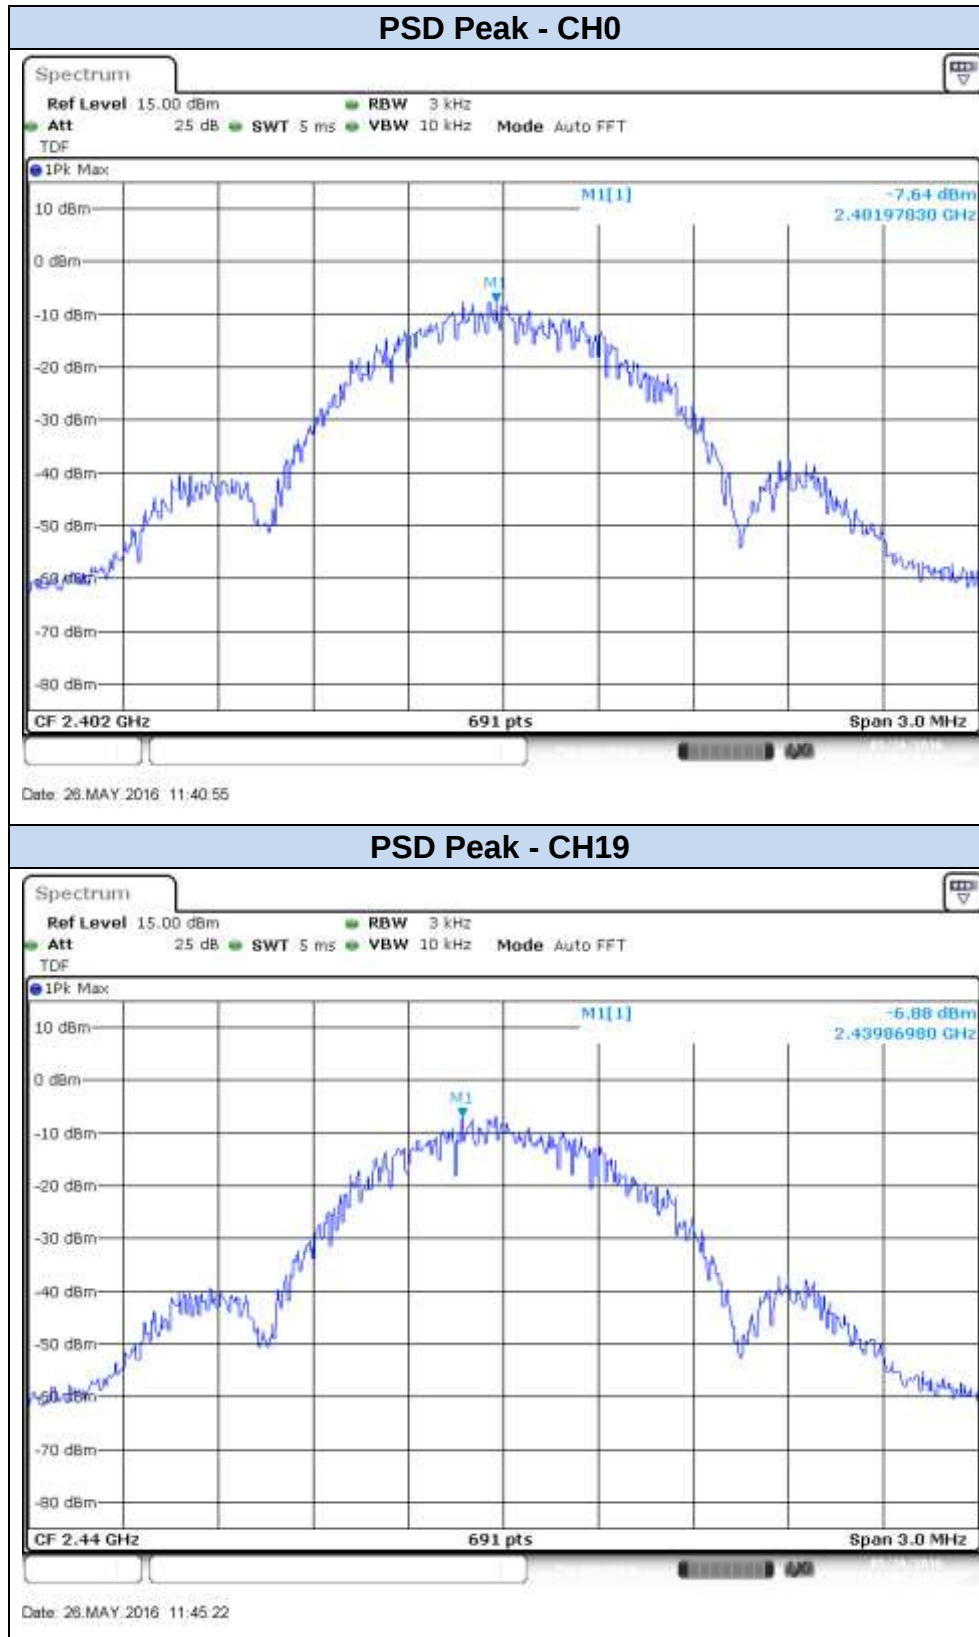

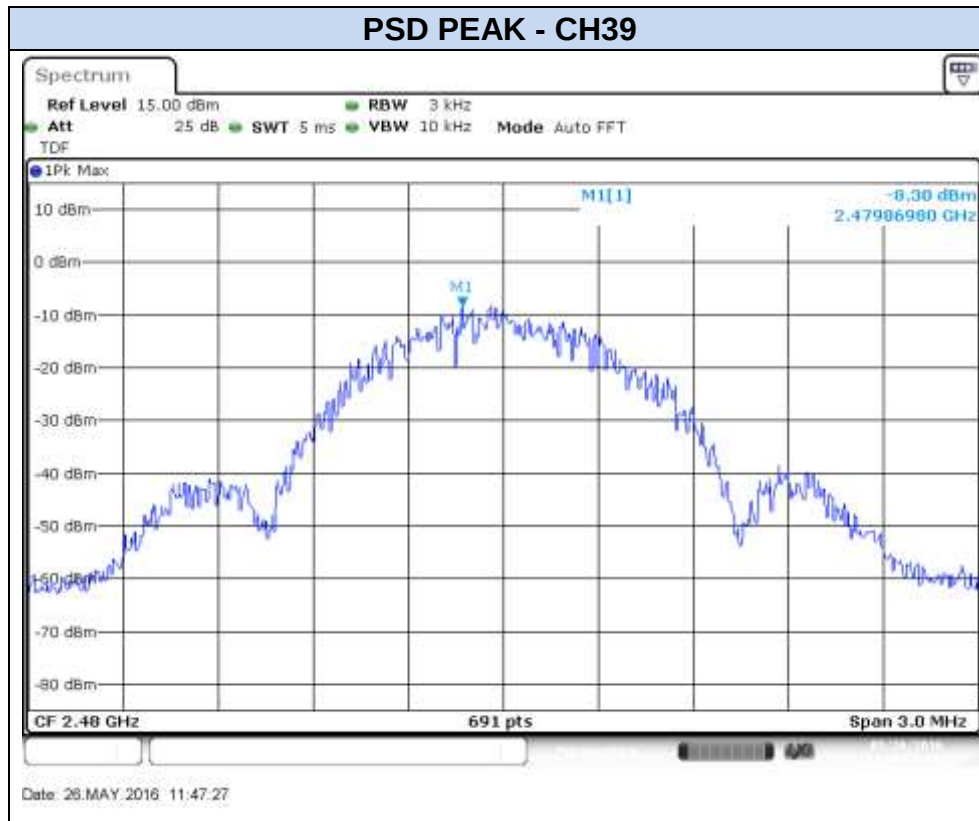

C.5 Radiated spurious emission

Standard references:

FCC part	RSS part	Limits																																
15.247 (d)	RSS-247 Clause 5.5	Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):																																
		<table><tr><th>Freq Range (MHz)</th><th>Field Strength (dBμV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>0.009-0.490</td><td>2400/f(kHz)</td><td>-</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/f(kHz)</td><td>-</td><td>300</td></tr><tr><td>1.705-30.0</td><td>30</td><td>-</td><td>30</td></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table>	Freq Range (MHz)	Field Strength (dBμV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	0.009-0.490	2400/f(kHz)	-	300	0.490-1.705	24000/f(kHz)	-	300	1.705-30.0	30	-	30	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
		Freq Range (MHz)	Field Strength (dBμV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																													
		0.009-0.490	2400/f(kHz)	-	300																													
		0.490-1.705	24000/f(kHz)	-	300																													
		1.705-30.0	30	-	30																													
		30-88	100	40	3																													
		88-216	150	43.5	3																													
		216-960	200	46	3																													
		Above 960	500	54	3																													
The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.																																		
For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.																																		

Test procedure:


The setups below were used to measure the radiated spurious emissions.

Depending of the frequency range and bands being tested, different antennas and filters were used.


The final measurement is done by varying the antenna height from 1 to 4 meters, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

The radiated spurious emissions were measured on the worst case configuration selected from the chapter *B.2 Maximum Output Power and antenna gain* and using the lowest, middle and highest channels.


Radiated Setup < 1GHz

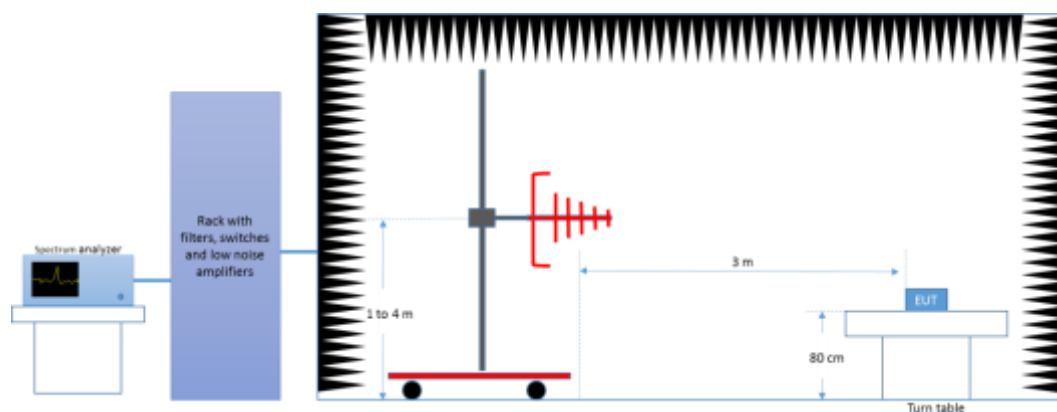


Radiated Setup 1GHz - 18GHz

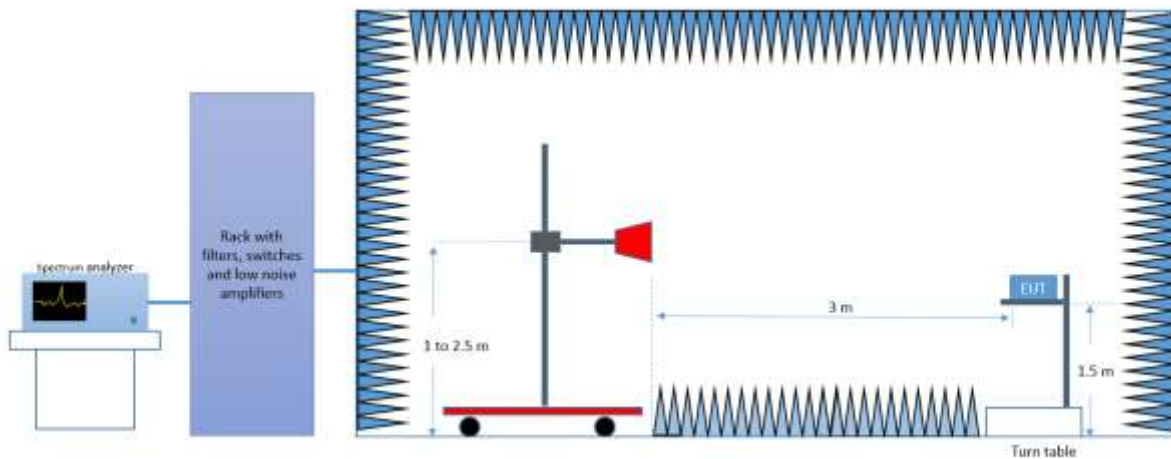

Radiated Setup 18 GHz - 25 GHz

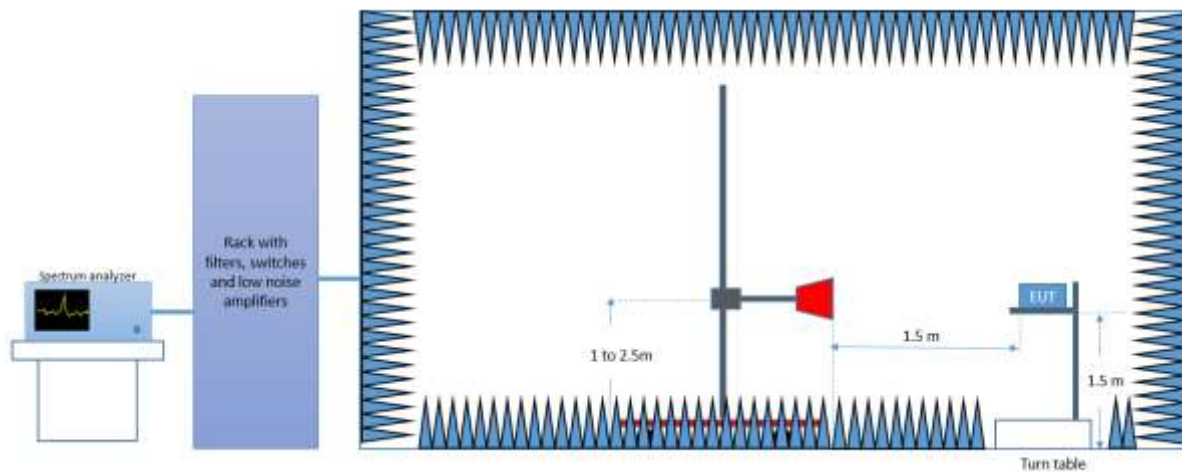


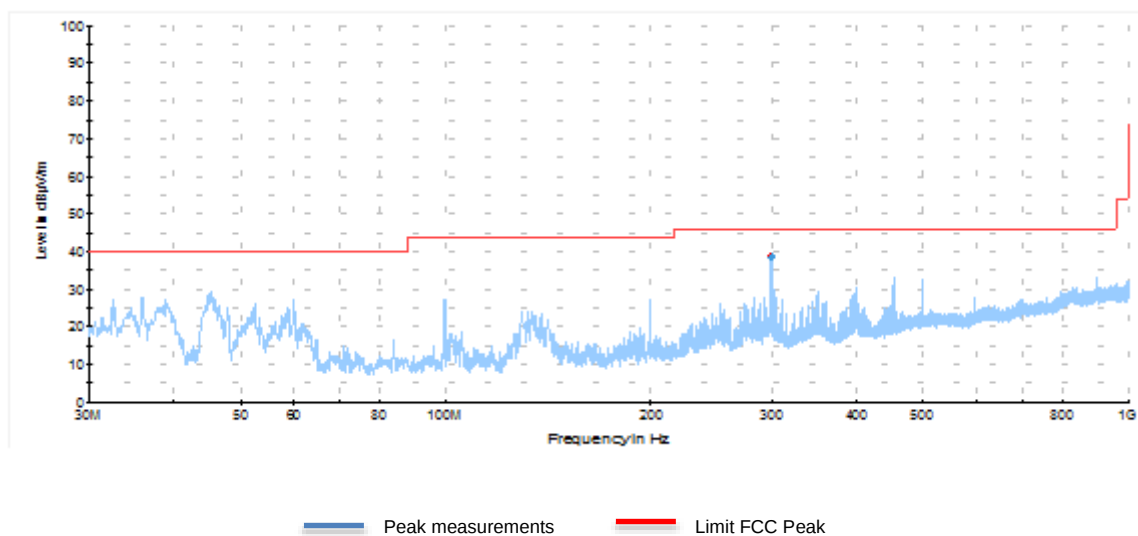
Test Results:**Radiated Spurious – 30MHz – 1GHz****Radiated Spurious – All Modes**

Frequency	Max Peak	Limit	Margin
MHz	dBuV/m	dBuV/m	dB
300	38.6	46	7.46

Note 1: The spurious signals detected do not depend on either the operating channel or the modulation mode.

1 GHz – 18GHz, BLE



Radiated Spurious – CH0

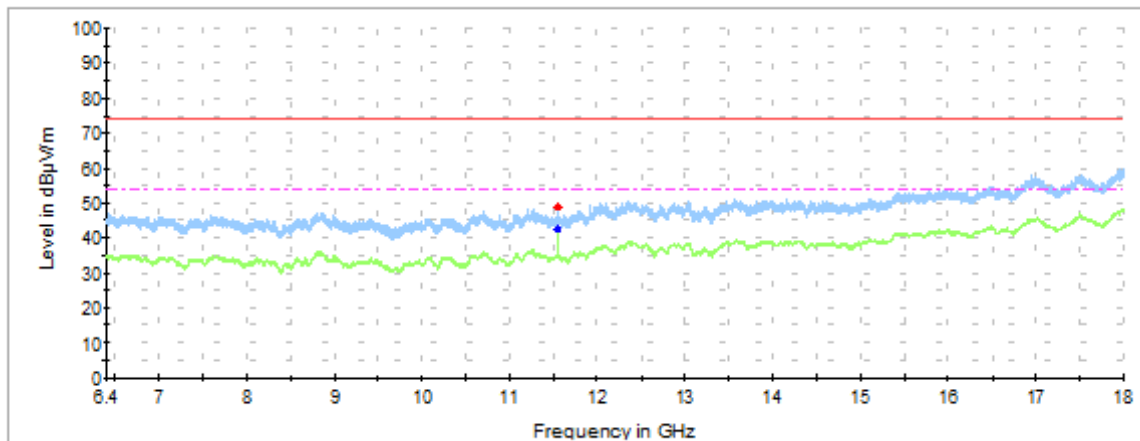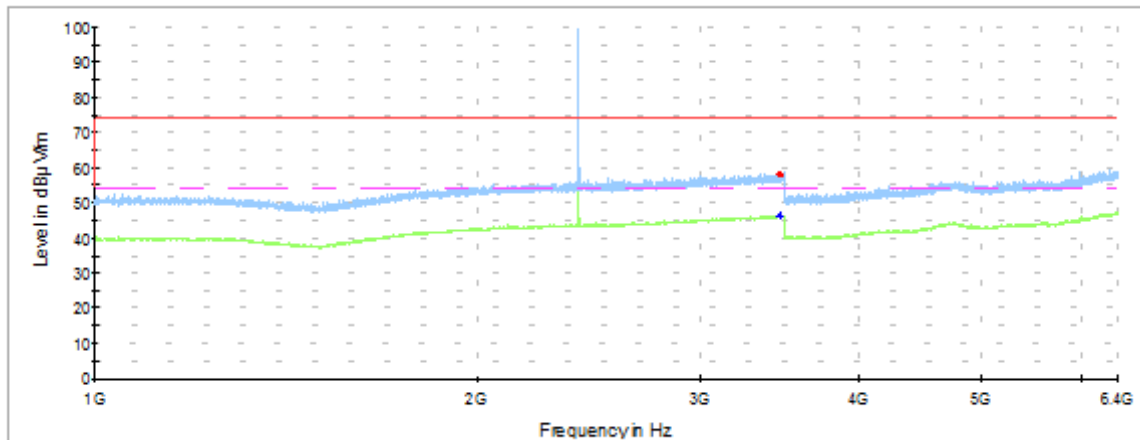

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	MaxPeak	AvG	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
3466	58.2	-	74	15.8
3466	-	46.5	54	7.5
11549	48.5	-	74	25.5
11550	-	43.7	54	10.3



Radiated Spurious – CH19

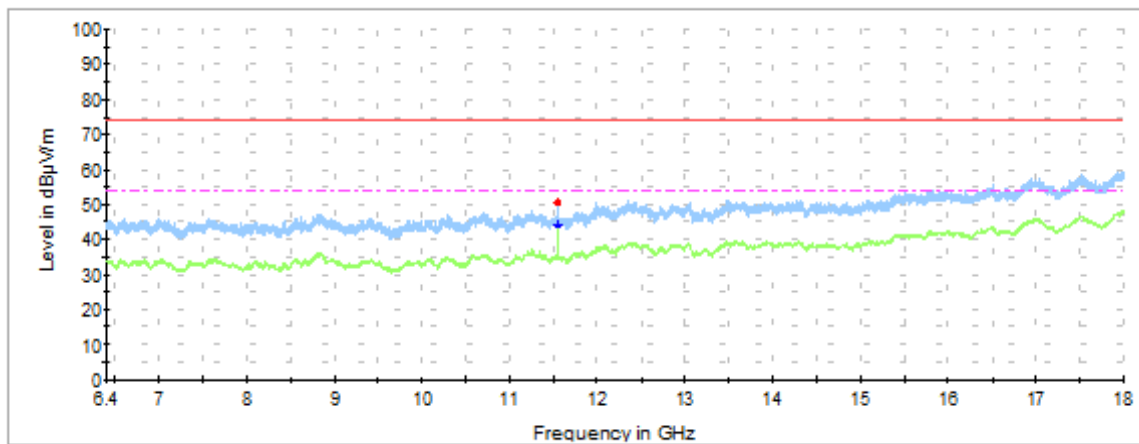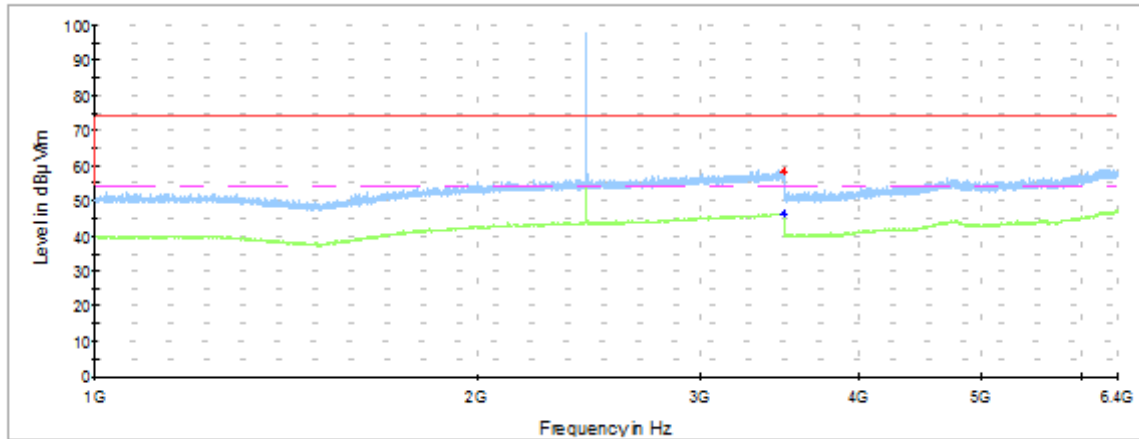

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - Limit FCC Avg

Frequency	MaxPeak	AvG	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
3490	58.3	-	74	15.7
3490	-	46.3	54	7.7
11549	49.8	-	74	24.2
11549	-	43.9	54	10.1

Radiated Spurious – CH39

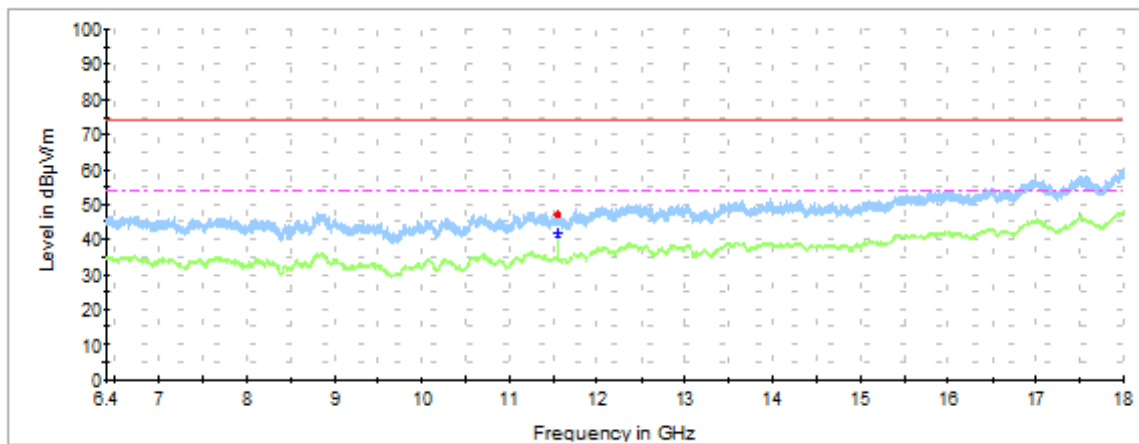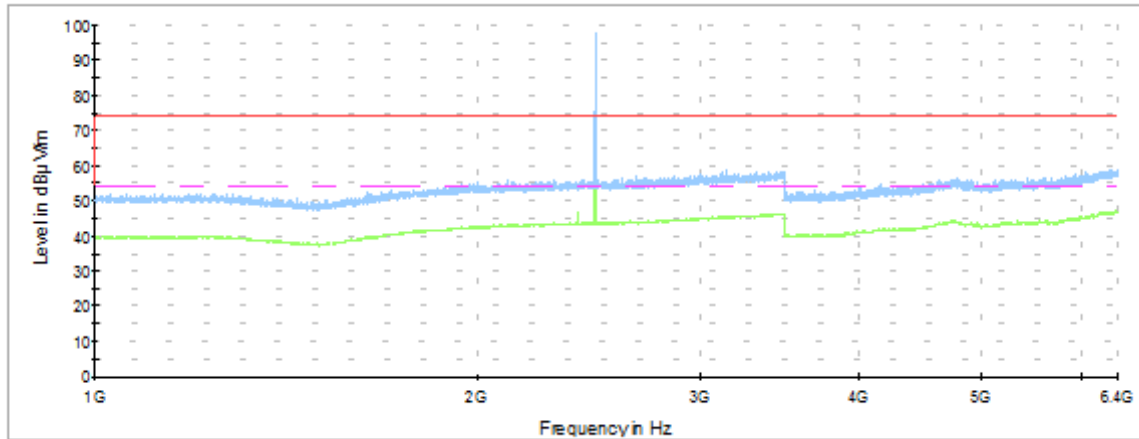


— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - Limit FCC Avg

Frequency	MaxPeak	AvG	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
2395	55.6	-	74	18.4
2400	-	46.6	54	7.4
11550	49.1	-	74	24.9
11550	-	43.8	54	10.2

Radiated Spurious – 18 GHz – 25 GHz

Radiated Spurious – All Modes

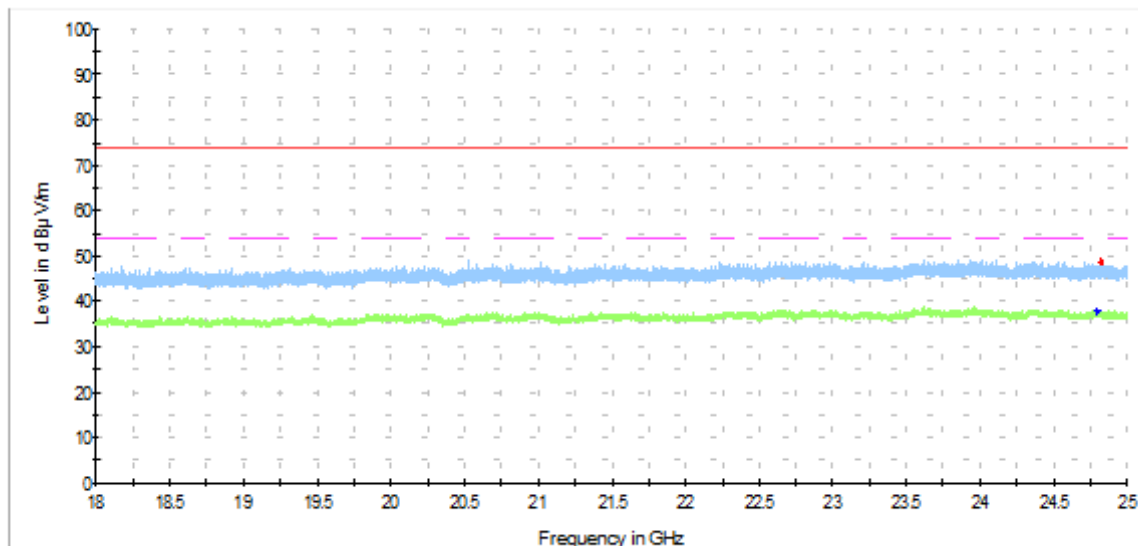

— Peak measurements
 — Avg measurements
 — Limit FCC Peak
 - - - Limit FCC Avg

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBuV/m	dBuV/m	dBuV/m	dB
24795	48.7	-	74	25.3
24822	-	37.7	54	16.3

Note 1: The spurious signals detected do not depend on either the operating channel or the modulation mode.