



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.407

Report Reference No.....: **GTS20220510015-1-4**

FCC ID.....: **2AYD5-I20D04**

Compiled by

(position+printed name+signature) .: File administrators Peter Xiao

Supervised by

(position+printed name+signature) .: Test Engineer Jenny Zeng

Approved by

(position+printed name+signature) .: Manager Simon Hu

Date of issue: Jul. 29, 2022

Representative Laboratory Name.: Shenzhen Global Test Service Co.,Ltd.

Address: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong,China

Applicant's name.....: Imin Technology Pte Ltd

Address: 11 Bishan Street 21, #03-05 Bosch Building,Singapore 573943

Test specification

Standard: **FCC Part 15.407: General technical requirements**

TRF Originator.....: Shenzhen Global Test Service Co.,Ltd.

Master TRF: Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description

Trade Mark

Manufacturer: Imin Technology Pte Ltd

Model/Type reference: I20D04

Listed Models: N/A

Operation Frequency.....: From 5180MHz to 5240MHz/ 5260MHz to 5320MHz/ 5500MHz to 5700MHz/ 5745MHz to 5825MHz

Hardware Version: N/A

Software Version: N/A

Rating: DC 24.0V/2.5A by adapter

Result: **PASS**

TEST REPORT

Test Report No. : GTS20220510015-1-4	Jul. 29, 2022 Date of issue
--	--------------------------------

Equipment under Test : POS Device

Model /Type : I20D04

Listed model : N/A

Applicant : **Imin Technology Pte Ltd**

Address : 11 Bishan Street 21, #03-05 Bosch Building,Singapore 573943

Manufacturer : **Imin Technology Pte Ltd**

Address : 11 Bishan Street 21, #03-05 Bosch Building,Singapore 573943

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	4
2. SUMMARY	5
2.1. General Remarks	5
2.2. Product Description	5
2.3. Equipment Under Test	6
2.4. Short description of the Equipment under Test (EUT)	6
2.5. EUT operation mode	6
2.6. Block Diagram of Test Setup	7
2.7. Related Submittal(s) / Grant (s)	7
2.8. EUT Exercise Software	7
2.9. Special Accessories	7
2.10. External I/O Cable	7
2.11. Modifications	7
3. TEST ENVIRONMENT	8
3.1. Address of the test laboratory	8
3.2. Test Facility	8
3.3. Environmental conditions	8
3.4. Statement of the measurement uncertainty	8
3.5. Test Description	9
3.6. Equipments Used during the Test.....	11
4. TEST CONDITIONS AND RESULTS	12
4.1. AC Power Conducted Emission	12
4.2. Radiated Emission	16
4.3. Duty Cycle	32
4.4. Maximum Average Output Power	33
4.5. Power Spectral Density	36
4.6. 99% and 6dB Bandwidth	37
4.7. 99% and 26dBc Bandwidth	38
4.8. Conducted Spurious Emissions and Band Edge Compliance	39
4.9. Frequency Stability	44
4.10. Antenna Requirement	48
5. TEST SETUP PHOTOS OF THE EUT.....	49
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	49

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.407](#): General technical requirements.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 789033 D02 General U-NII Test Procedures New Rules v02r01](#): UNII, U-NII, U-NII Test Procedures

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	May. 12, 2022
	:	
Testing commenced on	:	May. 12, 2022
	:	
Testing concluded on	:	Jul. 29, 2022

2.2. Product Description

Product Name	POS Device
Trade Mark	
Model/Type reference	I20D04
List Models	N/A
Model Declaration	N/A
Power supply:	DC 24.0V/2.5A by adapter
Sample ID	GTS20220510015-1-7#>S20220510015-1-8#
Bluetooth	
Operation frequency	2402-2480MHz
Channel Number	79 channels for Bluetooth (DSS) 40 channels for Bluetooth (DTS)
Channel Spacing	1MHz for Bluetooth (DSS) 2MHz for Bluetooth (DTS)
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK for Bluetooth (DSS) GFSK for Bluetooth (DTS)
WIFI(2.4G Band)	
Frequency Range	2412MHz ~ 2462MHz
Channel Spacing	5MHz
Channel Number	11 Channel for 20MHz bandwidth(2412~2462MHz)
Modulation Type	802.11b: DSSS; 802.11g/n: OFDM
WIFI(5.2G/5.3G/5.7G Band)	
Frequency Range	5180MHz ~ 5240MHz, 5260MHz ~ 5320MHz, 5500MHz ~ 5700MHz
Channel Number	4 Channels for 20MHz bandwidth(5180-5240MHz) 4 Channels for 20MHz bandwidth(5260-5320MHz) 11 Channels for 20MHz bandwidth(5500-5700MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 2 channels for 40MHz bandwidth(5270~5310MHz) 5 Channels for 40MHz bandwidth(5510-5670MHz) 1 channels for 80MHz bandwidth(5210MHz) 1 channels for 80MHz bandwidth(5290MHz) 2 Channels for 80MHz bandwidth(5530-5610MHz)
Modulation Type	802.11a/n/ac: OFDM
WIFI (5.8G Band)	
Frequency Range	5745MHz ~ 5825MHz
Channel Number	5 channels for 20MHz bandwidth(5745-5825MHz) 2 channels for 40MHz bandwidth(5755~5795MHz) 1 channels for 80MHz bandwidth(5775MHz)
Modulation Type	802.11a/n/ac: OFDM
Antenna Description	Internal Antenna, 4.17dBi(Max.) for 2.4G Band and 4.65dBi(Max.) for 5G Band
Remark: The I20D04 model has 3 versions; Version A: One large display and one small display Version B: Two large displays Version C: Only one large display	

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐	230V / 50 Hz	☐	120V / 60Hz
		☐	12 V DC	☒	24 V DC
		☐	Other (specified in blank below)		

DC 24.0V

2.4. Short description of the Equipment under Test (EUT)

This is a POS Device .

For more details, refer to the user's manual of the EUT.

2.5. EUT operation mode

The application provider specific test software to control sample in continuous TX and RX.

Antenna	Chain0 (ANT0)			Chain1 (ANT1)			Simultaneously
Bandwidth Mode	20MHz	40MHz	80MHz	20MHz	40MHz	80MHz	/
IEEE 802.11a	☒	☐	☐	☐	☐	☐	☐
IEEE 802.11n	☒	☒	☐	☐	☐	☐	☐
IEEE 802.11ac	☒	☒	☒	☐	☐	☐	☐

IEEE 802.11a/ac20/ac40/ac80/n20/n40:

UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

U-NI-2A		U-NI-2A		U-NI-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

U-NI-2C		U-NI-2C		U-NI-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

The EUT has been tested under operating condition.


This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

AC main conducted emission pre-test voltage at both AC 120V/60Hz and AC 240V/60Hz, recorded worst case;

AC main conducted emission pre-test at charge from PC modes, recorded worst case;

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be IEEE 802.11ac VHT20 mode (HCH).

2.6. Block Diagram of Test Setup

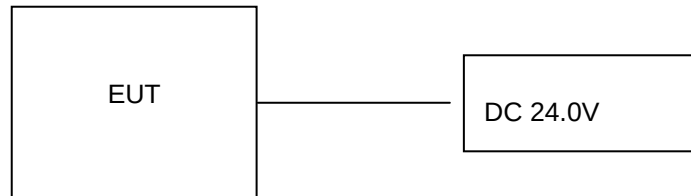

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AYD5-I20D04** filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.8. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (setup.exe) provided by application.

2.9. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
JiangSu Sunward Electronic Technology Co., Ltd	Adapter	AD65CM240250A	--	SDOC

2.10. External I/O Cable

I/O Port Description	Quantity	Cable
DC IN Port	1	1.2M, Unscreened Cable
USB Port	5	N/A
Type-C Port	1	N/A
RS232 Port	2	N/A
Earphone Port	1	N/A
LAN Port	1	N/A

2.11. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, China.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

Industry Canada Registration Number. is 24189.

FCC Designation Number is CN1234.

FCC Registered Test Site Number is165725.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Test Description

Applied Standard: FCC Part 15 Subpart E				
FCC Rules	Description of Test	Test Sample	Result	Remark
/	On Time and Duty Cycle	GTS20220510015-1-7#	Compliant	Appendix D Appendix E Appendix F Appendix G
§15.407(a)	Maximum Conducted Output Power	GTS20220510015-1-7#	Compliant	Note 1
§15.407(a)	Power Spectral Density	GTS20220510015-1-7#	Compliant	Appendix D Appendix E Appendix F Appendix G
§15.407(a)	26dB&6dB Bandwidth and 99% Bandwidth	GTS20220510015-1-7#	Compliant	Appendix D Appendix E Appendix F Appendix G
§15.209, §15.407(b)	Radiated Emissions	GTS20220510015-1-7#	Compliant	Note 1
§15.209, §15.407(b)	Conducted Spurious Emissions and Band Edges Test	GTS20220510015-1-7#	Compliant	Appendix D Appendix E Appendix F Appendix G
§15.209, §15.407(b)	Emissions at Restricted Band	GTS20220510015-1-7# GTS20220510015-1-8#	Compliant	Note 1
§15.407(g)	Frequency Stability	GTS20220510015-1-7#	Compliant	Note 1
§15.207(a)	AC Mians Line Conducted Emissions	GTS20220510015-1-8#	Compliant	Note 1
§15.203 §15.407(h)	Antenna Requirements	GTS20220510015-1-7#	Compliant	Note 1
§15.407 §2.1091	RF Exposure	/	Compliant	Note 2

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. Note 1 – Test results inside test report;
4. Note 2 – Test results in other test report (MPE Report).
5. We tested all test mode and recorded worst case in report

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth 26dB Bandwidth Radiated Emission 30M~1GHz & Radiated Emission 1GHz~10 th Harmonic	802.11a	6 Mbps
	802.11ac20/ac40/ac80 802.11n HT20/40	MCS0
Band Edge	802.11a	6 Mbps
	802.11ac20/ac40/ac80 802.11n HT20/40	MCS0

3.6. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	CYBERTEK	EM5040A	E1850400105	2022/07/16	2023/07/15
LISN	R&S	ESH2-Z5	893606/008	2022/07/16	2023/07/15
EMI Test Receiver	R&S	ESPI3	101841-cd	2022/07/16	2023/07/15
EMI Test Receiver	R&S	ESCI7	101102	2021/09/19	2022/09/18
Spectrum Analyzer	Agilent	N9020A	MY48010425	2021/09/19	2022/09/18
Spectrum Analyzer	R&S	FSV40	100019	2022/07/16	2023/07/15
Vector Signal generator	Agilent	N5181A	MY49060502	2022/07/16	2023/07/15
Signal generator	Agilent	N5182A	3610AO1069	2021/09/19	2022/09/18
Climate Chamber	ESPEC	EL-10KA	A20120523	2021/09/19	2022/09/18
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2021/11/07	2022/11/06
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2021/10/10	2022/11/09
Bilog Antenna	Schwarzbeck	VULB9163	000976	2021/07/23	2022/07/22
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2021/11/07	2022/11/06
Amplifier	Schwarzbeck	BBV 9743	#202	2021/08/08	2022/08/07
Amplifier	Schwarzbeck	BBV9179	9719-025	2022/07/16	2023/07/15
Amplifier	EMCI	EMC051845B	980355	2022/07/16	2023/07/15
Temperature/Humidity Meter	Gangxing	CTH-608	02	2022/07/16	2023/07/15
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2022/07/16	2023/07/15
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2022/07/16	2023/07/15
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2022/07/16	2023/07/15
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2022/07/16	2023/07/15
Data acquisition card	Agilent	U2531A	TW53323507	2022/07/16	2023/07/15
Power Sensor	Agilent	U2021XA	MY5365004	2022/07/16	2023/07/15
Test Control Unit	Tonscend	JS0806-1	178060067	2022/07/16	2023/07/15
Automated filter bank	Tonscend	JS0806-F	19F8060177	2022/07/16	2023/07/15
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/


Note: The Cal.Interval was one year.

1.All devices whose calibration expired on July 16, 2022 were calibrated from July 17, 2021 to July 16, 2022.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

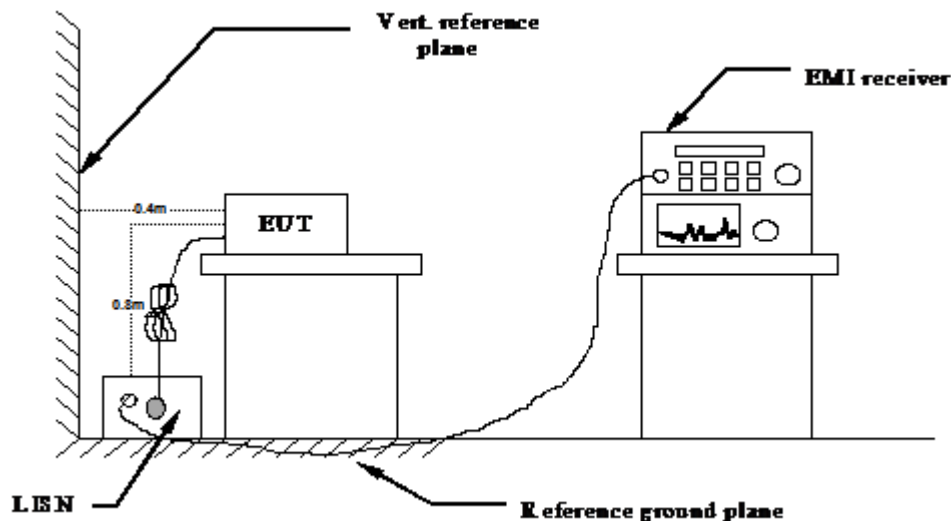

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 24.0V power, the adapter received AC120V/60Hz or AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark: We measured Conducted Emission at all mode in AC 120V/60Hz, the worst case was recorded .

Temperature	24.5°C	Humidity	53.7%
Test Engineer	Jenny Zeng	Configurations	IEEE 802.11ac20 HCH

Version A:

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1637	38.13	26.23	9.60	47.73	35.83	65.27	55.27	17.54	19.44	L1	PASS
2	0.1867	37.91	24.38	9.58	47.49	33.96	64.18	54.18	16.69	20.22	L1	PASS
3	0.4962	28.21	20.52	9.40	37.61	29.92	56.06	46.06	18.45	16.14	L1	PASS
4	0.7830	26.14	22.14	9.41	35.55	31.55	56.00	46.00	20.45	14.45	L1	PASS
5	2.1689	22.37	13.00	9.34	31.71	22.34	56.00	46.00	24.29	23.66	L1	PASS
6	10.8927	17.74	6.93	9.18	26.92	16.11	60.00	50.00	33.08	33.89	L1	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1502	39.24	23.69	9.61	48.85	33.30	65.99	55.99	17.14	22.69	N	PASS
2	0.1857	32.91	22.23	9.60	42.51	31.83	64.23	54.23	21.72	22.40	N	PASS
3	0.4852	33.60	24.96	9.41	43.01	34.37	56.25	46.25	13.24	11.88	N	PASS
4	0.7922	30.71	19.11	9.41	40.12	28.52	56.00	46.00	15.88	17.48	N	PASS
5	1.9565	27.79	14.64	9.35	37.14	23.99	56.00	46.00	18.86	22.01	N	PASS
6	6.6428	21.67	10.56	9.32	30.99	19.88	60.00	50.00	29.01	30.12	N	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Version B:

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1904	28.69	15.92	9.57	38.26	25.49	64.02	54.02	25.76	28.53	L1	PASS
2	0.2411	23.71	14.40	9.50	33.21	23.90	62.06	52.06	28.85	28.16	L1	PASS
3	0.4763	27.10	19.17	9.41	36.51	28.58	56.40	46.40	19.89	17.82	L1	PASS
4	0.9166	17.65	11.35	9.37	27.02	20.72	56.00	46.00	28.98	25.28	L1	PASS
5	1.3585	16.46	11.26	9.39	25.85	20.65	56.00	46.00	30.15	25.35	L1	PASS
6	5.7287	11.55	3.52	9.35	20.90	12.87	60.00	50.00	39.10	37.13	L1	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1544	35.17	20.18	9.61	44.78	29.79	65.76	55.76	20.98	25.97	N	PASS
2	0.1807	29.77	16.85	9.60	39.37	26.45	64.46	54.46	25.09	28.01	N	PASS
3	0.4865	31.62	24.54	9.41	41.03	33.95	56.23	46.23	15.20	12.28	N	PASS
4	0.7815	20.91	14.40	9.41	30.32	23.81	56.00	46.00	25.68	22.19	N	PASS
5	1.5380	19.79	12.24	9.36	29.15	21.60	56.00	46.00	26.85	24.40	N	PASS
6	2.7706	20.23	10.21	9.33	29.56	19.54	56.00	46.00	26.44	26.46	N	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Version C:

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1585	38.30	20.34	9.60	47.90	29.94	65.54	55.54	17.64	25.60	L1	PASS
2	0.2079	30.47	14.86	9.54	40.01	24.40	63.29	53.29	23.28	28.89	L1	PASS
3	0.4976	32.51	23.92	9.40	41.91	33.32	56.04	46.04	14.13	12.72	L1	PASS
4	0.7940	18.80	11.94	9.41	28.21	21.35	56.00	46.00	27.79	24.65	L1	PASS
5	3.2363	22.31	12.48	9.36	31.67	21.84	56.00	46.00	24.33	24.16	L1	PASS
6	6.3084	16.42	8.32	9.32	25.74	17.64	60.00	50.00	34.26	32.36	L1	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

Final Data List


NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1595	36.98	20.35	9.60	46.58	29.95	65.49	55.49	18.91	25.54	N	PASS
2	0.1733	35.01	19.50	9.59	44.60	29.09	64.80	54.80	20.20	25.71	N	PASS
3	0.2316	27.01	15.28	9.55	36.56	24.83	62.39	52.39	25.83	27.56	N	PASS
4	0.4850	37.68	28.67	9.41	47.09	38.08	56.25	46.25	9.16	8.17	N	PASS
5	3.2228	28.62	17.98	9.34	37.96	27.32	56.00	46.00	18.04	18.68	N	PASS
6	18.9562	9.14	2.94	9.21	18.35	12.15	60.00	50.00	41.65	37.85	N	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

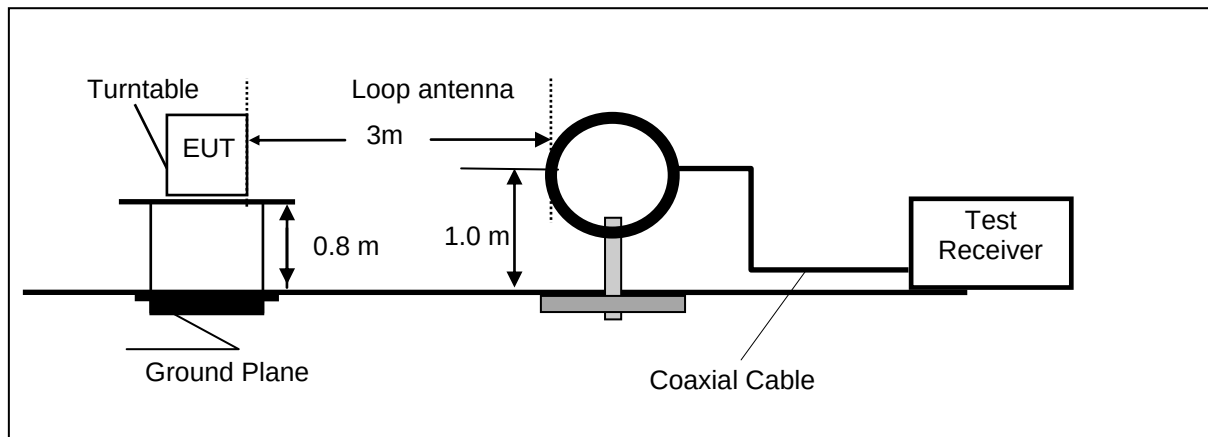

Frequency range 30MHz – 1000MHz

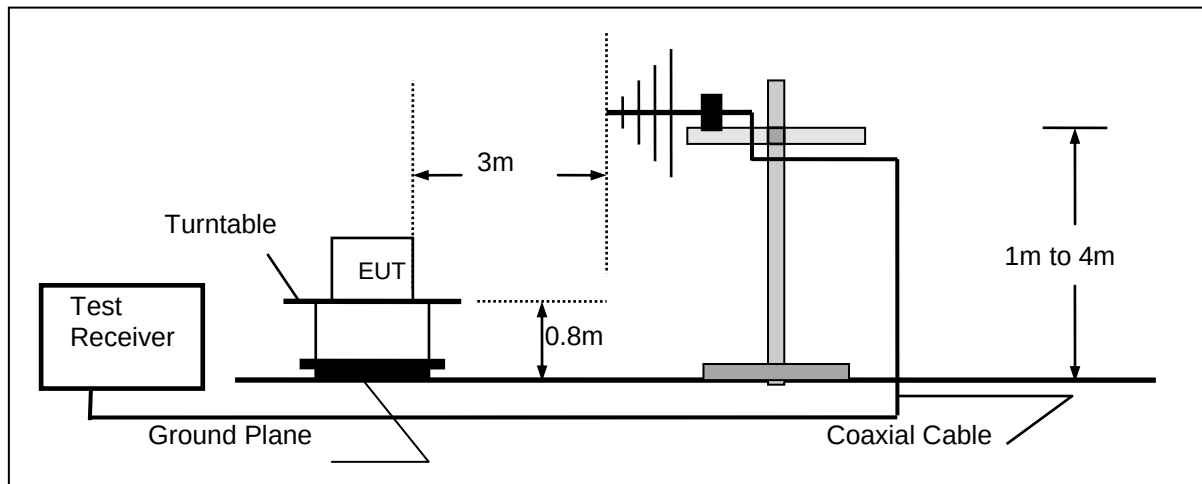

Frequency range above 1GHz

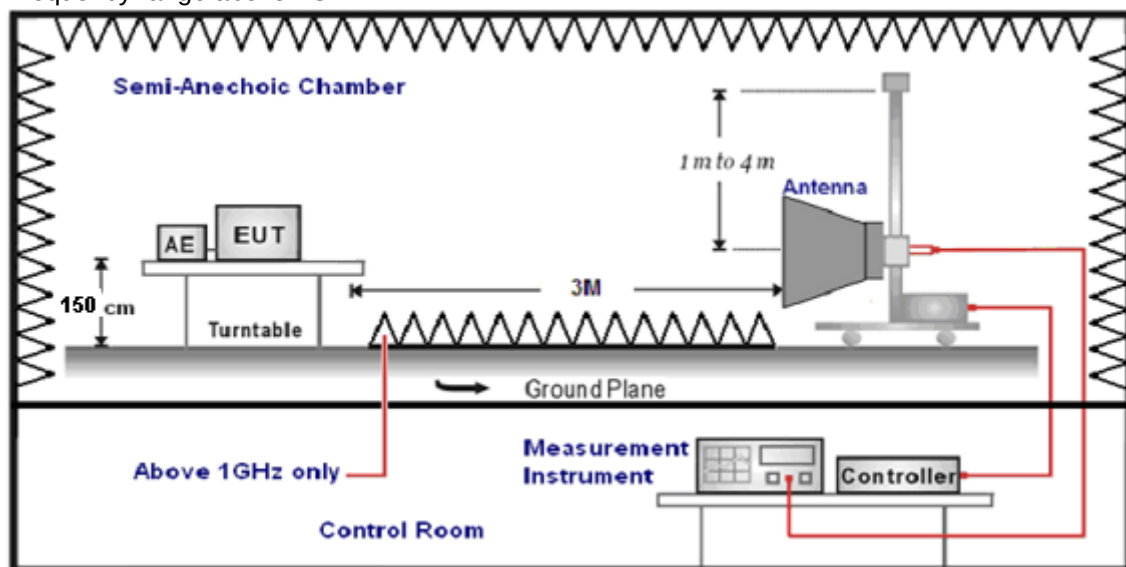

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing above 1GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 24MHz and maximum operation frequency was 5825MHz.so radiated emission test frequency band from 9KHz to 40GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$Transd=AF +CL-AG$$

RADIATION LIMIT

According to §15.407 (b): Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
5725-5850	-27 (beyond 10MHz of the bandedge)	68.2
	-17 (within 10 MHz of band edge)	78.2

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark: We measured Radiated Emission at all mode from 9KHz to 25GHz in AC 120V/60Hz and the worst case was recorded.

Temperature	23.4℃	Humidity	54.5%
Test Engineer	Jenny Zeng	Configurations	IEEE 802.11ac20 HCH

For 9 KHz~30MHz

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

For 30MHz-1GHz

Version A:

Horizontal

Test Graph

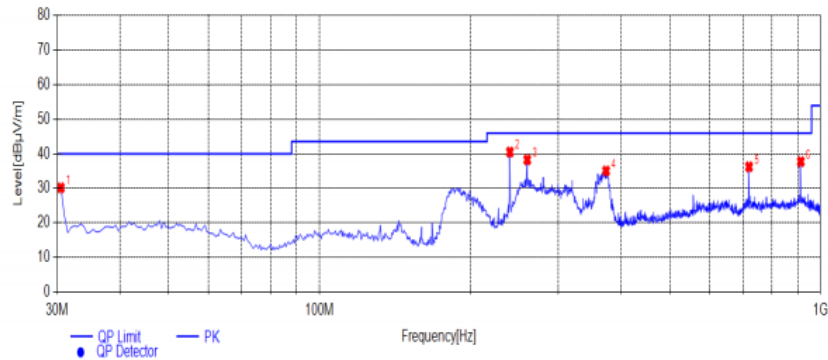

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	30.4850	39.80	-9.67	30.13	40.00	9.87	100	3	PK	Horizontal	PASS
2	240.0050	49.11	-8.62	40.49	46.00	5.51	100	274	PK	Horizontal	PASS
3	259.8900	46.13	-7.88	38.25	46.00	7.75	100	261	PK	Horizontal	PASS
4	373.3800	41.28	-6.27	35.01	46.00	10.99	100	239	PK	Horizontal	PASS
5	720.1550	36.46	-0.25	36.21	46.00	9.79	100	45	PK	Horizontal	PASS
6	913.6700	34.22	3.50	37.72	46.00	8.28	100	302	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

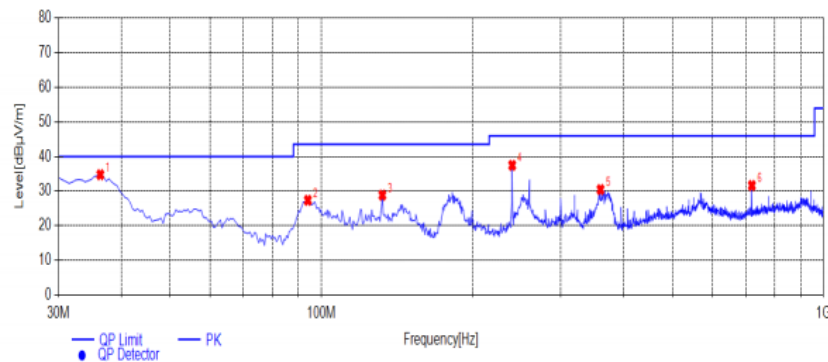

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	36.3050	44.27	-9.52	34.75	40.00	5.25	100	116	PK	Vertical	PASS
2	94.0200	36.71	-9.37	27.34	43.50	16.16	100	0	PK	Vertical	PASS
3	132.3350	41.26	-12.43	28.83	43.50	14.67	100	103	PK	Vertical	PASS
4	240.0050	46.08	-8.62	37.46	46.00	8.54	100	217	PK	Vertical	PASS
5	359.8000	36.33	-5.89	30.44	46.00	15.56	100	163	PK	Vertical	PASS
6	720.1550	31.87	-0.25	31.62	46.00	14.38	100	33	PK	Vertical	PASS


Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Version B:

Horizontal

Test Graph

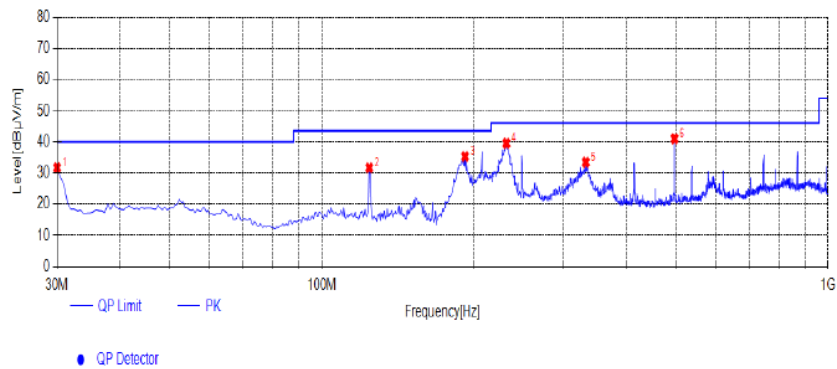

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	30.0000	41.49	-9.76	31.73	40.00	8.27	100	151	PK	Horizontal	PASS
2	124.0900	42.79	-11.07	31.72	43.50	11.78	100	260	PK	Horizontal	PASS
3	191.9900	45.11	-9.78	35.33	43.50	8.17	100	254	PK	Horizontal	PASS
4	231.7600	48.51	-8.97	39.54	46.00	6.46	100	337	PK	Horizontal	PASS
5	332.6400	40.05	-6.57	33.48	46.00	12.52	100	249	PK	Horizontal	PASS
6	498.0250	44.52	-3.51	41.01	46.00	4.99	100	52	PK	Horizontal	PASS

Note: 1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

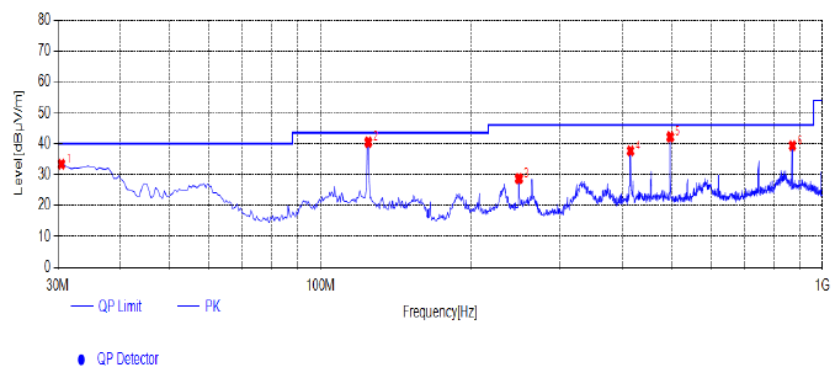

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	30.4850	43.08	-9.67	33.41	40.00	6.59	100	63	PK	Vertical	PASS
2	124.5750	51.79	-11.31	40.48	43.50	3.02	100	349	PK	Vertical	PASS
3	248.7350	37.09	-8.37	28.72	46.00	17.28	100	220	PK	Vertical	PASS
4	415.0900	42.66	-4.97	37.69	46.00	8.31	100	28	PK	Vertical	PASS
5	498.0250	45.70	-3.51	42.19	46.00	3.81	100	314	PK	Vertical	PASS
6	871.9600	38.02	1.36	39.38	46.00	6.62	100	290	PK	Vertical	PASS


Note: 1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Version C:

Horizontal

Test Graph

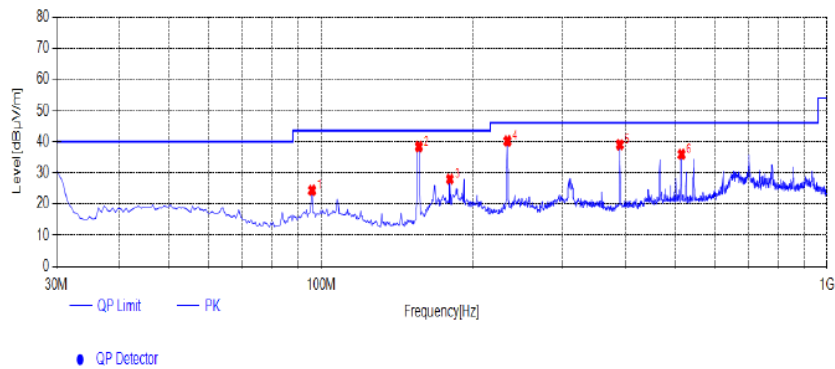

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	95.9600	33.18	-8.83	24.35	43.50	19.15	100	285	PK	Horizontal	PASS
2	156.1000	50.68	-12.26	38.42	43.50	5.08	100	118	PK	Horizontal	PASS
3	179.8650	39.41	-11.42	27.99	43.50	15.51	100	27	PK	Horizontal	PASS
4	233.7000	49.09	-8.89	40.20	46.00	5.80	100	115	PK	Horizontal	PASS
5	389.8700	44.83	-5.77	39.06	46.00	6.94	100	169	PK	Horizontal	PASS
6	515.9700	39.05	-3.11	35.94	46.00	10.06	100	2	PK	Horizontal	PASS

Note: 1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

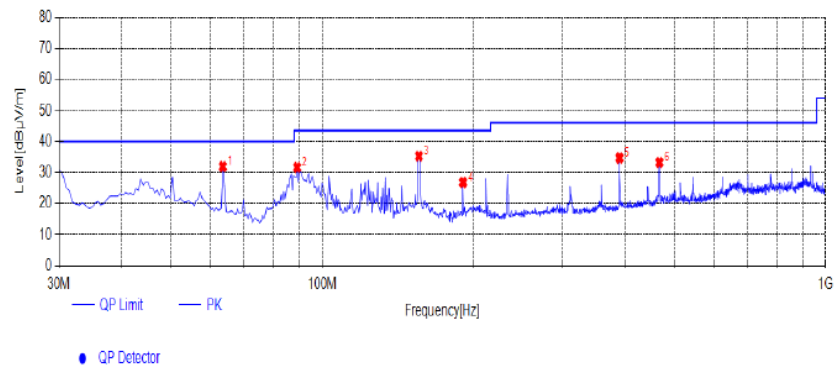

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	63.4650	40.95	-9.00	31.95	40.00	8.05	100	3	PK	Vertical	PASS
2	89.1700	42.32	-10.64	31.68	43.50	11.82	100	3	PK	Vertical	PASS
3	155.6150	47.61	-12.30	35.31	43.50	8.19	100	358	PK	Vertical	PASS
4	190.5350	37.09	-10.28	26.81	43.50	16.69	100	262	PK	Vertical	PASS
5	389.8700	40.51	-5.77	34.74	46.00	11.26	100	252	PK	Vertical	PASS
6	467.9550	37.36	-4.08	33.28	46.00	12.72	100	346	PK	Vertical	PASS

Note: 1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

**For 1GHz to 40GHz
5150-5250MHz:**

802.11a Mode Channel 36 5180 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10360	39.25	38.55	33.13	11.26	55.93	68.20	-12.27	Peak	Horizontal
1	10360	30.82	38.55	33.13	11.26	47.50	54.00	-6.50	AV	Horizontal
1	10360	40.02	38.55	33.13	11.26	56.70	68.20	-11.50	Peak	Vertical
1	10360	29.02	38.55	33.13	11.26	45.70	54.00	-8.30	AV	Vertical

802.11a Mode Channel 40 5200 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10400	40.72	38.55	33.13	11.26	57.40	68.20	-10.80	Peak	Horizontal
1	10400	30.06	38.55	33.13	11.26	46.74	54.00	-7.26	AV	Horizontal
1	10400	40.02	38.55	33.13	11.26	56.70	68.20	-11.50	Peak	Vertical
1	10400	28.65	38.55	33.13	11.26	45.33	54.00	-8.67	AV	Vertical

802.11a Mode Channel 48 5240 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10480	39.60	38.55	33.13	11.26	56.28	68.20	-11.92	Peak	Horizontal
1	10480	30.75	38.55	33.13	11.26	47.43	54.00	-6.57	AV	Horizontal
1	10480	41.64	38.55	33.13	11.26	58.32	68.20	-9.88	Peak	Vertical
1	10480	29.92	38.55	33.13	11.26	46.60	54.00	-7.40	AV	Vertical

802.11n20 Mode Channel 36 5180 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10360	39.59	38.55	33.13	11.26	56.27	68.20	-11.93	Peak	Horizontal
1	10360	31.12	38.55	33.13	11.26	47.80	54.00	-6.20	AV	Horizontal
1	10360	40.83	38.55	33.13	11.26	57.51	68.20	-10.69	Peak	Vertical
1	10360	28.07	38.55	33.13	11.26	44.75	54.00	-9.25	AV	Vertical

802.11n20 Mode Channel 40 5200 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10400	39.97	38.55	33.13	11.26	56.65	68.20	-11.55	Peak	Horizontal
1	10400	31.40	38.55	33.13	11.26	48.08	54.00	-5.92	AV	Horizontal
1	10400	40.20	38.55	33.13	11.26	56.88	68.20	-11.32	Peak	Vertical
1	10400	28.38	38.55	33.13	11.26	45.06	54.00	-8.94	AV	Vertical

802.11n20 Mode Channel 48 5240 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10480	39.43	38.55	33.13	11.26	56.11	68.20	-12.09	Peak	Horizontal
1	10480	30.21	38.55	33.13	11.26	46.89	54.00	-7.11	AV	Horizontal
1	10480	40.08	38.55	33.13	11.26	56.76	68.20	-11.44	Peak	Vertical
1	10480	29.96	38.55	33.13	11.26	46.64	54.00	-7.36	AV	Vertical

802.11n40 Mode Channel 38 5190 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10380	39.64	38.55	33.13	11.26	56.32	68.20	-11.88	Peak	Horizontal
1	10380	31.12	38.55	33.13	11.26	47.80	54.00	-6.20	AV	Horizontal
1	10380	40.85	38.55	33.13	11.26	57.53	68.20	-10.67	Peak	Vertical
1	10380	29.98	38.55	33.13	11.26	46.66	54.00	-7.34	AV	Vertical

802.11n40 Mode Channel 46 5230 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10460	39.77	38.55	33.13	11.26	56.45	68.20	-11.75	Peak	Horizontal
1	10460	30.81	38.55	33.13	11.26	47.49	54.00	-6.51	AV	Horizontal
1	10460	41.66	38.55	33.13	11.26	58.34	68.20	-9.86	Peak	Vertical
1	10460	28.17	38.55	33.13	11.26	44.85	54.00	-9.15	AV	Vertical

802.11ac20 Mode Channel 36 5180 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10360	39.01	38.55	33.13	11.26	55.69	68.20	-12.51	Peak	Horizontal
1	10360	30.15	38.55	33.13	11.26	46.83	54.00	-7.17	AV	Horizontal
1	10360	41.67	38.55	33.13	11.26	58.35	68.20	-9.85	Peak	Vertical
1	10360	29.19	38.55	33.13	11.26	45.87	54.00	-8.13	AV	Vertical

802.11ac20 Mode Channel 40 5200 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10400	40.52	38.55	33.13	11.26	57.20	68.20	-11.00	Peak	Horizontal
1	10400	31.14	38.55	33.13	11.26	47.82	54.00	-6.18	AV	Horizontal
1	10400	41.52	38.55	33.13	11.26	58.20	68.20	-10.00	Peak	Vertical
1	10400	29.52	38.55	33.13	11.26	46.20	54.00	-7.80	AV	Vertical

802.11ac20 Mode Channel 48 5240 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10480	39.16	38.55	33.13	11.26	55.84	68.20	-12.36	Peak	Horizontal
1	10480	30.57	38.55	33.13	11.26	47.25	54.00	-6.75	AV	Horizontal
1	10480	40.90	38.55	33.13	11.26	57.58	68.20	-10.62	Peak	Vertical
1	10480	29.81	38.55	33.13	11.26	46.49	54.00	-7.51	AV	Vertical

802.11ac40 Mode Channel 38 5190 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10380	40.94	38.55	33.13	11.26	57.62	68.20	-10.58	Peak	Horizontal
1	10380	30.03	38.55	33.13	11.26	46.71	54.00	-7.29	AV	Horizontal
1	10380	41.31	38.55	33.13	11.26	57.99	68.20	-10.21	Peak	Vertical
1	10380	29.45	38.55	33.13	11.26	46.13	54.00	-7.87	AV	Vertical

802.11ac40 Mode_Channel 46 _ 5230 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10460	40.32	38.55	33.13	11.26	57.00	68.20	-11.20	Peak	Horizontal
1	10460	30.94	38.55	33.13	11.26	47.62	54.00	-6.38	AV	Horizontal
1	10460	41.99	38.55	33.13	11.26	58.67	68.20	-9.53	Peak	Vertical
1	10460	28.29	38.55	33.13	11.26	44.97	54.00	-9.03	AV	Vertical

802.11ac80 Mode_Channel 42 _ 5210 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10420	40.54	38.55	33.13	11.26	57.22	68.20	-10.98	Peak	Horizontal
1	10420	31.50	38.55	33.13	11.26	48.18	54.00	-5.82	AV	Horizontal
1	10420	41.05	38.55	33.13	11.26	57.73	68.20	-10.47	Peak	Vertical
1	10420	28.90	38.55	33.13	11.26	45.58	54.00	-8.42	AV	Vertical

5260-5320MHz:**802.11a Mode_Channel 52 _ 5260 MHz**

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10520	40.15	38.55	33.13	11.26	56.83	68.20	-11.37	Peak	Horizontal
1	10520	31.13	38.55	33.13	11.26	47.81	54.00	-6.19	AV	Horizontal
1	10520	41.00	38.55	33.13	11.26	57.68	68.20	-10.52	Peak	Vertical
1	10520	29.65	38.55	33.13	11.26	46.33	54.00	-7.67	AV	Vertical

802.11a Mode_Channel 56 _ 5280 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10560	40.85	38.55	33.13	11.26	57.53	68.20	-10.67	Peak	Horizontal
1	10560	31.27	38.55	33.13	11.26	47.95	54.00	-6.05	AV	Horizontal
1	10560	40.55	38.55	33.13	11.26	57.23	68.20	-10.97	Peak	Vertical
1	10560	29.93	38.55	33.13	11.26	46.61	54.00	-7.39	AV	Vertical

802.11a Mode_Channel 64 _ 5320 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10640	39.74	38.55	33.13	11.26	56.42	68.20	-11.78	Peak	Horizontal
1	10640	31.19	38.55	33.13	11.26	47.87	54.00	-6.13	AV	Horizontal
1	10640	40.50	38.55	33.13	11.26	57.18	68.20	-11.02	Peak	Vertical
1	10640	29.67	38.55	33.13	11.26	46.35	54.00	-7.65	AV	Vertical

802.11n20 Mode_Channel 52 _ 5260 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10520	40.44	38.55	33.13	11.26	57.12	68.20	-11.08	Peak	Horizontal
1	10520	31.65	38.55	33.13	11.26	48.33	54.00	-5.67	AV	Horizontal
1	10520	41.51	38.55	33.13	11.26	58.19	68.20	-10.01	Peak	Vertical
1	10520	28.14	38.55	33.13	11.26	44.82	54.00	-9.18	AV	Vertical

802.11n20 Mode_Channel 56 _ 5280 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10560	40.16	38.55	33.13	11.26	56.84	68.20	-11.36	Peak	Horizontal
1	10560	30.54	38.55	33.13	11.26	47.22	54.00	-6.78	AV	Horizontal
1	10560	40.86	38.55	33.13	11.26	57.54	68.20	-10.66	Peak	Vertical
1	10560	29.10	38.55	33.13	11.26	45.78	54.00	-8.22	AV	Vertical

802.11n20 Mode_Channel 64 _ 5320 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10640	39.83	38.55	33.13	11.26	56.51	68.20	-11.69	Peak	Horizontal
1	10640	30.85	38.55	33.13	11.26	47.53	54.00	-6.47	AV	Horizontal
1	10640	41.97	38.55	33.13	11.26	58.65	68.20	-9.55	Peak	Vertical
1	10640	29.41	38.55	33.13	11.26	46.09	54.00	-7.91	AV	Vertical

802.11n40 Mode_Channel 54 _ 5270 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10540	40.63	38.55	33.13	11.26	57.31	68.20	-10.89	Peak	Horizontal
1	10540	30.88	38.55	33.13	11.26	47.56	54.00	-6.44	AV	Horizontal
1	10540	41.66	38.55	33.13	11.26	58.34	68.20	-9.86	Peak	Vertical
1	10540	28.57	38.55	33.13	11.26	45.25	54.00	-8.75	AV	Vertical

802.11n40 Mode_Channel 62 _ 5310 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10620	40.79	38.55	33.13	11.26	57.47	68.20	-10.73	Peak	Horizontal
1	10620	31.34	38.55	33.13	11.26	48.02	54.00	-5.98	AV	Horizontal
1	10620	40.29	38.55	33.13	11.26	56.97	68.20	-11.23	Peak	Vertical
1	10620	28.23	38.55	33.13	11.26	44.91	54.00	-9.09	AV	Vertical

802.11ac20 Mode_Channel 52 _ 5260 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10520	39.57	38.55	33.13	11.26	56.25	68.20	-11.95	Peak	Horizontal
1	10520	31.58	38.55	33.13	11.26	48.26	54.00	-5.74	AV	Horizontal
1	10520	40.64	38.55	33.13	11.26	57.32	68.20	-10.88	Peak	Vertical
1	10520	28.51	38.55	33.13	11.26	45.19	54.00	-8.81	AV	Vertical

802.11ac20 Mode_Channel 56 _ 5280 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10560	40.07	38.55	33.13	11.26	56.75	68.20	-11.45	Peak	Horizontal
1	10560	30.07	38.55	33.13	11.26	46.75	54.00	-7.25	AV	Horizontal
1	10560	40.72	38.55	33.13	11.26	57.40	68.20	-10.80	Peak	Vertical
1	10560	28.09	38.55	33.13	11.26	44.77	54.00	-9.23	AV	Vertical

802.11ac20 Mode_Channel 64_ 5320 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10640	39.99	38.55	33.13	11.26	56.67	68.20	-11.53	Peak	Horizontal
1	10640	31.69	38.55	33.13	11.26	48.37	54.00	-5.63	AV	Horizontal
1	10640	41.70	38.55	33.13	11.26	58.38	68.20	-9.82	Peak	Vertical
1	10640	29.31	38.55	33.13	11.26	45.99	54.00	-8.01	AV	Vertical

802.11ac40 Mode_Channel 54_ 5270 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10540	39.61	38.55	33.13	11.26	56.29	68.20	-11.91	Peak	Horizontal
1	10540	31.78	38.55	33.13	11.26	48.46	54.00	-5.54	AV	Horizontal
1	10540	40.20	38.55	33.13	11.26	56.88	68.20	-11.32	Peak	Vertical
1	10540	28.60	38.55	33.13	11.26	45.28	54.00	-8.72	AV	Vertical

802.11ac40 Mode_Channel 62_ 5310 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10620	40.08	38.55	33.13	11.26	56.76	68.20	-11.44	Peak	Horizontal
1	10620	31.38	38.55	33.13	11.26	48.06	54.00	-5.94	AV	Horizontal
1	10620	40.53	38.55	33.13	11.26	57.21	68.20	-10.99	Peak	Vertical
1	10620	29.62	38.55	33.13	11.26	46.30	54.00	-7.70	AV	Vertical

802.11ac80 Mode_Channel 58_ 5290 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	10580	40.02	38.55	33.13	11.26	56.70	68.20	-11.50	Peak	Horizontal
1	10580	30.79	38.55	33.13	11.26	47.47	54.00	-6.53	AV	Horizontal
1	10580	41.90	38.55	33.13	11.26	58.58	68.20	-9.62	Peak	Vertical
1	10580	29.68	38.55	33.13	11.26	46.36	54.00	-7.64	AV	Vertical

5500-5700MHz:**802.11a Mode_Channel 100_ 5500 MHz**

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11000	39.18	38.55	33.13	11.26	55.86	68.20	-12.34	Peak	Horizontal
1	11000	31.02	38.55	33.13	11.26	47.70	54.00	-6.30	AV	Horizontal
1	11000	40.08	38.55	33.13	11.26	56.76	68.20	-11.44	Peak	Vertical
1	11000	29.31	38.55	33.13	11.26	45.99	54.00	-8.01	AV	Vertical

802.11a Mode_Channel 120_ 5600 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11200	39.14	38.55	33.13	11.26	55.82	68.20	-12.38	Peak	Horizontal
1	11200	30.52	38.55	33.13	11.26	47.20	54.00	-6.80	AV	Horizontal
1	11200	40.77	38.55	33.13	11.26	57.45	68.20	-10.75	Peak	Vertical
1	11200	29.61	38.55	33.13	11.26	46.29	54.00	-7.71	AV	Vertical

802.11a Mode_Channel 140_ 5700 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11400	39.35	38.55	33.13	11.26	56.03	68.20	-12.17	Peak	Horizontal
1	11400	30.78	38.55	33.13	11.26	47.46	54.00	-6.54	AV	Horizontal
1	11400	40.82	38.55	33.13	11.26	57.50	68.20	-10.70	Peak	Vertical
1	11400	29.77	38.55	33.13	11.26	46.45	54.00	-7.55	AV	Vertical

802.11n20 Mode_Channel 100_ 5500 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11000	39.20	38.55	33.13	11.26	55.88	68.20	-12.32	Peak	Horizontal
1	11000	30.91	38.55	33.13	11.26	47.59	54.00	-6.41	AV	Horizontal
1	11000	41.54	38.55	33.13	11.26	58.22	68.20	-9.98	Peak	Vertical
1	11000	29.85	38.55	33.13	11.26	46.53	54.00	-7.47	AV	Vertical

802.11n20 Mode_Channel 120_ 5600 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11200	39.18	38.55	33.13	11.26	55.86	68.20	-12.34	Peak	Horizontal
1	11200	30.11	38.55	33.13	11.26	46.79	54.00	-7.21	AV	Horizontal
1	11200	41.14	38.55	33.13	11.26	57.82	68.20	-10.38	Peak	Vertical
1	11200	29.44	38.55	33.13	11.26	46.12	54.00	-7.88	AV	Vertical

802.11n20 Mode_Channel 140_ 5700 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11400	39.53	38.55	33.13	11.26	56.21	68.20	-11.99	Peak	Horizontal
1	11400	30.89	38.55	33.13	11.26	47.57	54.00	-6.43	AV	Horizontal
1	11400	40.53	38.55	33.13	11.26	57.21	68.20	-10.99	Peak	Vertical
1	11400	28.72	38.55	33.13	11.26	45.40	54.00	-8.60	AV	Vertical

802.11n40 Mode_Channel 102_ 5510 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11020	40.19	38.55	33.13	11.26	56.87	68.20	-11.33	Peak	Horizontal
1	11020	31.71	38.55	33.13	11.26	48.39	54.00	-5.61	AV	Horizontal
1	11020	41.45	38.55	33.13	11.26	58.13	68.20	-10.07	Peak	Vertical
1	11020	29.03	38.55	33.13	11.26	45.71	54.00	-8.29	AV	Vertical

802.11n40 Mode_Channel 110_ 5550 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11100	39.62	38.55	33.13	11.26	56.30	68.20	-11.90	Peak	Horizontal
1	11100	30.30	38.55	33.13	11.26	46.98	54.00	-7.02	AV	Horizontal
1	11100	40.10	38.55	33.13	11.26	56.78	68.20	-11.42	Peak	Vertical
1	11100	28.62	38.55	33.13	11.26	45.30	54.00	-8.70	AV	Vertical

802.11n40 Mode_Channel 134 _ 5670 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11340	39.86	38.55	33.13	11.26	56.54	68.20	-11.66	Peak	Horizontal
1	11340	31.14	38.55	33.13	11.26	47.82	54.00	-6.18	AV	Horizontal
1	11340	41.70	38.55	33.13	11.26	58.38	68.20	-9.82	Peak	Vertical
1	11340	28.44	38.55	33.13	11.26	45.12	54.00	-8.88	AV	Vertical

802.11ac20 Mode_Channel 100 _ 5550 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11000	39.83	38.55	33.13	11.26	56.51	68.20	-11.69	Peak	Horizontal
1	11000	30.64	38.55	33.13	11.26	47.32	54.00	-6.68	AV	Horizontal
1	11000	41.33	38.55	33.13	11.26	58.01	68.20	-10.19	Peak	Vertical
1	11000	28.13	38.55	33.13	11.26	44.81	54.00	-9.19	AV	Vertical

802.11ac20 Mode_Channel 120 _ 5600 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11200	40.36	38.55	33.13	11.26	57.04	68.20	-11.16	Peak	Horizontal
1	11200	31.32	38.55	33.13	11.26	48.00	54.00	-6.00	AV	Horizontal
1	11200	41.37	38.55	33.13	11.26	58.05	68.20	-10.15	Peak	Vertical
1	11200	28.02	38.55	33.13	11.26	44.70	54.00	-9.30	AV	Vertical

802.11ac20 Mode_Channel 140 _ 5700 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11400	39.76	38.55	33.13	11.26	56.44	68.20	-11.76	Peak	Horizontal
1	11400	30.48	38.55	33.13	11.26	47.16	54.00	-6.84	AV	Horizontal
1	11400	41.96	38.55	33.13	11.26	58.64	68.20	-9.56	Peak	Vertical
1	11400	29.45	38.55	33.13	11.26	46.13	54.00	-7.87	AV	Vertical

802.11ac40 Mode_Channel 102 _ 5510 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11020	39.87	38.55	33.13	11.26	56.55	68.20	-11.65	Peak	Horizontal
1	11020	30.01	38.55	33.13	11.26	46.69	54.00	-7.31	AV	Horizontal
1	11020	41.38	38.55	33.13	11.26	58.06	68.20	-10.14	Peak	Vertical
1	11020	28.37	38.55	33.13	11.26	45.05	54.00	-8.95	AV	Vertical

802.11ac40 Mode_Channel 110 _ 5550 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11100	39.50	38.55	33.13	11.26	56.18	68.20	-12.02	Peak	Horizontal
1	11100	30.63	38.55	33.13	11.26	47.31	54.00	-6.69	AV	Horizontal
1	11100	41.20	38.55	33.13	11.26	57.88	68.20	-10.32	Peak	Vertical
1	11100	29.33	38.55	33.13	11.26	46.01	54.00	-7.99	AV	Vertical

802.11ac40 Mode_Channel 134 _ 5670 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11340	39.79	38.55	33.13	11.26	56.47	68.20	-11.73	Peak	Horizontal
1	11340	30.29	38.55	33.13	11.26	46.97	54.00	-7.03	AV	Horizontal
1	11340	41.24	38.55	33.13	11.26	57.92	68.20	-10.28	Peak	Vertical
1	11340	28.96	38.55	33.13	11.26	45.64	54.00	-8.36	AV	Vertical

802.11ac80 Mode Channel 106 5530 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11060	39.30	38.55	33.13	11.26	55.98	68.20	-12.22	Peak	Horizontal
1	11060	31.54	38.55	33.13	11.26	48.22	54.00	-5.78	AV	Horizontal
1	11060	41.37	38.55	33.13	11.26	58.05	68.20	-10.15	Peak	Vertical
1	11060	28.92	38.55	33.13	11.26	45.60	54.00	-8.40	AV	Vertical

802.11ac80 Mode Channel 122 5610 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11060	39.52	38.55	33.13	11.26	56.20	68.20	-12.00	Peak	Horizontal
1	11060	31.97	38.55	33.13	11.26	48.65	54.00	-5.35	AV	Horizontal
1	11060	41.31	38.55	33.13	11.26	57.99	68.20	-10.21	Peak	Vertical
1	11060	29.53	38.55	33.13	11.26	46.21	54.00	-7.79	AV	Vertical

5725-5850MHz:**802.11a Mode Channel 149 5745 MHz**

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11490	40.67	38.55	33.13	11.26	57.35	68.20	-10.85	Peak	Horizontal
1	11490	30.19	38.55	33.13	11.26	46.87	54.00	-7.13	AV	Horizontal
1	11490	40.20	38.55	33.13	11.26	56.88	68.20	-11.32	Peak	Vertical
1	11490	29.96	38.55	33.13	11.26	46.64	54.00	-7.36	AV	Vertical

802.11a Mode Channel 157 5785 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11570	39.17	38.55	33.13	11.26	55.85	68.20	-12.35	Peak	Horizontal
1	11570	31.72	38.55	33.13	11.26	48.40	54.00	-5.60	AV	Horizontal
1	11570	41.55	38.55	33.13	11.26	58.23	68.20	-9.97	Peak	Vertical
1	11570	29.95	38.55	33.13	11.26	46.63	54.00	-7.37	AV	Vertical

802.11a Mode Channel 165 5825 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11650	40.16	38.55	33.13	11.26	56.84	68.20	-11.36	Peak	Horizontal
1	11650	31.33	38.55	33.13	11.26	48.01	54.00	-5.99	AV	Horizontal
1	11650	41.50	38.55	33.13	11.26	58.18	68.20	-10.02	Peak	Vertical
1	11650	29.46	38.55	33.13	11.26	46.14	54.00	-7.86	AV	Vertical

802.11n20 Mode Channel 149 5745 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11490	40.90	38.55	33.13	11.26	57.58	68.20	-10.62	Peak	Horizontal
1	11490	31.81	38.55	33.13	11.26	48.49	54.00	-5.51	AV	Horizontal
1	11490	41.67	38.55	33.13	11.26	58.35	68.20	-9.85	Peak	Vertical
1	11490	29.14	38.55	33.13	11.26	45.82	54.00	-8.18	AV	Vertical

802.11n20 Mode_Channel 157 _ 5785 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11570	39.30	38.55	33.13	11.26	55.98	68.20	-12.22	Peak	Horizontal
1	11570	30.72	38.55	33.13	11.26	47.40	54.00	-6.60	AV	Horizontal
1	11570	40.87	38.55	33.13	11.26	57.55	68.20	-10.65	Peak	Vertical
1	11570	28.49	38.55	33.13	11.26	45.17	54.00	-8.83	AV	Vertical

802.11n20 Mode_Channel 165 _ 5825 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11650	40.61	38.55	33.13	11.26	57.29	68.20	-10.91	Peak	Horizontal
1	11650	31.11	38.55	33.13	11.26	47.79	54.00	-6.21	AV	Horizontal
1	11650	40.58	38.55	33.13	11.26	57.26	68.20	-10.94	Peak	Vertical
1	11650	29.29	38.55	33.13	11.26	45.97	54.00	-8.03	AV	Vertical

802.11n40 Mode_Channel 151 _ 5755 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11510	39.34	38.55	33.13	11.26	56.02	68.20	-12.18	Peak	Horizontal
1	11510	31.59	38.55	33.13	11.26	48.27	54.00	-5.73	AV	Horizontal
1	11510	41.36	38.55	33.13	11.26	58.04	68.20	-10.16	Peak	Vertical
1	11510	28.57	38.55	33.13	11.26	45.25	54.00	-8.75	AV	Vertical

802.11n40 Mode_Channel 159 _ 5795MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11590	40.07	38.55	33.13	11.26	56.75	68.20	-11.45	Peak	Horizontal
1	11590	31.98	38.55	33.13	11.26	48.66	54.00	-5.34	AV	Horizontal
1	11590	41.56	38.55	33.13	11.26	58.24	68.20	-9.96	Peak	Vertical
1	11590	28.84	38.55	33.13	11.26	45.52	54.00	-8.48	AV	Vertical

802.11ac20 Mode_Channel 149 _ 5745 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11490	40.81	38.55	33.13	11.26	57.49	68.20	-10.71	Peak	Horizontal
1	11490	30.82	38.55	33.13	11.26	47.50	54.00	-6.50	AV	Horizontal
1	11490	40.37	38.55	33.13	11.26	57.05	68.20	-11.15	Peak	Vertical
1	11490	28.46	38.55	33.13	11.26	45.14	54.00	-8.86	AV	Vertical

802.11ac20 Mode_Channel 157 _ 5785 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11570	40.10	38.55	33.13	11.26	56.78	68.20	-11.42	Peak	Horizontal
1	11570	30.69	38.55	33.13	11.26	47.37	54.00	-6.63	AV	Horizontal
1	11570	41.67	38.55	33.13	11.26	58.35	68.20	-9.85	Peak	Vertical
1	11570	28.30	38.55	33.13	11.26	44.98	54.00	-9.02	AV	Vertical

802.11ac20 Mode_Channel 165 _ 5825 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11650	39.01	38.55	33.13	11.26	55.69	68.20	-12.51	Peak	Horizontal
1	11650	30.97	38.55	33.13	11.26	47.65	54.00	-6.35	AV	Horizontal
1	11650	41.64	38.55	33.13	11.26	58.32	68.20	-9.88	Peak	Vertical
1	11650	28.15	38.55	33.13	11.26	44.83	54.00	-9.17	AV	Vertical

802.11ac40 Mode_Channel 151 _5755 MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11510	39.69	38.55	33.13	11.26	56.37	68.20	-11.83	Peak	Horizontal
1	11510	31.90	38.55	33.13	11.26	48.58	54.00	-5.42	AV	Horizontal
1	11510	40.68	38.55	33.13	11.26	57.36	68.20	-10.84	Peak	Vertical
1	11510	29.83	38.55	33.13	11.26	46.51	54.00	-7.49	AV	Vertical

802.11ac40 Mode_Channel 159 _5795MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11590	39.43	38.55	33.13	11.26	56.11	68.20	-12.09	Peak	Horizontal
1	11590	31.29	38.55	33.13	11.26	47.97	54.00	-6.03	AV	Horizontal
1	11590	41.53	38.55	33.13	11.26	58.21	68.20	-9.99	Peak	Vertical
1	11590	28.53	38.55	33.13	11.26	45.21	54.00	-8.79	AV	Vertical

802.11ac80 Mode_Channel 155 _5775 MHz


Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
1	11550	40.83	38.55	33.13	11.26	57.51	68.20	-10.69	Peak	Horizontal
1	11550	30.53	38.55	33.13	11.26	47.21	54.00	-6.79	AV	Horizontal
1	11550	41.68	38.55	33.13	11.26	58.36	68.20	-9.84	Peak	Vertical
1	11550	28.57	38.55	33.13	11.26	45.25	54.00	-8.75	AV	Vertical

REMARKS:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. Margin = Result Level - Limit
3. The other emission levels were very low against the limit.
4. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=10Hz/Sweep time=Auto/Detector=Peak;

4.3. Duty Cycle

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Duty Cycle (x),
Transmission Duration (T):

- a. A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on and off times of the transmitted signal
- b. The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zerospan measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST RESULTS

For reporting purpose only.

Please refer to Appendix D.3.


Please refer to Appendix E.3.

Please refer to Appendix F.3.

Please refer to Appendix G.3.

4.4. Maximum Average Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Measurement using a Power Meter (PM):

- a. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied
 1. The EUT is configured to transmit continuously or to transmit with a constant duty cycle
 2. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 3. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b. If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in section II.B
- c. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).

LIMIT

According to §15.407(a): The maximum output power should be not exceed follow:

Frequency Range (MHz)	Limit
5150-5250	Fixed: 1 Watt (30dBm) Mobile and portable: 250mW (24dBm)
5250-5350	250mW (24dBm)
5470-5725	250mW (24dBm)
5725-5850	1 Watt (30dBm)
Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125mW(21dBm)	

TEST RESULTS

Temperature	25°C	Humidity	45%
Test Engineer	Jenny Zeng	Configurations	IEEE 802.11a/n/ac

5150-5250MHz:

Test Mode	Frequency (MHz)	Output Power AV (dBm)	Duty factor (dB)	Output Power AV + Duty factor (dBm)	Limits (dBm)	Verdict
802.11a	5180	12.44	0	12.44	24.00	PASS
	5200	12.20	0	12.20	24.00	PASS
	5240	12.59	0	12.59	24.00	PASS
802.11n20	5180	12.22	0	12.22	24.00	PASS
	5200	12.99	0	12.99	24.00	PASS
	5240	12.86	0	12.86	24.00	PASS
802.11n40	5190	12.60	0	12.60	24.00	PASS
	5230	12.59	0	12.59	24.00	PASS
802.11ac20	5180	12.05	0	12.05	24.00	PASS
	5200	12.17	0	12.17	24.00	PASS
	5240	12.57	0	12.57	24.00	PASS
802.11ac40	5190	12.71	0	12.71	24.00	PASS
	5230	12.91	0	12.91	24.00	PASS
802.11ac80	5210	12.14	0	12.14	24.00	PASS

5260-5320MHz:

Test Mode	Frequency (MHz)	Output Power AV (dBm)	Duty factor (dB)	Output Power AV + Duty factor (dBm)	Limits (dBm)	Verdict
802.11a	5260	8.22	2.01	10.23	24.00	PASS
	5280	8.77	2.01	10.78	24.00	PASS
	5320	8.74	1.92	10.66	24.00	PASS
802.11n20	5260	9.10	2.01	11.11	24.00	PASS
	5280	9.22	2.11	11.33	24.00	PASS
	5320	9.24	2.11	11.35	24.00	PASS
802.11n40	5270	7.84	3.01	10.85	24.00	PASS
	5310	7.00	3.01	10.01	24.00	PASS
802.11ac20	5260	7.01	2.52	9.53	24.00	PASS
	5280	7.53	2.22	9.75	24.00	PASS
	5320	7.43	2.22	9.65	24.00	PASS
802.11ac40	5270	6.68	3.76	10.44	24.00	PASS
	5310	6.57	3.24	9.81	24.00	PASS
802.11ac80	5290	6.27	4.26	10.53	24.00	PASS

5500-5700MHz:


Test Mode	Frequency (MHz)	Output Power AV (dBm)	Duty factor (dB)	Output Power AV + Duty factor (dBm)	Limits (dBm)	Verdict
802.11a	5500	8.60	1.92	10.52	24.00	PASS
	5600	8.65	2.01	10.66	24.00	PASS
	5700	8.12	2.01	10.13	24.00	PASS
802.11n20	5500	7.67	2.01	9.68	24.00	PASS
	5600	7.03	2.11	9.14	24.00	PASS
	5700	7.33	2.01	9.34	24.00	PASS
802.11n40	5510	7.36	3.01	10.37	24.00	PASS
	5590	7.95	3.01	10.96	24.00	PASS
	5670	7.85	3.47	11.32	24.00	PASS
802.11ac20	5500	7.48	2.22	9.70	24.00	PASS
	5600	6.53	2.22	8.75	24.00	PASS
	5700	6.93	2.22	9.15	24.00	PASS
802.11ac40	5510	6.47	3.24	9.71	24.00	PASS
	5590	6.60	3.24	9.84	24.00	PASS
	5670	6.56	3.24	9.80	24.00	PASS
802.11ac80	5530	6.26	4.26	10.52	24.00	PASS
	5610	6.36	3.31	9.67	24.00	PASS

5725-5850MHz:

Channel	Frequency (MHz)	Output Power AV (dBm)	Duty factor (dB)	Output Power AV + Duty factor (dBm)	Limits (dBm)	Verdict
802.11a	5745	10.46	0	10.46	30.00	PASS
	5785	10.76	0	10.76	30.00	PASS
	5825	10.41	0	10.41	30.00	PASS
802.11n20	5745	10.47	0	10.47	30.00	PASS
	5785	10.92	0	10.92	30.00	PASS
	5825	10.49	0	10.49	30.00	PASS
802.11n40	5755	10.06	0	10.06	30.00	PASS
	5795	10.59	0	10.59	30.00	PASS
802.11ac20	5745	10.93	0	10.93	30.00	PASS
	5785	10.35	0	10.35	30.00	PASS
	5825	10.22	0	10.22	30.00	PASS
802.11ac40	5755	10.13	0	10.13	30.00	PASS
	5795	10.23	0	10.23	30.00	PASS
802.11ac80	5775	10.99	0	10.99	30.00	PASS

4.5. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General U-NII Test Procedures New Rules v02r01: The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission

- a. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...”. (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
- b. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- c. Make the following adjustments to the peak value of the spectrum, if applicable:
 1. If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.
 2.) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
- d. The result is the Maximum PSD over 1 MHz reference bandwidth.
- e. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:
 1. Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
 2. Set $VBW \geq 3$ RBW.
 3. If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 4. If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 5. Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.
- f. Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).

LIMIT

According to §15.407(a): The maximum output power should be not exceed follow:


Frequency Range (MHz)	Limit
5150-5250	Other then Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz
5250-5350	11dBm/MHz
5470-5725	11dBm/MHz
5725-5850	30dBm/500kHz

TEST RESULTS

For reporting purpose only.
 Please refer to Appendix D.4.
 Please refer to Appendix E.4.
 Please refer to Appendix F.4.
 Please refer to Appendix G.4.

4.6. 99% and 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General U-NII Test Procedures New Rules v02r01 for one of the following procedures may be used for section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a. Set RBW = 100 kHz.
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

LIMIT

For Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz

TEST RESULTS


For reporting purpose only.

Please refer to Appendix G.1.

Please refer to Appendix G.2.

4.7. 99% and 26dBc Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General U-NII Test Procedures New Rules v02r01 for one of the following procedures may be used for Emission Bandwidth (EBW) measurement:

- a. Set RBW = 220 kHz/430 kHz /820 kHz (approximately 1% of the emission bandwidth).
- b. Set the video bandwidth (VBW) = 3* RBW
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize
- g. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

LIMIT

No Limits for 26dBc Bandwidth

TEST RESULTS

For reporting purpose only.

Please refer to Appendix D.1.

Please refer to Appendix D.2.

Please refer to Appendix E.1.


Please refer to Appendix E.2.

Please refer to Appendix F.1.

Please refer to Appendix F.2.

4.8. Conducted Spurious Emissions and Band Edge Compliance

TEST CONFIGURATION

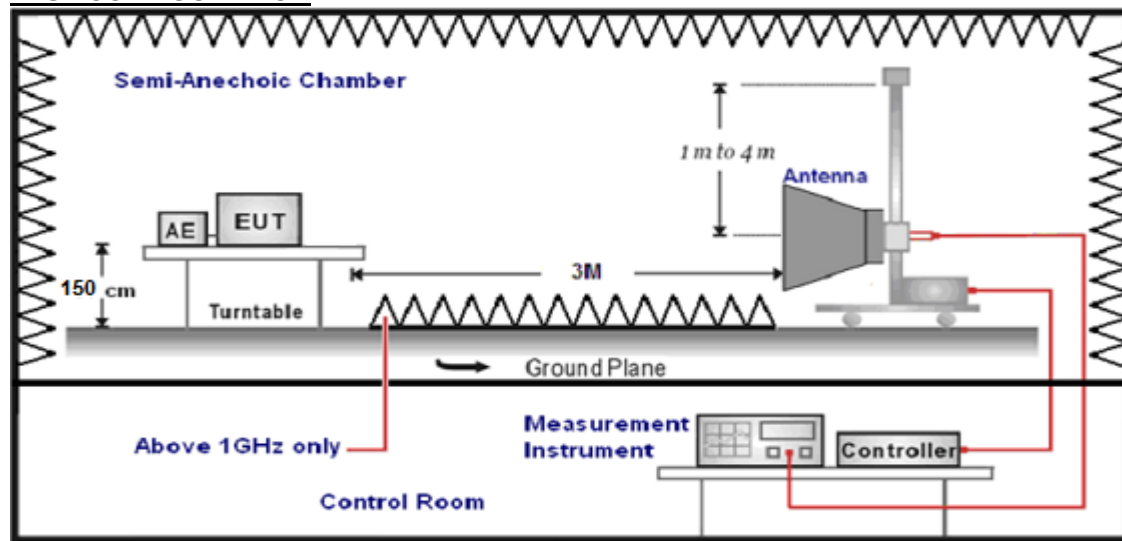

LIMIT

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

According to §15.407 (b): Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB μ V/m)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
5725-5850	-27 (beyond 10MHz of the band edge)	68.2
	-17 (within 10 MHz of band edge)	78.2

TEST PROCEDURE

- The EUT was placed on a turn table which is 1.5m above 1GHz.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed..
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
1GHz-18GHz	Double Ridged Horn Antenna	3

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-18GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

TEST RESULTS

Remark:For radiated bandedge We measured at both mode, recorded worst case in antenna 0's 802.11 ac20 mode;

For Radiated Bandedge Measurement

Temperature	23.4℃	Humidity	54.5%
Test Engineer	Jenny Zeng	Configurations	IEEE 802.11a/n/ac

802.11 ac20/ Channel 36 :5180 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
4500.0	35.21	35.58	29.04	8.28	50.03	68.20	-18.17	Peak	Horizontal
4500.0	30.26	35.58	29.04	8.28	45.08	54.00	-8.92	AV	Horizontal
5150.0	39.11	35.58	29.04	8.28	53.93	68.20	-14.27	Peak	Horizontal
5150.0	30.67	35.58	29.04	8.28	45.49	54.00	-8.51	AV	Horizontal

802.11 ac20/ Channel 36 :5180 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
4500.0	35.21	35.58	29.04	8.28	50.03	68.20	-18.17	Peak	Vertical
4500.0	30.07	35.58	29.04	8.28	44.89	54.00	-9.11	AV	Vertical
5150.0	39.03	35.58	29.04	8.28	53.85	68.20	-14.35	Peak	Vertical
5150.0	30.68	35.58	29.04	8.28	45.50	54.00	-8.50	AV	Vertical

802.11 ac20/ Channel 48 :5240 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5350.0	35.20	35.42	29.06	8.39	49.95	68.20	-18.25	Peak	Horizontal
5350.0	30.31	35.42	29.06	8.39	45.06	54.00	-8.94	AV	Horizontal
5460.0	39.03	35.42	29.06	8.39	53.78	68.20	-14.42	Peak	Horizontal
5460.0	30.55	35.42	29.06	8.39	45.30	54.00	-8.70	AV	Horizontal

802.11 ac20/ Channel 48 :5240 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5350.0	35.13	35.42	29.06	8.39	49.88	68.20	-18.32	Peak	Vertical
5350.0	30.20	35.42	29.06	8.39	44.95	54.00	-9.05	AV	Vertical
5460.0	39.22	35.42	29.06	8.39	53.97	68.20	-14.23	Peak	Vertical
5460.0	30.61	35.42	29.06	8.39	45.36	54.00	-8.64	AV	Vertical

802.11 a/ Channel 52 :5260 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
4500.0	30.19	35.35	29.07	8.43	44.90	68.20	-23.30	Peak	Horizontal
4500.0	30.23	35.35	29.07	8.43	44.94	54.00	-9.06	AV	Horizontal
5150.0	32.15	35.35	29.07	8.43	46.86	68.20	-21.34	Peak	Horizontal
5150.0	30.59	35.35	29.07	8.43	45.30	54.00	-8.70	AV	Horizontal

802.11 a/ Channel 52 :5260 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
4500.0	30.06	35.35	29.07	8.43	44.77	68.20	-23.43	Peak	Vertical
4500.0	30.22	35.35	29.07	8.43	44.93	54.00	-9.07	AV	Vertical
5150.0	32.18	35.35	29.07	8.43	46.89	68.20	-21.31	Peak	Vertical
5150.0	30.58	35.35	29.07	8.43	45.29	54.00	-8.71	AV	Vertical

802.11 a/ Channel 64 :5320 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5350.0	30.09	35.3	29.11	8.51	44.79	68.20	-23.41	Peak	Horizontal
5350.0	30.31	35.3	29.11	8.51	45.01	54.00	-8.99	AV	Horizontal
5460.0	32.25	35.3	29.11	8.51	46.95	68.20	-21.25	Peak	Horizontal
5460.0	30.53	35.3	29.11	8.51	45.23	54.00	-8.77	AV	Horizontal

802.11 a/ Channel 64 :5320 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5350.0	30.04	35.3	29.11	8.51	44.74	68.20	-23.46	Peak	Vertical
5350.0	30.22	35.3	29.11	8.51	44.92	54.00	-9.08	AV	Vertical
5460.0	32.07	35.3	29.11	8.51	46.77	68.20	-21.43	Peak	Vertical
5460.0	30.47	35.3	29.11	8.51	45.17	54.00	-8.83	AV	Vertical

802.11 a/ Channel 100 :5500 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5460.0	30.09	35.29	29.13	8.65	44.90	68.20	-23.30	Peak	Horizontal
5460.0	30.29	35.29	29.13	8.65	45.10	54.00	-8.90	AV	Horizontal
5470.0	32.10	35.29	29.13	8.65	46.91	68.20	-21.29	Peak	Horizontal
5470.0	30.49	35.29	29.13	8.65	45.30	54.00	-8.70	AV	Horizontal

802.11 a/ Channel 100 :5500 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5460.0	30.10	35.29	29.13	8.65	44.91	68.20	-23.29	Peak	Vertical
5460.0	30.24	35.29	29.13	8.65	45.05	54.00	-8.95	AV	Vertical
5470.0	32.00	35.29	29.13	8.65	46.81	68.20	-21.39	Peak	Vertical
5470.0	30.52	35.29	29.13	8.65	45.33	54.00	-8.67	AV	Vertical

802.11 a/ Channel 140 :5700 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5725.0	30.21	35.29	29.18	8.8	45.12	68.20	-23.08	Peak	Horizontal
5725.0	30.36	35.29	29.18	8.8	45.27	54.00	-8.73	AV	Horizontal
5735.0	32.06	35.29	29.18	8.8	46.97	68.20	-21.23	Peak	Horizontal
5735.0	30.73	35.29	29.18	8.8	45.64	54.00	-8.36	AV	Horizontal

802.11 a/ Channel 140 :5700 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5725.0	30.19	35.29	29.18	8.8	45.10	68.20	-23.10	Peak	Vertical
5725.0	30.19	35.29	29.18	8.8	45.10	54.00	-8.90	AV	Vertical
5735.0	32.06	35.29	29.18	8.8	46.97	68.20	-21.23	Peak	Vertical
5735.0	30.56	35.29	29.18	8.8	45.47	54.00	-8.53	AV	Vertical

802.11 ac20/ Channel 149 :5745 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5650.0	45.74	35.29	29.18	8.8	60.65	68.20	-7.55	Peak	Horizontal
5700.0	35.16	35.29	29.18	8.8	50.07	68.20	-18.13	Peak	Horizontal
5720.0	46.98	35.29	29.18	8.8	61.89	68.20	-6.31	Peak	Horizontal
5725.0	35.56	35.29	29.18	8.8	50.47	68.20	-17.73	Peak	Horizontal

802.11 ac20/ Channel 149 :5745 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5650.0	45.84	35.29	29.18	8.8	60.75	68.20	-7.45	Peak	Vertical
5700.0	34.95	35.29	29.18	8.8	49.86	68.20	-18.34	Peak	Vertical
5720.0	47.00	35.29	29.18	8.8	61.91	68.20	-6.29	Peak	Vertical
5725.0	35.64	35.29	29.18	8.8	50.55	68.20	-17.65	Peak	Vertical

802.11 ac20/ Channel 165 :5825 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5850.0	45.94	33.21	35.82	9.52	52.85	68.20	-15.35	Peak	Horizontal
5855.0	35.53	33.21	35.82	9.52	42.44	68.20	-25.76	Peak	Horizontal
5875.0	47.39	32.82	35.82	9.52	53.91	68.20	-14.29	Peak	Horizontal
5925.0	35.50	32.82	35.82	9.52	42.02	68.20	-26.18	Peak	Horizontal

802.11 ac20/ Channel 165 :5825 MHz									
Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector	Polarization
5850.0	46.06	33.21	35.82	9.52	52.97	68.20	-15.23	Peak	Vertical
5855.0	35.36	33.21	35.82	9.52	42.27	68.20	-25.93	Peak	Vertical
5875.0	47.15	32.82	35.82	9.52	53.67	68.20	-14.53	Peak	Vertical
5925.0	35.75	32.82	35.82	9.52	42.27	68.20	-25.93	Peak	Vertical

REMARKS:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. Margin value = Result Level-Limit value.
3. The other emission levels were very low against the limit.
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=10Hz/Sweep time=Auto/Detector=Peak;

For Conducted Band edge Measurement

For reporting purpose only.

Please refer to Appendix D.5.

Please refer to Appendix E.5.

Please refer to Appendix F.5.

Please refer to Appendix G.5.

For Conducted Spurious Emissions Measurement

For reporting purpose only.

Please refer to Appendix D.6.

Please refer to Appendix E.6.

Please refer to Appendix F.6.

Please refer to Appendix G.6.

4.9. Frequency Stability

Standard Applicable

According to FCC §15.407(g) "Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user manual."


According to FCC §2.1055(a) "The frequency stability shall be measured with variation of ambient temperature as follows:"

(1) From -30° to + 50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

(2) From -20° to + 50° centigrade for equipment to be licensed for use in the Maritime Services under part 80 of this chapter, except for Class A, B, and S Emergency Position Indicating Radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the Local Television Transmission Service and Point-to-Point Microwave Radio Service under part 21 of this chapter, equipment licensed for use aboard aircraft in the Aviation Services under part 87 of this chapter, and equipment authorized for use in the Family Radio Service under part 95 of this chapter.

(3) From 0° to + 50° centigrade for equipment to be licensed for use in the Radio Broadcast Services under part 73 of this chapter.

Test Configuration

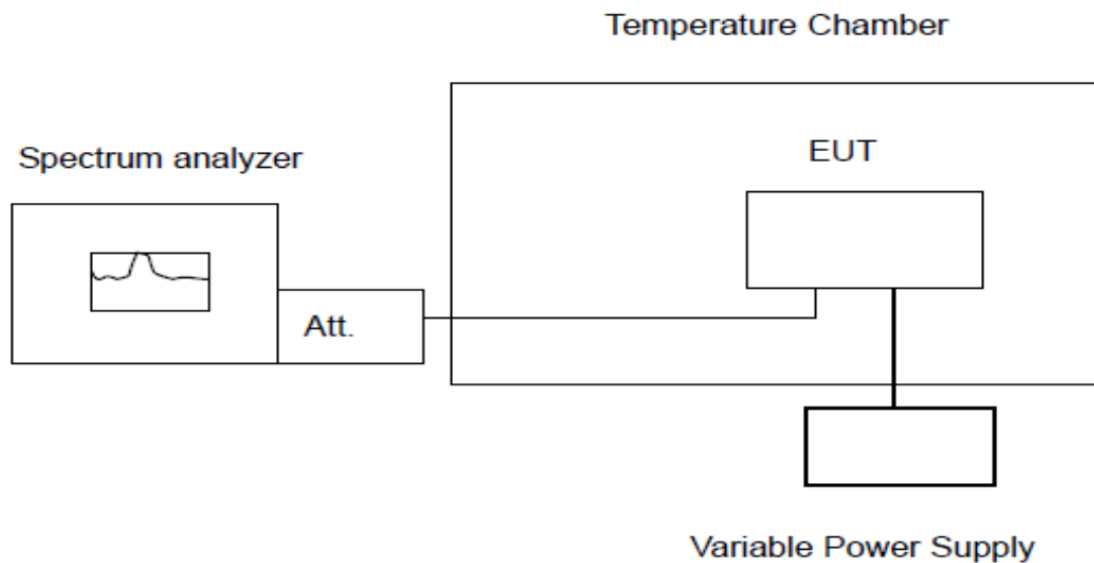

Test Procedure

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20 degree operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30 degree. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10 degree increased per stage until the highest temperature of +50 degree reached.

Test Results

PASS

Remark:

1. Measured all conditions and recorded worst case.

IEEE 802.11a Mode / 5180 – 5240 MHz / 5180 MHz

Enviroment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 26.4V	5179.996982	5150 – 5250	PASS
20	DC 21.6V	5179.995989	5150 – 5250	PASS
50	DC 24.0V	5179.971530	5150 – 5250	PASS
40	DC 24.0V	5179.957348	5150 – 5250	PASS
30	DC 24.0V	5180.018802	5150 – 5250	PASS
20	DC 24.0V	5180.001823	5150 – 5250	PASS
10	DC 24.0V	5179.995881	5150 – 5250	PASS
0	DC 24.0V	5179.955445	5150 – 5250	PASS
-10	DC 24.0V	5179.983297	5150 – 5250	PASS
-20	DC 24.0V	5180.010817	5150 – 5250	PASS
-30	DC 24.0V	5179.996429	5150 – 5250	PASS

IEEE 802.11a Mode / 5180 – 5240 MHz / 5240 MHz

Enviroment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 26.4V	5239.984488	5150 – 5250	PASS
20	DC 21.6V	5239.965197	5150 – 5250	PASS
50	DC 24.0V	5239.988447	5150 – 5250	PASS
40	DC 24.0V	5239.983951	5150 – 5250	PASS
30	DC 24.0V	5240.027775	5150 – 5250	PASS
20	DC 24.0V	5240.010968	5150 – 5250	PASS
10	DC 24.0V	5239.990808	5150 – 5250	PASS
0	DC 24.0V	5239.992421	5150 – 5250	PASS
-10	DC 24.0V	5239.997863	5150 – 5250	PASS
-20	DC 24.0V	5239.982431	5150 – 5250	PASS
-30	DC 24.0V	5239.976998	5150 – 5250	PASS

IEEE 802.11a Mode / 5260 – 5320 MHz / 5260 MHz

Enviroment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 26.4V	5260.002360	5250 – 5350	PASS
20	DC 21.6V	5259.988869	5250 – 5350	PASS
50	DC 24.0V	5260.035788	5250 – 5350	PASS
40	DC 24.0V	5260.004431	5250 – 5350	PASS
30	DC 24.0V	5260.008891	5250 – 5350	PASS
20	DC 24.0V	5260.020277	5250 – 5350	PASS
10	DC 24.0V	5259.958266	5250 – 5350	PASS
0	DC 24.0V	5259.984547	5250 – 5350	PASS
-10	DC 24.0V	5260.014854	5250 – 5350	PASS
-20	DC 24.0V	5260.002858	5250 – 5350	PASS
-30	DC 24.0V	5260.032564	5250 – 5350	PASS

IEEE 802.11a Mode / 5260 – 5320 MHz / 5320 MHz

Enviroment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 26.4V	5320.005097	5250 – 5350	PASS
20	DC 21.6V	5319.996174	5250 – 5350	PASS
50	DC 24.0V	5319.980539	5250 – 5350	PASS
40	DC 24.0V	5320.003786	5250 – 5350	PASS
30	DC 24.0V	5319.979040	5250 – 5350	PASS
20	DC 24.0V	5320.004460	5250 – 5350	PASS
10	DC 24.0V	5320.025121	5250 – 5350	PASS
0	DC 24.0V	5320.031093	5250 – 5350	PASS
-10	DC 24.0V	5319.978898	5250 – 5350	PASS
-20	DC 24.0V	5319.973103	5250 – 5350	PASS
-30	DC 24.0V	5320.015777	5250 – 5350	PASS

IEEE 802.11a Mode / 5500 – 5700 MHz / 5500 MHz

Enviroment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 26.4V	5500.026260	5470 – 5725	PASS
20	DC 21.6V	5499.999342	5470 – 5725	PASS
50	DC 24.0V	5499.993342	5470 – 5725	PASS
40	DC 24.0V	5500.033109	5470 – 5725	PASS
30	DC 24.0V	5500.011914	5470 – 5725	PASS
20	DC 24.0V	5500.041603	5470 – 5725	PASS
10	DC 24.0V	5499.999494	5470 – 5725	PASS
0	DC 24.0V	5499.996887	5470 – 5725	PASS
-10	DC 24.0V	5500.000777	5470 – 5725	PASS
-20	DC 24.0V	5500.032602	5470 – 5725	PASS
-30	DC 24.0V	5500.002602	5470 – 5725	PASS

IEEE 802.11a Mode / 5500 – 5700 MHz / 5700 MHz

Enviroment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 26.4V	5700.012220	5470 – 5725	PASS
20	DC 21.6V	5700.029441	5470 – 5725	PASS
50	DC 24.0V	5700.026040	5470 – 5725	PASS
40	DC 24.0V	5700.008957	5470 – 5725	PASS
30	DC 24.0V	5700.005051	5470 – 5725	PASS
20	DC 24.0V	5699.995040	5470 – 5725	PASS
10	DC 24.0V	5700.011497	5470 – 5725	PASS
0	DC 24.0V	5700.000576	5470 – 5725	PASS
-10	DC 24.0V	5699.978508	5470 – 5725	PASS
-20	DC 24.0V	5699.977879	5470 – 5725	PASS
-30	DC 24.0V	5700.015745	5470 – 5725	PASS

IEEE 802.11a Mode / 5745 – 5825 MHz / 5745 MHz

Enviroment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 26.4V	5744.992895	5725 – 5850	PASS
20	DC 21.6V	5745.002239	5725 – 5850	PASS
50	DC 24.0V	5745.003864	5725 – 5850	PASS
40	DC 24.0V	5745.027882	5725 – 5850	PASS
30	DC 24.0V	5744.985263	5725 – 5850	PASS
20	DC 24.0V	5745.006161	5725 – 5850	PASS
10	DC 24.0V	5745.008649	5725 – 5850	PASS
0	DC 24.0V	5745.022350	5725 – 5850	PASS
-10	DC 24.0V	5745.019479	5725 – 5850	PASS
-20	DC 24.0V	5744.991864	5725 – 5850	PASS
-30	DC 24.0V	5745.020891	5725 – 5850	PASS

IEEE 802.11a Mode / 5745 – 5825 MHz / 5825 MHz

Enviroment Temperature (Degree)	Voltage (V)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	DC 26.4V	5824.965086	5725 – 5850	PASS
20	DC 21.6V	5825.001618	5725 – 5850	PASS
50	DC 24.0V	5825.031743	5725 – 5850	PASS
40	DC 24.0V	5824.971785	5725 – 5850	PASS
30	DC 24.0V	5825.027359	5725 – 5850	PASS
20	DC 24.0V	5824.996944	5725 – 5850	PASS
10	DC 24.0V	5825.011905	5725 – 5850	PASS
0	DC 24.0V	5825.008391	5725 – 5850	PASS
-10	DC 24.0V	5824.998952	5725 – 5850	PASS
-20	DC 24.0V	5825.019222	5725 – 5850	PASS
-30	DC 24.0V	5824.957139	5725 – 5850	PASS

4.10. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Antenna Information

The antenna is Internal Aantenna, through the buckle stretched out, The directional gains of antenna used for transmitting is 4.65dBi.

Reference to the Test Report: **GTS20220510015-1-1.**

5. TEST SETUP PHOTOS OF THE EUT

Reference to the test report No. GTS20220510015-1-1.

6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Reference to the test report No. GTS20220510015-1-1.

.....End of Report.....