

Test Plot46#: LTE Band 2_Head Left Cheek_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.237 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.17 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.244 W/kg

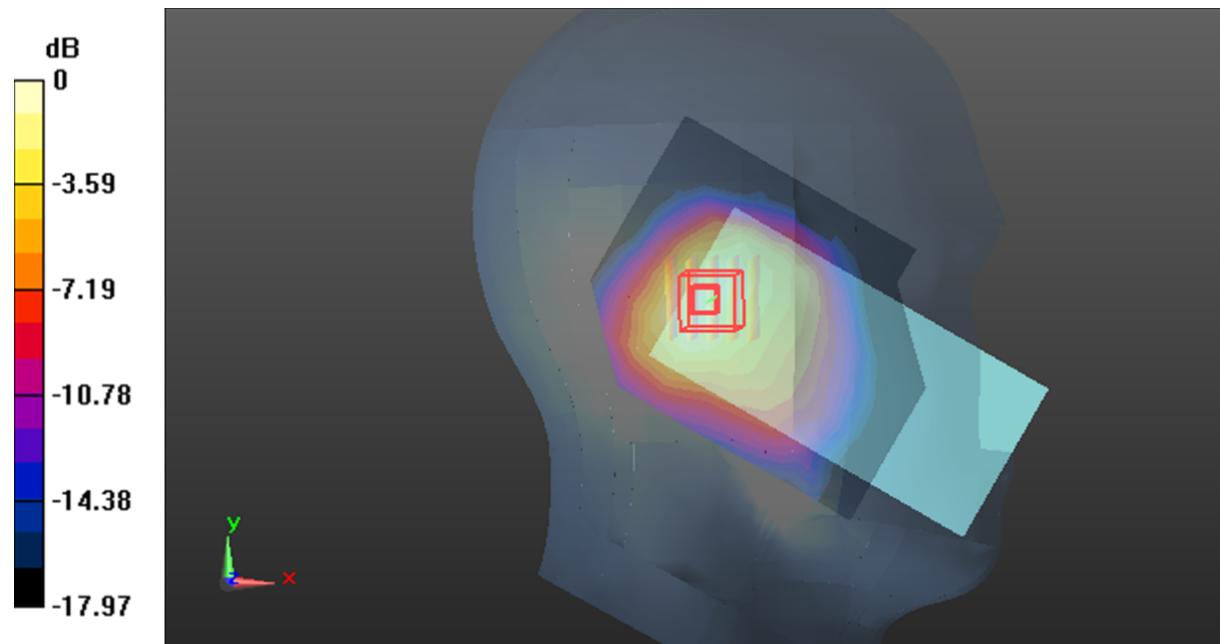

0 dB = 0.244 W/kg = -6.13 dB dBW/kg

Test Plot47#: LTE Band 2_Head Left Tilt_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.343 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.55 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.593 W/kg

SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 0.391 W/kg

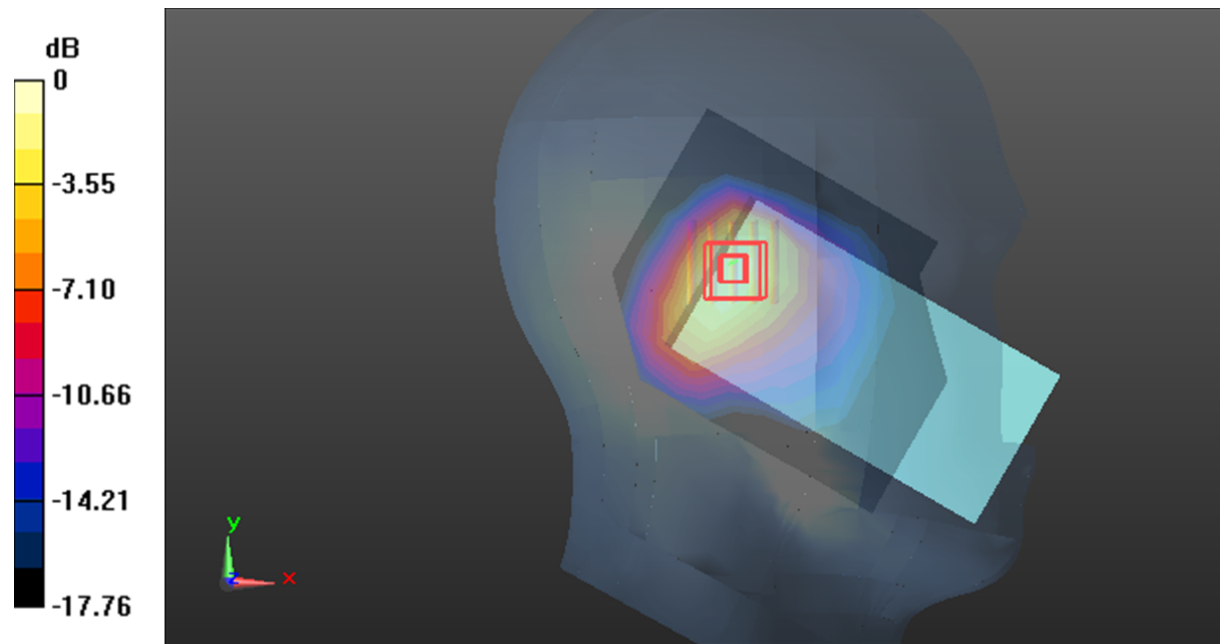

0 dB = 0.391 W/kg = -4.08 dB dBW/kg

Test Plot48#: LTE Band 2_Head Left Tilt_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.287 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.21 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.509 W/kg

SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.334 W/kg

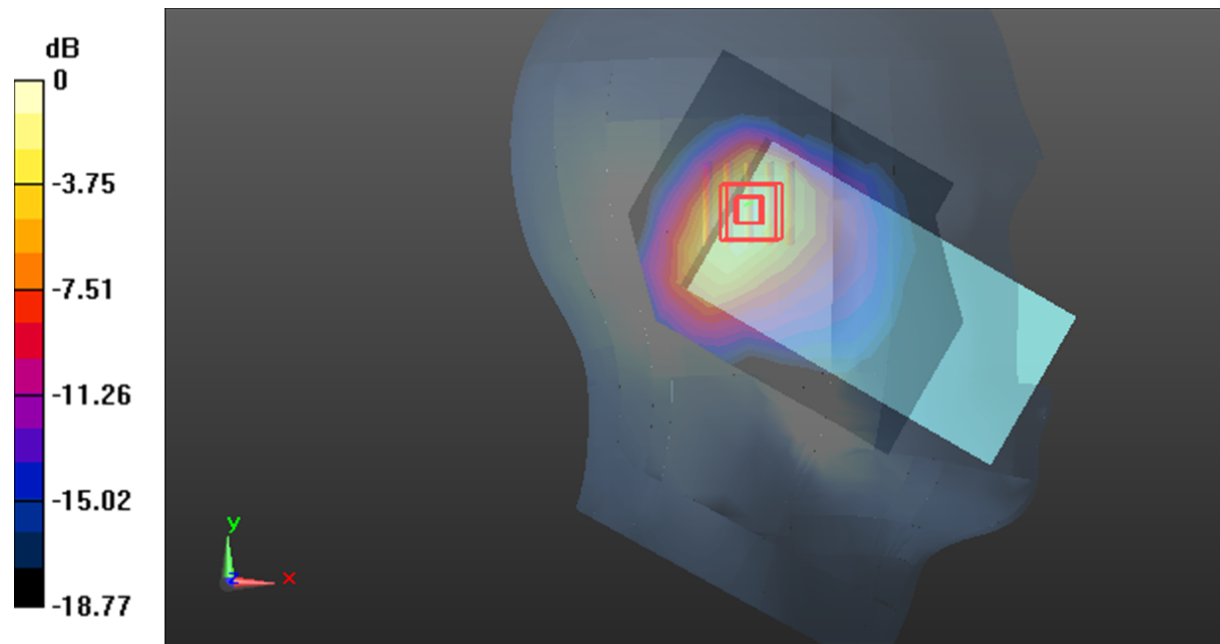

0 dB = 0.334 W/kg = -4.76 dB dBW/kg

Test Plot49#: LTE Band 2_Head Right Cheek_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.496 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.01 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.546 W/kg; SAR(10 g) = 0.292 W/kg

Maximum value of SAR (measured) = 0.615 W/kg

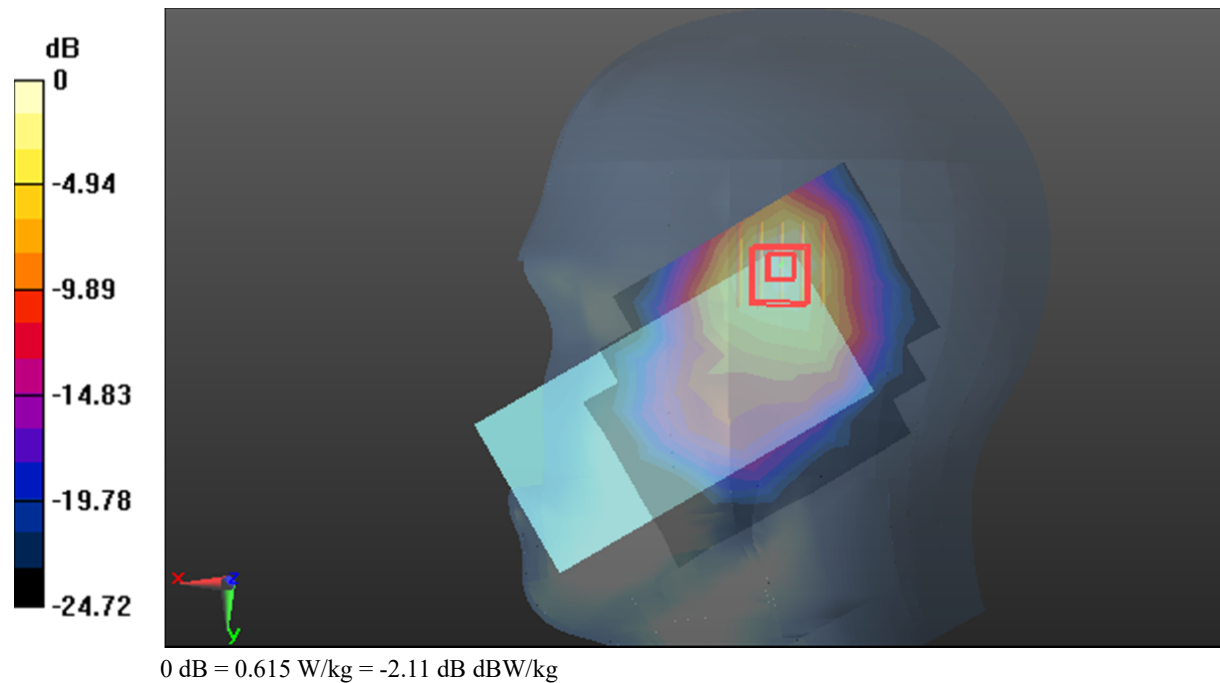

Test Plot50#: LTE Band 2_Head Right Cheek_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.417 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.03 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.855 W/kg

SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 0.522 W/kg

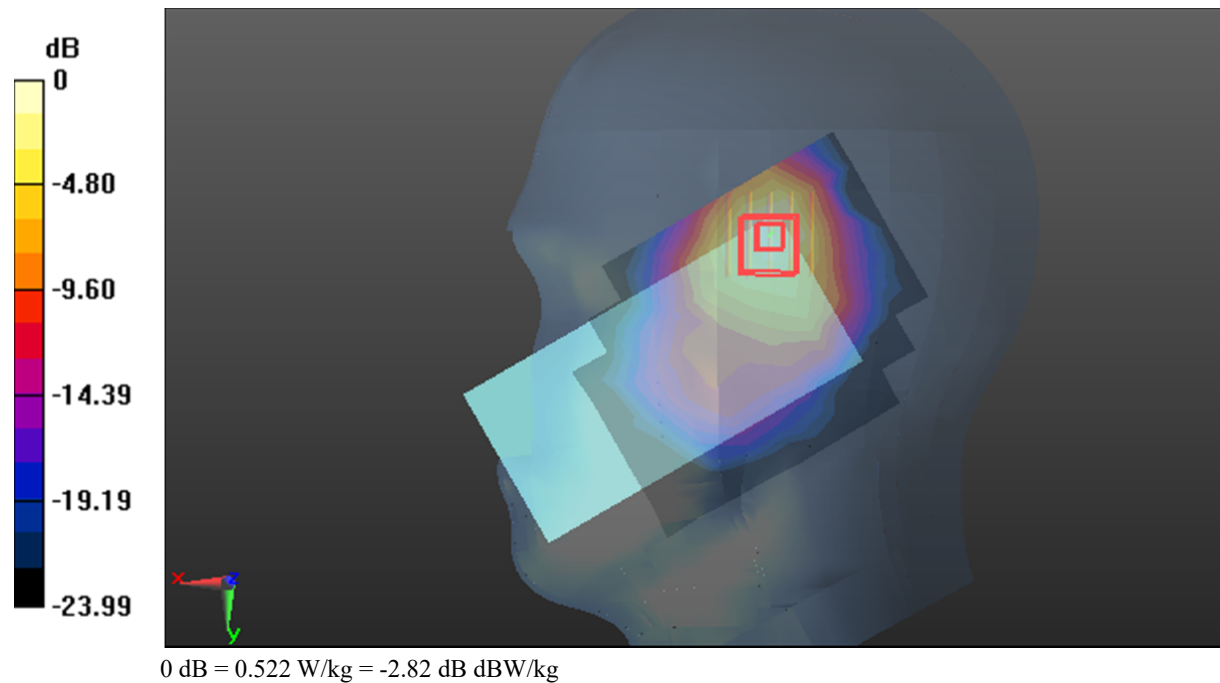

Test Plot51#: LTE Band 2_Head Right Tilt_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.358 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.27 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.783 W/kg

SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.216 W/kg

Maximum value of SAR (measured) = 0.437 W/kg

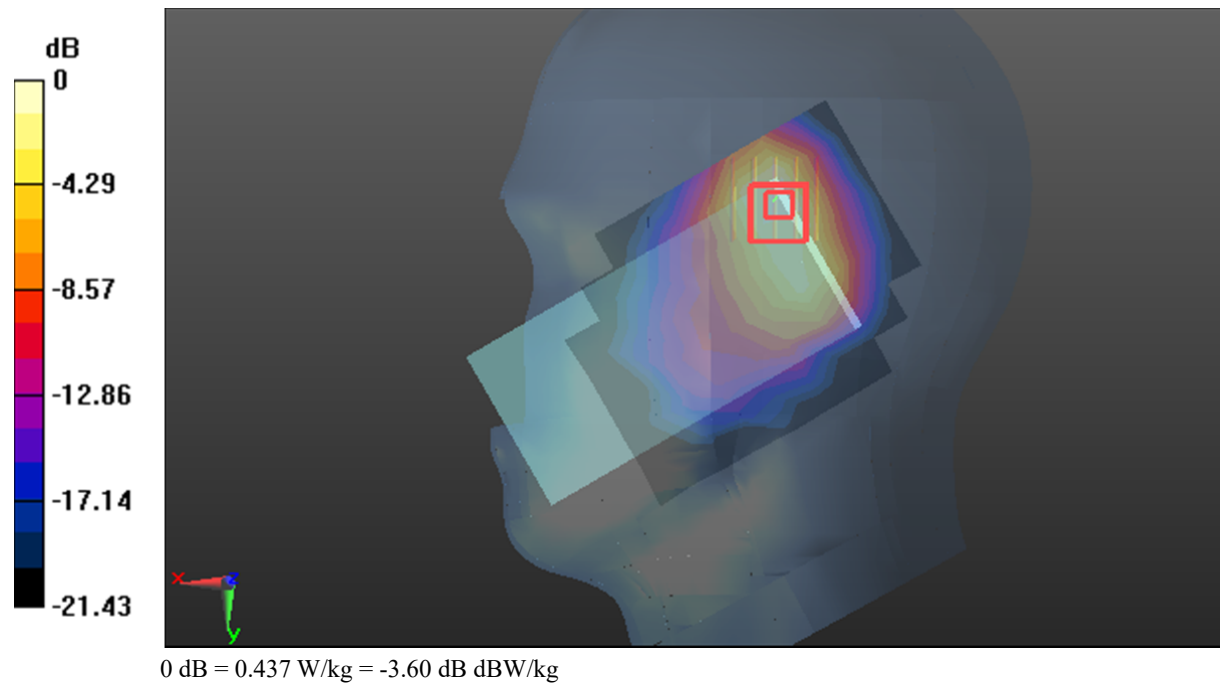

Test Plot52#: LTE Band 2_Head Right Tilt_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.298 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.91 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.669 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.369 W/kg

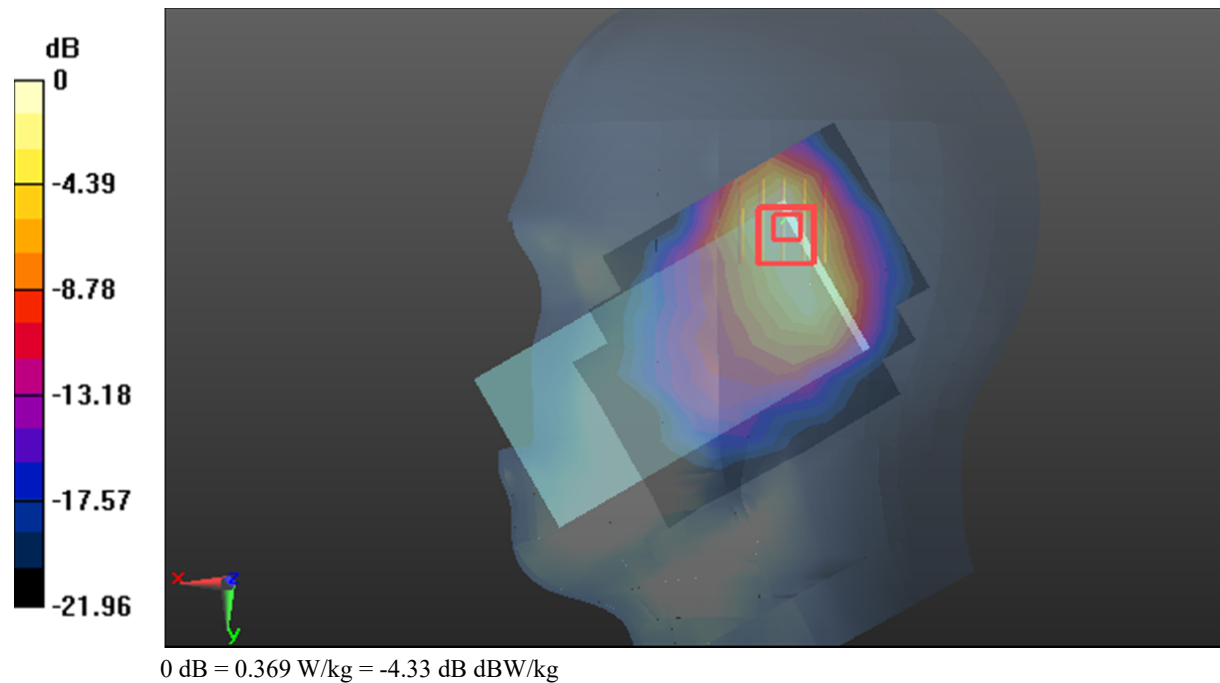

Test Plot53#: LTE Band 2_Body Front_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.109 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.101 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.118 W/kg

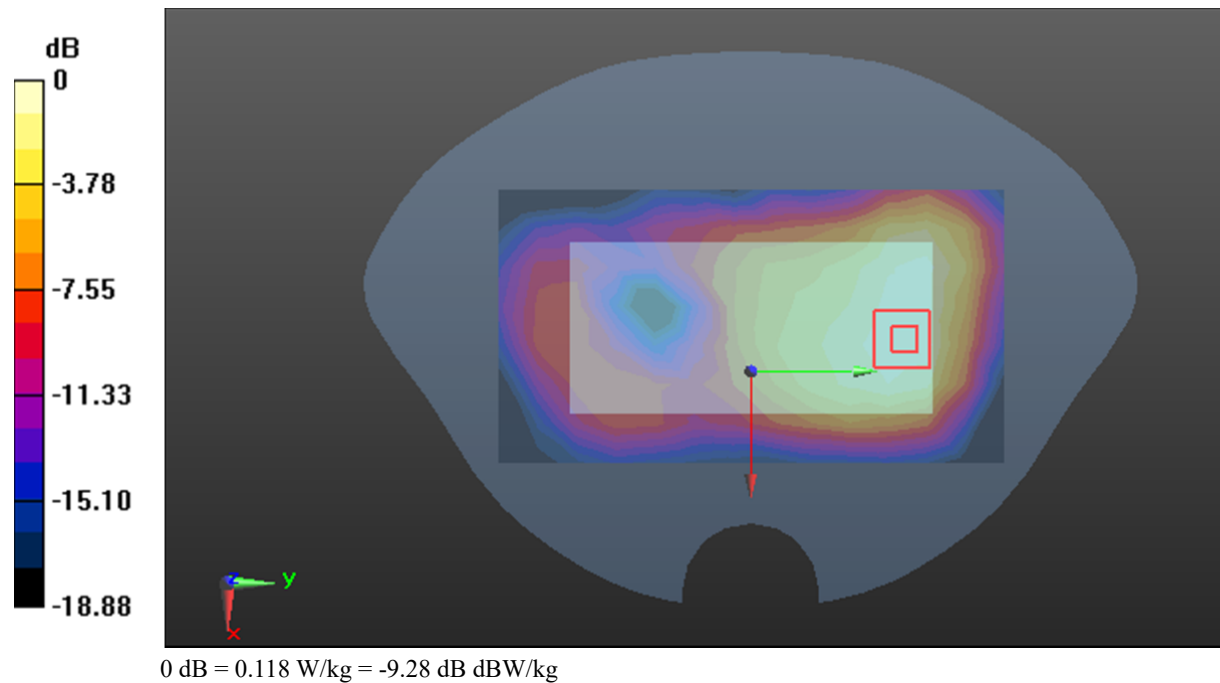

Test Plot54#: LTE Band 2_Body Front_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0926 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.629 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

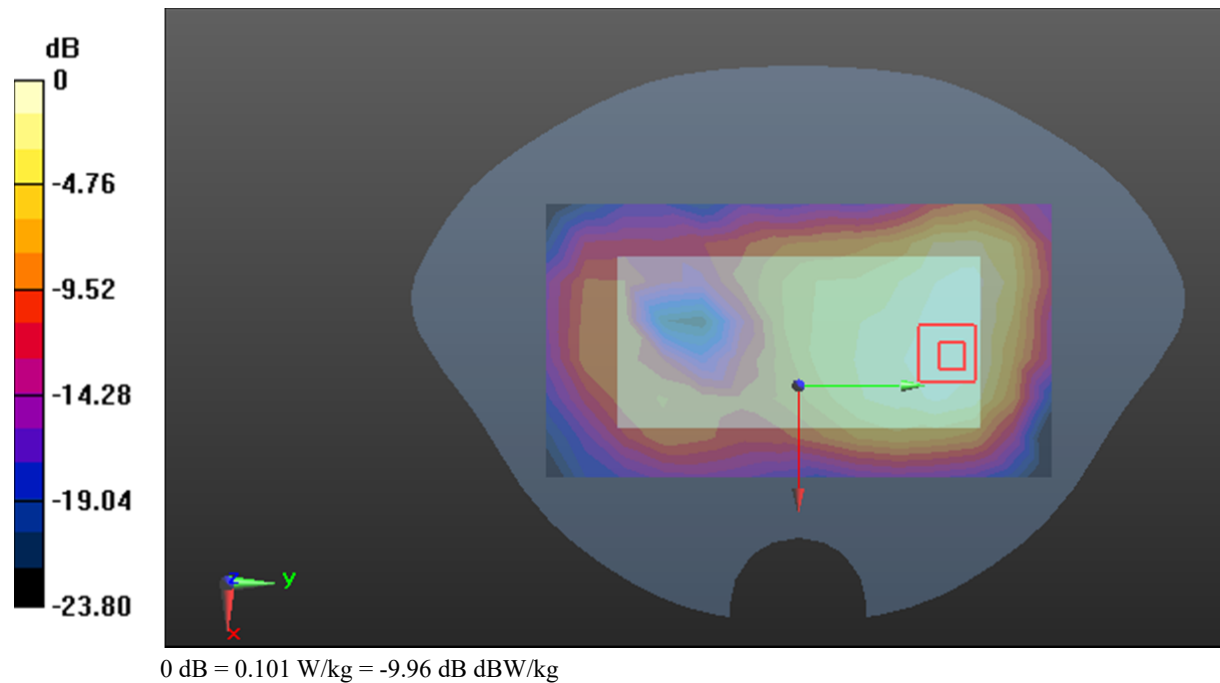

Test Plot55#: LTE Band 2_Body Back_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.160 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.490 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

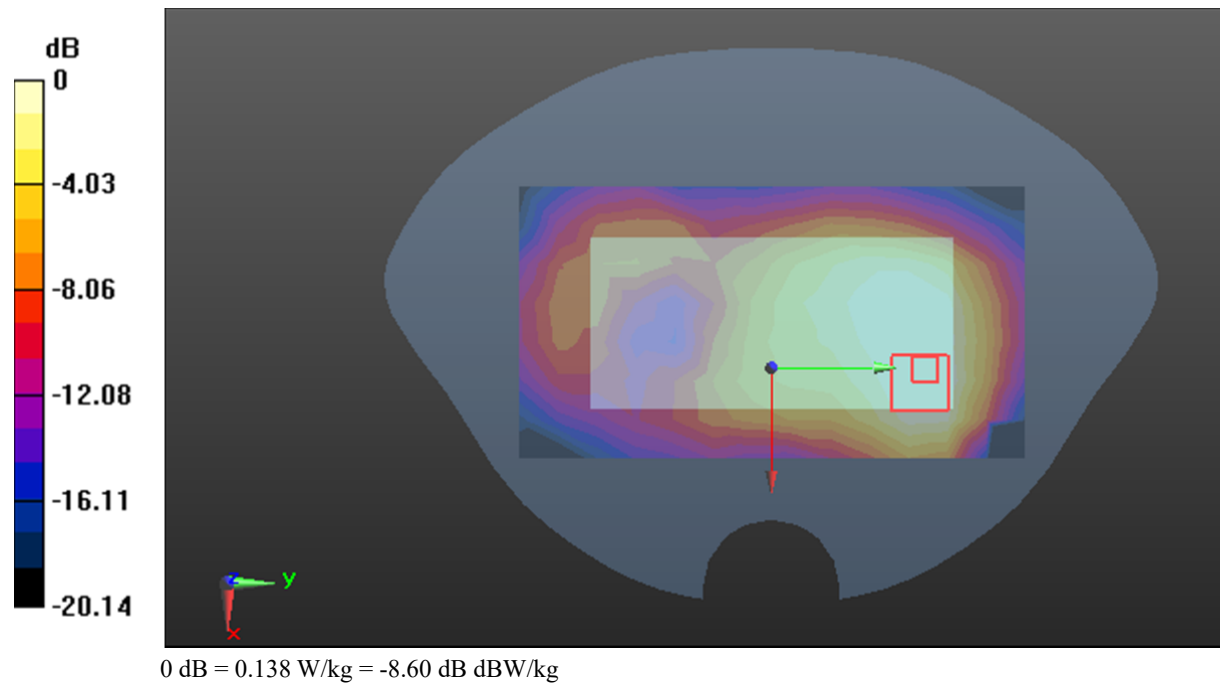

Test Plot56#: LTE Band 2_Body Back_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.124 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.569 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.136 W/kg

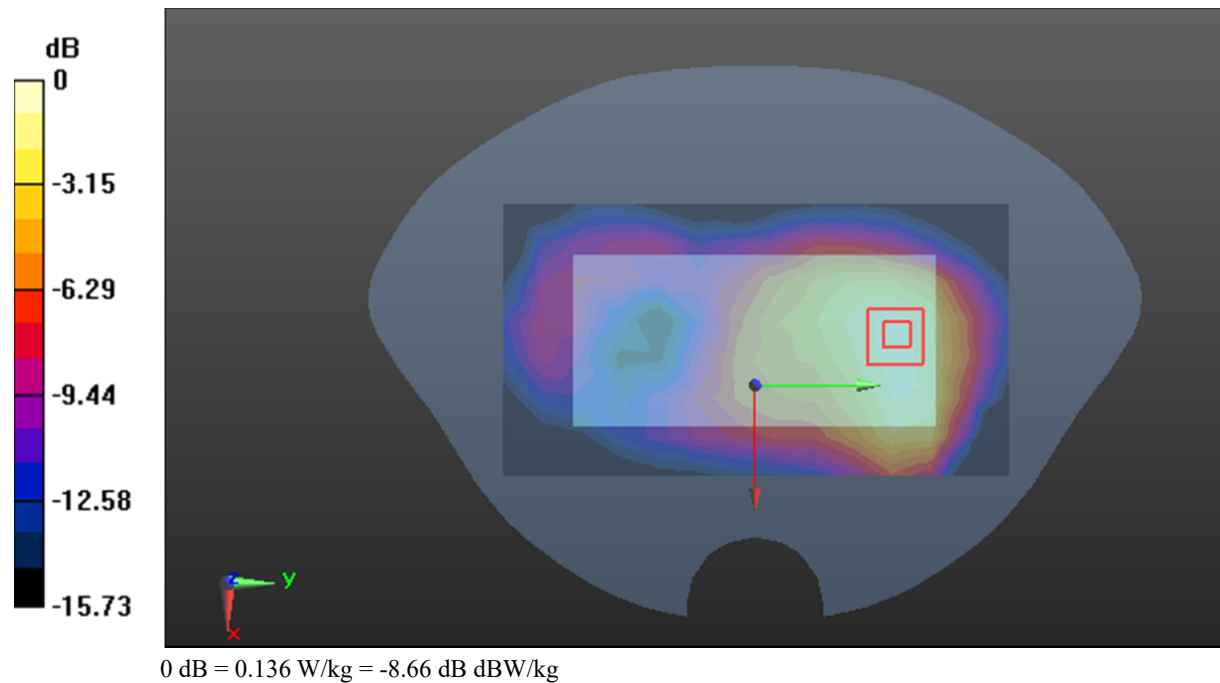

Test Plot57#: LTE Band 2_Body Left_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.272 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.34 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.564 W/kg

SAR(1 g) = 0.276 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 0.306 W/kg

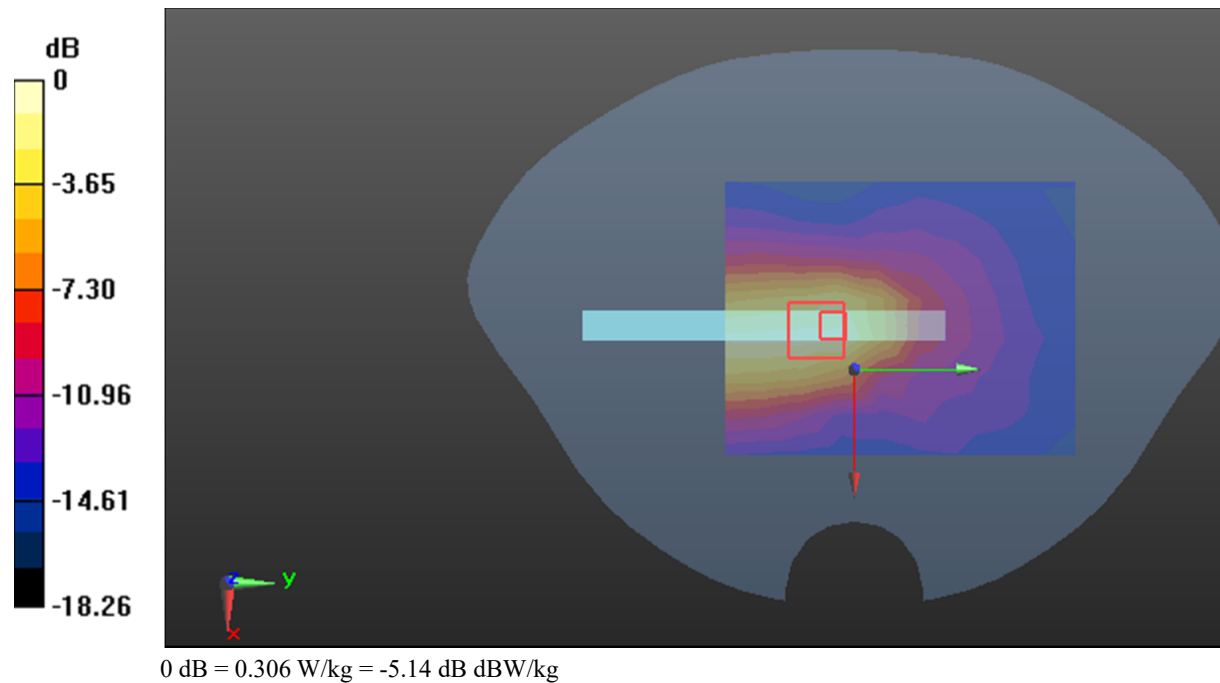

Test Plot58#: LTE Band 2_Body Left_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.216 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.07 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.454 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.249 W/kg

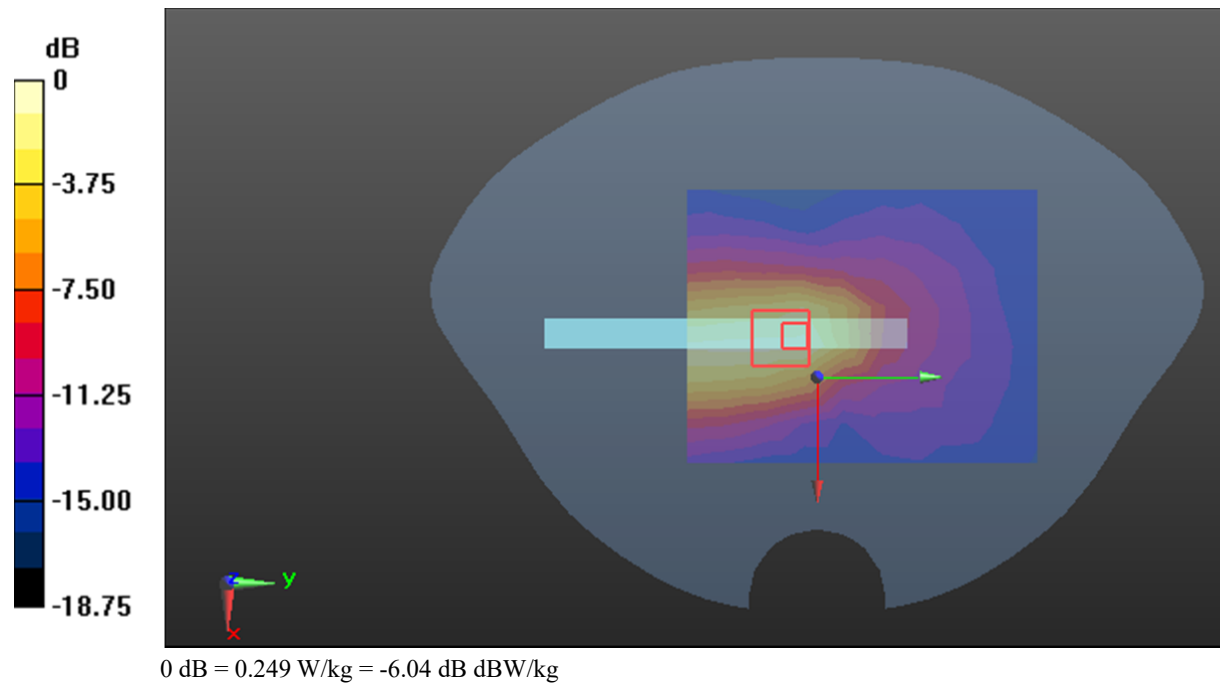

Test Plot60#: LTE Band 2_Body Top_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.668 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.48 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.982 W/kg

SAR(1 g) = 0.620 W/kg; SAR(10 g) = 0.368 W/kg

Maximum value of SAR (measured) = 0.677 W/kg

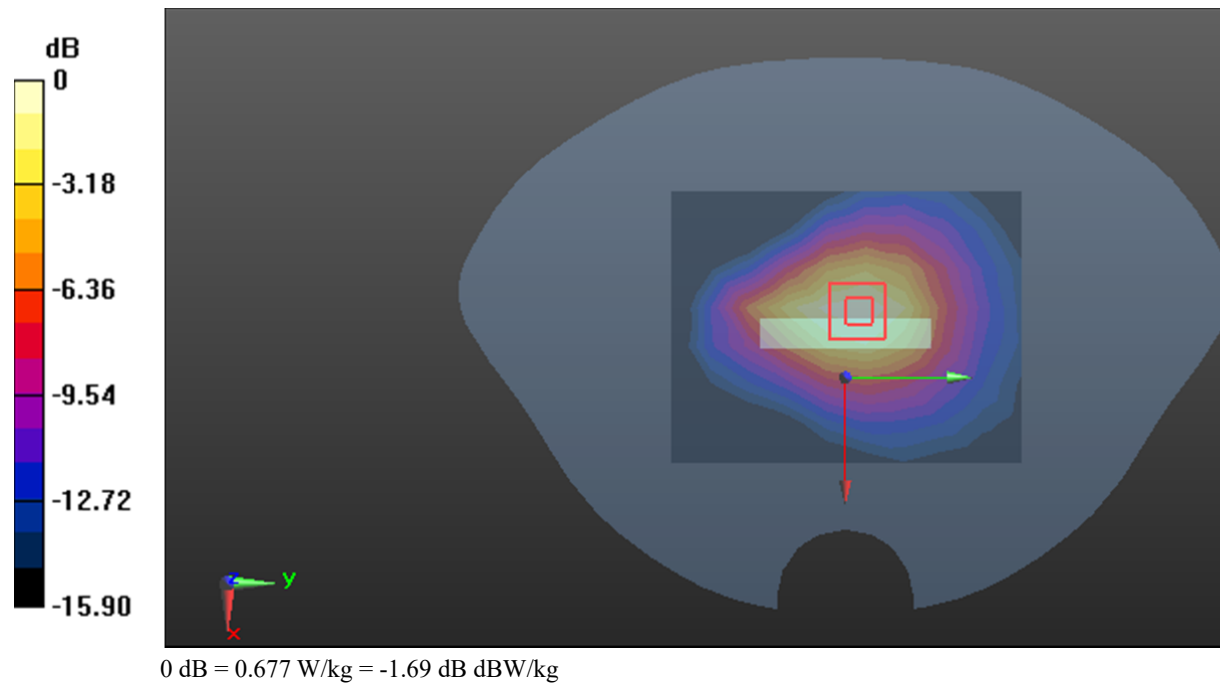

Test Plot62#: LTE Band 2_Body Top_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f=1880$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @1880 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.546 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.54 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.810 W/kg

SAR(1 g) = 0.508 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.556 W/kg

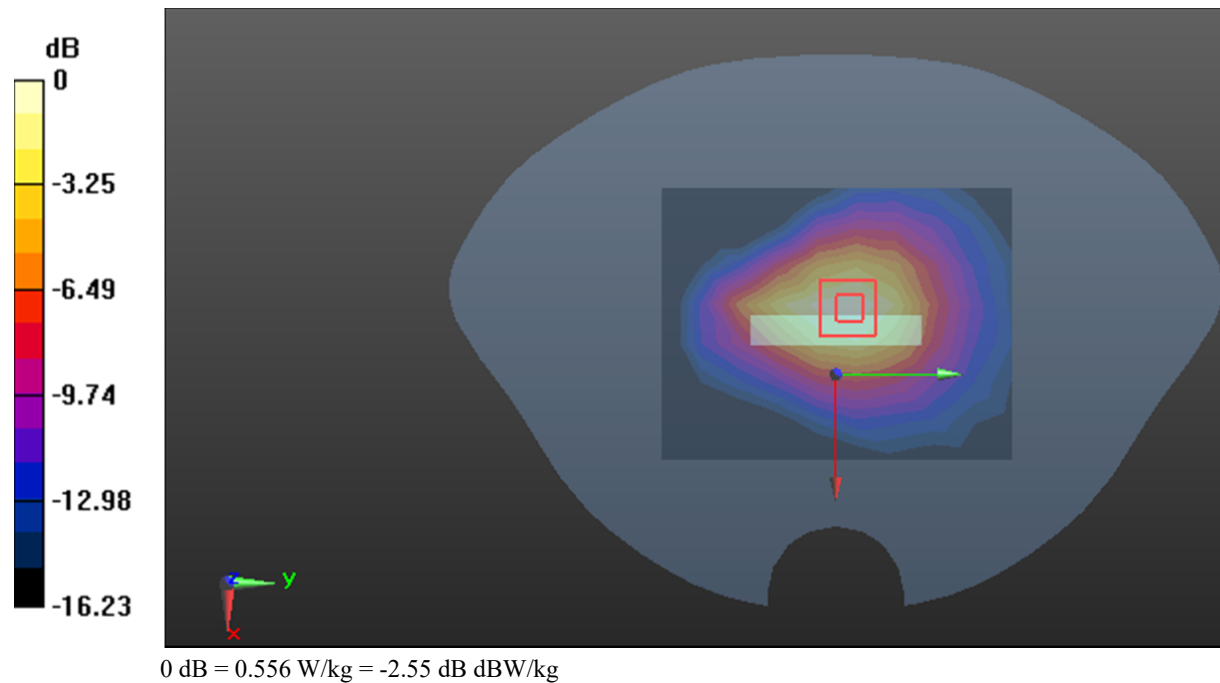

Test Plot63#: LTE Band 5_Head Left Cheek_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.426$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0747 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.267 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.0744 W/kg

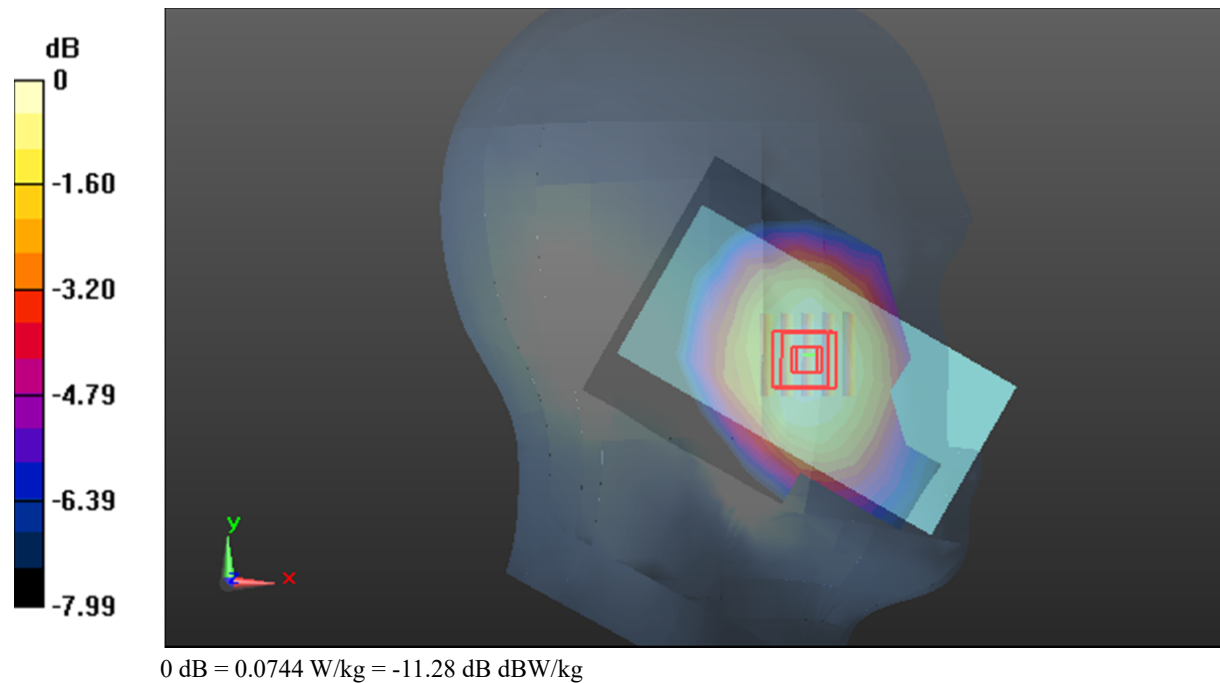

Test Plot64#: LTE Band 5_Head Left Cheek_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.426$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0601 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.569 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0700 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.0602 W/kg

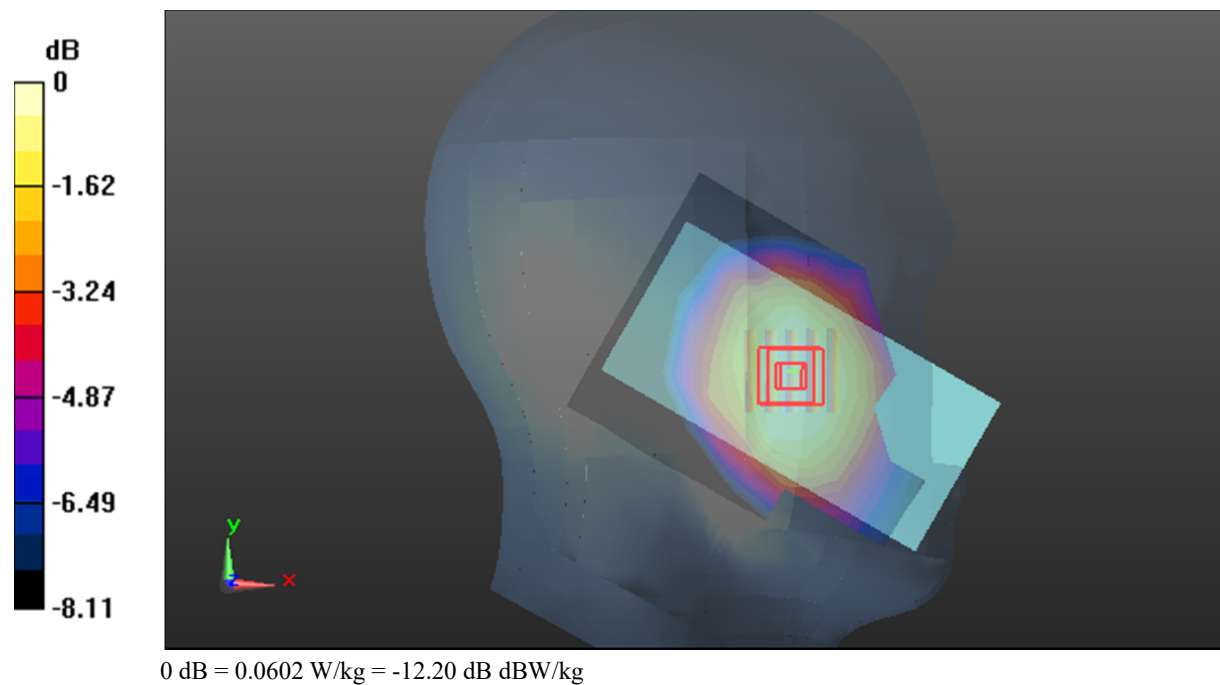

Test Plot65#: LTE Band 5_Head Left Tilt_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.426$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0527 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.232 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0630 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0537 W/kg

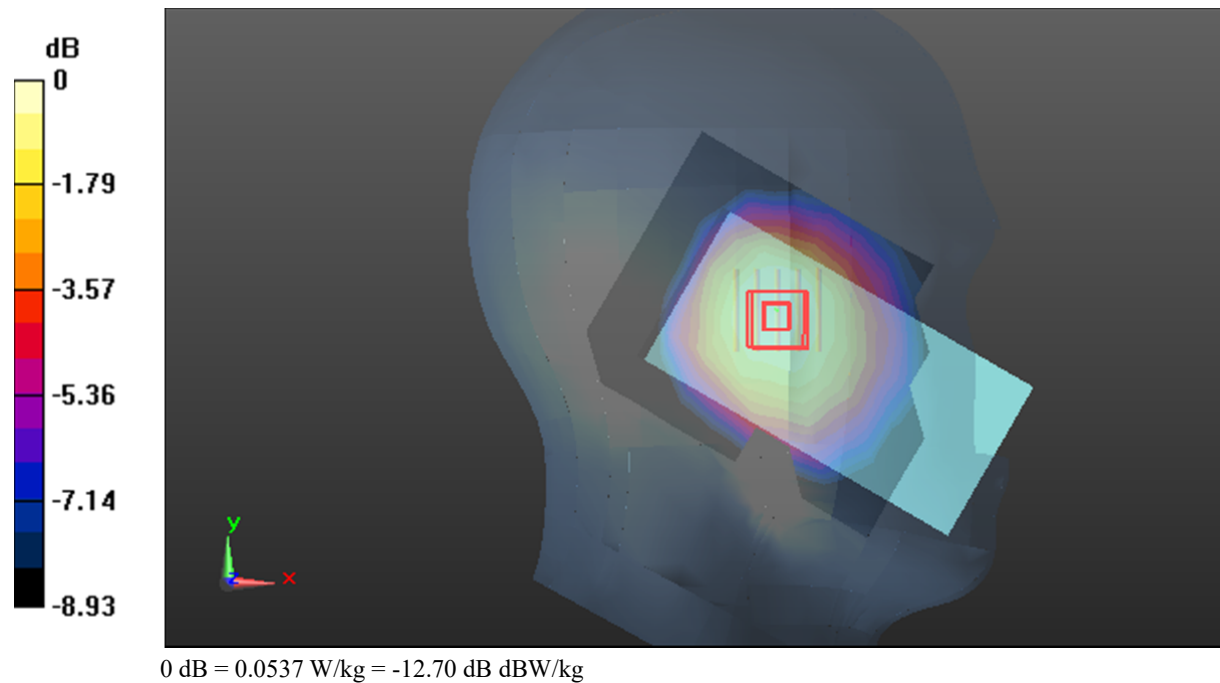

Test Plot66#: LTE Band 5_Head Left Tilt_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium parameters used: $f=836.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.426$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0419 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.652 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0500 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.0432 W/kg

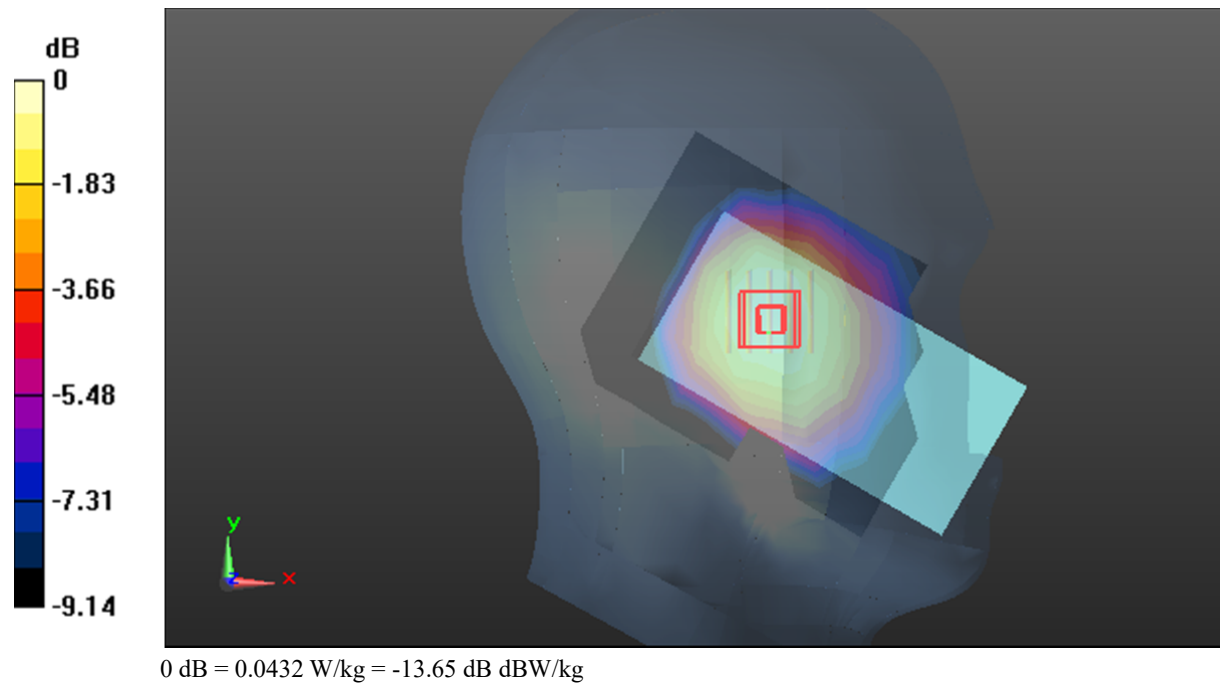

Test Plot67#: LTE Band 5_Head Right Cheek_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=836.5$ MHz; $\sigma=0.927$ S/m; $\epsilon_r=41.426$; $\rho=1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0866 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.091 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.0862 W/kg

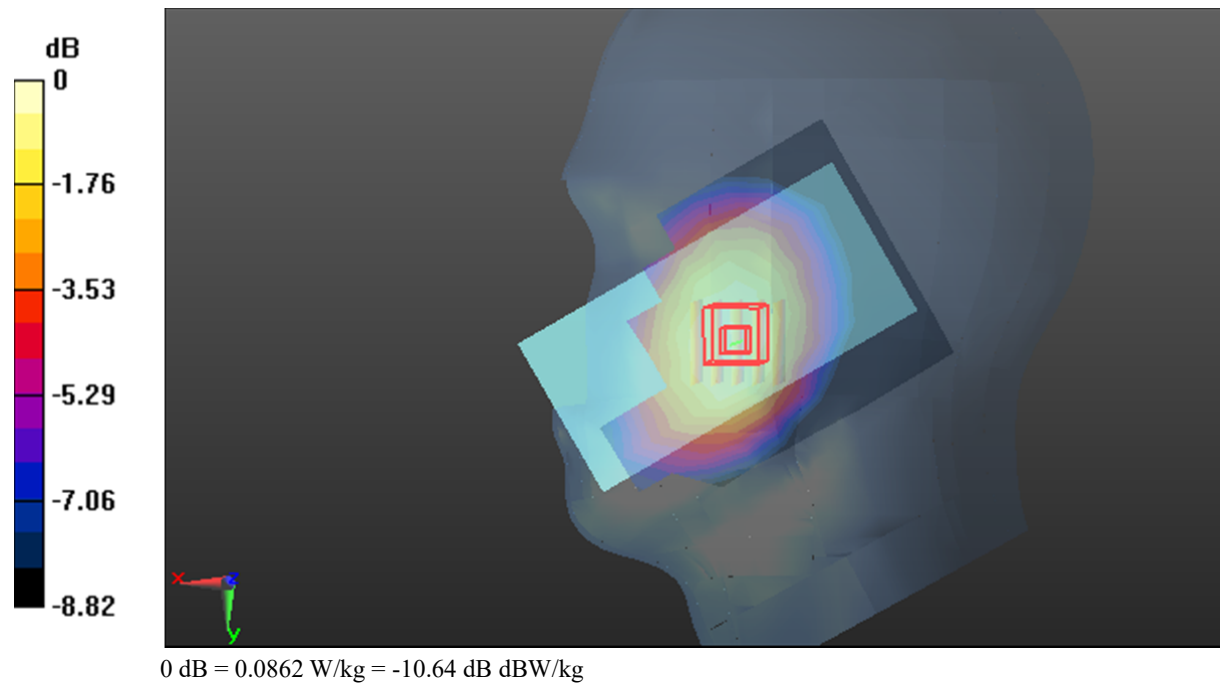

Test Plot68#: LTE Band 5_Head Right Cheek_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=836.5$ MHz; $\sigma=0.927$ S/m; $\epsilon_r=41.426$; $\rho=1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0714 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.711 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0830 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.0705 W/kg

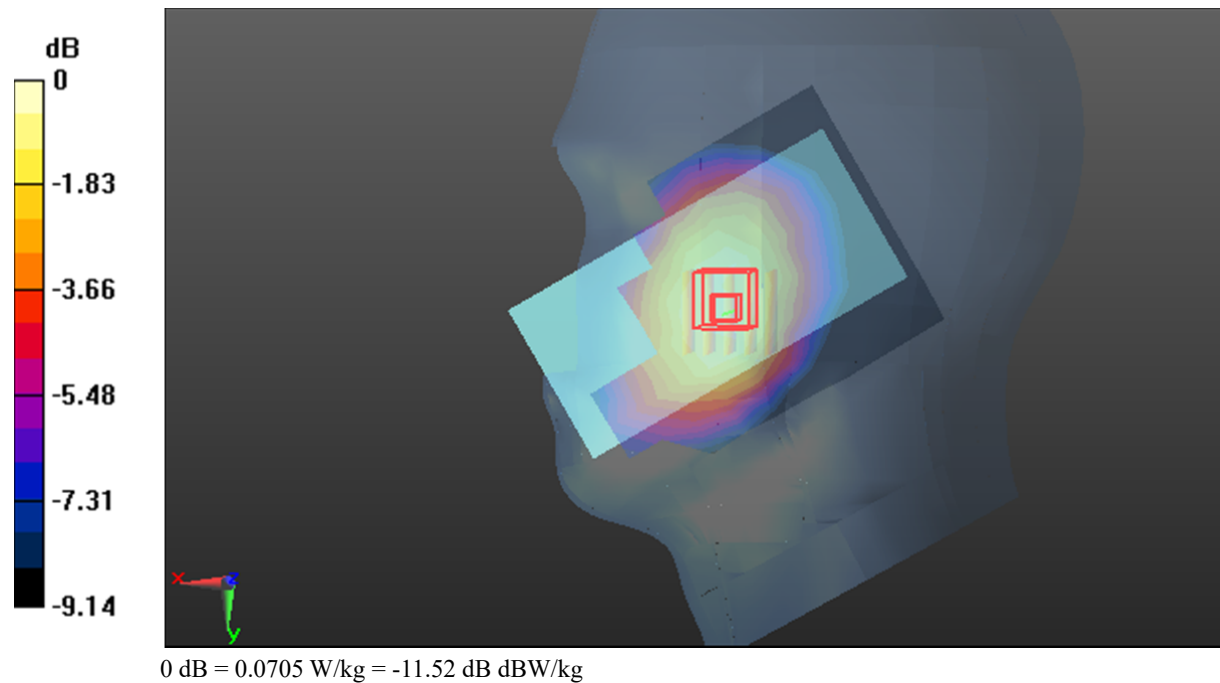

Test Plot69#: LTE Band 5_Head Right Tilt_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium parameters used: $f=836.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.426$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0518 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.485 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0529 W/kg

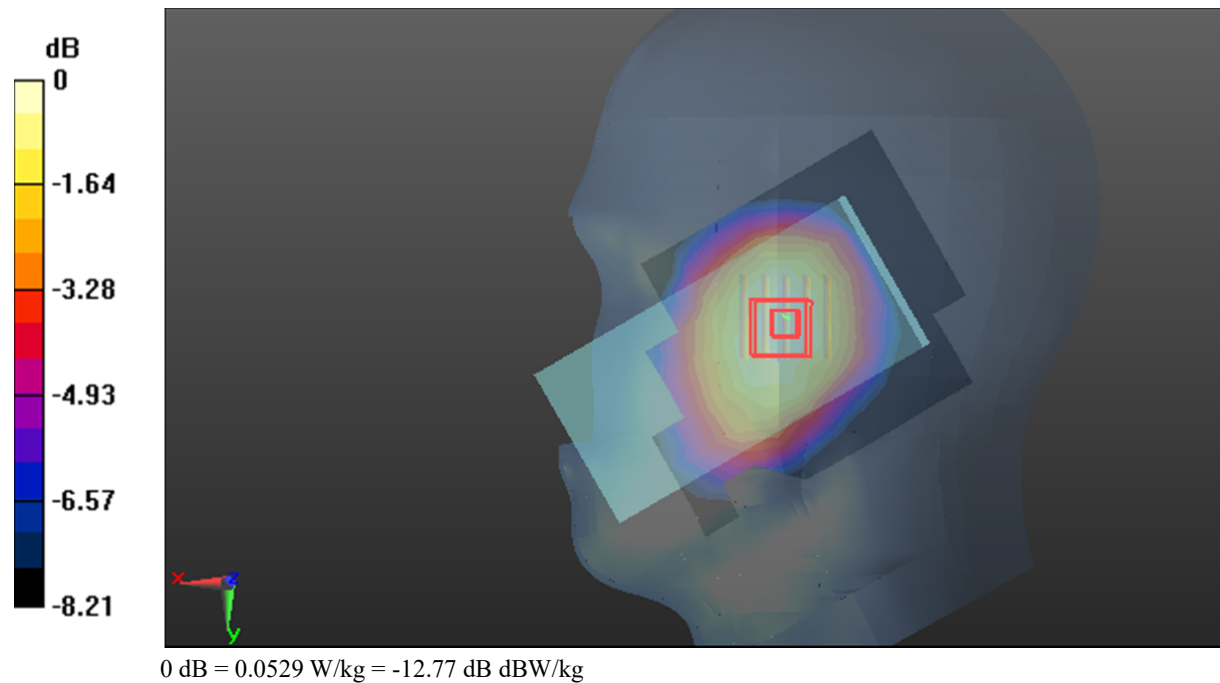

Test Plot70#: LTE Band 5_Head Right Tilt_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=836.5$ MHz; $\sigma=0.927$ S/m; $\epsilon_r=41.426$; $\rho=1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0429 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.026 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0500 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0436 W/kg

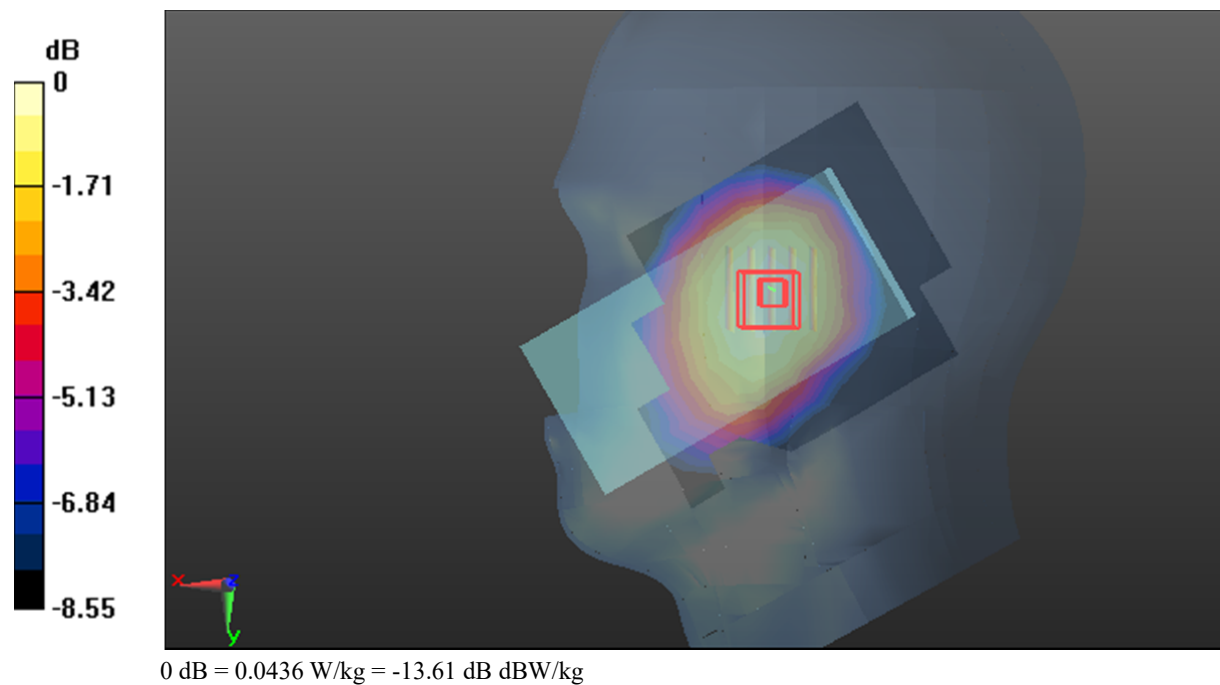

Test Plot71#: LTE Band 5_Body Front_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=836.5$ MHz; $\sigma=0.927$ S/m; $\epsilon_r=41.426$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0673 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.632 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0810 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0673 W/kg

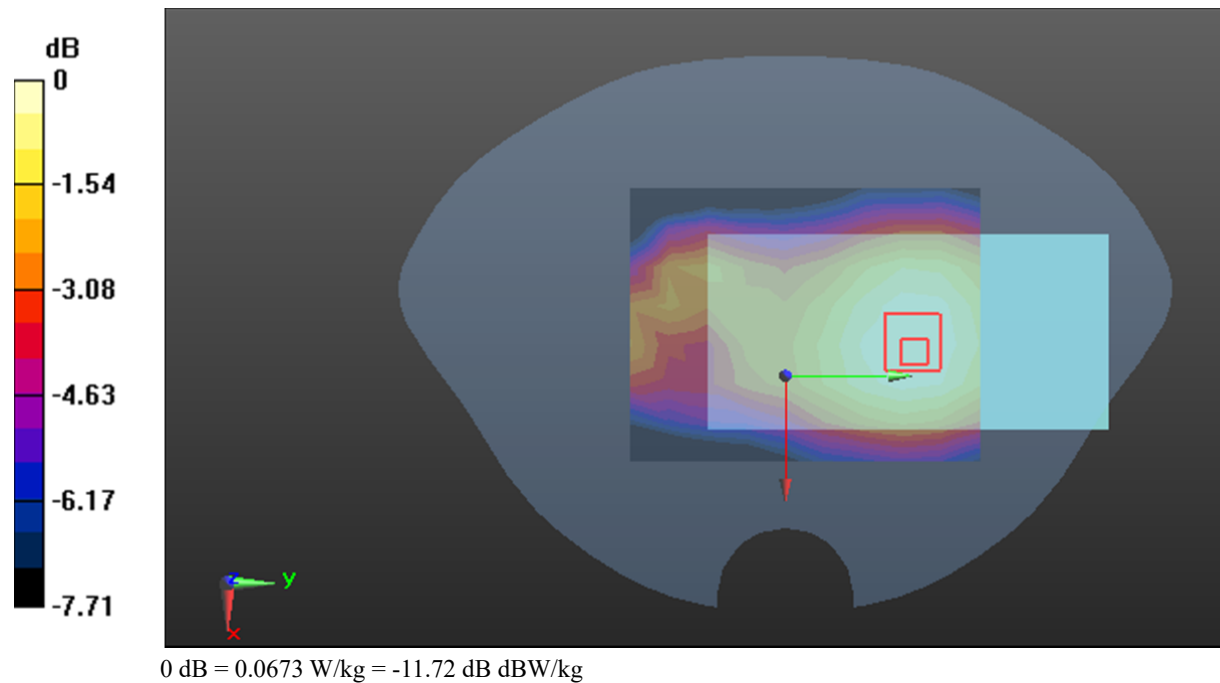

Test Plot72#: LTE Band 5_Body Front_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium parameters used: $f=836.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.426$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0559 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.024 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0680 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.0563 W/kg

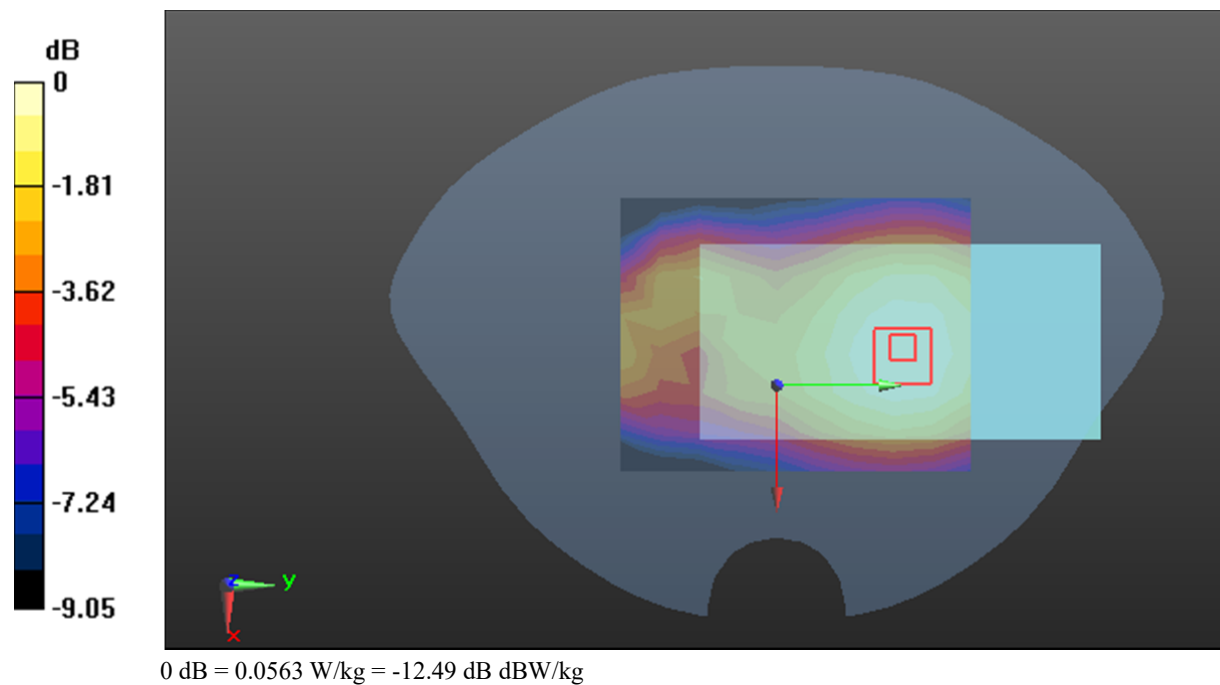

Test Plot74#: LTE Band 5_Body Back_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium parameters used: $f=836.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.426$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.172 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.718 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.193 W/kg

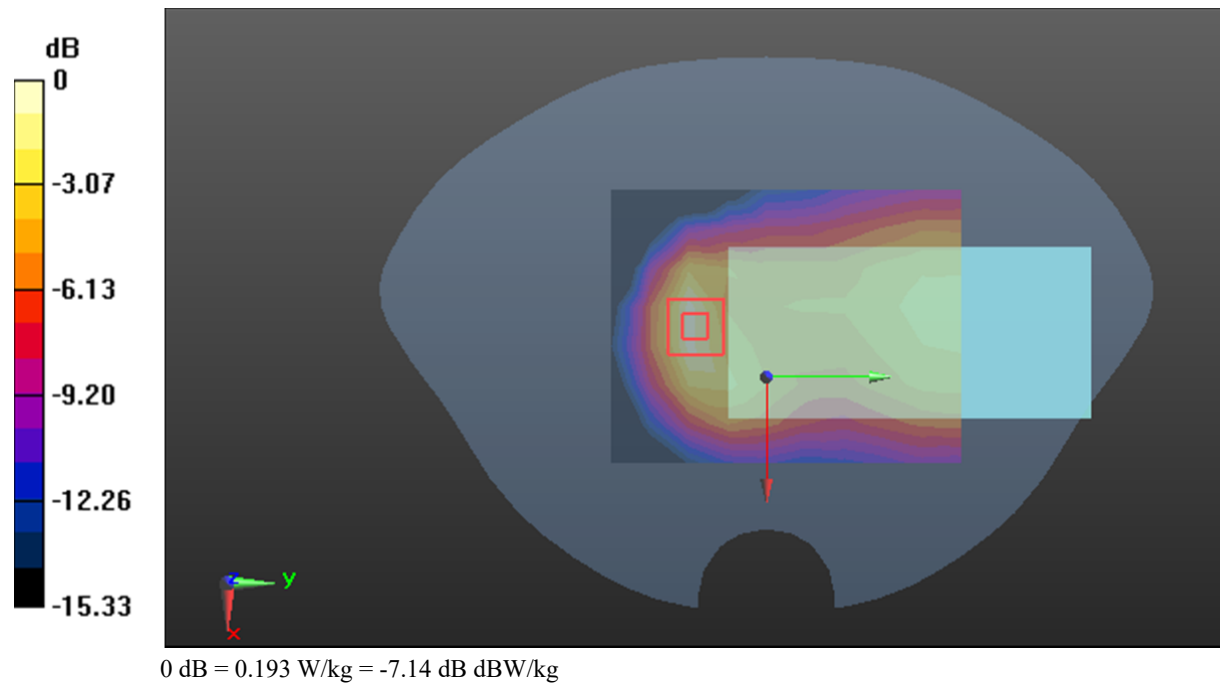

Test Plot76#: LTE Band 5_Body Back_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=836.5$ MHz; $\sigma=0.927$ S/m; $\epsilon_r=41.426$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.147 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.070 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.263 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.164 W/kg

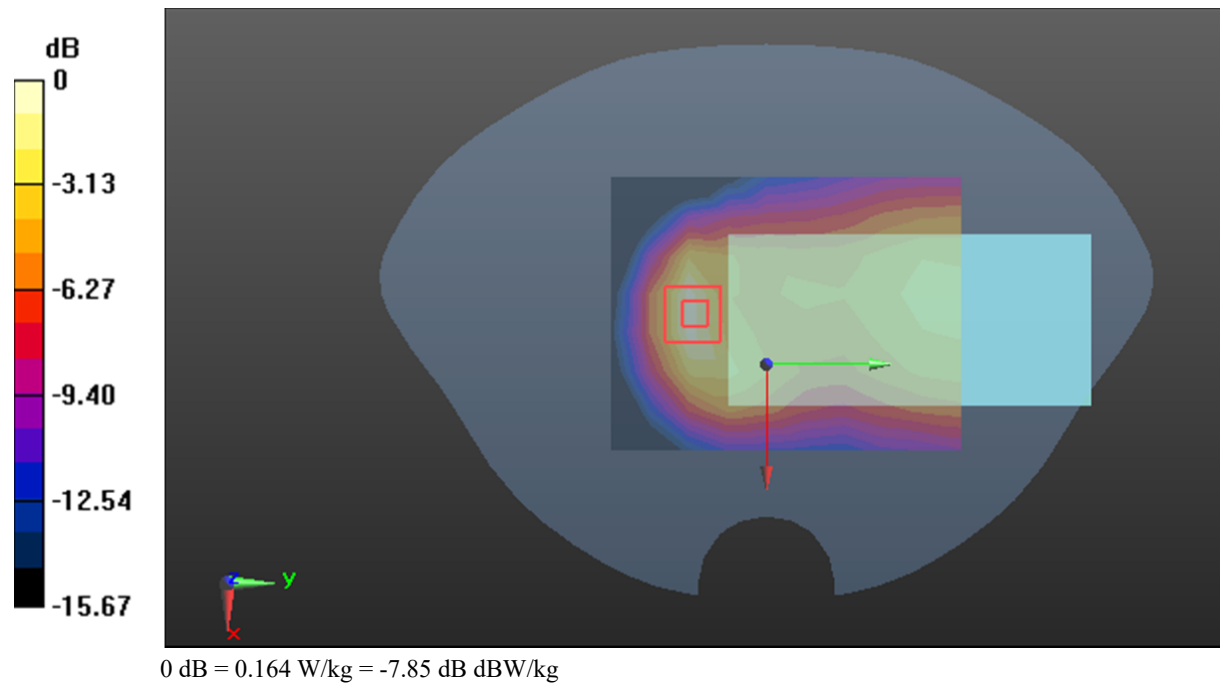

Test Plot77#: LTE Band 5_Body Left_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $f=836.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.426$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0561 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.063 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0830 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0618 W/kg

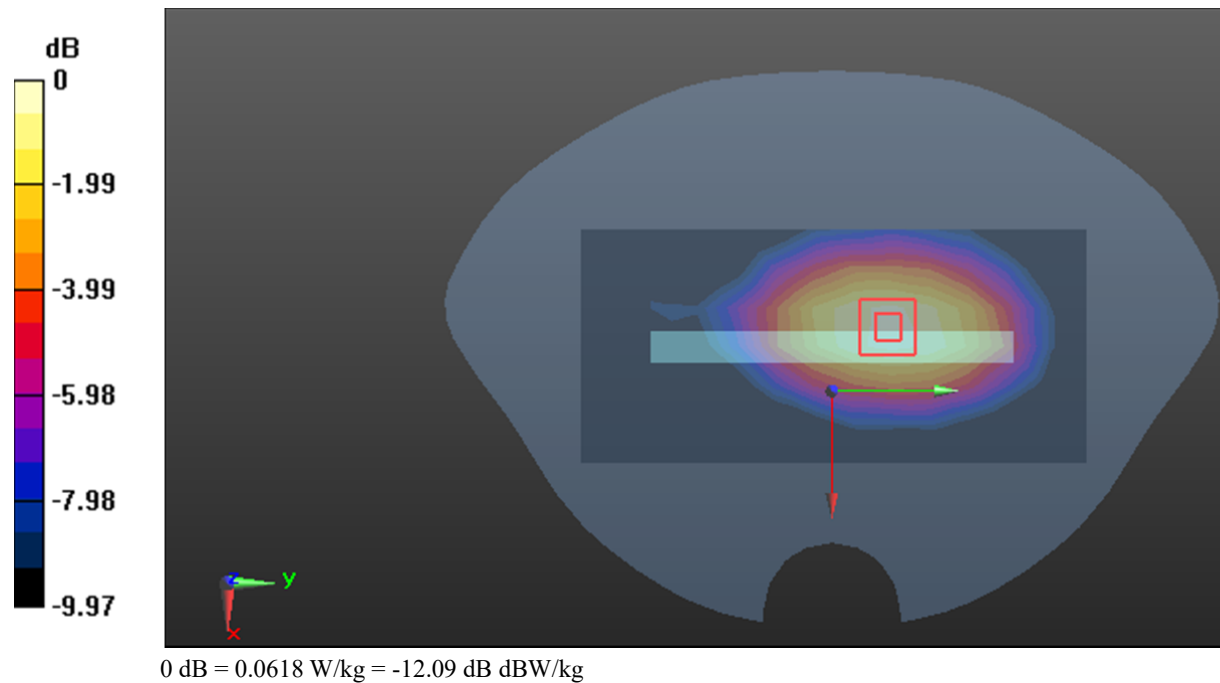

Test Plot78#: LTE Band 5_Body Left_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=836.5$ MHz; $\sigma=0.927$ S/m; $\epsilon_r=41.426$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0453 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.318 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0670 W/kg

SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.0505 W/kg

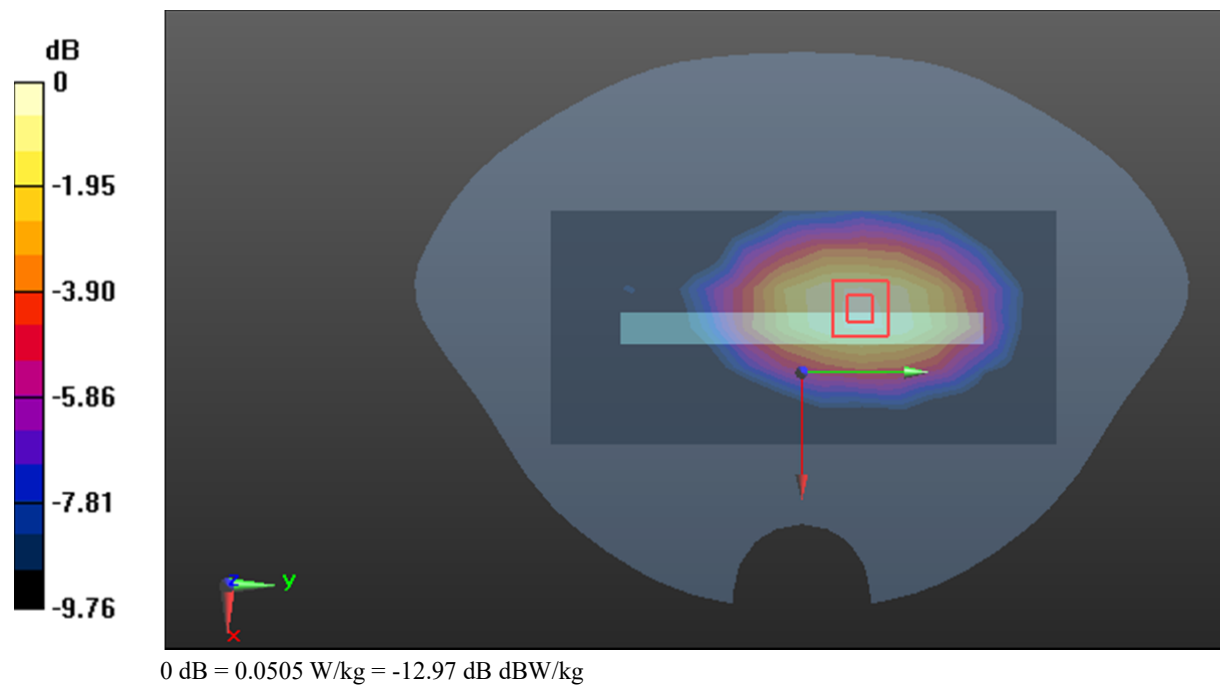

Test Plot79#: LTE Band 5_Body Right_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.426$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0989 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.401 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.100 W/kg

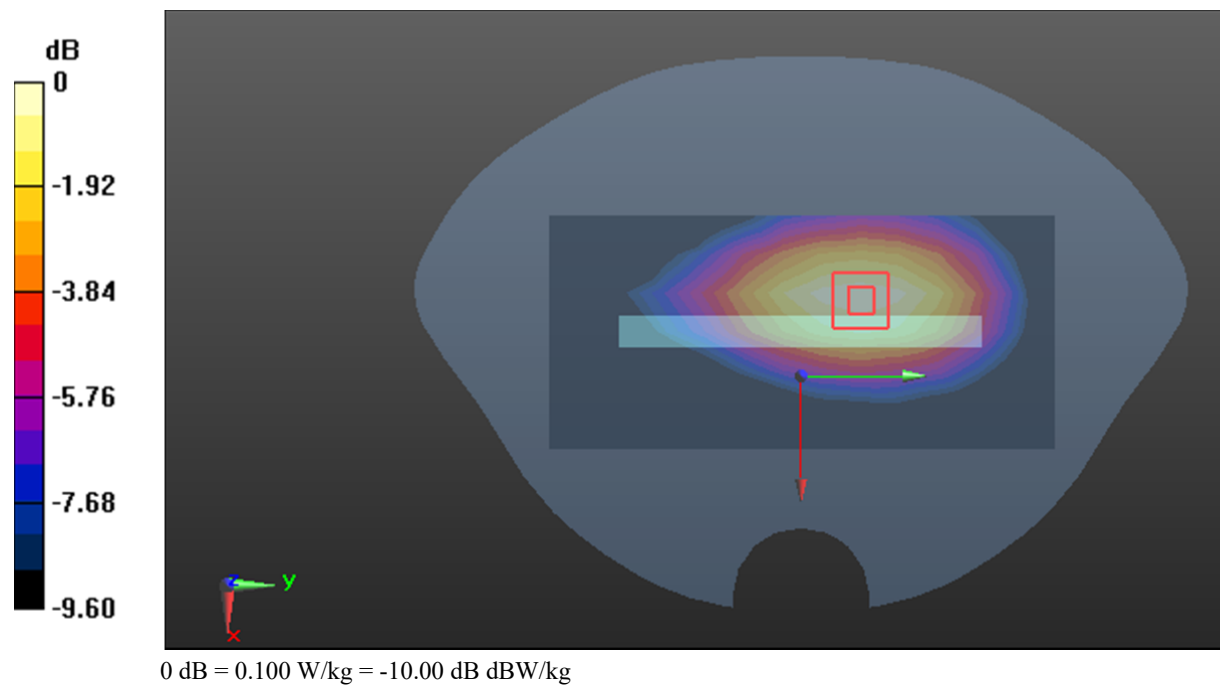

Test Plot80#: LTE Band 5_Body Right_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium parameters used: $f=836.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.426$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0803 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.517 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.0811 W/kg

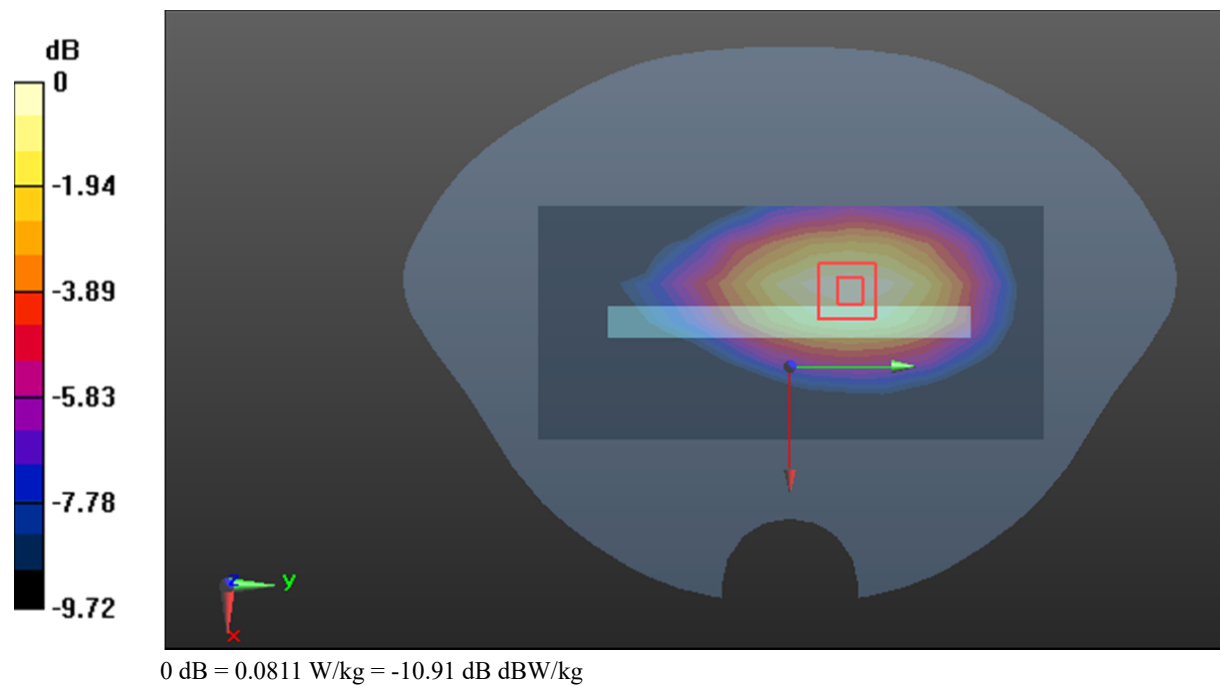

Test Plot81#: LTE Band 5_Body Bottom_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium parameters used: $f=836.5$ MHz; $\sigma=0.927$ S/m; $\epsilon_r=41.426$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0541 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.176 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.0749 W/kg

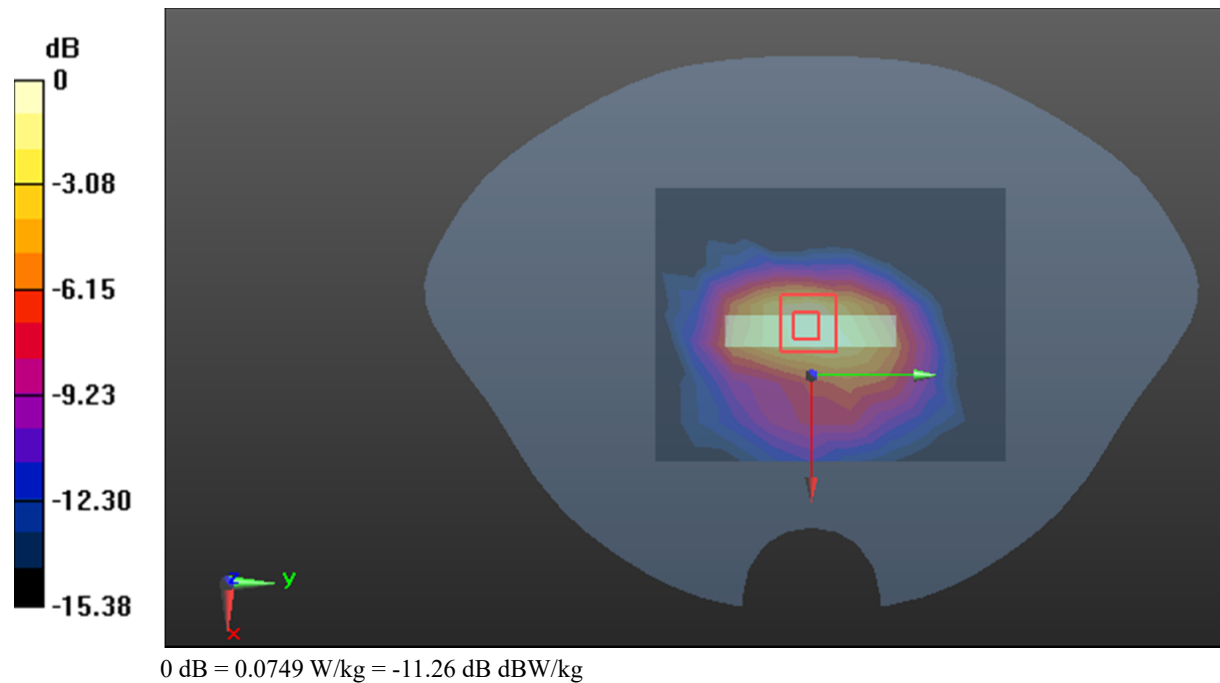

Test Plot82#: LTE Band 5_Body Bottom_50%RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.426$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @836.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0460 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.424 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.109 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.0641 W/kg

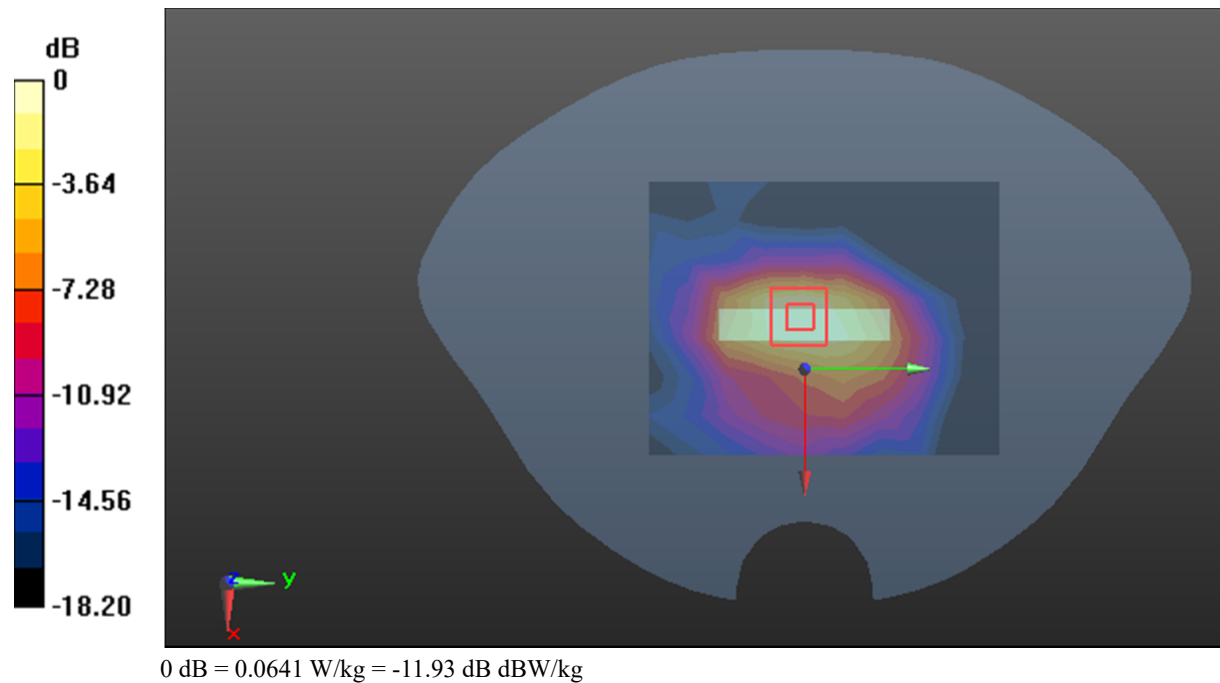

Test Plot83#: LTE Band 12_Head Left Cheek_1RB_Middle**DUT: Smart phone; Type: MP32;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=707.5$ MHz; $\sigma=0.861$ S/m; $\epsilon_r=42.478$; $\rho=1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @707.5 MHz; Calibrated: 2023/4/10;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0676 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.053 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0740 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.0652 W/kg

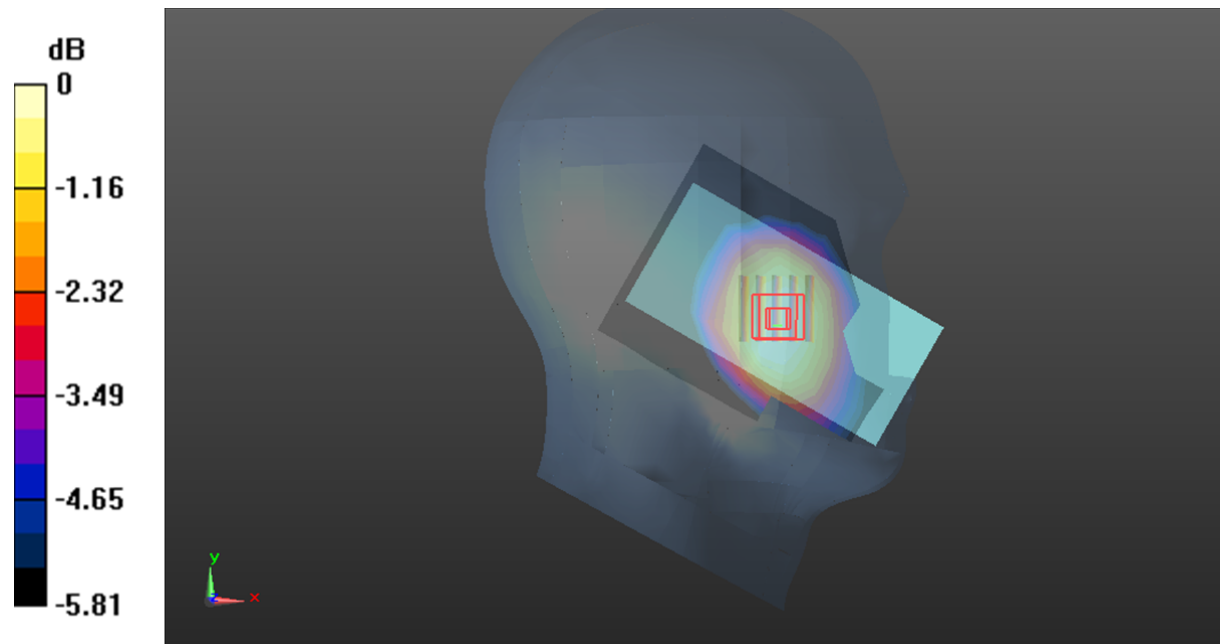

0 dB = 0.0652 W/kg = -11.86 dB dBW/kg