



File reference No.: 2021-09-28

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Product: Tablet PC

Model No.: W911W, PB9000, PB9000-32, ST9000

Trademark: PACKARD BELL, Smartab

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 &FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Manager

Dated: September 28, 2021

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to

withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Date: 2021-09-28



Page 2 of 39

Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Date: 2021-09-28



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test	8
5.2	Test Method and Test Procedure	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition	9
5.5	Conducted Emission Limit.	9
5.6	Test Result	9
6.0	Radiated Emission test	12
6.1	Test Method and Test Procedure	12
6.2	Configuration of the EUT	13
6.3	EUT Operation Condition	13
6.4	Radiated Emission Limit	14
6.5	Test Result.	15
7.0	Band Edge	23
7.1	Test Method and Test Procedure	23
7.2	Radiated Test Setup	23
7.3	Configuration of the EUT	23
7.4	EUT Operating Condition	23
7.5	Band Edge Limit.	23
7.6	Band Edge Test Result.	24
8.0	Antenna Requirement.	28
9.0	20dB bandwidth measurement	29
10.0	FCC ID Label	38
11.0	Photo of Test Setup and EUT View.	39

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2109119-03E Page 4 of 39

Date: 2021-09-28



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community, Huaqiangbei,

Futian District, Shenzhen

Telephone: 0755-84688843 Fax: 0755-84688843

1.3 Description of EUT

Product: Tablet PC

Manufacturer: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community,

Huaqiangbei, Futian District, Shenzhen

Trademark: PACKARD BELL, Smartab

Model Number: W911W

Additional Model Name PB9000, PB9000-32, ST9000

Hardware Version: 863A MB 5.1

Software Version: PB90000-32 20210904

Serial No.: PB90002108000001~PB90002108008000

Rating: DC5.0V, 2.0A

Power Supply: Model: TPA-46050200UU; Input: 100-240V~, 50/60Hz, 0.3A; Output: DC5V, 2A

Battery: DC3.8V===4000mAh, 15.2Wh Modulation Type: GFSK, (Bluetooth Low Energy)

Operation Frequency: 2402-2480MHz

Channel Separate: 2MHz
Channel Number: 40

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2021-09-28



Page 5 of 39

Antenna Designation

FPC antenna used. The gain of the antennas is -0.77dBi (get from the antenna

specification provided the applicant)

1.4 Submitted Sample: 2 pc

1.5 Test Duration

2021-09-11 to 2021-09-28

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty =3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 39

Report No.: TW2109119-03E

Date: 2021-09-28



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2021-06-18	2022-06-17
Loop Antenna	EMCO	6507	00078608	2021-06-18	2024-06-17
Spectrum	R&S	FSIQ26	100292	2021-06-18	2022-06-17
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2021-06-18	2022-06-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2021-07-02	2024-07-01
Power meter	Anritsu	ML2487A	6K00003613	2021-06-18	2022-06-17
Power sensor	Anritsu	MA2491A	32263	2021-06-18	2022-06-17
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2021-07-02	2024-07-01
9*6*6 Anechoic			N/A	2021-07-02	2022-07-01
EMI Test Receiver	RS	ESVB	826156/011	2021-06-18	2022-06-17
EMI Test Receiver	RS	ESH3	860904/006	2021-06-18	2022-06-17
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2021-06-18	2022-06-17
Spectrum	HP/Agilent	E4407B	MY50441392	2021-06-18	2022-06-17
Spectrum	RS	FSP	1164.4391.38	2021-01-07	2022-01-06
RF Cable	7honadi	ZT26-NJ-NJ-8		2021-06-18	2022-06-17
Kr Cable	Zhengdi	M/FA		2021-00-18	2022-00-17
RF Cable	Zhengdi	7m		2021-06-18	2022-06-17
RF Switch	EM	EMSW18	060391	2021-06-18	2022-06-17
Pre-Amplifier	Schwarebeck	BBV9743	#218	2021-06-18	2022-06-17
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2021-06-18	2022-06-17
LISN	SCHAFFNER	NNB42	00012	2021-01-06	2022-01-05

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

2.3 WIFI Test Software: RFtester V2.4

Power Setting: Default

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 7 of 39

Report No.: TW2109119-03E

Date: 2021-09-28



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	Pass	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2021-09-28



5. Power Line Conducted Emission Test

5.1 Schematics of the test

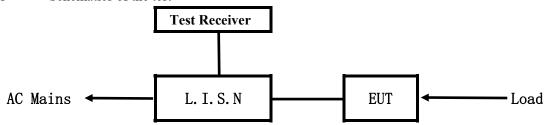


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

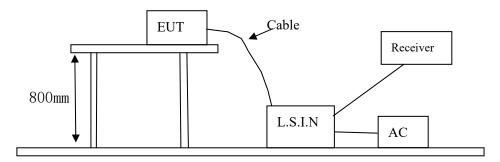

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

40 channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
Tablet PC	Shenzhen Jingwah Information	W911W, PB9000,	RBD-W911W
Tablet PC	Technology Co., Ltd.	PB9000-32, ST9000	KDD-W911W

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2109119-03E Page 9 of 39

Date: 2021-09-28



B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	KEYU	KA23-0502000DEU	Input: 100-240V~, 50/60Hz, 0.35A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)			
(MHz)	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	56.0	46.0		
5.00 ~ 30 00	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results:

Pass

Date: 2021-09-28



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Communication by BT

Model: W911W Results: Pass

Please refer to following diagram for individual

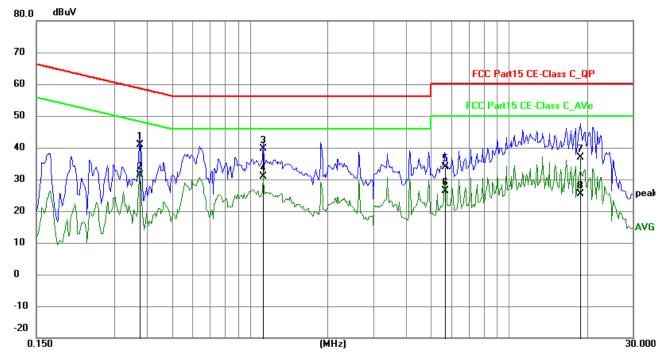

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.3762	31.12	9.76	40.88	58.36	-17.48	QP	Р
2	0.3762	21.65	9.76	31.41	48.36	-16.95	AVG	Р
3	1.1289	29.76	9.79	39.55	56.00	-16.45	QP	Ч
4	1.1289	21.20	9.79	30.99	46.00	-15.01	AVG	П
5	5.6598	24.02	9.96	33.98	60.00	-26.02	QP	П
6	5.6598	16.51	9.96	26.47	50.00	-23.53	AVG	П
7	18.8730	26.29	10.61	36.90	60.00	-23.10	QP	Р
8	18.8730	14.88	10.61	25.49	50.00	-24.51	AVG	Р

Date: 2021-09-28



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Communication by BT

Model: W911W Results: Pass

Please refer to following diagram for individual

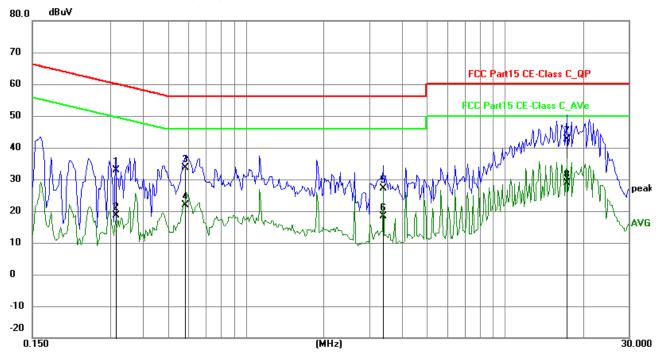

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.3138	23.00	9.76	32.76	59.87	-27.11	QP	Р
2	0.3138	8.84	9.76	18.60	49.87	-31.27	AVG	Р
3	0.5854	23.87	9.77	33.64	56.00	-22.36	QP	Р
4	0.5854	12.10	9.77	21.87	46.00	-24.13	AVG	Р
5	3.3939	17.19	9.86	27.05	56.00	-28.95	QP	Р
6	3.3939	8.48	9.86	18.34	46.00	-27.66	AVG	Р
7	17.3754	32.00	10.52	42.52	60.00	-17.48	QP	Р
8	17.3754	18.44	10.52	28.96	50.00	-21.04	AVG	Р

Report No.: TW2109119-03E Page 12 of 39

Date: 2021-09-28




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

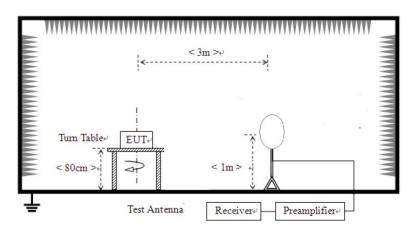


Date: 2021-09-28



For radiated emissions from 30MHz to1GHz

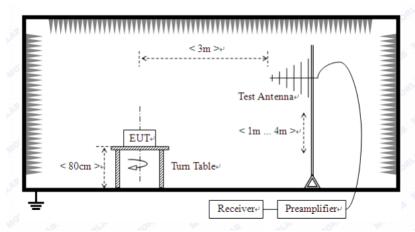

For radiated emissions above 1GHz

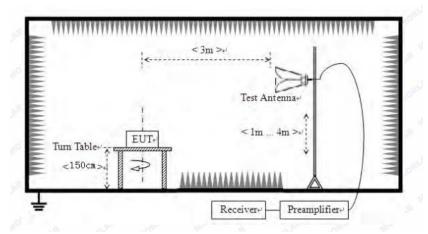

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No.: TW2109119-03E Page 14 of 39

Date: 2021-09-28



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	eld Strength of Fundamental (3m)			trength of Harmo	nics (3m)
(MHz)	mV/m	dBuV/m		uV/m	dBu	V/m
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 6. Battery full charged during tests.

Report No.: TW2109119-03E Page 15 of 39

Date: 2021-09-28




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

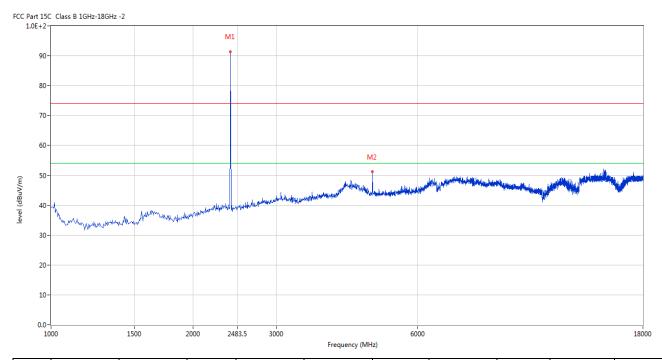


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2402.149	91.39	-3.57	114.0	-22.61	Peak	100.00	100	Horizontal	Pass
2	4802.799	51.17	3.12	74.0	-22.83	Peak	133.00	100	Horizontal	Pass

Report No.: TW2109119-03E Page 16 of 39

Date: 2021-09-28



Vertical

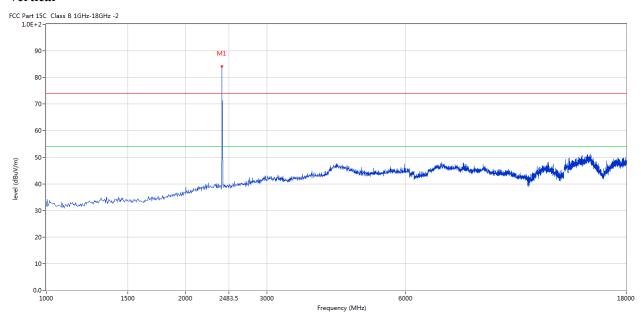

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402.149	84.12	-3.57	114.0	-29.88	Peak	235.00	100	Vertical	Pass


Report No.: TW2109119-03E Page 17 of 39

Date: 2021-09-28



Please refer to the following test plots for details: Middle Channel-2441MHz

Horizontal

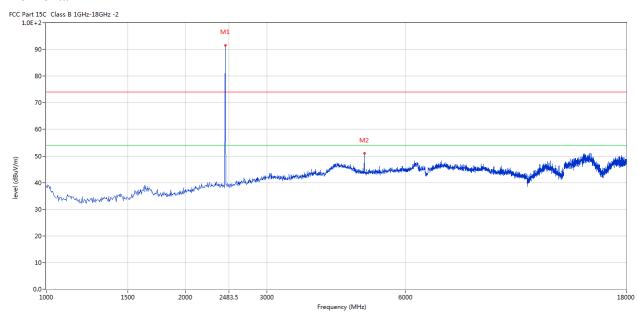


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440.390	91.58	-3.57	114.0	-22.42	Peak	98.00	100	Horizontal	Pass
2	4879.280	50.96	3.20	74.0	-23.04	Peak	93.00	100	Horizontal	Pass

Report No.: TW2109119-03E Page 18 of 39

Date: 2021-09-28



Vertical

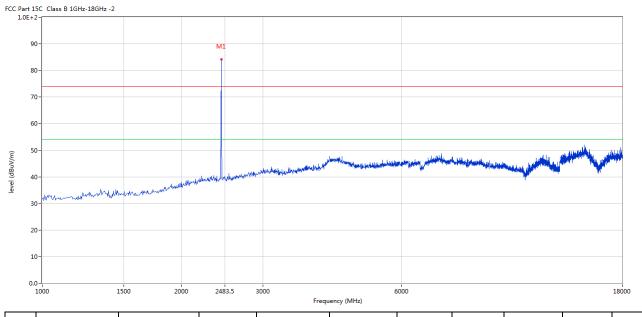

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440.390	84.11	-3.57	114.0	-29.89	Peak	234.00	100	Vertical	Pass


Report No.: TW2109119-03E Page 19 of 39

Date: 2021-09-28



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

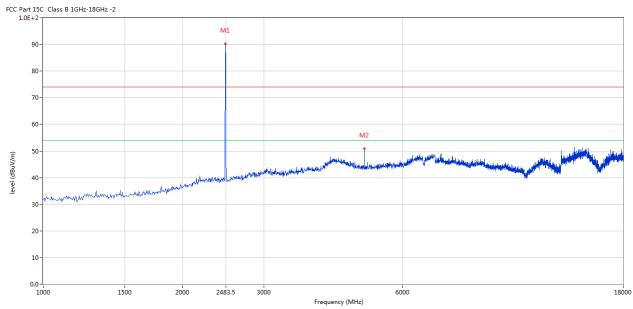


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2479.630	90.26	-3.57	114.0	-23.74	Peak	152.00	100	Horizontal	Pass
2	4960.010	50.89	3.36	74.0	-23.11	Peak	102.00	100	Horizontal	Pass

Report No.: TW2109119-03E Page 20 of 39

Date: 2021-09-28



Vertical

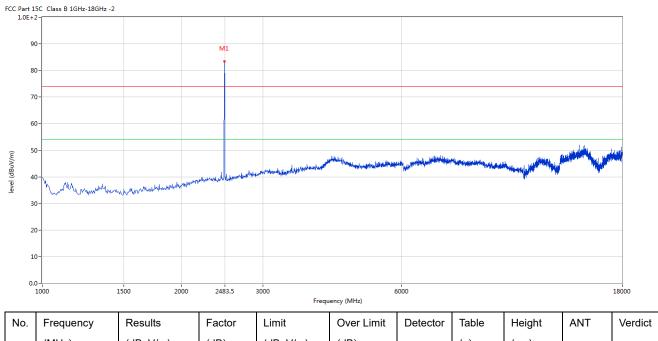

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2479.630	83.41	-3.57	114.0	-30.59	Peak	230.00	100	Vertical	Pass

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3) Margin=Emission-Limits
- (4) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2109119-03E Page 21 of 39

Date: 2021-09-28




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

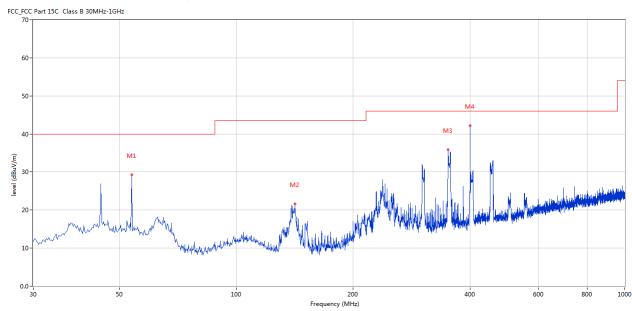

No	Frequenc	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	y (MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	53.759	29.32	-11.53	40.0	-10.68	Peak	360.00	100	Horizontal	Pass
2	141.522	21.67	-17.28	43.5	-21.83	Peak	116.00	100	Horizontal	Pass
3	350.990	35.87	-9.36	46.0	-10.13	Peak	287.00	100	Horizontal	Pass
4	399.963	42.20	-8.57	46.0	-3.80	Peak	287.00	100	Horizontal	Pass

Report No.: TW2109119-03E Page 22 of 39

Date: 2021-09-28




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

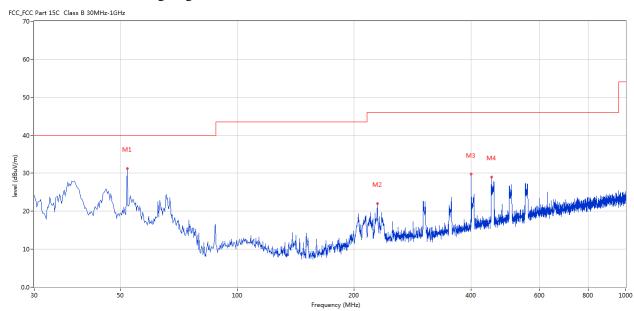

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	52.062	31.19	-11.43	40.0	-8.81	Peak	275.00	100	Vertical	Pass
2	229.285	22.00	-12.69	46.0	-24.00	Peak	291.00	100	Vertical	Pass
3	399.963	29.73	-8.57	46.0	-16.27	Peak	202.00	100	Vertical	Pass
4	451.602	29.05	-7.91	46.0	-16.95	Peak	324.00	100	Vertical	Pass

Date: 2021-09-28




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

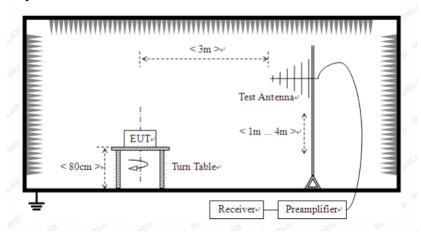

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.


Report No.: TW2109119-03E Page 24 of 39

Date: 2021-09-28



7.6 Test Result

Product:	Tablet PC	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

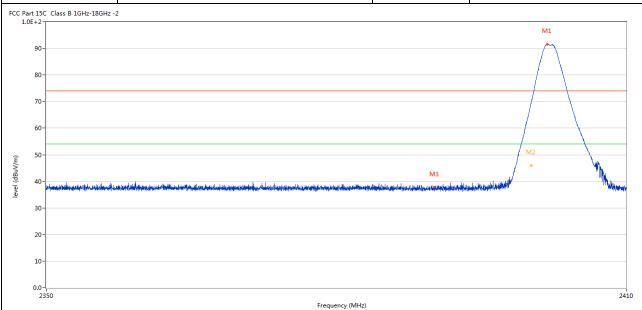

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	2400.042	68.20	-3.57	74.0	-5.80	Peak	132.00	100	Horizontal	Pass
2**	2400.042	45.92	-3.57	54.0	-8.08	AV	132.00	100	Horizontal	Pass
3	2390.025	37.61	-3.53	74.0	-36.39	Peak	339.00	100	Horizontal	Pass

Report No.: TW2109119-03E Page 25 of 39



	Product:		Tablet	PC		Detector		Vei	tical	
	Mode	Ke	eeping Tra	nsmitting	Te	st Voltage		DC	3.8V	
Te	mperature		24 deg	. C,	H	Humidity		56%	6 RH	
Т	est Result:		Pas	s						
CC Part 1	15C Class B 1GHz-18GHz	-2								
	0-									
9	0-							M1	\	
8	0-									
7	0-									
6	0-								$\overline{}$	
<u> </u>	0-									
evel (dBuV/m)						M3		√M2 •	_w.	
level (O - Marchalogia Landingon og Bredsteinner	ya kadada lakida wadaa da kadada ada ka ay gara ga	detallation de de de la designation de la contraction de la contra	if down that to play the profession is being to	edambahaha espera dibilik dinama dipibilikan	and distances income and design of which	المهاب مندرولات والإسمية	order high state	W.	hally the advantacions
3	0-									
2	0-									
1	0-									
0	0-									
	2350			Fre	equency (MHz)					2410
No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
		61.31	-3.57	74.0	-12.69	Peak	231.00	100	Vertical	Pass
2	2400.042	01.01								
2 2**	2400.042 2400.042	43.01	-3.57	54.0	-10.99	AV	231.00	100	Vertical	Pass

Report No.: TW2109119-03E Page 26 of 39



		_								
Product: Tablet PC Mode Keeping Transmitting Temperature 24 deg. C,			Polarity Test Voltage			Horizontal DC3.8V				
		ransmitting								
		eg. C,		Humidity	56% RH					
Te	st Result:		Pa	ss						
C Part 15 1.0E+2	5C Class B 1GHz-18GHz	-2								
90	1-									
80)-									
70)-									
60)-		/							
50)-		/	M2						
				MAN MAN						
40	- Indital thick principle with afternoon	· · · · · · · · · · · · · · · · · · ·			The state of the s	decorresconde productive de la cidade	rickfelderseephysiologistes	بمعدله بجافلية فرخيط فالبيساء موعني	gardinilla, kan partija and partini partini plante partini partini partini partini partini partini partini par	primiples
30)-									
20)-									
10)-									
0.0)- 2470			2483.5	Frequency (MHz)					2500
No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdi
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	2483.444	55.30	-3.57	74.0	-18.70	Peak	96.00	100	Horizontal	Pass
2**	2483.444	47.24	-3.57	54.0	-6.76	AV	96.00	100	Horizontal	Pass

Report No.: TW2109119-03E Page 27 of 39

Date: 2021-09-28



Product: Mode			Tablet PC			Detector		Vertical DC3.8V			
		Keeping Transmitting			Te	st Voltage					
Te	emperature		24 deg. C, Pass			Humidity	56% RH				
Te	est Result:										
CC Part : 1.0E+	15C Class B 1GHz-18GHz	-2			•						
ġ	90-										
8	30-										
7	70-										
6	50-										
evel (dBuV/m)	50-										
D) evel	10 -	- granis is the rest of the state of the sta				المادانية المعافرة أواستهم ومادون	Jėropė paradinini prompi	المطالة الإستان المساعدة ومراوا عاداتها	the state of the state of the state of	***	
-	30-										
	20-										
2											
2	10-										
2				2483.5	; Frequency (MHz)					2500	
2	.0-	Results	Factor			Detector	Table	Height	ANT	2500 Verdict	
1	.0-	Results (dBuV/m)	Factor (dB)	1	Frequency (MHz)	Detector	Table (o)	Height (cm)	ANT		

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Date: 2021-09-28



Page 28 of 39

8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has an FPC antenna with gain -0.77dBi Max. It fulfills the requirement of this section.

Test Result: Pass

Page 29 of 39

Report No.: TW2109119-03E



Product:	Tablet PC Keeping Transmitting 24 deg. C, Pass				t Mode:	Keep transmitting			
Mode					Test Voltage Humidity Detector		DC3.8V 56% RH PK		
Temperature									
Test Result:									
OdB Bandwidth	1.238MHz								
	Marker 1 [T1 ndB]			BW 100 ki		Hz RF Att 2		20 dB	
Nef Lvl	ndB	20.00 dB	VI	BW	300 kH	[z			
10 dBm	BW	1.23847695 MHz	SI	TW	5 ms	U1	nit	dBm	
10					v ₁	[T1]	-5	.20 dBm	
							2.40199	699 GHz	
0					ndB		20	.00 dB	
			\		BW ▼ _{T1}	[T1]	1.23847		
-10					\	[TI]	2.40138	.26 dBm 377 GHz	
					V _{T2}	[T1]	-24	.86 dBm	
-20	т					2	2.40262	224 GHz	
1MAX	7				Y	,			
-30						\			
	~								
-40	/ ~								
-50 MMM								hamer	
-60									
-70									
-80									
-90									
Center 2.40	2 GHz	300	kHz/				Spa	n 3 MHz	

Page 30 of 39

Report No.: TW2109119-03E



Product:	Т	ablet PC		Test Mode:	Keep	transmitting	
Mode	Keepin	g Transmitting		Test Voltage	Б	OC3.8V	
Temperature	2	4 deg. C,		Humidity	56% RH		
Test Result:		Pass		Detector		PK	
20dB Bandwidth	1.	.238MHz					
Ŕ	Marker	1 [T1 ndB]	RBI	W 100 kH	Iz RF Att	20 dB	
Ref Lvl	ndB	20.00 dB	VBI				
10 dBm	BW 1	L.23847695 MHz	SW	r 5 ms	s Unit	dBm	
10				v ₁	[T1] ·	-5.94 dBm	
0					2.4399		
			1	ndB	1 020	20.00 dB	
			\	BW VT1	1.2384	17695 MHz 25.67 dBm	
-10		/			2.4393		
				∇_{T2}	[T1] -:	25.87 dBm	
-20 1MAX	т				2.4406	52224 GHz 1MA	
IMAX	7			V	7	IMA	
-30							
-40							
/							
-50						- Llw	
-60							
-70							
						 	
-80							
						 	
-90							
Center 2	.44 GHz	300	kHz/		Sr	pan 3 MHz	
Date: 28	3.SEP.2021 14	:22:47					

Page 31 of 39

Report No.: TW2109119-03E



Product:	Tablet PC Keeping Transmitting 24 deg. C,				est Mode:		Keep transmitting		
Mode					est Voltage	DC3.8V 56% RH			
Temperature					Humidity				
Test Result:	Pass 1.232MHz				Detector	PK			
20dB Bandwidth									
Ŕ	Marker	1 [T1 ndB]	I	RBW	100 kH:	z RI	7 Att	20 dB	
Ref Lvl	ndB	20.00 d		VBW	300 kH:				
10 dBm	BW 1	.23246493 M	Iz S	SWT	5 ms	Ur	nit	dBm	
10					v ₁ [T1]	- 7	.47 dBm	A
							2.47999	699 GHz	
0					ndB		20	.00 dB	
					$oldsymbol{ abla}_{ ext{T1}}^{ ext{BW}}$	F 2 - 2	1.23246	493 MHz	
-10					V T	[T1]	2.47938	.36 dBm 377 GHz	
					∇_{T2}	[T1]	-27	.38 dBm	
-20		/					2.48061	623 GHz	
1MAX	Ţ,	/			T2				1MA
-30							~~~		
-40									
-50									
-60								•	
-70									
-80									
-90 Combana 2 4	10. GU-		20.1.7	,			~	2 1477	
Center 2.4	to GHZ	3	00 kHz/	′			Spa	n 3 MHz	

Report No.: TW2109119-03E Page 32 of 39

Date: 2021-09-28



10.0 FCC ID Label

FCC ID: RBD-W911W

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 33 of 39

Report No.: TW2109119-03E

Date: 2021-09-28



11.0 Photo of testing

11.1 Conducted test View--




Page 34 of 39

Report No.: TW2109119-03E

Date: 2021-09-28



Radiated emission test view

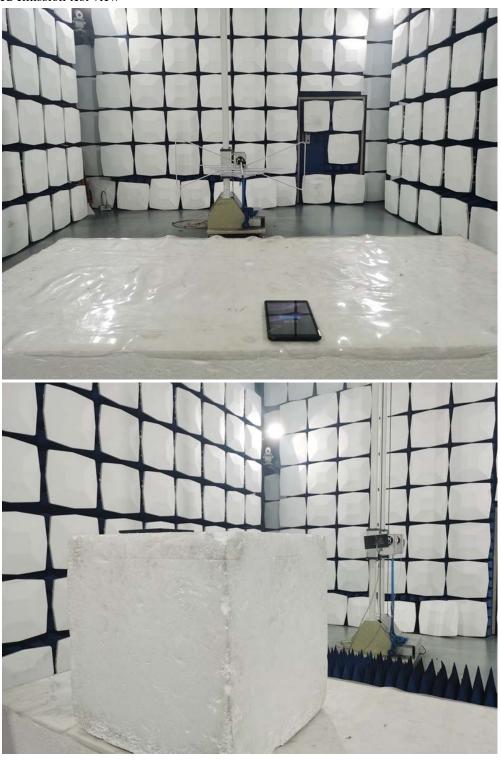

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2021-09-28



11.2 Photographs – EUT

Outside View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2021-09-28



Photographs – EUT

Outside View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 37 of 39

Report No.: TW2109119-03E

Date: 2021-09-28



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 38 of 39

Report No.: TW2109119-03E

Date: 2021-09-28



Inside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 39 of 39

Report No.: TW2109119-03E

Date: 2021-09-28



Inside View

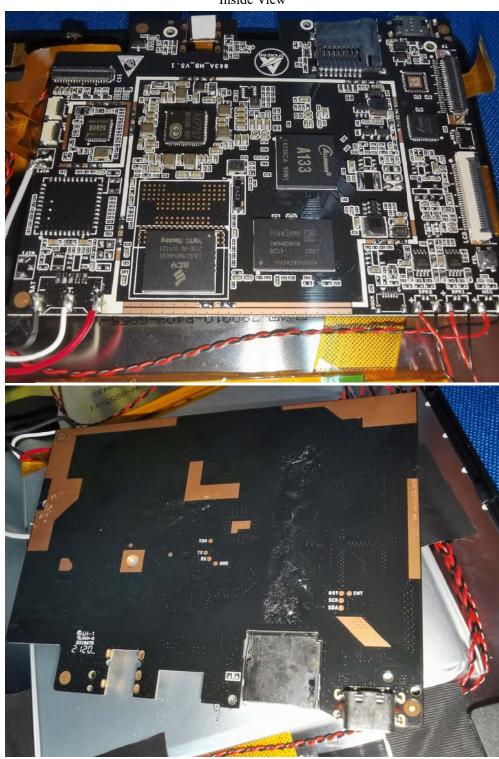

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.