

FCC Test Report

(PART 22)

Report No.: RF190516C01-6

FCC ID: B94HNQ20PK

Test Model: HSN-Q20C

Received Date: May 16, 2019

Test Date: May 25 ~ Jun. 07, 2019

Issued Date: Jun. 26, 2019

Applicant: HP Inc.

Address: 3390 East Harmony Road, Fort Collins, Colorado 80528, United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan (R.O.C)

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test	10
3.2.1 Description of Support Units	11
3.3 Test Mode Applicability and Tested Channel Detail	11
3.4 EUT Operating Conditions	14
3.5 General Description of Applied Standards	15
4 Test Types and Results	16
4.1 Output Power Measurement	16
4.1.1 Limits of Output Power Measurement	16
4.1.2 Test Procedures	16
4.1.3 Test Setup	17
4.1.4 Test Results	18
4.2 Modulation Characteristics Measurement	20
4.2.1 Limits of Modulation Characteristics	29
4.2.2 Test Setup	29
4.2.3 Test Procedure	29
4.2.4 Test Results	30
4.3 Frequency Stability Measurement	31
4.3.1 Limits of Frequency Stability Measurement	32
4.3.2 Test Procedure	32
4.3.3 Test Setup	32
4.3.4 Test Results	33
4.4 Occupied Bandwidth Measurement	43
4.4.1 Test Procedure	43
4.4.2 Test Setup	43
4.4.3 Test Result	44
4.5 Band Edge Measurement	50
4.5.1 Limits of Band Edge Measurement	50
4.5.2 Test Setup	50
4.5.3 Test Procedures	50
4.5.4 Test Results	51
4.6 Peak to Average Ratio	61
4.6.1 Limits of Peak to Average Ratio Measurement	61
4.6.2 Test Setup	61
4.6.3 Test Procedures	61
4.6.4 Test Results	61
4.7 Conducted Spurious Emissions	67
4.7.1 Limits of Conducted Spurious Emissions Measurement	67
4.7.2 Test Setup	67
4.7.3 Test Procedure	67
4.7.4 Test Results	68
4.8 Radiated Emission Measurement	78
4.8.1 Limits of Radiated Emission Measurement	78
4.8.2 Test Procedure	78
4.8.3 Deviation from Test Standard	78
4.8.4 Test Setup	79
4.8.5 Test Results	80

5 Pictures of Test Arrangements.....	122
Appendix – Information of the Testing Laboratories	123

Release Control Record

Issue No.	Description	Date Issued
RF190516C01-6	Original Release	Jun. 26, 2019

1 Certificate of Conformity

Product: Notebook Computer

Brand: HP

Test Model: HSN-Q20C

Sample Status: Engineering Sample

Applicant: HP Inc.

Test Date: May 25 ~ Jun. 07, 2019

Standards: FCC Part 22, Subpart H

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Gina Liu, **Date:** Jun. 26, 2019
Gina Liu / Specialist

Approved by : Dylan Chiou, **Date:** Jun. 26, 2019
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 22 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 22.913 (a)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1046 22.913 (d)	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 22.355	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
22.917	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 22.917	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -28.74 dB at 30.97 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2019	Mar. 17, 2020
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 13, 2018	Dec. 12, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 15, 2019	Apr. 14, 2020
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Nov. 23, 2018	Nov. 22, 2019
Double Ridge Guide Horn Antenna EMCO	3115	5619	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Nov. 23, 2018	Nov. 22, 2019
Fixed Attenuator WORKEN	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 19, 2018	Nov. 18, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 330H	980112	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1 000(140807)	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 12, 2018	Oct. 11, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8821C	6261806803	Jan. 22, 2019	Jan. 21, 2020
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 10.

3 General Information

3.1 General Description of EUT

Product	Notebook Computer	
Brand	HP	
Test Model	HSN-Q20C	
Status of EUT	Engineering Sample	
Power Supply Rating	5 or 9 or 12 or 15 or 20 Vdc (Adapter)	
Modulation Type	WCDMA	QPSK
	LTE	QPSK, 16QAM, 64QAM
Frequency Range	WCDMA	826.4 ~ 846.6 MHz
	LTE 5 (Channel Bandwidth: 1.4 MHz)	824.7 ~ 848.3 MHz
	LTE 5 (Channel Bandwidth: 3 MHz)	825.5 ~ 847.5 MHz
	LTE 5 (Channel Bandwidth: 5 MHz)	826.5 ~ 846.5 MHz
	LTE 5 (Channel Bandwidth: 10 MHz)	829 ~ 844 MHz
	LTE 26 (Channel Bandwidth: 1.4 MHz)	824.7 ~ 848.3 MHz
	LTE 26 (Channel Bandwidth: 3 MHz)	825.5 ~ 847.5 MHz
	LTE 26 (Channel Bandwidth: 5 MHz)	826.5 ~ 846.5 MHz
	LTE 26 (Channel Bandwidth: 10 MHz)	829 ~ 844 MHz
	LTE 26 (Channel Bandwidth: 15 MHz)	831.5 ~ 841.5 MHz
Max. ERP Power	WCDMA	60.12 mW
	LTE 5 (Channel Bandwidth: 1.4 MHz)	23.55 mW
	LTE 5 (Channel Bandwidth: 3 MHz)	24.89 mW
	LTE 5 (Channel Bandwidth: 5 MHz)	26.24 mW
	LTE 5 (Channel Bandwidth: 10 MHz)	27.67 mW
	LTE 26 (Channel Bandwidth: 1.4 MHz)	21.68 mW
	LTE 26 (Channel Bandwidth: 3 MHz)	23.17 mW
	LTE 26 (Channel Bandwidth: 5 MHz)	24.43 mW
	LTE 26 (Channel Bandwidth: 10 MHz)	25.88 mW
	LTE 26 (Channel Bandwidth: 15 MHz)	27.35 mW
Emission Designator	WCDMA	4M10F9W
	LTE 5 (Channel Bandwidth: 1.4 MHz)	1M09D7W
	LTE 5 (Channel Bandwidth: 3 MHz)	2M70D7W
	LTE 5 (Channel Bandwidth: 5 MHz)	4M50D7W
	LTE 5 (Channel Bandwidth: 10 MHz)	9M02D7W
	LTE 26 (Channel Bandwidth: 1.4 MHz)	1M09D7W
	LTE 26 (Channel Bandwidth: 3 MHz)	2M71D7W
	LTE 26 (Channel Bandwidth: 5 MHz)	4M51D7W
	LTE 26 (Channel Bandwidth: 10 MHz)	9M02G7D
	LTE 26 (Channel Bandwidth: 15 MHz)	13M5D7W
Antenna Type	Couple Antenna with -5.86 dBi gain	
Accessory Device	Refer to Note as below	
Data Cable Supplied	N/A	

Note:


1. The WWAN module (Brand: Fibocom, Model: L860-GL) was installed in the EUT.
2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	hp	TPN-TA02	I/P: 100-240 Vac, 50-60 Hz, 1.6 A O/P: 5 Vdc, 3 A or 9 Vdc, 3 A or 12 Vdc, 5 A or 15 Vdc, 4.33 A or 20 Vdc, 3.25 A


3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

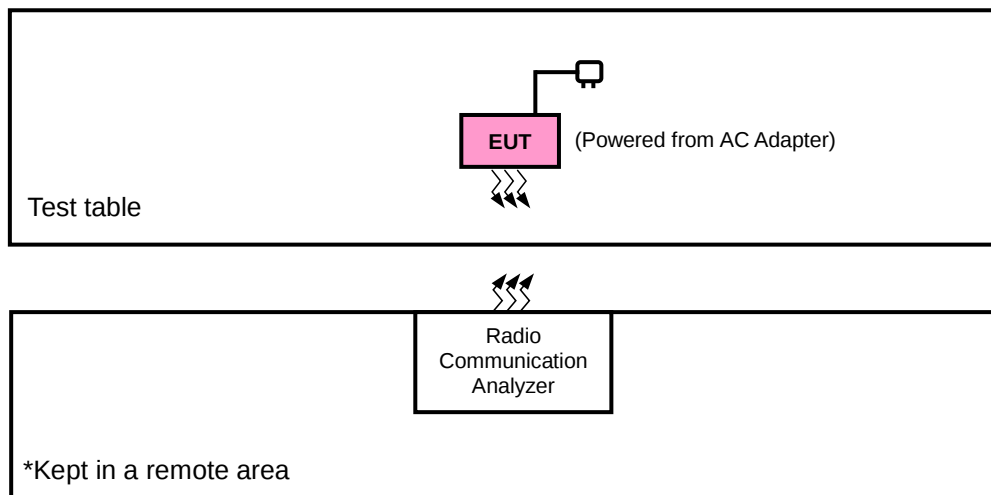

<E.R.P. Test>

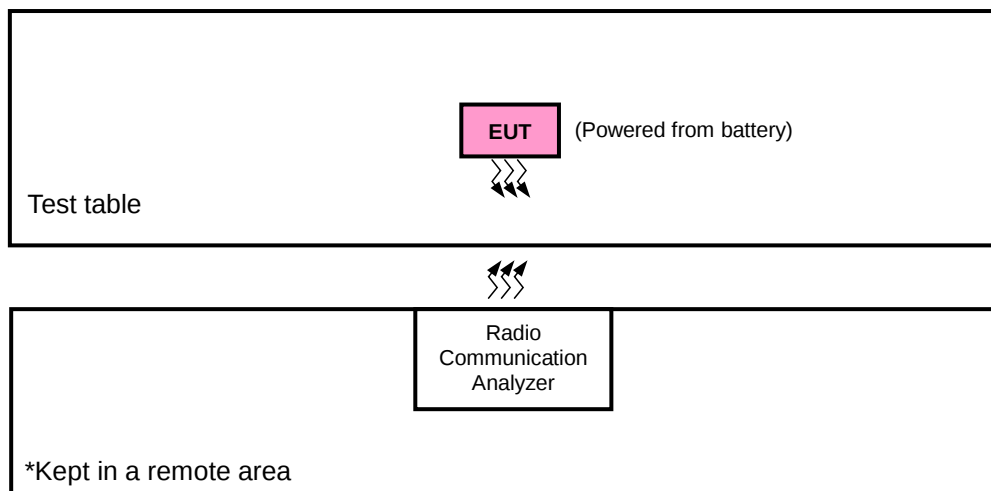

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and NB mode, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
WCDMA	X-plane	X-axis
LTE Band 5	NB mode	Z-axis
LTE Band 26	NB mode	Z-axis

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	ERP	4132 to 4233	4132, 4182, 4233	WCDMA
-	Modulation Characteristics	4132 to 4233	4182	WCDMA
-	Frequency Stability	4132 to 4233	4132, 4233	WCDMA
-	Occupied Bandwidth	4132 to 4233	4132, 4182, 4233	WCDMA
-	Band Edge	4132 to 4233	4132, 4233	WCDMA
-	Peak to Average Ratio	4132 to 4233	4132, 4182, 4233	WCDMA
-	Conducted Emission	4132 to 4233	4132, 4182, 4233	WCDMA
-	Radiated Emission	4132 to 4233	4132, 4182, 4233	WCDMA

LTE Band 5

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 7 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 12 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset
-	Modulation Characteristics	20450 to 20600	20525	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Frequency Stability	20407 to 20643	20407, 20643	1.4 MHz	QPSK	1 RB / 0 RB Offset
		20415 to 20635	20415, 20635	3 MHz	QPSK	1 RB / 0 RB Offset
		20425 to 20625	20425, 20625	5 MHz	QPSK	1 RB / 0 RB Offset
		20450 to 20600	20450, 20600	10 MHz	QPSK	1 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Occupied Bandwidth	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Band Edge	20407 to 20643	20407	1.4MHz	QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			20643	1.4MHz	QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		20415 to 20635	20415	3 MHz	QPSK	1 RB / 0 RB Offset 15 RB / 0 RB Offset
			20635	3 MHz	QPSK	1 RB / 14 RB Offset 15 RB / 0 RB Offset
		20425 to 20625	20425	5 MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			20625	5 MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		20450 to 20600	20450	10 MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			20600	10 MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset
-	Peak to Average Ratio	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 7 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 12 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset
-	Conducted Emission	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK	1 RB / 7 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK	1 RB / 12 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK	1 RB / 24 RB Offset
-	Radiated Emission	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK	1 RB / 12 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK	1 RB / 24 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

LTE Band 26

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 5 RB Offset
		26805 to 27025	26805, 26915, 27025	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 14 RB Offset
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset
		26840 to 26990	26840, 26915, 26990	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 49 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 74 RB Offset
-	Modulation Characteristics	26865 to 26965	26915	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
-	Frequency Stability	26797 to 27033	26797, 27033	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26805 to 27025	26805, 27025	3 MHz	QPSK	1 RB / 0 RB Offset
		26815 to 27015	26815, 27015	5 MHz	QPSK	1 RB / 0 RB Offset
		26840 to 26990	26840, 26990	10 MHz	QPSK	1 RB / 0 RB Offset
		26865 to 26965	26865, 26965	15 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset
		26805 to 27025	26805, 26915, 27025	3 MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		26840 to 26990	26840, 26915, 26990	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
-	Band Edge	26797 to 27033	26797	1.4 MHz	QPSK	1 RB / 0 RB Offset
			27033	1.4 MHz	QPSK	6 RB / 0 RB Offset
		26805 to 27025	26805	3 MHz	QPSK	1 RB / 5 RB Offset
			27025	3 MHz	QPSK	6 RB / 0 RB Offset
		26815 to 27015	26815	5 MHz	QPSK	1 RB / 0 RB Offset
			27015	5 MHz	QPSK	15 RB / 0 RB Offset
		26840 to 26990	26840	10 MHz	QPSK	1 RB / 14 RB Offset
			26990	10 MHz	QPSK	15 RB / 0 RB Offset
		26865 to 26965	26865	15 MHz	QPSK	1 RB / 0 RB Offset
			26965	15 MHz	QPSK	25 RB / 0 RB Offset
		26815 to 27015	26815	5 MHz	QPSK	1 RB / 24 RB Offset
			27015	5 MHz	QPSK	25 RB / 0 RB Offset
		26840 to 26990	26840	10 MHz	QPSK	1 RB / 0 RB Offset
			26990	10 MHz	QPSK	50 RB / 0 RB Offset
		26865 to 26965	26865	15 MHz	QPSK	1 RB / 49 RB Offset
			26965	15 MHz	QPSK	50 RB / 0 RB Offset
		26815 to 27015	26815	5 MHz	QPSK	1 RB / 0 RB Offset
			27015	5 MHz	QPSK	75 RB / 0 RB Offset
		26840 to 26990	26840	10 MHz	QPSK	1 RB / 74 RB Offset
			26990	10 MHz	QPSK	75 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Peak to Average Ratio	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 5 RB Offset
		26805 to 27025	26805, 26915, 27025	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 14 RB Offset
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset
		26840 to 26990	26840, 26915, 26990	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 49 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 74 RB Offset
-	Conducted Emission	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK	1 RB / 5 RB Offset
		26805 to 27025	26805, 26915, 27025	3 MHz	QPSK	1 RB / 14 RB Offset
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK	1 RB / 24 RB Offset
		26840 to 26990	26840, 26915, 26990	10 MHz	QPSK	1 RB / 49 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK	1 RB / 74 RB Offset
-	Radiated Emission	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK	1 RB / 5 RB Offset
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK	1 RB / 24 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK	1 RB / 74 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang
Modulation Characteristics	25 deg. C, 65 % RH	120 Vac, 60 Hz	Wayne Lin
Frequency Stability	25 deg. C, 65 % RH	120 Vac, 60 Hz	Wayne Lin
Occupied Bandwidth	25 deg. C, 65 % RH	120 Vac, 60 Hz	Wayne Lin
Band Edge	25 deg. C, 65 % RH	120 Vac, 60 Hz	Wayne Lin
Peak to Average Ratio	25 deg. C, 65 % RH	120 Vac, 60 Hz	Wayne Lin
Conducted Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Wayne Lin
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang, Thomas Wei

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5 MHz for WCDMA, and 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated from E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

The EUT was set up for the maximum power with WCDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

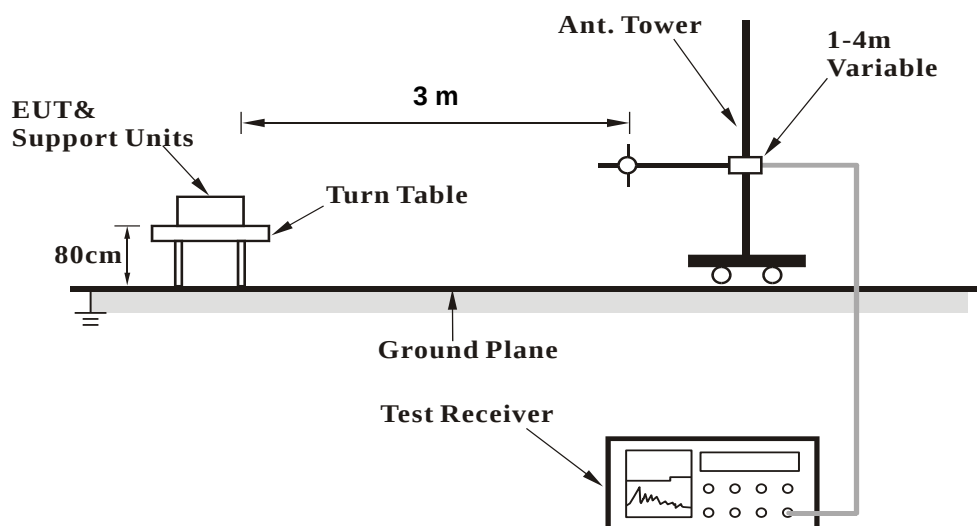


<Radiated Emission above 1 GHz>

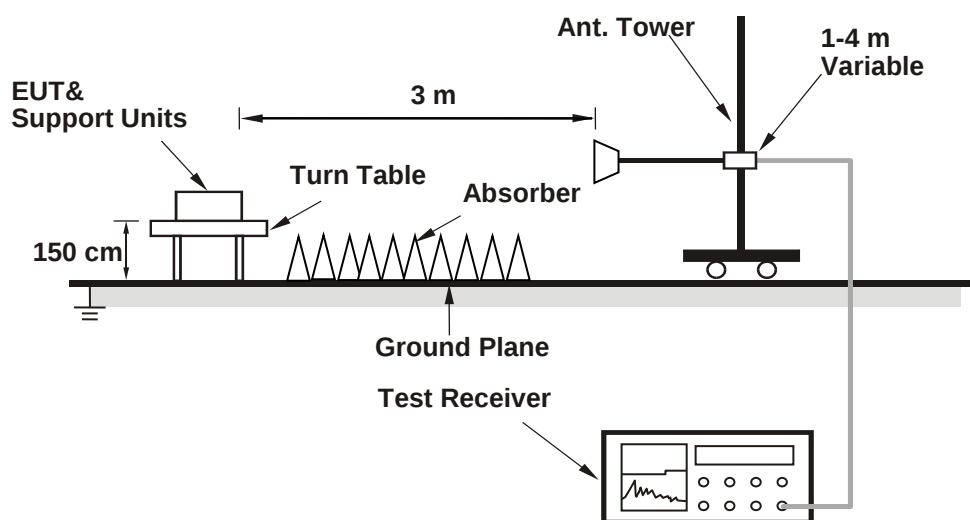

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA Band V			3GPP MPR (dB)
Channel	4132	4182	4233	
Frequency (MHz)	826.4	836.4	846.6	
RMC 12.2K	23.76	23.77	23.78	-
HSDPA Subtest-1	23.75	23.76	23.77	0
HSDPA Subtest-2	23.55	23.56	23.57	0
HSDPA Subtest-3	23.32	23.33	23.34	0.5
HSDPA Subtest-4	23.10	23.11	23.12	0.5
DC-HSDPA Subtest-1	23.69	23.70	23.71	0
DC-HSDPA Subtest-2	23.49	23.50	23.51	0
DC-HSDPA Subtest-3	23.26	23.27	23.28	0.5
DC-HSDPA Subtest-4	23.04	23.05	23.06	0.5
HSUPA Subtest-1	23.27	23.28	23.29	0
HSUPA Subtest-2	21.57	21.58	21.59	2
HSUPA Subtest-3	22.51	22.52	22.53	1
HSUPA Subtest-4	21.81	21.82	21.83	2
HSUPA Subtest-5	23.49	23.50	23.51	0

LTE Band 5															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600				Channel		20425	20525	20625	
		Frequency (MHz)		829.0	836.5	844.0				Frequency (MHz)		826.5	836.5	846.5	
10M	QPSK	1	0	23.18	23.14	23.19	0	5M	QPSK	1	0	23.17	23.06	23.18	0
		1	24	23.20	23.17	23.22	0			1	12	23.19	23.07	23.20	0
		1	49	23.07	23.09	23.10	0			1	24	23.01	23.03	23.06	0
		25	0	22.05	22.14	22.19	1			12	0	22.05	22.14	22.17	1
		25	12	22.12	22.13	22.20	1			12	6	22.12	22.12	22.18	1
		25	25	22.13	22.12	22.17	1			12	13	22.05	22.06	22.12	1
	16QAM	50	0	22.07	22.13	22.20	1			25	0	22.05	22.09	22.17	1
		1	0	22.13	22.12	22.10	1		16QAM	1	0	22.11	22.10	22.09	1
		1	24	22.16	22.07	22.17	1			1	12	22.12	22.09	22.15	1
		1	49	22.02	22.08	22.08	1			1	24	22.04	22.06	22.02	1
		25	0	21.07	21.09	21.13	2			12	0	21.02	21.05	21.08	2
		25	12	21.12	21.05	21.13	2			12	6	21.03	21.05	21.10	2
	64QAM	25	25	21.08	21.06	21.14	2			12	13	21.01	21.02	21.12	2
		50	0	21.03	21.08	21.12	2			25	0	21.03	21.04	21.17	2
		1	0	21.12	21.06	21.09	2		64QAM	1	0	21.15	21.12	21.01	2
		1	24	21.18	21.10	21.14	2			1	12	21.13	21.17	21.08	2
		1	49	21.01	21.06	21.06	2			1	24	21.06	21.11	21.02	2
		25	0	20.01	20.08	20.16	3			12	0	20.05	20.08	20.04	3
		25	12	20.08	20.11	20.15	3			12	6	20.08	20.01	20.11	3
		25	25	20.13	20.02	20.09	3			12	13	20.03	20.05	20.03	3
		50	0	20.03	20.07	20.17	3			25	0	20.02	20.04	20.11	3
3M	QPSK	1	0	23.18	23.06	23.18	0	1.4M	QPSK	1	0	23.14	23.04	23.06	0
		1	7	23.18	23.17	23.22	0			1	2	23.05	23.01	23.02	0
		1	14	23.04	23.06	23.04	0			1	5	23.03	23.01	23.04	0
		8	0	22.05	22.05	22.13	1			3	0	23.06	23.02	23.04	0
		8	3	22.09	22.12	22.12	1			3	1	23.03	23.02	23.05	0
		8	7	22.12	22.11	22.12	1			3	3	23.08	23.04	23.08	0
	16QAM	15	0	22.03	22.09	22.12	1			6	0	22.02	22.02	22.15	1
		1	0	22.08	22.06	22.11	1		16QAM	1	0	22.02	22.03	22.05	1
		1	7	22.08	22.01	22.18	1			1	2	22.07	22.05	22.04	1
		1	14	22.03	22.01	22.05	1			1	5	22.03	22.01	22.06	1
		8	0	21.01	21.01	21.09	2			3	0	22.05	22.02	22.04	1
		8	3	21.02	21.05	21.07	2			3	1	22.04	22.06	22.06	1
	64QAM	8	7	21.03	21.05	21.09	2			3	3	22.06	22.05	22.02	1
		15	0	21.03	21.02	21.10	2			6	0	21.03	21.04	21.06	2
		1	0	21.05	21.05	21.11	2		64QAM	1	0	21.01	21.02	21.03	2
		1	7	21.08	21.10	21.12	2			1	2	21.12	21.08	21.06	2
		1	14	21.04	21.03	21.05	2			1	5	21.07	21.06	21.03	2
		8	0	20.07	20.12	20.15	3			3	0	21.03	21.06	21.07	2
		8	3	20.05	20.02	20.11	3			3	1	21.06	21.05	21.02	2
		8	7	20.01	20.04	20.08	3			3	3	21.03	21.05	21.01	2
		15	0	20.03	20.01	20.09	3			6	0	20.05	20.04	20.06	3

LTE Band 26															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26865	26915	26965				Channel		26840	26915	26990	
		Frequency (MHz)		831.5	836.5	841.5				Frequency (MHz)		829.0	836.5	844.0	
15M	QPSK	1	0	23.17	23.11	23.15	0	10M	QPSK	1	0	23.03	23.07	23.05	0
		1	37	23.12	23.07	23.10	0			1	24	22.98	22.97	23.03	0
		1	74	23.23	23.18	23.21	0			1	49	23.13	23.18	23.18	0
		36	0	22.05	22.05	22.03	1			25	0	21.91	21.94	22.04	1
		36	19	22.06	21.97	22.04	1			25	12	21.98	21.88	22.02	1
		36	39	22.10	22.07	22.09	1			25	25	22.04	22.02	22.08	1
		75	0	22.11	22.03	22.09	1			50	0	22.08	22.01	22.03	1
		75	0	22.11	22.03	22.09	1			50	0	22.08	22.01	22.03	1
	16QAM	1	0	22.07	21.98	22.06	1		16QAM	1	0	21.92	21.89	22.05	1
		1	37	22.10	22.10	22.08	1			1	24	22.01	22.08	22.02	1
		1	74	22.14	22.08	22.13	1			1	49	22.08	22.03	22.13	1
		36	0	21.05	21.04	21.01	2			25	0	20.95	20.95	21.03	2
		36	19	21.06	20.96	21.01	2			25	12	20.98	20.94	21.03	2
		36	39	21.04	21.01	21.08	2			25	25	21.03	20.97	21.06	2
		75	0	21.03	20.98	21.02	2			50	0	20.97	20.91	21.07	2
		75	0	21.03	20.98	21.02	2			50	0	20.97	20.91	21.07	2
	64QAM	1	0	21.09	21.03	21.06	2		64QAM	1	0	21.08	20.92	21.13	2
		1	37	21.08	21.05	21.07	2			1	24	21.07	21.05	21.03	2
		1	74	21.16	21.11	21.19	2			1	49	21.06	21.02	21.11	2
		36	0	20.04	19.99	20.03	3			25	0	19.99	19.85	21.02	3
		36	19	21.03	20.94	21.01	3			25	12	21.01	20.85	21.03	3
		36	39	20.01	19.94	20.06	3			25	25	19.87	19.94	21.04	3
		75	0	20.06	20.02	20.08	3			50	0	20.00	19.91	20.03	3
		75	0	20.06	20.02	20.08	3			50	0	20.00	19.91	20.03	3
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26815	26915	27015				Channel		26805	26915	27025	
		Frequency (MHz)		826.5	836.5	846.5				Frequency (MHz)		825.5	836.5	847.5	
5M	QPSK	1	0	22.99	23.00	23.04	0	3M	QPSK	1	0	22.98	22.94	23.03	1
		1	12	22.93	22.93	23.03	0			1	7	22.85	22.93	23.04	1
		1	24	23.08	23.09	23.02	0			1	14	23.13	23.18	23.05	1
		12	0	21.77	21.80	22.07	1			8	0	21.84	22.02	22.04	3
		12	6	21.96	21.74	22.07	1			8	3	21.75	21.92	22.02	3
		12	13	21.96	22.02	22.04	1			8	7	21.95	21.99	22.04	3
		25	0	22.00	22.00	22.04	1			15	0	21.90	21.91	22.01	6
		25	0	22.00	22.00	22.04	1			15	0	21.90	21.91	22.01	6
	16QAM	1	0	21.80	21.86	22.05	1		16QAM	1	0	21.82	21.96	22.06	1
		1	12	21.96	21.94	22.06	1			1	7	22.07	21.90	22.04	1
		1	24	21.99	21.99	22.05	1			1	14	21.90	22.01	22.01	1
		12	0	20.83	20.86	21.06	2			8	0	20.93	20.92	21.06	2
		12	6	20.87	20.79	21.07	2			8	3	20.85	20.95	21.04	2
		12	13	20.99	20.86	21.02	2			8	7	20.86	21.03	21.01	2
		25	0	20.92	20.88	21.05	2			15	0	20.76	21.02	21.05	2
		25	0	20.92	20.88	21.05	2			15	0	20.76	21.02	21.05	2
	64QAM	1	0	20.93	20.86	21.06	2		64QAM	1	0	20.89	20.99	21.01	2
		1	12	21.04	21.02	21.06	2			1	7	20.93	20.92	21.04	2
		1	24	21.06	21.02	21.10	2			1	14	20.94	20.99	21.04	2
		12	0	19.98	19.71	20.06	3			8	0	19.84	20.90	21.03	3
		12	6	21.01	20.83	20.04	3			8	3	20.83	20.91	21.08	3
		12	13	19.78	19.86	20.05	3			8	7	19.85	20.90	21.02	3
		25	0	19.86	19.76	20.02	3			15	0	19.91	19.96	21.07	3
		25	0	19.86	19.76	20.02	3			15	0	19.91	19.96	21.07	3
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26797	26915	27033				Channel		26797	26915	27033	
		Frequency (MHz)		824.7	836.5	848.3				Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	22.99	23.05	23.03	0								
		1	2	22.95	23.02	23.04	0								
		1	5	23.17	23.09	23.03	0								
		3	0	22.82	22.96	23.02	0								
		3	1	22.75	22.89	23.02	0								
		3	3	22.90	23.08	23.06	0								
		6	0	21.98	21.98	22.02	1								
		6	0	21.98	21.98	22.02	1								
	16QAM	1	0	21.83	22.03	22.07	1								
		1	2	22.06	21.94	22.05	1								
		1	5	21.88	22.08	22.06	1								
		3	0	21.80	21.94	22.04	1								
		3	1	21.91	21.94	22.04	1								
		3	3	21.86	21.92	22.05	1								
		6	0	20.87	21.00	21.05	2								
		6	0	20.87	21.00	21.05	2								
	64QAM	1	0	20.86	21.05	21.02	2								
		1	2	20.90	20.98	21.11	2								
		1	5	20.97	20.96	21.05	2								
		3	0	20.78	21.93	21.10	2								
		3	1	21.83	21.95	21.03	2								
		3	3	20.80	21.95	21.08	2								
		6	0	19.78	19.99	21.09	3								
		6	0	19.78	19.99	21.09	3								

ERP Power (dBm)

WCDMA							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	4132	826.4	-12.68	32.62	17.79	60.12	H
	4182	836.4	-15.51	32.52	14.86	30.62	
	4233	846.6	-15.57	32.65	14.93	31.12	
	4132	826.4	-21.84	32.76	8.77	7.53	V
	4182	836.4	-21.35	32.39	8.89	7.74	
	4233	846.6	-21.30	32.54	9.09	8.11	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
NB	20407	824.7	-22.42	32.62	8.05	6.38	H
	20525	836.5	-22.62	32.52	7.75	5.96	
	20643	848.3	-22.49	32.65	8.01	6.32	
	20407	824.7	-16.89	32.76	13.72	23.55	V
	20525	836.5	-16.89	32.39	13.35	21.63	
	20643	848.3	-16.80	32.54	13.59	22.86	
Channel Bandwidth: 1.4 MHz / 16QAM							
NB	20407	824.7	-23.15	32.62	7.32	5.40	H
	20525	836.5	-23.69	32.52	6.68	4.66	
	20643	848.3	-23.75	32.65	6.75	4.73	
	20407	824.7	-18.00	32.76	12.61	18.24	V
	20525	836.5	-17.93	32.39	12.31	17.02	
	20643	848.3	-18.03	32.54	12.36	17.22	
Channel Bandwidth: 1.4 MHz / 64QAM							
NB	20407	824.7	-24.35	32.62	6.12	4.09	H
	20525	836.5	-24.95	32.52	5.42	3.48	
	20643	848.3	-24.64	32.65	5.86	3.85	
	20407	824.7	-19.13	32.76	11.48	14.06	V
	20525	836.5	-18.85	32.39	11.39	13.77	
	20643	848.3	-18.99	32.54	11.40	13.80	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
NB	20415	825.5	-22.18	32.62	8.29	6.75	H
	20525	836.5	-22.29	32.52	8.08	6.43	
	20635	847.5	-22.28	32.65	8.22	6.64	
	20415	825.5	-16.65	32.76	13.96	24.89	V
	20525	836.5	-16.58	32.39	13.66	23.23	
	20635	847.5	-16.52	32.54	13.87	24.38	
Channel Bandwidth: 3 MHz / 16QAM							
NB	20415	825.5	-22.91	32.62	7.56	5.70	H
	20525	836.5	-23.48	32.52	6.89	4.89	
	20635	847.5	-23.42	32.65	7.08	5.11	
	20415	825.5	-17.75	32.76	12.86	19.32	V
	20525	836.5	-17.60	32.39	12.64	18.37	
	20635	847.5	-17.72	32.54	12.67	18.49	
Channel Bandwidth: 3 MHz / 64QAM							
NB	20415	825.5	-24.12	32.62	6.35	4.32	H
	20525	836.5	-24.64	32.52	5.73	3.74	
	20635	847.5	-24.34	32.65	6.16	4.13	
	20415	825.5	-18.89	32.76	11.72	14.86	V
	20525	836.5	-18.58	32.39	11.66	14.66	
	20635	847.5	-18.71	32.54	11.68	14.72	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
NB	20425	826.5	-21.87	32.62	8.60	7.24	H
	20525	836.5	-22.01	32.52	8.36	6.85	
	20625	846.5	-21.96	32.65	8.54	7.14	
	20425	826.5	-16.42	32.76	14.19	26.24	V
	20525	836.5	-16.29	32.39	13.95	24.83	
	20625	846.5	-16.29	32.54	14.10	25.70	
Channel Bandwidth: 5 MHz / 16QAM							
NB	20425	826.5	-22.71	32.62	7.76	5.97	H
	20525	836.5	-23.16	32.52	7.21	5.26	
	20625	846.5	-23.19	32.65	7.31	5.38	
	20425	826.5	-17.44	32.76	13.17	20.75	V
	20525	836.5	-17.29	32.39	12.95	19.72	
	20625	846.5	-17.39	32.54	13.00	19.95	
Channel Bandwidth: 5 MHz / 64QAM							
NB	20425	826.5	-23.82	32.62	6.65	4.62	H
	20525	836.5	-24.34	32.52	6.03	4.01	
	20625	846.5	-24.13	32.65	6.37	4.34	
	20425	826.5	-18.64	32.76	11.97	15.74	V
	20525	836.5	-18.33	32.39	11.91	15.52	
	20625	846.5	-18.46	32.54	11.93	15.60	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 5							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
NB	20450	829.0	-21.55	32.62	8.92	7.80	H
	20525	836.5	-21.68	32.52	8.69	7.40	
	20600	844.0	-21.67	32.65	8.83	7.64	
	20450	829.0	-16.19	32.76	14.42	27.67	V
	20525	836.5	-15.99	32.39	14.25	26.61	
	20600	844.0	-16.02	32.54	14.37	27.35	
Channel Bandwidth: 10 MHz / 16QAM							
NB	20425	826.5	-22.49	32.62	7.98	6.28	H
	20525	836.5	-22.95	32.52	7.42	5.52	
	20625	846.5	-22.90	32.65	7.60	5.75	
	20425	826.5	-17.24	32.76	13.37	21.73	V
	20525	836.5	-17.01	32.39	13.23	21.04	
	20625	846.5	-17.08	32.54	13.31	21.43	
Channel Bandwidth: 10 MHz / 64QAM							
NB	20450	829.0	-23.58	32.62	6.89	4.89	H
	20525	836.5	-24.10	32.52	6.27	4.24	
	20600	844.0	-23.91	32.65	6.59	4.56	
	20450	829.0	-18.37	32.76	12.24	16.75	V
	20525	836.5	-18.05	32.39	12.19	16.56	
	20600	844.0	-18.17	32.54	12.22	16.67	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
NB	26797	824.7	-21.49	32.62	8.98	7.91	H
	26915	836.5	-21.00	32.52	9.37	8.65	
	27033	848.3	-21.23	32.65	9.27	8.45	
	26797	824.7	-17.44	32.76	13.17	20.75	V
	26915	836.5	-16.88	32.39	13.36	21.68	
	27033	848.3	-17.06	32.54	13.33	21.53	
Channel Bandwidth: 1.4 MHz / 16QAM							
NB	26797	824.7	-22.69	32.62	7.78	6.00	H
	26915	836.5	-22.19	32.52	8.18	6.58	
	27033	848.3	-22.58	32.65	7.92	6.19	
	26797	824.7	-18.73	32.76	11.88	15.42	V
	26915	836.5	-18.01	32.39	12.23	16.71	
	27033	848.3	-18.49	32.54	11.90	15.49	
Channel Bandwidth: 1.4 MHz / 64QAM							
NB	26797	824.7	-22.84	32.62	7.63	5.79	H
	26915	836.5	-22.32	32.52	8.05	6.38	
	27033	848.3	-22.62	32.65	7.88	6.14	
	26797	824.7	-19.65	32.76	10.96	12.47	V
	26915	836.5	-19.14	32.39	11.10	12.88	
	27033	848.3	-19.30	32.54	11.09	12.85	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
NB	26805	825.5	-21.20	32.62	9.27	8.45	H
	26915	836.5	-20.78	32.52	9.59	9.10	
	27025	847.5	-21.03	32.65	9.47	8.85	
	26805	825.5	-17.19	32.76	13.42	21.98	V
	26915	836.5	-16.59	32.39	13.65	23.17	
	27025	847.5	-16.78	32.54	13.61	22.96	
Channel Bandwidth: 3 MHz / 16QAM							
NB	26805	825.5	-22.38	32.62	8.09	6.44	H
	26915	836.5	-21.89	32.52	8.48	7.05	
	27025	847.5	-22.31	32.65	8.19	6.59	
	26805	825.5	-18.42	32.76	12.19	16.56	V
	26915	836.5	-17.77	32.39	12.47	17.66	
	27025	847.5	-18.18	32.54	12.21	16.63	
Channel Bandwidth: 3 MHz / 64QAM							
NB	26805	825.5	-30.47	32.62	7.92	6.19	H
	26915	836.5	-30.37	32.52	8.24	6.67	
	27025	847.5	-30.50	32.65	8.01	6.32	
	26805	825.5	-19.45	32.76	11.16	13.06	V
	26915	836.5	-18.85	32.39	11.39	13.77	
	27025	847.5	-19.06	32.54	11.33	13.58	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
NB	26815	826.5	-20.89	32.62	9.58	9.08	H
	26915	836.5	-20.56	32.52	9.81	9.57	
	27015	846.5	-20.77	32.65	9.73	9.40	
	26815	826.5	-16.93	32.76	13.68	23.33	V
	26919	836.5	-16.36	32.39	13.88	24.43	
	27015	846.5	-16.58	32.54	13.81	24.04	
Channel Bandwidth: 5 MHz / 16QAM							
NB	26815	826.5	-22.14	32.62	8.33	6.81	H
	26915	836.5	-21.69	32.52	8.68	7.38	
	27015	846.5	-21.98	32.65	8.52	7.11	
	26815	826.5	-18.13	32.76	12.48	17.70	V
	26919	836.5	-17.47	32.39	12.77	18.92	
	27015	846.5	-17.89	32.54	12.50	17.78	
Channel Bandwidth: 5 MHz / 64QAM							
NB	26815	826.5	-30.47	32.62	8.24	6.67	H
	26915	836.5	-30.37	32.52	8.53	7.13	
	27015	846.5	-30.50	32.65	8.41	6.93	
	26815	826.5	-19.19	32.76	11.42	13.87	V
	26919	836.5	-18.65	32.39	11.59	14.42	
	27015	846.5	-18.83	32.54	11.56	14.32	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
NB	26840	829.0	-20.64	32.62	9.83	9.62	H
	26915	836.5	-20.34	32.52	10.03	10.07	
	26990	844.0	-20.54	32.65	9.96	9.91	
	26840	829.0	-16.70	32.76	13.91	24.60	V
	26919	836.5	-16.11	32.39	14.13	25.88	
	26990	844.0	-16.34	32.54	14.05	25.41	
Channel Bandwidth: 10 MHz / 16QAM							
NB	26840	829.0	-21.90	32.62	8.57	7.19	H
	26915	836.5	-21.48	32.52	8.89	7.74	
	26990	844.0	-21.74	32.65	8.76	7.52	
	26840	829.0	-17.85	32.76	12.76	18.88	V
	26919	836.5	-17.18	32.39	13.06	20.23	
	26990	844.0	-17.56	32.54	12.83	19.19	
Channel Bandwidth: 10 MHz / 64QAM							
NB	26840	829.0	-30.47	32.62	8.43	6.97	H
	26915	836.5	-30.37	32.52	8.64	7.31	
	26990	844.0	-30.50	32.65	8.53	7.13	
	26840	829.0	-18.94	32.76	11.67	14.69	V
	26919	836.5	-18.39	32.39	11.85	15.31	
	26990	844.0	-18.61	32.54	11.78	15.07	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
NB	26865	831.5	-20.36	32.62	10.11	10.26	H
	26915	836.5	-20.14	32.52	10.23	10.54	
	26965	841.5	-20.33	32.65	10.17	10.40	
	26865	831.5	-16.42	32.76	14.19	26.24	V
	26915	836.5	-15.87	32.39	14.37	27.35	
	26965	841.5	-16.11	32.54	14.28	26.79	
Channel Bandwidth: 15 MHz / 16QAM							
NB	26865	831.5	-21.61	32.62	8.86	7.69	H
	26915	836.5	-21.24	32.52	9.13	8.18	
	26965	841.5	-21.50	32.65	9.00	7.94	
	26865	831.5	-17.59	32.76	13.02	20.04	V
	26915	836.5	-16.94	32.39	13.30	21.38	
	26965	841.5	-17.24	32.54	13.15	20.65	
Channel Bandwidth: 15 MHz / 64QAM							
NB	26865	831.5	-30.47	32.62	8.74	7.48	H
	26915	836.5	-30.37	32.52	9.02	7.98	
	26965	841.5	-30.50	32.65	8.88	7.73	
	26865	831.5	-18.70	32.76	11.91	15.52	V
	26915	836.5	-18.09	32.39	12.15	16.41	
	26965	841.5	-18.37	32.54	12.02	15.92	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A




4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

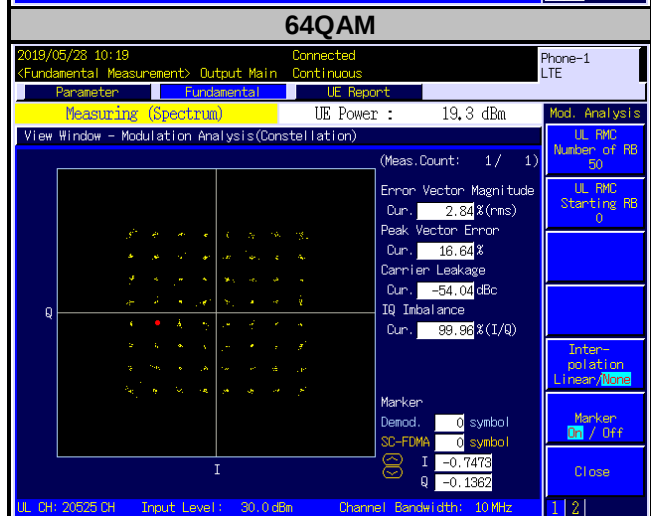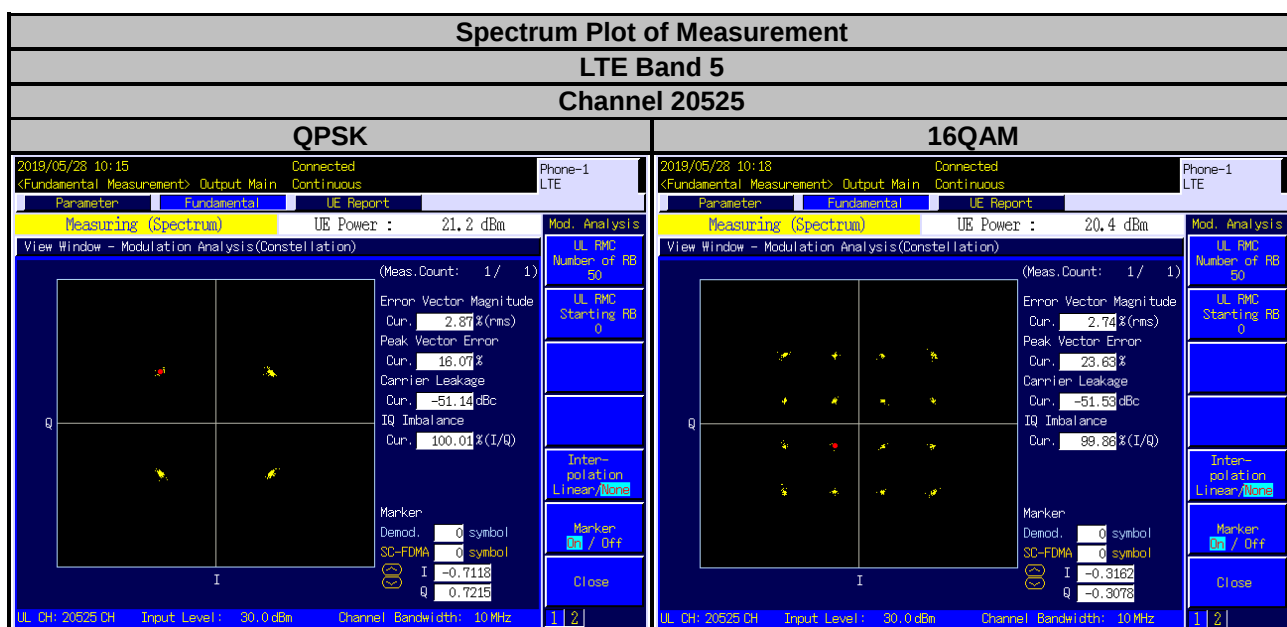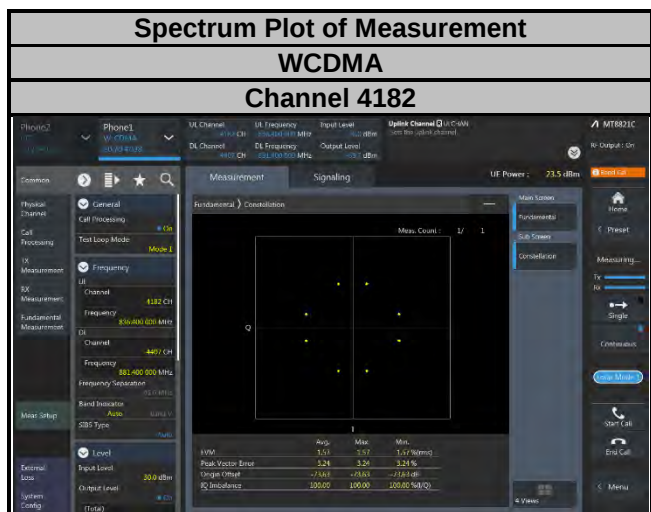



Spectrum Plot of Measurement

LTE Band 26


Channel 26915

QPSK

16QAM

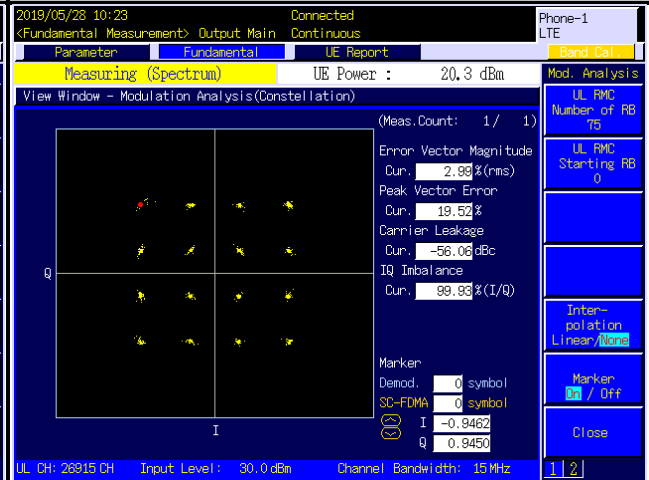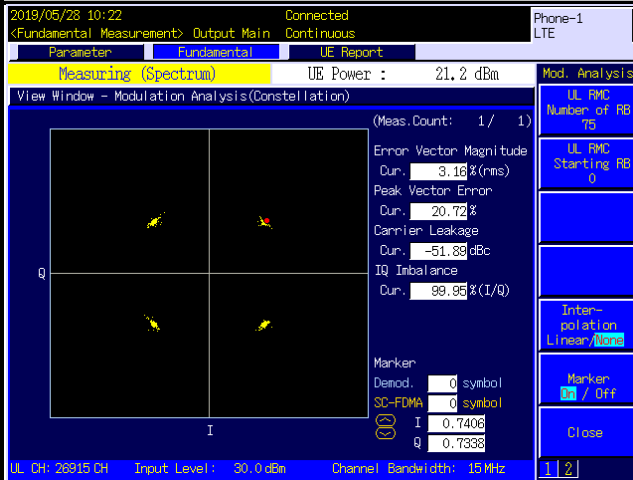

64QAM

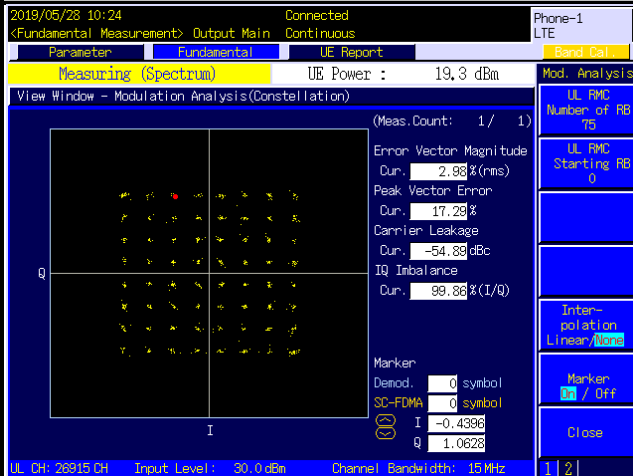

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

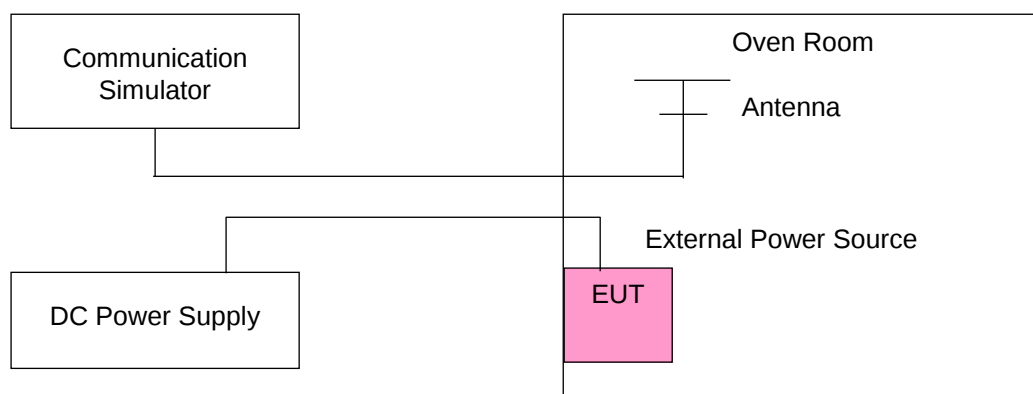

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	WCDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
120	826.400003	0.004	846.600001	0.001	2.5
102	826.400001	0.001	846.600002	0.002	2.5
138	826.400002	0.003	846.600003	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	WCDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	826.400004	0.005	846.600003	0.004	2.5
-20	826.400002	0.002	846.600003	0.003	2.5
-10	826.400002	0.003	846.600003	0.004	2.5
0	826.400003	0.004	846.600004	0.005	2.5
10	826.400001	0.002	846.600002	0.003	2.5
20	826.399997	-0.004	846.599996	-0.004	2.5
30	826.399997	-0.004	846.599998	-0.003	2.5
40	826.399998	-0.002	846.599997	-0.004	2.5
50	826.399997	-0.003	846.599997	-0.003	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
120	824.700001	0.002	848.300002	0.003	2.5
102	824.700003	0.004	848.300003	0.004	2.5
138	824.700003	0.004	848.300002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	824.700004	0.005	848.300001	0.002	2.5
-20	824.700003	0.003	848.300001	0.002	2.5
-10	824.700003	0.004	848.300003	0.003	2.5
0	824.700004	0.004	848.300002	0.002	2.5
10	824.700004	0.005	848.300003	0.004	2.5
20	824.699998	-0.003	848.299998	-0.002	2.5
30	824.699999	-0.001	848.299997	-0.003	2.5
40	824.699998	-0.003	848.299997	-0.004	2.5
50	824.699998	-0.003	848.299998	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
120	825.500002	0.002	847.500002	0.003	2.5
102	825.500002	0.003	847.500003	0.004	2.5
138	825.500004	0.004	847.500002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	825.500001	0.001	847.500003	0.003	2.5
-20	825.500003	0.004	847.500003	0.003	2.5
-10	825.500003	0.003	847.500003	0.003	2.5
0	825.500003	0.004	847.500002	0.002	2.5
10	825.500001	0.002	847.500002	0.003	2.5
20	825.499999	-0.002	847.499997	-0.003	2.5
30	825.499997	-0.004	847.499998	-0.002	2.5
40	825.499996	-0.004	847.499998	-0.003	2.5
50	825.499997	-0.004	847.499997	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
120	826.500003	0.004	846.500003	0.004	2.5
102	826.500003	0.003	846.500003	0.004	2.5
138	826.500004	0.005	846.500003	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	826.500002	0.002	846.500003	0.003	2.5
-20	826.500003	0.003	846.500003	0.003	2.5
-10	826.500004	0.004	846.500002	0.002	2.5
0	826.500003	0.004	846.500003	0.003	2.5
10	826.500004	0.005	846.500002	0.002	2.5
20	826.499997	-0.004	846.499996	-0.005	2.5
30	826.499997	-0.004	846.499997	-0.003	2.5
40	826.499998	-0.003	846.499997	-0.004	2.5
50	826.499997	-0.004	846.499996	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
120	829.000003	0.004	844.000002	0.003	2.5
102	829.000003	0.003	844.000003	0.003	2.5
138	829.000003	0.003	844.000004	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 5				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	829.000002	0.003	844.000004	0.004	2.5
-20	829.000003	0.004	844.000004	0.005	2.5
-10	829.000003	0.004	844.000001	0.002	2.5
0	829.000002	0.002	844.000003	0.003	2.5
10	829.000003	0.004	844.000002	0.003	2.5
20	828.999999	-0.001	843.999998	-0.002	2.5
30	828.999996	-0.004	843.999997	-0.004	2.5
40	828.999997	-0.004	843.999999	-0.001	2.5
50	828.999998	-0.003	843.999998	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
120	824.700002	0.003	848.300000	0.002	2.5
102	824.700002	0.003	848.300000	0.002	2.5
138	824.700002	0.002	848.300000	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	824.700003	0.003	848.300000	0.002	2.5
-20	824.700002	0.003	848.300000	0.004	2.5
-10	824.700003	0.004	848.300000	0.004	2.5
0	824.700002	0.002	848.300000	0.003	2.5
10	824.700002	0.003	848.300000	0.004	2.5
20	824.699997	-0.004	848.300000	-0.004	2.5
30	824.699998	-0.003	848.300000	-0.003	2.5
40	824.699997	-0.004	848.300000	-0.004	2.5
50	824.699998	-0.003	848.300000	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
120	825.500001	0.001	847.500000	0.002	2.5
102	825.500003	0.003	847.500000	0.004	2.5
138	825.500002	0.002	847.500000	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	825.500002	0.002	847.500000	0.003	2.5
-20	825.500004	0.005	847.500000	0.002	2.5
-10	825.500001	0.002	847.500000	0.003	2.5
0	825.500002	0.003	847.500000	0.002	2.5
10	825.500001	0.002	847.500000	0.005	2.5
20	825.499996	-0.004	847.500000	-0.003	2.5
30	825.499997	-0.004	847.500000	-0.004	2.5
40	825.499997	-0.003	847.500000	-0.003	2.5
50	825.499996	-0.005	847.500000	-0.003	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
120	826.500002	0.002	846.500004	0.004	2.5
102	826.500004	0.004	846.500004	0.004	2.5
138	826.500001	0.001	846.500003	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	826.500002	0.002	846.500001	0.001	2.5
-20	826.500002	0.002	846.500001	0.002	2.5
-10	826.500001	0.002	846.500003	0.004	2.5
0	826.500002	0.002	846.500002	0.003	2.5
10	826.500002	0.002	846.500002	0.002	2.5
20	826.499999	-0.001	846.499997	-0.004	2.5
30	826.499999	-0.002	846.499999	-0.002	2.5
40	826.499999	-0.001	846.499998	-0.002	2.5
50	826.499997	-0.003	846.499996	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
120	829.000002	0.002	844.000003	0.004	2.5
102	829.000002	0.002	844.000002	0.003	2.5
138	829.000002	0.003	844.000002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	829.000003	0.004	844.000002	0.002	2.5
-20	829.000003	0.004	844.000002	0.002	2.5
-10	829.000002	0.002	844.000003	0.004	2.5
0	829.000004	0.005	844.000001	0.002	2.5
10	829.000004	0.005	844.000003	0.003	2.5
20	828.999998	-0.002	843.999996	-0.005	2.5
30	828.999997	-0.004	843.999997	-0.004	2.5
40	828.999997	-0.003	843.999997	-0.004	2.5
50	828.999997	-0.004	843.999997	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
120	831.500002	0.002	841.500003	0.003	2.5
102	831.500004	0.005	841.500002	0.002	2.5
138	831.500001	0.001	841.500002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 102 Vac to 138 Vac.

Frequency Error vs. Temperature


Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	831.500001	0.002	841.500004	0.004	2.5
-20	831.500002	0.003	841.500003	0.003	2.5
-10	831.500003	0.004	841.500002	0.003	2.5
0	831.500002	0.002	841.500003	0.004	2.5
10	831.500003	0.004	841.500001	0.001	2.5
20	831.499996	-0.005	841.499997	-0.004	2.5
30	831.499999	-0.002	841.499997	-0.004	2.5
40	831.499998	-0.002	841.499997	-0.003	2.5
50	831.499997	-0.004	841.499999	-0.002	2.5

4.4 Occupied Bandwidth Measurement

4.4.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.2 Test Setup

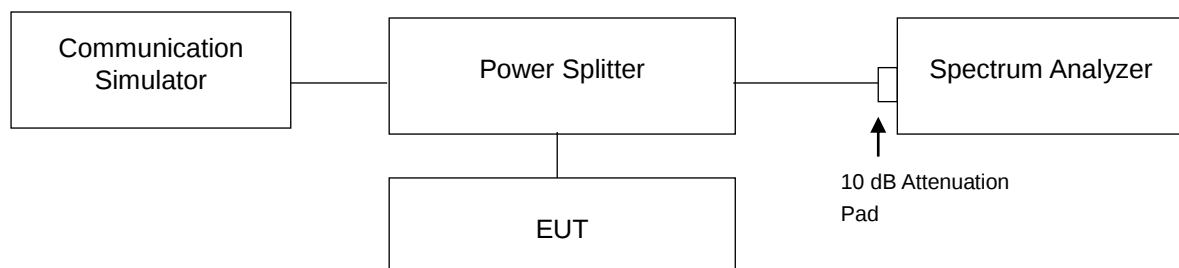


4.4.3 Test Result


WCDMA			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
4132	826.4	4.090	4.660
4182	836.4	4.081	4.650
4233	846.6	4.104	4.671

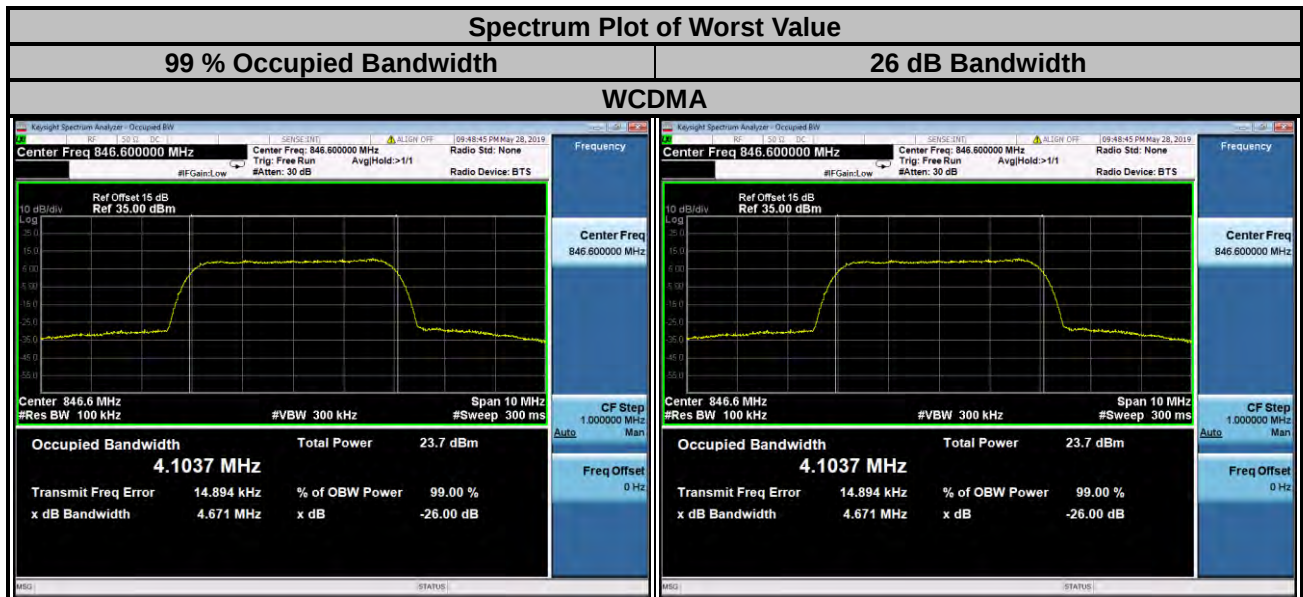

LTE Band 5							
Channel Bandwidth: 1.4 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20407	824.7	1.091	1.093	1.091	1.242	1.235	1.248
20525	836.5	1.091	1.093	1.093	1.245	1.244	1.243
20643	848.3	1.089	1.092	1.091	1.240	1.245	1.247
Channel Bandwidth: 3 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20415	825.5	2.703	2.699	2.702	2.966	2.974	2.963
20525	836.5	2.702	2.701	2.703	2.969	2.965	2.970
20635	847.5	2.702	2.701	2.703	2.958	2.964	2.970

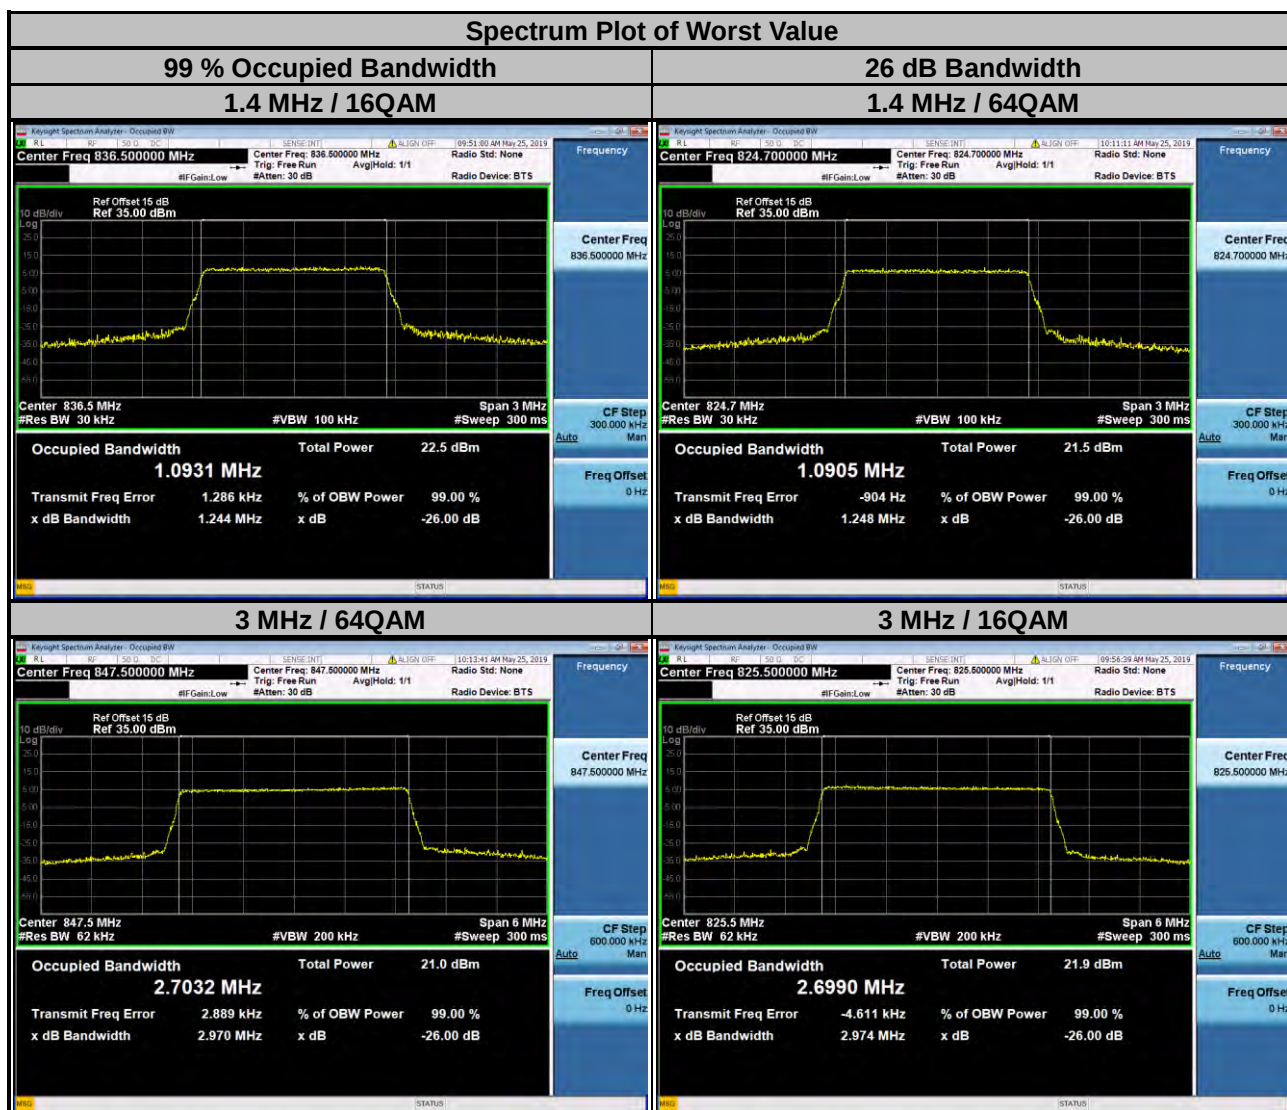


LTE Band 5							
Channel Bandwidth: 5 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20425	826.5	4.496	4.501	4.498	4.828	4.806	4.847
20525	836.5	4.493	4.496	4.495	4.825	4.845	4.839
20625	846.5	4.502	4.502	4.505	4.834	4.847	4.873
Channel Bandwidth: 10 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20450	829.0	9.005	8.999	9.004	9.817	9.816	9.901
20525	836.5	8.970	8.965	8.972	9.718	9.702	9.828
20600	844.0	9.017	9.017	9.020	9.924	9.966	9.951

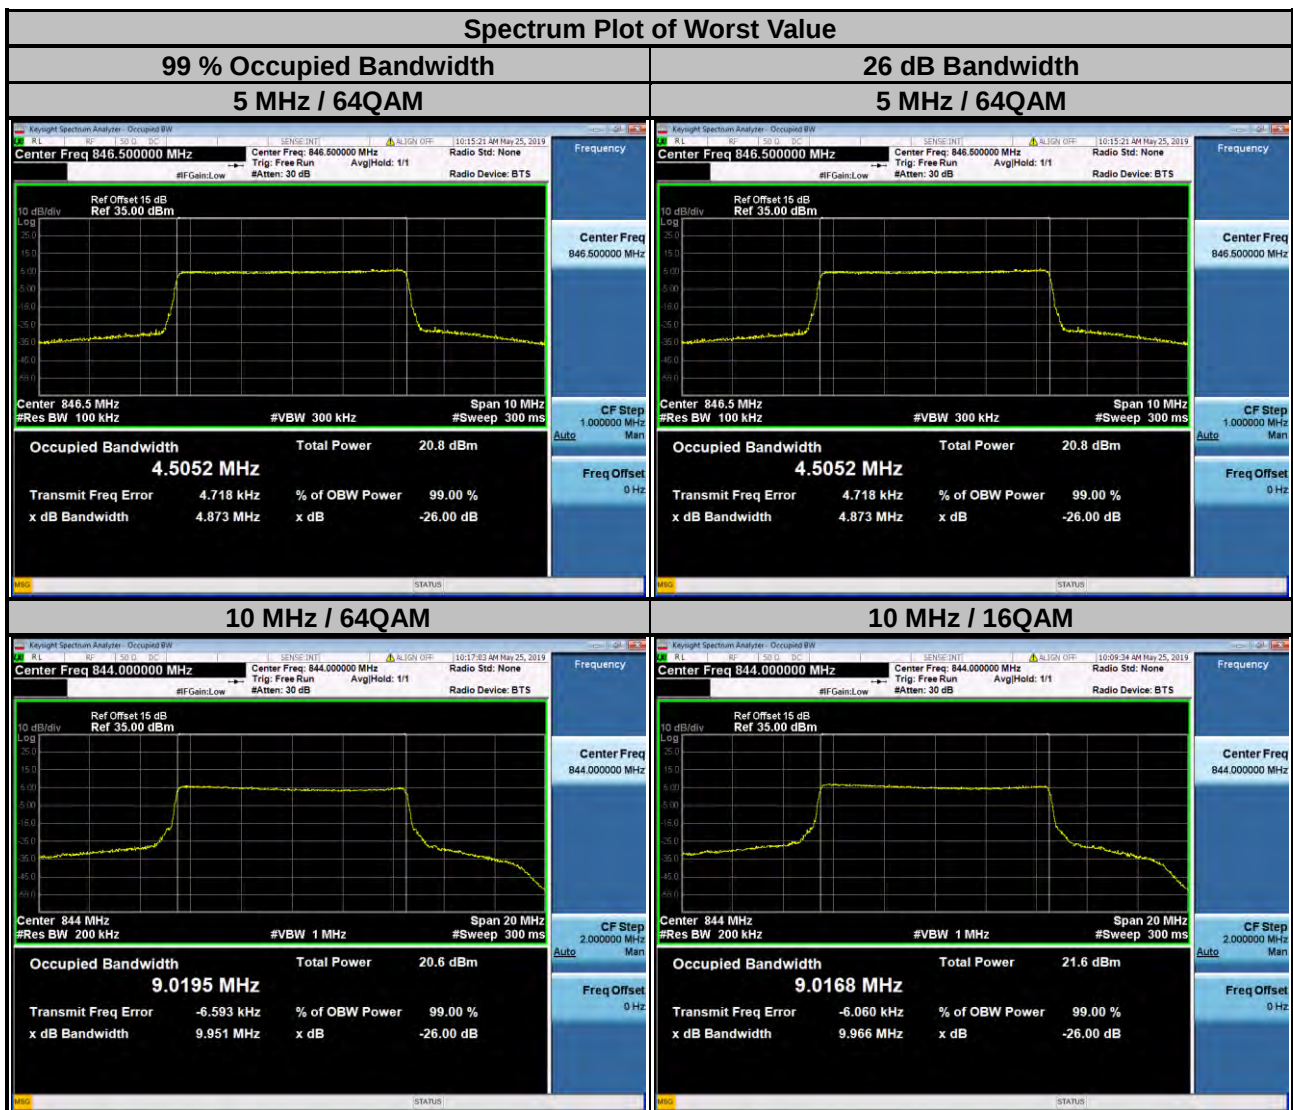


LTE Band 26							
Channel Bandwidth: 1.4 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26797	824.7	1.090	1.092	1.092	1.248	1.244	1.248
26915	836.5	1.091	1.092	1.094	1.242	1.244	1.249
27033	848.3	1.091	1.092	1.092	1.241	1.246	1.251
Channel Bandwidth: 3 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26805	825.5	2.705	2.700	2.701	2.965	2.967	2.964
26915	836.5	2.702	2.698	2.705	2.970	2.971	2.969
27025	847.5	2.707	2.706	2.707	2.955	2.964	2.961



LTE Band 26							
Channel Bandwidth: 5 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26815	826.5	4.497	4.495	4.497	4.830	4.831	4.841
26915	836.5	4.495	4.491	4.493	4.835	4.811	4.838
27015	846.5	4.503	4.504	4.506	4.839	4.830	4.864
Channel Bandwidth: 10 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26840	829.0	9.006	9.004	9.004	9.895	9.892	9.908
26915	836.5	8.972	8.969	8.971	9.748	9.722	9.687
26990	844.0	9.021	9.015	9.019	9.855	9.973	9.895

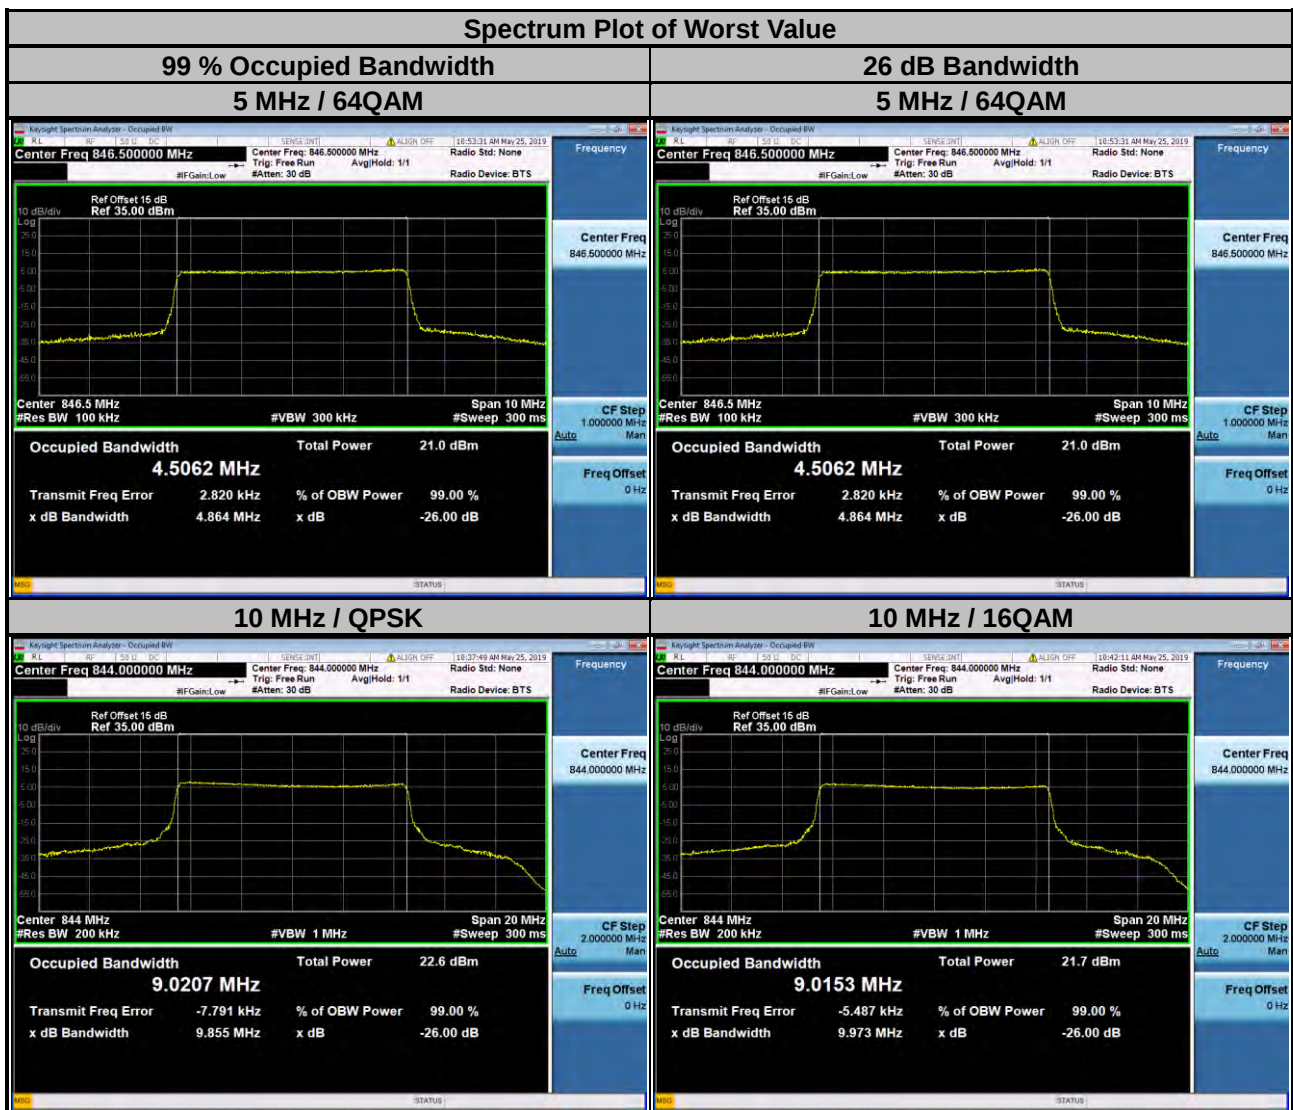

LTE Band 26							
Channel Bandwidth: 15 MHz							
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
26865	831.5	13.516	13.519	13.515	14.420	14.450	14.390
26915	836.5	13.426	13.416	13.428	14.240	14.250	14.260
26965	841.5	13.468	13.470	13.466	14.370	14.290	14.310

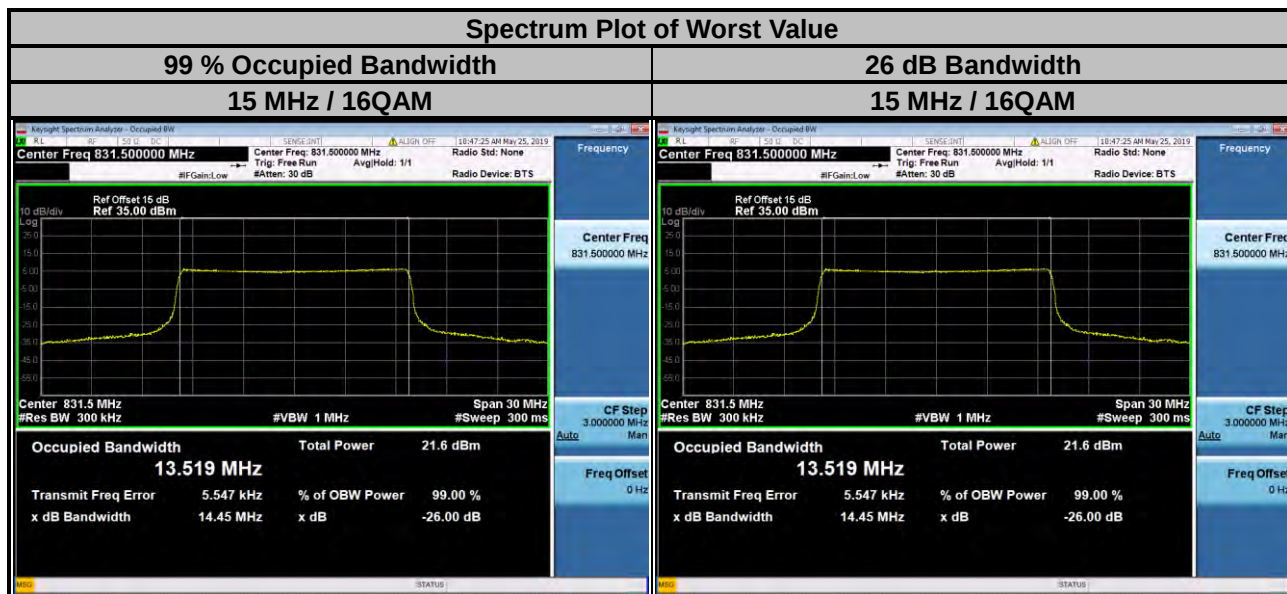


4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4.5.2 Test Setup

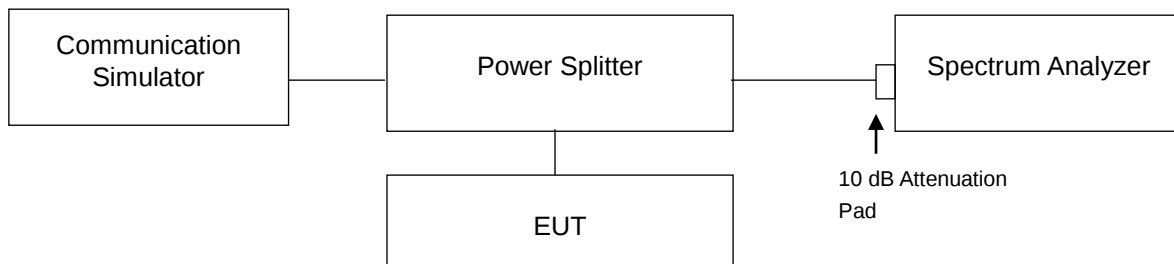



4.5.3 Test Procedures

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 47 kHz and VB of the spectrum is 150 kHz (WCDMA).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 15 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 62 kHz and VB of the spectrum is 200 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 10 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 150 kHz and VB of the spectrum is 470 kHz (LTE Bandwidth 15 MHz).
- Record the max trace plot into the test report.

4.5.4 Test Results

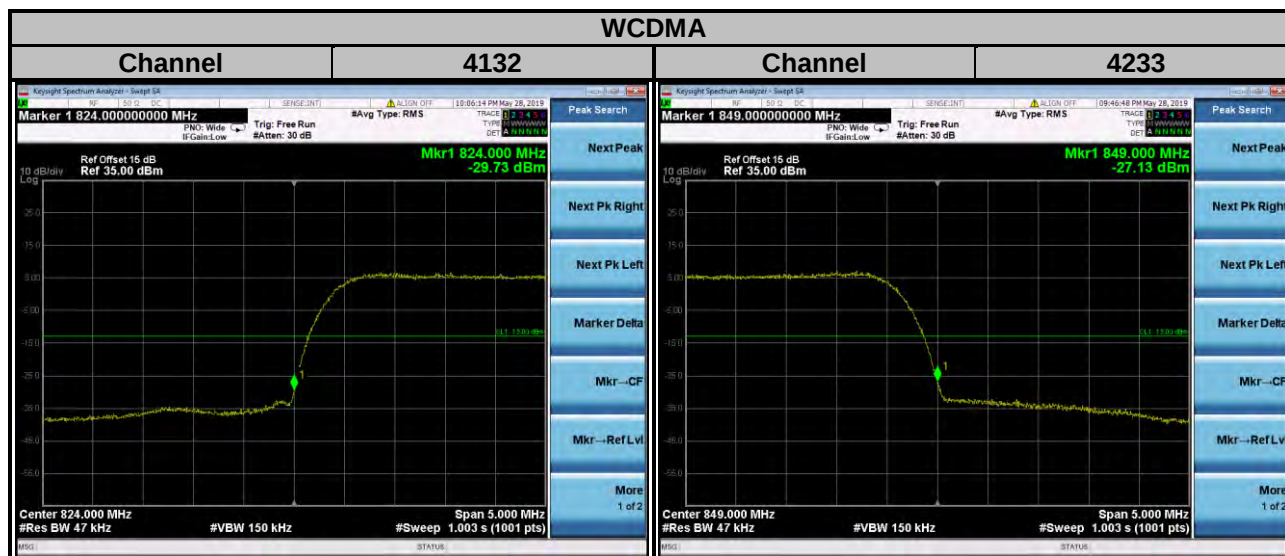


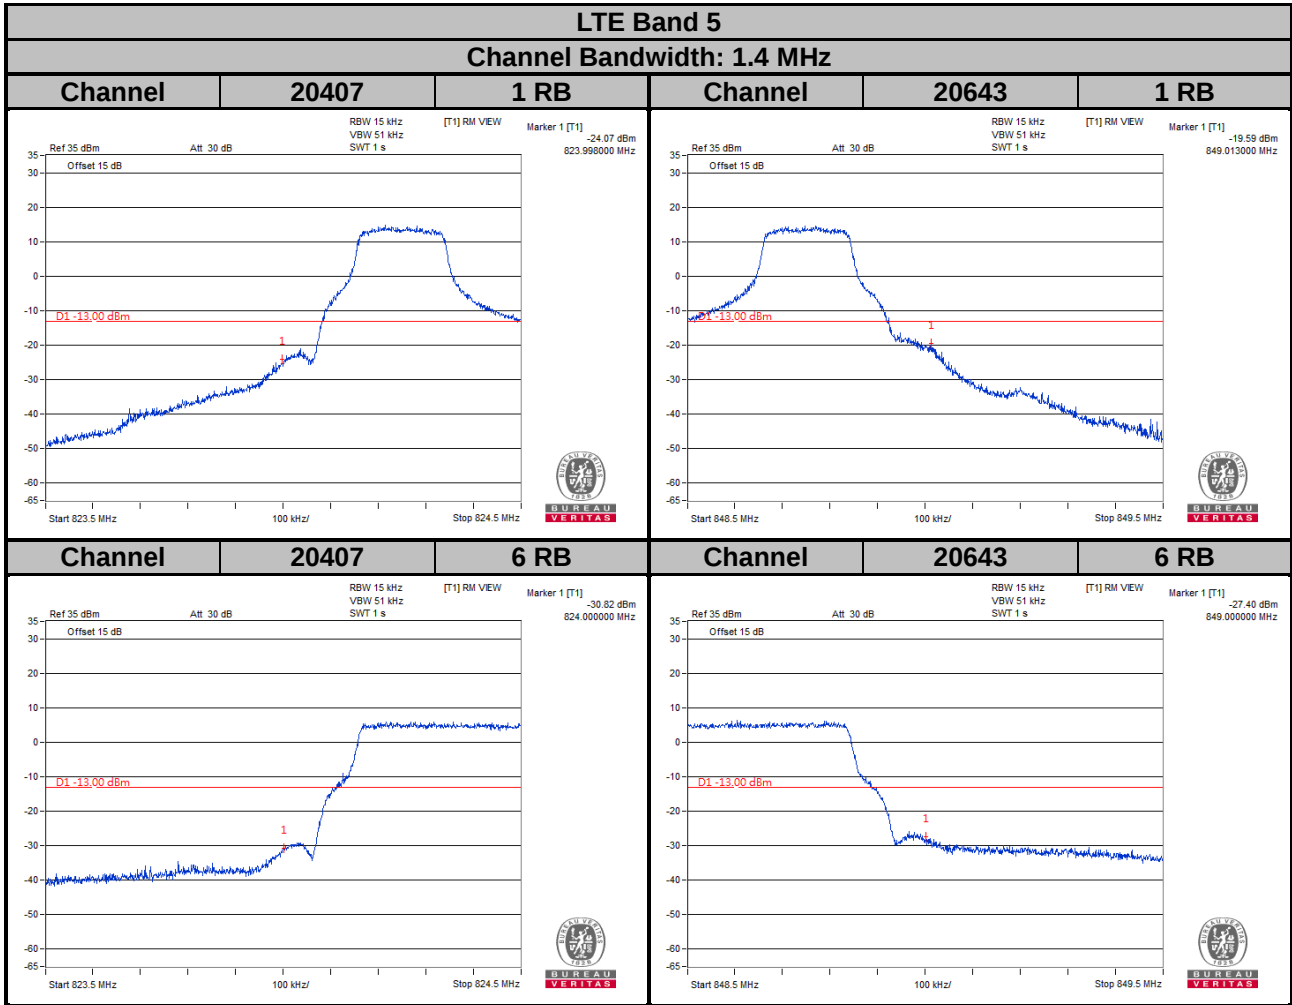


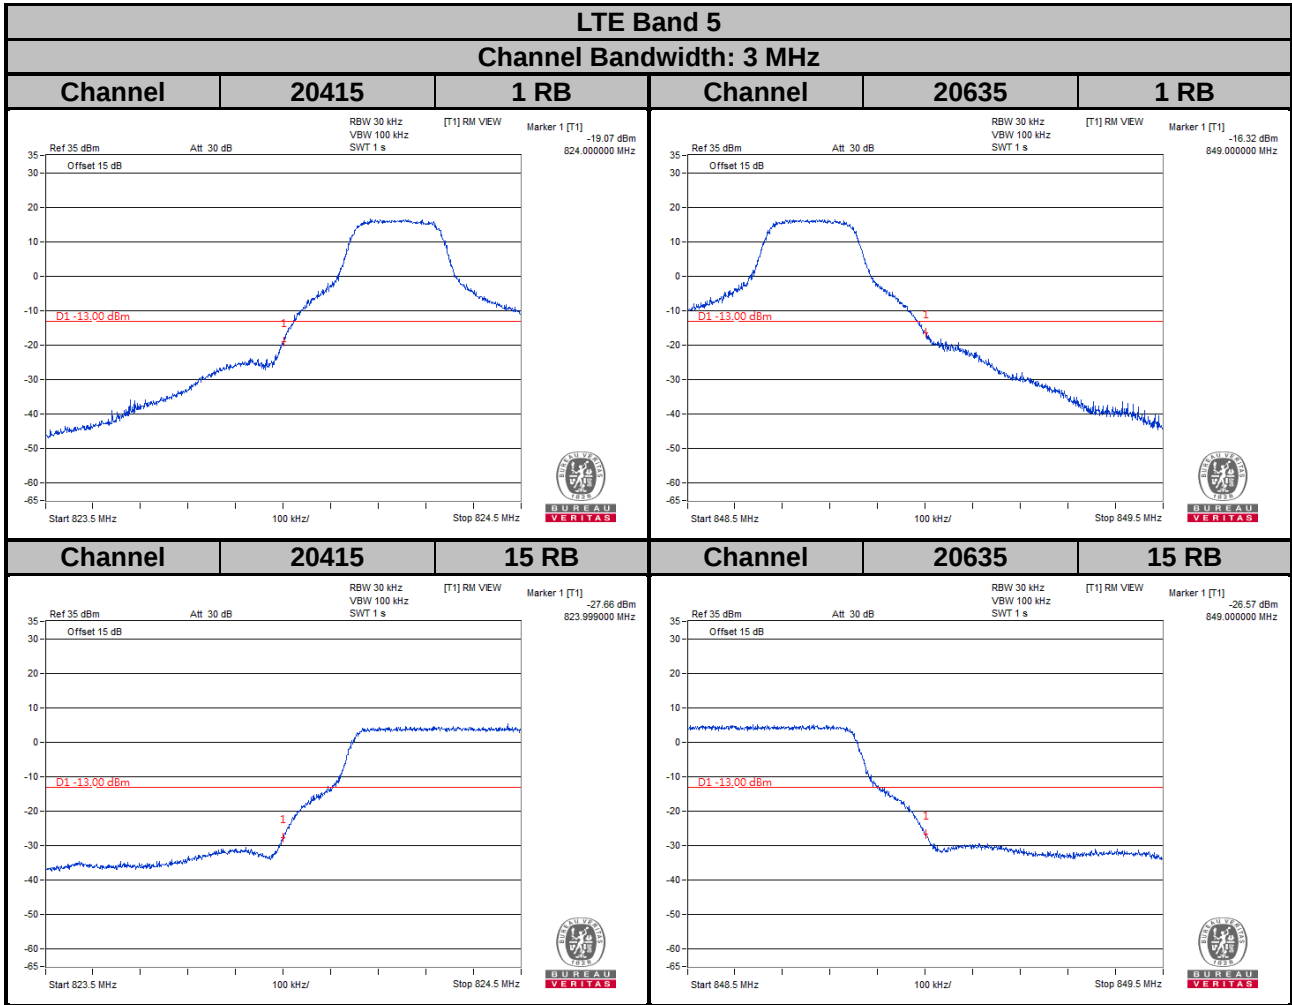



LTE Band 5

Channel Bandwidth: 5 MHz

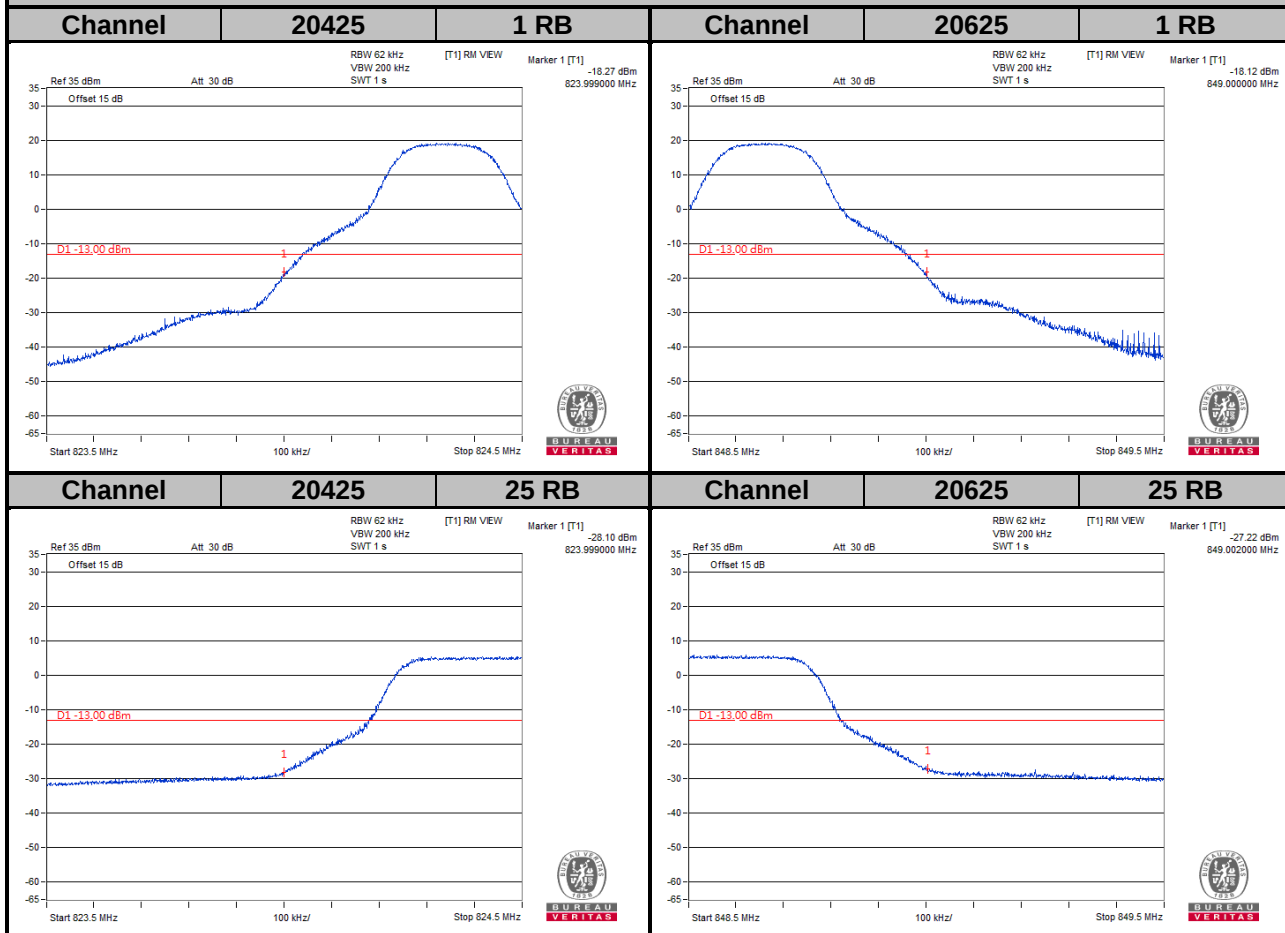

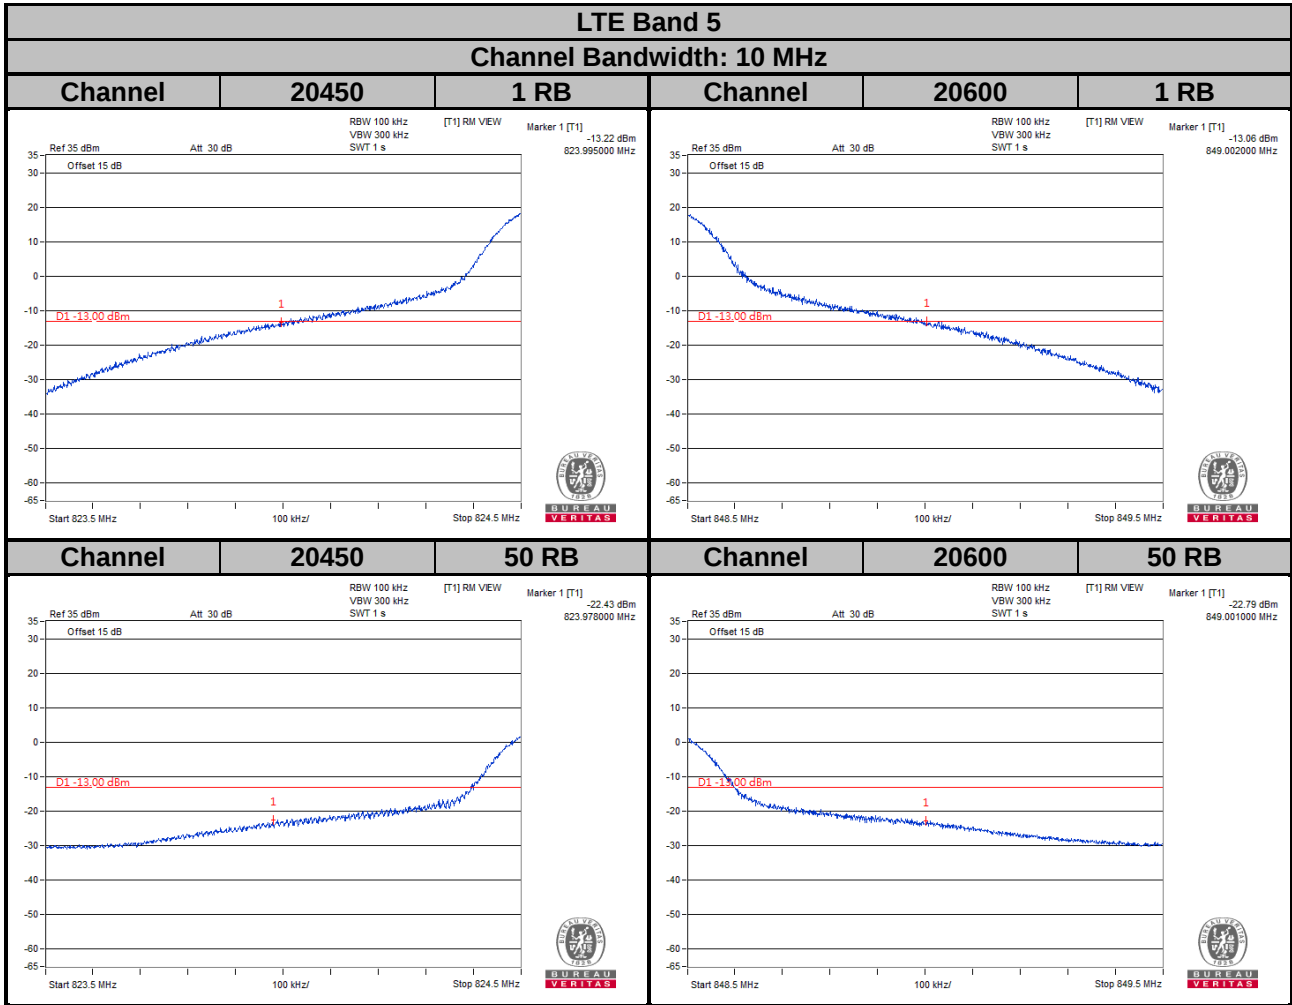


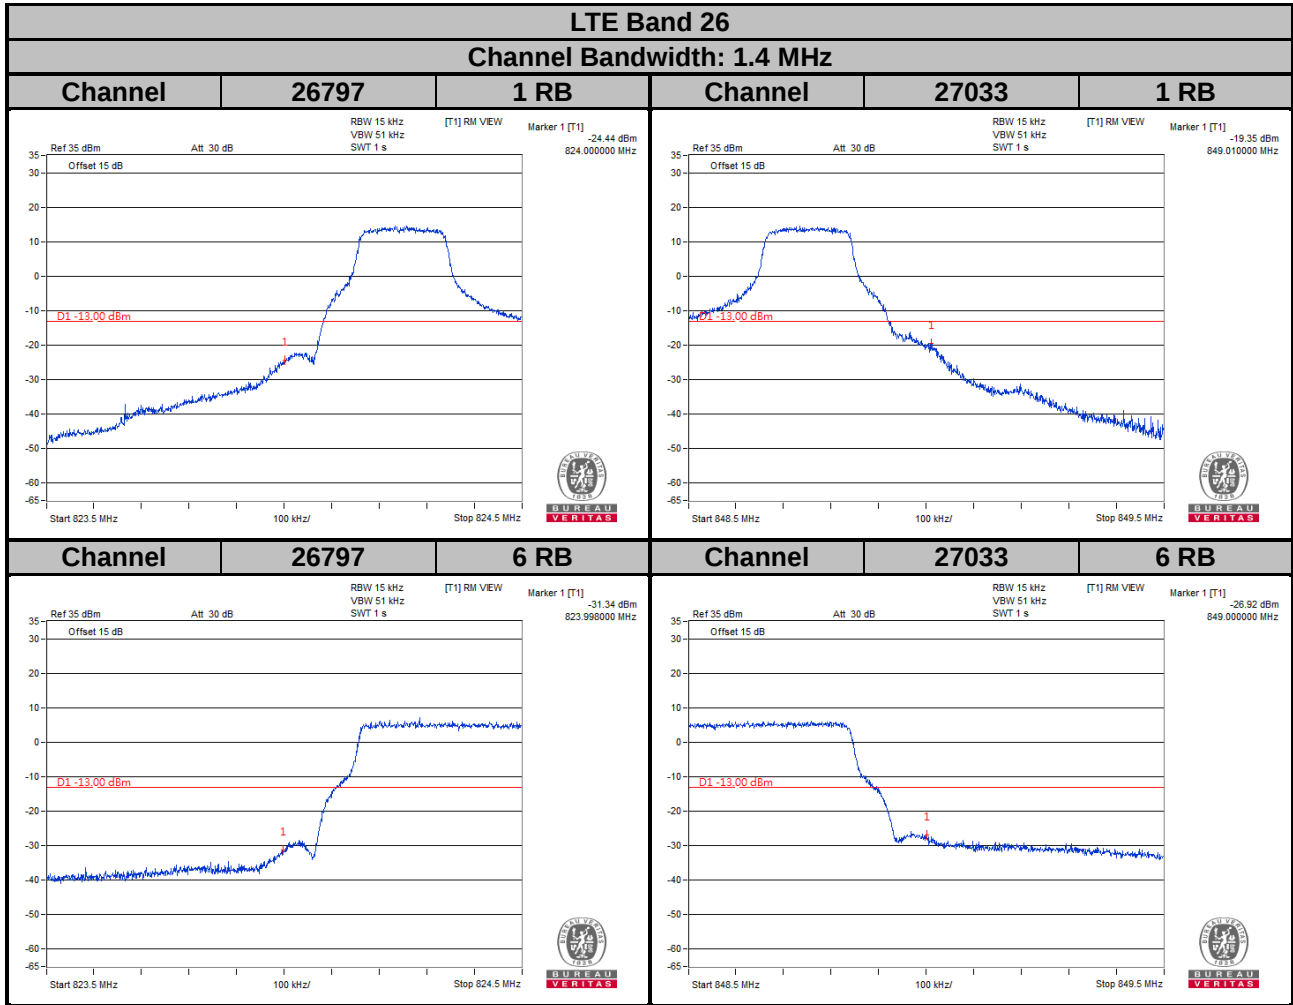


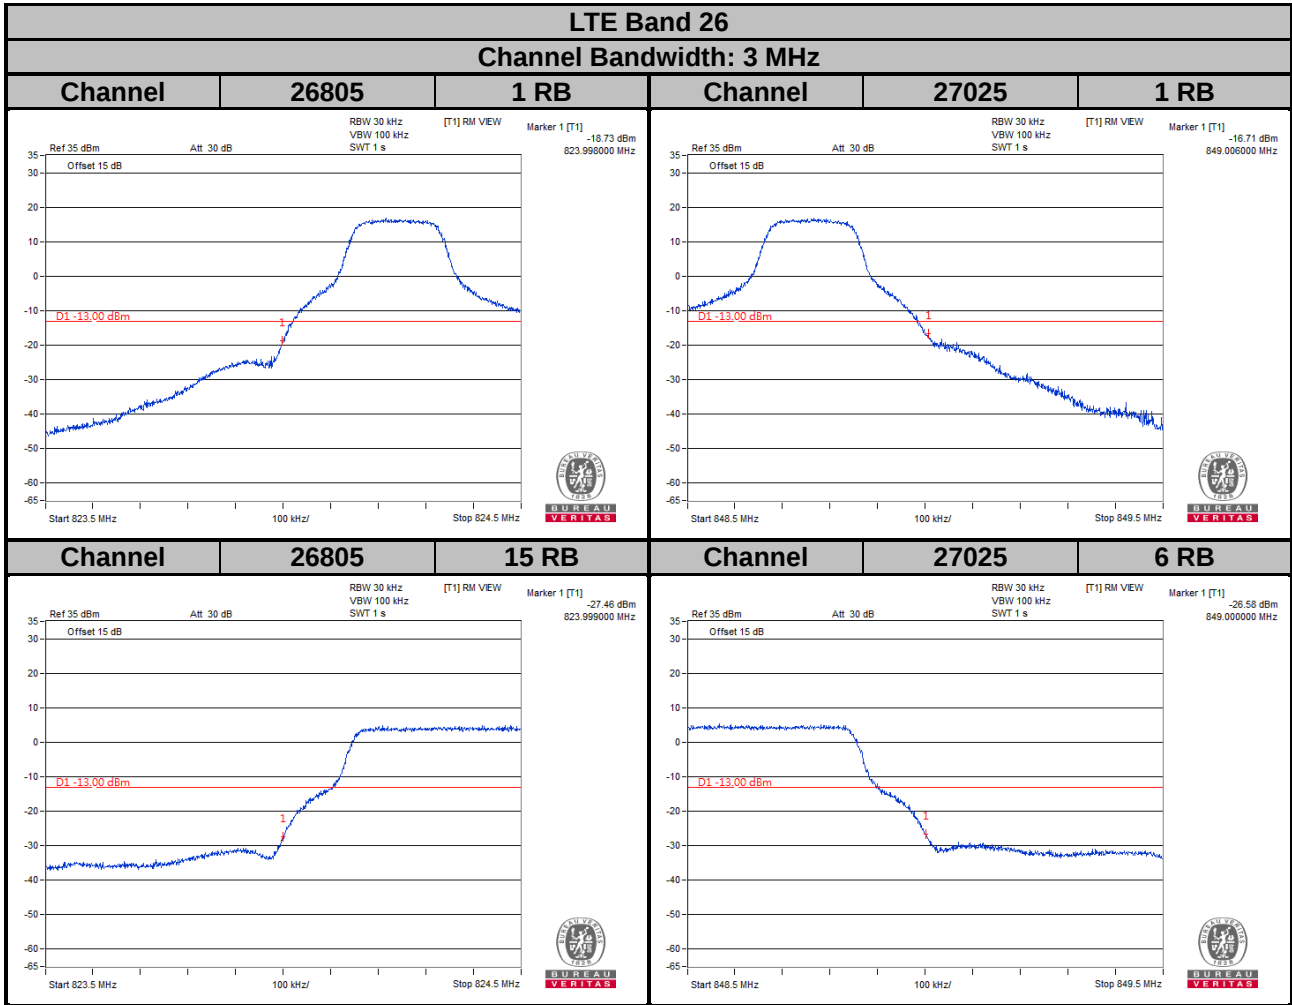


LTE Band 26

Channel Bandwidth: 5 MHz

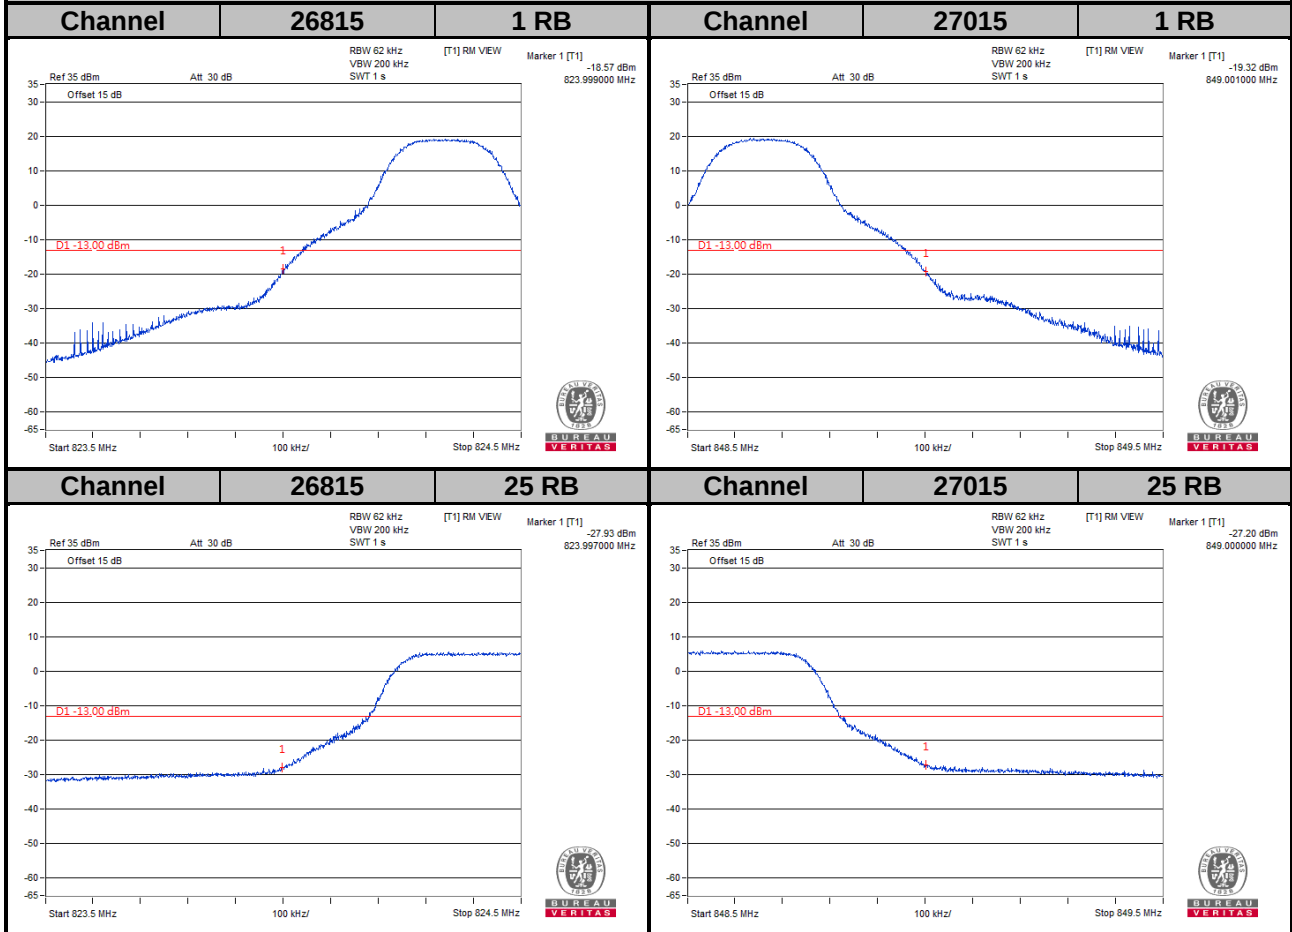

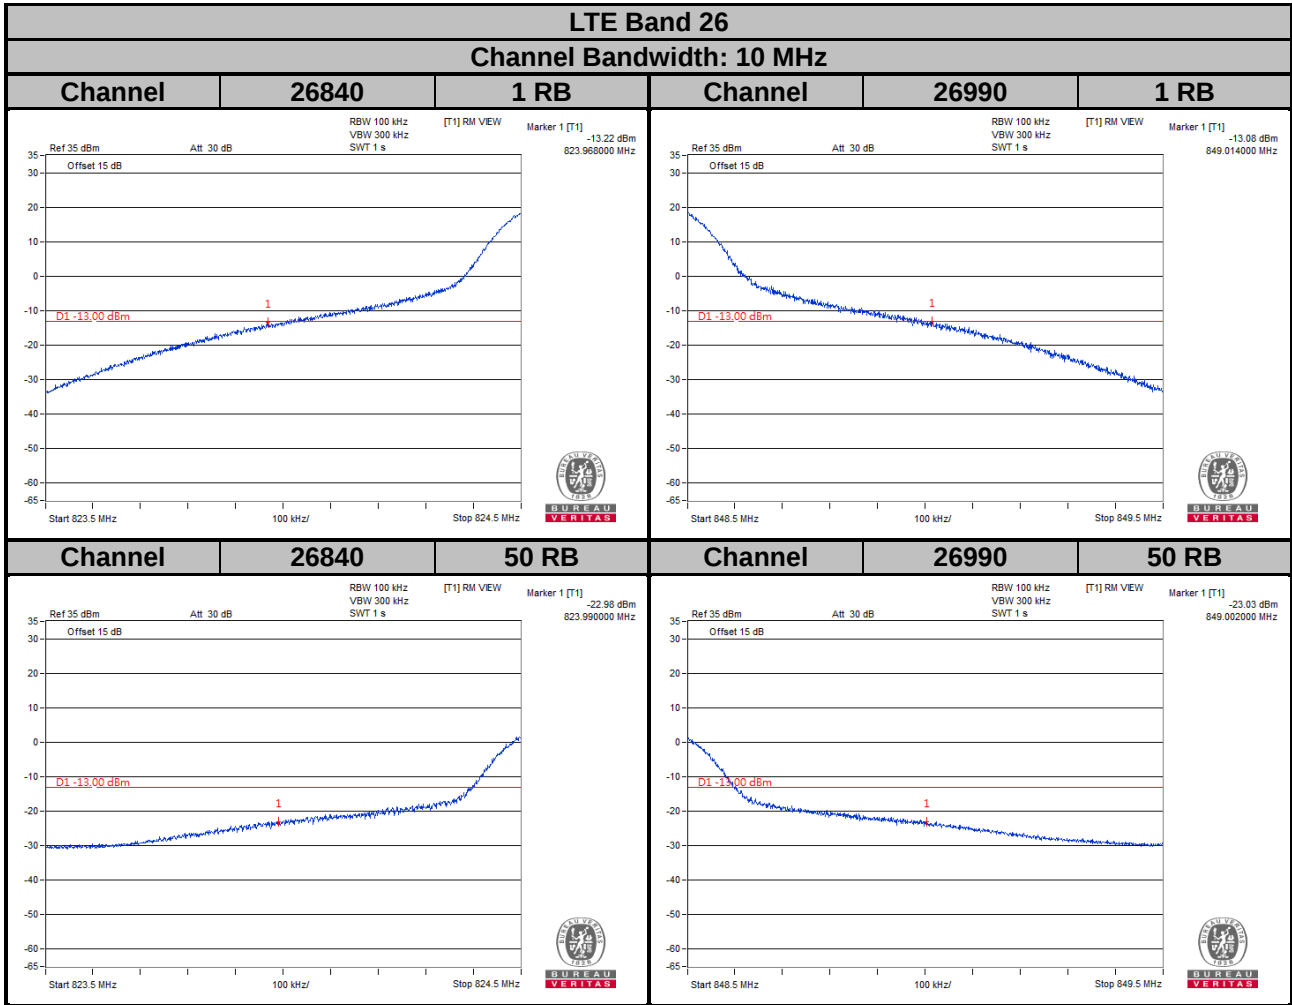

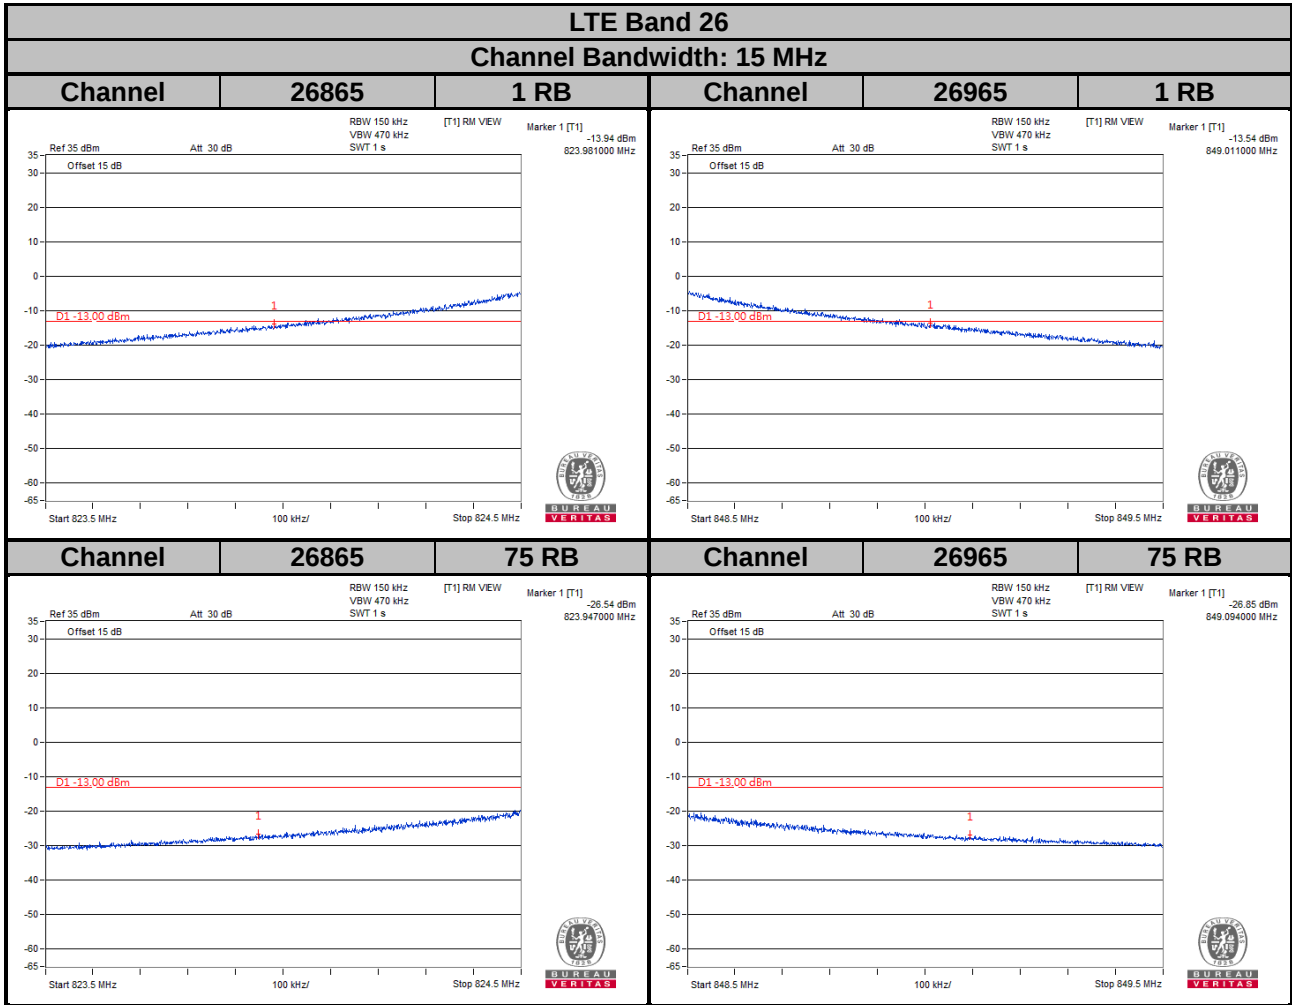


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

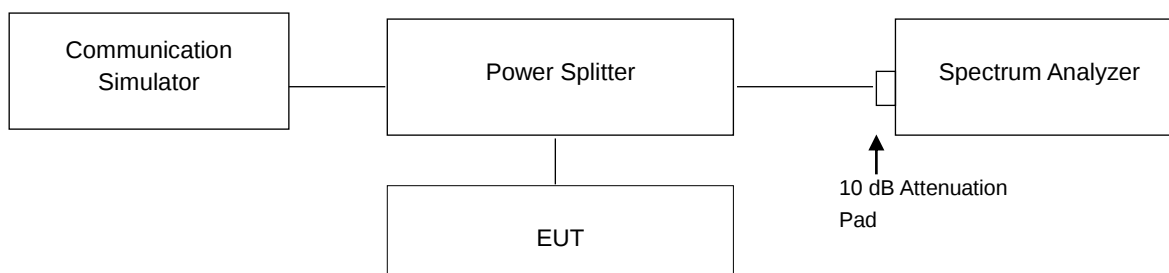


4.6.3 Test Procedures

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results

Channel	Frequency (MHz)	Peak to Average Ratio (dB)
		WCDMA
4132	826.4	3.12
4182	836.4	3.18
4233	846.6	3.04

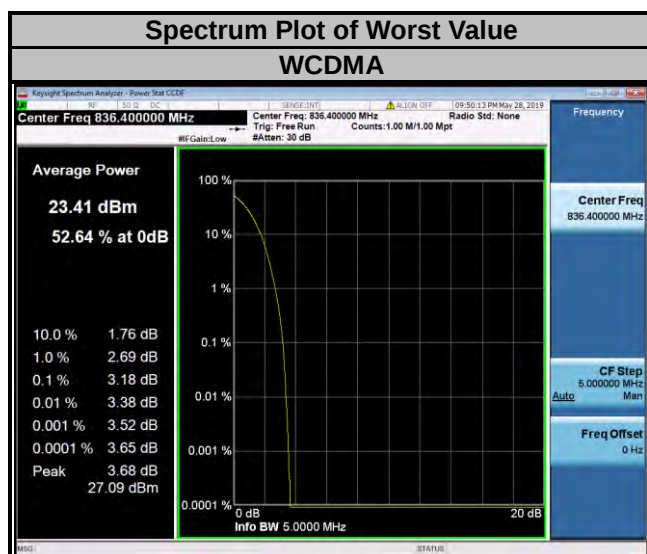


LTE Band 5


Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20407	824.7	4.87	5.50	5.69	20415	825.5	4.86	5.52	5.79
20525	836.5	5.13	5.81	6.00	20525	836.5	5.34	5.96	6.23
20643	848.3	4.43	5.06	5.30	20635	847.5	4.89	5.50	5.77

Spectrum Plot of Worst Value

1.4 MHz / 64QAM

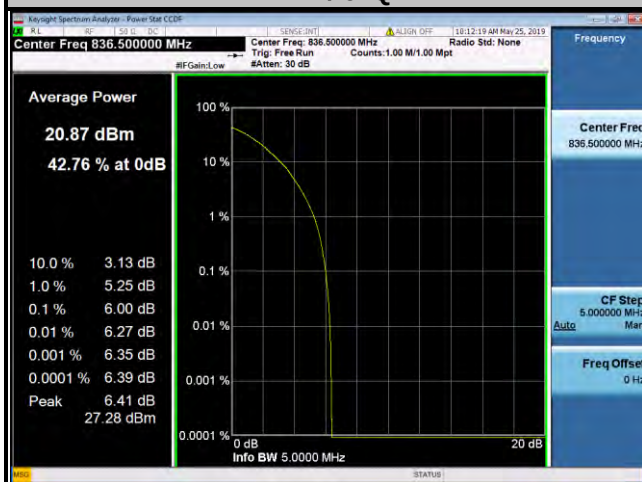


3 MHz / 64QAM

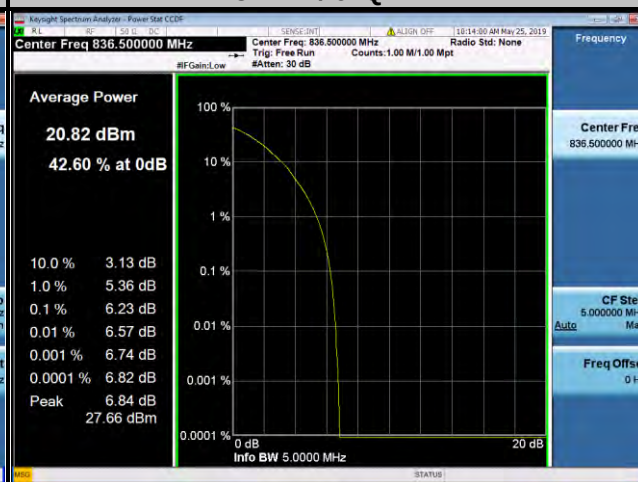

LTE Band 5

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20425	826.5	4.85	5.43	5.72	20450	829.0	4.81	5.51	5.76
20525	836.5	5.32	6.08	6.33	20525	836.5	5.30	6.09	6.29
20625	846.5	4.64	5.22	5.49	20600	844.0	4.50	5.15	5.39


Spectrum Plot of Worst Value

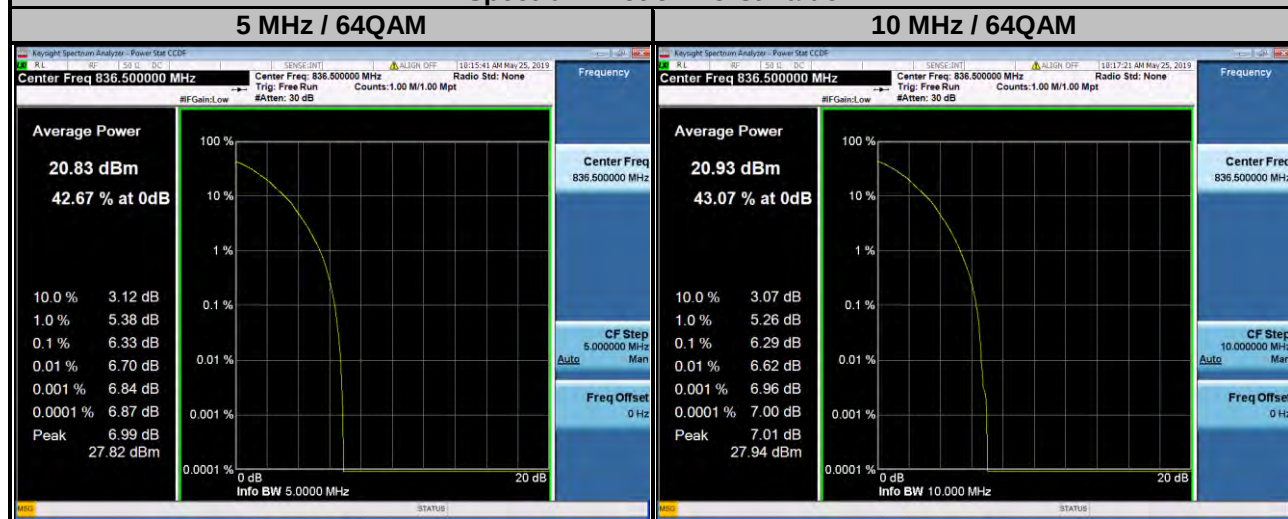


LTE Band 26

Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
26797	824.7	4.87	5.48	5.73	26805	825.5	4.87	5.55	5.75
26915	836.5	5.12	5.75	6.01	26915	836.5	5.29	6.00	6.31
27033	848.3	4.35	4.98	5.31	27025	847.5	4.88	5.54	5.73


Spectrum Plot of Worst Value

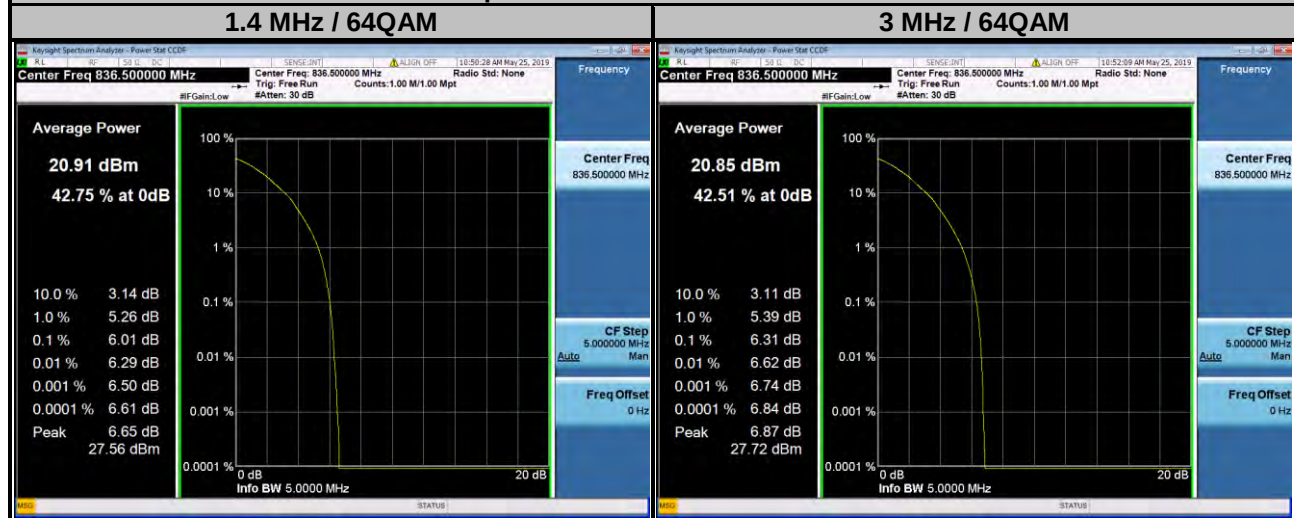

LTE Band 26									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
26815	826.5	4.91	5.53	5.68	26840	829.0	4.82	5.42	5.69
26915	836.5	5.33	6.10	6.32	26915	836.5	5.32	6.10	6.24
27015	846.5	4.62	5.23	5.45	26990	844.0	4.52	5.09	5.41

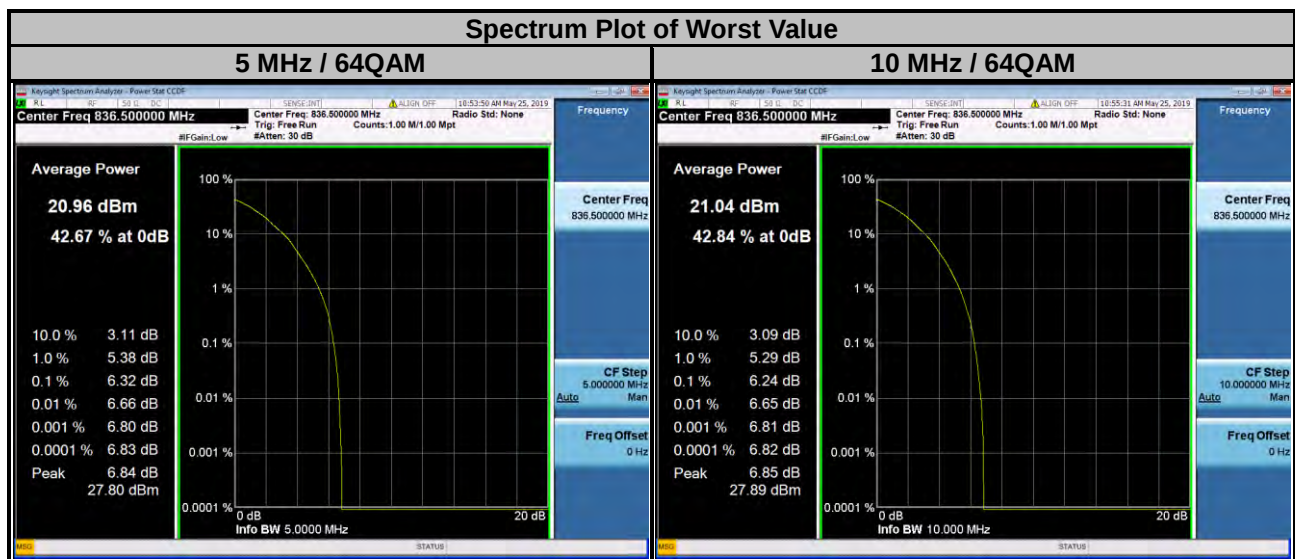

LTE Band 26				
Channel Bandwidth: 15 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM
26865	831.5	4.84	5.40	5.82
26915	836.5	5.29	6.00	6.28
26965	841.5	5.29	5.97	6.16

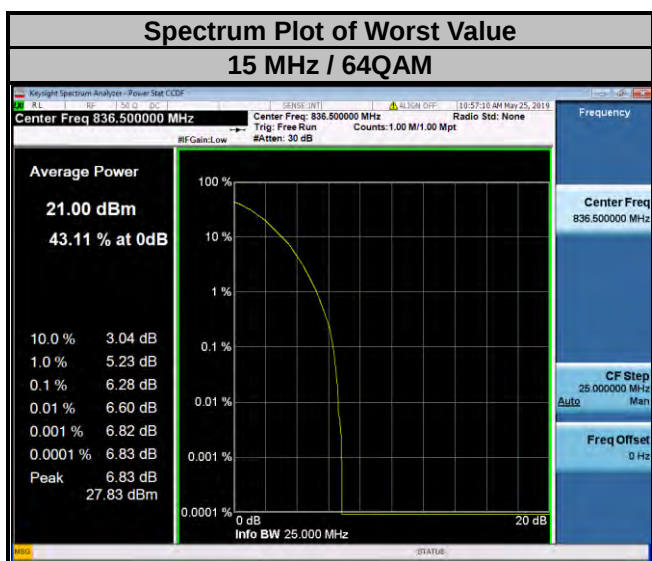


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.


4.7.2 Test Setup

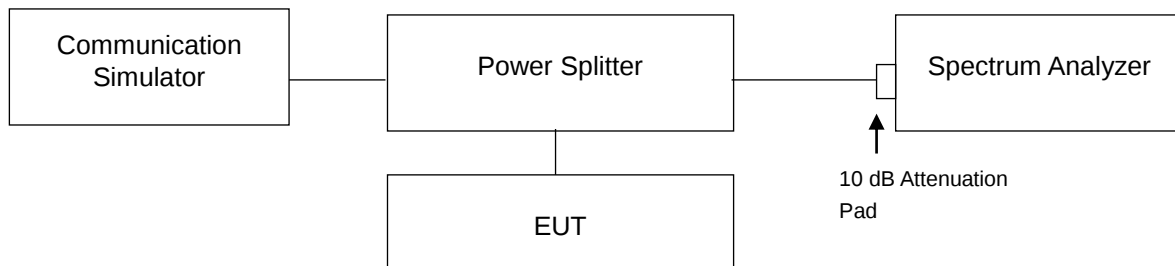

4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz is used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 9 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.

4.7.4 Test Results

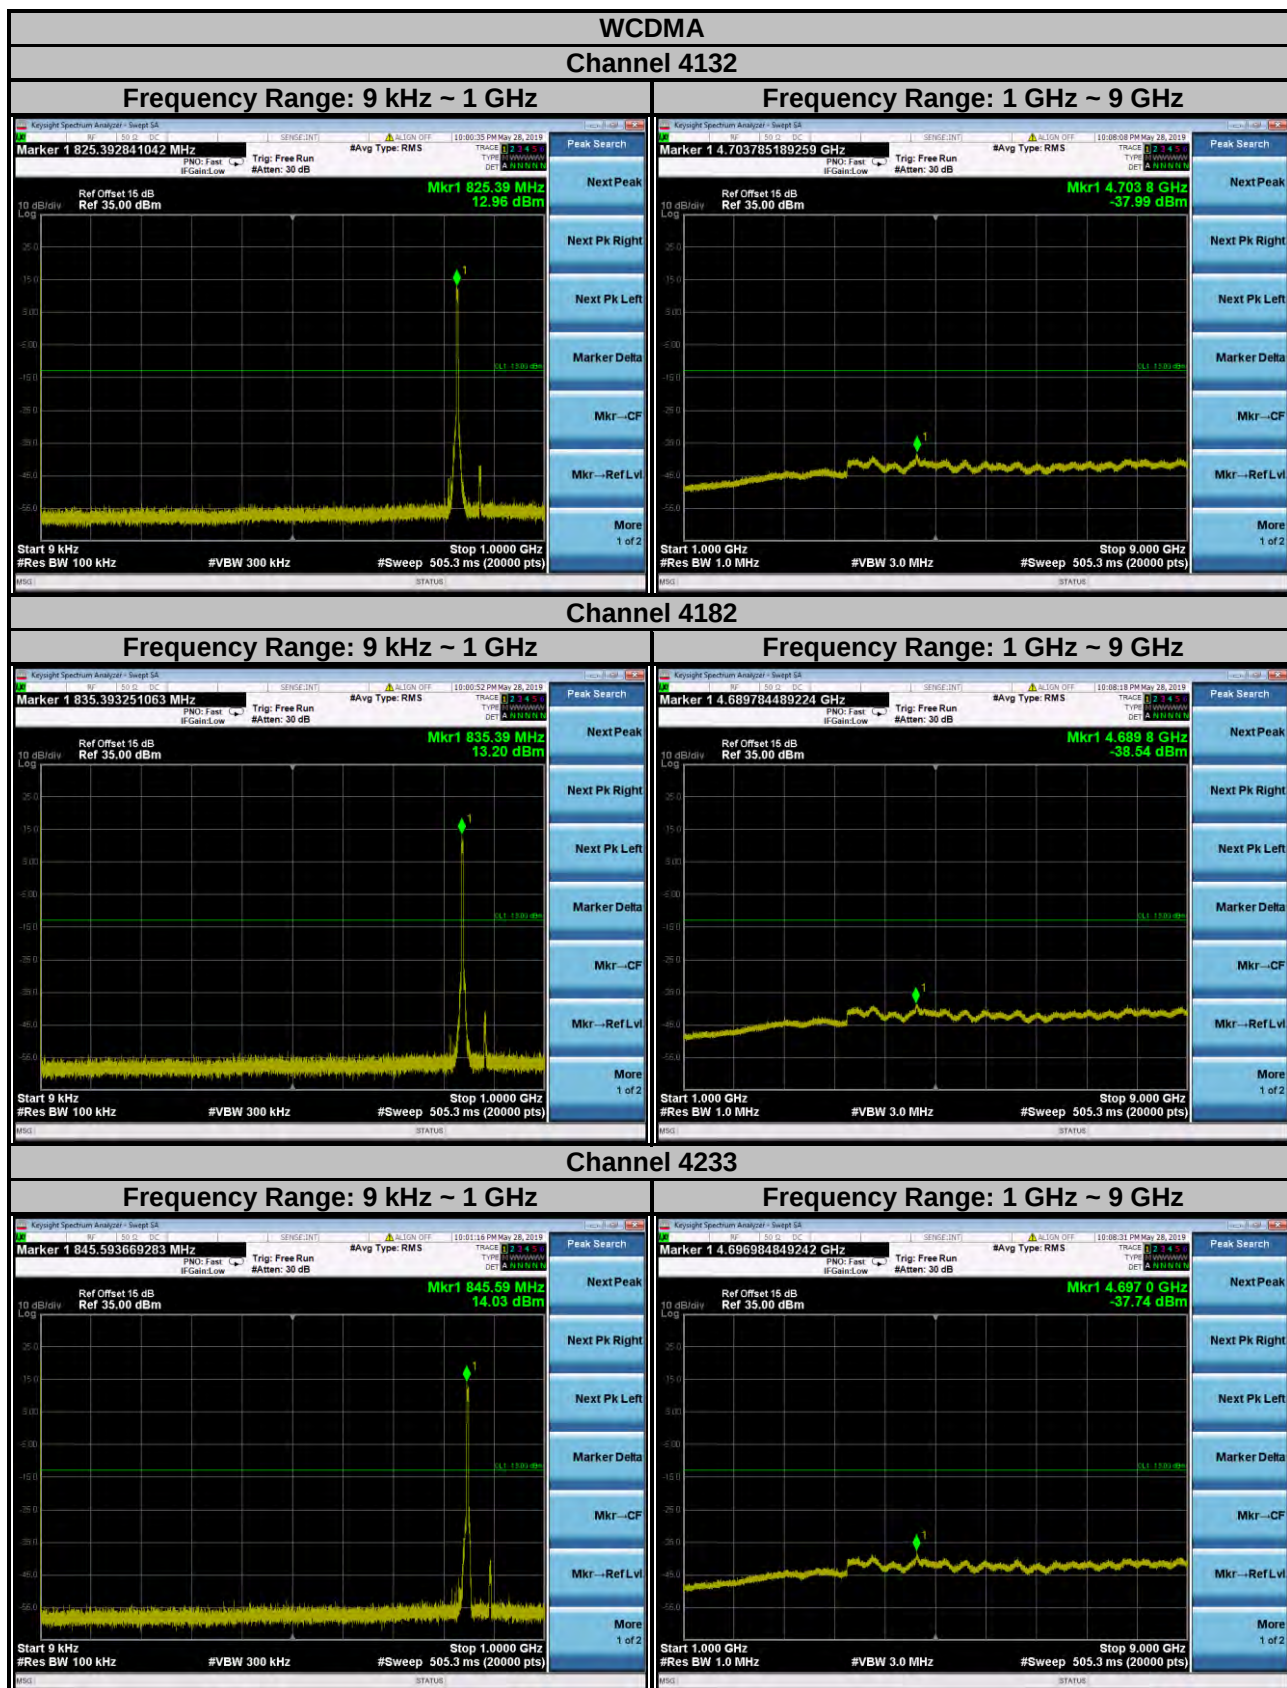


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 5


Channel Bandwidth: 1.4 MHz

Channel 20407

Frequency Range: 9 kHz ~ 1 GHz

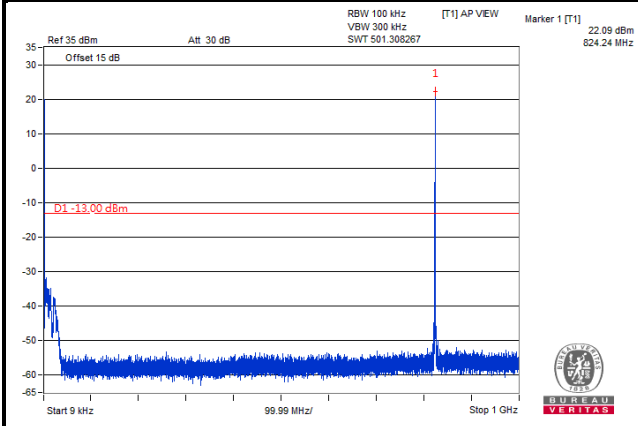


Frequency Range: 1 GHz ~ 9 GHz

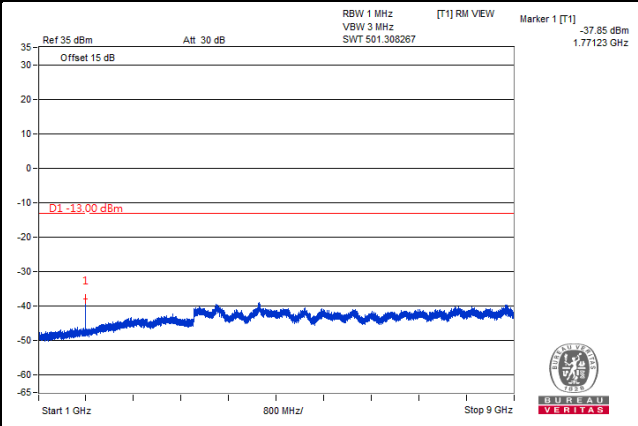


Channel 20525

Frequency Range: 9 kHz ~ 1 GHz

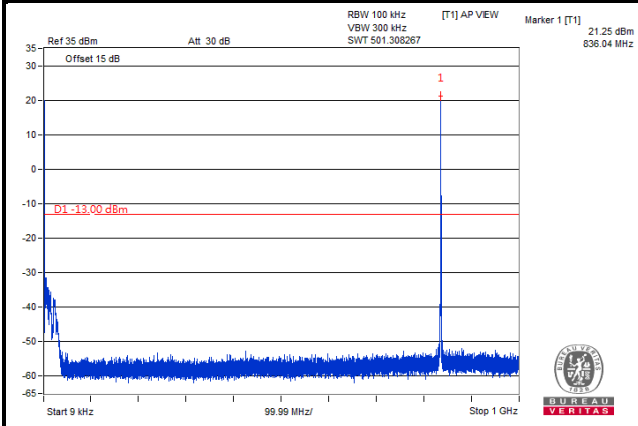


Frequency Range: 1 GHz ~ 9 GHz

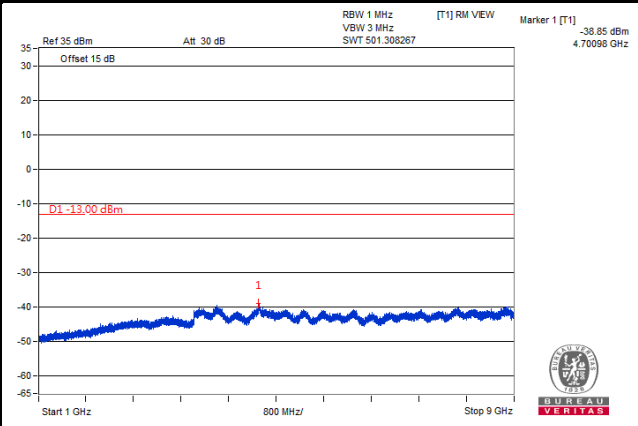


Channel 20643

Frequency Range: 9 kHz ~ 1 GHz

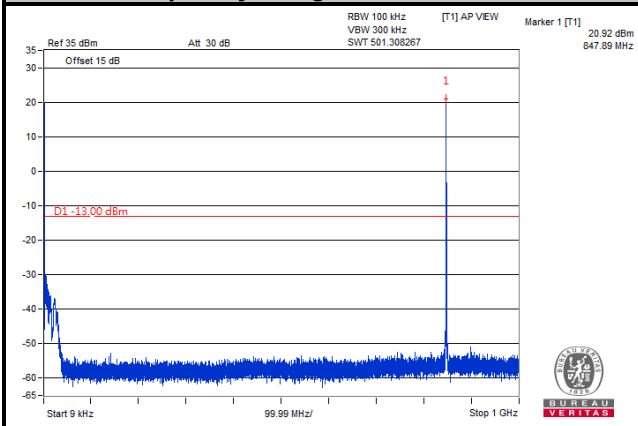

Frequency Range: 1 GHz ~ 9 GHz

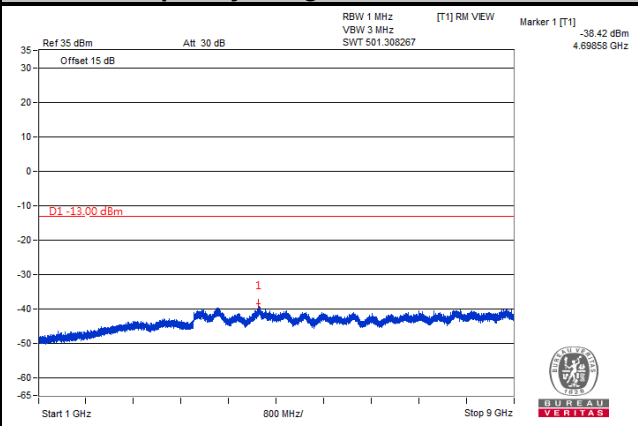


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 5


Channel Bandwidth: 3 MHz

Channel 20415

Frequency Range: 9 kHz ~ 1 GHz

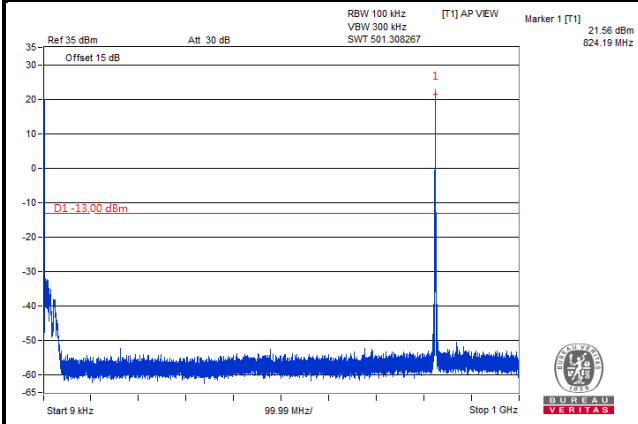


Frequency Range: 1 GHz ~ 9 GHz

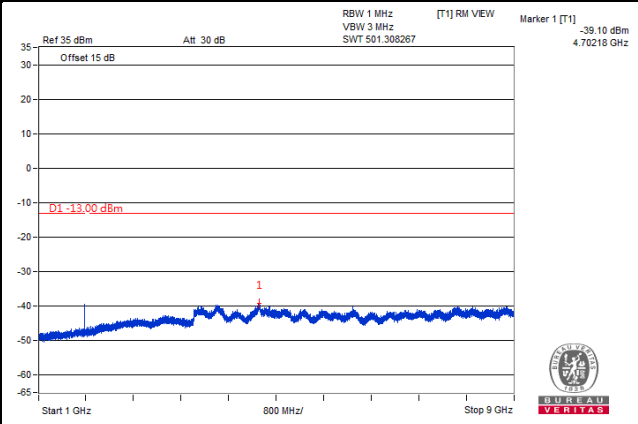


Channel 20525

Frequency Range: 9 kHz ~ 1 GHz

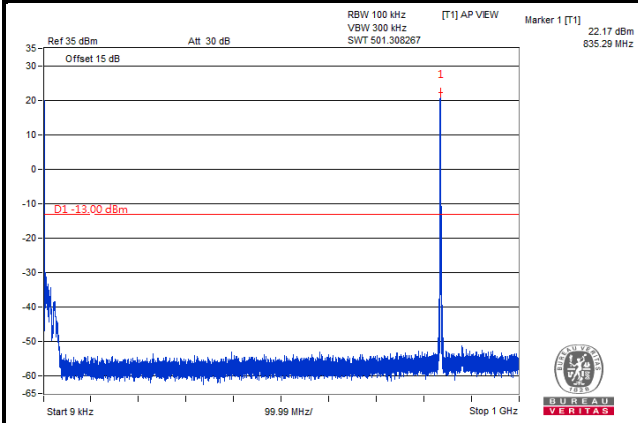


Frequency Range: 1 GHz ~ 9 GHz

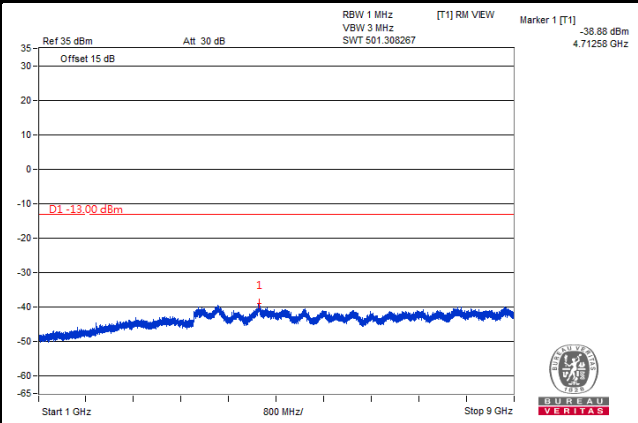


Channel 20635

Frequency Range: 9 kHz ~ 1 GHz

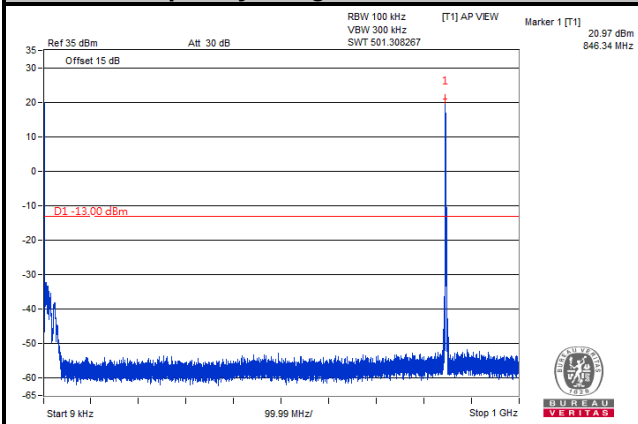

Frequency Range: 1 GHz ~ 9 GHz

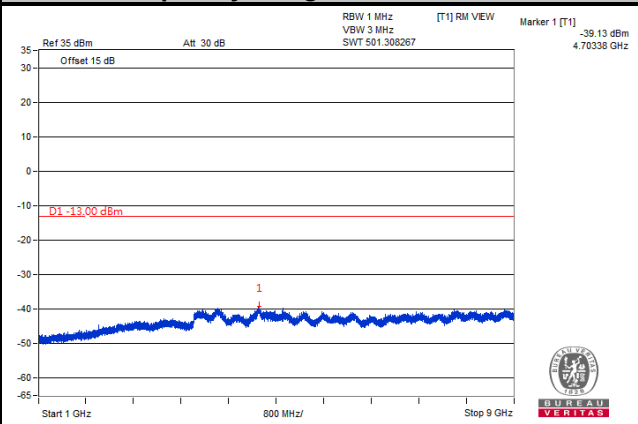


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 5


Channel Bandwidth: 5 MHz

Channel 20425

Frequency Range: 9 kHz ~ 1 GHz

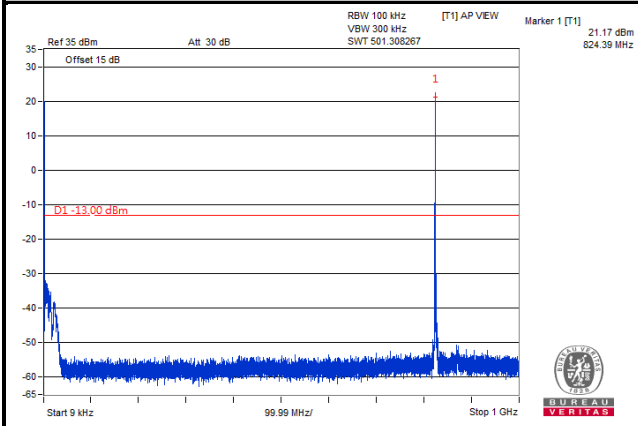


Frequency Range: 1 GHz ~ 9 GHz

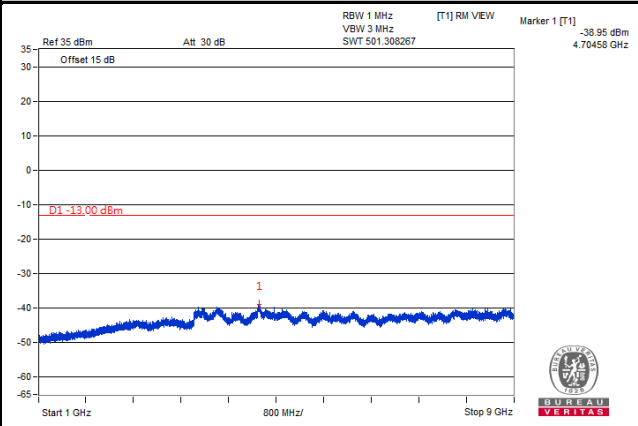


Channel 20525

Frequency Range: 9 kHz ~ 1 GHz

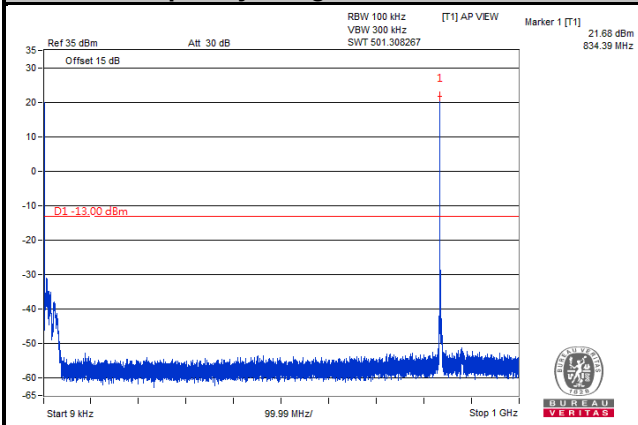


Frequency Range: 1 GHz ~ 9 GHz

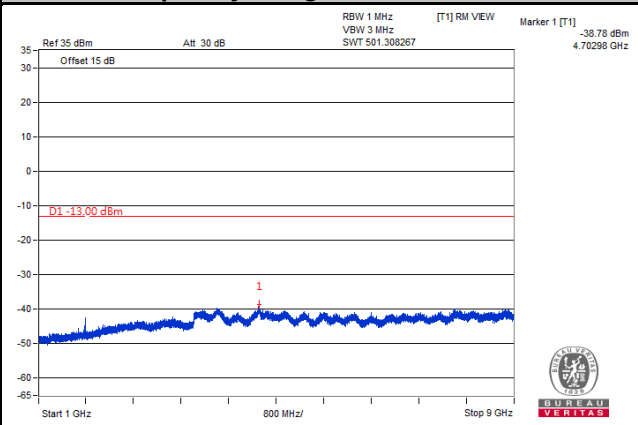


Channel 20625


Frequency Range: 9 kHz ~ 1 GHz

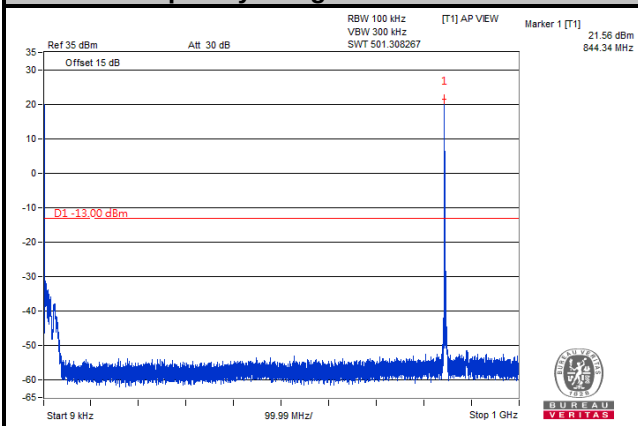

Frequency Range: 1 GHz ~ 9 GHz

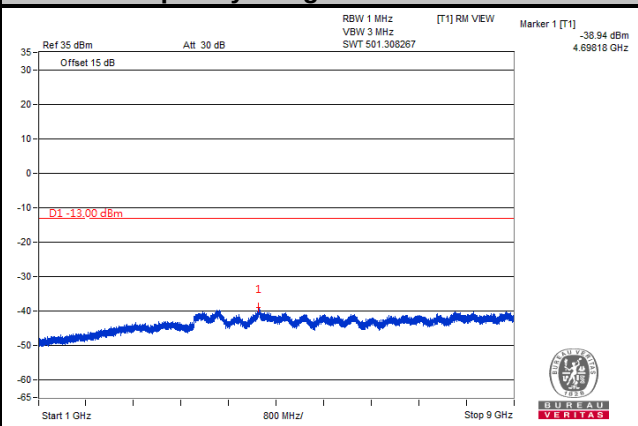

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

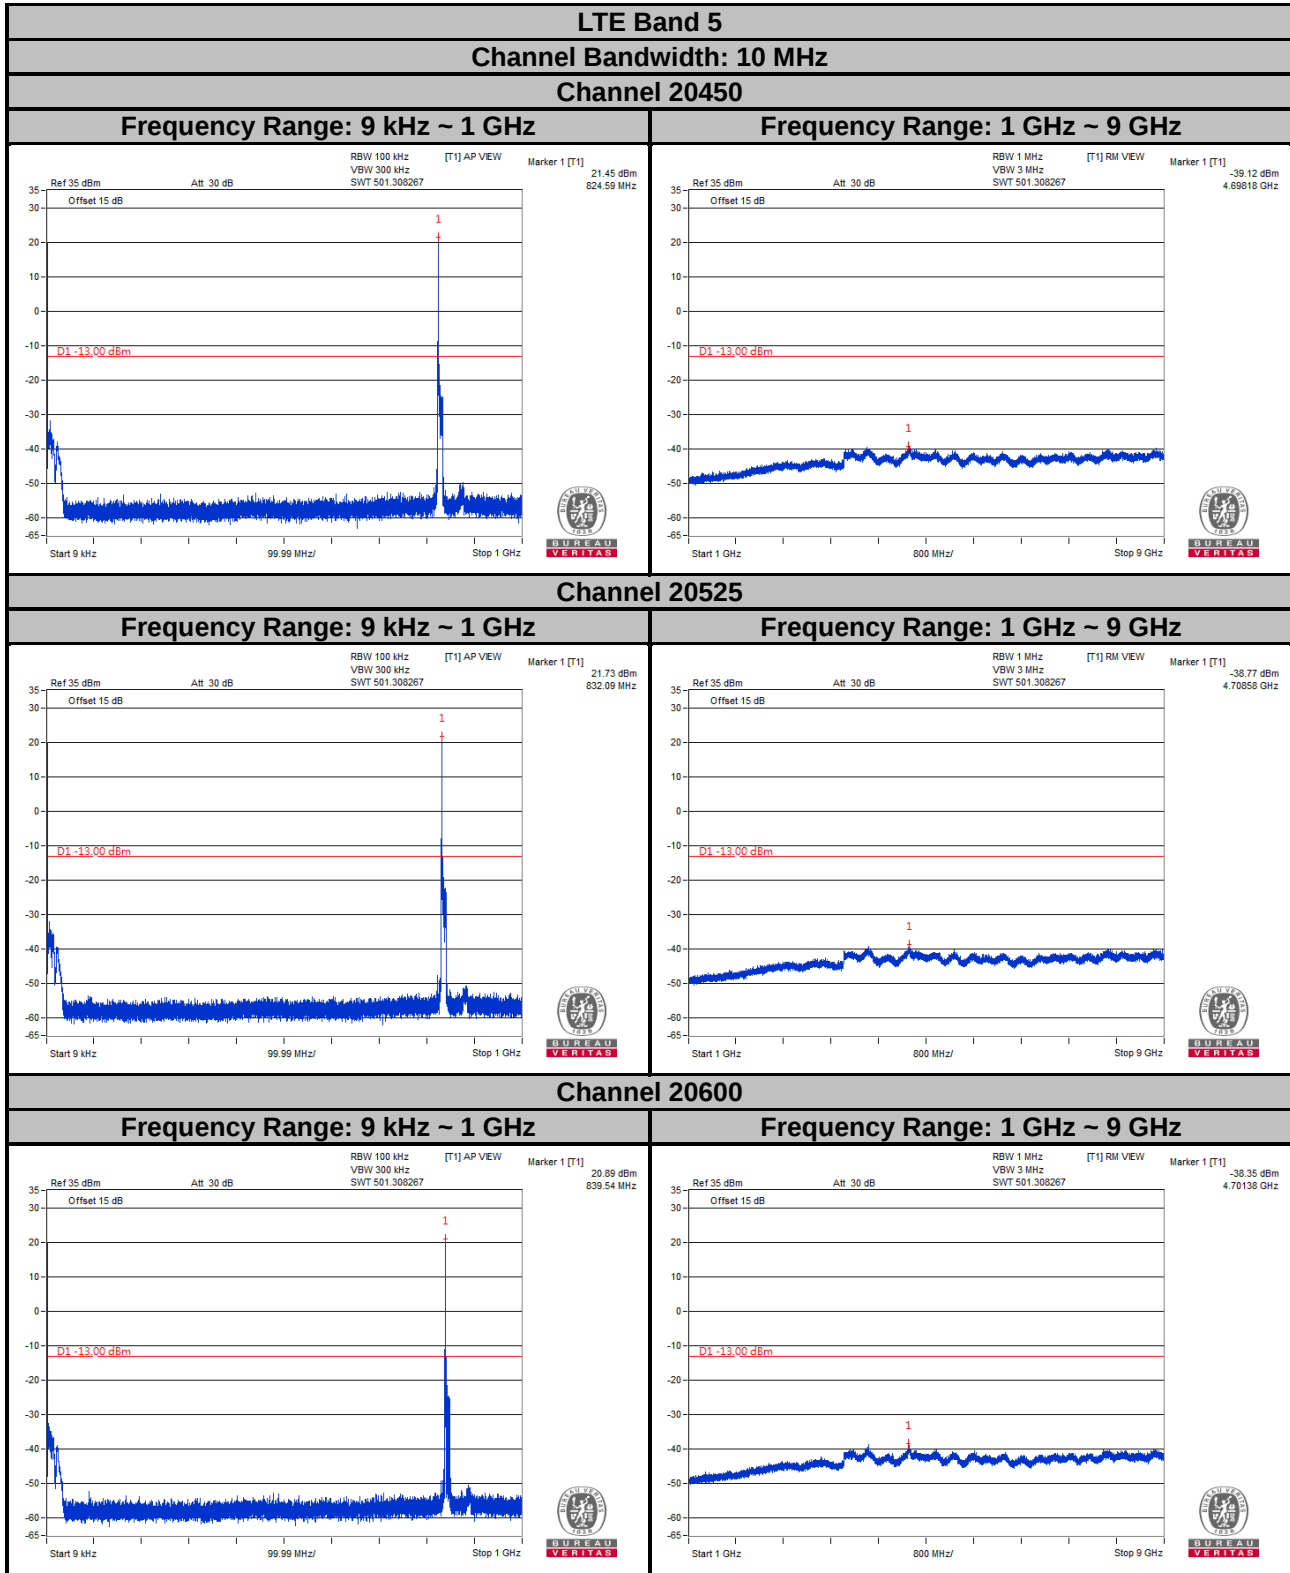


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 26


Channel Bandwidth: 1.4 MHz

Channel 26797

Frequency Range: 9 kHz ~ 1 GHz

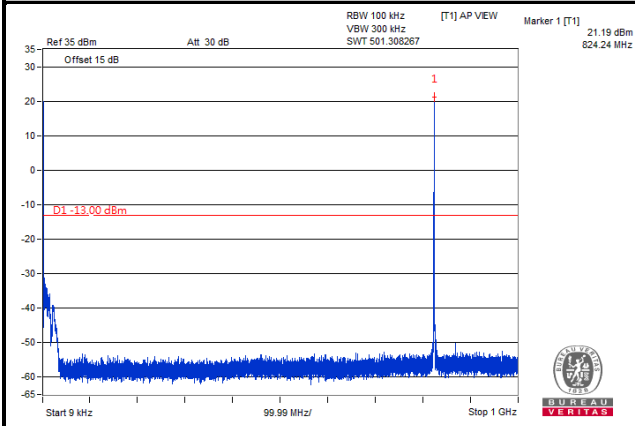


Frequency Range: 1 GHz ~ 9 GHz

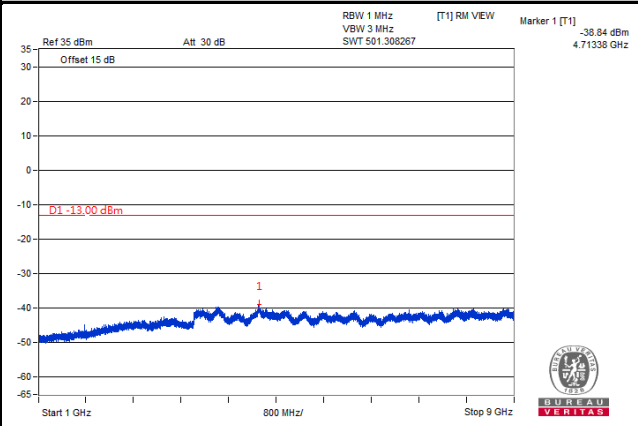


Channel 26915

Frequency Range: 9 kHz ~ 1 GHz

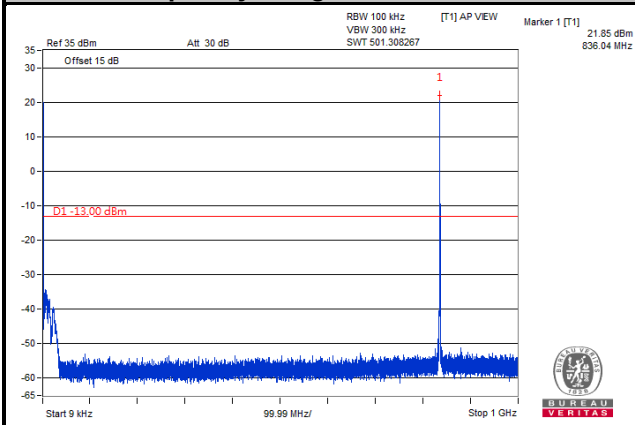


Frequency Range: 1 GHz ~ 9 GHz

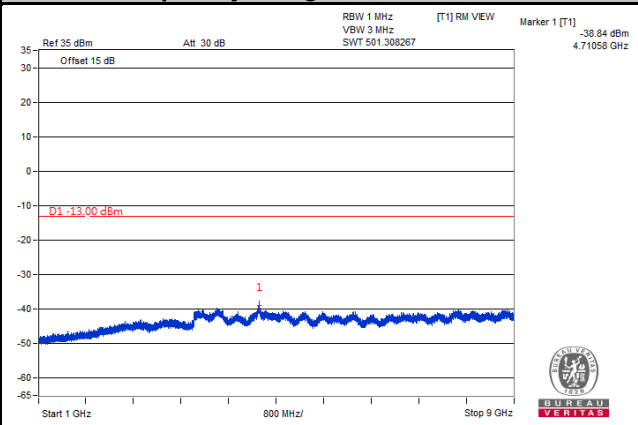


Channel 27033


Frequency Range: 9 kHz ~ 1 GHz

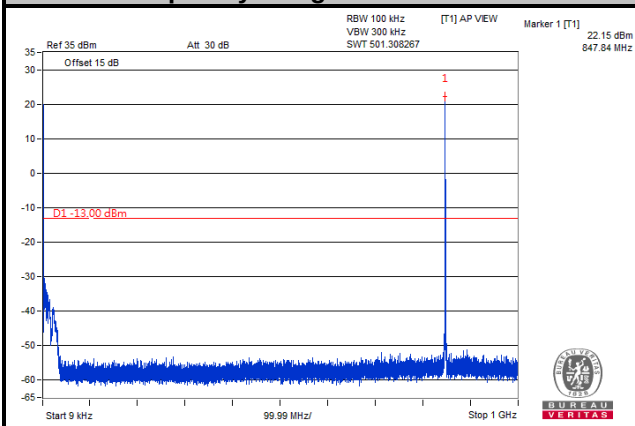

Frequency Range: 1 GHz ~ 9 GHz

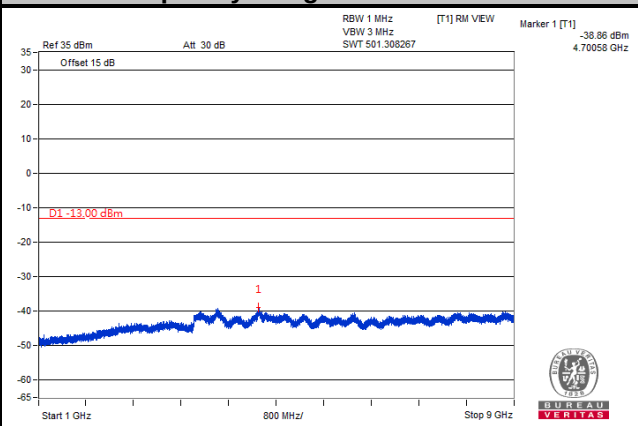

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

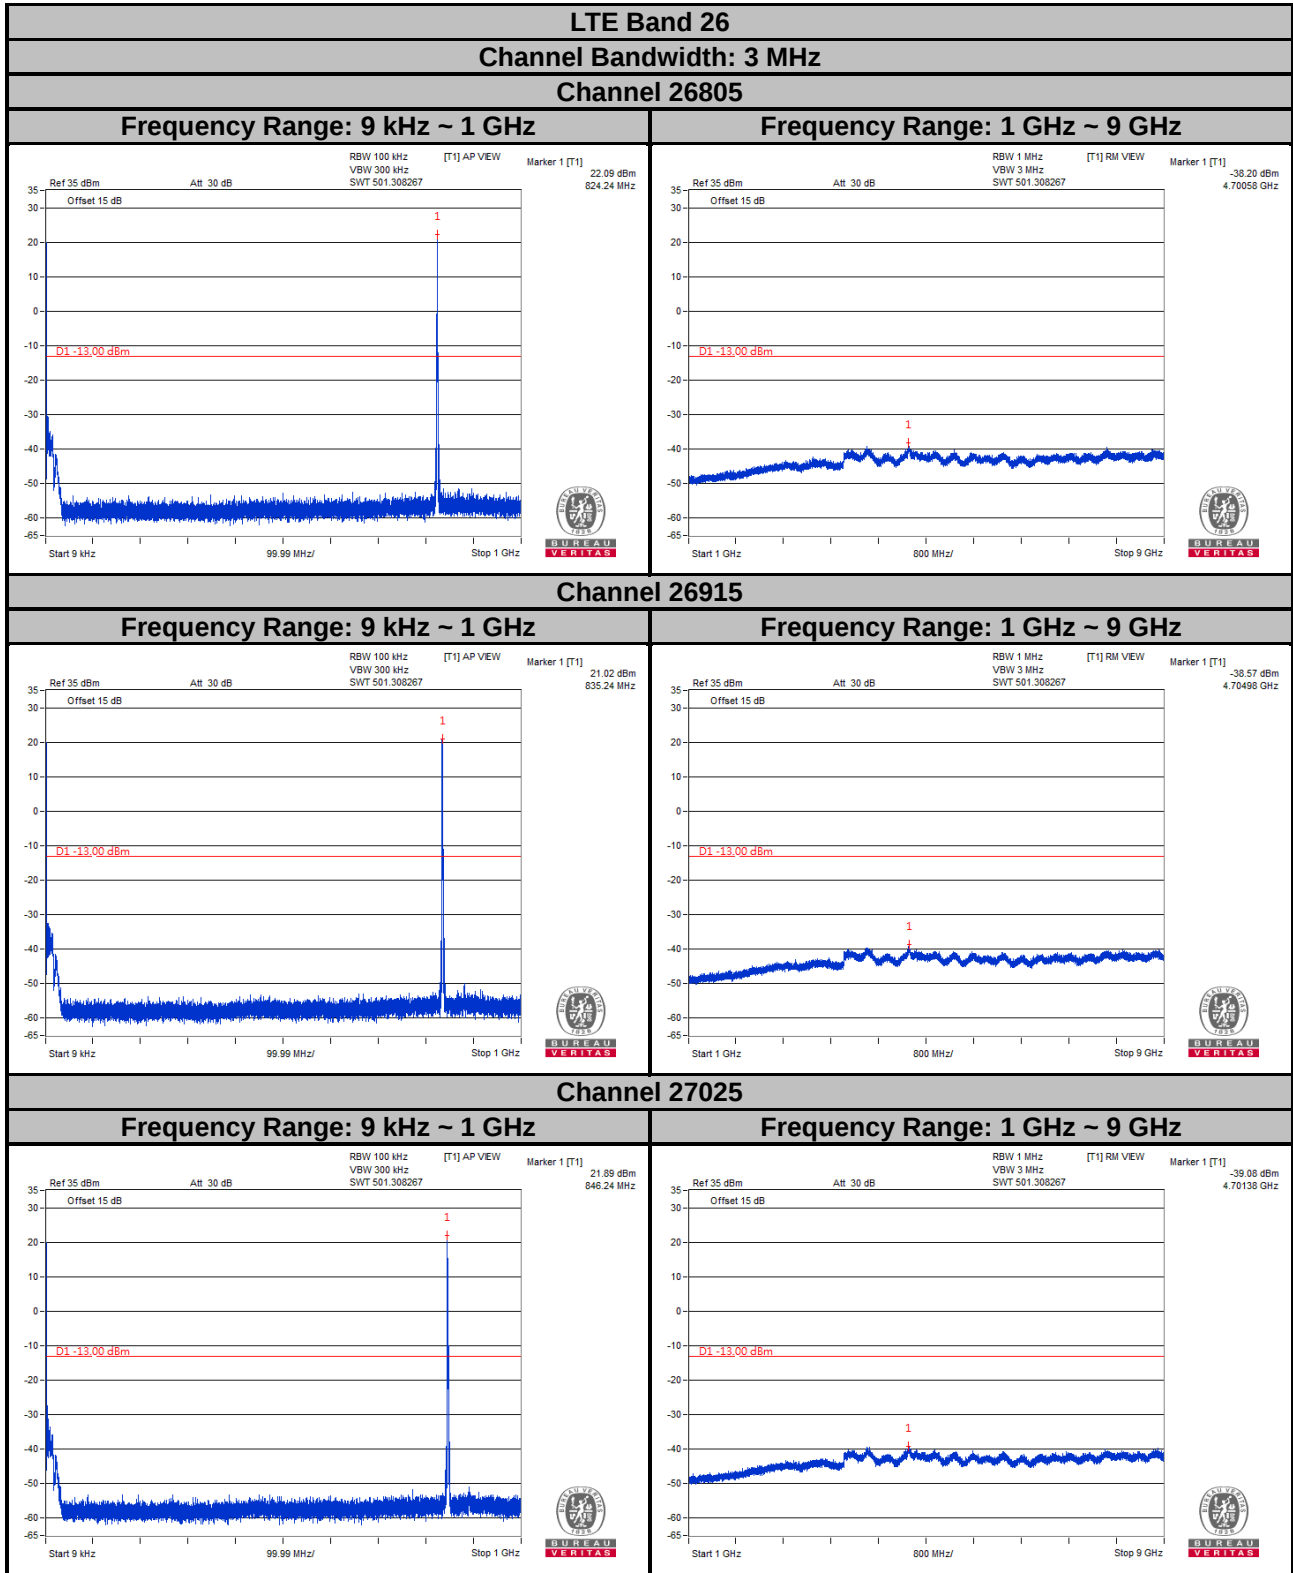


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 26


Channel Bandwidth: 5 MHz

Channel 26815

Frequency Range: 9 kHz ~ 1 GHz

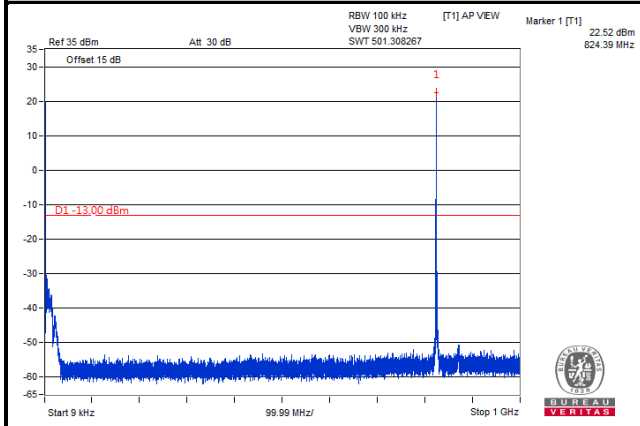


Frequency Range: 1 GHz ~ 9 GHz

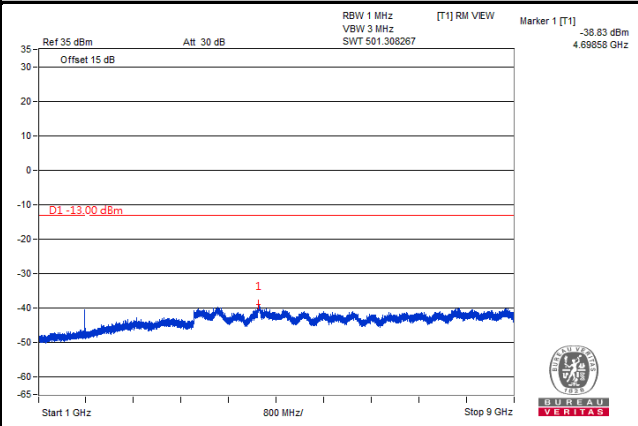


Channel 26915

Frequency Range: 9 kHz ~ 1 GHz

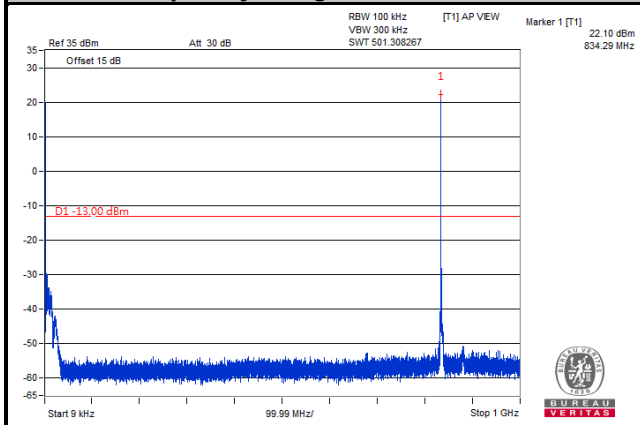


Frequency Range: 1 GHz ~ 9 GHz

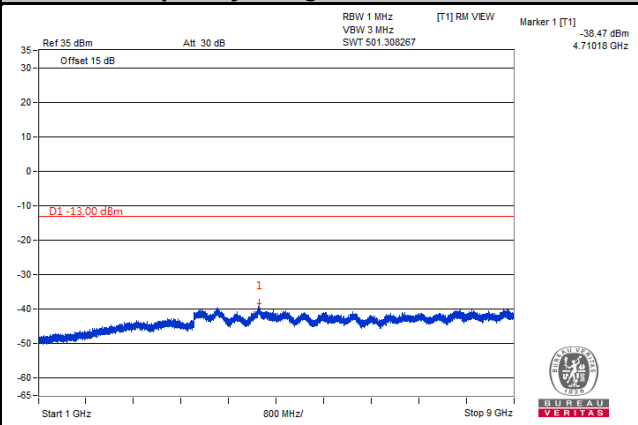


Channel 27015


Frequency Range: 9 kHz ~ 1 GHz

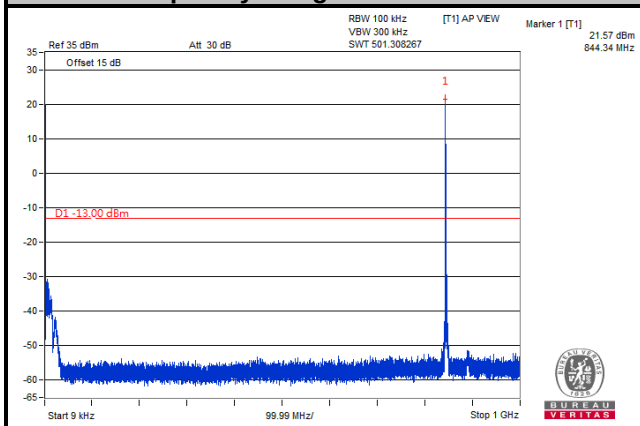


Frequency Range: 1 GHz ~ 9 GHz

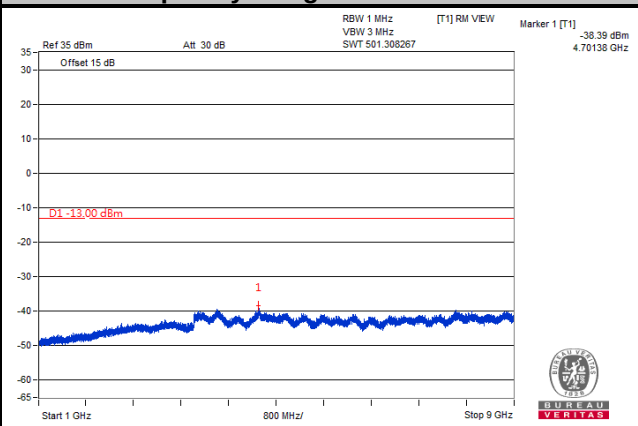

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

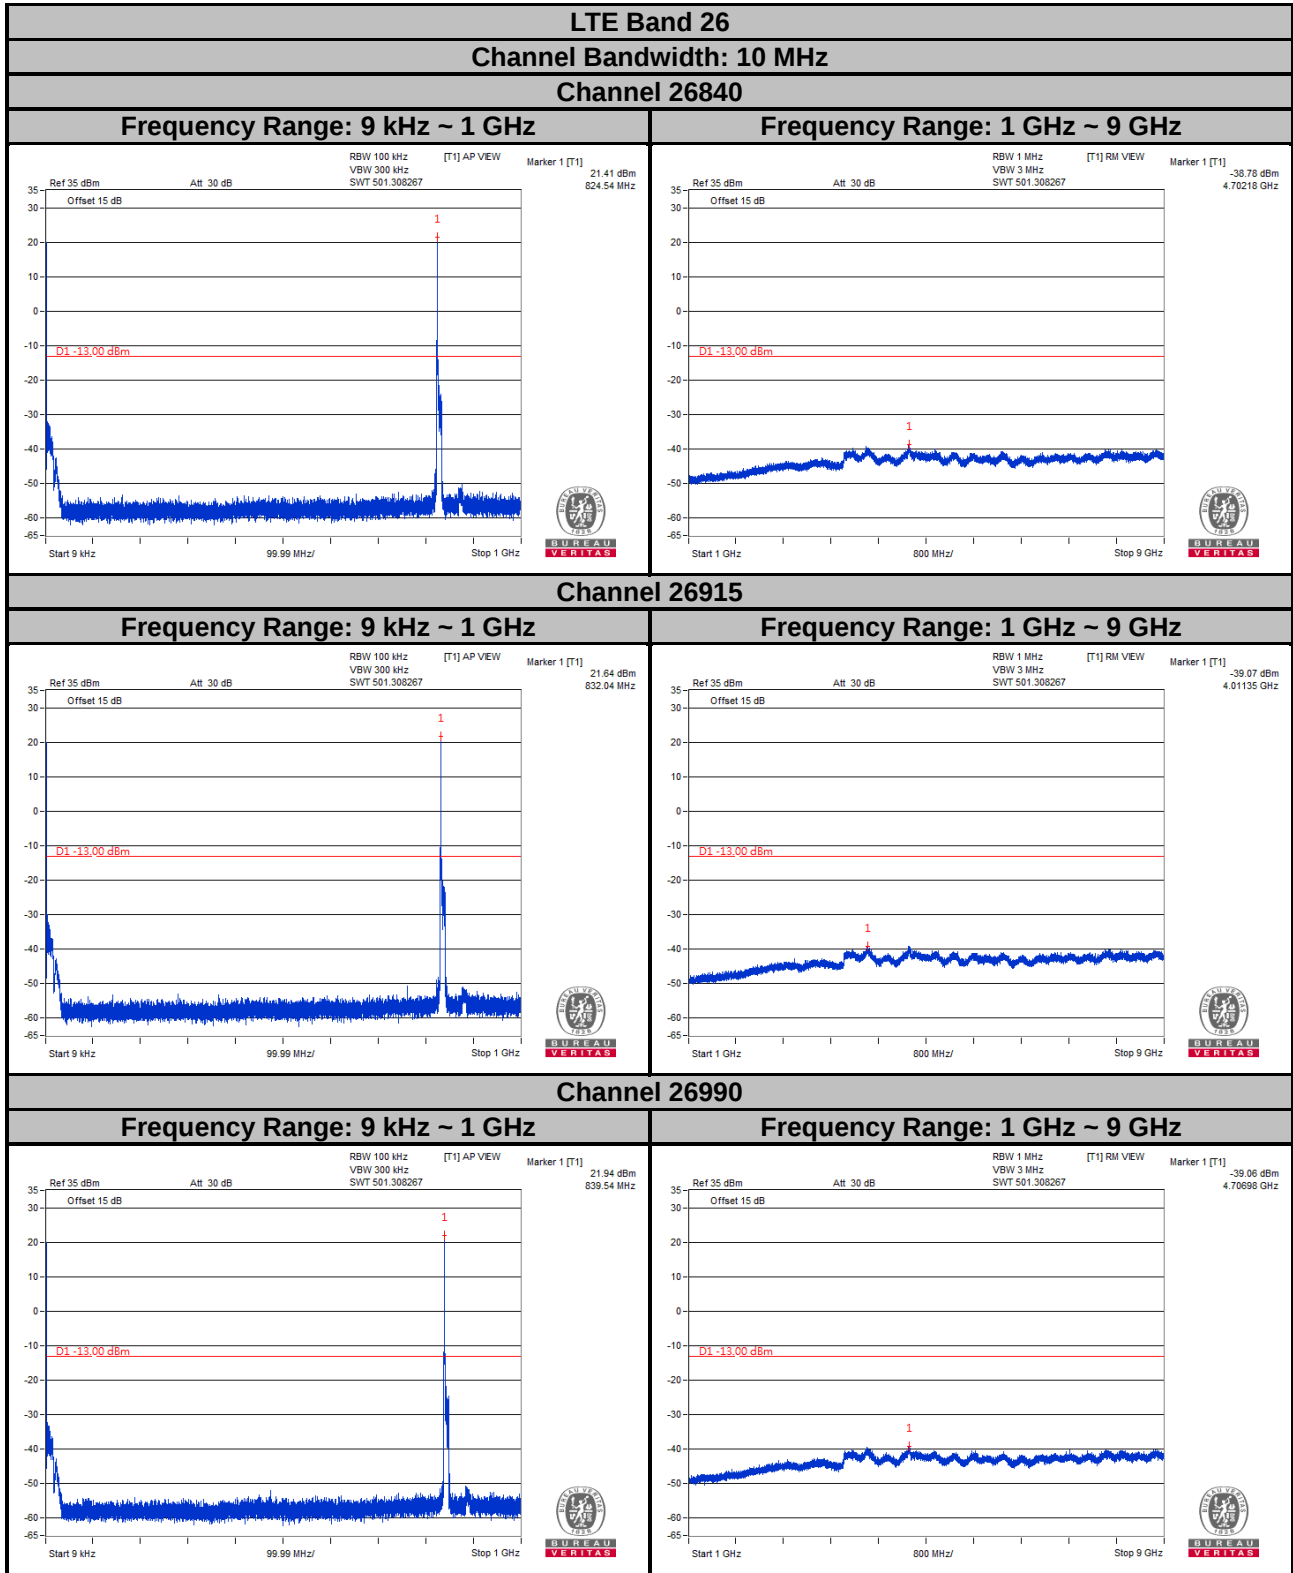

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

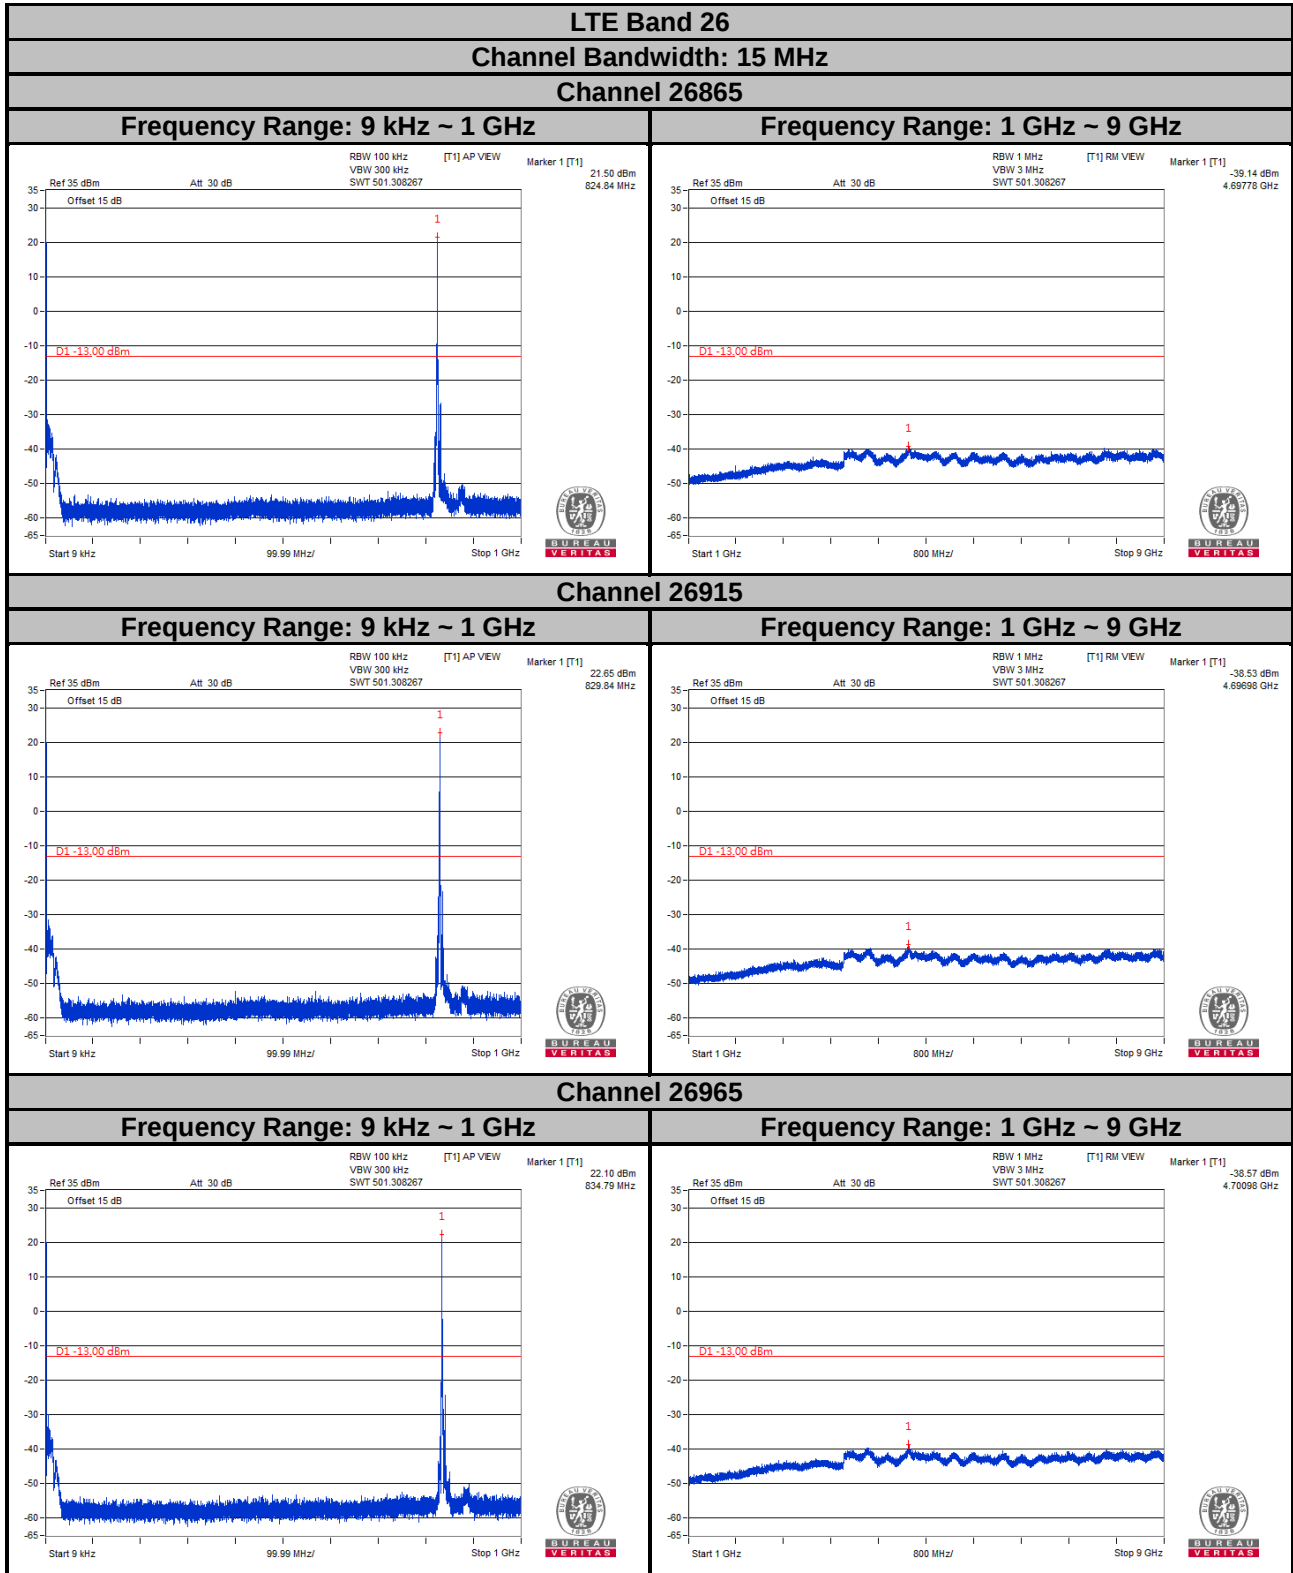

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.8.2 Test Procedure

- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}.$


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

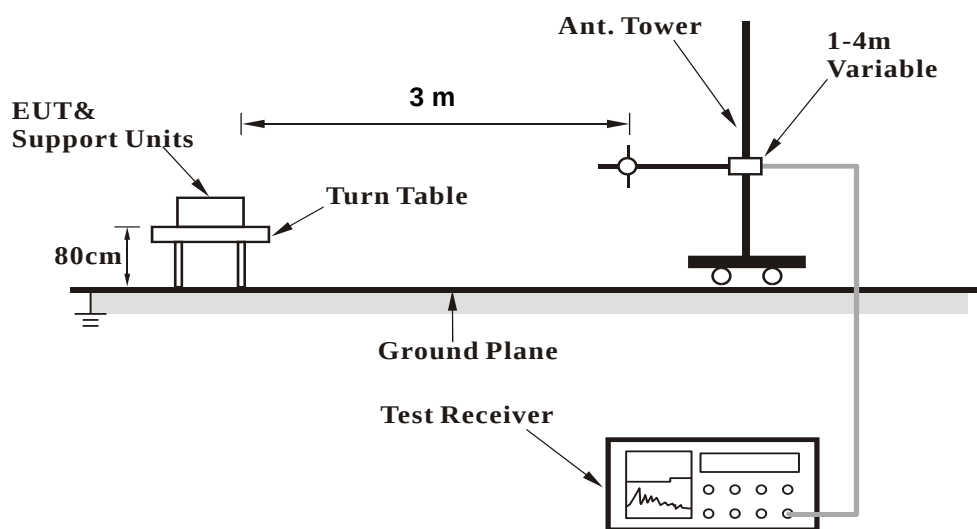

<Radiated Emission above 1 GHz>

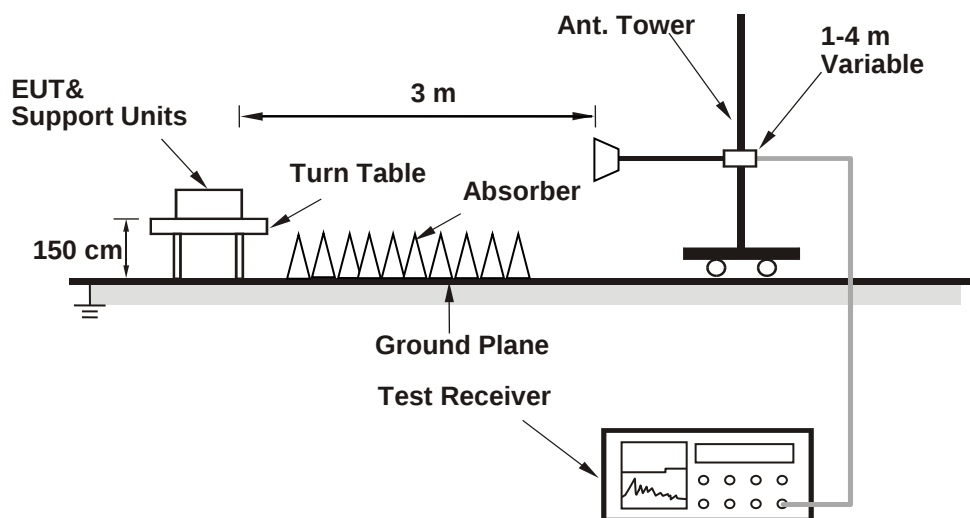

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

WCDMA:


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

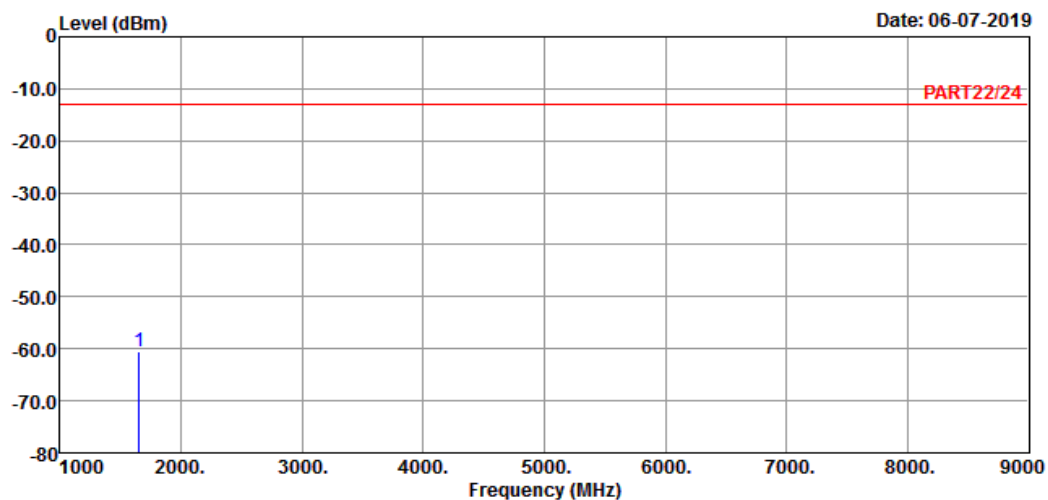

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : WCDMA Band 5 Link_L-CH
 Tested by: Thomas Wei

Freq	Level	Read	Limit	Over	
MHz	dBm	Level	Line	Factor	Limit Remark
		dBm	dBm	dB	dB

1 pp 1652.80 -60.48 -46.71 -13.00 -13.77 -47.48 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-07-2019

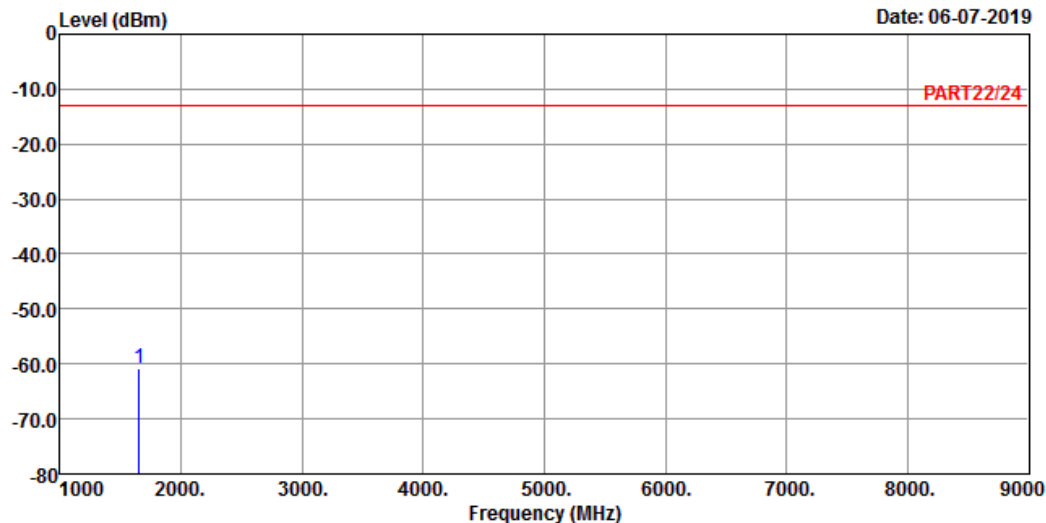

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : WCDMA Band 5 Link_L-CH

Tested by: Thomas Wei

Freq	Level	Read Level	Limit	Over	
MHz	dBm	dBm	dBm	dB	dB

1 pp 1652.80 -60.71 -46.94 -13.00 -13.77 -47.71 Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 06-07-2019

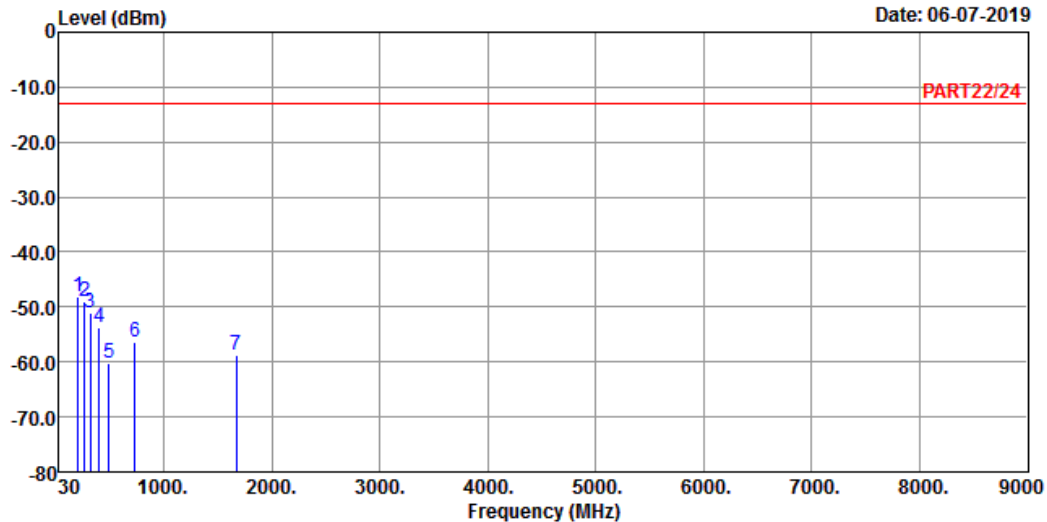

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : WCDMA Band 5 Link_M-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Over	
	MHz	dBm	dBm	dBm	Factor	Limit Remark
1 pp	204.60	-48.24	-40.41	-13.00	-7.83	-35.24 Peak
2	261.83	-48.93	-42.70	-13.00	-6.23	-35.93 Peak
3	317.12	-51.06	-44.31	-13.00	-6.75	-38.06 Peak
4	403.45	-53.75	-47.83	-13.00	-5.92	-40.75 Peak
5	488.81	-60.32	-55.49	-13.00	-4.83	-47.32 Peak
6	732.28	-56.25	-56.78	-13.00	0.53	-43.25 Peak
7	1672.80	-58.76	-44.86	-13.00	-13.90	-45.76 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 06-07-2019

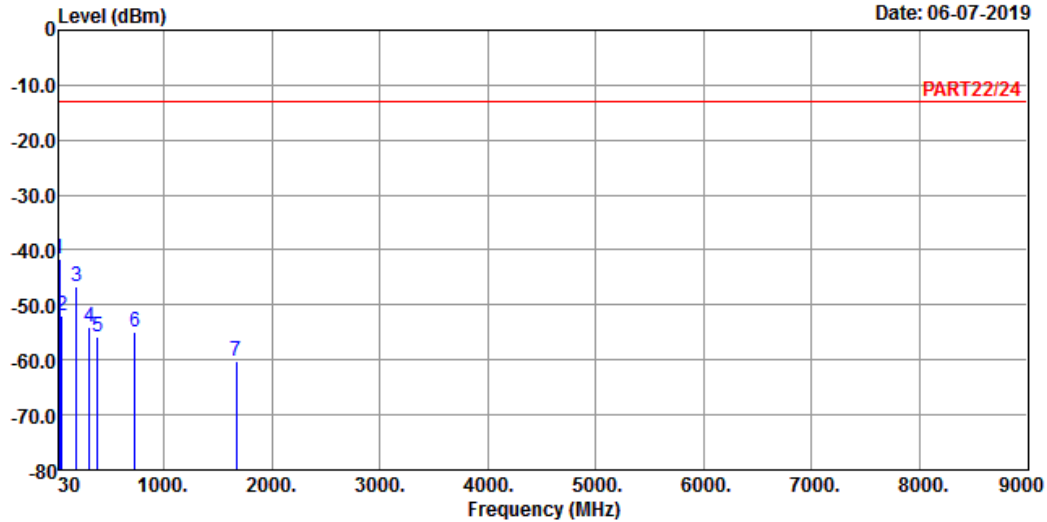

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : WCDMA Band 5 Link_M-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Over	
	MHz	dBm	dBm	dBm	dB	Limit Remark
1 pp	30.97	-41.74	-41.63	-13.00	-0.11	-28.74 Peak
2	53.28	-51.85	-46.04	-13.00	-5.81	-38.85 Peak
3	188.11	-46.59	-39.44	-13.00	-7.15	-33.59 Peak
4	311.30	-53.97	-47.14	-13.00	-6.83	-40.97 Peak
5	388.90	-55.80	-49.79	-13.00	-6.01	-42.80 Peak
6	731.31	-55.05	-55.57	-13.00	0.52	-42.05 Peak
7	1672.80	-60.34	-46.44	-13.00	-13.90	-47.34 Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 06-07-2019

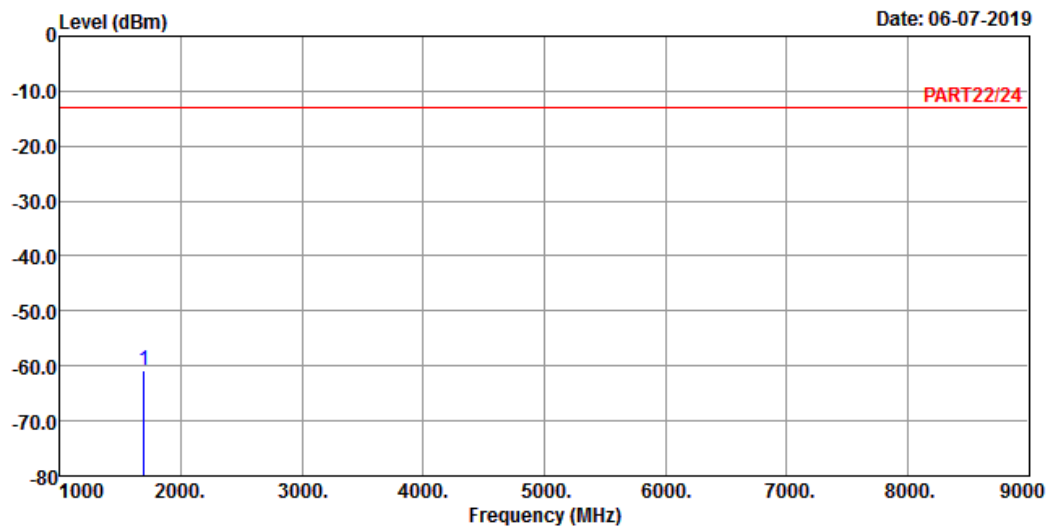

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : WCDMA Band 5 Link_H-CH

Tested by: Thomas Wei

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1693.20 -60.92 -46.90 -13.00 -14.02 -47.92 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-07-2019

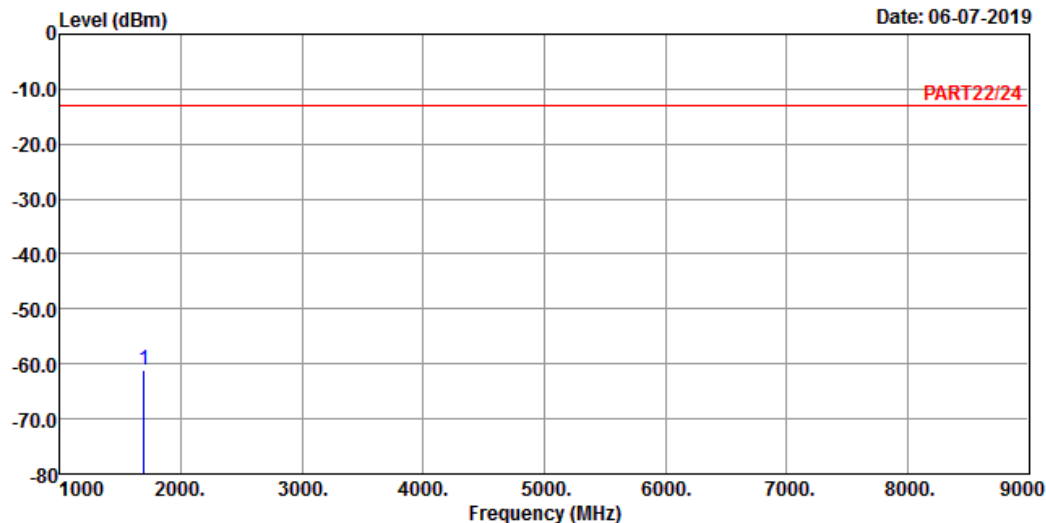

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : WCDMA Band 5 Link_H-CH

Tested by: Thomas Wei

Freq	Level	Read Level	Limit	Over	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1693.20 -61.15 -47.13 -13.00 -14.02 -48.15 Peak

LTE Band 5
Channel Bandwidth: 1.4 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 06-05-2019

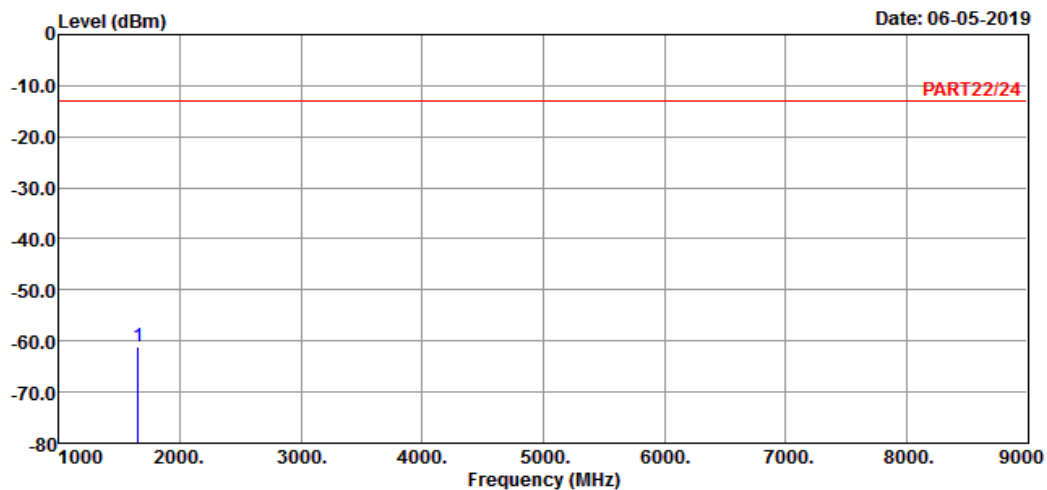

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_1.4M Link_L-CH
Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1649.40 -60.99 -47.25 -13.00 -13.74 -47.99 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

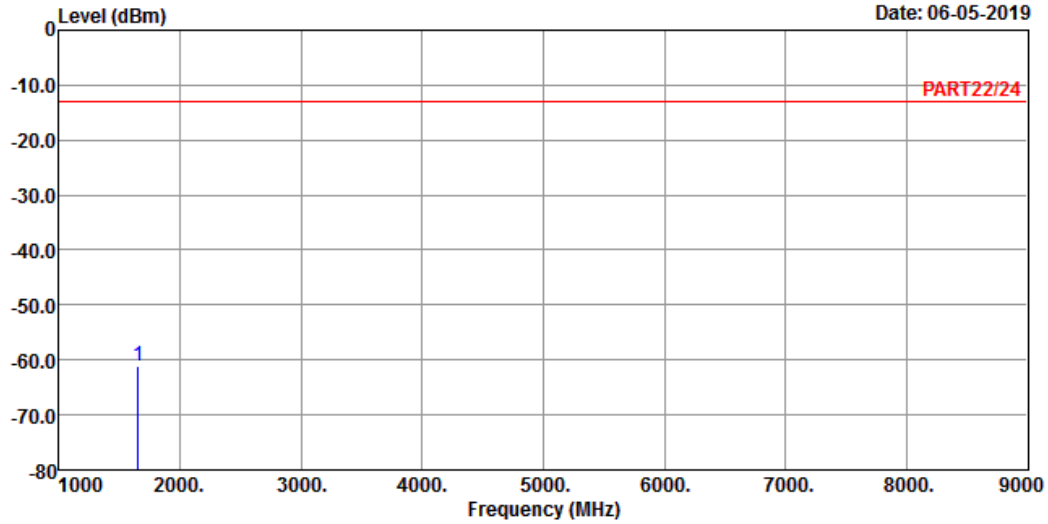

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_1.4M Link_L-CH

Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Over	
MHz	dBm	dBm	dBm	dB	dB

1 pp 1649.40 -61.12 -47.38 -13.00 -13.74 -48.12 Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 06-05-2019

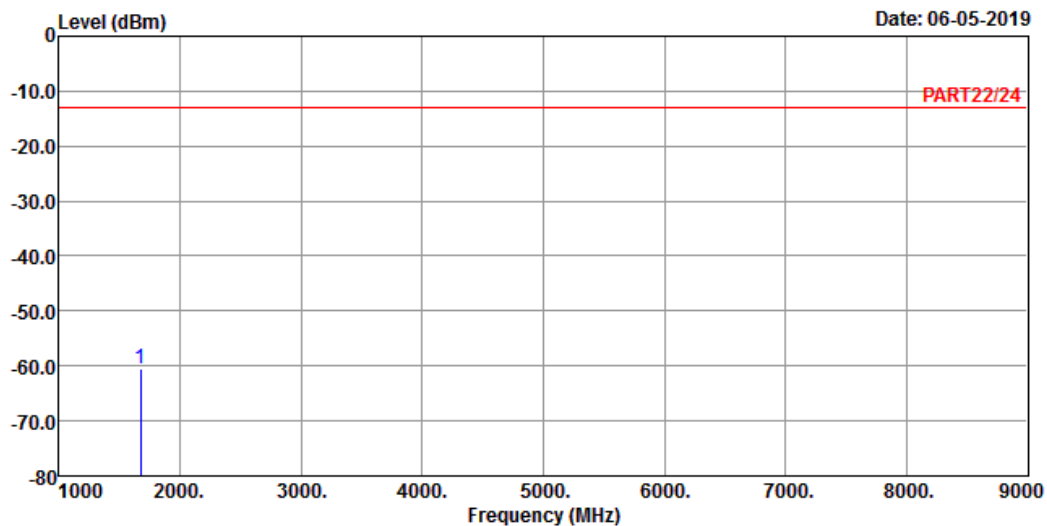

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_1.4M Link_M-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -60.44 -46.54 -13.00 -13.90 -47.44 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

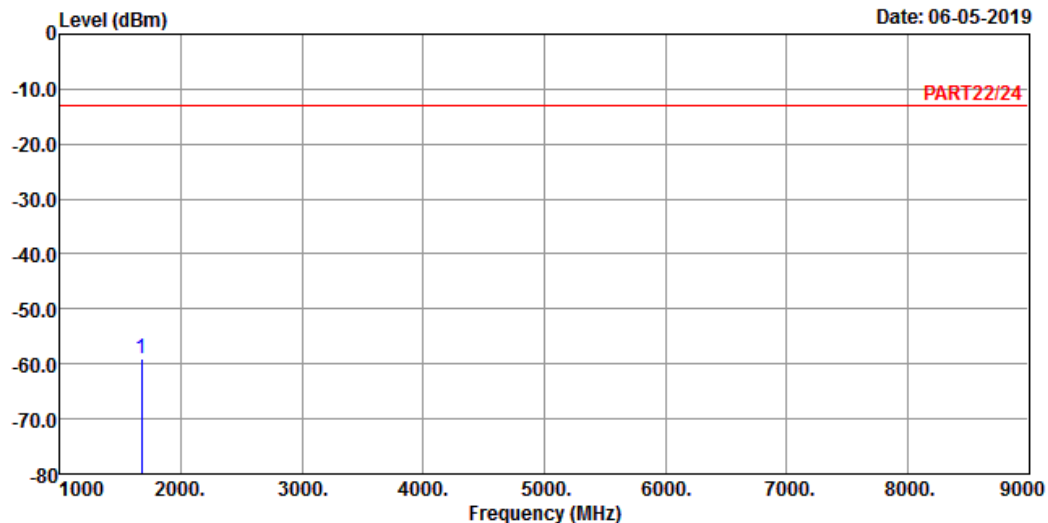

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_1.4M Link_M-CH

Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Over	Remark
MHz	dBm	dBm	dBm	dB	

1 pp 1673.00 -59.13 -45.23 -13.00 -13.90 -46.13 Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 06-05-2019

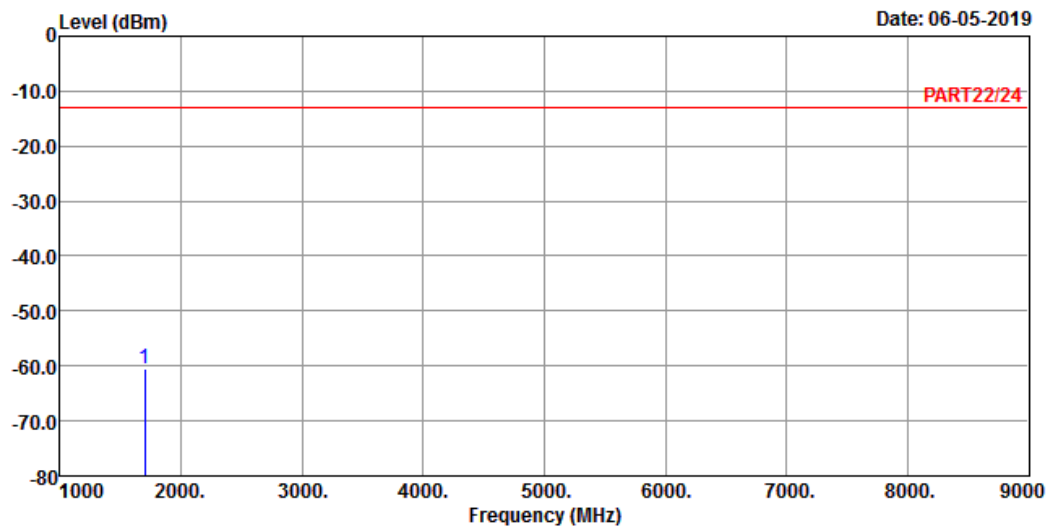

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_1.4M Link_H-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1696.60 -60.57 -46.55 -13.00 -14.02 -47.57 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

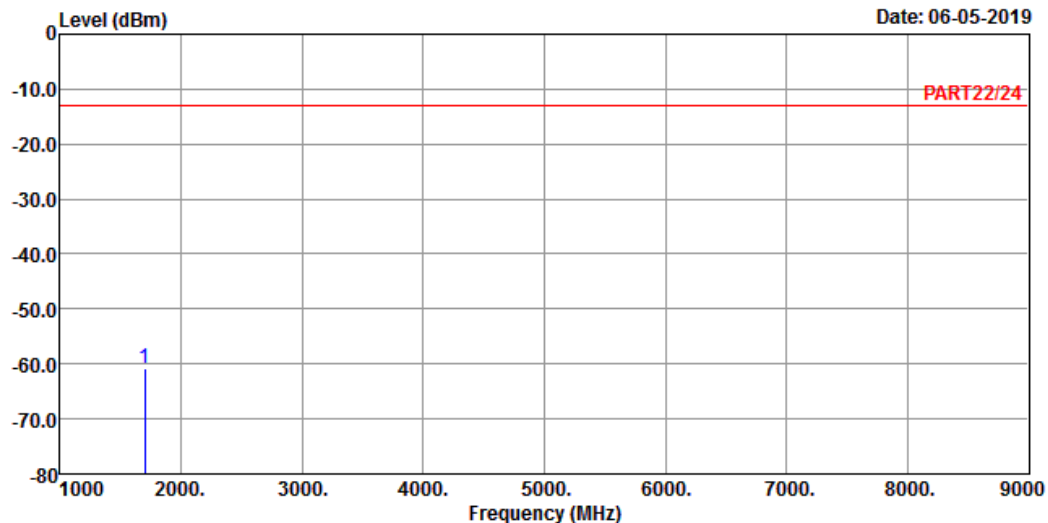

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_1.4M Link_H-CH

Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Over	
MHz	dBm	dBm	dBm	dB	dB

1 pp 1696.60 -60.87 -46.85 -13.00 -14.02 -47.87 Peak

Channel Bandwidth: 5 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 06-05-2019

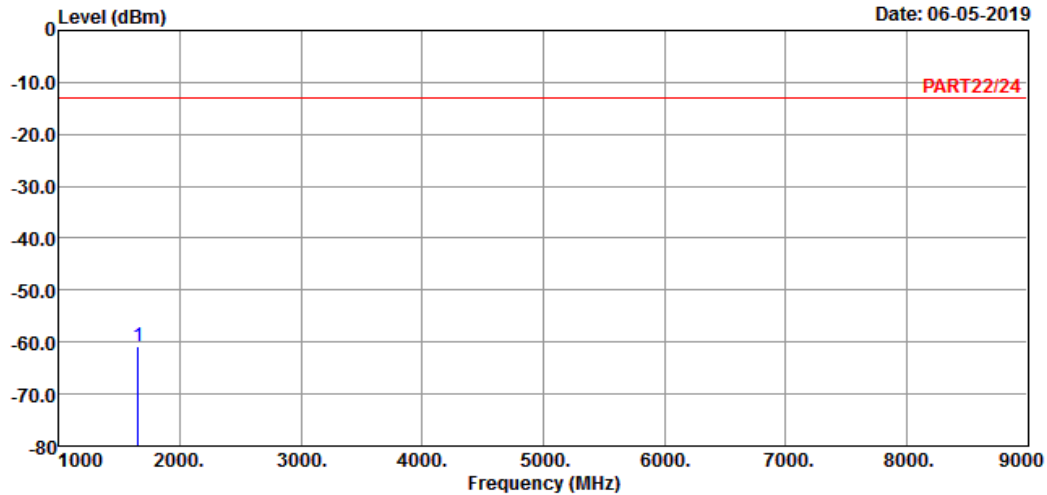

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_5M Link_L-CH
Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1653.00 -60.67 -46.90 -13.00 -13.77 -47.67 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

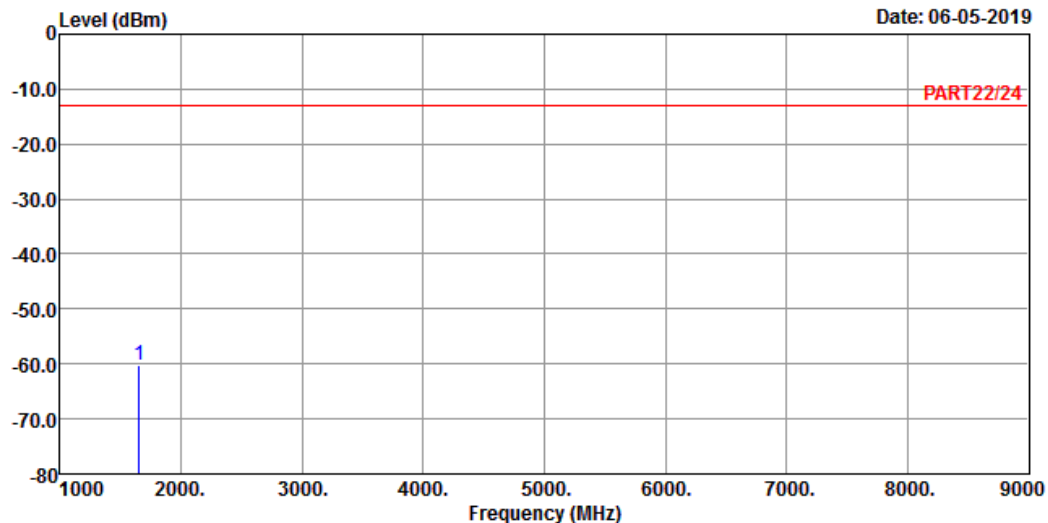

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_5M Link_L-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1653.00 -60.11 -46.34 -13.00 -13.77 -47.11 Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 06-05-2019

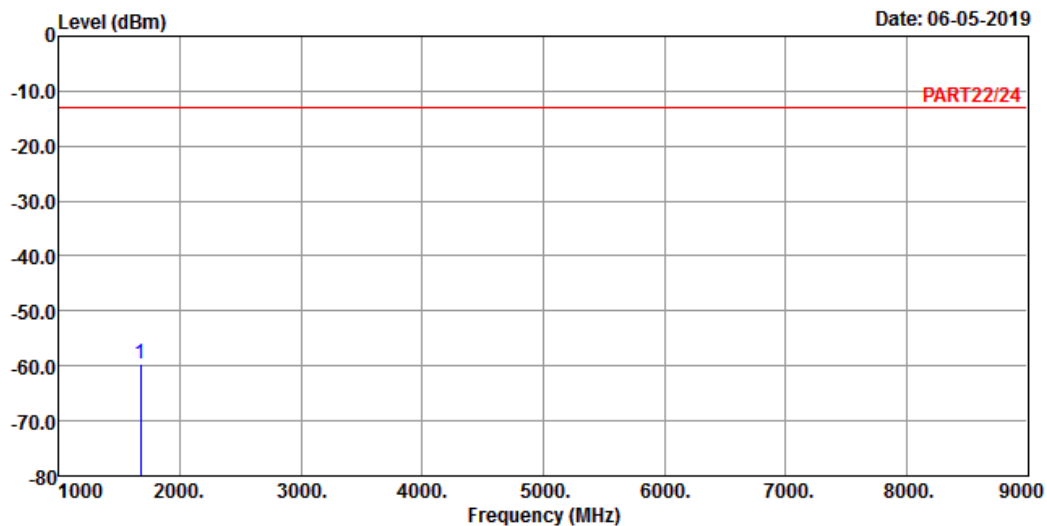

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_5M Link_M-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -59.49 -45.59 -13.00 -13.90 -46.49 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

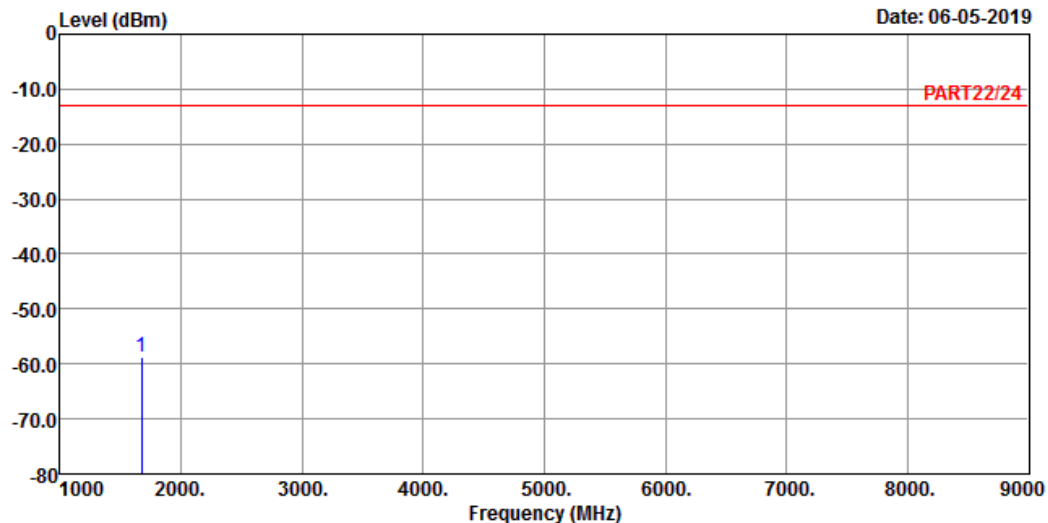

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_5M Link_M-CH

Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -58.74 -44.84 -13.00 -13.90 -45.74 Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 06-05-2019

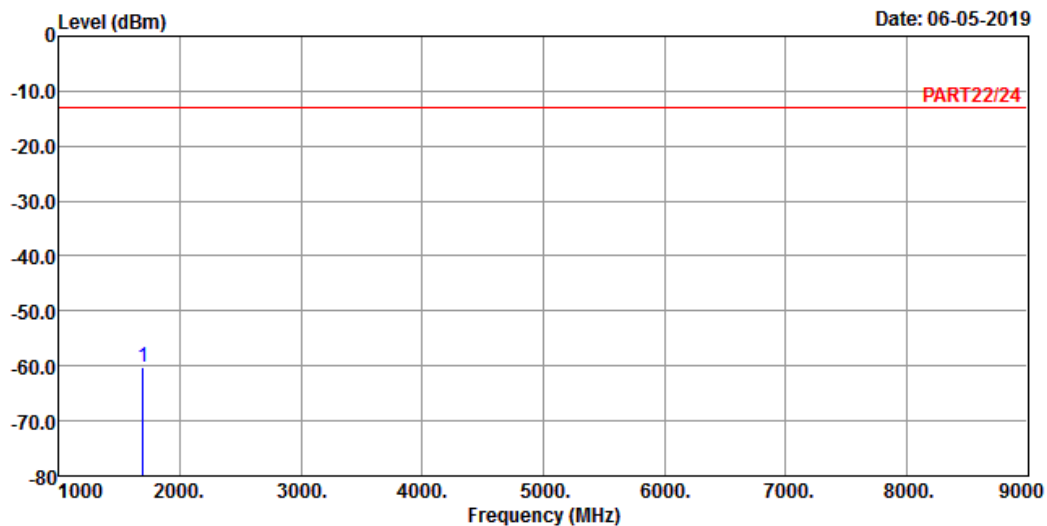

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_5M Link_H-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1693.00 -60.21 -46.19 -13.00 -14.02 -47.21 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

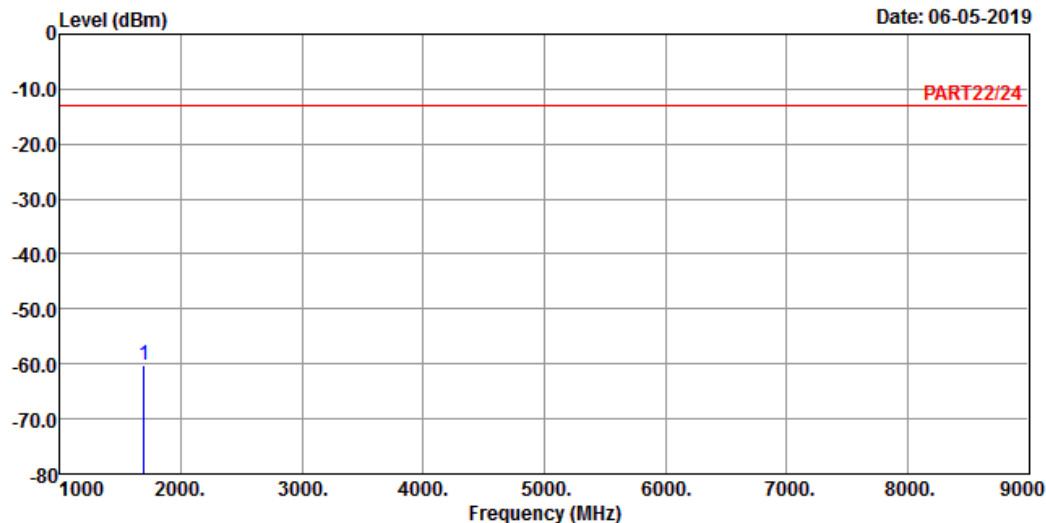

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_5M Link_H-CH

Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1693.00 -60.18 -46.16 -13.00 -14.02 -47.18 Peak


Channel Bandwidth: 10 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

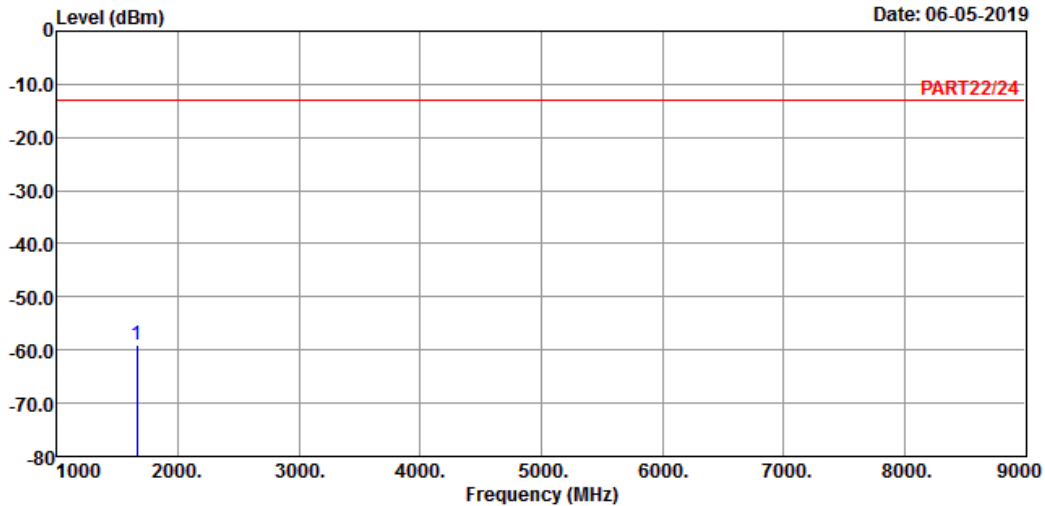

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 5 QPSK_10M Link_L-CH
Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Over	Remark
MHz	dBm	dBm	dBm	dB	

1 pp 1658.00 -59.14 -45.34 -13.00 -13.80 -46.14 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

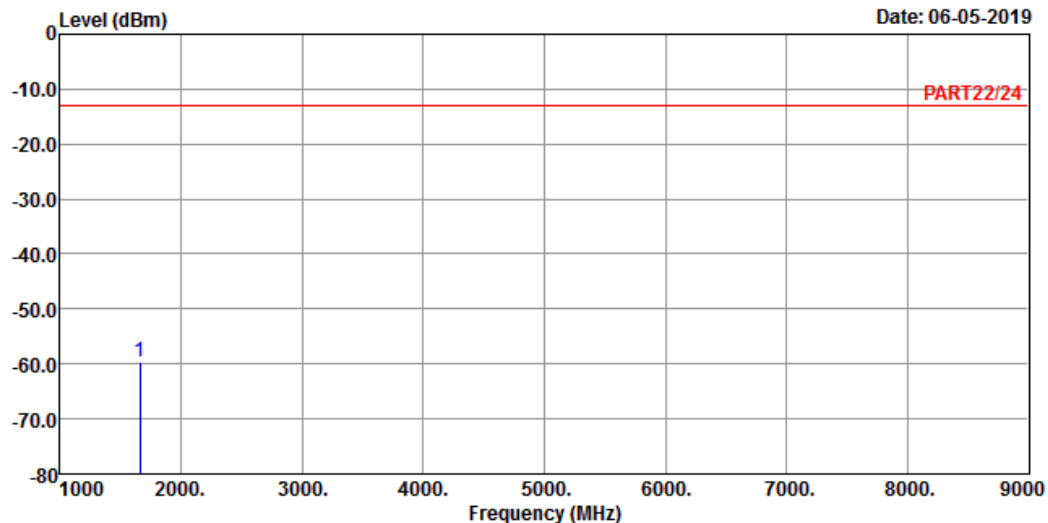

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_10M Link_L-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1658.00 -59.64 -45.84 -13.00 -13.80 -46.64 Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 06-05-2019

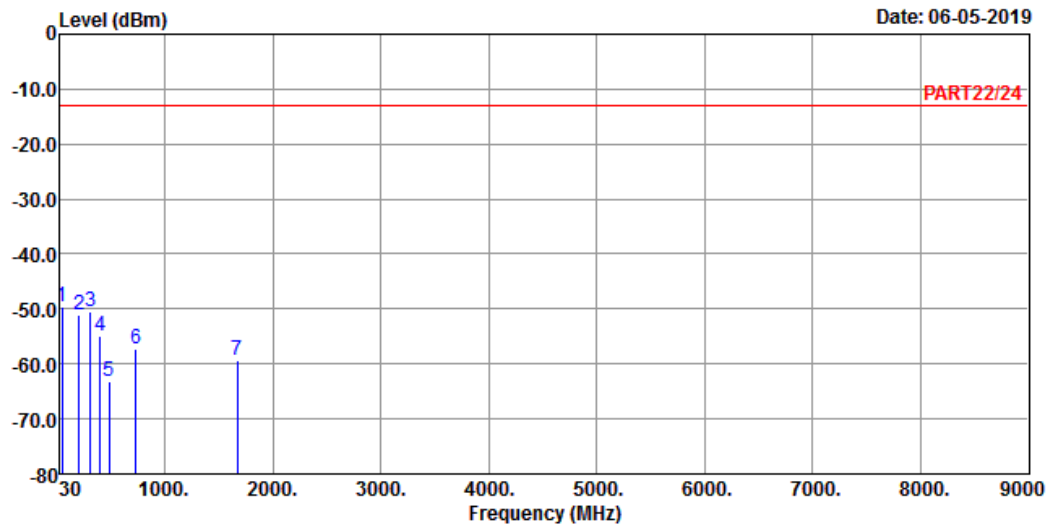

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_10M Link_M-CH

Tested by: Getaz Yang

			Read	Limit		Over	
	Freq	Level	Level	Line	Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	43.58	-49.60	-48.13	-13.00	-1.47	-36.60	Peak
2	206.54	-51.17	-43.42	-13.00	-7.75	-38.17	Peak
3	312.27	-50.52	-43.70	-13.00	-6.82	-37.52	Peak
4	403.45	-54.93	-49.01	-13.00	-5.92	-41.93	Peak
5	484.93	-63.23	-58.33	-13.00	-4.90	-50.23	Peak
6	731.31	-57.24	-57.76	-13.00	0.52	-44.24	Peak
7	1673.00	-59.33	-45.43	-13.00	-13.90	-46.33	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 06-05-2019

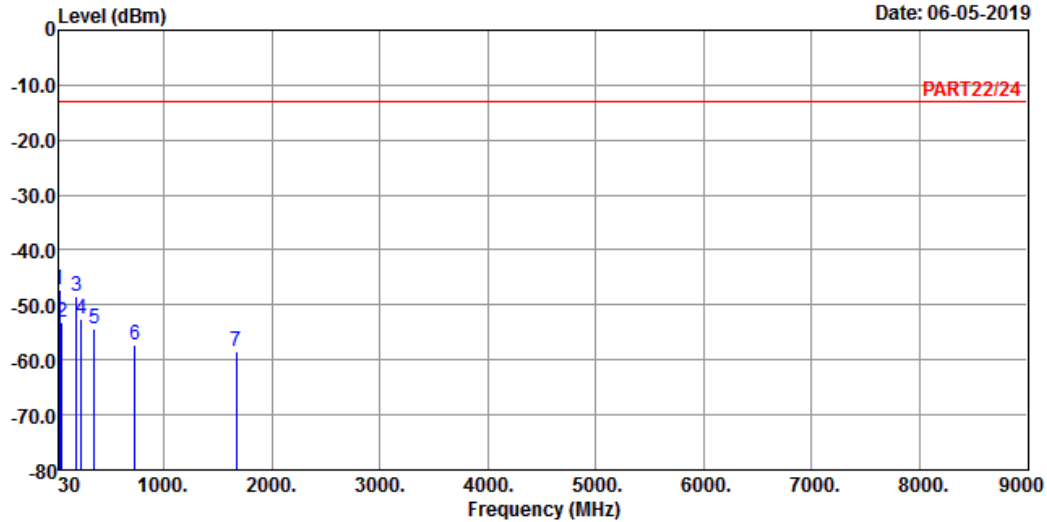

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_10M Link_M-CH

Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	30.00	-47.10	-47.48	-13.00	0.38	-34.10	Peak
2	53.28	-53.12	-47.31	-13.00	-5.81	-40.12	Peak
3	192.96	-48.38	-41.01	-13.00	-7.37	-35.38	Peak
4	236.61	-52.53	-45.99	-13.00	-6.54	-39.53	Peak
5	357.86	-54.43	-48.24	-13.00	-6.19	-41.43	Peak
6	729.37	-57.28	-57.76	-13.00	0.48	-44.28	Peak
7	1673.00	-58.34	-44.44	-13.00	-13.90	-45.34	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 06-05-2019

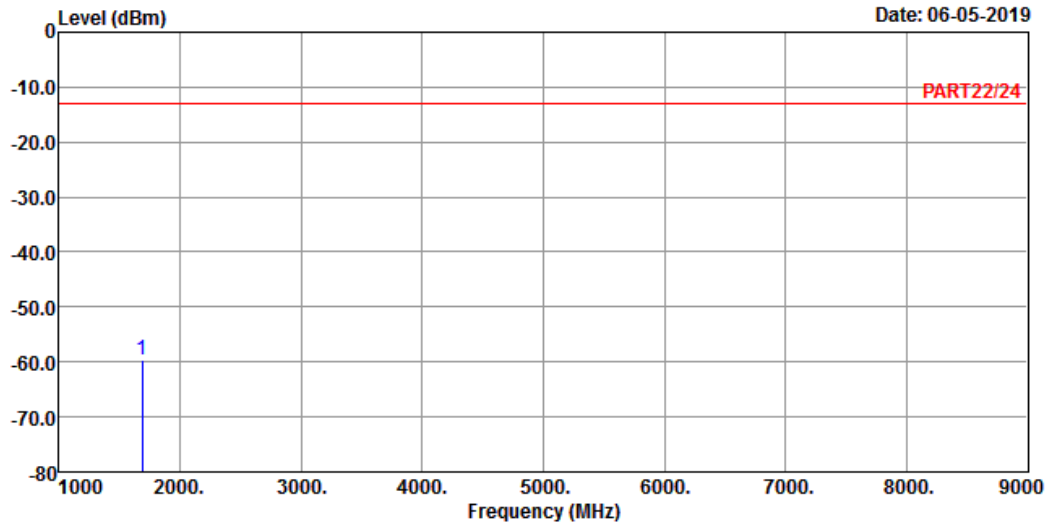

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 5 QPSK_10M Link_H-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1688.00 -59.73 -45.74 -13.00 -13.99 -46.73 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

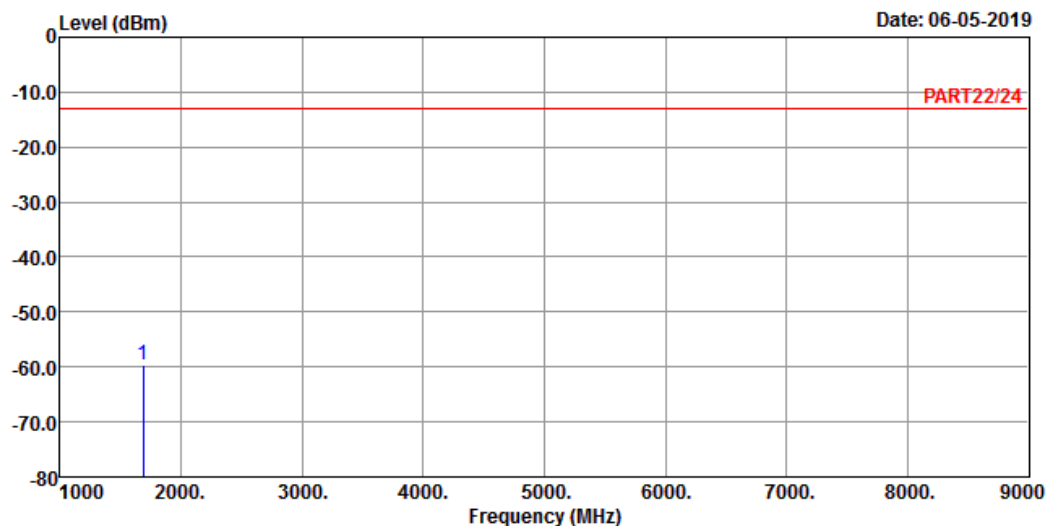

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 5 QPSK_10M Link_H-CH

Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1688.00 -59.78 -45.79 -13.00 -13.99 -46.78 Peak

LTE Band 26
Channel Bandwidth: 1.4 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 06-05-2019

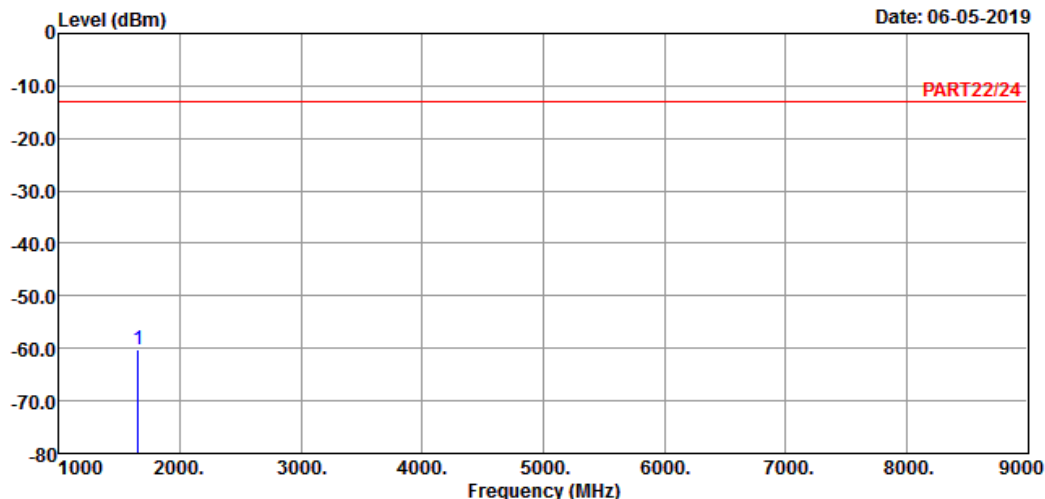

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_1.4M Link_L-CH
Tested by: Getaz Yang

Freq	Level	Read	Limit	Over	Remark
MHz	dBm	Level	Line	Factor	Limit
		dBm	dBm	dB	dB

1 pp 1649.40 -60.12 -46.38 -13.00 -13.74 -47.12 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

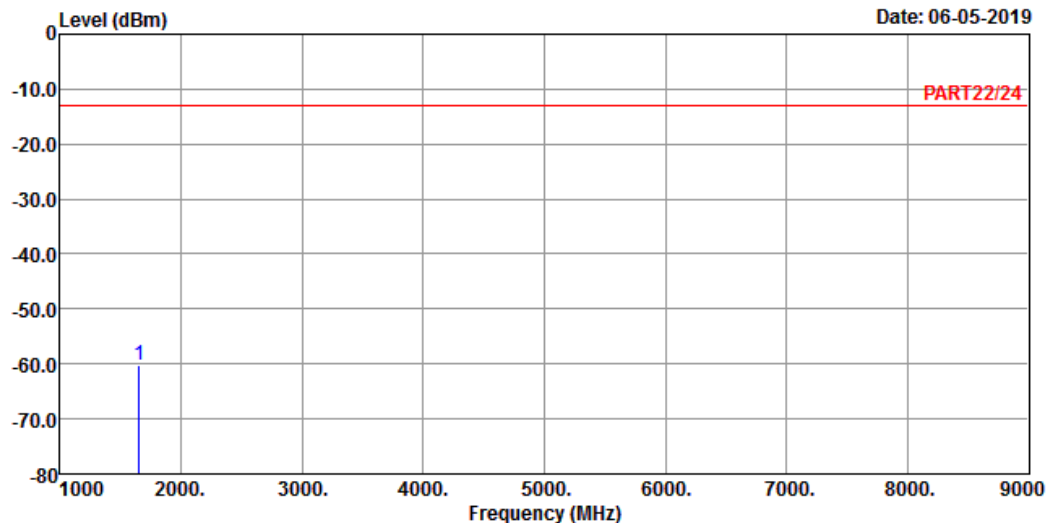

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_1.4M Link_L-CH

Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Over	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1649.40 -60.23 -46.49 -13.00 -13.74 -47.23 Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 06-05-2019

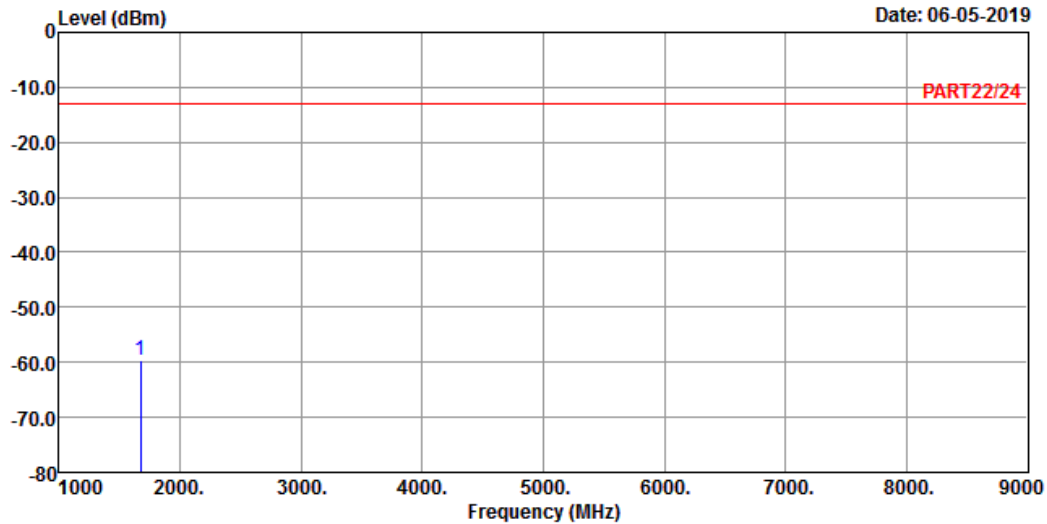

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 26 QPSK_1.4M Link_M-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -59.71 -45.81 -13.00 -13.90 -46.71 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

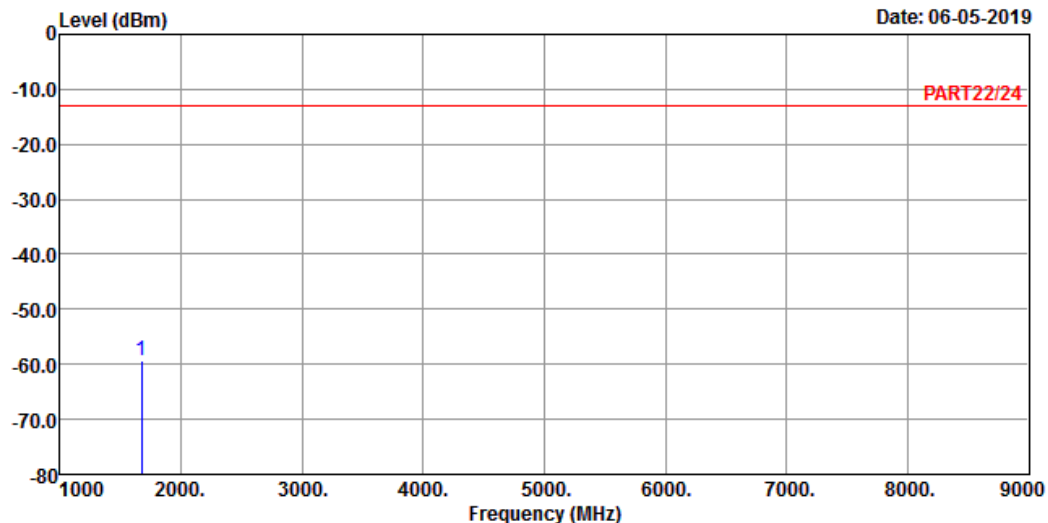

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_1.4M Link_M-CH

Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Over	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -59.44 -45.54 -13.00 -13.90 -46.44 Peak

High Channel




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

Date: 06-05-2019

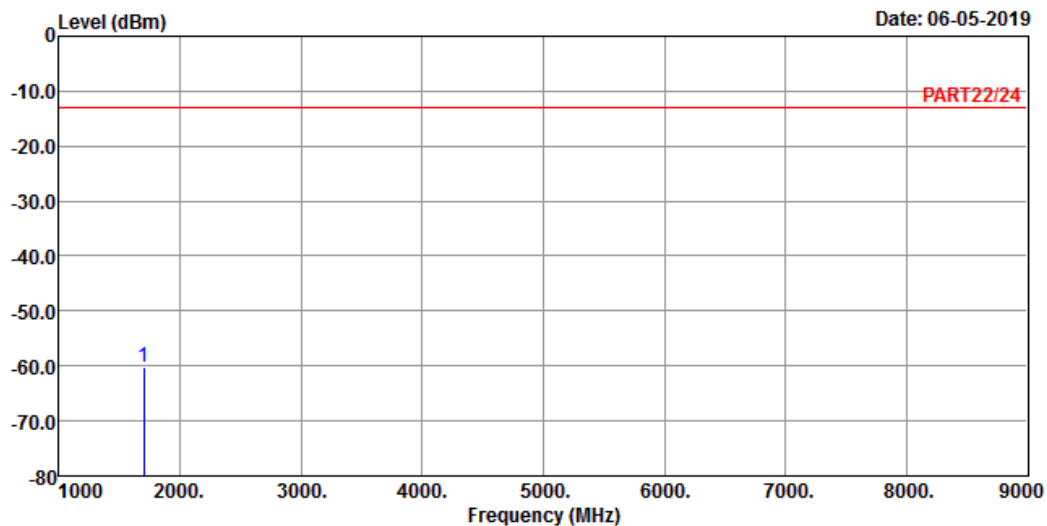

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 26 QPSK_1.4M Link_H-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1696.60 -60.16 -46.14 -13.00 -14.02 -47.16 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

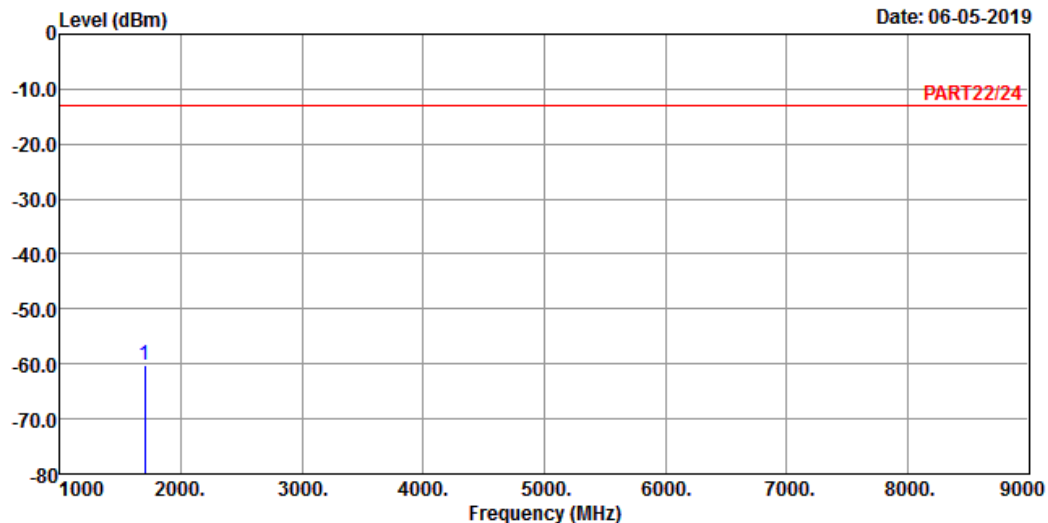

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_1.4M Link_H-CH

Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Over	
MHz	dBm	dBm	dBm	dB	dB

1 pp 1696.60 -60.37 -46.35 -13.00 -14.02 -47.37 Peak

Channel Bandwidth: 5 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 06-05-2019

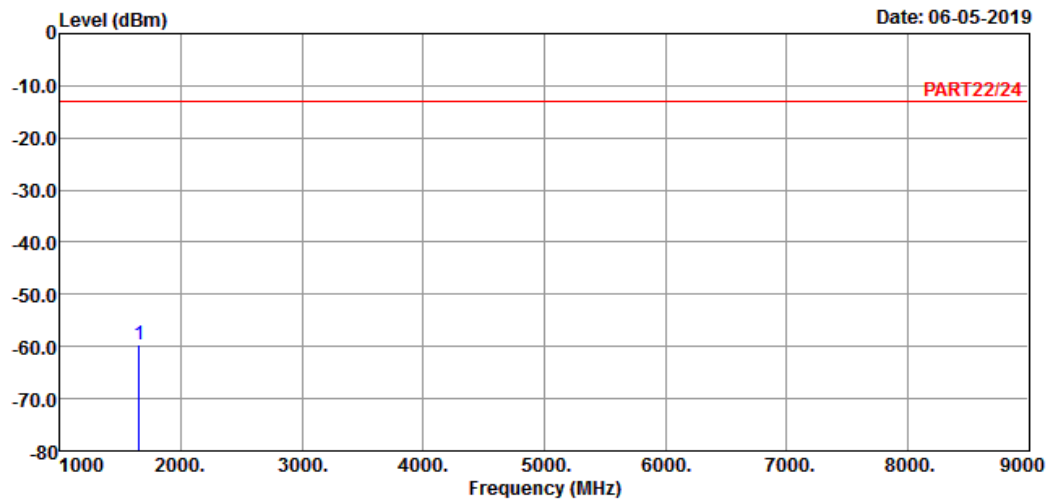

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_5M Link_L-CH
Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Over	Remark
MHz	dBm	dBm	dBm	dB	

1 pp 1653.00 -59.54 -45.77 -13.00 -13.77 -46.54 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

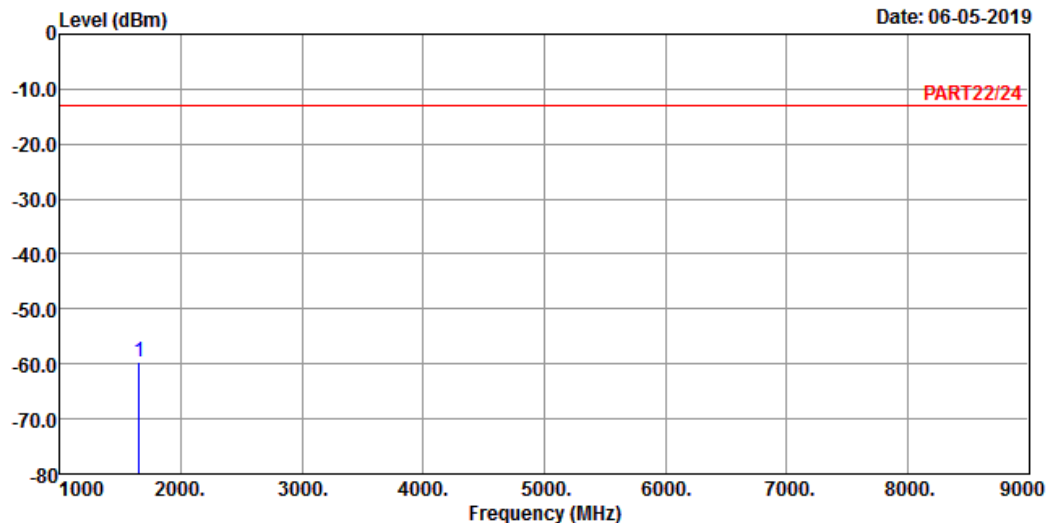

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_5M Link_L-CH

Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1653.00 -59.62 -45.85 -13.00 -13.77 -46.62 Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 06-05-2019

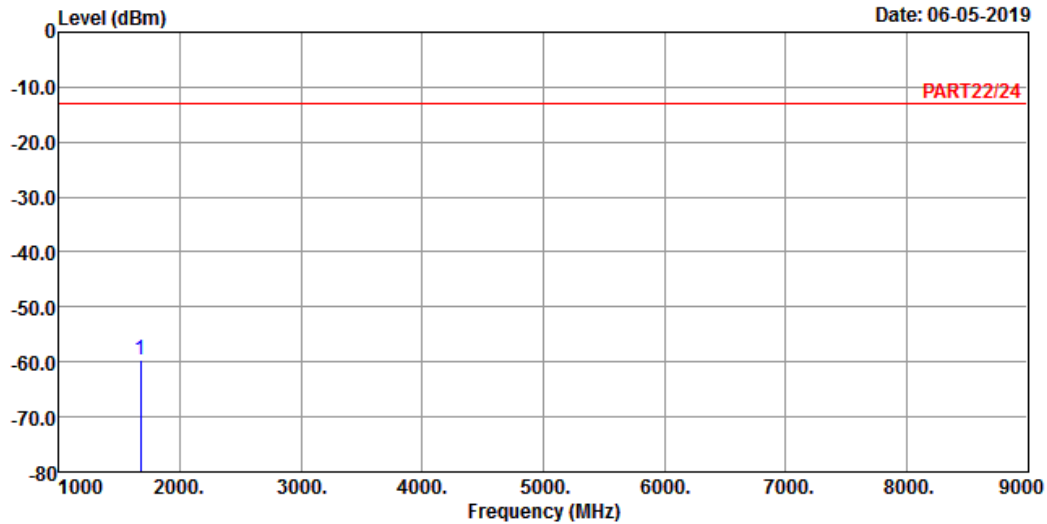

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 26 QPSK_5M Link_M-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -59.49 -45.59 -13.00 -13.90 -46.49 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

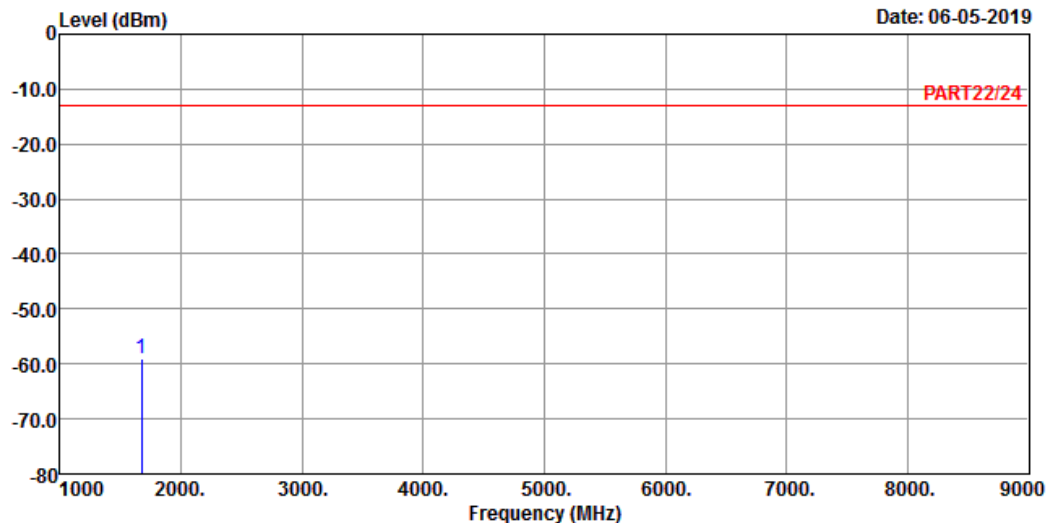

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_5M Link_M-CH

Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -58.93 -45.03 -13.00 -13.90 -45.93 Peak

High Channel




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

Date: 06-05-2019

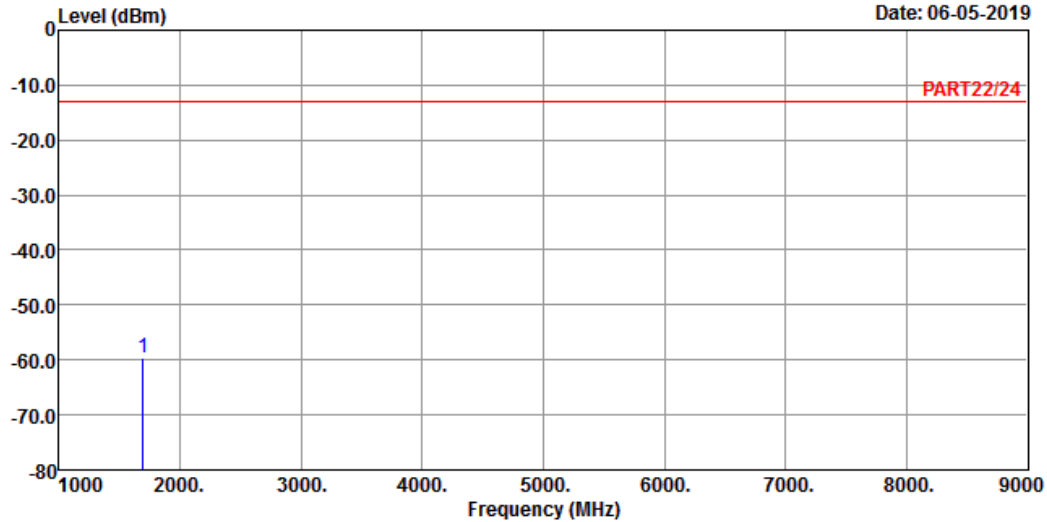

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 26 QPSK_5M Link_H-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1693.00 -59.69 -45.67 -13.00 -14.02 -46.69 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

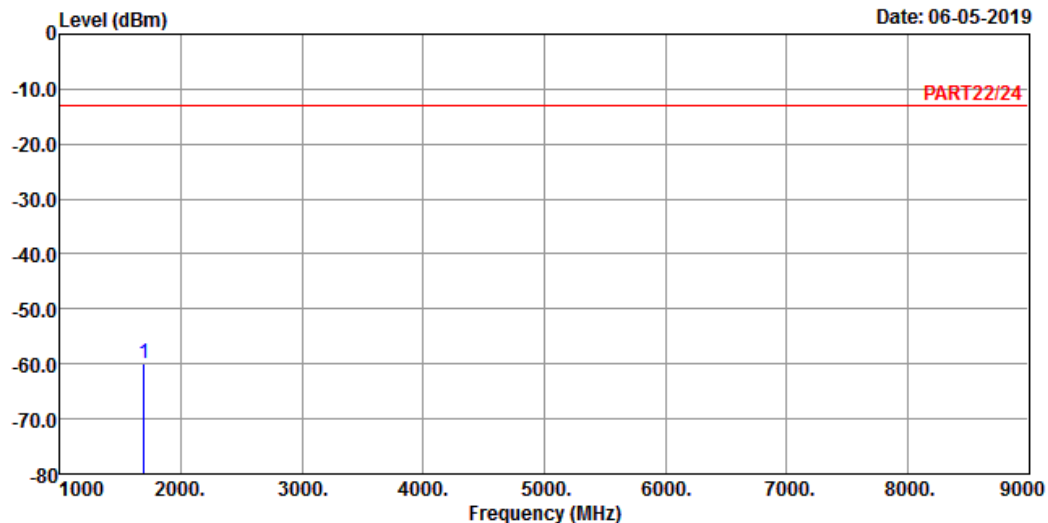

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_5M Link_H-CH

Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Over	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1693.00 -59.96 -45.94 -13.00 -14.02 -46.96 Peak

Channel Bandwidth: 15 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 06-05-2019

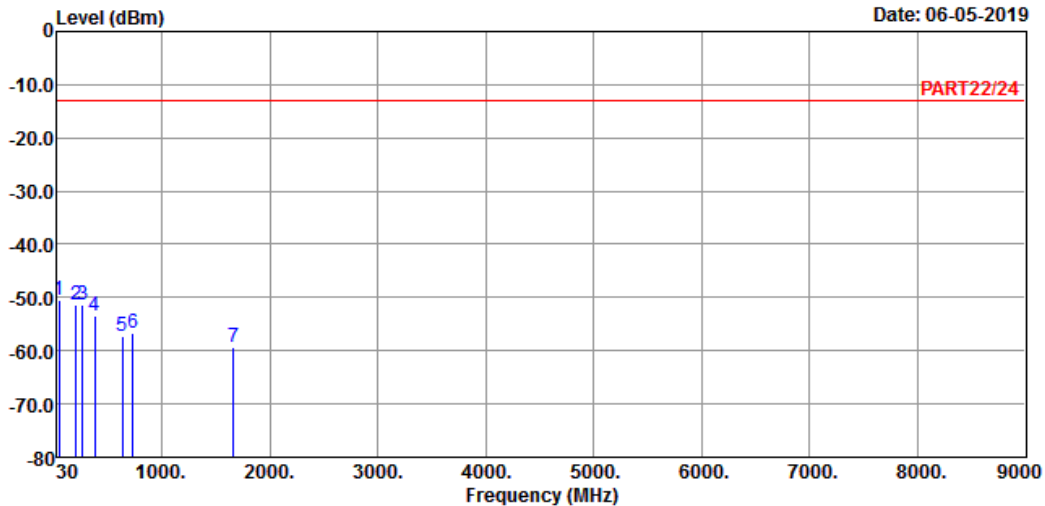

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : LTE Band 26 QPSK_15M Link_L-CH
Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Over		
	MHz	dBm	dBm	dBm	dB	dB	Remark
1 pp	43.58	-50.36	-48.89	-13.00	-1.47	-37.36	Peak
2	202.66	-51.27	-43.37	-13.00	-7.90	-38.27	Peak
3	265.71	-51.49	-45.18	-13.00	-6.31	-38.49	Peak
4	380.17	-53.54	-47.48	-13.00	-6.06	-40.54	Peak
5	632.37	-57.25	-56.41	-13.00	-0.84	-44.25	Peak
6	732.28	-56.68	-57.21	-13.00	0.53	-43.68	Peak
7	1663.00	-59.45	-45.62	-13.00	-13.83	-46.45	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 06-05-2019

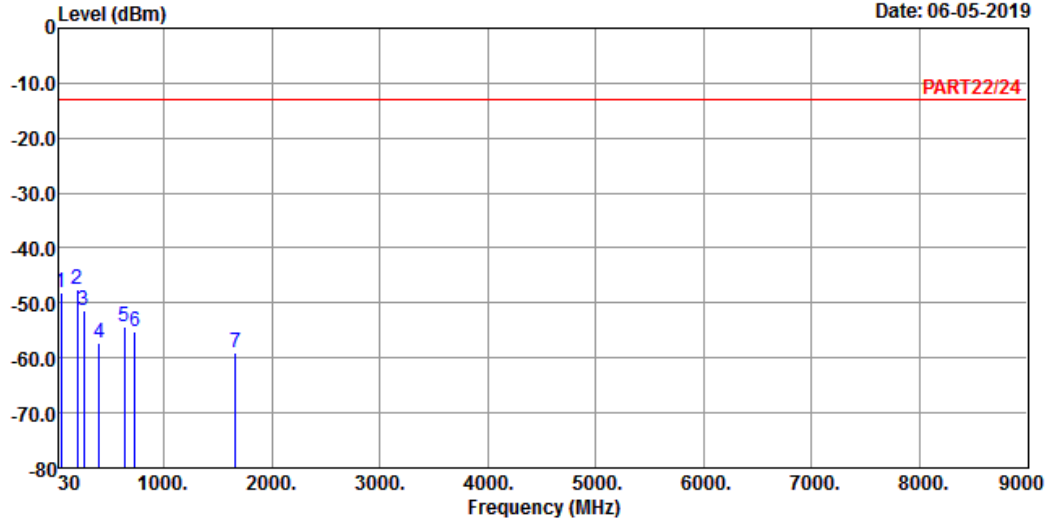

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_15M Link_L-CH

Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	43.58	-48.13	-46.66	-13.00	-1.47	-35.13	Peak
2 pp	193.93	-47.62	-40.16	-13.00	-7.46	-34.62	Peak
3	256.01	-51.37	-45.26	-13.00	-6.11	-38.37	Peak
4	399.57	-57.20	-51.25	-13.00	-5.95	-44.20	Peak
5	631.40	-54.18	-53.34	-13.00	-0.84	-41.18	Peak
6	734.22	-55.17	-55.74	-13.00	0.57	-42.17	Peak
7	1663.00	-59.06	-45.23	-13.00	-13.83	-46.06	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

Date: 06-05-2019

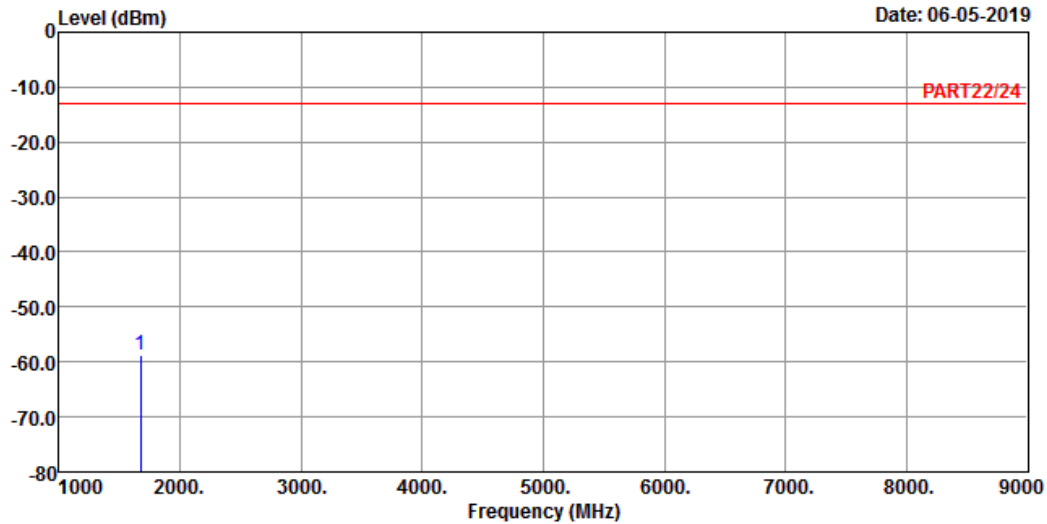

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 26 QPSK_15M Link_M-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1673.00 -58.78 -44.88 -13.00 -13.90 -45.78 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

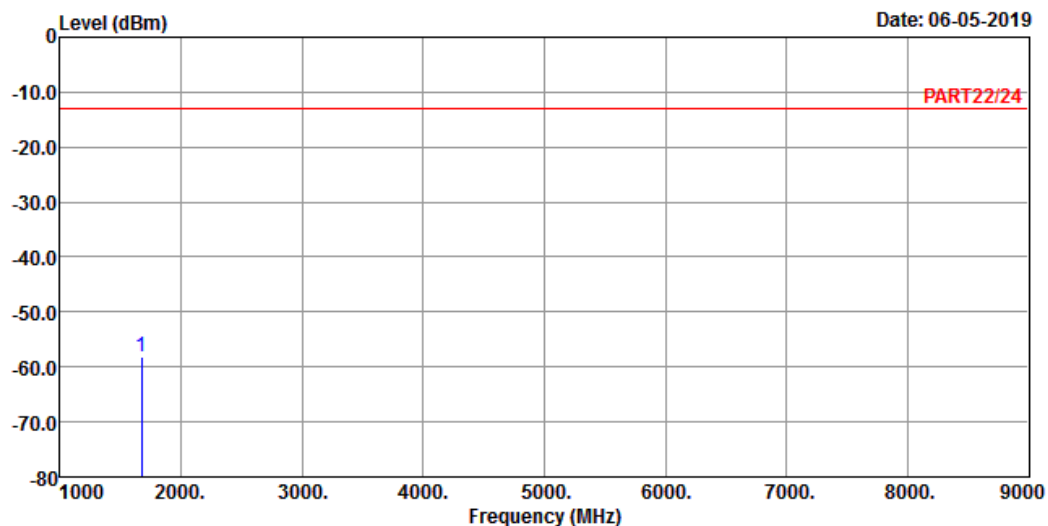

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_15M Link_M-CH

Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Over	
MHz	dBm	dBm	dBm	dB	dB

1 pp 1673.00 -58.14 -44.24 -13.00 -13.90 -45.14 Peak

High Channel




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

Date: 06-05-2019

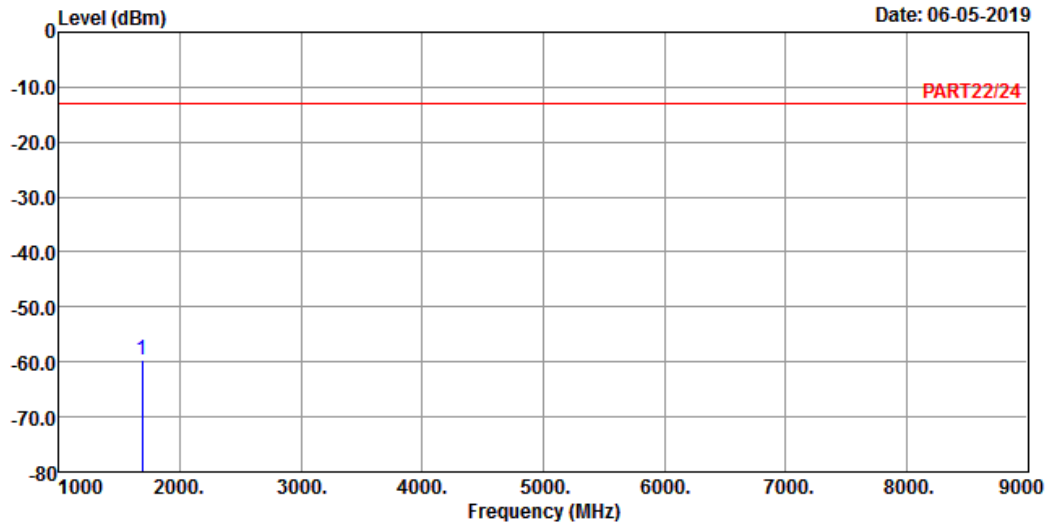

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 26 QPSK_15M Link_H-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1683.00 -59.51 -45.55 -13.00 -13.96 -46.51 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 06-05-2019

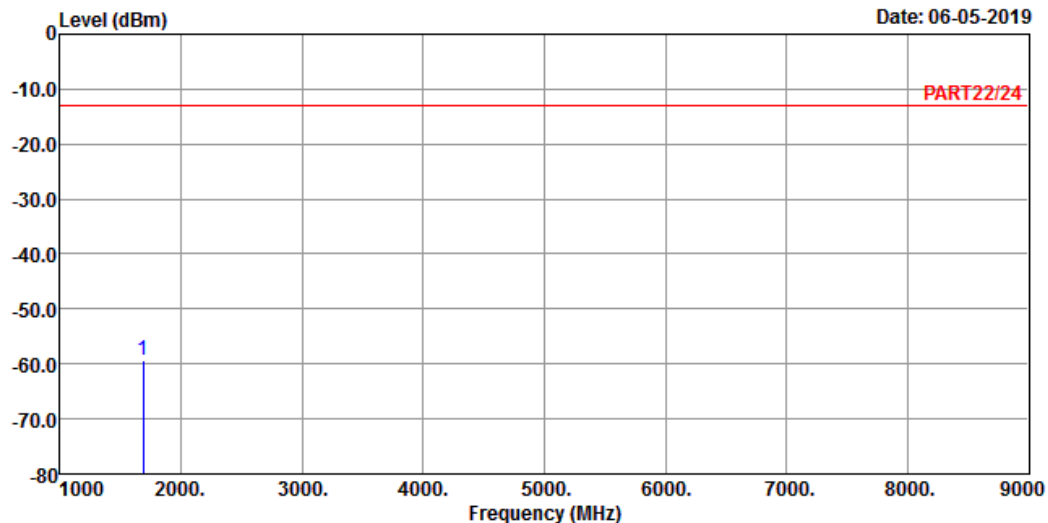

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 26 QPSK_15M Link_H-CH

Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Over	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1683.00 -59.26 -45.30 -13.00 -13.96 -46.26 Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---