




## FCC PART 15.247 TEST REPORT

For

**HoMedics, Inc.**

3000 Pontiac Trail, Commerce Township, Michigan 48390 United States

**FCC ID: TG3-HXHP303**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Bluetooth Headphone w/ANC
<b>Report Number:</b> RSZ180117803-00A	
<b>Report Date:</b> 2018-03-13	
Rocky Kang 	
<b>Reviewed By:</b> RF Engineer	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	4
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
SUPPORT EQUIPMENT LIST AND DETAILS .....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>9</b>
<b>FCC§15.247 (i), §1.1307 (b) (1) &amp;§2.1093 – RF EXPOSURE.....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
<b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
ANTENNA CONNECTOR CONSTRUCTION .....	11
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
EUT SETUP .....	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE .....	12
CORRECTED FACTOR & MARGIN CALCULATION .....	13
TEST RESULTS SUMMARY .....	13
TEST DATA .....	13
<b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
EUT SETUP .....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	17
TEST PROCEDURE .....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	17
TEST RESULTS SUMMARY .....	17
TEST DATA .....	17
<b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....</b>	<b>25</b>
APPLICABLE STANDARD .....	25
TEST PROCEDURE .....	25
TEST DATA .....	25
<b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....</b>	<b>32</b>
APPLICABLE STANDARD .....	32
TEST PROCEDURE .....	32
TEST DATA .....	32

<b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>38</b>
APPLICABLE STANDARD .....	38
TEST PROCEDURE .....	38
TEST DATA .....	38
<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>41</b>
APPLICABLE STANDARD .....	41
TEST PROCEDURE .....	41
TEST DATA .....	41
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>57</b>
APPLICABLE STANDARD .....	57
TEST PROCEDURE .....	57
TEST DATA .....	57
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>58</b>
APPLICABLE STANDARD .....	58
TEST PROCEDURE .....	58
TEST DATA .....	58

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The EUT (model name: HX-HP303, FCC ID: TG3-HXHP303) is a Bluetooth Headphone w/ANC, which is powered by internal polymer lithium battery with 3.7Vdc nominal output voltage. It can be recharged through the micro-USB port located in outer of enclosure by external power supply with rated 5Vdc output voltage.

*\* All measurement and test data in this report was gathered from production sample serial number: 180117803. (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2018-01-17.*

### Objective

This test report is prepared on behalf of *HoMedics, Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

Part 15.247 DTS submission with FCC ID: TG3-HXHP303.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.5dB
RF conducted test with spectrum		±1.5dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±3°C
Humidity		±6%
Supply voltages		±0.4%

### **Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 382179, the FCC Designation No.: CN5001.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in engineering mode.

### EUT Exercise Software

“Blue Test3.exe” software was used.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SKY	Adapter	N/A	N/A
BULL	Socket	GN-415K	5503290068073

### External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-Shielding Un-Detachable USB Cable	1.0	EUT	Adapter

## Block Diagram of Test Setup

For conducted emission:

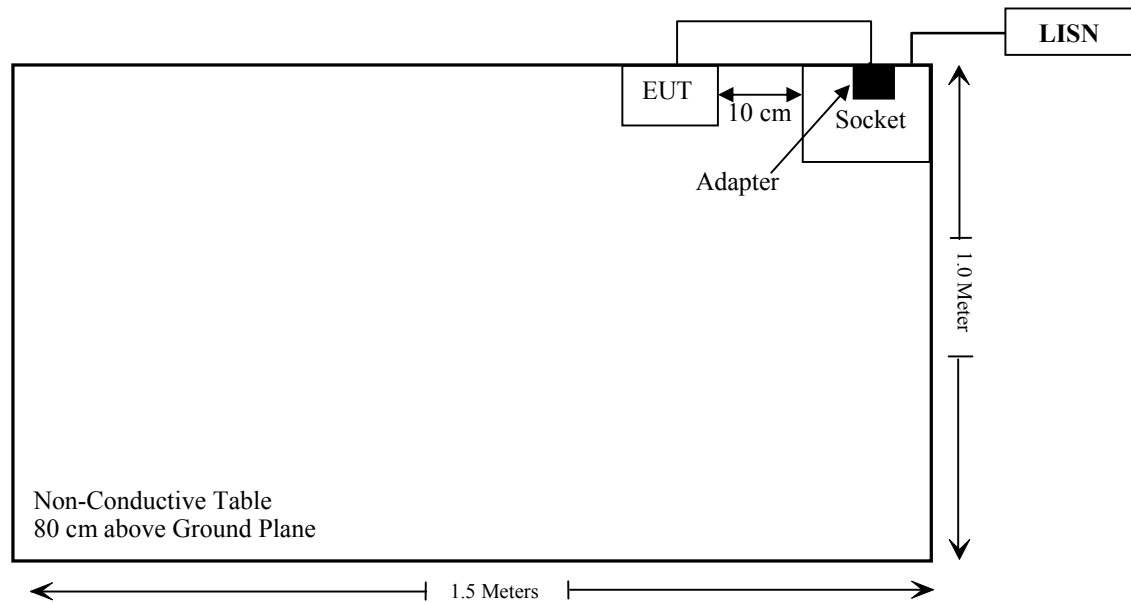

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance



**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted Emissions Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2017-08-04	2018-08-04
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2017-12-21	2018-12-21
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2017-11-19	2018-05-17
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
N/A	Conducted Emission Cable	N/A	UF A210B-1-0720-504504	2017-11-12	2018-05-12
<b>Radiated Emission Test</b>					
A.H.System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2017-04-24	2018-04-24
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-05-21	2018-05-21
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-17
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2017-12-17	2020-12-16
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2018-01-11	2019-01-11
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369223410-001	2017-11-19	2018-05-17
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-17
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-17
Ducommun technologies	RF Cable	RG-214	2	2017-11-22	2018-05-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Ducommun Technologies	Pre-amplifier	ALN-22093530-01	991373-01	2017-08-03	2018-08-03
Sinoscite	Band Reject Filter	BSF2402-2480MN-0898-001	N/A	2017-05-21	2018-05-21
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
<b>RF Conducted Test</b>					
Agilent	P-Series Power Meter	N1912A	MY5000448	2018-01-02	2019-01-02
Agilent	Wideband Power Sensor	N1921A	MY54210016	2018-01-02	2019-01-02
WEINSCHL	10dB Attenuator	N/A	N/A	2017-11-22	2018-05-23
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2017-08-17	2018-08-17
Ducommun technologies	RF Cable	RG-214	3	2017-11-22	2018-05-22

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## **FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE**

### **Applicable Standard**

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

1.  $f(\text{GHz})$  is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test Exclusion.

**For worst case:**

Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
	(dBm)	(mW)				
2480	5.5	3.55	5.0	1.12	3.0	Yes

**Result: No Standalone SAR test is required**

**FCC §15.203 – ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**Antenna Connector Construction**

The EUT has one PCB antenna arrangement for bluetooth which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the internal photos.


**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup

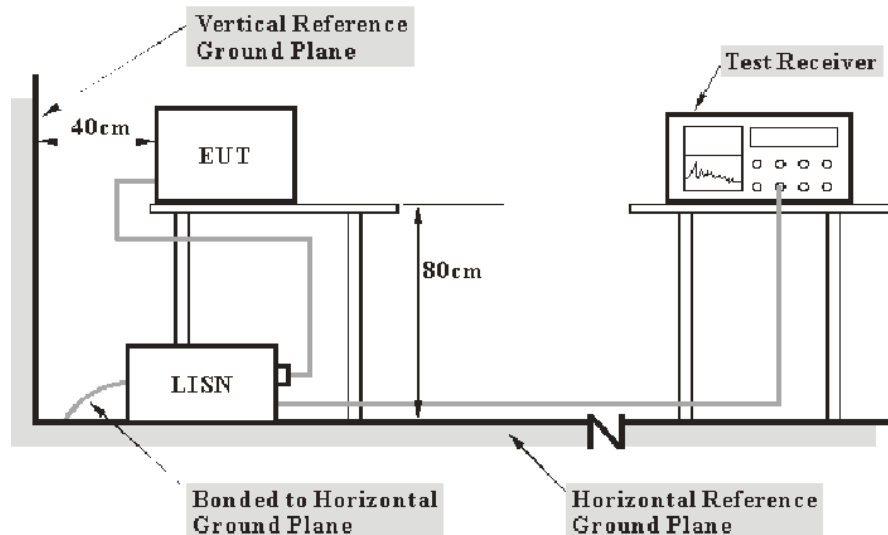

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL,  $U_{(Lm)}$  is less than  $U_{\text{cispr}}$ , if  $L_m$  is less than  $L_{\text{lim}}$ , it implies that the EUT complies with the limit.

## Test Data


### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


*The testing was performed by Nancy Wang on 2018-01-29.*

EUT operation mode: Charging

AC 120V/60 Hz, Line:

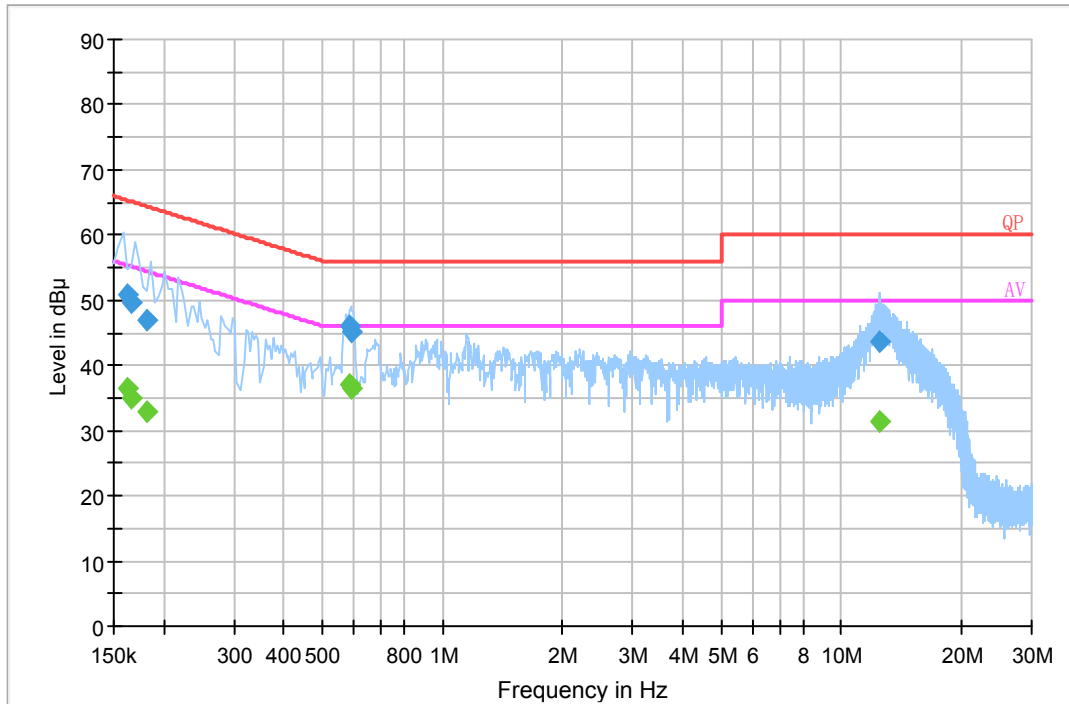

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.162500	50.8	20.2	65.3	14.5	QP
0.165500	49.6	20.2	65.2	15.6	QP
0.181500	47.0	20.2	64.4	17.4	QP
0.585150	46.0	20.1	56.0	10.0	QP
0.589030	45.2	20.1	56.0	10.8	QP
12.419010	43.8	20.0	60.0	16.2	QP
0.162500	36.5	20.2	55.3	18.8	Ave.
0.165500	35.1	20.2	55.2	20.1	Ave.
0.181500	32.8	20.2	54.4	21.6	Ave.
0.585150	37.2	20.1	46.0	8.8	Ave.
0.589030	36.5	20.1	46.0	9.5	Ave.
12.419010	31.3	20.0	50.0	18.7	Ave.

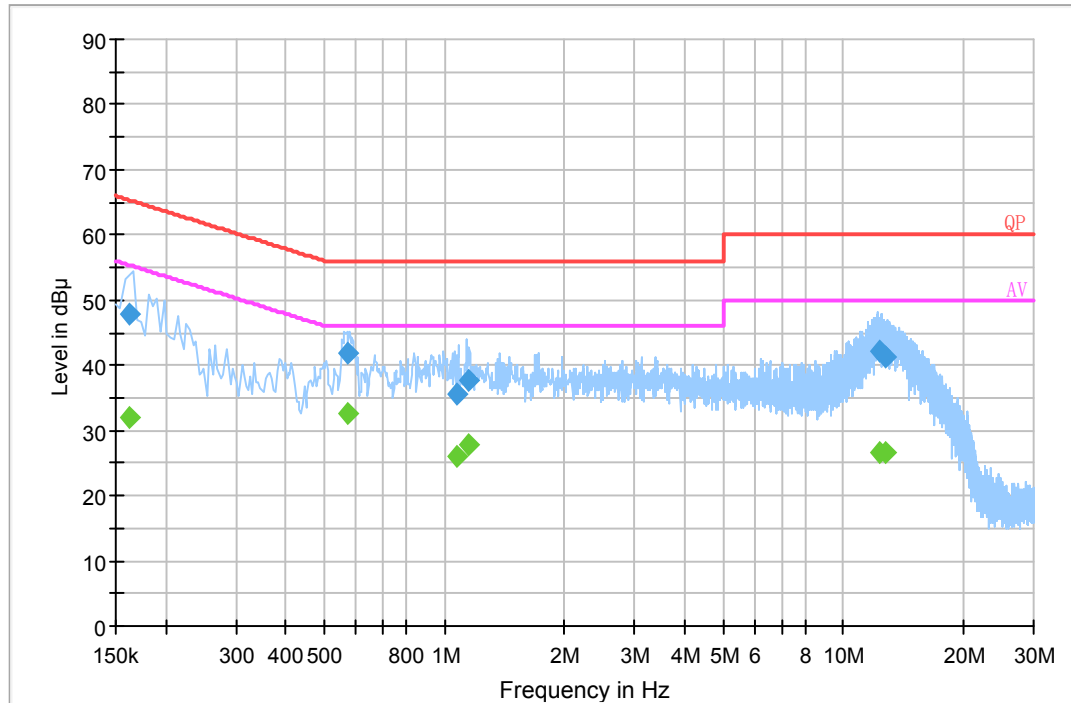**AC 120V/60 Hz, Neutral**


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.161500	47.8	20.2	65.4	17.6	QP
0.569570	41.7	20.1	56.0	14.3	QP
1.073710	35.6	20.1	56.0	20.4	QP
1.155070	37.7	20.1	56.0	18.3	QP
12.358730	42.1	20.0	60.0	17.9	QP
12.803690	41.4	20.1	60.0	18.6	QP
0.161500	32.1	20.2	55.4	23.3	Ave.
0.569570	32.6	20.1	46.0	13.4	Ave.
1.073710	25.9	20.1	46.0	20.1	Ave.
1.155070	27.7	20.1	46.0	18.3	Ave.
12.358730	26.7	20.0	50.0	23.3	Ave.
12.803690	26.5	20.1	50.0	23.5	Ave.

Note:

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation
- 3) Margin = Limit – Corrected Amplitude

**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS****Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

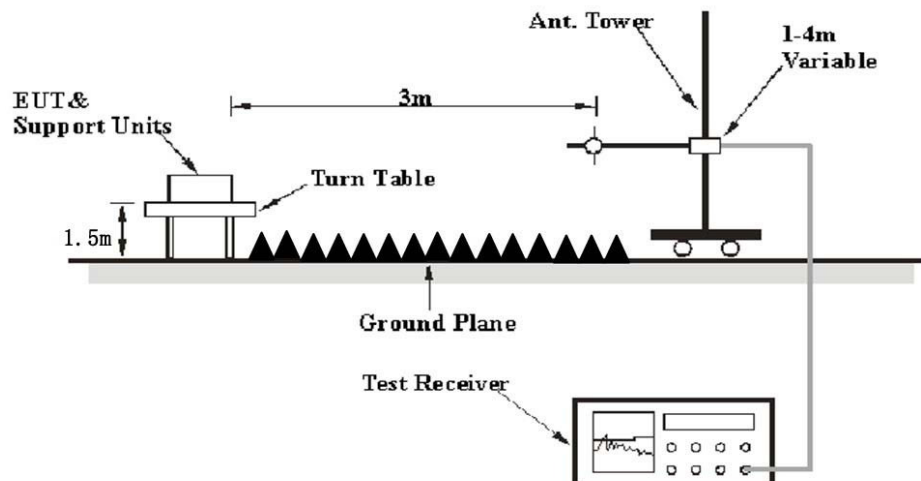**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, 205 and FCC 15.247 limits.



## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL,  $U_{(L_m)}$  is less than  $U_{\text{cispr}}$ , if  $L_m$  is less than  $L_{\text{lim}}$ , it implies that the EUT complies with the limit.

## Test Data

### Environmental Conditions


Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

*The testing was performed by Nancy Wang on 2018-03-02.*


EUT operation mode: Transmitting (Pre-scan with GFSK,  $\pi/4$ -DQPSK and 8DPSK mode, the worst case is GFSK mode)

30 MHz - 1GHz:

### Horizontal

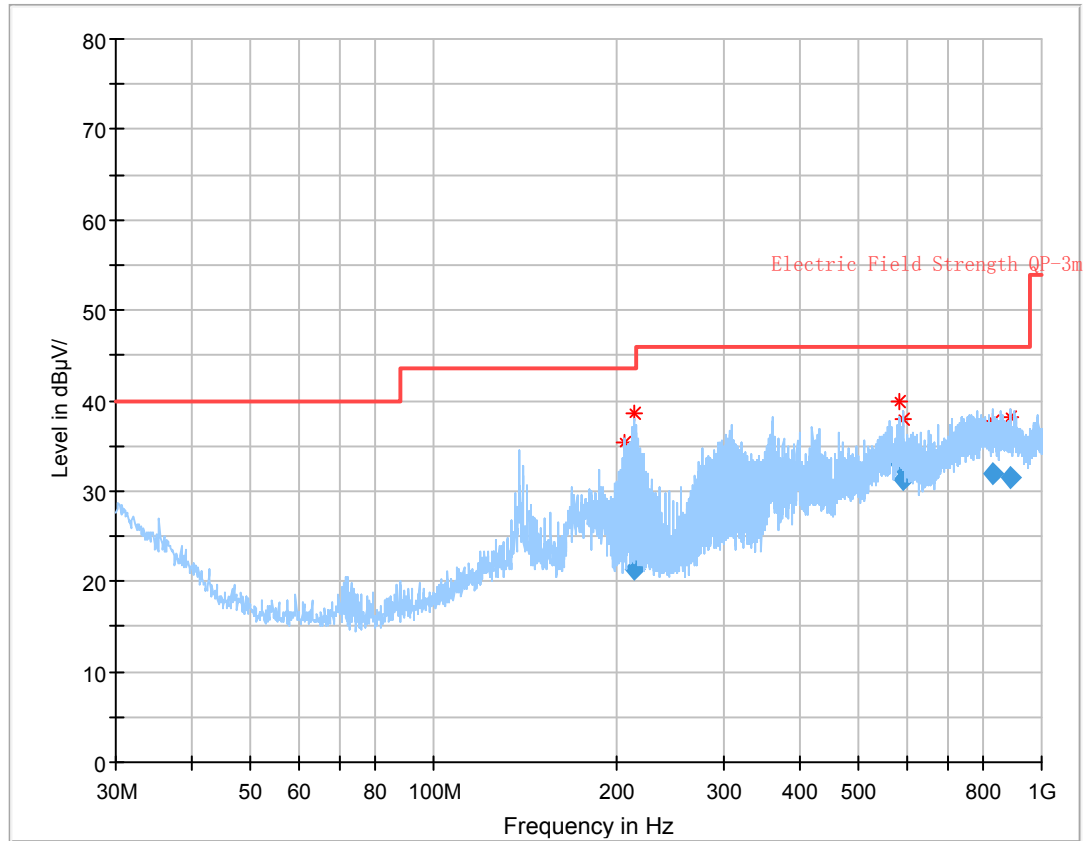

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
206.256000	26.66	138.0	H	203.0	-5.6	43.50	16.84
214.347250	21.32	139.0	H	171.0	-6.4	43.50	22.18
583.643875	33.08	100.0	H	319.0	4.0	46.00	12.92
592.736625	31.26	199.0	H	0.0	3.7	46.00	14.74
830.090625	31.86	100.0	H	150.0	9.0	46.00	14.14
887.070125	31.54	267.0	H	101.0	9.5	46.00	14.46

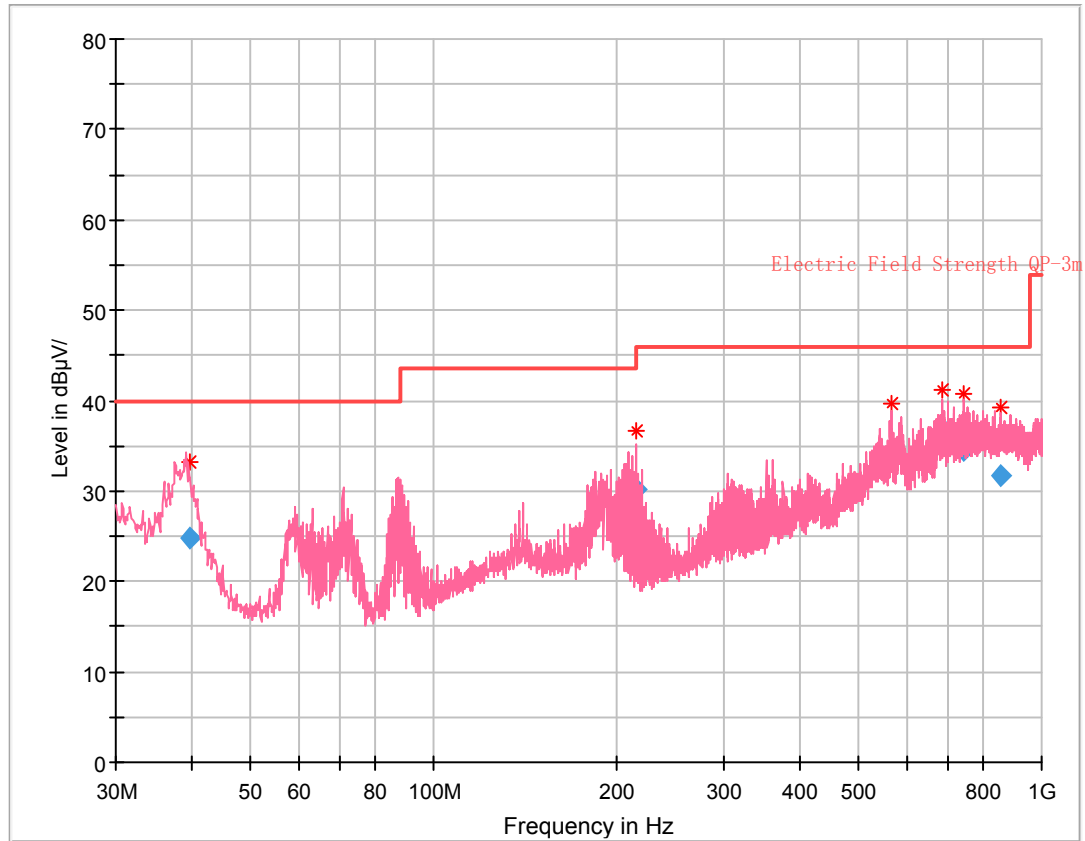**Vertical**

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
39.569500	24.86	101.0	V	110.0	-5.8	40.00	15.14
215.988875	30.18	105.0	V	333.0	-6.5	43.50	13.32
568.075375	33.64	189.0	V	277.0	4.4	46.00	12.36
688.021250	36.77	129.0	V	279.0	6.1	46.00	9.23
743.770500	34.46	117.0	V	257.0	7.5	46.00	11.54
858.521375	31.61	291.0	V	262.0	9.2	46.00	14.39

**1 GHz – 25 GHz:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
2402.00	66.83	PK	165	1.7	H	33.92	100.75	/	/
2402.00	54.76	Ave.	165	1.7	H	33.92	88.68	/	/
2402.00	65.11	PK	262	1.7	V	33.92	99.03	/	/
2402.00	53.24	Ave.	262	1.7	V	33.92	87.16	/	/
2387.35	27.28	PK	269	2.2	H	33.92	61.20	74	12.80
2387.35	13.49	Ave.	269	2.2	H	33.92	47.41	54	6.59
2484.31	26.89	PK	357	1.0	H	34.08	60.97	74	13.03
2484.31	13.24	Ave.	357	1.0	H	34.08	47.32	54	6.68
4804.00	53.63	PK	355	2.4	H	5.84	59.47	74	14.53
4804.00	35.67	Ave.	355	2.4	H	5.84	41.51	54	12.49
7206.00	53.42	PK	309	1.5	H	14.00	67.42	74	6.58
7206.00	35.44	Ave.	309	1.5	H	14.00	49.44	54	4.56
Middle Channel (2441 MHz)									
2441.00	67.55	PK	66	1.6	H	33.92	101.47	/	/
2441.00	55.21	Ave.	66	1.6	H	33.92	89.13	/	/
2441.00	66.73	PK	26	2.3	V	33.92	100.65	/	/
2441.00	54.72	Ave.	26	2.3	V	33.92	88.64	/	/
4882.00	56.49	PK	283	1.5	H	6.21	62.70	74	11.30
4882.00	36.21	Ave.	283	1.5	H	6.21	42.42	54	11.58
7323.00	53.85	PK	50	1.4	H	13.60	67.45	74	6.55
7323.00	35.64	Ave.	50	1.4	H	13.60	49.24	54	4.76
High Channel (2480 MHz)									
2480.00	68.59	PK	6	2.3	H	34.08	102.67	/	/
2480.00	56.24	Ave.	6	2.3	H	34.08	90.32	/	/
2480.00	66.57	PK	306	1.2	V	34.08	100.65	/	/
2480.00	54.23	Ave.	306	1.2	V	34.08	88.31	/	/
2345.62	27.13	PK	219	2.4	H	33.83	60.96	74	13.04
2345.62	13.36	Ave.	219	2.4	H	33.83	47.19	54	6.81
2483.53	30.17	PK	188	2.2	H	34.08	64.25	74	9.75
2483.53	16.37	Ave.	188	2.2	H	34.08	50.45	54	3.55
4960.00	50.63	PK	178	1.1	H	7.82	58.45	74	15.55
4960.00	34.29	Ave.	178	1.1	H	7.82	42.11	54	11.89
7440.00	54.77	PK	116	1.5	H	13.02	67.79	74	6.21
7440.00	34.69	Ave.	116	1.5	H	13.02	47.71	54	6.29

**Note:**

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor



Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude



The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.

### Pre-scan with 2480 MHz Horizontal

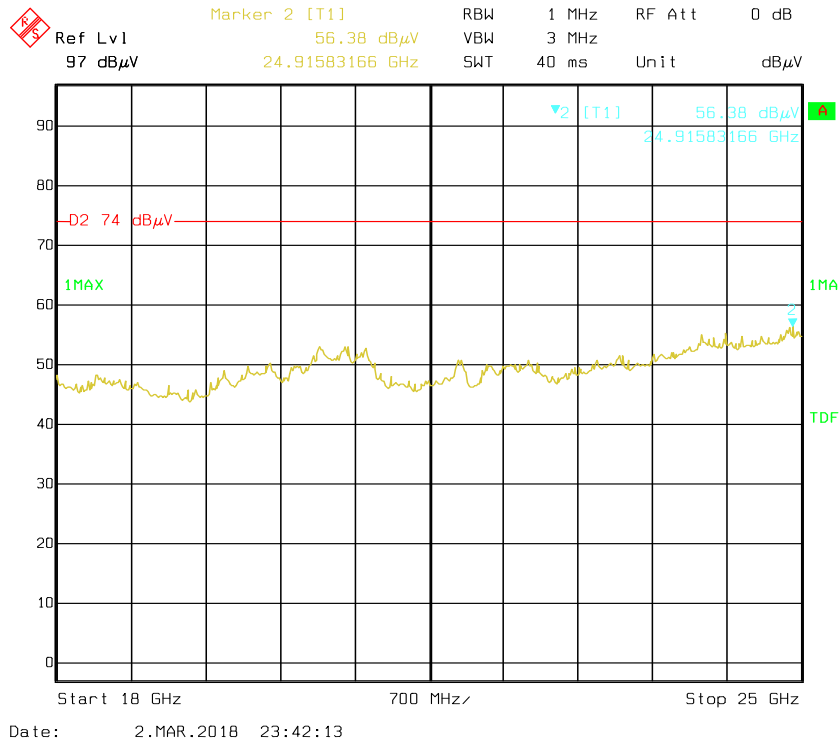
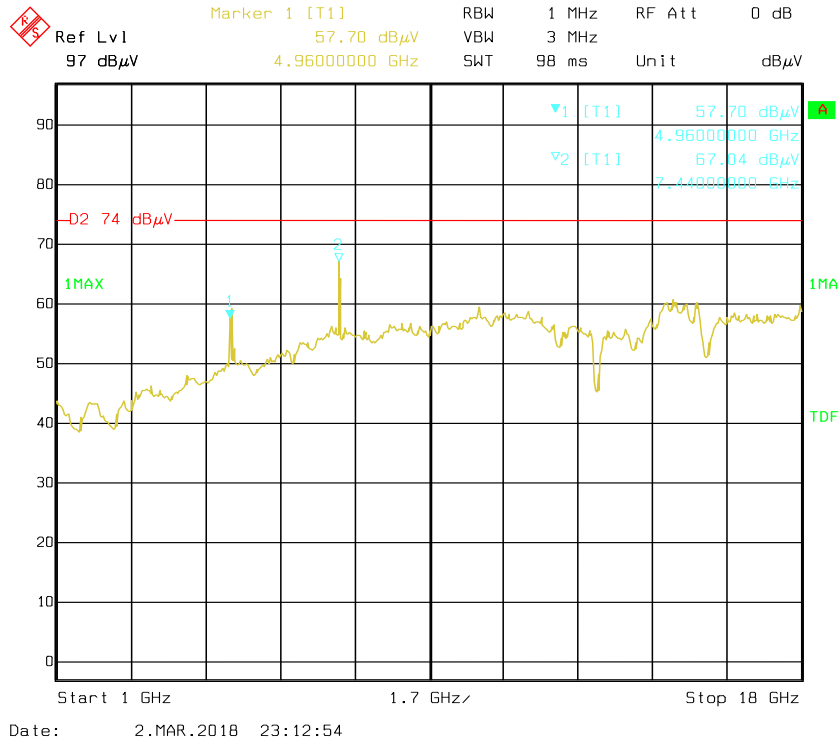


# Vertical

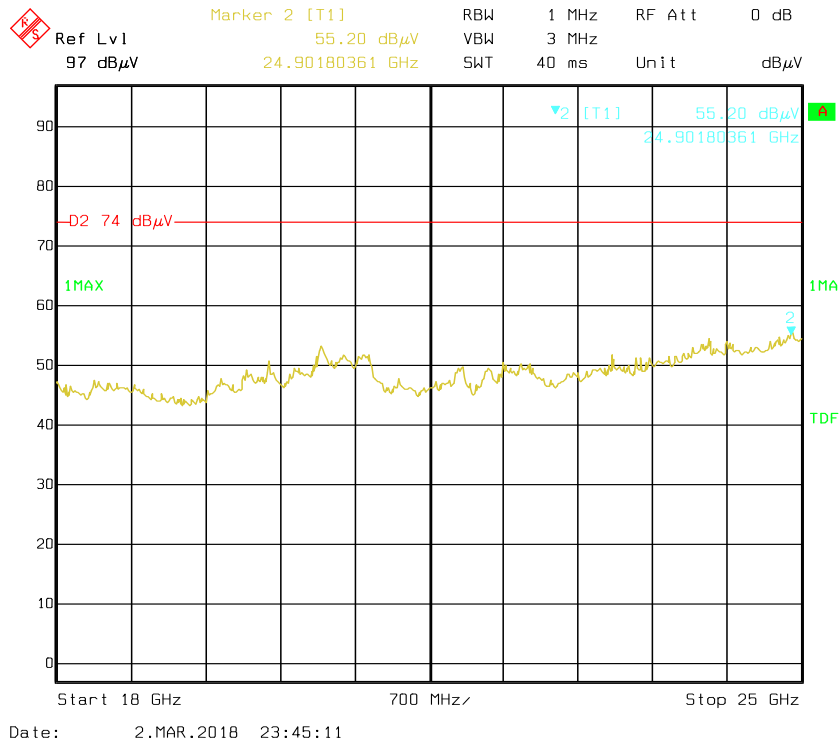
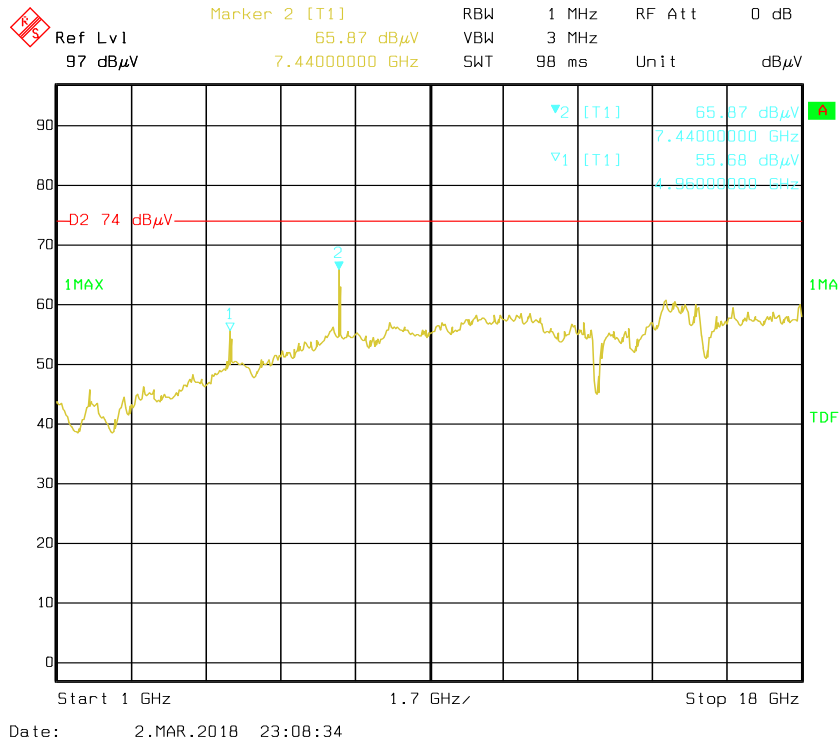


# For Average

## Horizontal

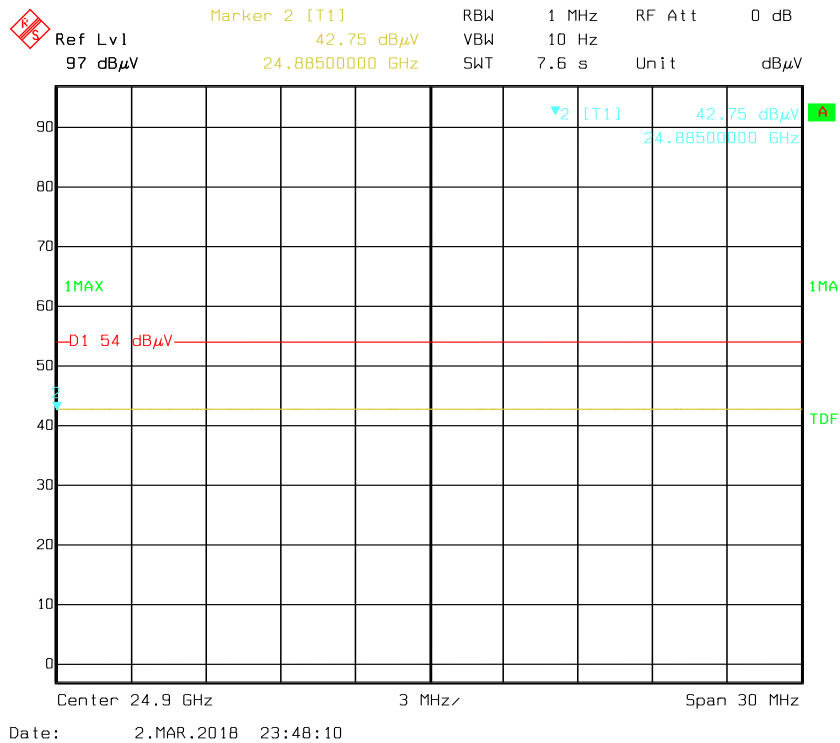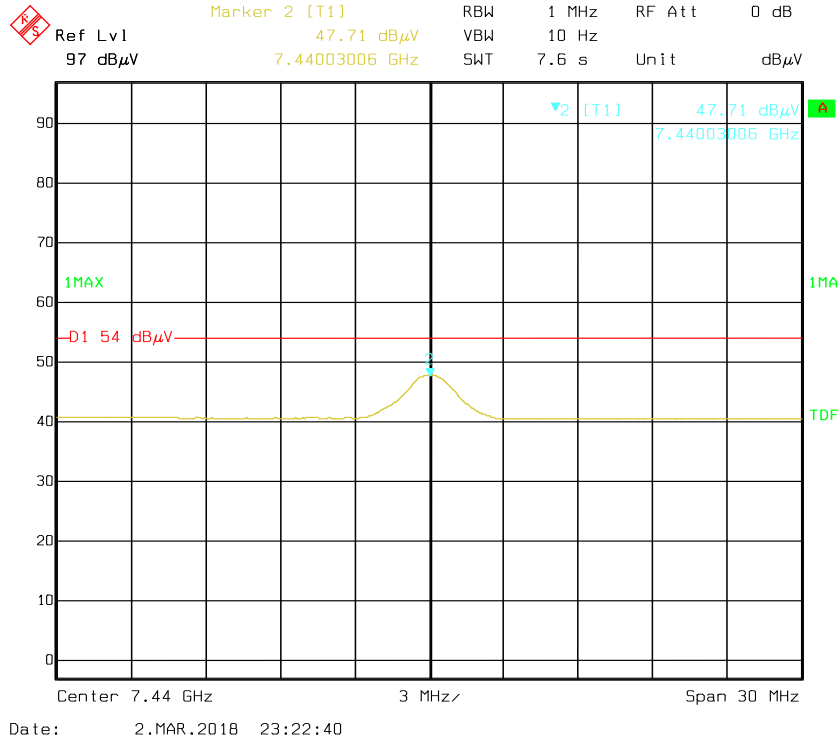

### Vertical

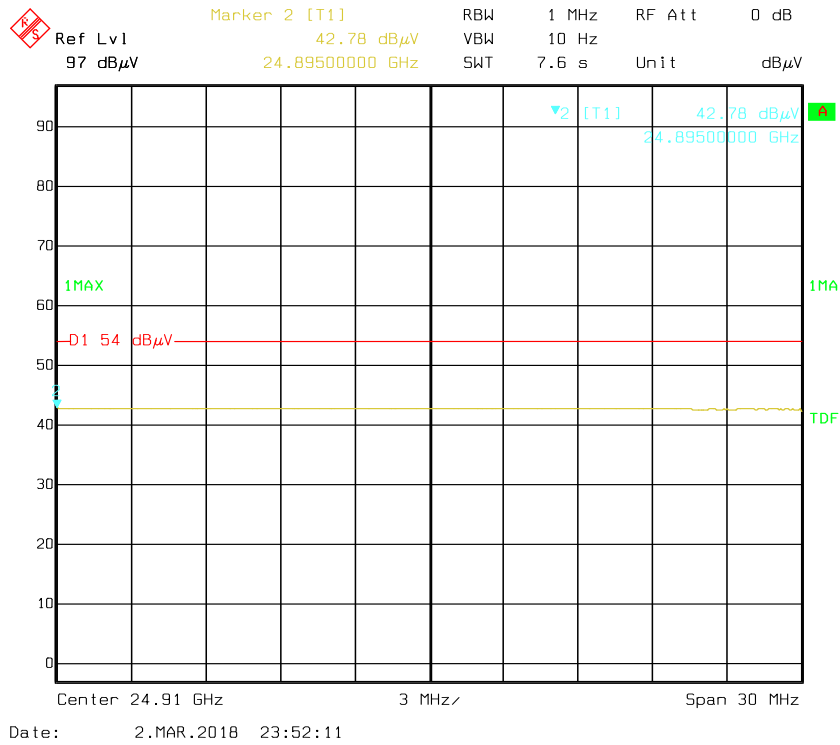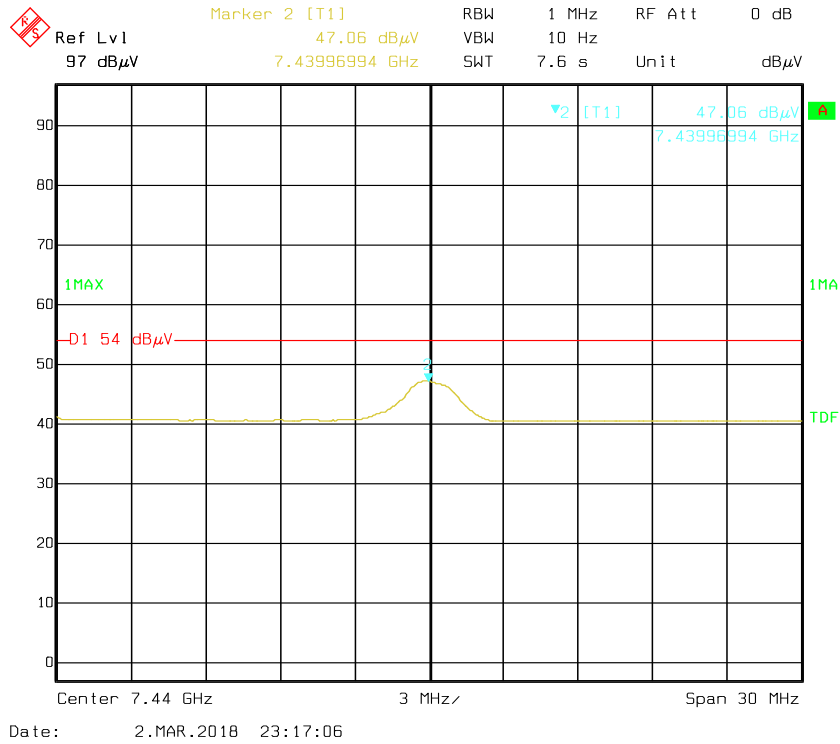



## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

*The testing was performed by Nancy Wang on 2018-03-02.*


*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table and plots*

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	$\geq$ Limit (MHz)	Result
<b>BDR (GFSK)</b>	Low	2402	1.003	0.617	Pass
	Adjacent	2403			
	Middle	2441	1.003	0.615	Pass
	Adjacent	2442			
	High	2480	1.003	0.615	Pass
	Adjacent	2479			
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	Low	2402	1.003	0.814	Pass
	Adjacent	2403			
	Middle	2441	1.003	0.811	Pass
	Adjacent	2442			
	High	2480	1.003	0.811	Pass
	Adjacent	2479			
<b>EDR (8DPSK)</b>	Low	2402	1.003	0.805	Pass
	Adjacent	2403			
	Middle	2441	1.003	0.807	Pass
	Adjacent	2442			
	High	2480	1.003	0.807	Pass
	Adjacent	2479			


Note: Limit = 20 dB bandwidth \*2/3

### BDR (GFSK): Low Channel

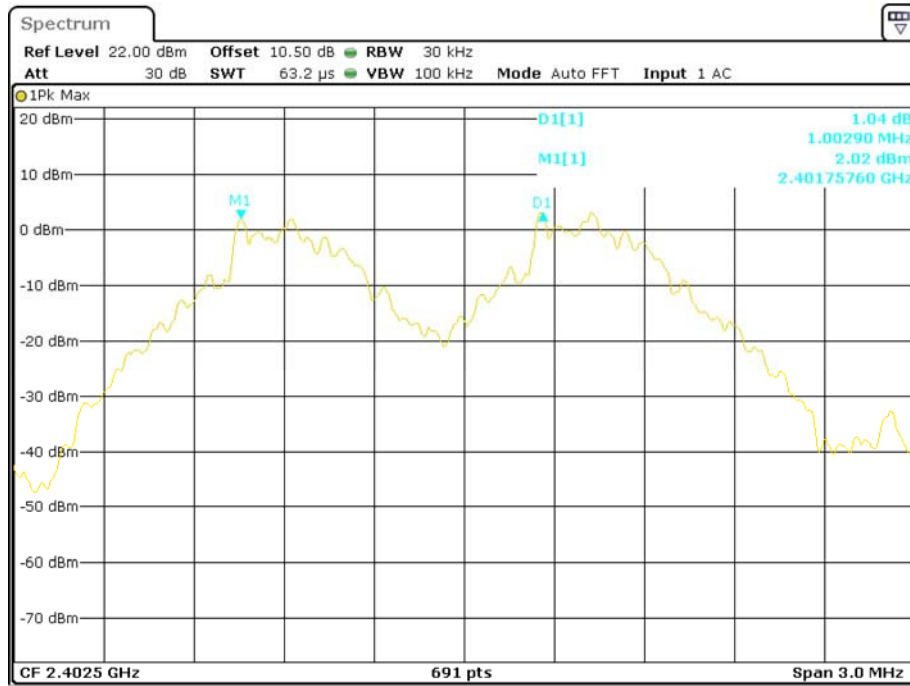


Date: 2.MAR.2018 14:52:33

### BDR (GFSK): Middle Channel

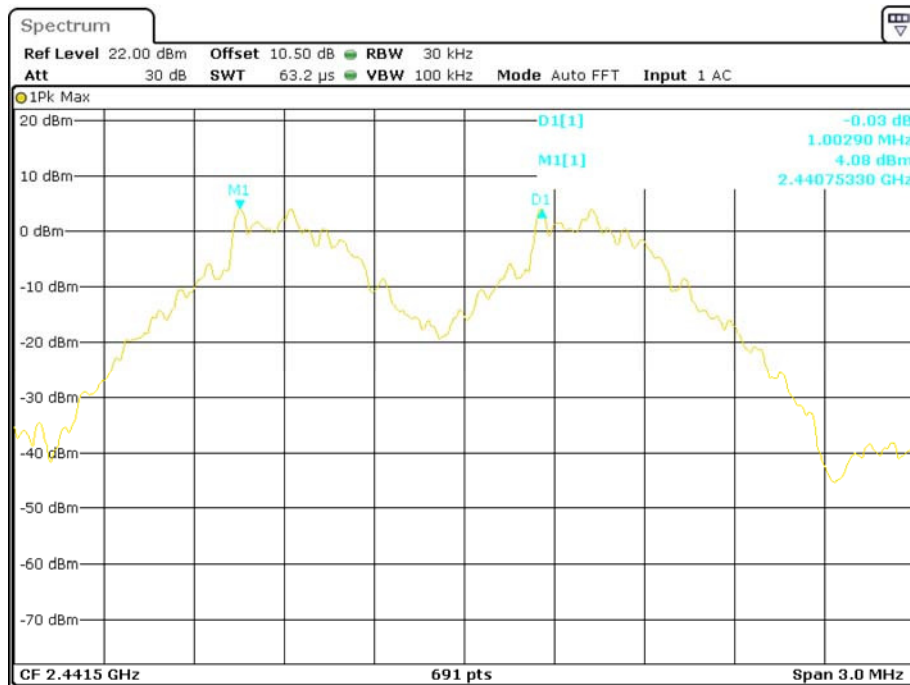


Date: 2.MAR.2018 14:53:12

### BDR (GFSK): High Channel

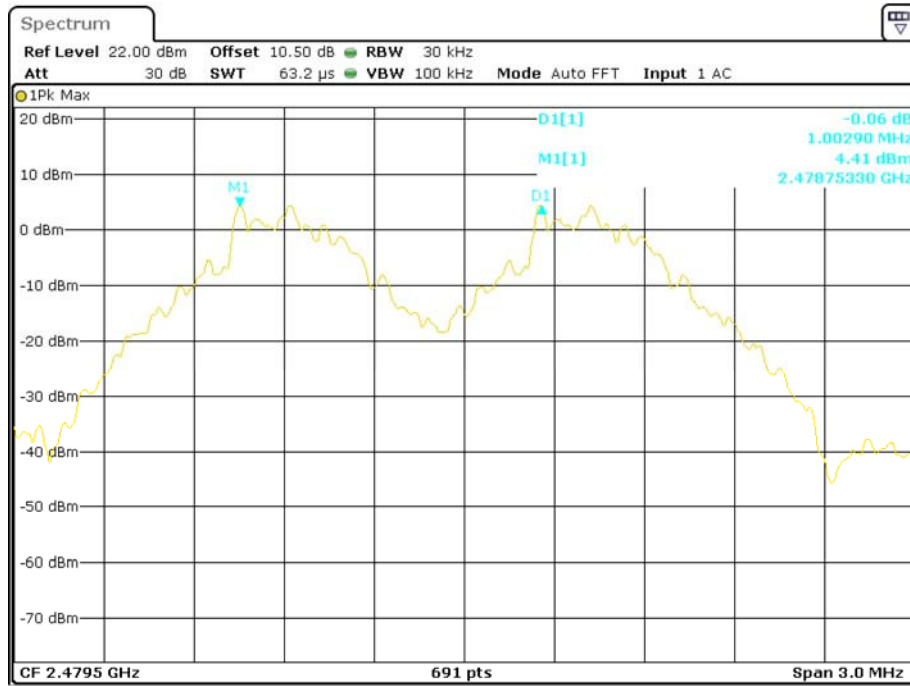


Date: 2.MAR.2018 14:53:51


### EDR ( $\pi/4$ -DQPSK): Low Channel

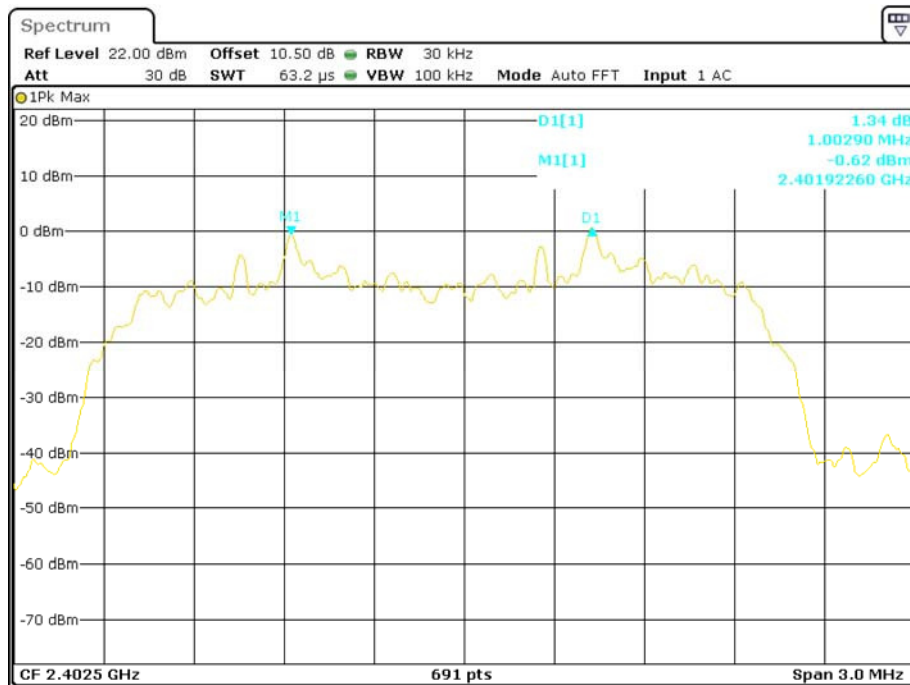

Date: 2.MAR.2018 14:55:01

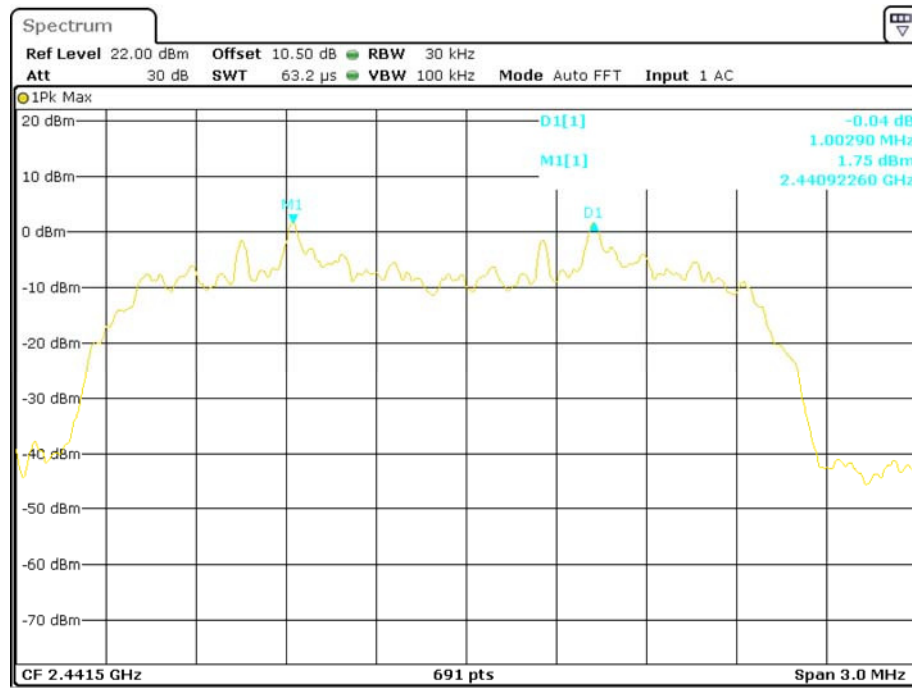
EDR ( $\pi/4$ -DQPSK): Middle Channel

Date: 2.MAR.2018 14:55:40

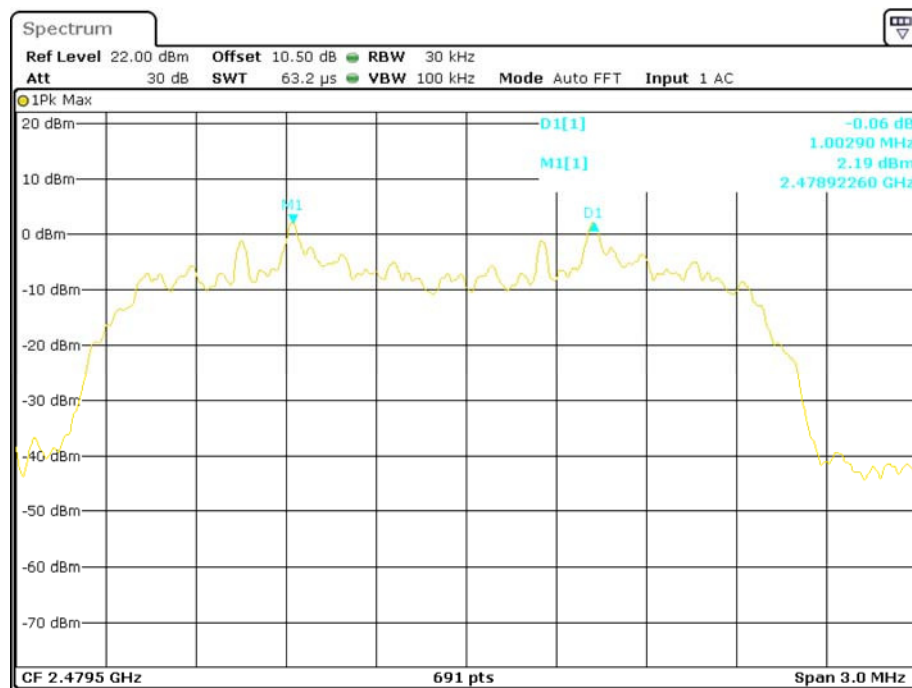EDR ( $\pi/4$ -DQPSK): High Channel


Date: 2.MAR.2018 14:56:22

## EDR (8DPSK): Low Channel

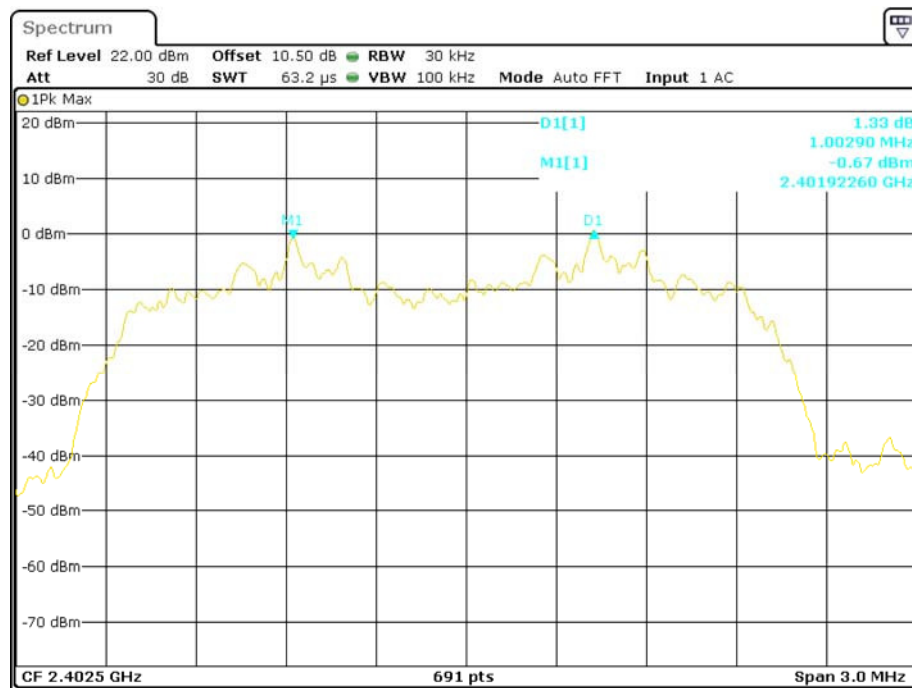


Date: 2.MAR.2018 14:49:46

## EDR (8DPSK): Middle Channel

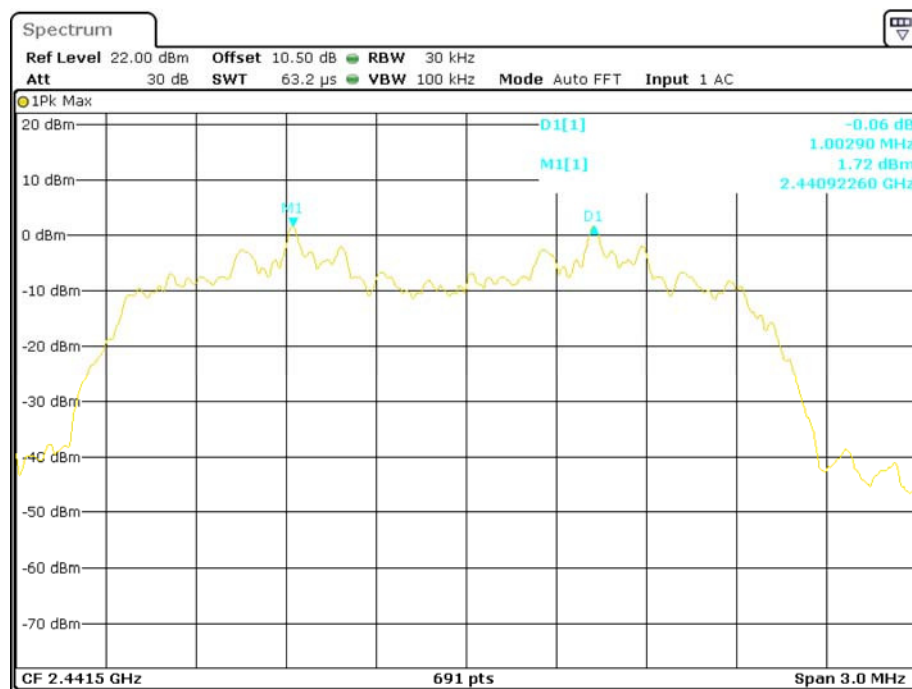

Date: 2.MAR.2018 14:50:53

# EDR (8DPSK): High Channel

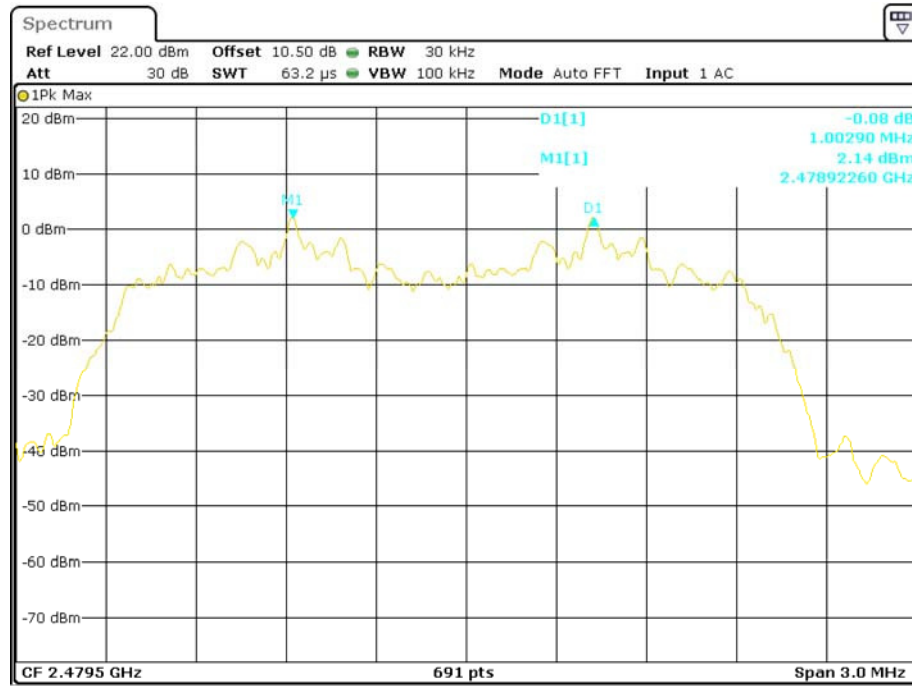

Date: 2.MAR.2018 14:51:29

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	21~25 °C
<b>Relative Humidity:</b>	51~52 %
<b>ATM Pressure:</b>	100~101.0 kPa

*The testing was performed by Nancy Wang from 2018-03-02 to 2018-03-05.*


*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table and plots.*

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
<b>BDR (GFSK)</b>	Low	2402	0.926
	Middle	2441	0.923
	High	2480	0.923
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	Low	2402	1.221
	Middle	2441	1.216
	High	2480	1.216
<b>EDR (8DPSK)</b>	Low	2402	1.207
	Middle	2441	1.210
	High	2480	1.210




### BDR (GFSK): Low Channel

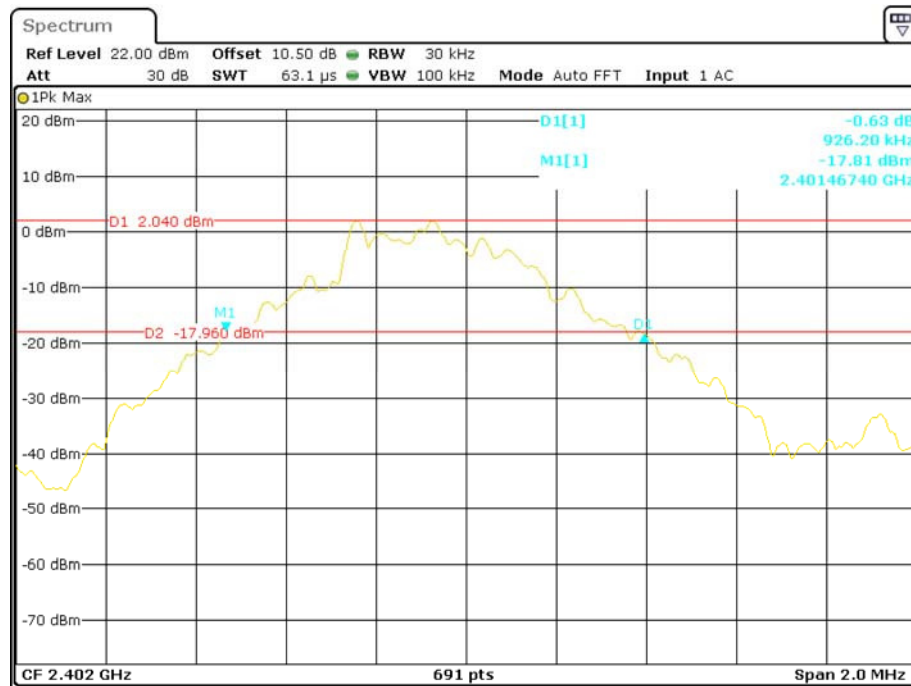

Date: 2.MAR.2018 14:26:08

### BDR (GFSK): Middle Channel

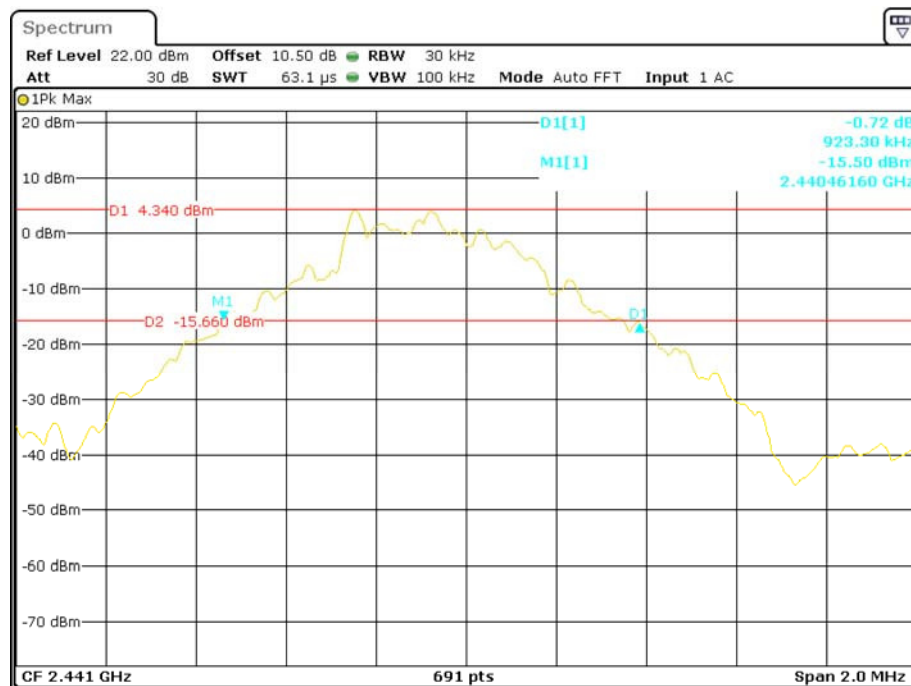

Date: 2.MAR.2018 14:35:41

**Spectrum**

Ref Level 22.00 dBm Offset 10.50 dB RBW 30 kHz  
Att 30 dB SWT 63.1  $\mu$ s VBW 100 kHz Mode Auto FFT Input 1 AC

1Pk Max

The spectrum plot displays a yellow trace representing the signal's power spectral density. The y-axis is labeled from -70 dBm to 20 dBm in 10 dB increments. The x-axis represents frequency, with labels at 2.48 GHz and 2.0 MHz. Several markers are present: a red horizontal line at 4.470 dBm labeled 'D1', a blue arrow pointing to the trace at -15.530 dBm labeled 'M1', and a red horizontal line at -15.26 dBm labeled 'D2'. In the top right corner, cyan text indicates a frequency of 923.30 kHz and a power level of -15.26 dBm. The bottom of the plot shows 'CF 2.48 GHz', '691 pts', and 'Span 2.0 MHz'.

20 dBm  
10 dBm  
0 dBm  
-10 dBm  
-20 dBm  
-30 dBm  
-40 dBm  
-50 dBm  
-60 dBm  
-70 dBm

D1 4.470 dBm  
M1  
D2 -15.530 dBm  
D1  
M1[1]  
-0.85 dB  
923.30 kHz  
-15.26 dBm  
2.47946160 GHz

CF 2.48 GHz 691 pts Span 2.0 MHz

**Spectrum**

Ref Level 22.00 dBm Offset 10.50 dB RBW 30 kHz  
 Att 30 dB SWT 63.1  $\mu$ s VBW 100 kHz Mode Auto FFT Input 1 AC

1Pk Max

20 dBm  
 10 dBm  
 0 dBm  
 -10 dBm  
 -20 dBm  
 -30 dBm  
 -40 dBm  
 -50 dBm  
 -60 dBm  
 -70 dBm


D1[1] -1.40 dB  
 M1[1] 1.22140 MHz  
 -20.12 dBm  
 2.40130250 GHz

D1 -0.600 dBm  
 M1  
 D2 -20.600 dBm  
 D3

CF 2.402 GHz 691 pts Span 2.0 MHz


Page 34 of 64

### EDR ( $\pi/4$ -DQPSK): Middle Channel

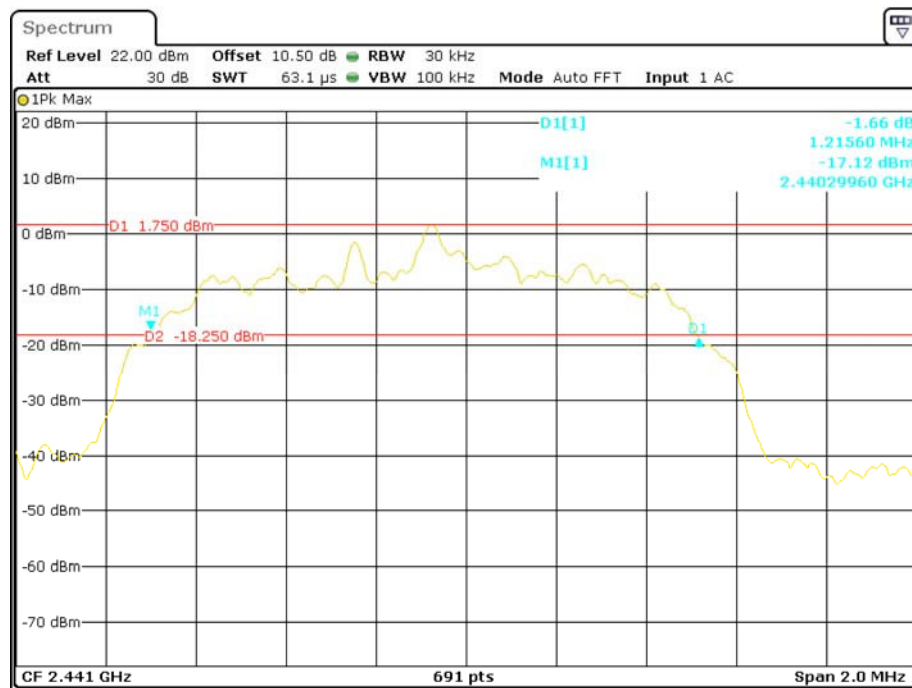


Date: 2.MAR.2018 14:40:04

### EDR ( $\pi/4$ -DQPSK): High Channel

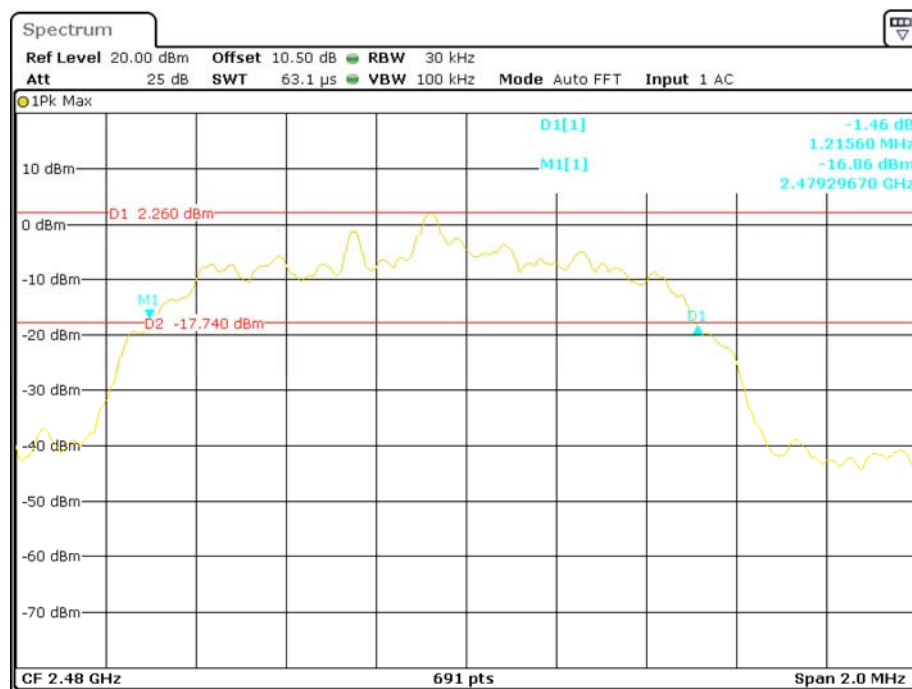


Date: 5.MAR.2018 08:53:09

### EDR (8DPSK): Low Channel

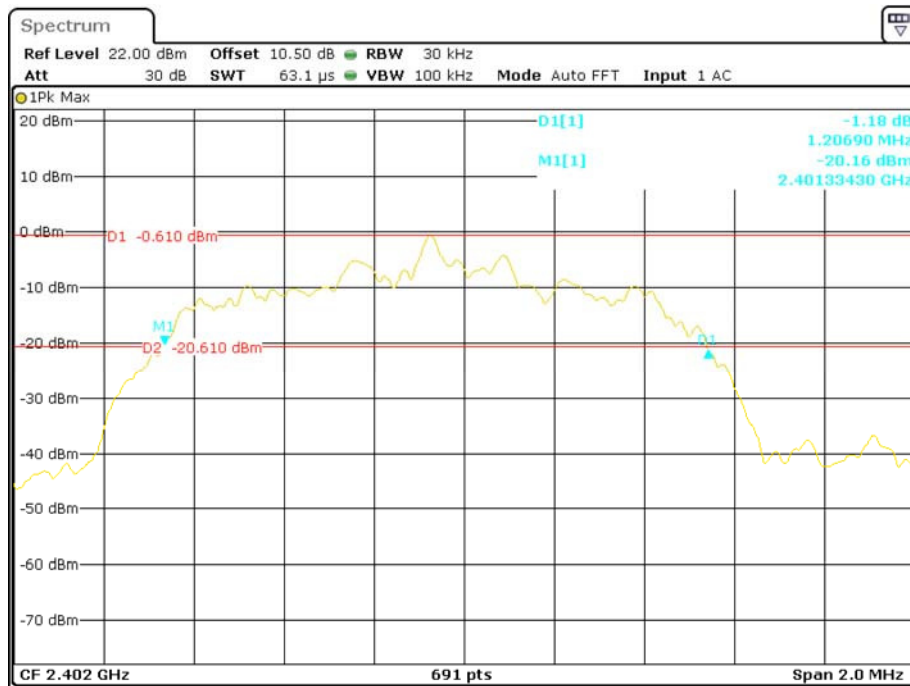


Date: 2.MAR.2018 14:43:41

### EDR (8DPSK): Middle Channel

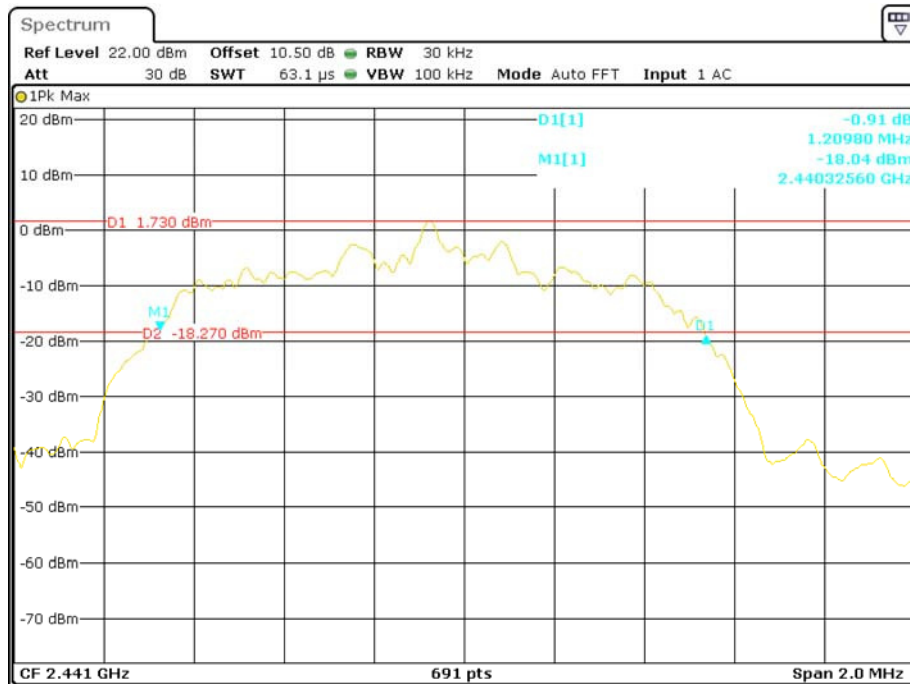

Date: 2.MAR.2018 14:44:47

### EDR (8DPSK): High Channel

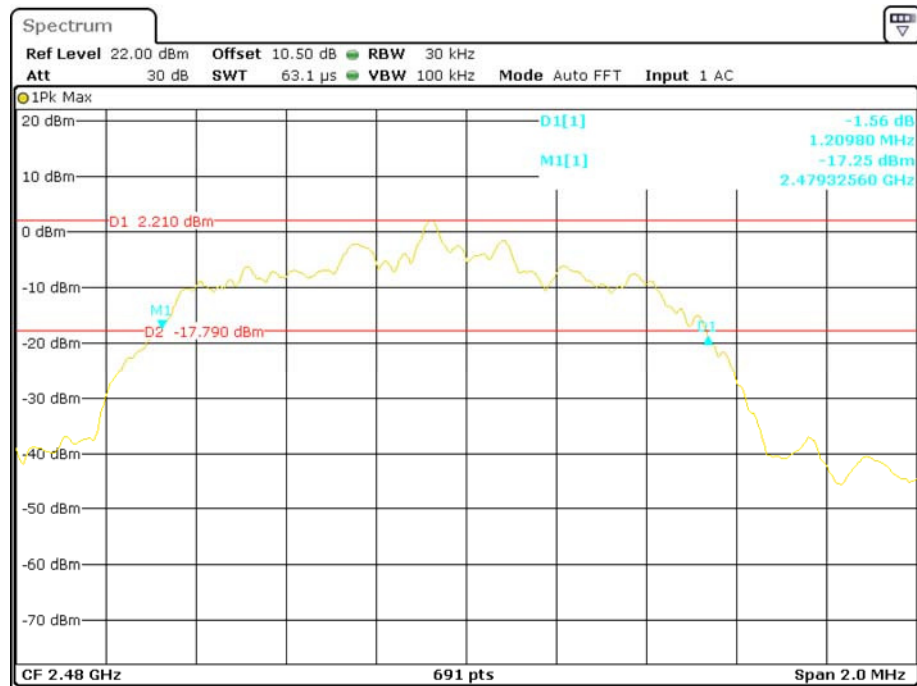

Date: 2.MAR.2018 14:45:49

## FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

### Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

### Test Data

#### Environmental Conditions


<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	52 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Nancy Wang on 2018-03-02.*


*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table and plots.*

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

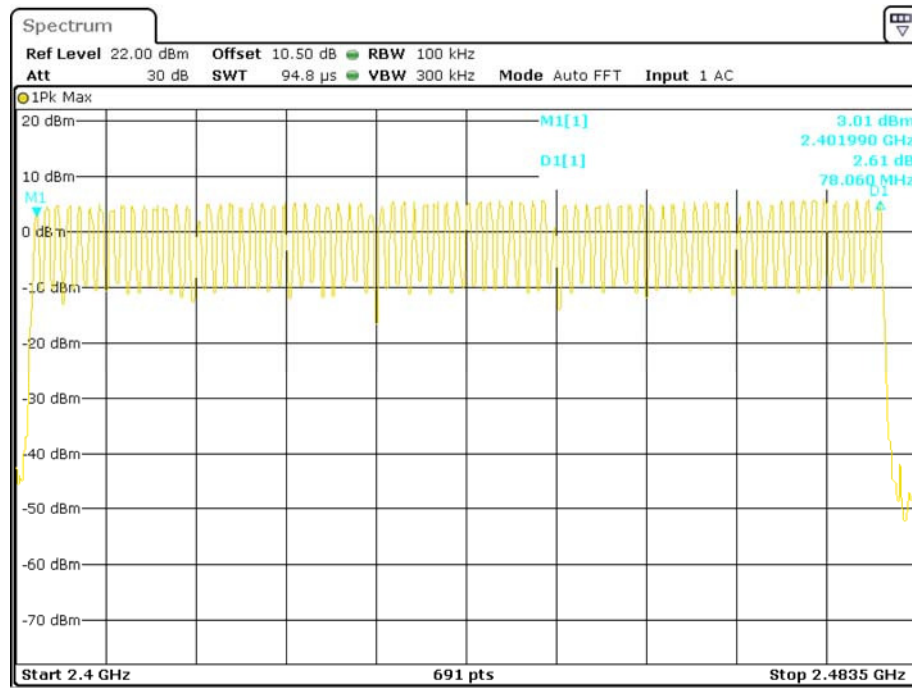
**BDR (GFSK): Number of Hopping Channels**

Date: 2.MAR.2018 13:58:07

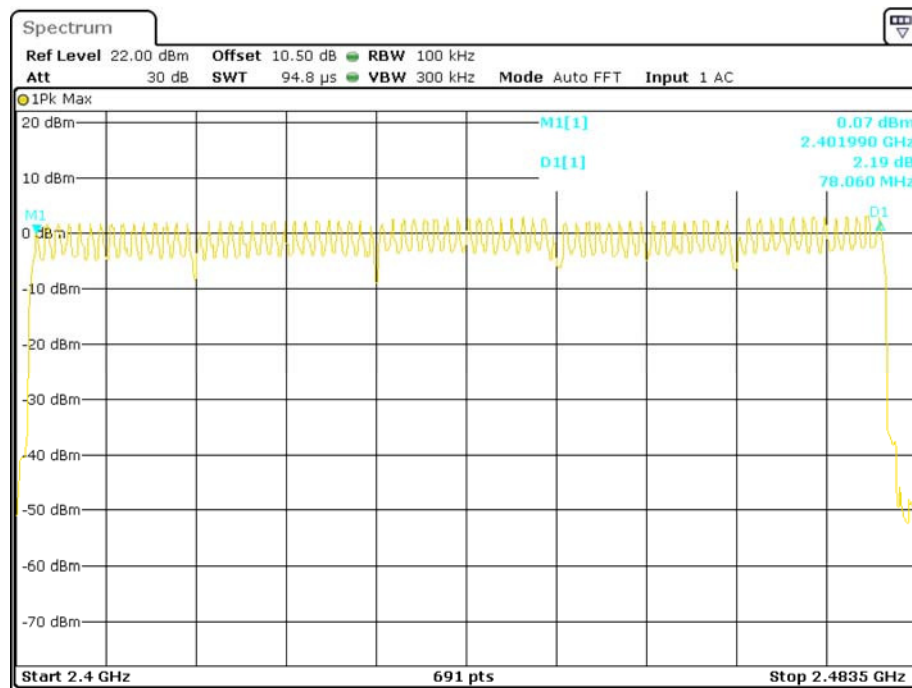**EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels**

Date: 2.MAR.2018 14:09:42

## EDR (8DPSK): Number of Hopping Channels

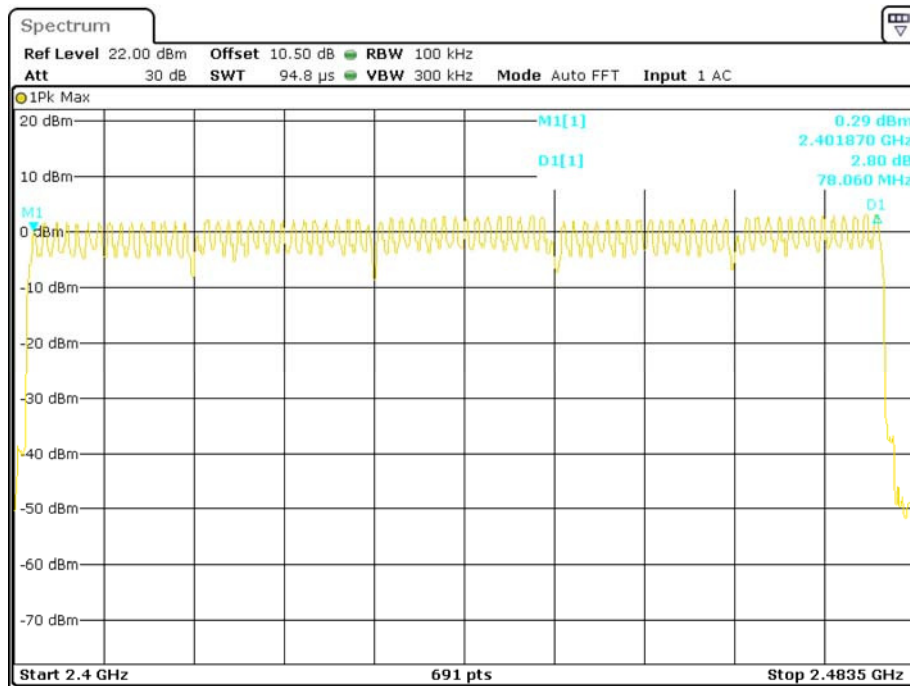

Date: 2.MAR.2018 14:18:24



**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWEELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

**Test Data****Environmental Conditions**

<b>Temperature:</b>	21~25 °C
<b>Relative Humidity:</b>	51~52 %
<b>ATM Pressure:</b>	100.0~101.0 kPa


*The testing was performed by Nancy Wang from 2018-03-02 on 2018-03-05.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table and plots.*


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.449	0.144	0.4	Pass
		Middle	0.452	0.145	0.4	Pass
		High	0.442	0.141	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.700	0.272	0.4	Pass
		Middle	1.700	0.272	0.4	Pass
		High	1.700	0.272	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.957	0.315	0.4	Pass
		Middle	2.949	0.315	0.4	Pass
		High	2.949	0.315	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ( $\pi/4$ -DQPSK)	2DH 1	Low	0.442	0.141	0.4	Pass
		Middle	0.445	0.142	0.4	Pass
		High	0.445	0.142	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH 3	Low	1.696	0.271	0.4	Pass
		Middle	1.722	0.276	0.4	Pass
		High	1.722	0.276	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH 5	Low	2.964	0.316	0.4	Pass
		Middle	2.964	0.316	0.4	Pass
		High	2.964	0.316	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH 1	Low	0.445	0.142	0.4	Pass
		Middle	0.445	0.142	0.4	Pass
		High	0.446	0.143	0.4	Pass
		Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH 3	Low	1.704	0.273	0.4	Pass
		Middle	1.700	0.272	0.4	Pass
		High	1.700	0.272	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH 5	Low	2.964	0.316	0.4	Pass
		Middle	2.964	0.316	0.4	Pass
		High	2.964	0.316	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

**BDR (GFSK):**  
**Pulse time, Low Channel, DH1**

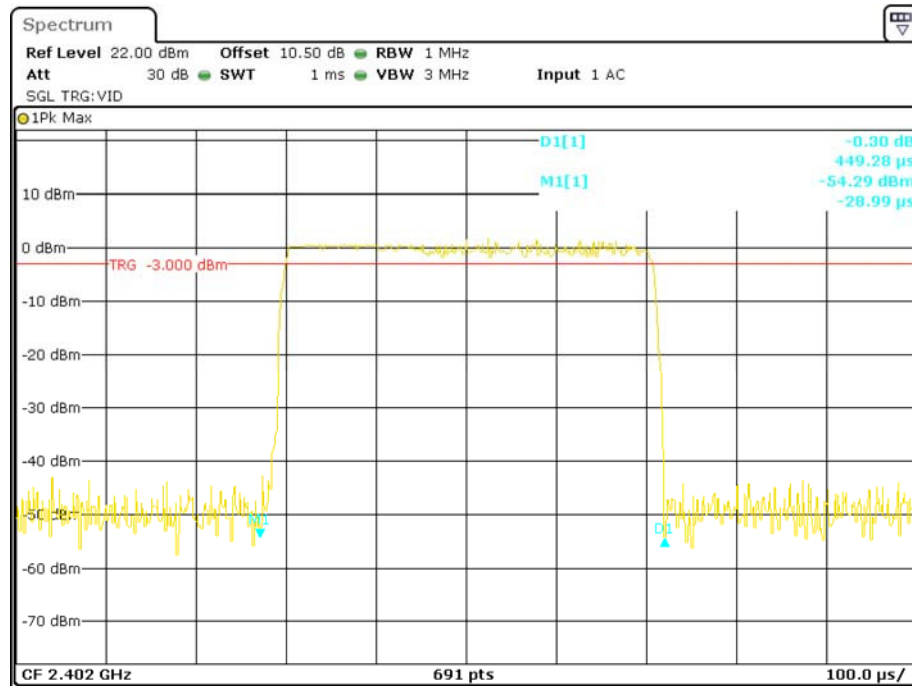


Date: 2.MAR.2018 15:29:37

**Pulse time, Middle Channel, DH1**

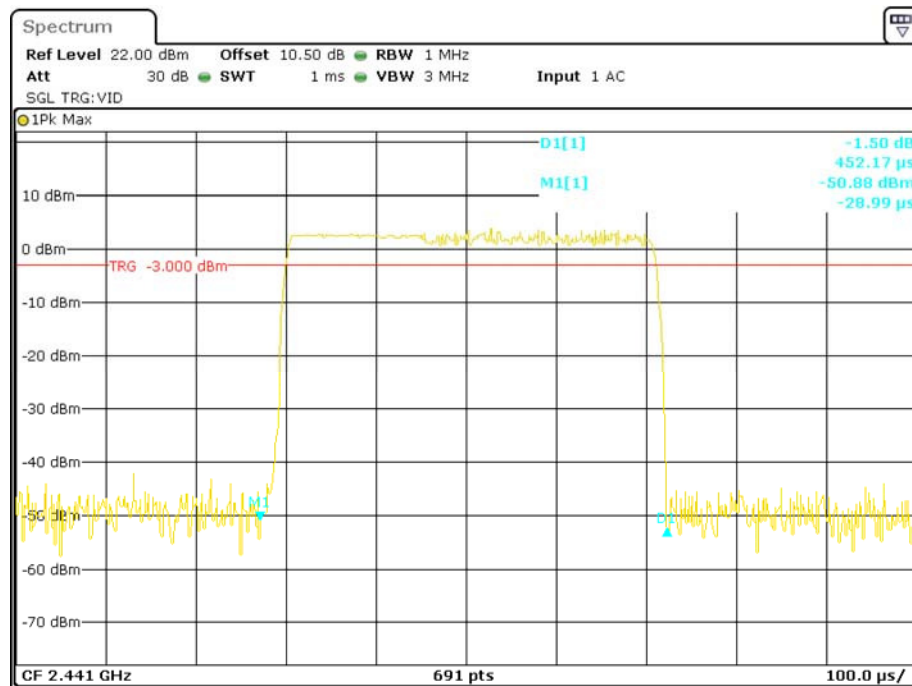


Date: 2.MAR.2018 15:30:17

## Pulse time, High Channel, DH1

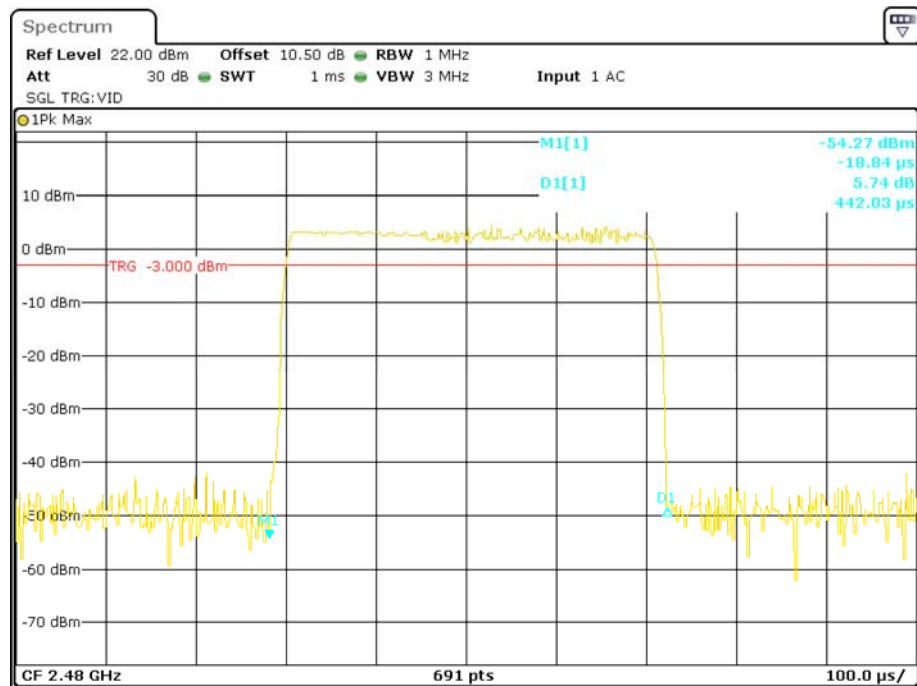


Date: 2.MAR.2018 15:31:44

## Pulse time, Low Channel, DH3

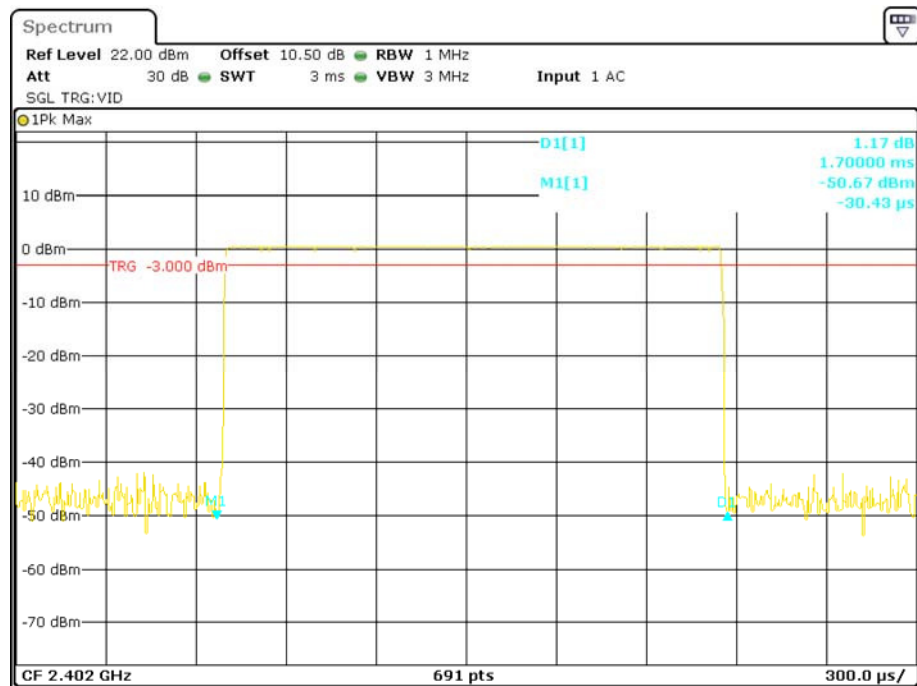


Date: 2.MAR.2018 15:40:44

## Pulse time, Middle Channel, DH3

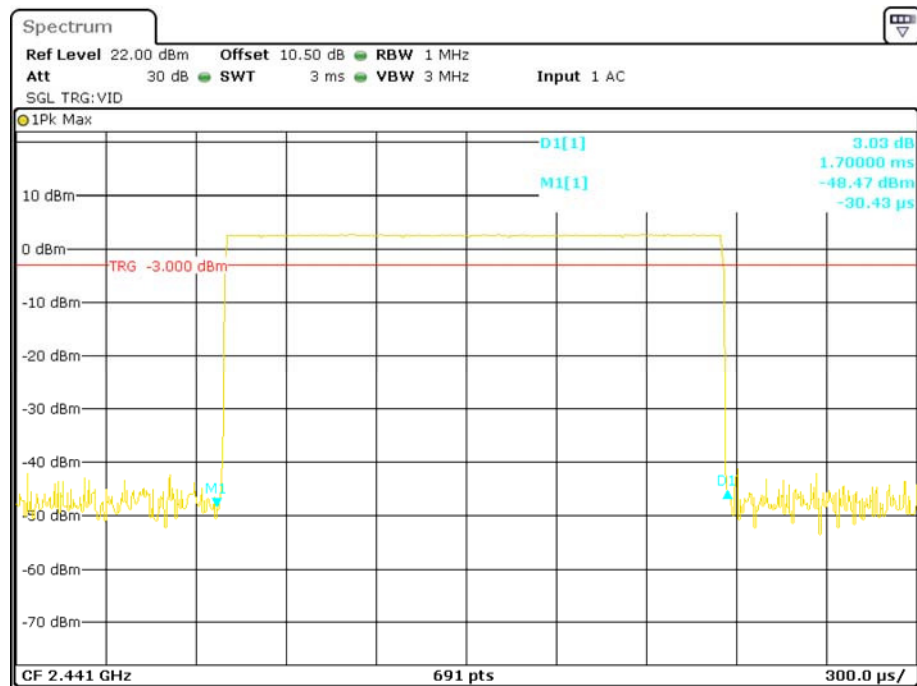


Date: 2.MAR.2018 15:41:08

## Pulse time, High Channel, DH3

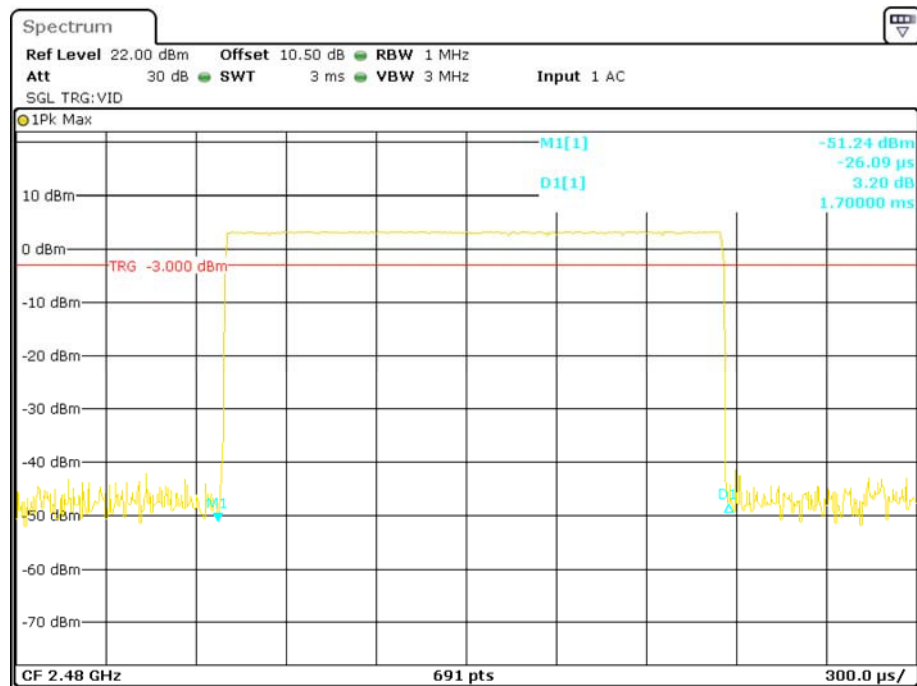


Date: 2.MAR.2018 15:41:40

## Pulse time, Low Channel, DH5

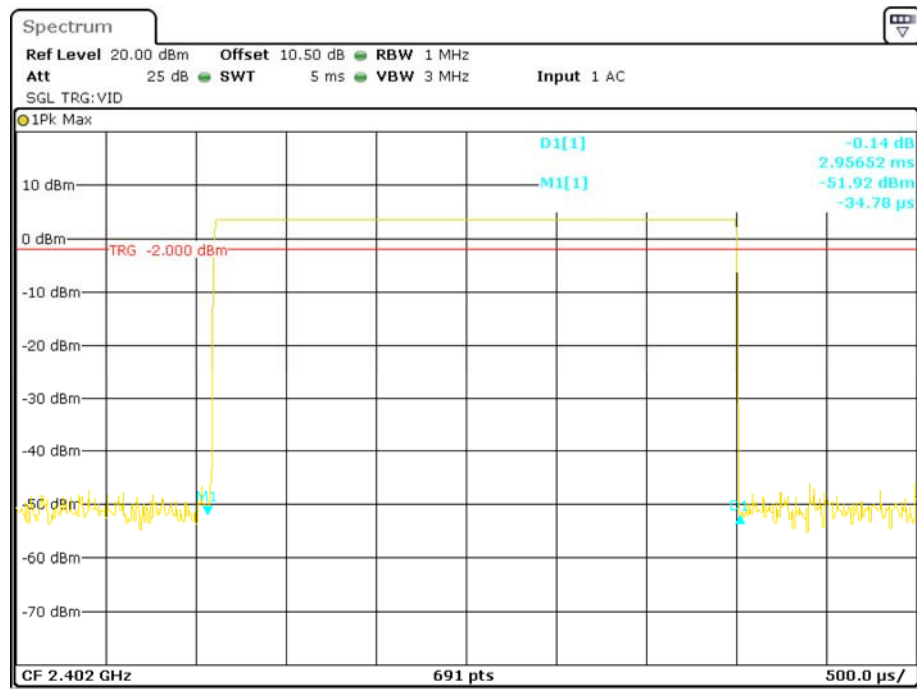


Date: 5.MAR.2018 09:00:48


## Pulse time, Middle Channel, DH5

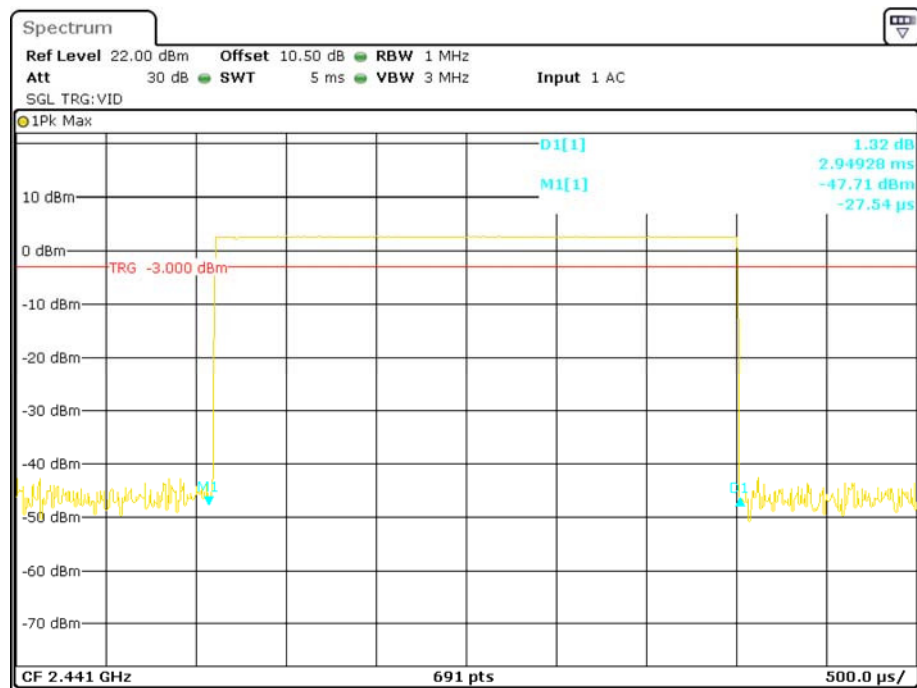

Date: 2.MAR.2018 15:46:37

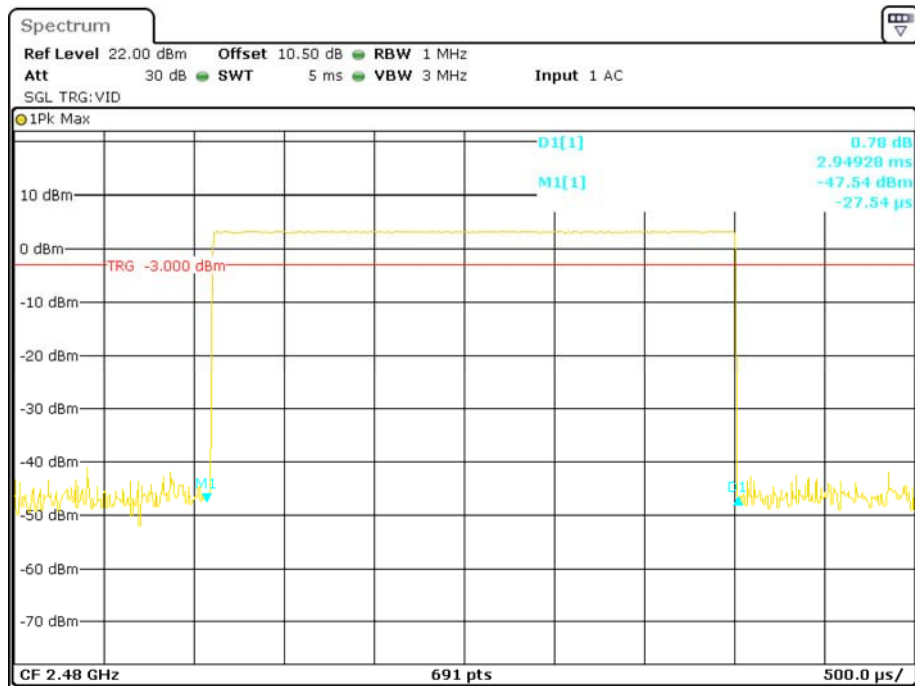
**Pulse time, High Channel, DH5**

Date: 2.MAR.2018 15:46:58

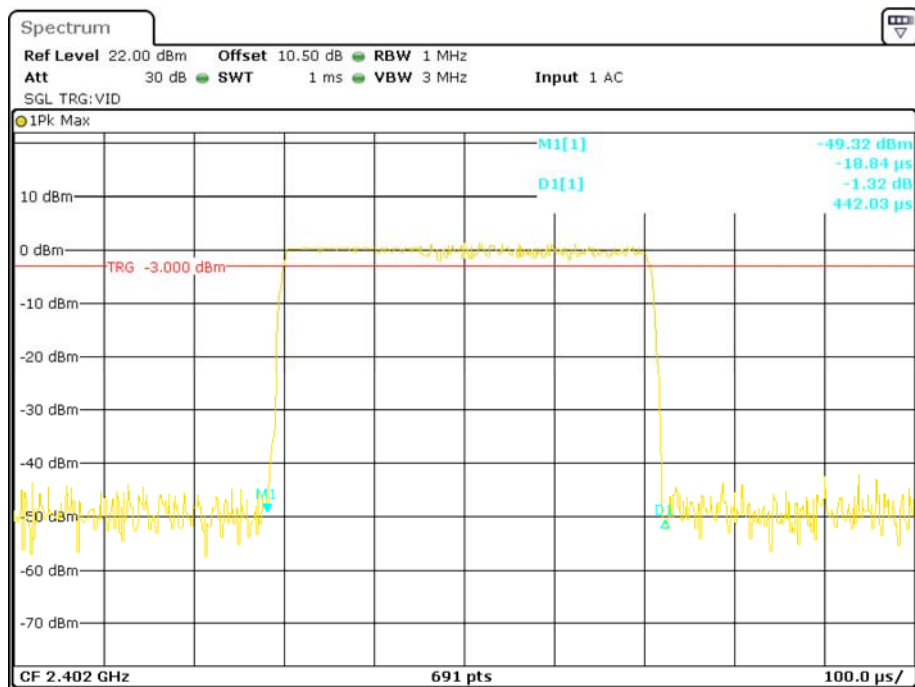**EDR ( $\pi/4$ -DQPSK):  
Pulse time, Low Channel, 2DH1**


Date: 2.MAR.2018 15:32:55

## Pulse time, Middle Channel, 2DH1

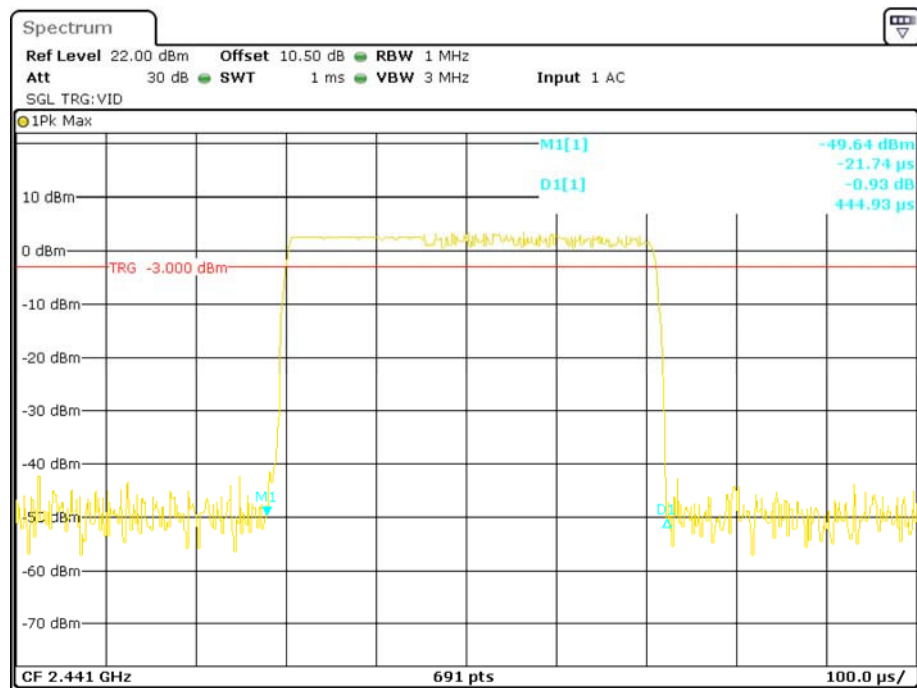

Date: 2.MAR.2018 15:33:22


## Pulse time, High Channel, 2DH1

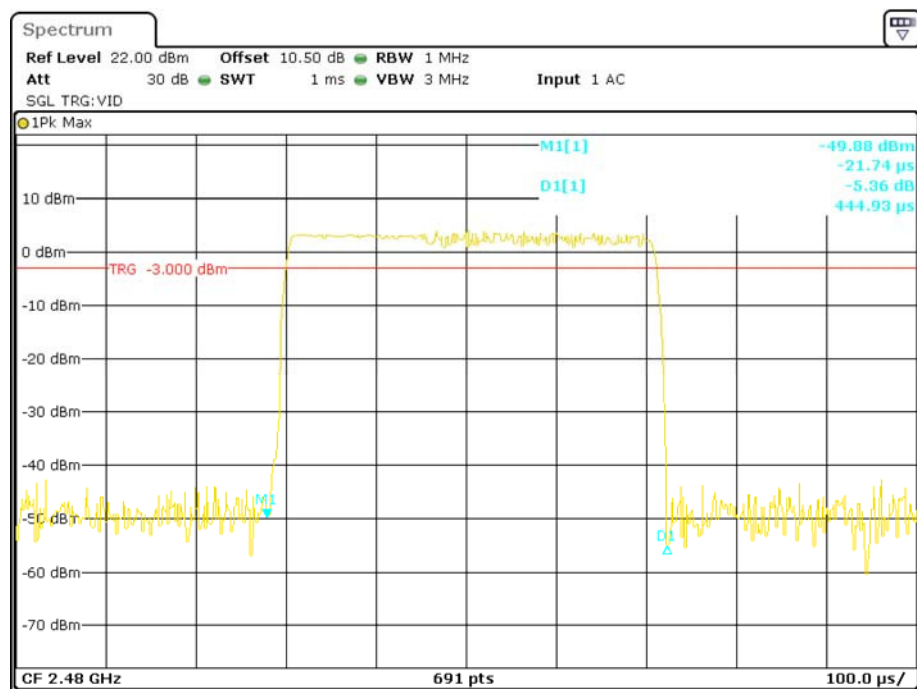

Date: 2.MAR.2018 15:33:48




## Pulse time, Low Channel, 2DH3

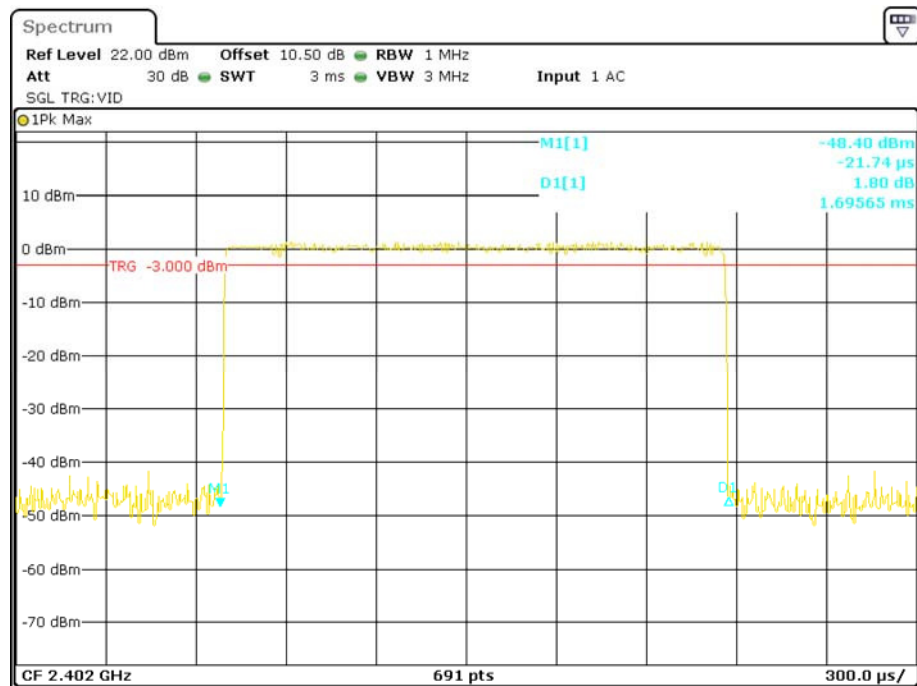


Date: 2.MAR.2018 15:42:23

## Pulse time, Middle Channel, 2DH3

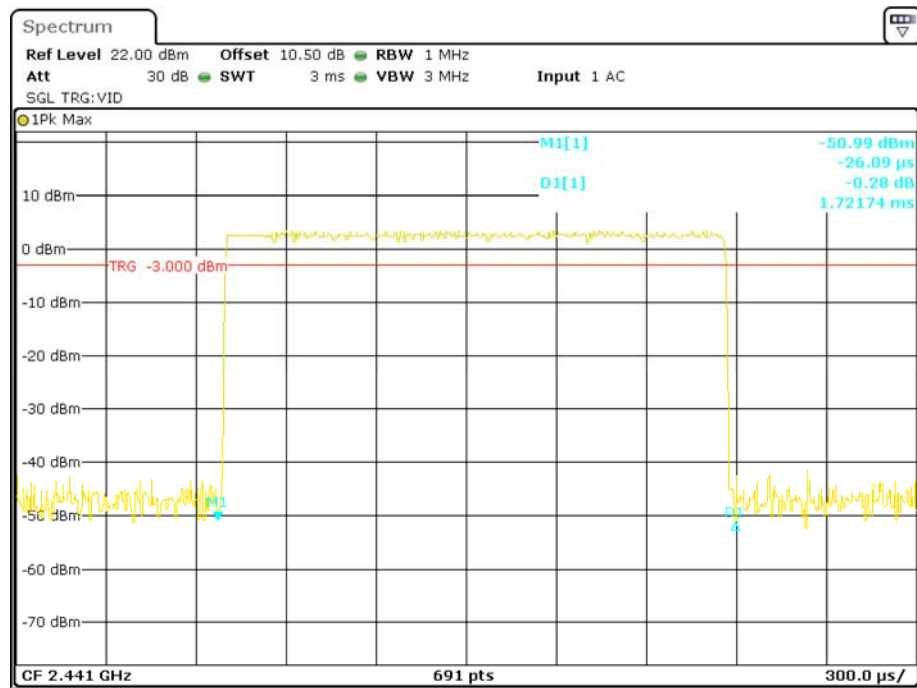


Date: 2.MAR.2018 15:42:58

## Pulse time, High Channel, 2DH3

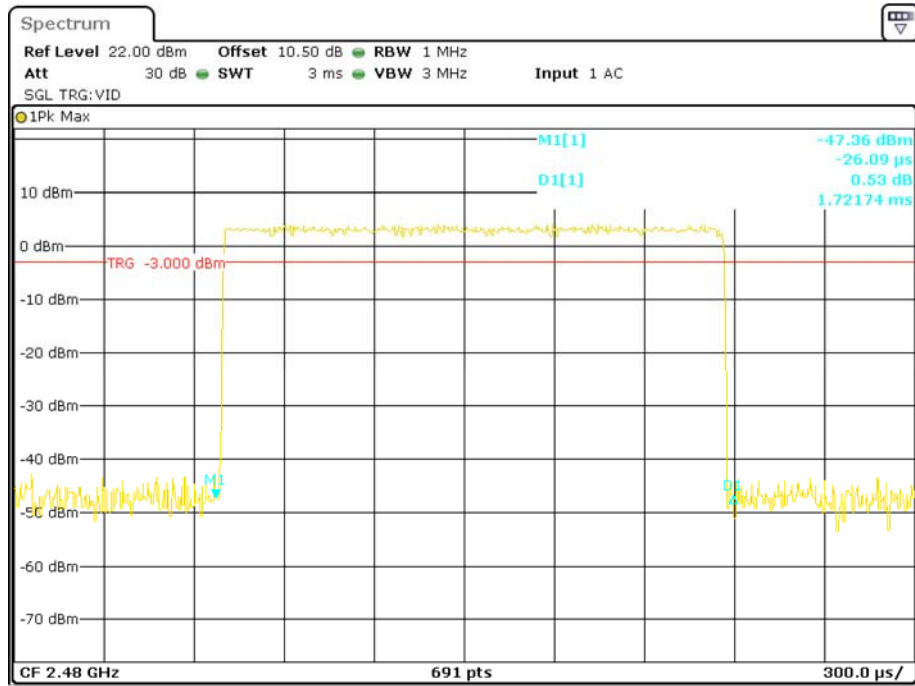


Date: 2.MAR.2018 15:43:24

## Pulse time, Low Channel, 2DH5

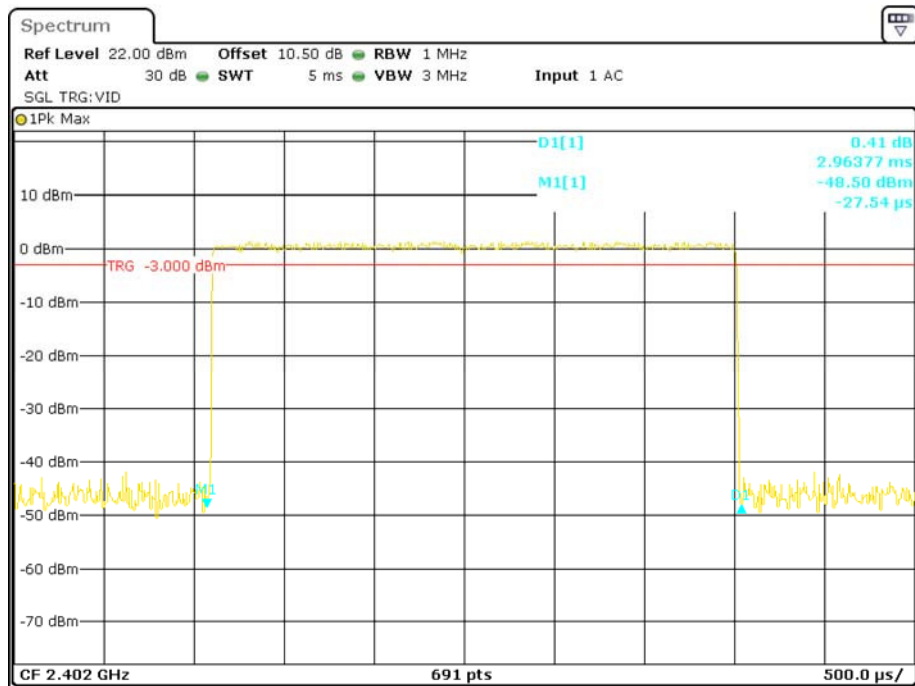


Date: 2.MAR.2018 15:47:40

### Pulse time, Middle Channel, 2DH5

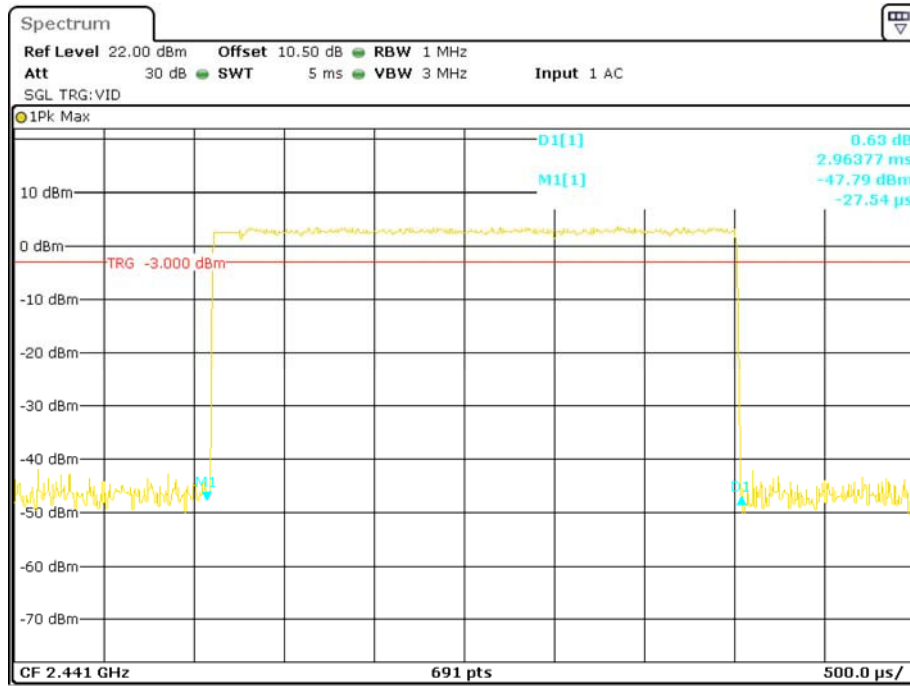


Date: 2.MAR.2018 15:48:05

### Pulse time, High Channel, 2DH5

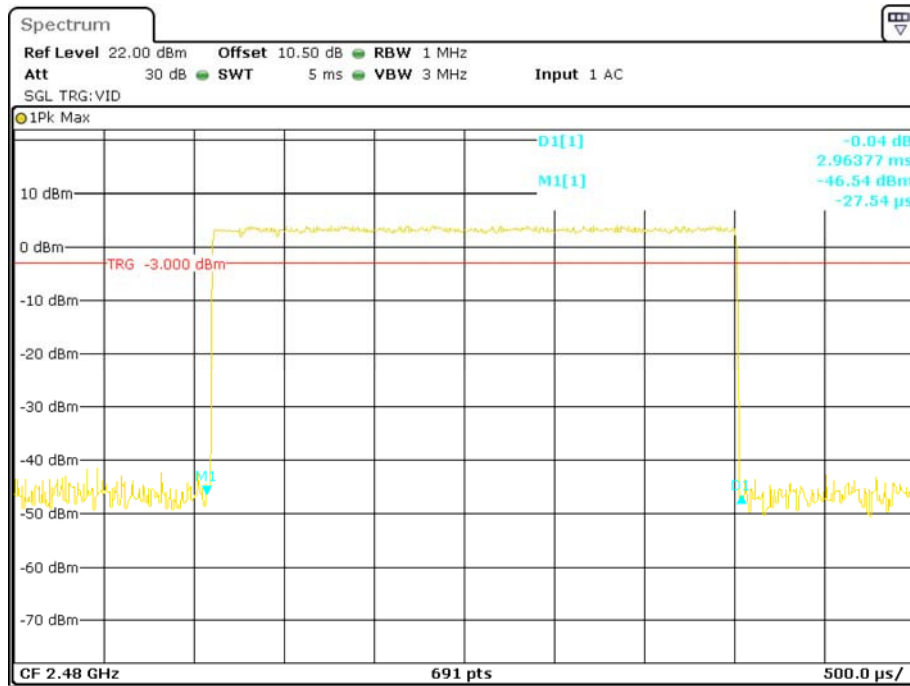


Date: 2.MAR.2018 15:48:25


**EDR (8DPSK):**  
**Pulse time, Low Channel, 3DH1**

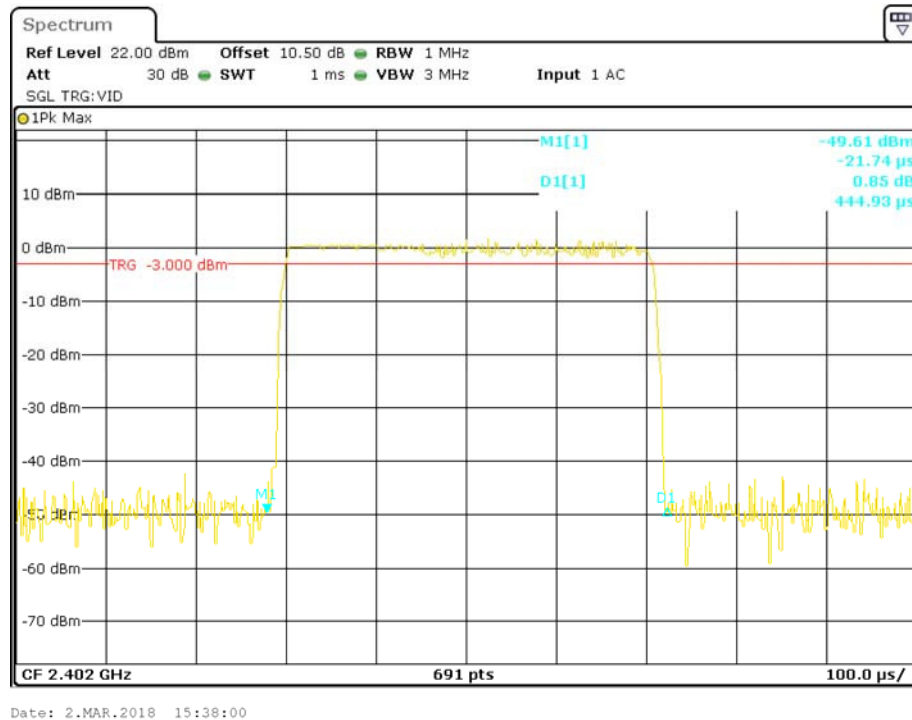

**Pulse time, Middle Channel, 3DH1**

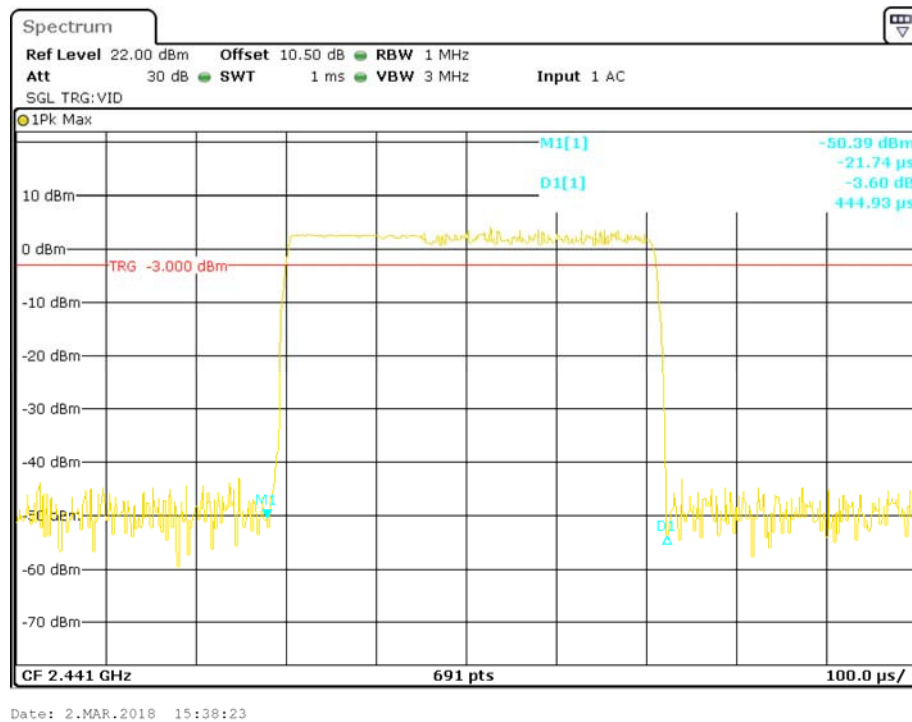


## Pulse time, High Channel, 3DH1

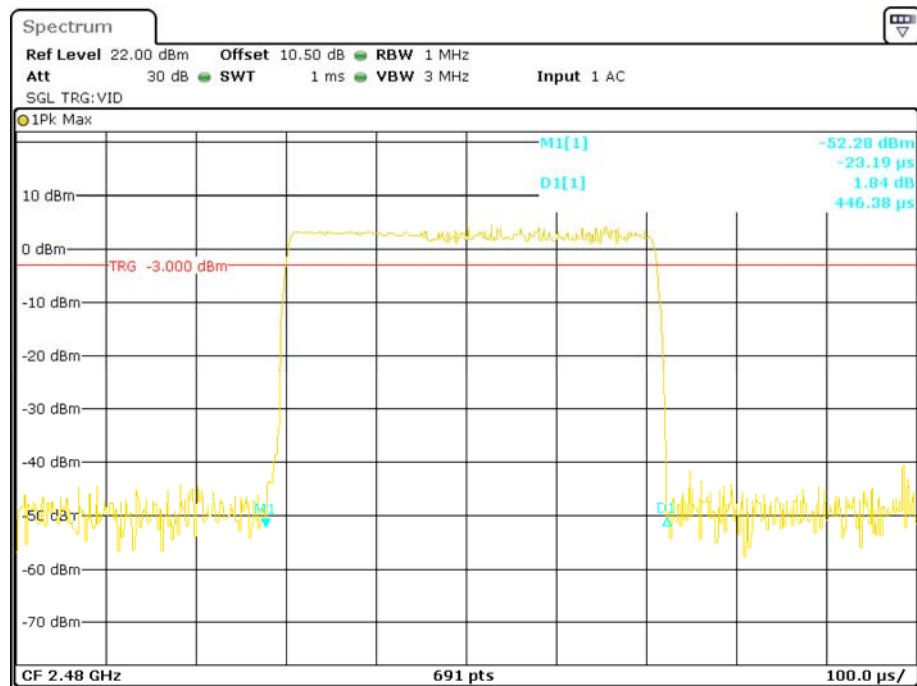


Date: 2.MAR.2018 15:38:54

## Pulse time, Low Channel, 3DH3

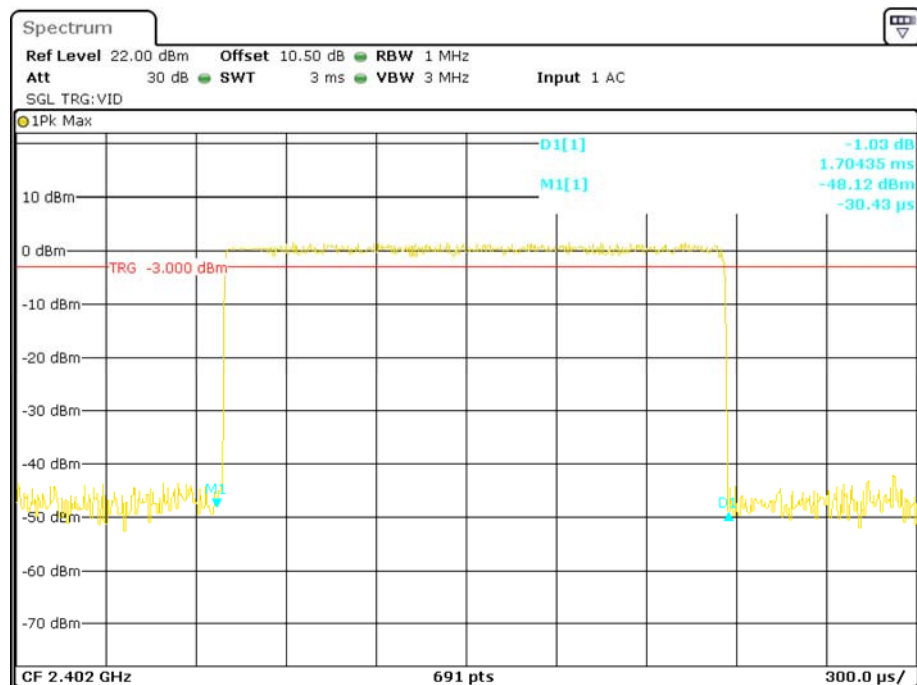


Date: 2.MAR.2018 15:44:10

## Pulse time, Middle Channel, 3DH3

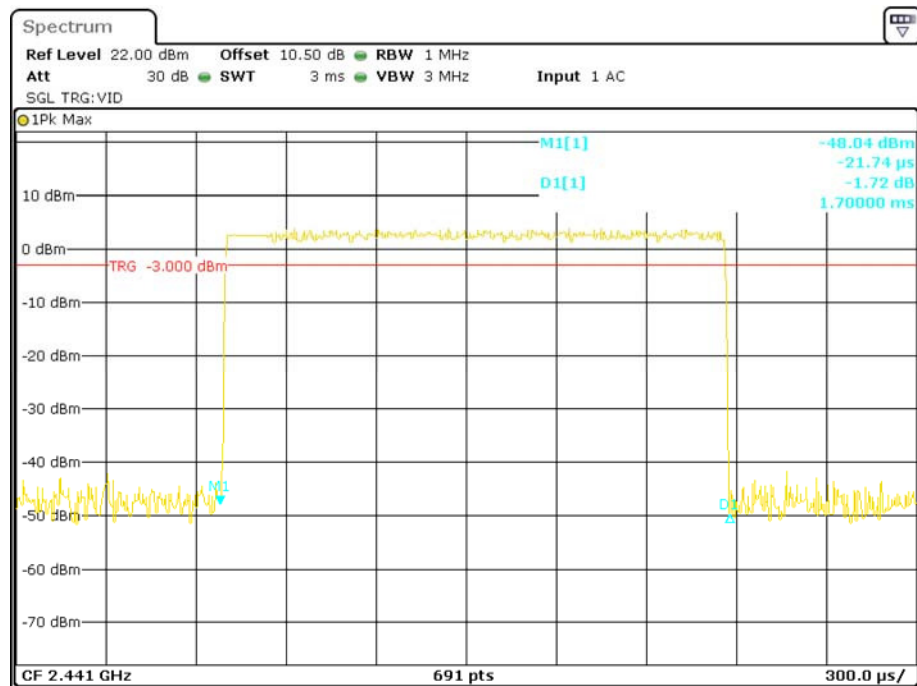


Date: 2.MAR.2018 15:44:44

## Pulse time, High Channel, 3DH3

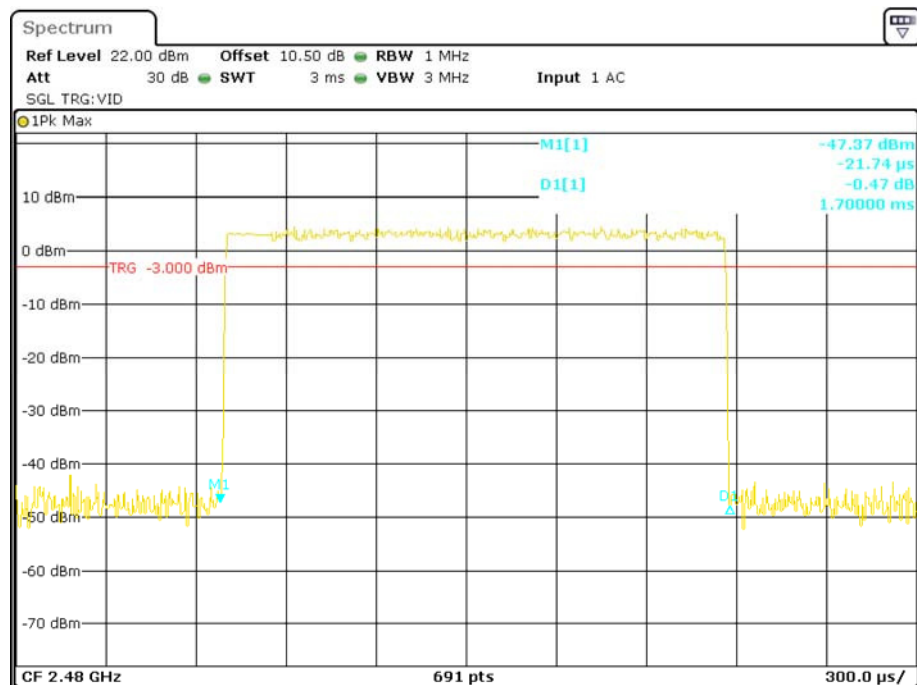


Date: 2.MAR.2018 15:45:13

## Pulse time, Low Channel, 3DH5

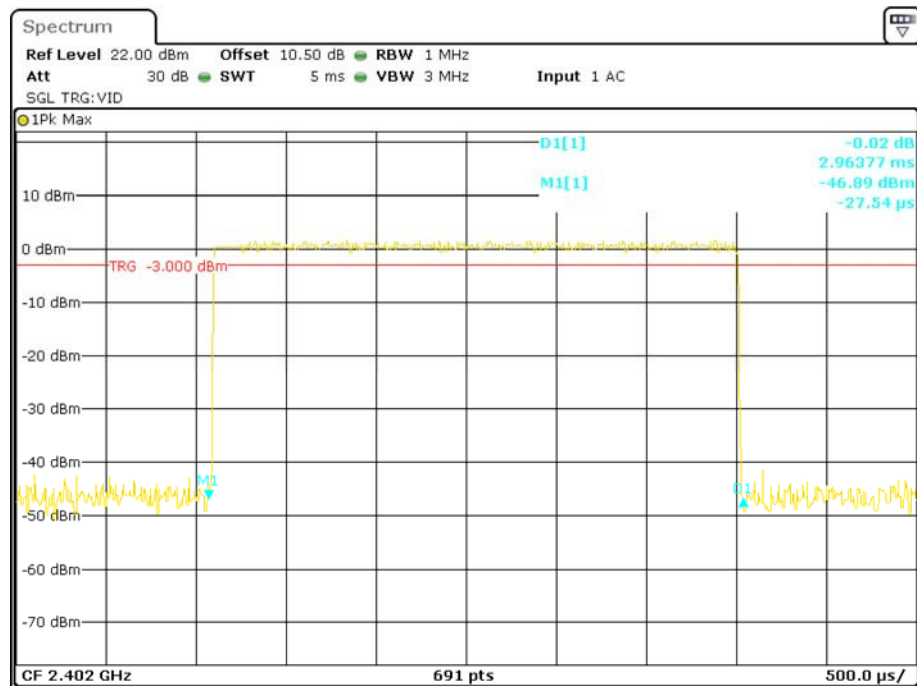


Date: 2.MAR.2018 15:48:59

## Pulse time, Middle Channel, 3DH5

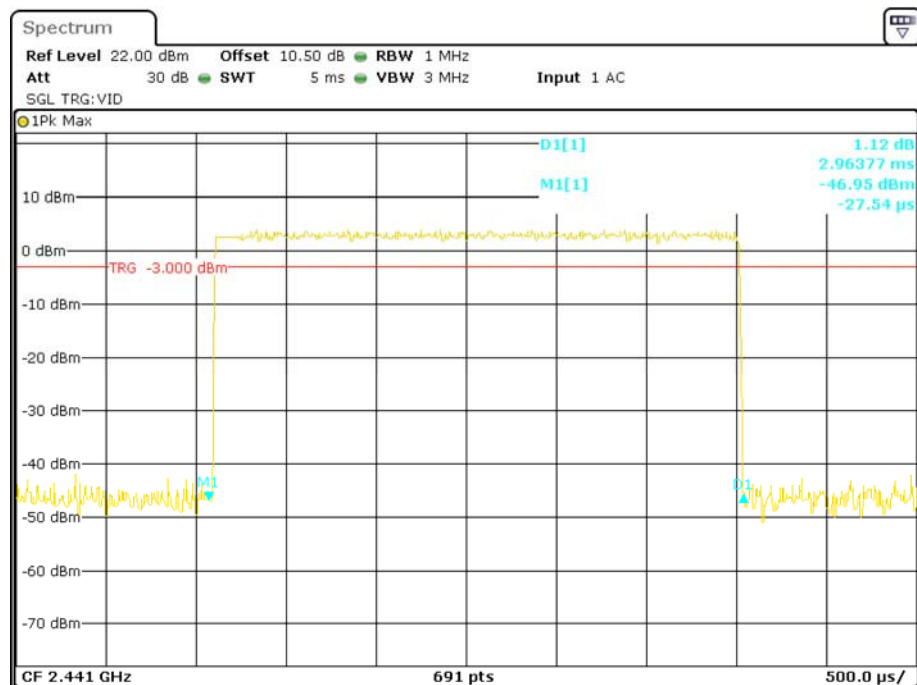

Date: 2.MAR.2018 15:49:21

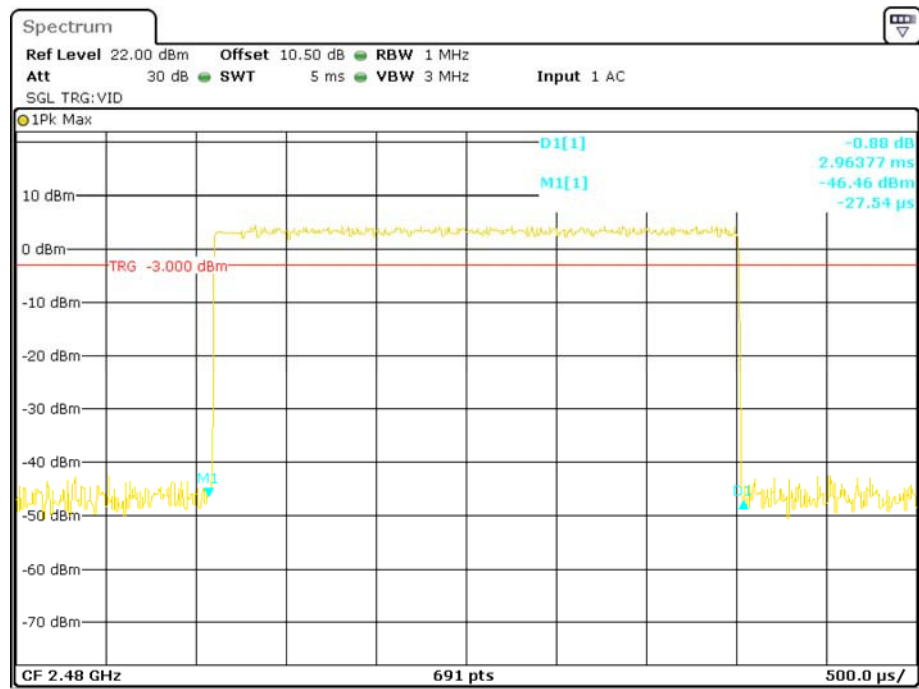**Pulse time, High Channel, 3DH5**

Date: 2.MAR.2018 15:49:45



## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	52 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Nancy Wang on 2018-03-02.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table.*

Mode	Channel	Frequency (MHz)	Peak Output Power		Limit (mW)
			(dBm)	(mW)	
<b>BDR (GFSK)</b>	Low	2402	3.87	2.44	125
	Middle	2441	5.26	3.36	125
	High	2480	5.01	3.17	125
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	Low	2402	1.44	1.39	125
	Middle	2441	3.60	2.29	125
	High	2480	4.22	2.64	125
<b>EDR (8DPSK)</b>	Low	2402	1.54	1.43	125
	Middle	2441	4.19	2.62	125
	High	2480	4.71	2.57	125

Note: The data above was tested in conducted mode.

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Data


#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


*The testing was performed by Nancy Wang on 2018-03-02.*

*EUT operation mode: Transmitting*


*Test Result: Compliance. Please refer to following plots.*

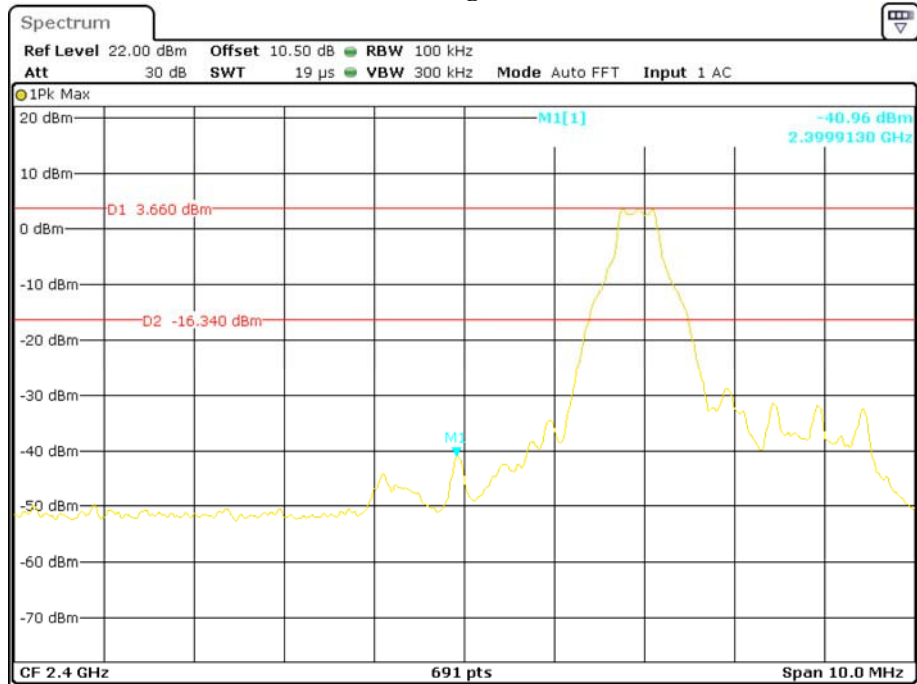**BDR (GFSK): Band Edge-Left Side****Single**


Date: 2.MAR.2018 14:58:55

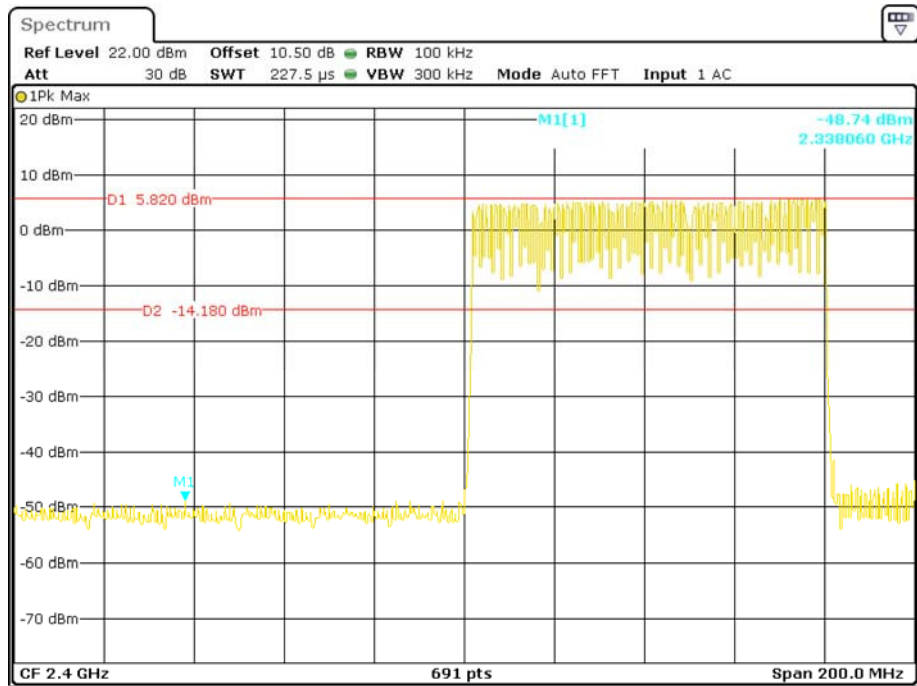**Hopping**

Date: 2.MAR.2018 15:06:08

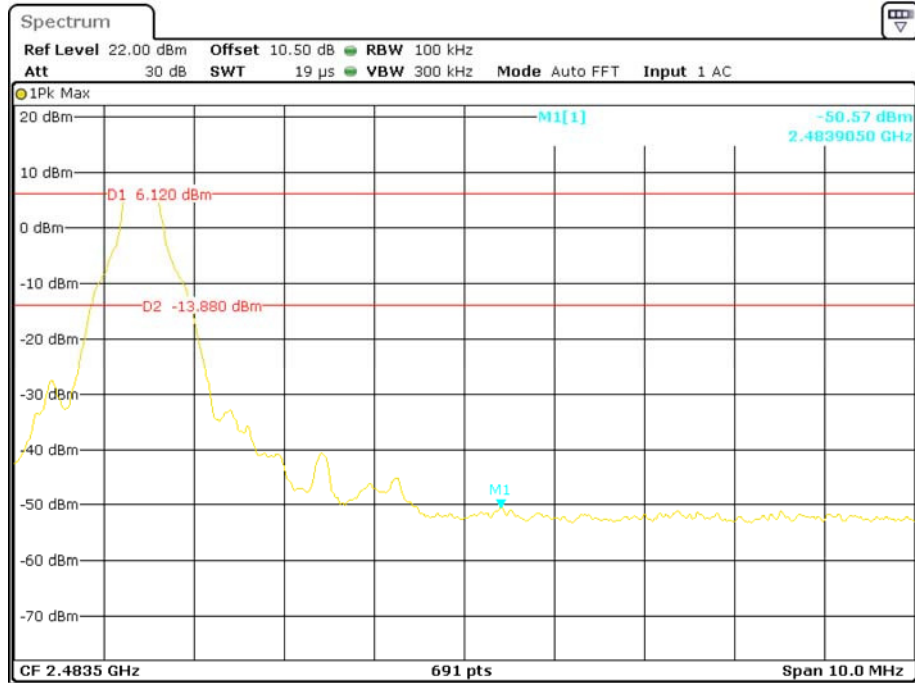**BDR (GFSK): Band Edge-Right Side****Single**


Date: 2.MAR.2018 15:00:00

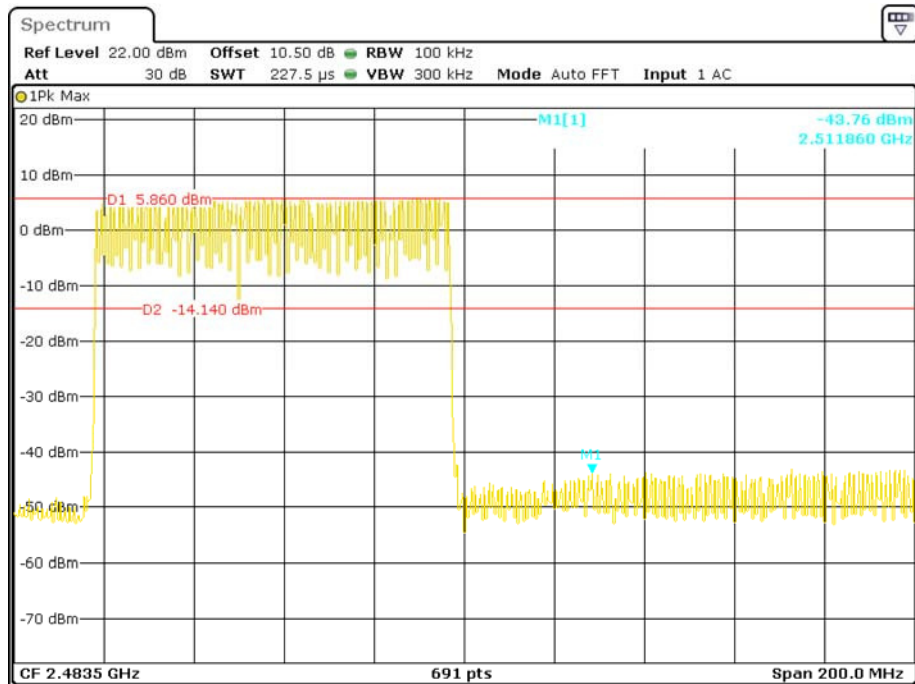**Hopping**

Date: 2.MAR.2018 15:02:41


# EDR ( $\pi/4$ -DQPSK): Band Edge-Left Side

## Single

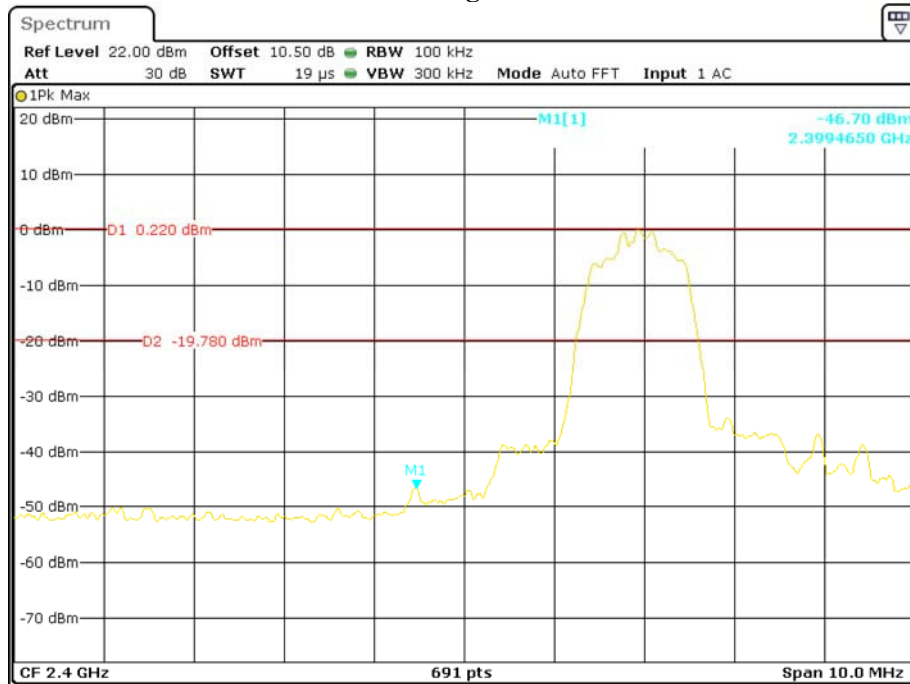

Date: 2.MAR.2018 15:17:03


## Hopping

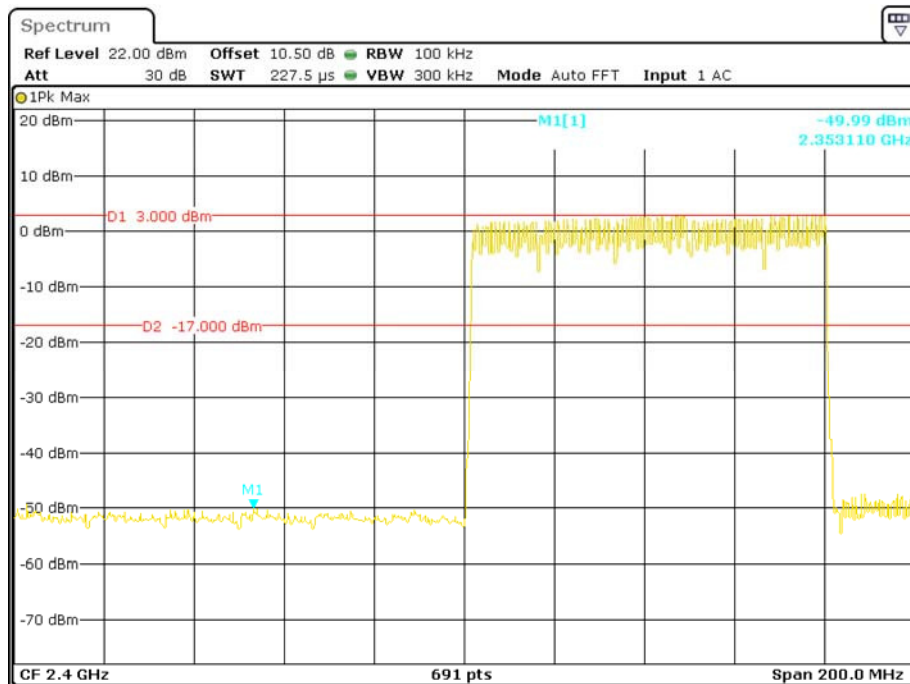

Date: 2.MAR.2018 15:11:09


EDR ( $\pi/4$ -DQPSK): Band Edge-Right Side

## Single

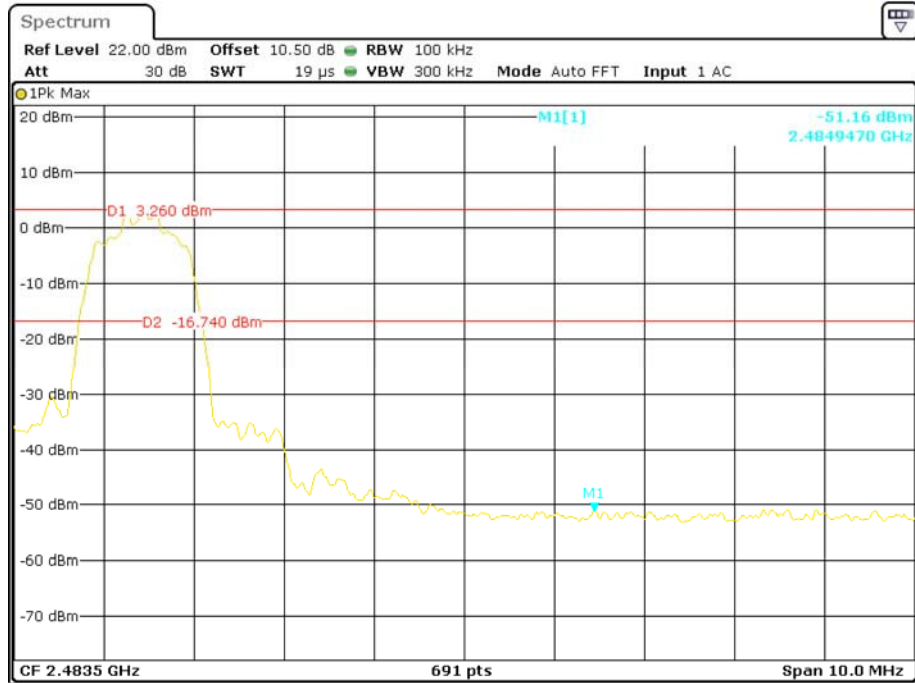

Date: 2.MAR.2018 15:15:34


## Hopping

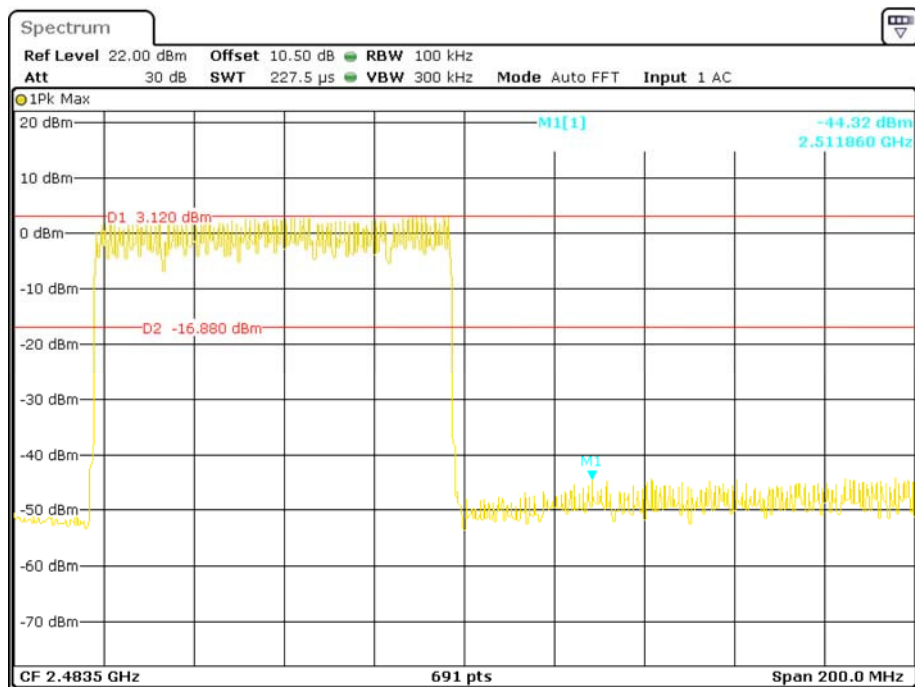

Date: 2.MAR.2018 15:14:18


# EDR (8DPSK): Band Edge-Left Side

## Single

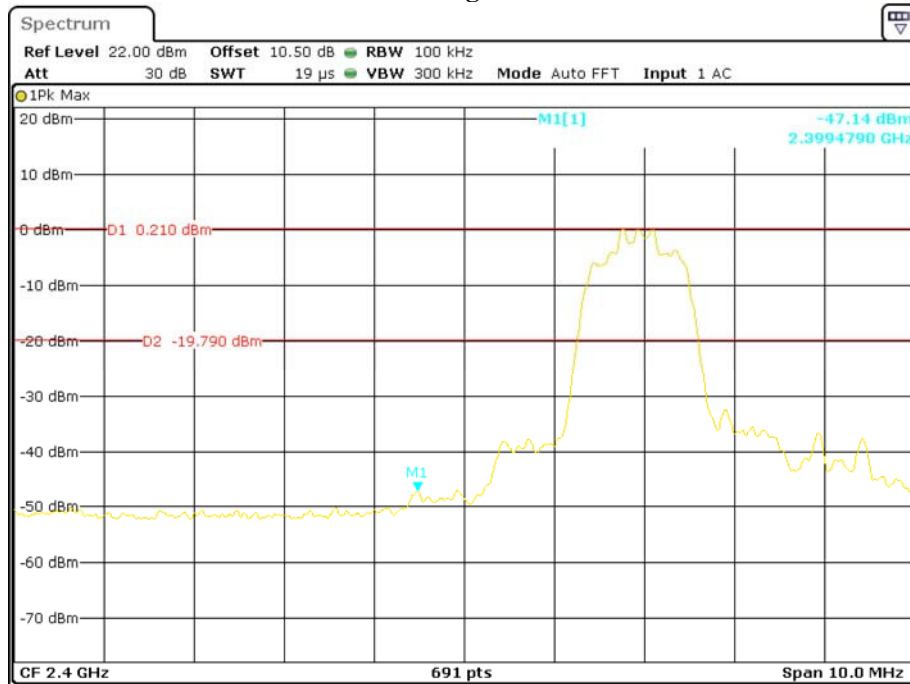

Date: 2.MAR.2018 15:19:30


## Hopping

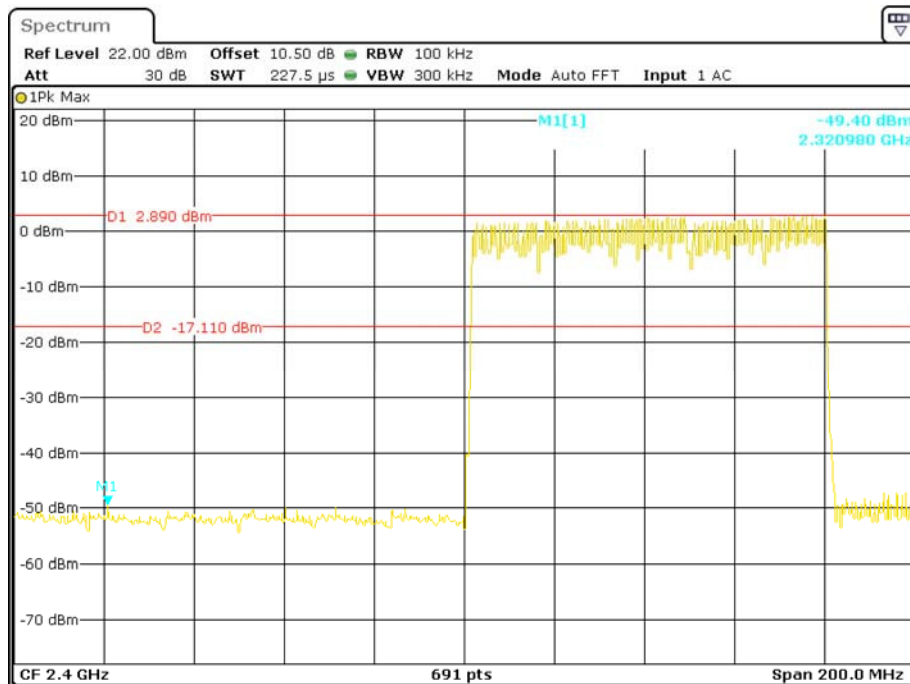

Date: 2.MAR.2018 15:25:49


# EDR (8DPSK): Band Edge-Right Side

## Single

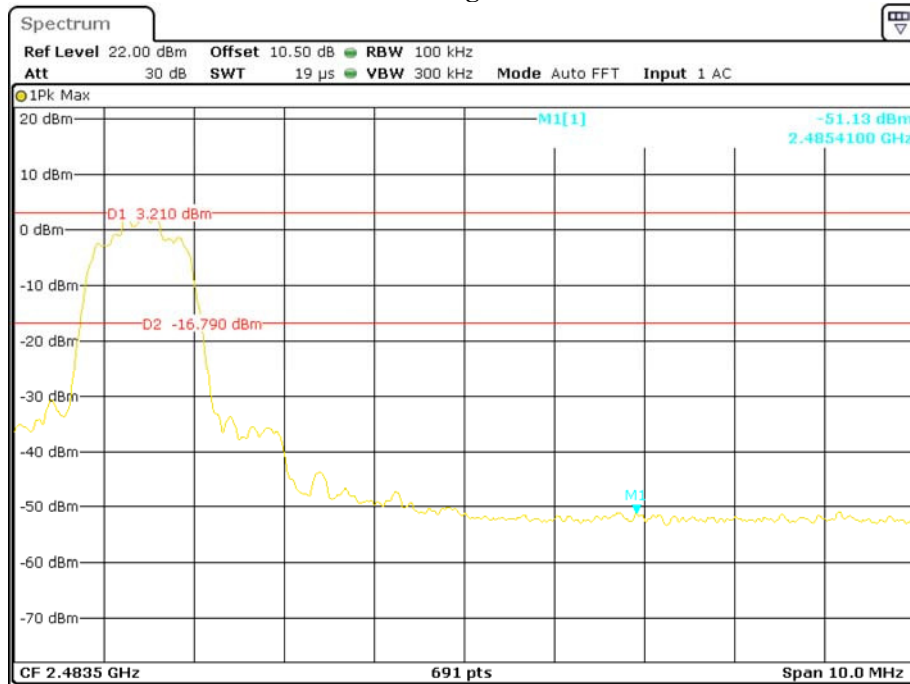

Date: 2.MAR.2018 15:20:40

## Hopping

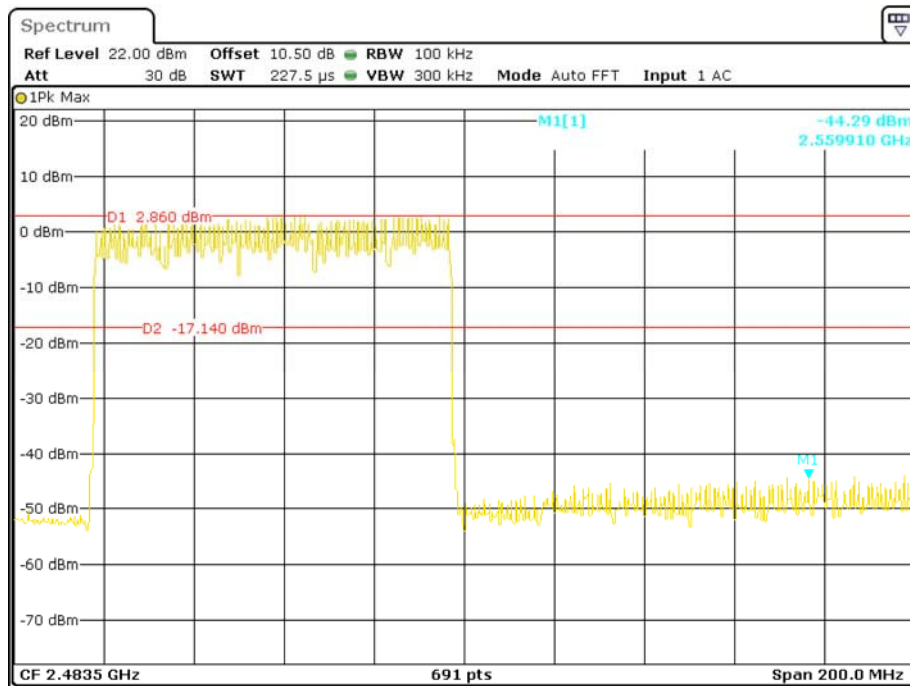

Date: 2.MAR.2018 15:22:42

\*\*\*\*\* END OF REPORT \*\*\*\*\*