

MEASUREMENT REPORT

FCC PART 15C / WLAN 802.11b/g/n

FCC ID: HD5-WCT0TR1001

Applicant: Honeywell International Inc
Honeywell Safety and Productivity Solutions

Application Type: Certification

Product: WIFI/BT Board

Model No.: WCT0TR1001

Brand Name: Intermec


FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part 15 Subpart C (Section 15.247)

Test Procedure(s): ANSI C63.10-2013


Test Date: November 15 ~ 30, 2020

Reviewed By:



(Jame Yuan)

Approved By:



(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2010RSU087-U1	Rev. 01	Initial Report	11-30-2020	Valid

CONTENTS

Description	Page
1. General Information.....	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
2. PRODUCT INFORMATION.....	6
2.1. Equipment Description	6
2.2. Product Specification Subjective to this Report.....	6
2.3. Description of Available Antennas.....	6
2.4. Working Frequencies for this report	7
2.5. Test Mode	7
2.6. Description of Test Configuration and Software	8
2.7. Duty Cycle.....	9
2.8. EMI Suppression Device(s)/Modifications	10
2.9. Labeling Requirements	10
2.10. Test Environment Condition.....	10
3. ANTENNA REQUIREMENTS	11
4. TEST EQUIPMENT CALIBRATION DATE	12
5. MEASUREMENT UNCERTAINTY.....	16
6. TEST RESULT	17
6.1. Summary.....	17
6.2. 6dB Bandwidth Measurement.....	18
6.2.1. Test Limit	18
6.2.2. Test Procedure used.....	18
6.2.3. Test Setting.....	18
6.2.4. Test Setup.....	18
6.2.5. Test Result.....	19
6.3. Output Power Measurement.....	24
6.3.1. Test Limit	24
6.3.2. Test Procedure Used	24
6.3.3. Test Setting.....	24
6.3.4. Test Setup.....	25
6.3.5. Test Result.....	26
6.4. Power Spectral Density Measurement	29
6.4.1. Test Limit	29

6.4.2.	Test Procedure Used	29
6.4.3.	Test Setting	29
6.4.4.	Test Setup.....	29
6.4.5.	Test Result.....	30
6.5.	Conducted Band Edge and Out-of-Band Emissions.....	35
6.5.1.	Test Limit	35
6.5.2.	Test Procedure Used	35
6.5.3.	Test Setting	35
6.5.4.	Test Setup.....	36
6.5.5.	Test Result.....	37
6.6.	Radiated Spurious Emission Measurement	46
6.6.1.	Test Limit	46
6.6.2.	Test Procedure Used	46
6.6.3.	Test Setting	46
6.6.4.	Test Setup.....	48
6.6.5.	Test Result.....	49
6.1.	Radiated Restricted Band Edge Measurement	75
6.1.1.	Test Limit	75
6.1.2.	Test Procedure Used	76
6.1.3.	Test Setting	76
6.1.4.	Test Setup.....	77
6.1.5.	Test Result.....	78
6.2.	AC Conducted Emissions Measurement	142
6.2.1.	Test Limit	142
6.2.2.	Test Setup.....	142
6.2.3.	Test Result.....	143
7.	CONCLUSION	147
	Appendix A - Test Setup Photograph	148
	Appendix B - EUT Photograph	149

1. General Information

1.1. Applicant

Honeywell International Inc
Honeywell Safety and Productivity Solutions
9680 Old Baires Road, Fort Mill, SC 29707 United States

1.2. Manufacturer

Honeywell International Inc
Honeywell Safety and Productivity Solutions
9680 Old Baires Road, Fort Mill, SC 29707 United States

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory
	Laboratory Location (Suzhou – Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou – SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Accreditations
	A2LA: 3628.01CNAS: L10551 FCC: CN1166ISED: CN0001 VCCI: R-20025, G-20034, C-20020, T-20020
☐	Test Site – MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02CNAS: L10551 FCC: CN1284ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2 nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: L3261-190725 FCC: 291082, TW3261ISED: TW3261

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	WIFI/BT Board
Model No.	WCT0TR1001
Serial No.	20201030 Sample18#
Wi-Fi Specification	802.11b/g/n
Bluetooth Version	v4.2 dual mode
Antenna Delivery	1*TX + 1*RX

2.2. Product Specification Subjective to this Report

Frequency Range	802.11b/g/n-HT20: 2412 ~ 2462 MHz 802.11n-HT40: 2422 ~ 2452 MHz
Channel Number	802.11b/g/n-HT20: 11 802.11b/g/n-HT20: 7
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
Data Rate	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Description of Available Antennas

Antenna Type	Frequency Band (GHz)	Manufacturer	Antenna Gain (dBi)	
			With Cable	Without Cable
PCB Antenna	2.4~2.5	WALSIN TECHNOLOGY CORPORATION	1.99	
Dipole Antenna	2.4~2.5		1.90	5.00

Note 1: All antenna information is provided by the manufacturer.

Note 2: The RF cable used with dipole antenna, its cable loss is 3.1dB declared by the manufacturer.

2.4. Working Frequencies for this report

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40


Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

2.5. Test Mode

Test Mode	Mode 1: Transmit by 802.11b (1Mbps)
	Mode 2: Transmit by 802.11g (6Mbps)
	Mode 3: Transmit by 802.11n-HT20 (MCS0)
	Mode 4: Transmit by 802.11n-HT40 (MCS0)

2.6. Description of Test Configuration and Software

The device was tested per the guidance ANSI C63.10: 2013 that was used to reference the appropriate EUT setup for radiated spurious emissions and AC line conducted emission testing.

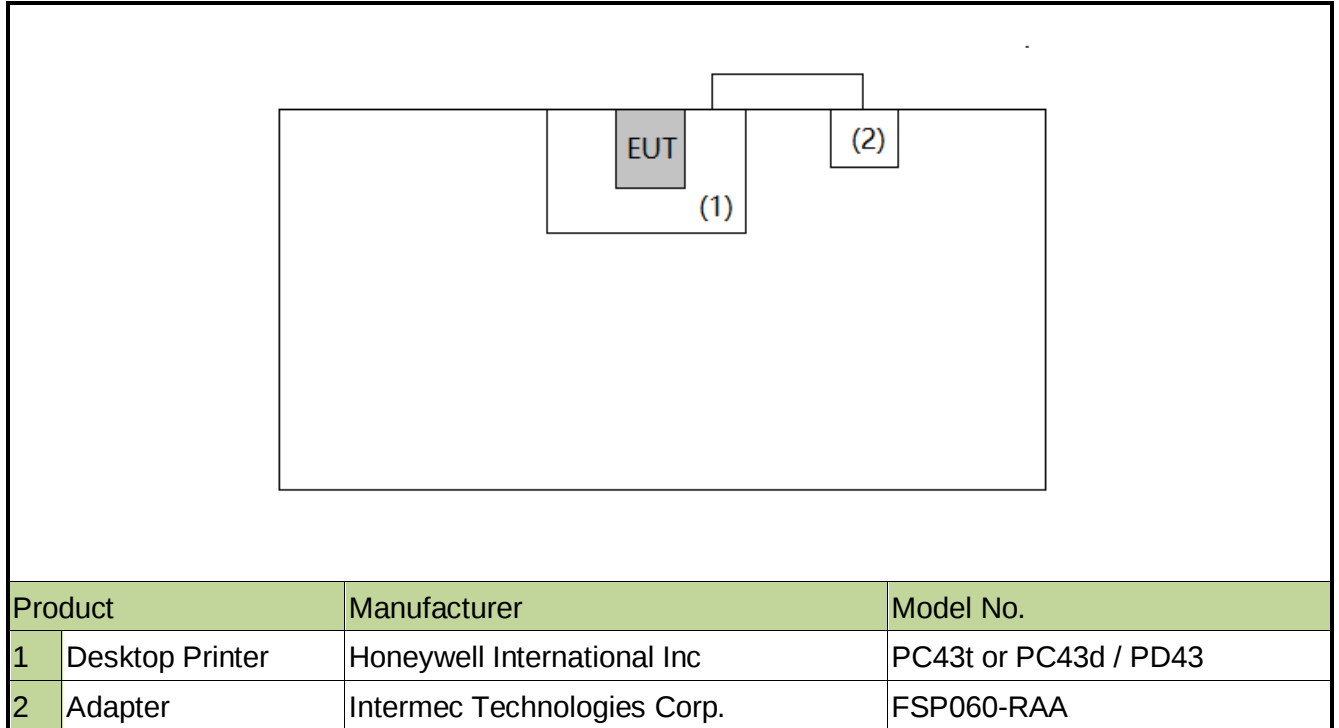


Note 1: The test utility software used during testing was "IPOP", and the version was 4.1.

Note 2: Detail power setting refer to operation description.

2.7. Duty Cycle

2.4GHz WLAN (DTS) operation is possible in 20MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11b	100%
802.11g	100%
802.11n-HT20	100%
802.11n-HT40	100%

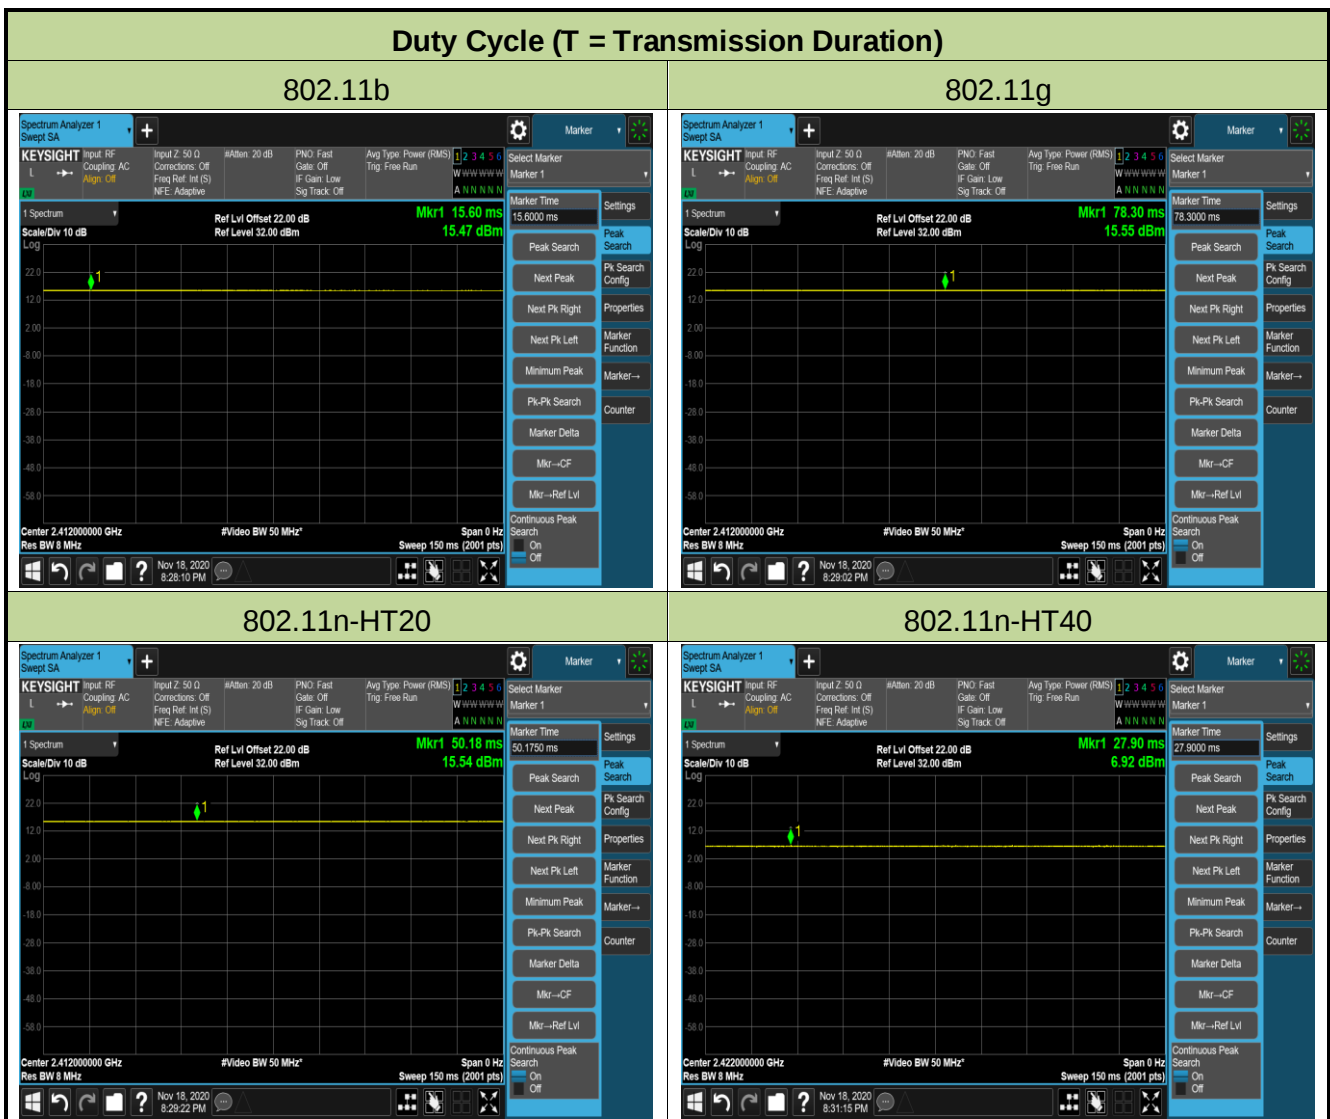

2.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.9. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

2.10. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~75 %RH

3. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. TEST EQUIPMENT CALIBRATION DATE

Conducted Emission - (WZ-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2021/01/18
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2021/09/09
Thermal Hygrometer	testo	608-H1	MRTSUE06404	1 year	2021/07/26
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Conducted Emission - (SIP-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2021/07/02
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2021/09/09
Thermal Hygrometer	testo	608-H1	MRTSUE06621	1 year	2020/12/29

Radiated Emission - (WZ-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2021/01/18
PXA Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2021/08/30
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2021/08/08
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2021/09/27
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2020/12/17
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermal Hygrometer	testo	608-H1	MRTSUE06403	1 year	2021/07/26
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2021/04/30

Radiated Emission - (WZ-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Keysight	N9038A	MRTSUE06125	1 year	2021/07/02
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2021/05/26
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2021/10/25
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2020/12/17
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermal Hygrometer	Minggao	ETH529	MRTSUE06170	1 year	2020/12/15
Anechoic Chamber	RIKEN	Chamber-WZ-AC2	MRTSUE06213	1 year	2021/04/30

Radiated Emission - (SIP-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2021/07/02
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2021/07/23
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06645	1 year	2021/08/30
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2021/08/30
Preamplifier	EMCI	EMC051845SE	MRTSUE06600	1 year	2021/11/09
Thermal Hygrometer	testo	608-H1	MRTSUE06620	1 year	2020/12/29
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2020/12/25

Radiated Emission - (SIP-WZ-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2021/07/02
MXA Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2021/09/26
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06646	1 year	2021/08/30
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06648	1 year	2020/12/17
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06599	1 year	2020/12/17
Preamplifier	EMCI	EMC051845SE	MRTSUE06644	1 year	2021/11/09
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2021/10/21
Thermal Hygrometer	testo	608-H1	MRTSUE06624	1 year	2020/12/29
Anechoic Chamber	RIKEN	SIP-WZ-AC2	MRTSUE06781	1 year	2020/12/25

Radiated Emission - (SIP-AC3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2021/07/02
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2021/07/23
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06647	1 year	2021/08/08
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2021/09/13
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06598	1 year	2020/12/17
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2021/01/16
Preamplifier	EMCI	EMC184045SE	MRTSUE06641	1 year	2021/01/16
Thermal Hygrometer	testo	608-H1	MRTSUE06622	1 year	2020/12/29
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2020/12/25

Conducted Test Equipment - (WZ-TR3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2021/04/14
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2021/01/08
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2021/04/14
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2021/10/22
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2021/08/30
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2021/08/08
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2021/06/11
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2021/06/11
Attenuator	MVE	10dB	MRTSUE06545	N/A	N/A
Modulation Analyzer	HP	HP8901A	MRTSUE06098	1 year	2021/09/26
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/10/20
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2021/10/21
Thermal Hygrometer	testo	608-H1	MRTSUE06401	1 year	2021/07/26

Conducted Test Equipment - (SIP-SR5)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2021/04/14
PXA Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2021/08/30
USB wideband power sensor	Agilent	U2021XA	MRTSUE06595	1 year	2021/09/26
Attenuator	MVE	10dB	MRTSUE06545	N/A	N/A
USB wideband power sensor	Agilent	U2021XA	MRTSUE06596	1 year	2021/09/26
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/10/20
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2021/06/11
Temperature Chamber	BAOYT	BYG-408CS	MRTSUE06847	1 year	2021/03/31
Thermal Hygrometer	testo	622	MRTSUE06629	1 year	2020/12/30

Software	Version	Function
EMI Software	V3	EMI Test Software

5. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.13dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.15dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.28%

6. TEST RESULT

6.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 6.2
15.247(b)(3)	Output Power	$\leq 1\text{Watt}$		Pass	Section 6.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm} / 3\text{kHz}$		Pass	Section 6.4
15.247(d)	Band Edge / Out-of-Band Emissions	$\geq 20\text{dBc (Peak)}$		Pass	Section 6.5
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 6.6 & 6.7
15.207	AC Conducted Emissions 150kHz - 30MHz	$< \text{FCC 15.207 limits}$	Line Conducted	Pass	Section 6.8

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 6dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure used

ANSI C63.10-2013 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace was allowed to stabilize

6.2.4. Test Setup

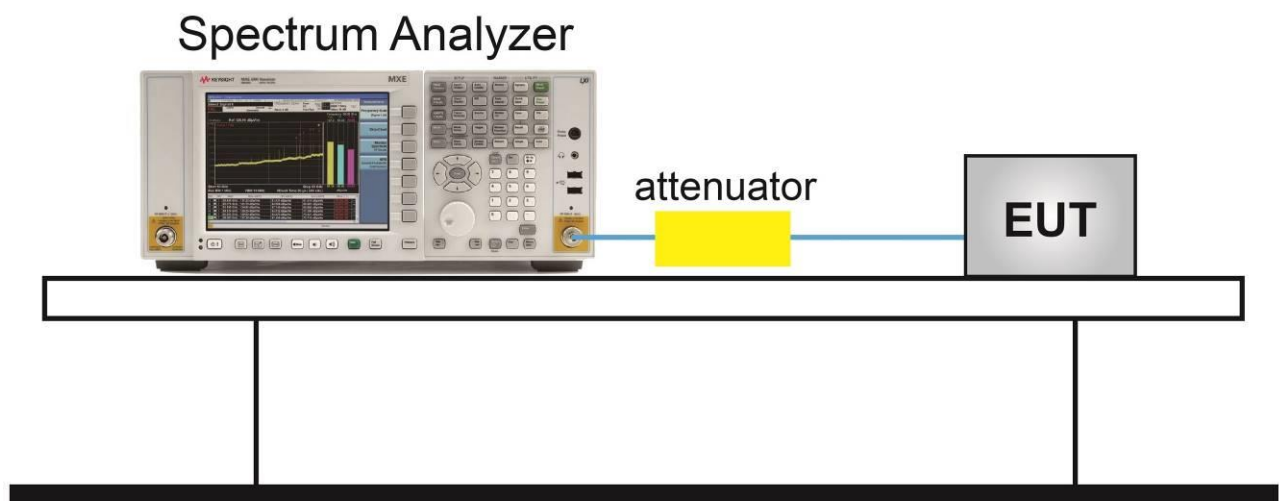


6.2.5. Test Result

Product	WIFI/BT Board	Test Engineer	Dandy Li
Test Site	WZ-TR3	Test Date	2020/11/18

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	1Mbps	01	2412	10.13	≥ 0.5	Pass
802.11b	1Mbps	06	2437	10.09	≥ 0.5	Pass
802.11b	1Mbps	11	2462	10.11	≥ 0.5	Pass
802.11g	6Mbps	01	2412	16.51	≥ 0.5	Pass
802.11g	6Mbps	06	2437	16.52	≥ 0.5	Pass
802.11g	6Mbps	11	2462	16.52	≥ 0.5	Pass
802.11n-HT20	MCS0	01	2412	17.64	≥ 0.5	Pass
802.11n-HT20	MCS0	06	2437	17.69	≥ 0.5	Pass
802.11n-HT20	MCS0	11	2462	17.67	≥ 0.5	Pass
802.11n-HT40	MCS0	03	2422	36.42	≥ 0.5	Pass
802.11n-HT40	MCS0	06	2437	36.42	≥ 0.5	Pass
802.11n-HT40	MCS0	09	2452	36.42	≥ 0.5	Pass

802.11b 6dB Bandwidth

Channel 01 (2412MHz)

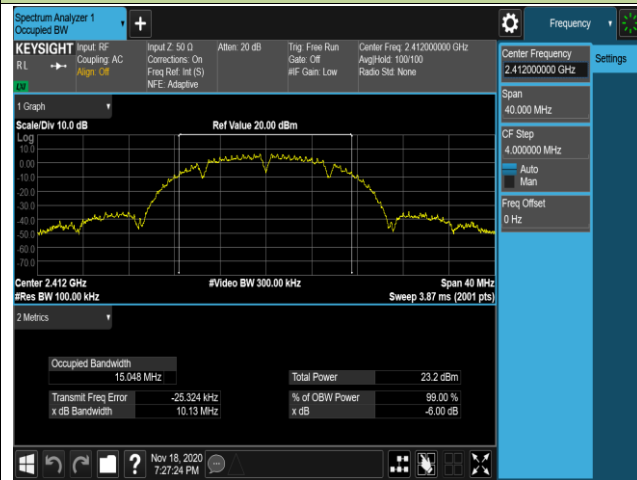

Channel 06 (2437MHz)




Channel 11 (2462MHz)




802.11g 6dB Bandwidth


Channel 01 (2412MHz)

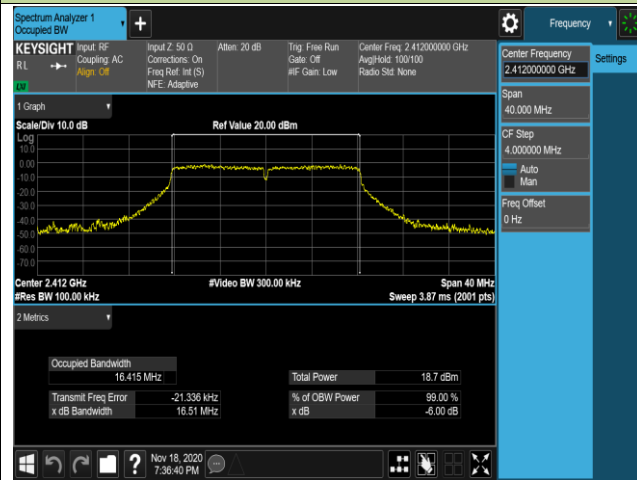

Channel 06 (2437MHz)

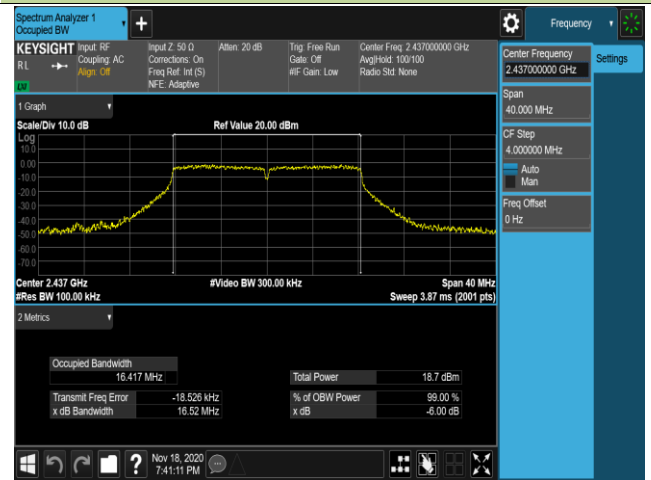


Channel 11 (2462MHz)

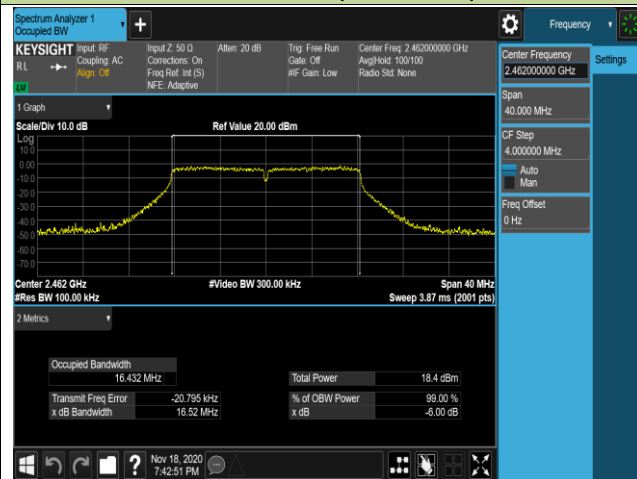


802.11n-HT20 6dB Bandwidth


Channel 01 (2412MHz)

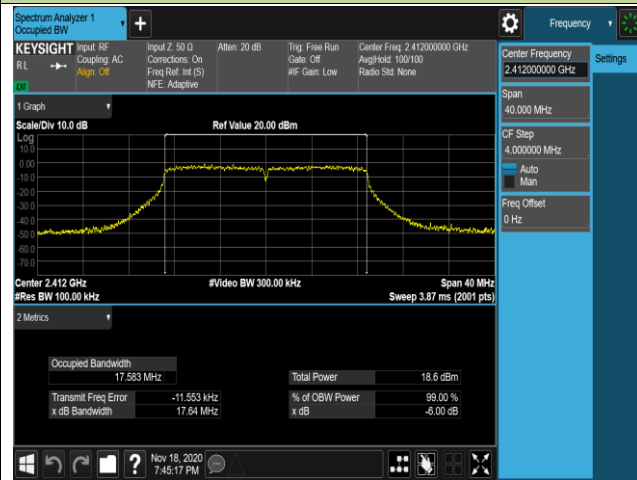

Channel 06 (2437MHz)

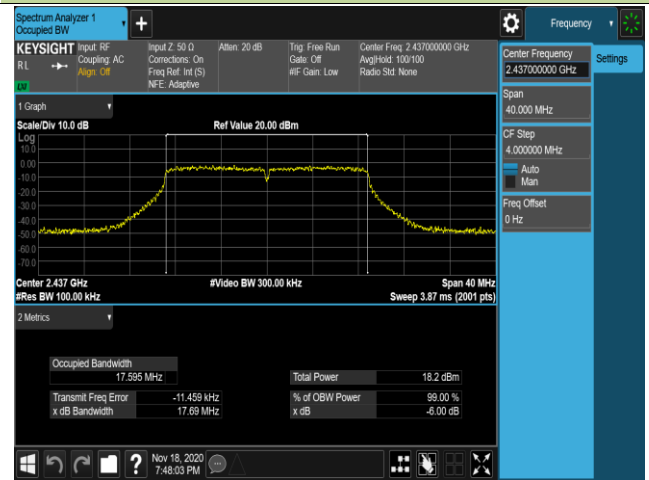


Channel 11 (2462MHz)

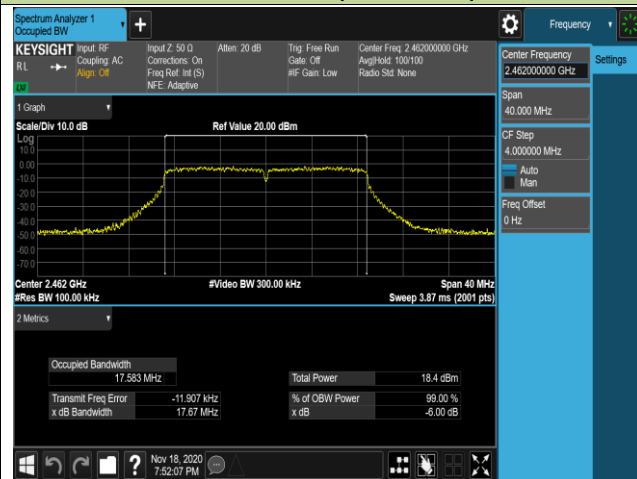


802.11n-HT40 6dB Bandwidth


Channel 03 (2422MHz)

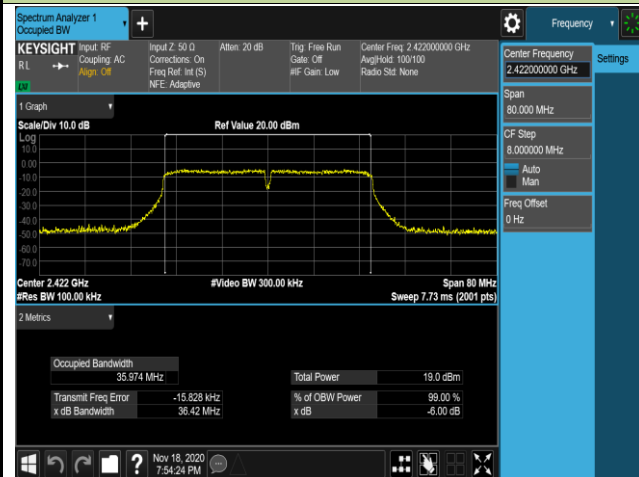

Channel 06 (2437MHz)

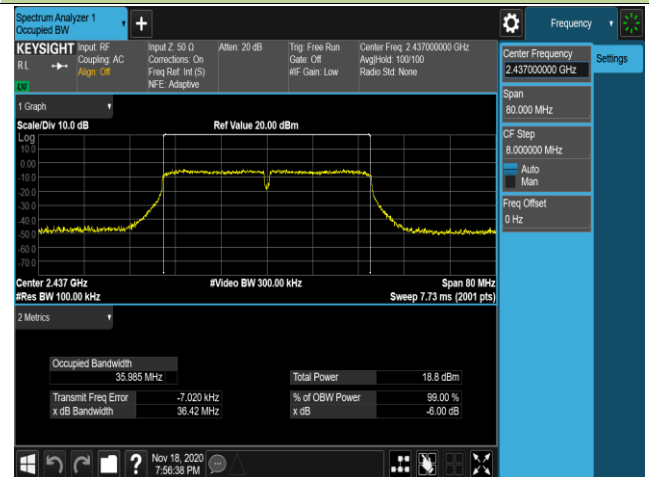

Channel 09 (2452MHz)

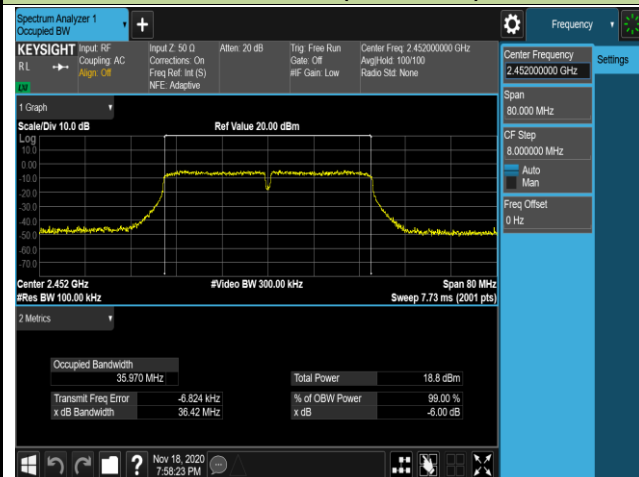

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum conducted output power shall not exceed 1 Watt (30dBm).

6.3.2. Test Procedure Used

ANSI C63.10 Section 11.9.1.3

ANSI C63.10 Section 11.9.2.3

6.3.3. Test Setting


Method PKPM1 (Peak Power Measurement of Signals with DTS BW $\leq$ 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

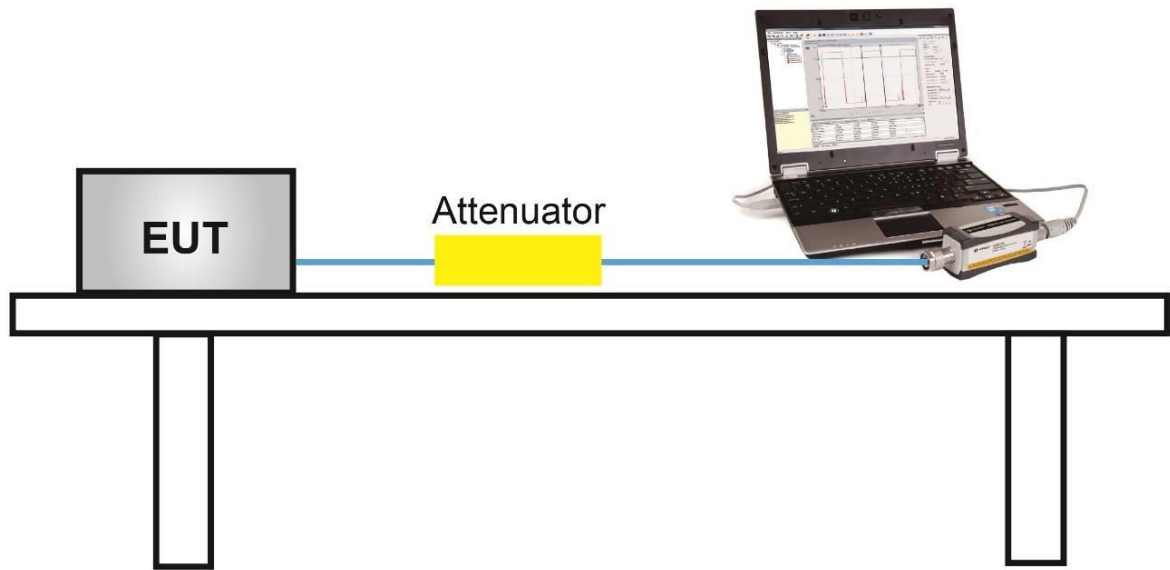

6.3.5.Test Result

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (gray marker) for final test of each channel.

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate / MCS	Average Power (dBm)
802.11b	20	6	2437	1Mbps	19.75
				5.5Mbps	19.62
				11Mbps	19.47
802.11g	20	6	2437	6Mbps	22.28
				24Mbps	22.16
				54Mbps	22.05
802.11n	20	6	2437	MCS0	21.61
				MCS3	21.46
				MCS7	21.26
802.11n	40	6	2437	MCS0	21.33
				MCS3	21.14
				MCS7	21.05

Test Result of Peak Output Power

Product	WIFI/BT Board	Test Engineer	Dandy Li
Test Site	WZ-TR3	Test Date	2020/11/17

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
11b	1Mbps	01	2412	18.71	≤ 30.00	Pass
11b	1Mbps	06	2437	19.75	≤ 30.00	Pass
11b	1Mbps	11	2462	19.87	≤ 30.00	Pass
11g	6Mbps	01	2412	22.32	≤ 30.00	Pass
11g	6Mbps	06	2437	22.28	≤ 30.00	Pass
11g	6Mbps	11	2462	22.02	≤ 30.00	Pass
11n-HT20	MCS0	01	2412	21.26	≤ 30.00	Pass
11n-HT20	MCS0	06	2437	21.61	≤ 30.00	Pass
11n-HT20	MCS0	11	2462	21.56	≤ 30.00	Pass
11n-HT40	MCS0	03	2422	18.56	≤ 30.00	Pass
11n-HT40	MCS0	06	2437	21.33	≤ 30.00	Pass
11n-HT40	MCS0	09	2452	18.91	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Product	WIFI/BT Board	Test Engineer	Dandy Li
Test Site	WZ-TR3	Test Date	2020/11/17

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
11b	1Mbps	01	2412	15.96	≤ 30.00	Pass
11b	1Mbps	06	2437	17.05	≤ 30.00	Pass
11b	1Mbps	11	2462	17.09	≤ 30.00	Pass
11g	6Mbps	01	2412	12.34	≤ 30.00	Pass
11g	6Mbps	06	2437	12.83	≤ 30.00	Pass
11g	6Mbps	11	2462	12.38	≤ 30.00	Pass
11n-HT20	MCS0	01	2412	12.62	≤ 30.00	Pass
11n-HT20	MCS0	06	2437	12.88	≤ 30.00	Pass
11n-HT20	MCS0	11	2462	12.82	≤ 30.00	Pass
11n-HT40	MCS0	03	2422	10.00	≤ 30.00	Pass
11n-HT40	MCS0	06	2437	12.75	≤ 30.00	Pass
11n-HT40	MCS0	09	2452	10.13	≤ 30.00	Pass

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


6.4.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.10.2

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the OBW
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = RMS
6. Employ trace averaging (rms) mode over a minimum of 100 traces.
7. Sweep time = auto couple
8. Trace mode = max hold
9. Trace was allowed to stabilize

6.4.4. Test Setup

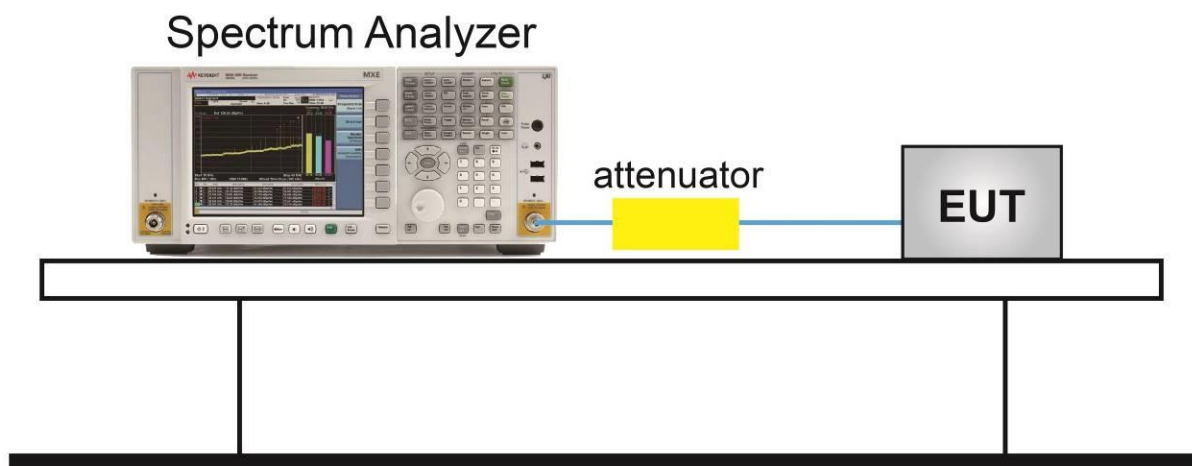

6.4.5. Test Result

Product	WIFI/BT Board	Test Engineer	Dandy Li
Test Site	WZ-TR3	Test Date	2020/11/18

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PKPSD (dBm / 3kHz)	Duty Cycle (%)	PKPSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
11b	1Mbps	01	2412	-14.04	100	-14.04	≤ 8.00	Pass
11b	1Mbps	06	2437	-13.82	100	-13.82	≤ 8.00	Pass
11b	1Mbps	11	2462	-13.88	100	-13.88	≤ 8.00	Pass
11g	6Mbps	01	2412	-15.98	100	-15.98	≤ 8.00	Pass
11g	6Mbps	06	2437	-15.58	100	-15.58	≤ 8.00	Pass
11g	6Mbps	11	2462	-15.98	100	-15.98	≤ 8.00	Pass
11n-HT20	MCS0	01	2412	-15.00	100	-15.00	≤ 8.00	Pass
11n-HT20	MCS0	06	2437	-15.15	100	-15.15	≤ 8.00	Pass
11n-HT20	MCS0	11	2462	-15.59	100	-15.59	≤ 8.00	Pass
11n-HT40	MCS0	03	2422	-17.84	100	-17.84	≤ 8.00	Pass
11n-HT40	MCS0	06	2437	-15.85	100	-15.85	≤ 8.00	Pass
11n-HT40	MCS0	09	2452	-18.12	100	-18.12	≤ 8.00	Pass


Note:

When EUT duty cycle > 98%, Final PKPSD (dBm / 3kHz) = PKPSD (dBm / 3kHz).


When EUT duty cycle < 98%, Final PKPSD (dBm / 3kHz) = PKPSD (dBm / 3kHz) + 10*log(1/Duty cycle).

802.11b PKPSD


Channel 01 (2412MHz)

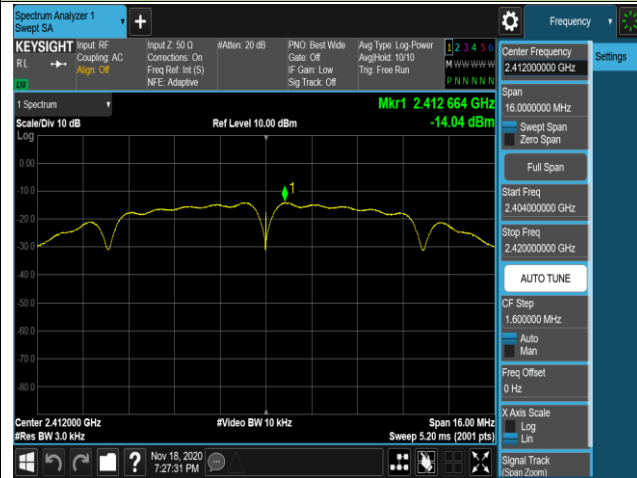

Channel 06 (2437MHz)

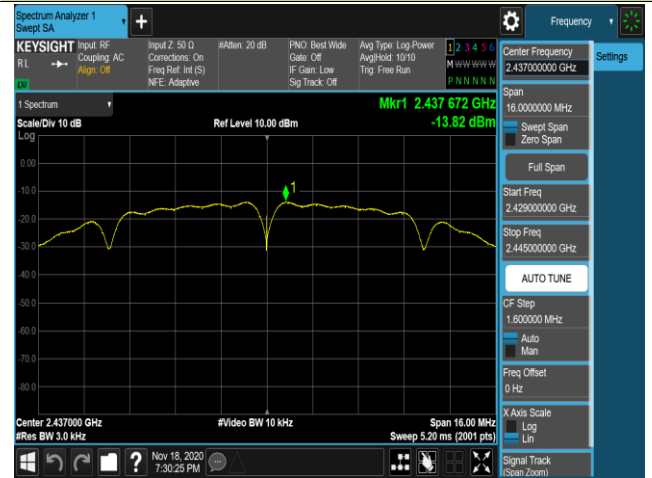


Channel 11 (2462MHz)

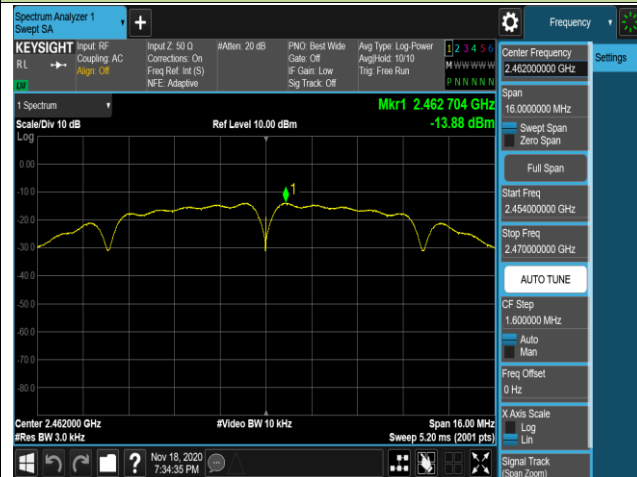


802.11g - PKPSD


Channel 01 (2412MHz)

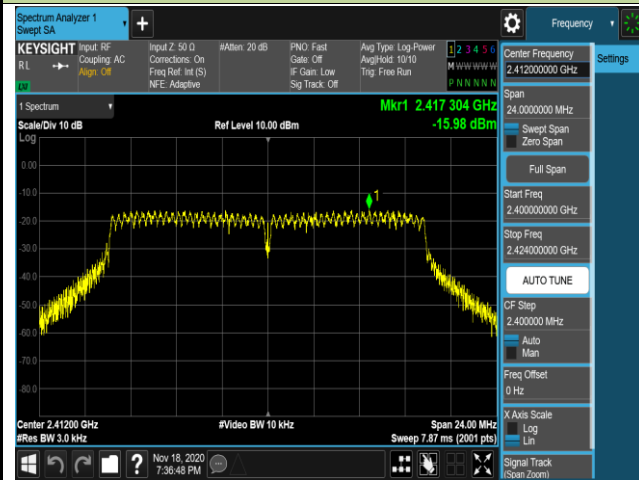

Channel 06 (2437MHz)

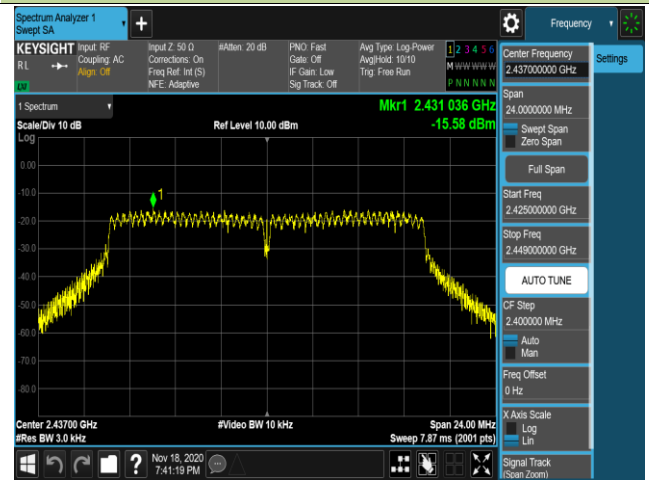


Channel 11 (2462MHz)

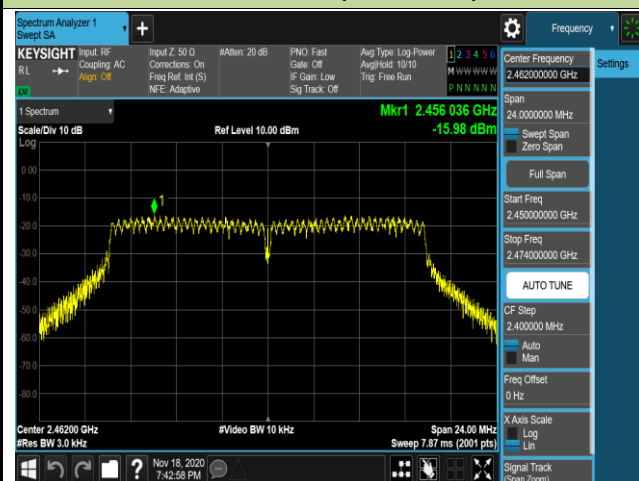


802.11n-HT20 - PKPSD


Channel 01 (2412MHz)

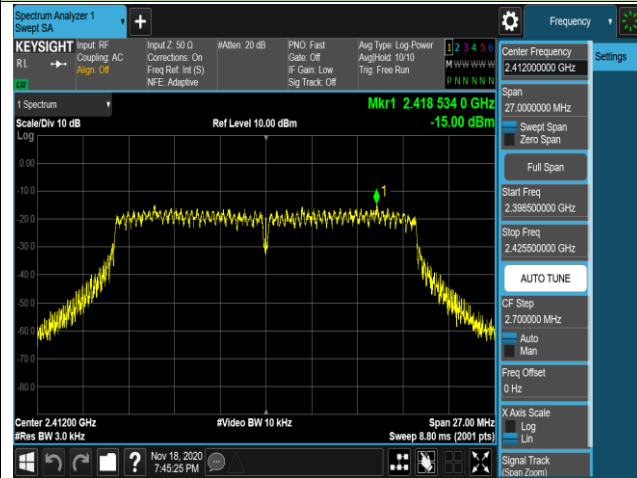

Channel 06 (2437MHz)

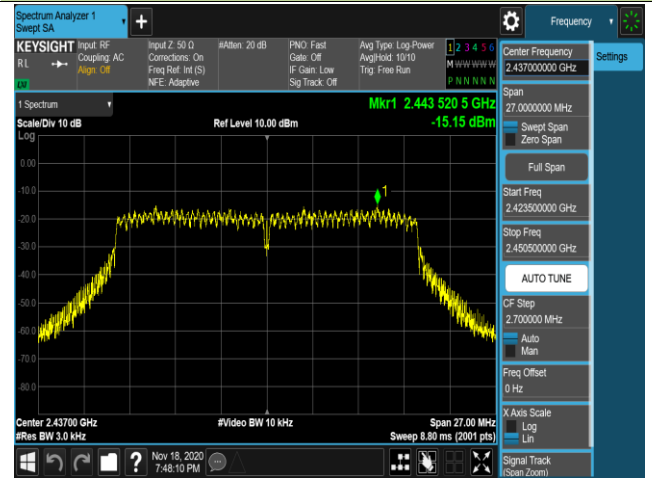


Channel 11 (2462MHz)

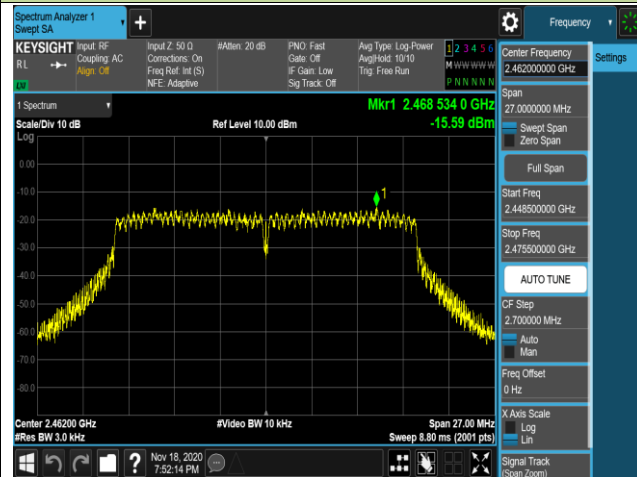


802.11n-HT40 - PKPSD


Channel 3 (2422MHz)

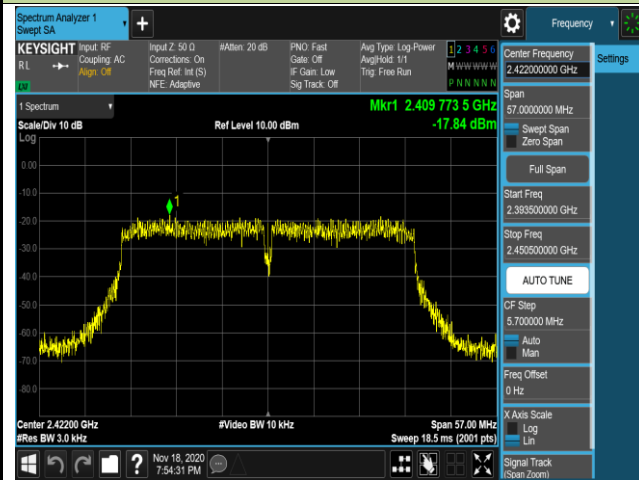

Channel 06 (2437MHz)

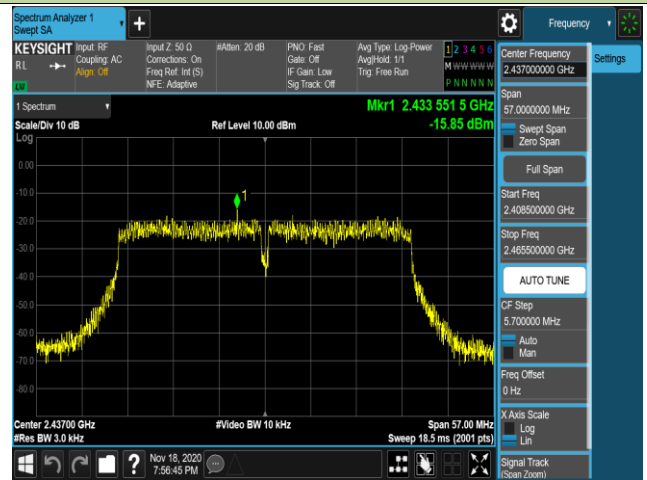

Channel 9 (2452MHz)

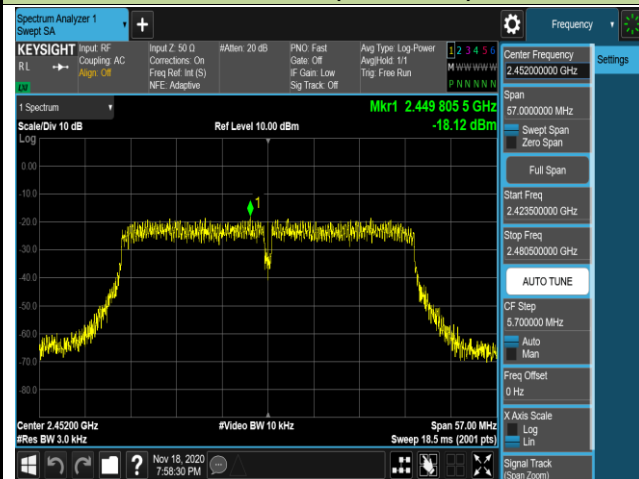

6.5. Conducted Band Edge and Out-of-Band Emissions

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.11

6.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

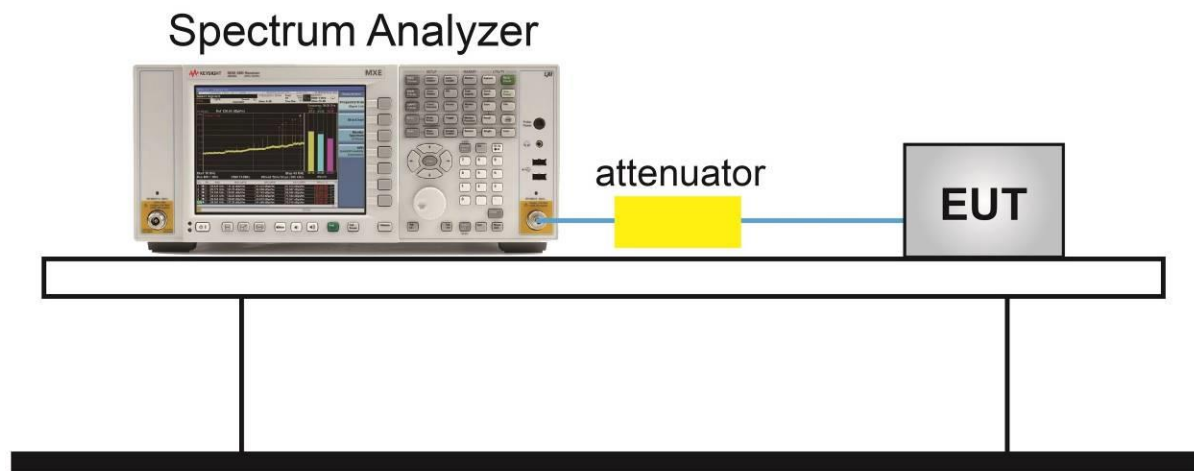

6.5.5. Test Result


Product	WIFI/BT Board	Test Engineer	Dandy Li
Test Site	WZ-TR3	Test Date	2020/11/18

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit	Result
802.11b	1Mbps	01	2412	20dBc	Pass
802.11b	1Mbps	06	2437	20dBc	Pass
802.11b	1Mbps	11	2462	20dBc	Pass
802.11g	6Mbps	01	2412	20dBc	Pass
802.11g	6Mbps	06	2437	20dBc	Pass
802.11g	6Mbps	11	2462	20dBc	Pass
802.11n-HT20	MCS0	01	2412	20dBc	Pass
802.11n-HT20	MCS0	06	2437	20dBc	Pass
802.11n-HT20	MCS0	11	2462	20dBc	Pass
802.11n-HT40	MCS0	03	2422	20dBc	Pass
802.11n-HT40	MCS0	06	2437	20dBc	Pass
802.11n-HT40	MCS0	09	2452	20dBc	Pass


802.11b Out-of-Band Emissions

Channel 01 (2412MHz)

100kHz PSD Reference Level

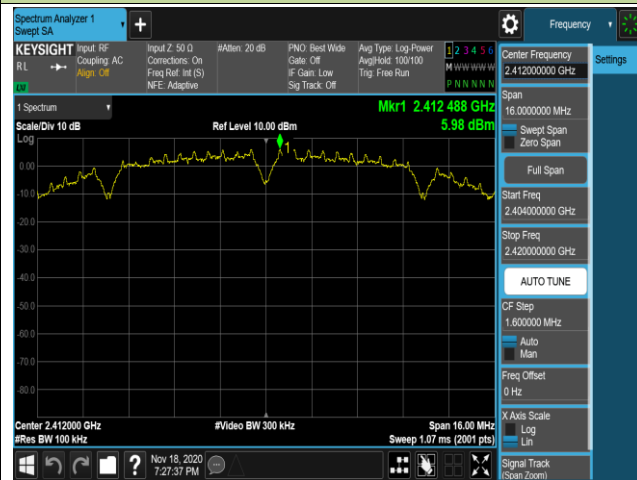

Low Band Edge

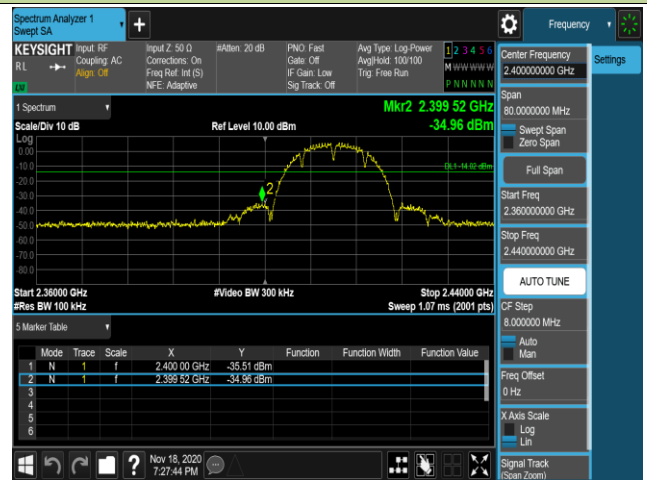


Spurious Emission



Channel 06 (2437MHz)

100kHz PSD Reference Level

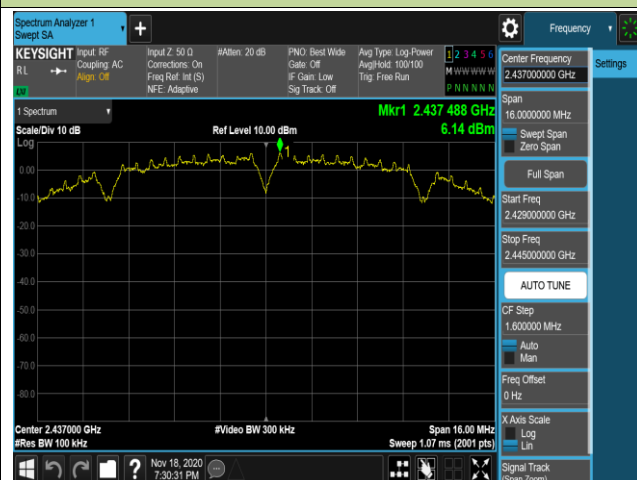


Spurious Emission




802.11b Out-of-Band Emissions

Channel 11 (2462MHz)

100kHz PSD Reference Level

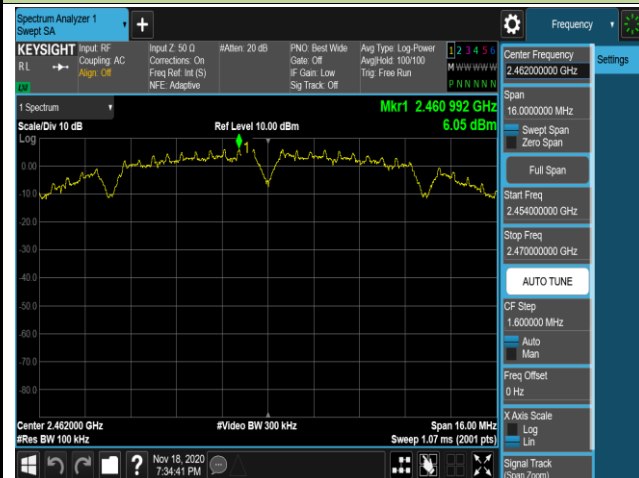

High Band Edge

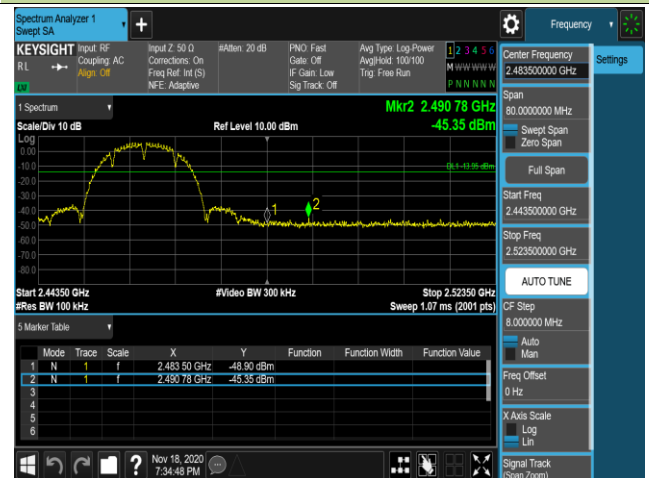


Spurious Emission




802.11g Out-of-Band Emissions

Channel 01 (2412MHz)

100kHz PSD Reference Level

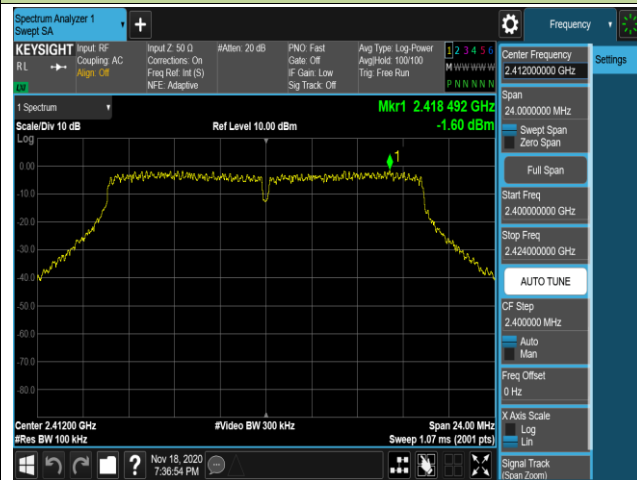

Low Band Edge

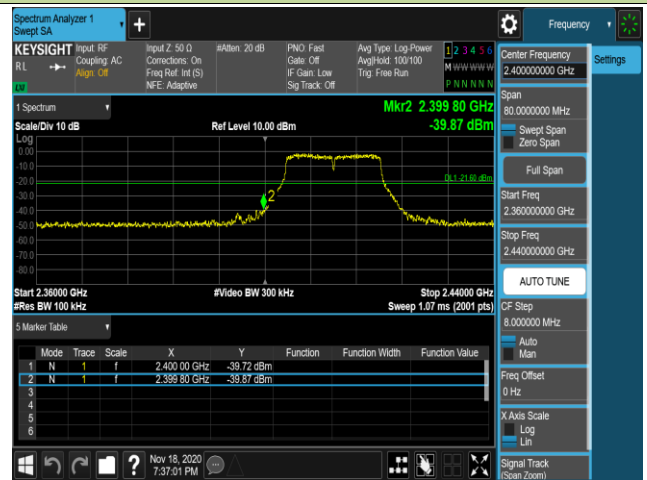


Spurious Emission



Channel 06 (2437MHz)

100kHz PSD Reference Level

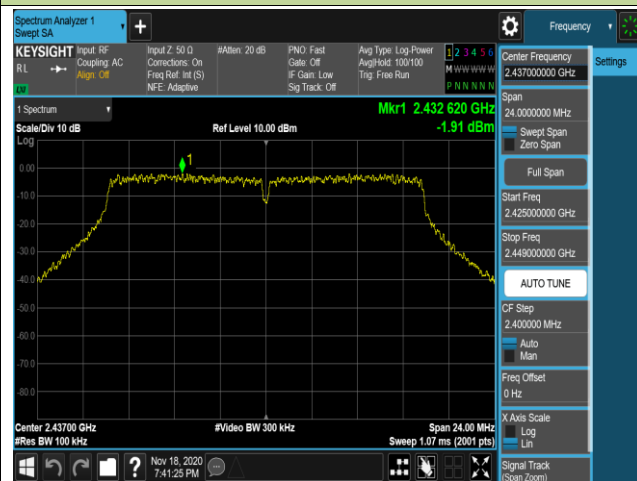


Spurious Emission




802.11g Out-of-Band Emissions

Channel 11 (2462MHz)

100kHz PSD Reference Level

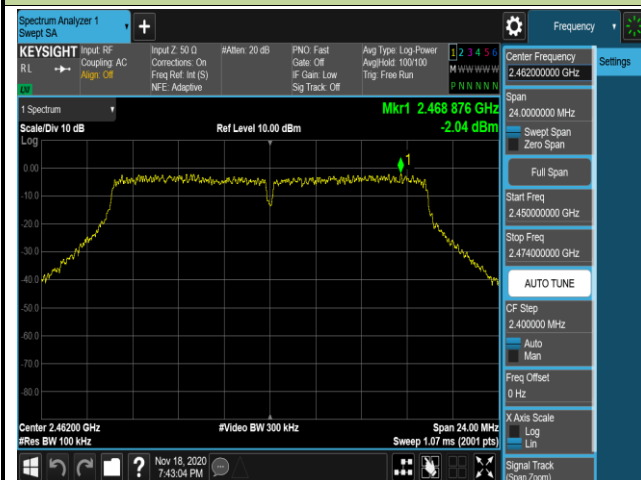

High Band Edge

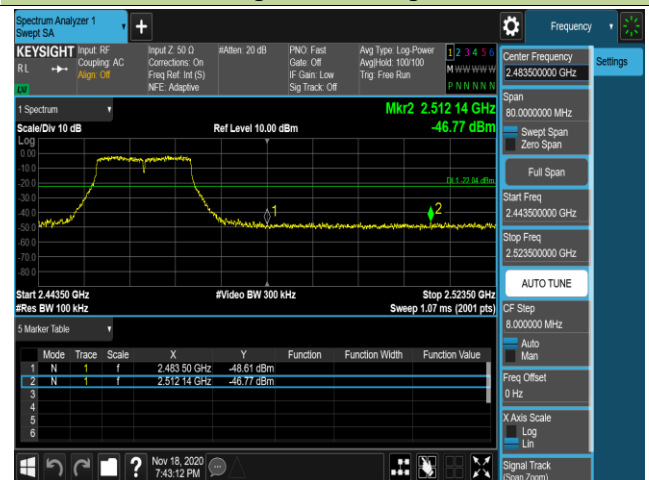


Spurious Emission




802.11n-HT20 Out-of-Band Emissions

Channel 01 (2412MHz)

100kHz PSD Reference Level

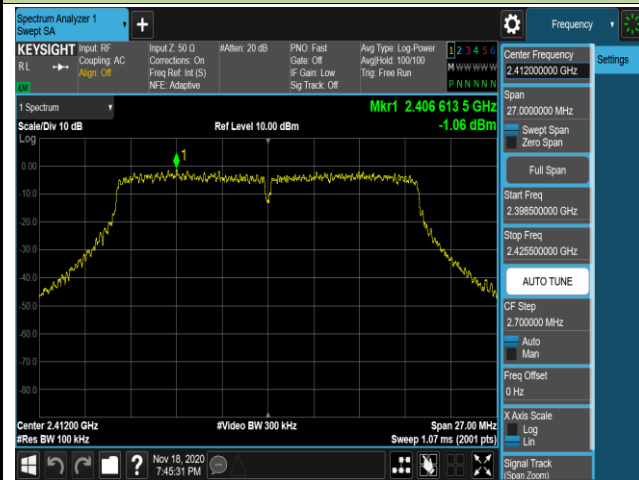

Low Band Edge

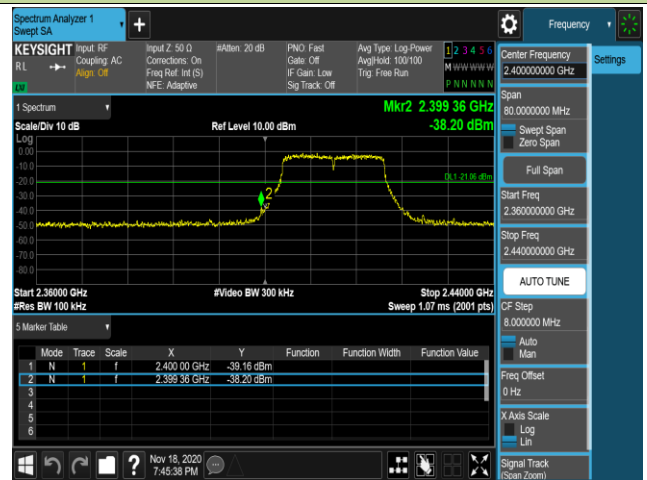


Spurious Emission



Channel 06 (2437MHz)

100kHz PSD Reference Level

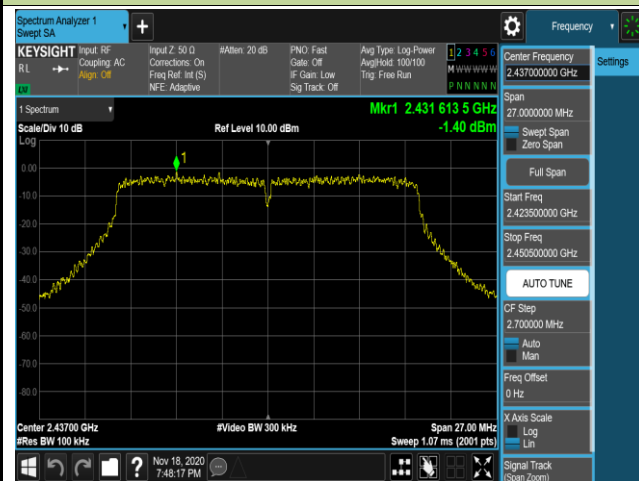


Spurious Emission




802.11n-HT20 Out-of-Band Emissions

Channel 11 (2462MHz)

100kHz PSD Reference Level

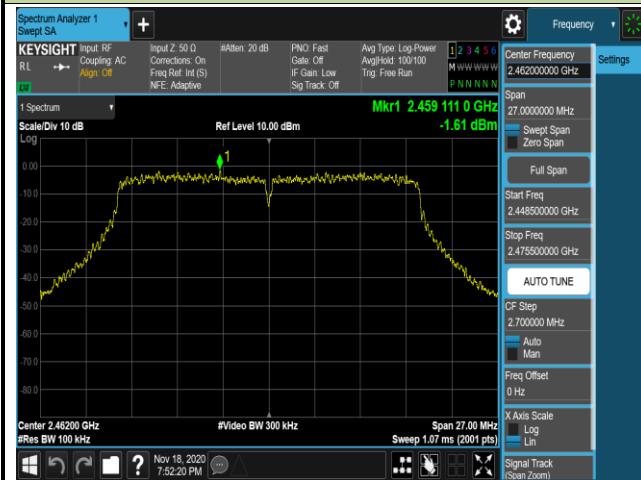

High Band Edge

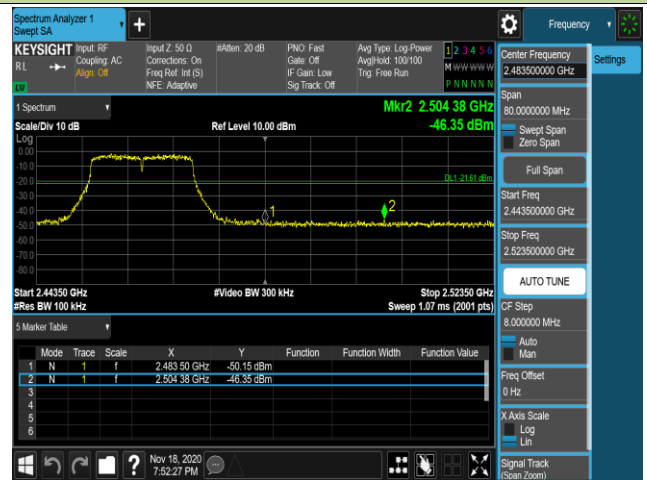


Spurious Emission




802.11n-HT40 Out-of-Band Emissions

Channel 03 (2422MHz)

100kHz PSD Reference Level

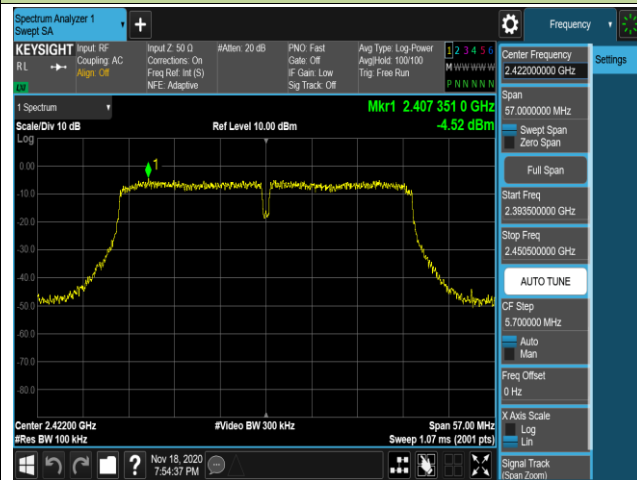

Low Band Edge

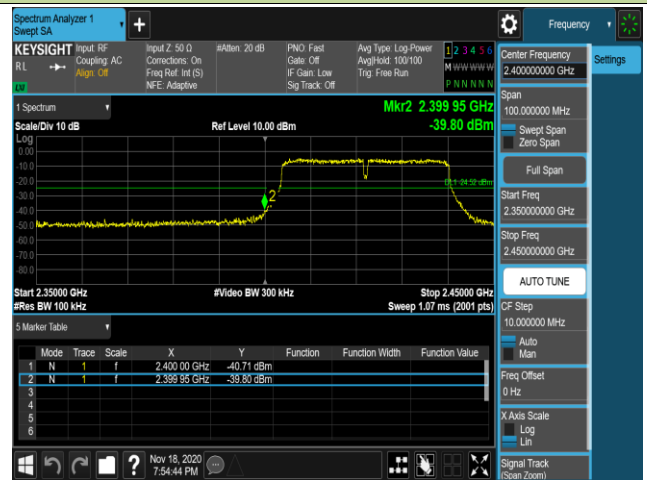


Spurious Emission



Channel 06 (2437MHz)

100kHz PSD Reference Level

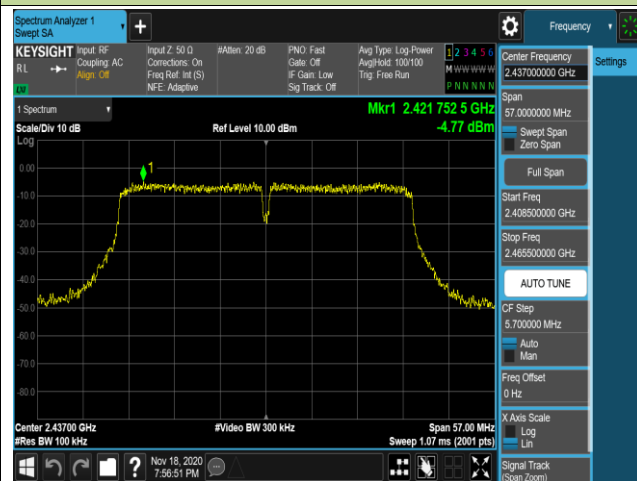

Spurious Emission

