

FCC Test Report

Report No.: AGC00008220503FE03

FCC ID	:	TW5GD7606
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	2.4GHz Digital Wireless Baby Monitor
BRAND NAME	:	N/A
MODEL NAME	:	GD7606
APPLICANT	:	Shenzhen Gospell Smarthome Electronic Co., Ltd.
DATE OF ISSUE	:	Jun. 28, 2022
STANDARD(S) TEST PROCEDURE(S)	:	FCC Part 15 Rules
REPORT VERSION	:	V1.0







REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 28, 2022	Valid	Initial Release



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCY	7
3. MEASUREMENT UNCERTAINTY	8
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF EUT SYSTEM	10
5.2 EQUIPMENT USED IN TESTED SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	11
7. RADIATED EMISSION	
7.1TEST LIMIT	
7.2. MEASUREMENT PROCEDURE	13
7.3. TEST SETUP	
7.4. TEST RESULT	
8. BAND EDGE EMISSION	
8.1. MEASUREMENT PROCEDURE	
8.2 TEST SETUP	
8.3 RADIATED TEST RESULT	
9. 20DB BANDWIDTH	
9.1. MEASUREMENT PROCEDURE	
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT RESULTS	
10. FCC LINE CONDUCTED EMISSION TEST	
10.1. LIMITS OF LINE CONDUCTED EMISSION TEST	
10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	



Report No.: AGC00008220503FE03 Page 4 of 34

A	PPENDIX B: PHOTOGRAPHS OF THE EUT	. 34
A	PPENDIX A: PHOTOGRAPHS OF TEST SETUP	. 34
	10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	. 32
	10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	. 31
	10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	. 31



1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen Gospell Smarthome Electronic Co., Ltd.		
Address	Room 101, 201, 311, Building No. 28, Block B, Tantou Industrial Park, Songgang, Baoan, Shenzhen City, Guangdong Province, China		
Manufacturer	Shenzhen Gospell Smarthome Electronic Co., Ltd.		
Address Room 101, 201, 311, Building No. 28, Block B, Tantou Industrial Park, Song Baoan, Shenzhen City, Guangdong Province, China			
Factory	Shenzhen Gospell Smarthome Electronic Co., Ltd.		
Address	Idress Room 101, 201, 311, Building No. 28, Block B, Tantou Industrial Park, Songgar Baoan, Shenzhen City, Guangdong Province, China		
Product Designation	2.4GHz Digital Wireless Baby Monitor		
Brand Name	N/A		
Test Model	GD7606		
Date of test	May 25, 2022 to Jun. 28, 2022		
Deviation	No any deviation from the test method		
Condition of Test Sample	Normal		
Test Result	Pass		
Report Template	AGCRT-US-BR/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Alan Duan (Project Engineer)

Jun. 28, 2022

Reviewed By

Prepared By

Calvin Liu (Reviewer)

Jun. 28, 2022

Approved By

Zha

Max Zhang (Authorized Officer)

Jun. 28, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2410 MHz to 2477 MHz	
Maximum field strength	87.32dBuV/m(average)@3m	
Modulation	GFSK	
Number of channels	20	
Antenna Gain	3dBi	
Antenna Designation	Integral Antenna (Met 15.203 Antenna requirement)	
Hardware Version	GD7606M05	
Software Version	V1.0	
Power Supply	DC 3.7V by battery or DC 5V by adapter	



2.2. TABLE OF CARRIER FREQUENCY

Channel Number	Frequency (MHz)
1	2410
2	2413.5
3	2417
4	2420.5
5	2424
6	2427.5
7	2431
8	2434.5
9	2438
10	2441.5
11	2445
12	2448.5
13	2452
14	2455.5
15	2459
16	2462.5
17	2466
18	2469.5
19	2473
20	2477



3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of Occupied Channel Bandwidth: $Uc = \pm 2 \%$



4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION				
1	Low channel GFSK				
2	Middle channel GFSK				
3	High channel GFSK				
Note:	Note:				
1. O	1. Only the result of the worst case was recorded in the report, if no other cases.				
2. Fo	2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.				



5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure:

EUT

Conducted Emission Configure:

EUT

5.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	2.4GHz Digital Wireless Baby Monitor	GD7606	TW5GD7606	EUT
2	ADAPTER	TPA-46B050100UU	Input: 100-240V~,50/60Hz,0.2A Output: DC 5.0V,1000mA	EUT

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249&15.209	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	Compliant



6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd	
Location 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Commun Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259	
FCC Test Firm Registration Number	975832	
A2LA Cert. No.	5054.02	
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA	

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar.28, 2022	Mar.27, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2022	Jun. 08, 2023
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Sep. 06, 2021	Sep. 05, 2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
2.4GHz Fliter	EM Electronics	2400-2500MHz	N/A	Mar. 22, 2022	Mar. 21, 2024
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2020	Jan. 07, 2023



7. RADIATED EMISSION

7.1TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics
	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency	Distance	Field Strengths Limit			
(MHz)	Meters	μ V/m	dB(µV)/m		
0.009 ~ 0.490	300	2400/F(kHz)			
0.490 ~ 1.705	30	24000/F(kHz)			
1.705 ~ 30	30	30			
30 ~ 88	3	100	40.0		
88 ~ 216	3	150	43.5		
216 ~ 960	3	200	46.0		
960 ~ 1000	3	500	54.0		
Above 1000	3	Other:74.0 dB(µV)/m (Peał	<) 54.0 dB(μV)/m (Average)		
Remark: (1) Emission le	evel dB μ V = 20 log Emission	n level µV/m			
(2) The smalle	(2) The smaller limit shall apply at the cross point between two frequency bands.				

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



7.2. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use minimum resolution bandwidth of 1 MHz. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
	1GHz~26.5GHz
Start ~Stop Frequency	RBW 2.4MHz/ VBW 8MHz for Peak,
	RBW 2.4MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




7.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

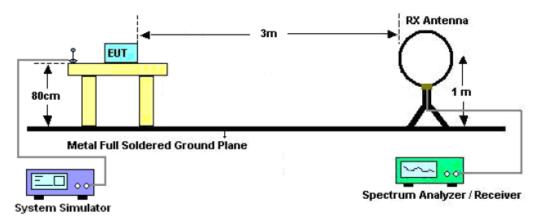

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

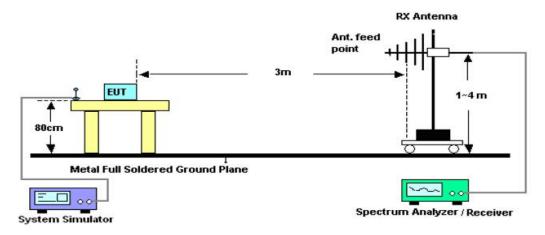

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

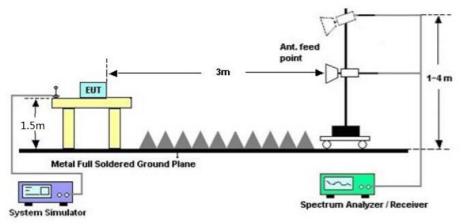




7.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED	EMISSION	30MHz-	1GHZ
----------	-----------------	--------	------

	2.4GHz Digital Wireless Baby Monitor	Model Name. :	GD7606
Temperature :	25 ℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 1	Polarization :	Horizontal

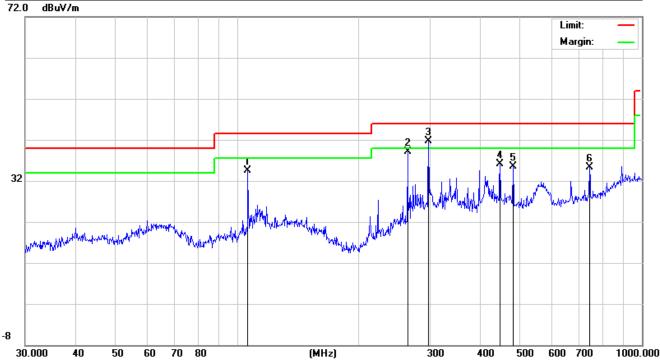


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		106.3850	18.74	15.72	34.46	43.50	-9.04	peak
2	:	263.8190	22.34	16.81	39.15	46.00	-6.85	peak
3	*	297.2241	21.51	20.23	41.74	46.00	-4.26	peak
4		446.4141	15.25	20.83	36.08	46.00	-9.92	peak
5		480.5276	14.57	20.95	35.52	46.00	-10.48	peak
6	-	742.2587	11.70	23.68	35.38	46.00	-10.62	peak



	2.4GHz Digital Wireless Baby Monitor	Model Name. :	GD7606
Temperature :	25 ℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 1	Polarization :	Vertical

72.0 dBuV/m

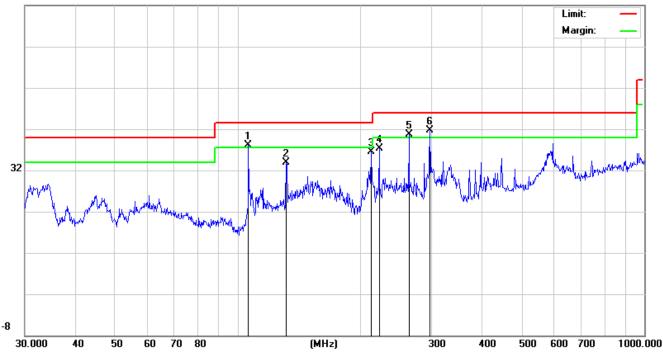

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	ļ	106.3850	23.57	14.59	38.16	43.50	-5.34	peak
2		131.7577	15.85	18.12	33.97	43.50	-9.53	peak
3		213.0151	22.07	14.48	36.55	43.50	-6.95	peak
4		222.9502	21.60	15.74	37.34	46.00	-8.66	peak
5	ļ	263.8190	22.14	18.62	40.76	46.00	-5.24	peak
6	*	297.2241	22.15	19.54	41.69	46.00	-4.31	peak

RESULT: PASS

Note:

Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



	2.4GHz Digital Wireless Baby Monitor	Model Name. :	GD7606				
Temperature :	25 ℃	Relative Humidity :	55%				
Pressure :	1010 hPa	Test Voltage :	DC 5V				
Test Modulation :	GFSK	Polarization :	Horizontal				

FIELD STRENGTH OF FUNDAMENTAL

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
2410	101.84	-9.61	92.23	114.00	-21.77	peak
2410	96.93	-9.61	87.32	94.00	-6.68	AVG
2441.5	90.22	-9.61	80.61	114.00	-33.39	peak
2441.5	88.44	-9.61	78.83	94.00	-15.17	AVG
2477	98.81	-9.61	89.20	114.00	-24.80	peak
2477	93.82	-9.61	84.21	94.00	-9.79	AVG
Remark:						
Factor = Ante	nna Factor + C	able Loss – Pr	e-amplifier.			

	2.4GHz Digital Wireless Baby Monitor	Model Name. :	GD7606
Temperature :	25 ℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Modulation :	GFSK	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
2410	100.36	-9.61	90.75	114.00	-23.25	peak	
2410	95.38	-9.61	85.77	94.00	-8.23	AVG	
2441.5	89.42	-9.61	79.81	114.00	-34.19	peak	
2441.5	88.54	-9.61	78.93	94.00	-15.07	AVG	
2477	97.92	-9.61	88.31	114.00	-25.69	peak	
2477 93.02 -9.61 83.41 94.00 -10.59 AVG							
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							



Test Mode :

Mode 1

Horizontal

RADIATED EMISSION ABOVE TOTZ						
	2.4GHz Digital Wireless Baby Monitor	Model Name. :	GD7606			
Temperature :	25 ℃	Relative Humidity :	55%			
Pressure :	1010 hPa	Test Voltage :	DC 5V			

RADIATED EMISSION ABOVE 1GHZ

Polarization :

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4820	48.67	3.76	52.43	74.00	-21.57	peak	
4820	43.54	3.76	47.30	54.00	-6.70	AVG	
7230	42.52	8.17	50.69	74.00	-23.31	peak	
7230	7230 38.66 8.17 46.83 54.00 -7.17 AVG						
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

	2.4GHz Digital Wireless Baby Monitor	Model Name. :	GD7606
Temperature :	25℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 1	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4820	47.94	3.76	51.70	74.00	-22.30	peak
4820	43.82	3.76	47.58	54.00	-6.42	AVG
7230	42.16	8.17	50.33	74.00	-23.67	peak
7230 37.58 8.17 45.75 54.00 -8.25 AVG						
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



	2.4GHz Digital Wireless Baby Monitor	Model Name. :	GD7606
Temperature :	25 ℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 2	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
4883	47.15	3.78	50.93	74.00	-23.07	peak	
4883	43.56	3.78	47.34	54.00	-6.66	AVG	
7324.5	43.83	8.23	52.06	74.00	-21.94	peak	
7324.5	7324.5 39.68 8.23 47.91 54.00 -6.09 AVG						
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

	2.4GHz Digital Wireless Baby Monitor	Model Name. :	GD7606
Temperature :	25 ℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 2	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
4883	48.96	3.78	52.74	74.00	-21.26	peak		
4883	42.64	3.78	46.42	54.00	-7.58	AVG		
7324.5	44.18	8.23	52.41	74.00	-21.59	peak		
7324.5	7324.5 39.95 8.23 48.18 54.00 -5.82 AVG							
Remark:								
- Factor = Antenna Factor + Cable Loss – Pre-amplifier.								



	2.4GHz Digital Wireless Baby Monitor	Model Name. :	GD7606
Temperature :	25 ℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 3	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4954	47.84	3.81	51.65	74.00	-22.35	peak	
4954	44.23	3.81	48.04	54.00	-5.96	AVG	
7431	42.18	8.27	50.45	74.00	-23.55	peak	
7431	7431 38.65 8.27 46.92 54.00 -7.08 AVG						
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

	2.4GHz Digital Wireless Baby Monitor	Model Name. :	GD7606
Temperature :	25 ℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 3	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4954	48.65	3.81	52.46	74.00	-21.54	peak	
4954	43.13	3.81	46.94	54.00	-7.06	AVG	
7431	44.56	8.27	52.83	74.00	-21.17	peak	
7431 40.28 8.27 48.55 54.00 -5.45 AVG					AVG		
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

Note: Other emissions from 8G to 25 GHz are considered as ambient noise. No recording in the test report. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



8. BAND EDGE EMISSION

8.1TEST LIMIT

	Limit of the Fiel	d Strength (dBµV/m)
Frequency Band	Peak	Average
f≪2390MHz	74	54
f≥2483.5MHz	74	54

8.2. MEASUREMENT PROCEDURE

1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.


2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=1MHz, VBW=3MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz ; VBW=1/on time(1KHz) / Sweep=AUTO

3. Other procedures refer to clause 7.2.

8.3 TEST SETUP

RADIATED EMISSION TEST SETUP

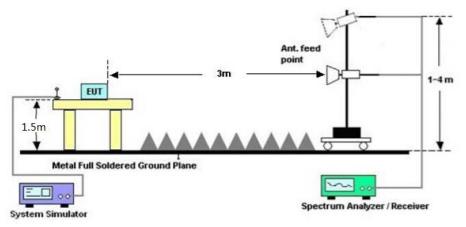

8.4 TEST RESULT

Note:

1. Factor=Antenna Factor + Cable loss - Amplifier gain. Field Strength=Factor + Reading level 2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.



Report No.: AGC00008220503FE03 Page 23 of 34

	2.4GHz Digital Wireless Baby Monitor	Model Name. :	GD7606
Temperature :	25 ℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 1	Polarization :	Horizontal



Peak Value

Average Value






Frequency

Auto Tune

EUT :	2.4GHz Digital Wireless Baby Monitor	Model Name. :	GD7606
Temperature :	25 ℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 1	Polarization :	Vertical

Align and spectrum Analyzer - Swept SA Senter Freq 2.391750000 GHz Senter Freq 2.391750000 GHz Aug Auton 0.22 PHO: Fast (FGaint.ow Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr Avg|Hold: 100/100 Trig: Pree Run Wtr2 2.390 00 GH 0 dB/div Ref 126.99 dBµV/m Mkr2 2.390 00 GH Mkr2 2.390 00 GH 17 Intervention Intervention Intervention 9 Intervention Intervention Intervention 107 Intervention Intervention Intervention 107 Intervention Intervention Intervention

Peak Value

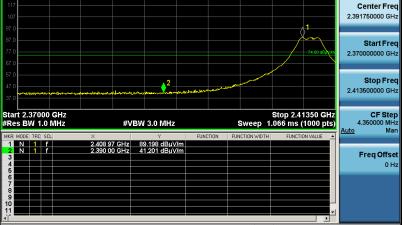

Average Value





	2.4GHz Digital Wireless Baby Monitor	Model Name. :	GD7606
Temperature :	25 ℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 3	Polarization :	Horizontal

Peak Value



Average Value





	2.4GHz Digital Wireless Baby Monitor	Model Name. :	GD7606
Temperature :	25 ℃	Relative Humidity :	55%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 3	Polarization :	Vertical

Peak Value



Average Value






9. 20DB BANDWIDTH

9.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set SPA Centre Frequency = Operation Frequency, RBW= 30 KHz, VBW≥ 3×RBW.
- 3. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

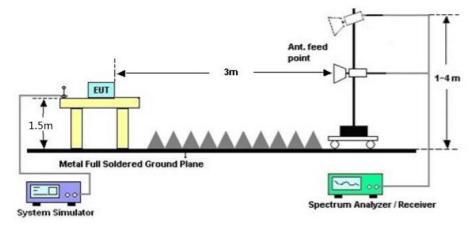



9.3. MEASUREMENT RESULTS

TEST ITEM	20DB BANDWIDTH
TEST MODULATION	GFSK

Test Data (MHz)	Criteria	
Low Channel	4.039	PASS
Middle Channel	4.150	PASS
High Channel	4.046	PASS



TEST PLOT OF BANDWIDTH FOR LOW CHANNEL





TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL





10. FCC LINE CONDUCTED EMISSION TEST

10.1. LIMITS OF LINE CONDUCTED EMISSION TEST


Frequency	Maximum RF Line Voltage				
Frequency	Q.P.(dBuV)	Average(dBuV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

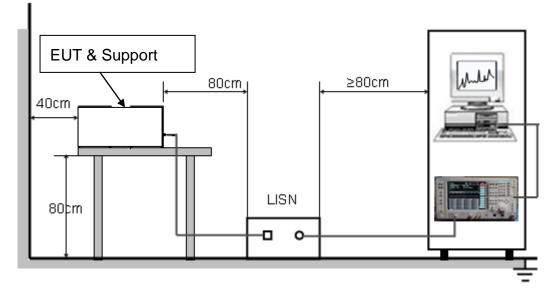



10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST


- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120VV/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



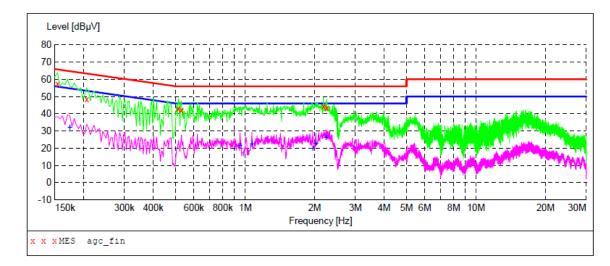

10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

MEASUREMENT RESULT: "agc fin"

2022/5/27 9:39

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.154000 0.206000 0.514000 0.530000 2.182000 2.258000	57.40 48.70 43.00 42.40 44.20 43.50	6.9 6.5 5.4 5.4 6.5 6.5	66 63 56 56 56	8.4 14.7 13.0 13.6 11.8 12.5	QP QP QP QP	L1 L1 L1 L1 L1 L1

MEASUREMENT RESULT: "agc fin2"


2022/5/27 9:38 Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.174000 0.950000	32.10 21.70	6.7 5.4	55 46	22.7 24.3		L1 L1
1.070000	22.20	5.5	46		AV	L1
1.962000 2.026000	19.80 23.00	6.5 6.5	46 46	26.2 23.0	AV AV	L1 L1
2.238000	26.30	6.5	46	19.7	AV	L1

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd





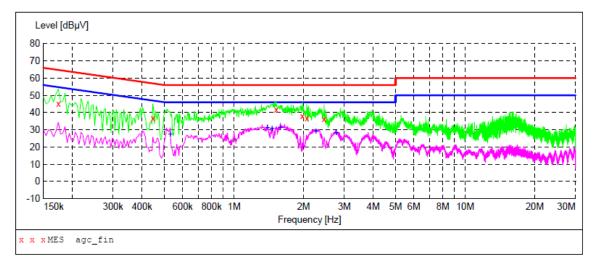

MEASUREMENT RESULT: "agc fin"

2022/5/27 9:41

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.174000	45.30	6.7	65	19.5	QP	N
0.446000	36.80	5.5	57	20.1	QP	N
1.522000	41.80	6.1	56	14.2	QP	N
1.974000	37.90	6.5	56	18.1	QP	N
2.066000	36.60	6.5	56	19.4	QP	N
2.454000	36.50	6.5	56	19.5	QP	N

MEASUREMENT RESULT: "agc fin2"

2022/5/27 9:41 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.530000 1.394000 1.462000 1.590000 2.262000 2.766000	27.60 31.20 30.90 31.20 29.20 28.20	5.4 5.9 6.0 6.1 6.5 6.5	46 46 46 46 46	15.1 14.8	AV AV	N N N N N

RESULT: PASS

Note: All the test modes had been tested, the mode 1 was the worst case. Only the data of the worst case would be record in this test report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com
 Web: http://www.agccert.com/



APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC00008220503AP01

APPENDIX B: PHOTOGRAPHS OF THE EUT

Refer to the Report No.: AGC00008220503AP02

----END OF REPORT----



Conditions of Issuance of Test Reports

 All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
 Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.