


TECOM PROPRIETARY:
INFORMATION CONTAINED HEREIN SHALL NOT BE DISCLOSED TO
A THIRD PARTY WITHOUT WRITTEN PERMISSION FROM TECOM.

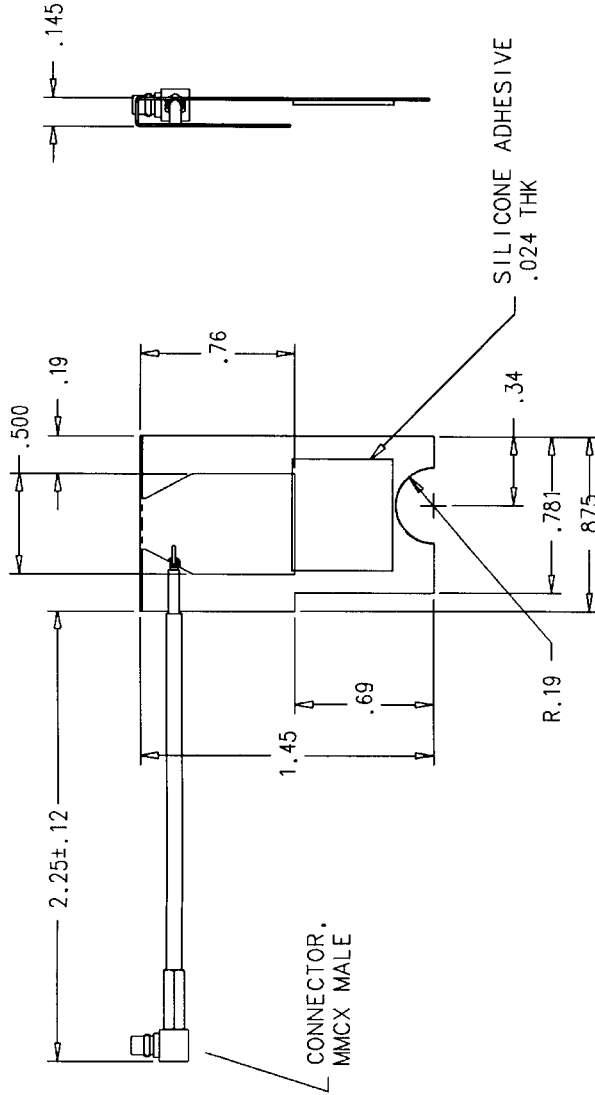

6. TOLERANCES ON: .XX ±.03, .XXX ±.010, ANGLES ±0°30'0"0'0"

5. INTERNAL & EXTERNAL CORNERS TO BE R.03 MAX.

4. SHARP CORNERS & EDGES .005 MAX.

3. FINISH SHALL BE UNIFORM AND EXHIBIT NO EVIDENCE OF CORROSION OR OXIDATION WHEN VIEWED WITH THE UNAIDED EYE. EDGE PLATING ON CUT OR SHEARED SURFACES IS NOT REQUIRED.

2. ALTERNATE:

MATERIAL: CRS 1008, .010 THK.
FINISH: BRIGHT TIN PLATE PER
MIL-T-10727A, TYPE 1, ELECTRO
DEPOSITED .00010-.00025 IN.

1. MATERIAL: ELECTROLYTIC TIN
PLATED STEEL SHEET, .010 THK.

NOTES : UNLESS OTHERWISE SPECIFIED SCALE

SPECIFICATIONS

FREQUENCY: 2.4-2.485 GHZ
VSWR 2.5:1 MAX
GAIN 0dBi NOMINAL
POLARIZATION LINEAR

REVISIONS

ZONE	LTR	DESCRIPTION	DATE	APPROVED
1		RELEASED AS A SYMBOL DOCUMENT PER PPD#65366	3/28/01	J.C.

PMIC		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. TOLERANCES: .XXX ±.010 ANGLES ± 0°30'0"0' MACHINED SURFACE ROUGHNESS 125 REMOVE BURRS, SHARP EDGES R.005-.015 MACHINED FILLETS R.005-.015 DIMENSIONS ARE AFTER PLATING. CONCENTRICITY ON CIRCULAR CENTERLINE INTERPRET PER ANSI Y14.9M-1992.		CONTRACT NUMBER		TECOM INDUSTRIES INC. 9324 TOPANGA CYN BLVD CHATSWORTH, CA. 91311 TECHNICAL EXCELLENCE COMMITTED TO QUALITY	
		HOLE TOLERANCES:		DRAWN BY J. LOWE		DATE 6-29-00	
		.040 - .120 +.003 - .001 .136 - .220 +.001 - .001 .234 - .500 +.006 - .001		CHECKER		MFG ENGR	
		APPROVAL		QA		ENGR	
NEXT ASSY		USED ON		PRGM MGR		ENGR	
APPLICATION							
SCALE		2/1		UNIT WT		SHEET 1 OF 1	

ANTENNA, 2.4 GHZ

SIZE C
CAGE CODE 52791
DWG NO 703676