



## MEASUREMENT REPORT

### FCC PART 15.247 WLAN 802.11b/g/n

---

**FCC ID:** 2ABLK-8X4G-1V2

**APPLICANT:** Calix Inc.

**Application Type:** Certification

**Product:** WIFI dual band 4 GE LAN GPON HGU, BROADBAND CPE

**Model No.:** 844G-1, 854G-1, 844GE-1, C844G

**Trademark:** Calix

**FCC Classification:** Digital Transmission System (DTS)

**FCC Rule Part(s):** Part 15.247

**Test Procedure(s):** ANSI C63.10-2013, KDB 558074 D01v03r02,  
KDB 662911 D01v02r01

**Test Date:** January 13, 2015 ~ April 22, 2016

Reviewed By : Robin Wu  
( Robin Wu )

Approved By : Marlin Chen  
( Marlin Chen )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v03r02. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

## Revision History

| Report No.   | Version | Description                           | Issue Date |
|--------------|---------|---------------------------------------|------------|
| 1502RSU00401 | Rev. 01 | Initial report                        | 04-01-2015 |
| 1502RSU00401 | Rev. 02 | Added the model number "844GE-1"      | 11-24-2015 |
| 1502RSU00401 | Rev. 03 | Add the UK adapter                    | 03-29-2016 |
| 1502RSU00401 | Rev. 04 | Add the product name and model number | 04-24-2016 |

# CONTENTS

| Description                                        | Page      |
|----------------------------------------------------|-----------|
| <b>§2.1033 General Information .....</b>           | <b>5</b>  |
| <b>1. INTRODUCTION .....</b>                       | <b>6</b>  |
| 1.1. Scope.....                                    | 6         |
| 1.2. MRT Test Location .....                       | 6         |
| <b>2. PRODUCT INFORMATION .....</b>                | <b>7</b>  |
| 2.1. Equipment Description .....                   | 7         |
| 2.2. Applicable Standards.....                     | 7         |
| 2.3. Working Frequencies.....                      | 9         |
| 2.4. Description of Available Antennas .....       | 10        |
| 2.5. Description of Antenna RF Port .....          | 11        |
| 2.6. Test Mode .....                               | 11        |
| 2.7. Test Software .....                           | 12        |
| 2.8. Device Capabilities.....                      | 14        |
| 2.9. Test Configuration .....                      | 15        |
| 2.10. EMI Suppression Device(s)/Modifications..... | 15        |
| 2.11. Labeling Requirements.....                   | 15        |
| <b>3. DESCRIPTION of TEST.....</b>                 | <b>16</b> |
| 3.1. Evaluation Procedure .....                    | 16        |
| 3.2. AC Line Conducted Emissions .....             | 16        |
| 3.3. Radiated Emissions.....                       | 17        |
| <b>4. ANTENNA REQUIREMENTS.....</b>                | <b>18</b> |
| <b>5. TEST EQUIPMENT CALIBRATION DATE.....</b>     | <b>19</b> |
| <b>6. MEASUREMENT UNCERTAINTY .....</b>            | <b>20</b> |
| <b>7. TEST RESULT .....</b>                        | <b>21</b> |
| 7.1. Summary.....                                  | 21        |
| 7.2. 6dB Bandwidth Measurement.....                | 22        |
| 7.2.1. Test Limit .....                            | 22        |
| 7.2.2. Test Procedure used.....                    | 22        |
| 7.2.3. Test Setting.....                           | 22        |
| 7.2.4. Test Setup .....                            | 22        |
| 7.2.5. Test Result.....                            | 23        |
| 7.3. Output Power Measurement.....                 | 35        |
| 7.3.1. Test Limit .....                            | 35        |

|           |                                                     |            |
|-----------|-----------------------------------------------------|------------|
| 7.3.2.    | Test Procedure Used .....                           | 35         |
| 7.3.3.    | Test Setting.....                                   | 35         |
| 7.3.4.    | Test Setup .....                                    | 35         |
| 7.3.5.    | Test Result of Output Power .....                   | 36         |
| 7.4.      | Power Spectral Density Measurement.....             | 39         |
| 7.4.1.    | Test Limit .....                                    | 39         |
| 7.4.2.    | Test Procedure Used .....                           | 39         |
| 7.4.3.    | Test Setting.....                                   | 39         |
| 7.4.4.    | Test Setup .....                                    | 40         |
| 7.4.5.    | Test Result.....                                    | 41         |
| 7.5.      | Conducted Band Edge and Out-of-Band Emissions ..... | 52         |
| 7.5.1.    | Test Limit .....                                    | 52         |
| 7.5.2.    | Test Procedure Used .....                           | 52         |
| 7.5.3.    | Test Setting.....                                   | 52         |
| 7.5.4.    | Test Setup .....                                    | 53         |
| 7.5.5.    | Test Result.....                                    | 54         |
| 7.6.      | Radiated Spurious Emission Measurement .....        | 76         |
| 7.6.1.    | Test Limit .....                                    | 76         |
| 7.6.2.    | Test Procedure Used .....                           | 76         |
| 7.6.3.    | Test Setting.....                                   | 76         |
| 7.6.4.    | Test Setup .....                                    | 78         |
| 7.6.5.    | Test Result.....                                    | 80         |
| 7.7.      | Radiated Restricted Band Edge Measurement .....     | 110        |
| 7.7.1.    | Test Result.....                                    | 110        |
| 7.8.      | AC Conducted Emissions Measurement .....            | 238        |
| 7.8.1.    | Test Limit .....                                    | 238        |
| 7.8.2.    | Test Setup .....                                    | 238        |
| 7.8.3.    | Test Result.....                                    | 239        |
| <b>8.</b> | <b>CONCLUSION .....</b>                             | <b>241</b> |

## §2.1033 General Information

|                                |                                                                                                                                 |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant:</b>              | Calix Inc.                                                                                                                      |
| <b>Applicant Address:</b>      | 1035 N. McDowell Blvd Petaluma, CA94954 U.S.A                                                                                   |
| <b>Manufacturer:</b>           | Calix Inc.                                                                                                                      |
| <b>Manufacturer Address:</b>   | 1035 N. McDowell Blvd Petaluma, CA94954 U.S.A                                                                                   |
| <b>Test Site:</b>              | MRT Technology (Suzhou) Co., Ltd                                                                                                |
| <b>Test Site Address:</b>      | D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China                      |
| <b>MRT Registration No.:</b>   | 809388                                                                                                                          |
| <b>FCC Rule Part(s):</b>       | Part 15.247                                                                                                                     |
| <b>Model No.:</b>              | 844G-1, 854G-1, 844GE-1, C844G                                                                                                  |
| <b>FCC ID:</b>                 | 2ABLK-8X4G-1V2                                                                                                                  |
| <b>Test Device Serial No.:</b> | N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering |
| <b>FCC Classification:</b>     | Digital Transmission System (DTS)                                                                                               |

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

|                      |                                                                                            |
|----------------------|--------------------------------------------------------------------------------------------|
| Product Name         | WIFI dual band 4 GE LAN GPON HGU, BROADBAND CPE                                            |
| Model No.            | 844G-1, 854G-1, 844GE-1, C844G                                                             |
| Frequency Range      | 802.11b/g/n-HT20: 2412 ~ 2462 MHz<br>802.11n-HT40: 2422 ~ 2452 MHz                         |
| Maximum Output Power | 802.11b: 24.02dBm<br>802.11g: 23.74dBm<br>802.11n-HT20: 26.30dBm<br>802.11n-HT40: 23.46dBm |
| Type of Modulation   | 802.11b: DSSS<br>802.11g/n: OFDM                                                           |
| <b>Components</b>    |                                                                                            |
| UPS #1               | M/N: D13CU12V-NA3-G<br>Input: 100-240V ~ 50/60Hz, 1.0A<br>OUTPUT: 12Vdc, 30W               |
| UPS #2               | M/N: D13CU12V-NA3-G<br>Input: 100-240V ~ 50/60Hz, 1.0A<br>OUTPUT: 12Vdc, 36W               |
| Adapter #1           | M/N: AMS157-1202500FU<br>Input: 100-240V ~ 50/60Hz, 1.0A<br>OUTPUT: 12Vdc, 2.5A            |
| Adapter #2           | M/N: AMS157-1202500FB<br>Input: 100-120V ~ 50/60Hz, 1.0A<br>OUTPUT: 12Vdc, 2.5A            |

Note 1: There is different laser module between models “844G-1” & “844GE-1”.

Note 2: For this model “844GE-1” has been assessed the worst case mode in this report, and showed in the Annex 1.

Note 3: There is different DDR between models “844G-1” & “C844G”, for this model “C844G” has been assessed the worst case mode in this report, and showed in the Annex 2.

## 2.2. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.207
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ANSI C63.10-2013

Note:

1. All the test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in ANSI C63.10-2013 through inquiry tracking number 198796.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B recorded in a separate report.



## 2.3. Working Frequencies

### Channel List for 802.11b/g/n-HT20

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 01      | 2412 MHz  | 02      | 2417 MHz  | 03      | 2422 MHz  |
| 04      | 2427 MHz  | 05      | 2432 MHz  | 06      | 2437 MHz  |
| 07      | 2442 MHz  | 08      | 2447 MHz  | 09      | 2452 MHz  |
| 10      | 2457 MHz  | 11      | 2462 MHz  | N/A     | N/A       |

### Channel List for 802.11n-HT40

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 03      | 2422 MHz  | 04      | 2427 MHz  | 05      | 2432 MHz  |
| 06      | 2437 MHz  | 07      | 2442 MHz  | 08      | 2447 MHz  |
| 09      | 2452 MHz  | N/A     | N/A       | N/A     | N/A       |

## 2.4. Description of Available Antennas

| Antenna Type | Frequency Band (GHz) | T <sub>x</sub> Paths | Directional Gain (dBi) |
|--------------|----------------------|----------------------|------------------------|
| PCB Antenna  | 2.4                  | 2                    | 1.90                   |

| Antenna Type | Frequency Band (GHz) | T <sub>x</sub> Paths | Directional Gain (dBi) |      |
|--------------|----------------------|----------------------|------------------------|------|
|              |                      |                      | Beam Forming           | CDD  |
| PCB Antenna  | 5.2                  | 4                    | 8.04                   | 8.04 |
|              | 5.3                  | 4                    | 7.78                   | 7.78 |
|              | 5.6                  | 4                    | 8.38                   | 8.38 |
|              | 5.8                  | 4                    | 8.70                   | 8.70 |

Note:

- Transmit at 2.4GHz support two antennas, and support four antennas at 5GHz transmit. There are different antenna gains between each antenna.
- The EUT working on Beam Forming mode, and the Beam Forming support 802.11n/ac, not include 802.11a, and 802.11a working on CDD mode.
- Correlated signals include, but are not limited to, signals transmitted in any of the following modes:
  - Any transmit Beam Forming mode, whether fixed or adaptive (e.g., phased array modes, closed loop MIMO modes, Transmitter Adaptive Antenna modes, Maximum Ratio Transmission (MRT) modes, and Statistical Eigen Beam Forming (EBF) modes).
- Unequal antenna gains, with equal transmit powers. For antenna gains given by  $G_1, G_2, \dots, G_N$  dBi
  - transmit signals are correlated, then
  - Directional gain =  $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$  dBi [Note the “20”s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

## 2.5. Description of Antenna RF Port

| RF Port               |                       |       |       |       |
|-----------------------|-----------------------|-------|-------|-------|
| Test Mode             | Software Control Port |       |       |       |
| 2.4GHz T <sub>x</sub> | Ant 0                 | Ant 1 | --    | --    |
| Test Mode             | Software Control Port |       |       |       |
| 5GHz T <sub>x</sub>   | Ant 0                 | Ant 1 | Ant 2 | Ant 3 |


## 2.6. Test Mode

|           |                                  |
|-----------|----------------------------------|
| Test Mode | Mode 1: Transmit by 802.11b      |
|           | Mode 2: Transmit by 802.11g      |
|           | Mode 3: Transmit by 802.11n-HT20 |
|           | Mode 4: Transmit by 802.11n-HT40 |

## 2.7. Test Software

The test utility software used during testing was “MTool\_2.0.07”.

Final Power Parameter Value of the test software.

| Test Mode    | Test Frequency<br>(MHz) | Power Parameter Value |             |
|--------------|-------------------------|-----------------------|-------------|
|              |                         | Ant 0                 | Ant 1       |
| 802.11b      | 2412                    | 22.5                  | Not Support |
|              | 2417                    | 23.0                  |             |
|              | 2437                    | 23.0                  |             |
|              | 2457                    | 23.0                  |             |
|              | 2462                    | 22.5                  |             |
| 802.11g      | 2412                    | 19.0                  | Not Support |
|              | 2417                    | 22.0                  |             |
|              | 2437                    | 23.0                  |             |
|              | 2457                    | 21.0                  |             |
|              | 2462                    | 19.5                  |             |
| 802.11n-HT20 | 2412                    | 18.0                  | 18.0        |
|              | 2417                    | 21.0                  | 23.0        |
|              | 2437                    | 23.0                  | 23.0        |
|              | 2457                    | 20.5                  | 21.0        |
|              | 2462                    | 18.0                  | 18.0        |
| 802.11n-HT40 | 2422                    | 15.5                  | 15.5        |
|              | 2427                    | 18.0                  | 19.5        |
|              | 2437                    | 21.0                  | 21.0        |
|              | 2447                    | 17.5                  | 19.5        |
|              | 2452                    | 16.5                  | 16.5        |

Power Parameter Value for 2T<sub>x</sub>

| Test Mode    | Test Frequency<br>(MHz) | Power Parameter Value |
|--------------|-------------------------|-----------------------|
| 802.11n-HT20 | 2412                    | 17.5                  |
|              | 2417                    | 19.0                  |
|              | 2437                    | 23.0                  |
|              | 2457                    | 20.0                  |
|              | 2462                    | 18.0                  |
| 802.11n-HT40 | 2422                    | 15.5                  |
|              | 2427                    | 18.5                  |
|              | 2437                    | 21.0                  |
|              | 2447                    | 17.5                  |
|              | 2452                    | 16.5                  |


## 2.8. Device Capabilities

This device contains the following capabilities:

2.4GHz WLAN (DTS) & 5GHz WLAN (UNII).

**Note:** 2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01v03r02. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Test Mode    | Duty Cycle |
|--------------|------------|
| 802.11b      | 95.0%      |
| 802.11g      | 95.0%      |
| 802.11n-HT20 | 95.0%      |
| 802.11n-HT40 | 90.4%      |

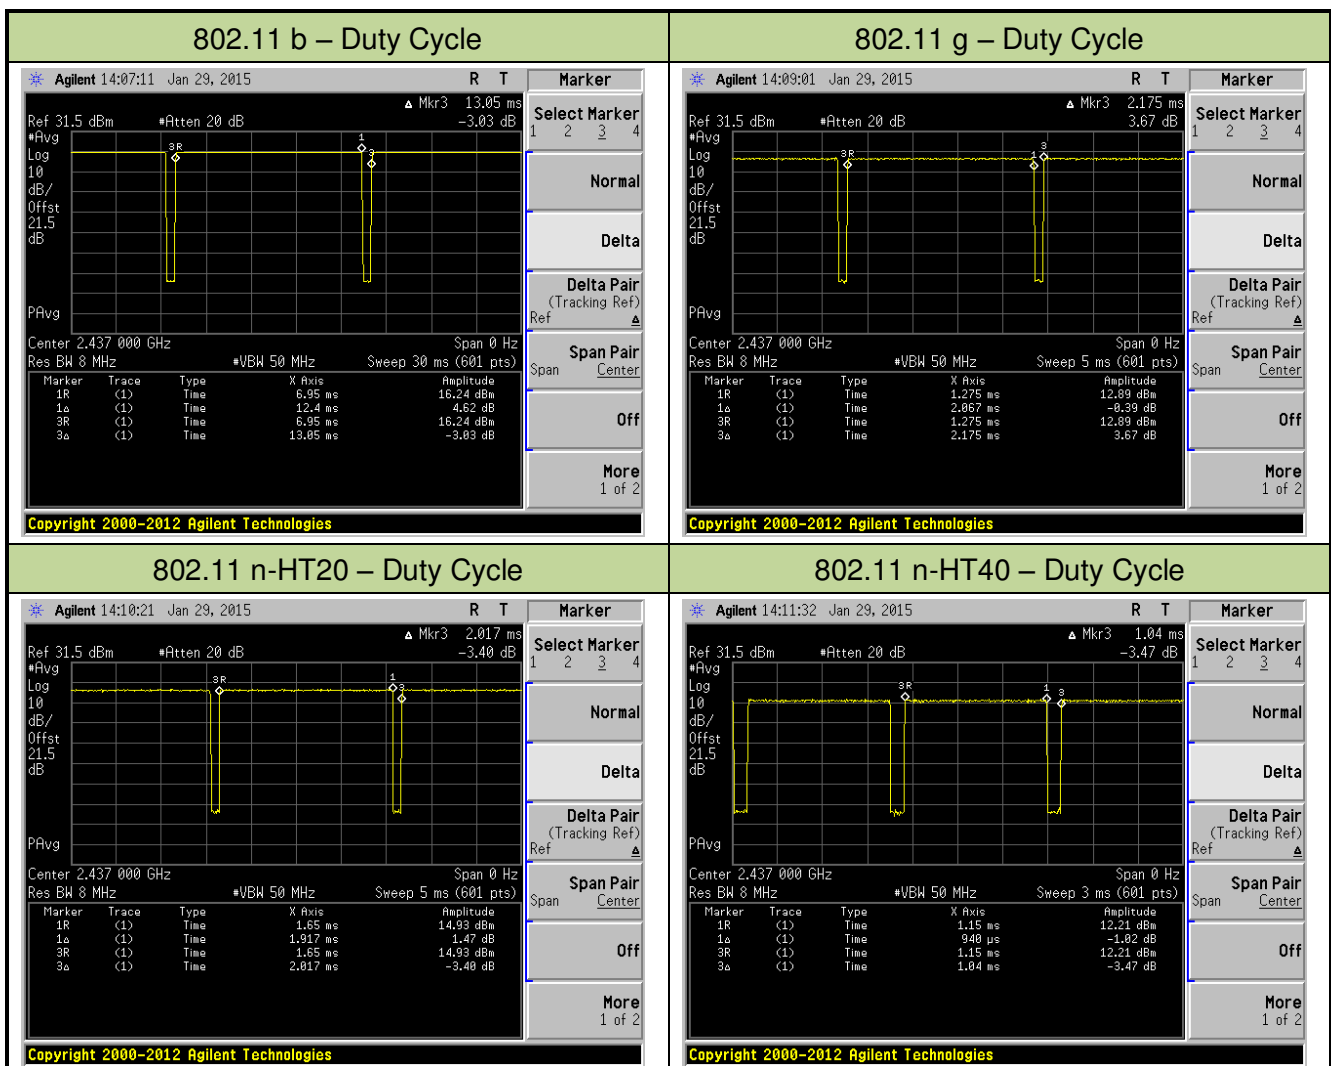

## **2.9. Test Configuration**

The **WIFI dual band 4 GE LAN GPON HGU FCC ID: 2ABLK-8X4G-1V2** was tested per the guidance of KDB 558074 D01v03r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## **2.10. EMI Suppression Device(s)/Modifications**

No EMI suppression device(s) were added and/or no modifications were made during testing.

## **2.11. Labeling Requirements**

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5).

Please see attachment for FCC ID label and label location.

### 3. DESCRIPTION of TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v03r02 were used in the measurement of the **WIFI dual band 4 GE LAN GPON HGU FCC ID:**

**2ABLK-8X4G-1V2.**

**Deviation from measurement procedure.....None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.



### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of **WIFI dual band 4 GE LAN GPON HGU** is **permanently attached**.
- There are no provisions for connection to an external antenna.

### **Conclusion:**

The **WIFI dual band 4 GE LAN GPON HGU FCC ID: 2ABLK-8X4G-1V2** unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emissions – TR1

| Instrument                 | Manufacturer | Type No. | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------|--------------|----------|-------------|----------------|----------------|
| EMI Test Receiver          | R&S          | ESR7     | MRTSUE06001 | 1 year         | 2016/11/03     |
| Two-Line V-Network         | R&S          | ENV216   | MRTSUE06002 | 1 year         | 2016/11/03     |
| Two-Line V-Network         | R&S          | ENV216   | MRTSUE06003 | 1 year         | 2016/11/03     |
| Temperature/Humidity Meter | Yuhuaze      | HTC-2    | MRTSUE06178 | 1 year         | 2016/12/20     |

### Radiated Emissions – AC1

| Instrument                 | Manufacturer | Type No.  | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------|--------------|-----------|-------------|----------------|----------------|
| Spectrum Analyzer          | Agilent      | E4447A    | MRTSUE06028 | 1 year         | 2016/12/09     |
| EMI Test Receiver          | R&S          | ESR7      | MRTSUE06001 | 1 year         | 2016/11/03     |
| Preamplifier               | Agilent      | 83017A    | MRTSUE06020 | 1 year         | 2017/03/29     |
| Preamplifier               | Schwarzbeck  | BBV9721   | MRTSUE06121 | 1 year         | 2017/04/16     |
| Loop Antenna               | Schwarzbeck  | FMZB1519  | MRTSUE06025 | 1 year         | 2016/12/09     |
| TRILOG Antenna             | Schwarzbeck  | VULB9162  | MRTSUE06022 | 1 year         | 2016/11/07     |
| Broad-Band Horn Antenna    | Schwarzbeck  | BBHA9120D | MRTSUE06023 | 1 year         | 2016/11/07     |
| Broadband Horn Antenna     | Schwarzbeck  | BBHA9170  | MRTSUE06024 | 1 year         | 2017/01/06     |
| Temperature/Humidity Meter | Yuhuaze      | HTC-2     | MRTSUE06183 | 1 year         | 2016/12/20     |

### Conducted Test Equipment – TR3

| Instrument                 | Manufacturer | Type No. | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------|--------------|----------|-------------|----------------|----------------|
| Spectrum Analyzer          | Agilent      | N9020A   | MRTSUE06106 | 1 year         | 2017/04/23     |
| USB Wideband Power Sensor  | Boonton      | 55006    | MRTSUE06109 | 1 year         | 2016/05/08     |
| Temperature/Humidity Meter | Yuhuaze      | HTC-2    | MRTSUE06180 | 1 year         | 2016/12/20     |

| Software | Version | Function          |
|----------|---------|-------------------|
| e3       | V 8.3.5 | EMI Test Software |

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

|                                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------|
| AC Conducted Emission Measurement                                                                                      |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>150kHz~30MHz: 3.46dB                        |
| Radiated Emission Measurement                                                                                          |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>9kHz ~ 1GHz: 4.18dB<br>1GHz ~ 25GHz: 4.76dB |

## 7. TEST RESULT

### 7.1. Summary

**Product Name:** WIFI dual band 4 GE LAN GPON HGU, BROADBAND CPE

**FCC ID:** 2ABLK-8X4G-1V2

**FCC Classification:** Digital Transmission System (DTS)

**Data Rate(s) Tested:** 1Mbps ~ 11Mbps (b);

6Mbps ~ 54Mbps (g);

6.5/7.2Mbps ~ 130/144.4Mbps (n-HT20);

13.5/15Mbps ~ 270/300Mbps (n-HT40)

| FCC Part Section(s) | Test Description                                                              | Test Limit                                                                     | Test Condition | Test Result | Reference         |
|---------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------|-------------|-------------------|
| 15.247(a)(2)        | 6dB Bandwidth                                                                 | $\geq 500\text{kHz}$                                                           | Conducted      | Pass        | Section 7.2       |
| 15.247(b)(3)        | Output Power                                                                  | $\leq 30\text{dBm}$                                                            |                | Pass        | Section 7.3       |
| 15.247(e)           | Power Spectral Density                                                        | $\leq 8\text{dBm}/3\text{kHz}$                                                 |                | Pass        | Section 7.4       |
| 15.247(d)           | Band Edge / Out-of-Band Emissions                                             | $\geq 30\text{dBc(Average)}$                                                   |                | Pass        | Section 7.5       |
| 15.205<br>15.209    | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 | Radiated       | Pass        | Section 7.6 & 7.7 |
| 15.207              | AC Conducted Emissions<br>150kHz - 30MHz                                      | < FCC 15.207 limits                                                            | Line Conducted | Pass        | Section 7.8       |

#### Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

## 7.2. 6dB Bandwidth Measurement

### 7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 7.2.2. Test Procedure used

KDB 558074 D01v03r02 - Section 8.2 Option 2

### 7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

### 7.2.4. Test Setup

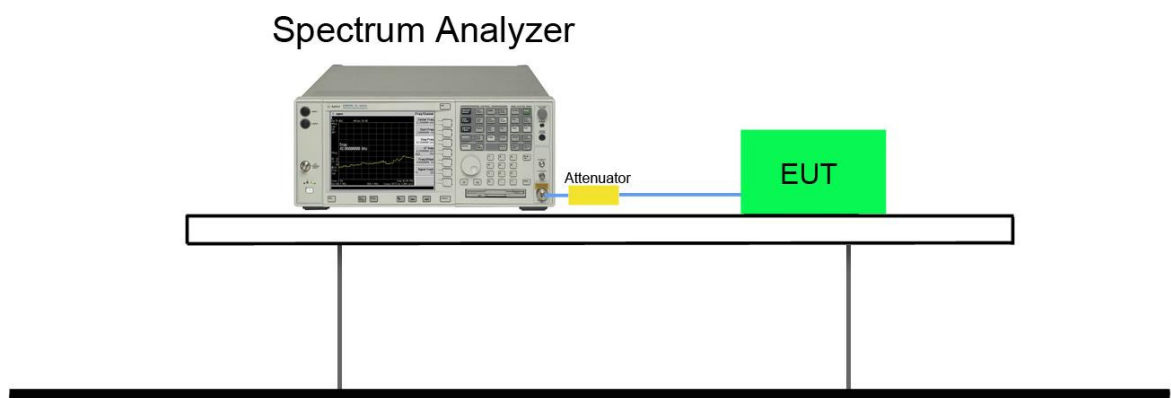

### 7.2.5. Test Result


| Test Mode    | Data Rate (Mbps) | Channel No. | Frequency (MHz) | 6dB Bandwidth (MHz) | Limit (MHz) | Result |
|--------------|------------------|-------------|-----------------|---------------------|-------------|--------|
| Ant 0        |                  |             |                 |                     |             |        |
| 802.11b      | 1                | 01          | 2412            | 8.10                | $\geq 0.5$  | Pass   |
| 802.11b      | 1                | 06          | 2437            | 8.11                | $\geq 0.5$  | Pass   |
| 802.11b      | 1                | 11          | 2462            | 8.10                | $\geq 0.5$  | Pass   |
| 802.11g      | 6                | 01          | 2412            | 16.39               | $\geq 0.5$  | Pass   |
| 802.11g      | 6                | 06          | 2437            | 16.37               | $\geq 0.5$  | Pass   |
| 802.11g      | 6                | 11          | 2462            | 16.38               | $\geq 0.5$  | Pass   |
| 802.11n-HT20 | 6.5              | 01          | 2412            | 17.63               | $\geq 0.5$  | Pass   |
| 802.11n-HT20 | 6.5              | 06          | 2437            | 17.60               | $\geq 0.5$  | Pass   |
| 802.11n-HT20 | 6.5              | 11          | 2462            | 17.62               | $\geq 0.5$  | Pass   |
| 802.11n-HT40 | 13.5             | 03          | 2422            | 35.74               | $\geq 0.5$  | Pass   |
| 802.11n-HT40 | 13.5             | 06          | 2437            | 35.45               | $\geq 0.5$  | Pass   |
| 802.11n-HT40 | 13.5             | 09          | 2452            | 35.55               | $\geq 0.5$  | Pass   |
| Ant 1        |                  |             |                 |                     |             |        |
| 802.11n-HT20 | 6.5              | 01          | 2412            | 17.62               | $\geq 0.5$  | Pass   |
| 802.11n-HT20 | 6.5              | 06          | 2437            | 17.59               | $\geq 0.5$  | Pass   |
| 802.11n-HT20 | 6.5              | 11          | 2462            | 17.61               | $\geq 0.5$  | Pass   |
| 802.11n-HT40 | 13.5             | 03          | 2422            | 35.63               | $\geq 0.5$  | Pass   |
| 802.11n-HT40 | 13.5             | 06          | 2437            | 35.77               | $\geq 0.5$  | Pass   |
| 802.11n-HT40 | 13.5             | 09          | 2452            | 35.60               | $\geq 0.5$  | Pass   |

| Test Mode         | Data Rate<br>(Mbps) | Channel No. | Frequency<br>(MHz) | 6dB Bandwidth<br>(MHz) | Limit<br>(MHz) | Result |
|-------------------|---------------------|-------------|--------------------|------------------------|----------------|--------|
| Ant 0 / Ant 0 + 1 |                     |             |                    |                        |                |        |
| 802.11n-HT20      | 6.5                 | 01          | 2412               | 17.60                  | ≥0.5           | Pass   |
| 802.11n-HT20      | 6.5                 | 06          | 2437               | 17.58                  | ≥0.5           | Pass   |
| 802.11n-HT20      | 6.5                 | 11          | 2462               | 17.61                  | ≥0.5           | Pass   |
| 802.11n-HT40      | 13.5                | 03          | 2422               | 35.74                  | ≥0.5           | Pass   |
| 802.11n-HT40      | 13.5                | 06          | 2437               | 35.77                  | ≥0.5           | Pass   |
| 802.11n-HT40      | 13.5                | 09          | 2452               | 35.80                  | ≥0.5           | Pass   |
| Ant 1 / Ant 0 + 1 |                     |             |                    |                        |                |        |
| 802.11n-HT20      | 6.5                 | 01          | 2412               | 17.63                  | ≥0.5           | Pass   |
| 802.11n-HT20      | 6.5                 | 06          | 2437               | 17.63                  | ≥0.5           | Pass   |
| 802.11n-HT20      | 6.5                 | 11          | 2462               | 17.65                  | ≥0.5           | Pass   |
| 802.11n-HT40      | 13.5                | 03          | 2422               | 36.34                  | ≥0.5           | Pass   |
| 802.11n-HT40      | 13.5                | 06          | 2437               | 35.99                  | ≥0.5           | Pass   |
| 802.11n-HT40      | 13.5                | 09          | 2452               | 35.50                  | ≥0.5           | Pass   |




## 802.11b 6dB Bandwidth - Ant 0


### Channel 01 (2412MHz)

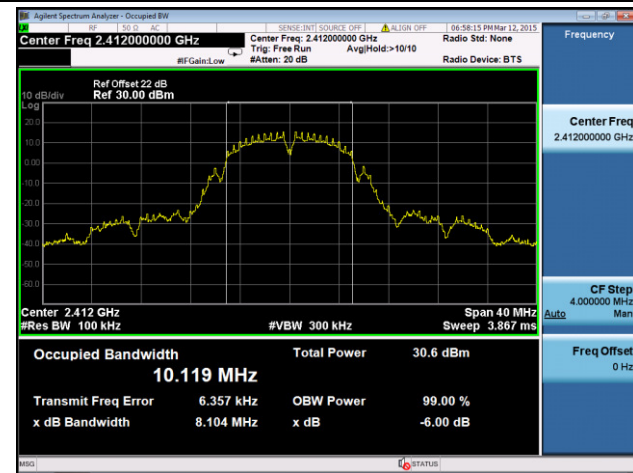

### Channel 06 (2437MHz)

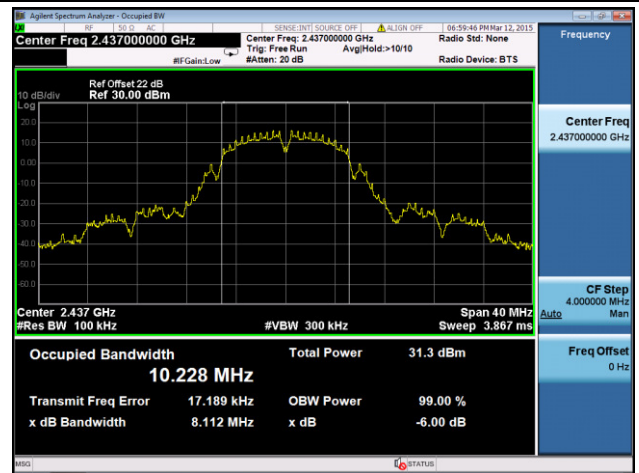


### Channel 11 (2462MHz)

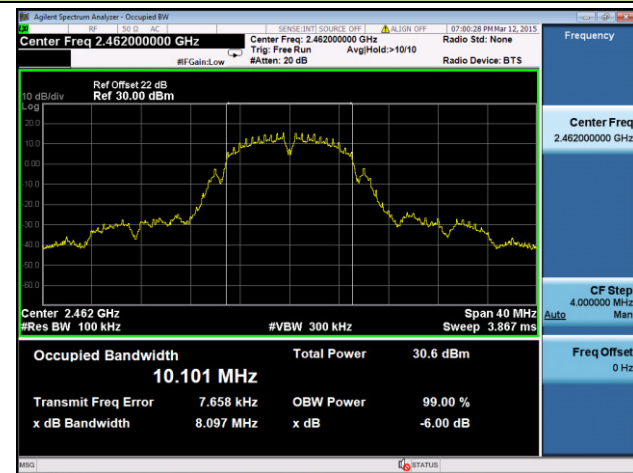


## 802.11g 6dB Bandwidth - Ant 0


### Channel 01 (2412MHz)

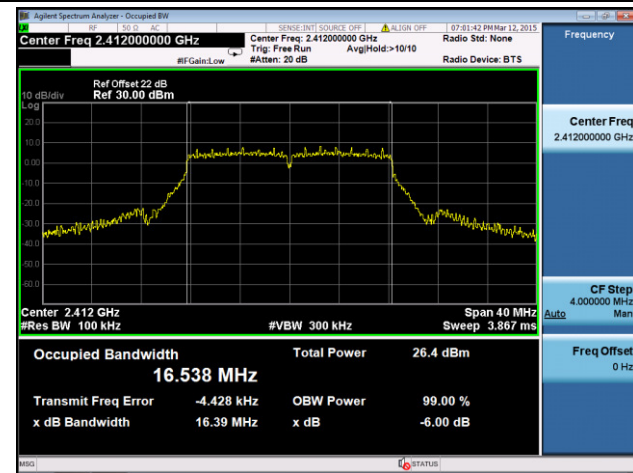

### Channel 06 (2437MHz)

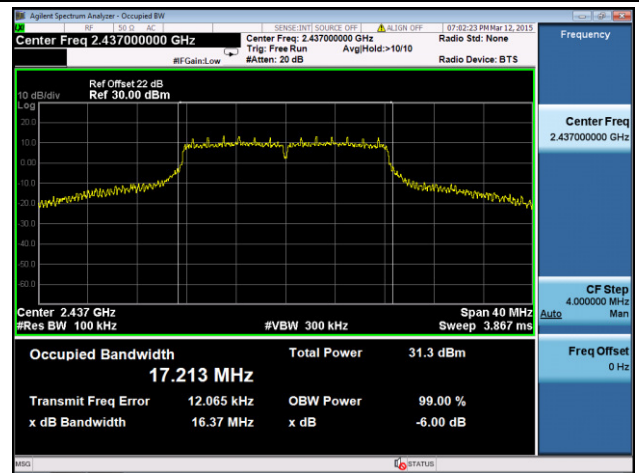


### Channel 11 (2462MHz)

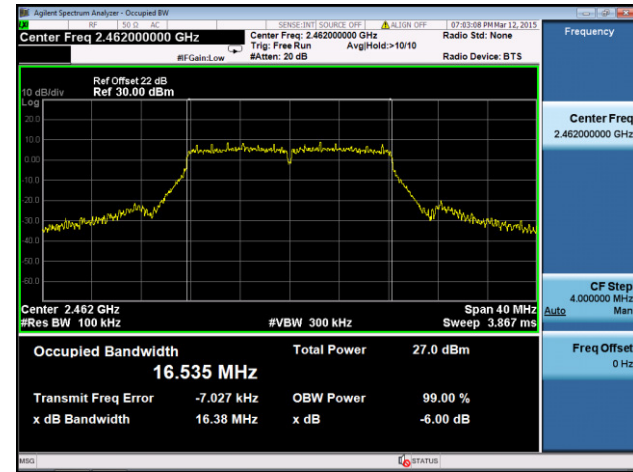


# 802.11n-HT20 6dB Bandwidth - Ant 0


## Channel 01 (2412MHz)

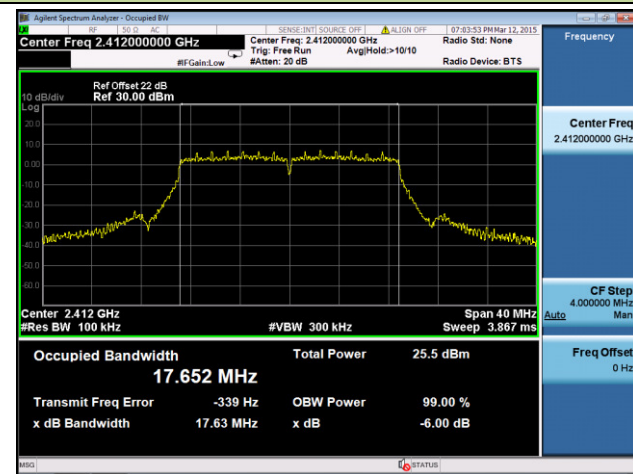

## Channel 06 (2437MHz)

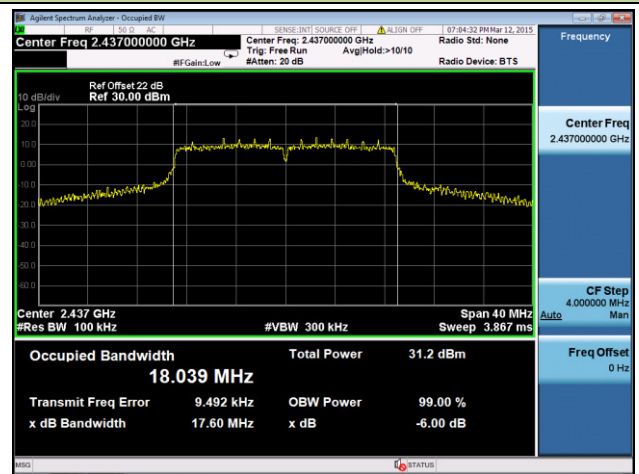


## Channel 11 (2462MHz)

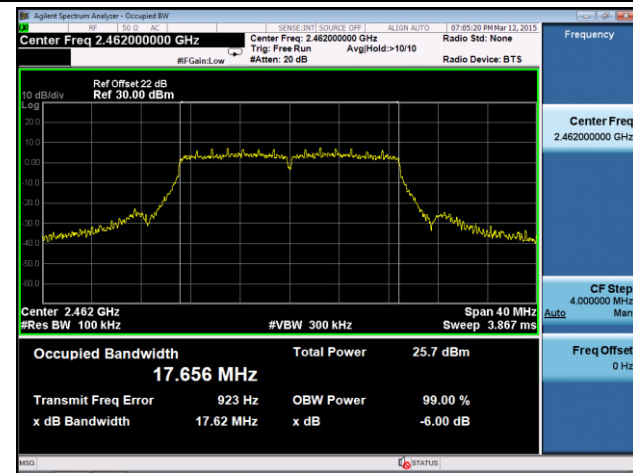


## 802.11n-HT40 6dB Bandwidth - Ant 0


### Channel 03 (2422MHz)

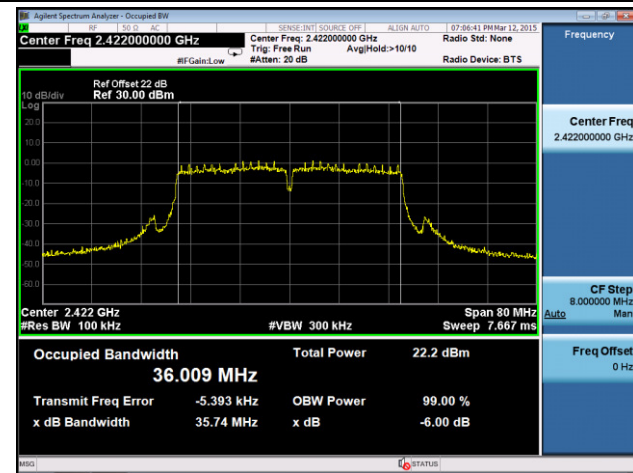

### Channel 06 (2437MHz)

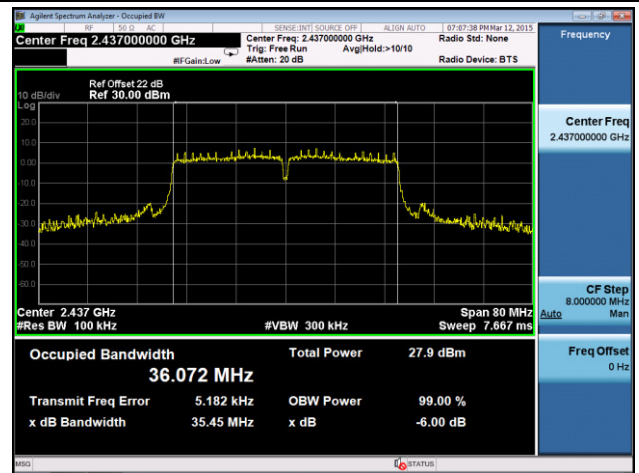


### Channel 09 (2452MHz)

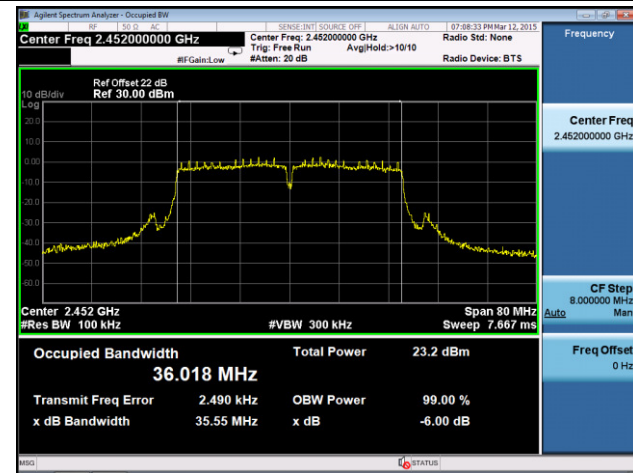


## 802.11n-HT20 6dB Bandwidth - Ant 1


### Channel 01 (2412MHz)

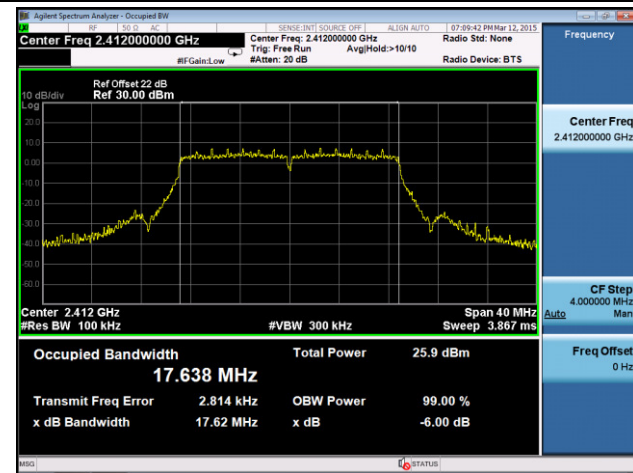

### Channel 06 (2437MHz)

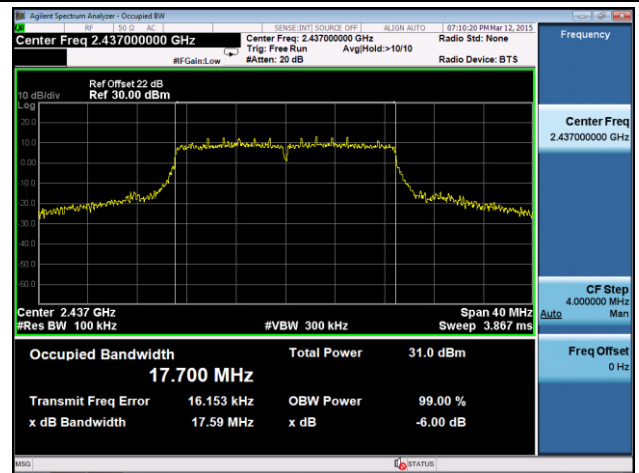


### Channel 11 (2462MHz)

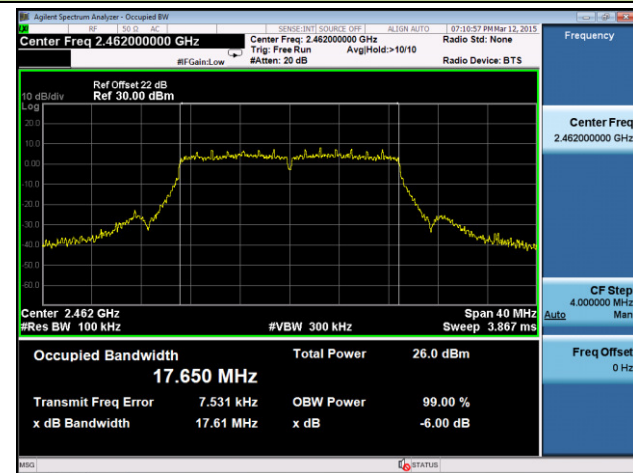


## 802.11n-HT40 6dB Bandwidth - Ant 1


### Channel 03 (2422MHz)

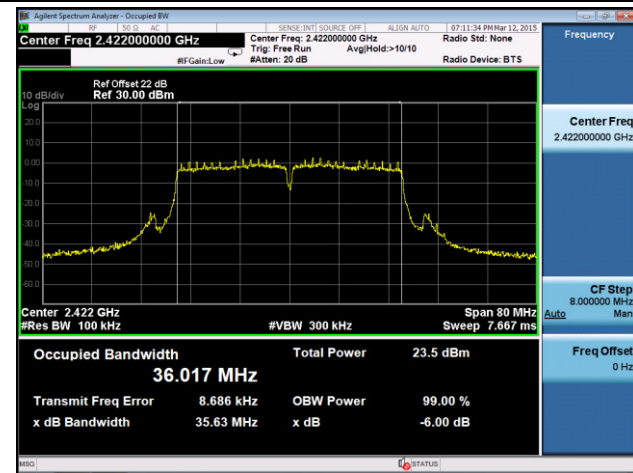

### Channel 06 (2437MHz)

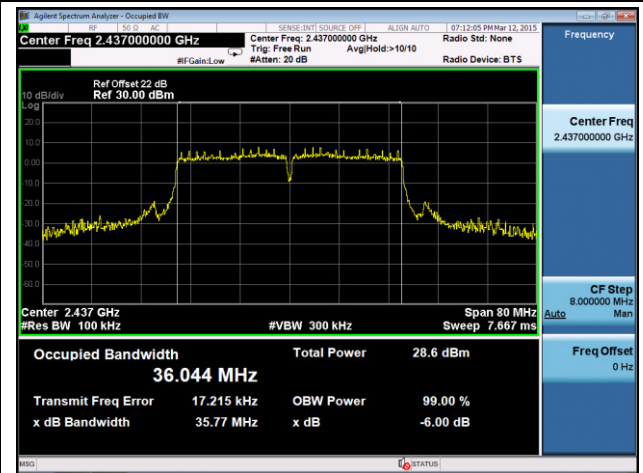


### Channel 09 (2452MHz)

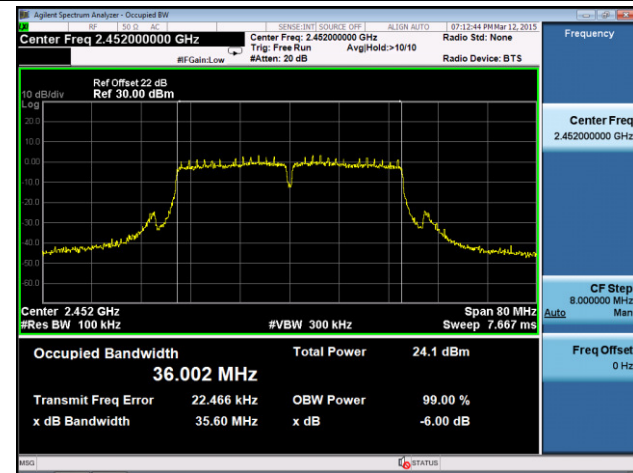


# 802.11n-HT20 6dB Bandwidth - Ant 0 / Ant 0 + 1


## Channel 01 (2412MHz)

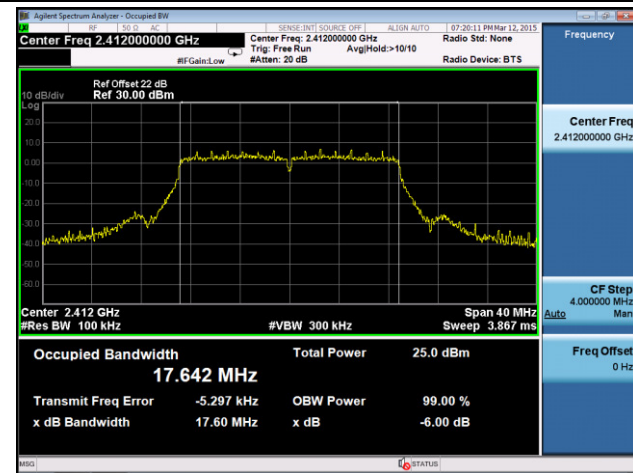

## Channel 06 (2437MHz)

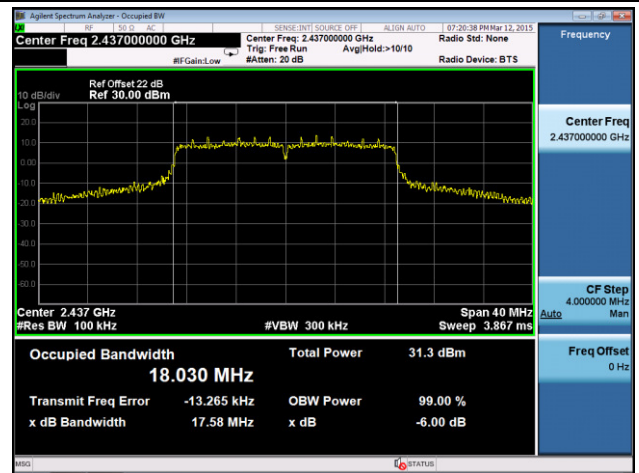


## Channel 11 (2462MHz)

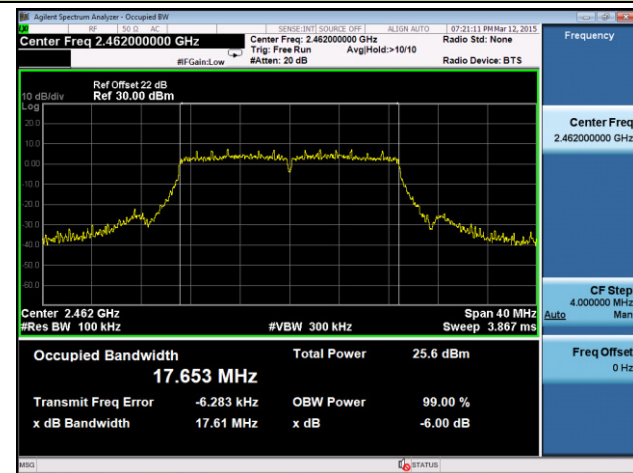


# 802.11n-HT40 6dB Bandwidth - Ant 0 / Ant 0 + 1


## Channel 03 (2422MHz)

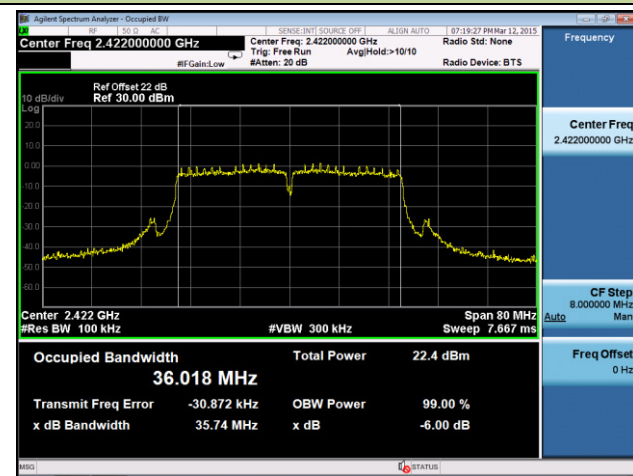

## Channel 06 (2437MHz)

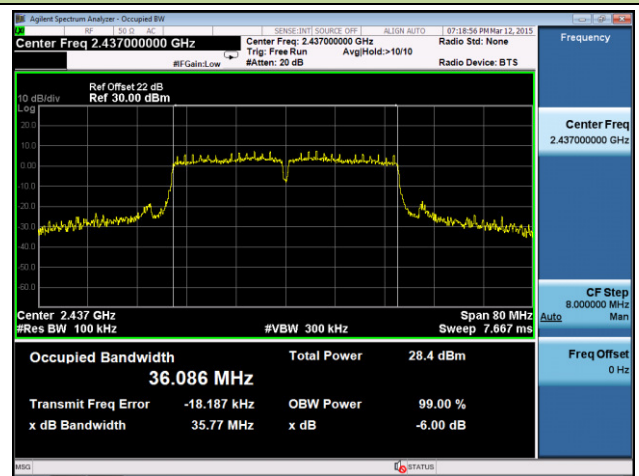


## Channel 09 (2452MHz)

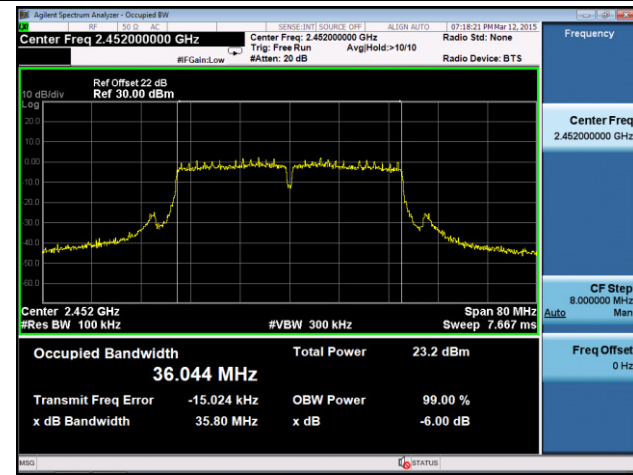




# 802.11n-HT20 6dB Bandwidth - Ant 1 / Ant 0 + 1


## Channel 01 (2412MHz)

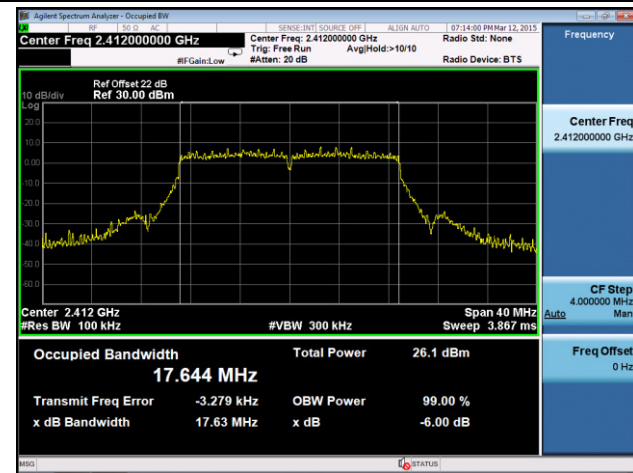

## Channel 06 (2437MHz)

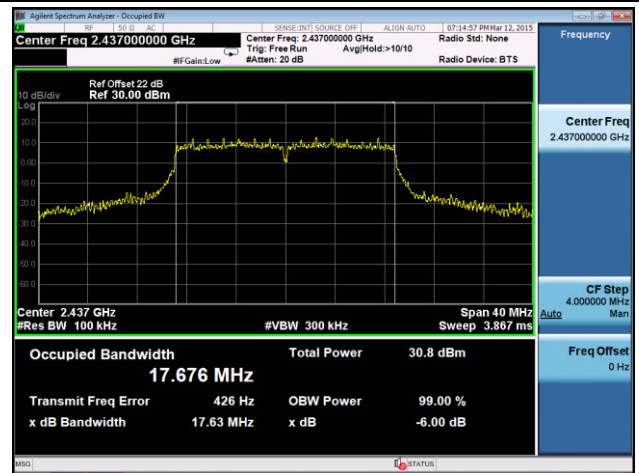


## Channel 11 (2462MHz)

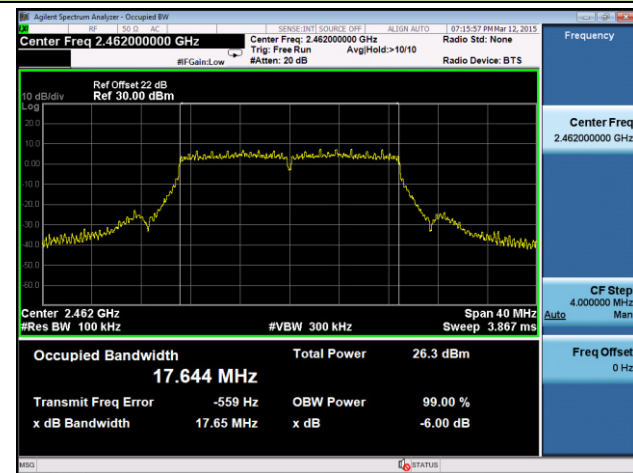


# 802.11n-HT40 6dB Bandwidth - Ant 1 / Ant 0 + 1


## Channel 03 (2422MHz)

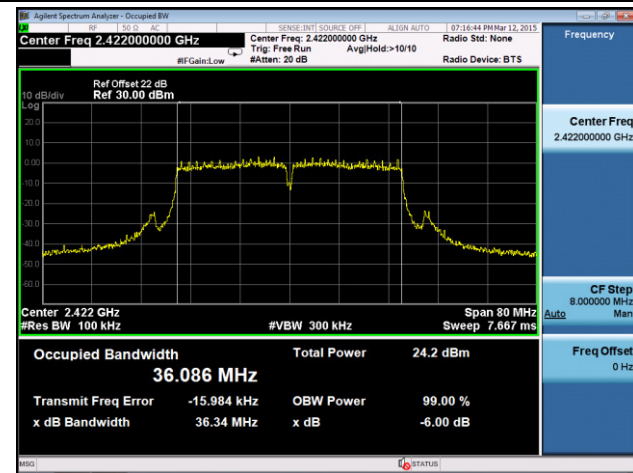

## Channel 06 (2437MHz)

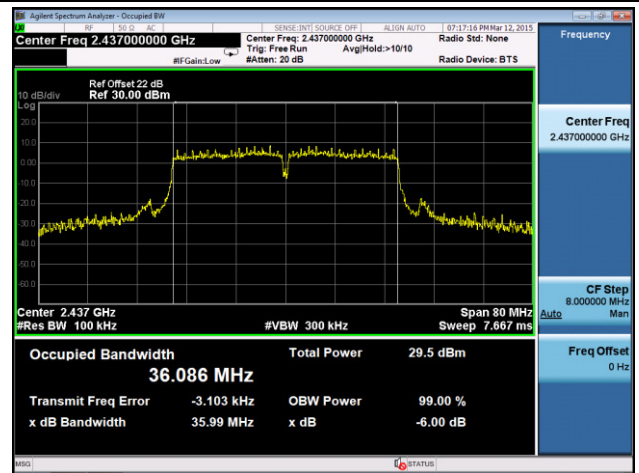

## Channel 09 (2452MHz)

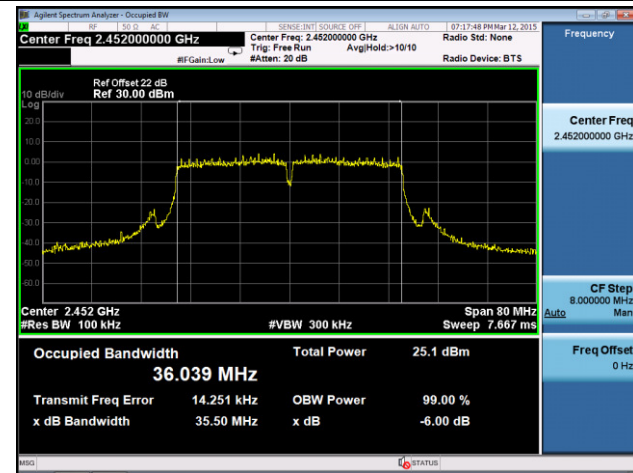

### 7.3. Output Power Measurement

#### 7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

#### 7.3.2. Test Procedure Used


KDB 558074 D01v03r02 - Section 9.2.3.2 AVGPM-G Average Power Method

#### 7.3.3. Test Setting

##### Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

#### 7.3.4. Test Setup

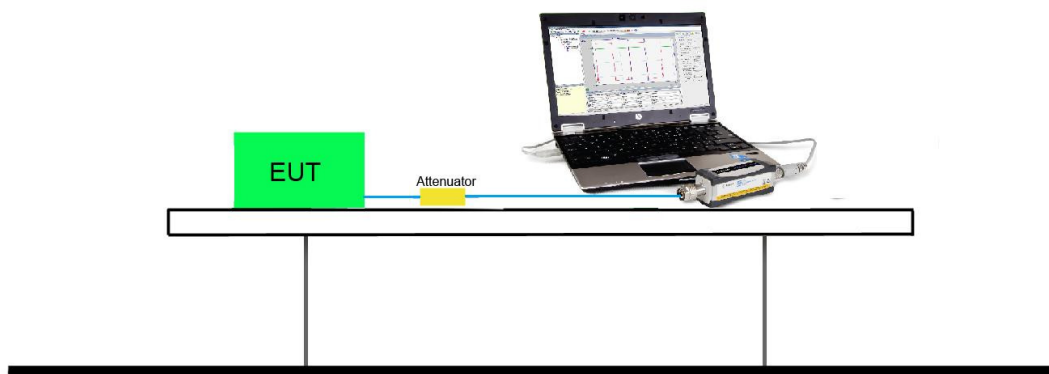

### 7.3.5. Test Result of Output Power

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (yellow marker) for final test of each channel.

| MCS Index<br>for 802.11n | N <sub>TX</sub> | Data Rate (Mbps) |         |                 |          |                 |          |
|--------------------------|-----------------|------------------|---------|-----------------|----------|-----------------|----------|
|                          |                 | 802.11b          | 802.11g | 20MHz Bandwidth |          | 40MHz Bandwidth |          |
|                          |                 |                  |         | 800ns GI        | 400ns GI | 800ns GI        | 400ns GI |
| 0                        | 1               | 1                | 6       | 6.5             | 7.2      | 13.5            | 15.0     |
| 1                        | 1               | 2                | 9       | 13.0            | 14.4     | 27.0            | 30.0     |
| 2                        | 1               | 5.5              | 12      | 19.5            | 21.7     | 40.5            | 45.0     |
| 3                        | 1               | 11               | 18      | 26.0            | 28.9     | 54.0            | 60.0     |
| 4                        | 1               | --               | 24      | 39.0            | 43.3     | 81.0            | 90.0     |
| 5                        | 1               | --               | 36      | 52.0            | 57.8     | 108.0           | 120.0    |
| 6                        | 1               | --               | 48      | 58.5            | 65.0     | 121.5           | 135.0    |
| 7                        | 1               | --               | 54      | 65.0            | 72.2     | 135.0           | 150.0    |
| 8                        | 2               | --               | --      | 13.0            | 14.4     | 27.0            | 30.0     |
| 9                        | 2               | --               | --      | 26.0            | 28.9     | 54.0            | 60.0     |
| 10                       | 2               | --               | --      | 39.0            | 43.3     | 81.0            | 90.0     |
| 11                       | 2               | --               | --      | 52.0            | 57.8     | 108.0           | 120.0    |
| 12                       | 2               | --               | --      | 78.0            | 86.7     | 162.0           | 180.0    |
| 13                       | 2               | --               | --      | 104.0           | 115.6    | 216.0           | 240.0    |
| 14                       | 2               | --               | --      | 117.0           | 130.0    | 243.0           | 270.0    |
| 15                       | 2               | --               | --      | 130.0           | 144.0    | 270.0           | 300.0    |

**Output power at various data rates for Ant 0:**

| Test Mode | Bandwidth (MHz) | Channel No. | Frequency (MHz) | Data Rate (Mbps) | Average Power (dBm) |
|-----------|-----------------|-------------|-----------------|------------------|---------------------|
| 802.11b   | 20              | 6           | 2437            | 1                | 24.02               |
|           |                 |             |                 | 5.5              | 23.86               |
|           |                 |             |                 | 11               | 23.69               |
| 802.11g   | 20              | 6           | 2437            | 6                | 23.74               |
|           |                 |             |                 | 24               | 23.47               |
|           |                 |             |                 | 54               | 23.16               |
| 802.11n   | 20              | 6           | 2437            | 6.5              | 23.65               |
|           |                 |             |                 | 7.2              | 23.58               |
|           |                 |             |                 | 52               | 23.25               |
|           |                 |             |                 | 57.8             | 23.21               |
|           |                 |             |                 | 130              | 23.04               |
|           |                 |             |                 | 144              | 22.94               |
| 802.11n   | 40              | 6           | 2437            | 13.5             | 20.19               |
|           |                 |             |                 | 15               | 20.14               |
|           |                 |             |                 | 108              | 20.06               |
|           |                 |             |                 | 120              | 19.97               |
|           |                 |             |                 | 270              | 19.68               |
|           |                 |             |                 | 300              | 19.66               |

### Test Result of Average Output Power

| Test Mode | Data Rate (Mbps) | Channel No. | Freq. (MHz) | Ant 0 Average Power (dBm) | Ant 1 Average Power (dBm) | Total Average Power (dBm) | Limit (dBm) | Result |
|-----------|------------------|-------------|-------------|---------------------------|---------------------------|---------------------------|-------------|--------|
| Ant 0     |                  |             |             |                           |                           |                           |             |        |
| 11b       | 1                | 1           | 2412        | 23.12                     | --                        | 23.12                     | ≤30         | Pass   |
| 11b       | 1                | 6           | 2437        | 24.02                     | --                        | 24.02                     | ≤30         | Pass   |
| 11b       | 1                | 11          | 2462        | 23.48                     | --                        | 23.48                     | ≤30         | Pass   |
| 11g       | 6                | 1           | 2412        | 18.93                     | --                        | 18.93                     | ≤30         | Pass   |
| 11g       | 6                | 6           | 2437        | 23.74                     | --                        | 23.74                     | ≤30         | Pass   |
| 11g       | 6                | 11          | 2462        | 19.87                     | --                        | 19.87                     | ≤30         | Pass   |
| 11n-HT20  | 6.5              | 1           | 2412        | 18.02                     | --                        | 18.02                     | ≤30         | Pass   |
| 11n-HT20  | 6.5              | 6           | 2437        | 23.65                     | --                        | 23.65                     | ≤30         | Pass   |
| 11n-HT20  | 6.5              | 11          | 2462        | 18.32                     | --                        | 18.32                     | ≤30         | Pass   |
| 11n-HT40  | 13.5             | 3           | 2422        | 14.12                     | --                        | 14.12                     | ≤30         | Pass   |
| 11n-HT40  | 13.5             | 6           | 2437        | 20.19                     | --                        | 20.19                     | ≤30         | Pass   |
| 11n-HT40  | 13.5             | 9           | 2452        | 15.41                     | --                        | 15.41                     | ≤30         | Pass   |
| Ant 1     |                  |             |             |                           |                           |                           |             |        |
| 11n-HT20  | 6.5              | 1           | 2412        | --                        | 18.84                     | 18.84                     | ≤30         | Pass   |
| 11n-HT20  | 6.5              | 6           | 2437        | --                        | 23.39                     | 23.39                     | ≤30         | Pass   |
| 11n-HT20  | 6.5              | 11          | 2462        | --                        | 18.58                     | 18.58                     | ≤30         | Pass   |
| 11n-HT40  | 13.5             | 3           | 2422        | --                        | 15.48                     | 15.48                     | ≤30         | Pass   |
| 11n-HT40  | 13.5             | 6           | 2437        | --                        | 20.71                     | 20.71                     | ≤30         | Pass   |
| 11n-HT40  | 13.5             | 9           | 2452        | --                        | 16.15                     | 16.15                     | ≤30         | Pass   |
| Ant 0 + 1 |                  |             |             |                           |                           |                           |             |        |
| 11n-HT20  | 6.5              | 1           | 2412        | 17.29                     | 18.18                     | 20.77                     | ≤30         | Pass   |
| 11n-HT20  | 6.5              | 6           | 2437        | 23.48                     | 23.09                     | 26.30                     | ≤30         | Pass   |
| 11n-HT20  | 6.5              | 11          | 2462        | 18.14                     | 18.04                     | 21.10                     | ≤30         | Pass   |
| 11n-HT40  | 13.5             | 3           | 2422        | 13.96                     | 15.81                     | 17.99                     | ≤30         | Pass   |
| 11n-HT40  | 13.5             | 6           | 2437        | 19.89                     | 20.95                     | 23.46                     | ≤30         | Pass   |
| 11n-HT40  | 13.5             | 9           | 2452        | 15.11                     | 16.37                     | 18.80                     | ≤30         | Pass   |

Note: Total Average Power (dBm) =  $10 \cdot \log\{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$  (dBm).

## 7.4. Power Spectral Density Measurement

### 7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.


### 7.4.2. Test Procedure Used

KDB 558074 D01v03r02 - Section 10.5 Method AVGPST

### 7.4.3. Test Setting

1. Measure the duty cycle (x) of the transmitter output signal
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 10kHz
5. VBW = 30kHz
6. Detector = RMS
7. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$ .
8. Sweep time = auto couple
9. Don't use sweep triggering. Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.
13. Add Constant Factor =  $10 \cdot \log(3\text{kHz} / 10\text{kHz}) = -5.23$

#### 7.4.4. Test Setup

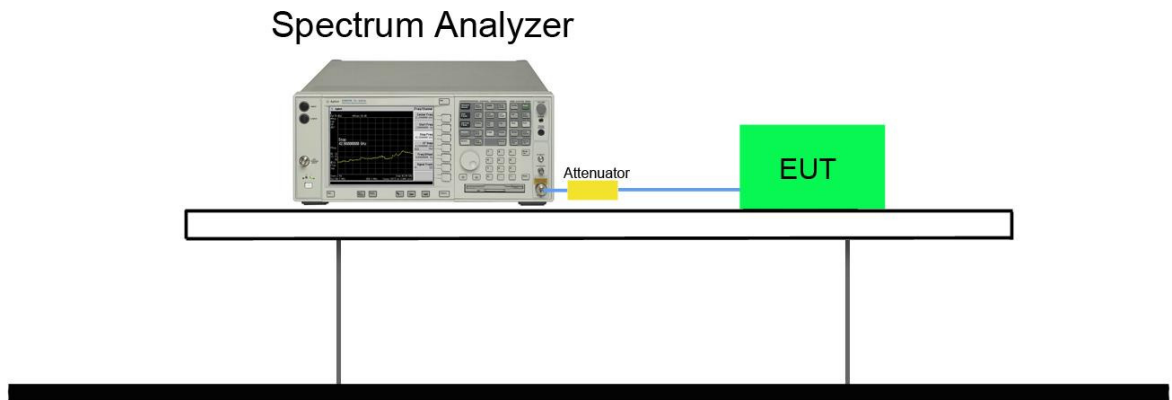




### 7.4.5. Test Result

| Test Mode | Data Rate (Mbps) | Channel No. | Freq. (MHz) | Ant 0 AVGPDS (dBm / 10kHz) | Ant 1 AVGPDS (dBm / 10kHz) | Duty Cycle (%) | Constant Factor | Total AVGPDS (dBm / 3kHz) | Limit (dBm / 3kHz) | Result |
|-----------|------------------|-------------|-------------|----------------------------|----------------------------|----------------|-----------------|---------------------------|--------------------|--------|
| Ant 0     |                  |             |             |                            |                            |                |                 |                           |                    |        |
| 11b       | 1                | 1           | 2412        | -3.34                      | --                         | 95.1           | -5.23           | -8.35                     | ≤8.0               | Pass   |
| 11b       | 1                | 6           | 2437        | -2.72                      | --                         | 95.1           | -5.23           | -7.73                     | ≤8.0               | Pass   |
| 11b       | 1                | 11          | 2462        | -3.48                      | --                         | 95.1           | -5.23           | -8.49                     | ≤8.0               | Pass   |
| 11g       | 6                | 1           | 2412        | -9.83                      | --                         | 94.2           | -5.23           | -14.80                    | ≤8.0               | Pass   |
| 11g       | 6                | 6           | 2437        | -6.30                      | --                         | 94.2           | -5.23           | -11.27                    | ≤8.0               | Pass   |
| 11g       | 6                | 11          | 2462        | -9.93                      | --                         | 94.2           | -5.23           | -14.90                    | ≤8.0               | Pass   |
| 11n-HT20  | 6.5              | 1           | 2412        | -10.81                     | --                         | 94.1           | -5.23           | -15.77                    | ≤8.0               | Pass   |
| 11n-HT20  | 6.5              | 6           | 2437        | -5.74                      | --                         | 94.1           | -5.23           | -10.70                    | ≤8.0               | Pass   |
| 11n-HT20  | 6.5              | 11          | 2462        | -10.96                     | --                         | 94.1           | -5.23           | -15.92                    | ≤8.0               | Pass   |
| 11n-HT40  | 13.5             | 3           | 2422        | -17.44                     | --                         | 89.7           | -5.23           | -22.20                    | ≤8.0               | Pass   |
| 11n-HT40  | 13.5             | 6           | 2437        | -11.96                     | --                         | 89.7           | -5.23           | -16.72                    | ≤8.0               | Pass   |
| 11n-HT40  | 13.5             | 9           | 2452        | -16.56                     | --                         | 89.7           | -5.23           | -21.32                    | ≤8.0               | Pass   |
| Ant 1     |                  |             |             |                            |                            |                |                 |                           |                    |        |
| 11n-HT20  | 6.5              | 1           | 2412        | --                         | -11.05                     | 94.1           | -5.23           | -16.01                    | ≤8.0               | Pass   |
| 11n-HT20  | 6.5              | 6           | 2437        | --                         | -6.53                      | 94.1           | -5.23           | -11.49                    | ≤8.0               | Pass   |
| 11n-HT20  | 6.5              | 11          | 2462        | --                         | -11.05                     | 94.1           | -5.23           | -16.01                    | ≤8.0               | Pass   |
| 11n-HT40  | 13.5             | 3           | 2422        | --                         | -16.30                     | 89.7           | -5.23           | -21.06                    | ≤8.0               | Pass   |
| 11n-HT40  | 13.5             | 6           | 2437        | --                         | -11.32                     | 89.7           | -5.23           | -16.08                    | ≤8.0               | Pass   |
| 11n-HT40  | 13.5             | 9           | 2452        | --                         | -15.79                     | 89.7           | -5.23           | -20.55                    | ≤8.0               | Pass   |
| Ant 0 + 1 |                  |             |             |                            |                            |                |                 |                           |                    |        |
| 11n-HT20  | 6.5              | 1           | 2412        | -11.51                     | -10.88                     | 94.1           | -5.23           | -13.14                    | ≤8.0               | Pass   |
| 11n-HT20  | 6.5              | 6           | 2437        | -6.19                      | -6.96                      | 94.1           | -5.23           | -8.51                     | ≤8.0               | Pass   |
| 11n-HT20  | 6.5              | 11          | 2462        | -10.94                     | -11.79                     | 94.1           | -5.23           | -13.30                    | ≤8.0               | Pass   |
| 11n-HT40  | 13.5             | 3           | 2422        | -16.94                     | -15.86                     | 89.7           | -5.23           | -18.12                    | ≤8.0               | Pass   |
| 11n-HT40  | 13.5             | 6           | 2437        | -11.91                     | -10.94                     | 89.7           | -5.23           | -13.14                    | ≤8.0               | Pass   |
| 11n-HT40  | 13.5             | 9           | 2452        | -14.69                     | -14.15                     | 89.7           | -5.23           | -16.16                    | ≤8.0               | Pass   |


Note: When EUT duty cycle < 98%, the total AVGPDS =  $10^{\log\{10^{(\text{Ant 0 AVGPDS}/10)} + 10^{(\text{Ant 1 AVGPDS}/10)}\}} + 10^{\log(1/\text{duty cycle})} + \text{Constant Factor}$ .

## 802.11b AVGPDS - Ant 0


### Channel 01 (2412MHz)

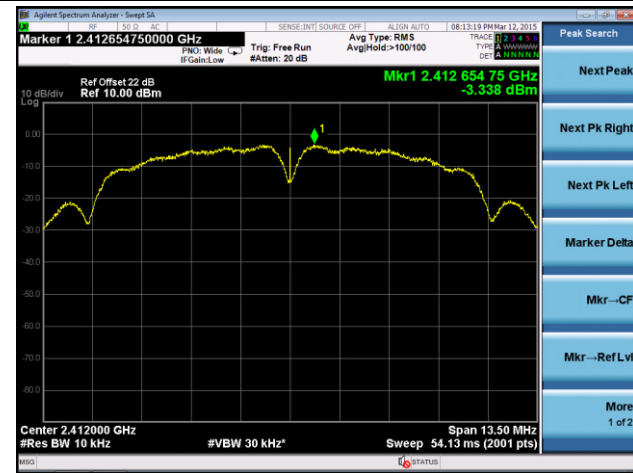

### Channel 06 (2437MHz)

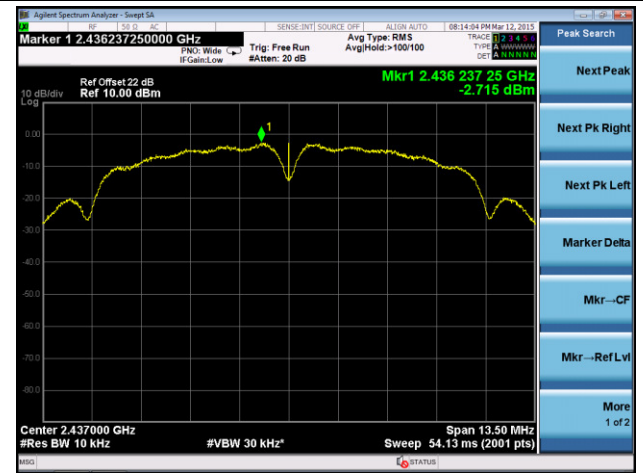


### Channel 11 (2462MHz)

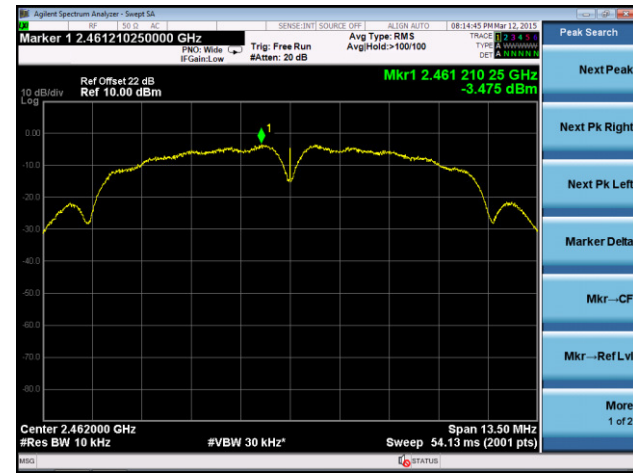


# 802.11g AVGPDS - Ant 0


## Channel 01 (2412MHz)

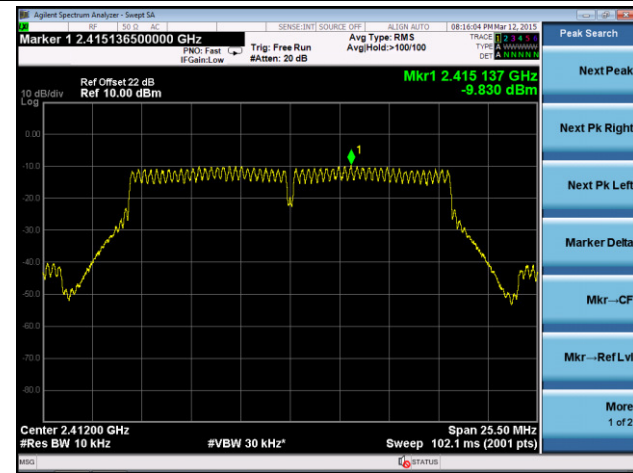

## Channel 06 (2437MHz)

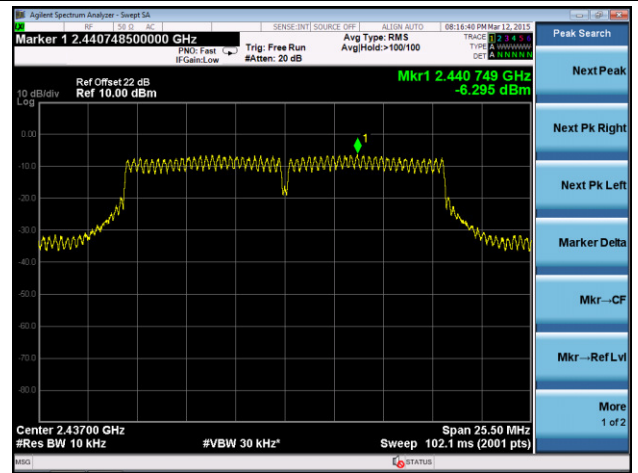


## Channel 11 (2462MHz)

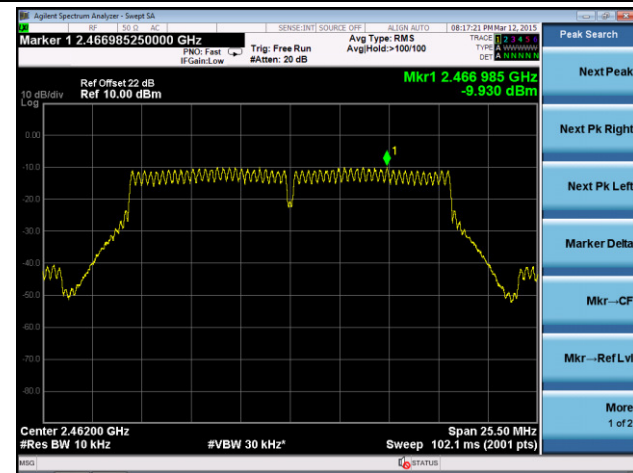


# 802.11n-HT20 AVGPSD - Ant 0


## Channel 01 (2412MHz)

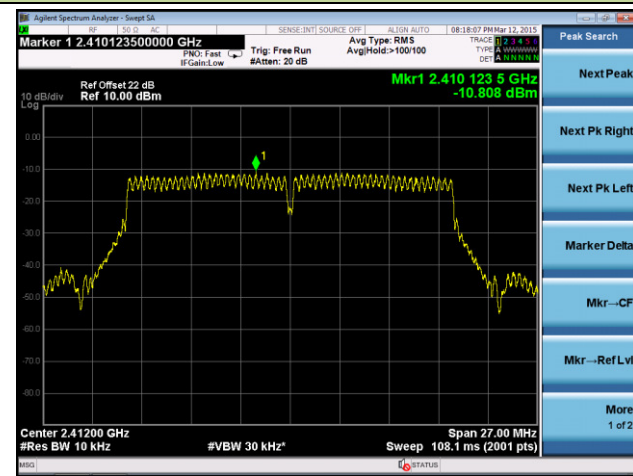

## Channel 06 (2437MHz)

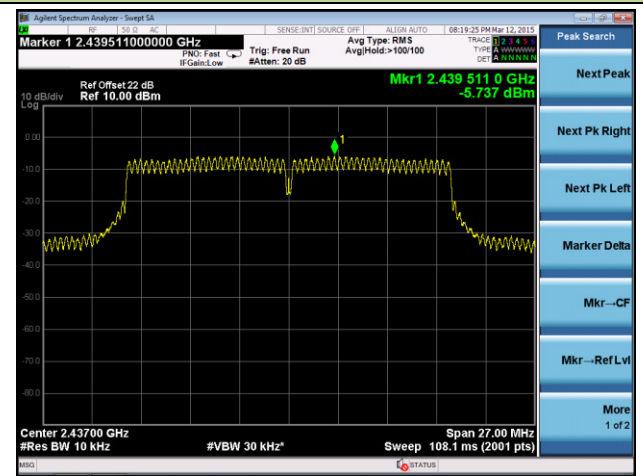


## Channel 11 (2462MHz)

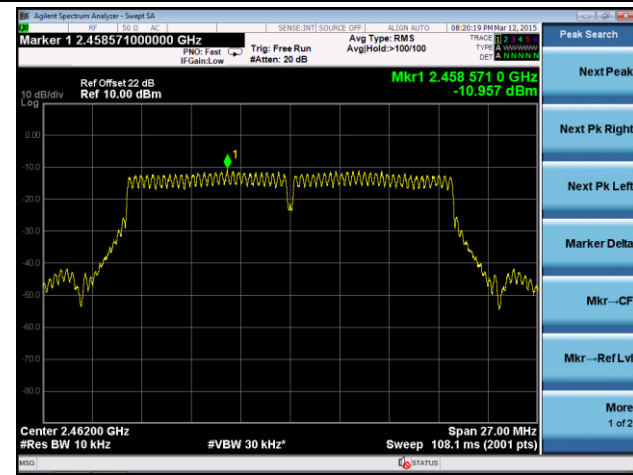


# 802.11n-HT40 AVGPSD - Ant 0


## Channel 03 (2422MHz)

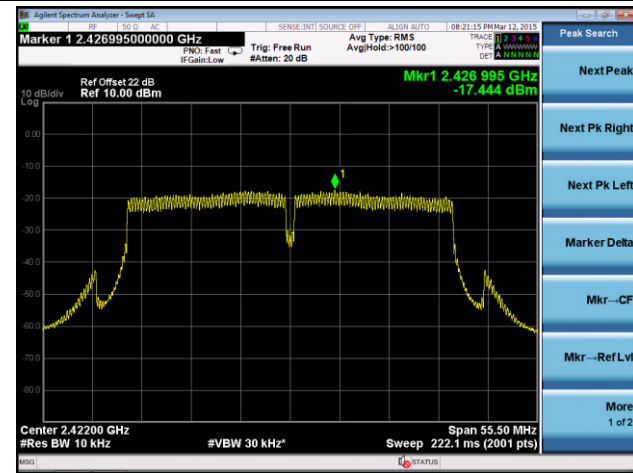

## Channel 06 (2437MHz)

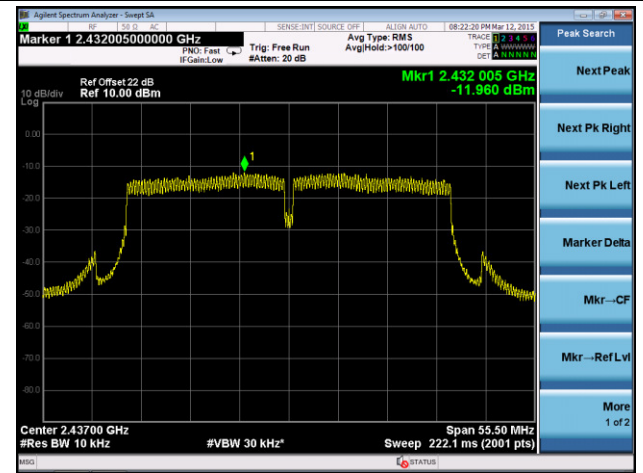


## Channel 09 (2452MHz)

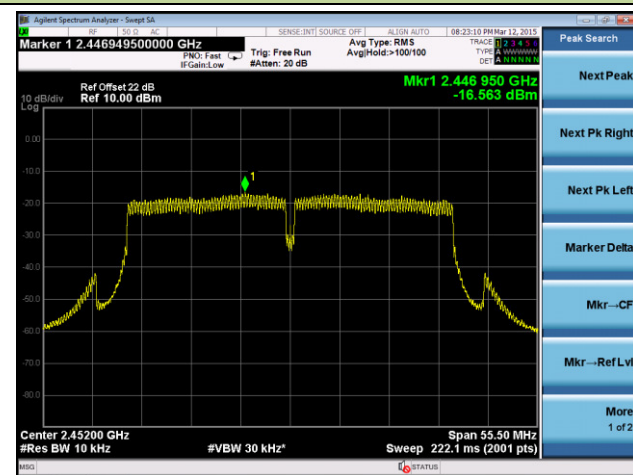


# 802.11n-HT20 AVGPSD - Ant 1


## Channel 01 (2412MHz)

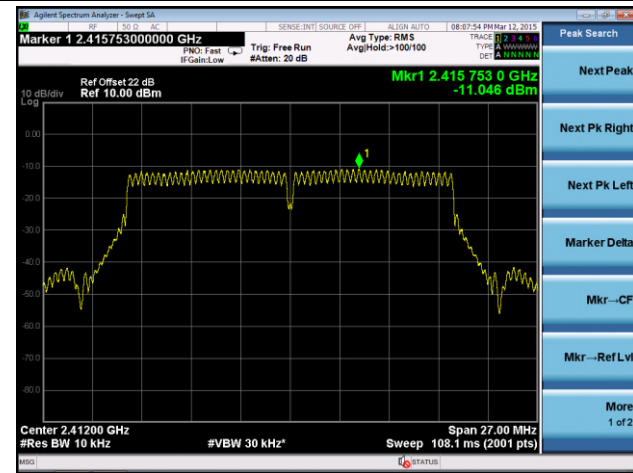

## Channel 06 (2437MHz)

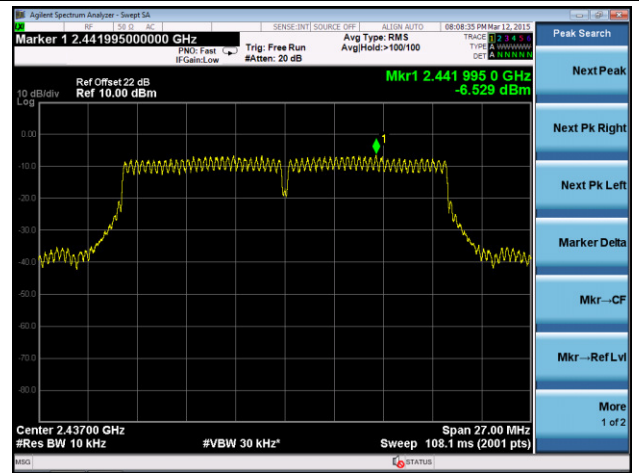


## Channel 11 (2462MHz)

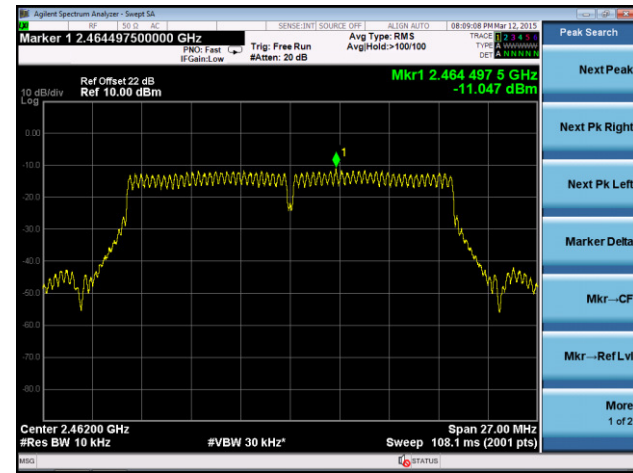


# 802.11n-HT40 AVGPSD - Ant 1


## Channel 03 (2422MHz)

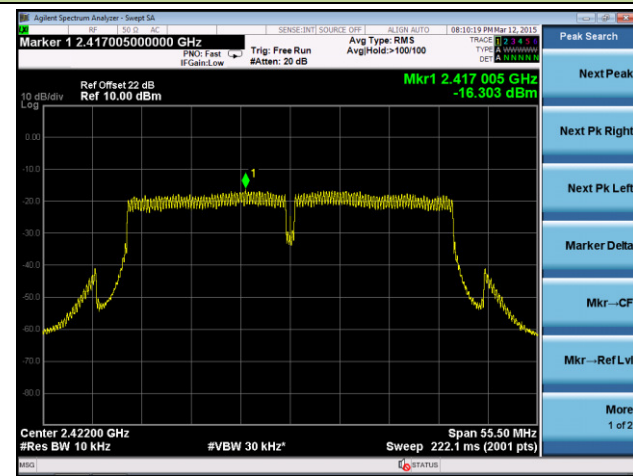

## Channel 06 (2437MHz)

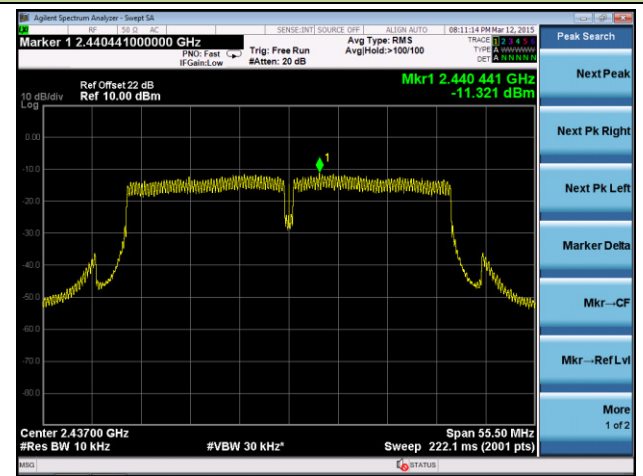


## Channel 09 (2452MHz)

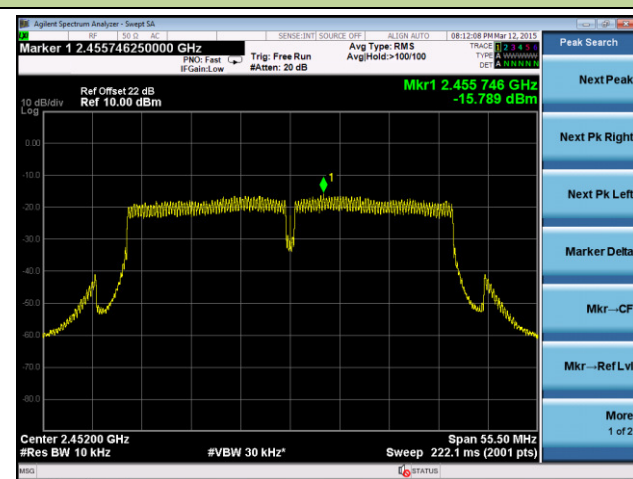




## 802.11n-HT20 AVGPSD - Ant 0 / Ant 0 + 1


## Channel 01 (2412MHz)

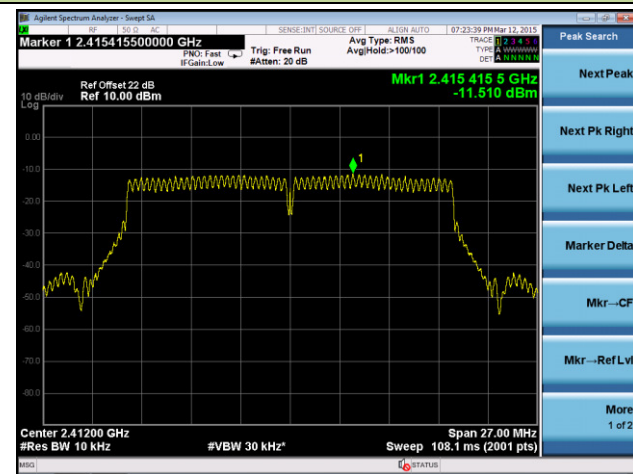

## Channel 06 (2437MHz)

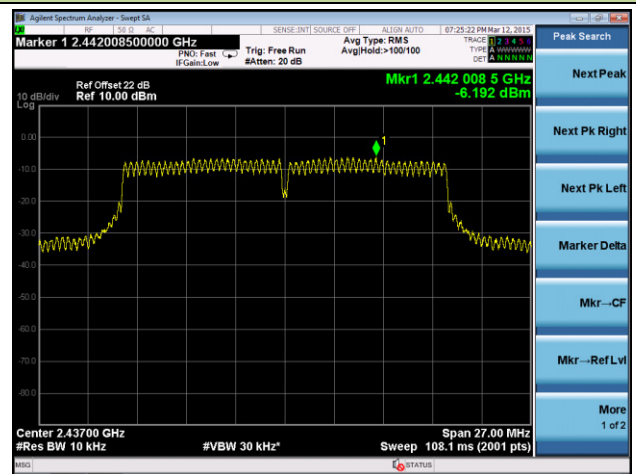


## Channel 11 (2462MHz)

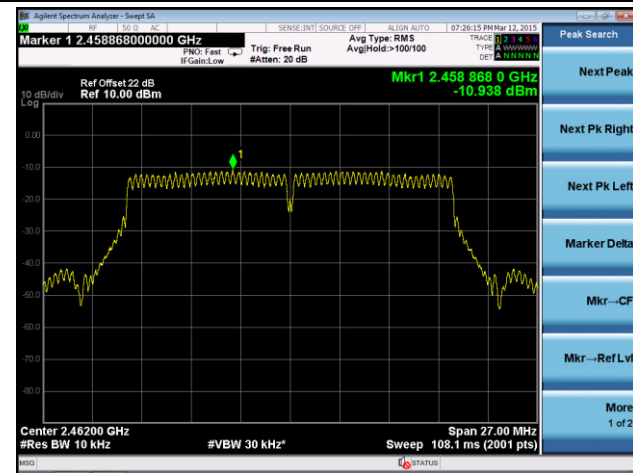




## 802.11n-HT40 AVGPSD - Ant 0 / Ant 0 + 1


## Channel 03 (2422MHz)

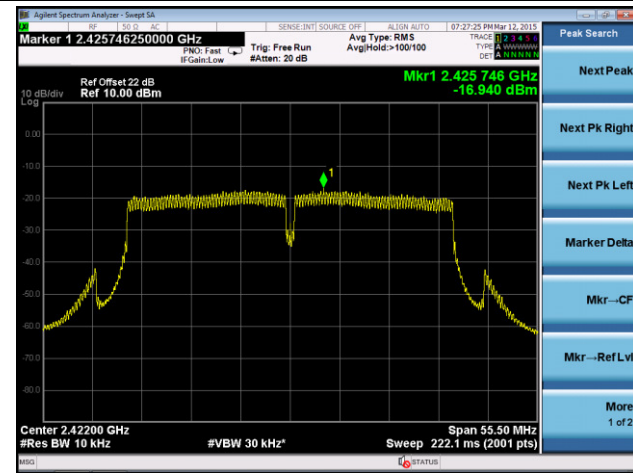

## Channel 06 (2437MHz)

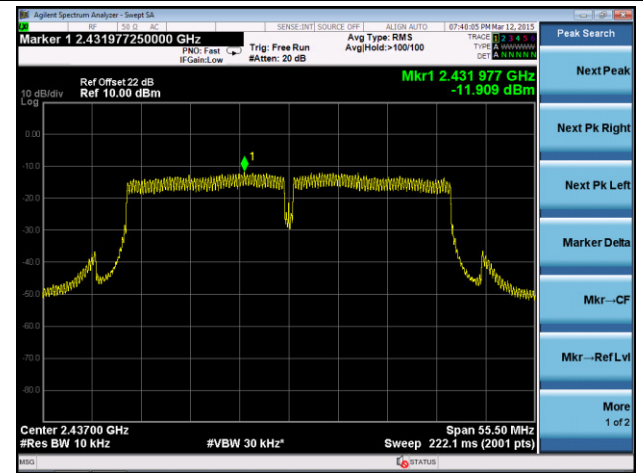


## Channel 09 (2452MHz)

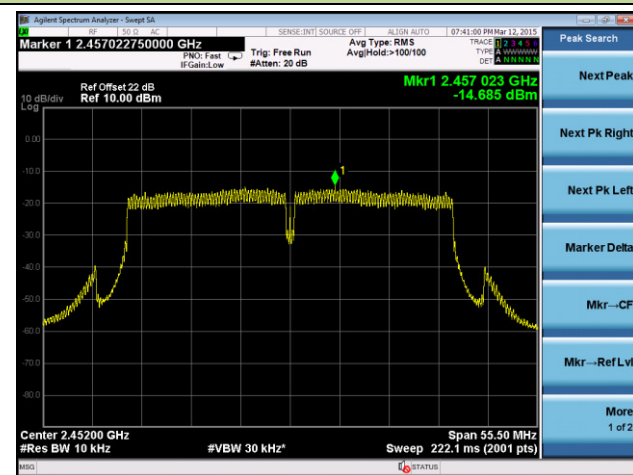


## 802.11n-HT20 AVGPSD - Ant 1 / Ant 0 + 1

## Channel 01 (2412MHz)

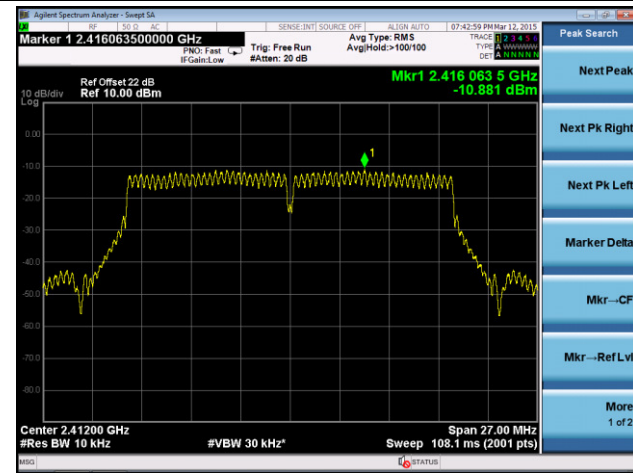

## Channel 06 (2437MHz)

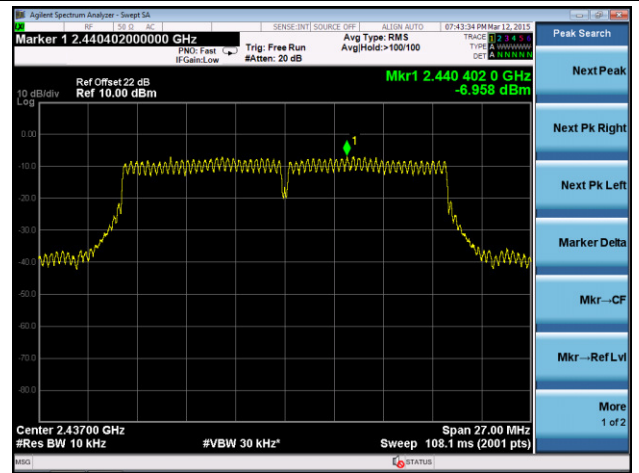

## Channel 11 (2462MHz)

