


FCC CERTIFICATION TEST REPORT

Applicant:	Shenzhen PVT Electronics Co.,Ltd
Address:	2201, West Tower, Skyworth Semiconductor Design Building, Shenzhen, China, 518057.
Manufacturer:	Shenzhen PVT Electronics Co.,Ltd
Address:	2201, West Tower, Skyworth Semiconductor Design Building, Shenzhen, China, 518057.
Product Description:	Vehicle wireless module
Brand Name:	NA
Tested Model:	P13.A01.H4
FCC ID:	2BMJZ-P13A01H4
Report No.:	JCF241024031-003
Received Date:	Oct. 24, 2024
Tested Date:	Oct. 24, 2024 ~ Mar. 07, 2025
Issued Date:	Mar. 07, 2025
Test Standards:	FCC Rules and Regulations Part 15 Subpart C,
Test Procedure:	ANSI C63.10:2013
Test Result:	Pass
Prepared By:  <u>Roger Li/Engineer</u> Date: Mar. 07, 2025	
Reviewed By:  <u>Kennys Zhang/Engineer</u> Date: Mar. 07, 2025	
Approved By:  <u>Talent Zhang/Engineer</u> Date: Mar. 07, 2025	

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar. 07, 2025	Original Report	/

Table of Contents

1. Test Report Declare	5
2. Summary of Test Results	6
3. Test Laboratory	6
4. Equipment Under Test	7
4.1. Description of EUT	7
4.2. Channel List	7
4.3. Test Channel Configuration	7
4.4. Test environment conditions	8
4.5. Description of Available Antennas	8
4.6. Description of Available Antennas	8
5. Description of Test Setup	9
5.1. Accessory	9
5.2. Support Equipment	9
5.3. Test Setup	9
5.4. Setup Diagram for Tests	9
6. Measurement Uncertainty	9
7. Measuring Instrument and Software Used	10
8. On Time and Duty Cycle	12
8.1. Block diagram of test setup	12
8.2. Limits	12
8.3. Procedure	12
8.4. Results	12
8.5. Original test data	13
9. 6 dB DTS Bandwidth	22
9.1. Block diagram of test setup	22
9.2. Limits	22
9.3. Test Procedure	22
9.4. Results	22
9.5. Original test data	23
10. Conducted Output Power	40
10.1. Block diagram of test setup	40
10.2. Limits	40
10.3. Test Procedure	40
10.4. Results	40
11. Power Spectral Density	41
11.1. Block diagram of test setup	41
11.2. Limits	41
11.3. Test Procedure	41
11.4. Results	41
11.5. Original test data	42
12. Conducted Band edge and Spurious Emissions	51
12.1. Block diagram of test setup	51
12.2. Limits	51
12.3. Test Procedure	51
12.4. Test result	51
12.5. Original test data	53
13. Radiated Emission	83
13.1. Block diagram of test setup	83
13.2. Limit	84
13.3. Test Procedure	85
13.4. Results	87
13.5. Original test data	87

14. AC Power Line Conducted Emissions 88
 14.1. Block diagram of test setup 88
 14.2. Limits 88
 14.3. Test procedure 88
 14.4. Test result 89
15. Antenna Requirements 90
 15.1. Applicable Requirements 90
 15.2. Result 90
APPENDIX A – Radiated Emission Below 1GHz Test Data 91
APPENDIX B – Radiated Emission Above 1GHz Test Data 93

1. Test Report Declare

Applicant:	Shenzhen PVT Electronics Co.,Ltd
Address:	2201, West Tower, Skyworth Semiconductor Design Building, Shenzhen, China, 518057.
Manufacturer:	Shenzhen PVT Electronics Co.,Ltd
Address:	2201, West Tower, Skyworth Semiconductor Design Building, Shenzhen, China, 518057.
Product Name:	Vehicle wireless module
Brand Name:	NA
Model Name:	P13.A01.H4
Difference Description:	NA

We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests except as provided information by clients.

2. Summary of Test Results

Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6dB Bandwidth	FCC Part 15.247 (a) (2)	Pass
2	Peak Conducted Output Power	FCC Part 15.247 (b) (3)	Pass
3	Power Spectral Density	FCC Part 15.247 (e)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d)	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205	Pass
6	Conducted Emission Test For AC Power Port	FCC Part 15.207	NA
7	Antenna Requirement	FCC Part 15.203	Pass

3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.10, Hefeng No.1 street, Huangpu District, Guangzhou, Guangdong, People's Republic of China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.03

FCC Designation Number: CN1381. Test Firm Registration Number: 486550

IC Test Firm Registration Number: 31808

Conformity Assessment Body identifier: CN0173

4. Equipment Under Test

4.1. Description of EUT

EUT Name:	Vehicle wireless module
Model Number:	P13.A01.H4
EUT Function Description:	Please refer to the manual
Power Supply:	DC 4.2V
Hardware Version:	NA
Software Version:	NA
Radio Specification:	IEEE802.11b/g/n
Operation Frequency:	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz
Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n (HT20/40): OFDM (64QAM, 16QAM, QPSK, BPSK)
Data Rate:	IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: 14.4, 28.9, 43.3, 57.8, 86.7, 115.6, 130.0, 144.4Mbps IEEE 802.11n HT40: 30.0, 60.0, 90.0, 120.0, 180.0, 240.0, 270.0, 300.0 Mbps
Antenna Type:	PCB Antenna1, MAX. Gain: 4.86 dBi PCB Antenna2, MAX. Gain: 3.49 dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

4.2. Channel List

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n (40 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442	/	/
5	2432	8	2447	/	/

4.3. Test Channel Configuration

Tested mode, channel and rand data rate information			
Mode	Data rate (Mbps) (see Note)	Channel	Frequency (MHz)

802.11b	1	Low: CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
802.11g	6	Low: CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
802.11n HT20	MCS 8	Low: CH1	2412
	MCS 8	Middle: CH6	2437
	MCS 8	High: CH11	2462
802.11n HT40	MCS 8	Low: CH3	2422
	MCS 8	Middle: CH6	2437
	MCS 8	High: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

4.4. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

4.5. Description of Available Antennas

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		Scrcpy		
Modulation Mode	Transmit Antenna Number	Test Software Setting Value		
		Channel	ANT1	ANT2
802.11b	2	CH1	21	23
		CH6	21	22
		CH11	21	22
802.11g	2	CH1	15	16
		CH6	15	16
		CH11	15	16
802.11HT20	2	CH1	13	13
		CH6	13	13
		CH11	13	13
802.11n HT40	2	CH3	13	13
		CH6	13	13
		CH9	13	13

4.6. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
802.11b	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11g	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.

802.11n HT20	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11n HT40	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
Note: 1. Only 802.11n HT20/HT40 support MIMO mode 2. WLAN 2.4 GHz & WLAN 5G can't transmit simultaneously. (declared by client)		

5. Description of Test Setup

5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
/	/	/	/	/


5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/

5.3. Test Setup

The EUT can work in Fixed Frequency mode.

5.4. Setup Diagram for Tests



6. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
AC Power Conduction emission	1.37 dB
All Radiated emissions	5.4dB
Conducted emissions	3.09 dB
Occupied Channel Bandwidth	1.1%
Conducted Output power	0.82dB
Power Spectral Density	0.82dB
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k = 2.	


7. Measuring Instrument and Software Used

TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Spectrum Analyzer	Keysight	N9030B	MY56320512	Aug. 22, 2024	Aug. 21, 2025
☒	Vector Signal Generator	Keysight	N5182B	MY57300334	Aug. 22, 2024	Aug. 21, 2025
☒	Signal Generator	Keysight	N5171B	MY57280639	Aug. 22, 2024	Aug. 21, 2025
☒	DC POWER	Keysight	E342A	MY59020356	Aug. 29, 2024	Aug. 28, 2025
☒	Incubator thermometer	GWS	EL-02JA	21107288	Aug. 15, 2024	Aug. 14, 2025
☒	Control unit(Power sensor)	Tonscend	JS0806-2	/	Aug. 23, 2024	Aug. 22, 2025
☒	Spectrum Analyzer	Keysight	N9020B	MY60112206	Sep. 11, 2024	Sep. 10, 2025
☒	Control unit(Power sensor)	Tonscend	JS0806-2	21H8060465	Aug. 22, 2024	Aug. 21, 2025
☒	Spectrum Analyzer	Keysight	N9020B	MY60112811	Aug. 23, 2024	Aug. 22, 2025
☒	Signal Generator	Keysight	N5173B	MY62220145	Aug. 23, 2024	Aug. 22, 2025
☒	Vector Signal Generator	Keysight	N5182B	MY61252859	Aug. 22, 2024	Aug. 21, 2025
☒	DC POWER	Keysight	E3642A	MY40005294	Aug. 30, 2024	Aug. 29, 2025
☒	Control unit(Power sensor)	Tonscend	JS0806-2	24F80620865	Aug. 23, 2024	Aug. 22, 2025
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	Tonscend	JS1120-3		V3.3.10	
RSE Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	EMI Receiver	R&S	ESR26	101424	Sep. 14, 2024	Sep. 13, 2025
☒	Hybrid Antenna	Schwarzbeck	VULB9163	01416	May. 22, 2024	May. 21, 2025
☒	Horn Antenna 1	Schwarzbeck	BBHA 9120 D	02910	Sep. 11, 2024	Sep. 10, 2025
☒	Horn Antenna 2	ETS	BBHA 9170	1090	Sep. 11, 2024	Sep. 10, 2025
☒	loop-antenna	Schwarzbeck	FMZB 1513-60	00030	Jan. 12, 2025	Jan. 11, 2026
☒	Test path	/	Path2: WIFI-2.4G 1-3GHz	/	Aug. 23, 2024	Aug. 22, 2025
☒	Test path	/	Path7: ALL PASS 1-18GHz	/	Aug. 23, 2024	Aug. 22, 2025
☒	Test path	/	Path9: 3GHz High PASS 3-18GHz	/	Aug. 23, 2024	Aug. 22, 2025
☒	Test path	/	Path16: 30MHz-1GHz ALL PASS	/	Aug. 23, 2024	Aug. 22, 2025

			NO AMP			
☑	Signal Pre-Amplifier	ETS	3116C-PA	00217677	Sep. 06, 2024	Sep. 05, 2025
☑	3m Fully-anechoic Chamber	YIHENG	9m*6m*6m	001	Sep. 05, 2023	Sep. 04, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☑	Test software	Tonscend	TS+		V5.0.0.0	
Conducted Emission Test For AC Power Port						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☑	LISN	R&S	ENV216	102509	Aug. 22, 2024	Aug. 21, 2025
☑	EMI Receiver	R&S	ESR	102154	Aug. 22, 2024	Aug. 21, 2025
Software						
Used	Description	Manufacturer	Name		Version	
☑	Test software	EZ	EZ-EMC		EMEC-3A1	
Other Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☑	Temperature & Humidity	Temperature	HTC-1	/	Sep. 04, 2024	Sep. 03, 2025

8. On Time and Duty Cycle

8.1. Block diagram of test setup

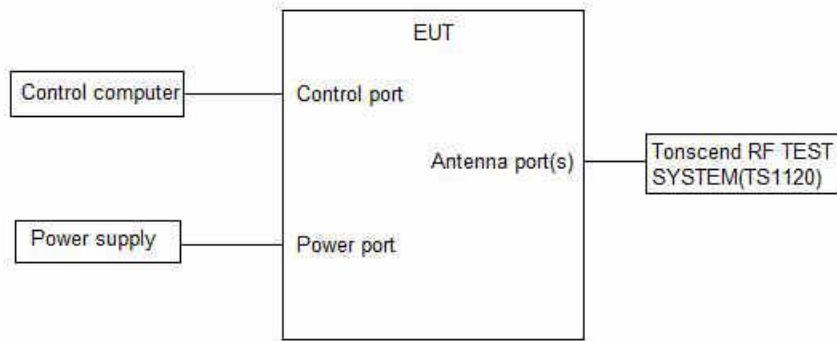

8.2. Limits

None; for reporting purposes only

8.3. Procedure

KDB 558074 Zero-Span Spectrum Analyzer Method

8.4. Results

Test Mode	Ant.	Freq. (MHz)	Transmission Duration (ms)	Transmission Period (ms)	Duty Cycle (%)
11B	Ant1	2412	8.38	8.41	99.64
	Ant2	2412	8.38	8.41	99.64
	Ant1	2437	8.39	8.42	99.64
	Ant2	2437	8.38	8.41	99.64
	Ant1	2462	8.39	8.42	99.64
	Ant2	2462	8.38	8.41	99.64
11G	Ant1	2412	1.39	1.43	97.20
	Ant2	2412	1.39	1.42	97.89
	Ant1	2437	1.39	1.42	97.89
	Ant2	2437	1.39	1.43	97.20
	Ant1	2462	1.39	1.43	97.20
	Ant2	2462	1.39	1.43	97.20
11N20MIMO	Ant1	2412	1.29	1.33	96.99
	Ant2	2412	1.29	1.33	96.99
	Ant1	2437	1.29	1.33	96.99
	Ant2	2437	1.29	1.32	97.73
	Ant1	2462	1.29	1.32	97.73
	Ant2	2462	1.29	1.32	97.73
11N40MIMO	Ant1	2422	0.63	0.67	94.03
	Ant2	2422	1.40	1.43	97.90
	Ant1	2437	0.64	0.67	95.52
	Ant2	2437	0.64	0.67	95.52
	Ant1	2452	0.64	0.67	95.52
	Ant2	2452	0.64	0.67	95.52

Note: Duty Cycle Correction Factor = $10\log(1/x)$.

Where: x is Duty Cycle (Linear)


Where: T is On Time

If that calculated VBW is not available on the analyzer, then the next higher value should be used.

For mode 11b, the duty cycle is greater than 98 %, so it can set VBW to 10 Hz.

8.5. Original test data




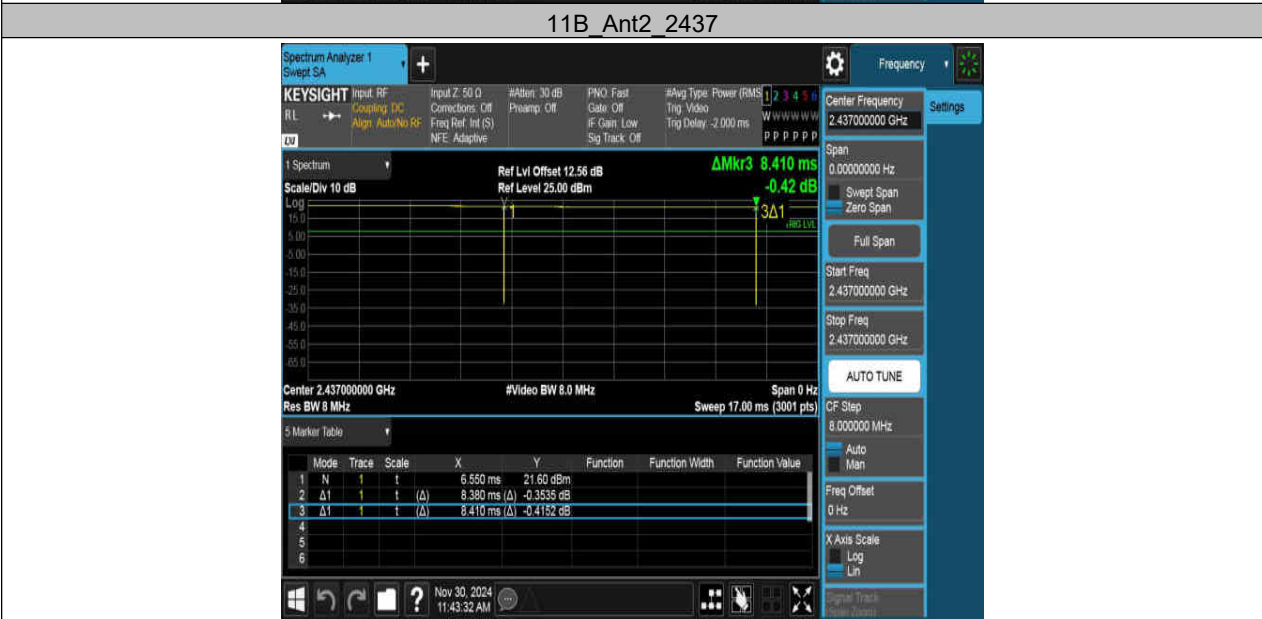





11G_Ant2_2437

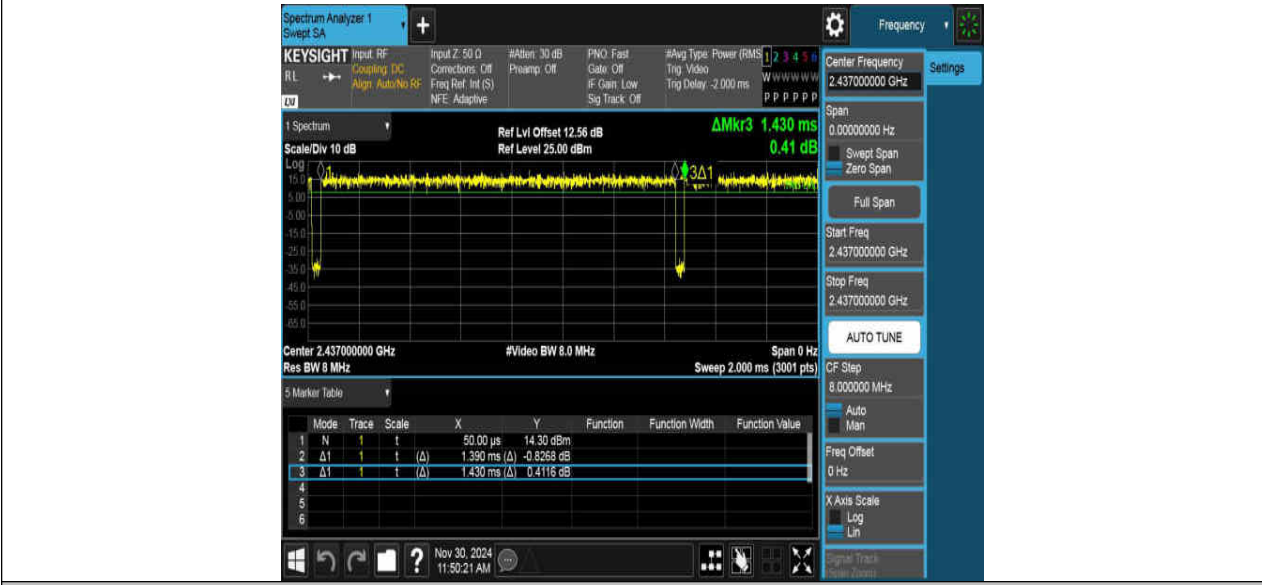

11G_Ant1_2462



11G_Ant2_2462





11N20MIMO_Ant2_2437




11N20MIMO_Ant1_2462



11N20MIMO_Ant2_2462





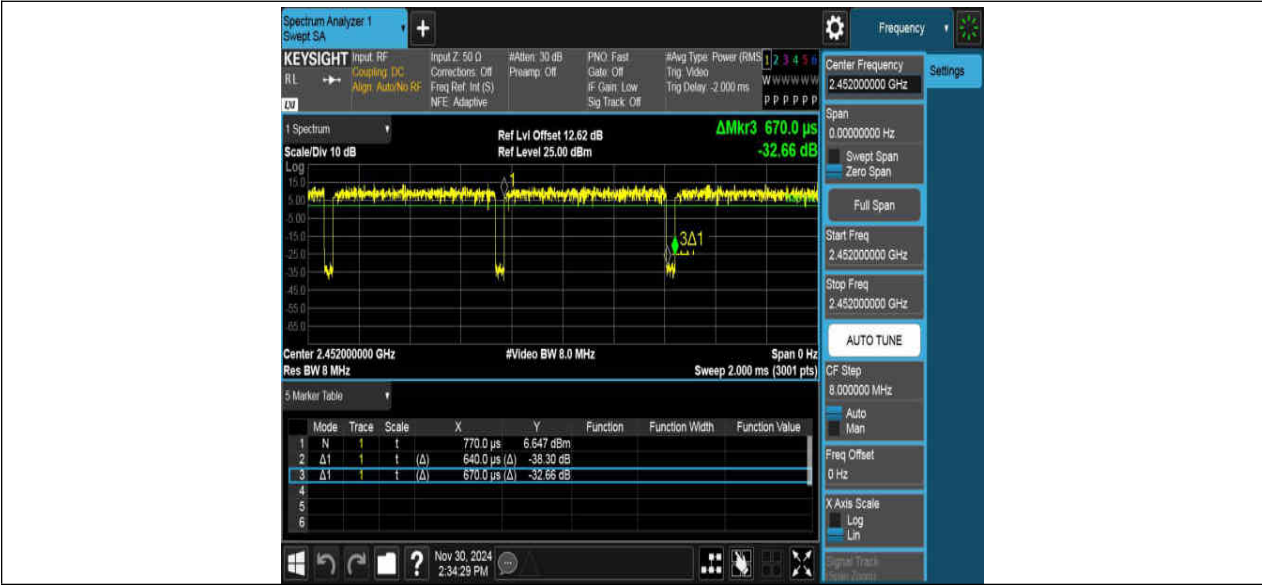

9. 6 dB DTS Bandwidth

9.1. Block diagram of test setup

Same as section 8.1

9.2. Limits

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5

9.3. Test Procedure

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth :100 kHz For 99 % Occupied Bandwidth :1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth : $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99 % relative to the maximum level measured in the fundamental emission.

9.4. Results

6dB bandwidth:

Test Mode	Ant.	Freq. (MHz)	DTS BW (MHz)	FL (MHz)	FH (MHz)	Limit (MHz)	Verdict
11B	Ant1	2412	9.560	2407.000	2416.560	0.5	PASS
	Ant2	2412	9.000	2407.040	2416.040	0.5	PASS
	Ant1	2437	8.560	2432.480	2441.040	0.5	PASS
	Ant2	2437	8.520	2432.520	2441.040	0.5	PASS
	Ant1	2462	8.520	2458.040	2466.560	0.5	PASS
	Ant2	2462	9.040	2458.000	2467.040	0.5	PASS
11G	Ant1	2412	15.720	2403.880	2419.600	0.5	PASS
	Ant2	2412	15.680	2403.880	2419.560	0.5	PASS
	Ant1	2437	13.920	2429.760	2443.680	0.5	PASS
	Ant2	2437	16.280	2428.880	2445.160	0.5	PASS
	Ant1	2462	15.520	2454.240	2469.760	0.5	PASS
	Ant2	2462	15.680	2454.520	2470.200	0.5	PASS
11N20MIMO	Ant1	2412	16.280	2403.240	2419.520	0.5	PASS
	Ant2	2412	16.320	2403.240	2419.560	0.5	PASS
	Ant1	2437	14.080	2430.480	2444.560	0.5	PASS
	Ant2	2437	16.880	2428.240	2445.120	0.5	PASS
	Ant1	2462	16.920	2453.240	2470.160	0.5	PASS
	Ant2	2462	13.800	2456.360	2470.160	0.5	PASS
11N40MIMO	Ant1	2422	35.120	2404.480	2439.600	0.5	PASS
	Ant2	2422	23.840	2414.480	2438.320	0.5	PASS
	Ant1	2437	33.840	2420.680	2454.520	0.5	PASS
	Ant2	2437	35.040	2419.480	2454.520	0.5	PASS
	Ant1	2452	35.040	2434.480	2469.520	0.5	PASS

	Ant2	2452	35.040	2434.480	2469.520	0.5	PASS
--	------	------	--------	----------	----------	-----	------

99 % bandwidth:

Test Mode	Ant.	Channel Freq. (MHz)	OCB (MHz)	FL (MHz)	FH (MHz)	Limit (MHz)	Verdict
11B	Ant1	2412	13.877	2404.9076	2418.7846	---	---
	Ant2	2412	13.700	2404.9574	2418.6574	---	---
	Ant1	2437	13.400	2430.2647	2443.6647	---	---
	Ant2	2437	13.442	2430.1484	2443.5904	---	---
	Ant1	2462	13.233	2455.4573	2468.6903	---	---
	Ant2	2462	13.214	2455.6087	2468.8227	---	---
11G	Ant1	2412	16.991	2403.4636	2420.4546	---	---
	Ant2	2412	16.913	2403.4242	2420.3372	---	---
	Ant1	2437	16.790	2428.6558	2445.4458	---	---
	Ant2	2437	17.050	2428.4529	2445.5029	---	---
	Ant1	2462	16.771	2453.6084	2470.3794	---	---
	Ant2	2462	16.793	2453.7236	2470.5166	---	---
11N20MIMO	Ant1	2412	17.893	2403.1272	2421.0202	---	---
	Ant2	2412	17.799	2403.0642	2420.8632	---	---
	Ant1	2437	17.814	2428.0752	2445.8892	---	---
	Ant2	2437	17.811	2428.0305	2445.8415	---	---
	Ant1	2462	17.731	2453.0887	2470.8197	---	---
	Ant2	2462	17.655	2453.2136	2470.8686	---	---
11N40MIMO	Ant1	2422	36.129	2403.8108	2439.9398	---	---
	Ant2	2422	36.087	2404.0757	2440.1627	---	---
	Ant1	2437	35.911	2419.1828	2455.0938	---	---
	Ant2	2437	36.248	2418.7957	2455.0437	---	---
	Ant1	2452	36.356	2433.7609	2470.1169	---	---
	Ant2	2452	36.019	2433.9945	2470.0135	---	---

9.5. Original test data

6dB bandwidth:



















11N40MIMO_Ant2_2452



99 % bandwidth:


11B_Ant1_2412



11B_Ant2_2412




11B_Ant1_2437

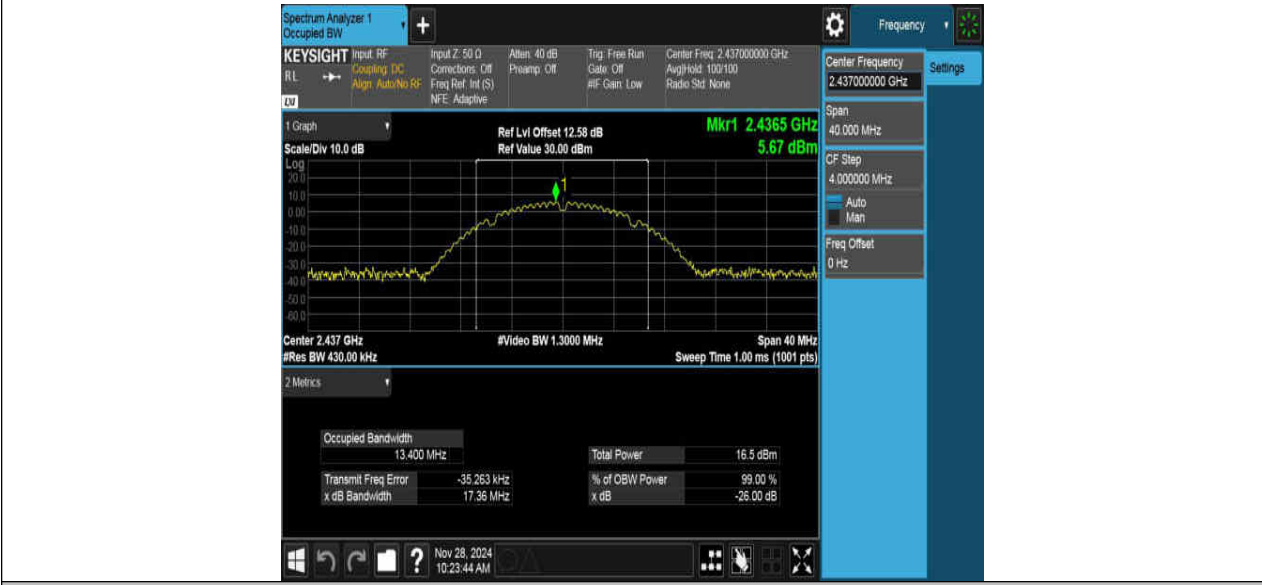


11B_Ant2_2437



11B_Ant1_2462

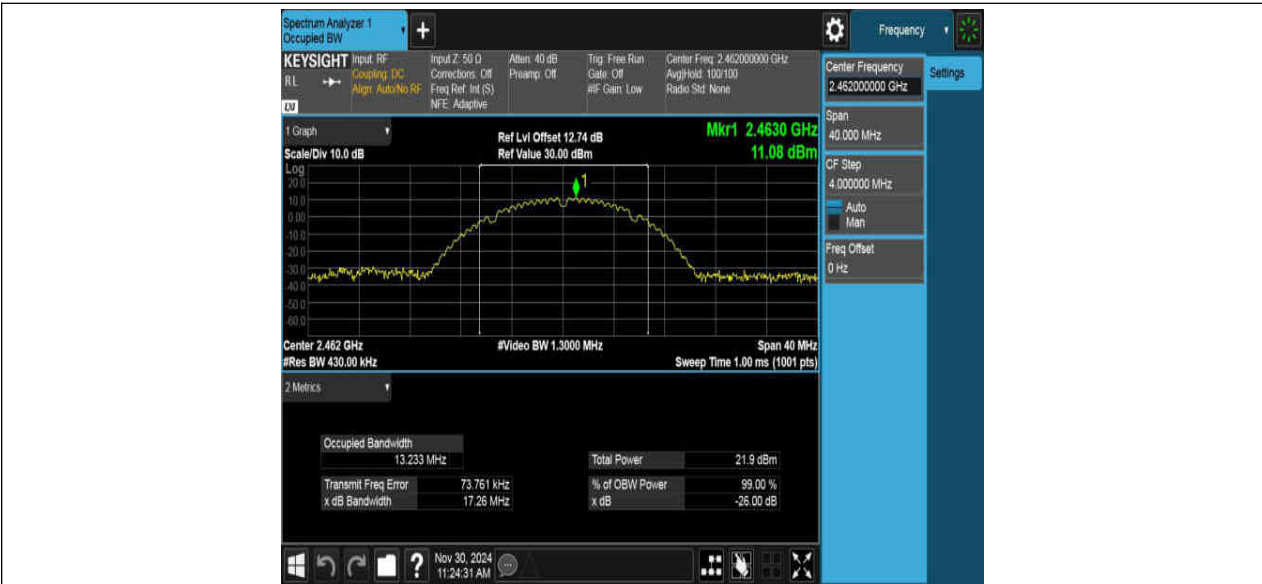

11B_Ant2_2462

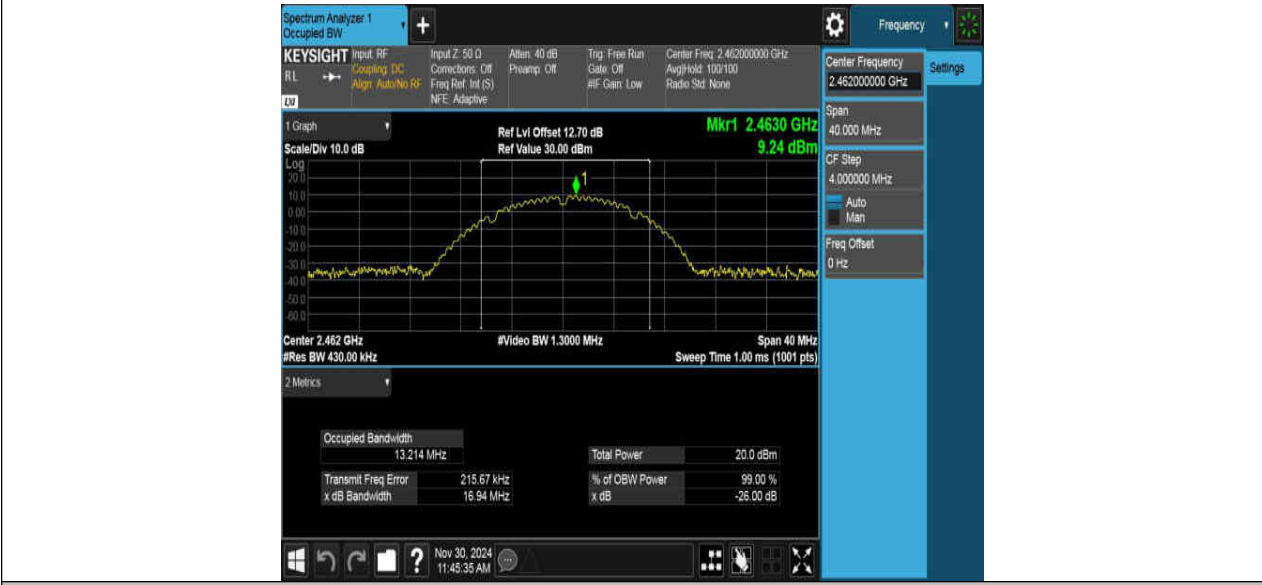


11G_Ant1_2412



11G_Ant2_2412



11G_Ant1_2437

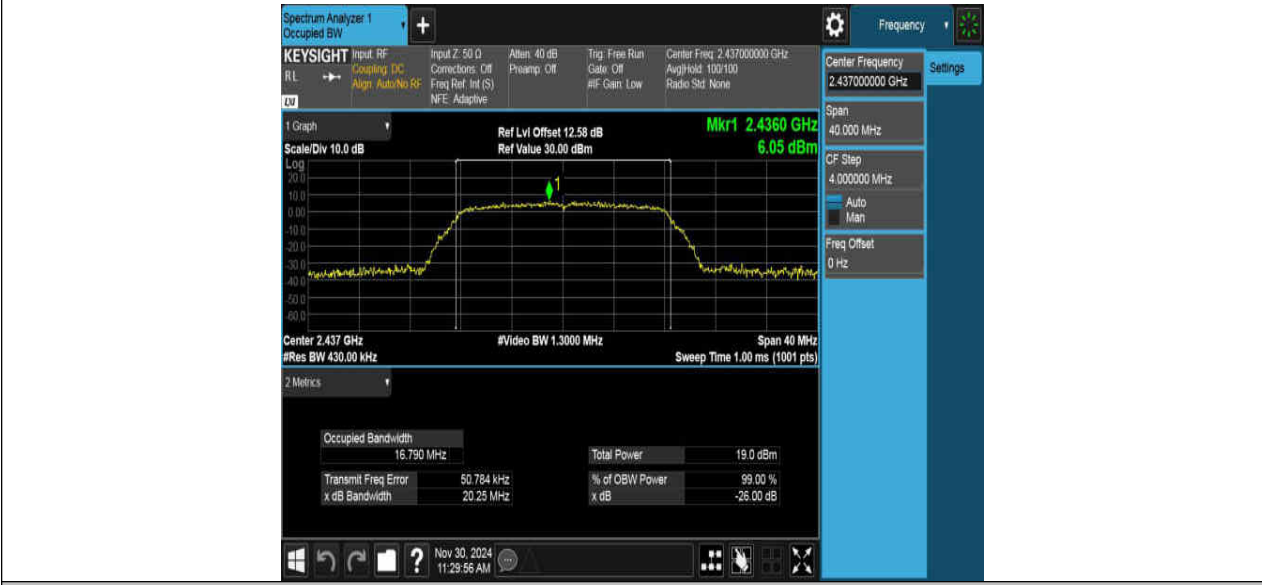

11G_Ant2_2437



11G_Ant1_2462




11G_Ant2_2462




11N20MIMO_Ant1_2412



11N20MIMO_Ant2_2412

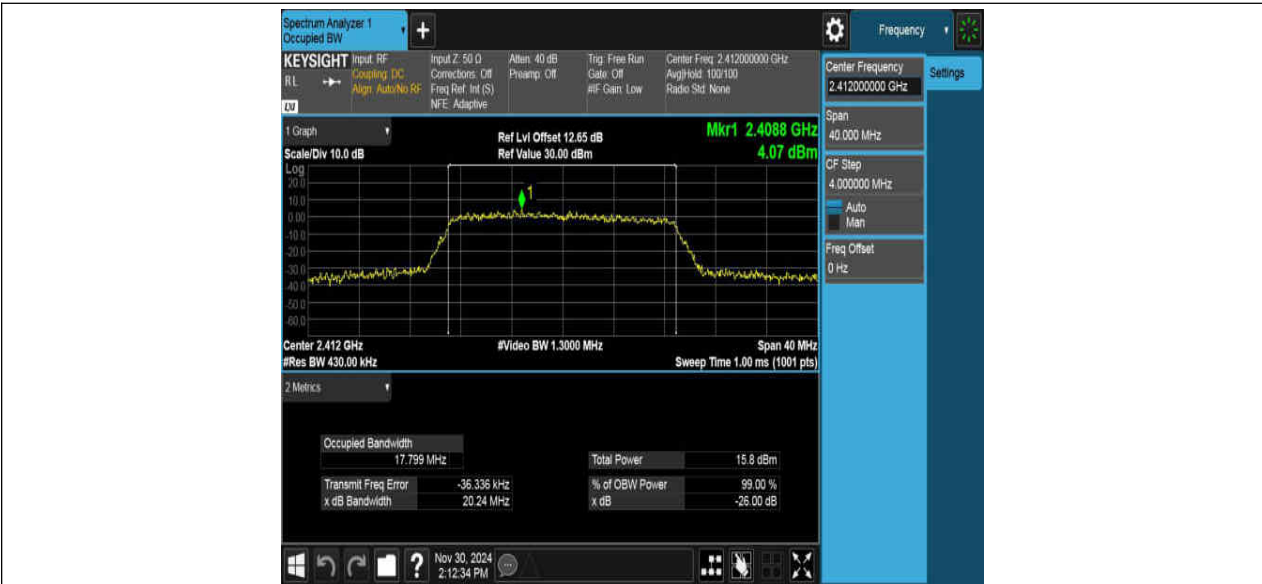

11N20MIMO_Ant1_2437

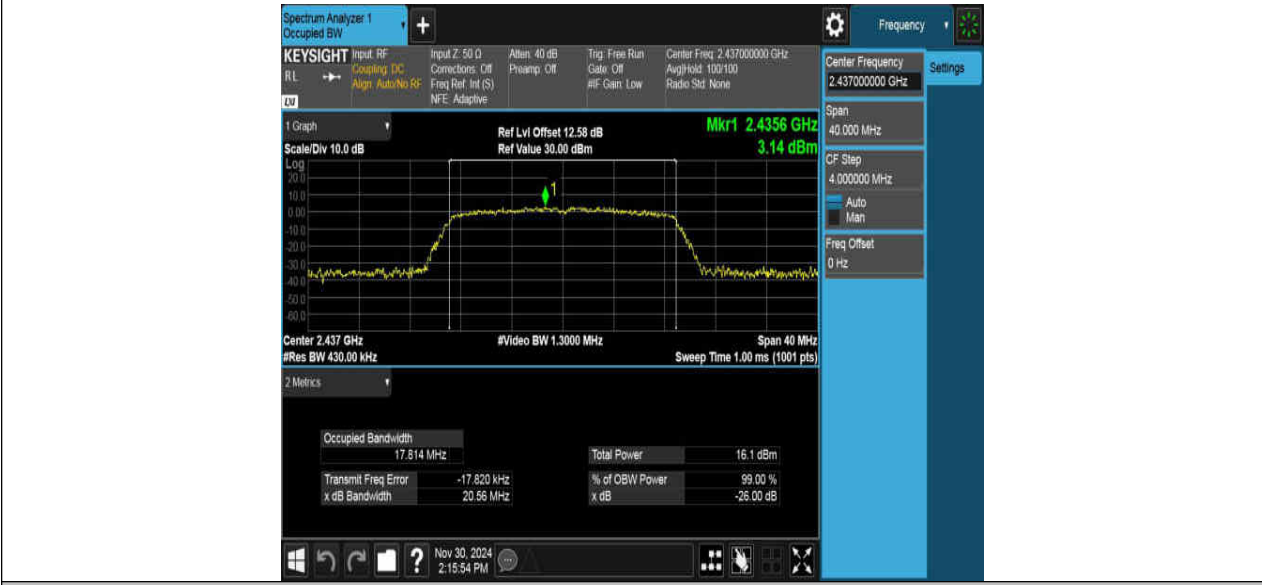

11N20MIMO_Ant2_2437




11N20MIMO_Ant1_2462







11N40MIMO_Ant2_2452

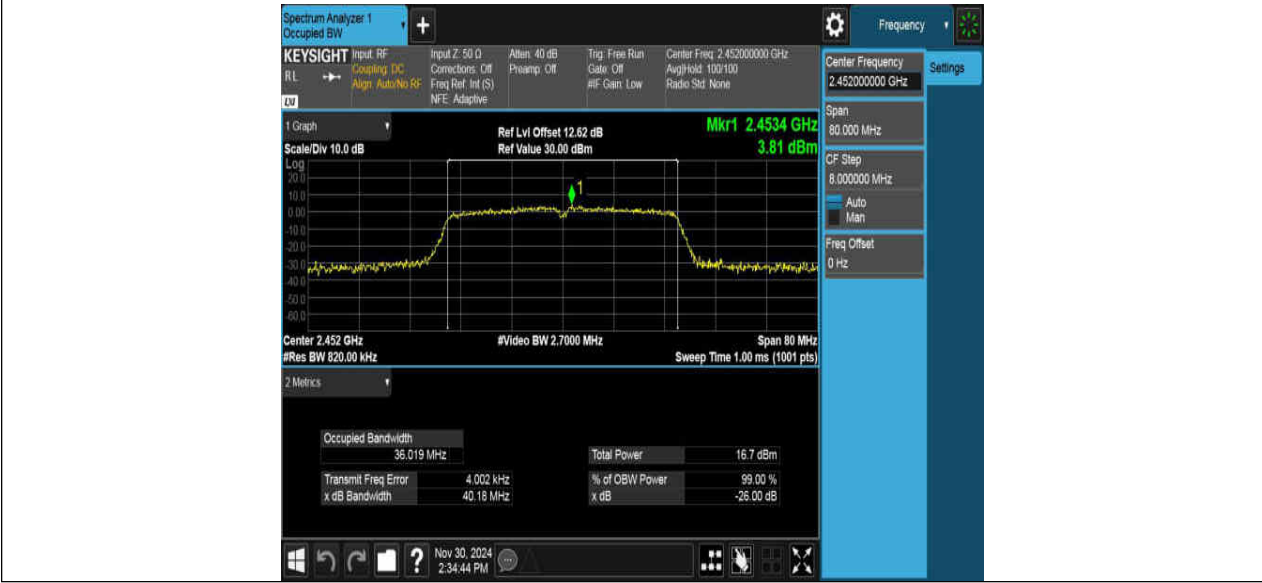

10. Conducted Output Power

10.1. Block diagram of test setup

Same as section 8.1

10.2. Limits

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	Peak Output Power	1 watt or 30 dBm	2400-2483.5

10.3. Test Procedure

Place the EUT on the table and set it in the transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.

Measure peak power each channel.

Peak Detector use for Peak result.

AVG Detector use for AVG result.

10.4. Results

Test Mode	Ant.	Freq. (MHz)	Peak Power (dBm)	Conducted Limit (dBm)	Verdict
11B	Ant1	2412	19.96	≤30.00	PASS
	Ant2	2412	20.34	≤30.00	PASS
	Ant1	2437	20.19	≤30.00	PASS
	Ant2	2437	19.21	≤30.00	PASS
	Ant1	2462	21.55	≤30.00	PASS
	Ant2	2462	21.42	≤30.00	PASS
11G	Ant1	2412	19.36	≤30.00	PASS
	Ant2	2412	18.94	≤30.00	PASS
	Ant1	2437	19.75	≤30.00	PASS
	Ant2	2437	19.22	≤30.00	PASS
	Ant1	2462	20.31	≤30.00	PASS
	Ant2	2462	18.57	≤30.00	PASS
11N20MIMO	Ant1	2412	15.44	≤30.00	PASS
	Ant2	2412	16.35	≤30.00	PASS
	total	2412	18.93	≤30.00	PASS
	Ant1	2437	16.59	≤30.00	PASS
	Ant2	2437	16.90	≤30.00	PASS
	total	2437	19.76	≤30.00	PASS
	Ant1	2462	18.01	≤30.00	PASS
	Ant2	2462	16.70	≤30.00	PASS
	total	2462	20.41	≤30.00	PASS
11N40MIMO	Ant1	2422	17.12	≤30.00	PASS
	Ant2	2422	14.01	≤30.00	PASS
	total	2422	18.85	≤30.00	PASS
	Ant1	2437	17.82	≤30.00	PASS
	Ant2	2437	15.70	≤30.00	PASS
	total	2437	19.90	≤30.00	PASS
	Ant1	2452	16.77	≤30.00	PASS
	Ant2	2452	16.82	≤30.00	PASS
	total	2452	19.81	≤30.00	PASS

11. Power Spectral Density

11.1. Block diagram of test setup

Same as section 8.1

11.2. Limits

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

11.3. Test Procedure

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4. Results

Test Mode	Ant.	Freq. (MHz)	Result (dBm/3-100kHz)	Limit (dBm/3kHz)	Verdict
11B	Ant1	2412	-12.77	≤ 8.00	PASS
	Ant2	2412	-3.66	≤ 8.00	PASS
	Ant1	2437	-20.96	≤ 8.00	PASS
	Ant2	2437	-1.87	≤ 8.00	PASS
	Ant1	2462	-20.61	≤ 8.00	PASS
	Ant2	2462	-1.82	≤ 8.00	PASS
11G	Ant1	2412	-20.18	≤ 8.00	PASS
	Ant2	2412	-10.70	≤ 8.00	PASS
	Ant1	2437	-18.06	≤ 8.00	PASS
	Ant2	2437	-10.72	≤ 8.00	PASS
	Ant1	2462	-19.08	≤ 8.00	PASS
	Ant2	2462	-11.33	≤ 8.00	PASS
11N20MIMO	Ant1	2412	-21.36	≤ 8.00	PASS
	Ant2	2412	-15.74	≤ 8.00	PASS
	total	2412	-14.69	≤ 8.00	PASS
	Ant1	2437	-18.61	≤ 8.00	PASS
	Ant2	2437	-13.28	≤ 8.00	PASS
	total	2437	-12.16	≤ 8.00	PASS
	Ant1	2462	-16.89	≤ 8.00	PASS
	Ant2	2462	-12.49	≤ 8.00	PASS
	total	2462	-11.14	≤ 8.00	PASS
11N40MIMO	Ant1	2422	-16.46	≤ 8.00	PASS
	Ant2	2422	-15.56	≤ 8.00	PASS
	total	2422	-12.98	≤ 8.00	PASS

	Ant1	2437	-16.08	≤8.00	PASS
	Ant2	2437	-15.64	≤8.00	PASS
	total	2437	-12.84	≤8.00	PASS
	Ant1	2452	-17.70	≤8.00	PASS
	Ant2	2452	-15.47	≤8.00	PASS
	total	2452	-13.43	≤8.00	PASS

11.5. Original test data








11G_Ant1_2412



11G_Ant2_2412

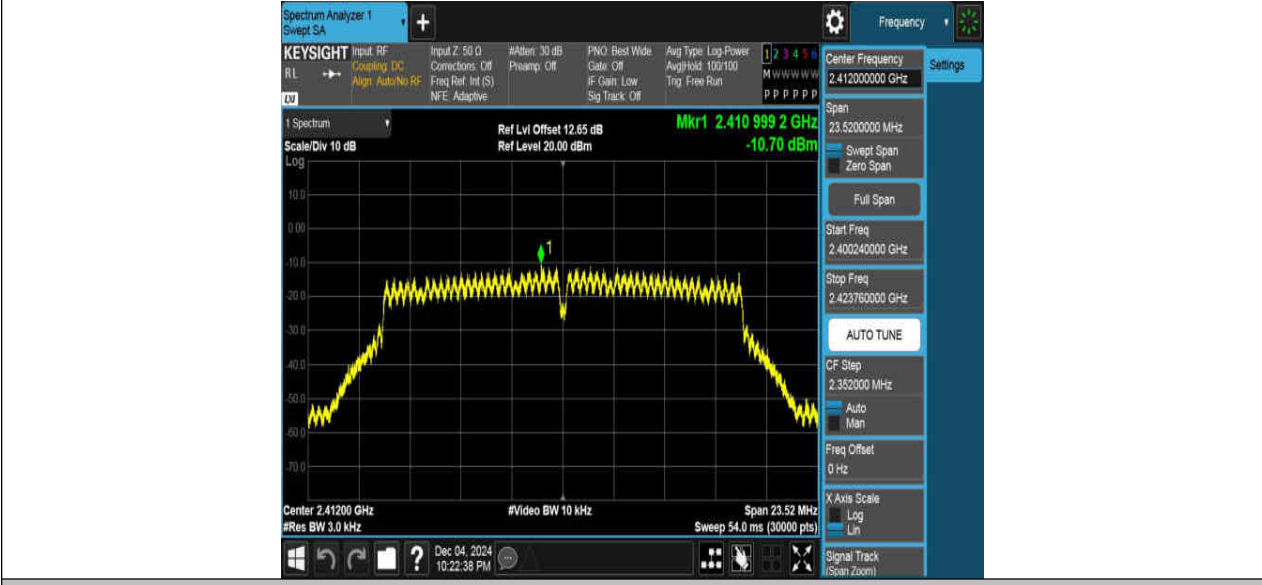


11G_Ant1_2437




11G_Ant2_2437




11G_Ant1_2462

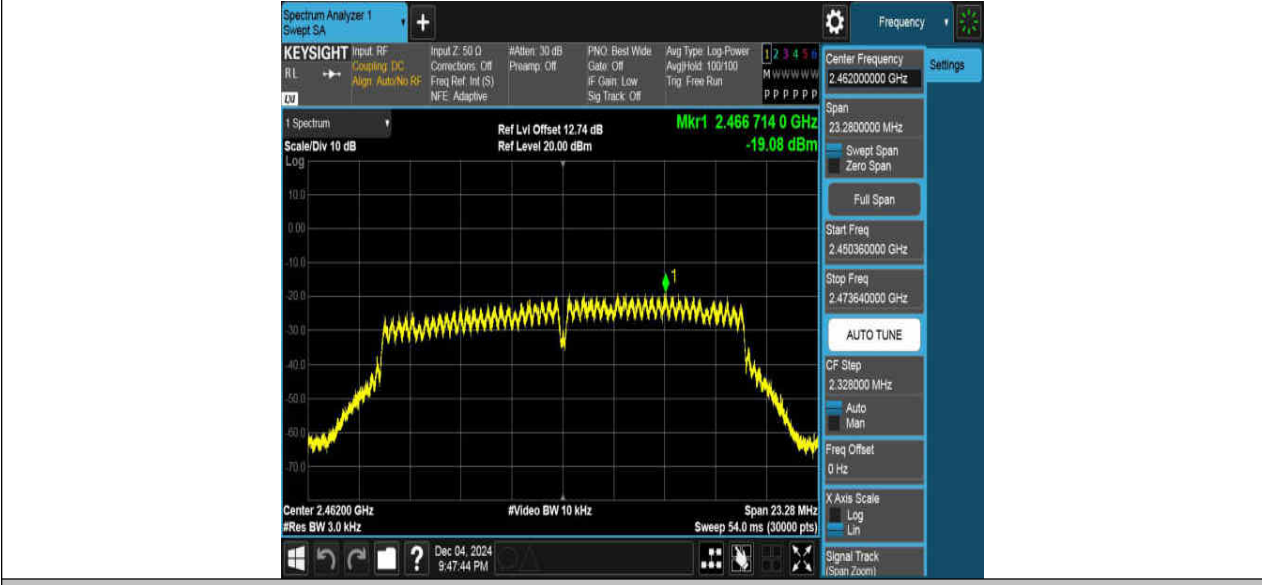


11G_Ant2_2462

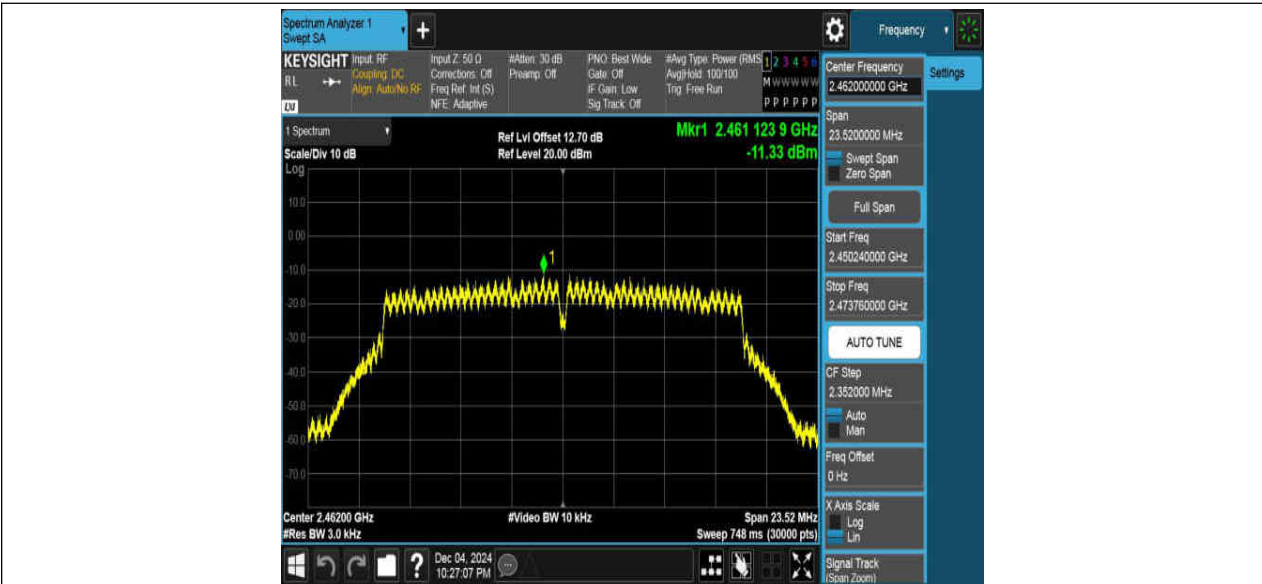

11N20MIMO_Ant1_2412

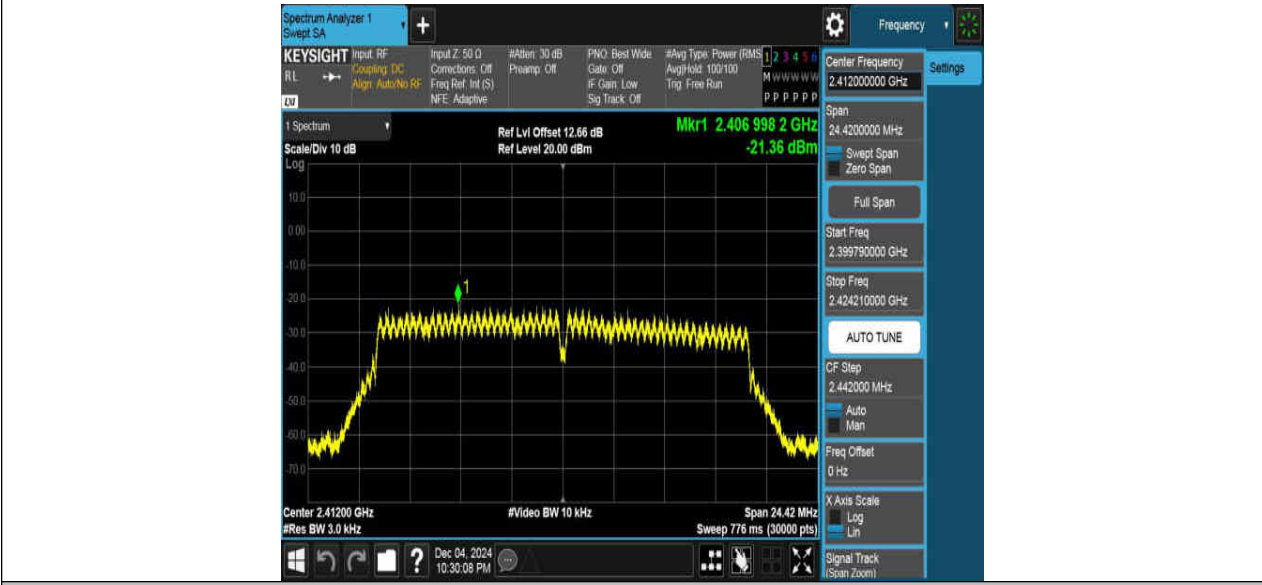

11N20MIMO_Ant2_2412

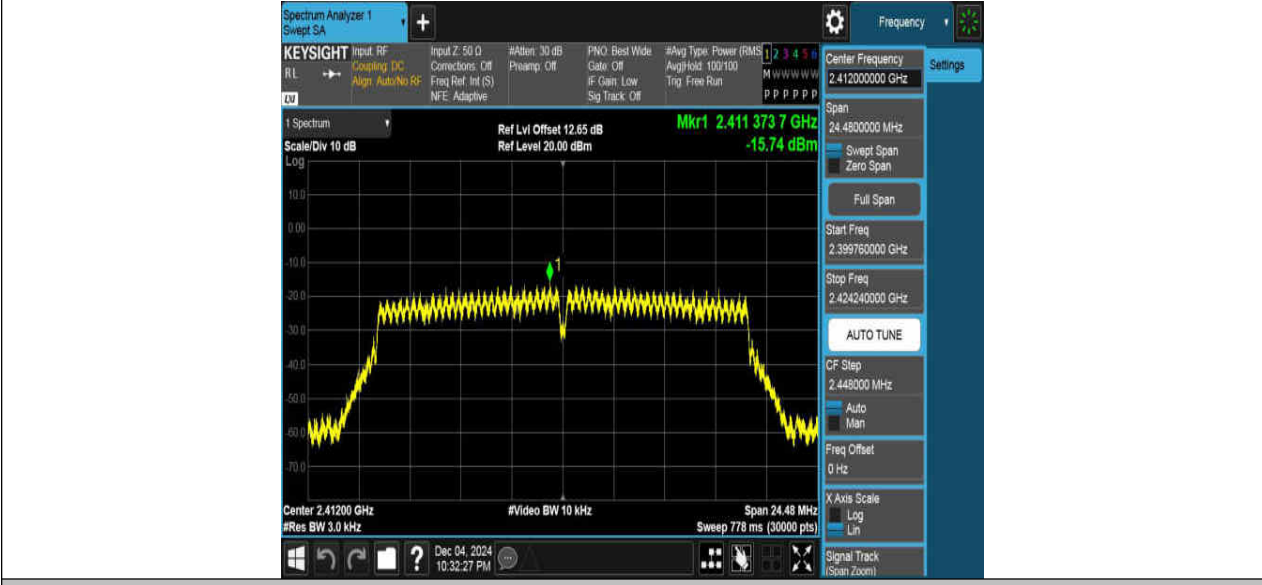


11N20MIMO_Ant1_2437









11N40MIMO_Ant2_2437

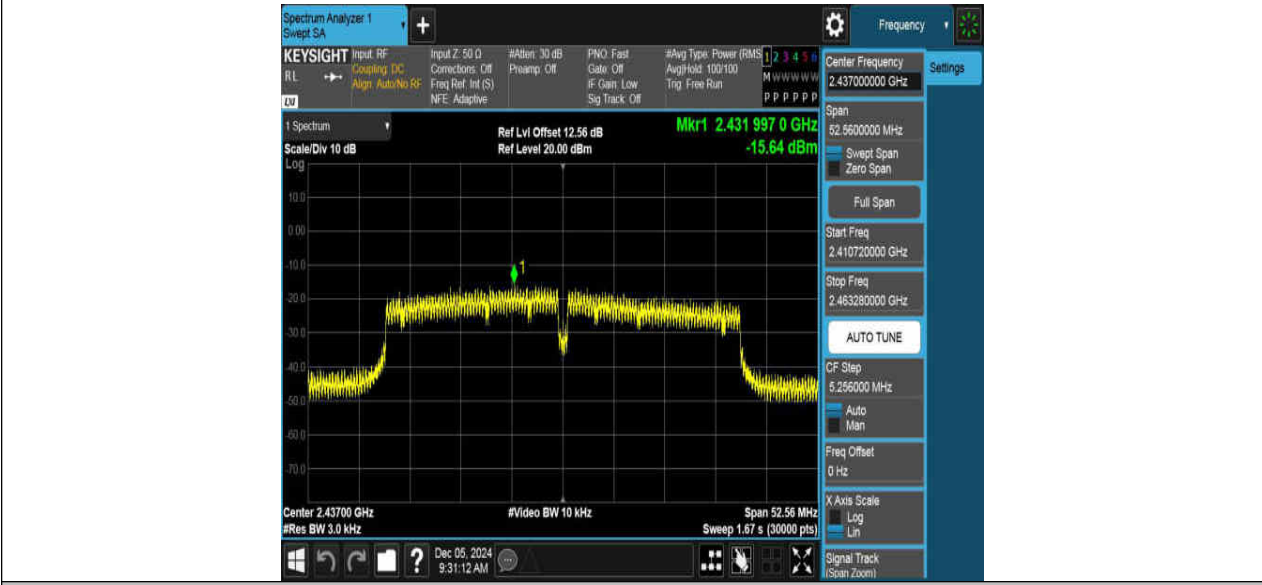

11N40MIMO_Ant1_2452

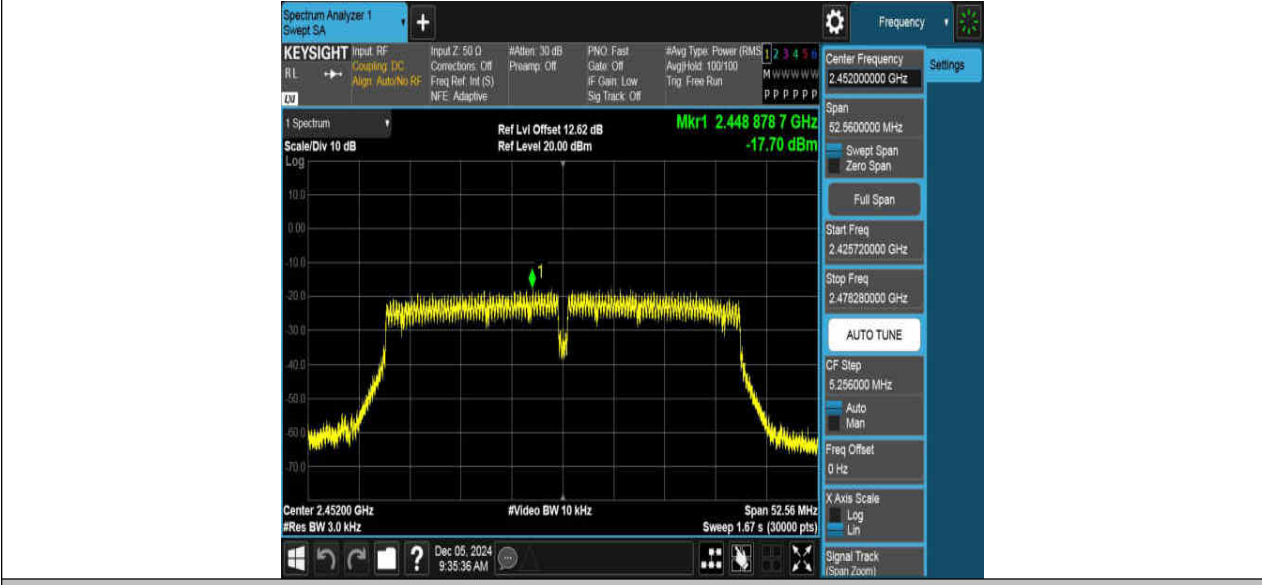

11N40MIMO_Ant2_2452

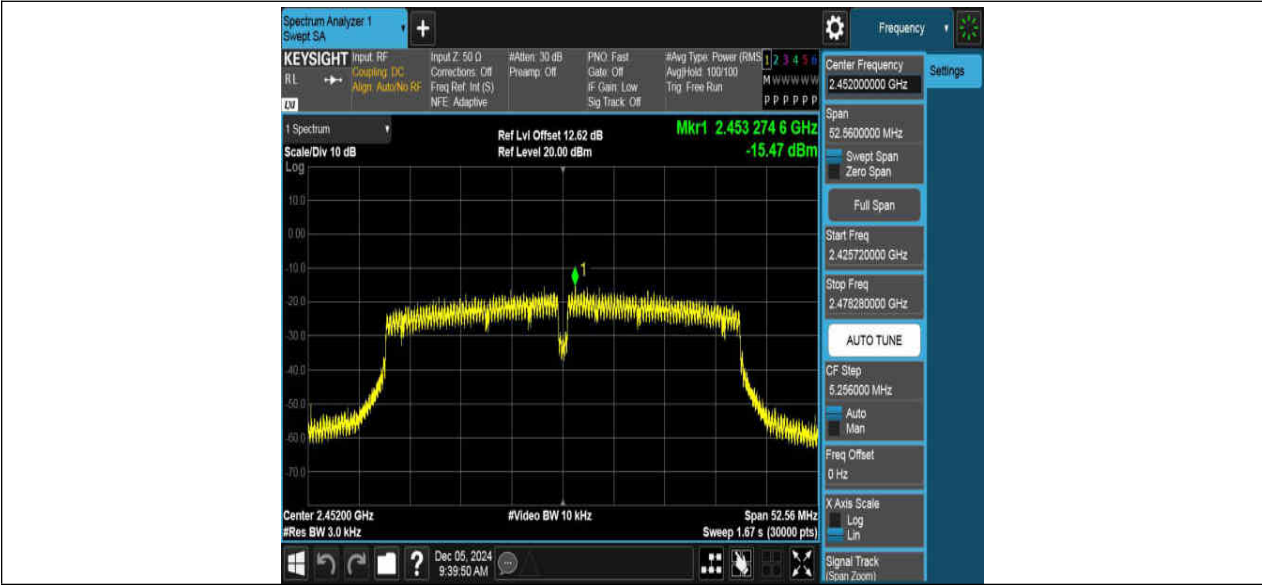

12. Conducted Band edge and Spurious Emissions

12.1. Block diagram of test setup

Same as section 8.1

12.2. Limits

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

12.3. Test Procedure

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Connect the UUT to the spectrum analyzer and use the following settings:

Use the peak marker function to determine the maximum PSD level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span/RBW}$
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.

12.4. Test result

Test Mode	Ant.	Ch Name	Freq. (MHz)	Ref Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
11B	Ant1	Low	2412	-1.35	-45.61	≤ -21.35	PASS
	Ant2	Low	2412	9.84	-36.64	≤ -10.16	PASS
	Ant1	High	2462	-8.79	-46.65	≤ -28.79	PASS
	Ant2	High	2462	11.32	-45.87	≤ -8.69	PASS
11G	Ant1	Low	2412	-8.94	-46.15	≤ -28.94	PASS
	Ant2	Low	2412	0.07	-38.5	≤ -19.93	PASS
	Ant1	High	2462	-6.82	-48.34	≤ -26.82	PASS
	Ant2	High	2462	0.53	-47.37	≤ -19.47	PASS
11N20MIMO	Ant1	Low	2412	-9.38	-46.9	≤ -29.38	PASS
	Ant2	Low	2412	-3.37	-45.14	≤ -23.37	PASS
	Ant1	High	2462	-4.69	-48.31	≤ -24.69	PASS
	Ant2	High	2462	-0.13	-48.2	≤ -20.13	PASS

11N40MIMO	Ant1	Low	2422	-3.33	-41.26	≤-23.33	PASS
	Ant2	Low	2422	-3.08	-39.49	≤-23.08	PASS
	Ant1	High	2452	-3.85	-47.59	≤-23.85	PASS
	Ant2	High	2452	-2.25	-41.96	≤-22.25	PASS

Test Mode	Ant.	Freq. (MHz)	Freq Range (Mhz)	Ref Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
11B	Ant1	2412	30~1000	-0.92	-59.88	≤-20.92	PASS
			1000~26500	-0.92	-51.27	≤-20.92	PASS
	Ant2	2412	30~1000	9.34	-59.88	≤-10.66	PASS
			1000~26500	9.34	-50.58	≤-10.66	PASS
	Ant1	2437	30~1000	-7.63	-59.77	≤-27.63	PASS
			1000~26500	-7.63	-50.86	≤-27.63	PASS
	Ant2	2437	30~1000	10.63	-59.76	≤-9.37	PASS
			1000~26500	10.63	-50.41	≤-9.37	PASS
	Ant1	2462	30~1000	-8.47	-59.98	≤-28.47	PASS
			1000~26500	-8.47	-50.76	≤-28.47	PASS
	Ant2	2462	30~1000	10.77	-60.1	≤-9.23	PASS
			1000~26500	10.77	-51.7	≤-9.23	PASS
11G	Ant1	2412	30~1000	-8.16	-60.04	≤-28.16	PASS
			1000~26500	-8.16	-50.75	≤-28.16	PASS
	Ant2	2412	30~1000	1.98	-60.57	≤-18.02	PASS
			1000~26500	1.98	-50.95	≤-18.02	PASS
	Ant1	2437	30~1000	-6.28	-60.13	≤-26.28	PASS
			1000~26500	-6.28	-51.32	≤-26.28	PASS
	Ant2	2437	30~1000	1.50	-60.07	≤-18.5	PASS
			1000~26500	1.50	-50.68	≤-18.5	PASS
	Ant1	2462	30~1000	-5.63	-60.18	≤-25.63	PASS
			1000~26500	-5.63	-50.85	≤-25.63	PASS
	Ant2	2462	30~1000	0.30	-59.84	≤-19.7	PASS
			1000~26500	0.30	-50.89	≤-19.7	PASS
11N20MIMO	Ant1	2412	30~1000	-10.73	-59.54	≤-30.73	PASS
			1000~26500	-10.73	-50.45	≤-30.73	PASS
	Ant2	2412	30~1000	-2.79	-59.78	≤-22.79	PASS
			1000~26500	-2.79	-50.77	≤-22.79	PASS
	Ant1	2437	30~1000	-5.33	-60.79	≤-25.33	PASS
			1000~26500	-5.33	-51.09	≤-25.33	PASS
	Ant2	2437	30~1000	-2.10	-59.72	≤-22.1	PASS
			1000~26500	-2.10	-50.16	≤-22.1	PASS
	Ant1	2462	30~1000	-3.69	-60.19	≤-23.69	PASS
			1000~26500	-3.69	-50.33	≤-23.69	PASS
	Ant2	2462	30~1000	-0.24	-60.15	≤-20.24	PASS
			1000~26500	-0.24	-51.04	≤-20.24	PASS
11N40MIMO	Ant1	2422	30~1000	-4.25	-59.47	≤-24.25	PASS
			1000~26500	-4.25	-50.83	≤-24.25	PASS
	Ant2	2422	30~1000	-1.96	-59.7	≤-21.96	PASS
			1000~26500	-1.96	-49.86	≤-21.96	PASS
	Ant1	2437	30~1000	-2.59	-59.23	≤-22.59	PASS
			1000~26500	-2.59	-51.34	≤-22.59	PASS
	Ant2	2437	30~1000	-1.85	-59.81	≤-21.85	PASS
			1000~26500	-1.85	-50.83	≤-21.85	PASS

	Ant1	2452	30~1000	-3.81	-60.39	≤-23.81	PASS
			1000~26500	-3.81	-51.39	≤-23.81	PASS
	Ant2	2452	30~1000	-2.29	-59.33	≤-22.29	PASS
			1000~26500	-2.29	-51.11	≤-22.29	PASS

12.5. Original test data

Band edge:





11B Ant2 High 2462



11G Ant1 Low 2412



11G Ant2 Low 2412



11G_Ant1_High_2462



11G_Ant2_High_2462



11N20MIMO_Ant1_Low_2412



11N20MIMO_Ant2_Low_2412



11N20MIMO_Ant1_High_2462



11N20MIMO_Ant2_High_2462

