

FCC PART 27
FCC PART 22H, PART 24E
MEASUREMENT AND TEST REPORT

For

b mobile HK Limited

Flat 18; 14/F Block 1; Golden Industrial Building; 16-26 Kwai Tak Street;
Kwai Chung; New Territories, HONG KONG, China

FCC ID: ZSW-30-023

Report Type: Original Report	Product Type: Mobile Phone
Test Engineer: David Lee	David Lee
Report Number: RSZ151125003-00D	
Report Date: 2016-01-04	
Reviewed By: RF Engineer	Bell Hu
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION.....	8
APPLICABLE STANDARD	8
TEST RESULT	8
FCC §2.1047 - MODULATION CHARACTERISTIC	9
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) & § 27.50 - RF OUTPUT POWER.....	10
APPLICABLE STANDARDS.....	10
TEST PROCEDURE	10
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA	11
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH.....	19
APPLICABLE STANDARDS.....	19
TEST PROCEDURE	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST DATA	19
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS..	28
APPLICABLE STANDARDS.....	28
TEST PROCEDURE	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA	28
FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS	34
APPLICABLE STANDARDS.....	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	35
FCC §22.917(A) & §24.238(A) & §27.53 - BAND EDGES.....	38
APPLICABLE STANDARDS.....	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	39

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY.....53
 APPLICABLE STANDARDS.....53
 TEST PROCEDURE53
 TEST EQUIPMENT LIST AND DETAILS.....54
 TEST DATA54
PRODUCT SIMILARITY DECLARATION LETTER.....58

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *b mobile HK Limited*'s product, model number: AX675 (FCC ID: ZSW-30-023) or the "EUT" in this report was a *Mobile Phone*, which was measured approximately: 125 mm (L) × 64.6 mm (W) × 11.9 mm (H), rated with input voltage: DC 3.7V rechargeable Li-ion battery or DC 5.0V from adapter.

Adapter Information:

Input: AC 100-240V, 50/60Hz, 0.15A

Output: DC 5.0V, 500mA

Note: The series product, model AX670 and AX675 are electrically identical, they are just different from model number due to marketing purposes. Detailed information is stated and guaranteed by the applicant which was explained in the attached declaration letter.

**All measurement and test data in this report was gathered from production sample serial number: 1507200 (Assigned by Shenzhen BACL). The EUT supplied by the applicant was received on 2015-11-25.*

Objective

This type approval report is prepared on behalf of *b mobile HK Limited* in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E and Part 27 of the Federal Communication Commissions rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP and Part 15.247 DSS & DTS submissions with FCC ID: ZSW-30-023.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services
Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D, ANSI C63.4-2014.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2103. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891

Block Diagram of Test Setup

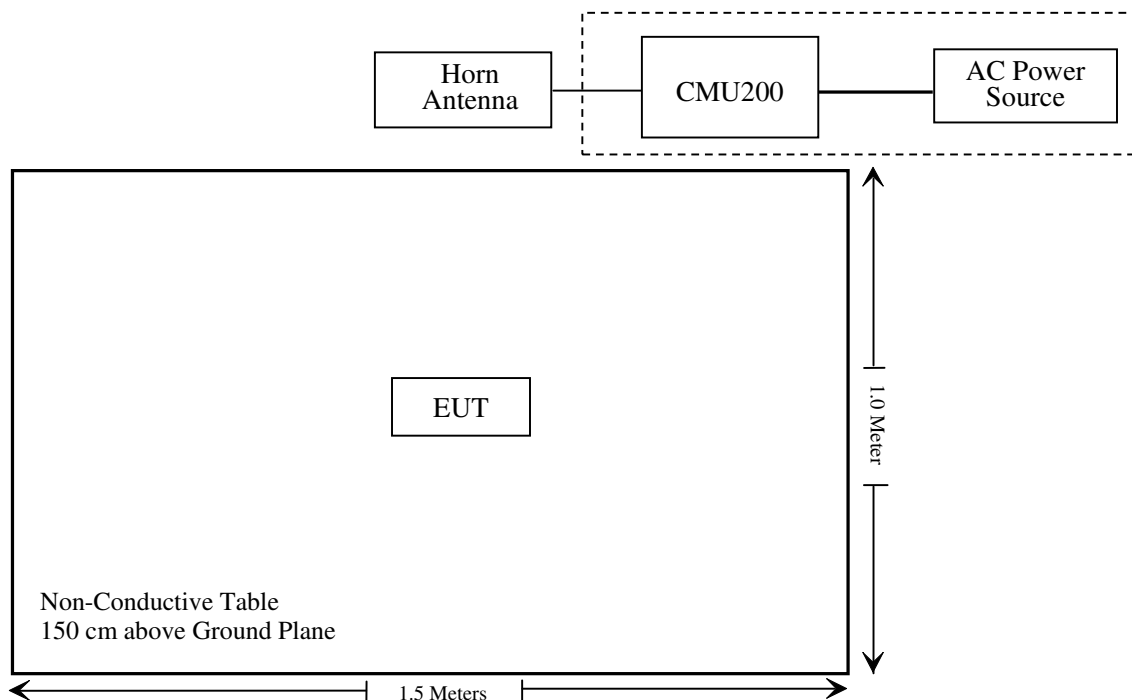

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b)(1), §2.1093	RF Exposure Information	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d) (i)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53 (c)	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53(c) (g)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (c) (g)	Spurious Radiated Emissions	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (c) (g);	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

Compliance*: Please refer to the SAR report released by BACL, report number: RSZ151125003-20.

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1307, §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ151125003-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d) , Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50 - RF OUTPUT POWER**Applicable Standards**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..


According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz. The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

According to §27.50(c), Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP. According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz. According to §27.50(h), the maximum EIRP must not exceed 2Watts (33dBm) for 2500-2570MHz.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

Test Procedure*Conducted method:*

The RF output of the transmitter was connected to the CMU200 through sufficient attenuation.

*Radiated method:*

TIA603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-12-15	2016-12-14
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
HP	Synthesized Sweeper	HP 8341B	2624A00116	2015-07-02	2016-07-01
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Sunol Sciences	Horn Antenna	DRH-118	A052304	2014-12-29	2017-12-28
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by David Lee on 2015-12-24.

Conducted Power**Cellular Band (Part 22H)**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	33.05	38.45
	190	836.6	33.03	38.45
	251	848.8	33.01	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	33.07	32.12	30.14	29.03	38.45
	190	836.6	33.04	32.12	30.11	28.99	38.45
	251	848.8	32.99	32.07	30.09	28.95	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	25.34	24.24	22.09	20.80	38.45
	190	836.6	25.10	24.00	21.91	20.69	38.45
	251	848.8	24.81	23.74	21.61	20.34	38.45

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	Normal	RMC12.2k		22.31	22.42	22.09
		Rel 6 HSDPA	1	21.44	21.61	21.28
			2	21.42	21.59	21.43
			3	21.44	21.49	21.25
			4	21.37	21.49	21.27
		Rel 6 HSUPA	1	21.49	21.66	21.37
			2	21.37	21.32	21.29
			3	21.27	21.43	21.34
			4	21.37	21.30	21.47
			5	21.35	21.46	21.31

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	29.56	33
	661	1880.0	29.68	33
	810	1909.8	29.63	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	29.65	28.66	26.67	25.42	33
	661	1880.0	29.81	28.93	27.06	25.91	33
	810	1909.8	29.74	28.91	27.11	26.02	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	25.08	23.99	21.76	20.53	33
	661	1880.0	25.21	24.08	21.88	20.64	33
	810	1909.8	25.24	24.20	21.90	20.64	33

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	RMC12.2k		22.60	22.17	22.14
		Rel 6 HSDPA	1	21.73	21.31	21.27
			2	21.82	21.41	21.15
			3	21.52	21.42	21.22
			4	21.85	21.53	20.87
		Rel 6 HSUPA	1	21.73	21.37	21.29
			2	21.88	21.26	21.19
			3	22.02	21.30	20.95
			4	21.85	21.41	20.80
			5	21.65	21.48	21.29

AWS Band (Part 27)

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band IV)	Normal	RMC12.2k		22.25	21.94	22.04
		Rel 6 HSDPA	1	21.39	21.06	21.21
			2	21.39	21.03	20.98
			3	21.35	21.03	21.03
			4	21.20	21.04	20.97
		Rel 6 HSUPA	1	21.42	21.10	21.21
			2	21.61	21.02	21.27
			3	21.10	21.08	21.32
			4	21.05	21.12	21.13
			5	21.34	21.03	21.09

Peak-to-average ratio (PAR)**Cellular Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.24	13
	Middle	0.29	13
	High	0.28	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	2.32	13
	Middle	2.46	13
	High	2.52	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.39	13
	Middle	3.46	13
	High	3.39	13
HSDPA (16QAM)	Low	3.21	13
	Middle	3.18	13
	High	3.25	13
HSUPA (BPSK)	Low	3.20	13
	Middle	3.19	13
	High	3.16	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.28	13
	Middle	0.24	13
	High	0.22	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	2.26	13
	Middle	2.41	13
	High	2.39	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	2.96	13
	Middle	3.02	13
	High	3.01	13
HSDPA (16QAM)	Low	2.95	13
	Middle	2.98	13
	High	3.00	13
HSUPA (BPSK)	Low	2.87	13
	Middle	2.89	13
	High	2.88	13

WCDMA1700

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	2.95	13
	Middle	2.97	13
	High	2.99	13
HSDPA (16QAM)	Low	2.95	13
	Middle	2.99	13
	High	3.08	13
HSUPA (BPSK)	Low	2.81	13
	Middle	2.80	13
	High	2.79	13

Radiated Power**ERP & EIRP****GSM Mode:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for Cellular Band (Part 22H)										
836.60	94.69	59	1.9	H	27.7	0.67	0	27.02	38.45	11.43
836.60	95.80	23	1.2	V	28.8	0.67	0	28.13	38.45	10.32
EIRP for PCS Band (Part 24E)										
1850.20	88.79	204	1.8	H	20.1	1.40	7.30	26.00	33	7.00
1850.20	84.97	354	2.1	V	15.7	1.40	7.30	21.60	33	11.40

EDGE Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for Cellular Band (Part 22H)										
836.6	90.12	58	1.5	H	23.1	0.67	0	22.43	38.45	16.02
836.6	89.66	125	1.6	V	22.7	0.67	0	22.03	38.45	16.42
EIRP for PCS Band (Part 24E)										
1850.20	84.26	335	1.9	H	15.6	1.4	7.3	21.5	33	11.5
1850.20	81.02	102	1.6	V	11.7	1.4	7.3	17.6	33	15.4

WCDMA Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E/27	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for WCDMA Band V (Part 22H)										
836.6	87.61	309	2.1	H	20.6	0.67	0	19.94	38.45	18.51
836.6	88.09	332	1.2	V	21.1	0.67	0	20.42	38.45	18.03
EIRP for WCDMA Band II (Part 24E)										
1880.0	112.06	88	1.6	H	17.1	1.40	7.30	23.00	33	10.00
1880.0	110.45	117	2.1	V	14.9	1.40	7.30	20.80	33	12.20
EIRP for WCDMA Band IV (Part 27)										
1732.6	113.35	151	2.3	H	17.0	1.60	6.90	22.30	30	7.70
1732.6	111.59	232	1.9	V	14.8	1.60	6.90	20.10	30	9.90

Note:

All above data were tested with no amplifier.

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


Applicable Standards

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (Cellular /PCS) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.

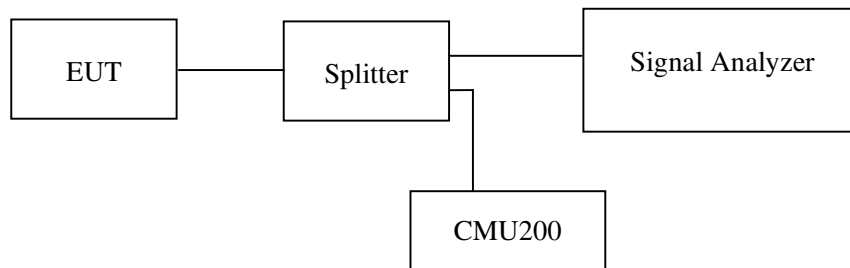

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by David Lee on 2015-12-23.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	246.5	310.6
EGPRS(8PSK)	836.6	248.5	316.6

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	836.6	4.17	4.73
HSUPA (BPSK)	836.6	4.17	4.71
HSDPA (16QAM)	836.6	4.17	4.69

PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	244.5	312.6
EGPRS(8PSK)	1880.0	250.5	322.6


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	1880.0	4.17	4.71
HSUPA (BPSK)	1880.0	4.17	4.75
HSDPA (16QAM)	1880.0	4.17	4.71

Part 27


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	1732.6	4.15	4.71
HSUPA (BPSK)	1732.6	4.17	4.71
HSDPA (16QAM)	1732.6	4.15	4.71



Cellular Band (Part 22H)



99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode


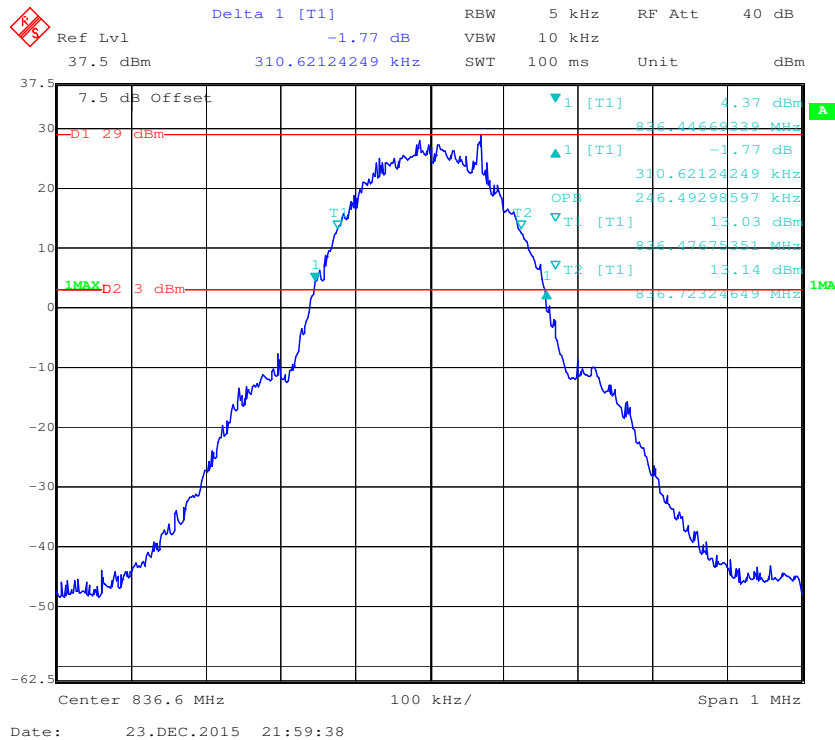


99% Occupied & 26 dB Emissions Bandwidth for EDGE Mode

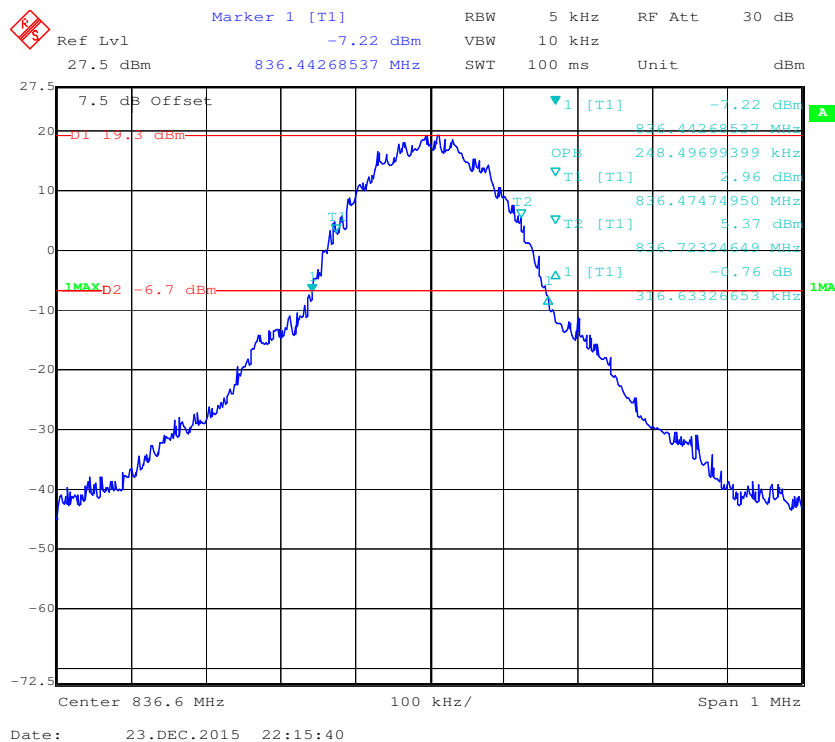


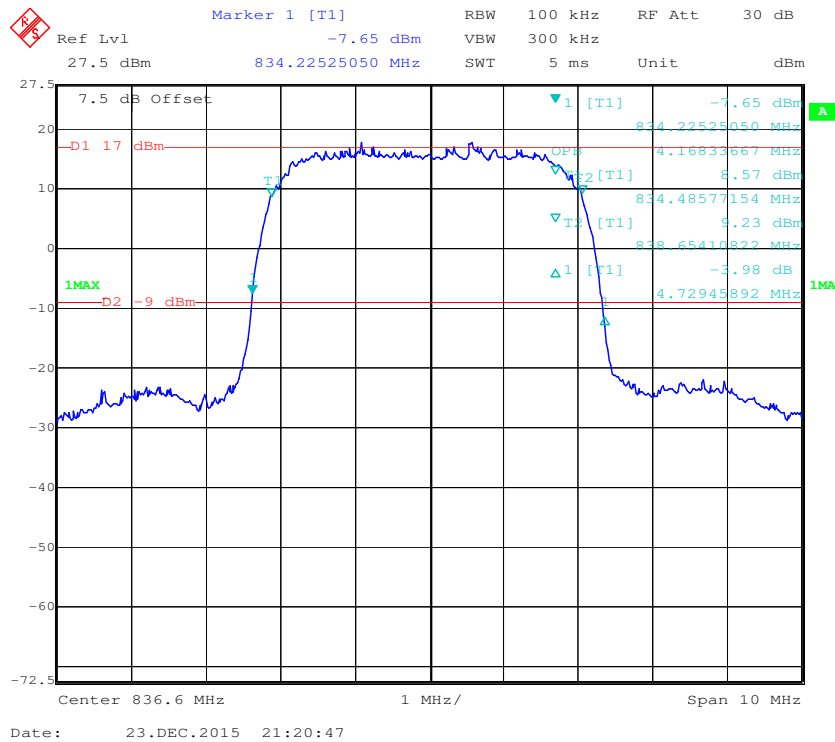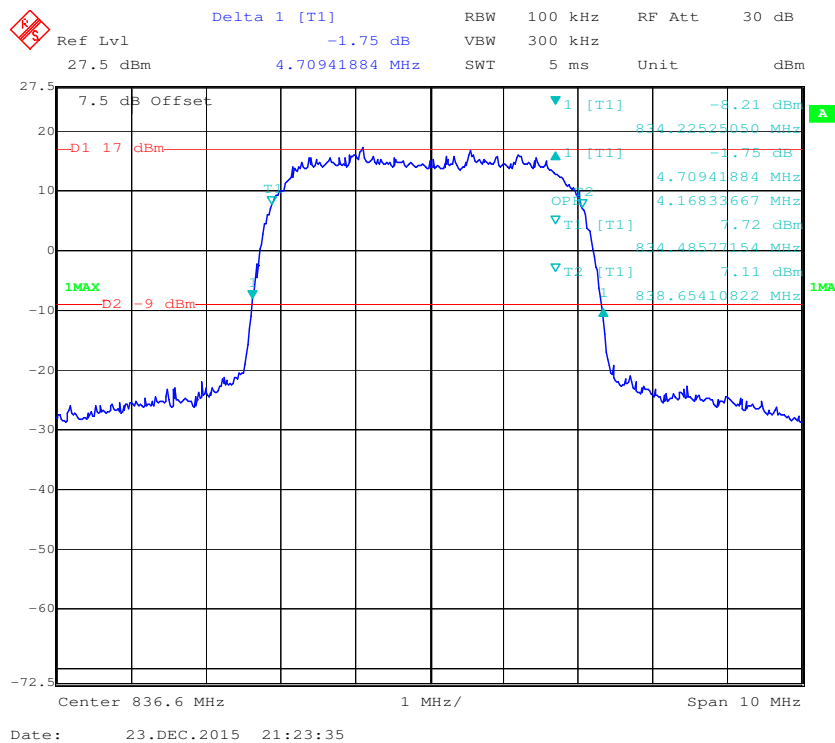99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode**99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode**

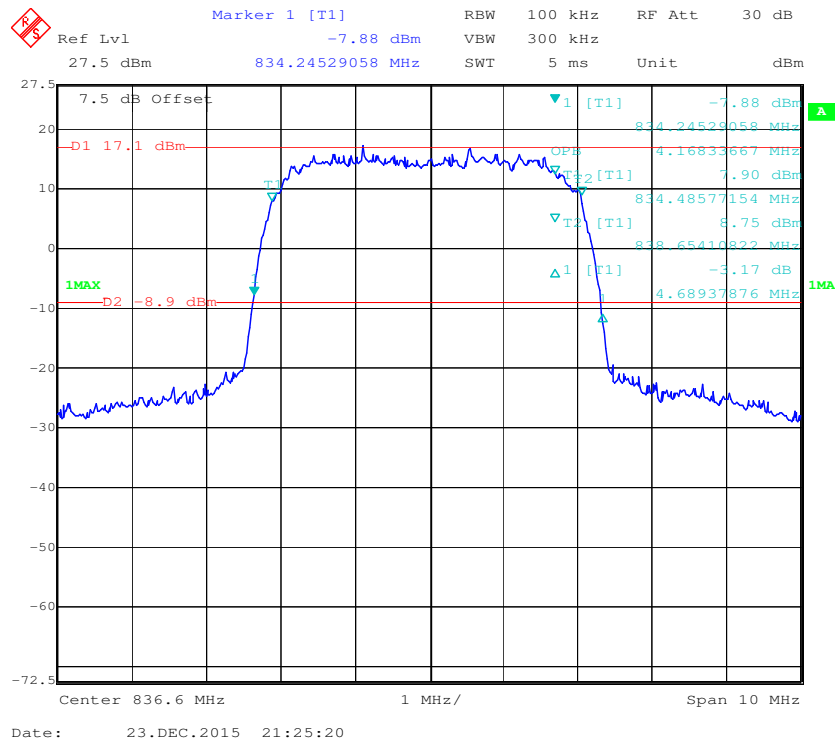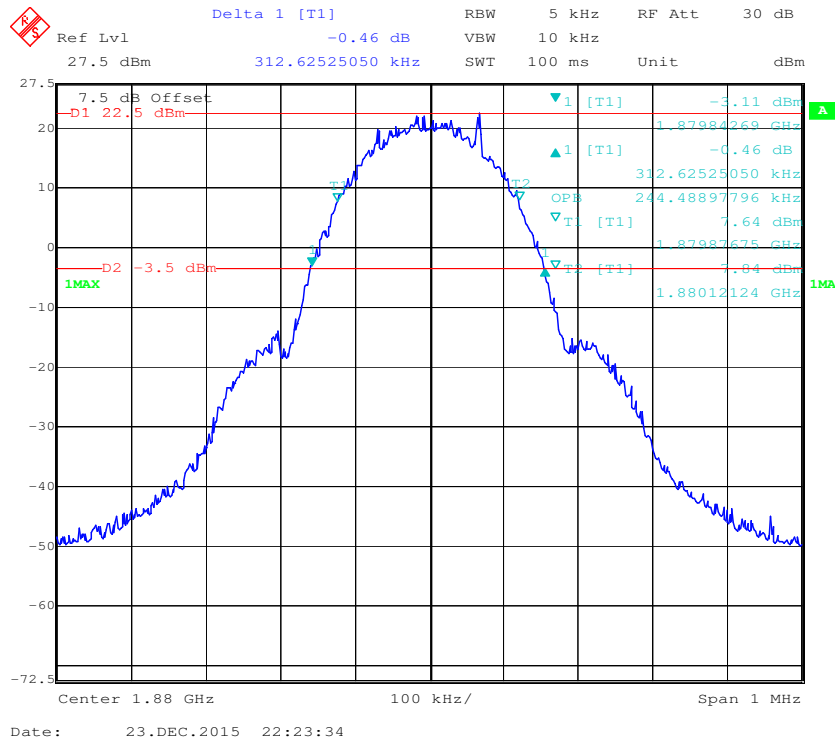
99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode**PCS Band (Part 24E)****99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode**

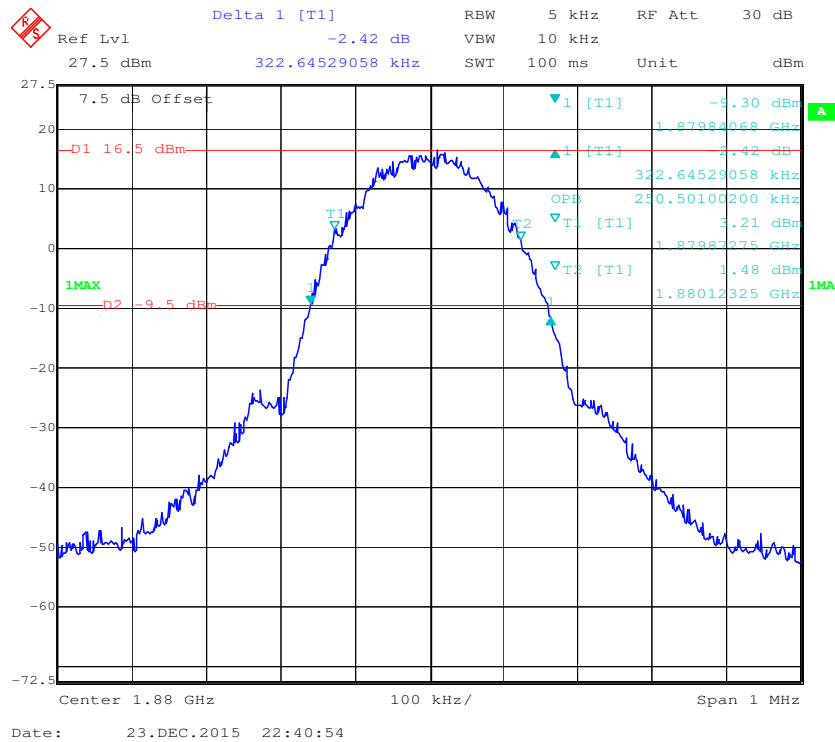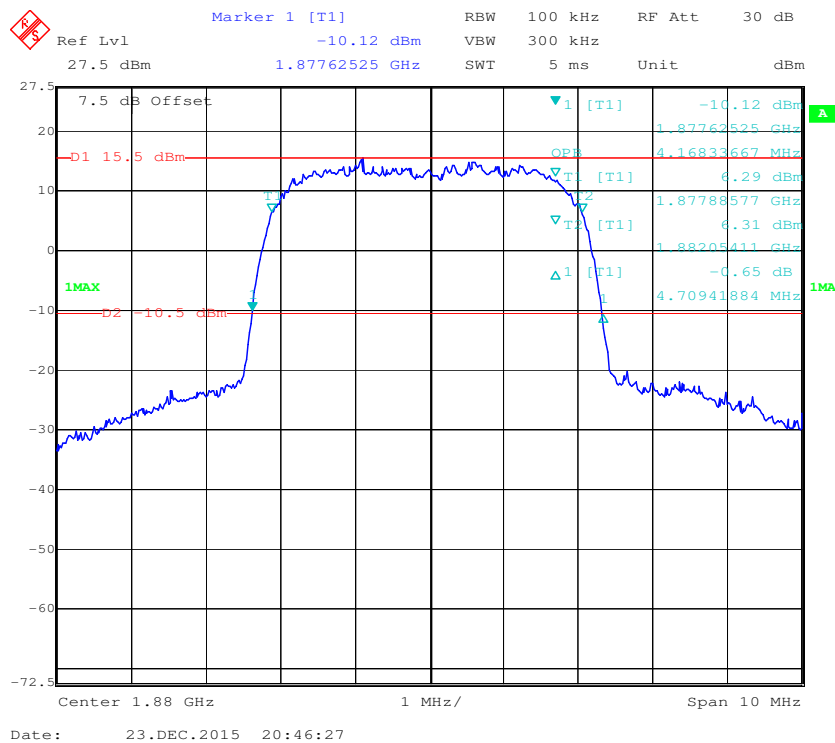99% Occupied & 26 dB Emissions Bandwidth for EGPRS Mode**999% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode**

99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

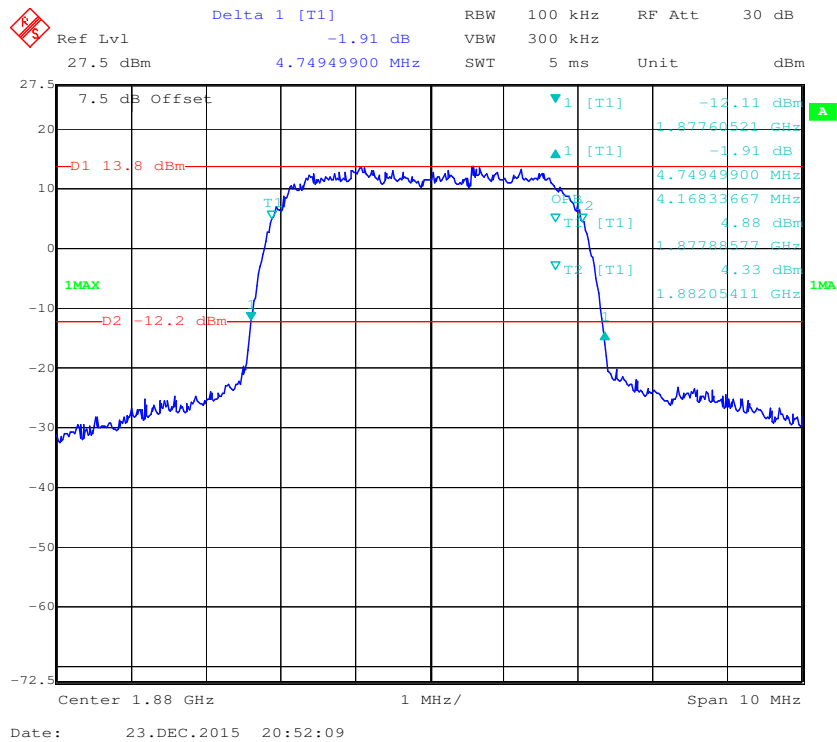


99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

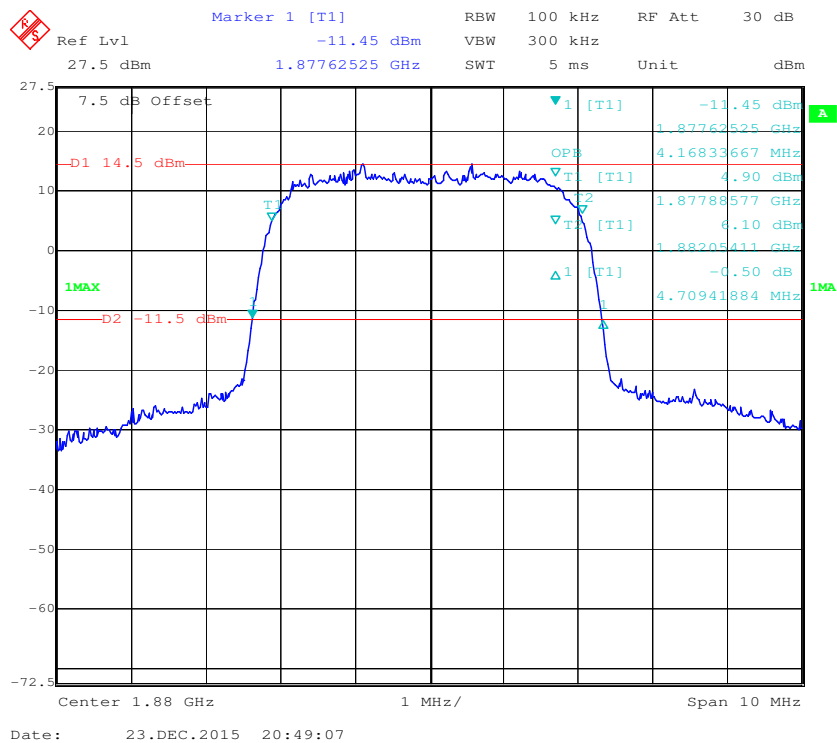


Part 27


99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode

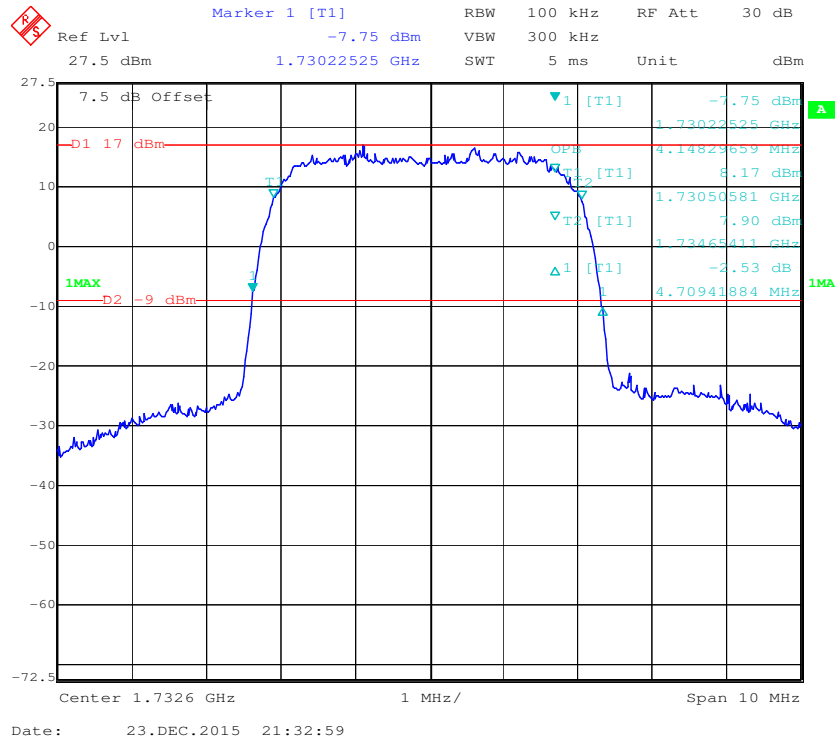

99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

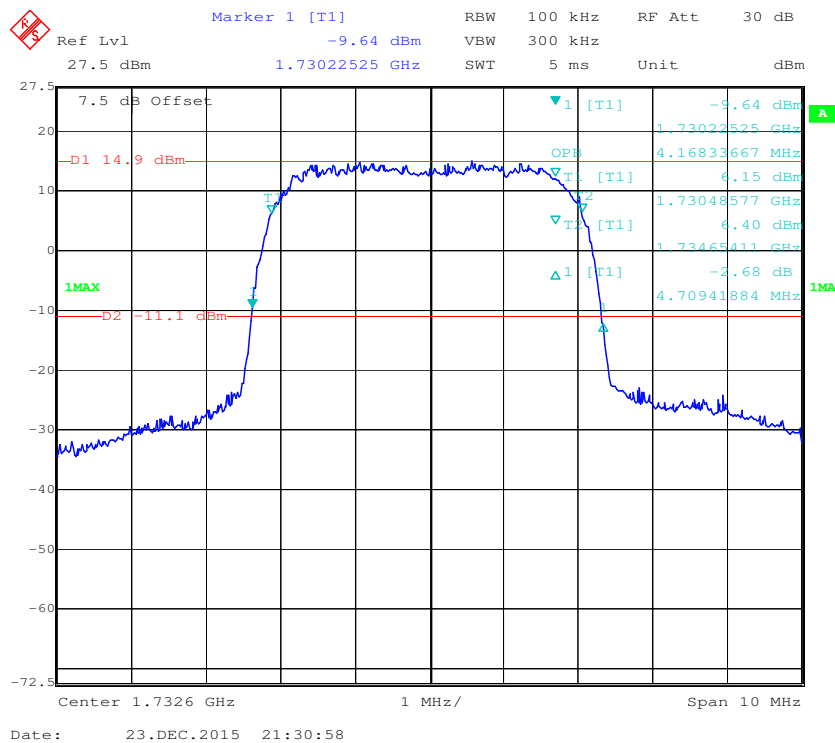

99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

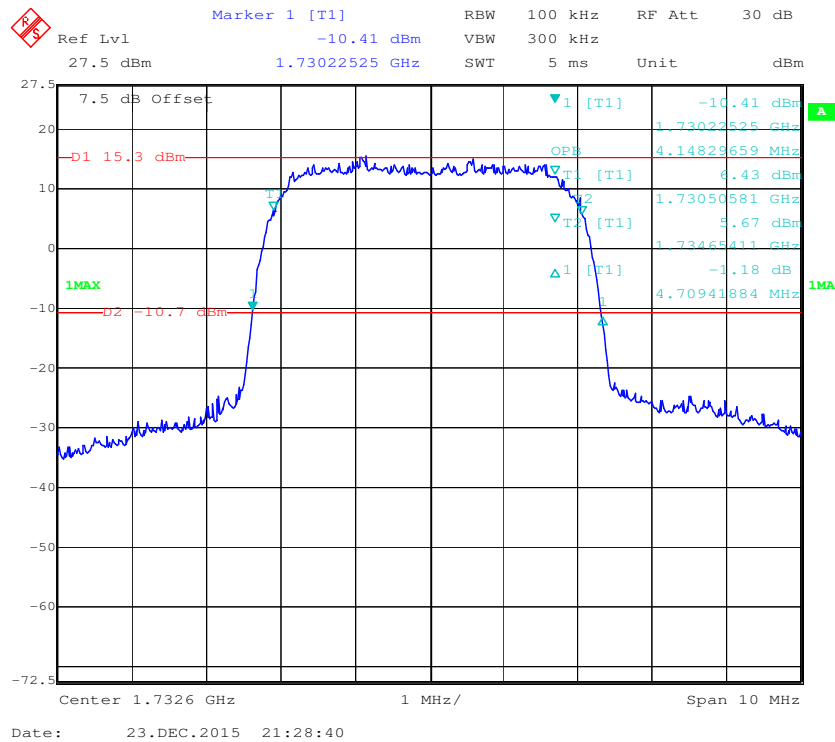

FCC §2.1051, §22.917(a) & §24.238(a) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standards

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

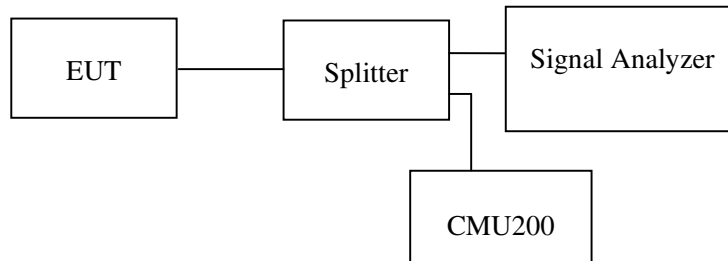

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	24 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by David Lee on 2015-12-23.


Please refer to the following plots.

Cellular Band (Part 22H)


30 MHz – 1 GHz (GSM Mode)

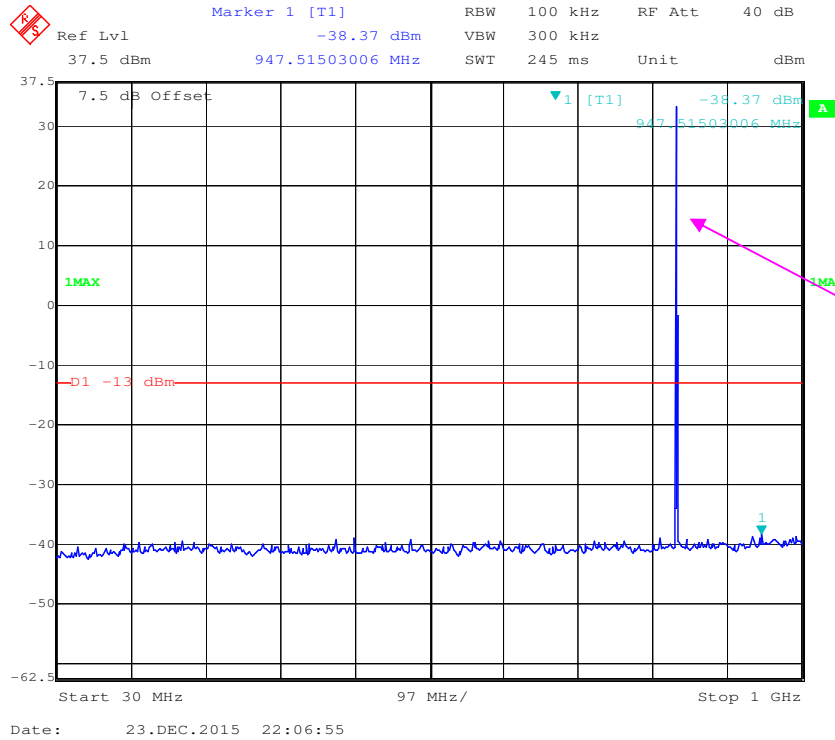


1 GHz – 10 GHz (GSM Mode)

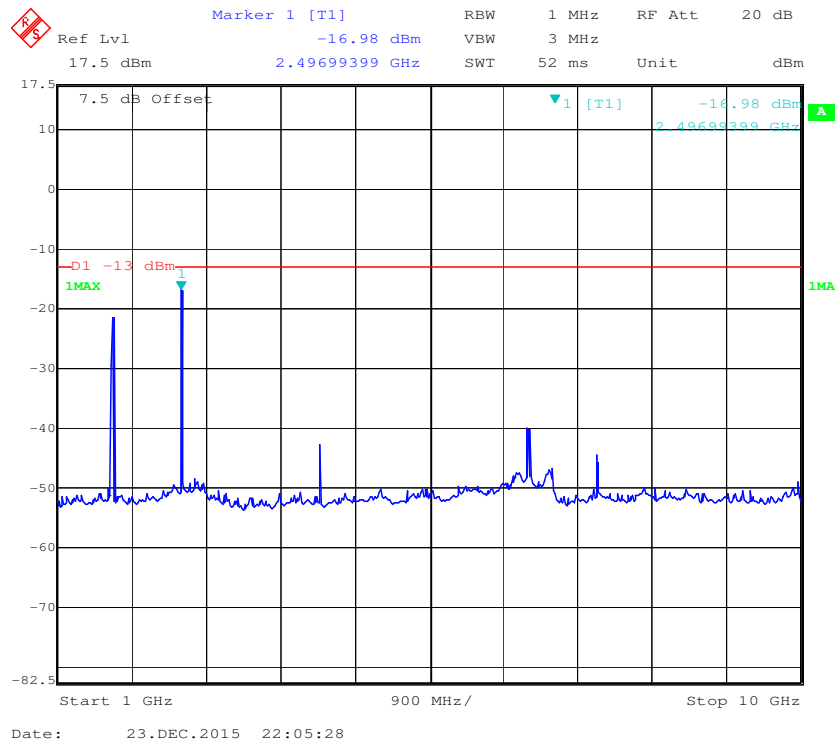

30 MHz – 1 GHz (WCDMA Mode)

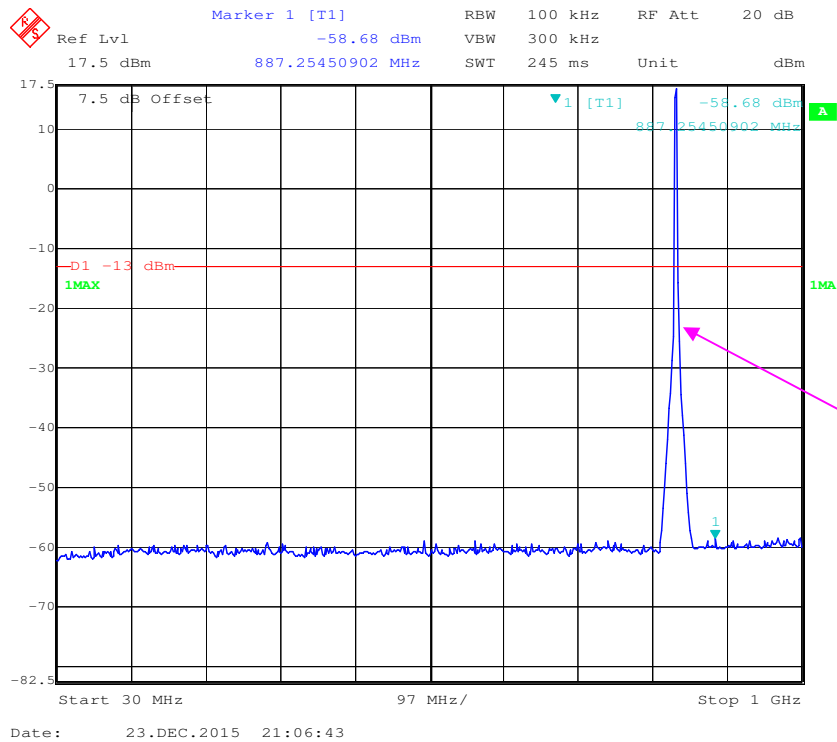


1 GHz – 10 GHz (WCDMA Mode)

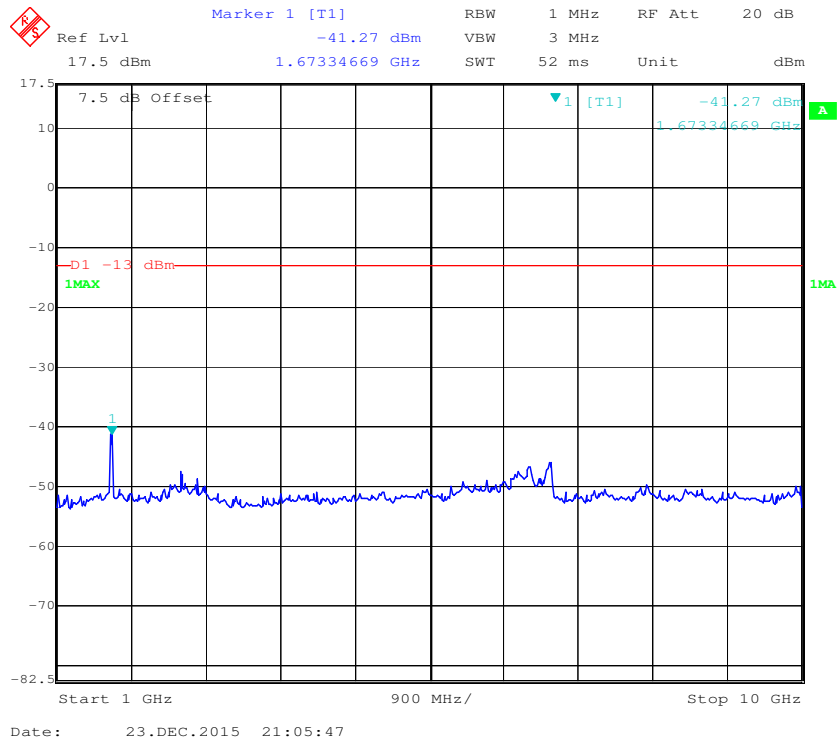


PCS Band (Part 24E)


30 MHz – 1 GHz (GSM Mode)

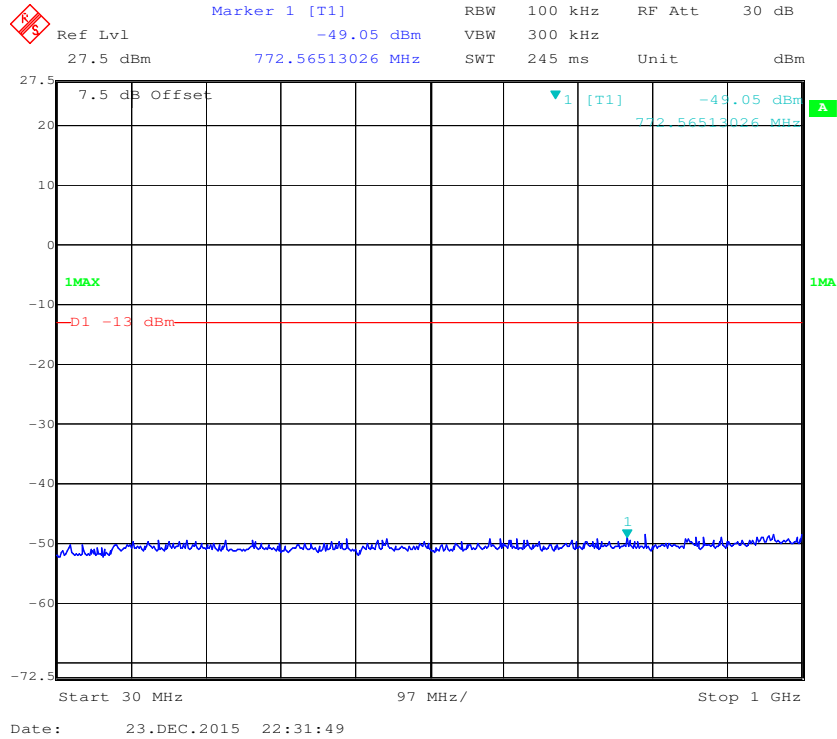


1 GHz – 20 GHz (GSM Mode)

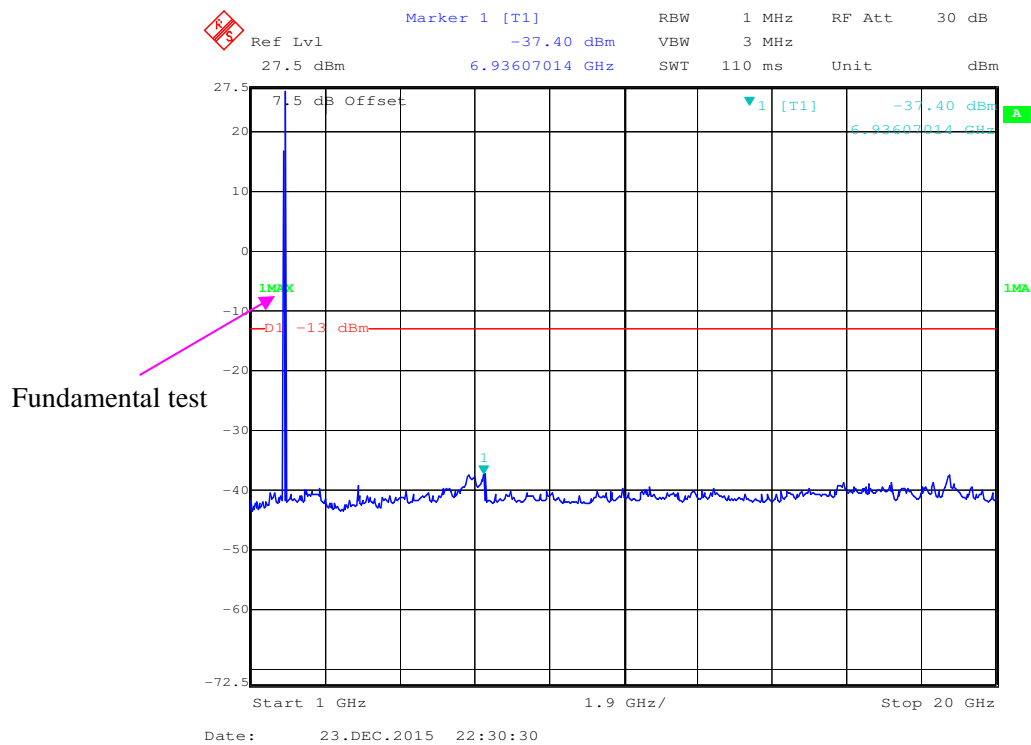

30 MHz – 1 GHz (WCDMA Mode)

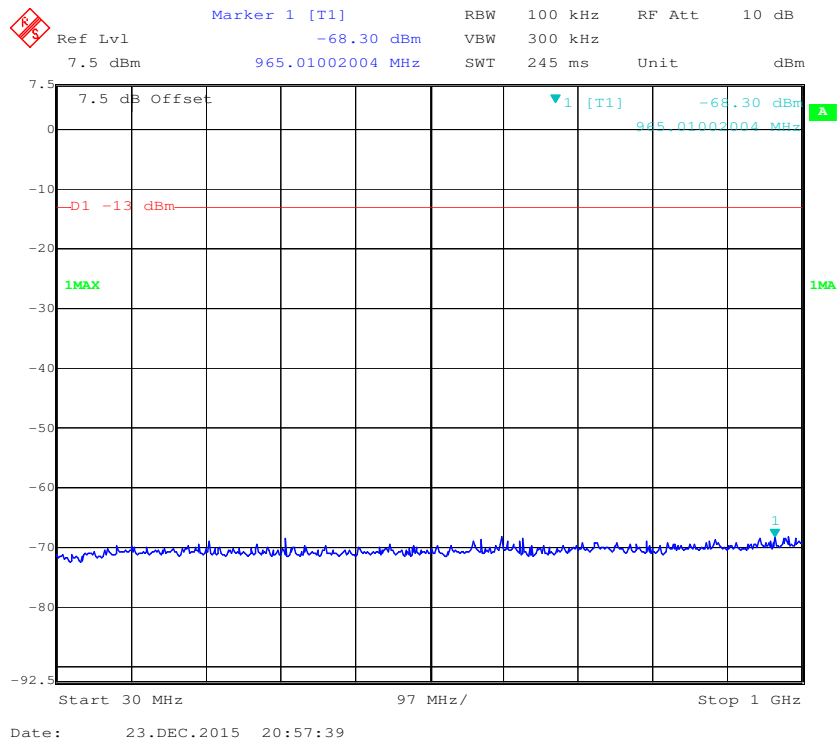


1 GHz – 20 GHz (WCDMA Mode)

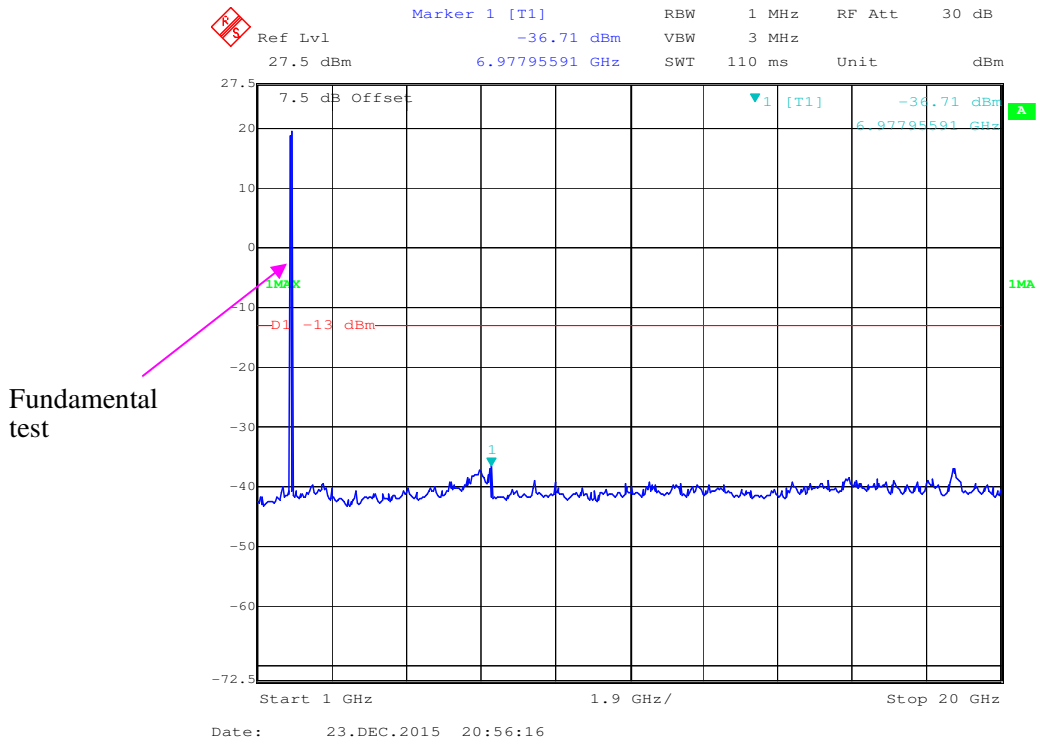


Part 27

30 MHz – 1 GHz (WCDMA Mode)

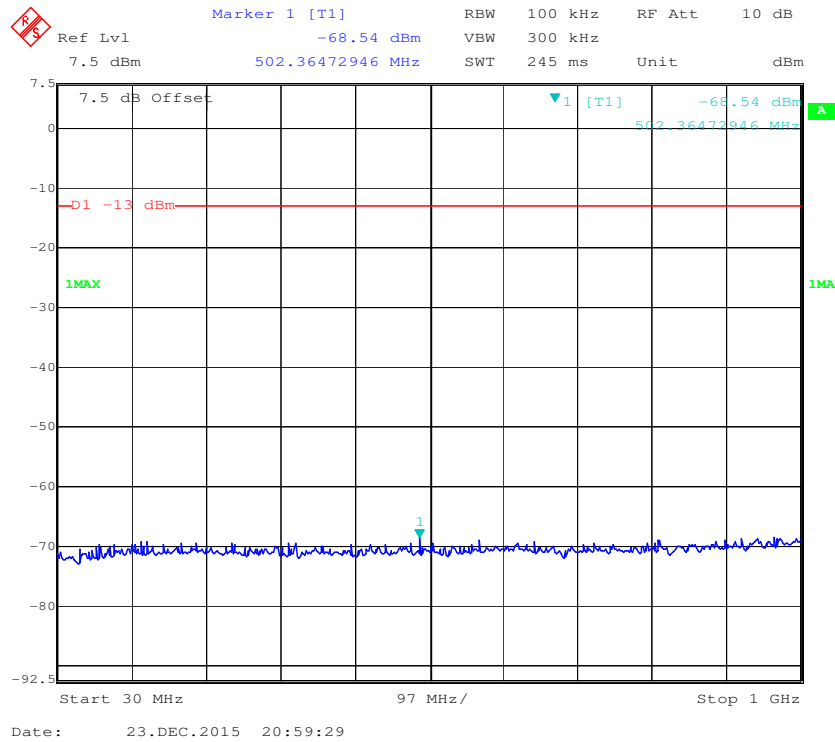

1 GHz – 20 GHz (WCDMA Mode)

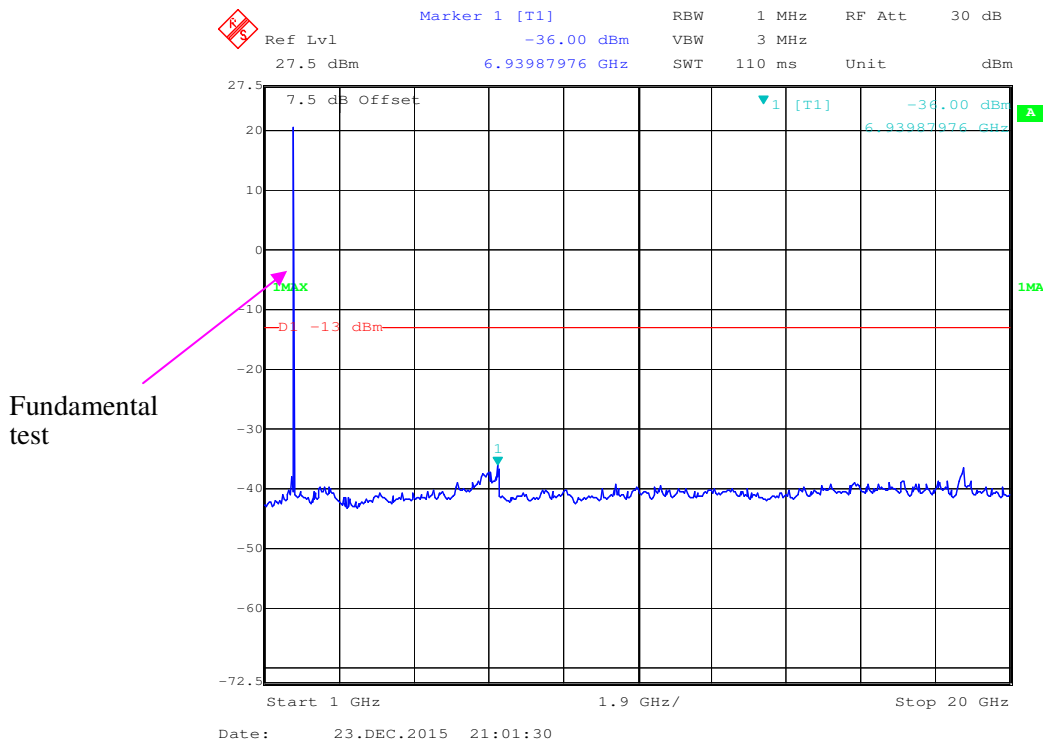

FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS

Applicable Standards

FCC § 2.1053, §22.917 and § 24.238 and § 27.53.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TX pwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052304	2014-12-29	2017-12-28
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2015-04-23	2016-04-23
HP	Amplifier	HP8447E	1937A01046	2015-05-06	2016-05-06
HP	Signal Generator	HP 8341B	2624A00116	2015-07-02	2016-07-01
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-12-15	2016-12-14
Electro-Mechanics	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by David Lee on 2015-12-23.

Test mode: Transmitting

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
GSM Mode										
460.00	36.45	283	1.2	H	-60.5	0.47	0	-60.97	-13	47.97
460.00	33.57	2	1.8	V	-63.4	0.47	0	-63.87	-13	50.87
1673.20	48.47	296	1.5	H	-47.2	1.60	6.90	-41.90	-13	28.90
1673.20	56.53	297	1.9	V	-39.6	1.60	6.90	-34.30	-13	21.30
2509.80	40.22	32	2.1	H	-53.3	1.70	8.60	-46.40	-13	33.40
2509.80	43.74	353	1.5	V	-50.1	1.70	8.60	-43.20	-13	30.20
3346.40	32.77	46	1.6	H	-57.6	1.90	9.80	-49.70	-13	36.70
3346.40	34.37	101	2.3	V	-56.6	1.90	9.80	-48.70	-13	35.70
WCDMA Mode										
460.00	37.36	225	1.3	H	-59.6	0.47	0	-60.07	-13	47.07
460.00	33.55	150	1.4	V	-63.4	0.47	0	-63.87	-13	50.87
1673.20	40.69	263	1.9	H	-55.0	1.60	6.90	-49.70	-13	36.70
1673.20	39.70	300	1.1	V	-56.4	1.60	6.90	-51.10	-13	38.10
2509.80	35.19	149	1.8	H	-58.4	1.70	8.60	-51.50	-13	38.50
2509.80	34.05	36	2.3	V	-59.8	1.70	8.60	-52.90	-13	39.90
3346.40	36.65	238	2.0	H	-53.7	1.90	9.80	-45.80	-13	32.80
3346.40	37.62	182	1.1	V	-53.4	1.90	9.80	-45.50	-13	32.50

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 24E	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
GSM Mode										
460.00	36.33	131	1.8	H	-60.7	0.47	0	-61.17	-13	48.17
460.00	34.06	141	1.1	V	-62.9	0.47	0	-63.37	-13	50.37
3760.00	32.82	300	1.1	H	-54.2	1.90	9.90	-46.20	-13	33.20
3760.00	34.09	235	1.3	V	-52.6	1.90	9.90	-44.60	-13	31.60
WCDMA Mode										
460.00	36.75	176	2.5	H	-60.2	0.47	0	-60.67	-13	47.67
460.00	33.99	355	2.0	V	-63.0	0.47	0	-63.47	-13	50.47
3704.80	32.38	47	1.6	H	-50.0	1.80	10.00	-41.80	-13	28.80
3704.80	32.19	286	1.7	V	-50.5	1.80	10.00	-42.30	-13	29.30

Part 27

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 27	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
WCDMA Mode										
460.00	36.37	168	1.7	H	-60.6	0.47	0	-61.07	-13	48.07
460.00	34.45	155	1.2	V	-62.5	0.47	0	-62.97	-13	49.97
3424.80	33.71	219	1.8	H	-43.7	1.90	9.90	-35.70	-13	22.70
3424.80	32.88	196	2.2	V	-44.6	1.90	9.90	-36.60	-13	23.60

Note:

1) Absolute Level = SG Level - Cable loss + Antenna Gain

2) Margin = Limit- Absolute Level

FCC §22.917(a) & §24.238(a) & §27.53 - BAND EDGES**Applicable Standards**

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to FCC §27.53, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

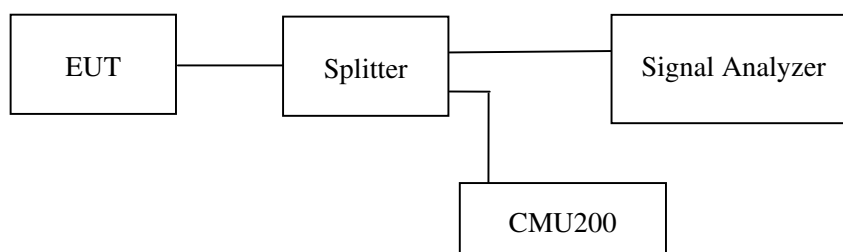**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	24 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by David Lee on 2015-12-23.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following plots.


Cellular Band, Left Band Edge for GSM (GMSK) Mode

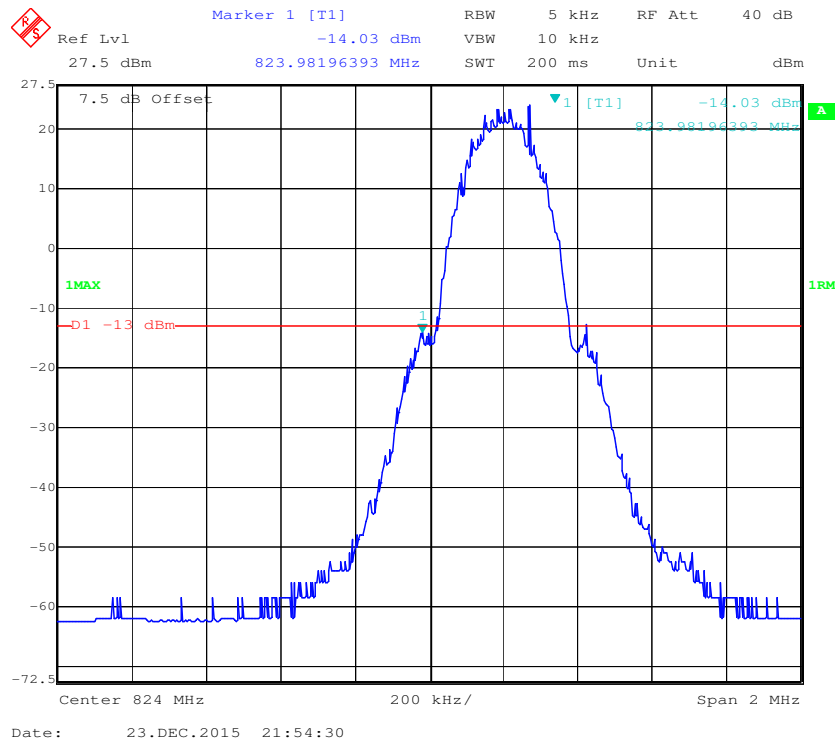


Cellular Band, Right Band Edge for GSM (GMSK) Mode


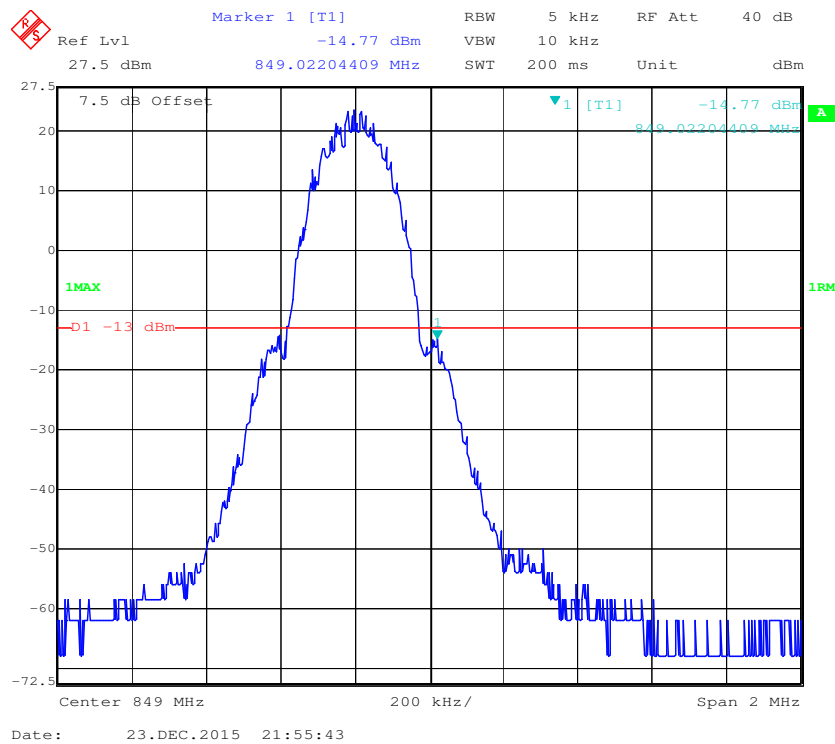


Cellular Band, Left Band Edge for EGPRS Mode

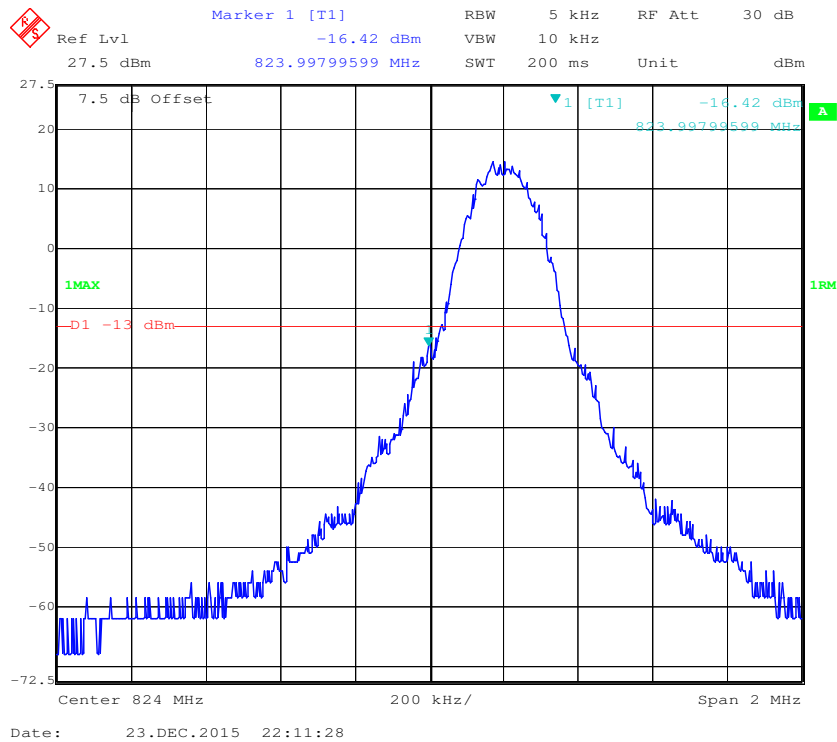


Cellular Band, Right Band Edge for EGPRS Mode

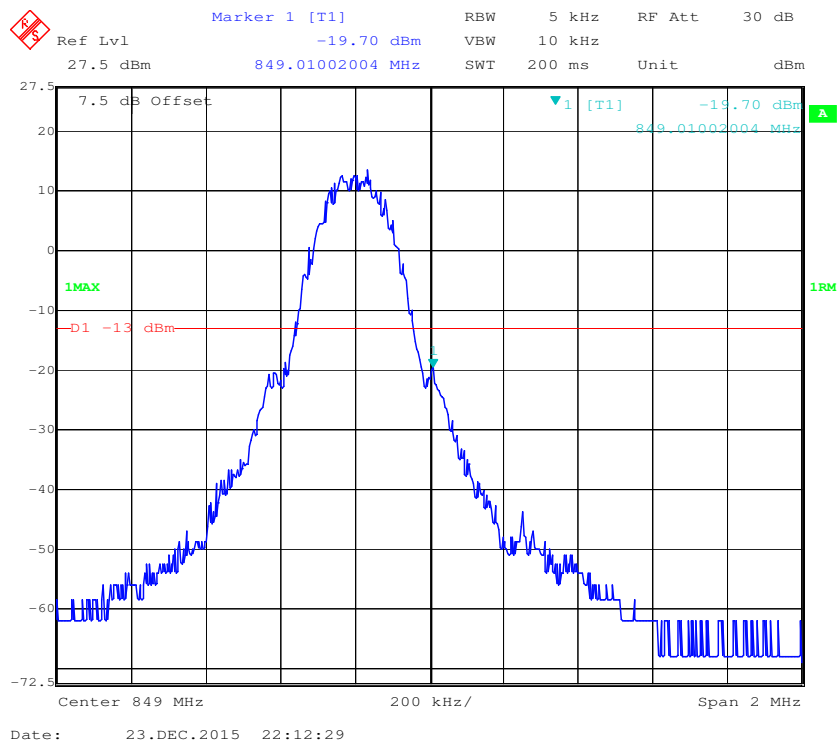


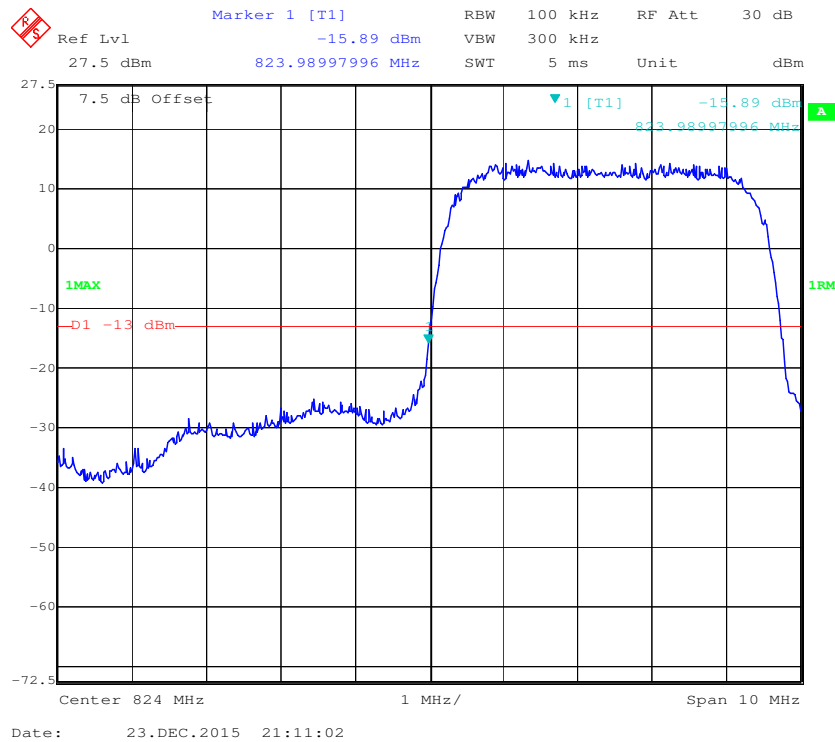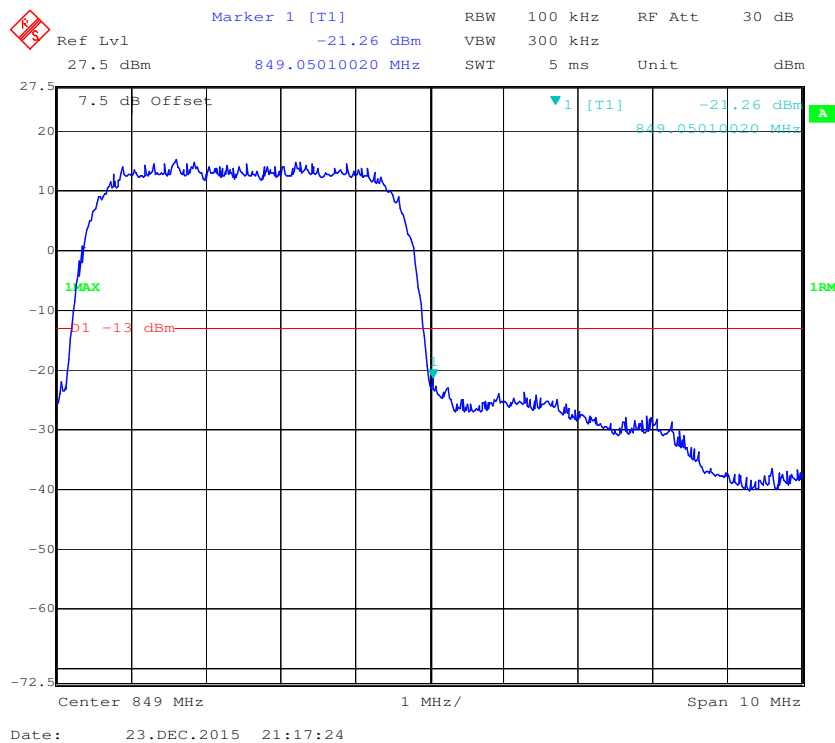Cellular Band, Left Band Edge for WCDMA (BPSK) Mode**Cellular Band, Right Band Edge for WCDMA (BPSK) Mode**


Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

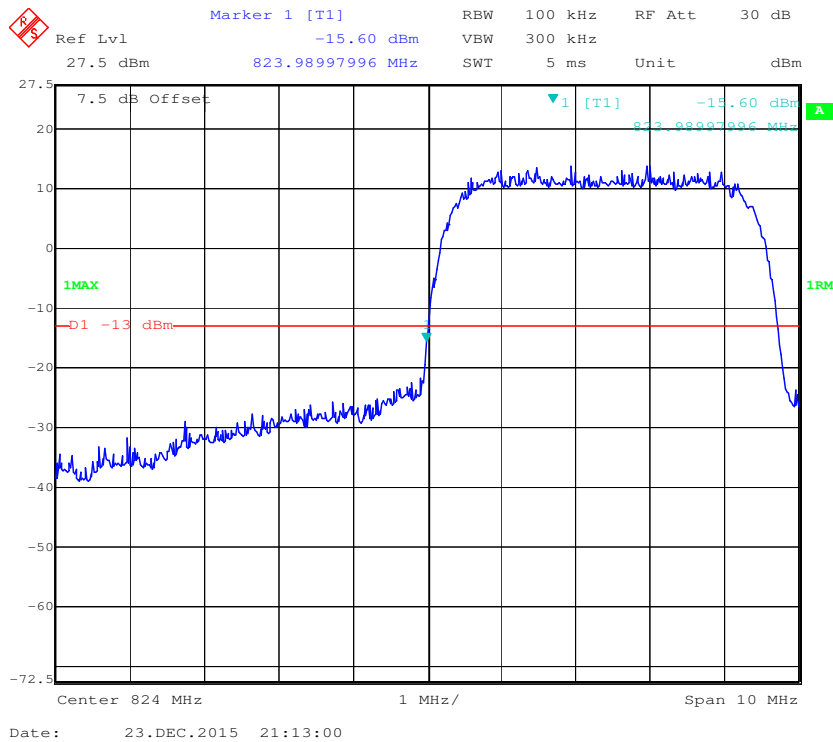


Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

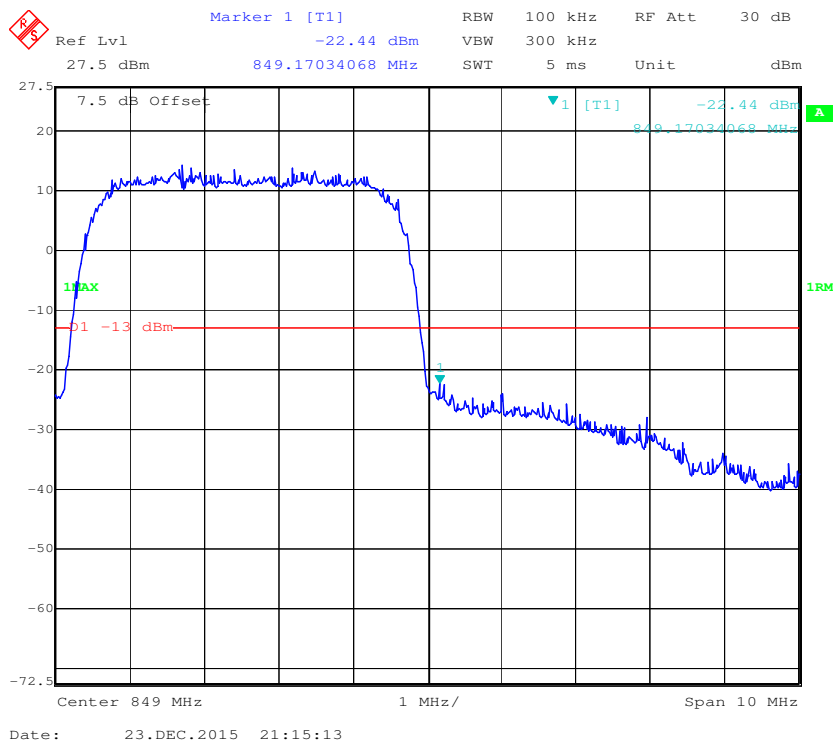


Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

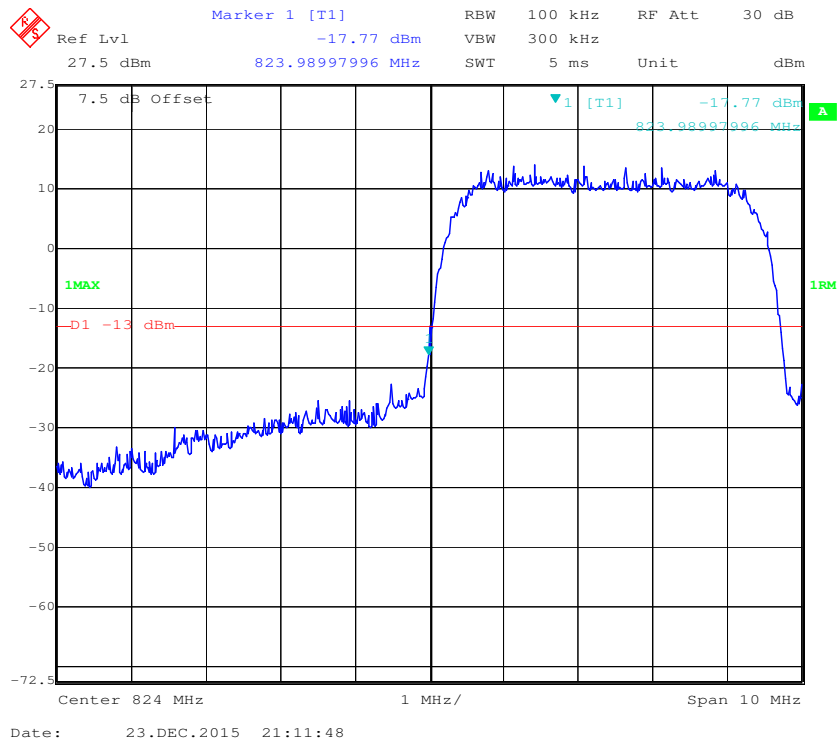


Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

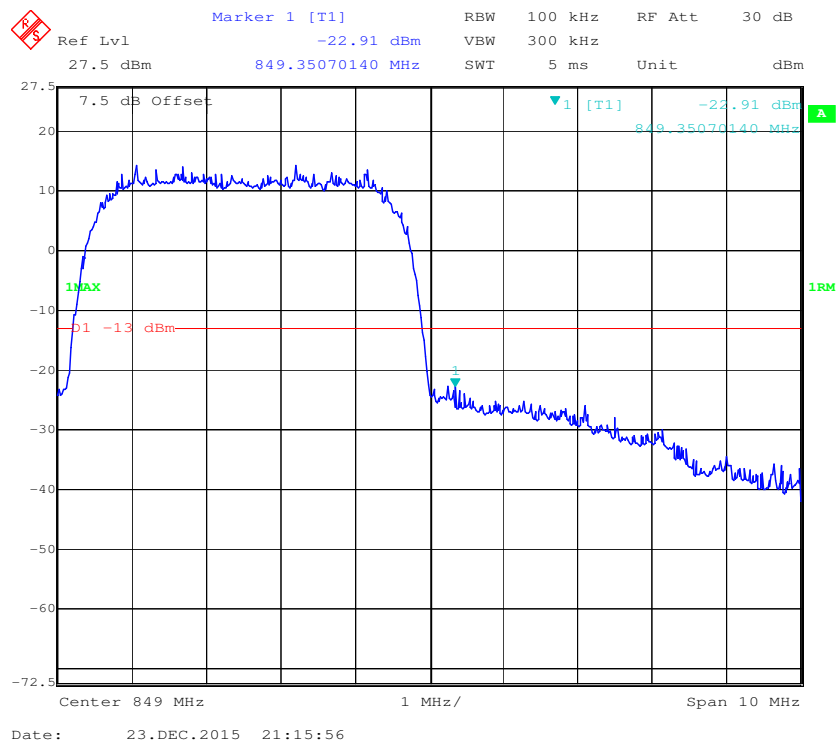


PCS Band, Left Band Edge for GSM (GMSK) Mode

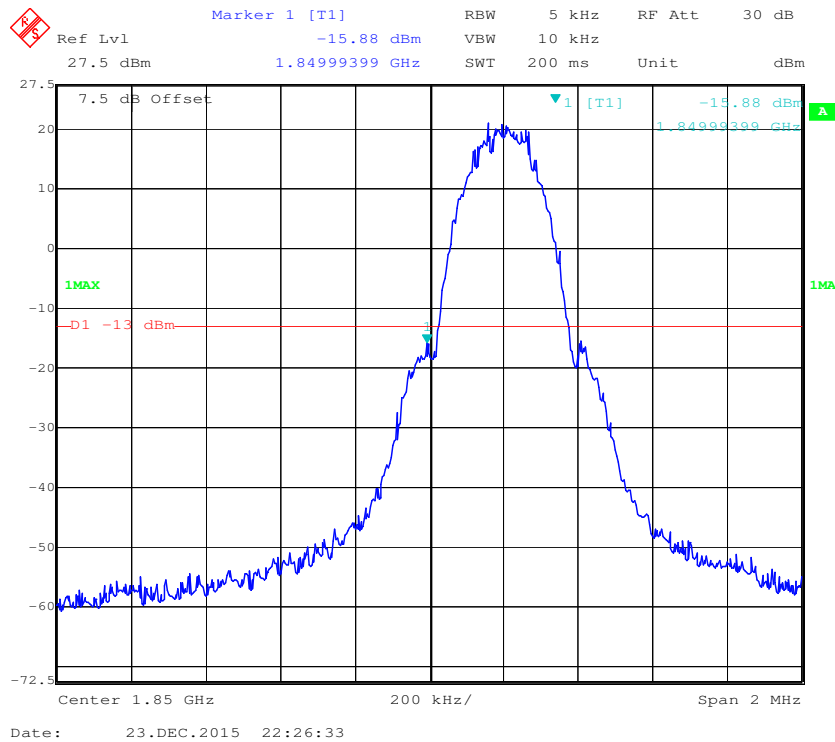


PCS Band, Right Band Edge for GSM (GMSK) Mode

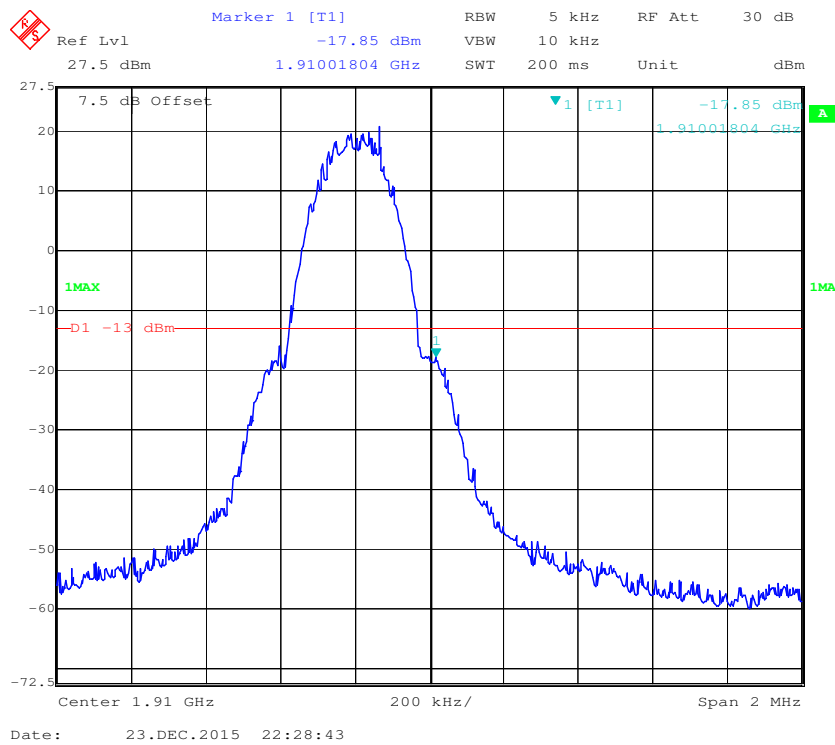


PCS Band, Left Band Edge for EGPRS Mode

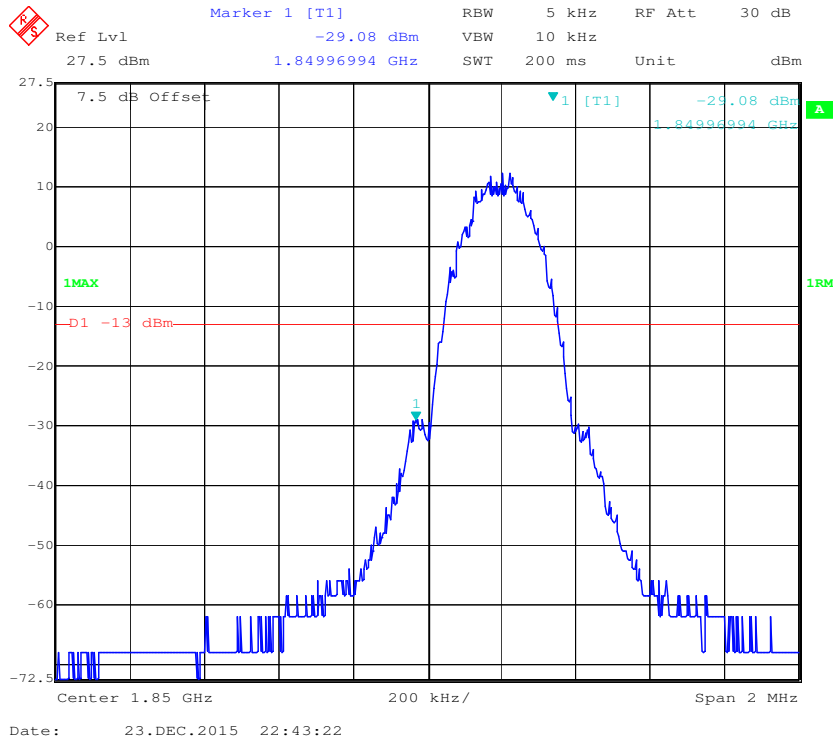


PCS Band, Right Band Edge for EGPRS Mode


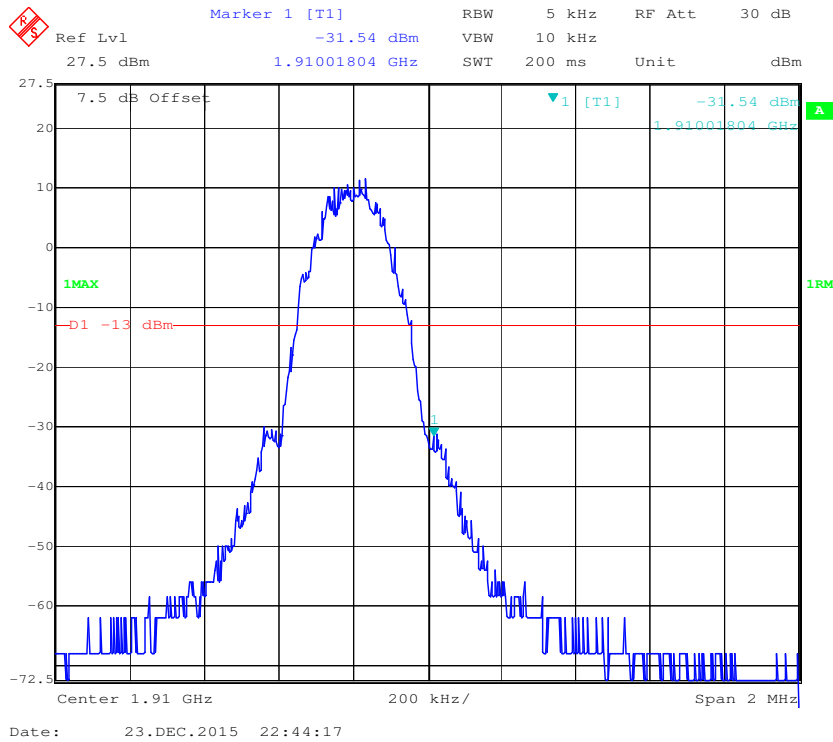


PCS Band, Left Band Edge for WCDMA (BPSK) Mode

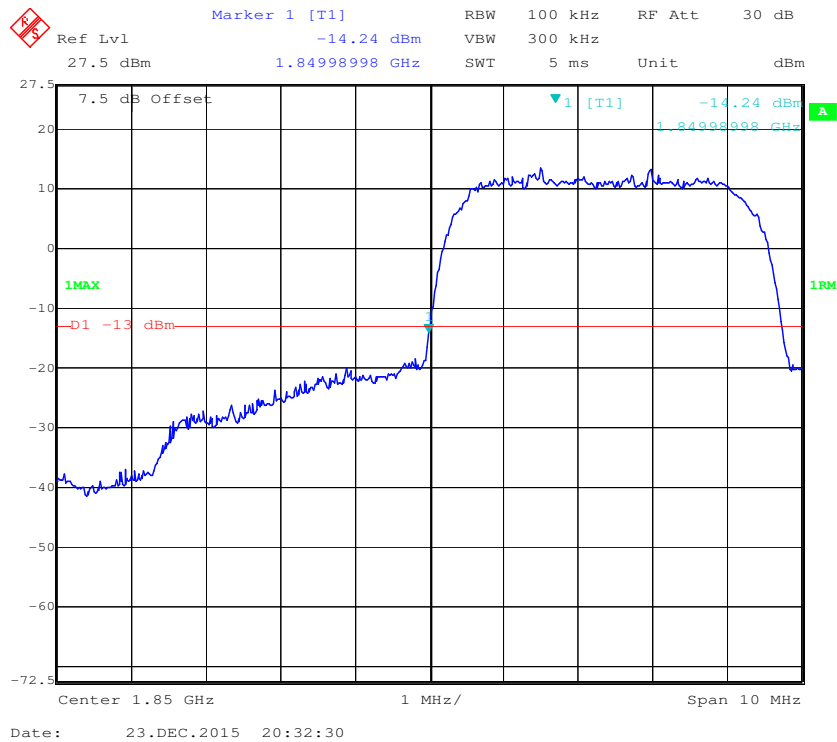


PCS Band, Right Band Edge for WCDMA (BPSK) Mode

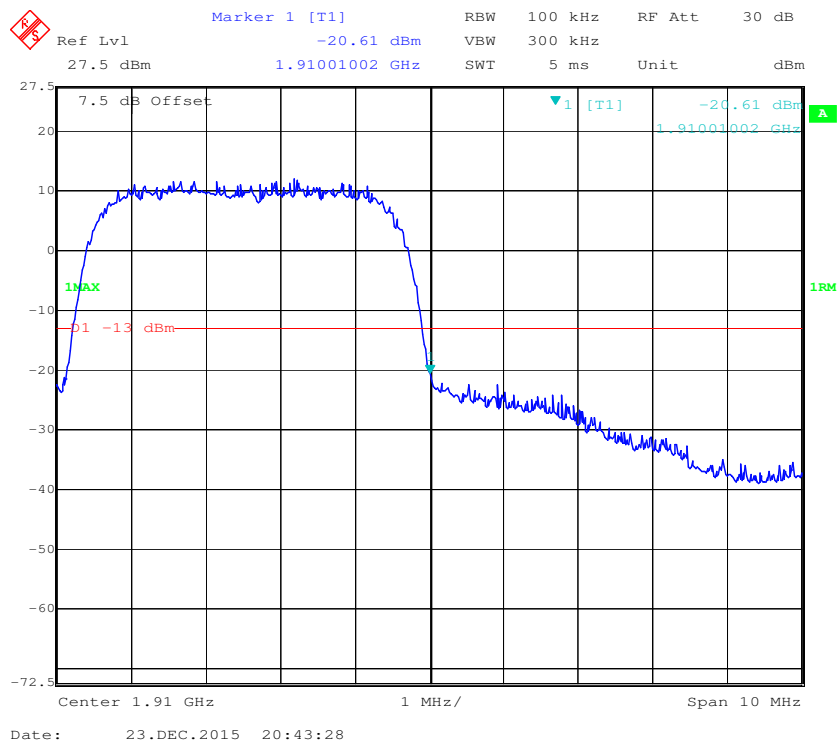


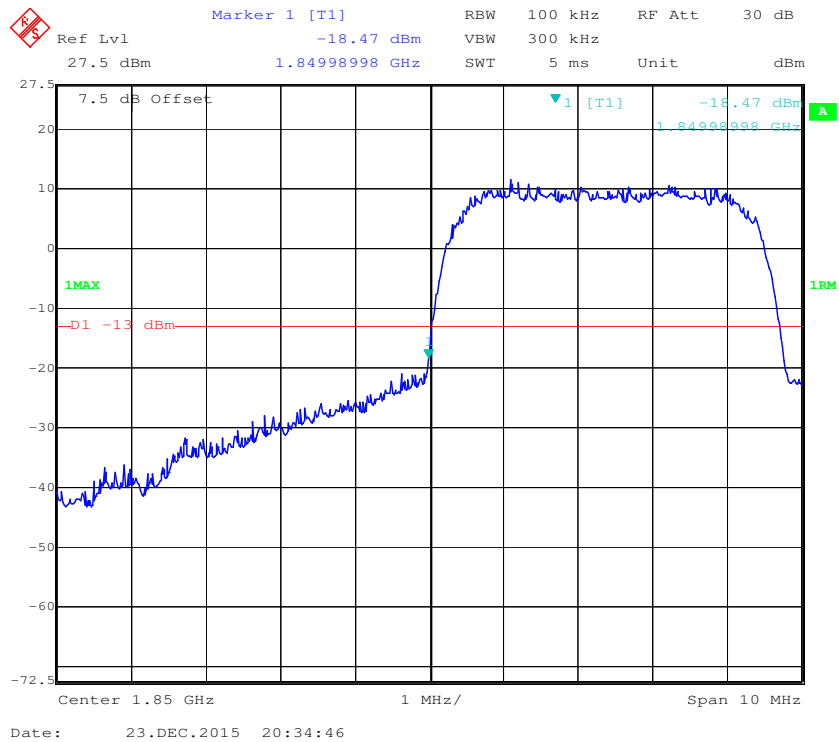
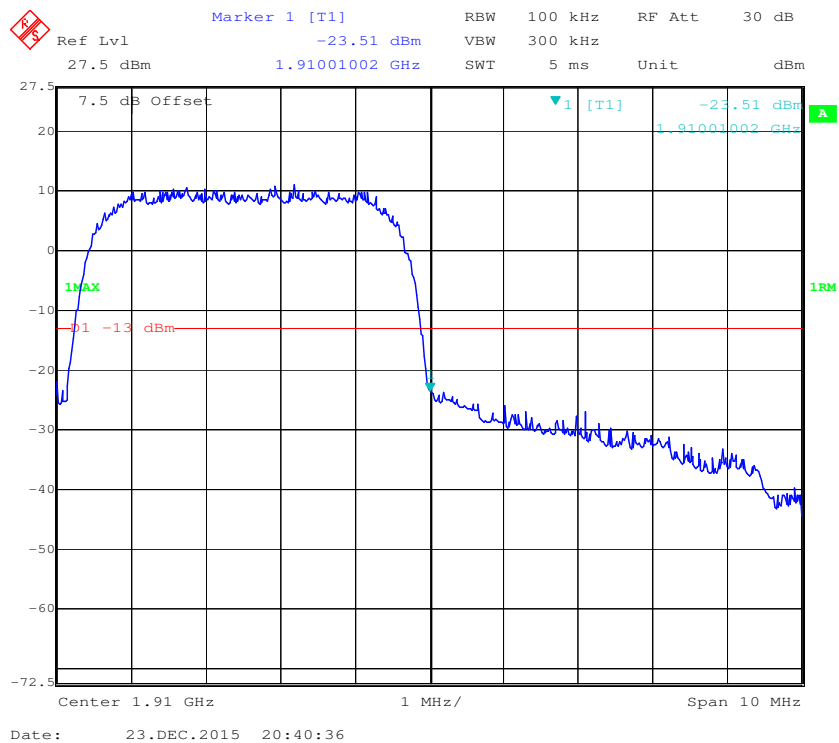
PCS Band, Left Band Edge for HSDPA (16QAM) Mode**PCS Band, Right Band Edge for HSDPA (16QAM) Mode**



PCS Band, Left Band Edge for HSUPA (BPSK) Mode


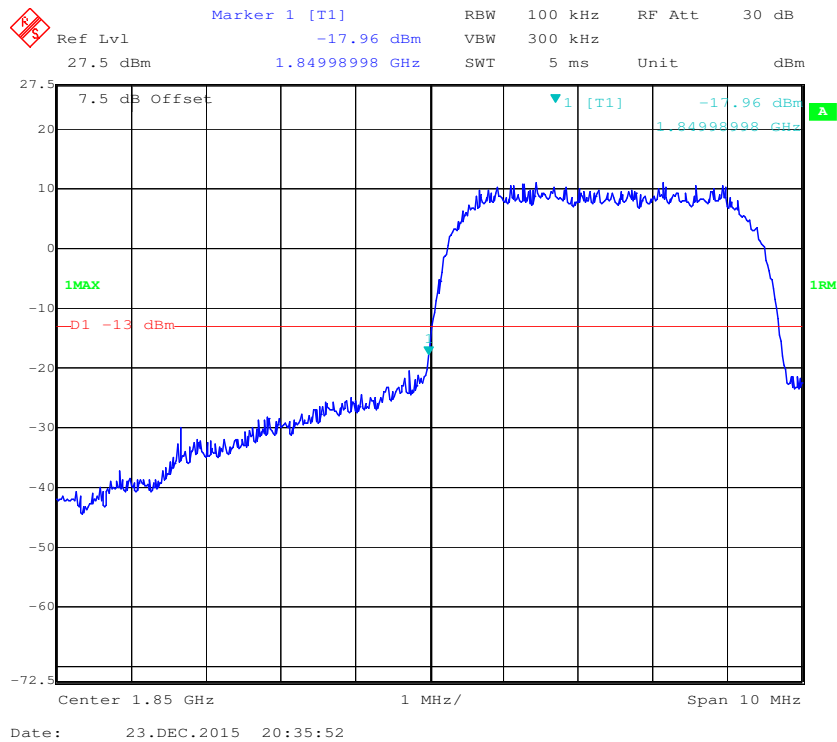


PCS Band, Right Band Edge for HSUPA (BPSK) Mode

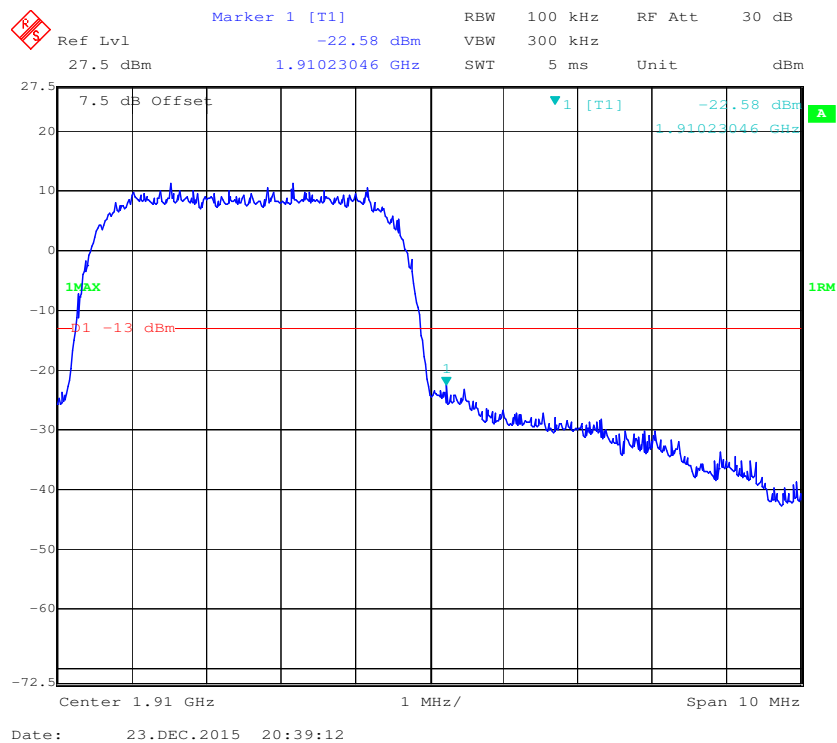

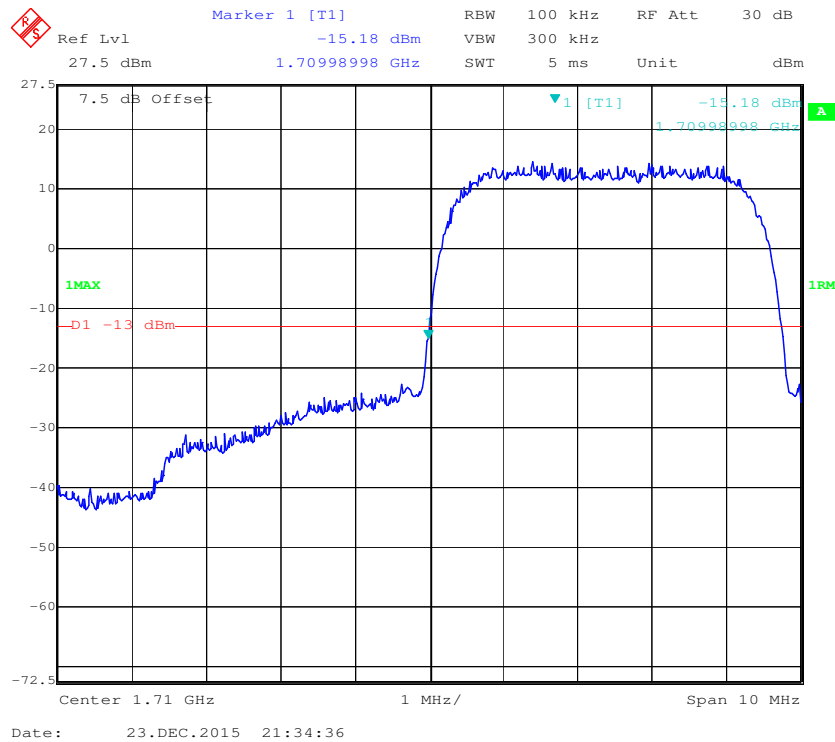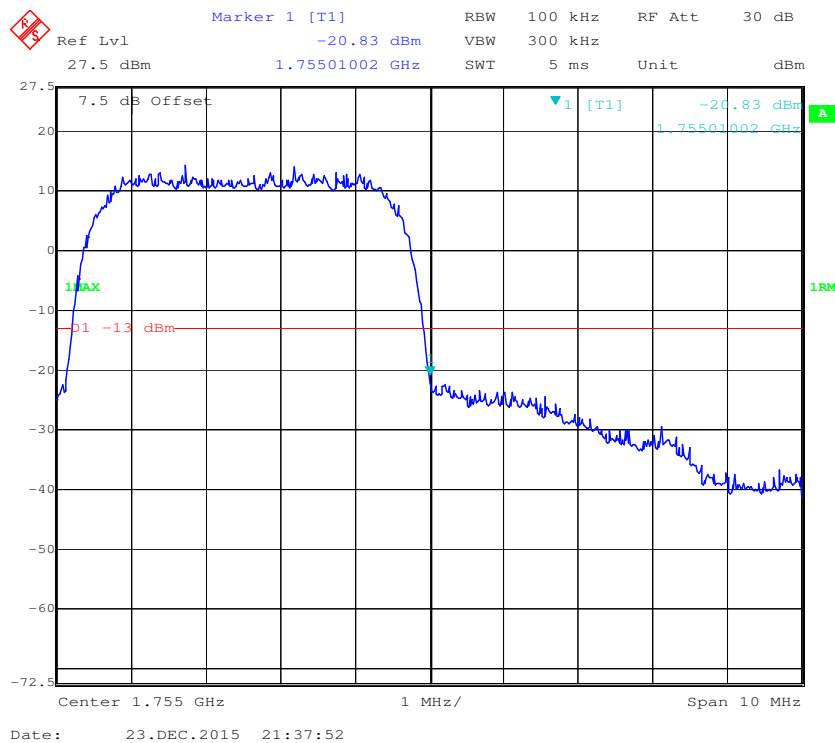Band IV, Left Band Edge for WCDMA (BPSK) Mode**Band IV, Right Band Edge for WCDMA (BPSK) Mode**

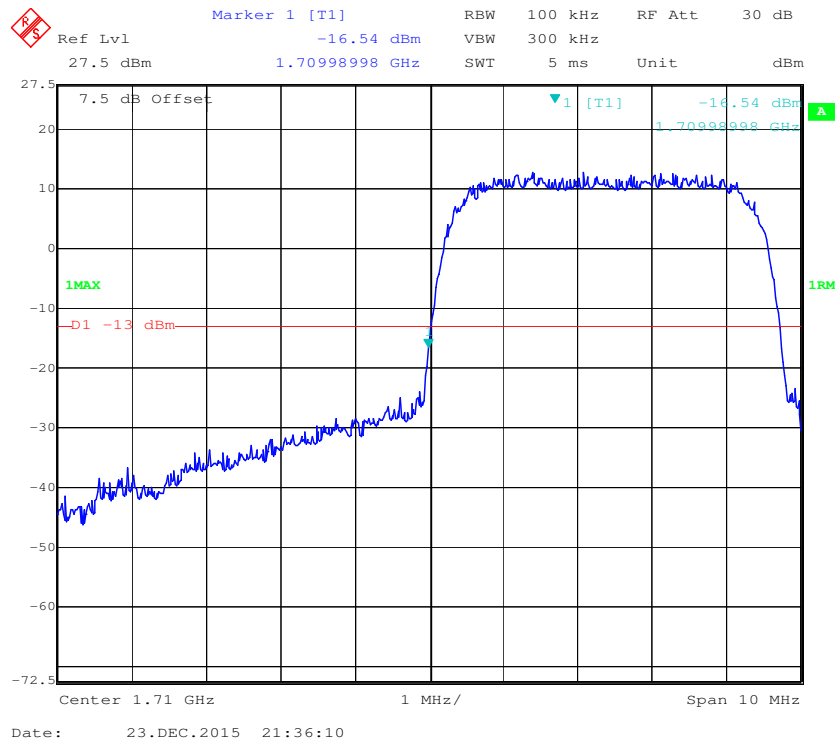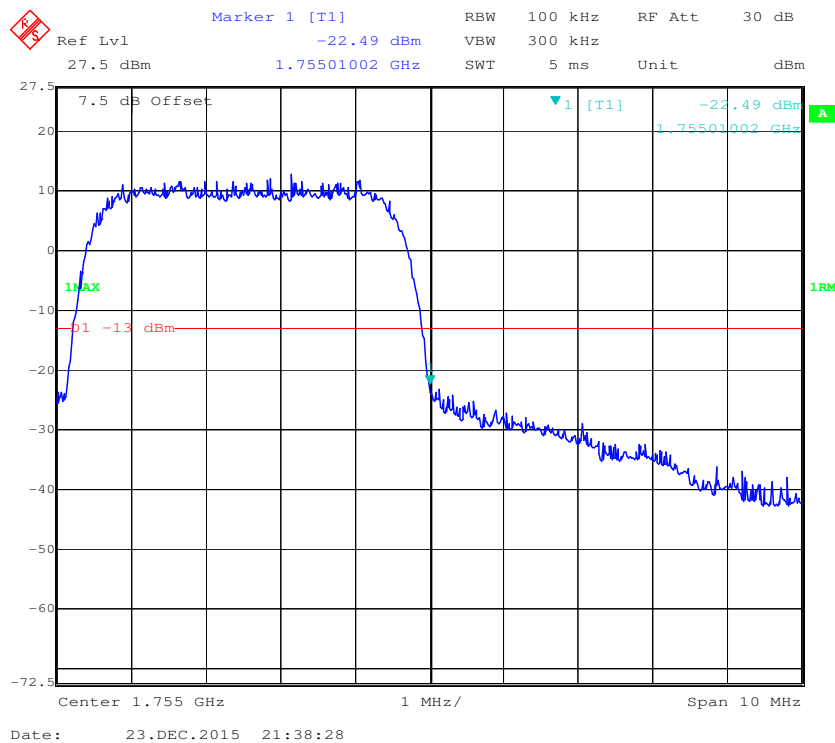Band IV, Left Band Edge for HSDPA (16QAM) Mode**Band IV, Right Band Edge for HSDPA (16QAM) Mode**

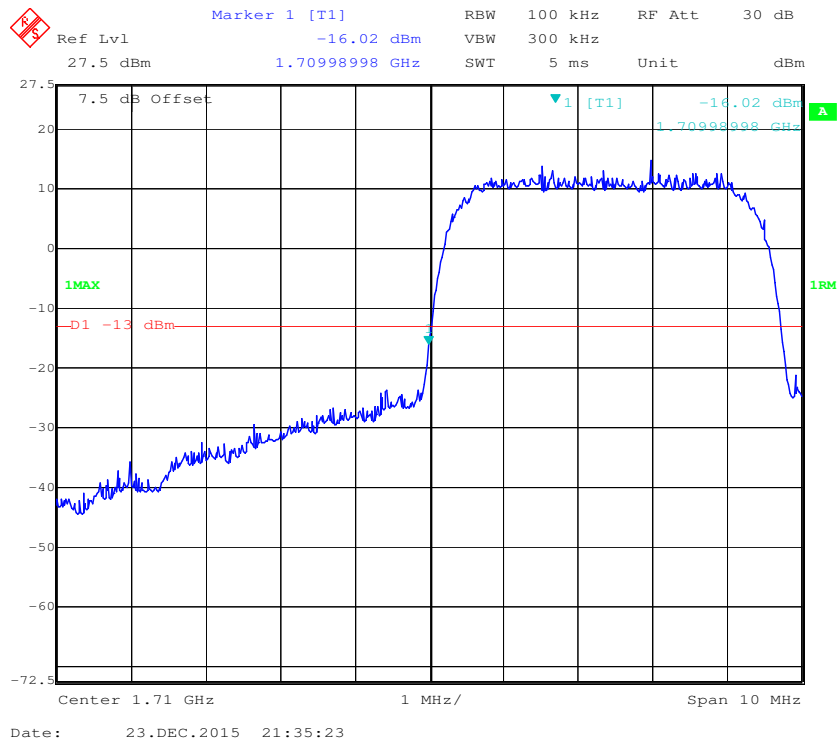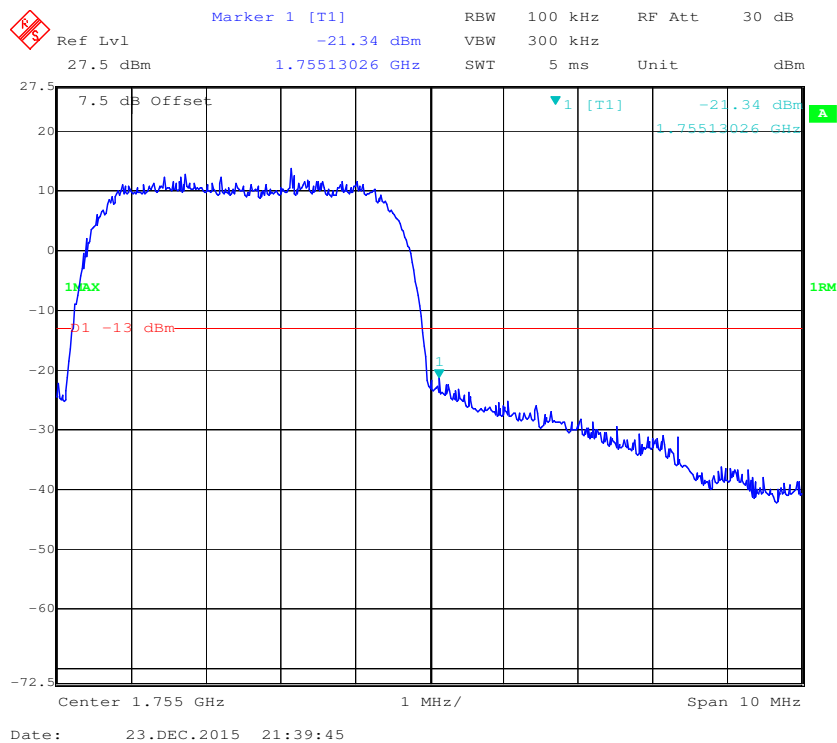Band IV, Left Band Edge for HSUPA (BPSK) Mode**Band IV, Right Band Edge for HSUPA (BPSK) Mode**

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY

Applicable Standards

FCC § 2.1055, §22.355, §24.235 and § 27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

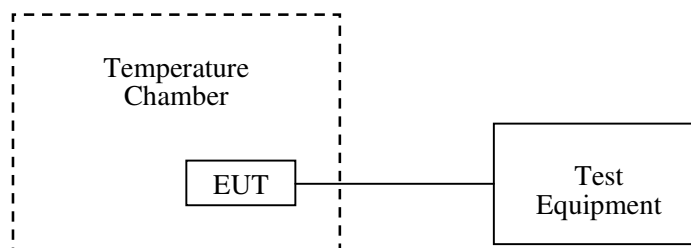

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2015-11-01	2016-10-31
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by David Lee on 2015-12-23.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)**GSM Mode**

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-20	3.7	19	0.02271	2.5
-10		18	0.02152	2.5
0		10	0.01195	2.5
10		14	0.01673	2.5
20		9	0.01076	2.5
30		15	0.01793	2.5
40		20	0.02391	2.5
50		20	0.02391	2.5
25	V min.= 3.5	15	0.02032	2.5
25	V max.= 4.2	14	0.01793	2.5

EDGE Mode

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-20	3.7	31	0.03705	2.5
-10		26	0.03108	2.5
0		22	0.02630	2.5
10		12	0.01434	2.5
20		10	0.01195	2.5
30		23	0.02749	2.5
40		32	0.03825	2.5
50		11	0.01315	2.5
25	V min.= 3.5	22	0.02630	2.5
25	V max.= 4.2	21	0.02510	2.5

WCDMA Mode

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-20	3.7	23	0.02749	2.5
-10		25	0.02988	2.5
0		20	0.02391	2.5
10		27	0.03227	2.5
20		24	0.02869	2.5
30		17	0.02032	2.5
40		19	0.02271	2.5
50		24	0.02869	2.5
25	V min.= 3.5	37	0.04423	2.5
25	V max.= 4.2	33	0.03945	2.5

PCS Band (Part 24E)**GSM Mode**

Middle Channel, $f_0=1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-20	3.7	21	0.01117	Pass
-10		25	0.01330	Pass
0		23	0.01223	Pass
10		22	0.01170	Pass
20		27	0.01436	Pass
30		20	0.01064	Pass
40		29	0.01543	Pass
50		34	0.01809	Pass
25	V min.= 3.5	31	0.01649	Pass
25	V max.= 4.2	25	0.01330	Pass

EDGE Mode

Middle Channel, $f_0=1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-20	3.7	24	0.01277	Pass
-10		27	0.01436	Pass
0		19	0.01011	Pass
10		13	0.00691	Pass
20		19	0.01011	Pass
30		29	0.01543	Pass
40		28	0.01489	Pass
50		35	0.01862	Pass
25	V min.= 3.5	34	0.01809	Pass
25	V max.= 4.2	38	0.02021	Pass

WCDMA Mode

Middle Channel, $f_0=1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-20	3.7	20	0.01064	Pass
-10		15	0.00798	Pass
0		17	0.00904	Pass
10		16	0.00851	Pass
20		25	0.01330	Pass
30		32	0.01702	Pass
40		34	0.01809	Pass
50		39	0.02074	Pass
25	V min.= 3.5	34	0.01809	Pass
25	V max.= 4.2	31	0.01649	Pass

Part 27

Middle Channel, $f_0=1732.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-20	3.7	27	0.01558	Pass
-10		33	0.01905	Pass
0		31	0.01789	Pass
10		21	0.01212	Pass
20		23	0.01327	Pass
30		28	0.01616	Pass
40		14	0.00808	Pass
50		28	0.01616	Pass
25	V min.= 3.5	29	0.01674	Pass
25	V max.= 4.2	23	0.01327	Pass

PRODUCT SIMILARITY DECLARATION LETTER

b mobile HK Limited
Flat 18; 14/F Block 1; Golden Industrial Building; 16-26 Kwai Tak Street; Kwai Chung;
New Territories, HONG KONG, China
TEL.: 852-2728 7886 FAX: 852-2728 0468

02/04/2016

Product Similarity Declaration

To Whom It May Concern,

We, b mobile HK Limited, hereby declare that we have a product named as Mobile Phone (Model No: AX675) was tested by BACL, meanwhile, for our marketing purpose, we would like to list a series model (AX670), on reports and certificate, all the models are identical schematics, except for the differences as below,
1, Only different Model No.

No other changes are made to them.

We confirm that all information above is true, and we'll be responsible for all the consequences. Please contact me if you have any question.

Sincerely Yours,

For and on behalf of
b mobile HK Limited

Signature:

KA SHING LAM *Authorized Signature(s)*
DIRECTOR

******* END OF REPORT *******