


Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT20-OFDMA	5	6195	6194	-68.57	-70.64	V	V	V	V	V	V	V	V	X	V	90	90
	6	6475	6474	-68.86	-70.67	V	V	V	V	V	V	V	V	V	V	100	90
	7	6695	6694	-66.55	-68.41	V	V	V	V	V	V	V	V	V	V	100	90
	8	6995	6994	-69	-70.47	V	V	V	V	V	V	V	V	V	V	100	90


Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT320-OFDMA	5	6105	5950	-70.29	-72.36	V	V	V	V	V	V	V	V	V	V	100	90
			6100	-69.23	-71.3	V	V	V	V	V	V	V	V	V	V	100	90
			6260	-69.79	-71.86	V	V	V	V	V	V	V	V	V	V	100	90
	6 / 7	6585	6430	-71.64	-73.45	V	V	V	V	V	V	V	V	V	V	100	90
			6580	-67.88	-69.69	V	V	V	V	V	V	V	V	V	V	100	90
			6740	-69.95	-71.76	V	V	V	V	V	V	V	V	V	V	100	90
	7 / 8	6905	6750	-70.76	-72.23	V	V	V	V	V	V	V	V	V	V	100	90
			6900	-68.81	-70.28	V	V	V	V	V	V	V	V	V	V	100	90
			7060	-72.64	-74.11	V	V	V	V	V	V	V	V	V	V	100	90

Test plot of Incumbent signal


BW: 20 MHz / Frequency : 6194 MHz

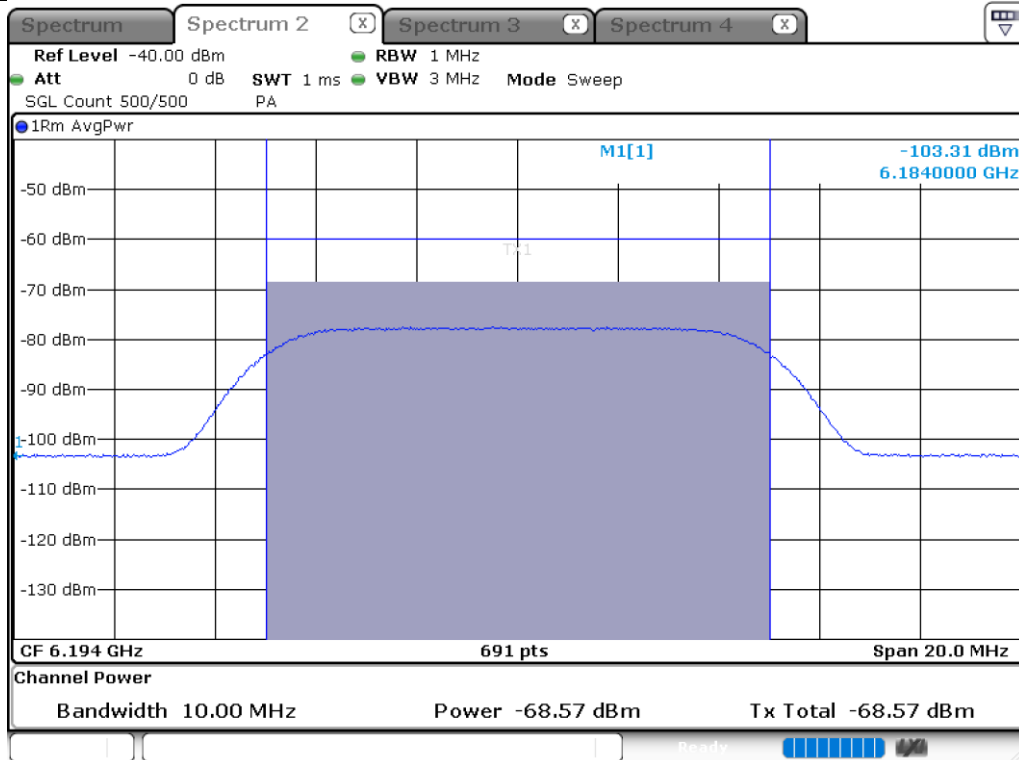


BW: 20 MHz / Frequency : 6474 MHz

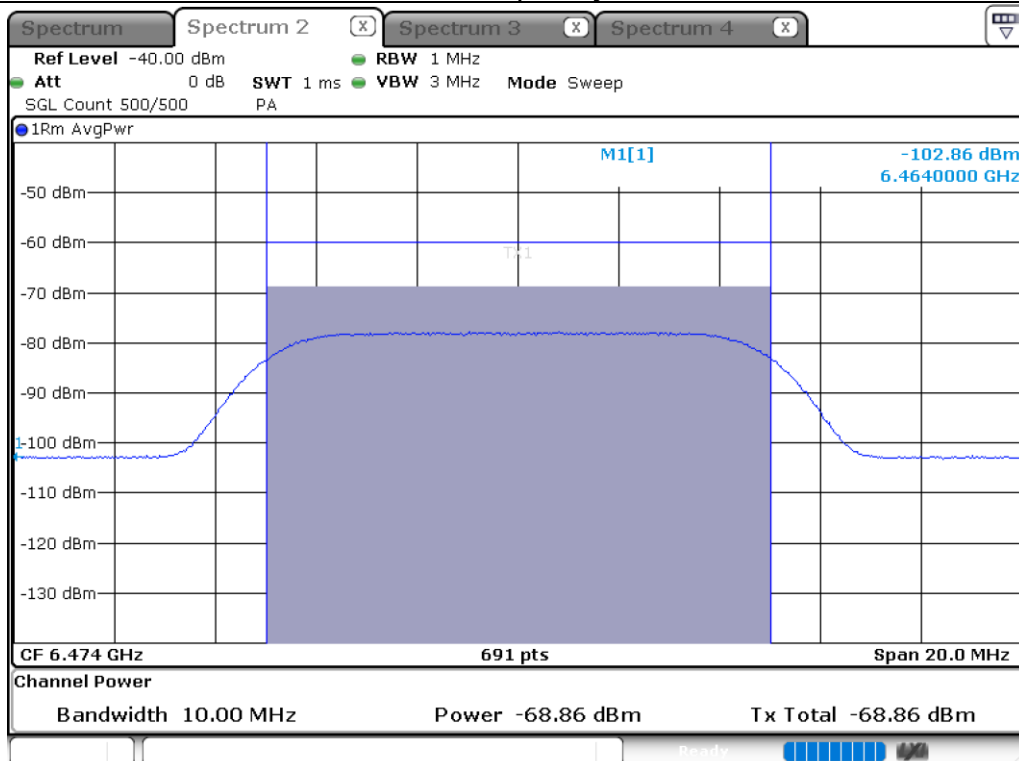


BW: 20 MHz / Frequency : 6694 MHz

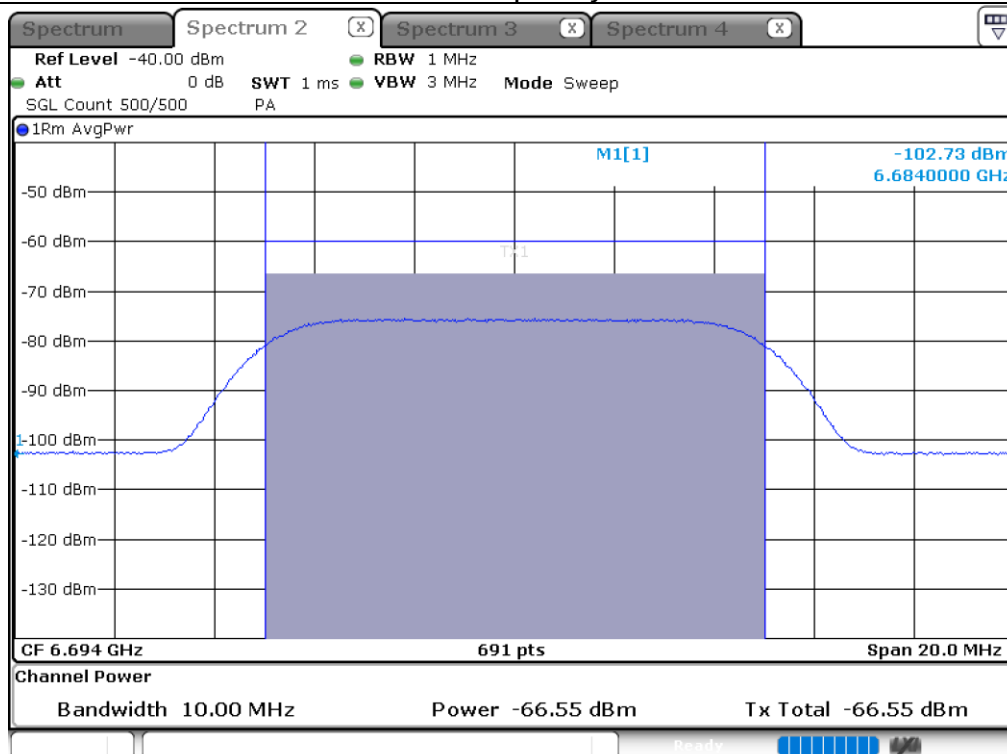


BW: 20 MHz / Frequency : 6994MHz

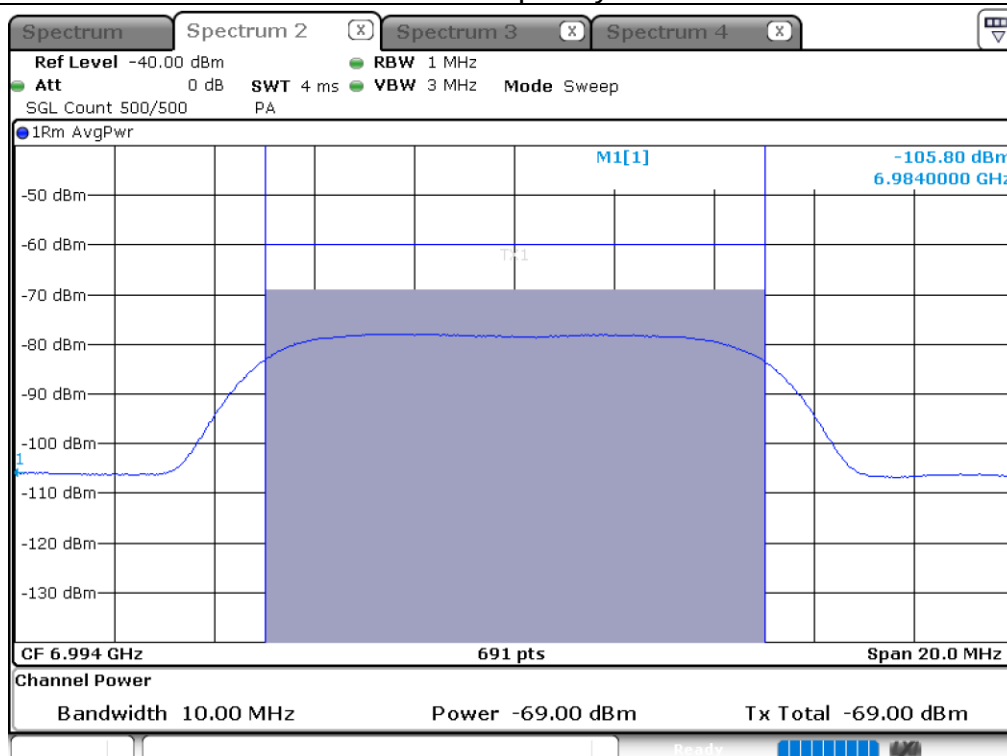


BW: 320 MHz / Frequency : 5950 MHz

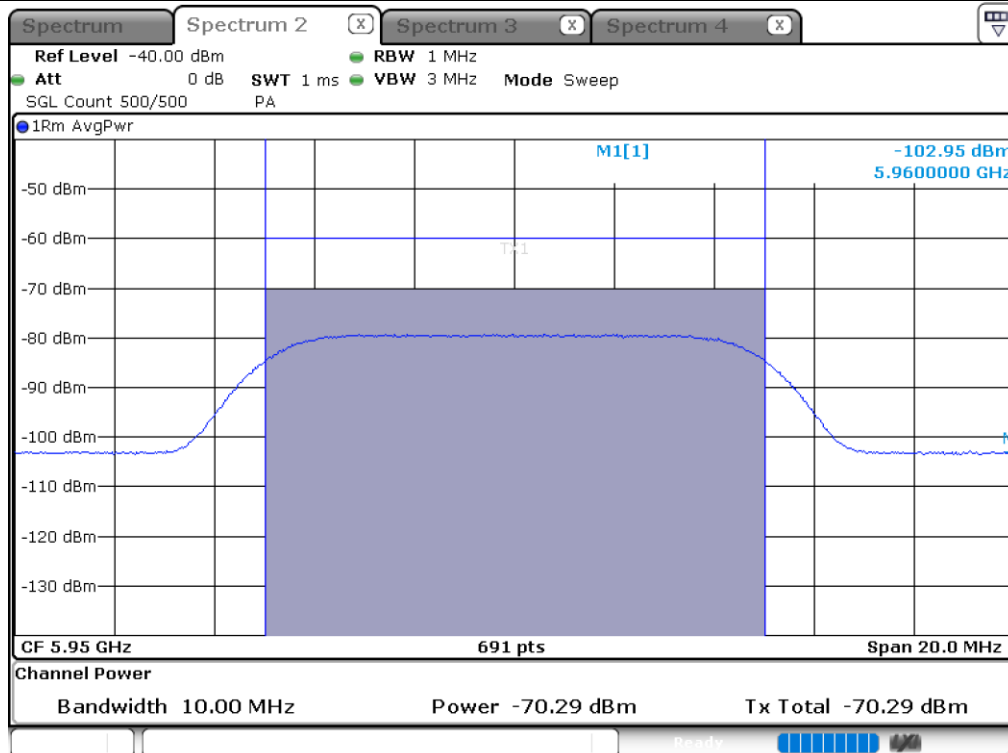


BW: 320 MHz / Frequency : 6100 MHz

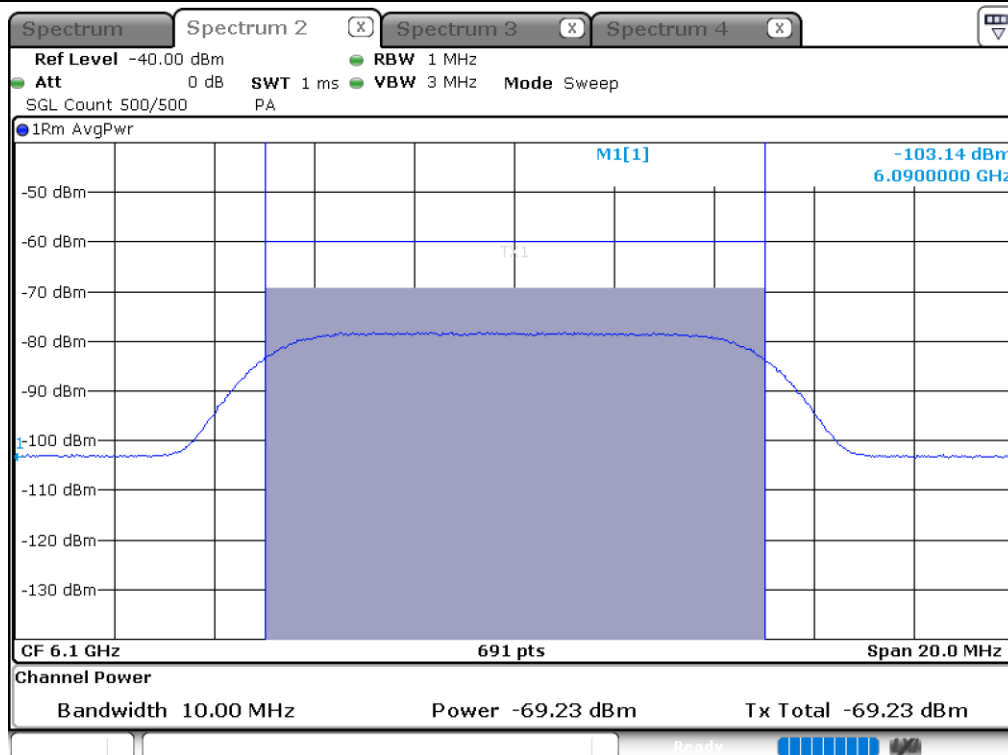


BW: 320 MHz / Frequency : 6260 MHz

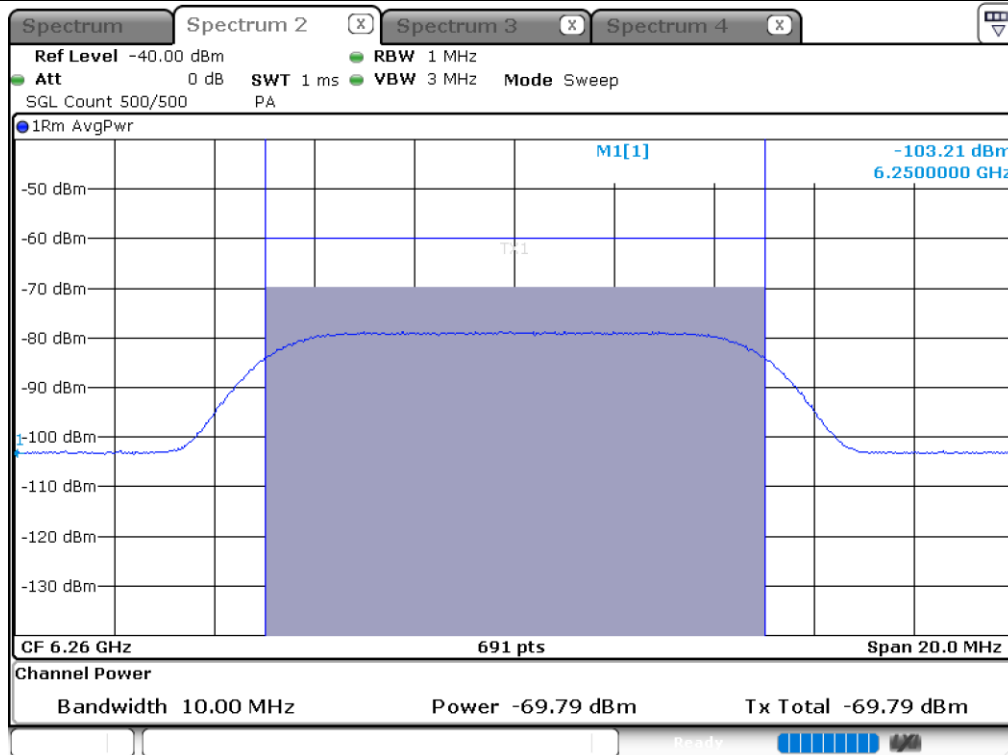


BW: 320 MHz / Frequency : 6430 MHz

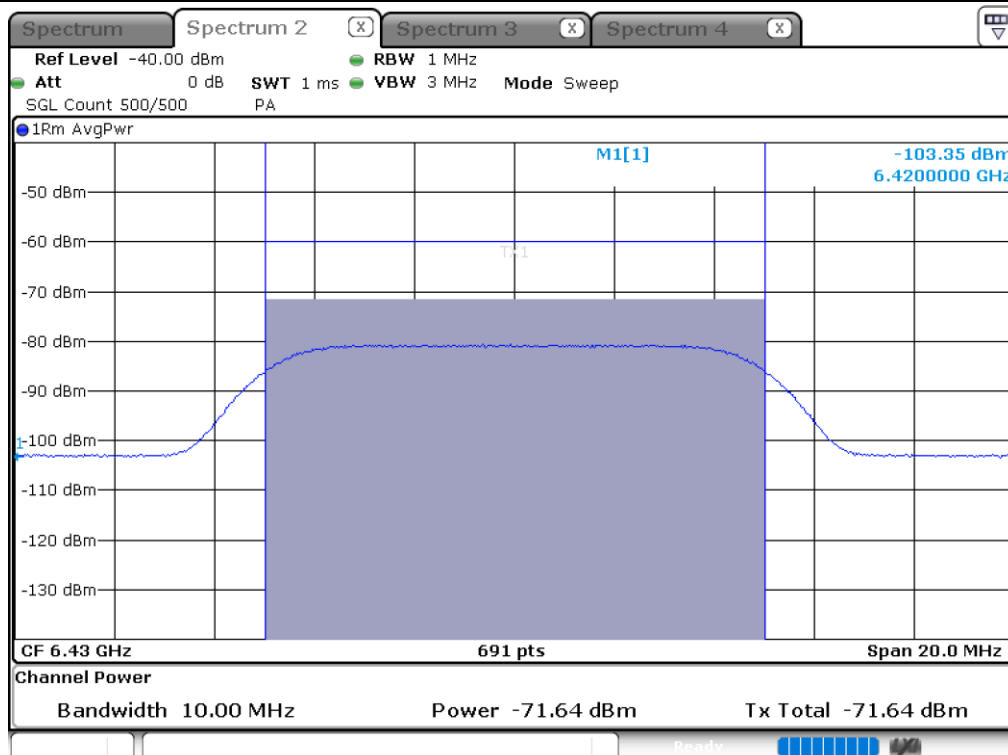


BW: 320 MHz / Frequency : 6580 MHz

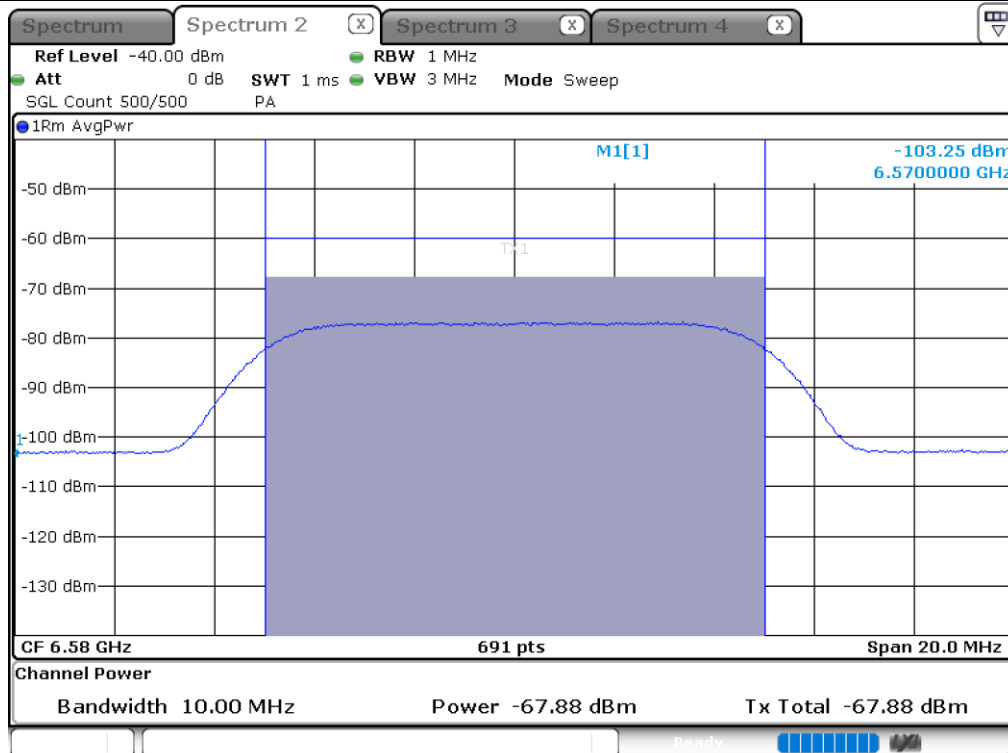


BW: 320 MHz / Frequency : 6740 MHz

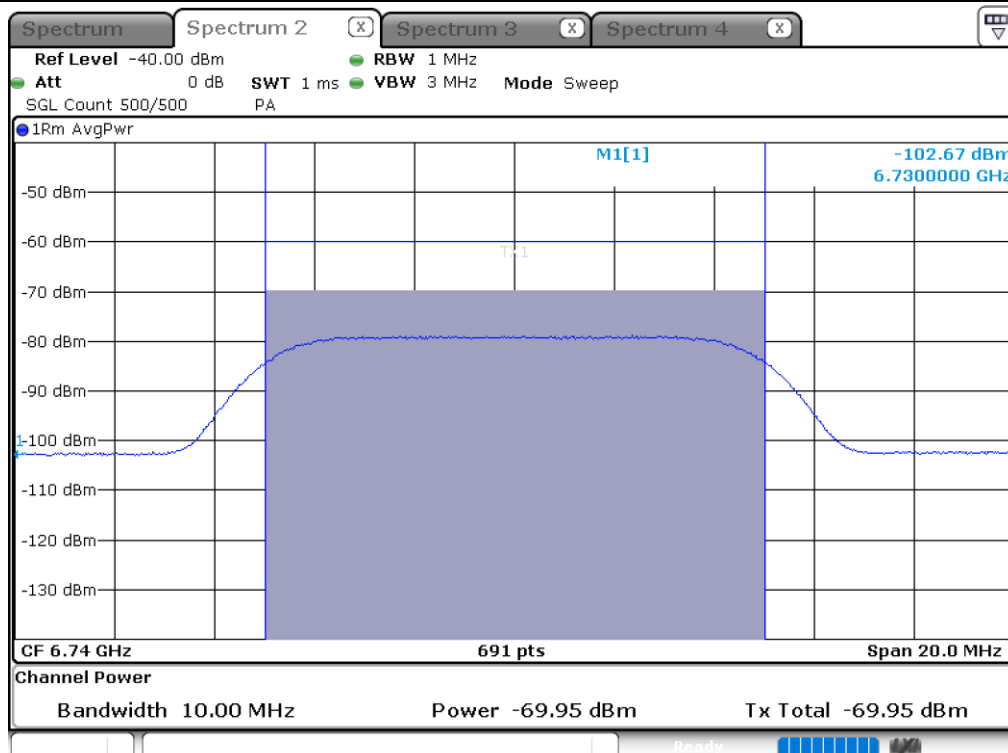


BW: 320 MHz / Frequency : 6750 MHz

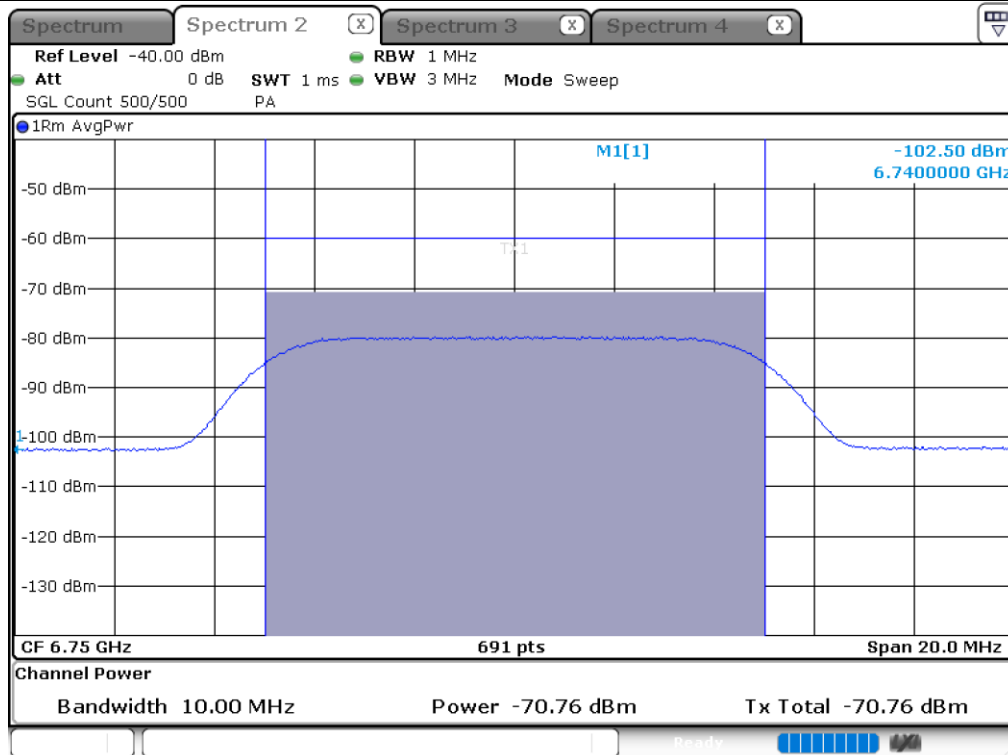


BW: 320 MHz / Frequency : 6900 MHz

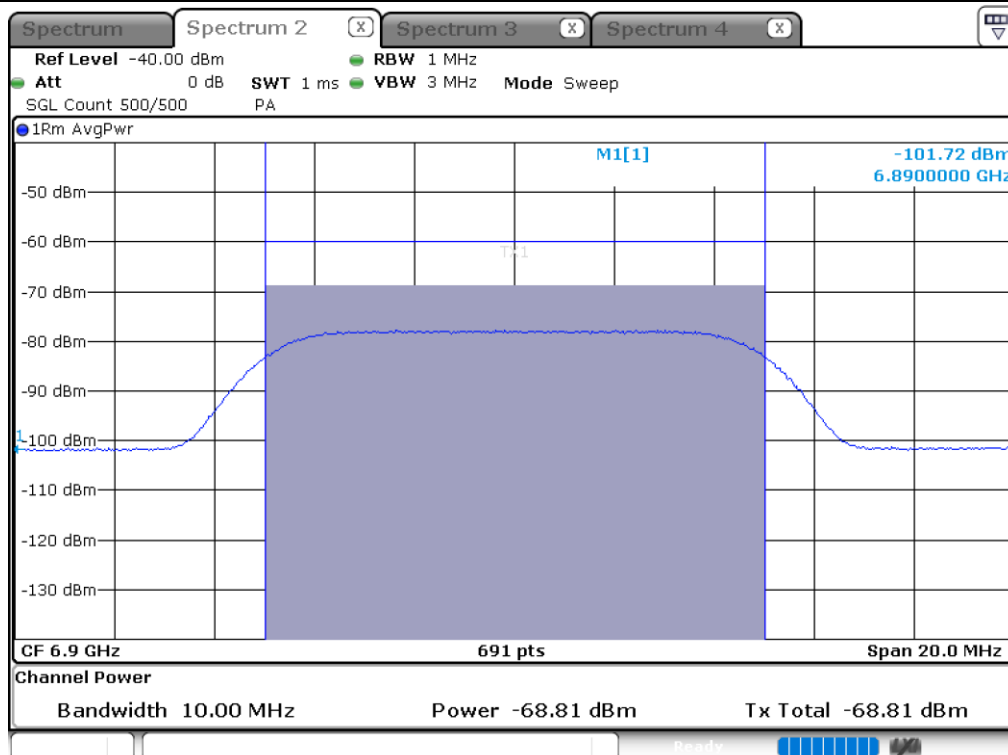


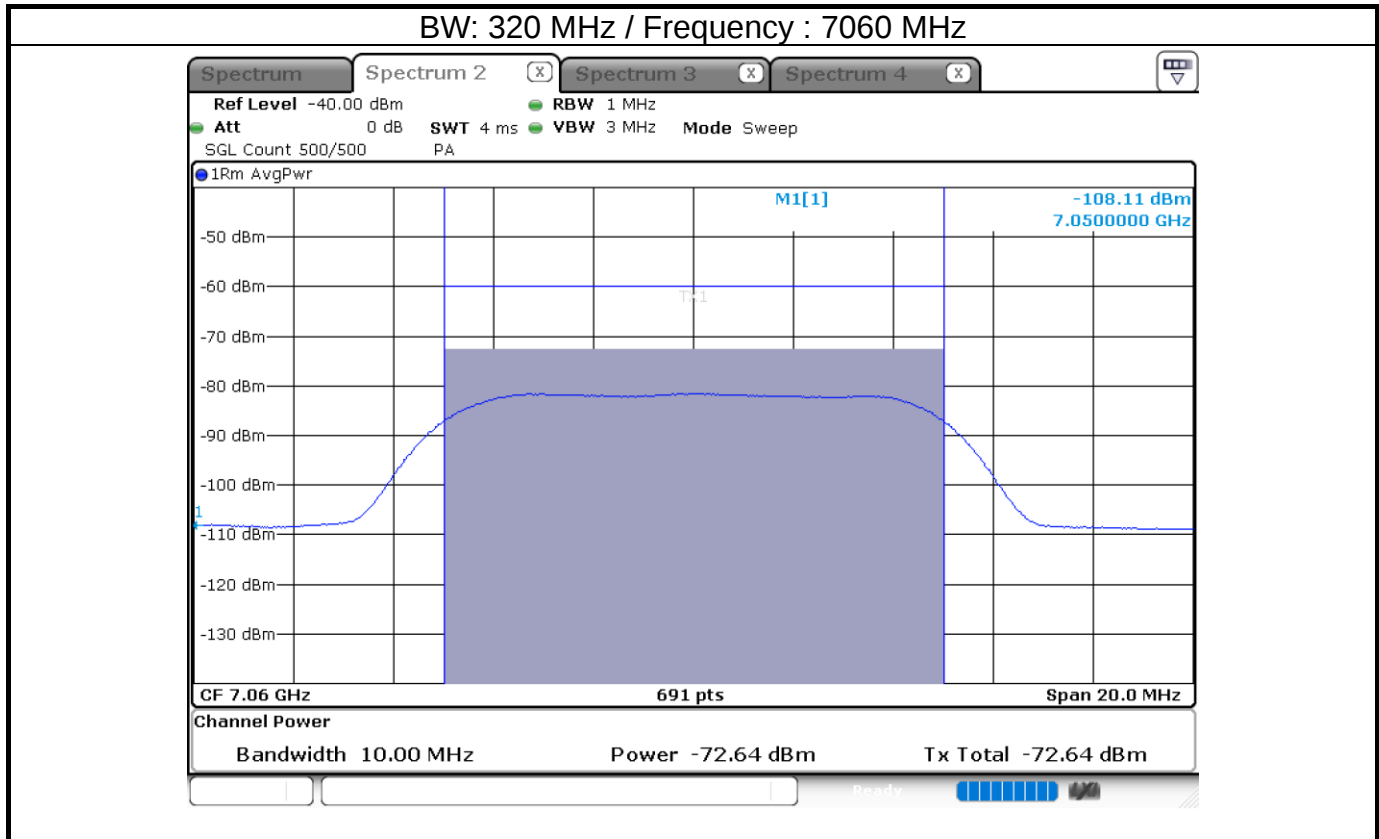


Test plot of Contention Based Protocol EUT Normal transmission

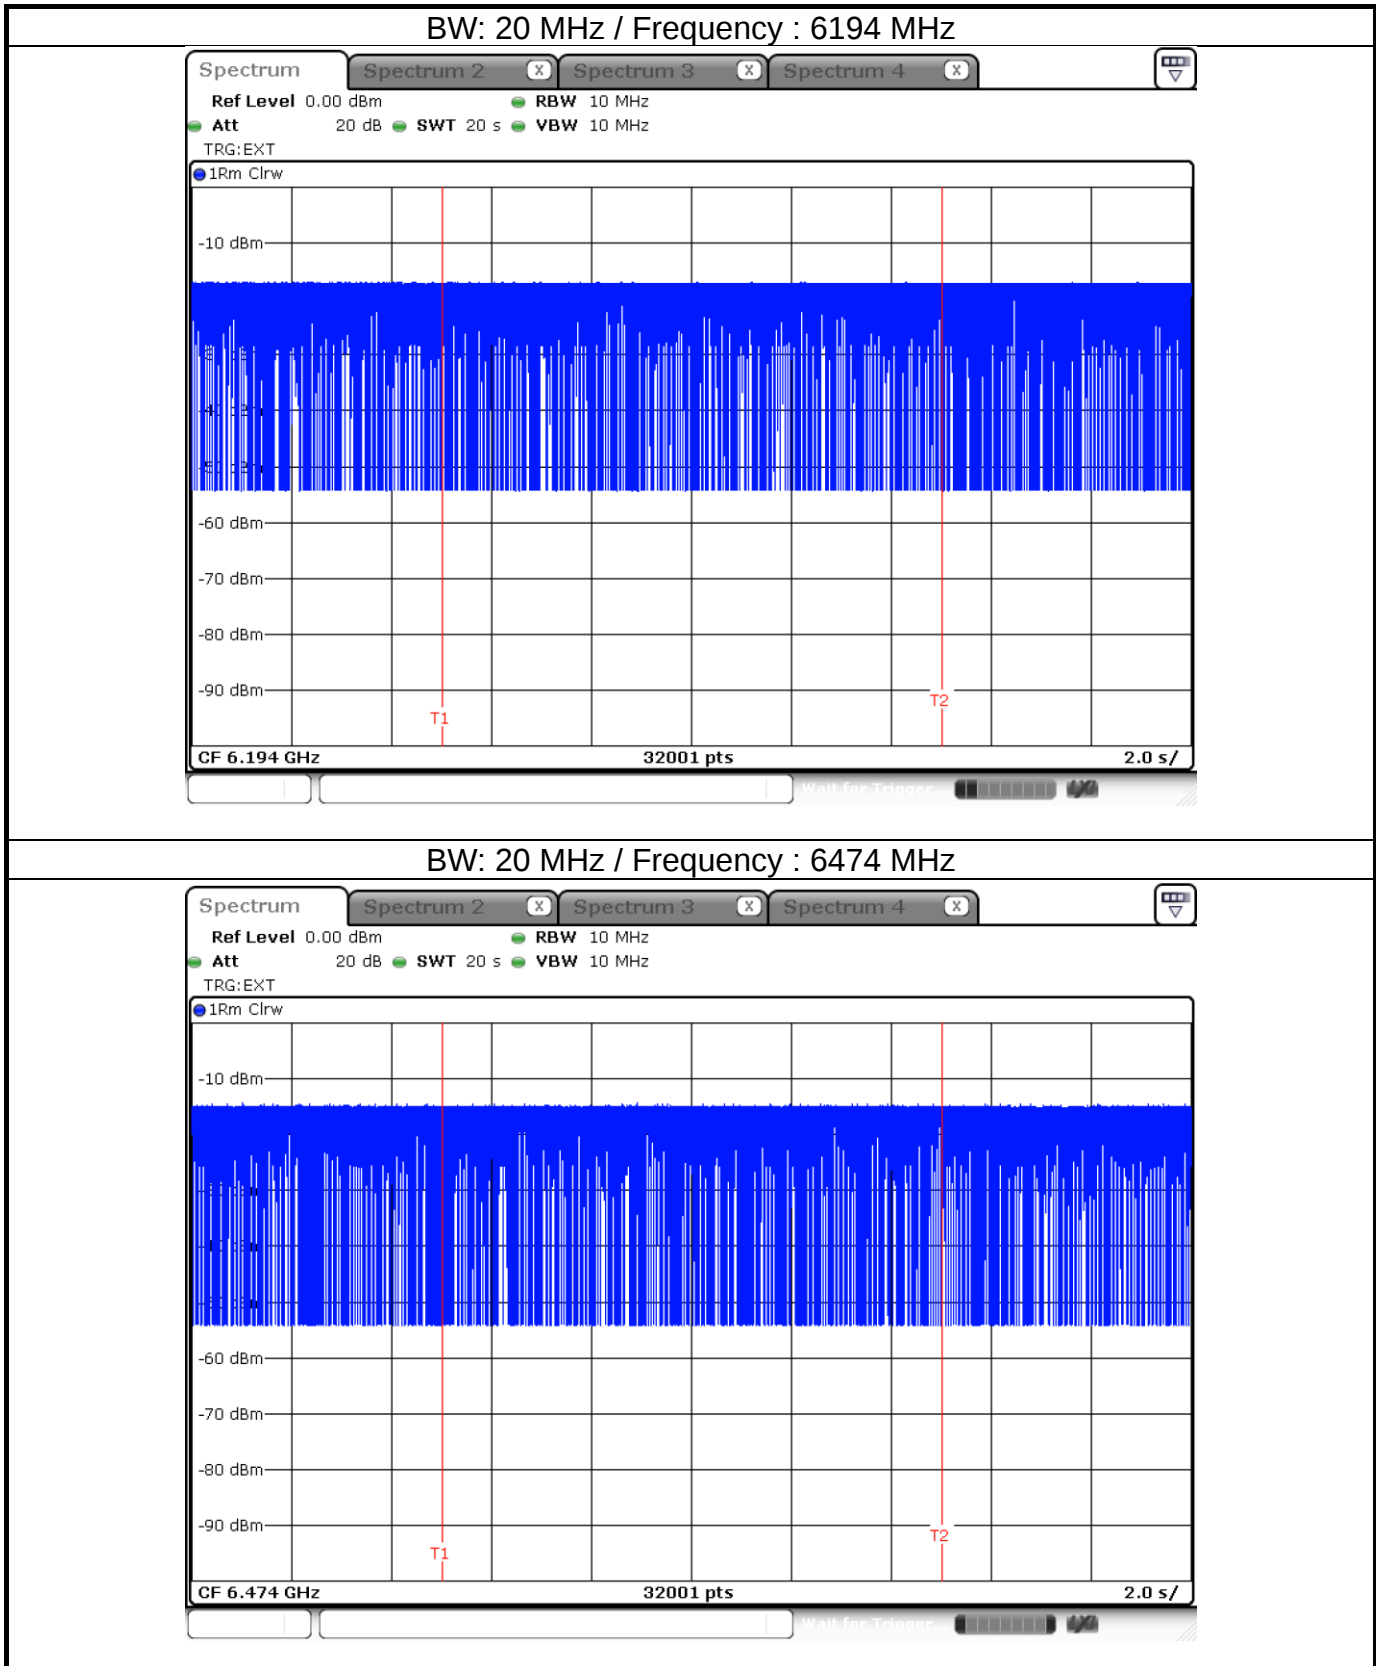


BW: 20 MHz / Frequency : 6694 MHz

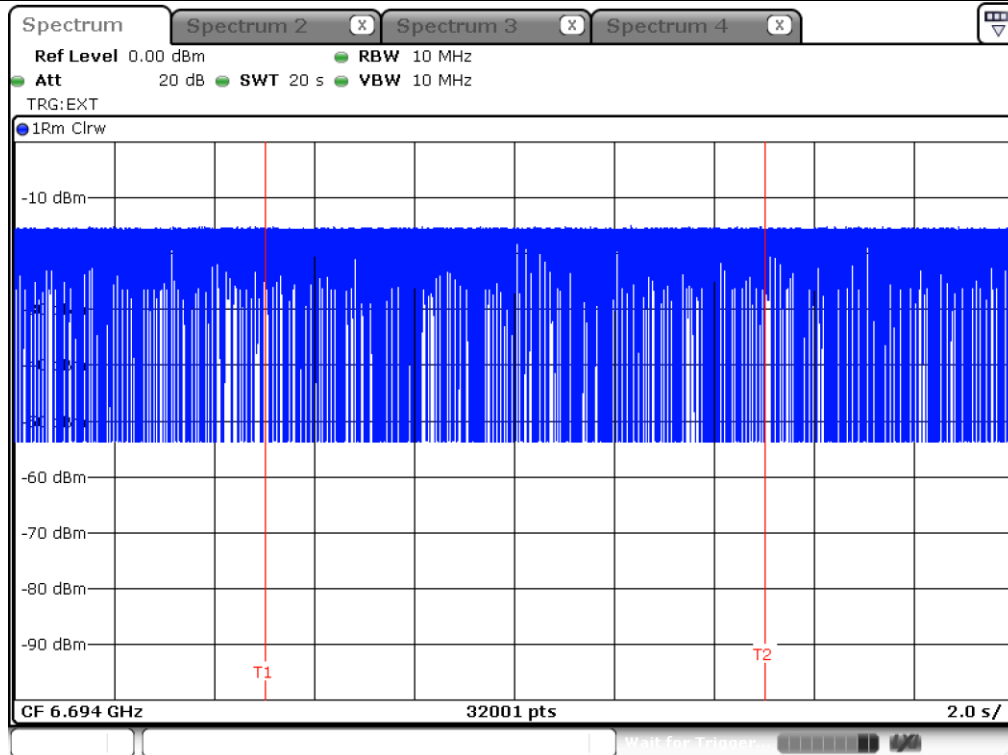


BW: 20 MHz / Frequency : 6994 MHz

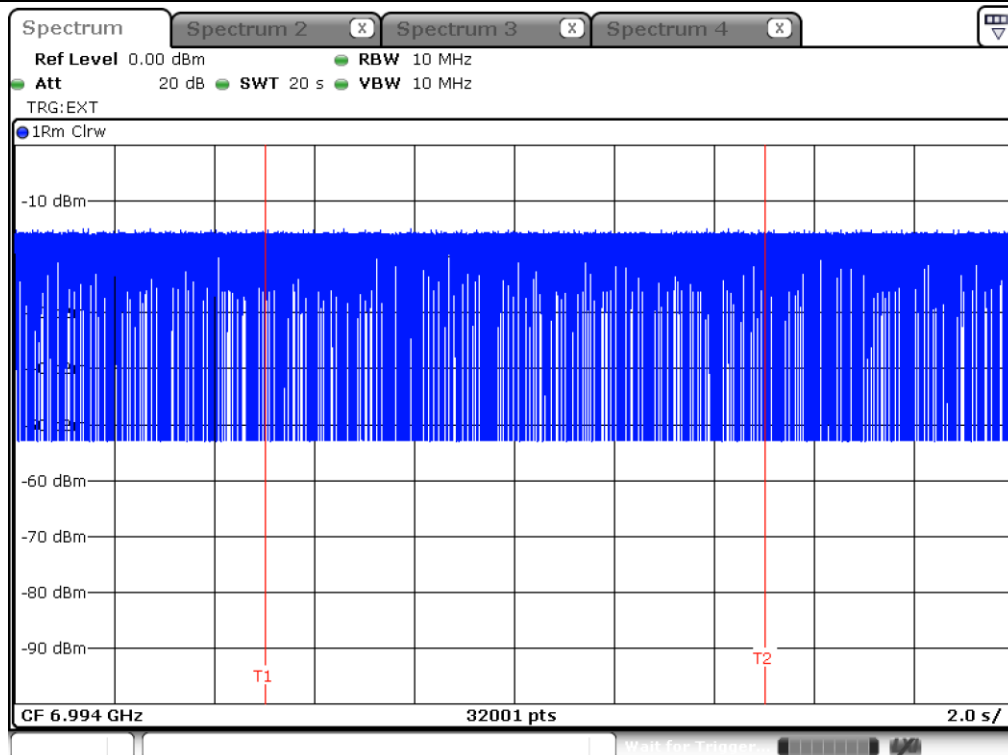


BW: 320 MHz / Frequency : 6100 MHz


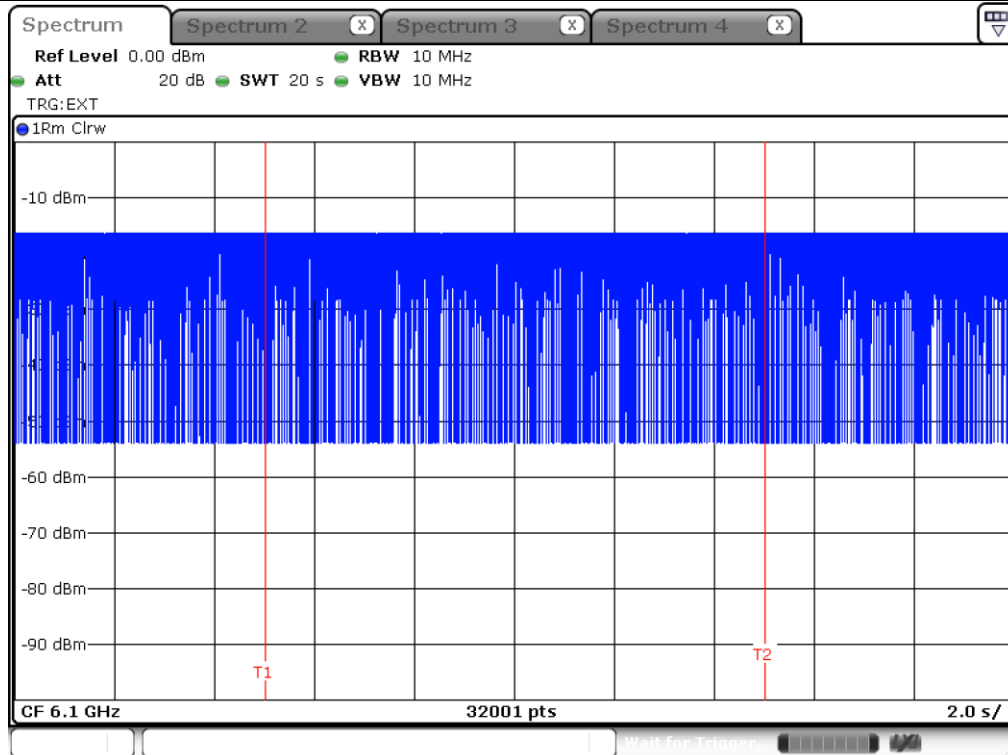


BW: 320 MHz / Frequency : 6580 MHz

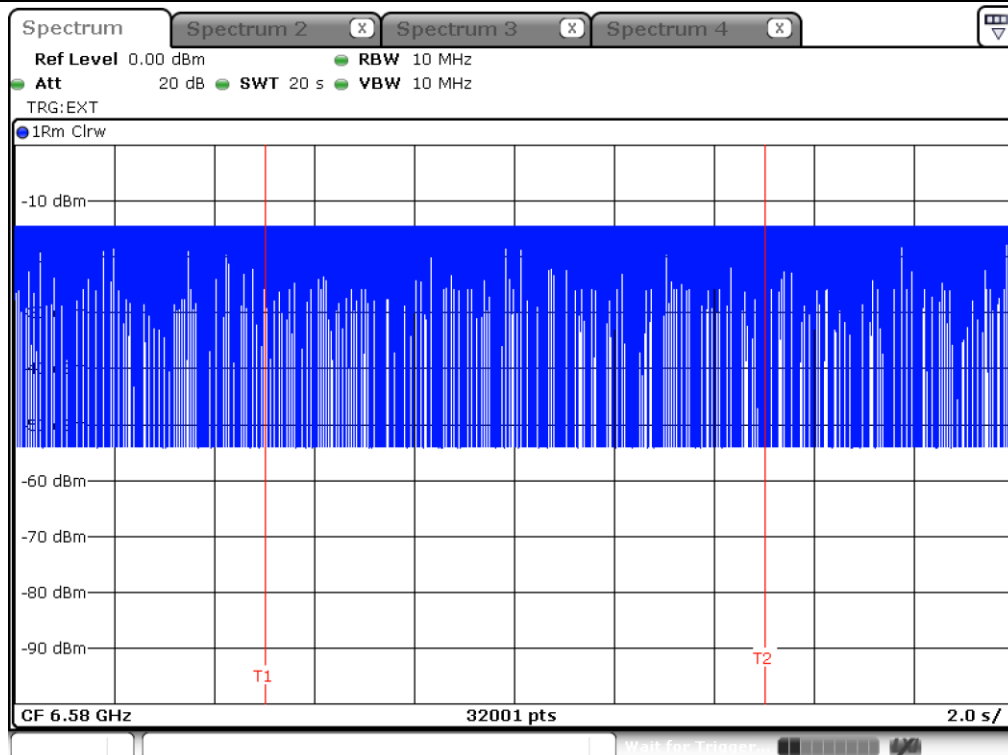


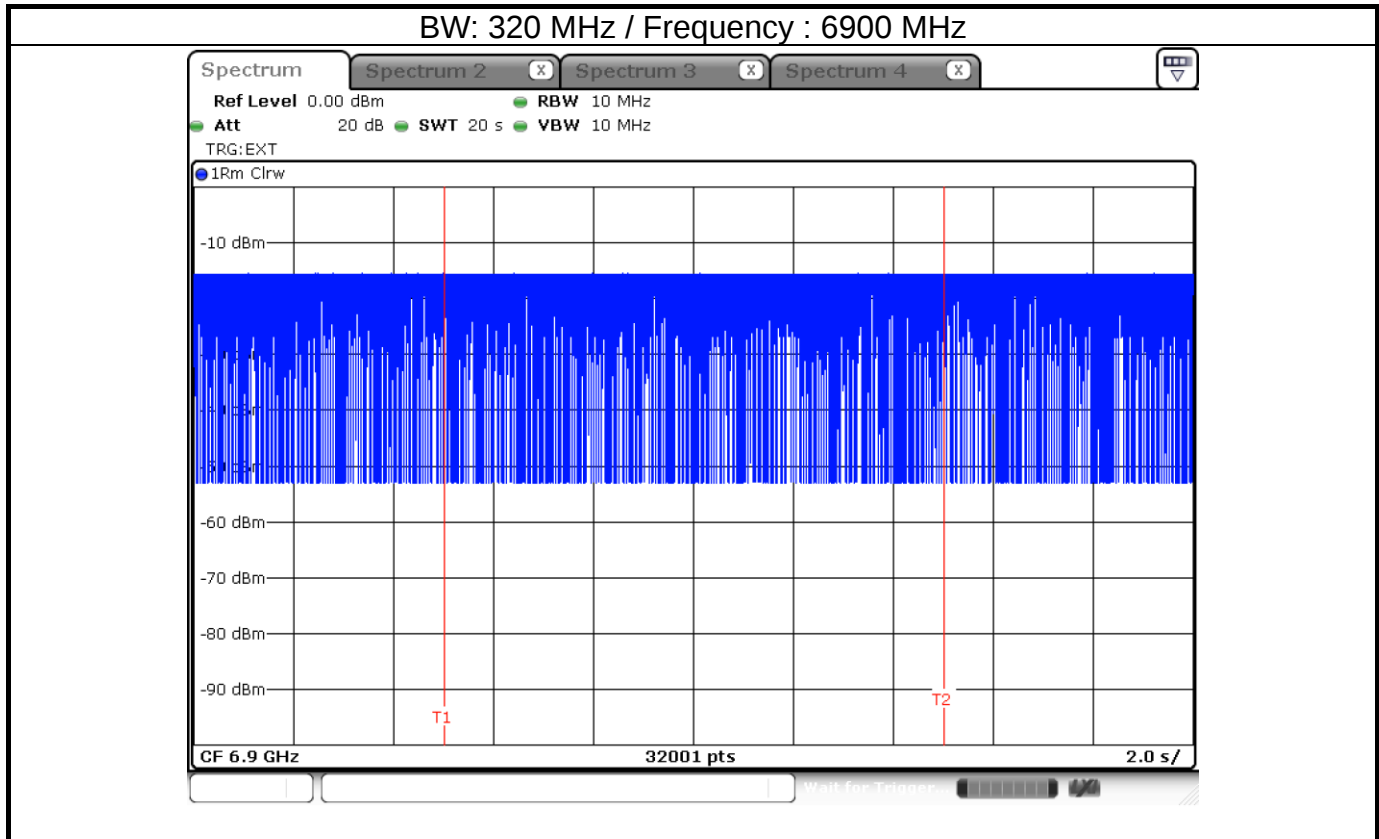


EUT Minimal transmission

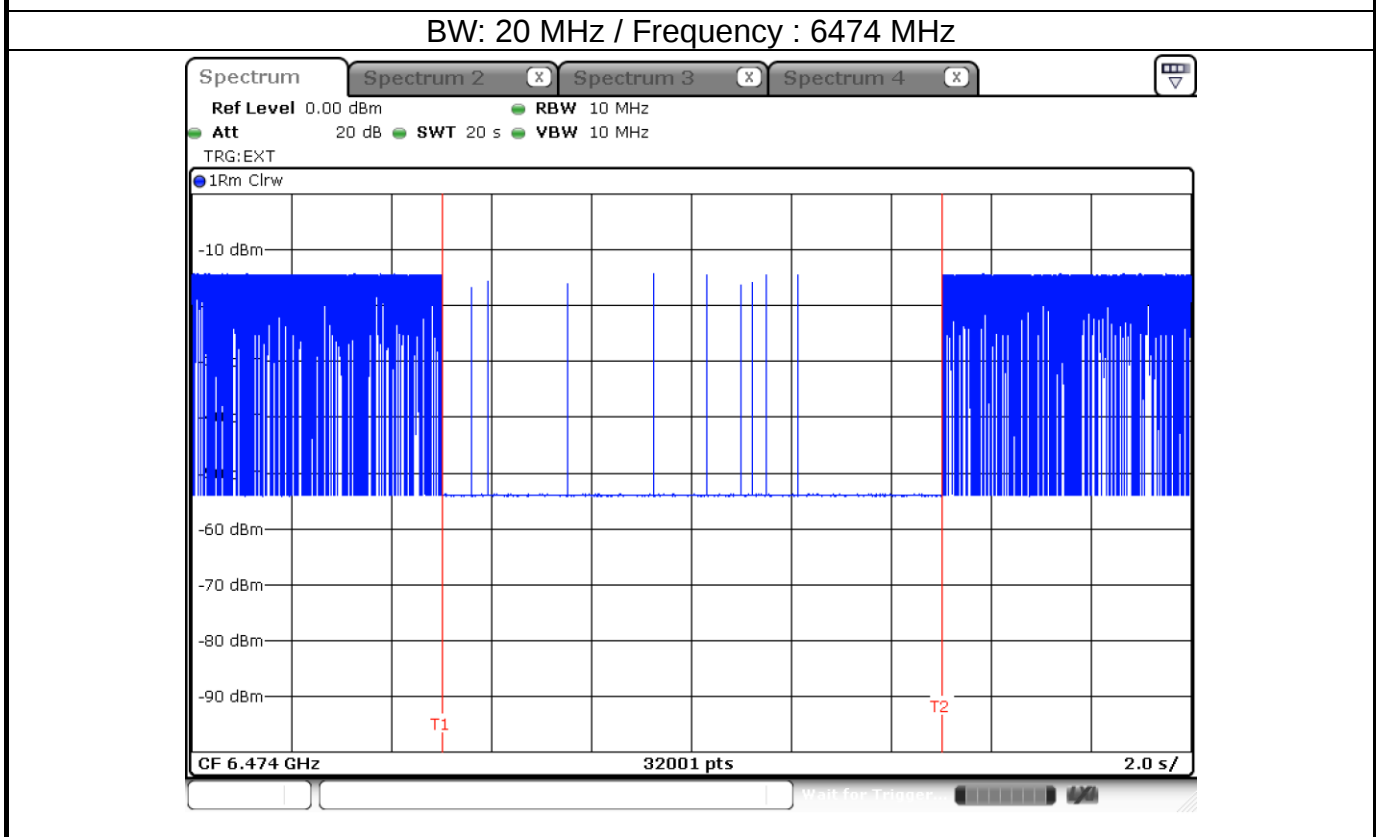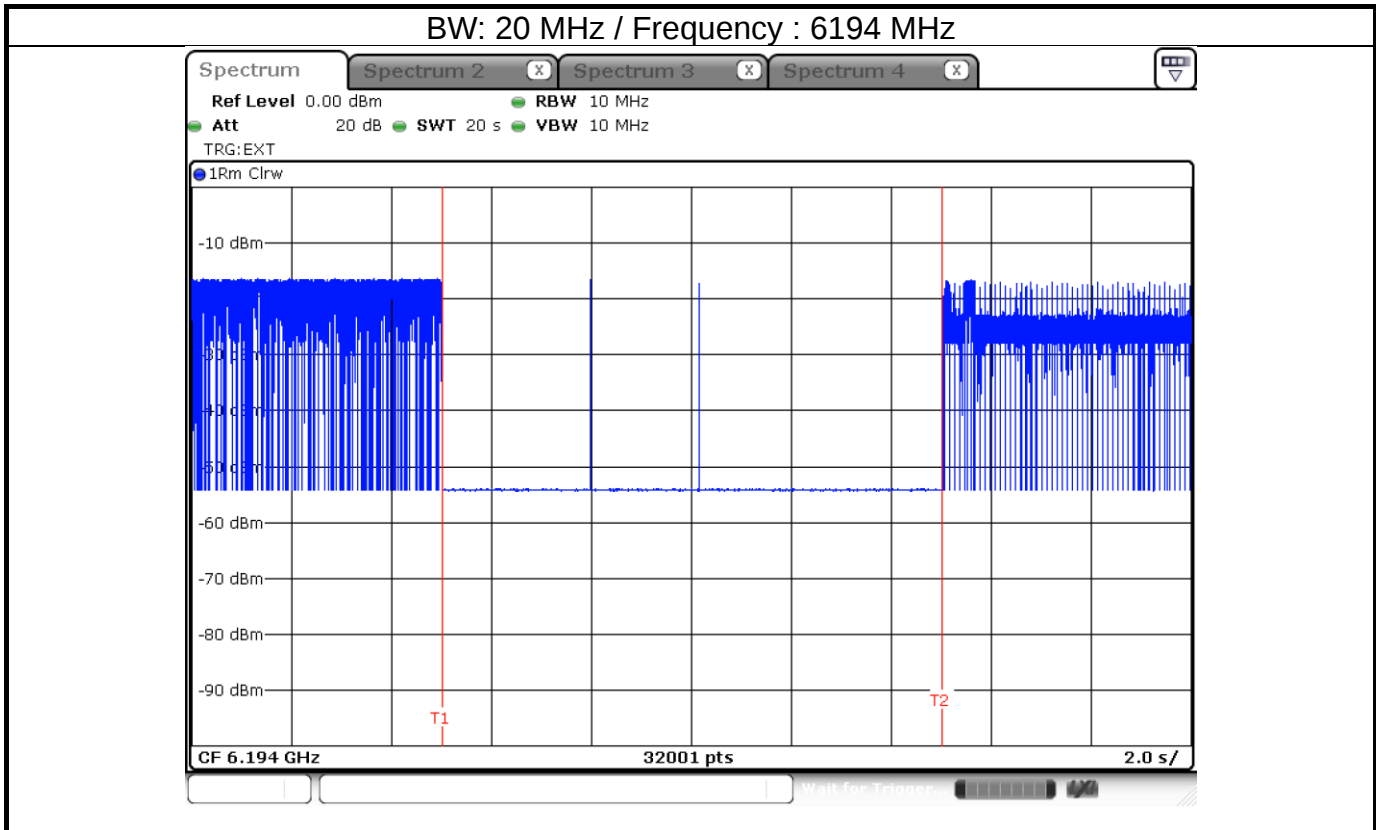


BW: 20 MHz / Frequency : 6694 MHz

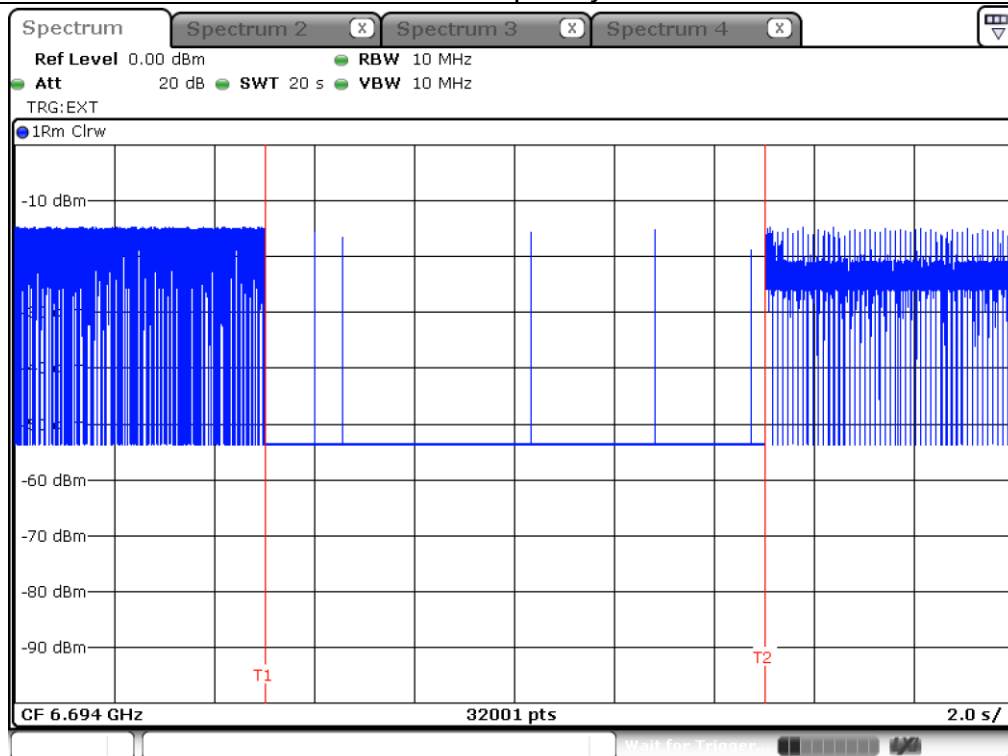


BW: 20 MHz / Frequency : 6994 MHz

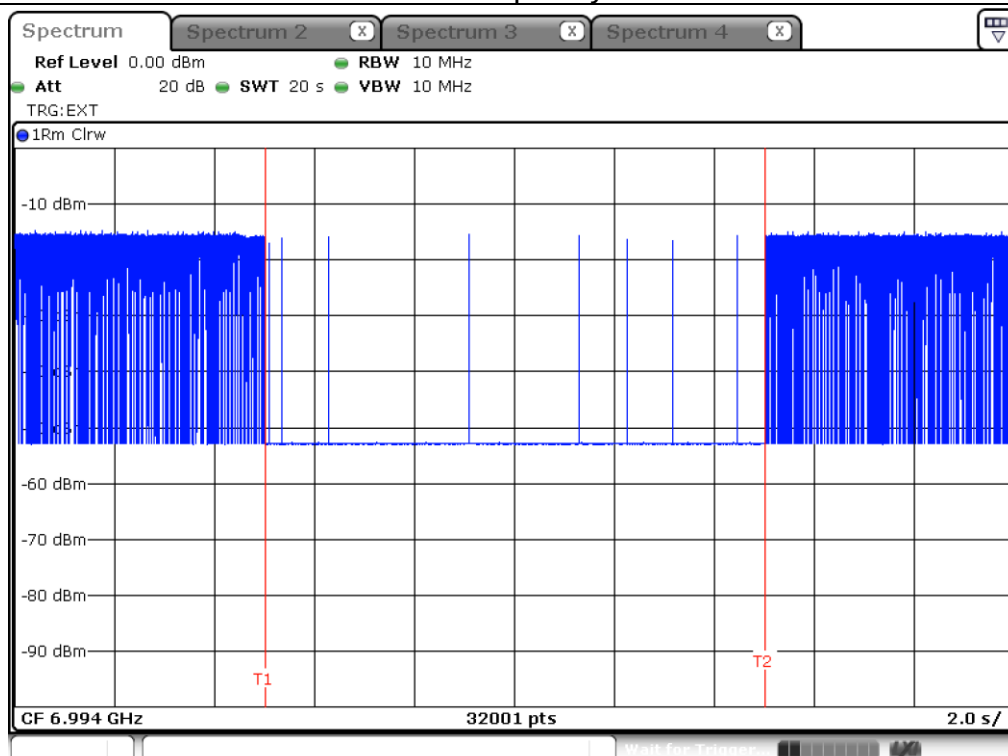


BW: 320 MHz / Frequency : 6100 MHz


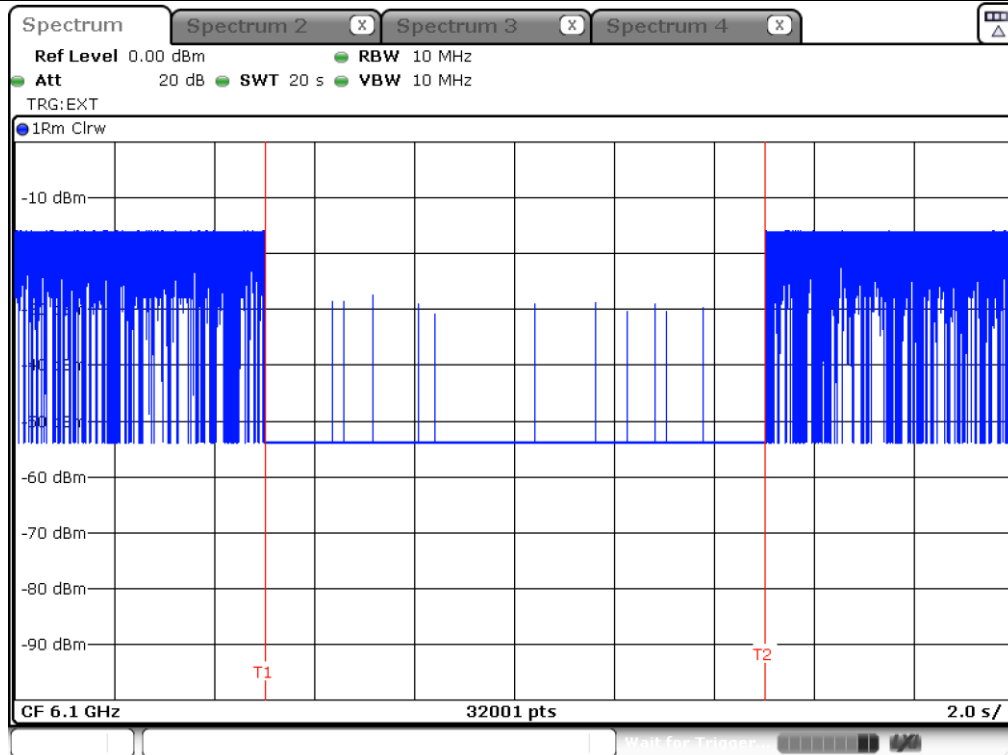


BW: 320 MHz / Frequency : 6580 MHz


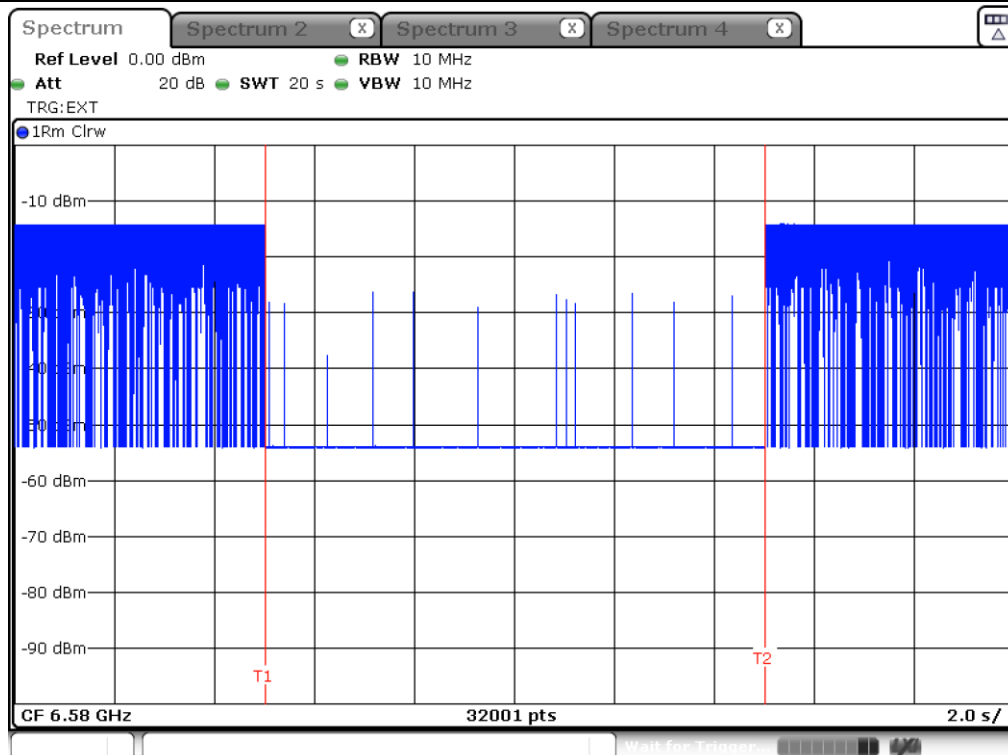


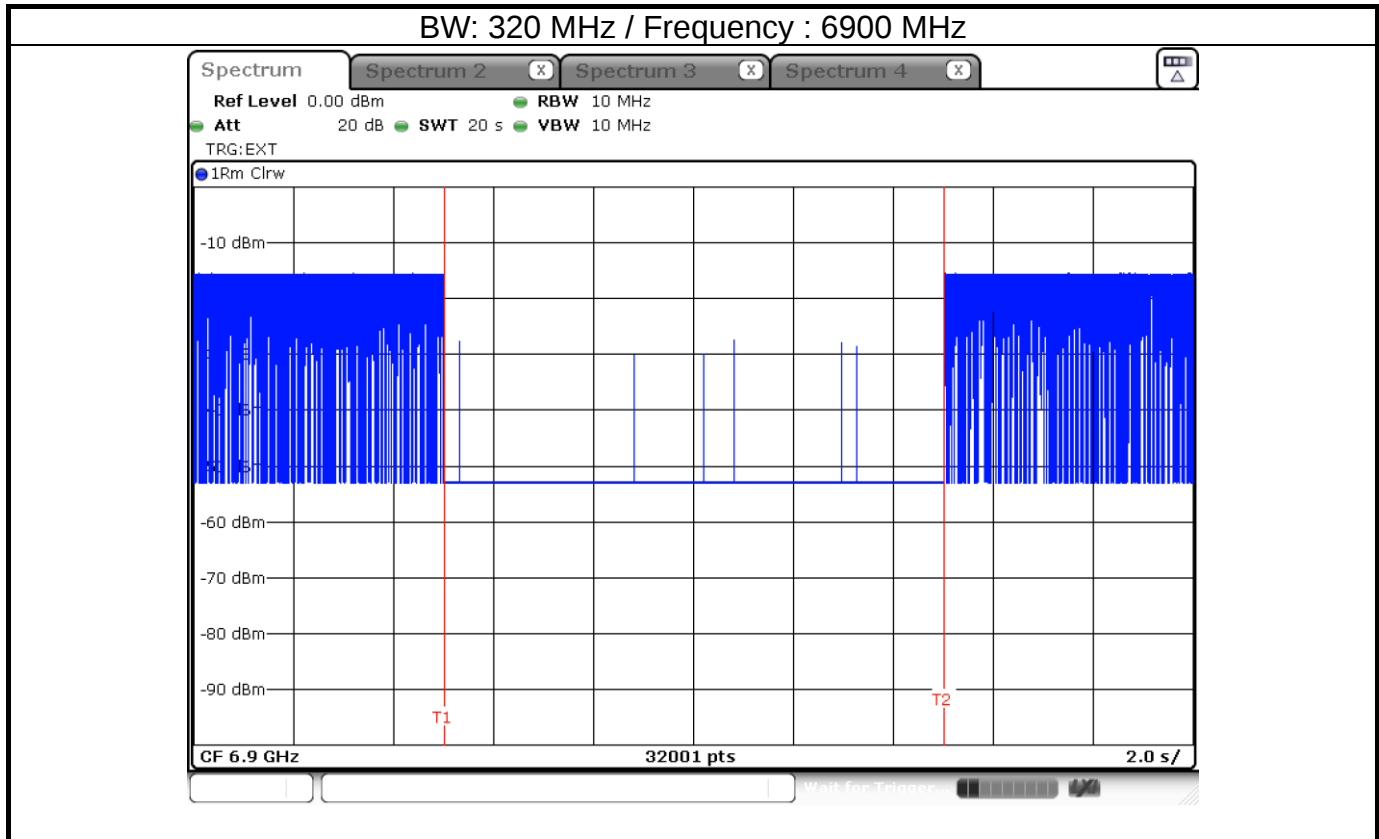



EUT ceased transmission

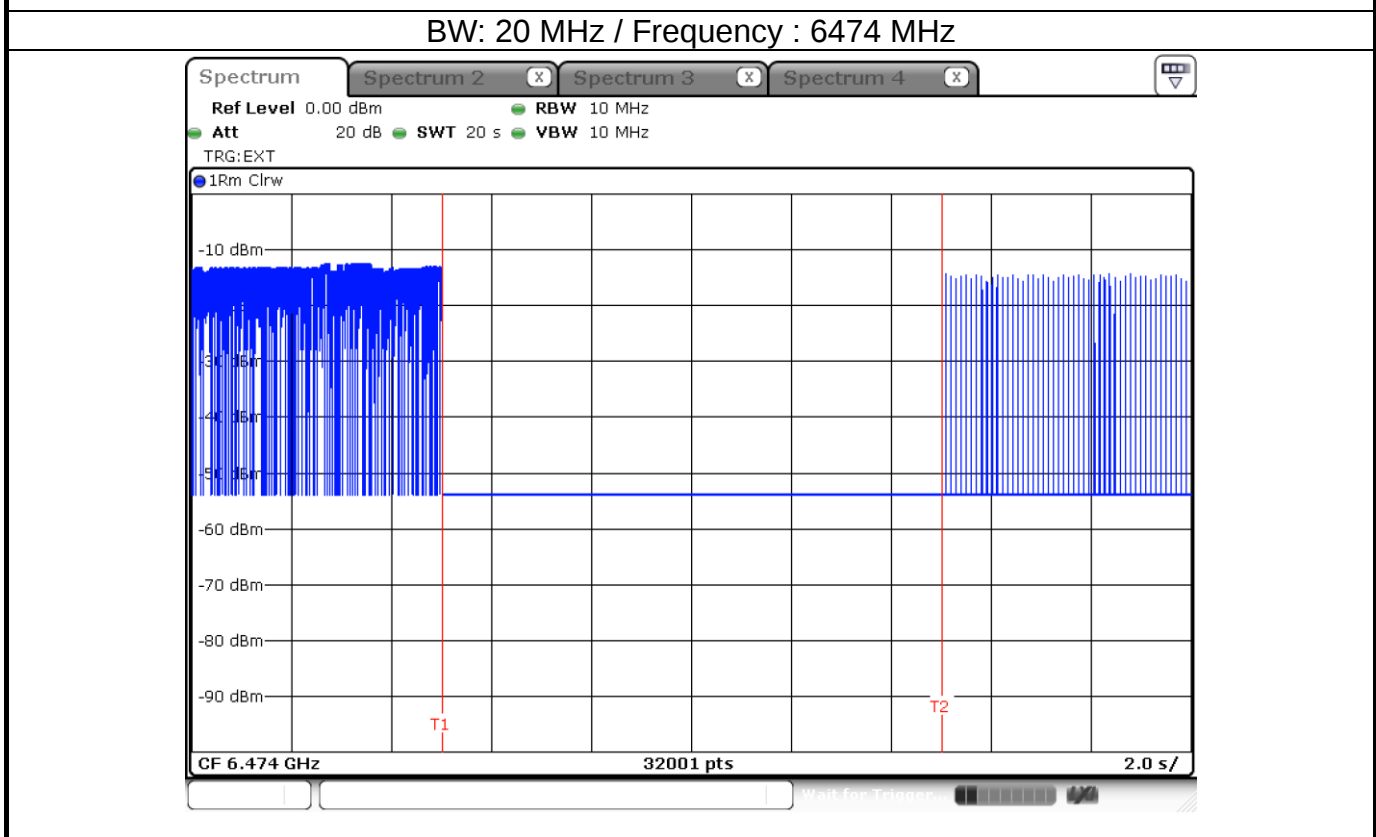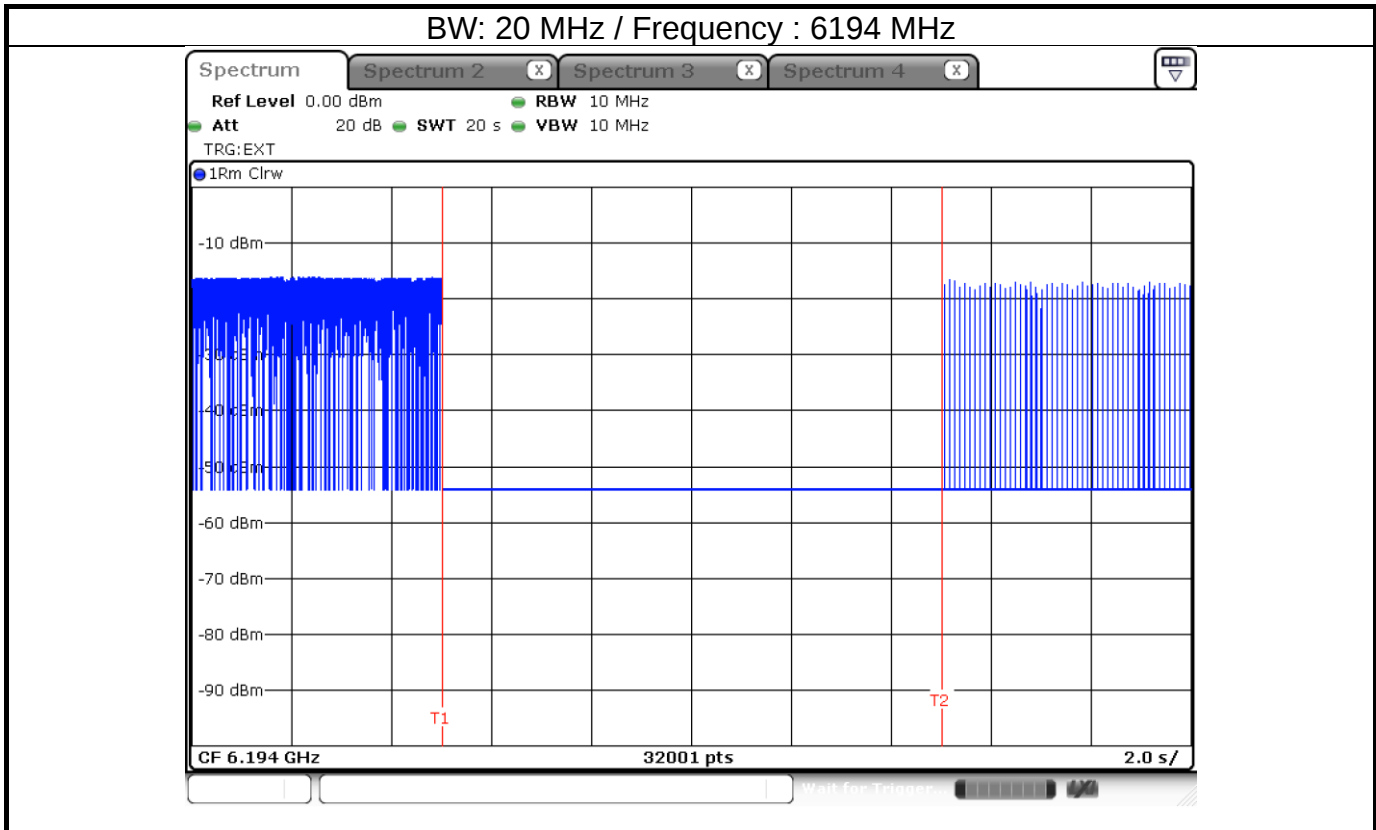


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

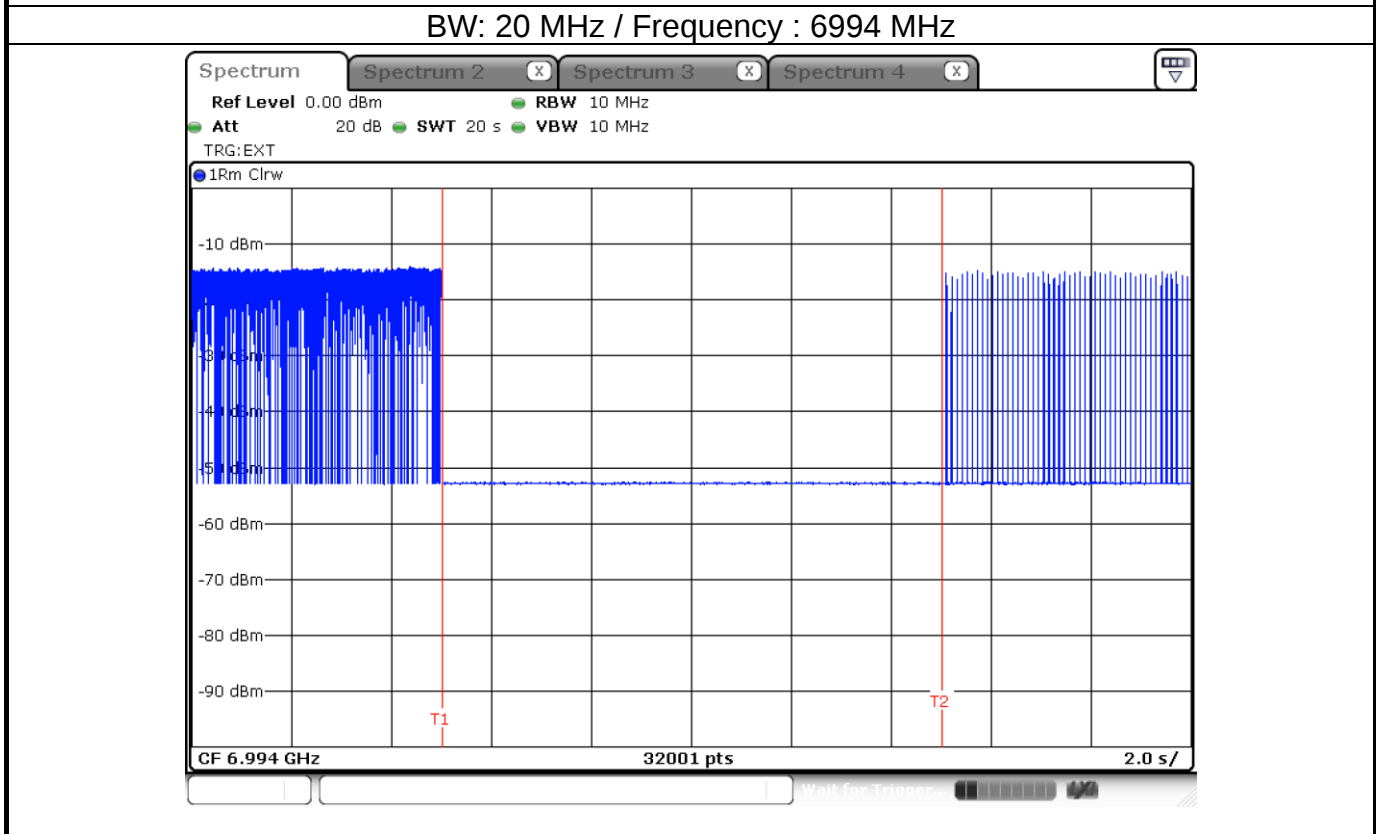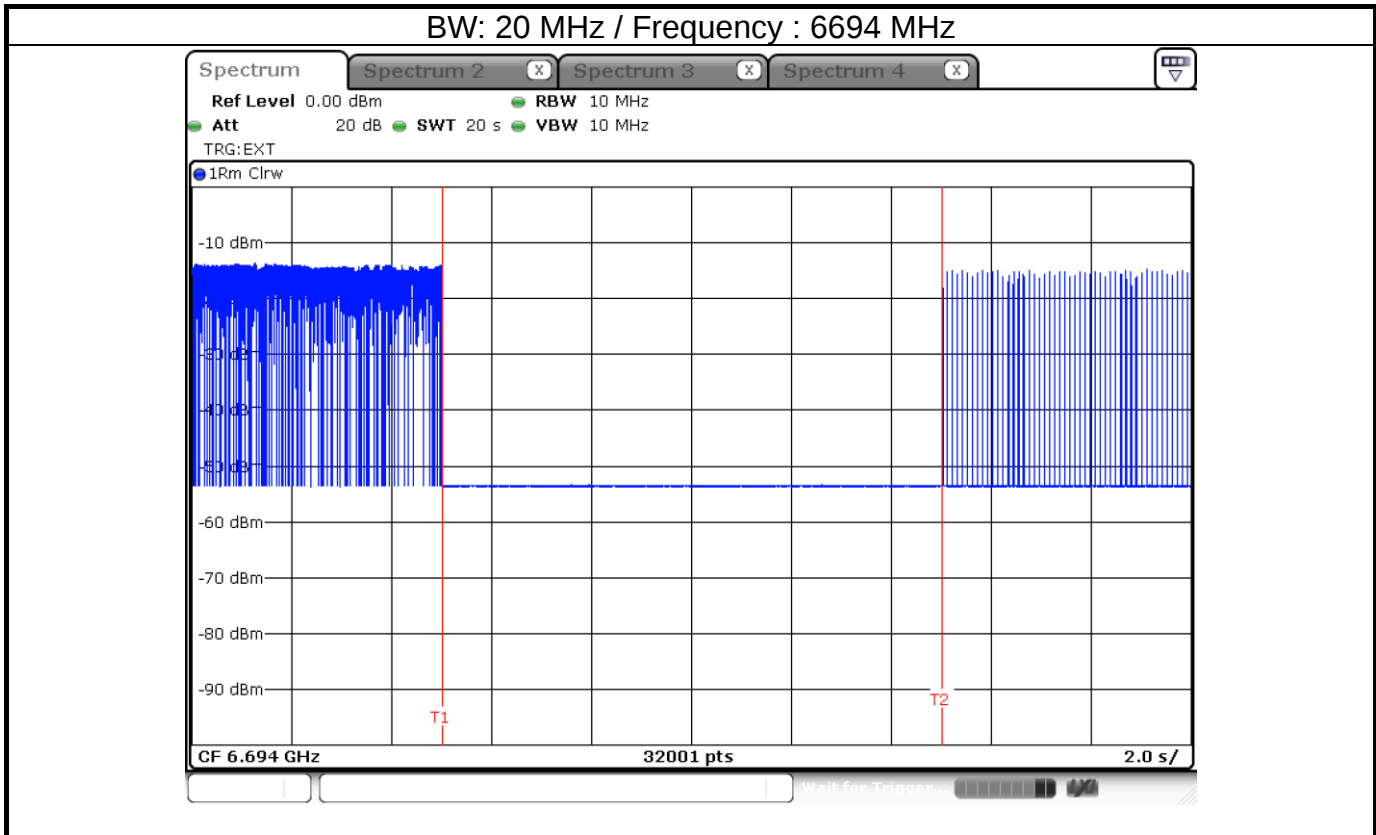


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

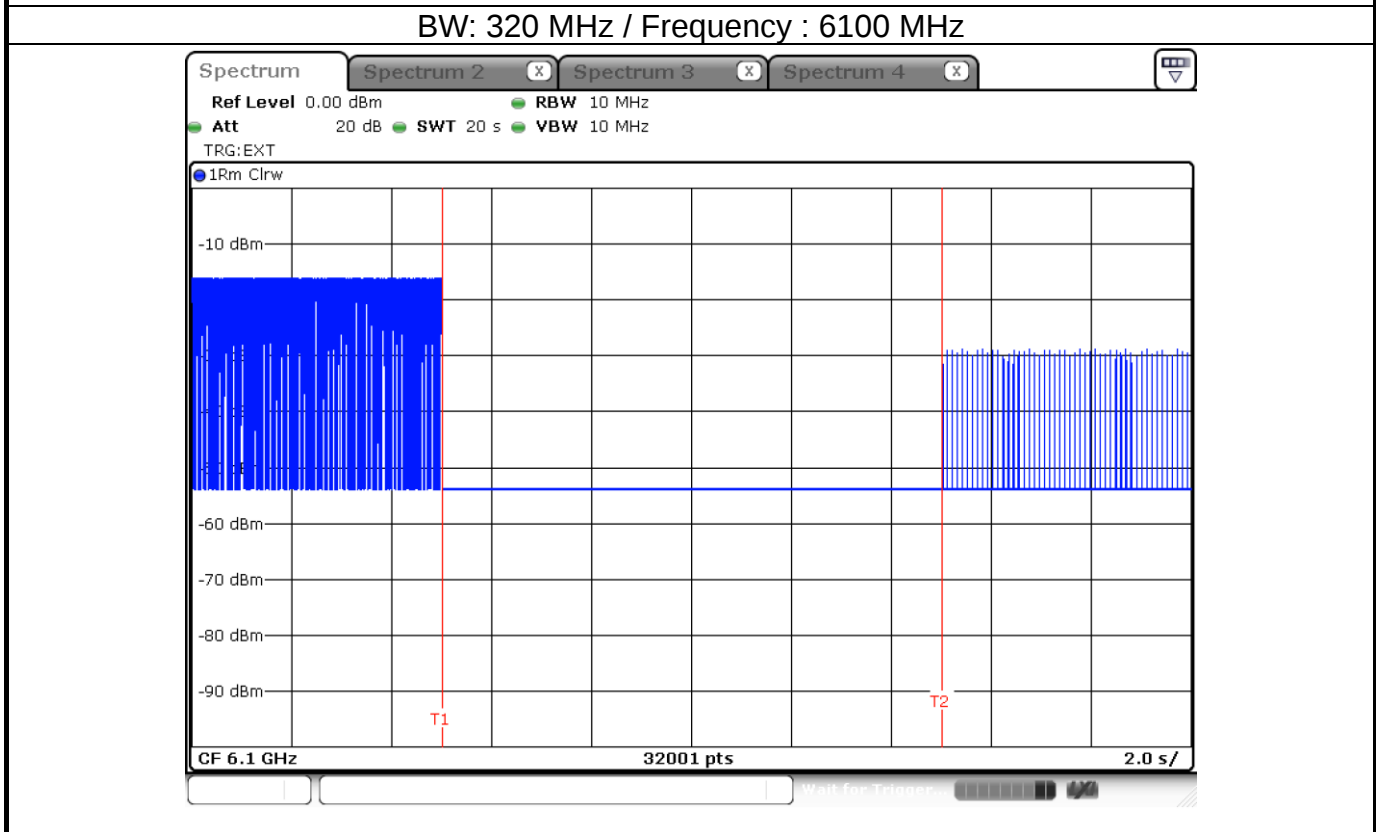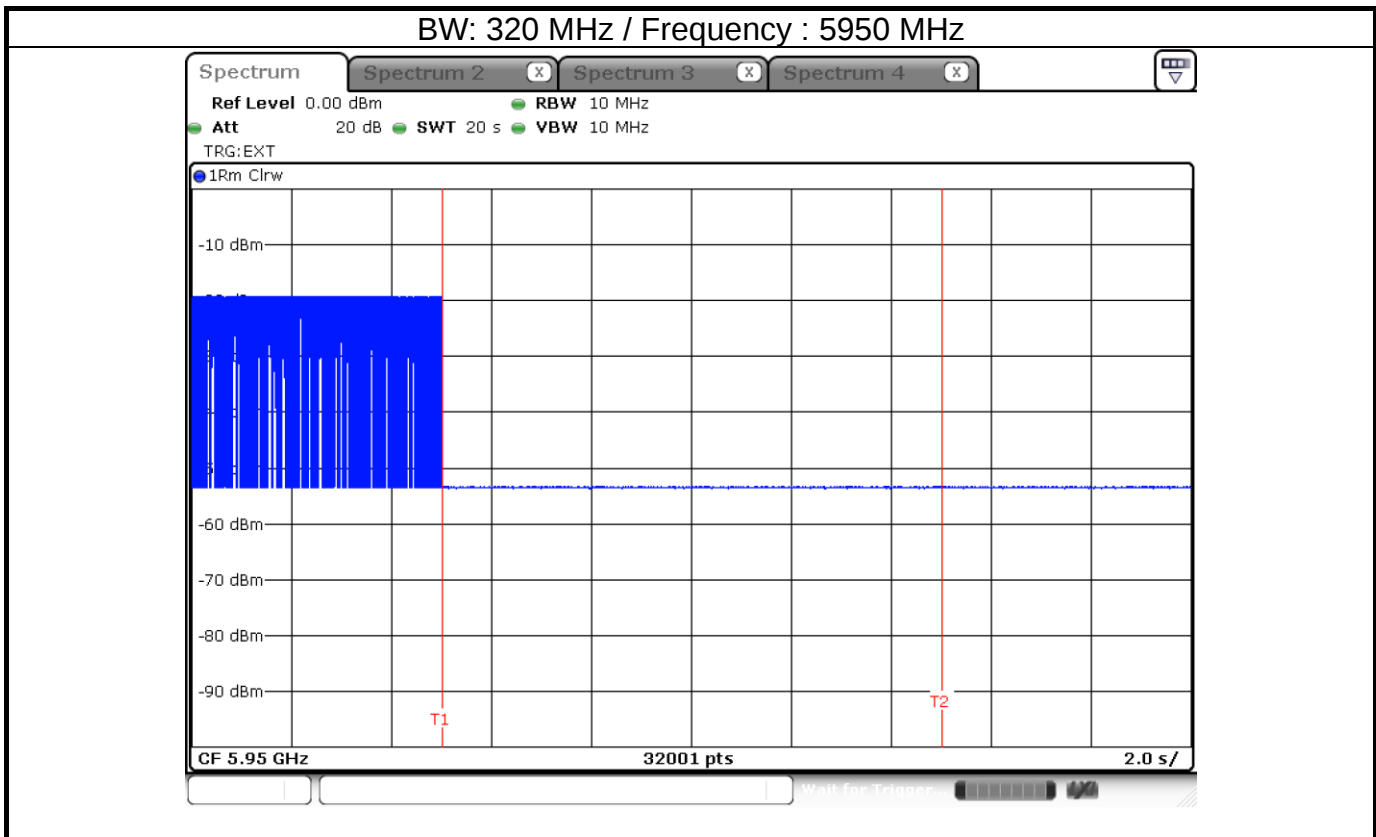


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

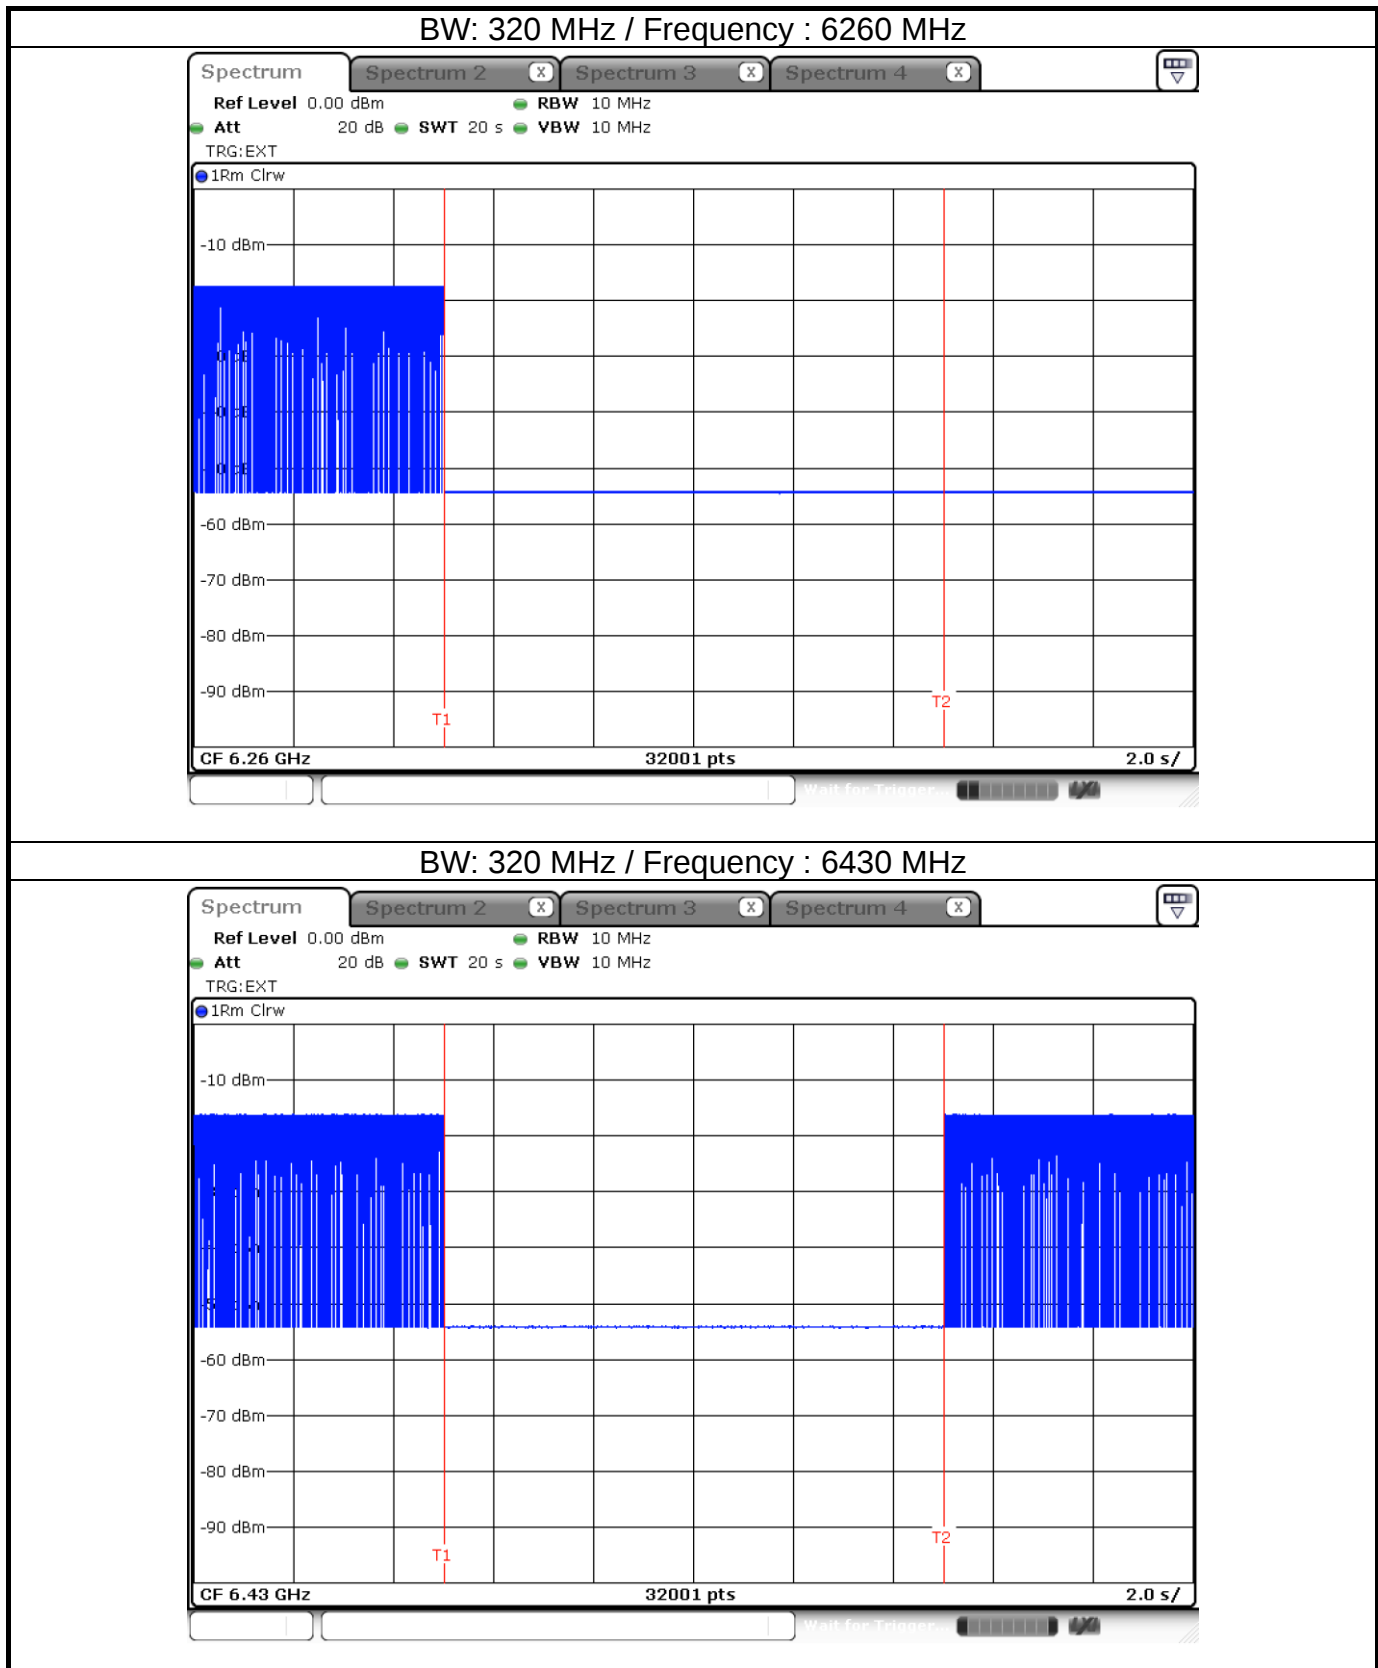


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

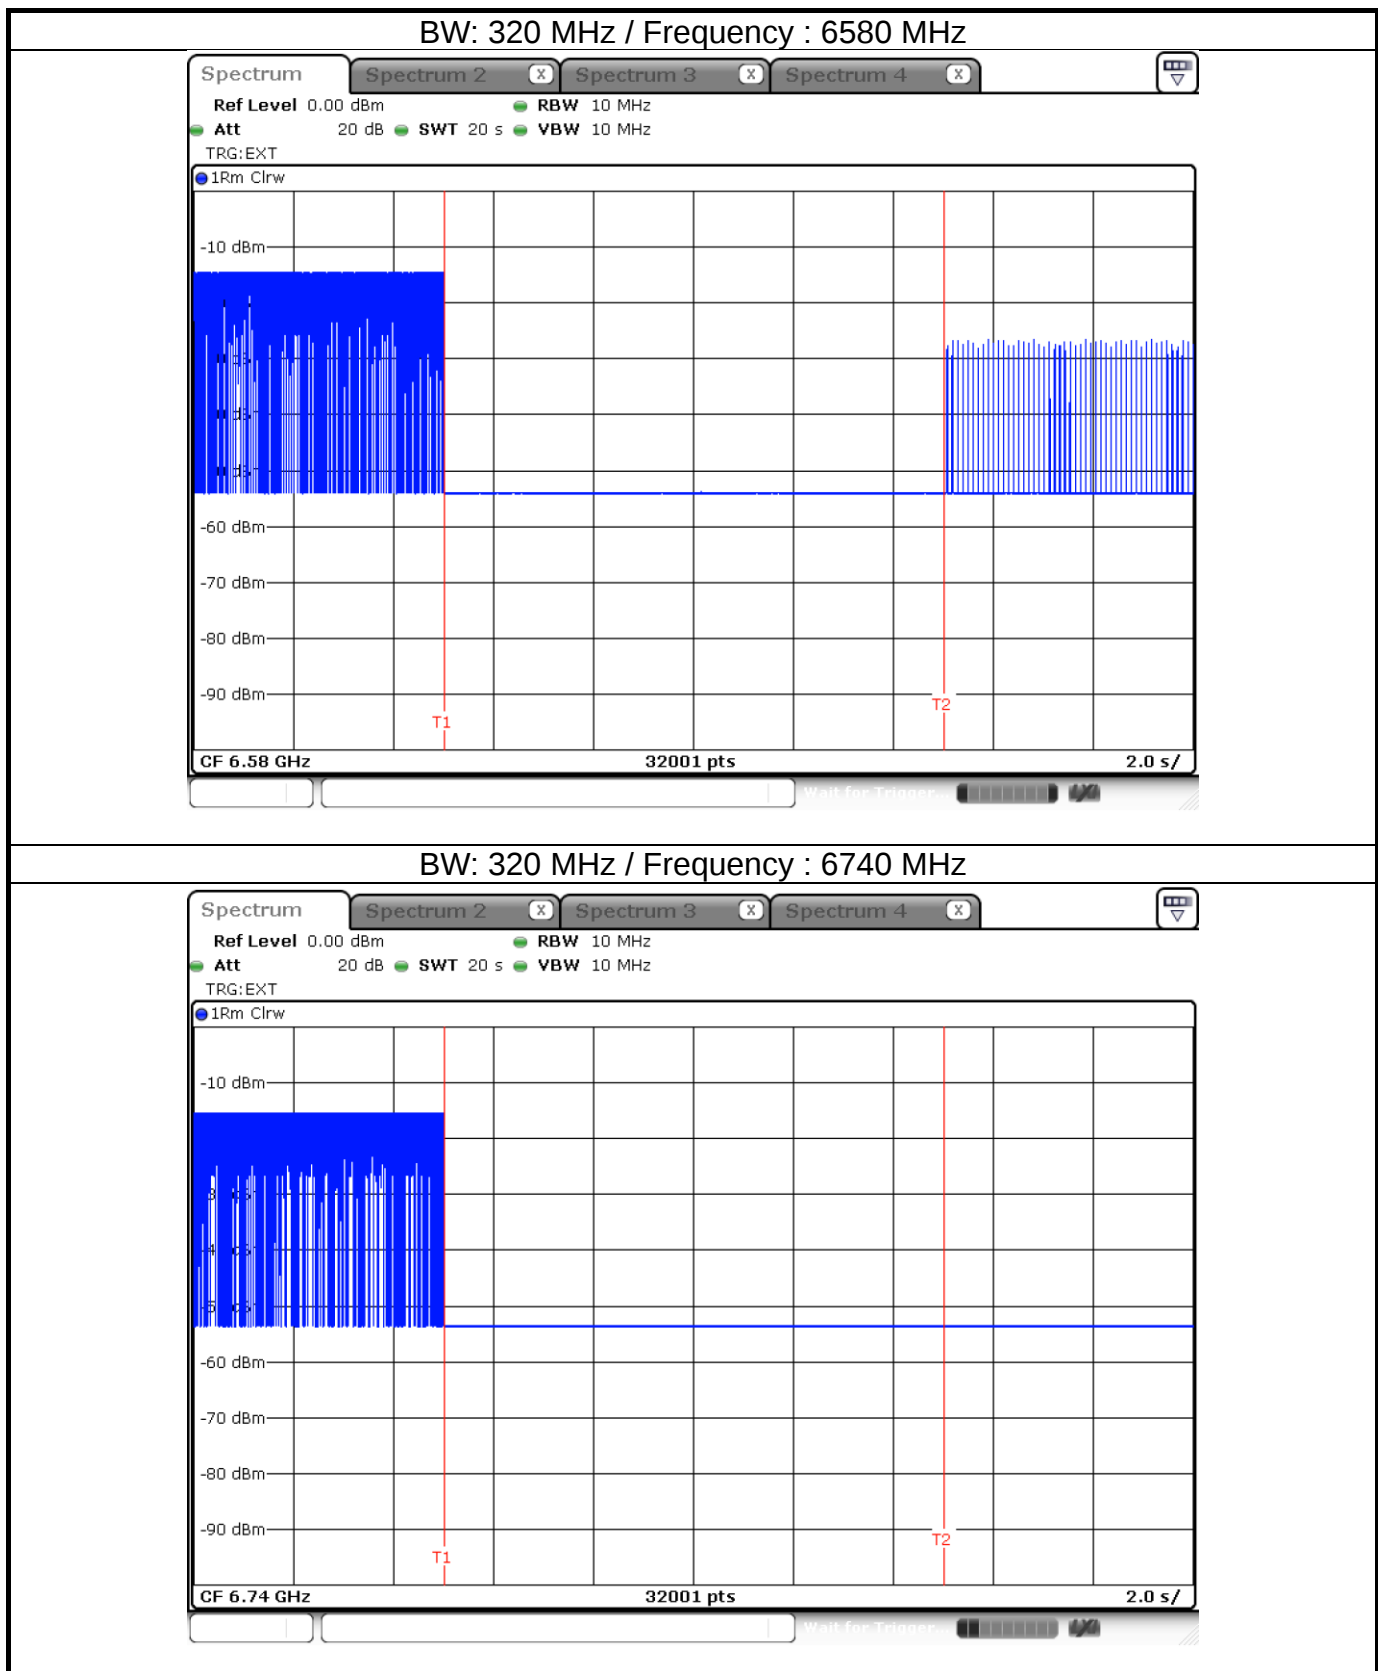

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

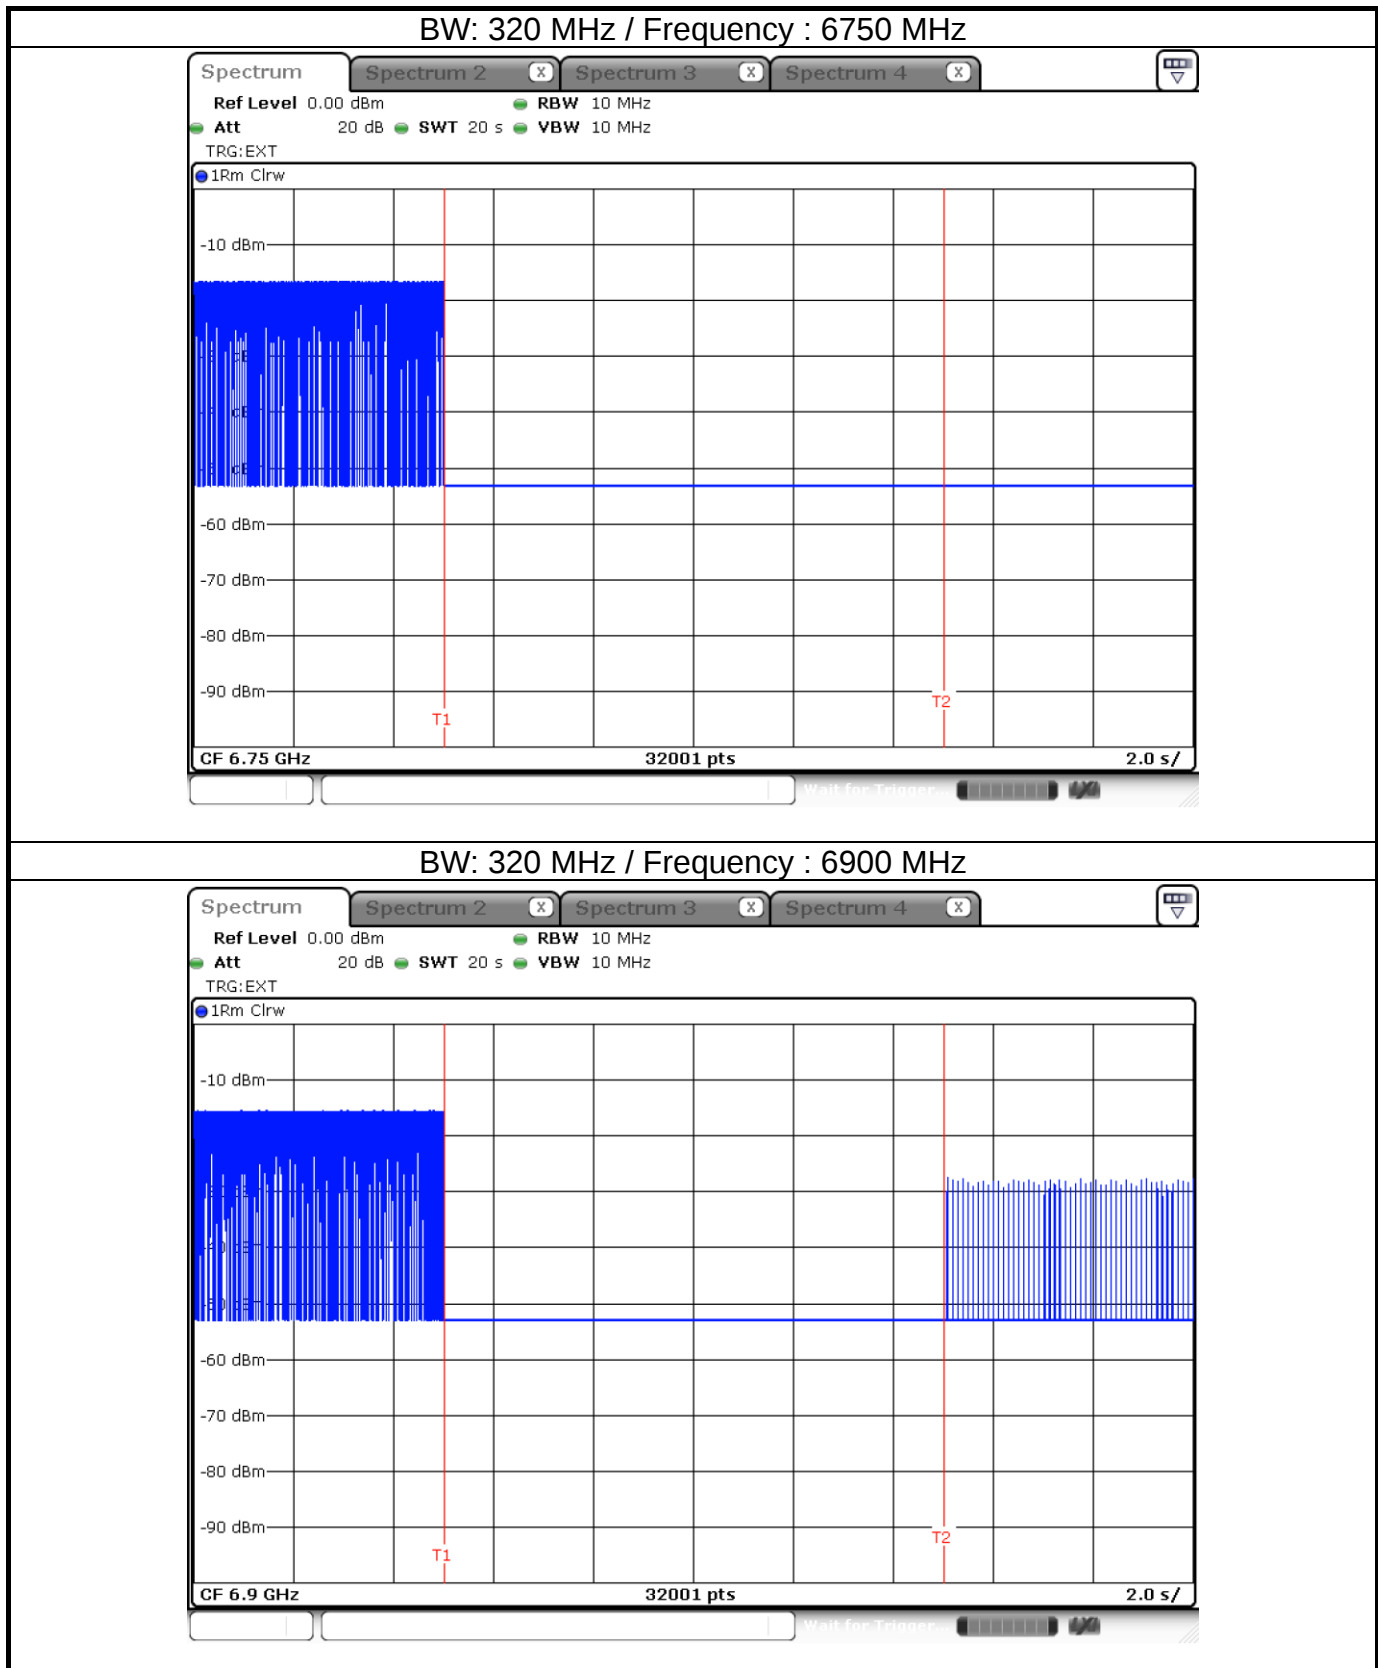

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

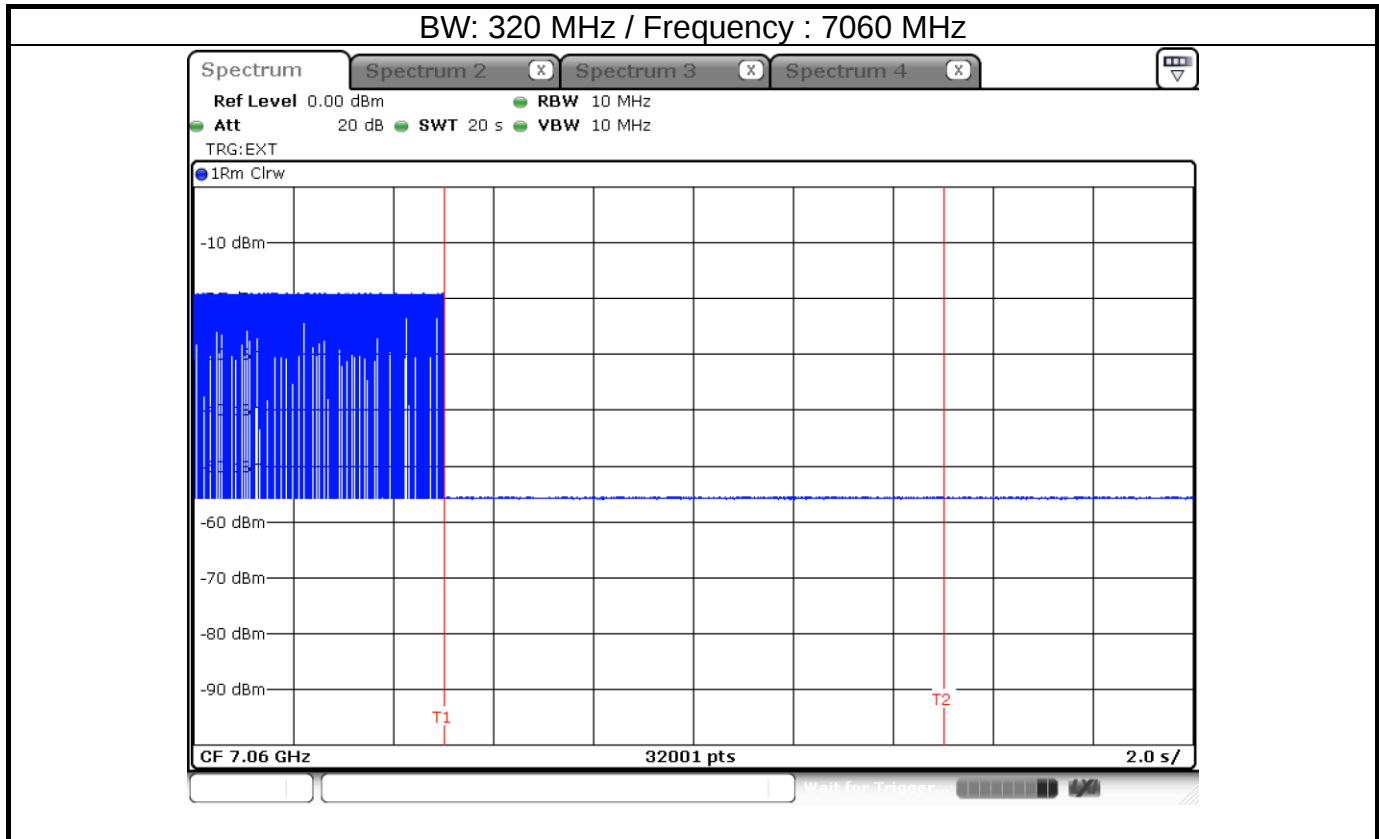

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.




Modulation Mode	be EHT320-OFDMA	Test Freq. (MHz)	6585
Power Phase	Line		

Test by : Brad Wu

Temperature: 22°C

Humidity: 64%

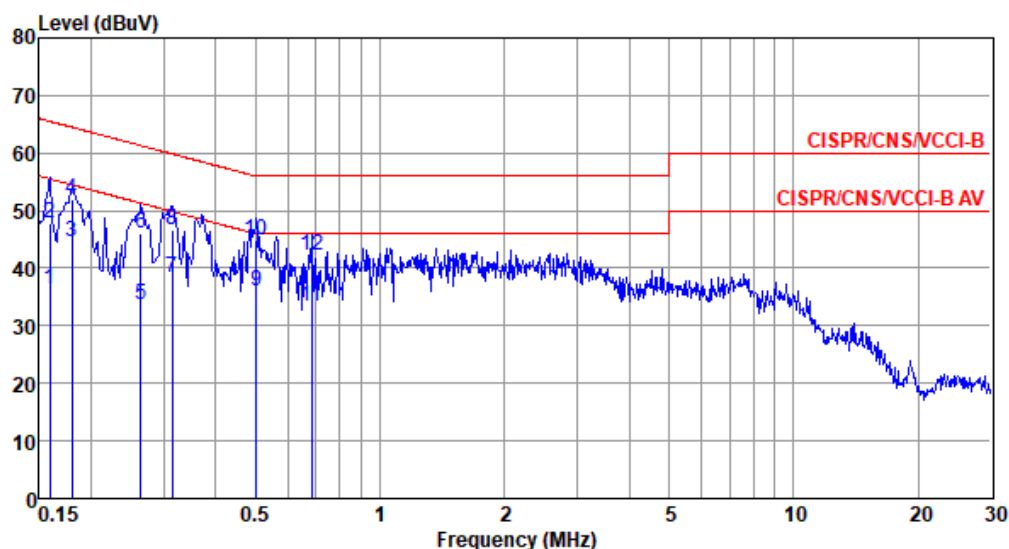

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.159	36.38	55.52	-19.14	26.46	9.63	0.08	0.21	Average
2	0.159	47.96	65.52	-17.56	38.04	9.63	0.08	0.21	QP
3*	0.180	44.60	54.50	-9.90	34.68	9.62	0.07	0.23	Average
4	0.180	51.82	64.50	-12.68	41.90	9.62	0.07	0.23	QP
5	0.264	33.61	51.29	-17.68	23.64	9.62	0.07	0.28	Average
6	0.264	46.08	61.29	-15.21	36.11	9.62	0.07	0.28	QP
7	0.315	38.46	49.84	-11.38	28.47	9.62	0.07	0.30	Average
8	0.315	46.65	59.84	-13.19	36.66	9.62	0.07	0.30	QP
9	0.502	35.96	46.00	-10.04	25.92	9.62	0.08	0.34	Average
10	0.502	44.98	56.00	-11.02	34.94	9.62	0.08	0.34	QP
11	0.683	33.45	46.00	-12.55	23.38	9.63	0.09	0.35	Average
12	0.683	42.14	56.00	-13.86	32.07	9.63	0.09	0.35	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	be EHT320-OFDMA	Test Freq. (MHz)	6585
Power Phase	Neutral		

Test by : Brad Wu

Temperature: 22°C

Humidity: 64%

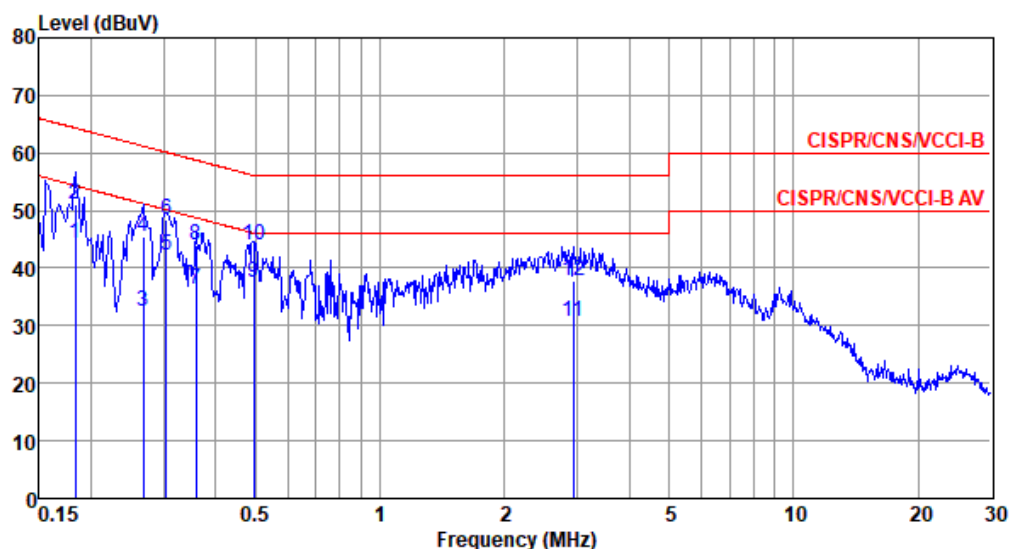

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.183	44.27	54.33	-10.06	34.41	9.63	0.07	0.16	Average
2	0.183	50.96	64.33	-13.37	41.10	9.63	0.07	0.16	QP
3	0.267	32.51	51.20	-18.69	22.61	9.63	0.07	0.20	Average
4	0.267	45.47	61.20	-15.73	35.57	9.63	0.07	0.20	QP
5*	0.303	42.28	50.15	-7.87	32.37	9.62	0.07	0.22	Average
6	0.303	48.42	60.15	-11.73	38.51	9.62	0.07	0.22	QP
7	0.360	36.24	48.74	-12.50	26.30	9.62	0.08	0.24	Average
8	0.360	44.13	58.74	-14.61	34.19	9.62	0.08	0.24	QP
9	0.494	37.46	46.10	-8.64	27.50	9.62	0.08	0.26	Average
10	0.494	44.12	56.10	-11.98	34.16	9.62	0.08	0.26	QP
11	2.931	30.72	46.00	-15.28	20.55	9.65	0.15	0.37	Average
12	2.931	37.67	56.00	-18.33	27.50	9.65	0.15	0.37	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).