






U-NII-3, 802.11a, Channel No.: 165

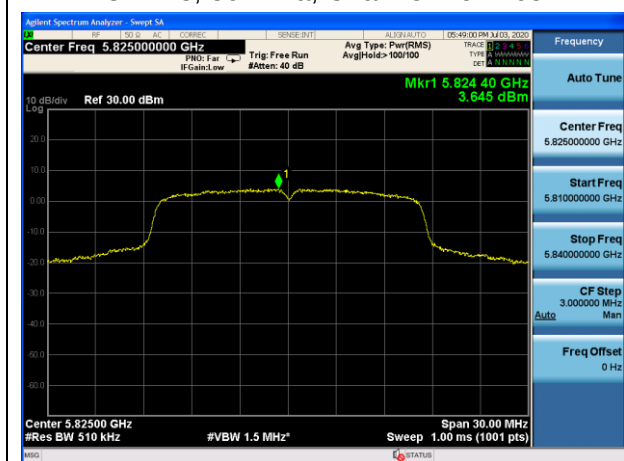


U-NII-3, 802.11n HT20, Channel No.: 165

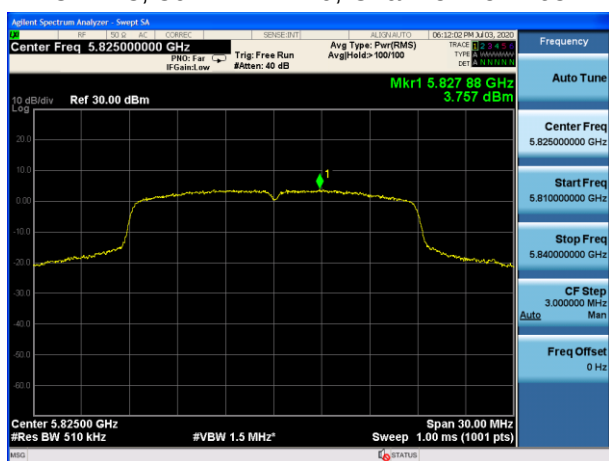


U-NII-3, 802.11n HT40, Channel No.: 151

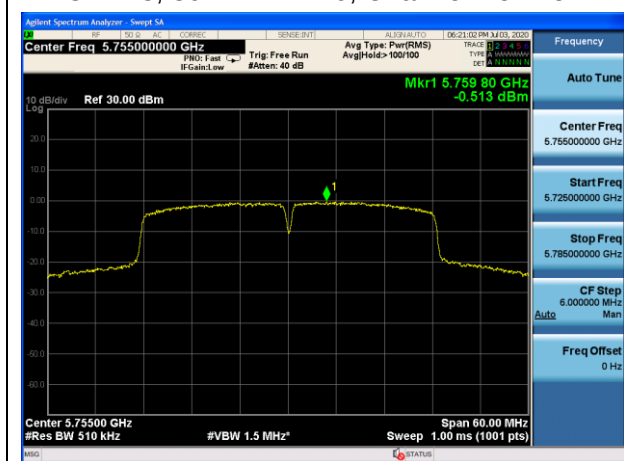


U-NII-3, 802.11ac VHT20, Channel No.: 149

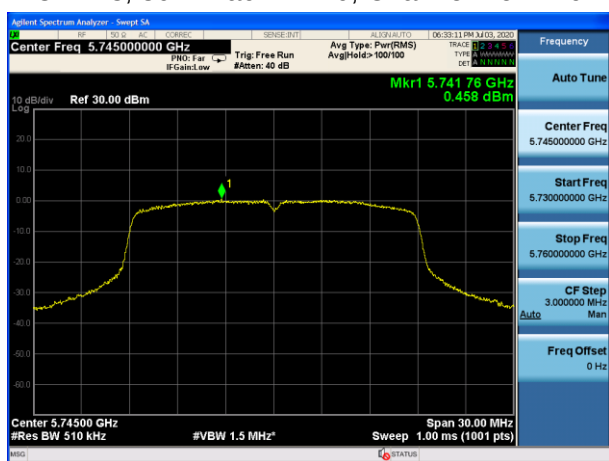

U-NII-3, 802.11n HT40, Channel No.: 159

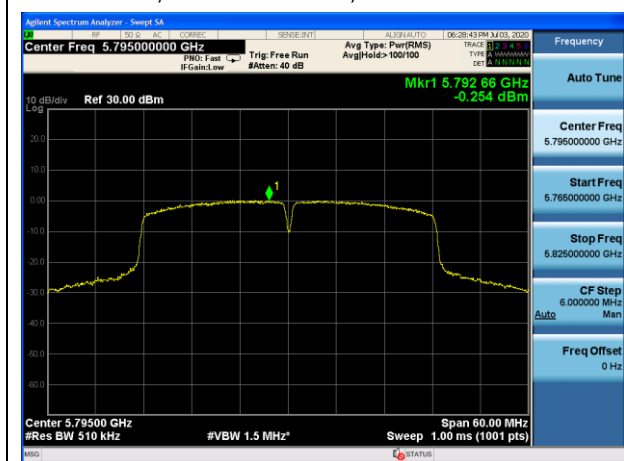


U-NII-3, 802.11ac VHT20, Channel No.: 157

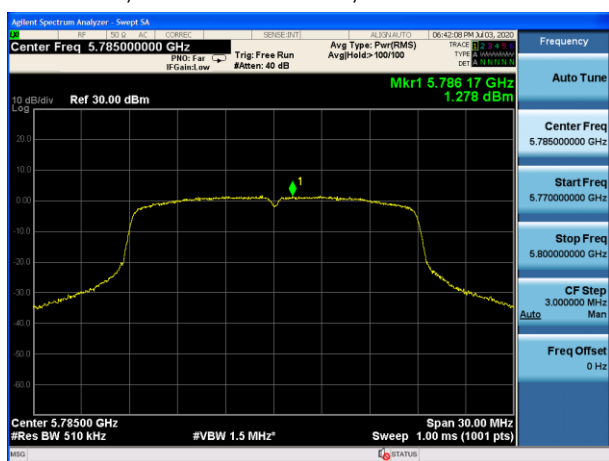





U-NII-3, 802.11ac VHT40, Channel No.: 151

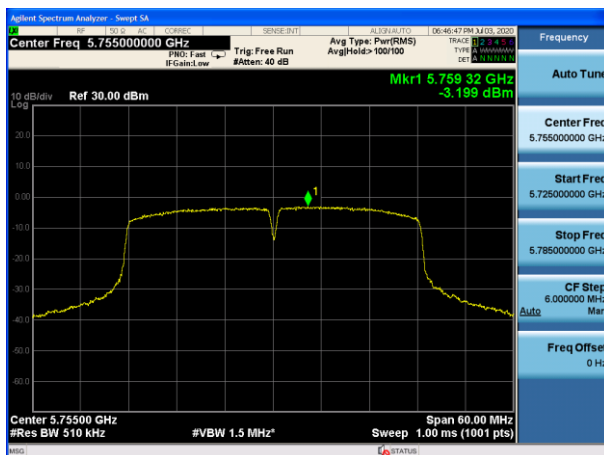


U-NII-3, 802.11ac VHT20, Channel No.: 165

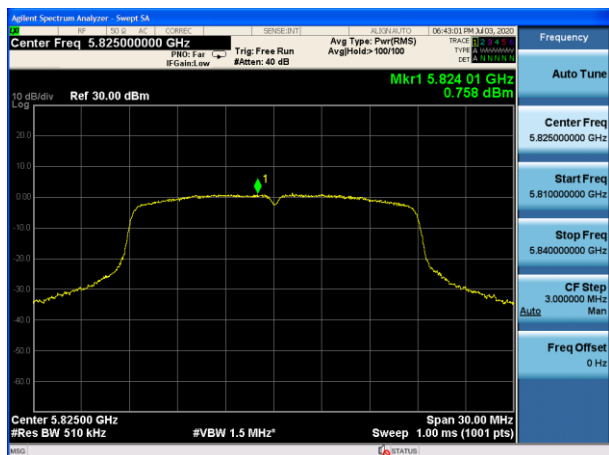

U-NII-3, 802.11ac VHT40, Channel No.: 159

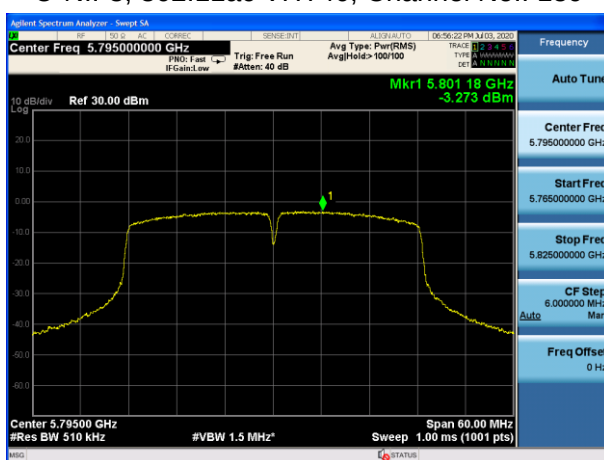

U-NII-3, 802.11ac VHT80, Channel No.: 155

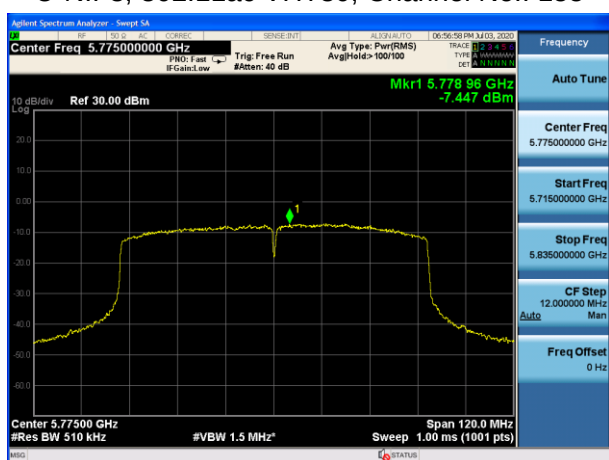

5.5. Unwanted Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration. Sweep the whole frequency band range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific



emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.


3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Reduce the video bandwidth until no significant variations in the displayed signal are observed in subsequent traces, provided the video bandwidth is no less than 1 Hz. For regulatory requirements that specify averaging only over the transmit duration (e.g., digital transmission system [DTS] and Unlicensed National Information Infrastructure [U-NII]), the video bandwidth shall be greater than $[1 / (\text{minimum transmitter on time})]$ and no less than 1 Hz.


The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the loop antenna is vertical, others antenna are vertical and horizontal.

The test is in transmitting mode.


9KHz~~~30MHz

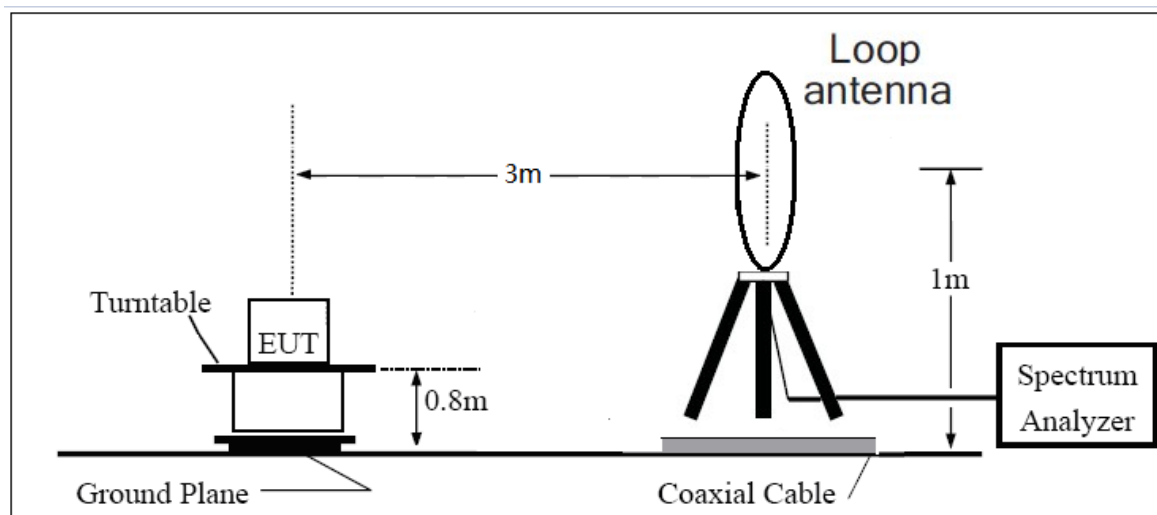

30MHz~~~ 1GHz

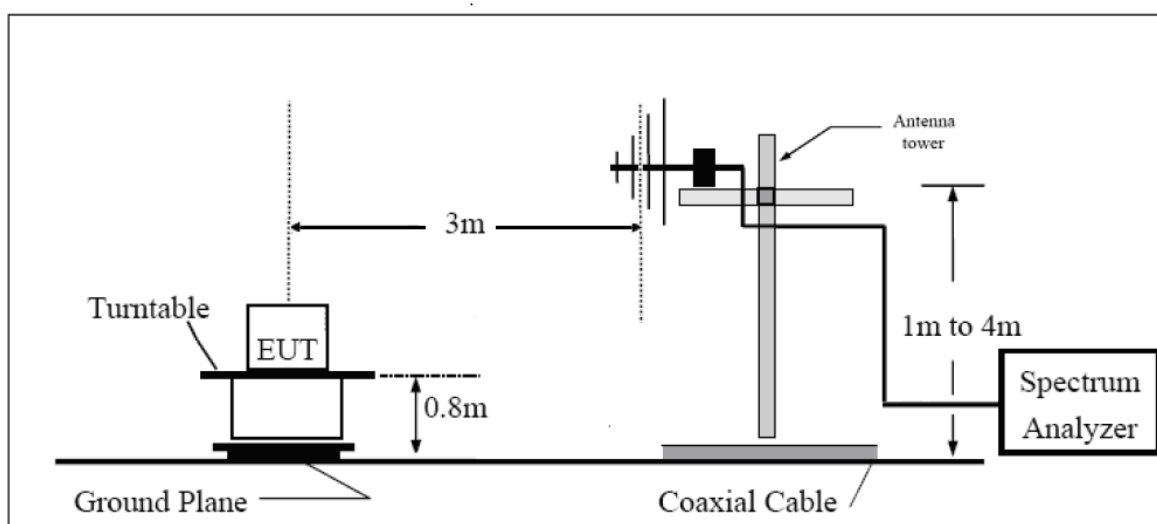

Above 1GHz

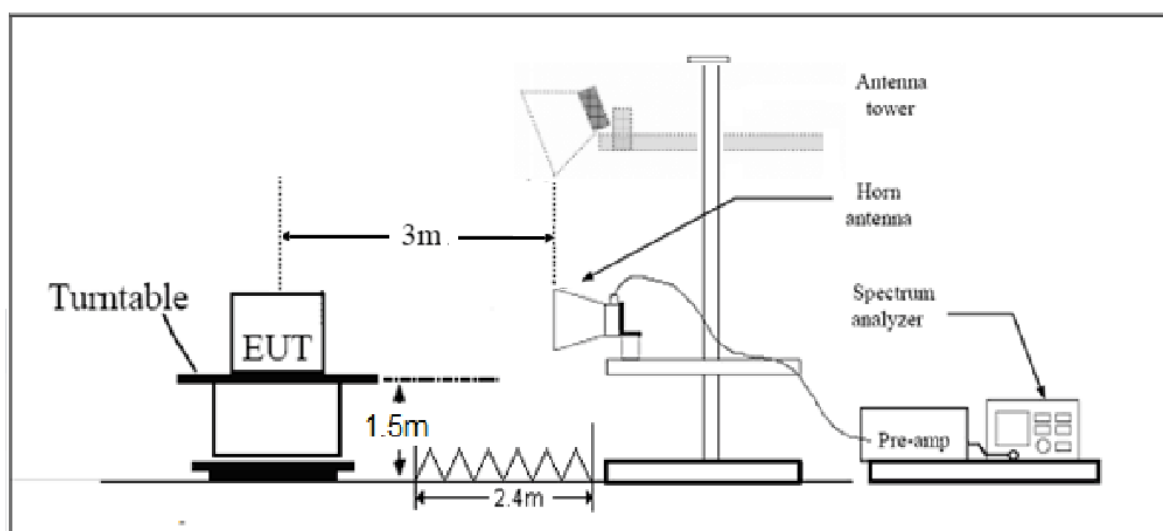

Note: Area side:2.4mX3.6m

Limits

- (1) For transmitters operating in the 5725-5850 MHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).

Note: the following formula is used to convert the EIRP to field strength

§1、 $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$, where E = field strength and

d = distance at which field strength limit is specified in the rules;

§2、 $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$, for d = 3 meters

- (5) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table.





Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB

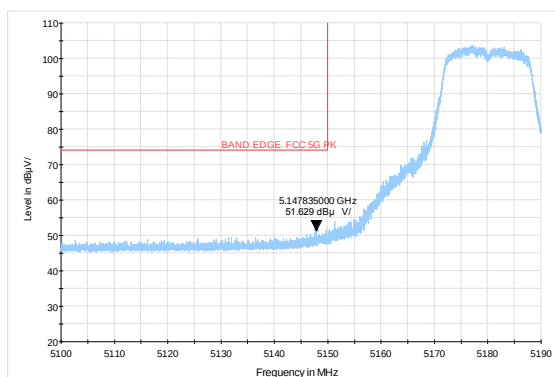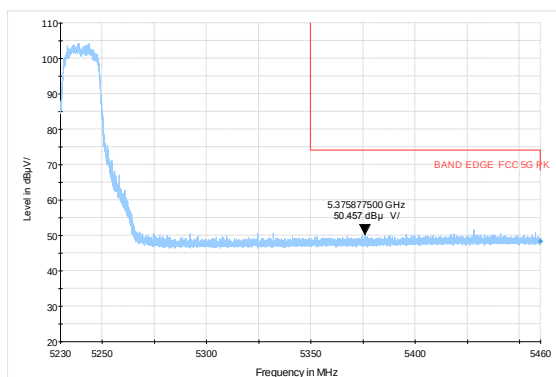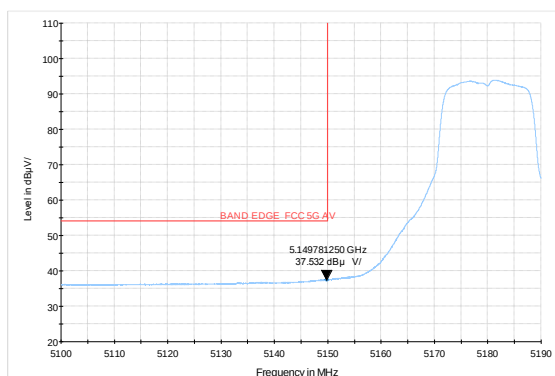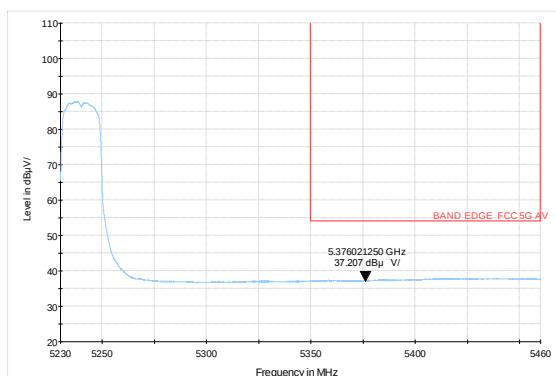
**Test Results:****The signal beyond the limit is carrier.****U-NII-1****802.11a-Channel 36: Peak****802.11a-Channel 48: Peak****802.11a-Channel 36: Average****802.11a-Channel 48: Average**




802.11n HT20-Channel 36: Peak

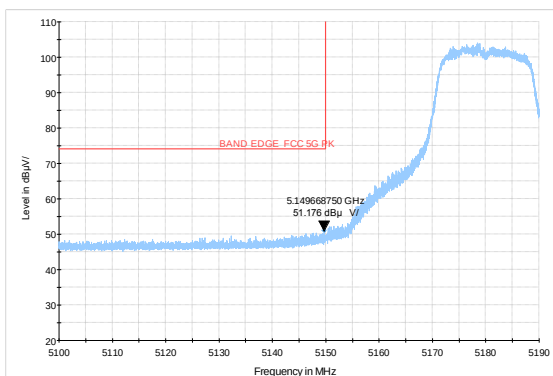


802.11n HT20-Channel 48: Peak

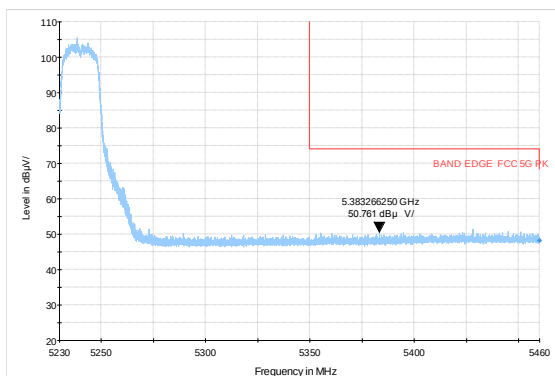


802.11n HT20-Channel 36: Average

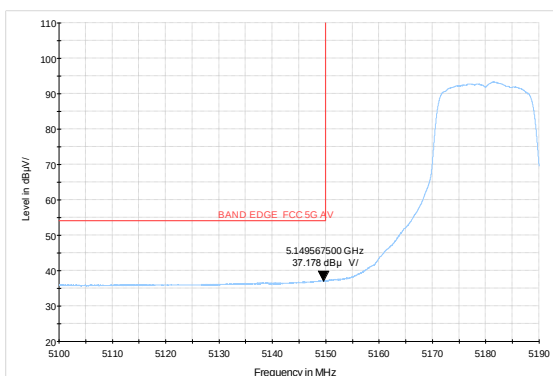


802.11n HT20-Channel 48: Average

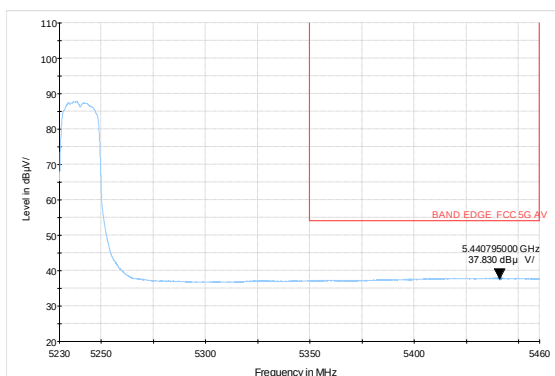


802.11n HT40-Channel 38: Peak

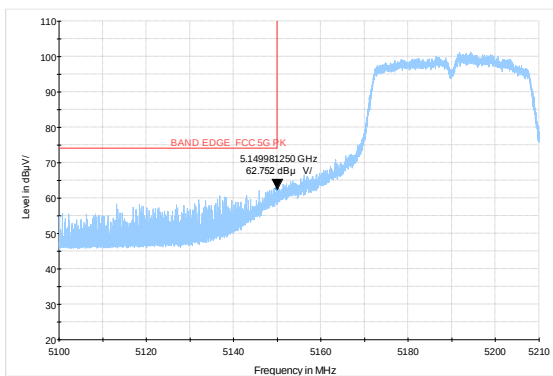


802.11n HT40-Channel 46: Peak

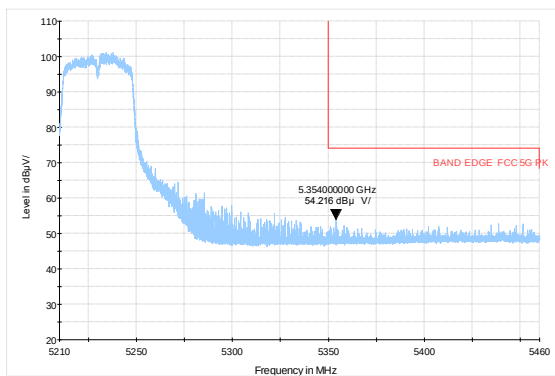

802.11n HT40-Channel 38: Average

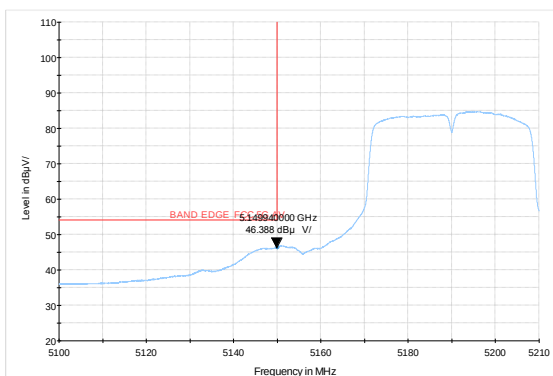


802.11n HT40-Channel 46: Average

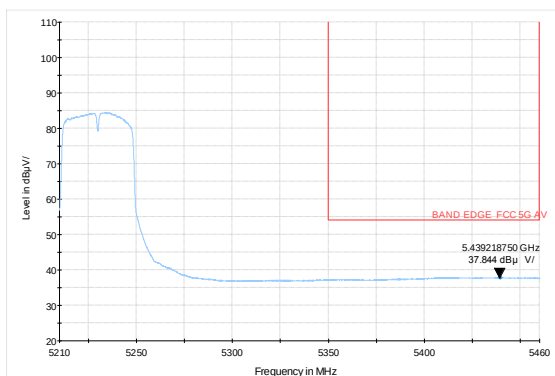





802.11ac VHT20 -Channel 36: Peak

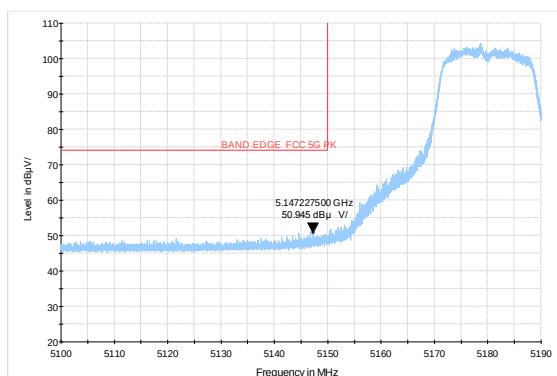


802.11ac VHT20 -Channel 48: Peak

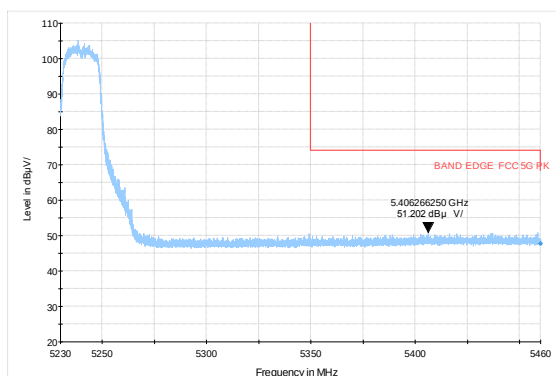


802.11ac VHT20-Channel 36: Average

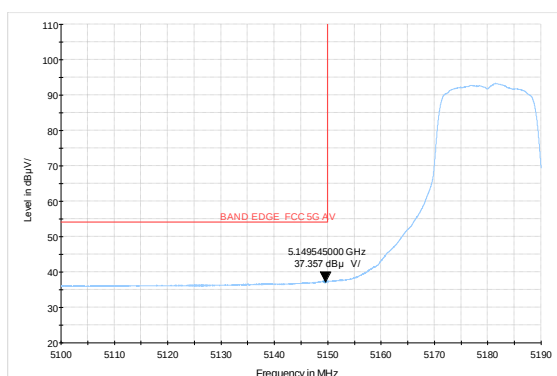


802.11ac VHT20 -Channel 48: Average

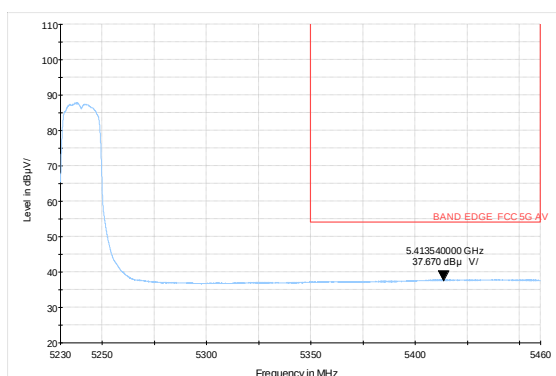


802.11ac VHT40-Channel 38: Peak

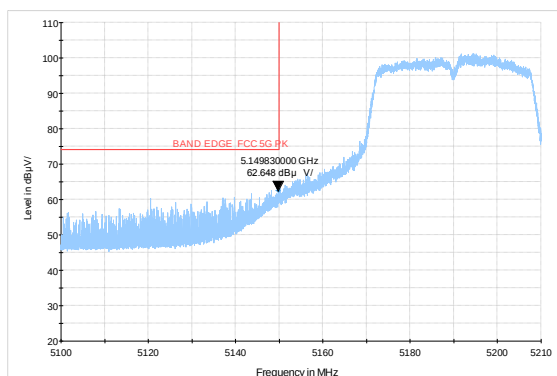


802.11ac VHT40-Channel 46: Peak






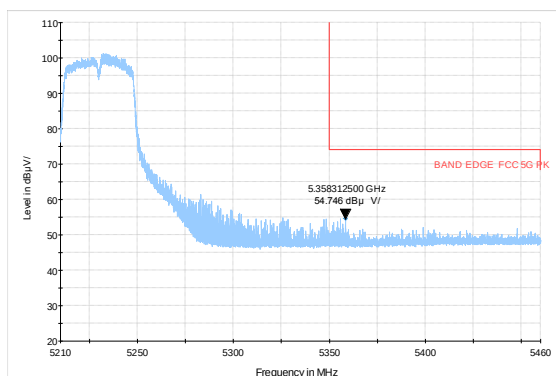


802.11ac VHT40-Channel 38: Average

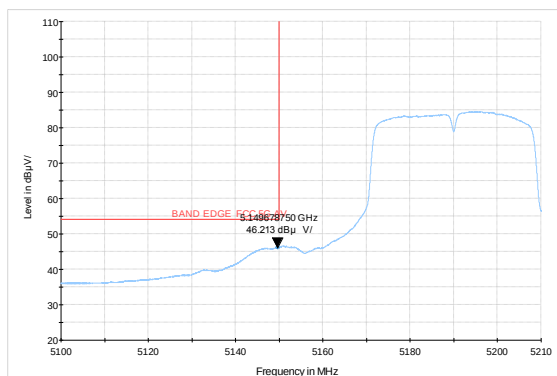


802.11ac VHT40-Channel 46: Average

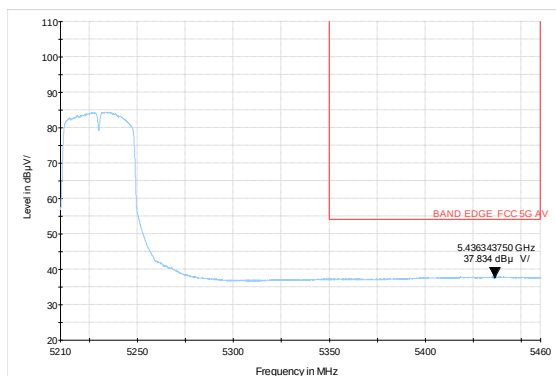

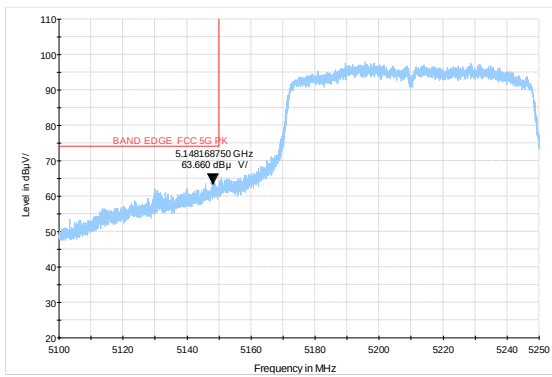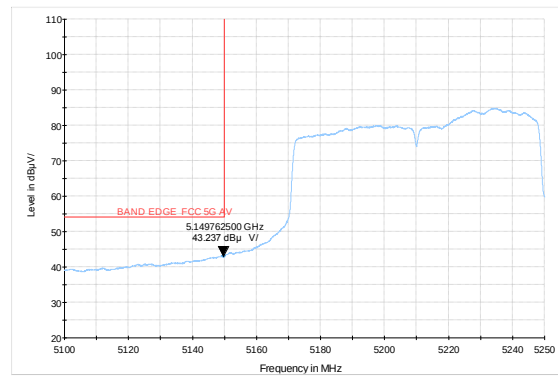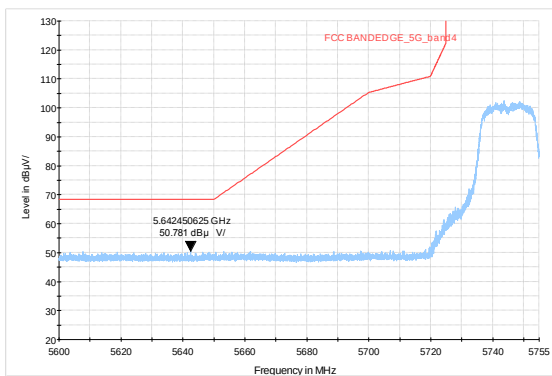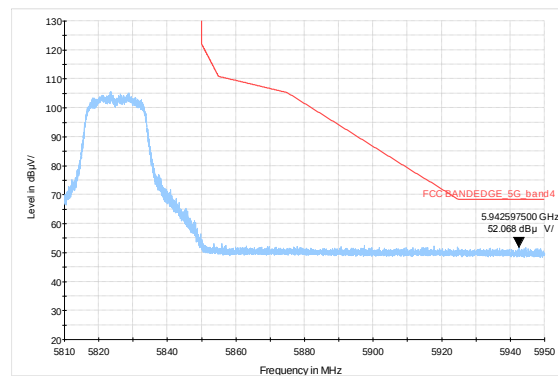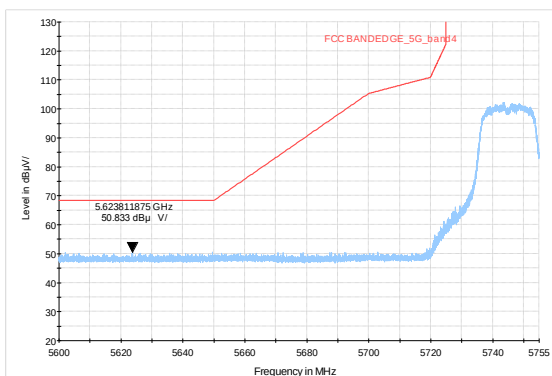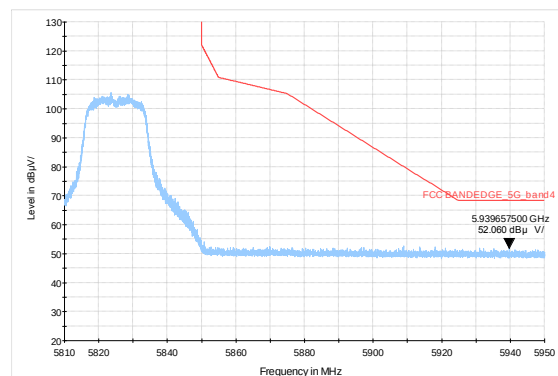
**802.11ac VHT80 –Channel 42: Peak****802.11ac VHT80- Channel 42: Average****U-NII-3****802.11a-Channel 149: Peak****802.11a-Channel 165: Peak****802.11n HT20-Channel 149: Peak****802.11n HT20-Channel 165: Peak**




802.11n HT40-Channel 151: Peak

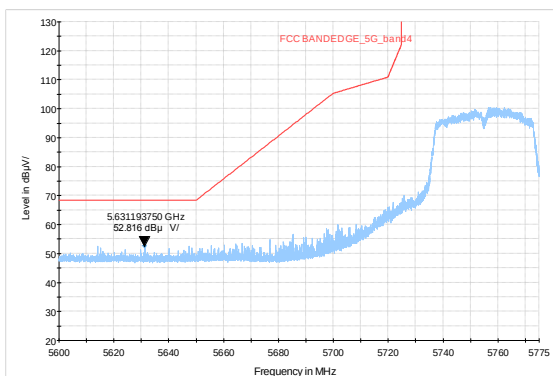


802.11n HT40-Channel 159: Peak

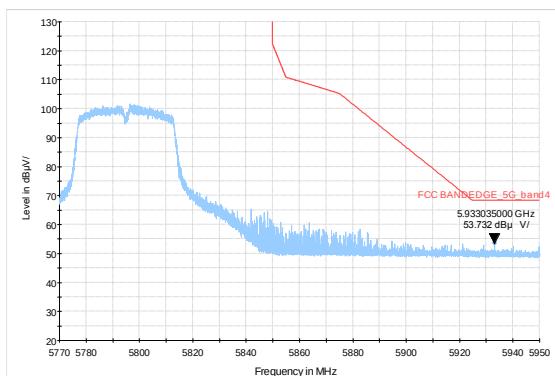


802.11ac VHT20-Channel 149: Peak

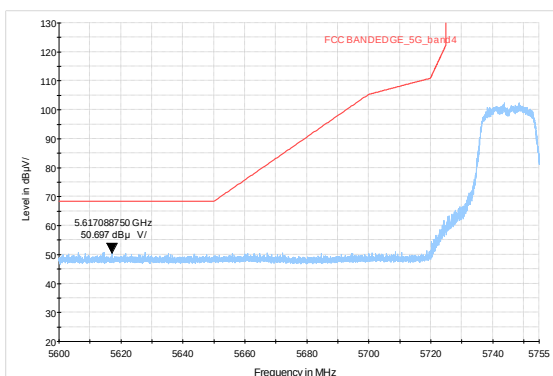


802.11ac VHT20-Channel 165: Peak

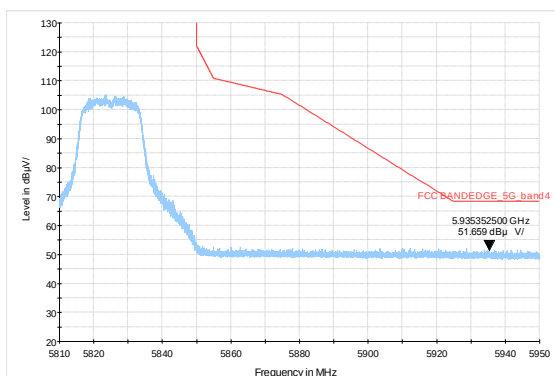


802.11ac VHT40-Channel 151: Peak

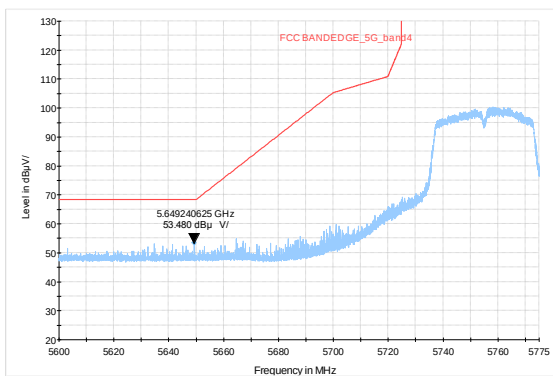

802.11ac VHT40-Channel 159: Peak

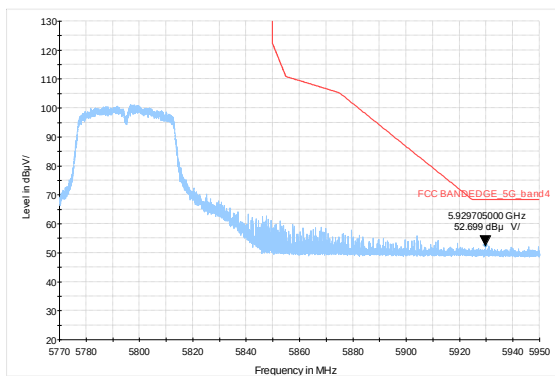

802.11ac VHT80- Channel 155: Peak

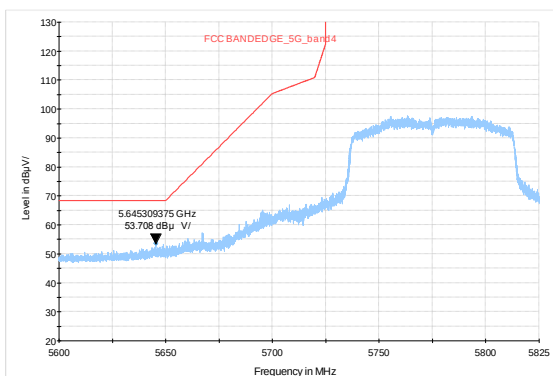


**Result of RE****Test result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz and 26.5GHz-40GHz are more than 20dB below the limit are not reported.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11a, Channel 165 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Continuous TX mode:

FCC RE 0.03-1GHz QP Class B

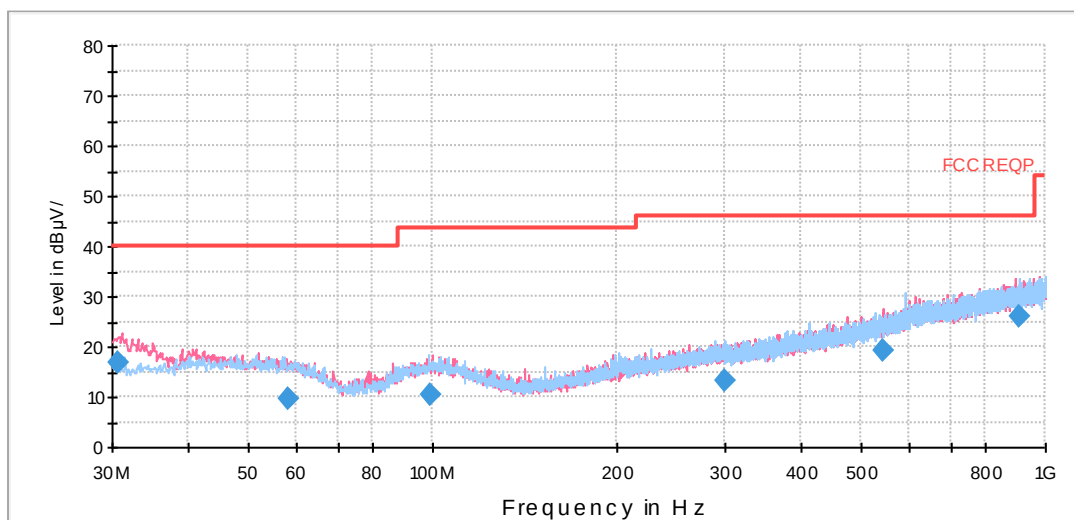

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.771250	16.7	4.6	100.0	V	41.0	12.1	23.3	40.0
58.002500	9.8	-2.9	100.0	H	19.0	12.7	30.2	40.0
98.988750	10.4	-2.8	125.0	H	210.0	13.2	33.1	43.5
299.573750	13.3	-2.4	125.0	H	155.0	15.7	32.7	46.0
545.272500	19.2	-2.4	100.0	V	0.0	21.6	26.8	46.0
907.245000	26.1	-0.9	125.0	H	188.0	27.0	19.9	46.0


Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

3. Margin = Limit – Quasi-Peak


802.11a CH36

FCC RE 1G-3GHz PK+AV Class B

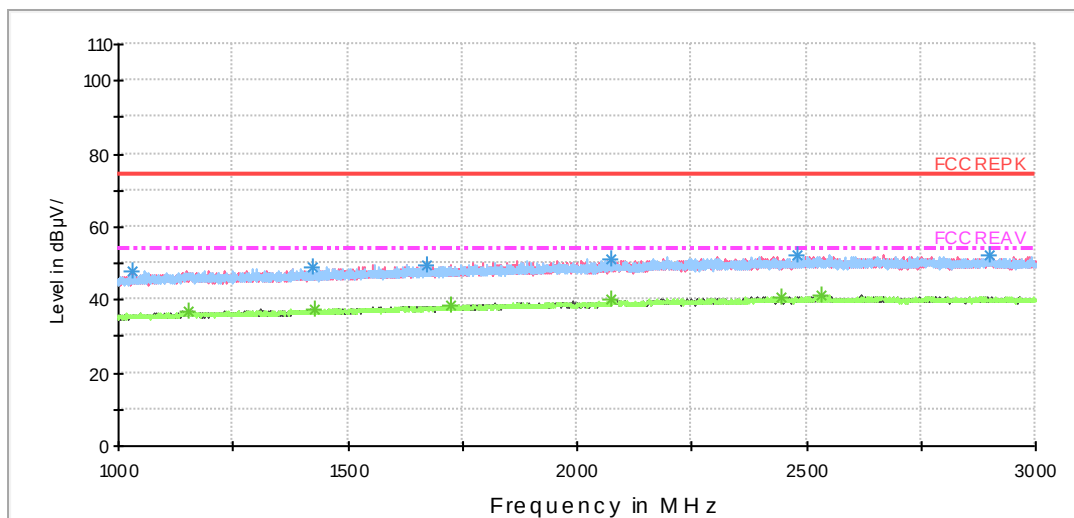

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

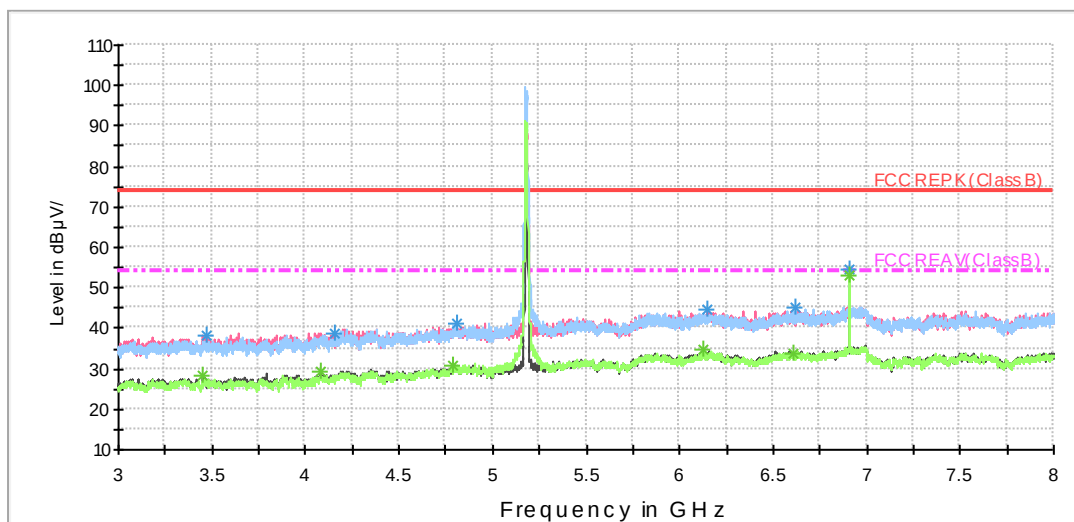

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

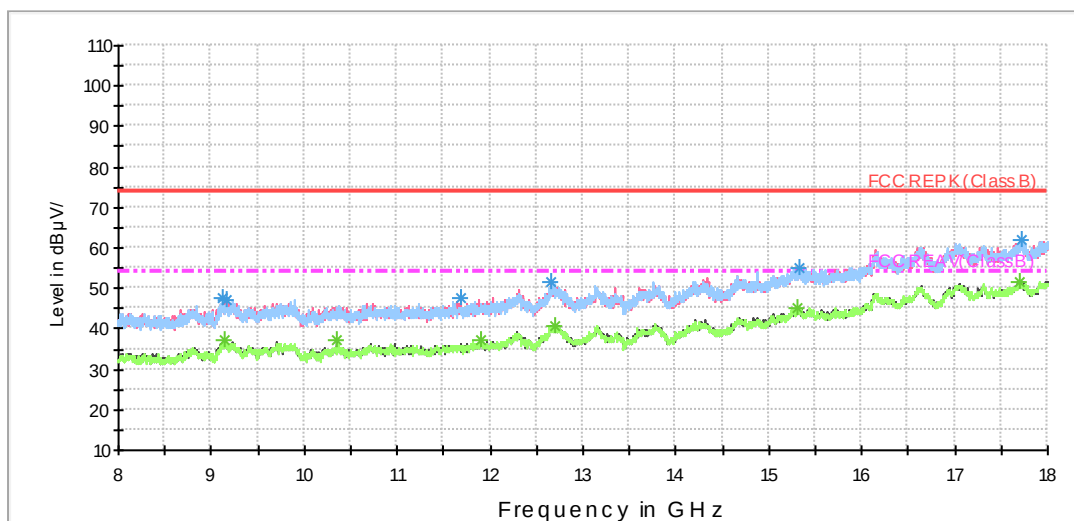


Radiates Emission from 8GHz to 18GHz

RE 18-26.5GHz PK+AV

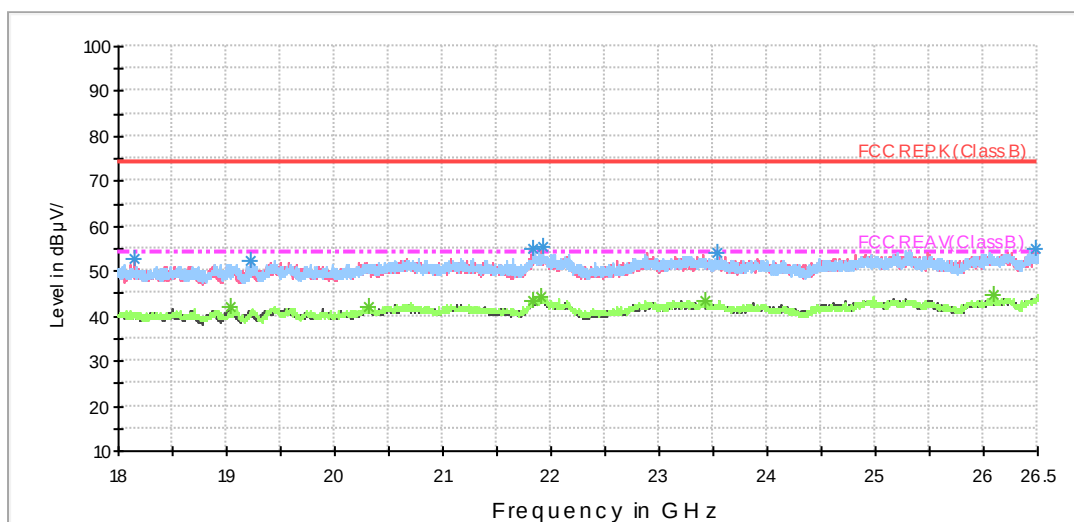

Radiates Emission from 18GHz to 26.5GHz

BELL RE 26.5-40GHz PK+AV

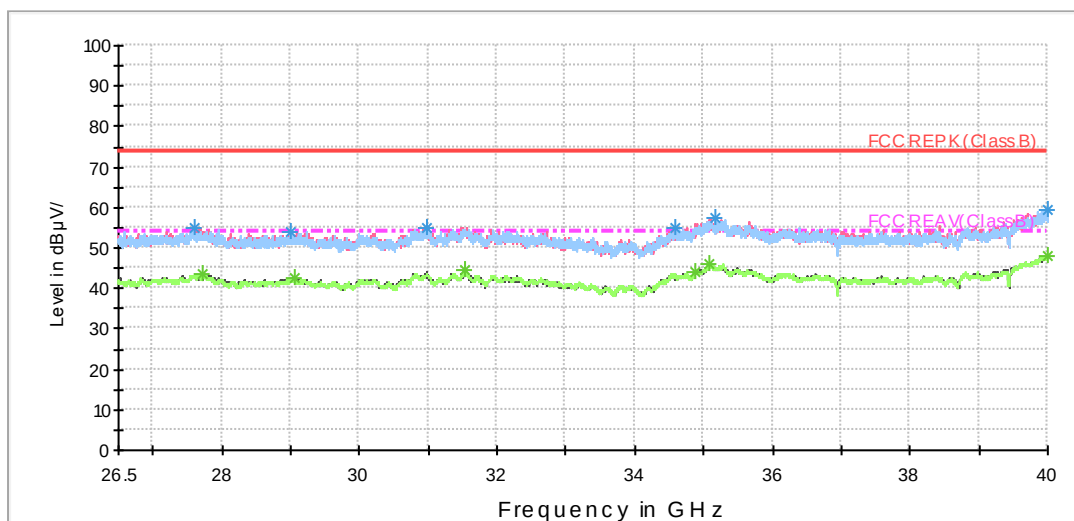

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3470.625000	38.4	200.0	V	304.0	40.5	-2.1	35.6	74
4151.250000	38.9	200.0	V	226.0	39.0	-0.1	35.1	74
4808.750000	41.0	200.0	H	183.0	39.7	1.3	33.0	74
6143.750000	44.5	200.0	V	358.0	39.1	5.4	29.5	74
6623.750000	45.1	200.0	H	23.0	39.6	5.5	28.9	74
6906.875000	54.5	200.0	H	264.0	48.2	6.3	19.5	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3450.000000	28.6	200.0	V	166.0	30.8	-2.2	25.4	54
4083.125000	29.1	200.0	V	236.0	30.0	-0.9	24.9	54
4787.500000	30.9	200.0	H	183.0	29.8	1.1	23.1	54
6130.625000	34.6	200.0	H	162.0	29.2	5.4	19.4	54
6612.500000	34.0	200.0	V	156.0	28.5	5.5	20.0	54
6906.875000	53.0	200.0	H	264.0	46.7	6.3	1.0	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11a CH40

FCC RE 1G-3GHz PK+AV Class B

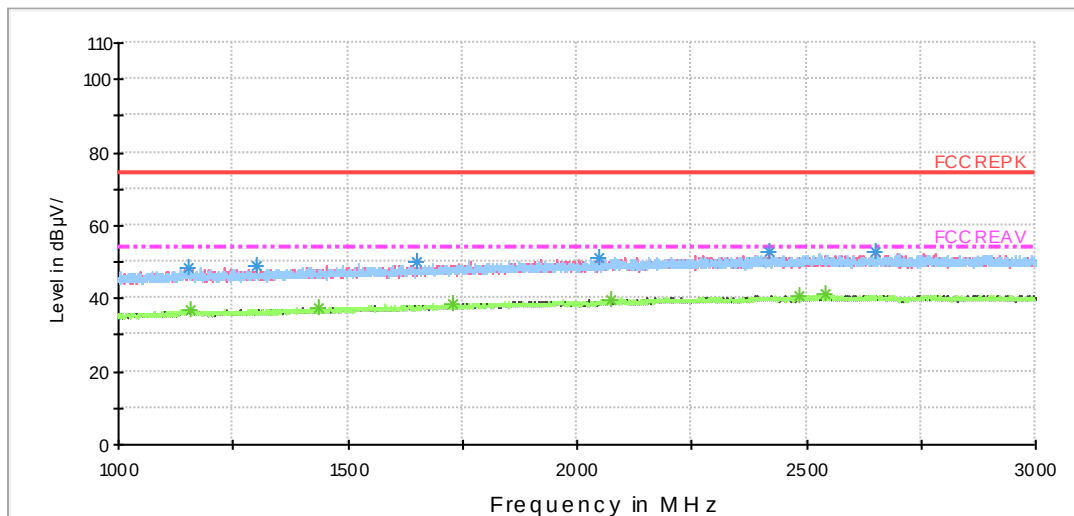

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

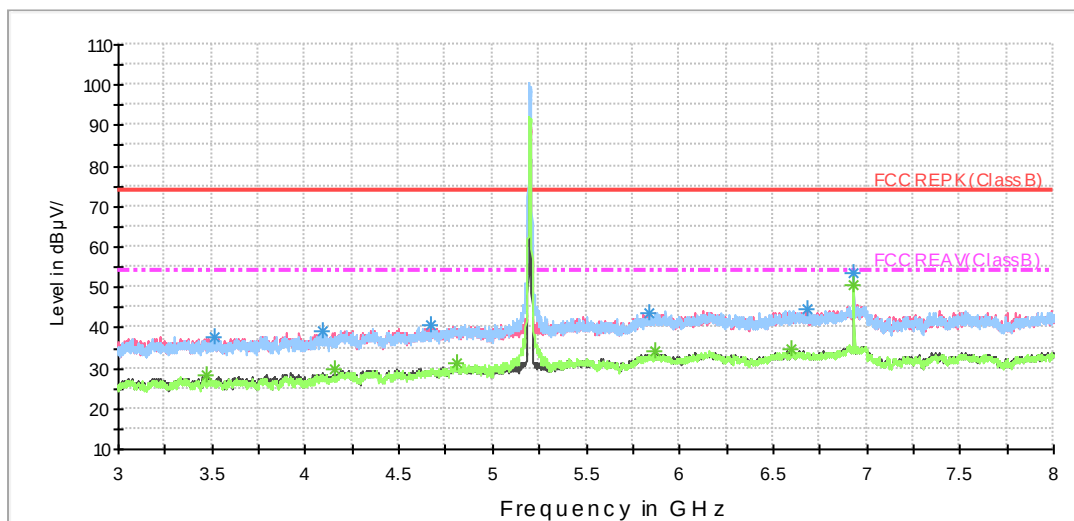

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

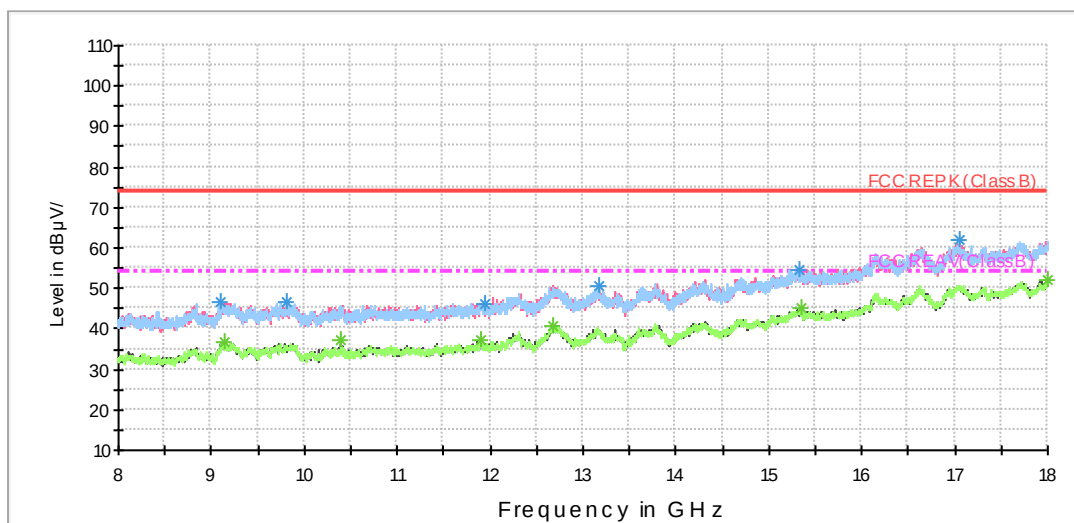


Radiates Emission from 8GHz to 18GHz

RE 18-26.5GHz PK+AV

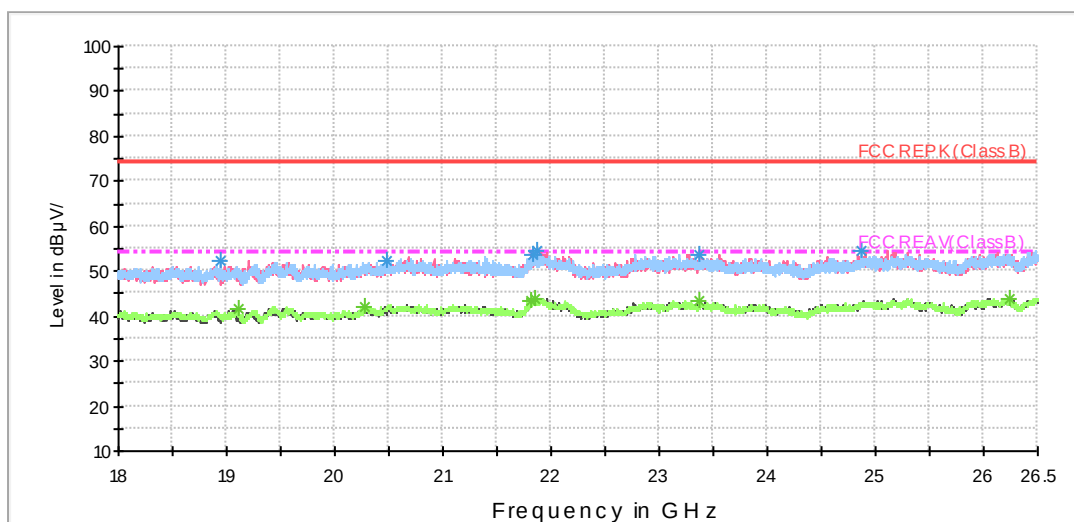

Radiates Emission from 18GHz to 26.5GHz

BELL RE 26.5-40GHz PK+AV

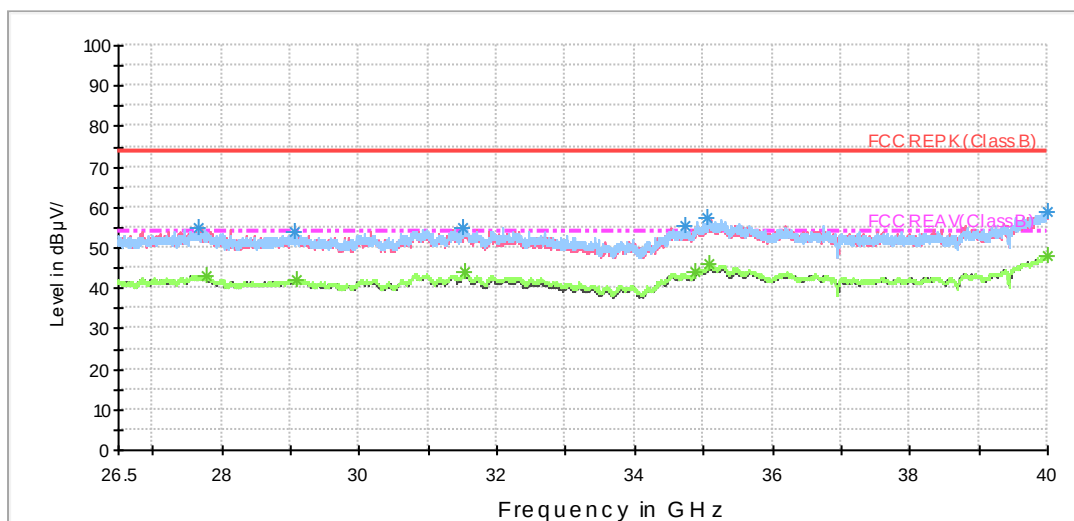

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3514.375000	37.6	200.0	V	166.0	39.6	-2.0	36.4	74
4091.250000	39.0	200.0	H	294.0	39.9	-0.9	35.0	74
4672.500000	40.8	200.0	H	0.0	40.0	0.8	33.2	74
5833.125000	43.7	200.0	V	314.0	39.2	4.5	30.3	74
6683.750000	44.7	200.0	V	0.0	39.3	5.4	29.3	74
6933.750000	53.7	200.0	H	262.0	47.5	6.2	20.3	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3467.500000	28.1	200.0	H	273.0	30.2	-2.1	25.9	54
4151.875000	29.7	200.0	V	314.0	29.8	-0.1	24.3	54
4807.500000	31.2	200.0	H	85.0	29.9	1.3	22.8	54
5873.750000	34.0	200.0	V	294.0	29.1	4.9	20.0	54
6595.625000	34.6	200.0	H	242.0	28.9	5.7	19.4	54
6933.750000	50.7	200.0	H	262.0	44.5	6.2	3.3	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11a CH48

FCC RE 1G-3GHz PK+AV Class B

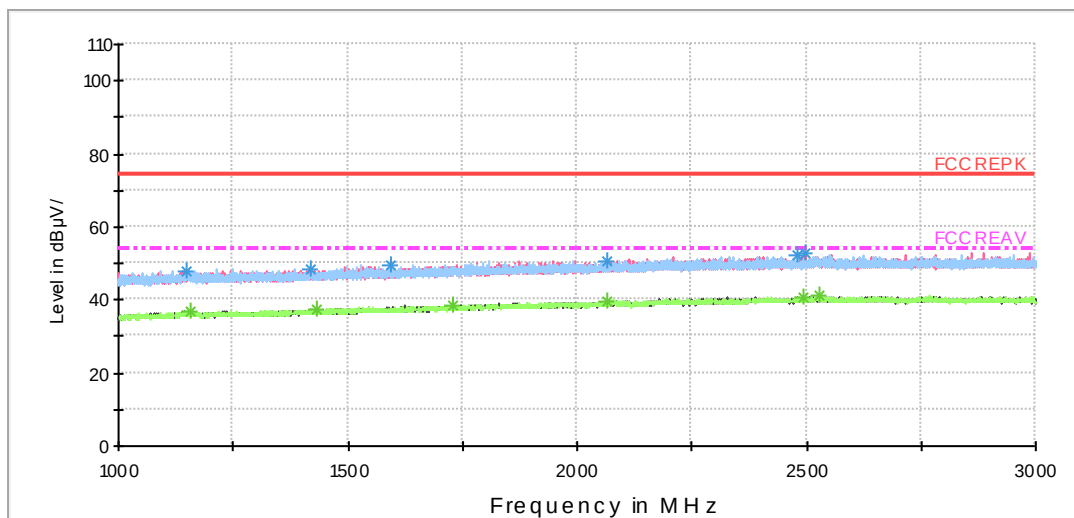

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

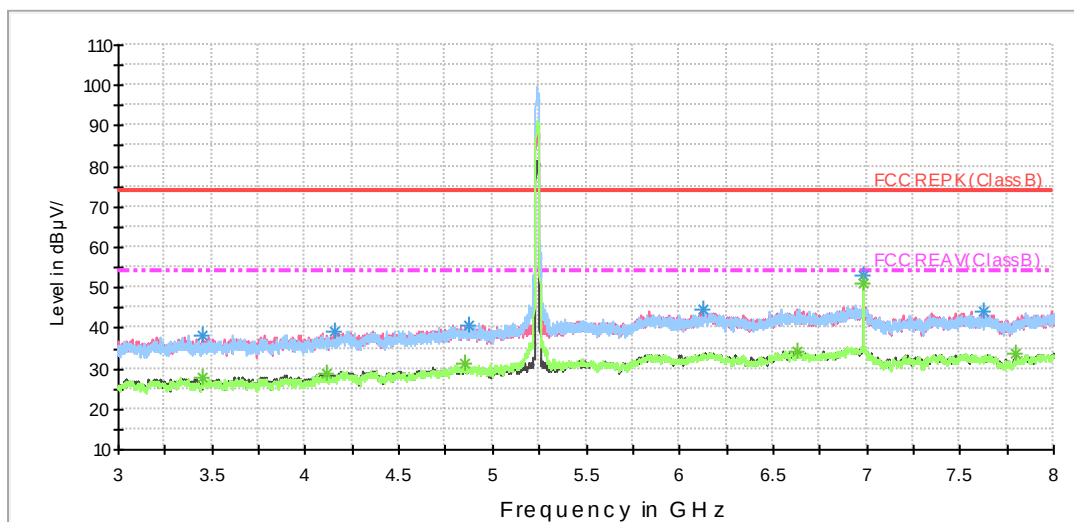

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

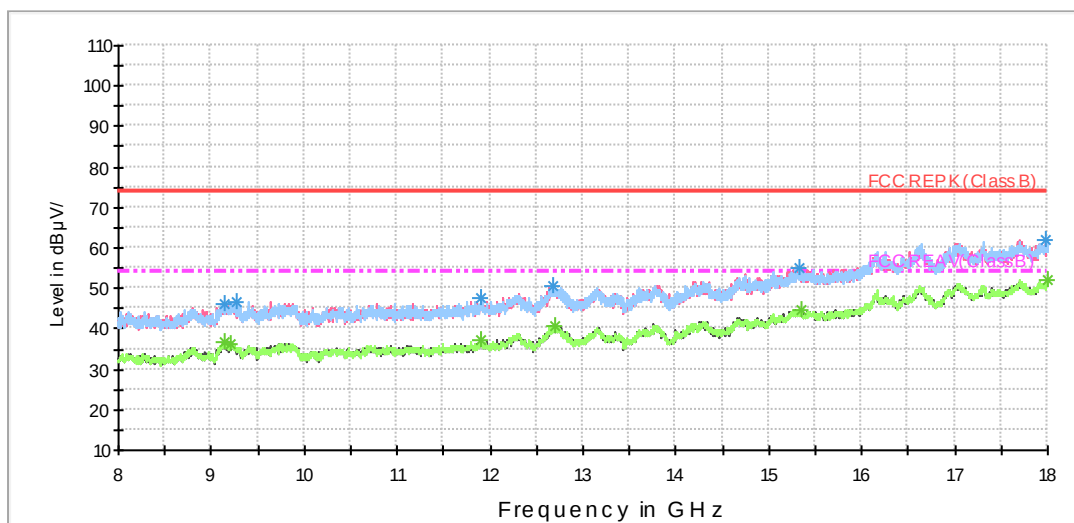


Radiates Emission from 8GHz to 18GHz

RE 18-26.5GHz PK+AV

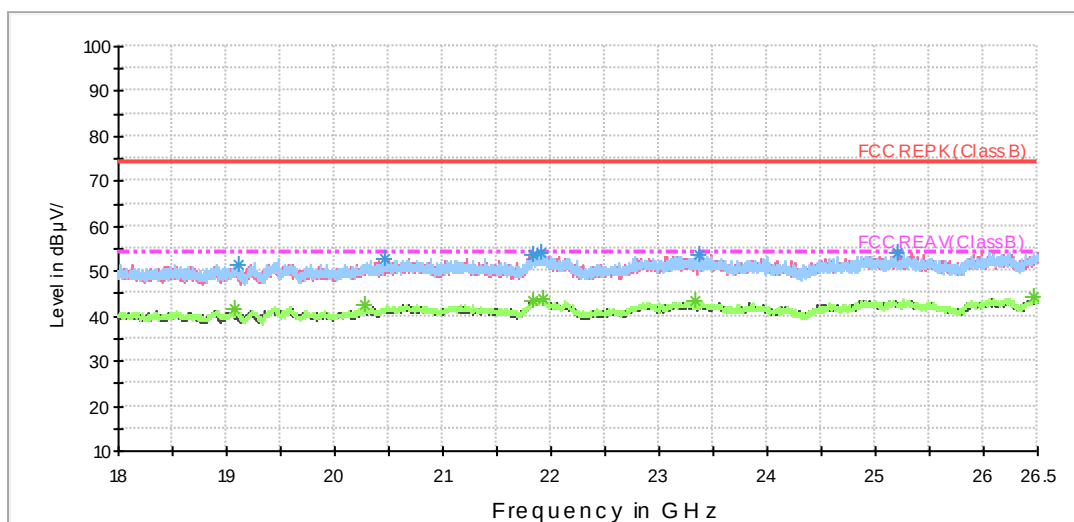

Radiates Emission from 18GHz to 26.5GHz

BELL RE 26.5-40GHz PK+AV

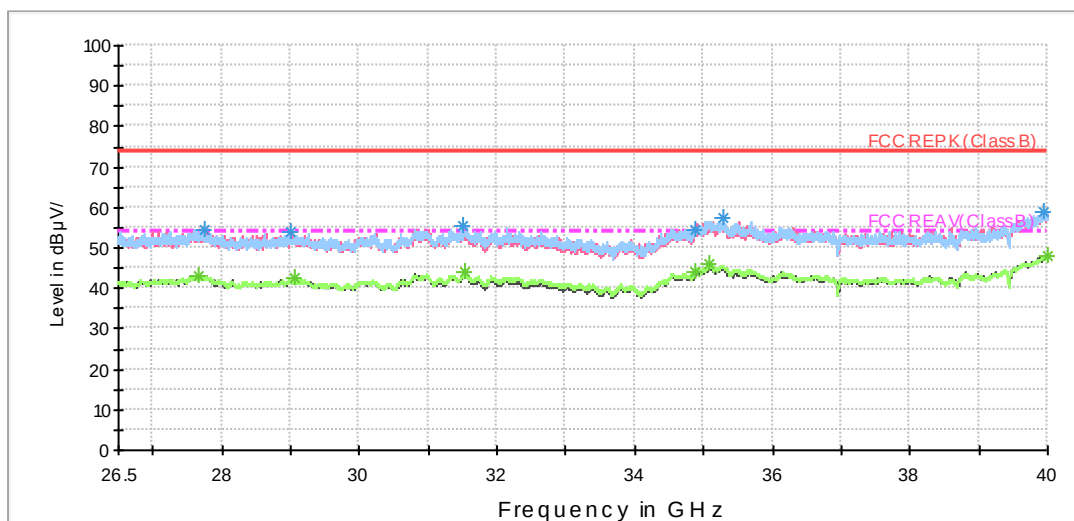

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3450.000000	38.1	200.0	V	186.0	40.3	-2.2	35.9	74
4152.500000	39.2	200.0	V	226.0	39.3	-0.1	34.8	74
4871.250000	40.7	200.0	H	191.0	38.9	1.8	33.3	74
6121.250000	44.8	200.0	V	127.0	39.4	5.4	29.2	74
6986.875000	53.0	200.0	H	270.0	46.6	6.4	21.0	74
7621.875000	44.2	200.0	H	154.0	37.4	6.8	29.8	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3450.000000	27.7	200.0	V	186.0	29.9	-2.2	26.3	54
4113.125000	28.6	200.0	V	0.0	29.3	-0.7	25.4	54
4848.125000	31.5	200.0	H	191.0	29.9	1.6	22.5	54
6631.875000	34.4	200.0	H	128.0	28.9	5.5	19.6	54
6986.875000	51.1	200.0	H	270.0	44.7	6.4	2.9	54
7798.750000	33.6	200.0	V	177.0	26.6	7.0	20.4	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11a CH149

FCC RE 1G-3GHz PK+AV Class B

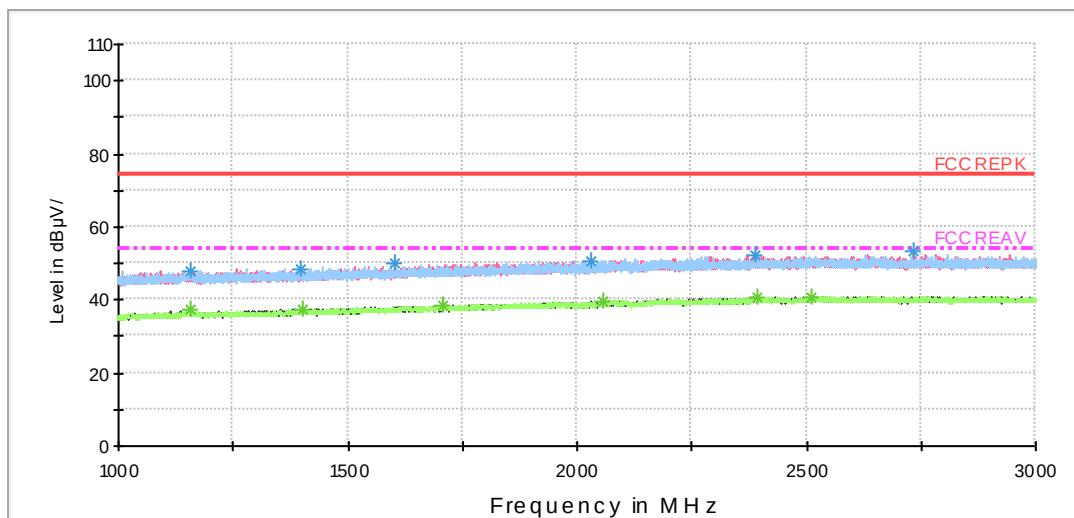

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

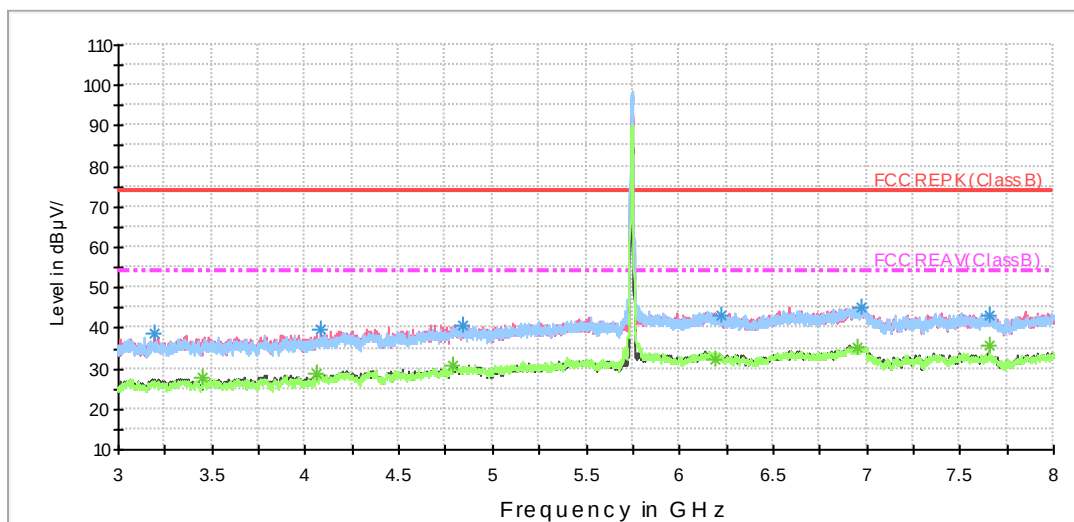

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

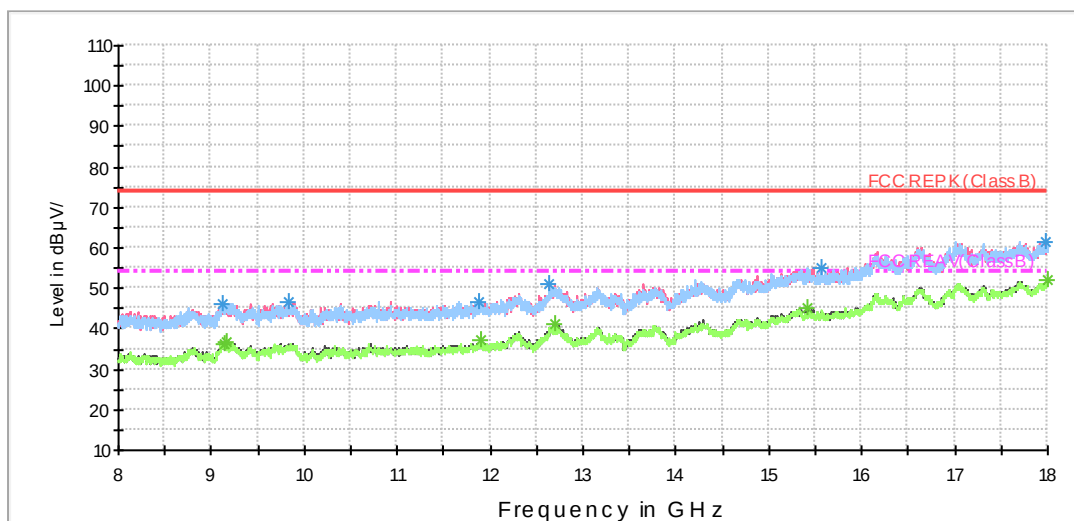

Radiates Emission from 8GHz to 18GHz


RE 18-26.5GHz PK+AV

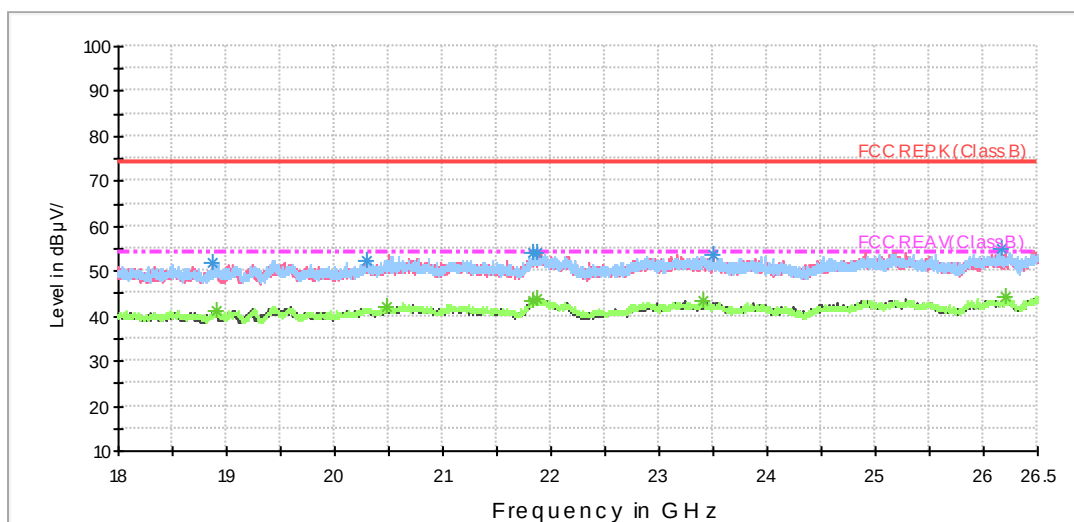

Radiates Emission from 18GHz to 26.5GHz



BELL RE 26.5-40GHz PK+AV

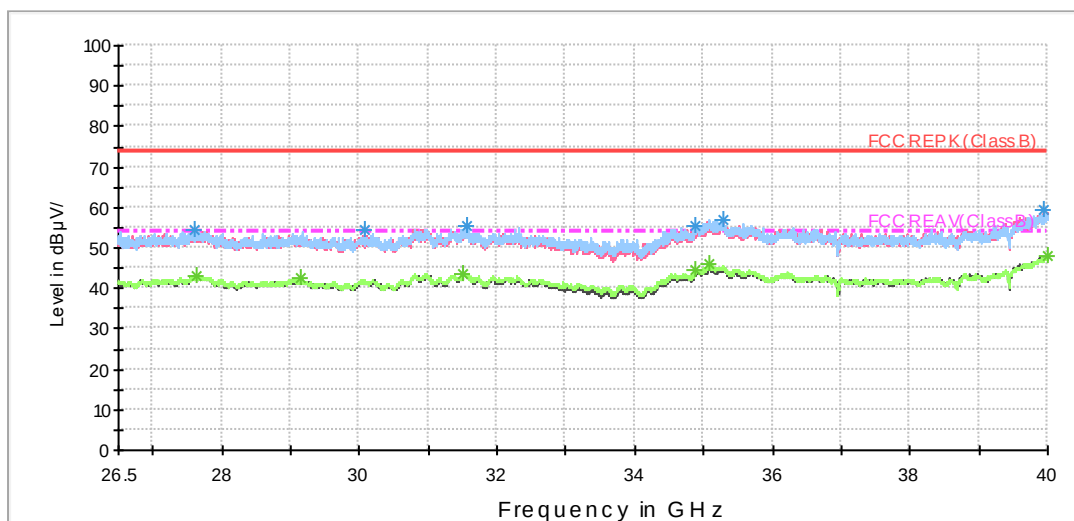

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3188.125000	38.6	200.0	V	288.0	41.5	-2.9	35.4	74
4077.500000	39.6	200.0	V	208.0	40.5	-0.9	34.4	74
4844.375000	40.9	200.0	V	0.0	39.3	1.6	33.1	74
6225.625000	43.3	200.0	V	298.0	37.9	5.4	30.7	74
6973.750000	45.2	200.0	V	308.0	38.9	6.3	28.8	74
7658.125000	43.1	200.0	H	0.0	36.3	6.8	30.9	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3449.375000	27.8	200.0	V	188.0	30.0	-2.2	26.2	54
4063.750000	28.6	200.0	V	0.0	29.7	-1.1	25.4	54
4783.125000	30.6	200.0	V	318.0	29.5	1.1	23.4	54
6195.625000	32.5	200.0	V	347.0	27.1	5.4	21.5	54
6950.000000	35.2	200.0	H	0.0	29.0	6.2	18.8	54
7660.000000	35.5	200.0	H	192.0	28.7	6.8	18.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11a CH157

FCC RE 1G-3GHz PK+AV Class B

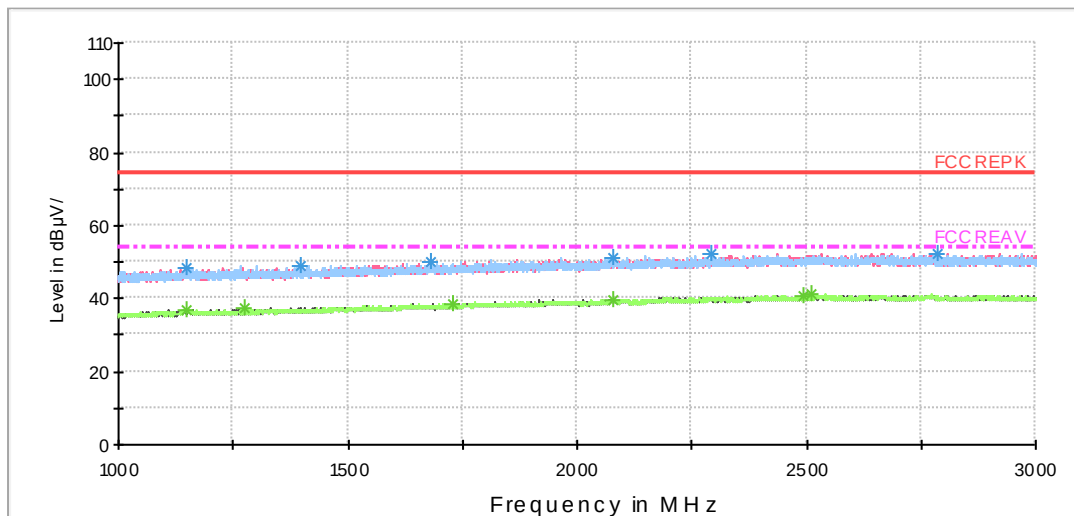

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

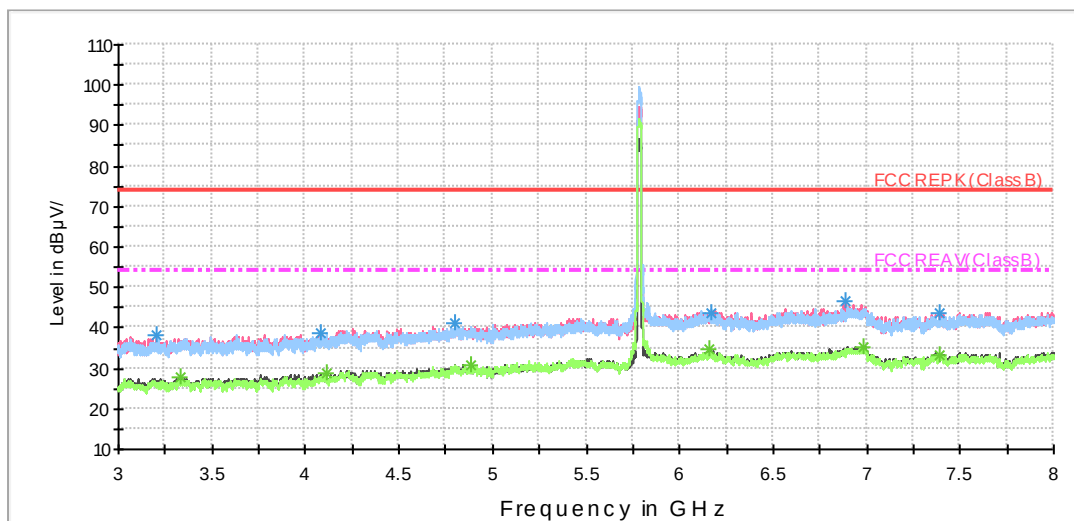

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

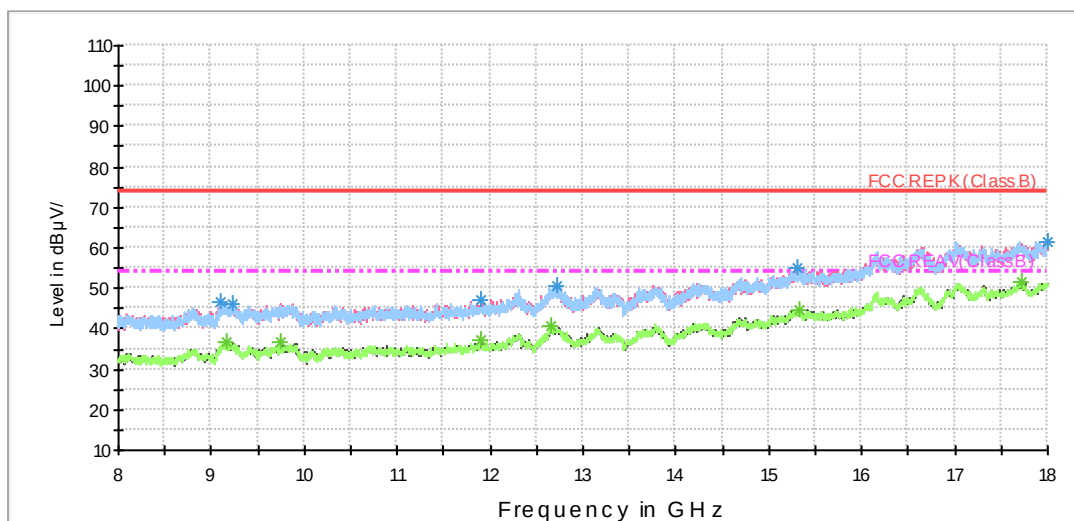


Radiates Emission from 8GHz to 18GHz

RE 18-26.5GHz PK+AV

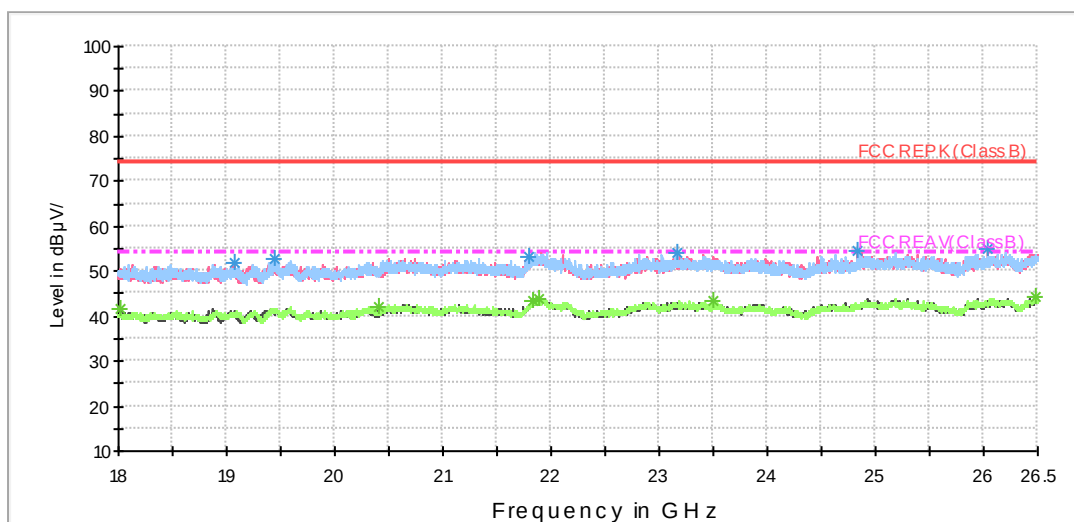

Radiates Emission from 18GHz to 26.5GHz

BELL RE 26.5-40GHz PK+AV

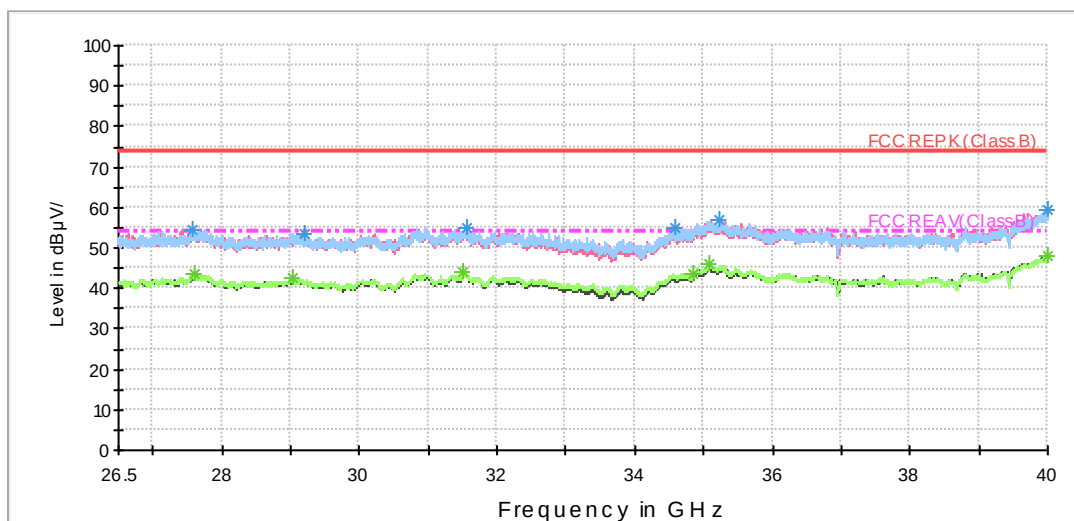

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3201.875000	38.0	200.0	V	187.0	40.8	-2.8	36.0	74
4085.625000	38.5	200.0	V	323.0	39.4	-0.9	35.5	74
4800.000000	41.0	200.0	H	0.0	39.7	1.3	33.0	74
6167.500000	43.5	200.0	V	333.0	37.9	5.6	30.5	74
6891.250000	46.8	200.0	V	333.0	40.7	6.1	27.2	74
7394.375000	43.8	200.0	V	167.0	36.9	6.9	30.2	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3331.250000	27.7	200.0	V	294.0	29.9	-2.2	26.3	54
4110.625000	28.7	200.0	V	255.0	29.4	-0.7	25.3	54
4889.375000	30.7	200.0	H	163.0	28.8	1.9	23.3	54
6162.500000	34.6	200.0	V	34.0	29.0	5.6	19.4	54
6985.000000	35.4	200.0	V	284.0	29.0	6.4	18.6	54
7390.000000	33.5	200.0	V	304.0	26.6	6.9	20.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11a CH165

FCC RE 1G-3GHz PK+AV Class B

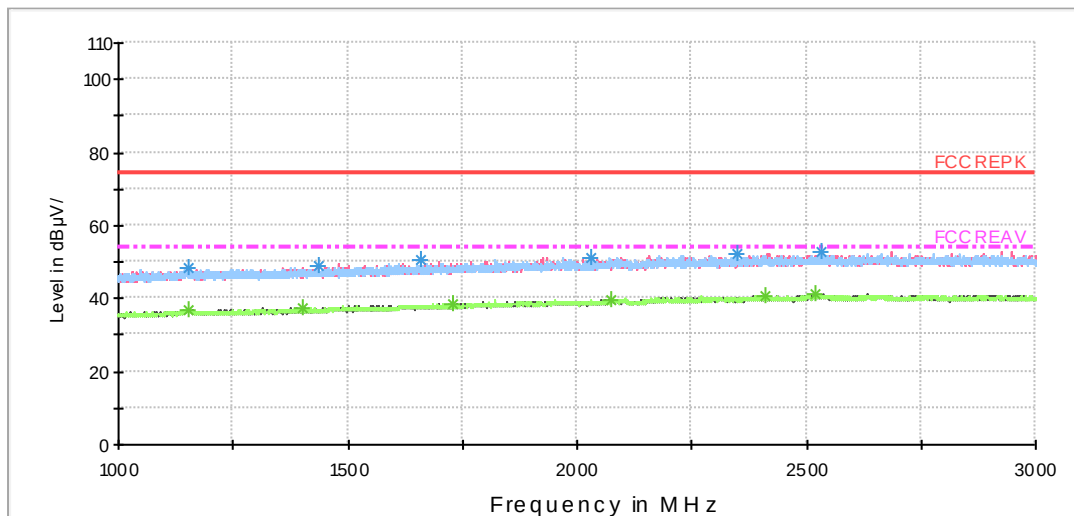

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

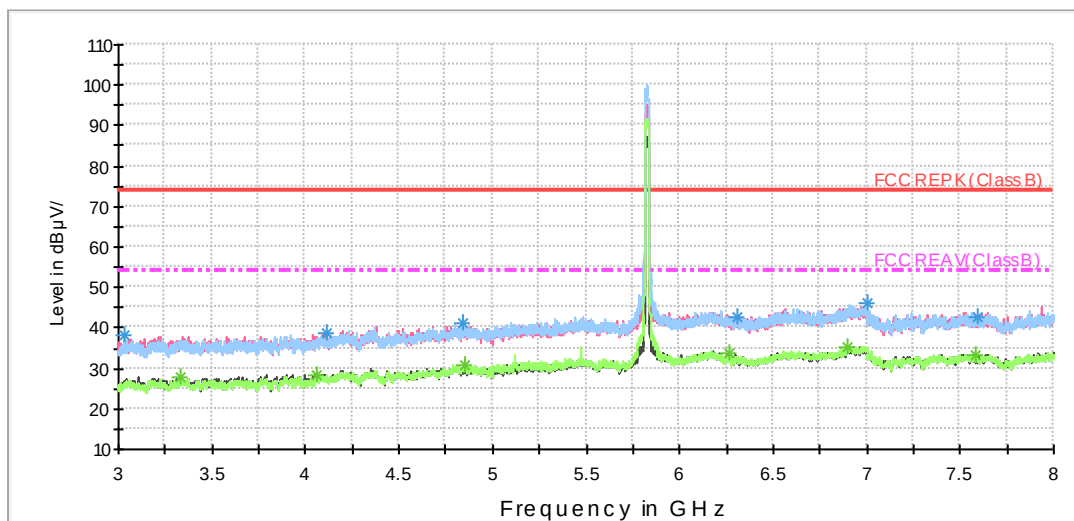

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

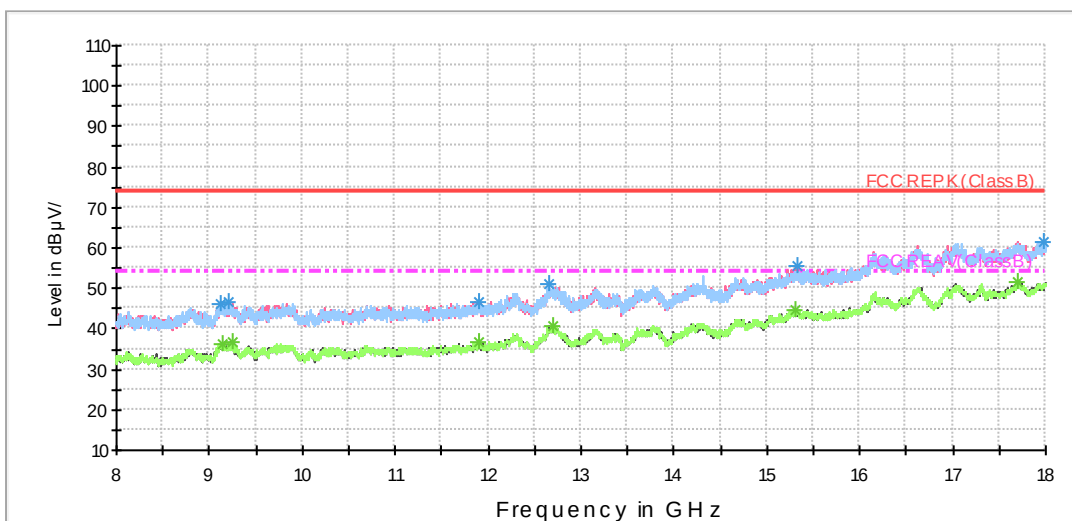


Radiates Emission from 8GHz to 18GHz

RE 18-26.5GHz PK+AV

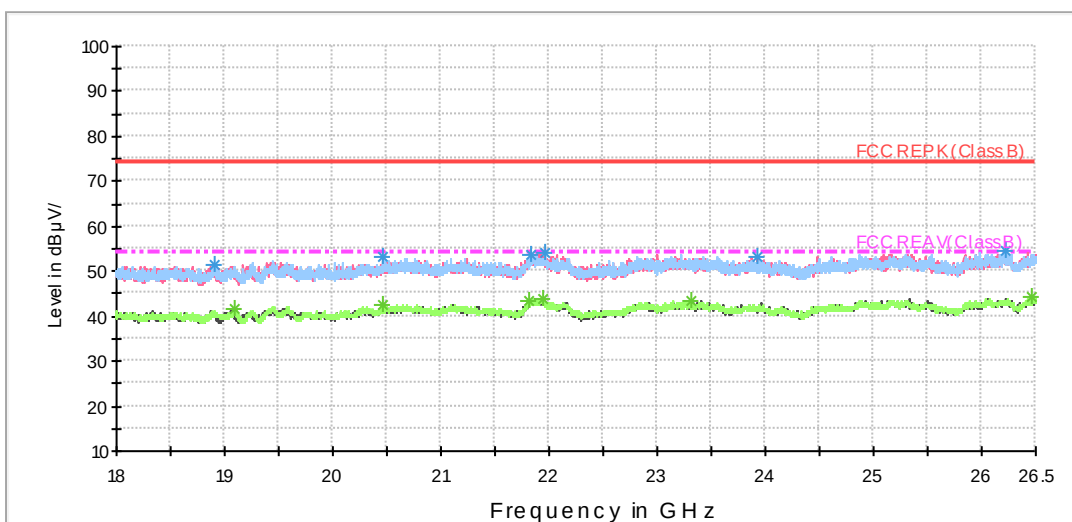

Radiates Emission from 18GHz to 26.5GHz

BELL RE 26.5-40GHz PK+AV

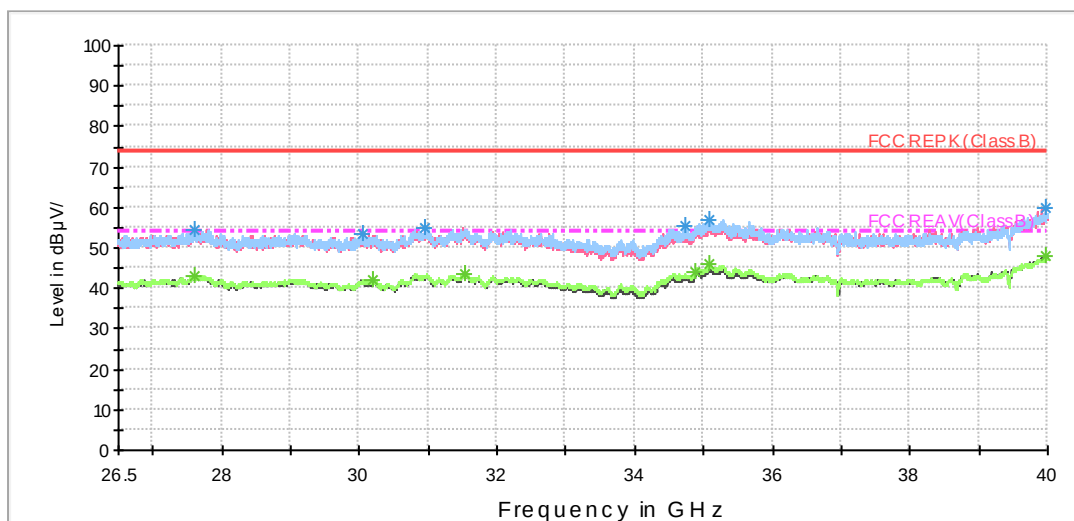

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3033.125000	38.0	200.0	H	250.0	41.3	-3.3	36.0	74
4113.125000	38.6	200.0	V	79.0	39.3	-0.7	35.4	74
4843.125000	41.1	200.0	H	185.0	39.5	1.6	32.9	74
6305.000000	42.9	200.0	H	115.0	37.5	5.4	31.1	74
6999.375000	45.9	200.0	H	134.0	39.4	6.5	28.1	74
7593.125000	42.9	200.0	V	0.0	35.9	7.0	31.1	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3331.875000	28.0	200.0	V	22.0	30.2	-2.2	26.0	54
4057.500000	28.5	200.0	V	229.0	29.6	-1.1	25.5	54
4853.750000	30.8	200.0	H	174.0	29.2	1.6	23.2	54
6264.375000	33.6	200.0	V	319.0	28.1	5.5	20.4	54
6902.500000	35.4	200.0	H	0.0	29.1	6.3	18.6	54
7579.375000	33.1	200.0	V	179.0	26.0	7.1	20.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH36

FCC RE 1G-3GHz PK+AV Class B

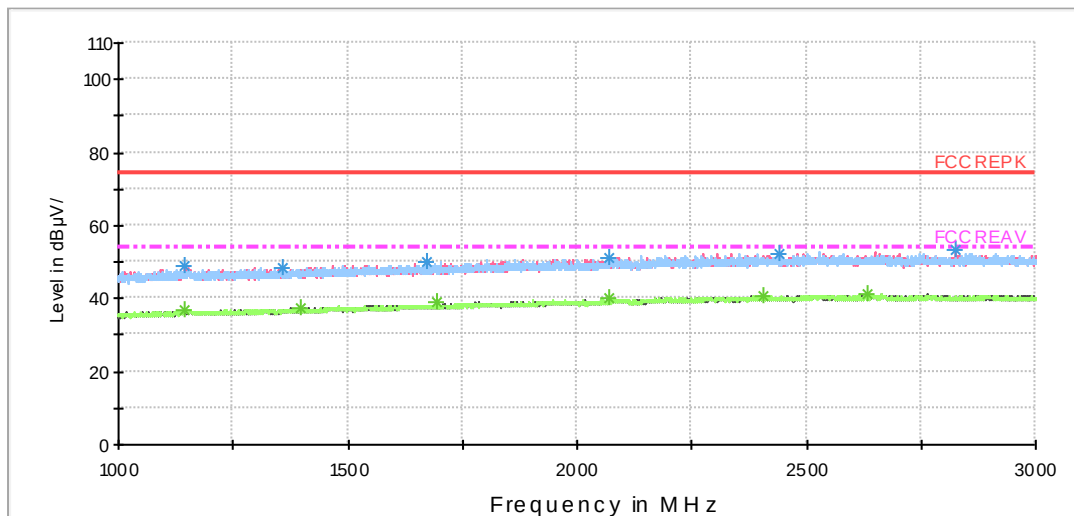

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

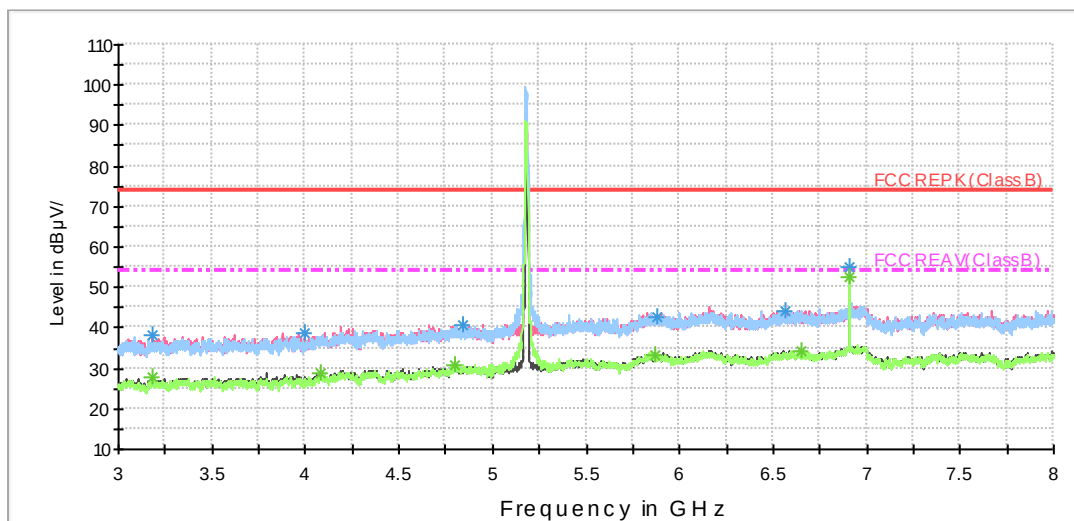

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

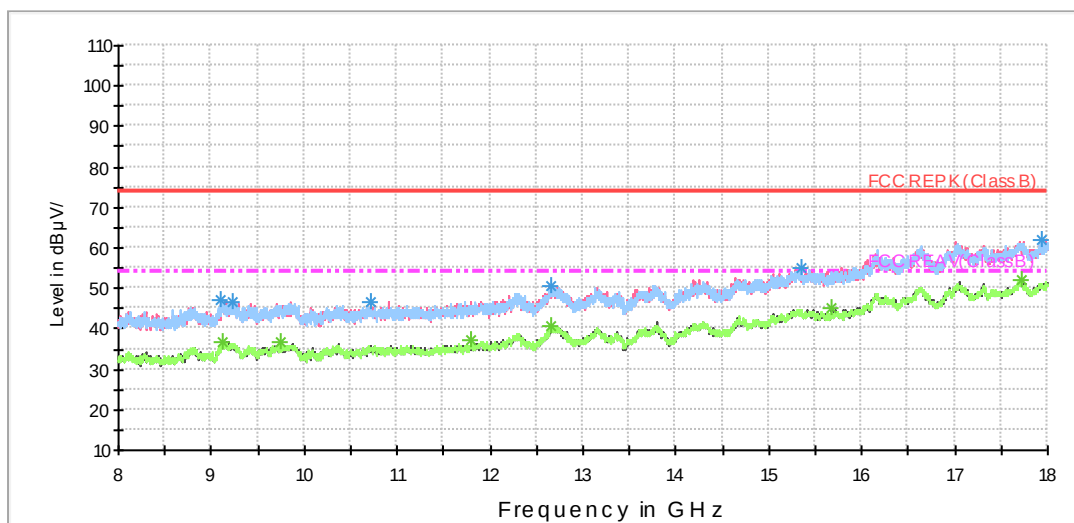


Radiates Emission from 8GHz to 18GHz

RE 18-26.5GHz PK+AV

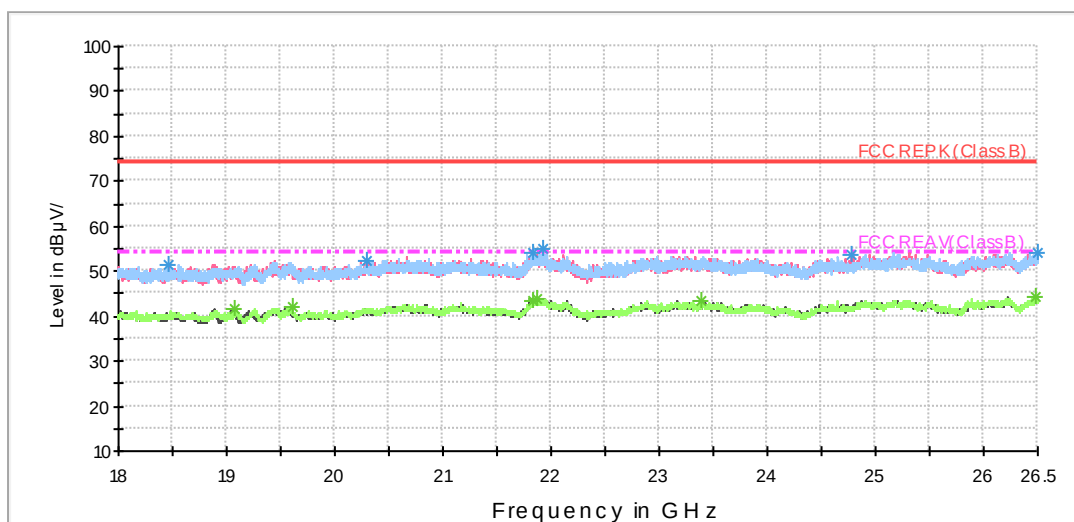

Radiates Emission from 18GHz to 26.5GHz

BELL RE 26.5-40GHz PK+AV

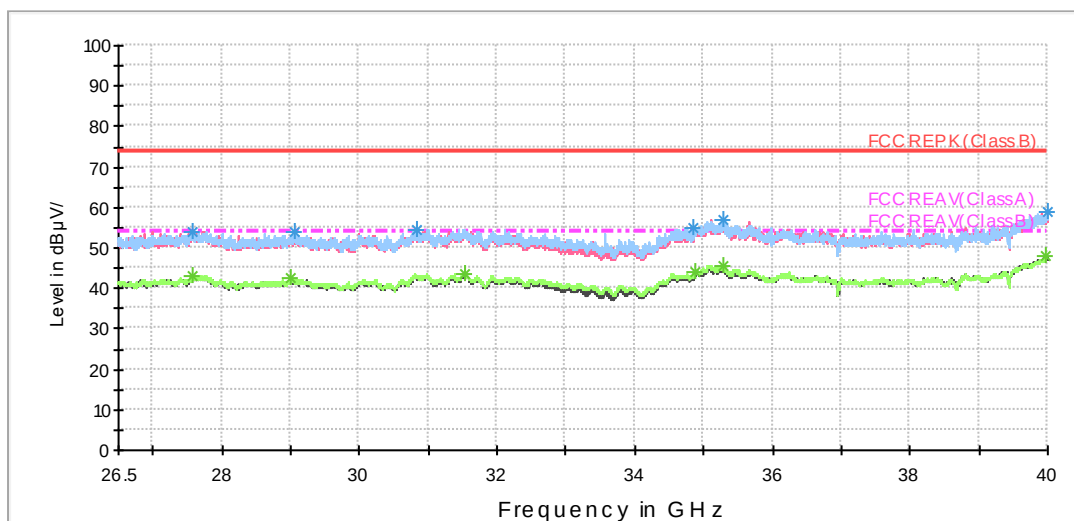

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3182.500000	38.1	200.0	V	315.0	41.0	-2.9	35.9	74
3993.750000	38.8	200.0	V	198.0	39.9	-1.1	35.2	74
4840.625000	40.6	200.0	V	148.0	39.0	1.6	33.4	74
5877.500000	42.8	200.0	V	237.0	37.9	4.9	31.2	74
6570.000000	44.1	200.0	V	343.0	38.4	5.7	29.9	74
6906.875000	54.9	200.0	H	264.0	48.6	6.3	19.1	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3178.750000	27.7	200.0	V	315.0	30.6	-2.9	26.3	54
4080.625000	28.7	200.0	V	315.0	29.6	-0.9	25.3	54
4801.875000	30.9	200.0	H	135.0	29.6	1.3	23.1	54
5867.500000	33.2	200.0	V	148.0	28.3	4.9	20.8	54
6651.250000	34.5	200.0	V	67.0	29.0	5.5	19.5	54
6906.875000	52.5	200.0	H	264.0	46.2	6.3	1.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH40

FCC RE 1G-3GHz PK+AV Class B

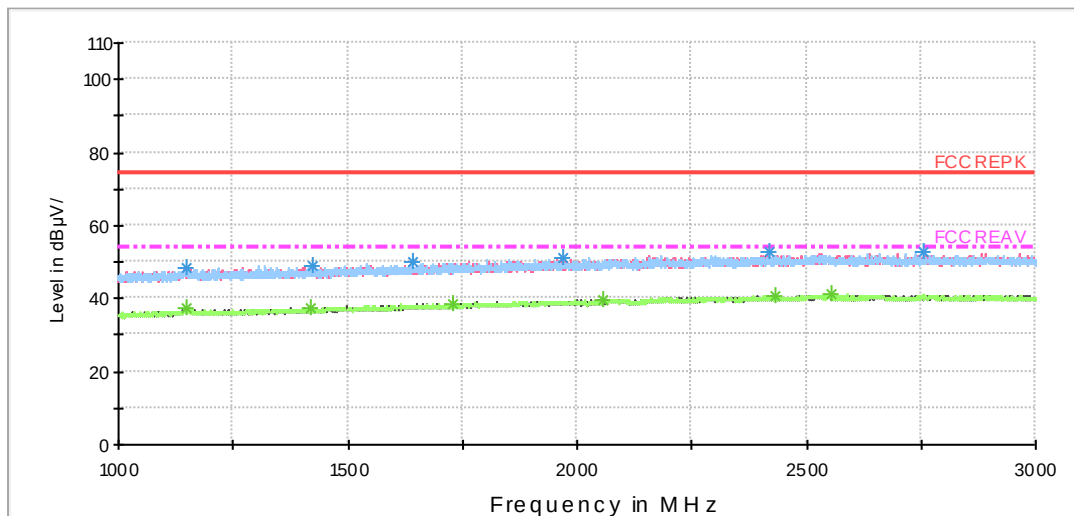

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

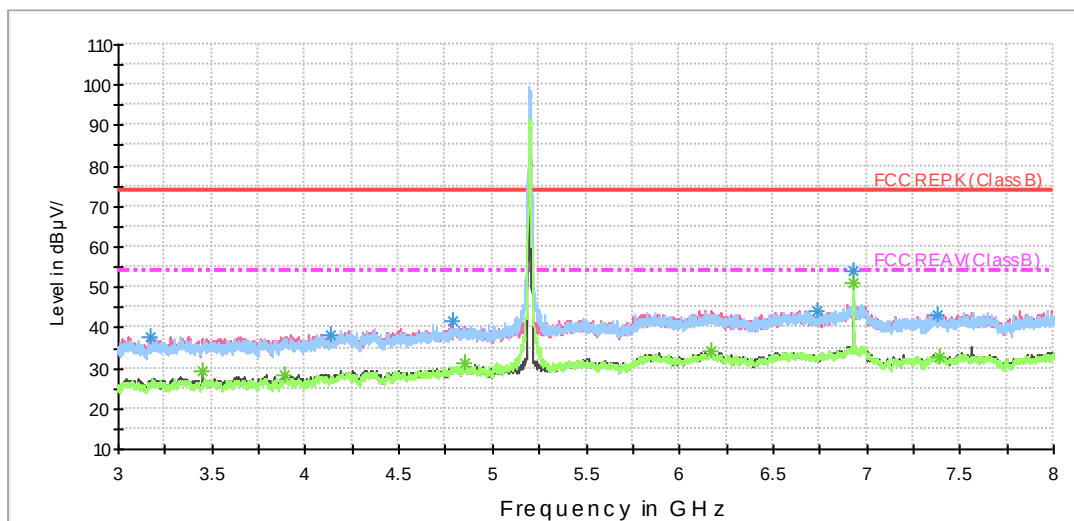

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

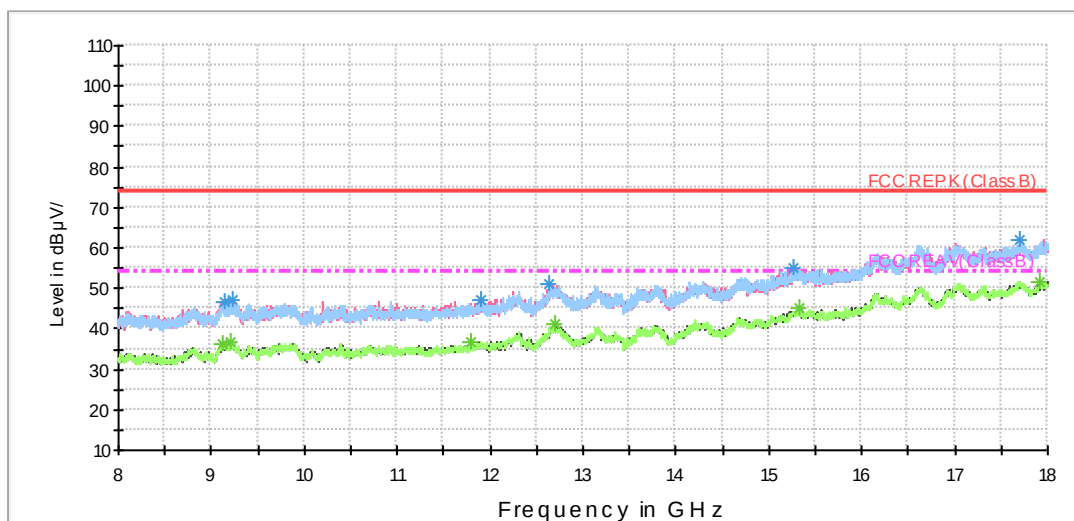

Radiates Emission from 8GHz to 18GHz


RE 18-26.5GHz PK+AV

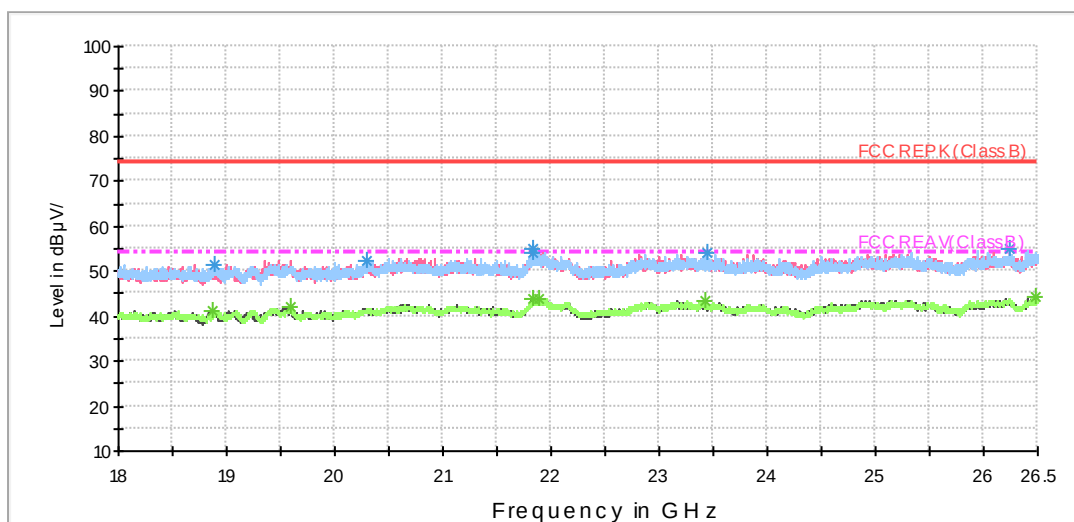

Radiates Emission from 18GHz to 26.5GHz



BELL RE 26.5-40GHz PK+AV

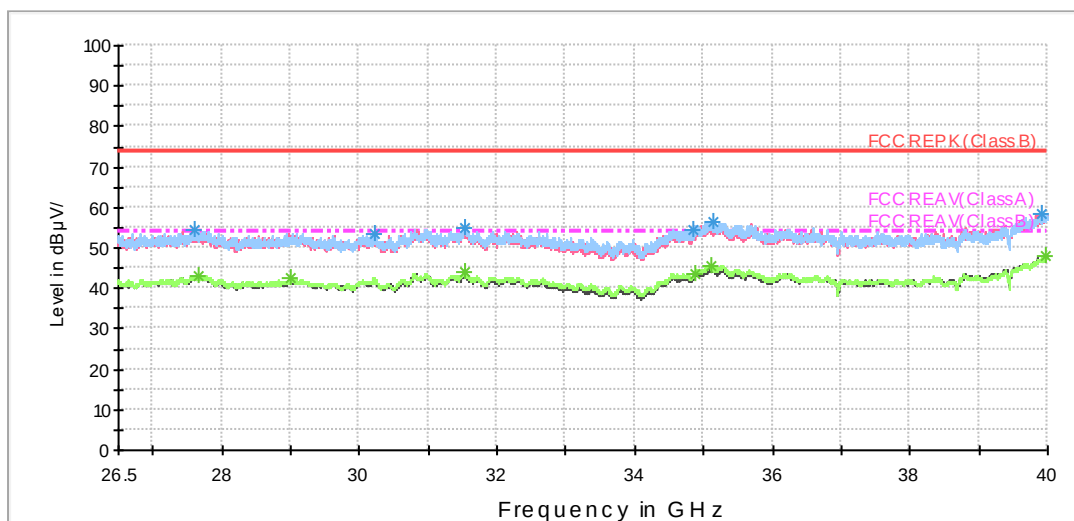

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3175.625000	37.9	200.0	V	0.0	40.8	-2.9	36.1	74
4130.000000	38.3	200.0	V	0.0	38.7	-0.4	35.7	74
4792.500000	41.5	200.0	H	188.0	40.3	1.2	32.5	74
6735.625000	44.2	200.0	H	26.0	38.8	5.4	29.8	74
6933.750000	54.1	200.0	H	270.0	47.9	6.2	19.9	74
7380.000000	43.4	200.0	V	159.0	36.3	7.1	30.6	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3450.000000	29.1	200.0	V	213.0	31.3	-2.2	24.9	54
3886.250000	28.6	200.0	V	351.0	29.9	-1.3	25.4	54
4848.750000	31.3	200.0	H	134.0	29.7	1.6	22.7	54
6165.625000	34.1	200.0	H	75.0	28.5	5.6	19.9	54
6933.750000	50.9	200.0	H	270.0	44.7	6.2	3.1	54
7391.875000	33.0	200.0	V	341.0	26.1	6.9	21.0	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH48

FCC RE 1G-3GHz PK+AV Class B

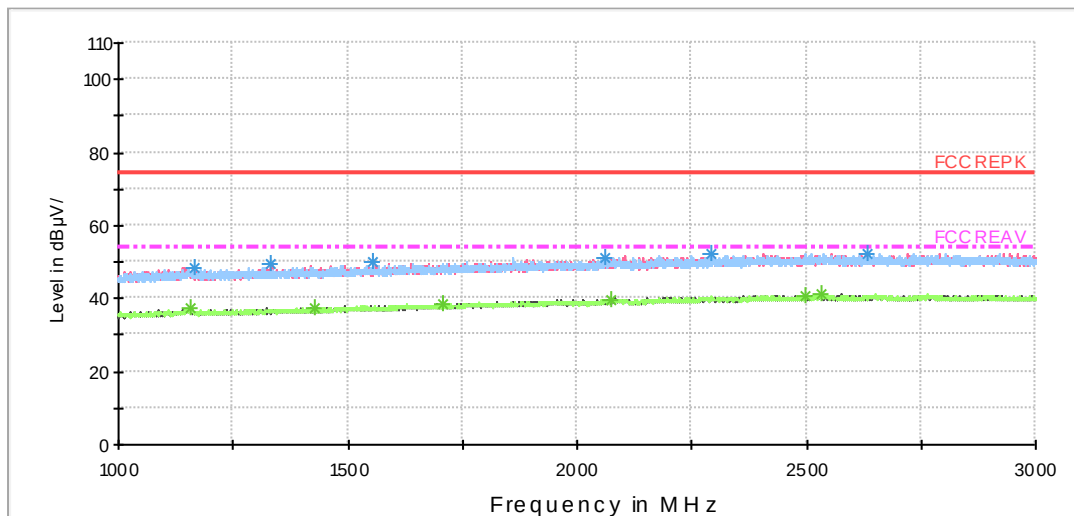

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

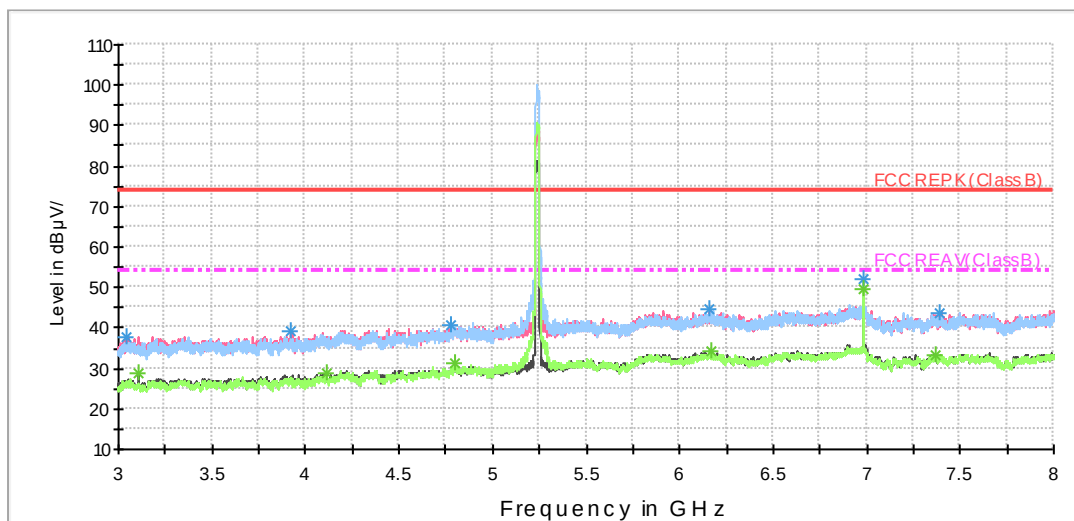

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

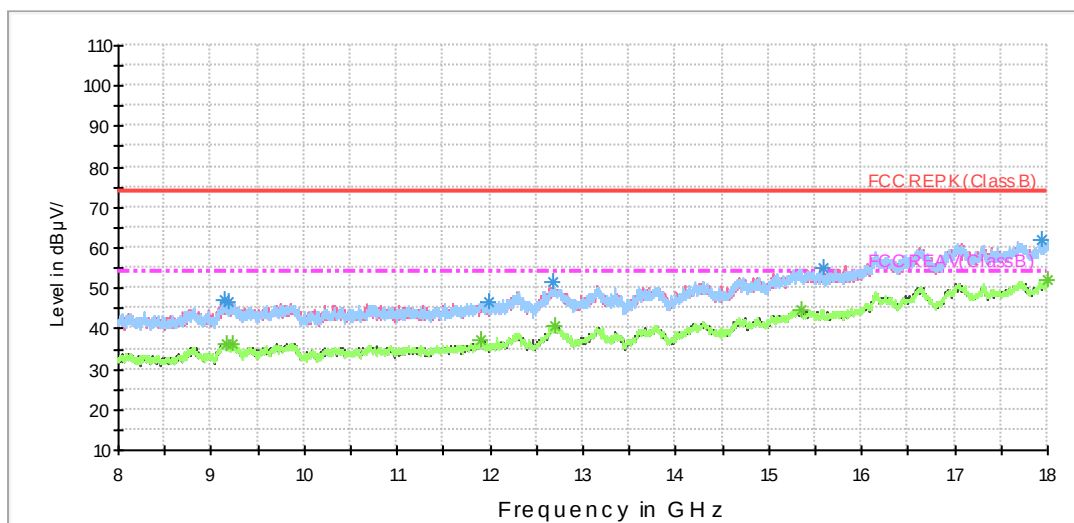


Radiates Emission from 8GHz to 18GHz

RE 18-26.5GHz PK+AV

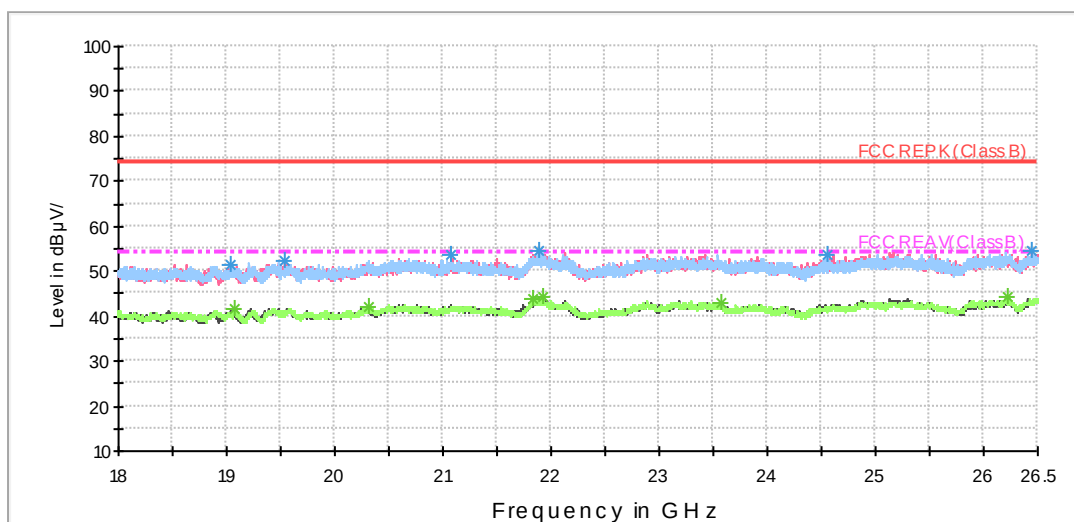

Radiates Emission from 18GHz to 26.5GHz

BELL RE 26.5-40GHz PK+AV

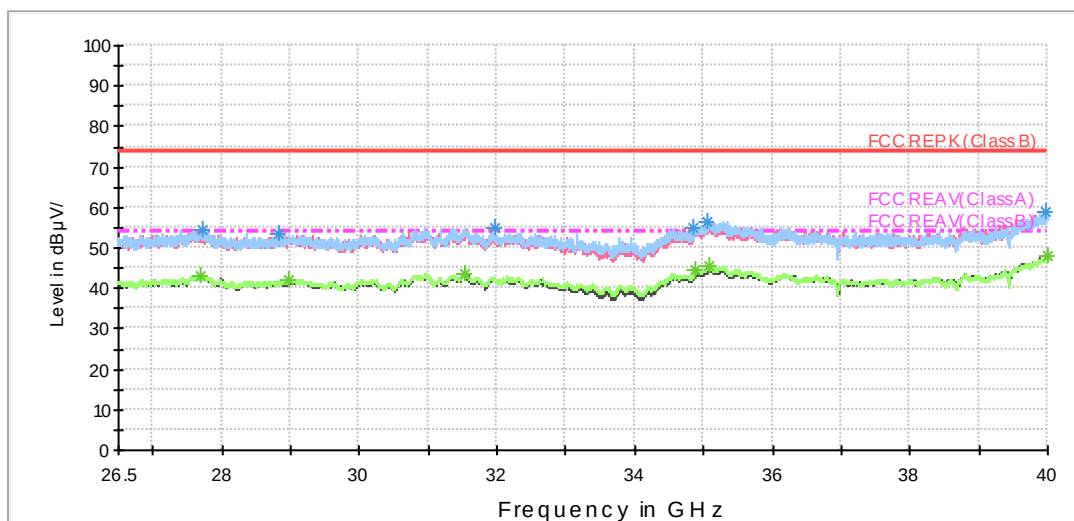

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3045.625000	37.7	200.0	V	322.0	40.9	-3.2	36.3	74
3922.500000	39.0	200.0	V	273.0	40.2	-1.2	35.0	74
4773.125000	40.8	200.0	H	160.0	39.7	1.1	33.2	74
6163.750000	44.5	200.0	V	214.0	38.9	5.6	29.5	74
6986.875000	52.1	200.0	H	263.0	45.7	6.4	21.9	74
7391.875000	43.5	200.0	V	117.0	36.6	6.9	30.5	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3105.000000	28.8	200.0	V	214.0	31.6	-2.8	25.2	54
4115.000000	28.6	200.0	V	340.0	29.2	-0.6	25.4	54
4803.750000	31.4	200.0	H	179.0	30.1	1.3	22.6	54
6167.500000	34.1	200.0	V	145.0	28.5	5.6	19.9	54
6986.875000	49.8	200.0	H	263.0	43.4	6.4	4.2	54
7367.500000	33.2	200.0	V	301.0	26.2	7.0	20.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH149

FCC RE 1G-3GHz PK+AV Class B

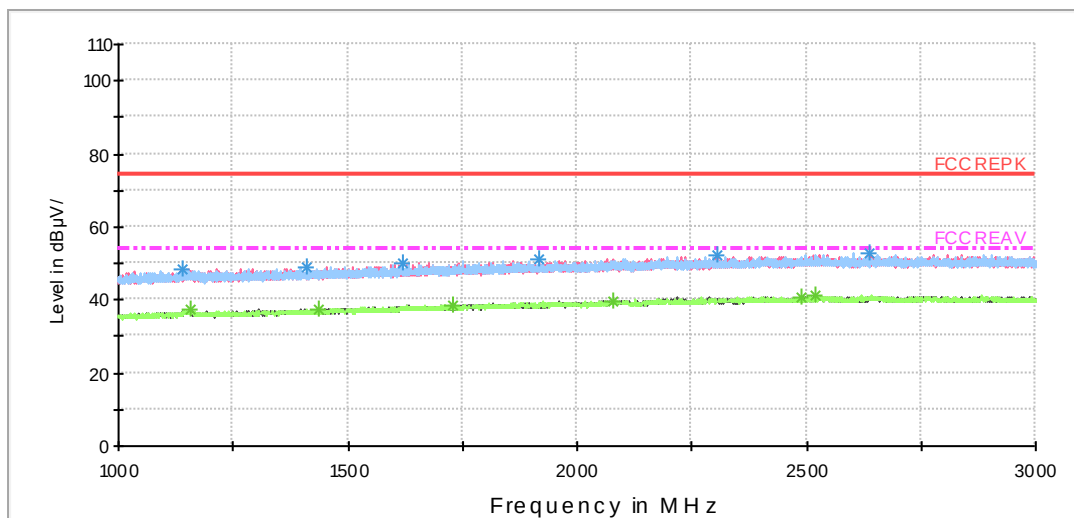

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

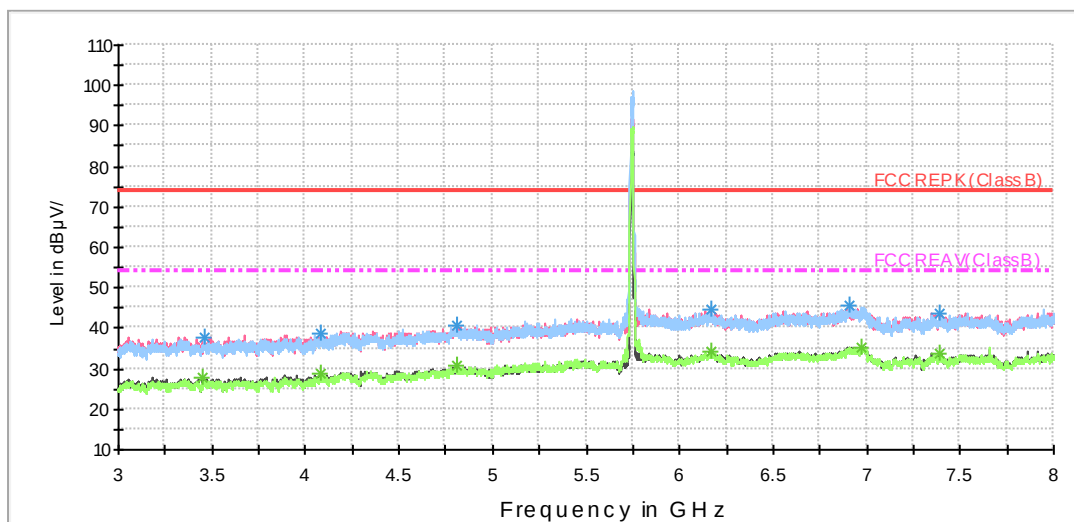

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

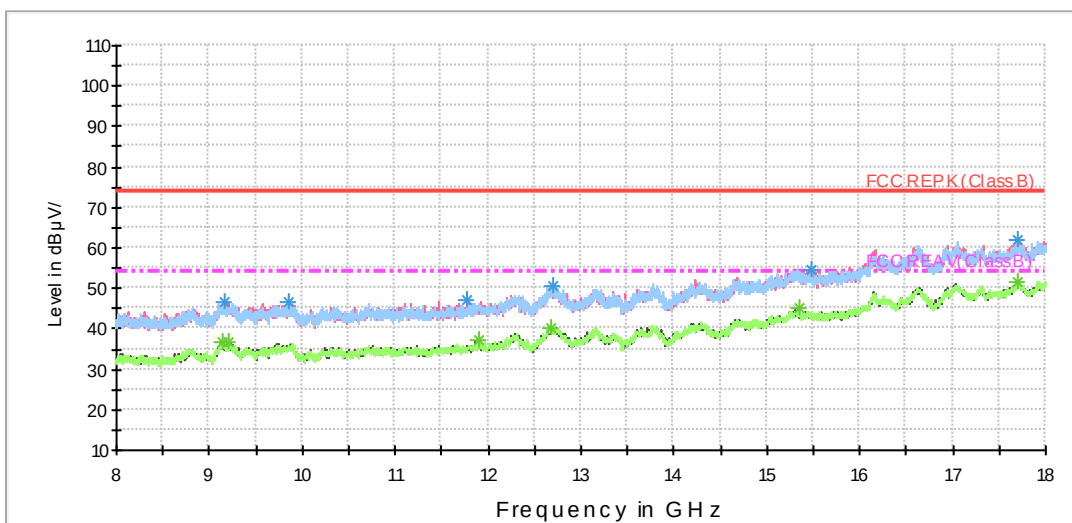

Radiates Emission from 8GHz to 18GHz


RE 18-26.5GHz PK+AV

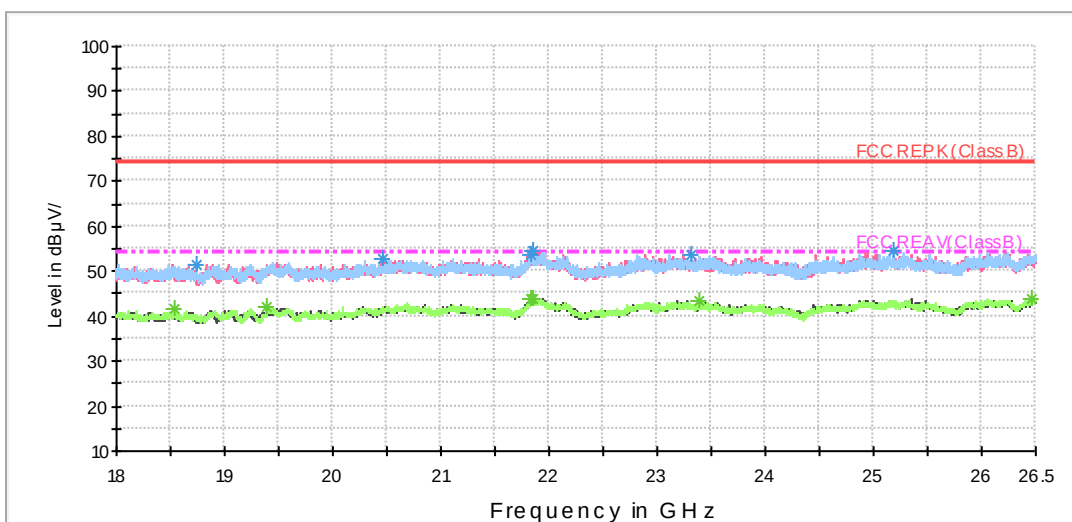

Radiates Emission from 18GHz to 26.5GHz



BELL RE 26.5-40GHz PK+AV

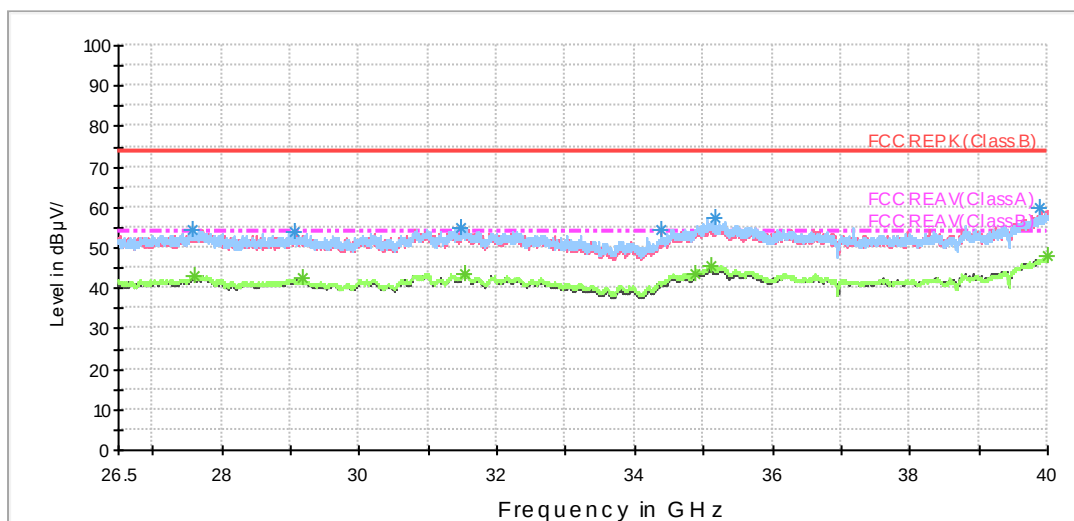

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3456.875000	38.0	200.0	H	109.0	40.2	-2.2	36.0	74
4078.125000	38.8	200.0	V	85.0	39.7	-0.9	35.2	74
4810.625000	40.6	200.0	H	0.0	39.3	1.3	33.4	74
6164.375000	44.7	200.0	V	352.0	39.1	5.6	29.3	74
6905.625000	45.5	200.0	H	219.0	39.2	6.3	28.5	74
7393.750000	43.9	200.0	V	126.0	37.0	6.9	30.1	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3450.000000	28.0	200.0	V	176.0	30.2	-2.2	26.0	54
4086.250000	28.7	200.0	V	234.0	29.6	-0.9	25.3	54
4806.875000	30.8	200.0	H	178.0	29.5	1.3	23.2	54
6165.625000	34.1	200.0	V	22.0	28.5	5.6	19.9	54
6977.500000	35.5	200.0	V	314.0	29.2	6.3	18.5	54
7394.375000	33.6	200.0	V	116.0	26.7	6.9	20.4	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH157

FCC RE 1G-3GHz PK+AV Class B

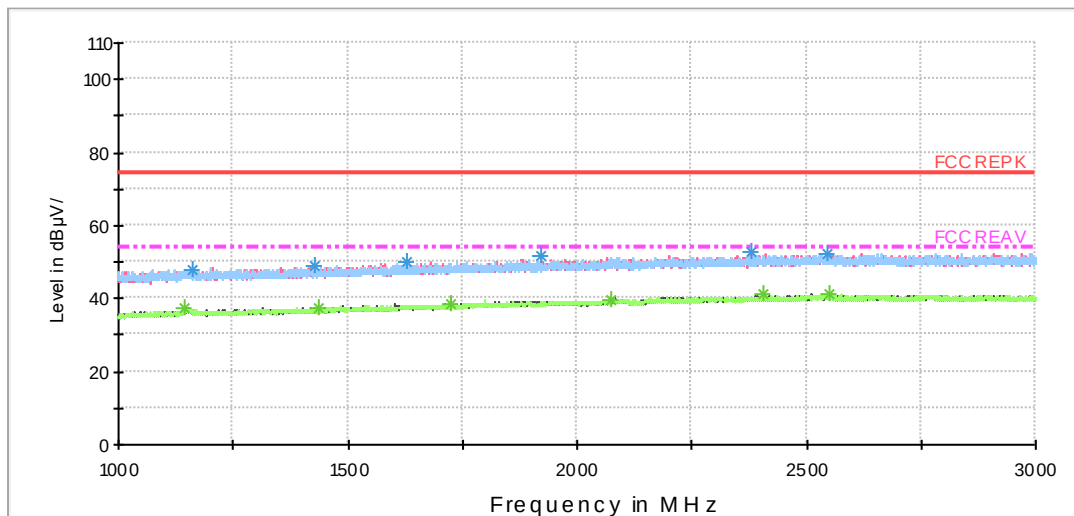

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

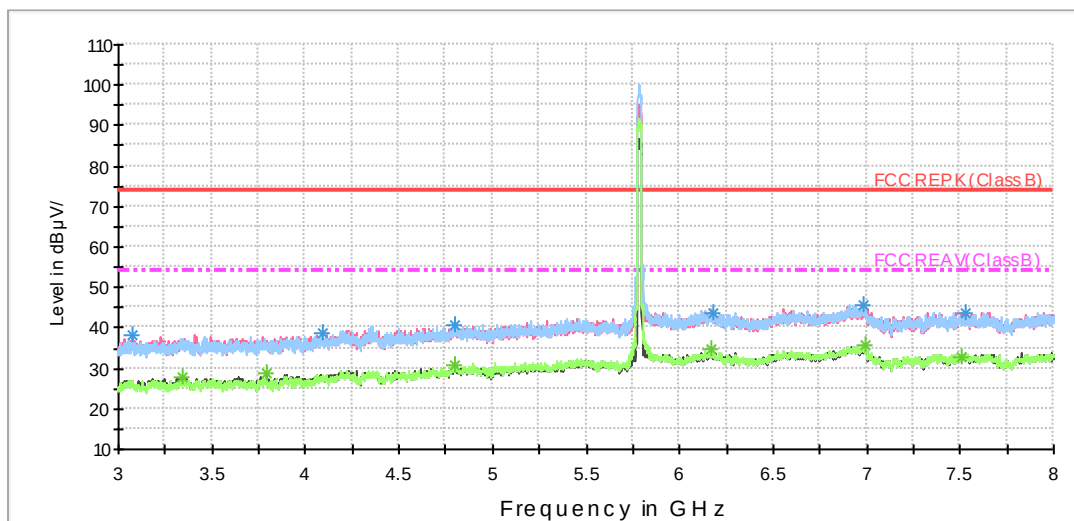

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

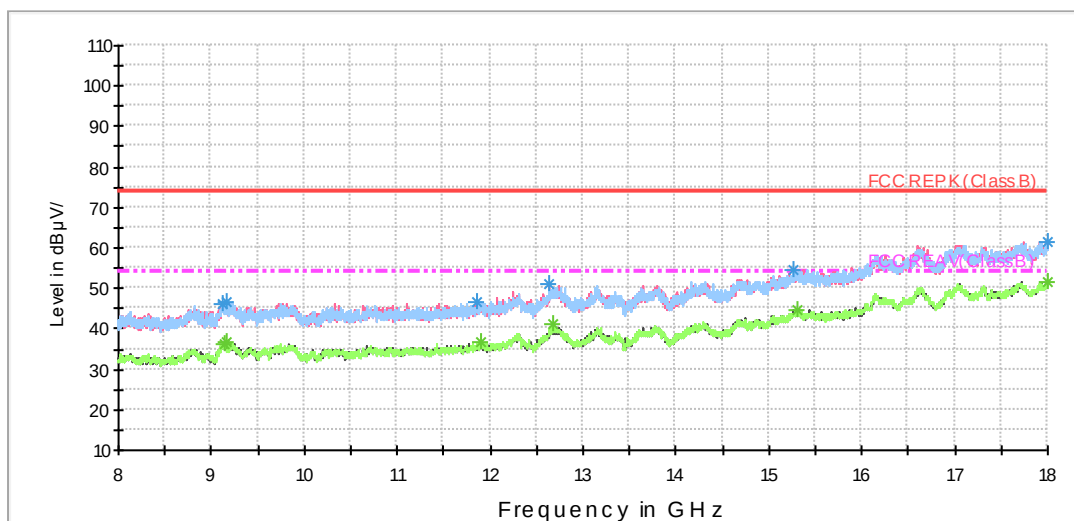


Radiates Emission from 8GHz to 18GHz

RE 18-26.5GHz PK+AV

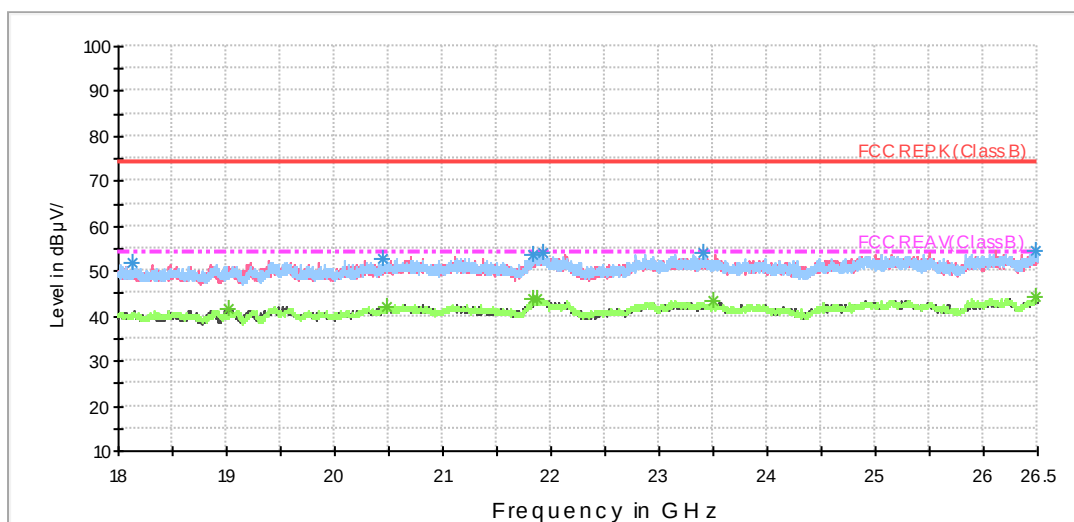

Radiates Emission from 18GHz to 26.5GHz

BELL RE 26.5-40GHz PK+AV

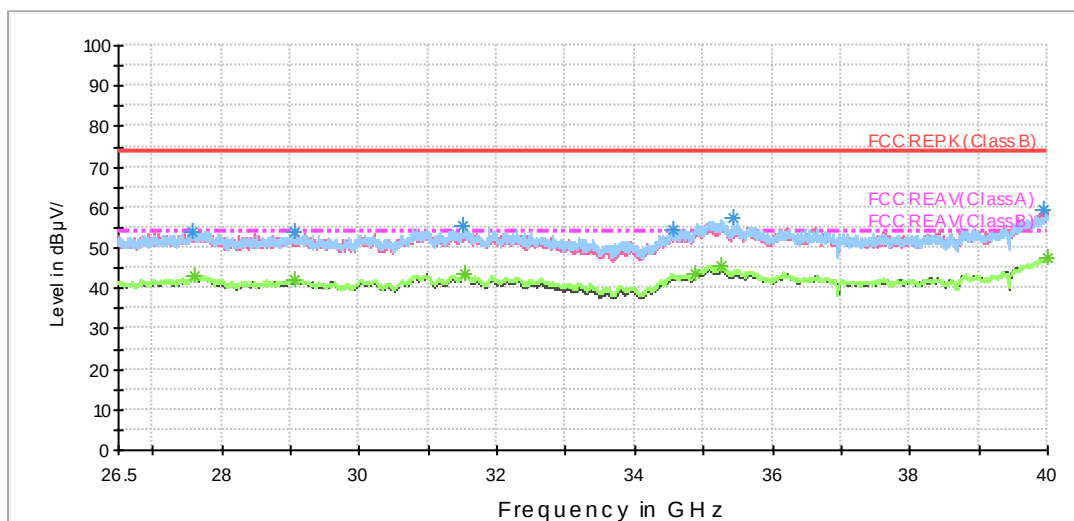

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3075.000000	38.2	200.0	V	343.0	41.2	-3.0	35.8	74
4095.000000	38.7	200.0	V	274.0	39.7	-1.0	35.3	74
4797.500000	40.7	200.0	H	193.0	39.4	1.3	33.3	74
6178.750000	43.8	200.0	H	74.0	38.4	5.4	30.2	74
6985.625000	45.7	200.0	H	173.0	39.3	6.4	28.3	74
7523.750000	43.7	200.0	H	26.0	36.6	7.1	30.3	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3343.750000	27.9	200.0	V	196.0	30.3	-2.4	26.1	54
3795.000000	28.6	200.0	V	264.0	30.3	-1.7	25.4	54
4801.875000	30.6	200.0	H	5.0	29.3	1.3	23.4	54
6172.500000	34.5	200.0	H	74.0	29.0	5.5	19.5	54
6993.125000	35.5	200.0	V	22.0	29.0	6.5	18.5	54
7507.500000	32.7	200.0	V	343.0	25.8	6.9	21.3	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH165

FCC RE 1G-3GHz PK+AV Class B

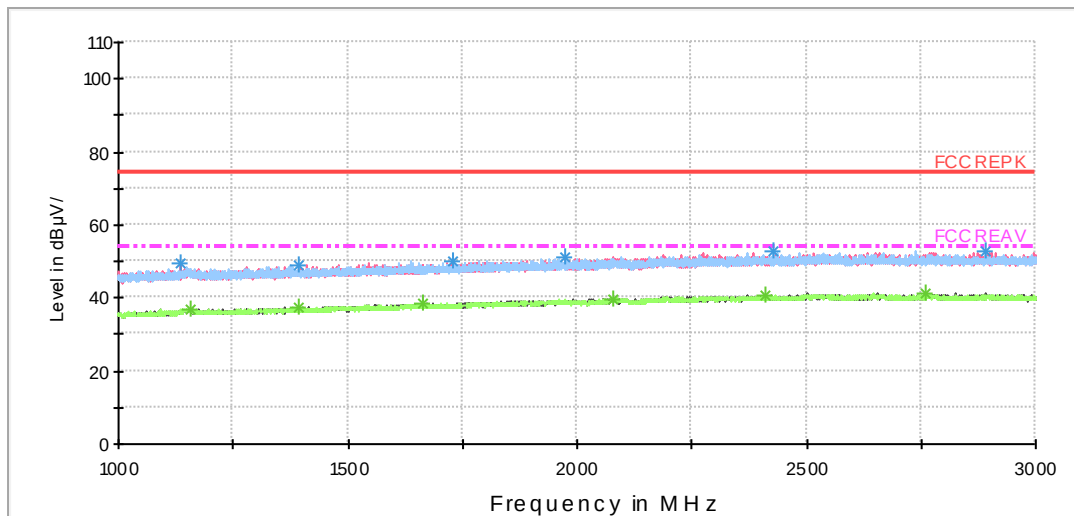

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

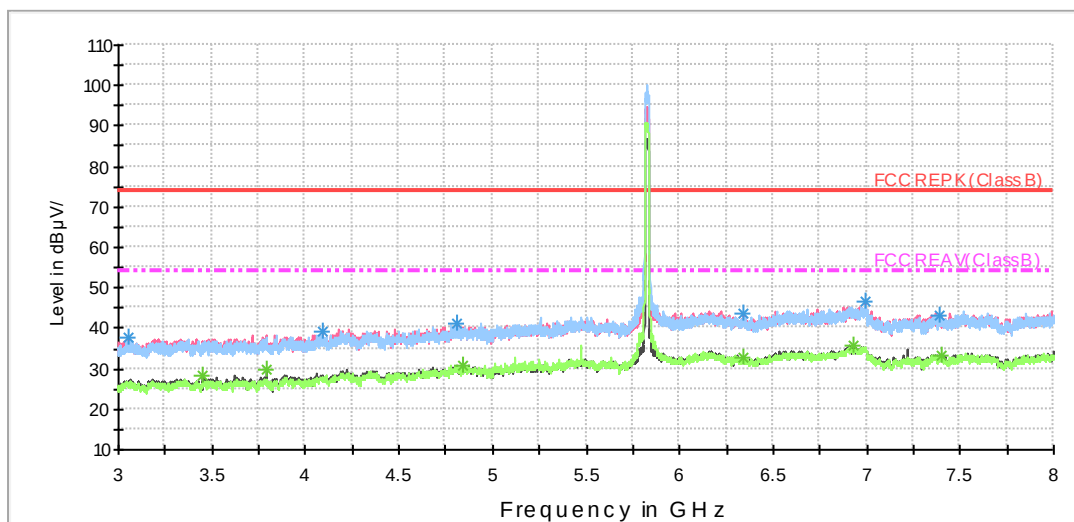

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

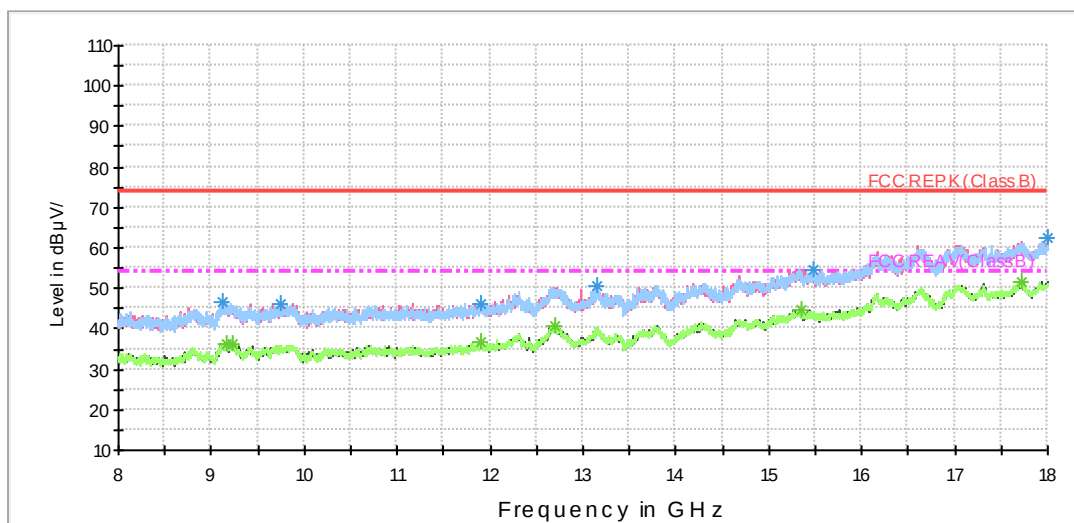


Radiates Emission from 8GHz to 18GHz

RE 18-26.5GHz PK+AV

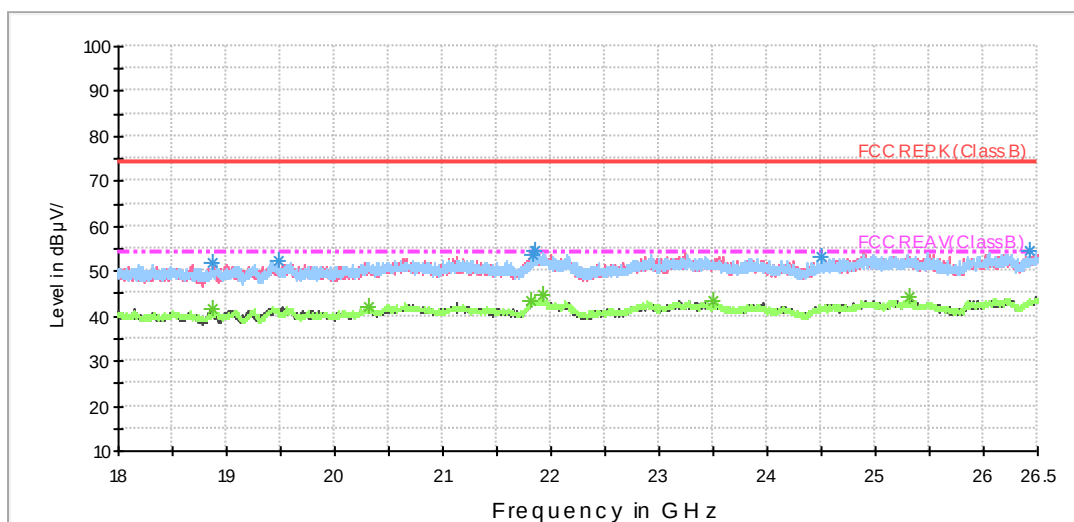

Radiates Emission from 18GHz to 26.5GHz

BELL RE 26.5-40GHz PK+AV

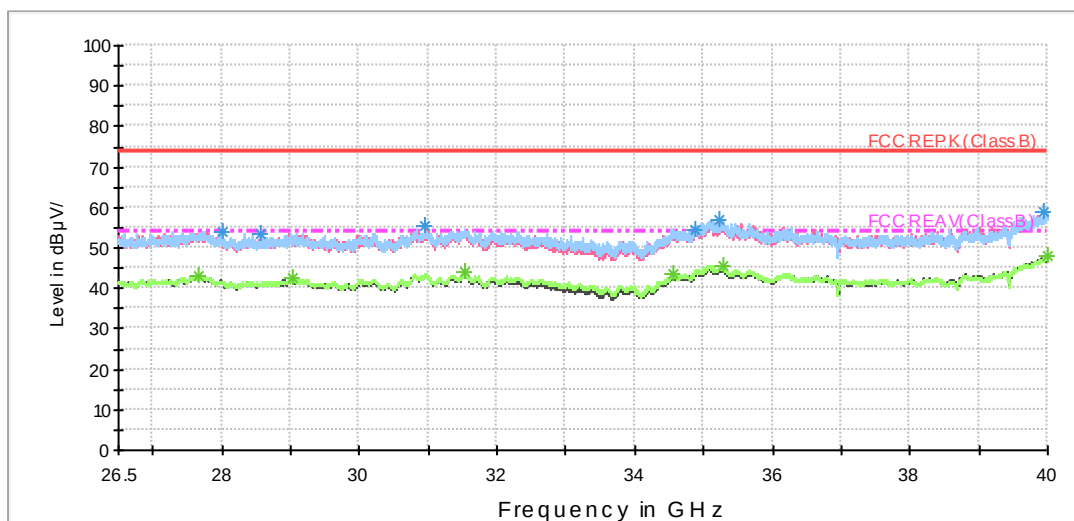

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3050.000000	37.7	200.0	V	344.0	40.9	-3.2	36.3	74
4090.625000	39.2	200.0	V	136.0	40.1	-0.9	34.8	74
4813.125000	41.1	200.0	V	206.0	39.8	1.3	32.9	74
6338.125000	43.6	200.0	V	0.0	38.2	5.4	30.4	74
6989.375000	46.7	200.0	V	107.0	40.3	6.4	27.3	74
7390.000000	43.4	200.0	V	286.0	36.5	6.9	30.6	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3450.000000	28.1	200.0	V	196.0	30.3	-2.2	25.9	54
3795.000000	29.9	200.0	V	256.0	31.6	-1.7	24.1	54
4846.250000	30.8	200.0	H	202.0	29.2	1.6	23.2	54
6339.375000	32.9	200.0	H	52.0	27.5	5.4	21.1	54
6926.875000	35.7	200.0	V	186.0	29.5	6.2	18.3	54
7403.125000	33.1	200.0	V	0.0	26.3	6.8	20.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT40) CH38

FCC RE 1G-3GHz PK+AV Class B

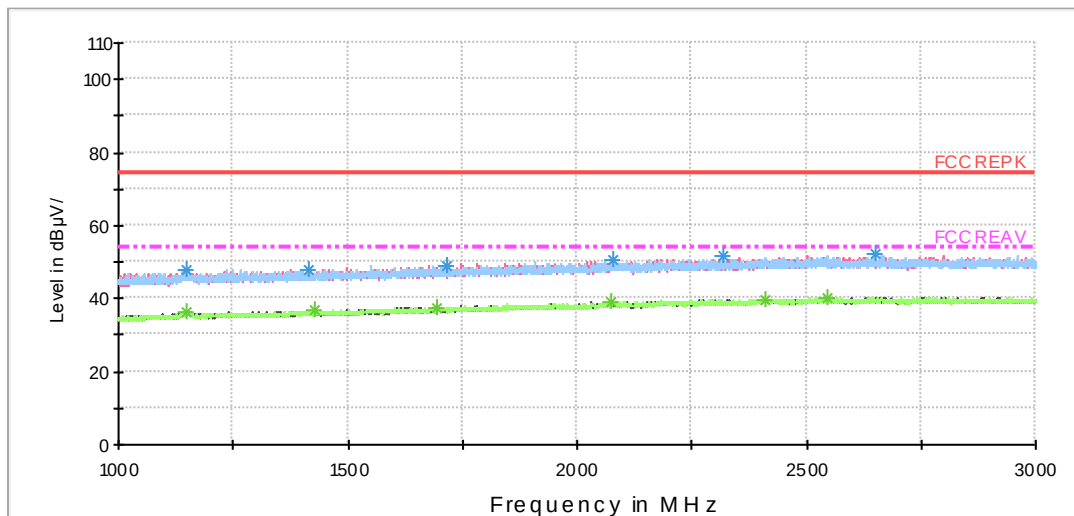

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

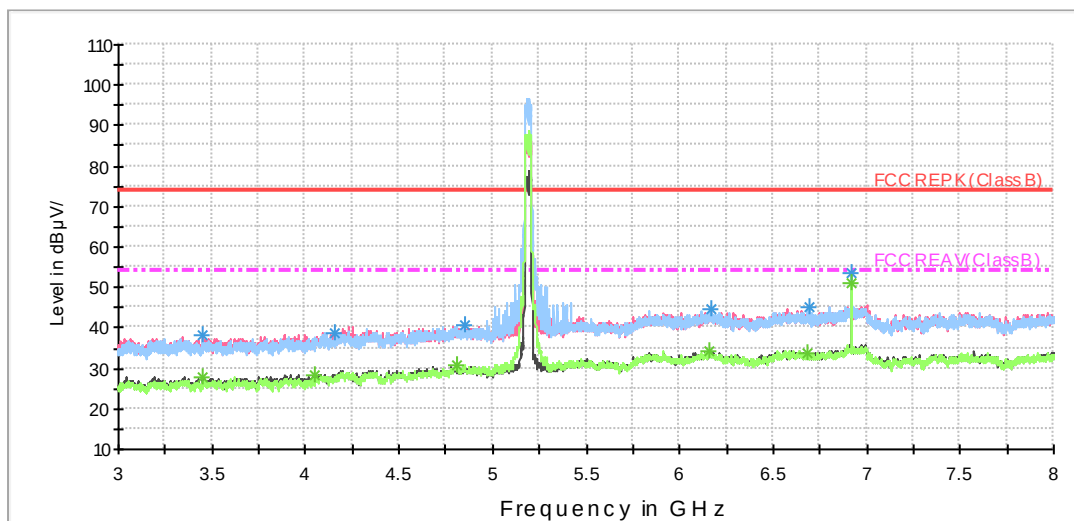

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

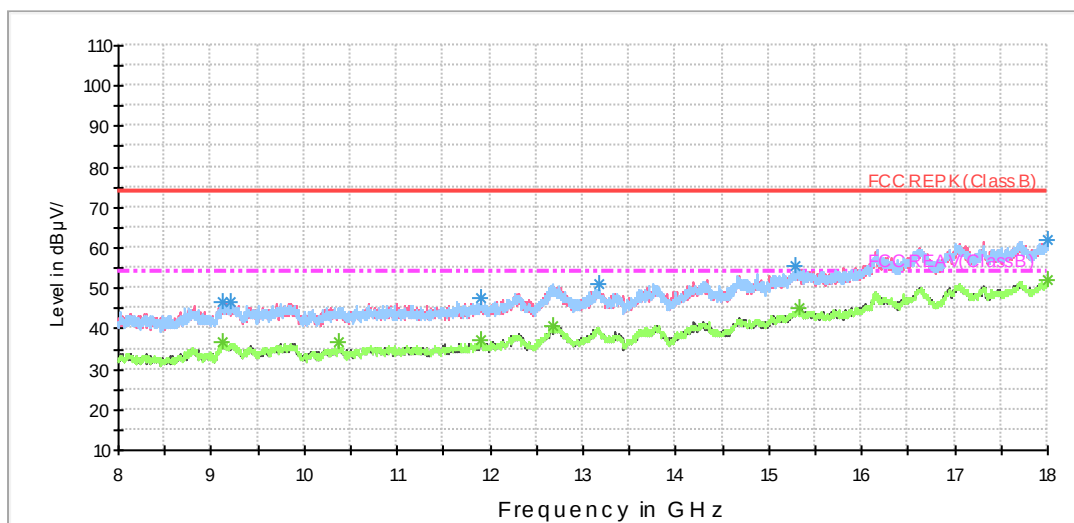

Radiates Emission from 8GHz to 18GHz


RE 18-26.5GHz PK+AV

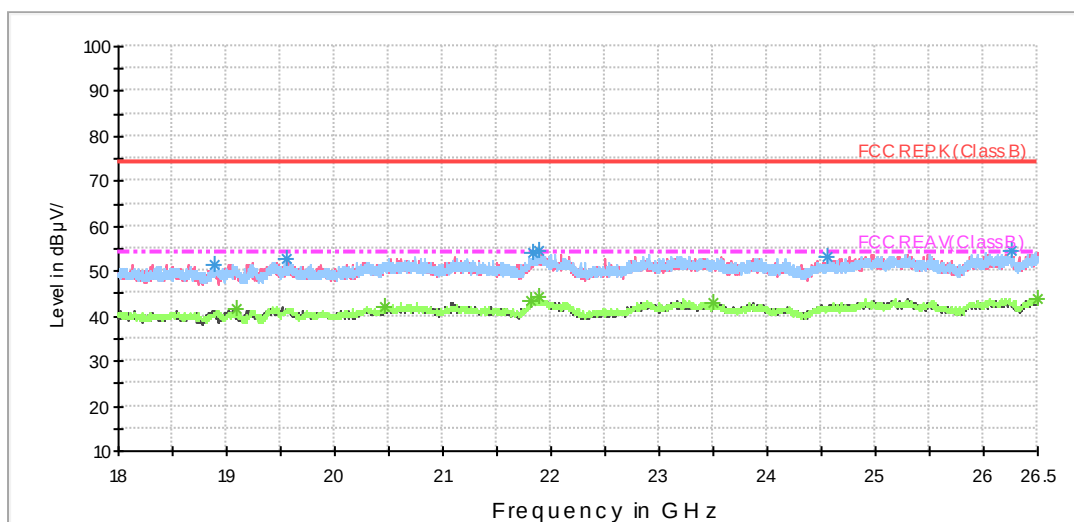

Radiates Emission from 18GHz to 26.5GHz



BELL RE 26.5-40GHz PK+AV

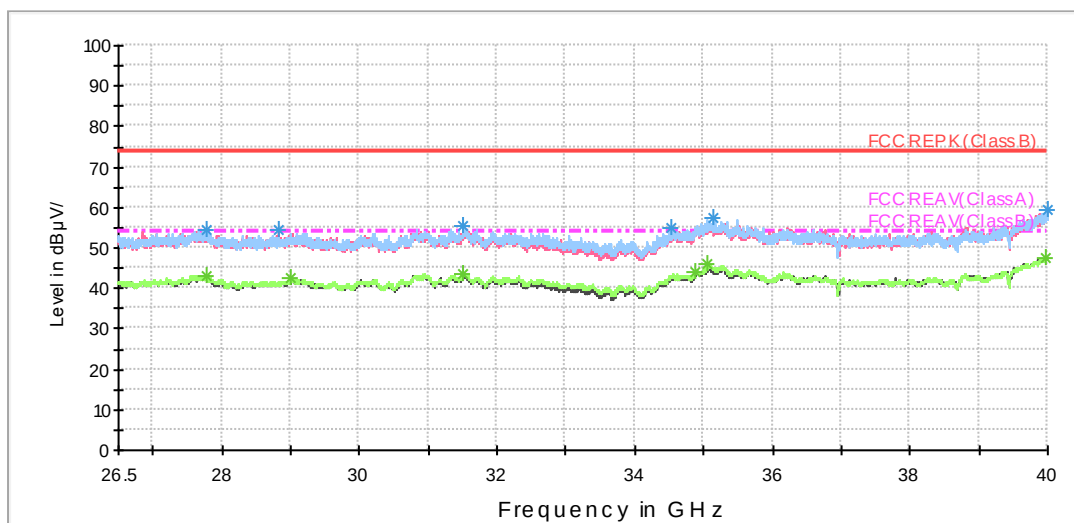

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3450.000000	38.3	200.0	V	182.0	40.5	-2.2	35.7	74
4151.250000	38.9	200.0	V	321.0	39.0	-0.1	35.1	74
4856.250000	40.6	200.0	H	193.0	38.9	1.7	33.4	74
6164.375000	44.8	200.0	V	0.0	39.2	5.6	29.2	74
6690.000000	45.2	200.0	H	25.0	39.9	5.3	28.8	74
6920.000000	53.4	200.0	H	263.0	47.2	6.2	20.6	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3450.000000	27.8	200.0	V	182.0	30.0	-2.2	26.2	54
4054.375000	28.5	200.0	V	321.0	29.6	-1.1	25.5	54
4807.500000	30.9	200.0	H	173.0	29.6	1.3	23.1	54
6155.000000	34.3	200.0	V	232.0	28.7	5.6	19.7	54
6679.375000	33.8	200.0	H	213.0	28.3	5.5	20.2	54
6920.000000	51.2	200.0	H	263.0	45.0	6.2	2.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT40) CH46

FCC RE 1G-3GHz PK+AV Class B

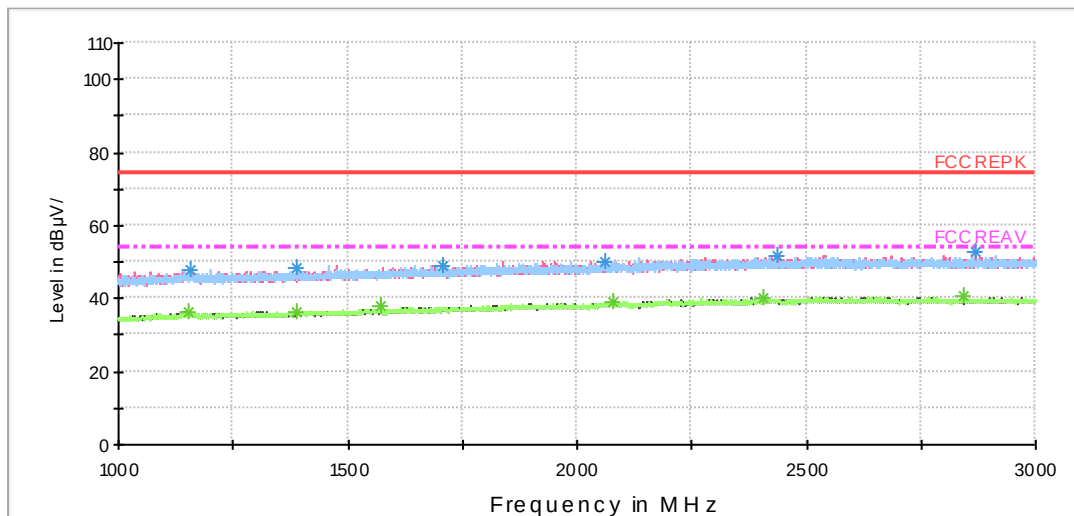

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

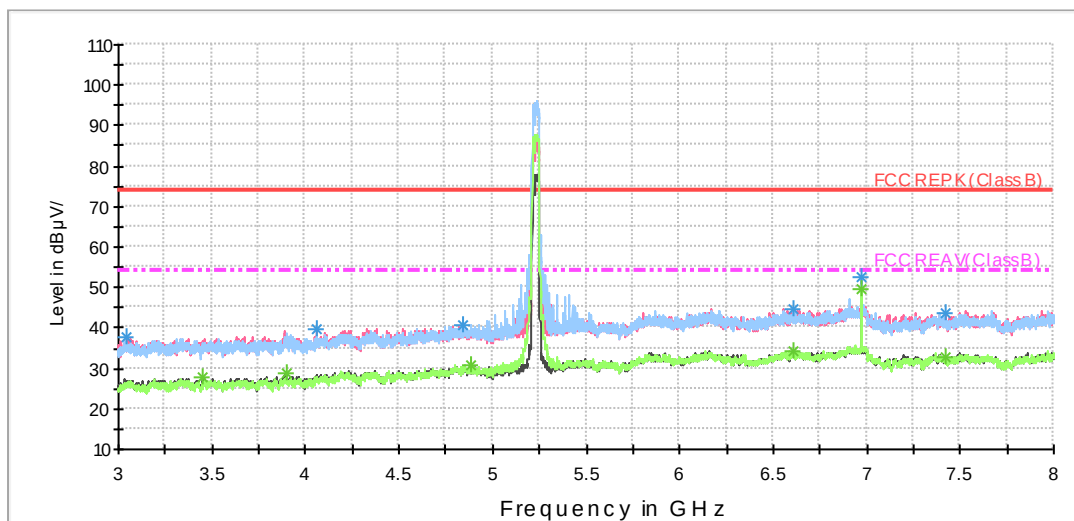

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

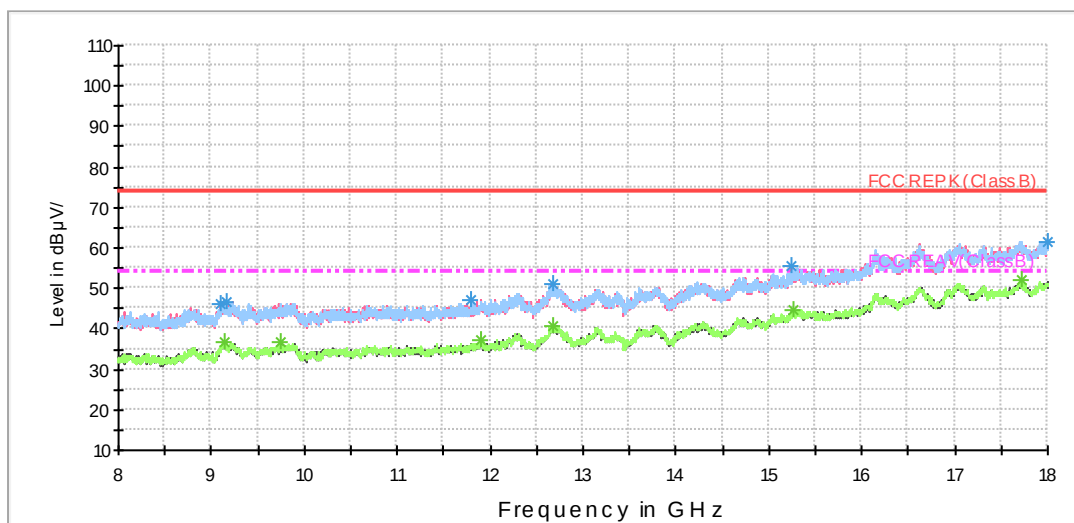


Radiates Emission from 8GHz to 18GHz

RE 18-26.5GHz PK+AV

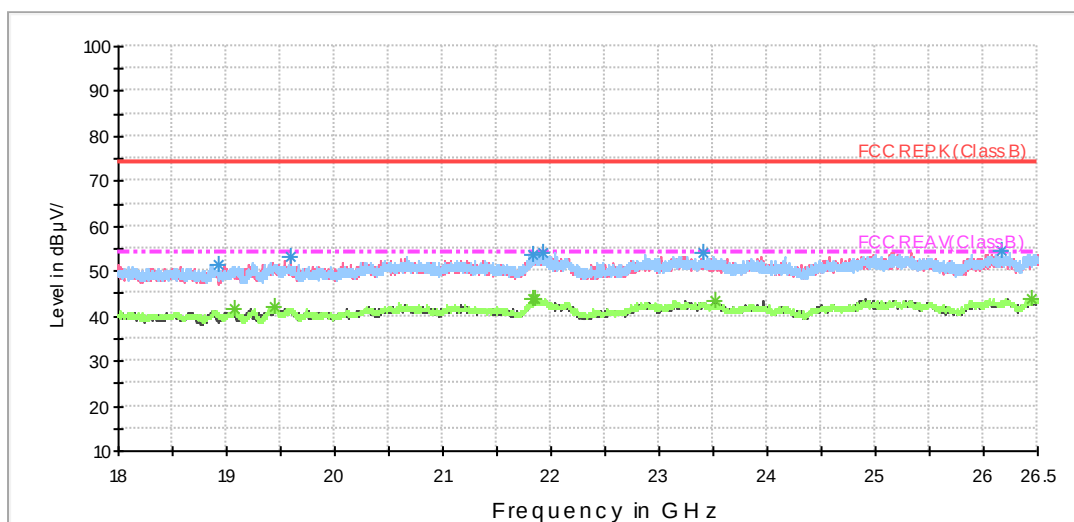

Radiates Emission from 18GHz to 26.5GHz

BELL RE 26.5-40GHz PK+AV

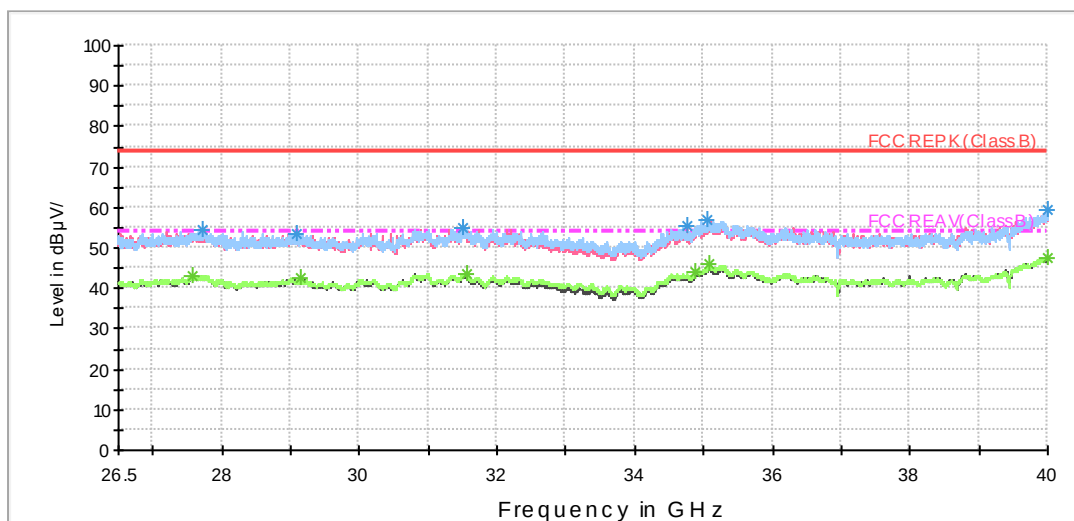

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3048.125000	37.5	200.0	V	75.0	40.7	-3.2	36.5	74
4058.750000	39.6	200.0	V	344.0	40.7	-1.1	34.4	74
4843.750000	40.6	200.0	H	198.0	39.0	1.6	33.4	74
6611.250000	44.7	200.0	V	334.0	39.1	5.6	29.3	74
6973.125000	52.5	200.0	H	269.0	46.2	6.3	21.5	74
7422.500000	43.8	200.0	V	246.0	36.8	7.0	30.2	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3449.375000	28.0	200.0	V	208.0	30.2	-2.2	26.0	54
3895.625000	28.8	200.0	V	305.0	30.1	-1.3	25.2	54
4888.750000	30.7	200.0	H	128.0	28.8	1.9	23.3	54
6611.250000	34.1	200.0	H	237.0	28.5	5.6	19.9	54
6973.750000	49.5	200.0	H	187.0	43.2	6.3	4.5	54
7423.125000	32.7	200.0	V	295.0	25.7	7.0	21.3	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT40) CH151

FCC RE 1G-3GHz PK+AV Class B

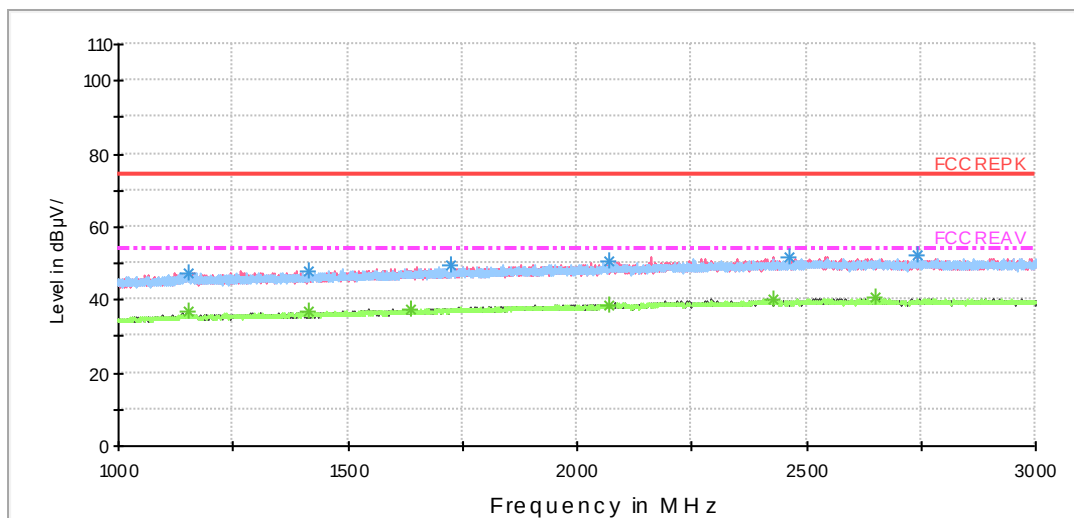

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

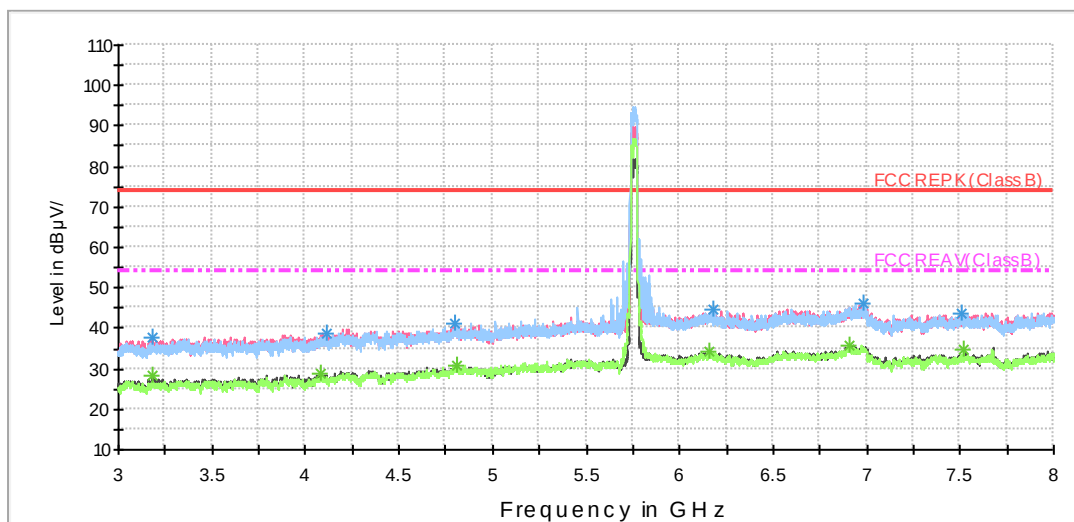

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

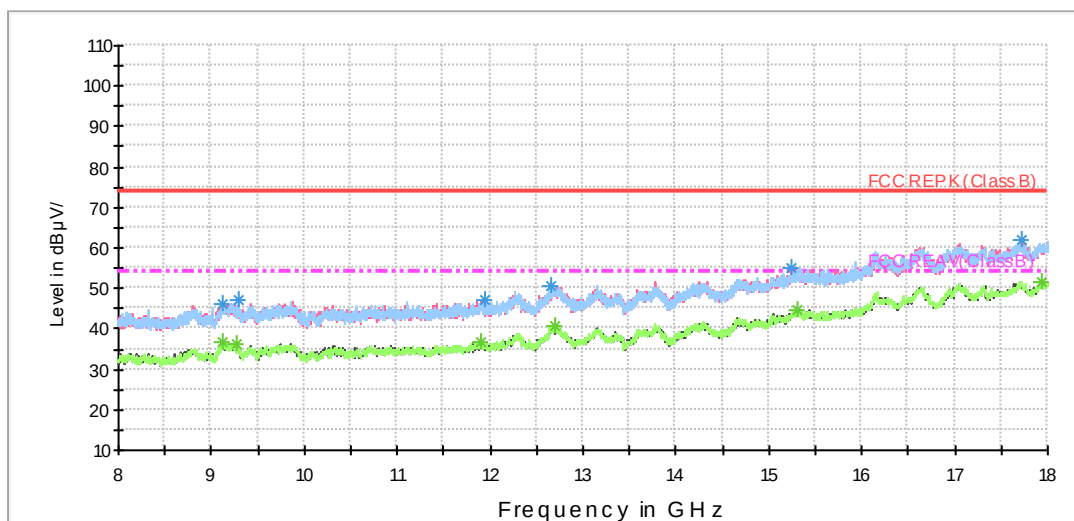


Radiates Emission from 8GHz to 18GHz

RE 18-26.5GHz PK+AV

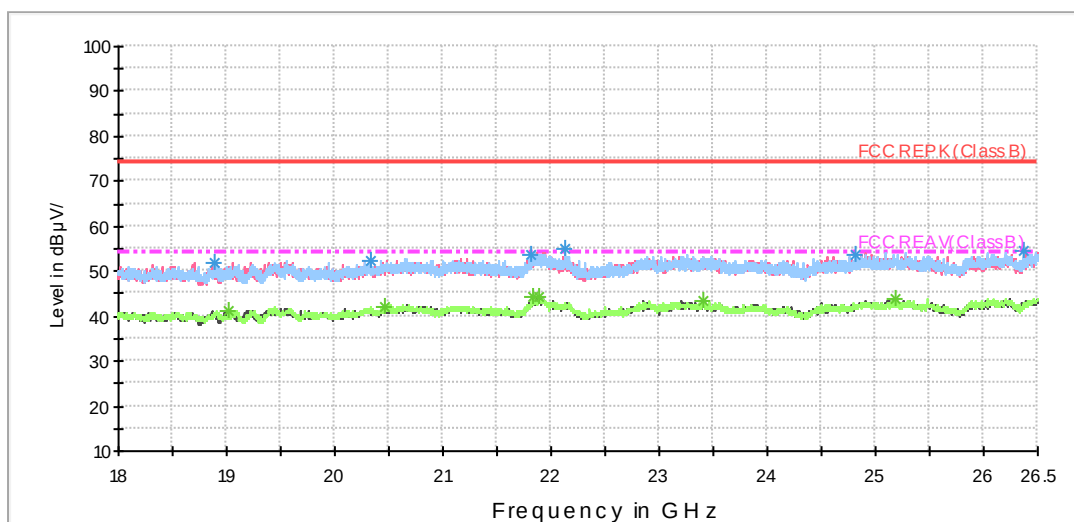

Radiates Emission from 18GHz to 26.5GHz

BELL RE 26.5-40GHz PK+AV

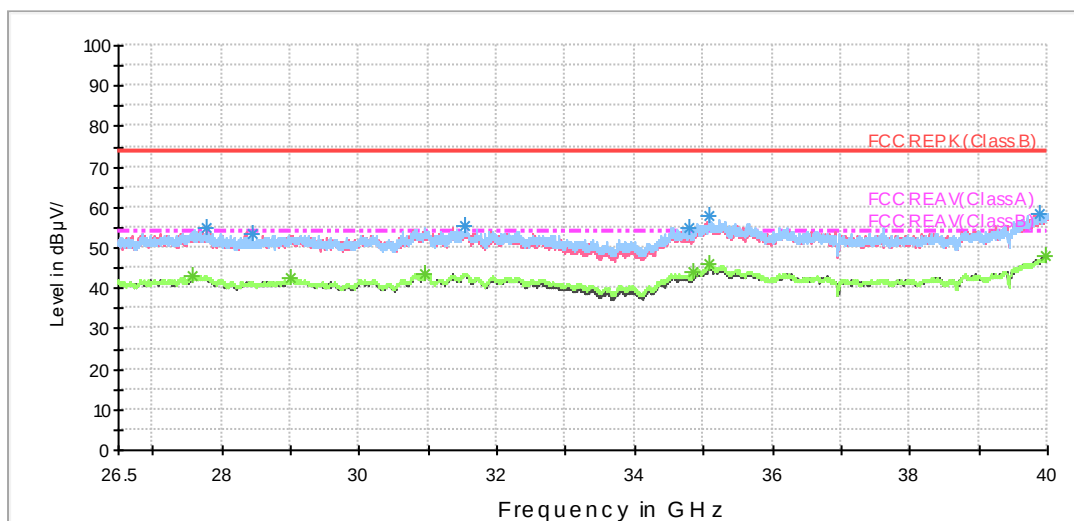

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3180.625000	37.8	200.0	V	237.0	40.7	-2.9	36.2	74
4110.625000	38.7	200.0	V	306.0	39.4	-0.7	35.3	74
4803.125000	41.0	200.0	V	358.0	39.7	1.3	33.0	74
6176.875000	44.6	200.0	V	296.0	39.2	5.4	29.4	74
6979.375000	46.2	200.0	V	34.0	39.9	6.3	27.8	74
7503.125000	43.8	200.0	V	87.0	36.9	6.9	30.2	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3181.875000	28.1	200.0	V	286.0	31.0	-2.9	25.9	54
4078.750000	28.8	200.0	V	148.0	29.7	-0.9	25.2	54
4805.000000	30.7	200.0	V	319.0	29.4	1.3	23.3	54
6161.875000	34.1	200.0	V	0.0	28.5	5.6	19.9	54
6903.750000	35.9	200.0	H	0.0	29.6	6.3	18.1	54
7519.375000	34.7	200.0	H	201.0	27.6	7.1	19.3	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT40) CH159

FCC RE 1G-3GHz PK+AV Class B

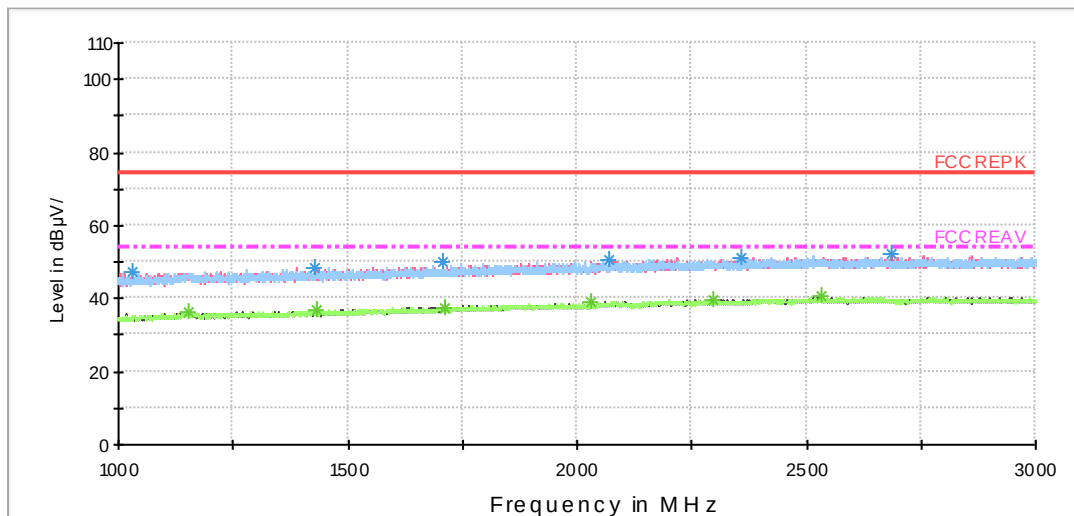

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

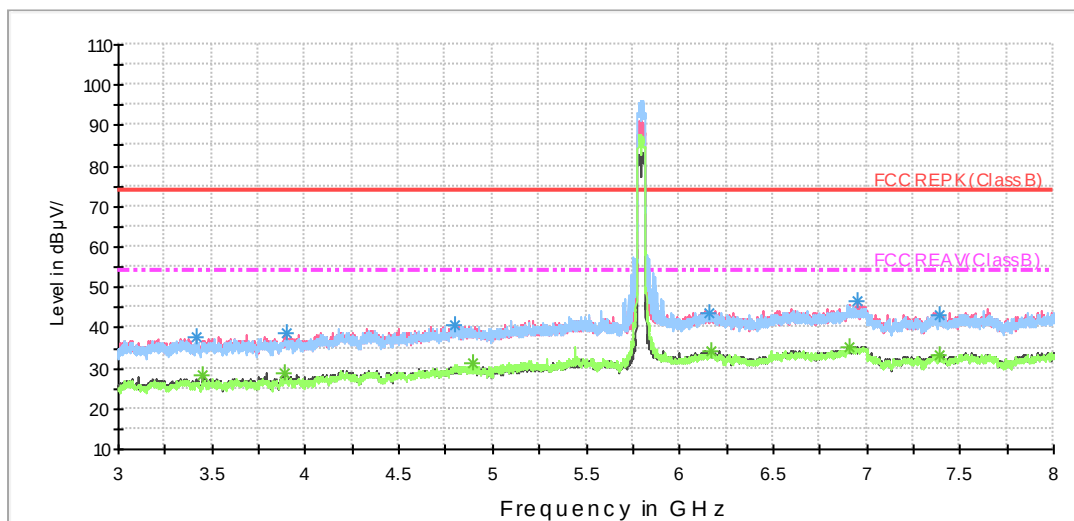

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

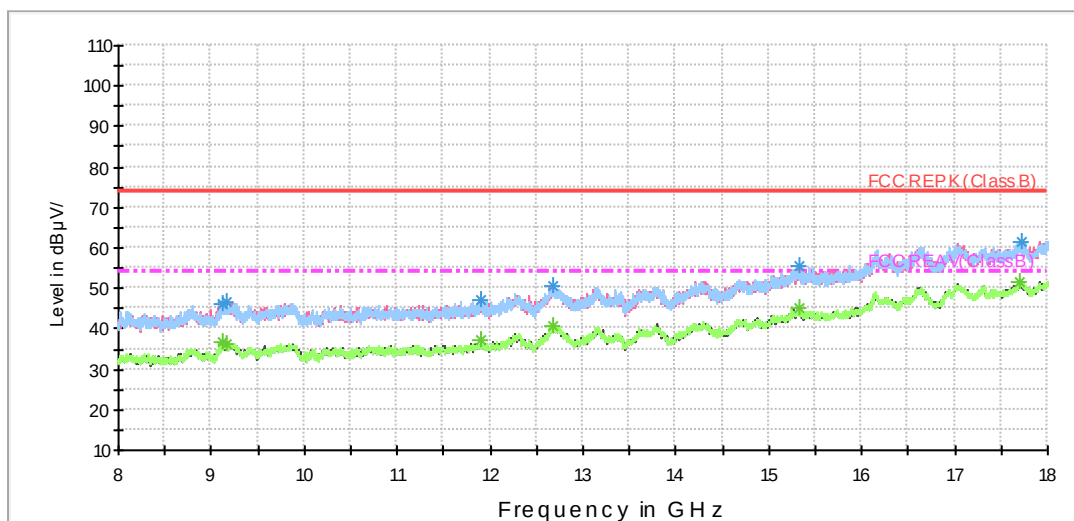

Radiates Emission from 8GHz to 18GHz


RE 18-26.5GHz PK+AV

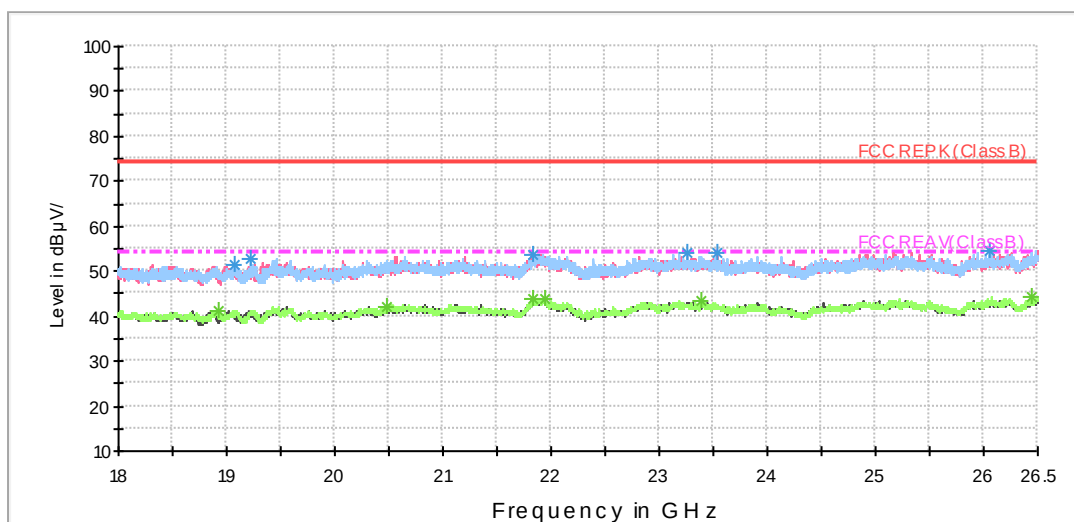

Radiates Emission from 18GHz to 26.5GHz



BELL RE 26.5-40GHz PK+AV

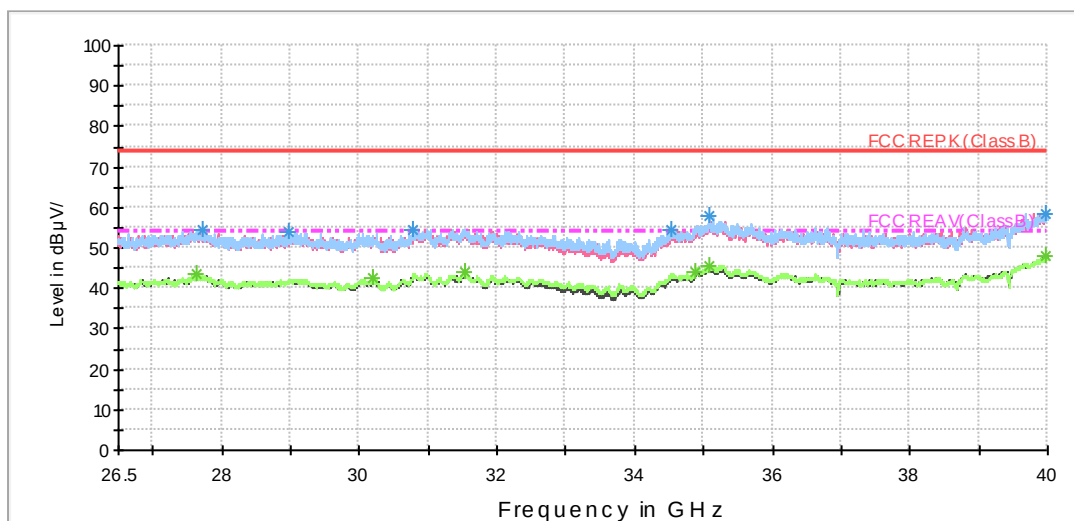

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3420.625000	37.5	200.0	V	259.0	40.0	-2.5	36.5	74
3895.000000	38.6	200.0	V	327.0	39.9	-1.3	35.4	74
4798.125000	40.5	200.0	H	182.0	39.2	1.3	33.5	74
6159.375000	43.7	200.0	V	201.0	38.0	5.7	30.3	74
6947.500000	46.6	200.0	V	91.0	40.4	6.2	27.4	74
7395.000000	43.2	200.0	H	44.0	36.3	6.9	30.8	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3450.000000	28.4	200.0	V	0.0	30.6	-2.2	25.6	54
3891.250000	28.8	200.0	V	220.0	30.1	-1.3	25.2	54
4898.750000	31.5	200.0	H	182.0	29.6	1.9	22.5	54
6171.875000	34.1	200.0	H	242.0	28.6	5.5	19.9	54
6903.750000	35.3	200.0	V	211.0	29.0	6.3	18.7	54
7391.250000	33.1	200.0	V	0.0	26.2	6.9	20.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11ac (HT20) CH36

FCC RE 1G-3GHz PK+AV Class B

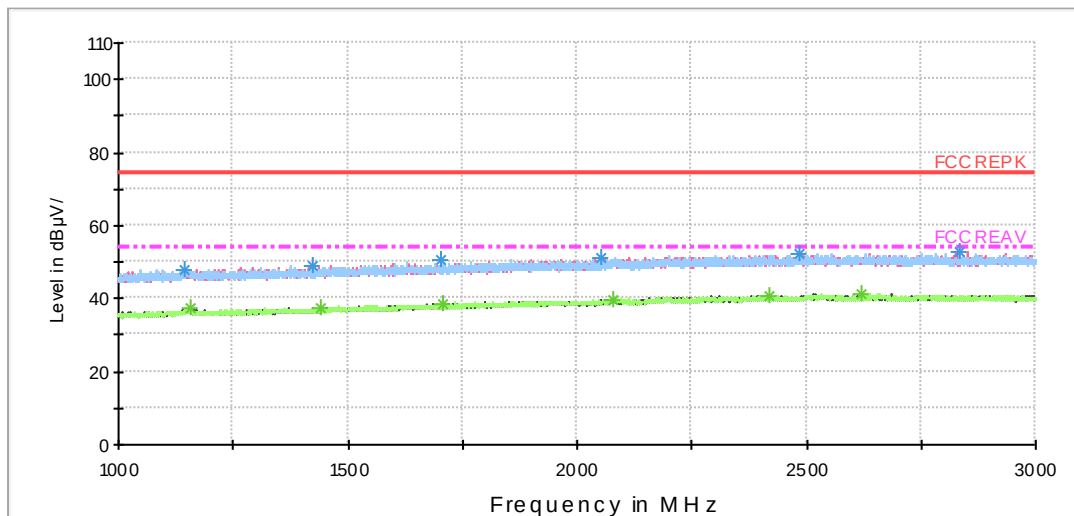

Radiates Emission from 1GHz to 3GHz


RE 3-18GHz PK+AV

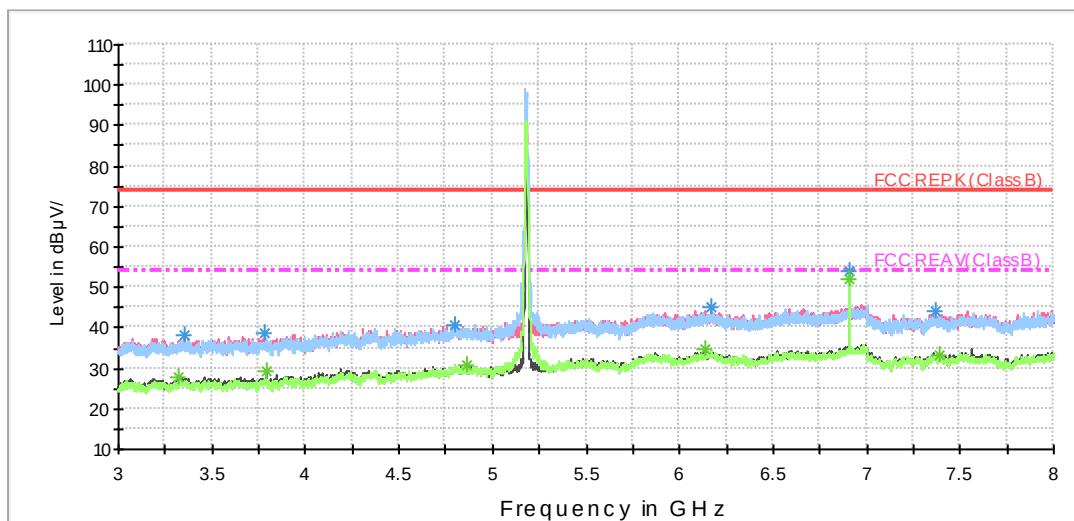

Note: The signal beyond the limit is carrier.


Radiates Emission from 3GHz to 8GHz

RE 3-18GHz PK+AV

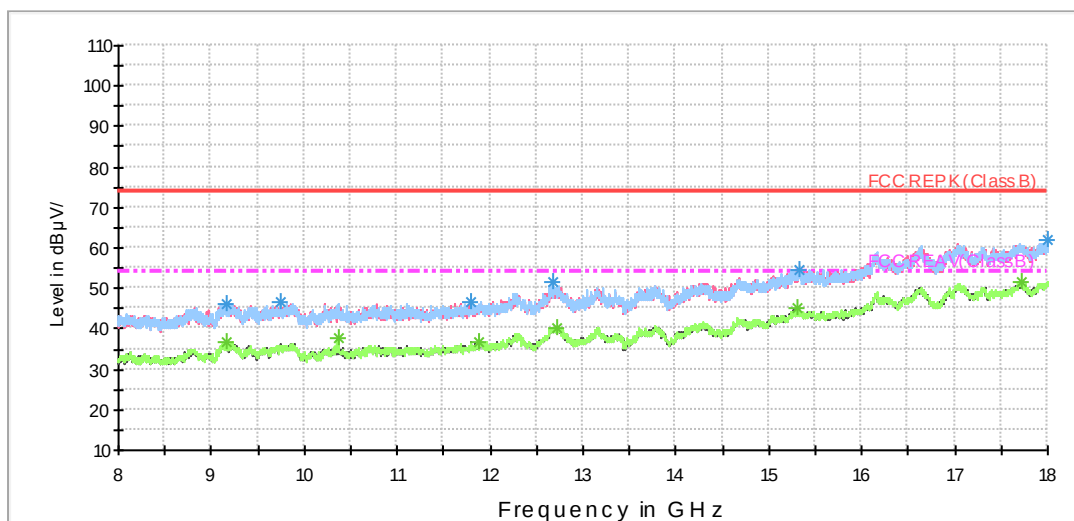

Radiates Emission from 8GHz to 18GHz


RE 18-26.5GHz PK+AV

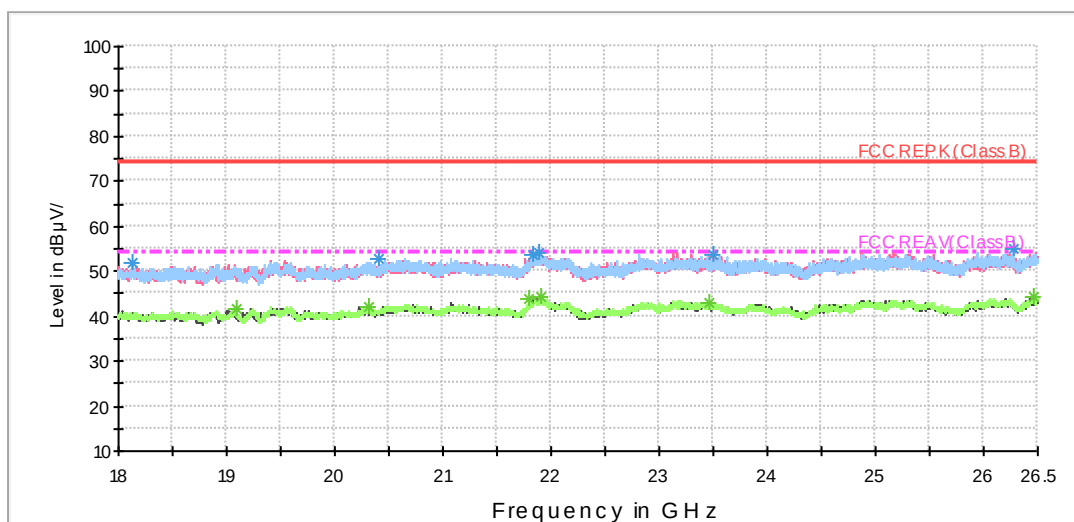

Radiates Emission from 18GHz to 26.5GHz



BELL RE 26.5-40GHz PK+AV

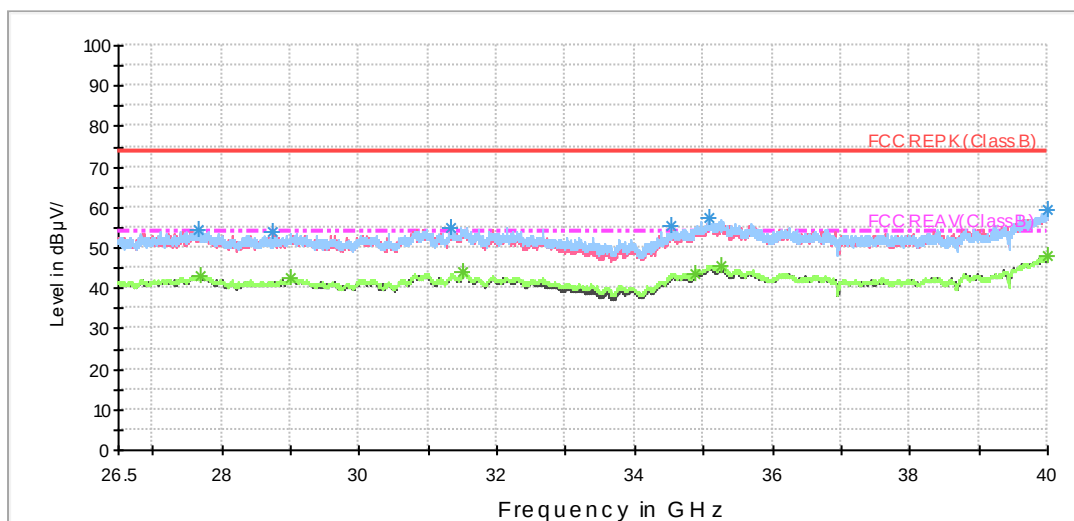

Radiates Emission from 26.5GHz to 40GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3351.250000	38.0	200.0	V	340.0	40.3	-2.3	36.0	74
3778.125000	38.9	200.0	V	0.0	40.7	-1.8	35.1	74
4800.000000	40.5	200.0	H	8.0	39.2	1.3	33.5	74
6171.875000	45.2	200.0	V	146.0	39.7	5.5	28.8	74
6906.875000	54.1	200.0	H	143.0	47.8	6.3	19.9	74
7365.625000	44.0	200.0	V	317.0	37.0	7.0	30.0	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3319.375000	27.9	200.0	V	306.0	30.0	-2.1	26.1	54
3795.000000	29.4	200.0	V	187.0	31.1	-1.7	24.6	54
4865.000000	30.9	200.0	V	166.0	29.2	1.7	23.1	54
6140.000000	34.5	200.0	V	258.0	29.1	5.4	19.5	54
6906.875000	52.2	200.0	H	143.0	45.9	6.3	1.8	54
7393.750000	33.2	200.0	V	317.0	26.3	6.9	20.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)