

## Antenna Gain test report

FCC ID: 2AUYFRMX5020

Equipment: Mobile Phone

Brand Name: realme

Model Name: RMX5020

Manufacturer: Realme Chongqing Mobile

Telecommunications Corp., Ltd.

No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing,  
China


Issue Date: December 13, 2023

Project Engineer: pengtao Nan Date:2023/12/13

Checked by: yunpan Wei Date:2023/12/13

Approved by:wei Li Date:2023/12/13

## Antenna Location&amp;dimension:

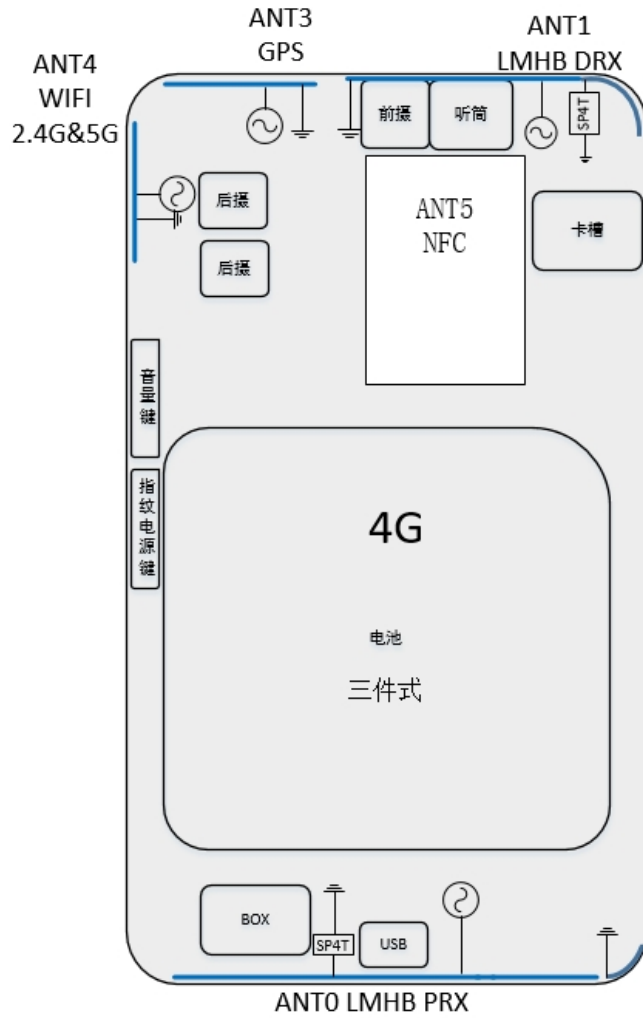

批注 [姚琴1]: 保密设置: 此页需要设置为短期保密

BT WIFI 天线: 天线增益, 结构, 尺寸

NFC 天线: (无需天线增益) 结构, 尺寸

Fig 1 Antenna location &amp; dimension

## Test Report


Report No.:OP20220708

### Antenna Gain and Antenna Type specification:

Antenna Gain (dBi)		Ant 0	Ant 1	Ant 3	Antenna Type
2.4G WiFi	2400~2483.5MHz	-1.5	/	/	IFA(Inverted F Antenna)
5G Wifi	5150~5250 MHz	-0.1	/	/	IFA(Inverted F Antenna)
	5250~5350 MHz	0.5	/	/	IFA(Inverted F Antenna)
	5470~5725 MHz	-0.2	/	/	IFA(Inverted F Antenna)
	5725~5850 MHz	-2.3	/	/	IFA(Inverted F Antenna)
BT	2400~2483.5MHz	-1.5	/	/	IFA(Inverted F Antenna)
NFC	13.56MHz	/	/	/	LOOP(loop Antenna)

Table1 Antenna Gain and Antenna Type specification


2450MHz:

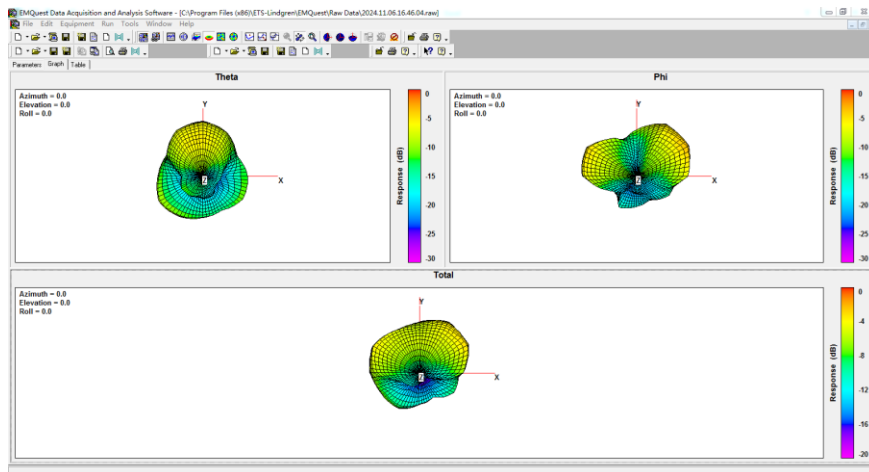


## Test Report

Report No.:OP20220708

5200MHz:

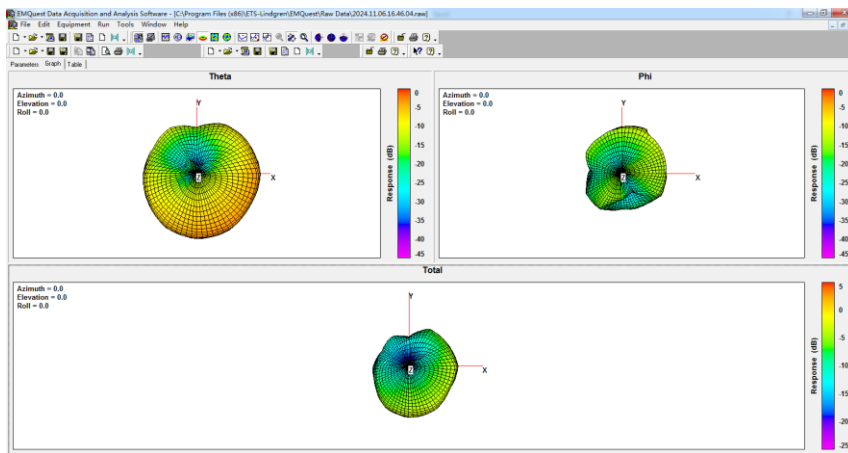


5300MHz:

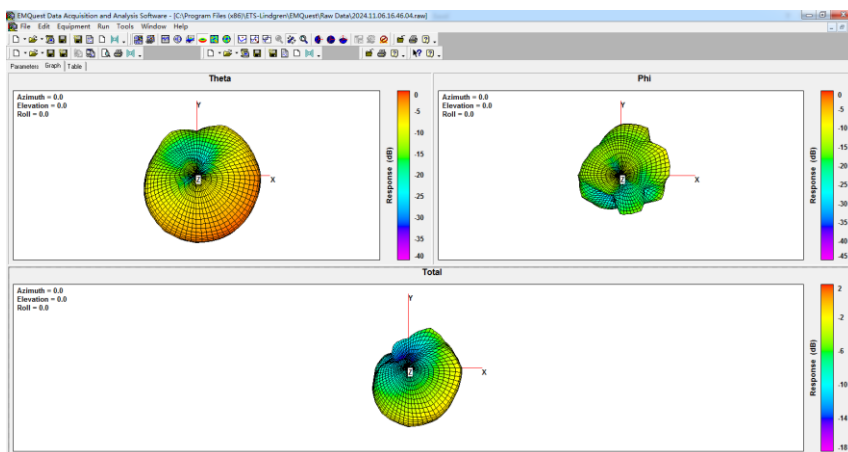

## Test Report

Report No.:OP20220708


5700MHz:

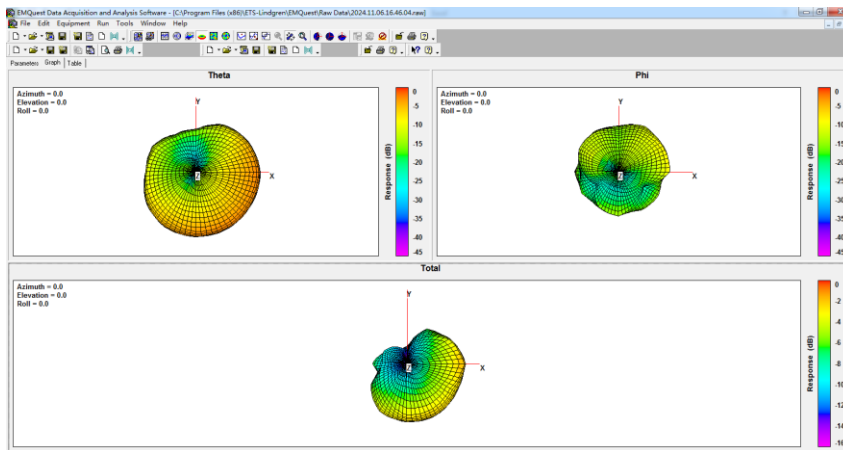

5800MHz:

## Test Report

Report No.:OP20220708

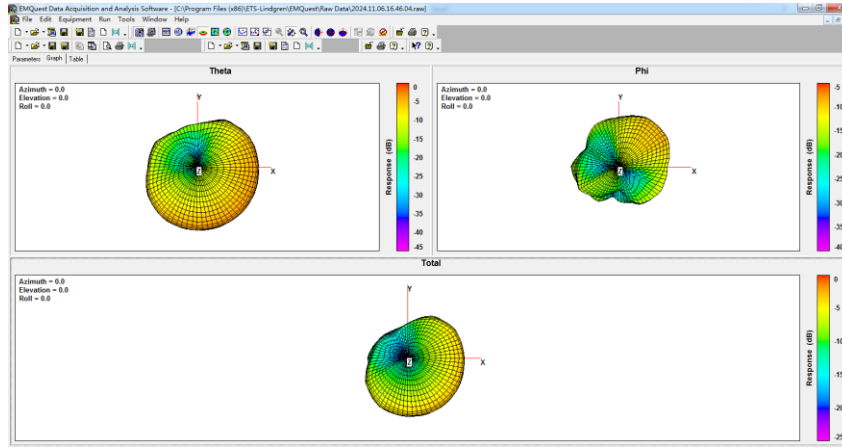

Note: Antenna gain was measured in the anechoic chamber, 3D scan was exercised, and the highest numbers are reported in this document.

According to Test standard: IEEE Std 149-2021, we measure antenna gain.

### List of Test and Measurement Instruments

#### TEST EQUIPMENT

NO.	Equipment	Manufacturer	Model No.
1	AMS-8923	ETS-Lingen	SN1702
2	Network Analyzer E5071C	Kesight	MY4690575

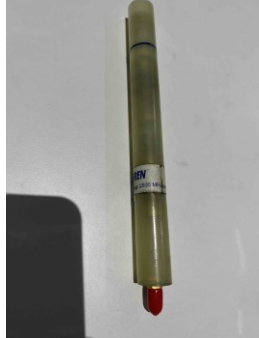


Fig 2 dipole model 3126-2500 frequency 2500 MHz



Fig 3 model 3126-5500 frequency 5500 MHz

## **I. Measurement Setup:**

### **A. Reflection Coefficient Measurement:**

**Instrument:** Network Analyzer (Kesight E5071C).

**Setup:**

1. Calibrate the Network Analyzer by one port calibration using Kesight 85093C Electronic calibration module .
2. Connect the antenna under test to the Network Analyzer.
3. Measure the S11(reflection coefficient),Return Loss....

### **B. Pattern Measurement:**

A Fully Anechoic Chamber is used to simulate free-space conditions.

A Fully Anechoic Chamber is a shielded room lined with RF/microwave absorber on all walls, ceiling, and floor.

RF/microwave absorber reduces reflections from the inner walls of the shield. Absorber performance depends on the depth and design of the absorber and the angle of incidence of the field.

Normal incidence is best, shallower angles are worse.

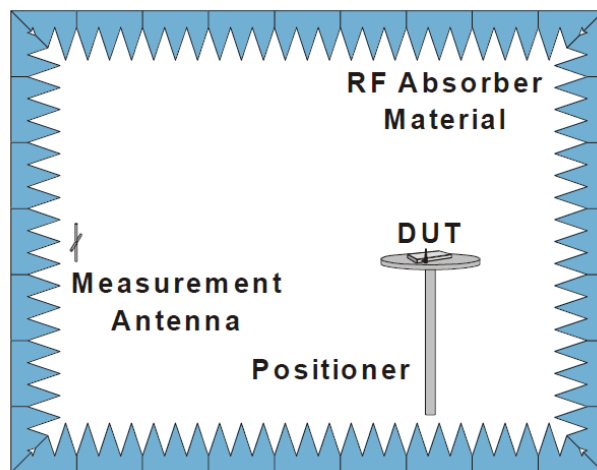


Fig. 4. The fully anechoic chamber

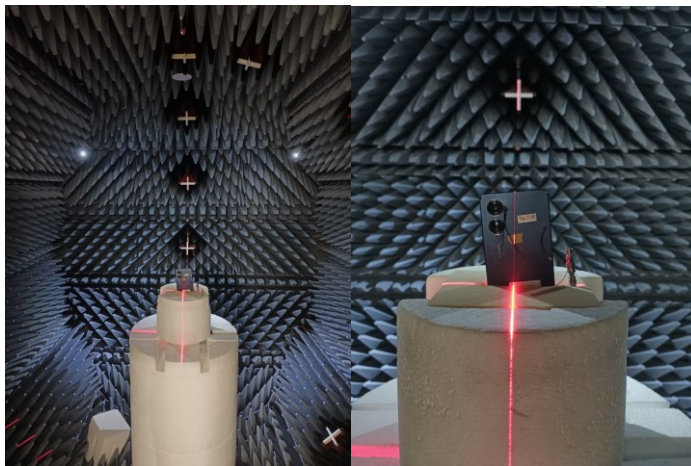


Fig.5. The DUT in the fully anechoic chamber