

TC		-		
TEST REPORT				
F	or WiFi-5GHz Band			
Report No	CHTEW22090124	Report Verification:		
Project No	SHT2208193404EW			
FCC ID:	2ASRT-NPX320			
Applicant's name:	Screeneo Innovation SA			
Address	Route de Lully 5C, 1131 Tol	ochenaz, Switzerland		
Product Name:	Digital Projector			
Trade Mark	PHILIPS			
Model No	NeoPix 320			
Listed Model(s)	NPX320			
Standard:	FCC CFR Title 47 Part 15 S	Subpart E Section 15.407		
Date of receipt of test sample	Aug.22, 2022			
Date of testing	Aug.22, 2022- Sep.26, 2022			
Date of issue	Sep.27, 2022			
Result	PASS			
Compiled by		Color W.		
(Position+Printed name+Signature):	File administrator Echo Wei	Echo Wei		
Supervised by		1210, Kont		
(Position+Printed name+Signature):	Project Engineer Kiki Kong	Luber 6		
Approved by		1+		
(Position+Printed name+Signature):	RF Manager Hans Hu	Homsty		
Testing Laboratory Name: :	Shenzhen Huatongwei International Inspection Co., Ltd.			
Address	1/F, Bldg 3, Hongfa Hi-tech Tianliao, Gongming, Shenzh	Industrial Park, Genyu Road, ien, China		
Shenzhen Huatongwei International Inspe	· · ·			
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. The test report merely correspond to the test sample.				

Test Standards

Report version

<u>1.</u>

1.1.

1.2.

TEST DESCRIPTION	
SUMMARY	5
Client Information	5
Product Description	5
Radio Specification Description	5
Testing Laboratory Information	6
TEST CONFIGURATION	7
Test frequency list	7
Descriptions of Test mode	7
Test mode	7
Test sample information	8
Support unit used in test configuration and system	8
Testing environmental condition	8
Statement of the measurement uncertainty	8
Equipment Used during the Test	9
TEST CONDITIONS AND RESULTS	11
Antenna Requirement	11
AC Conducted Emission	12
Maximum Conducted Output Power	14
Power Spectral Density	16
26dB bandwidth and 99% Occupy bandwidth	18
6dB Bandwidth	19
Band edge	20
Radiated Spurious Emissions	25
Frequency stability	33
TEST SETUP PHOTOS	34
EXTERNAL AND INTERNAL PHOTOS	35
APPENDIX REPORT	35

3 3

Contents

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- FCC Rules Part 15.407: General technical requirements. _
- ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices
- KDB789033 D02 v02r01: GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E
- KDB662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
- KDB662911 D02 MIMO with Cross-Polarized Antennas v01: MIMO with Cross-Polarized Antenna

1.2. Report version

Revision No.	Date of issue	Description
N/A	2022-09-27	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result	Test Engineer
5.1	Antenna Requirement	15.203/15.247(c)	PASS	Xiaoxiao Li
5.2	AC Conducted Emission	15.207	PASS	Junman Wang
5.3	Maximum Conducted Output Power	15.407(a)	PASS	Xiaoxiao Li
5.4	Maximum Power Spectral Density	15.407(a)	PASS	Xiaoxiao Li
5.5	26dB Bandwidth and 99% Ocuppy bandwith	15.407(a)	PASS	Xiaoxiao Li
5.6	6dB Bandwidth	15.407(a)	PASS	Xiaoxiao Li
5.7	Band edge	15.407(b)	PASS	Xiaoxiao Li
5.8	Radiated Spurious Emissions	15.209	PASS	Xiaoxiao Li
5.9	Frequency Stability	15.407(g)	PASS	Dongyang Wu

Note:

- The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	Screeneo Innovation SA	
Address:	Route de Lully 5C, 1131 Tolochenaz, Switzerland	
Manufacturer:	Screeneo Innovation SA	
Address:	Route de Lully 5C, 1131 Tolochenaz, Switzerland	

3.2. Product Description

Main unit information:		
Product Name:	Digital Projector	
Trade Mark:	PHILIPS	
Model No.:	NeoPix 320	
Listed Model(s):	NPX320	
Power supply:	AC 100-240V from AC power	
Hardware version:	1.0.0	
Software version:	1.0.0	

3.3. Radio Specification Description

5G WIFI			
Support type ^{*1}	🔀 802.11a	🔀 802.11n(HT20)	🔀 802.11n(HT40)
	B02.11ac(HT20)	802.11ac(HT40)	B02.11ac(HT80)
Function:	Outdoor AP	Indoor AP	Fixed P2P
	⊠ Client		
DFS type:			Slave devices without radar detection
Modulation:	BPSK, QPSK, 16QAM, 64	4QAM	
Operation frequency:	Band I:	5150MHz~5250MHz	
	Band II:	5250MHz~5350MHz	
	Band III:	5470MHz~5725MHz	
	Band IV:	5725MHz~5850MHz	
Supported Bandwidth	20MHz:	802.11n, 802.11a	
	40MHz:	802.11n	
Antenna type:	FPC Antenna		
Antenna gain:	ANT0:4dBi ANT1:4dBi		

Note:

*1: only show the RF function associated with this report.

Laboratory Name	Shenzhen Huatongwei International Insp	Shenzhen Huatongwei International Inspection Co., Ltd.			
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China				
Connect information:	Phone: 86-755-26715499 E-mail: <u>cs@szhtw.com.cn</u> <u>http://www.szhtw.com.cn</u>				
Qualifications	Туре	Accreditation Number			
Qualifications	FCC	762235			

3.4. Testing Laboratory Information

4. TEST CONFIGURATION

4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below .

Band	Test Channel	20MHz		40MHz	
		Channel	Frequency (MHz)	Channel	Frequency (MHz)
	CH∟	36	5180	38	5190
I	CH_M	44	5220	-	-
	CH _H	48	5240	46	5230
	CH∟	149	5745	151	5755
IV	СН _м	157	5785	-	-
	СН _н	165	5825	159	5795

4.2. Descriptions of Test mode

Preliminary tests were performed in different data rates, final test modes are considering the modulation and worse data rates as below table.

Modulation	Data rate
802.11a	6Mbps
802.11n(HT20	MCS0
802.11n(HT40)	MCS0

4.3. Test mode

For RF test items

The engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions:

The EUT was set to connect with the WLAN AP under large package sizes transmission.

For Radiated spurious emissions test item:

The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

4.4. Test sample information

Test item	HTW sample no.	
RF Conducted test items	Please refer to the description in the appendix report	
RF Radiated test items	YPHT22081934003	
EMI test items	YPHT22081934001	

Note:

RF Conducted test items: Maximum Conducted Output Power, Maximum Power Spectral Density , 26dB Bandwidth and 99% Ocuppy bandwith , 6dB Bandwidth ,Frequency Stability

RF Radiated test items: Band edge, Radiated Spurious Emission

EMI test items : AC Conducted Emission

4.5. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?				
✓ No				
Item	Equipment	Trade Name	Model No.	
1				
2				

4.6. Testing environmental condition

Туре	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.7. Statement of the measurement uncertainty

Test Item	Measurement Uncertainty
AC Conducted Emission (150kHz~30MHz)	3.00 dB
Radiated Emission (30MHz~1000MHz	4.36 dB
Radiated Emissions (1GHz~25GHz)	5.10 dB
Peak Output Power	0.77dB
Power Spectral Density	0.77dB
Conducted Spurious Emission	0.77dB
6dB Bandwidth	70Hz for <1GHz 130Hz for >1GHz
Frequency error	70Hz for <1GHz 130Hz for >1GHz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

•	Conducted Emission												
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)						
•	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27						
•	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2022/08/30	2023/08/29						
•	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2022/08/29	2023/08/28						
•	Pulse Limiter	R&S	HTWE0193	ESH3-Z2	101447	2022/08/29	2023/08/28						
•	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLE X_142	EF-NM- BNCM-2M	2022/09/17	2023/09/16						
•	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A						

4.8. Equipment Used during the Test

•	Radiated emission-6th test site												
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)						
•	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2023/09/29						
•	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2022/08/30	2023/08/29						
•	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2021/04/06	2024/04/05						
•	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2021/04/06	2024/04/05						
•	Pre-Amplifer	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2021/11/05	2022/11/04						
•	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2022/02/25	2023/02/24						
•	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX104	501184/4	2022/02/25	2023/02/24						
•	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A						

•	Radiated em	ission-7th test s	ite				
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
•	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2018/09/27	2023/09/26
•	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2022/08/25	2023/08/24
•	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
•	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2020/04/27	2023/04/26
•	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2021/11/05	2022/11/04
•	Broadband Pre- amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2022/02/28	2023/02/27
•	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2022/02/25	2023/02/24
•	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2022/02/25	2023/02/24
•	RF Connection Cable	HUBER+SUHNER	HTWE0119-05	6m 3GHz RG Serisa	N/A	2022/02/25	2023/02/24
•	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2022/02/25	2023/02/24
•	Test Software	Audix	N/A	E3	N/A	N/A	N/A

•	RF Conducted Method					
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
•	Signal and spectrum Analyzer	R&S	FSV40	100048	2022/08/25	2023/08/24
•	Spectrum Analyzer	Agilent	N9020A	MY50510187	2022/08/25	2023/08/24
•	Power Meter	Anritsu	ML249A	N/A	2022/08/25	2023/08/24
0	Radio communication tester	R&S	CMW500	137688-Lv	2022/08/25	2023/08/24

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

<u>Requirement</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responseble party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.407(a) :

Systems operating in the NII band, if transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST RESULT

☑ Passed □ Not Applicable

The product has two external antennas, both two are 4dBi antenna gain, and the product is a CDD device with the same gain, according to KDB 662911 D01 section F, the Directional gain=Gant + Array gain

For power spectral density measurements on all devices,


Array gain=10log(Nant/Nss) dB,

So the Directional gain=4+10log(2/1)=7.01dBi

For power measurements on IEEE 802.11 devices,

Array gain=0 dB for Nant≤4

So the Directional gain=7.01+0=7.01dBi,please refer to the below antenna photo.

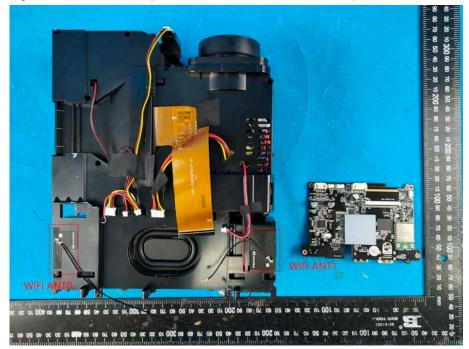

5.2. AC Conducted Emission


<u>LIMIT</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.207

	Limit (dBuV)				
Frequency range (MHz)	Quasi-peak	Average			
0.15-0.5	66 to 56*	56 to 46*			
0.5-5	56	46			
5-30	60	50			

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

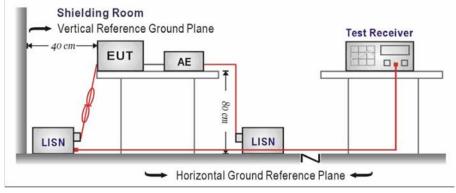

TEST PROCEDURE

- 1. The EUT was setup according to ANSI C63.10 requirements.
- The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
- 3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
- 4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
- 5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
- 6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- 7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
- 8. During the above scans, the emissions were maximized by cable manipulation.


TEST MODE:

Please refer to the clause 4.3


TEST RESULT

☑ Passed □ Not Applicable

Shenzhen Huatongwei International Inspection Co., Ltd.

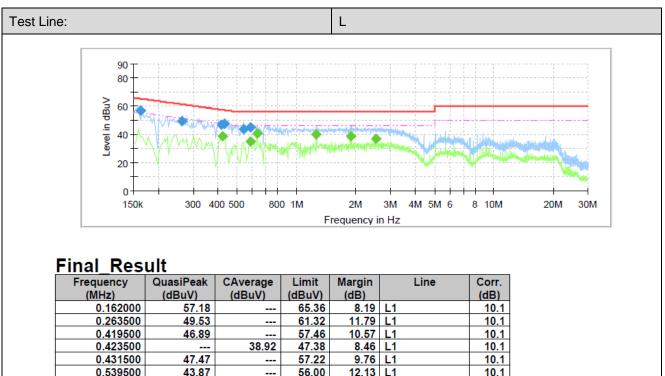

Frequency	QuasiPeak	CAverage	Limit	Margin	Line	Corr.
(MHz)	(dBuV)	(dBuV)	(dBuV)	(dB)		(dB)
0.162000	57.18		65.36	8.19	L1	10.1
0.263500	49.53		61.32	11.79	L1	10.1
0.419500	46.89		57.46	10.57	L1	10.1
0.423500		38.92	47.38	8.46	L1	10.1
0.431500	47.47		57.22	9.76	L1	10.1
0.539500	43.87		56.00	12.13	L1	10.1
0.587500		35.28	46.00	10.72	L1	10.1
0.587500	45.26		56.00	10.74	L1	10.1
0.631500		40.48	46.00	5.52	L1	10.1
1.263500		40.13	46.00	5.87	L1	10.1
1.891500		38.72	46.00	7.28	L1	10.1
2.523500		36.87	46.00	9.13	L1	10.2

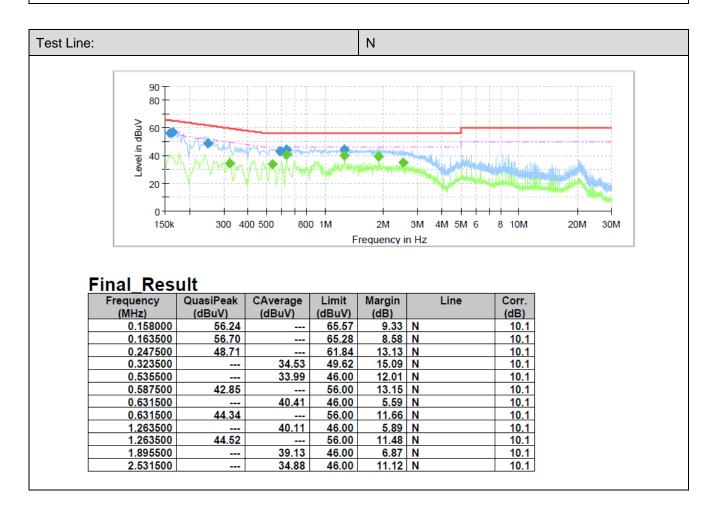


5.3. Maximum Conducted Output Power

LIMIT FCC CFR Title 47 Part 15 Subpart E Section 15.407(a): For the 5.15~5.25GHz band: Outdoor AP The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if G_{Tx} >6dBi, then P_{out} =30-(G_{Tx} -6). e.i.r.p. at any elevation angle above 30 degrees \leq 125mW (21dBm) Indoor AP The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if G_{Tx} >6dBi, then Pout =30-(G_{Tx} -6). Point-to-point AP The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if G_{Tx} >23dBi, then Pout =30-(G_{Tx} -23). Client devices The maximum conducted output power (Pout) shall not exceed the lesser of 250W (24dBm). if G_{Tx} >6dBi, then Pout =24-(G_{Tx} -6). For the 5.25~5.35GHz band: The maximum conducted output power (Pout) shall not exceed the lesser of 250mW (24dBm) or 11dBm+10 log B, where B is the 26dB emission bandwith in MHz. if G_{Tx} >6dBi, then $P_{out} = 24 - (G_{Tx}-6)$. For the 5.47~5.725GHz band: The maximum conducted output power (Pout) shall not exceed the lesser of 250mW (24dBm) or 11dBm+10 log B, where B is the 26dB emission bandwith in MHz. if G_{Tx} >6dBi, then P_{out} =24-(G_{Tx} -6). For the 5.725~5.85GHz band: Point-to-multipoint systems (P2M)

The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm). if G_{Tx} >6dBi, then P_{out} =30-(G_{Tx} -6).

 Point-to-point systems (P2P) The maximum conducted output power (P_{out}) shall not exceed the lesser of 1W (30dBm).

TEST CONFIGURATION

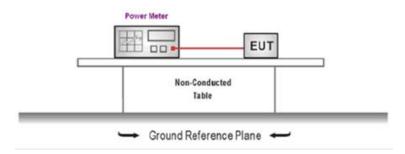

TEST PROCEDURE

- 1. The EUT was tested according to KDB789033 Section E-3-b)
- 2. The maximum conducted output power may be measured using a broadband AVG RF power meter.
- 3. Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor.
- 4. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
- 5. Record the measurement data.

6. TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☑ Passed □ Not Applicable

TEST Data

Please refer to appendix A on the appendix report

5.4. Power Spectral Density


<u>LIMIT</u>

FCC CFR Title 47 Part 15 Subpart E Section 15.407(a):

100011	Thie 47 Fait to Subpart E Section 13.407(a).
For the 5.	15~5.25GHz band:
i	Outdoor AP The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if G _{Tx} >6dBi, then PSD =17-(G _{Tx} -6). ndoor AP
i	The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if G _{Tx} >6dBi, then PSD =17-(G _{Tx} -6). Point-to-point AP
i	The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if $G_{Tx}>23dBi$, then PSD =17-(G_{Tx} -23). Client devices
	The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. if G_{Tx} >6dBi, then PSD =11-(G_{Tx} -6).
For the 5.	25~5.35GHz band:
	beak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. >6 dBi, then PSD =11-(G _{Tx} -6).
For the 5.	47~5.725GHz band:
	beak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. >6 dBi, then PSD =11-(G _{Tx} -6).
For the 5.	725~5.85GHz band:
-	Point-to-multipoint systems (P2M) The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz. if Gr >6dBi, then PSD =30-(Gr -6)

if G_{Tx}>6dBi, then PSD =30-(G_{Tx}-6).
Point-to-point systems (P2P) The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.

TEST CONFIGURATION

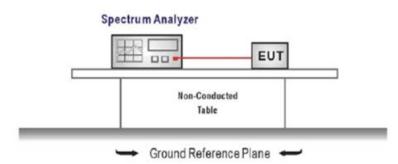

TEST PROCEDURE

- 1. According KDB 789033 D02 Section F
- Analyzer was setting as follow: Center frequency: test channel Span was set to encompass the entire emission bandwidth of the signal RBW=1MHz for devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz RBW=500kHz for devices operating in the band 5.725-5.85 GHz VBW ≥ 3 RBW Number of sweep points > 2 x (span/RBW) Sweep time = auto Detector = Peak Trigger was set to free run for all modes, trace was averaged over 100 sweeps
- 3. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☑ Passed □ Not Applicable

TEST Data


Please refer to appendix B on the appendix report

5.5. 26dB bandwidth and 99% Occupy bandwidth

<u>LIMIT</u>

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

TEST CONFIGURATION

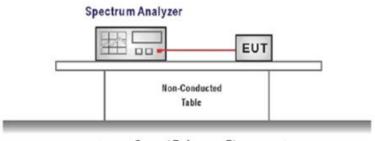

Ground Reference Plane

TEST PROCEDURE

- 1. According KDB 789033 D02 Section C, 26dB bandwidth test as follow
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set the VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

- 2. According KDB 789033 D02 Section D, 99% bandwidth test as follow a). Set center frequency to the nominal EUT channel center frequency.
 - b). Set span = 1.5 times to 5.0 times the OBW.
 - c). Set RBW = 1% to 5% of the OBW
 - d). Set VBW ≥ 3 RBW

e). Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

f). Use the 99% power bandwidth function of the instrument

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☑ Passed □ Not Applicable

TEST Data

Please refer to appendix C and D on the appendix report


5.6. 6dB Bandwidth

<u>LIMIT</u>

FCC CFR Title 47 Part 15 Subpart E Section 15.407(e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz

TEST CONFIGURATION

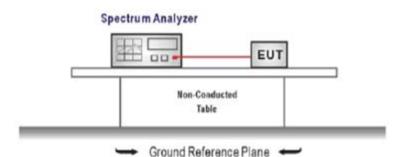

TEST PROCEDURE

- 1. C Connect the antenna port(s) to the spectrum analyzer input.
- 2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency =test channel center frequency Span=2 x emission bandwidth RBW = 100 kHz, VBW ≥ 3 × RBW Sweep time= auto couple Detector = Peak Trace mode = max hold

- 3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE:

Please refer to the clause 4.3

TEST RESULT

☑ Passed □ Not Applicable

TEST Data

Please refer to appendix E on the appendix report

5.7. Band edge

LIMIT

FCC CFR Title 47 Part 15 Subpart E Section 15.407(b)


	Un-restricted band	emissions above 1GHz	
Operating Band	Frequency	EIRP Limit	Value
5150-5250MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m	Peak
5250-5350MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m	Peak
5470-5725MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m	Peak
	1GHz-5.65GHz	-27 dBm/MHz(68.2dBuV/m)@3m	Peak
	5.65GHz-5.7GHz	-27*dBm/MHz to 10dBm/MHz (68.2* dBuV/m to 105.6dBuV/m)	Peak
	5.7GHz-5.72GHz	10*dBm/MHz to 15.6dBm/MHz (105.6*dBuV/m to 110.8dBuV/m)	Peak
	5.72GHz-5.725GHz	15.6*dBm/MHz to 27dBm/MHz (110.8dBuV/m to* 122.2dBuV/m)	Peak
5725-5850 MHz	5.85GHz-5.855GHz	27dBm/MHz to 15.6*dBm/MHz (122.2dBuV/m to110.8* dBuV/m)	Peak
	5.855GHz-5.875GHz	15.6dBm/MHz to 10*dBm/MHz (110.8dBuV/m to 105.6* dBuV/m	Peak
	5.875GHz-5.925GHz	10dBm/MHz to -27*dBm/MHz (105.6dBuV/m to 68.2* dBuV/m)	Peak
	Above 5.925GHz	-27 dBm/MHz(68.2dBuV/m)@3m	Peak

* Increase/Decreases with the linearly of the frequency.

For emission above 1GHz and in restricted band, according to FCC KDB 789033 D02 General UNII Test Procedure, all emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit. $E[dB\mu V/m] = EIRP[dBm] + 95.2$, for d = 3 meters.

TEST CONFIGURATION

Radiated:

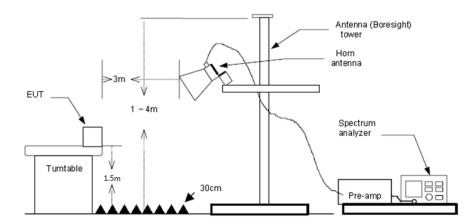

TEST PROCEDURE

- 1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
- 2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3. The EUT waspositioned such that the distance from antenna to the EUT was 3 meters.
- 4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find themaximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- The receiver set as follow: RBW=1MHz, VBW=3MHz PEAK detector for Peak value. RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 4.3

TEST RESULTS

☑ Passed □ Not Applicable

Radiated Band Edge Test Data

Band: I Worst m					2.11a		Test	t channe	l: CH∟	
Test value					Horiz	Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5000.00	41.74	31.90	5.80	35.25	10.00	54.19	68.20	-14.01	Peak
2	5150.07	51.90	32.00	5.97	35.44	10.00	64.43	68.20	-3.77	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5000.00	27.74	31.90	5.80	35.25	10.00	40.19	54.00	-13.81	Average
2	5150.07	32.91	32.00	5.97	35.44	10.00	45.44	54.00	-8.56	Average
Dondul		_								
Band: I		V	Vorst mod	le: 802.1	1a		Те	st chann	el: CH _∟	
Test value		V	Vorst mod	le: 802.1	1a Vertica		Те	st chann	el: CH _∟	
	Frequency MHz	Reading dBuV/m	Vorst mod Antenna dB	Cable	1		Te Level dBuV/m	st chann Limit dBuV/m	el: CH _L Over limit	Remark
Test value		Reading	Antenna	Cable	Vertica	Aux	Level	Limit	0ver	
Test value Mark	MHz	Reading dBuV/m	Antenna dB	Cable dB	Vertica Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Peak
Test value Mark	MHz 5000.00	Reading dBuV/m 38.30	Antenna dB 31.90	Cable dB 5.80	Vertica Preamp dB 35.25	Aux dB 10.00	Level dBuV/m 50.75	Limit dBuV/m 68.20	Over limit -17.45	Peak
Test value Mark 1 2	MHz 5000.00 5150.07 Frequency	Reading dBuV/m 38.30 46.70 Reading	Antenna dB 31.90 32.00 Antenna	Cable dB 5.80 5.97 Cable	Vertica Preamp dB 35.25 35.44 Preamp	Aux dB 10.00 10.00 Aux	Level dBuV/m 50.75 59.23 Level	Limit dBuV/m 68.20 68.20 Limit	Over limit -17.45 -8.97 Over	Peak Peak

Band: I	Worst mode: 802.11a			Tes						
Test value		Horiz	ontal							
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	0ver	Remark
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit	
1	5350.06	41.69	31.50	6.09	35.37	10.00	53.91	68.20	-14.29	Peak
2	5459.88	41.18	31.74	6.13	35.39	10.00	53.66	68.20	-14.54	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5350.06	30.08	31.50	6.09	35.37	10.00	42.30	54.00	-11.70	Average
2	5459.88	29.16	31.74	6.13	35.39	10.00	41.64	54.00		Average
Band: I		W	orst mode	: 802.11	а		Т	est chan	nel: CH	Н
Test value					Vertical					
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	5350.06	40.24	31.50	6.09	35.37	10.00	52.46	68.20	-15.74	Peak
2	5459.88	40.07	31.74	6.13	35.39	10.00	52.55	68.20	-15.65	Peak
2	5455.00	40.07	21.74	0.15	55.55	10.00	52.55	00.20	10.00	1 Cak
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit	
			24 50	6.09	35.37	10.00	41.33	54.00	-12.67	Avenage
1	5350.06	29.11	31.50	0.09	JJ.J/	10.00	41.00	54.00	-12.0/	Average

Band: I			Worst mo	de: 802.	.11n(HT4	11n(HT40) Test char				nnel: CH _H		
Test value					Horiz	Horizontal						
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark		
1	5350.06	42.11	31.50	6.09	35.37	10.00	54.33	68.20	-13.87	Peak		
2	5459.88	41.30	31.74	6.13	35.39	10.00	53.78	68.20	-14.42	Peak		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark		
1	5350.06	29.73	31.50	6.09	35.37	10.00	41.95	54.00	-12.05	Average		
2	5459.88	29.66	31.74	6.13	35.39	10.00	42.14	54.00	-11.86	Average		
Band: I			Worst mo	de: 802.	.11n(HT4	40)	Τe	est chan	nel: CH⊦	1		
Test value					Vertic	cal						
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark		
1	5350.06	41.22	31.50	6.09	35.37	10.00	53.44	68.20	-14.76	Peak		
2	5459.88	42.01	31.74	6.13	35.39	10.00	54.49	68.20	-13.71	Peak		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark		
1	5350.06	29.76	31.50	6.09	35.37	10.00	41.98	54.00	-12.02	Average		
			31.74	6.13	35.39	10.00	42.18	54.00	-11.82	Average		

2022-09	-27
---------	-----

Band: IV			Worst n	node: 802	.11a			Test ch	annel: CH_{L}	
Frequency (MHz)	Read Level (dBuV)	Antenn a Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Pream p Factor (dB)	Level (dBuV/ m)	Limit Line (dBuV/ m)	Over Limit (dB)	Test value	Polari zation
5650.00	40.70	31.90	6.46	10.00	34.99	54.07	68.20	-14.13	Vertical	Peak
5700.01	41.40	31.90	6.44	10.00	34.91	54.83	105.20	-50.37	Vertical	Peak
5720.05	49.35	31.90	6.50	10.00	34.87	62.88	110.80	-47.92	Vertical	Peak
5650.00	41.54	31.90	6.46	10.00	34.99	54.91	68.20	-13.29	Horizontal	Peak
5700.01	41.21	31.90	6.44	10.00	34.91	54.64	105.20	-50.56	Horizontal	Peak
5720.05	53.02	31.90	6.50	10.00	34.87	66.55	110.80	-44.25	Horizontal	Peak
Band: IV			Worst n	node: 802	.11a			Test ch	annel: CH _H	
Frequency (MHz)	Read Level (dBuV)	Antenn a Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Pream p Factor (dB)	Level (dBuV/ m)	Limit Line (dBuV/ m)	Over Limit (dB)	Test value	Polari zation
5849.961	46.32	32.2	6.63	10	34.9	60.25	110.8	-50.55	Vertical	Peak
5875.003	40.74	32.25	6.58	10	34.97	54.6	105.2	-50.6	Vertical	Peak
5925.008	40.6	32.35	6.55	10	35.04	54.46	68.2	-13.74	Vertical	Peak
5849.96	52.27	32.20	6.63	10.00	34.90	66.20	110.80	-44.60	Horizontal	Peak
5875.00	40.80	32.25	6.58	10.00	34.97	54.66	105.20	-50.54	Horizontal	Peak
5925.01	41.28	32.35	6.55	10.00	35.04	55.14	68.20	-13.06	Horizontal	Peak

Page:

Date of issue:

2022-09-27

Band: IV			Worst	mode: 80)2.11n(HT	40)	Te	st channel:	CHL	
Frequency (MHz)	Read Level (dBuV)	Antenn a Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Pream p Factor (dB)	Level (dBuV/ m)	Limit Line (dBuV/ m)	Over Limit (dB)	Test value	Polariz ation
5650.00	41.33	31.90	6.46	10.00	34.99	54.70	68.20	-13.50	Vertical	Peak
5700.01	49.33	31.90	6.44	10.00	34.91	62.76	105.20	-42.44	Vertical	Peak
5720.05	56.95	31.90	6.50	10.00	34.87	70.48	110.80	-40.32	Vertical	Peak
5650.00	41.47	31.90	6.46	10.00	34.99	54.84	68.20	-13.36	Horizontal	Peak
5700.01	45.68	31.90	6.44	10.00	34.91	59.11	105.20	-46.09	Horizontal	Peak
5719.83	58.43	31.90	6.50	10.00	34.88	71.95	110.80	-38.85	Horizontal	Peak
Band: IV			Worst	mode: 80)2.11n(HT	40)	Te	st channel:	CH _H	
Frequency (MHz)	Read Level (dBuV)	Antenn a Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Pream p Factor (dB)	Level (dBuV/ m)	Limit Line (dBuV/ m)	Over Limit (dB)	Test value	Polariz ation
5849.96	45.98	32.20	6.63	10.00	34.90	59.91	110.80	-50.89	Vertical	Peak
5875.00	40.62	32.25	6.58	10.00	34.97	54.48	105.20	-50.72	Vertical	Peak
5925.01	39.97	32.35	6.55	10.00	35.04	53.83	68.20	-14.37	Vertical	Peak
5849.96	43.76	32.20	6.63	10.00	34.90	57.69	110.80	-53.11	Horizontal	Peak
5875.00	41.47	32.25	6.58	10.00	34.97	55.33	105.20	-49.87	Horizontal	Peak
5925.01	41.24	32.35	6.55	10.00	35.04	55.10	68.20	-13.10	Horizontal	Peak

Remark:

1. Final Level =Receiver Read level + Factor

2. The emission levels of other frequencies are very lower than the limit and not show in test report.

3. Pre-scan all modulation mode and antenna. *802.11a, 802.11n mode* in the report only displays the worst antenna information. The worst antenna is antenna 1.

5.8. Radiated Spurious Emissions

<u>LIMIT</u>

T

FCC CFR Title 47 Part 15 Subpart C Section 15.209 and Part 15 Subpart E Section 15.407

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)= Limit dBuV/m @300m +80,

imit dBuV/m	@3m – Limit dBuV/m	@30m + 40*log(30/3)	= Limit dBuV/m @30m + 40.
		@30III +40 l0g(30/3)	$= \text{Linit uDu v/iii} \oplus \text{Join } \mp 40.$


Unwanted emissions below	v 1GHz and Restricted band emissions	above 1GHz
Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


> 9KHz ~30MHz

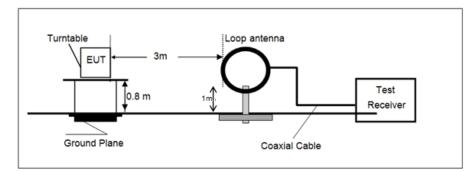

➢ 30MHz ~ 1GHz

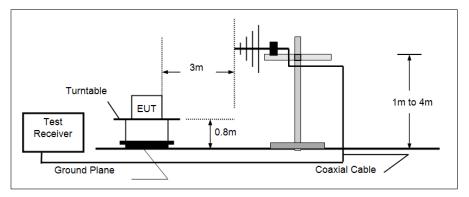

> Above 1GHz

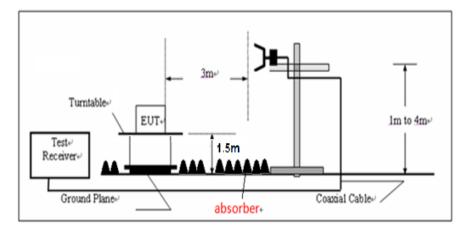

TEST PROCEDURE

- 1. The EUT was setup and tested according to ANSI C63.10:2013
- 2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
- 4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
- 5. Set to the maximum power setting and enable the EUT transmit continuously.
- 6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

 c) From 1 GHz to 10th harmonic: RBW=1MHz, VBW=3MHz Peak detector for Peak value. RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE: Please refer to the clause 4.3

TEST RESULT


☑ Passed □ Not Applicable


TEST Data

TEST DATA FOR 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

TEST DATA FOR 30MHz-1GHz

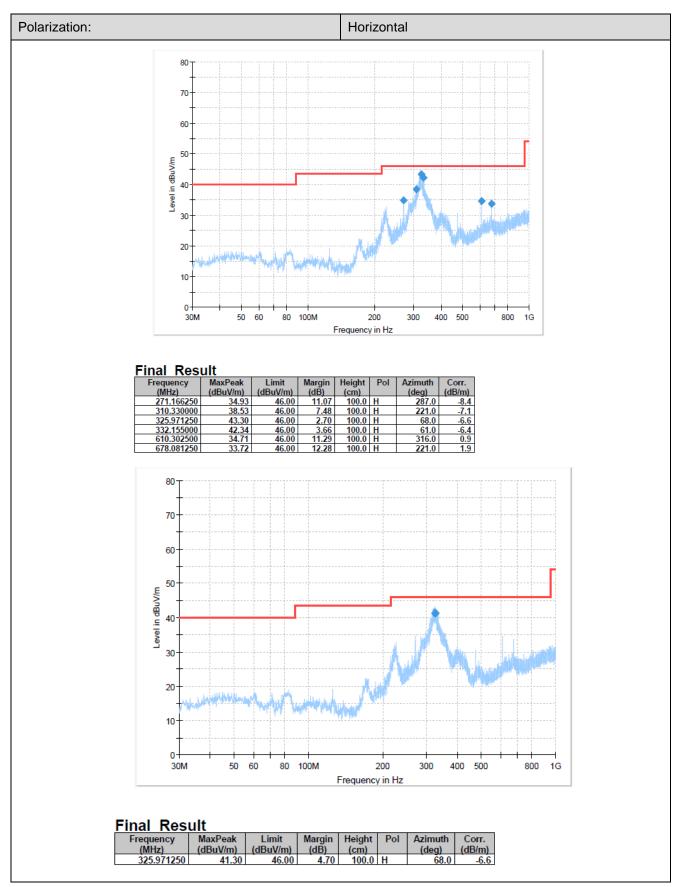

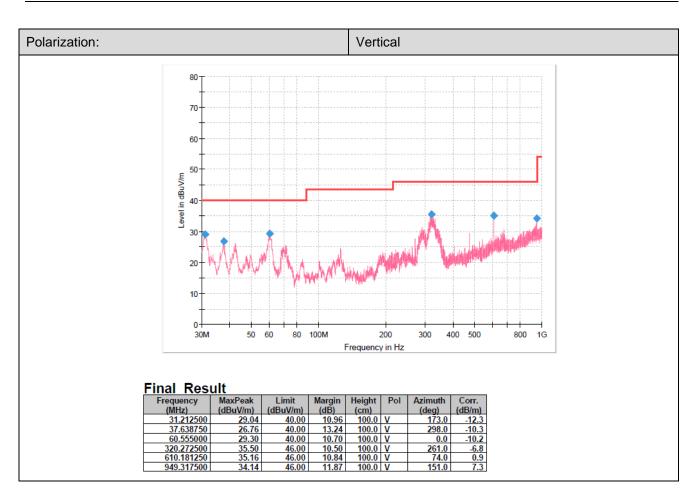

Remark:

Transd=Cable lose+ Antenna factor- Pre-amplifier; Margin=Limit -Level

TEST DATA FOR Above 1GHz

Band: I		: 802.1	la	Test channel: CH _L					
Polarization:				F	lorizonta	1			
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1053.81	56.60	25.22	2.58	36.98	47.42	68.20	-20.78	Peak
2	3167.78	52.73	28.96	4.63	37.12	49.20	68.20	-19.00	Peak
3	8002.06	36.36	37.10	7.61	33.31	47.76	68.20	-20.44	Peak
4	10888.51	37.20	40.57	9.10	36.76	50.11	68.20	-18.09	Peak
Polarization:				V	/ertical				
Mark	Frequency	Reading	Antenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	dBuV/m	dB	dB	dB	dBuV/m	dBuV/m	limit	
1	3167.78	53.37	28.96	4.63	37.12	49.84	68.20	-18.36	Peak
2	4226.13	48.63	30.15	5.57	36.07	48.28	68.20	-19.92	Peak
3	8002.06	35.80	37.10	7.61	33.31	47.20	68.20	-21.00	Peak
4	10916.26	36.21	40.60	9.11	36.74	49.18	68.20	-19.02	Peak

Band: I	Worst mode: 802.11a Test channel: CH _M									
Polarization:	Horizontal									
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	1053.81	56.60	25.22	2.58	36.98	47.42	68.20	-20.78	Peak	
2	3167.78	52.73	28.96	4.63	37.12	49.20	68.20	-19.00	Peak	
3	8145.93	36.99	37.02	7.70	33.40	48.31	68.20	-19.89	Peak	
4	10916.26	36.93	40.60	9.11	36.74	49.90	68.20	-18.30	Peak	
Polarization:				V	ertical					
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	3167.78	53.37	28.96	4.63	37.12	49.84	68.20	-18.36	Peak	
2	4226.13	48.63	30.15	5.57	36.07	48.28	68.20	-19.92	Peak	
3	7961.43	36.98	36.95	7.58	33.32	48.19	68.20	-20.01	Peak	
4	11056.09	36.33	40.43	9.17	36.64	49.29	68.20	-18.91	Peak	

Band: I		W	orst mode:	802.11	а	Τe	est chann	el: CH _H	
Polarization:				Н	orizontal	l			
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1053.81	56.60	25.22	2.58	36.98	47.42	68.20	-20.78	Peak
2	3167.78	52.73	28.96	4.63	37.12	49.20	68.20	-19.00	Peak
3	7941.19	36.76	36.88	7.57	33.32	47.89	68.20	-20.31	Peak
4	10916.26	37.40	40.60	9.11	36.74	50.37	68.20	-17.83	Peak
Polarization:				V	ertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3167.78	53.37	28.96	4.63	37.12	49.84	68.20	-18.36	Peak
2	4226.13	48.63	30.15	5.57	36.07	48.28	68.20	-19.92	Peak
3	6331.33	43.43	33.06	6.76	34.59	48.66	68.20	-19.54	Peak
4	10860.83	38.30	40.48	9.09	36.78	51.09	68.20	-17.11	Peak

Band: I		W	orst mode:	802.11	n(HT40)	Те	st channe	el: CH _L	
Polarization:				H	orizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1053.81	56.60	25.22	2.58	36.98	47.42	68.20	-20.78	Peak
2	3167.78	52.73	28.96	4.63	37.12	49.20	68.20	-19.00	Peak
3	7413.73	37.37	36.60	7.31	34.00	47.28	68.20	-20.92	Peak
4	9809.40	38.00	39.58	8.46	36.19	49.85	68.20	-18.35	Peak
Polarization:				V	ertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3167.78	53.37	28.96	4.63	37.12	49.84	68.20	-18.36	Peak
2	4226.13	48.63	30.15	5.57	36.07	48.28	68.20	-19.92	Peak
3	6331.33	42.86	33.06	6.76	34.59	48.09	68.20	-20.11	Peak
4	7981.72	36.96	37.03	7.60	33.31	48.28	68.20	-19.92	Peak

Band: I		W	orst mode:	802.11	n(HT40)	Τe	est chann	el: CH _H	
Polarization:				Н	orizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1053.81	56.60	25.22	2.58	36.98	47.42	68.20	-20.78	Peak
2	3167.78	52.73	28.96	4.63	37.12	49.20	68.20	-19.00	Peak
3	8002.06	35.74	37.10	7.61	33.31	47.14	68.20	-21.06	Peak
4	10400.86	38.93	39.90	8.97	37.25	50.55	68.20	-17.65	Peak
Polarization:				V	ertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3167.78	53.37	28.96	4.63	37.12	49.84	68.20	-18.36	Peak
2	4226.13	48.63	30.15	5.57	36.07	48.28	68.20	-19.92	Peak
3	8002.06	36.29	37.10	7.61	33.31	47.69	68.20	-20.51	Peak
4	10480.59	37.71	39.98	8.99	37.12	49.56	68.20	-18.64	Peak

Page:

Band: IV		802.11	Test channel: CH _L								
Polarization:	Horizontal										
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark		
1	1053.81	56.60	25.22	2.58	36.98	47.42	68.20	-20.78	Peak		
2	3167.78	52.73	28.96	4.63	37.12	49.20	68.20	-19.00	Peak		
3	7413.73	37.72	36.60	7.31	34.00	47.63	68.20	-20.57	Peak		
4	9809.40	37.15	39.58	8.46	36.19	49.00	68.20	-19.20	Peak		
Polarization:				V	ertical						
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark		
1	3167.78	53.37	28.96	4.63	37.12	49.84	68.20	-18.36	Peak		
2	4226.13	48.63	30.15	5.57	36.07	48.28	68.20	-19.92	Peak		
3	6331.33	41.83	33.06	6.76	34.59	47.06	68.20	-21.14	Peak		
4	9759.59	37.35	39.60	8.44	36.29	49.10	68.20	-19.10	Peak		

Band: IV		Τe									
Polarization:	Horizontal										
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark		
1	1053.81	56.60	25.22	2.58	36.98	47.42	68.20	-20.78	Peak		
2	3167.78	52.73	28.96	4.63	37.12	49.20	68.20	-19.00	Peak		
3	7981.72	37.59	37.03	7.60	33.31	48.91	68.20	-19.29	Peak		
4	11457.21	36.86	40.77	9.43	36.40	50.66	68.20	-17.54	Peak		
Polarization:				V	ertical						
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark		
1	3167.78	53.37	28.96	4.63	37.12	49.84	68.20	-18.36	Peak		
2	4226.13	48.63	30.15	5.57	36.07	48.28	68.20	-19.92	Peak		
3	7451.57	37.12	36.60	7.34	33.97	47.09	68.20	-21.11	Peak		
4	11084.27	36.07	40.35	9.19	36.62	48.99	68.20	-19.21	Peak		

Band: IV		Test channel: CH _H							
Polarization:				Н	lorizonta	I			
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	b Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1053.81	56.60	25.22	2.58	36.98	47.42	68.20	-20.78	Peak
2	3167.78	52.73	28.96	4.63	37.12	49.20	68.20	-19.00	Peak
3	6331.33	43.31	33.06	6.76	34.59	48.54	68.20	-19.66	Peak
4	9809.40	37.30	39.58	8.46	36.19	49.15	68.20	-19.05	Peak
Polarization:				V	'ertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3167.78	53.37	28.96	4.63	37.12	49.84	68.20	-18.36	Peak
2	4226.13	48.63	30.15	5.57	36.07	48.28	68.20	-19.92	Peak
3	6331.33	43.84	33.06	6.76	34.59	49.07	68.20	-19.13	Peak
4	11663.00	33.17	40.28	9.52	36.39	46.58	54.00	-7.42	Average
5	11663.19	42.98	40.28	9.52	36.39	56.39	68.20	-11.81	Peak

Page:

Band: IV		Τe							
Polarization:				Н	orizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1053.81	56.60	25.22	2.58	36.98	47.42	68.20	-20.78	Peak
2	3167.78	52.73	28.96	4.63	37.12	49.20	68.20	-19.00	Peak
3	7921.00	36.56	36.84	7.55	33.33	47.62	68.20	-20.58	Peak
4	10916.26	36.48	40.60	9.11	36.74	49.45	68.20	-18.75	Peak
Polarization:				V	ertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3167.78	53.37	28.96	4.63	37.12	49.84	68.20	-18.36	Peak
2	4226.13	48.63	30.15	5.57	36.07	48.28	68.20	-19.92	Peak
3	6851.19	39.46	34.70	6.98	34.20	46.94	68.20	-21.26	Peak
4	9784.47	37.28	39.60	8.44	36.17	49.15	68.20	-19.05	Peak

Band: IV		Τe							
Polarization:				Н	orizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1053.81	56.60	25.22	2.58	36.98	47.42	68.20	-20.78	Peak
2	3167.78	52.73	28.96	4.63	37.12	49.20	68.20	-19.00	Peak
3	8063.40	35.56	37.20	7.65	33.32	47.09	68.20	-21.11	Peak
4	11283.55	35.82	40.38	9.32	36.50	49.02	68.20	-19.18	Peak
Polarization:				V	ertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3167.78	53.37	28.96	4.63	37.12	49.84	68.20	-18.36	Peak
2	4226.13	48.63	30.15	5.57	36.07	48.28	68.20	-19.92	Peak
3	7319.96	37.01	36.44	7.30	34.10	46.65	68.20	-21.55	Peak
4	9784.47	36.73	39,60	8.44	36.17	48,60	68.20	-19.60	Peak

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor


- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3. Measuring frequencies from 1 GHz to 40GHz.
- 4. Pre-scan all modulation mode and antenna. 802.11a, 802.11n mode in the report only displays the worst antenna information. The worst antenna is antenna 1.

5.9. Frequency stability

<u>LIMIT</u>

Within Operation Band

TEST CONFIGURATION

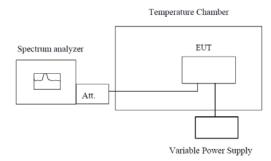

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE

- 1. The equipment under test was connected to an external power supply.
- 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
- 3. The EUT was placed inside the temperature chamber.
- 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25℃ operating frequency as reference frequency.
- 5. Turn EUT off and set the chamber temperature to −20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
- 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached..

TEST MODE:

Please refer to the clause 4.3


TEST RESULT

☑ Passed □ Not Applicable

Please refer to appendix F on the appendix report

Radiated Emission



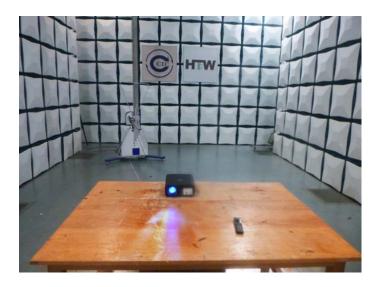





AC Conducted Emission



7. EXTERNAL AND INTERNAL PHOTOS

Refer to the test report No.: CHTEW22090121.

8. APPENDIX REPORT