

Shanghai Sunnyway Communication Technology Limited Company

Temporary antenna specification

Customer: Xiangcheng		The project: S0361
Operating frequency band: 2400-2500MHz, 5150-5850MHz		
Motherboard version:		
Shangyuan material specifications		
Specifications and models	Shangyuan material number	Customer part number
WIFI	SH23348IB75	

The record of project changes			
Date of preparation/change	Changes	Change of person	version

Sunnyway counter-signature bar				
Research and development	ME:	Auditor:	QE:	Approver:
	RF:	Auditor:		
Client Counter-signature bar				
EE	PM	RF	QE	

Tel: +86-021-60835368 (Shanghai); +86-0755-82504258 (Shenzhen)

Shanghai R&D Center Address: 1st Floor, Building 4, No. 99, Lane 215, Gaoguang Road,
Qingpu District, Shanghai

Shenzhen R & D Center Address: Shenzhen Guangming District South Taiyun Chuanggu Center 5
Building 6 floor

Chongqing R&D Center Address: C08-1 Building-1, No. 19 Xiantao Data Valley East Road,
Yubei District, Chongqing

contents

1. Project picture.....	3
2. Test fixtures.....	4
3. Matching circuits.....	4
4. S11 test.....	5
4.1 S11 Test Method Description.....	5
4.2 S11 parameter.....	5
5 . DARKROOM TEST DATA.....	6
5.1 Passive test data.	6
5.2 Active test data.....	7
6. Prototype grounding treatment.....	12
7. Mass production antenna indicators.....	12
8 Drawing.....	13

1. Project information

Machine information



Antenna information




	Version
WIFI Antenna	SY-超嗨S0361 WIFI-V0.5
Antenna form	PIFA antenna

Note: The customer finally verified that the antenna performance prototype was retained in our company for at least one year, which is convenient for analysis and solution to abnormal situations in antenna mass production.
Ensure antenna shipment quality.


2. Test fixtures

Purpose: To test the passive parameters of the antenna as accurately as possible.

How to make: The prototyping mechanism is made of a 50 ohm coaxial cable, one end is connected to the test point at the back of the matching circuit of the prototype motherboard (the front of the RF test hole), and the other end is connected to the SMA connector. The schematic diagram is as follows:

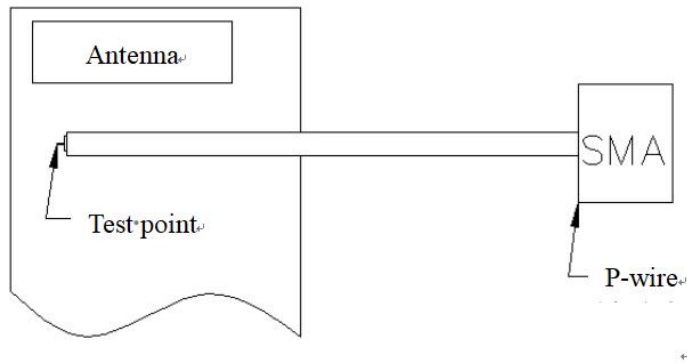

3. Matching circuits

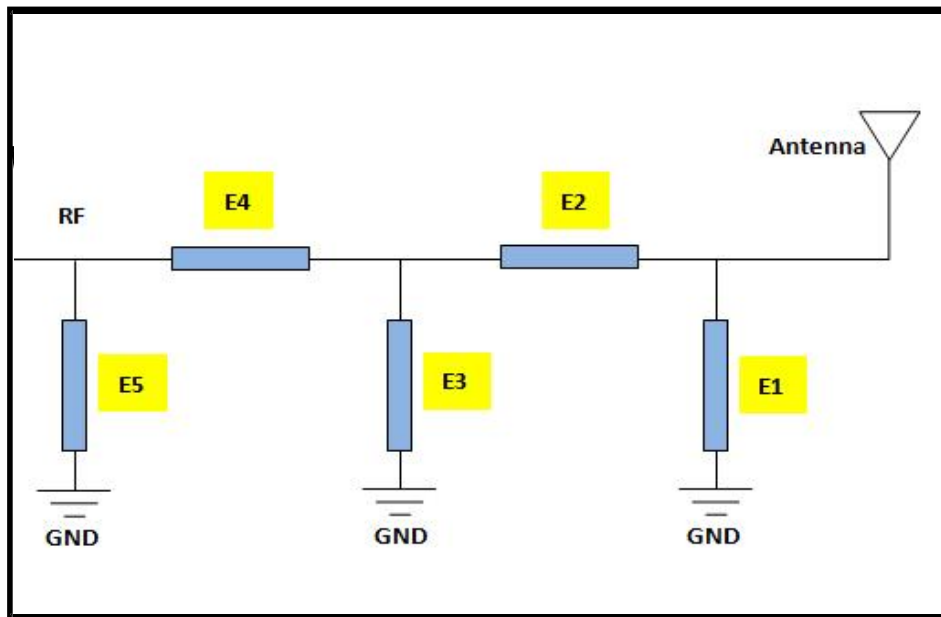

Element	Value	tags	specificat ion
WiFi antennas			
E1	N/A		
E2	0Ω		
E3	N/A		
E4	0Ω		
E5	N/A		


4. S11 test

4.1 S11 Test Method Description

Test Equipment: Network Analyzer (E5071C)

Test method: A 50 ohm CABLE cable is derived from the instrument test port, and the SMA connector of the prototype is connected after calibration using the calibrator to record the return loss and standing wave ratio corresponding to the relevant frequency point.


The test diagram is as follows:

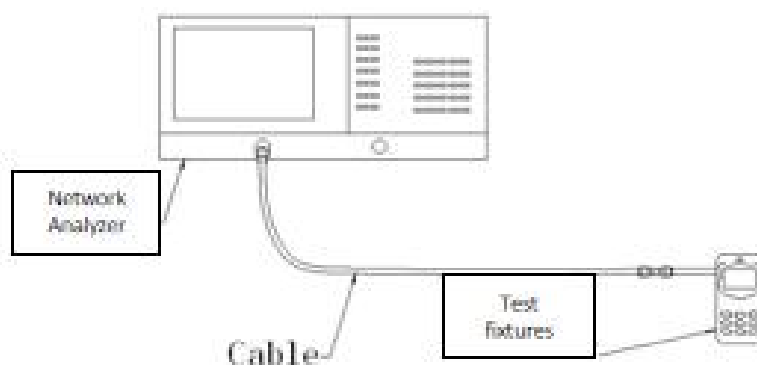

Test the schematic

4.2 S11 parameter

WIFI Antenna

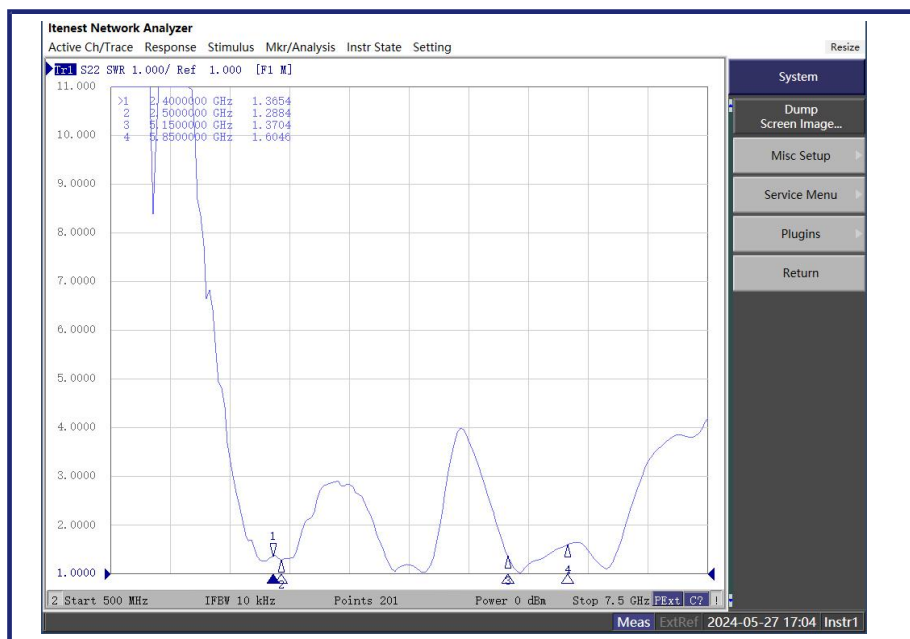

	wifi
frequency (MHz)	SWR
2400	1.36
2500	1.28
5150	1.37
5850	1.60

5 Darkroom test data

Test system: Shielded darkroom

Test environment: temperature $22^{\circ}\text{C}\pm 3^{\circ}\text{C}$, humidity
50% $\pm$ 15%

Test equipment: When testing passive data, use the
Network Analyzer Agilent E5062C When testing
active data, the Comprehensive Tester Agilent 8960
/CMW500/E4438C is used

5.1 Passive test data


WIFI antenna efficiency

Freq. (MHz)	Effi (dB)	Effi (%)	Max Gain (dBi)	Freq. (MHz)	Effi (dB)	Effi (%)	Max Gain (dBi)
2400	-2.91	51.17	3.06	5150	-2.77	52.84	4.34
2410	-3.00	50.12	2.72	5200	-2.56	55.46	4.55
2420	-2.70	53.70	3.51	5250	-2.75	53.09	3.87
2430	-2.86	51.76	3.81	5300	-2.80	52.48	3.44
2440	-2.87	51.64	2.75	5350	-2.91	51.17	2.73
2450	-2.68	53.95	3.46	5400	-2.97	50.47	3.07
2460	-2.99	50.23	3.47	5450	-3.01	50.00	2.29
2470	-2.91	51.17	2.87	5500	-2.79	52.60	1.52
2480	-2.84	52.00	3.77	5550	-2.99	50.23	0.96
2490	-2.80	52.48	3.52	5600	-2.93	50.93	1.57
2500	-2.49	56.36	3.72	5650	-2.70	53.70	1.46
				5700	-2.99	50.23	0.85
				5750	-2.86	51.76	1.20
				5800	-2.90	51.29	1.34
				5850	-2.89	51.40	1.61



5.2 Active test data

Band	Test Item	Channel	OTA (dBm)		
			SPEC	TRP/TIS	GAP
2.4G 802.11B- 11Mbps	TRP	1	15.00	15.25	0.25
		6		16.43	1.43
		11		15.77	0.77
	TIS	1	-84.00		
		6			
		11		-84.51	-0.51
2.4G 802.11G- 54Mbps	TRP	1	14.00	14.57	0.57
		6		14.80	0.80
		11		14.40	0.40
	TIS	1	-71.00		
		6			
		11		-71.29	-0.29
2.4G 802.11N- MCS7	TRP	1	13.00	13.47	0.47
		6		13.58	0.58
		11		13.53	0.53
	TIS	1	-69.00		
		6			
		11		-69.63	-0.63
5.8G 802.11A- 54Mbps	TRP	36	12.00	13.62	1.62
		149		13.07	1.07
		165		13.76	1.76
	TIS	36	-71.00		
		149			
		165		-71.53	-0.53
5.8G WFI_N	TRP	36	11.50	12.22	0.72
		149		12.47	0.97
		165		12.16	0.66
	TIS	36	-69.00		
		149			
		165		-70.39	-1.39
5.8G WFI_AC	TRP	36	10.50	11.90	1.40
		149		11.49	0.99
		165		11.11	0.61
	TIS	36	-68.00		
		149			
		165		-67.58	0.42



Wifi antenna 3D diagram

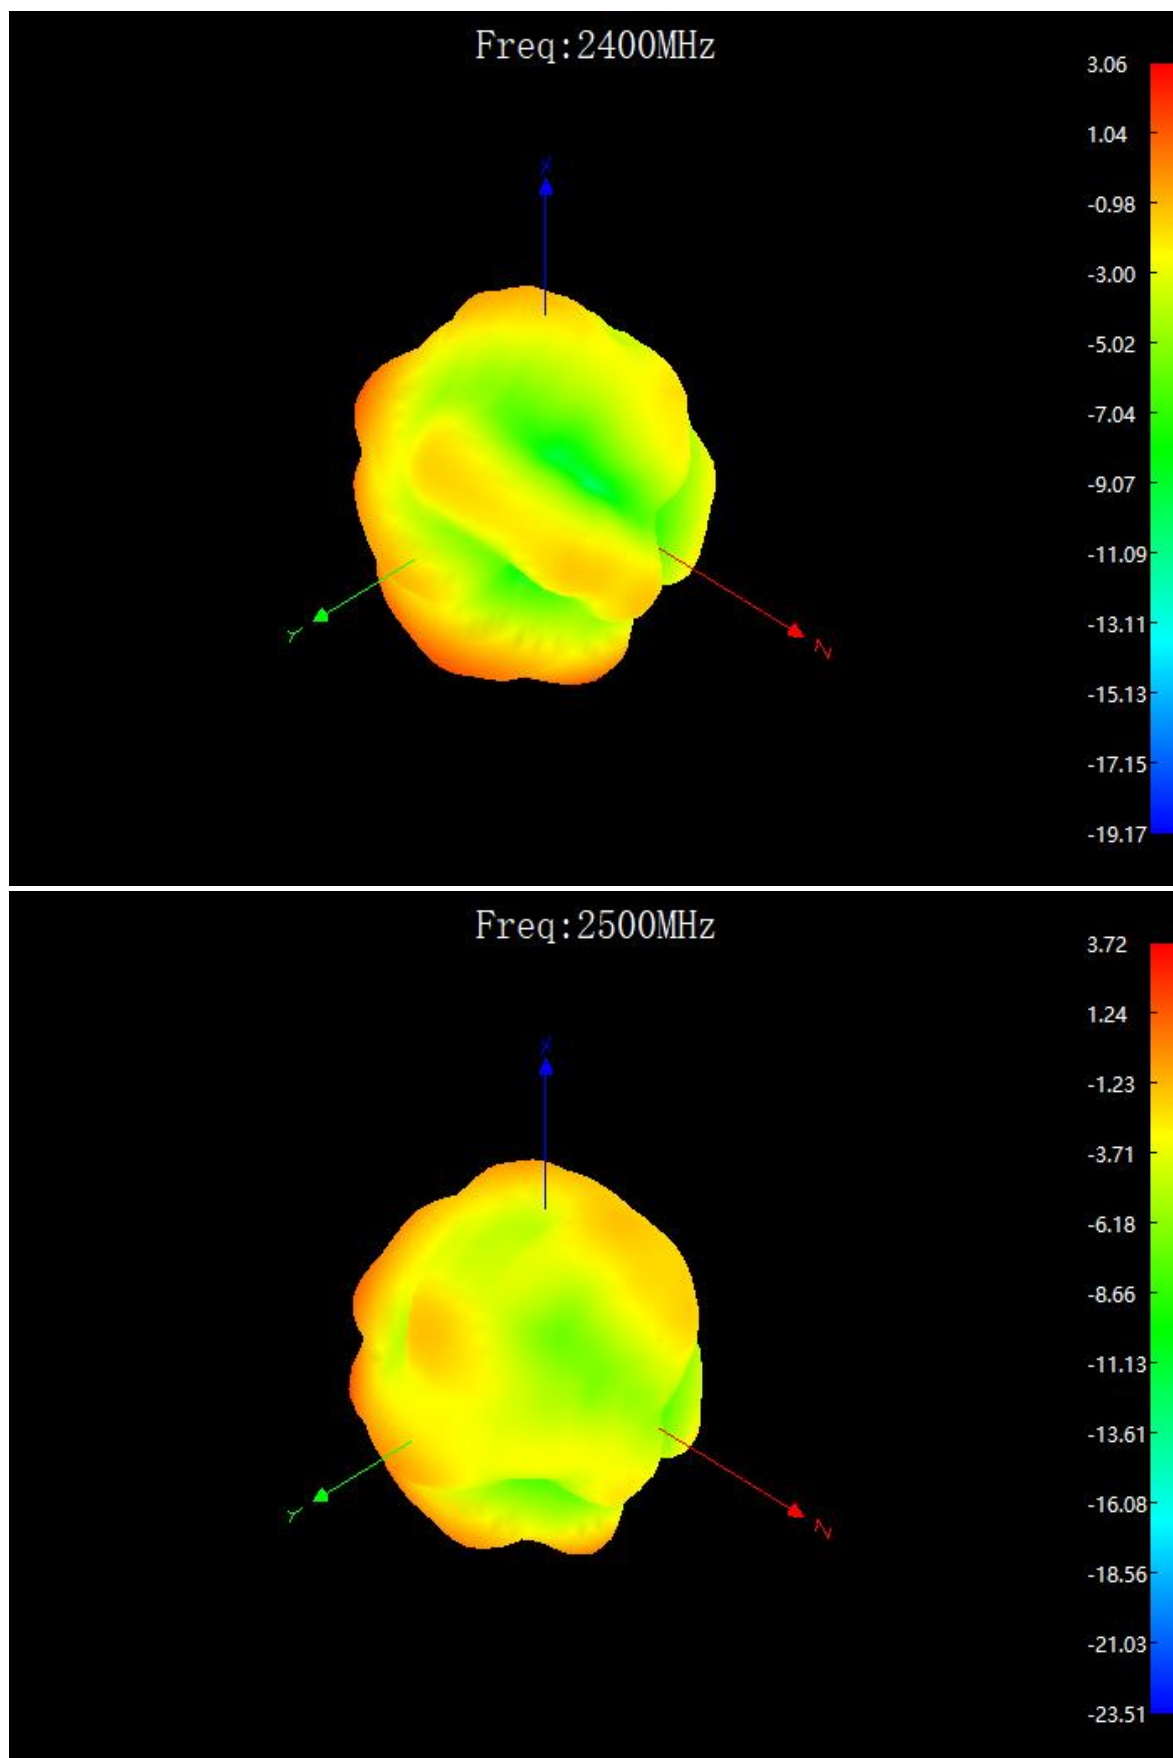


Wifi antenna 3D diagram

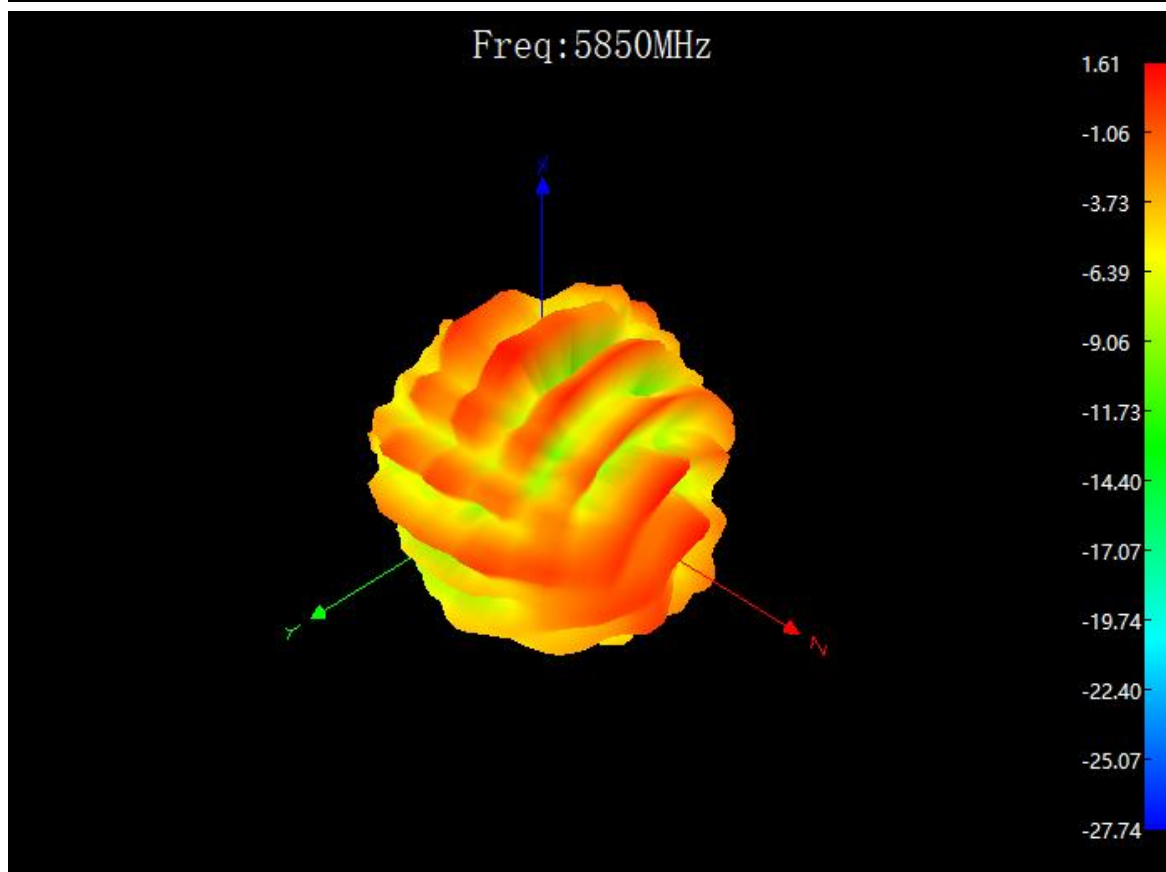
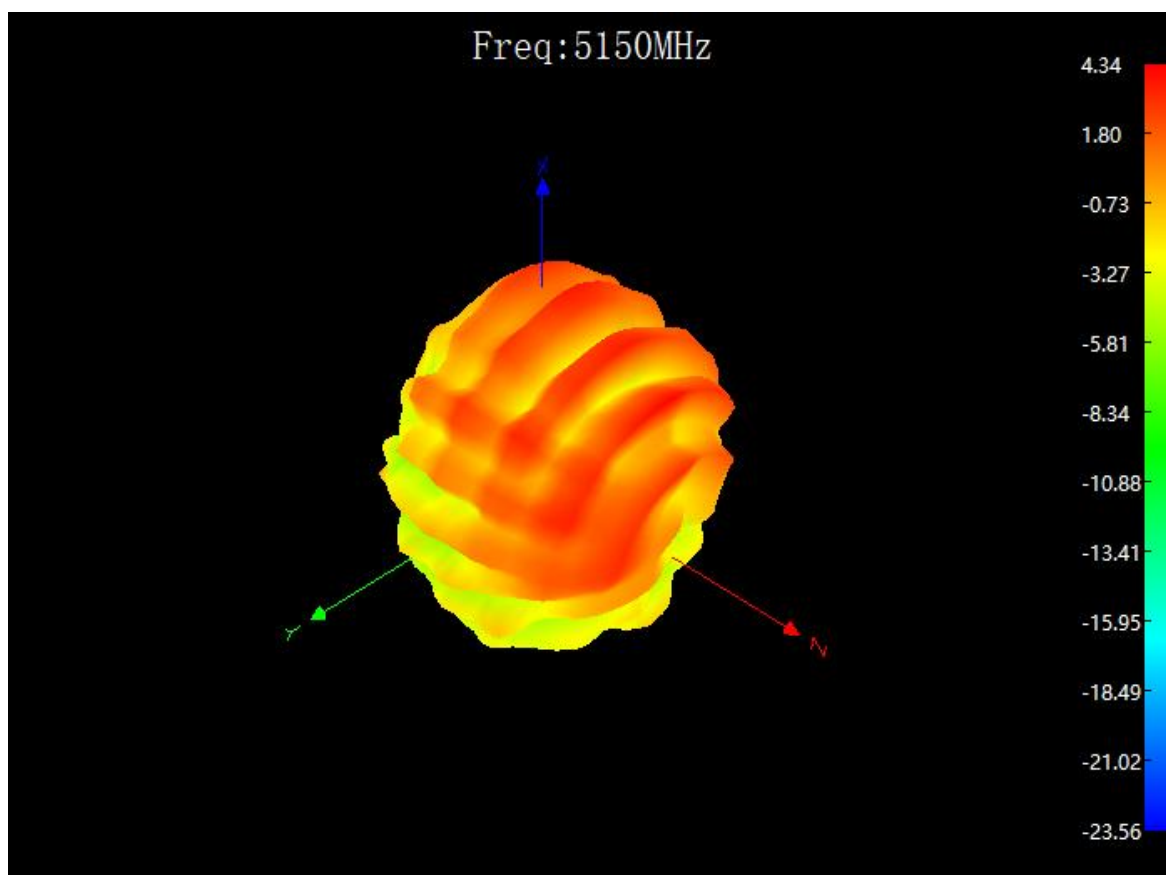


Wifi antenna 2D diagram

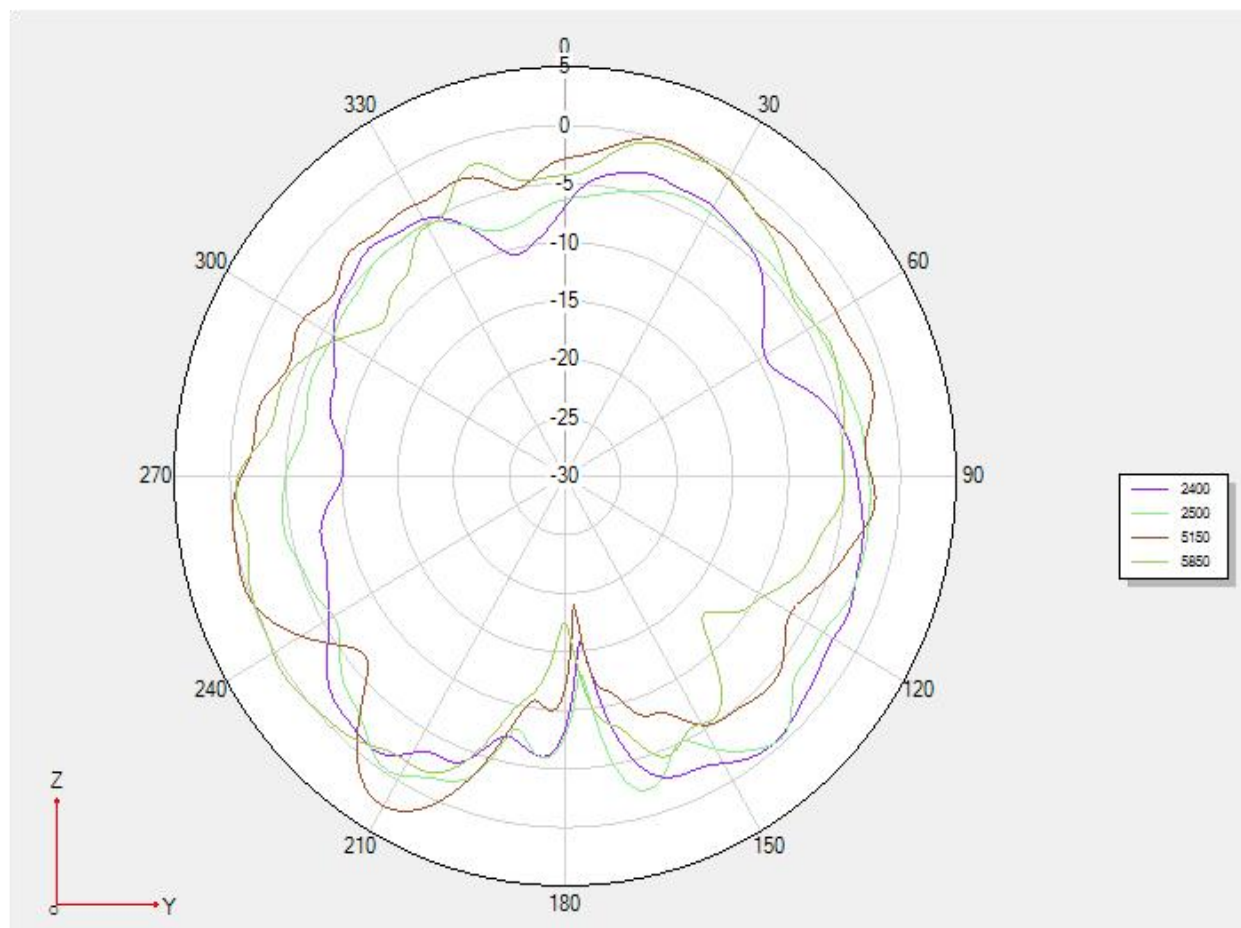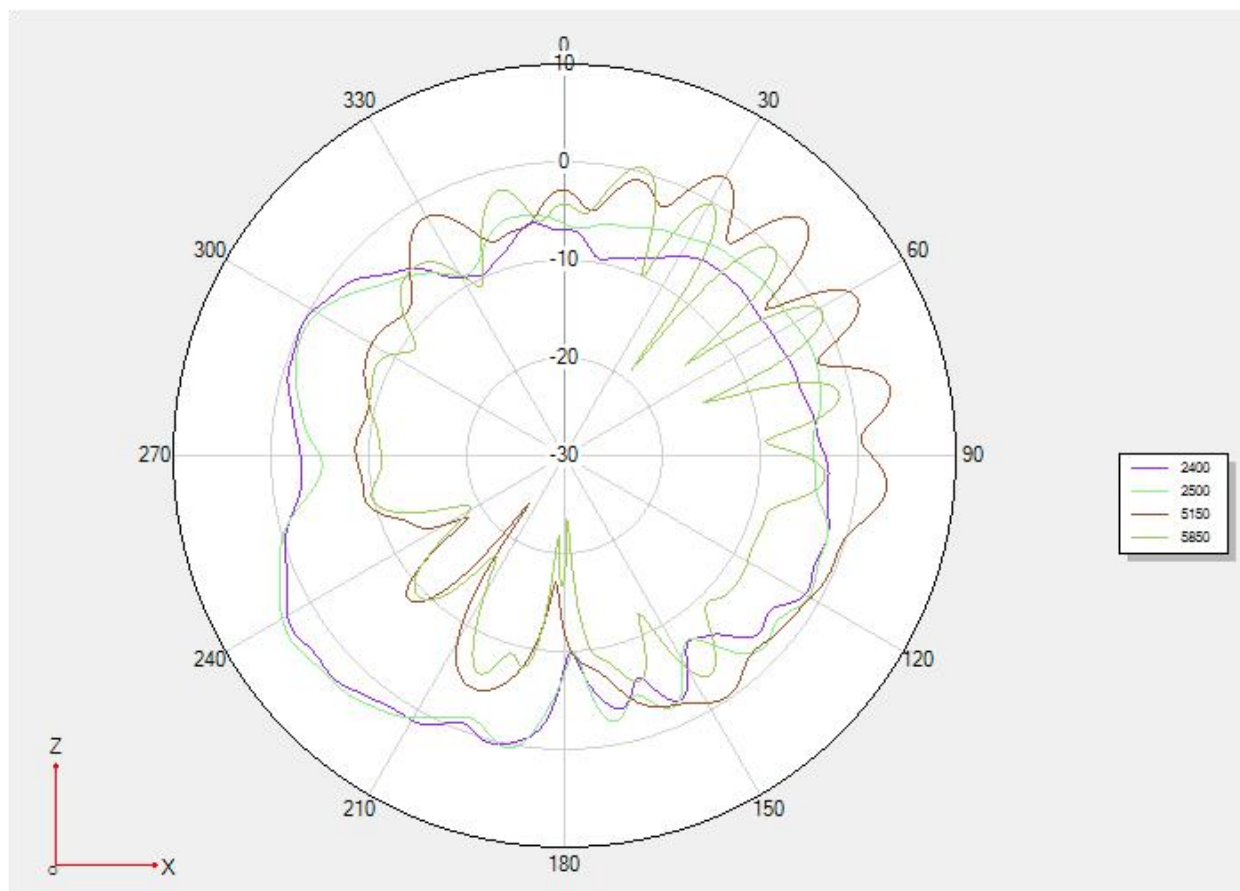

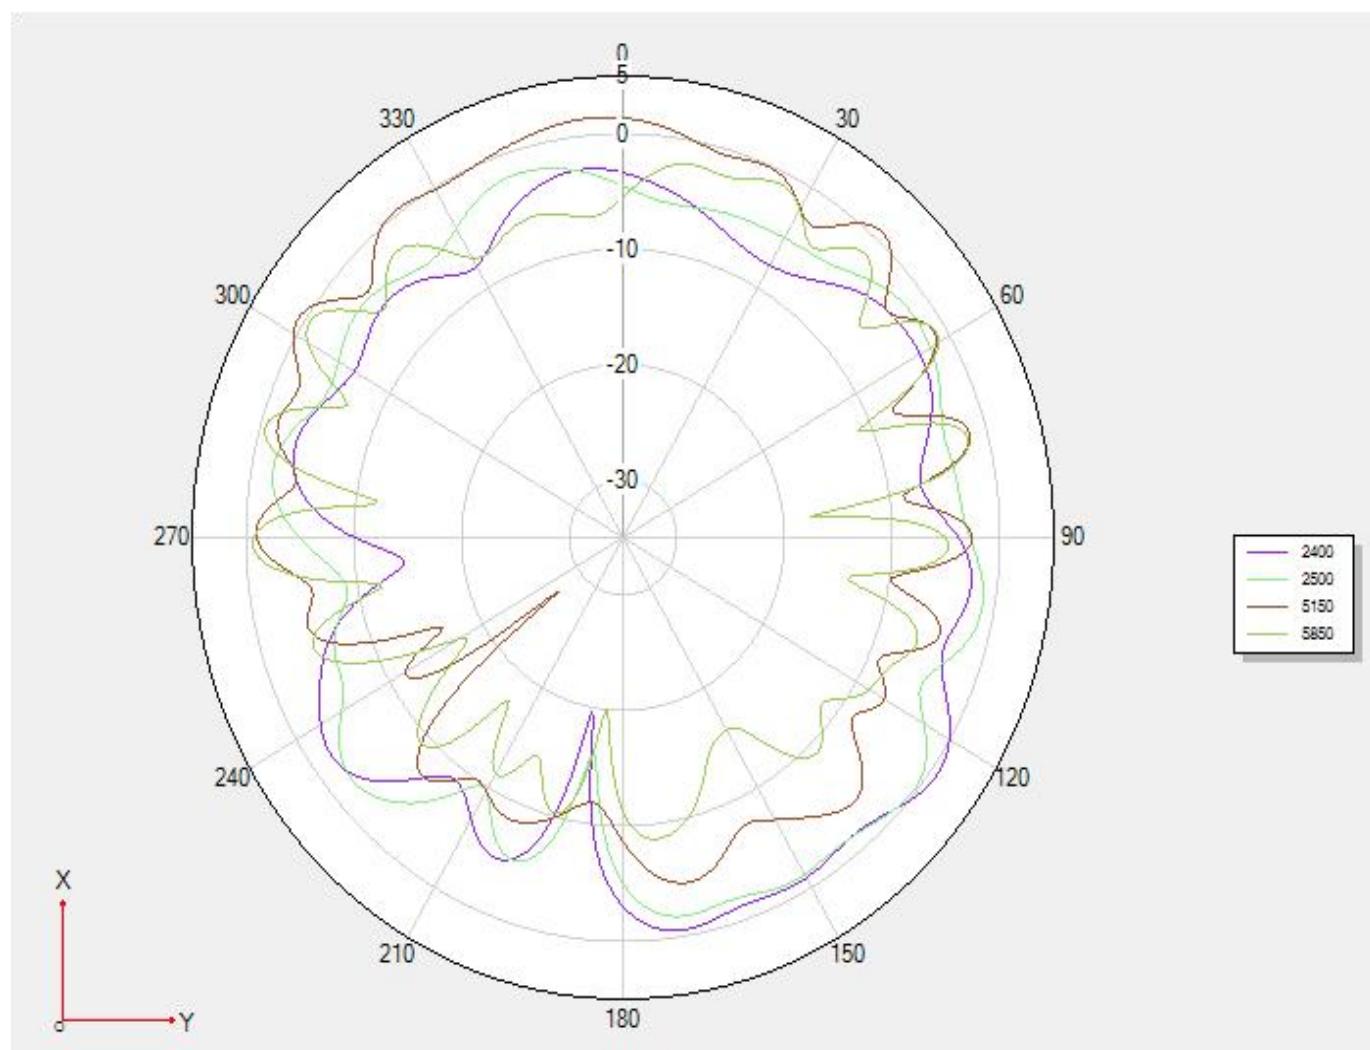

6. Prototype grounding treatment

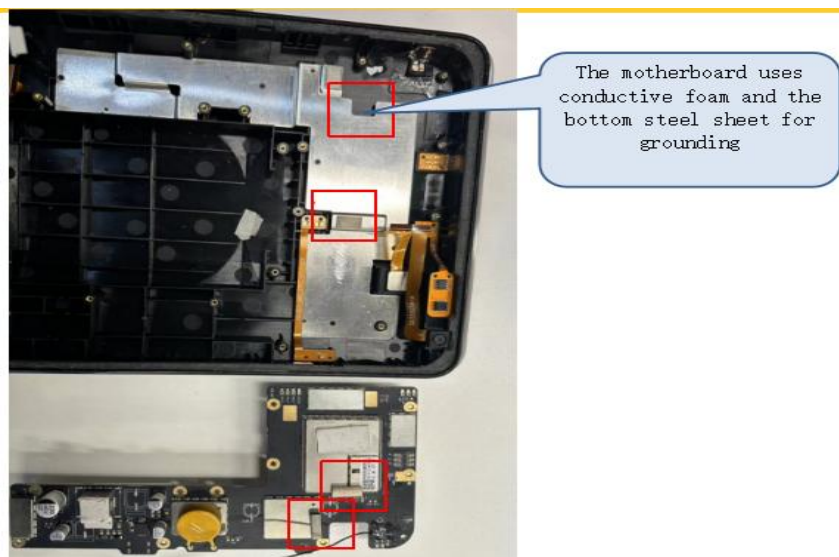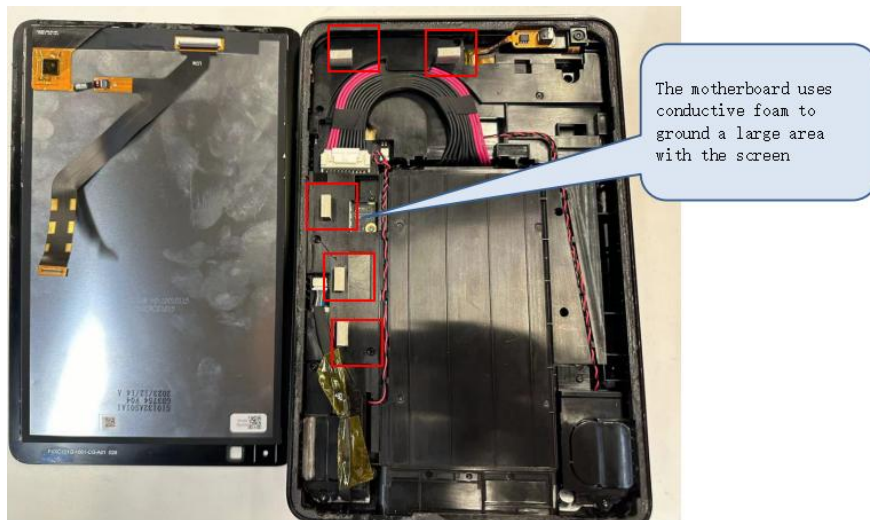

7. Mass production antenna indicators

When the antenna is mass-produced, the standing wave ratio is used as the mass production test standard. According to the differences in the project itself, the following criteria are given:

frequency (MHz)	Mass production standards
2400-2500; 5150--5850MHz	VSWR (Mass production performance) <VSWR(Acknowledge performance)+1

