Shenzhen Huatongwei International Inspection Co., Ltd.



1/F,Bldg 3,Hongfa Hi-tech Industrial Park,Genyu Road,Tianliao,Gongming,Shenzhen,China Phone:86-755-26748019 Fax:86-755-26748089 http://www.szhtw.com.cn



TEST REPORT

Report Reference No.....:: CHTEW19100157 Report verification:

Project No.:: SHT1909043101EW

FCC ID.....:: ZSW-10-026

Applicant's name.....: b mobile HK Limited

Address..... Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak

Street; Kwai Chung; New Territories; Hong Kong.

Manufacturer....: b mobile HK Limited

Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Address.....:

Street; Kwai Chung; New Territories; Hong Kong

Test item description: **Mobile Phone**

Trade Mark: **Bmobile**

W120 Model/Type reference....:

Listed Model(s):

Standard:: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of receipt of test sample.....: Sep 17, 2019

Date of testing..... Sep 18, 2019- Oct 28, 2019

Date of issue.....: Oct 29, 2019

Result....: **PASS**

Compiled by

(Position+Printed name+Signature): File administrators Silvia Li

Supervised by

(Position+Printed name+Signature): Project Engineer Aaron Fang Silvia Li Aaron.Fang

Approved by

(Position+Printed name+Signature): RF Manager Hans Hu

Testing Laboratory Name:: Shenzhen Huatongwei International Inspection Co., Ltd.

1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Address.....:

Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Report No.: CHTEW19100157 Page: 2 of 59 Issued: 2019-10-29

Contents

<u>1.</u>	TEST STANDARDS AND REPORT VERSION	
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	TEST DESCRIPTION	4
<u>3.</u>	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<u>4.</u>	TEST ENVIRONMENT	7
		_
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<u>5.</u>	TEST CONDITIONS AND RESULTS	11
5.1.	Antenna requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Conducted Peak Output Power	15
5.4.	20 dB Bandwidth	19
5.5.	Carrier Frequencies Separation	23
5.6.	Hopping Channel Number	25
5.7.	Dwell Time	27
5.8.	Pseudorandom Frequency Hopping Sequence	34
5.9.	Restricted band (radiated)	35
5.10.	Band edge and Spurious Emissions (conducted)	37
5.11.	Spurious Emissions (radiated)	53
<u>6.</u>	TEST SETUP PHOTOS	58
7.	EXTERANAL AND INTERNAL PHOTOS	59
<u> </u>		3 3

Report No.: CHTEW19100157 Page: 3 of 59 Issued: 2019-10-29

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

<u>FCC Rules Part 15.247:</u> Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devicese

KDB 558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

1.2. Report version

Revision No.	Date of issue	Description
N/A	2019-10-29	Original

Report No.: CHTEW19100157 Page: 4 of 59 Issued: 2019-10-29

2. TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Antenna Requirement	15.203/15.247 (c)	PASS	Kang Yang
AC Power Line Conducted Emissions	15.207	PASS	Kang Yang
Conducted Peak Output Power	15.247 (b)(1)	PASS	Bruce Wong
20 dB Bandwidth	15.247 (a)(1)	PASS	Bruce Wong
Carrier Frequencies Separation	15.247 (a)(1)	PASS	Bruce Wong
Hopping Channel Number	15.247 (a)(1)	PASS	Bruce Wong
Dwell Time	15.247 (a)(1)	PASS	Bruce Wong
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	PASS	Bruce Wong
Restricted band	15.247(d)/15.205	PASS	Barry Chang
Radiated Emissions	15.247(d)/15.209	PASS	Barry Chang

Note: The measurement uncertainty is not included in the test result.

Report No.: CHTEW19100157 Page: 5 of 59 Issued: 2019-10-29

3. **SUMMARY**

3.1. Client Information

Applicant:	b mobile HK Limited
Address:	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.
Manufacturer:	b mobile HK Limited
Address:	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong

3.2. Product Description

Name of EUT:	Mobile Phone
Trade Mark:	Bmobile
Model No.:	W120
Listed Model(s):	-
IMEI Code:	Conducted: 351727110000117 Radiated: 351727110000075
Power supply:	DC 3.7V
Adapter information:	Input:100-240Va.c., 50/60Hz, 0.15A Output:5.0Vd.c., 650mA
Hardware version:	Bmobile_W120_HW_V001
Software version:	Bmobile_W120_TEM_MX_V001
Bluetooth	
Version:	Supported BT4.0+EDR
Modulation:	GFSK, π/4DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PIFA Antenna
Antenna gain:	0dBi

Report No.: CHTEW19100157 Page: 6 of 59 Issued: 2019-10-29

3.3. Operation state

> Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2403
÷	:
39	2441
:	
77	2479
78	2480

> TEST MODE

_			_
For	RF	tact	items:

The engineering test program was provided and enabled to make EUT continuous transmit

For AC power line conducted emissions:

The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.

For Radiated suprious emissions test item:

The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- supplied by the lab

	1	Manufacturer:	/
	,	Model No.:	/
		Manufacturer:	/
		Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

Report No.: CHTEW19100157 Page: 7 of 59 Issued: 2019-10-29

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd. Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377A

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377A.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

Report No.: CHTEW19100157 Page: 8 of 59 Issued: 2019-10-29

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.51 dB	(1)
Conducted spurious emissions 9kHz~40GHz	0.51 dB	(1)
Conducted Disturbance 150kHz~30MHz	3.02 dB	(1)
Radiated Emissions below 1GHz	4.90 dB	(1)
Radiated Emissions above 1GHz	4.96 dB	(1)
Occupied Bandwidth	70 Hz	(1)

⁽¹⁾ This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96

Report No.: CHTEW19100157 Page: 9 of 59 Issued: 2019-10-29

4.5. Equipments Used during the Test

•	Conducted Emission								
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
•	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27		
•	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2019/10/26	2020/10/25		
•	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2019/10/23	2020/10/22		
•	Pulse Limiter	R&S	HTWE0033	ESH3-Z2	100499	2019/10/23	2020/10/22		
•	RF Connection Cable	HUBER+SUHNE R	HTWE0113-02	ENVIROFLE X_142	EF-NM- BNCM-2M	2019/10/23	2020/10/22		
•	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A		

•	Radiated Emission-6th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
•	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2021/09/29	
•	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2019/10/26	2020/10/25	
•	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2017/04/05	2020/04/04	
•	Pre-Amplifer	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2018/11/14	2019/11/13	
•	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2019/8/21	2020/8/20	
•	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX104	501184/4	2019/5/27	2020/5/26	
•	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A	

•	Radiated emissi	on-7th test site				
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
•	Semi-Anechoic Chamber	Albatross projects	SAC-3m-01	N/A	2018/09/30	2021/09/29
•	Spectrum Analyzer	R&S	FSP40	100597	2019/10/26	2020/10/25
•	Horn Antenna	SCHWARZBECK	9120D	1011	2017/03/27	2020/03/26
•	Pre-amplifier	BONN	BLWA0160-2M	1811887	2018/11/14	2019/11/13
•	Pre-amplifier	CD	PAP-0102	12004	2018/11/14	2019/11/13
•	Broadband Pre- amplifier	SCHWARZBECK	BBV 9718	9718-248	2019/04/26	2020/04/25
•	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	2018/11/15	2019/11/14
•	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	2018/11/15	2019/11/14
•	Test Software	Audix	E3	N/A	N/A	N/A
•	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
•	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

Report No.: CHTEW19100157 Page: 10 of 59 Issued: 2019-10-29

•	RF Conducted Method									
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)			
•	Signal and spectrum Analyzer	R&S	HTWE0242	FSV40	100048	2018/10/28	2019/10/27			
•	Spectrum Analyzer	Agilent	HTWE0286	N9020A	MY5051018 7	2018/10/8	2020/10/7			
•	Radio communication tester	R&S	HTWE0287	CMW500	137688-Lv	2019/10/26	2020/10/25			
•	Test software	Tonscend	N/A	JS1120	N/A	N/A	N/A			

Report No.: CHTEW19100157 Page: 11 of 59 Issued: 2019-10-29

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of anantenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Test Result:

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



Report No.: CHTEW19100157 Page: 12 of 59 Issued: 2019-10-29

5.2. Conducted Emissions (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Fraguency range (MLIT)	Limit (d	BuV)
Frequency range (MHz)	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST CONFIGURATION

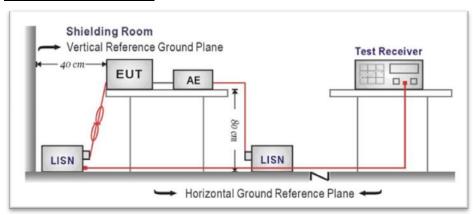

TEST PROCEDURE


- 1. The EUT was setup according to ANSI C63.10:2013 requirements.
- 2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
- 3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
- 4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
- 5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor,was individually connected through a LISN to the input power source.
- 6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- 7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
- 8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS


Note:

- 1) Transd= Cable lose + Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit Level

Report No.: CHTEW19100157 Page: 13 of 59 Issued: 2019-10-29

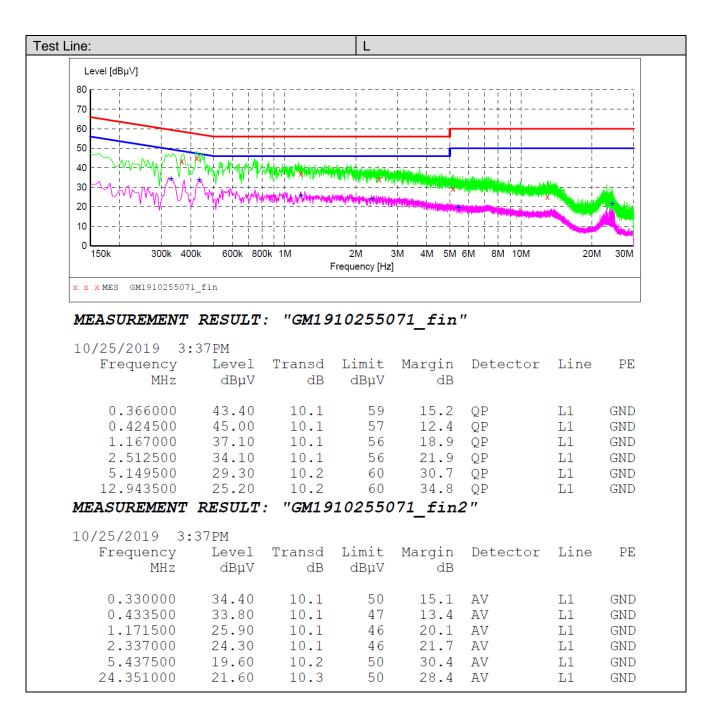

Report No.: CHTEW19100157 Page: 14 of 59 Issued: 2019-10-29

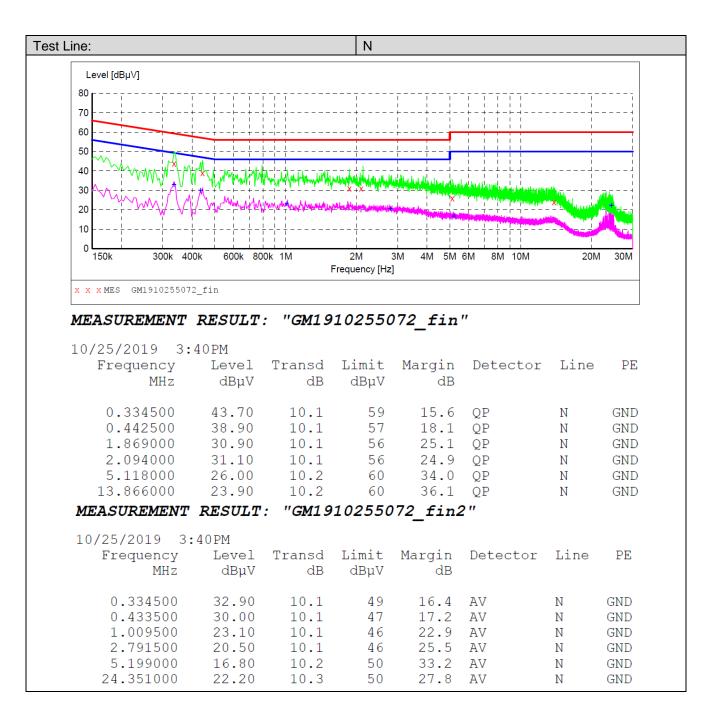

Report No.: CHTEW19100157 Page: 15 of 59 Issued: 2019-10-29


5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1):

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

TEST CONFIGURATION

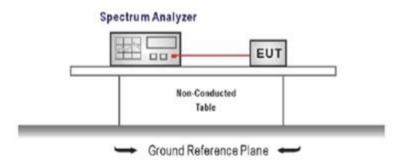

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- 3. Use the following spectrum analyzer settings: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel RBW≥ the 20 dB bandwidth of the emission being measured, VBW≥RBW Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Modulation type	Channel	Peak Output power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
	00	3.68	3.60		
GFSK	39	4.20	4.11	≤ 30.00	Pass
	78	4.40	4.30		
	00	3.56	3.00		
π/4DQPSK	39	4.05	3.44	≤ 21.00	Pass
	78	4.21	3.86		
	00	3.85	3.31		
8DPSK	39	4.37	3.73	≤ 21.00	Pass
	78	4.60	3.86		

Report No.: CHTEW19100157 Page: 16 of 59 Issued: 2019-10-29

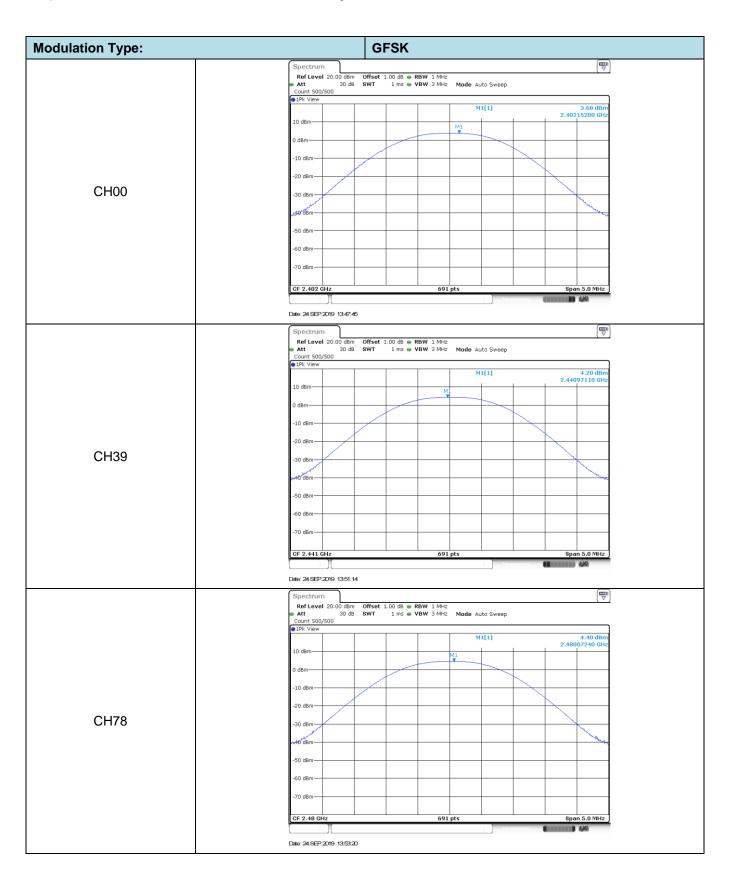

Report No.: CHTEW19100157 Page: 17 of 59 Issued: 2019-10-29



Report No.: CHTEW19100157 Page: 18 of 59 Issued: 2019-10-29




Report No.: CHTEW19100157 Page: 19 of 59 Issued: 2019-10-29

5.4. 20 dB Bandwidth

LIMIT

N/A

TEST CONFIGURATION

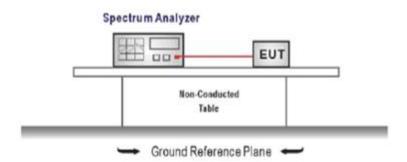

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- 3. Use the following spectrum analyzer settings: Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

Modulation type	Channel	20 dB Bandwidth (MHz)	Limit (MHz)	Result
	00	0.93		
GFSK	39	0.93	-	Pass
	78	0.93		
	00	1.30		
π/4DQPSK	39	1.30	-	Pass
	78	1.29		
8DPSK	00	1.29		
	39	1.29	-	Pass
	78	1.29		


Report No.: CHTEW19100157 Page: 20 of 59 Issued: 2019-10-29

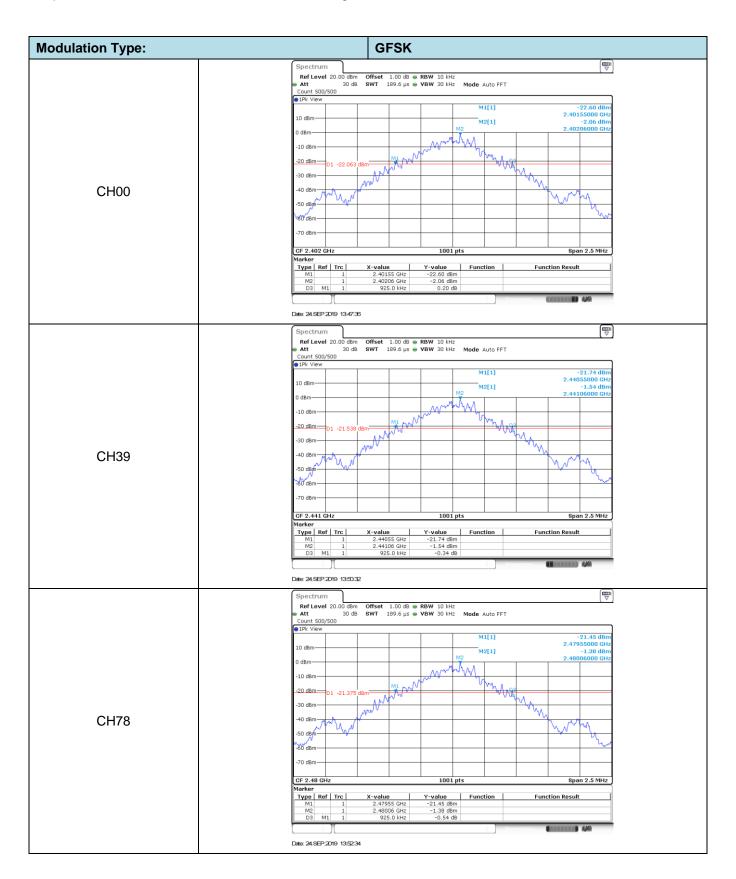

Report No.: CHTEW19100157 Page: 21 of 59 Issued: 2019-10-29

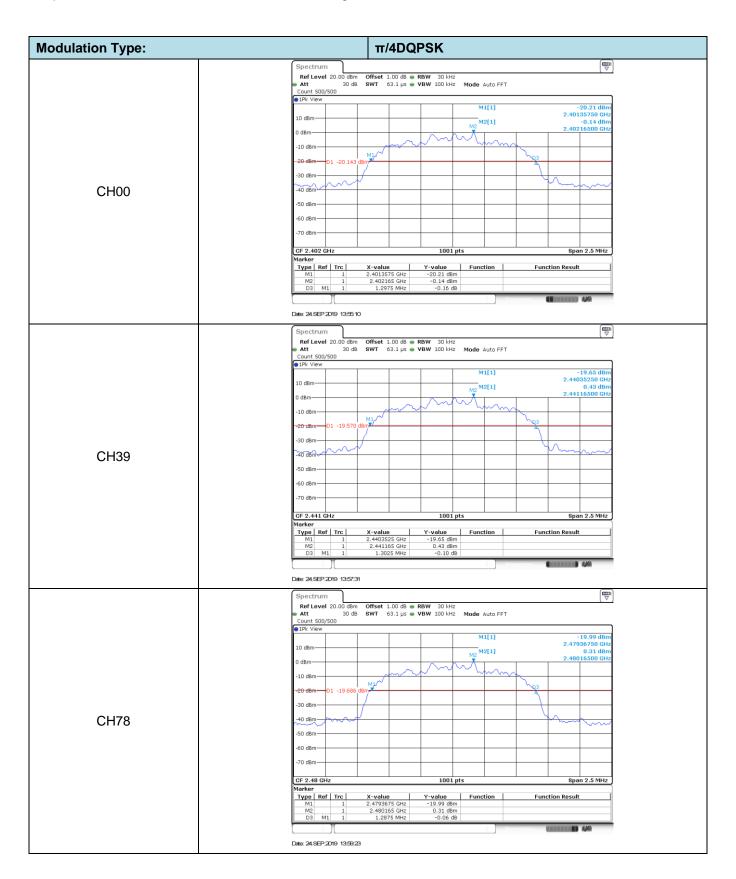

Report No.: CHTEW19100157 Page: 22 of 59 Issued: 2019-10-29

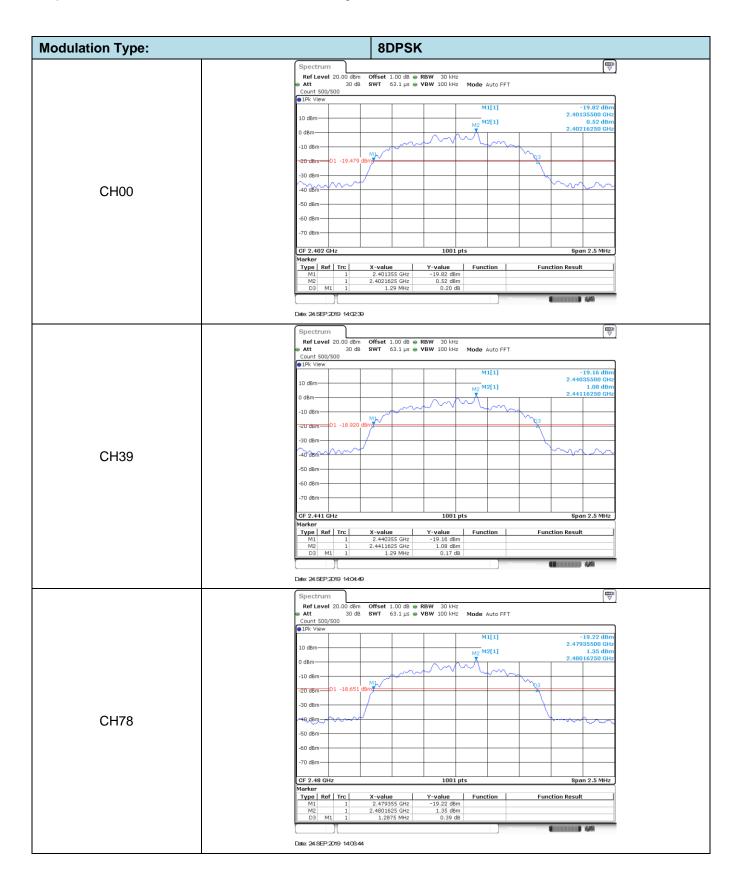

Report No.: CHTEW19100157 Page: 23 of 59 Issued: 2019-10-29

5.5. Carrier Frequencies Separation


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively,

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST CONFIGURATION

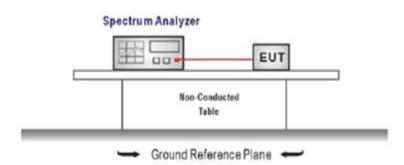

TEST PROCEDURE

- The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peaks of two adjacent channels
 - RBW ≥ 1% of the span, VBW ≥ RBW
 - Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS


⊠ Passed	■ Not Applicable
∠ i assca	

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz) *	Result
GFSK	39	1.00	≥0.93	Pass
π/4DQPSK	39	1.00	≥0.87	Pass
8DPSK	39	1.00	≥0.86	Pass

Note:

^{*:} GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the section 5.4. $\pi/4DQPSK$ limit = 2/3 * The maximum 20 dB Bandwidth for $\pi/4DQPSK$ modulation on the section 5.4. 8DPSK limit = 2/3 * The maximum 20 dB Bandwidth for 8DPSK modulation on the section 5.4

Report No.: CHTEW19100157 Page: 24 of 59 Issued: 2019-10-29

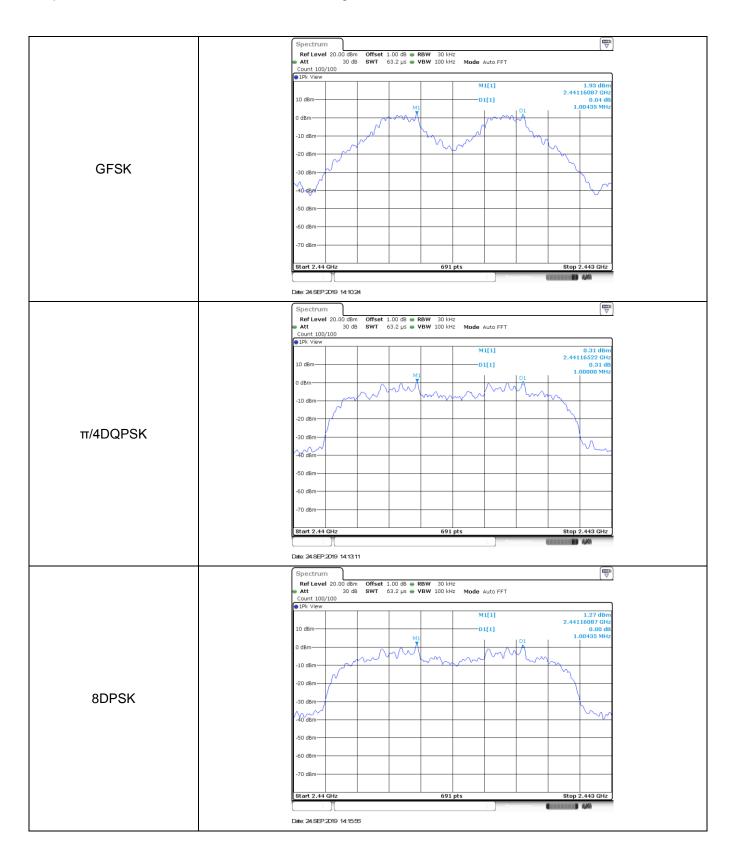


Report No.: CHTEW19100157 Page: 25 of 59 Issued: 2019-10-29

5.6. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

TEST CONFIGURATION

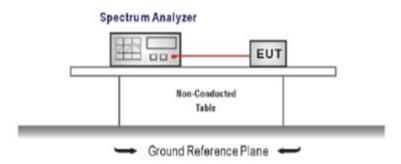

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- 3. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW ≥ 1% of the span, VBW ≥ RBW

Sweep = auto, Detector function = peak, Trace = max hold

4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Modulation type	Channel number	Limit	Result
GFSK	79		
π/4DQPSK	79	≥15.00	Pass
8DPSK	79		

Report No.: CHTEW19100157 Page: 26 of 59 Issued: 2019-10-29

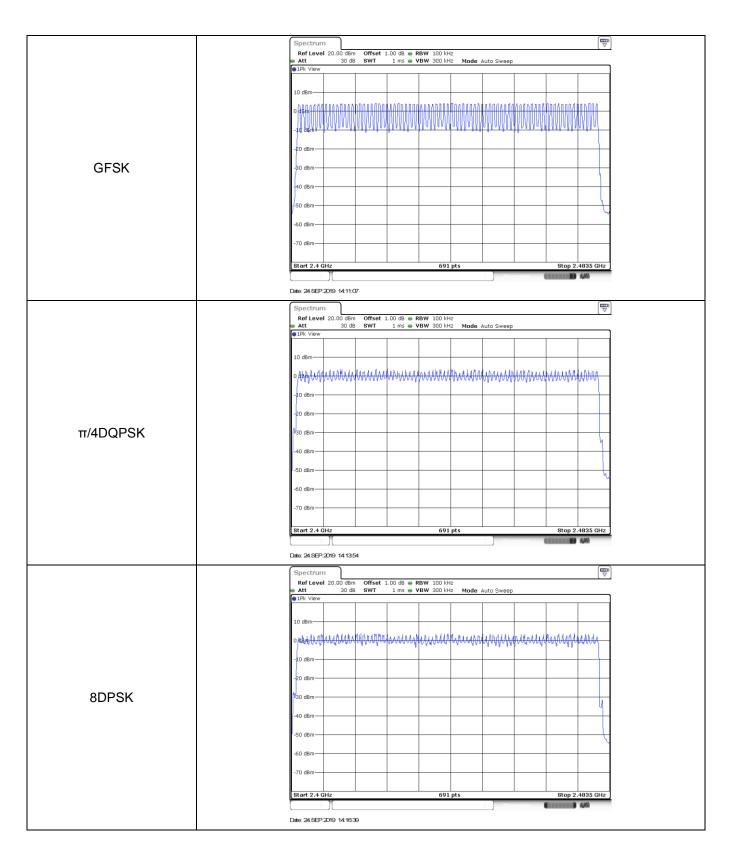


Report No.: CHTEW19100157 Page: 27 of 59 Issued: 2019-10-29

5.7. Dwell Time

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST CONFIGURATION

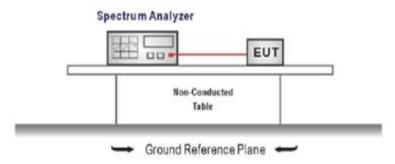

TEST PROCEDURE

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- 3. Use the following spectrum analyzer settings:
 - Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW \geq RBW
 - Sweep = as necessary to capture the entire dwell time per hopping channel,
 - Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

Modulation type	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell time (Second)	Limit (Second)	Result
	DH1	0.37	314.00	0.12		
GFSK	DH3	1.63	158.00	0.26	≤ 0.40	Pass
	DH5	2.87	111.00	0.32		
	2DH1	0.38	316.00	0.12		
π/4DQPSK	2DH3	1.63	166.00	0.27	≤ 0.40	Pass
	2DH5	2.88	101.00	0.29		
	3DH1	0.38	315.00	0.12		
8DPSK	3DH3	1.63	158.00	0.26	≤ 0.40	Pass
	3DH5	2.88	111.00	0.32		


Report No.: CHTEW19100157 Page: 28 of 59 Issued: 2019-10-29

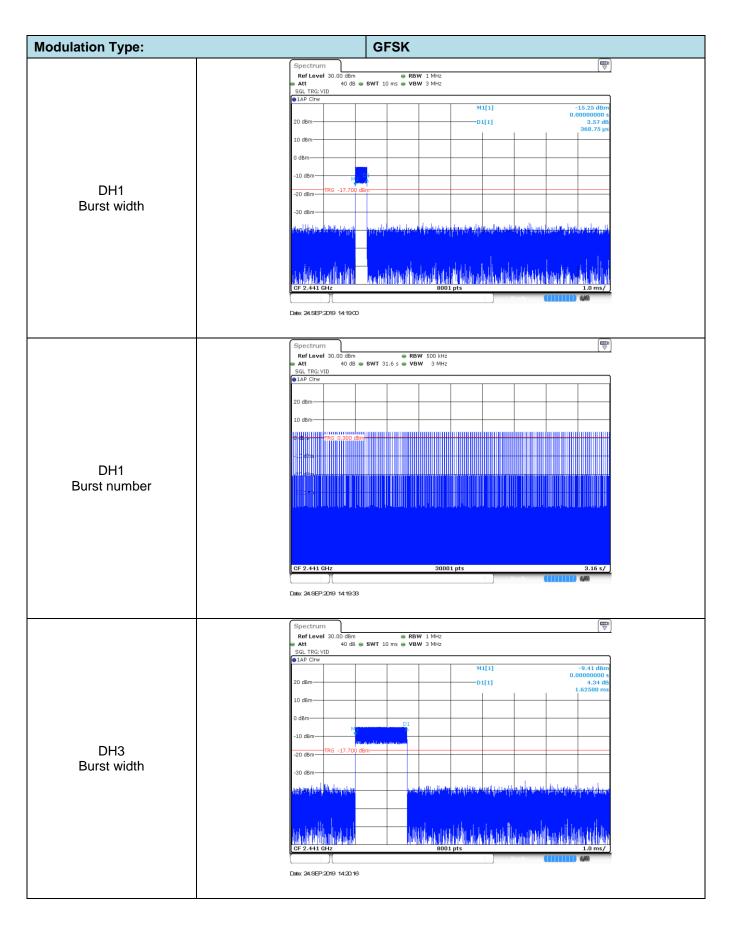


Report No.: CHTEW19100157 Page: 29 of 59 Issued: 2019-10-29

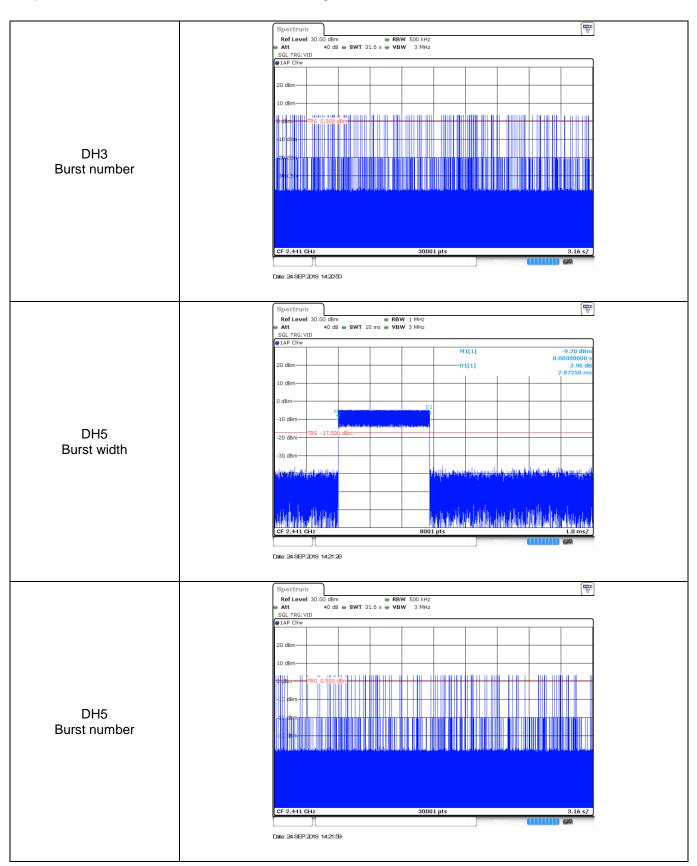


Report No.: CHTEW19100157 Page: 30 of 59 Issued: 2019-10-29

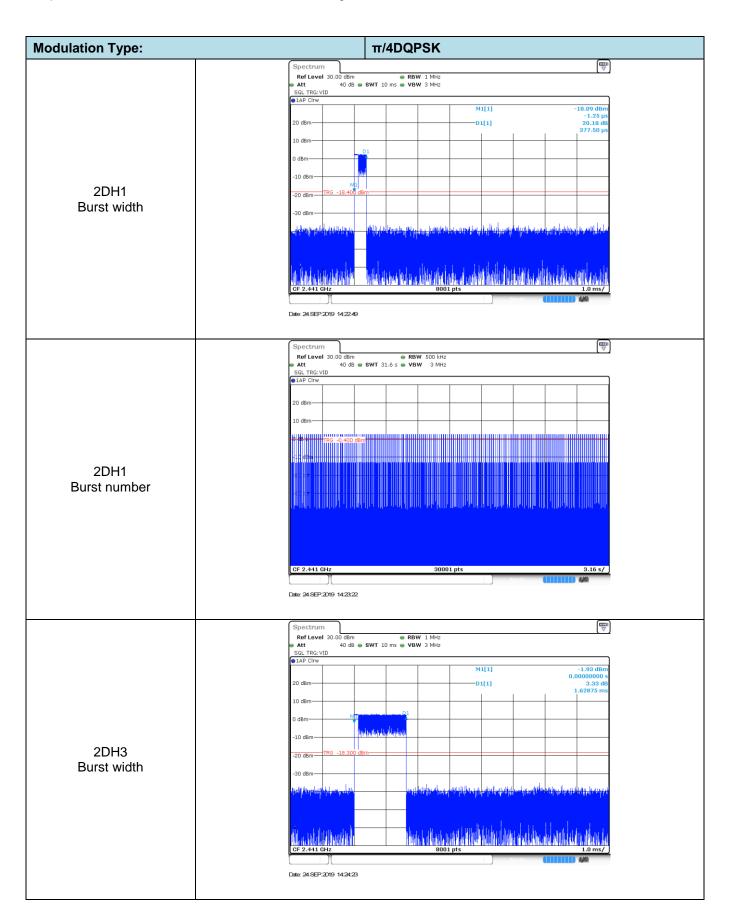


Report No.: CHTEW19100157 Page: 31 of 59 Issued: 2019-10-29

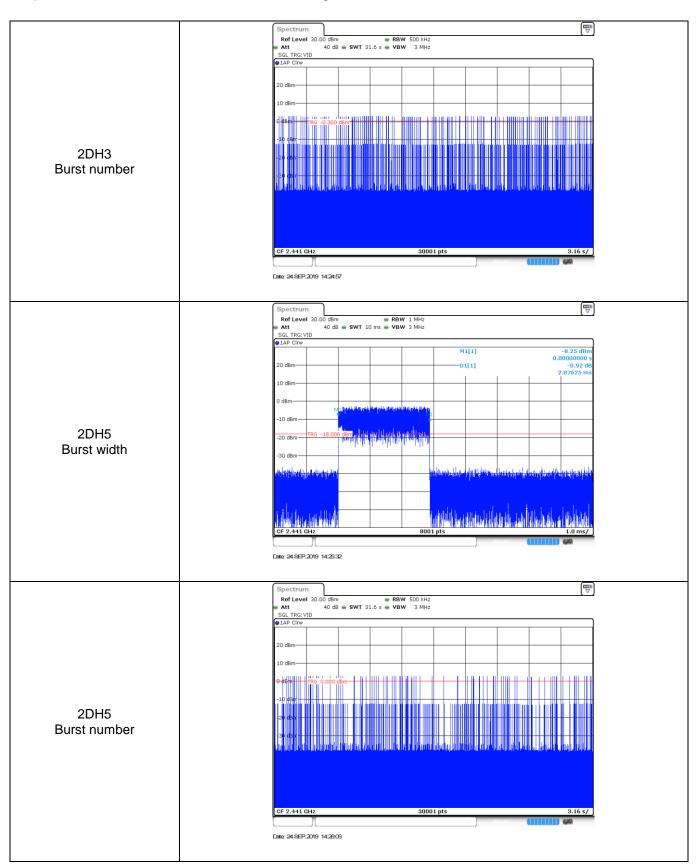

Report No.: CHTEW19100157 Page: 32 of 59 Issued: 2019-10-29

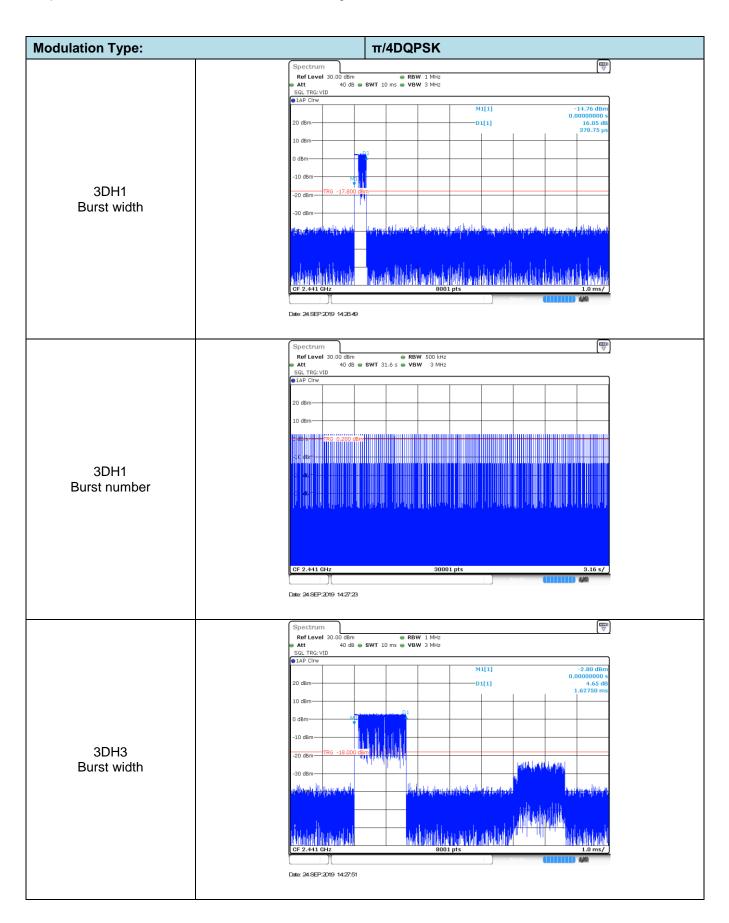

Report No.: CHTEW19100157 Page: 33 of 59 Issued: 2019-10-29

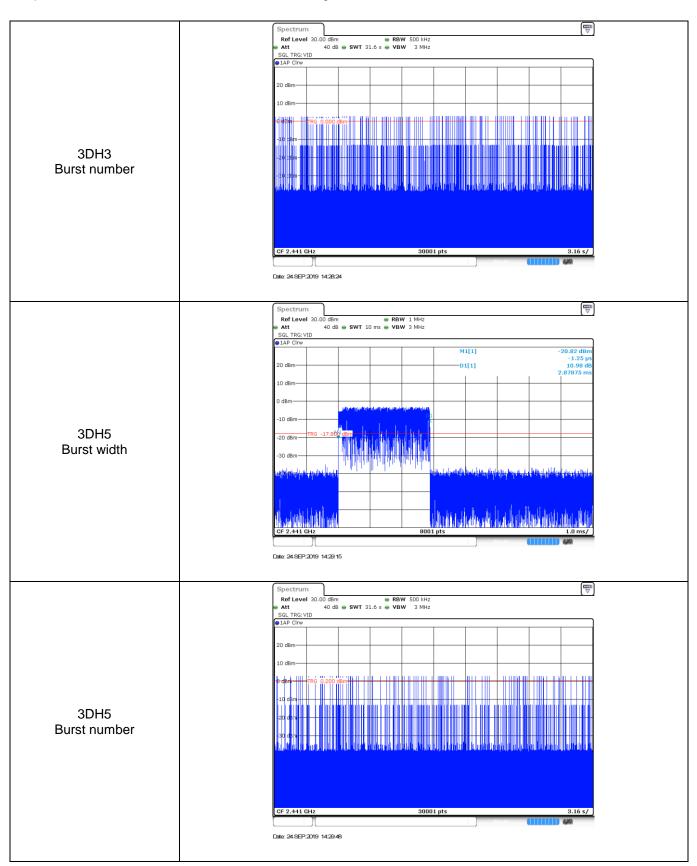

Report No.: CHTEW19100157 Page: 34 of 59 Issued: 2019-10-29

5.8. Pseudorandom Frequency Hopping Sequence


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems shall have hopping channel carrier fre-quencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Al-ternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier fre-quencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to chan-nel frequencies that are selected at the system hopping rate from a pseudo ran-domly ordered list of hopping fre-quencies. Each frequency must be used equally on the average by each trans-mitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their cor-responding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nice-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the friststage. The sequence begins with the frist one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An explame of pseudorandom frequency hopping sequence as follows:



Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

Report No.: CHTEW19100157 Page: 35 of 59 Issued: 2019-10-29


5.9. Restricted band (radiated)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

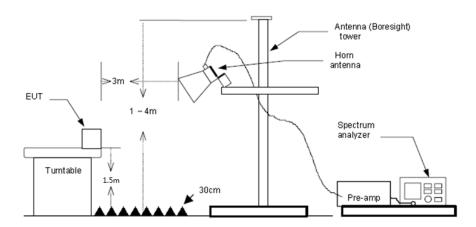

TEST PROCEDURE

- The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3. The EUT waspositioned such that the distance from antenna to the EUT was 3 meters.
- 4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. Thisis repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- The receiver set as follow: RBW=1 MHz, VBW=3 MHz Peak detector for Peak value RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Note:

- 1) Final level= Read level + Factor
- Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report.
- 3) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

Report No.: CHTEW19100157 Page: 36 of 59 Issued: 2019-10-29

_	_						
Test chann	nel:			CH00			
Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
2310.000	52.04	-2.34	49.70	74.00	24.30	Horizontal	PK
2390.000	52.04	-2.3 4 -2.41	49.70	74.00	24.04	Horizontal	PK
2310.000	52.04	-27.21	24.83	54.00	29.17	Horizontal	AV
2390.000	52.37	-27.21	25.09	54.00	28.91	Horizontal	AV
Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
2310.000	52.62	-2.34	50.28	74.00	23.72	Vertical	PK
2390.000	51.83	-2.41	49.42	74.00	24.58	Vertical	PK
2310.000	52.62	-27.21	25.41	54.00	28.59	Vertical	AV
2390.000	51.83	-27.28	24.55	54.00	29.45	Vertical	AV
Test chann	nel:			CH78			
Freq.	Reading	Factor	Level	Limit	Margin		
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	Polarity	Detector
2483.500	60.51	-2.15	58.36	74.00	15.64	Horizontal	PK
2500.000	52.62	-2.10	50.52	74.00	23.48	Horizontal	PK
2483.500	60.51	-27.02	33.49	54.00	20.51	Horizontal	AV
2500.000	52.62	-26.97	25.65	54.00	28.35	Horizontal	AV
Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector
2483.500	57.45	-2.15	55.30	74.00	18.70	Vertical	PK
2500.000	52.29	-2.10	50.19	74.00	23.81	Vertical	PK
2483.500	57.45	-27.02	30.43	54.00	23.57	Vertical	AV
2500.000	52.29	-26.97	25.32	54.00	28.68	Vertical	AV


Report No.: CHTEW19100157 Page: 37 of 59 Issued: 2019-10-29

5.10. Band edge and Spurious Emissions (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

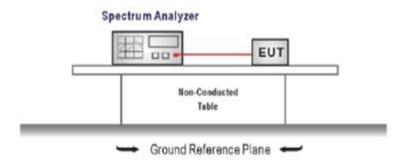

TEST PROCEDURE


- 1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously
- Use the following spectrum analyzer settings:
 RBW = 100 kHz, VBW ≥ RBW, scan up through 10th harmonic.
 Sweep = auto, Detector function = peak, Trace = max hold
- 4. Measure and record the results in the test report.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS


 Report No.: CHTEW19100157 Page: 38 of 59 Issued: 2019-10-29

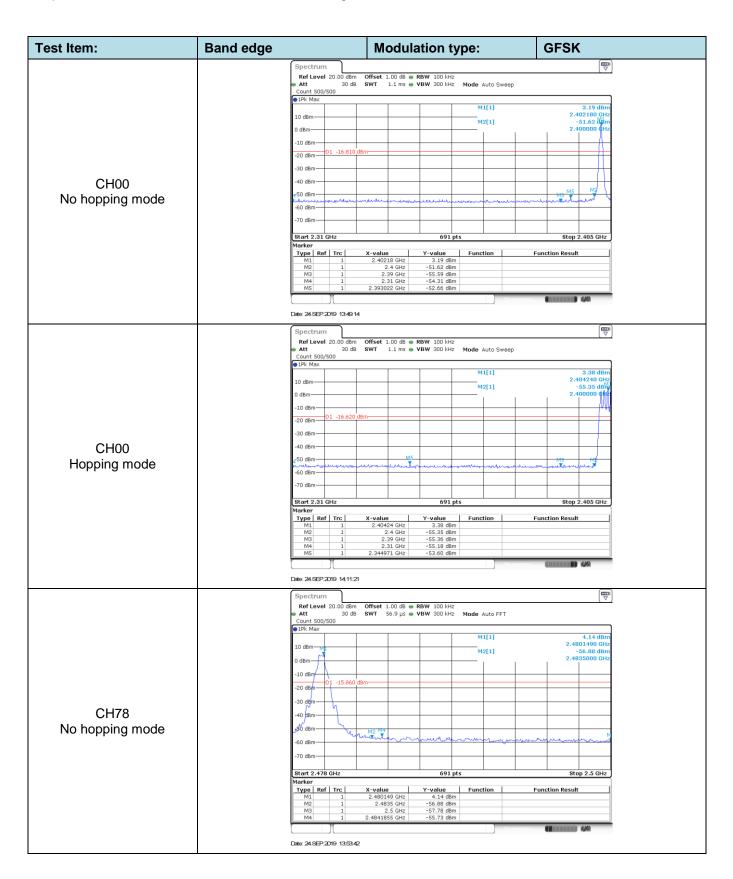


Report No.: CHTEW19100157 Page: 39 of 59 Issued: 2019-10-29

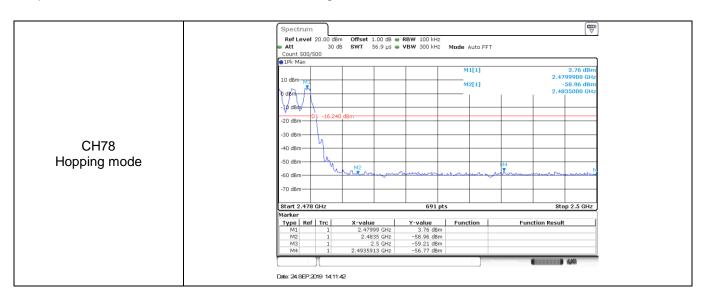


Report No.: CHTEW19100157 Page: 40 of 59 Issued: 2019-10-29

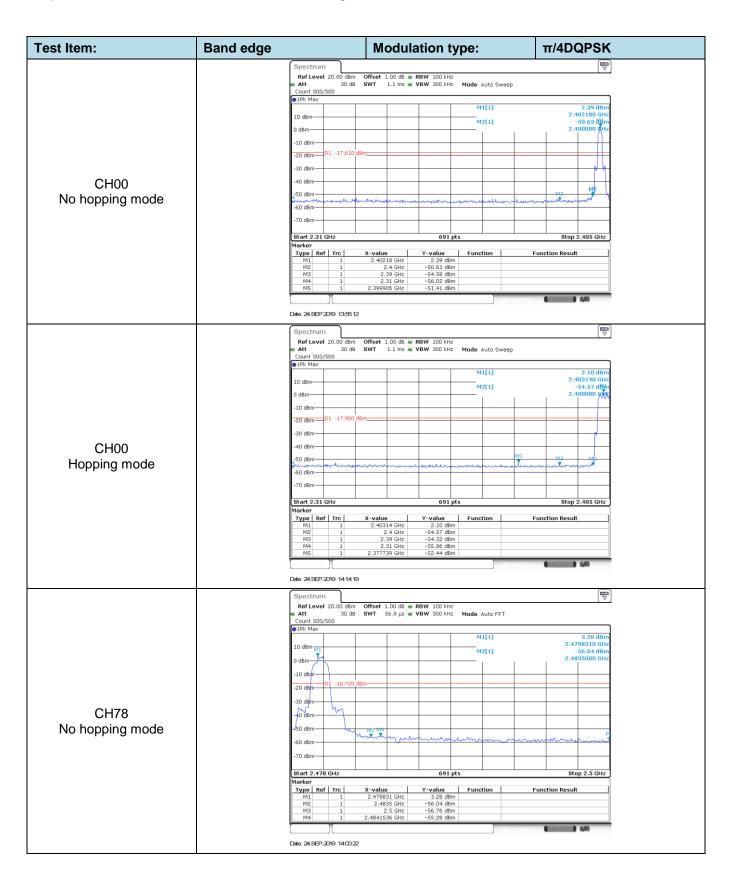


Report No.: CHTEW19100157 Page: 41 of 59 Issued: 2019-10-29

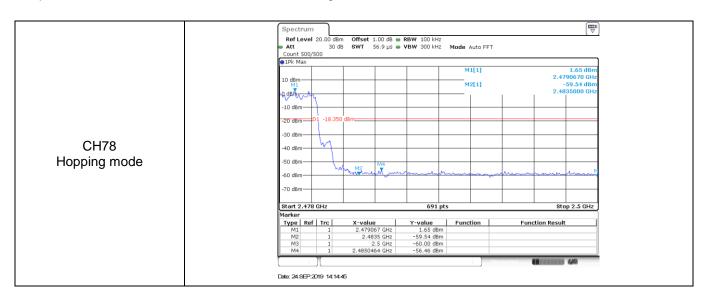


Report No.: CHTEW19100157 Page: 42 of 59 Issued: 2019-10-29

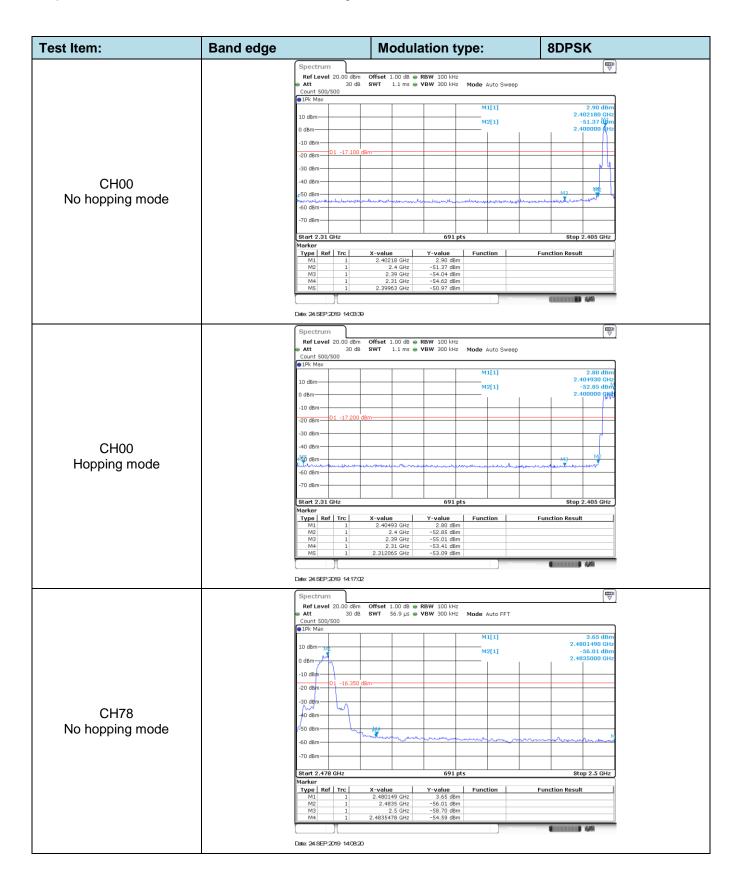


Report No.: CHTEW19100157 Page: 43 of 59 Issued: 2019-10-29

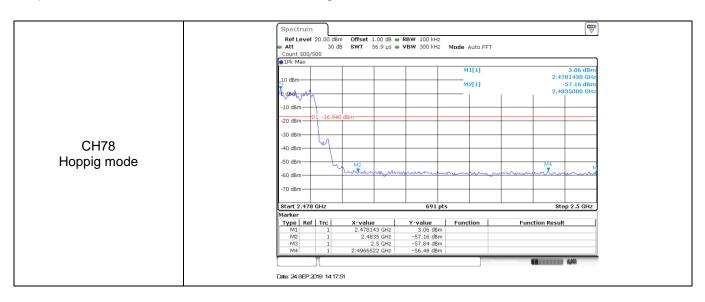


Report No.: CHTEW19100157 Page: 44 of 59 Issued: 2019-10-29

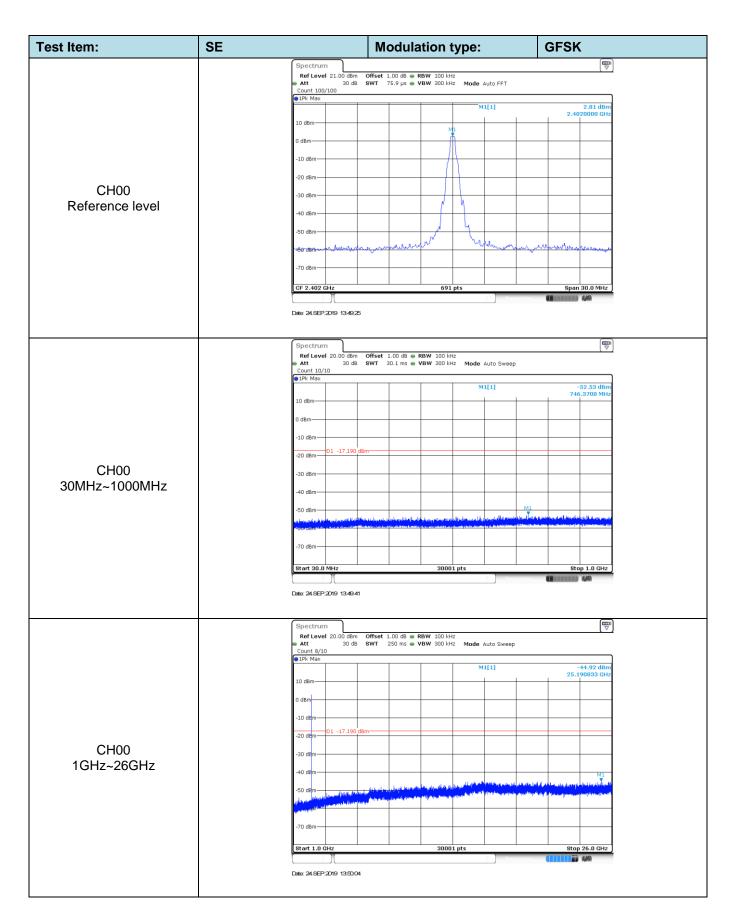


Report No.: CHTEW19100157 Page: 45 of 59 Issued: 2019-10-29

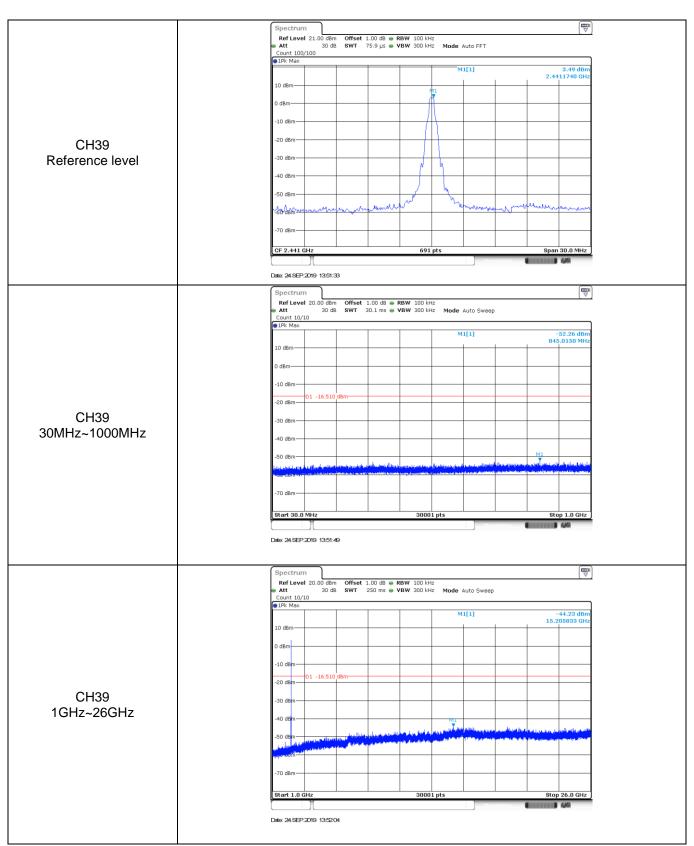


Report No.: CHTEW19100157 Page: 46 of 59 Issued: 2019-10-29

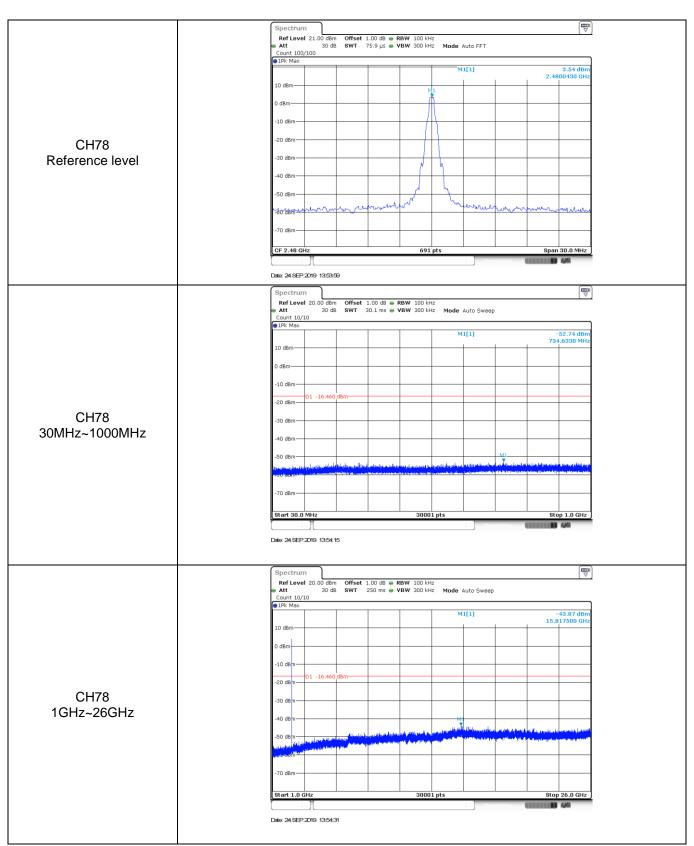


Report No.: CHTEW19100157 Page: 47 of 59 Issued: 2019-10-29

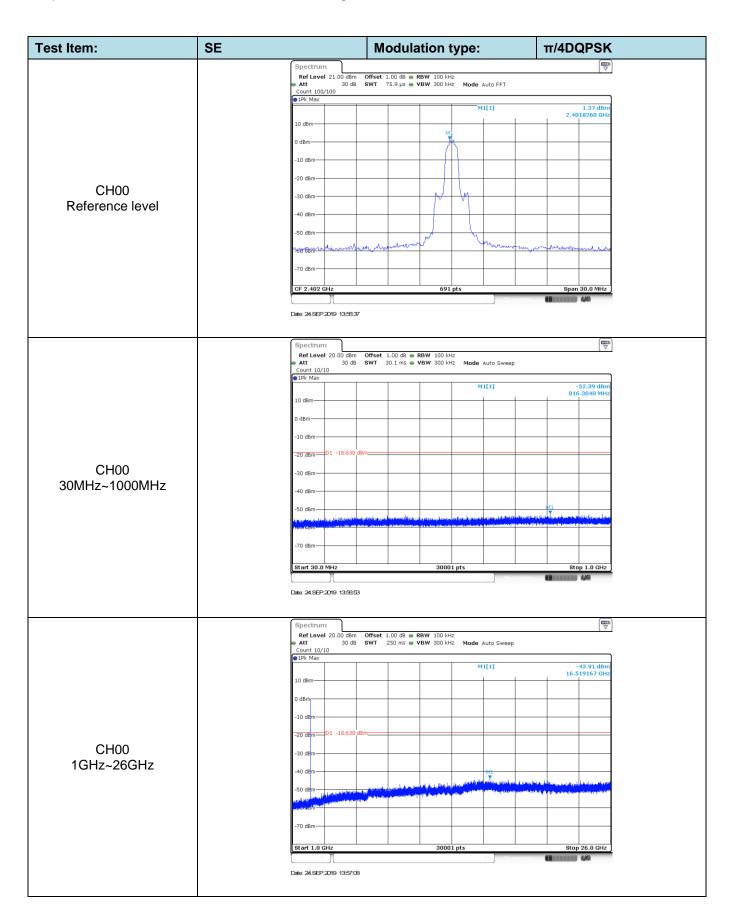


Report No.: CHTEW19100157 Page: 48 of 59 Issued: 2019-10-29

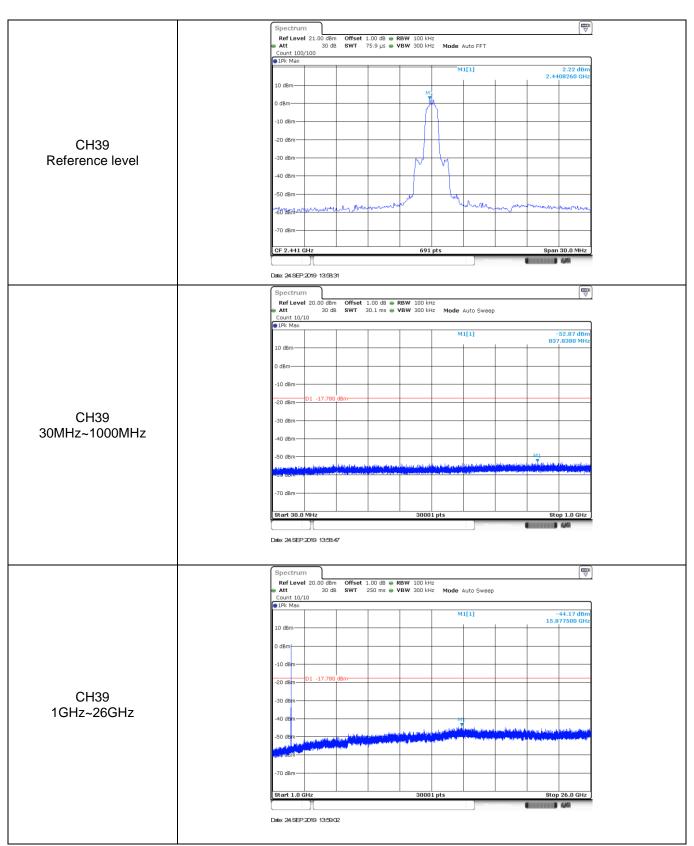


Report No.: CHTEW19100157 Page: 49 of 59 Issued: 2019-10-29

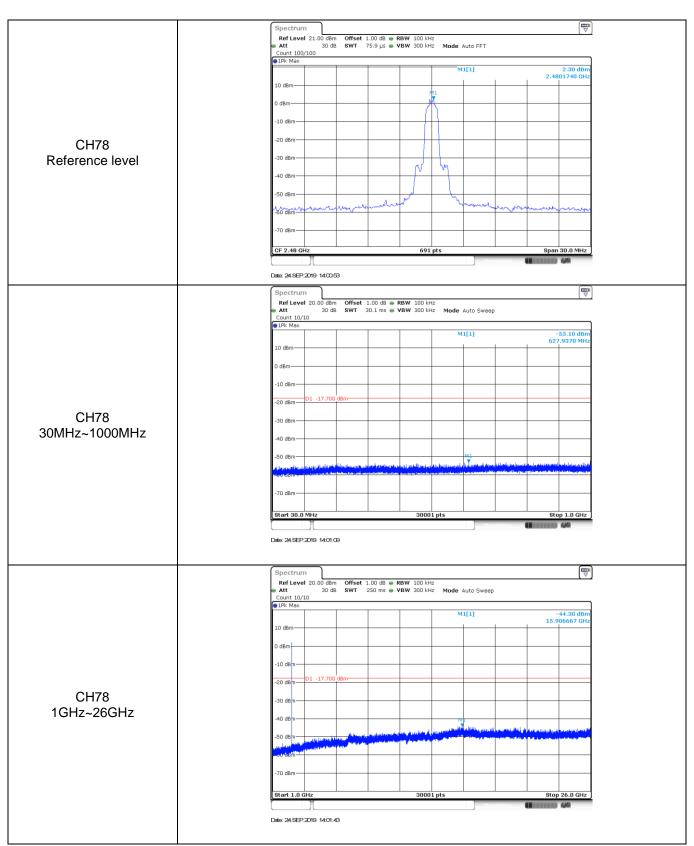


Report No.: CHTEW19100157 Page: 50 of 59 Issued: 2019-10-29

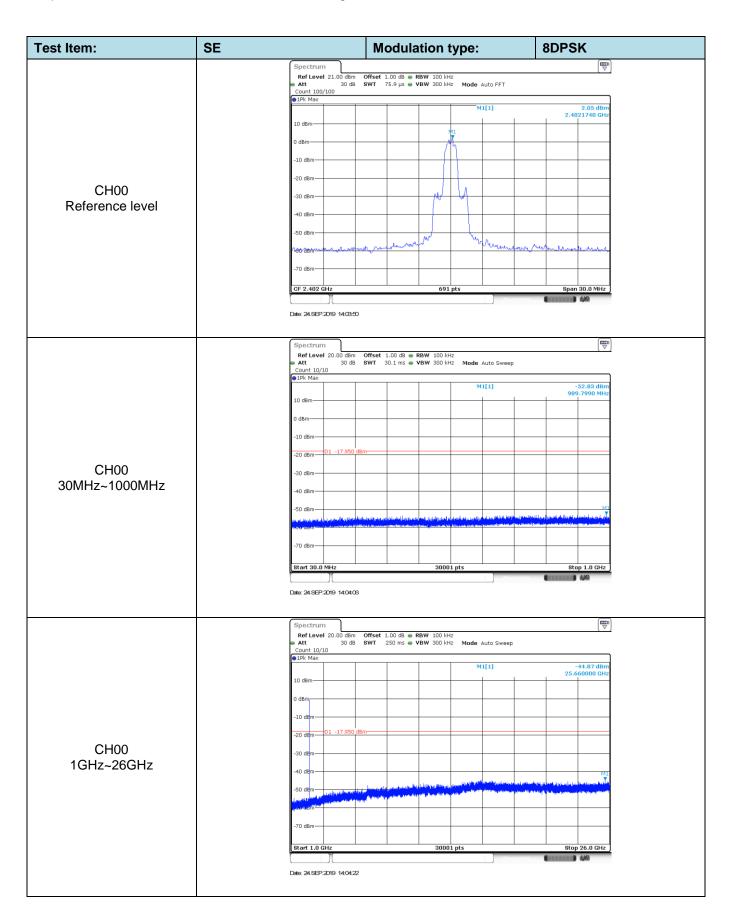

Report No.: CHTEW19100157 Page: 51 of 59 Issued: 2019-10-29

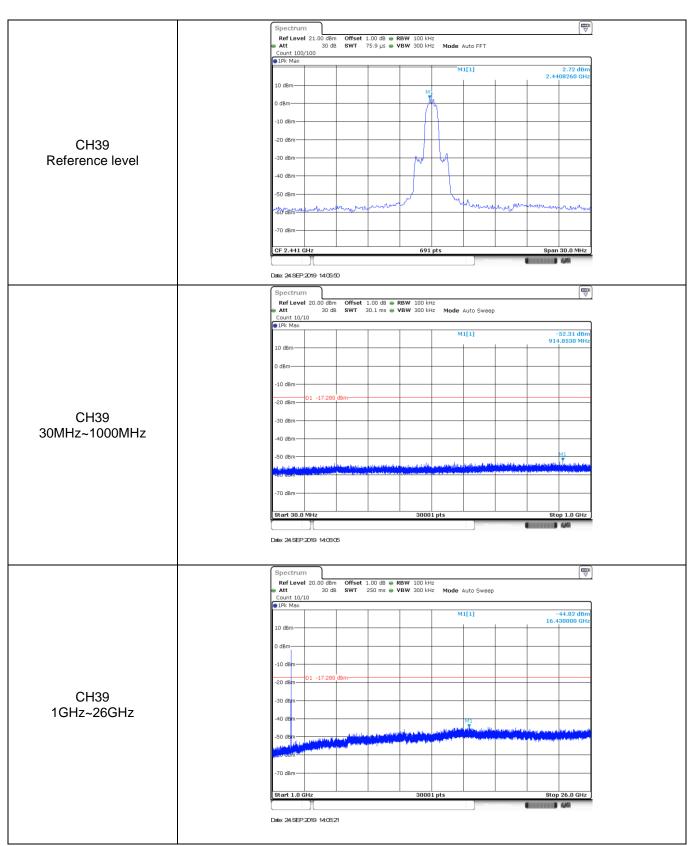

Report No.: CHTEW19100157 Page: 52 of 59 Issued: 2019-10-29

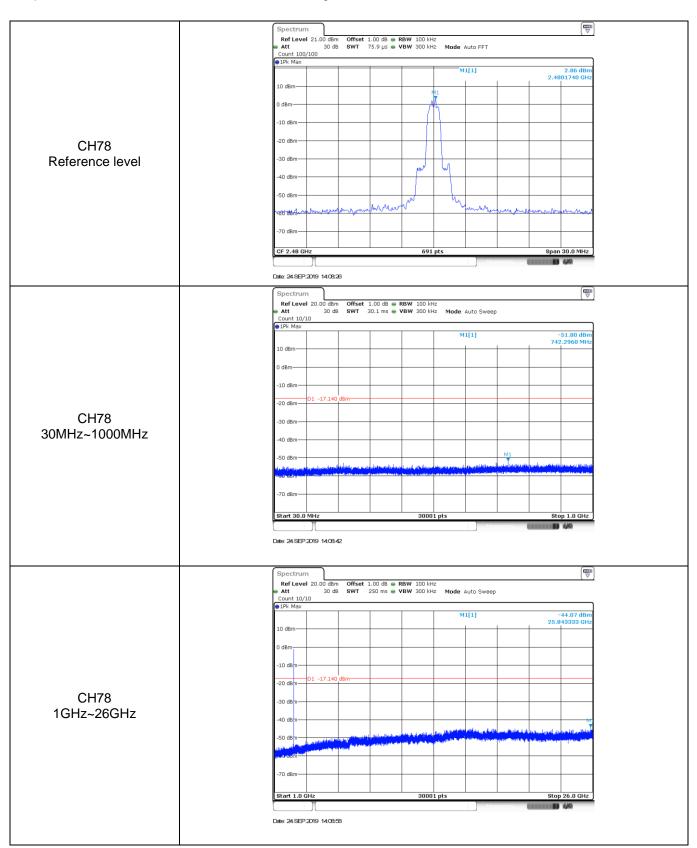

Report No.: CHTEW19100157 Page: 53 of 59 Issued: 2019-10-29

5.11. Spurious Emissions (radiated)


<u>LIMIT</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value				
30 MHz ~ 88 MHz	40.00	Quasi-peak				
88 MHz ~ 216 MHz	43.50	Quasi-peak				
216 MHz ~ 960 MHz	46.00	Quasi-peak				
960 MHz ~ 1 GHz	54.00	Quasi-peak				
Above 1 GHz	54.00	Average				
Above I GIIZ	74.00	Peak				

TEST CONFIGURATION

➤ Below 30 MHz

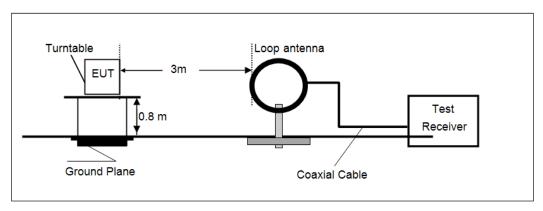


> 30 MHz ~1000 MHz

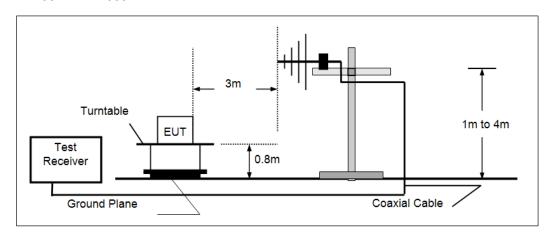

Above 1 GHz

Report No.: CHTEW19100157 Page: 54 of 59 Issued: 2019-10-29

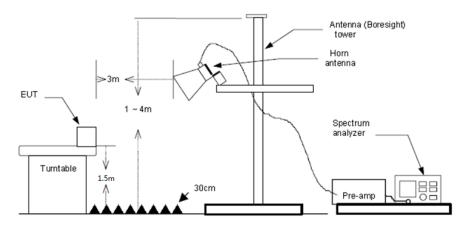

TEST PROCEDURE

- 1. The EUT was tested according to ANSI C63.10:2013.
- The EUT is placed on a turn table with 0.8 meter above ground for below 1GHz, 1.5 meter above ground for above 1GHz.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
- 4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
- 5. Set to the maximum power setting and enable the EUT transmit continuously.
- 6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(3) From 1 GHz to 10th harmonic:

RBW=1 MHz, VBW=3 MHz Peak detector for Peak value RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Note:

- 1) Final Level = Receiver Read level + Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3) Below 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation High channel which it was worst case, so only the worst case's data on the test report.
- 4) Above 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report
- 5) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.


> 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Report No.: CHTEW19100157 Page: 55 of 59 Issued: 2019-10-29

> 30 MHz ~ 1 GHz

rization:					Vertical				
Level [dBµV/m]									
80									
70	-++	++					++	i i i i i	
60							· · · · · · · · · · · · · · · · · · ·	-+	
50				!		i i			
		· ·		Ţ			TT		
40	1 1 1						<u> </u>	and the state of t	
30							the state of the s	 	
20	X		X		v~~~~		‡ <u></u>	- +	
		+ 1 1		- 1			<u> </u>		
10			. – – – – – .			1	1 1		
		- -] 			
	50M 60M 70I	M 100		200		300M 4	00M 500M 6	00M 800M 1G	
0 30M 40M		M 100		200 Frequency [Hz		300M 4	00M 500M 6	00M 800M 1G	
		M 100				300M 4	00M 500M 6	00M 800M 1G	
0 30M 40M	256024_red		F	Frequency [Hz		300M 4	00M 500M 6	00M 800M 1G	
0 30M 40M x x x MES GM1910 MEASUREMENT	256024_red		F	Frequency [Hz		300M 4	00M 500M 6	00M 800M 1G	
0 30M 40M x x x MES GM1910 MEASUREMENT 10/25/2019 1	256024_red **RESULT: 1:14AM	"GM19	1025602	requency [Hz	z]				
0 30M 40M x x x MES GM1910 MEASUREMENT	256024_red		F	Frequency [Hz				00M 800M 1G	
0 30M 40M EXXXMES GM1910 MEASUREMENT 10/25/2019 1 Frequency MHz	PESULT: 1:14AM Level dBμV/m	Transd dB	1025602 Limit dBμV/m	requency [Hz 24_red" Margin dB	Det.	Height cm	Azimuth deg	Polarization	
0 30M 40M 20 30M 40M 20 30M 40M 20 30M 20M 20M 20M 20M 20M 20M 20M 20M 20M 2	256024_red **RESULT: 1:14AM	"GM19 Transd dB -8.8	1025602 Limit dBµV/m 40.0	Prequency [Hz 24_red" Margin dB 13.6	Det.	Height cm	Azimuth deg	Polarization VERTICAL	
0 30M 40M 200 30M 40M 200 30M 40M 200 30M 40M 200 30M	256024_red **RESULT: 1:14AM	Transd dB -8.8 -4.7	1025602 Limit dBµV/m 40.0 40.0	24_red" Margin dB 13.6 17.7	Det. QP QP	Height cm	Azimuth deg 1.00 353.00	Polarization VERTICAL VERTICAL	
0 30M 40M 200 30M 40M 200 30M 40M 200 30M 40M 200 30M	PESULT: 1:14AM Level dBμV/m 26.40 22.30 21.90	Transd dB -8.8 -4.7 -6.3	1025602 Limit dBµV/m 40.0 40.0 43.5	24_red" Margin dB 13.6 17.7 21.6	Det. QP QP QP QP	Height cm 100.0 100.0 100.0	Azimuth deg 1.00 353.00 0.00	Polarization VERTICAL VERTICAL VERTICAL	
0 30M 40M 200 30M 40M 200 30M 40M 200 30M 40M 200 30M	256024_red **RESULT: 1:14AM	Transd dB -8.8 -4.7	1025602 Limit dBµV/m 40.0 40.0	24_red" Margin dB 13.6 17.7	Det. QP QP	Height cm	Azimuth deg 1.00 353.00	Polarization VERTICAL VERTICAL	

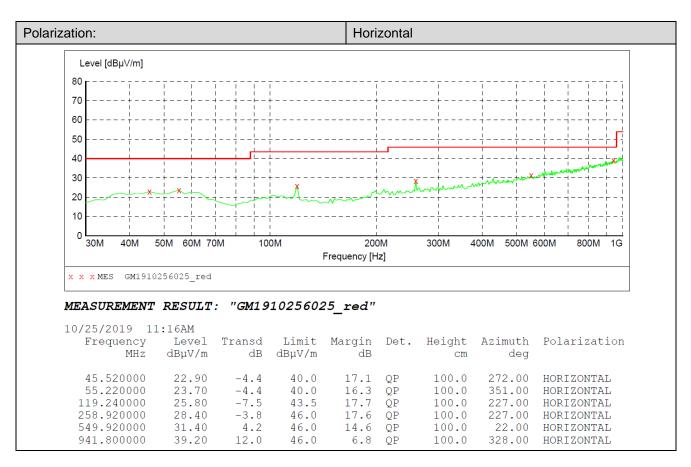

Report No.: CHTEW19100157 Page: 56 of 59 Issued: 2019-10-29

→ 1 GHz ~ 25 GHz

CH00								
Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector	
1179.187	36.05	-6.05	30.00	74.00	44.00	Horizontal	PK	
1688.843	34.77	-6.12	28.65	74.00	45.35	Horizontal	PK	
3016.593	34.73	-0.05	34.68	74.00	39.32	Horizontal	PK	
3852.312	34.73	2.35	37.08	74.00	36.92	Horizontal	PK	
5948.218	30.47	10.21	40.68	74.00	33.32	Horizontal	PK	
8690.375	30.79	19.17	49.96	74.00	24.04	Horizontal	PK	
Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector	
1221.781	35.74	-5.77	29.97	74.00	44.03	Vertical	PK	
1775.500	35.55	-5.87	29.68	74.00	44.32	Vertical	PK	
3186.968	34.21	0.77	34.98	74.00	39.02	Vertical	PK	
5155.093	31.39	8.90	40.29	74.00	33.71	Vertical	PK	
6735.468	30.63	13.37	44.00	74.00	30.00	Vertical	PK	
8047.062	30.83	18.26	49.09	74.00	24.91	Vertical	PK	

CH39								
Freq.	Reading	Factor	Level	Limit	Margin	Polarity	Detector	
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	loianty	Dotootoi	
1148.343	35.73	-6.38	29.35	74.00	44.65	Horizontal	PK	
1656.531	34.80	-6.18	28.62	74.00	45.38	Horizontal	PK	
2440.843	39.40	-2.29	37.11	74.00	36.89	Horizontal	PK	
3173.750	35.87	0.70	36.57	74.00	37.43	Horizontal	PK	
4661.593	31.86	6.15	38.01	74.00	35.99	Horizontal	PK	
8020.625	31.02	18.22	49.24	74.00	24.76	Horizontal	PK	
Freq.	Reading	Factor	Level	Limit	Margin	5.1."		
[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	Polarity	Detector	
1193.875	35.68	-5.89	29.79	74.00	44.21	Vertical	PK	
1633.031	35.12	-6.22	28.90	74.00	45.10	Vertical	PK	
3222.218	34.50	0.58	35.08	74.00	38.92	Vertical	PK	
5090.468	32.13	8.71	40.84	74.00	33.16	Vertical	PK	
6462.281	30.00	12.05	42.05	74.00	31.95	Vertical	PK	
7322.968	32.64	16.12	48.76	74.00	25.24	Vertical	PK	

Report No.: CHTEW19100157 Page: 57 of 59 Issued: 2019-10-29

CH78								
Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector	
1195.343	36.31	-5.88	30.43	74.00	43.57	Horizontal	PK	
1784.312	34.71	-5.85	28.86	74.00	45.14	Horizontal	PK	
3145.843	35.23	0.56	35.79	74.00	38.21	Horizontal	PK	
5162.437	30.96	8.91	39.87	74.00	34.13	Horizontal	PK	
6629.718	30.00	13.25	43.25	74.00	30.75	Horizontal	PK	
7322.968	31.75	16.12	47.87	74.00	26.13	Horizontal	PK	
Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	Detector	
1282.000	35.25	-5.62	29.63	74.00	44.37	Vertical	PK	
2166.187	33.53	-3.32	30.21	74.00	43.79	Vertical	PK	
3148.781	35.83	0.57	36.40	74.00	37.60	Vertical	PK	
5100.750	31.16	8.80	39.96	74.00	34.04	Vertical	PK	
6640.000	30.49	13.28	43.77	74.00	30.23	Vertical	PK	
7975.093	31.25	17.97	49.22	74.00	24.78	Vertical	PK	

Remark:

- 1. Final Level = Receiver Read level + Factor
- 2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Report No.: CHTEW19100157 Page: 58 of 59 Issued: 2019-10-29

6. TEST SETUP PHOTOS

Conducted Emissions (AC Mains)




Radiated Emissions





Report No.: CHTEW19100157 Page: 59 of 59 Issued: 2019-10-29

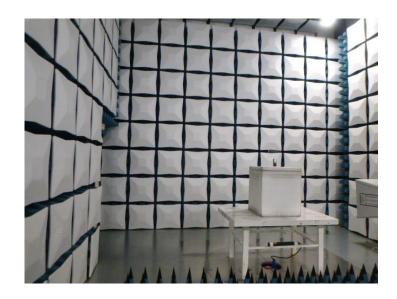

7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No. CHTEW19100155

-----End of Report-----