



AOS (Antenna Optimisation Service)

Customer: Buddi

Project: OBC Dock

Report: SZ23-037-R02_915

06 SEP 2023



Introduction

- Buddi supplied a OBC dock plus battery pack to find the optimal location and matching for DRACONIS for 928MHz ISM band.


Antenna Requirements	
Application	OBC Dock
Frequency Range (MHz)	902-928
Solution used	DRACONIS (SZK-C-2M10-050-01)
Cable length (mm)	50mm



Test Setup

- The antenna was placed as shown below. This location was chosen to ensure the best clearance when battery pack is docked.
- A matching circuit was also used to optimise the impedance match for the undocked setup.

Antenna adhered to the inside of the top lid enclosure as shown below. This area was chosen to ensure maximum clearance.

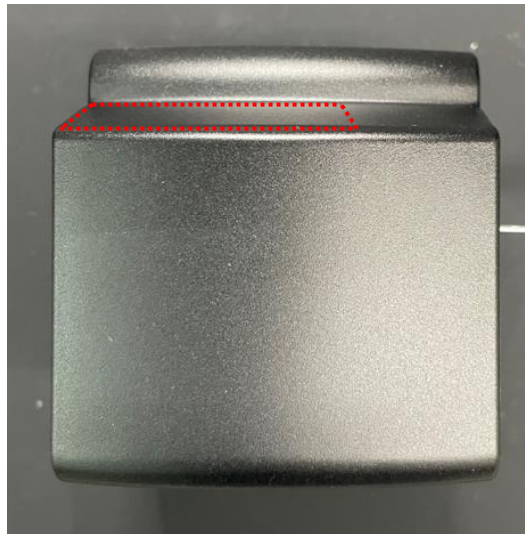


Final assembled device.



- DRACONIS 915

Test Equipment


Equipment	Model/Type	Calibration due date
Network Analyser	Rhode&Schwarz ZNB-8	07/2024
Calibration Kit	Rhode&Schwarz ZV-Z132	07/2024
Chamber	AMS-8500	CTIA Approved IST

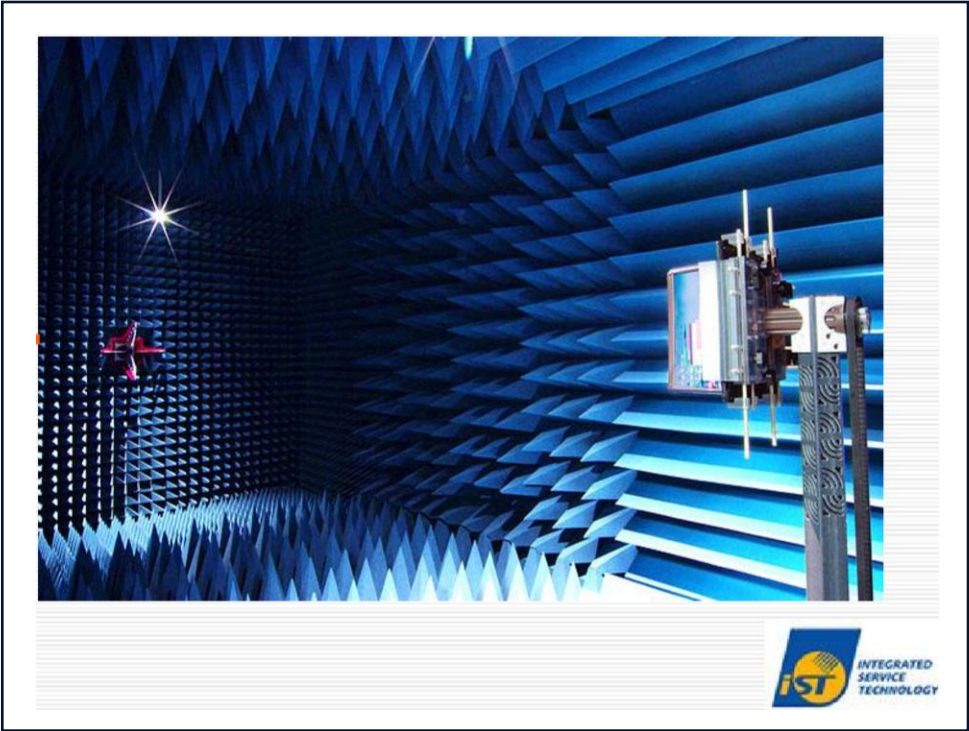

Result Summary

DRACONIS 915	
Frequency Range (MHz)	902-928
Peak Efficiency (%)	52.1
Avg Efficiency (%)	49.0
Peak Gain (dBi)	0.85




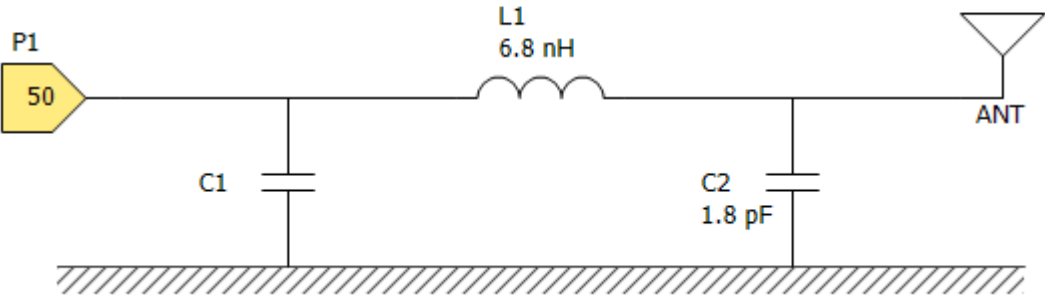

Designator	Type	Value	Package	MPN
C1	NA	DNP	0402	Not Fitted
L1	Ind	6.8nH	0402	LQG15HS6N8H02D
C2	Cap	1.8pF	0402	GJM1555C1H1R8WB01D



S-Parameters

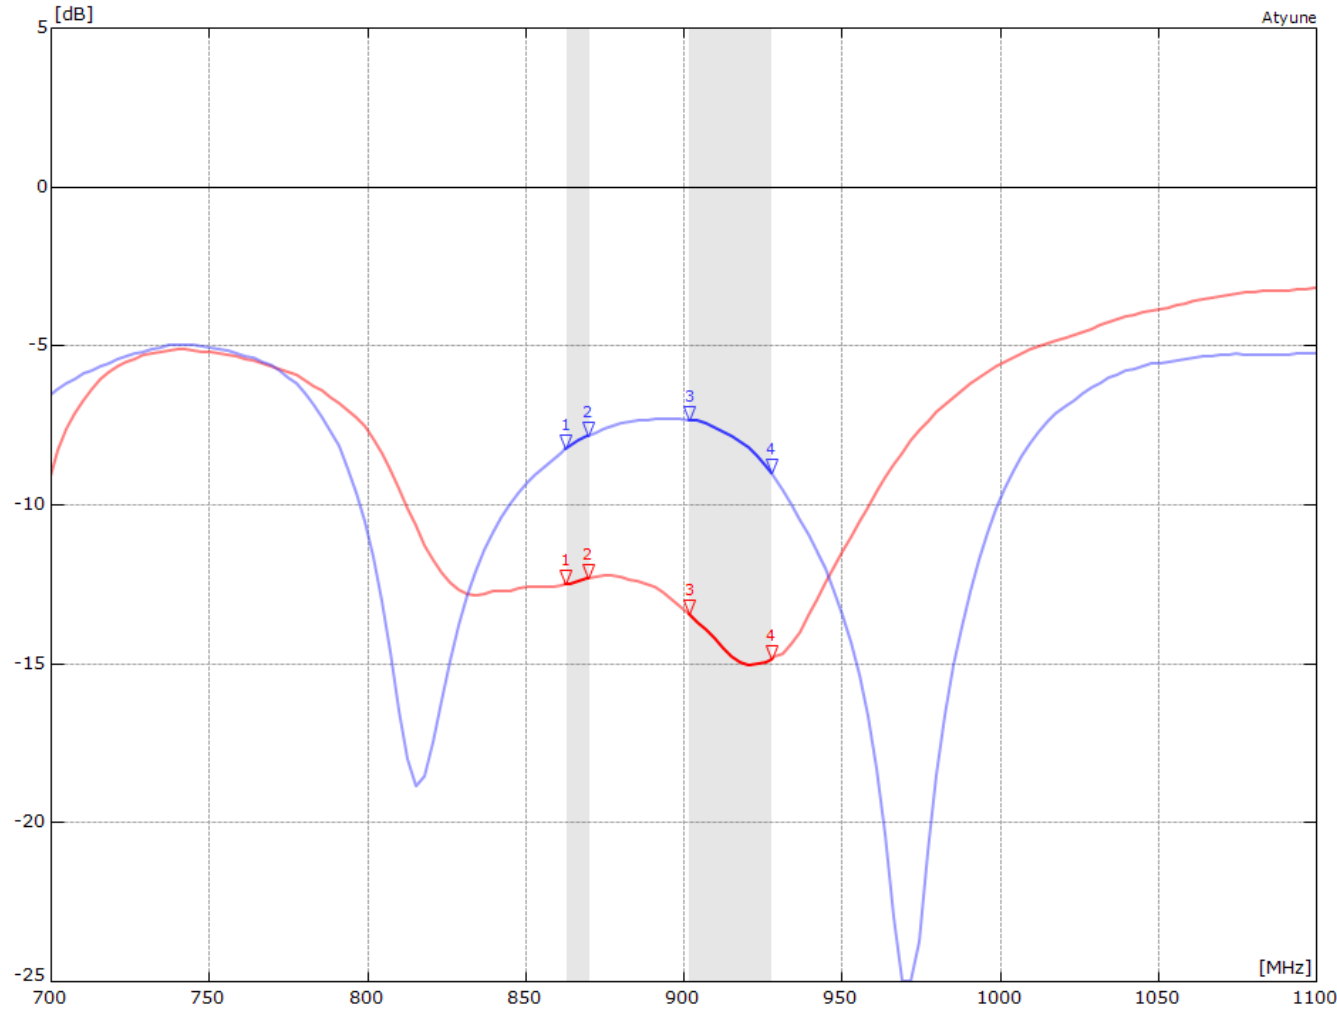

MARKERS: MHz dB MHz dB			
915-SZK-C-2M10-050-01-6.8nHseri 1.8pFshun .s1p - S11			
1: 863	-12.50	3: 902	-13.42
2: 870	-12.29	4: 928	-14.84
915-SZK-C-2M10-050-01-6.8nHseri 1.8pFshun with battery .s1p - S11			
1: 863	-8.25	3: 902	-7.31
2: 870	-7.82	4: 928	-8.98


- DRACONIS 915




Chamber Test Setup

- The device was placed in the chamber as shown. The antenna under test used the required RF choke to prevent cable radiation which can give false high performance and incorrect radiation pattern data.


- DRACONIS 915

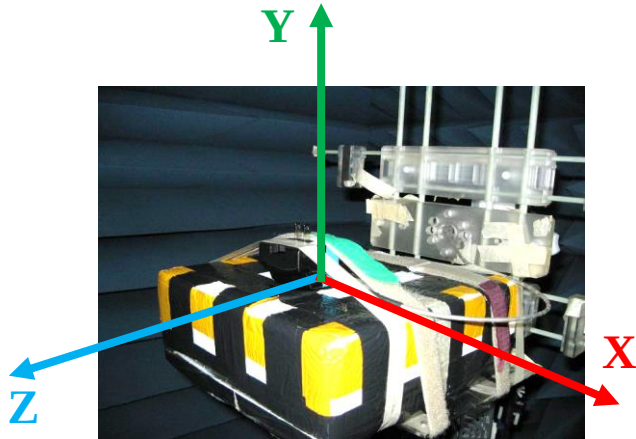


- DRACONIS 915

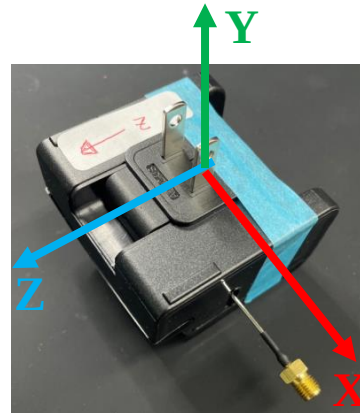

Antenna Efficiency / Peak Gain

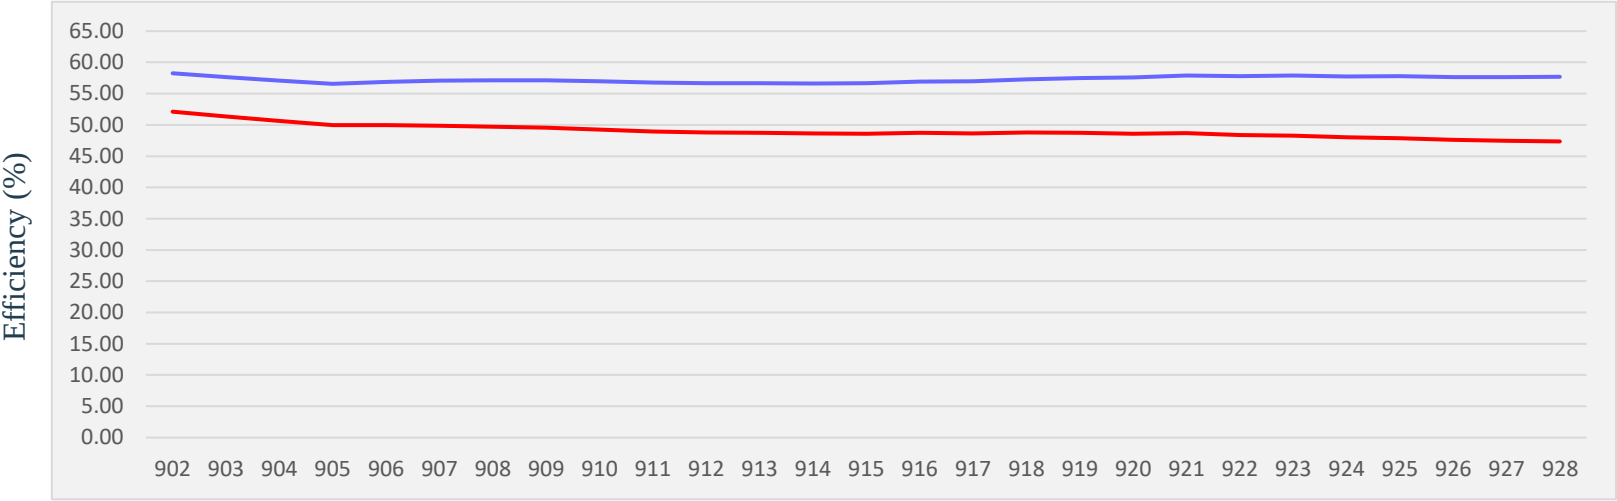


- DRACONIS 915

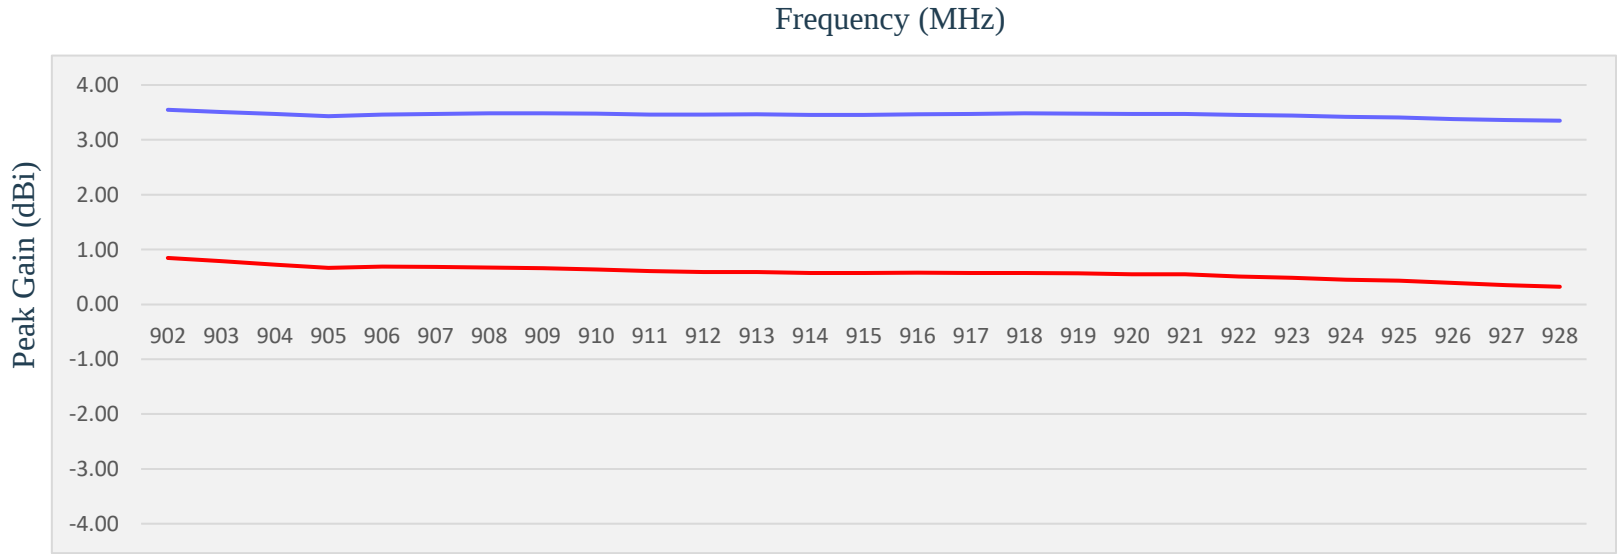


Patterns at 915MHz

- DRACONIS 915

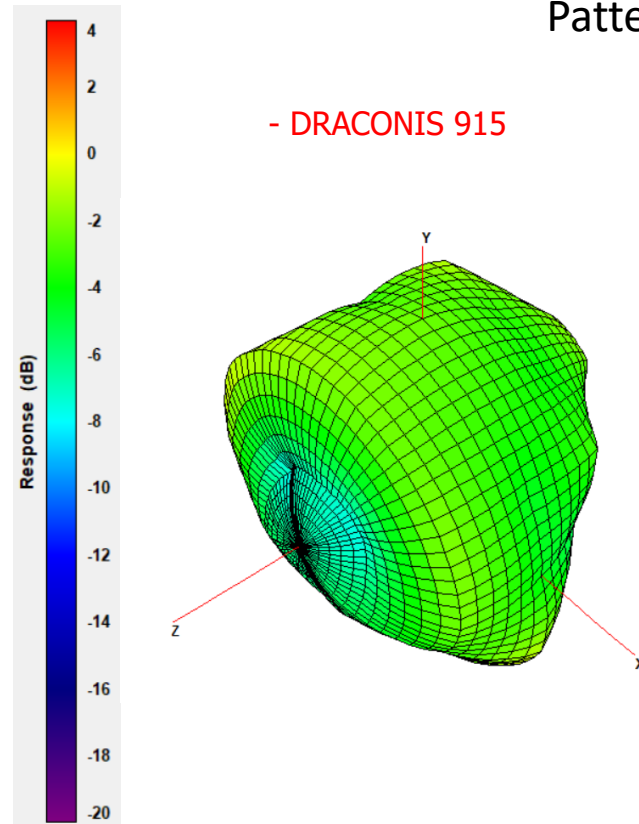

S-Parameters – Device Plugged to outlet

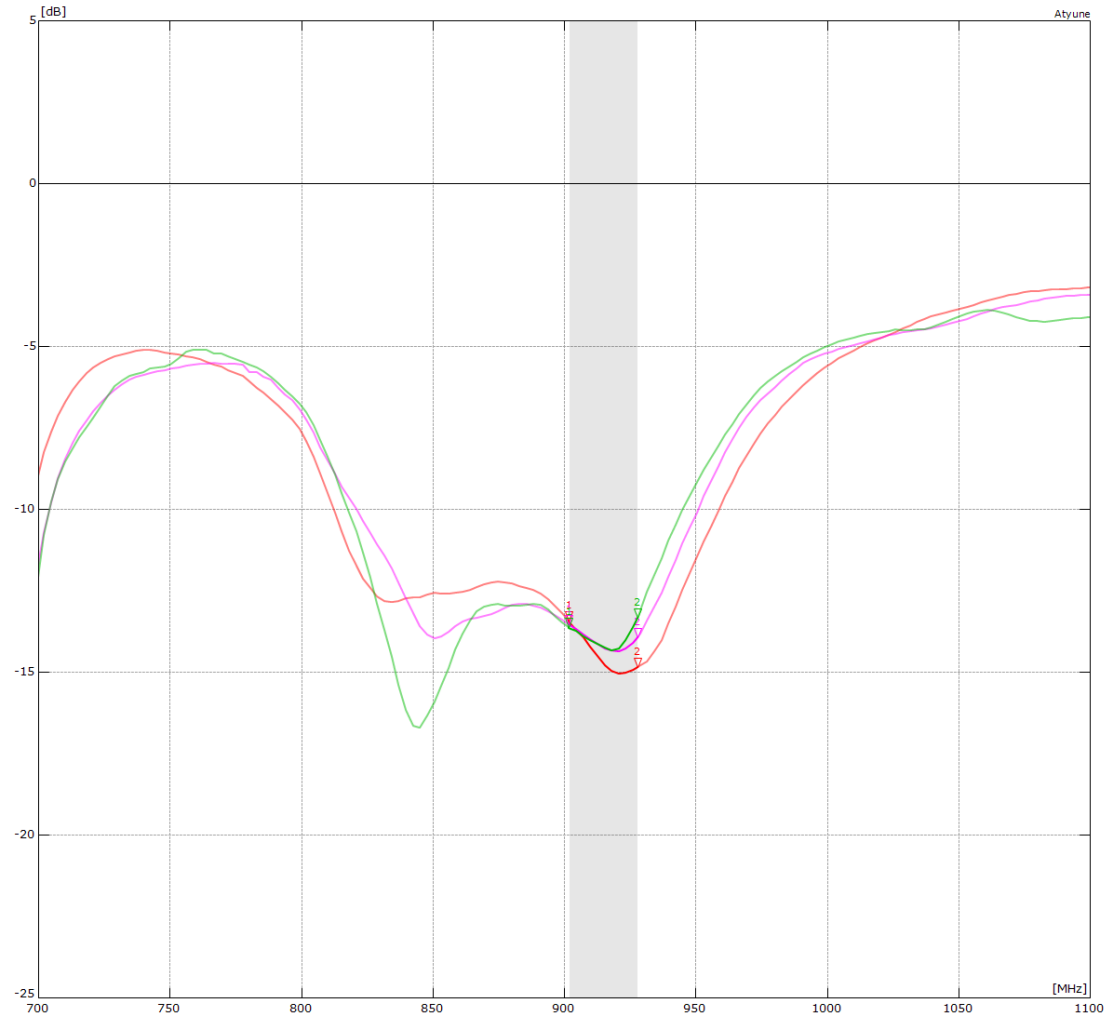


- DRACONIS 915 undocked

- DRACONIS 915 undocked outlet 1



- DRACONIS 915 undocked outlet 2

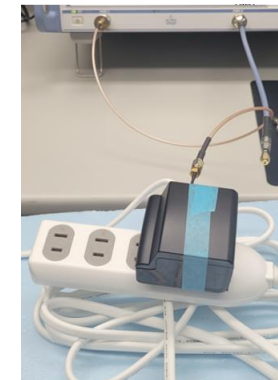



Statement on Intellectual Property It is the policy of Synzen Precision Technology Ltd to file worldwide patents on all novel technology and exploitable ideas developed within the company. All information provided in this document is, and shall remain, the property of Synzen. Nothing herein shall be construed as granting or conferring any rights by license or otherwise in the Information except as expressly provided herein. A recipient acquires hereunder only a limited right to use the Information solely for the purpose of evaluation of the technology, subject to the terms and conditions set out in an associated Non Disclosure Agreement.

Disclaimer: Synzen accepts no responsibility for injury to the individual resulting from the use or misuse of this product.

