

FCC PART 15.247

TEST REPORT

For

Fujian LANDI Commercial Equipment Co., Ltd.

Building 17, Section A, Software Park, No. 89 Software Road, Gulou District, Fuzhou Municipality,
Fujian Province, P.R. China.

FCC ID: 2AG6N-C10-BLWF

Report Type: Original Report	Product Name: AECR C10
Report Number: RXM171225067-00A	
Report Date: 2018-05-09	
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATIONS	10
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	10
SUPPORT CABLE LIST AND DETAILS	11
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS	12
FCC §15.247 (i) , §1.1310 , §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	13
APPLICABLE STANDARD	13
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA	17
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	29
APPLICABLE STANDARD	29
EUT SETUP	29
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	30
TEST PROCEDURE	30
CORRECTED AMPLITUDE & MARGIN CALCULATION	30
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA	31
FCC §15.247(a) (2) –6 dB EMISSION BANDWIDTH.....	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST EQUIPMENT LIST AND DETAILS.....	41
TEST DATA	41
FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	51
APPLICABLE STANDARD	51
TEST PROCEDURE	51
TEST EQUIPMENT LIST AND DETAILS.....	51

TEST DATA	52
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST EQUIPMENT LIST AND DETAILS.....	53
TEST DATA	54
FCC §15.247(e) - POWER SPECTRAL DENSITY	60
APPLICABLE STANDARD	60
TEST PROCEDURE	60
TEST EQUIPMENT LIST AND DETAILS.....	60
TEST DATA	60

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		AECR C10
EUT Model ^{Note} :		AECR C10 configuration 1: C10-S197A1-0001(LED touch screen) configuration 2: C10-S397B1-0001(LED digital tube)
FCC ID:		2AG6N-C10-BLWF
Rated Input Voltage:		DC 19/19.5V from Adapter
Adapter #1 Information	Model:	PA-1650-90
	Input:	AC 100-240V~50/60Hz ,1.6A
	Output:	DC 19V, 3.42A
Adapter #2 Information	Model:	HKA06519034-6J
	Input:	AC 100-240V~50/60Hz ,1.5A
	Output:	DC 19V, 3.42A
Adapter #3 Information	Model:	A14-065N1A
	Input:	AC 100-240V~50/60Hz ,1.7A
	Output:	DC 19.5V, 3.33A
External Dimension:		LED touch screen:Length (403mm)*Width (225mm)*High (390mm) LED digital tube: Length (403mm)*Width (225mm)*High (380mm)
Serial Number:		171225067-1(C10-S197A1-0001), 171225067-2(C10-S397B1-0001)
EUT Received Date:		2017.12.25

Note: this model of device has two different configurations, 15.6-inch LED touch screen and LED digital tube. Both configurations have identical circuit board and software, and the only difference is the customer display, we selected 15.6'' Dual Monitor for fully testing. The difference between them was explained in the declaration letter.

Objective

This report is prepared on behalf of **Fujian LANDI Commercial Equipment Co., Ltd.** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DSS submissions with FCC ID: 2AG6N-C10-BLWF.
FCC Part 15E NII submissions with FCC ID: 2AG6N-C10-BLWF.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and KDB 558074 D01 DTS Meas Guidance v04.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218,the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

For 2.4GHz band, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1,6,11.

For 802.11n ht40 mode was test with channel 3,6,9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

EUT Exercise Software

The software “QRCT.exe” was used for testing, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer:


Mode	Channel	Frequency (MHz)	Data rate	Power Level Setting
802.11b	Low	2412	1 Mbps	12
	Middle	2437	1 Mbps	12
	High	2462	1 Mbps	12
802.11g	Low	2412	6 Mbps	12
	Middle	2437	6 Mbps	12
	High	2462	6 Mbps	12
802.11n ht20	Low	2412	MCS0	12
	Middle	2437	MCS0	12
	High	2462	MCS0	12
802.11n ht40	Low	2422	MCS0	12
	Middle	2437	MCS0	12
	High	2452	MCS0	12

Note: BLE mode configured as maximum power by the system default setting.

The maximum duty cycle as following table:


Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	8.24	8.48	97.17
802.11g	1.36	1.56	87.18
802.11n ht20	1.28	1.48	86.49
802.11n ht40	0.635	0.833	76.23
BLE	0.396	0.632	62.66

802.11b

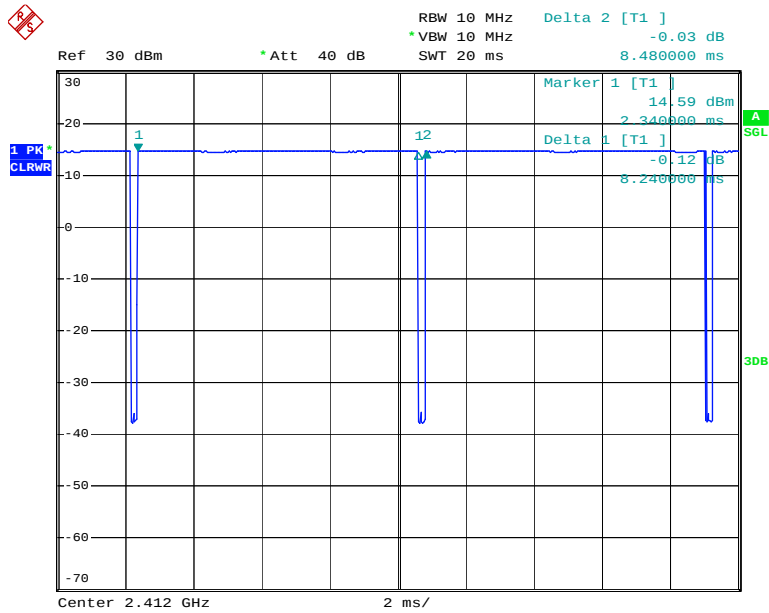


Date: 12.MAR.2018 16:42:23

802.11g

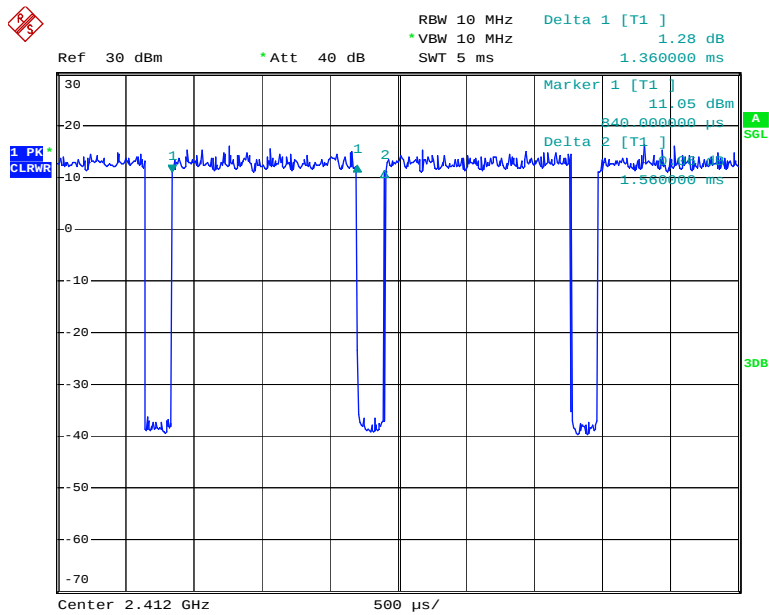


Date: 12.MAR.2018 16:43:23

802.11n ht20

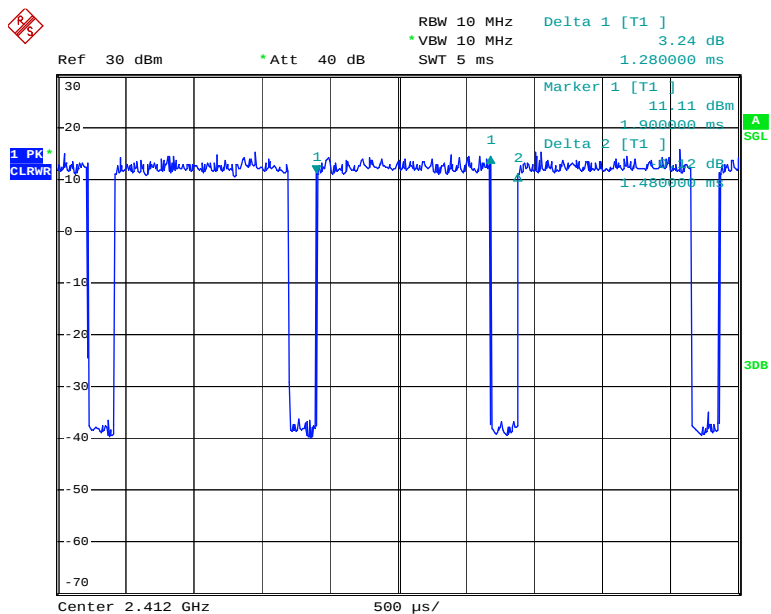


Date: 12.MAR.2018 16:44:52

802.11n ht40

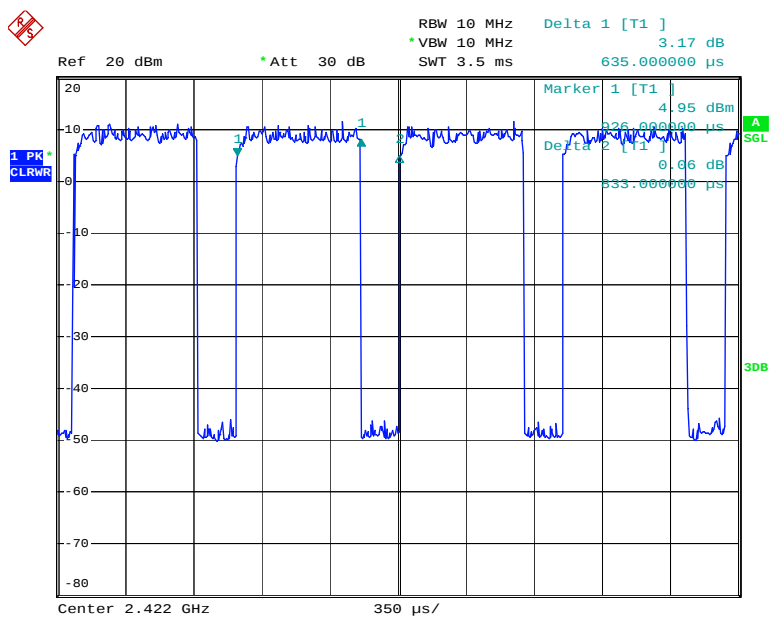

Date: 12.MAR.2018 16:47:29

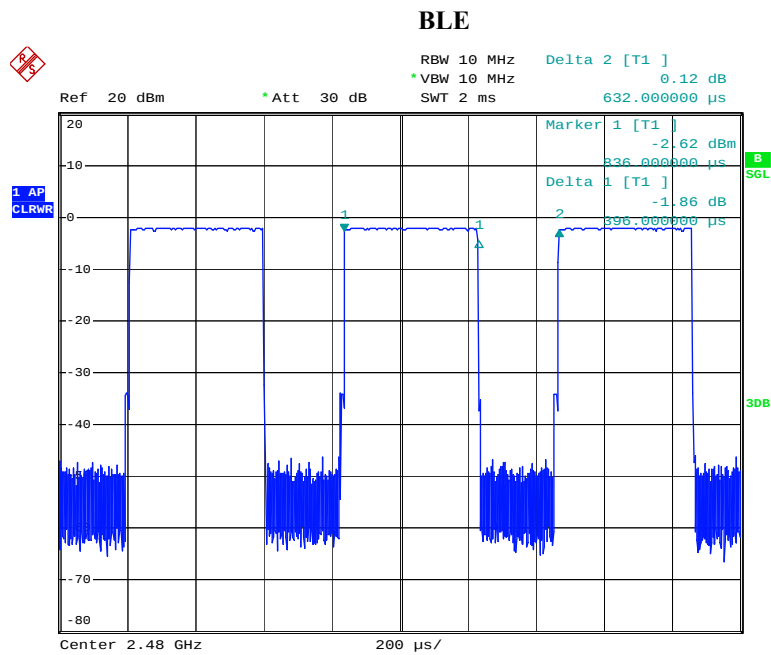

Date: 16.JAN.2018 13:59:03

Equipment Modifications


No modification was made to the EUT.

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
HUAWEI	Earphone	/	/
TOSHIBA	USB HDD	v63700-A	V123212
Sandisk	U-DISK	4GB	S4766
Tenda	Router	D301	/
MAKEN	Cash Drawer	MT-350T	MT-350T
YD	PIN Pad	YD511DA-RJ	YD511DA-RJ
Sandisk	TF Card	4GB	2142231

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	0.45	EUT USB Port	USB HDD
RJ45 Cable	No	No	2.00	Router	EUT
RJ11 Cable	No	No	2.00	EUT	Cash Drawer
RS232 Cable	No	No	2.00	EUT	PIN Pad
Earphone Cable	No	No	1.5	EUT	Earphone
DC Power Cable	No	No	1.2	Adapter	EUT

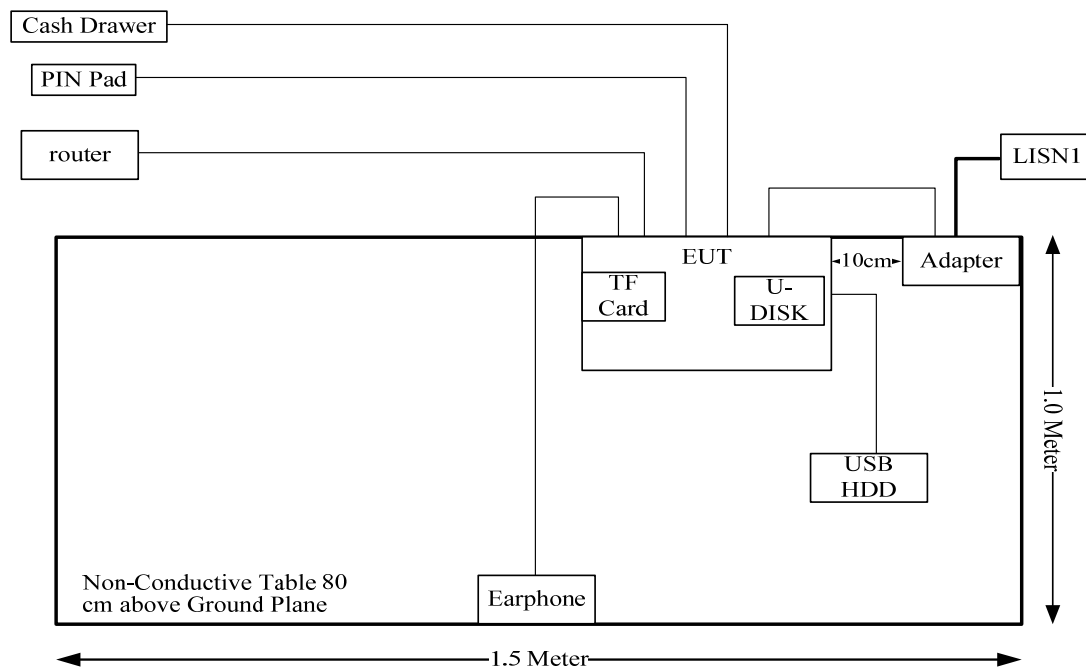Block Diagram of Test Setup

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
FCC §15.203	Antenna Requirement	Compliance
FCC §15.207 (a)	AC Line Conducted Emissions	Compliance
FCC §15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
FCC §15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
FCC §15.247(b)(3)	Maximum Conducted Output Power	Compliance
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
FCC §15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) , §1.1310 , §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation Formula:

Prediction of power density at the distance of the applicable MPE limit:

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency Range (MHz)	Antenna Gain		Maximum Power Including Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	3.8	2.40	20	100.00	20.00	0.0478	1.0
2402-2480	3.8	2.40	2	1.58	20.00	0.0008	1.0

Note:

The Maximum Power Including Tolerance was declared by manufacturer.

The 2.4GHz WIFI can't transmit simultaneously with 5G WIFI or Bluetooth.

Result: Compliance, The device meets FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one internal antenna arrangement for BT/WIFI, and the antenna gain is 3.8 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

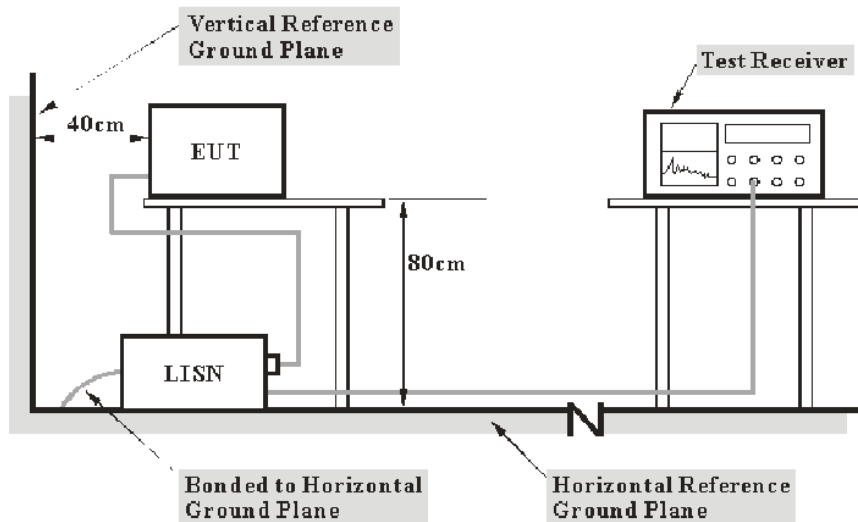

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
N/A	Coaxial Cable	C-NJNJ-50	C-0200-01	2017-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	24.3 °C
Relative Humidity:	42 %
ATM Pressure:	101.2 kPa

The testing was performed by Alex You on 2018-01-26.

Test Mode: Transmitting


Adapter#1(C10-S197A1-0001):

AC120 V, 60 Hz, Line:

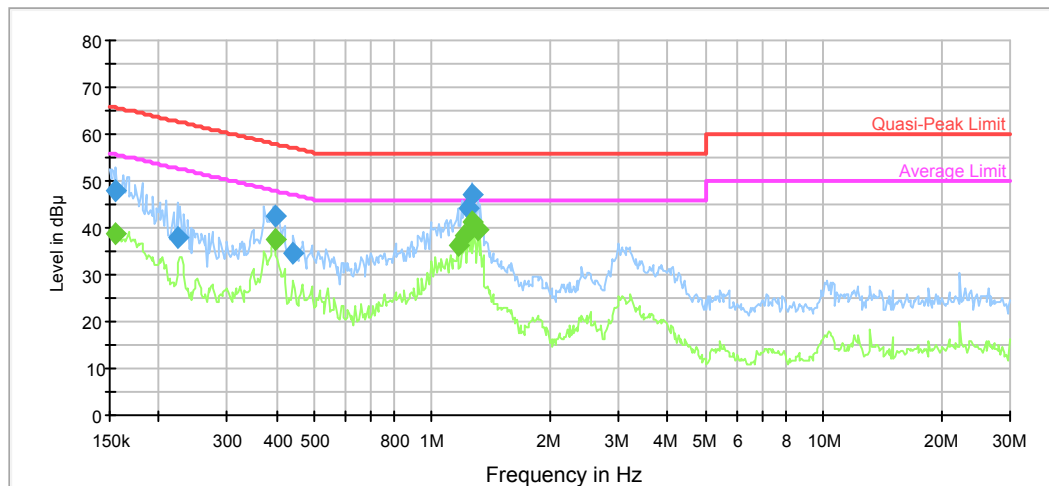


Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.156097	47.9	9.000	L1	11.1	17.8	65.7	Compliance
0.223418	38.0	9.000	L1	10.5	24.7	62.7	Compliance
0.396530	42.4	9.000	L1	10.0	15.5	57.9	Compliance
0.443327	34.6	9.000	L1	9.9	22.4	57.0	Compliance
1.239175	44.0	9.000	L1	9.8	12.0	56.0	Compliance
1.259081	47.2	9.000	L1	9.8	8.8	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.156097	38.7	9.000	L1	11.1	17.0	55.7	Compliance
0.396530	37.5	9.000	L1	10.0	10.4	47.9	Compliance
1.162648	36.3	9.000	L1	9.8	9.7	46.0	Compliance
1.209904	38.4	9.000	L1	9.8	7.6	46.0	Compliance
1.259081	41.2	9.000	L1	9.8	4.8	46.0	Compliance
1.310256	39.4	9.000	L1	9.8	6.6	46.0	Compliance

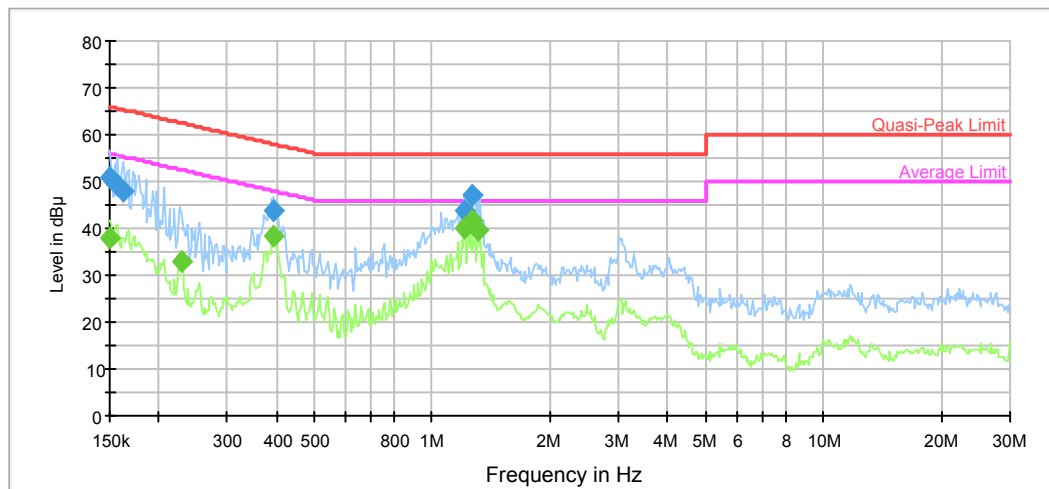AC120 V, 60 Hz, Neutral:


Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	50.9	9.000	N	11.2	15.1	66.0	Compliance
0.157346	49.4	9.000	N	11.1	16.2	65.6	Compliance
0.162441	47.8	9.000	N	11.0	17.5	65.3	Compliance
0.393383	43.8	9.000	N	10.0	14.2	58.0	Compliance
1.209904	43.9	9.000	N	9.8	12.1	56.0	Compliance
1.259081	47.0	9.000	N	9.8	9.0	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	38.1	9.000	N	11.2	17.9	56.0	Compliance
0.228823	33.0	9.000	N	10.4	19.5	52.5	Compliance
0.393383	38.3	9.000	N	10.0	9.7	48.0	Compliance
1.209904	39.9	9.000	N	9.8	6.1	46.0	Compliance
1.259081	41.8	9.000	N	9.8	4.2	46.0	Compliance
1.310256	39.7	9.000	N	9.8	6.3	46.0	Compliance

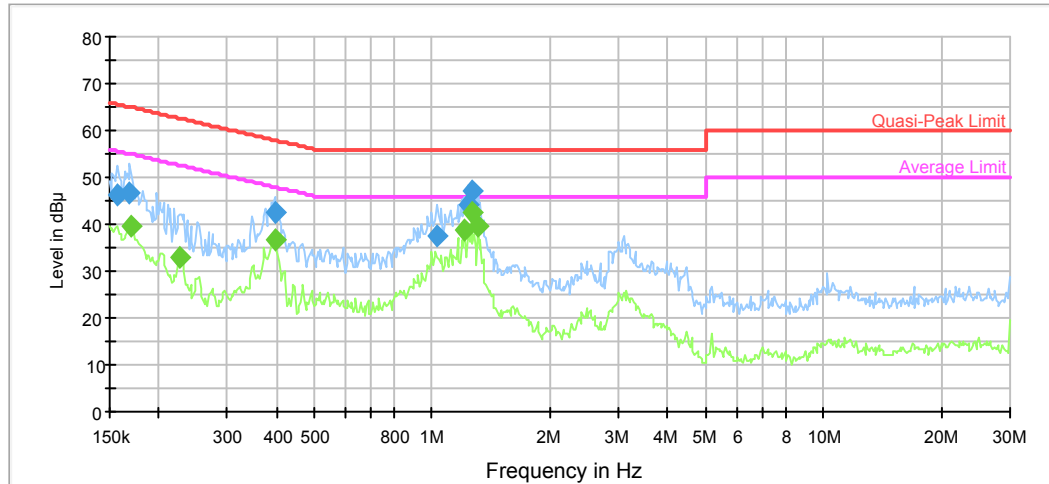Adapter#1(C10-S397B1-0001):**AC120 V, 60 Hz, Line:**


Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.157346	46.0	9.000	L1	11.1	19.6	65.6	Compliance
0.169044	46.9	9.000	L1	10.9	18.1	65.0	Compliance
0.396530	42.6	9.000	L1	10.0	15.3	57.9	Compliance
1.031669	37.5	9.000	L1	9.8	18.5	56.0	Compliance
1.239175	44.2	9.000	L1	9.8	11.8	56.0	Compliance
1.259081	46.9	9.000	L1	9.8	9.1	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.170396	39.6	9.000	L1	10.9	15.3	54.9	Compliance
0.227007	32.8	9.000	L1	10.5	19.8	52.6	Compliance
0.396530	36.8	9.000	L1	10.0	11.1	47.9	Compliance
1.209904	38.9	9.000	L1	9.8	7.1	46.0	Compliance
1.259081	42.4	9.000	L1	9.8	3.6	46.0	Compliance
1.310256	39.7	9.000	L1	9.8	6.3	46.0	Compliance

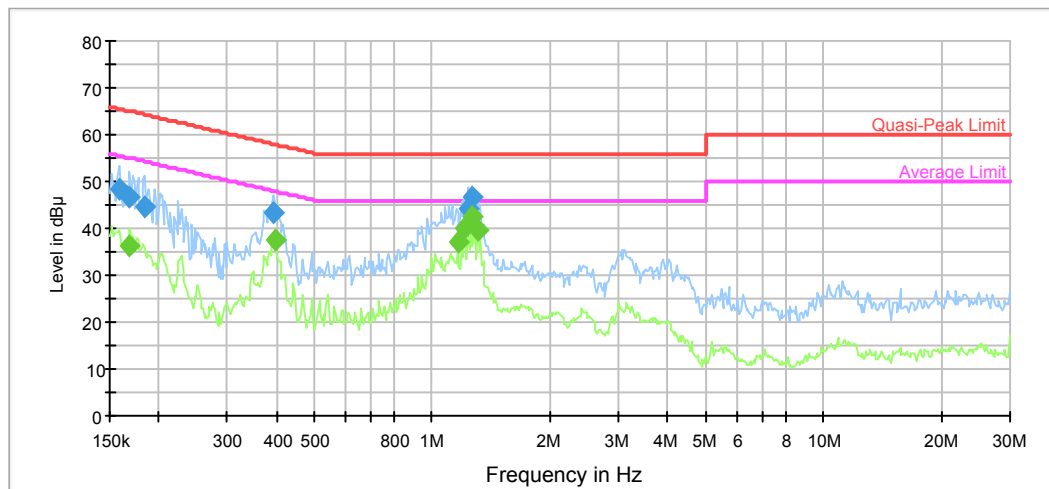AC120 V, 60 Hz, Neutral:


Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.158604	48.2	9.000	N	11.1	17.3	65.5	Compliance
0.169044	46.7	9.000	N	10.9	18.3	65.0	Compliance
0.184529	44.5	9.000	N	10.8	19.8	64.3	Compliance
0.393383	43.3	9.000	N	10.0	14.7	58.0	Compliance
1.239175	44.1	9.000	N	9.8	11.9	56.0	Compliance
1.259081	46.7	9.000	N	9.8	9.3	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.169044	36.3	9.000	N	10.9	18.7	55.0	Compliance
0.396530	37.6	9.000	N	10.0	10.3	47.9	Compliance
1.162648	37.2	9.000	N	9.8	8.8	46.0	Compliance
1.209904	40.1	9.000	N	9.8	5.9	46.0	Compliance
1.259081	42.4	9.000	N	9.8	3.6	46.0	Compliance
1.310256	39.5	9.000	N	9.8	6.5	46.0	Compliance

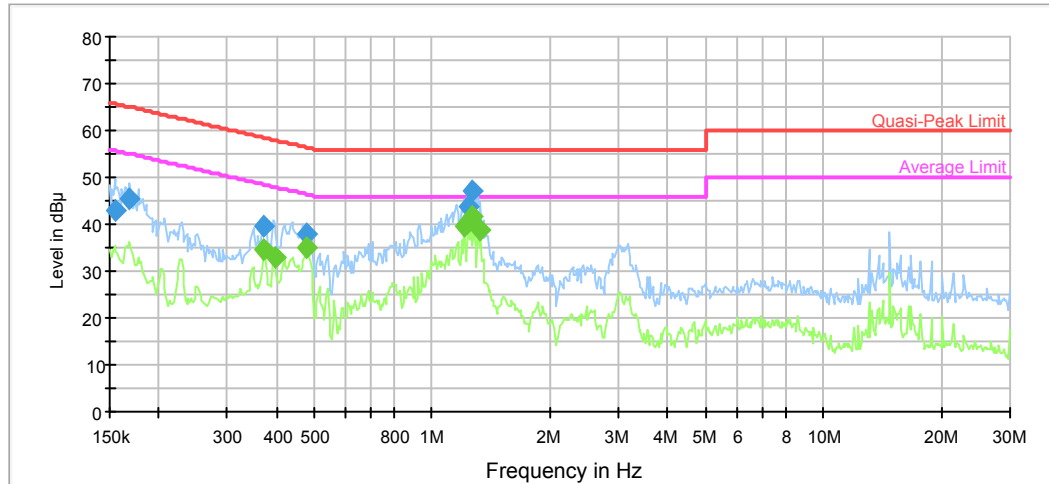Adapter#2(C10-S197A1-0001):**AC120 V, 60 Hz, Line:**


Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.154858	42.8	9.000	L1	11.1	22.9	65.7	Compliance
0.169044	45.5	9.000	L1	10.9	19.5	65.0	Compliance
0.372042	39.6	9.000	L1	10.0	18.9	58.5	Compliance
0.480097	37.9	9.000	L1	9.9	18.4	56.3	Compliance
1.239175	43.8	9.000	L1	9.8	12.2	56.0	Compliance
1.259081	47.0	9.000	L1	9.8	9.0	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.372042	34.6	9.000	L1	10.0	13.9	48.5	Compliance
0.396530	32.9	9.000	L1	10.0	15.0	47.9	Compliance
0.480097	34.8	9.000	L1	9.9	11.5	46.3	Compliance
1.209904	39.5	9.000	L1	9.8	6.5	46.0	Compliance
1.259081	41.5	9.000	L1	9.8	4.5	46.0	Compliance
1.331304	38.8	9.000	L1	9.7	7.2	46.0	Compliance

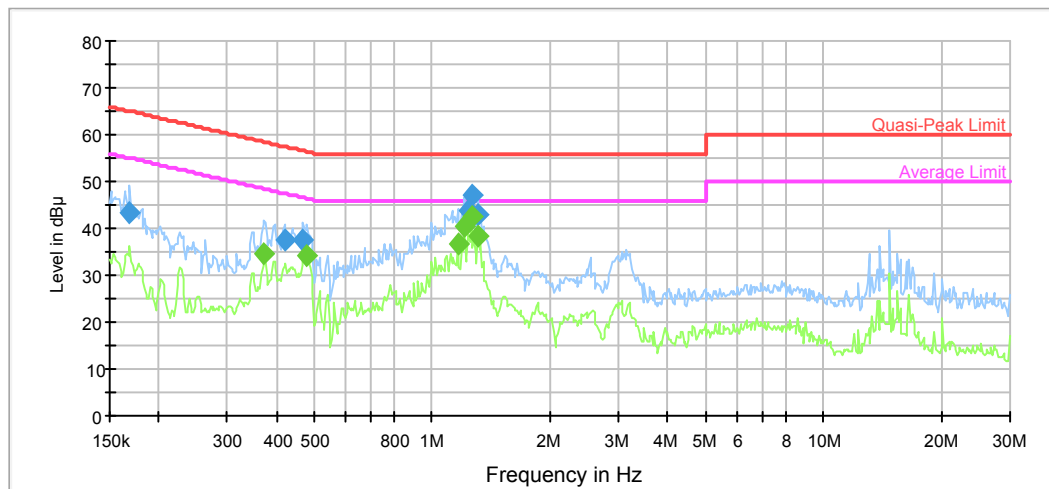AC120 V, 60 Hz, Neutral:


Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.169044	43.4	9.000	N	10.9	21.6	65.0	Compliance
0.419276	37.4	9.000	N	10.0	20.1	57.5	Compliance
0.468757	37.3	9.000	N	9.9	19.2	56.5	Compliance
1.239175	43.7	9.000	N	9.8	12.3	56.0	Compliance
1.259081	47.0	9.000	N	9.8	9.0	56.0	Compliance
1.310256	42.7	9.000	N	9.8	13.3	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.372042	34.8	9.000	N	10.0	13.7	48.5	Compliance
0.480097	34.3	9.000	N	9.9	12.0	46.3	Compliance
1.162648	36.7	9.000	N	9.8	9.3	46.0	Compliance
1.209904	40.4	9.000	N	9.8	5.6	46.0	Compliance
1.259081	42.5	9.000	N	9.8	3.5	46.0	Compliance
1.310256	38.5	9.000	N	9.8	7.5	46.0	Compliance

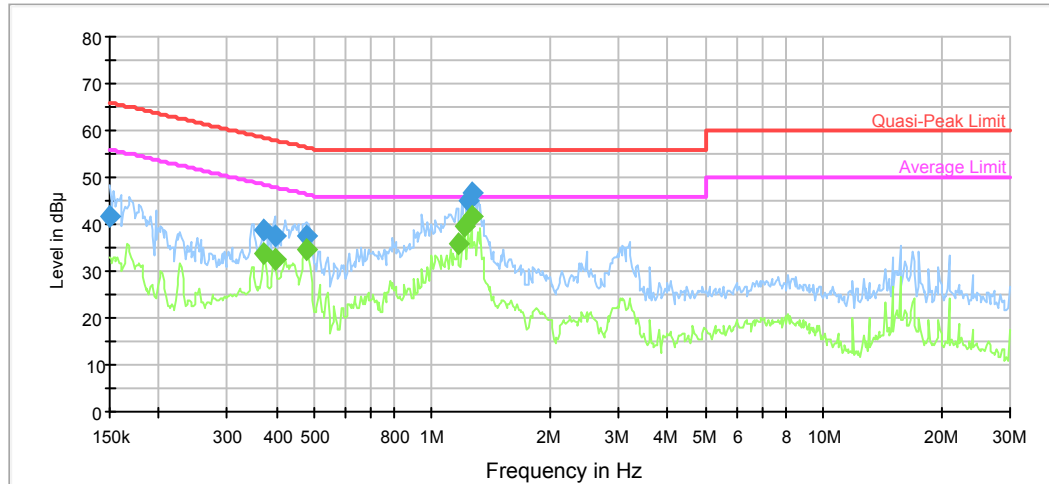Adapter#2(C10-S397B1-0001):**AC120 V, 60 Hz, Line:**


Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.150000	41.7	9.000	L1	11.2	24.3	66.0	Compliance
0.372042	38.9	9.000	L1	10.0	19.6	58.5	Compliance
0.396530	37.6	9.000	L1	10.0	20.3	57.9	Compliance
0.480097	37.6	9.000	L1	9.9	18.7	56.3	Compliance
1.239175	44.9	9.000	L1	9.8	11.1	56.0	Compliance
1.259081	46.9	9.000	L1	9.8	9.1	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.372042	33.6	9.000	L1	10.0	14.9	48.5	Compliance
0.396530	32.6	9.000	L1	10.0	15.3	47.9	Compliance
0.476287	34.6	9.000	L1	9.9	11.8	46.4	Compliance
1.162648	35.8	9.000	L1	9.8	10.2	46.0	Compliance
1.209904	39.7	9.000	L1	9.8	6.3	46.0	Compliance
1.259081	41.8	9.000	L1	9.8	4.2	46.0	Compliance

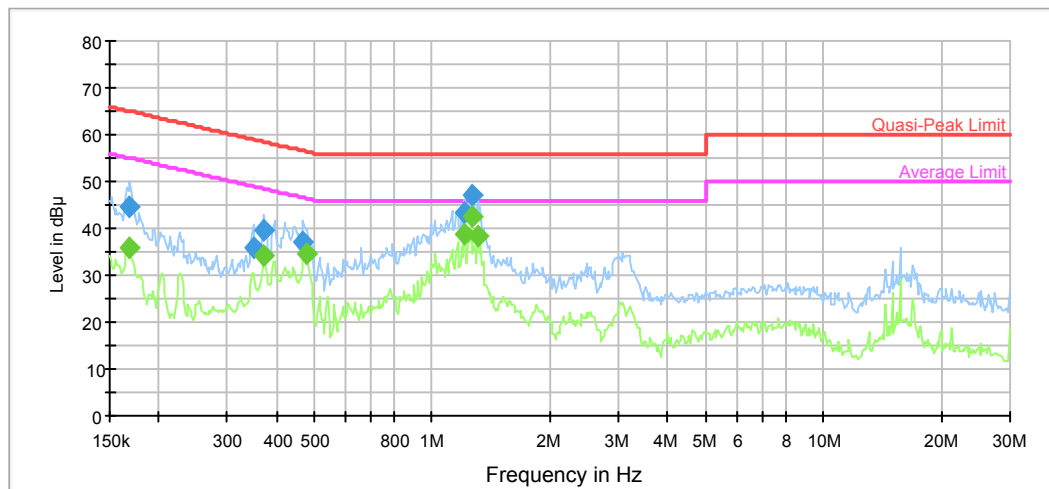AC120 V, 60 Hz, Neutral:


Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.169044	44.5	9.000	N	10.9	20.5	65.0	Compliance
0.349066	35.9	9.000	N	10.0	23.1	59.0	Compliance
0.372042	39.4	9.000	N	10.0	19.1	58.5	Compliance
0.468757	37.2	9.000	N	9.9	19.3	56.5	Compliance
1.209904	43.3	9.000	N	9.8	12.7	56.0	Compliance
1.259081	46.9	9.000	N	9.8	9.1	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.167702	35.8	9.000	N	10.9	19.3	55.1	Compliance
0.372042	34.3	9.000	N	10.0	14.2	48.5	Compliance
0.476287	34.6	9.000	N	9.9	11.8	46.4	Compliance
1.209904	38.6	9.000	N	9.8	7.4	46.0	Compliance
1.259081	42.4	9.000	N	9.8	3.6	46.0	Compliance
1.310256	38.4	9.000	N	9.8	7.6	46.0	Compliance

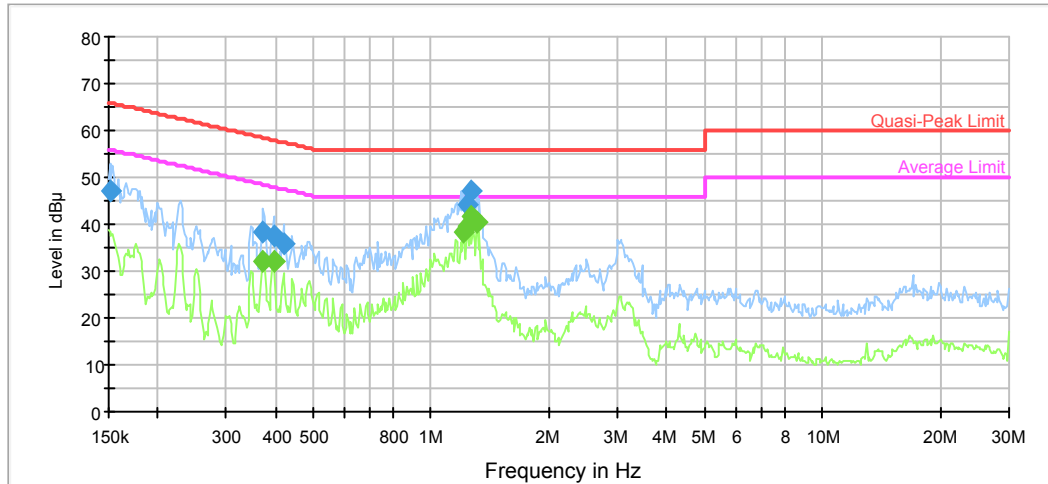Adapter#3(C10-S197A1-0001):**AC120 V, 60 Hz, Line:**


Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.151200	47.2	9.000	L1	11.2	18.7	65.9	Compliance
0.372042	38.5	9.000	L1	10.0	19.9	58.5	Compliance
0.396530	37.3	9.000	L1	10.0	20.6	57.9	Compliance
0.419276	35.7	9.000	L1	10.0	21.8	57.5	Compliance
1.239175	44.4	9.000	L1	9.8	11.6	56.0	Compliance
1.259081	47.0	9.000	L1	9.8	9.0	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.372042	32.3	9.000	L1	10.0	16.2	48.5	Compliance
0.396530	32.3	9.000	L1	10.0	15.7	47.9	Compliance
1.209904	38.3	9.000	L1	9.8	7.7	46.0	Compliance
1.239175	39.6	9.000	L1	9.8	6.4	46.0	Compliance
1.259081	41.5	9.000	L1	9.8	4.5	46.0	Compliance
1.310256	40.3	9.000	L1	9.8	5.7	46.0	Compliance

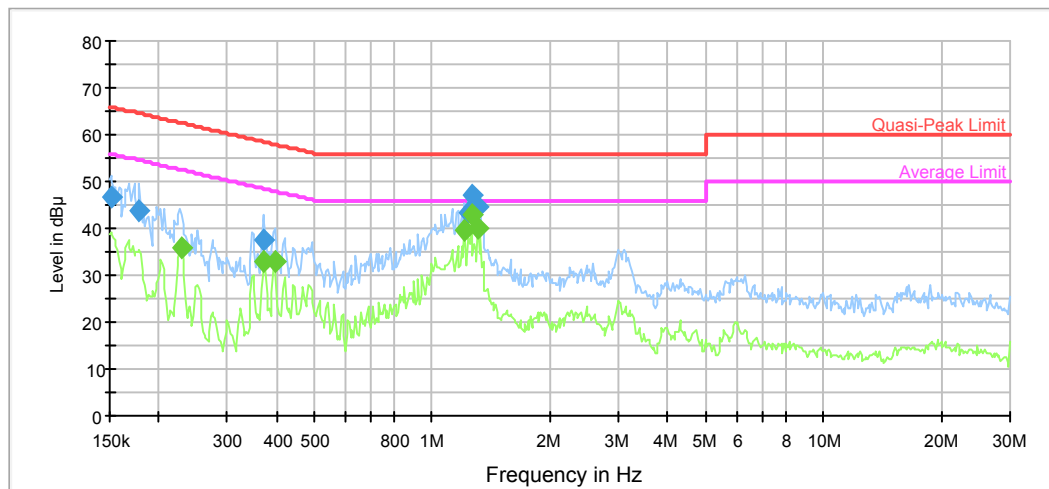AC120 V, 60 Hz, Neutral:


Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.151200	46.6	9.000	N	11.2	19.3	65.9	Compliance
0.178741	43.7	9.000	N	10.8	20.8	64.5	Compliance
0.369089	37.4	9.000	N	10.0	21.1	58.5	Compliance
1.239175	43.4	9.000	N	9.8	12.6	56.0	Compliance
1.259081	47.0	9.000	N	9.8	9.0	56.0	Compliance
1.310256	44.4	9.000	N	9.8	11.6	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.228823	35.9	9.000	N	10.4	16.6	52.5	Compliance
0.372042	33.1	9.000	N	10.0	15.4	48.5	Compliance
0.396530	32.8	9.000	N	10.0	15.1	47.9	Compliance
1.209904	39.6	9.000	N	9.8	6.4	46.0	Compliance
1.259081	43.1	9.000	N	9.8	2.9	46.0	Compliance
1.310256	40.0	9.000	N	9.8	6.0	46.0	Compliance

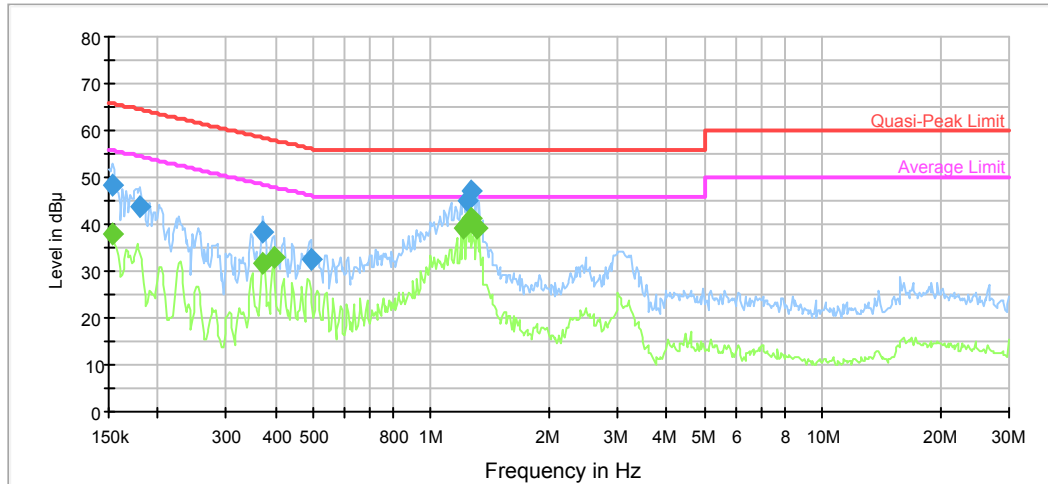Adapter#3(C10-S397B1-0001):**AC120 V, 60 Hz, Line:**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.153629	48.4	9.000	L1	11.1	17.4	65.8	Compliance
0.180171	43.6	9.000	L1	10.8	20.9	64.5	Compliance
0.372042	38.4	9.000	L1	10.0	20.1	58.5	Compliance
0.491712	32.4	9.000	L1	9.9	23.7	56.1	Compliance
1.239175	44.9	9.000	L1	9.8	11.1	56.0	Compliance
1.259081	47.0	9.000	L1	9.8	9.0	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.153629	37.9	9.000	L1	11.1	17.9	55.8	Compliance
0.369089	31.7	9.000	L1	10.0	16.8	48.5	Compliance
0.396530	32.8	9.000	L1	10.0	15.1	47.9	Compliance
1.209904	39.0	9.000	L1	9.8	7.0	46.0	Compliance
1.259081	41.4	9.000	L1	9.8	4.6	46.0	Compliance
1.310256	39.2	9.000	L1	9.8	6.8	46.0	Compliance


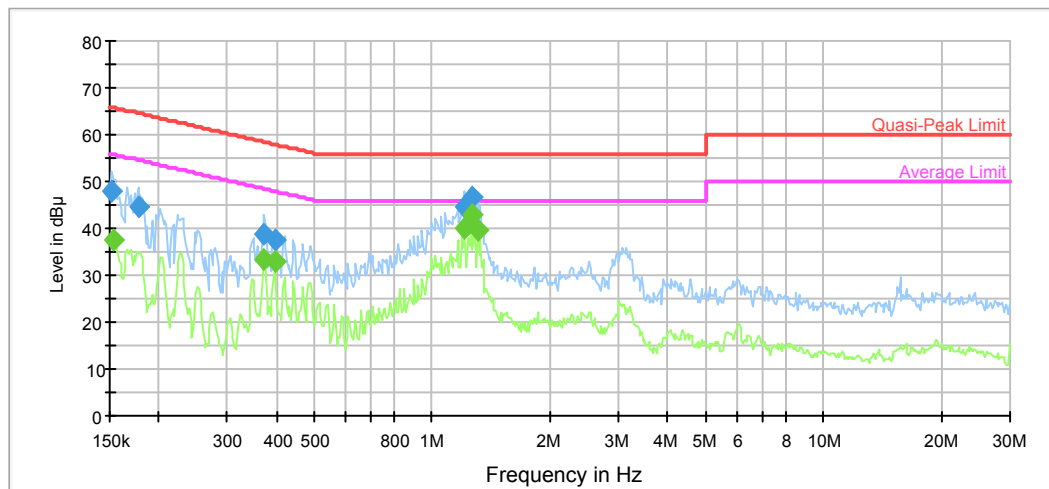
AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.152410	48.0	9.000	N	11.1	17.9	65.9	Compliance
0.177322	44.4	9.000	N	10.8	20.2	64.6	Compliance
0.372042	38.8	9.000	N	10.0	19.7	58.5	Compliance
0.396530	37.6	9.000	N	10.0	20.3	57.9	Compliance
1.209904	44.5	9.000	N	9.8	11.5	56.0	Compliance
1.259081	46.7	9.000	N	9.8	9.3	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.153629	37.4	9.000	N	11.1	18.4	55.8	Compliance
0.372042	33.6	9.000	N	10.0	14.9	48.5	Compliance
0.396530	33.1	9.000	N	10.0	14.8	47.9	Compliance
1.209904	40.2	9.000	N	9.8	5.8	46.0	Compliance
1.259081	42.7	9.000	N	9.8	3.3	46.0	Compliance
1.310256	39.7	9.000	N	9.8	6.3	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205

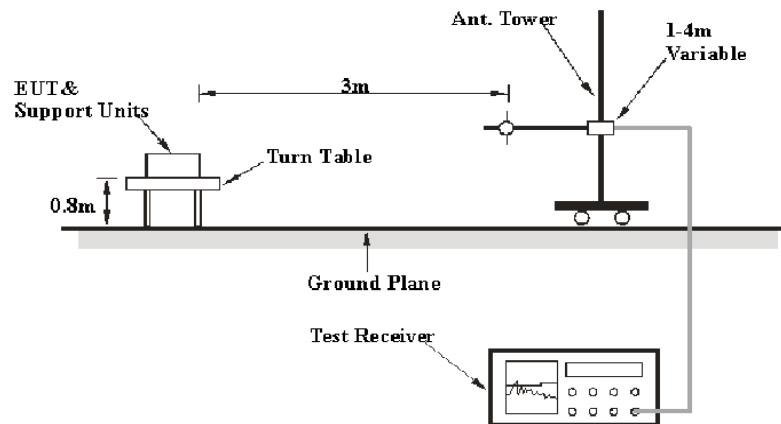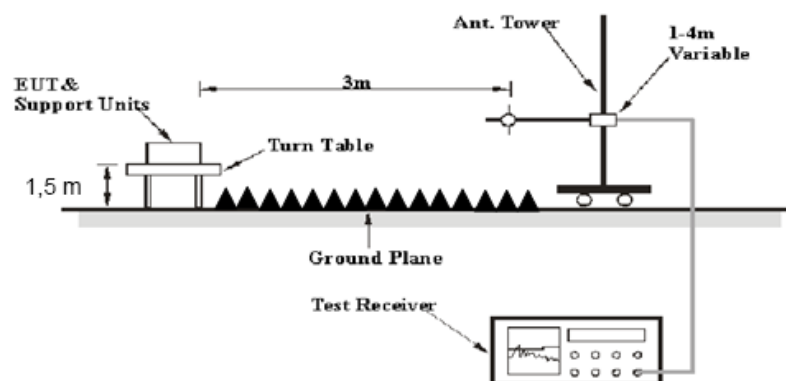EUT Setup**Below 1GHz:****Above 1GHz:**

The radiated emission below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-09-01	2018-09-01
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2018-11-10
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
R&S	Spectrum Analyzer	E4440A	SG43360054	2017-12-08	2018-12-08
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2017-09-05	2018-09-05
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2016-11-18	2019-11-18
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2017-06-27	2018-06-27
N/A	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
N/A	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Chengdu Ouli	Band Rejection Filter	2400-2483.5	002	2017-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	22.1 °C
Relative Humidity:	45 %
ATM Pressure:	101.3 kPa


* The testing was performed by Sunny Cen & Kakaxi Chen on 2018-01-19.

Test Result: Compliance, please Refer to the following data

Test Mode: Transmitting (per pretest, C10-S197A1-0001 +Adapter #1 was the worst)

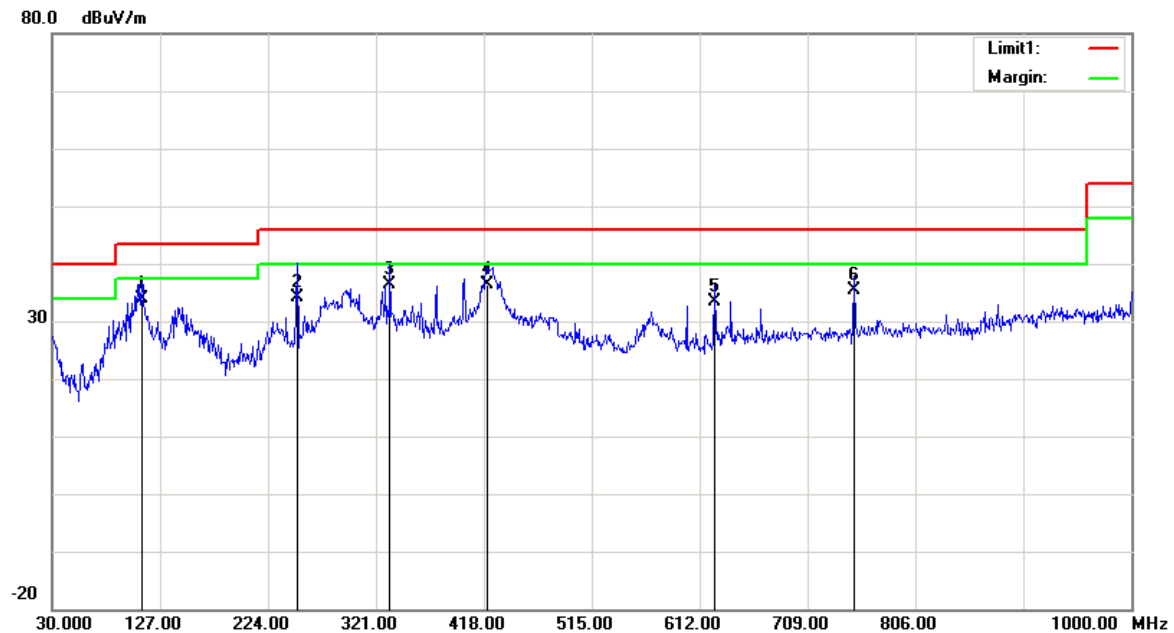1) 30MHz-1GHz (802.11b mode Middle channel was the worst):**Horizontal:**

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
110.5100	39.93	QP	-6.03	33.90	43.50	9.60
250.1900	40.52	QP	-6.42	34.10	46.00	11.90
333.6100	40.02	QP	-3.62	36.40	46.00	9.60
420.9100	38.32	QP	-2.02	36.30	46.00	9.70
625.5800	32.34	QP	1.06	33.40	46.00	12.60
750.7100	32.04	QP	3.26	35.30	46.00	10.70

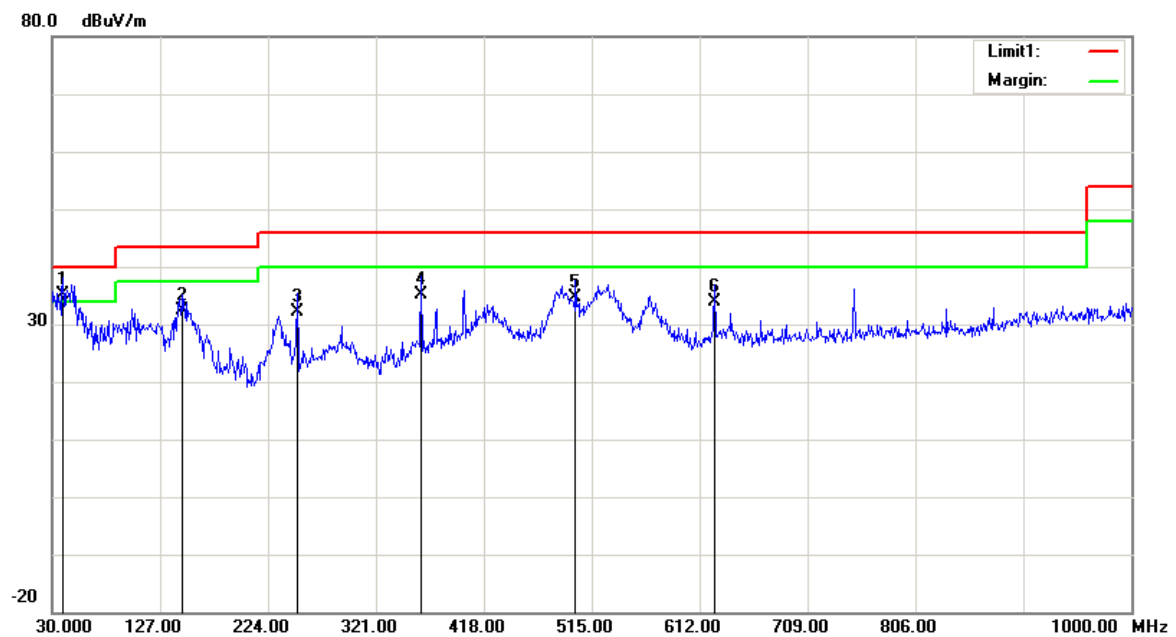Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
39.7000	41.29	QP	-6.09	35.20	40.00	4.80
147.3700	38.79	QP	-6.49	32.30	43.50	11.20
250.1900	38.52	QP	-6.42	32.10	46.00	13.90
361.7400	38.10	QP	-2.90	35.20	46.00	10.80
500.4500	35.67	QP	-1.07	34.60	46.00	11.40
625.5800	32.74	QP	1.06	33.80	46.00	12.20

2) 1-25GHz:
802.11b Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	73.09	PK	H	28.12	1.81	0.00	103.02	N/A	N/A
2412.00	70.06	AV	H	28.12	1.81	0.00	99.99	N/A	N/A
2412.00	66.87	PK	V	28.12	1.81	0.00	96.80	N/A	N/A
2412.00	63.07	AV	V	28.12	1.81	0.00	93.00	N/A	N/A
2390.00	24.37	PK	H	28.08	1.80	0.00	54.25	74.00	19.75
2390.00	15.38	AV	H	28.08	1.80	0.00	45.26	54.00	8.74
4824.00	48.65	PK	H	32.95	3.19	37.20	47.59	74.00	26.41
4824.00	39.75	AV	H	32.95	3.19	37.20	38.69	54.00	15.31
7236.00	46.34	PK	H	35.81	4.77	37.27	49.65	74.00	24.35
7236.00	36.72	AV	H	35.81	4.77	37.27	40.03	54.00	13.97
Middle Channel: 2437 MHz									
2437.00	71.43	PK	H	28.17	1.82	0.00	101.42	N/A	N/A
2437.00	68.37	AV	H	28.17	1.82	0.00	98.36	N/A	N/A
2437.00	67.68	PK	V	28.17	1.82	0.00	97.67	N/A	N/A
2437.00	63.64	AV	V	28.17	1.82	0.00	93.63	N/A	N/A
4874.00	48.67	PK	H	33.05	3.26	37.21	47.77	74.00	26.23
4874.00	39.71	AV	H	33.05	3.26	37.21	38.81	54.00	15.19
7311.00	46.88	PK	H	36.01	4.64	37.36	50.17	74.00	23.83
7311.00	38.67	AV	H	36.01	4.64	37.36	41.96	54.00	12.04
High Channel: 2462 MHz									
2462.00	72.94	PK	H	28.22	1.83	0.00	102.99	N/A	N/A
2462.00	69.58	AV	H	28.22	1.83	0.00	99.63	N/A	N/A
2462.00	72.36	PK	V	28.22	1.83	0.00	102.41	N/A	N/A
2462.00	69.48	AV	V	28.22	1.83	0.00	99.53	N/A	N/A
2483.50	25.85	PK	H	28.27	1.84	0.00	55.96	74.00	18.04
2483.50	14.98	AV	H	28.27	1.84	0.00	45.09	54.00	8.91
4924.00	48.65	PK	H	33.15	3.27	37.22	47.85	74.00	26.15
4924.00	38.55	AV	H	33.15	3.27	37.22	37.75	54.00	16.25
7386.00	45.27	PK	H	36.20	4.51	37.46	48.52	74.00	25.48
7386.00	35.75	AV	H	36.20	4.51	37.46	39.00	54.00	15.00

802.11g Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	74.25	PK	H	28.12	1.81	0.00	104.18	N/A	N/A
2412.00	65.20	AV	H	28.12	1.81	0.00	95.13	N/A	N/A
2412.00	70.21	PK	V	28.12	1.81	0.00	100.14	N/A	N/A
2412.00	61.21	AV	V	28.12	1.81	0.00	91.14	N/A	N/A
2390.00	24.23	PK	H	28.08	1.80	0.00	54.11	74.00	19.89
2390.00	14.42	AV	H	28.08	1.80	0.00	44.30	54.00	9.70
4824.00	49.40	PK	H	32.95	3.19	37.20	48.34	74.00	25.66
4824.00	40.18	AV	H	32.95	3.19	37.20	39.12	54.00	14.88
7236.00	47.47	PK	H	35.81	4.77	37.27	50.78	74.00	23.22
7236.00	37.04	AV	H	35.81	4.77	37.27	40.35	54.00	13.65
Middle Channel: 2437 MHz									
2437.00	72.63	PK	H	28.17	1.82	0.00	102.62	N/A	N/A
2437.00	62.76	AV	H	28.17	1.82	0.00	92.75	N/A	N/A
2437.00	69.96	PK	V	28.17	1.82	0.00	99.95	N/A	N/A
2437.00	57.89	AV	V	28.17	1.82	0.00	87.88	N/A	N/A
4874.00	49.27	PK	H	33.05	3.26	37.21	48.37	74.00	25.63
4874.00	40.68	AV	H	33.05	3.26	37.21	39.78	54.00	14.22
7311.00	47.21	PK	H	36.01	4.64	37.36	50.50	74.00	23.50
7311.00	37.54	AV	H	36.01	4.64	37.36	40.83	54.00	13.17
High Channel: 2462 MHz									
2462.00	74.42	PK	H	28.22	1.83	0.00	104.47	N/A	N/A
2462.00	64.24	AV	H	28.22	1.83	0.00	94.29	N/A	N/A
2462.00	71.37	PK	V	28.22	1.83	0.00	101.42	N/A	N/A
2462.00	62.14	AV	V	28.22	1.83	0.00	92.19	N/A	N/A
2483.50	25.65	PK	H	28.27	1.84	0.00	55.76	74.00	18.24
2483.50	14.44	AV	H	28.27	1.84	0.00	44.55	54.00	9.45
4924.00	49.80	PK	H	33.15	3.27	37.22	49.00	74.00	25.00
4924.00	38.61	AV	H	33.15	3.27	37.22	37.81	54.00	16.19
7386.00	45.73	PK	H	36.20	4.51	37.46	48.98	74.00	25.02
7386.00	35.88	AV	H	36.20	4.51	37.46	39.13	54.00	14.87

802.11n ht20 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	74.89	PK	H	28.12	1.81	0.00	104.82	N/A	N/A
2412.00	65.84	AV	H	28.12	1.81	0.00	95.77	N/A	N/A
2412.00	71.26	PK	V	28.12	1.81	0.00	101.19	N/A	N/A
2412.00	61.56	AV	V	28.12	1.81	0.00	91.49	N/A	N/A
2390.00	24.36	PK	H	28.08	1.80	0.00	54.24	74.00	19.76
2390.00	14.64	AV	H	28.08	1.80	0.00	44.52	54.00	9.48
4824.00	49.00	PK	H	32.95	3.19	37.20	47.94	74.00	26.06
4824.00	40.77	AV	H	32.95	3.19	37.20	39.71	54.00	14.29
7236.00	46.30	PK	H	35.81	4.77	37.27	49.61	74.00	24.39
7236.00	37.23	AV	H	35.81	4.77	37.27	40.54	54.00	13.46
Middle Channel: 2437 MHz									
2437.00	71.35	PK	H	28.17	1.82	0.00	101.34	N/A	N/A
2437.00	61.62	AV	H	28.17	1.82	0.00	91.61	N/A	N/A
2437.00	67.63	PK	V	28.17	1.82	0.00	97.62	N/A	N/A
2437.00	57.84	AV	V	28.17	1.82	0.00	87.83	N/A	N/A
4874.00	49.09	PK	H	33.05	3.26	37.21	48.19	74.00	25.81
4874.00	40.87	AV	H	33.05	3.26	37.21	39.97	54.00	14.03
7311.00	46.39	PK	H	36.01	4.64	37.36	49.68	74.00	24.32
7311.00	37.53	AV	H	36.01	4.64	37.36	40.82	54.00	13.18
High Channel: 2462 MHz									
2462.00	72.37	PK	H	28.22	1.83	0.00	102.42	N/A	N/A
2462.00	61.17	AV	H	28.22	1.83	0.00	91.22	N/A	N/A
2462.00	68.46	PK	V	28.22	1.83	0.00	98.51	N/A	N/A
2462.00	57.48	AV	V	28.22	1.83	0.00	87.53	N/A	N/A
2483.50	26.90	PK	H	28.27	1.84	0.00	57.01	74.00	16.99
2483.50	14.86	AV	H	28.27	1.84	0.00	44.97	54.00	9.03
4924.00	48.75	PK	H	33.15	3.27	37.22	47.95	74.00	26.05
4924.00	38.67	AV	H	33.15	3.27	37.22	37.87	54.00	16.13
7386.00	45.67	PK	H	36.20	4.51	37.46	48.92	74.00	25.08
7386.00	35.71	AV	H	36.20	4.51	37.46	38.96	54.00	15.04

802.11n ht40 Mode:




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2422 MHz									
2422.00	74.21	PK	H	28.14	1.81	0.00	104.16	N/A	N/A
2422.00	64.01	AV	H	28.14	1.81	0.00	93.96	N/A	N/A
2422.00	72.98	PK	V	28.14	1.81	0.00	102.93	N/A	N/A
2422.00	61.12	AV	V	28.14	1.81	0.00	91.07	N/A	N/A
2390.00	25.28	PK	H	28.08	1.80	0.00	55.16	74.00	18.84
2390.00	14.24	AV	H	28.08	1.80	0.00	44.12	54.00	9.88
4844.00	49.81	PK	H	32.99	3.22	37.20	48.82	74.00	25.18
4844.00	39.85	AV	H	32.99	3.22	37.20	38.86	54.00	15.14
7266.00	47.02	PK	H	35.89	4.72	37.31	50.32	74.00	23.68
7266.00	36.86	AV	H	35.89	4.72	37.31	40.16	54.00	13.84
Middle Channel: 2437 MHz									
2437.00	70.99	PK	H	28.17	1.82	0.00	100.98	N/A	N/A
2437.00	61.40	AV	H	28.17	1.82	0.00	91.39	N/A	N/A
2437.00	68.97	PK	V	28.17	1.82	0.00	98.96	N/A	N/A
2437.00	57.69	AV	V	28.17	1.82	0.00	87.68	N/A	N/A
4874.00	48.35	PK	H	33.05	3.26	37.21	47.45	74.00	26.55
4874.00	40.71	AV	H	33.05	3.26	37.21	39.81	54.00	14.19
7311.00	46.88	PK	H	36.01	4.64	37.36	50.17	74.00	23.83
7311.00	37.28	AV	H	36.01	4.64	37.36	40.57	54.00	13.43
High Channel: 2452 MHz									
2452.00	71.88	PK	H	28.20	1.83	0.00	101.91	N/A	N/A
2452.00	61.58	AV	H	28.20	1.83	0.00	91.61	N/A	N/A
2452.00	68.74	PK	V	28.20	1.83	0.00	98.77	N/A	N/A
2452.00	62.95	AV	V	28.20	1.83	0.00	92.98	N/A	N/A
2483.50	24.69	PK	H	28.27	1.84	0.00	54.80	74.00	19.20
2483.50	14.56	AV	H	28.27	1.84	0.00	44.67	54.00	9.33
4904.00	48.61	PK	H	33.11	3.30	37.21	47.81	74.00	26.19
4904.00	39.67	AV	H	33.11	3.30	37.21	38.87	54.00	15.13
7356.00	46.48	PK	H	36.13	4.56	37.42	49.75	74.00	24.25
7356.00	36.06	AV	H	36.13	4.56	37.42	39.33	54.00	14.67

BLE Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	64.66	PK	H	28.10	1.80	0.00	94.56	N/A	N/A
2402.00	59.92	AV	H	28.10	1.80	0.00	89.82	N/A	N/A
2402.00	62.74	PK	V	28.10	1.80	0.00	92.64	N/A	N/A
2402.00	57.28	AV	V	28.10	1.80	0.00	87.18	N/A	N/A
2390.00	24.31	PK	H	28.08	1.80	0.00	54.19	74.00	19.81
2390.00	13.75	AV	H	28.08	1.80	0.00	43.63	54.00	10.37
4804.00	48.09	PK	H	32.91	3.17	37.20	46.97	74.00	27.03
4804.00	38.86	AV	H	32.91	3.17	37.20	37.74	54.00	16.26
7206.00	45.48	PK	H	35.74	4.82	37.23	48.81	74.00	25.19
7206.00	35.32	AV	H	35.74	4.82	37.23	38.65	54.00	15.35
Middle Channel: 2440 MHz									
2440.00	65.62	PK	H	28.18	1.82	0.00	95.62	N/A	N/A
2440.00	60.42	AV	H	28.18	1.82	0.00	90.42	N/A	N/A
2440.00	63.49	PK	V	28.18	1.82	0.00	93.49	N/A	N/A
2440.00	58.57	AV	V	28.18	1.82	0.00	88.57	N/A	N/A
4880.00	47.69	PK	H	33.06	3.27	37.21	46.81	74.00	27.19
4880.00	36.25	AV	H	33.06	3.27	37.21	35.37	54.00	18.63
7320.00	43.49	PK	H	36.03	4.62	37.37	46.77	74.00	27.23
7320.00	35.14	AV	H	36.03	4.62	37.37	38.42	54.00	15.58
High Channel: 2480 MHz									
2480.00	65.78	PK	H	28.26	1.84	0.00	95.88	N/A	N/A
2480.00	60.55	AV	H	28.26	1.84	0.00	90.65	N/A	N/A
2480.00	63.93	PK	V	28.26	1.84	0.00	94.03	N/A	N/A
2480.00	58.76	AV	V	28.26	1.84	0.00	88.86	N/A	N/A
2483.50	25.27	PK	H	28.27	1.84	0.00	55.38	74.00	18.62
2483.50	15.63	AV	H	28.27	1.84	0.00	45.74	54.00	8.26
4960.00	46.48	PK	H	33.22	3.23	37.25	45.68	74.00	28.32
4960.00	38.22	AV	H	33.22	3.23	37.25	37.42	54.00	16.58
7440.00	46.36	PK	H	36.34	4.41	37.52	49.59	74.00	24.41
7440.00	35.35	AV	H	36.34	4.41	37.52	38.58	54.00	15.42




Worst plots(802.11b middle channel) **Horizontal**

Fundamental
Test with Band
Rejection Filter

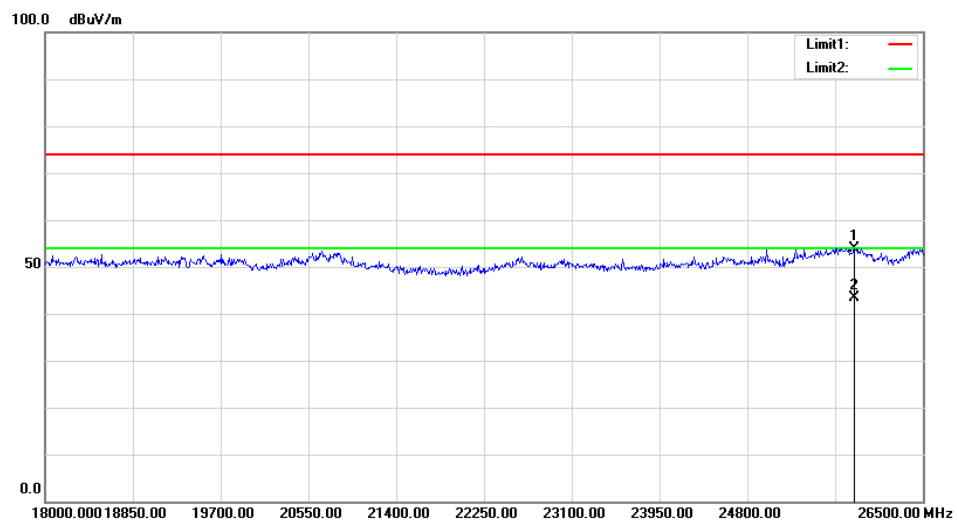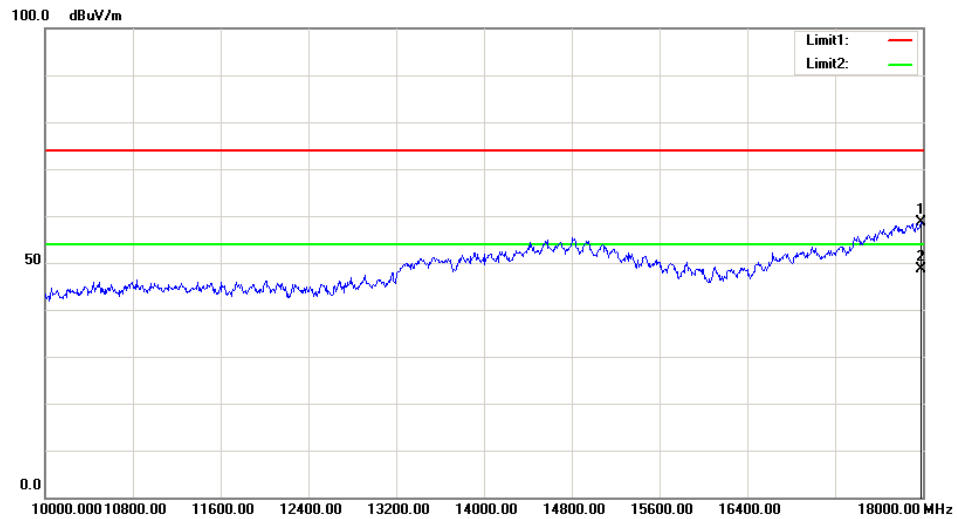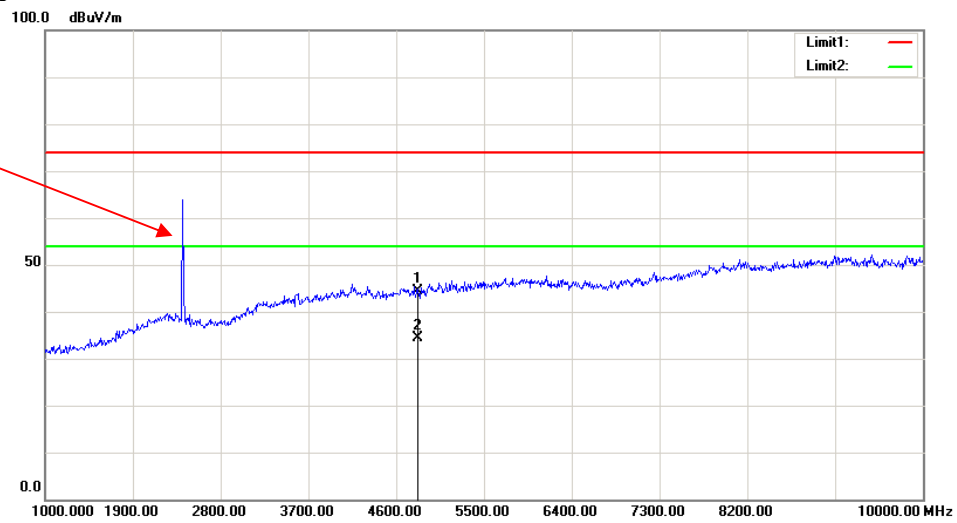

Vertical

Fundamental
Test with Band
Rejection Filter

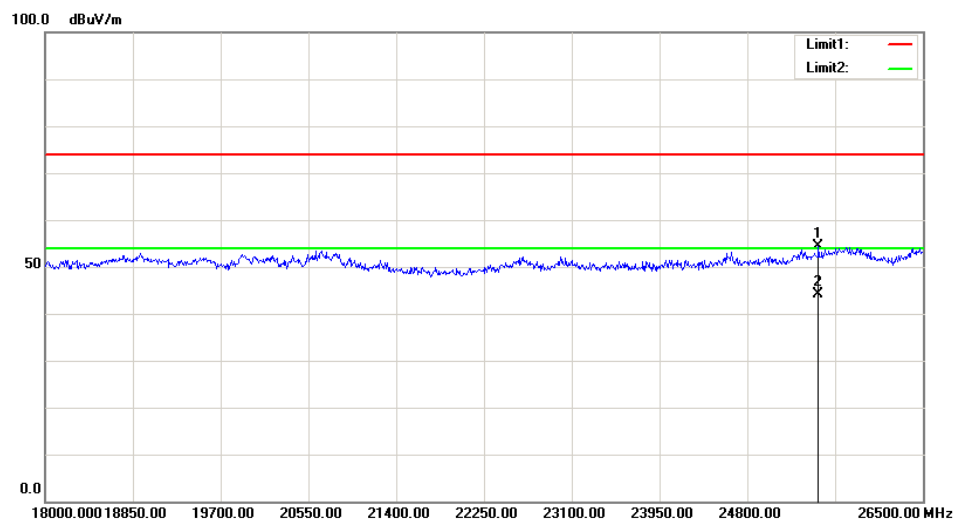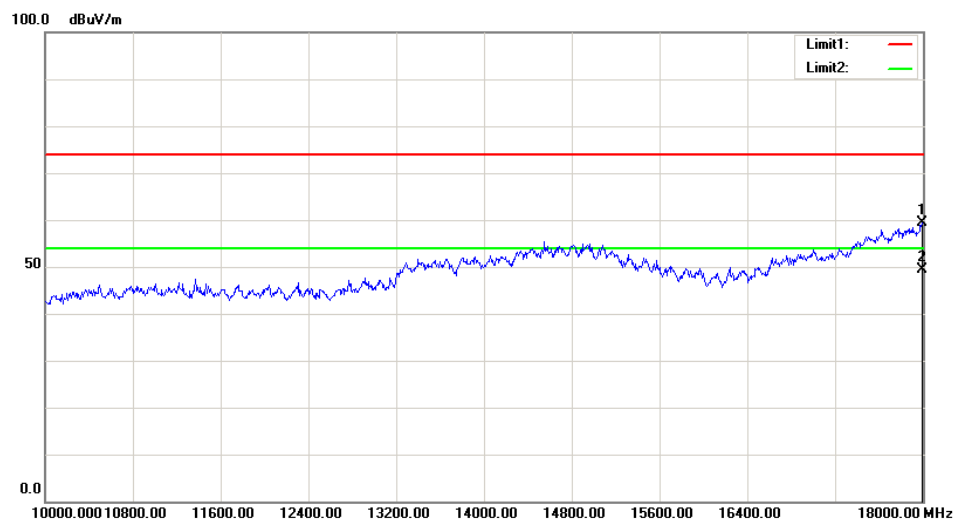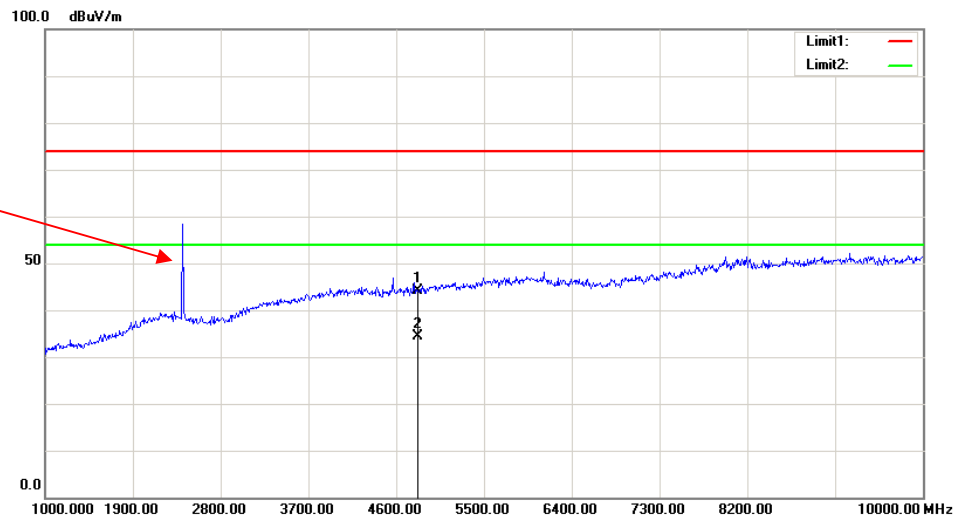

FCC §15.247(a) (2) –6 dB EMISSION BANDWIDTH


Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Measure the 99% bandwidth use OBW test function.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
N/A	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	24.8 °C
Relative Humidity:	37 %
ATM Pressure:	101.6 kPa

* The testing was performed by Mark Pan and Swim Lv on 2018-01-16.


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.


Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	7.2	≥ 0.5
	Middle	2437	7.6	≥ 0.5
	High	2462	7.68	≥ 0.5
802.11g	Low	2412	16.48	≥ 0.5
	Middle	2437	16.32	≥ 0.5
	High	2462	16.4	≥ 0.5
802.11n ht20	Low	2412	17.6	≥ 0.5
	Middle	2437	17.68	≥ 0.5
	High	2462	17.44	≥ 0.5
802.11n ht40	Low	2422	35.68	≥ 0.5
	Middle	2437	35.52	≥ 0.5
	High	2452	35.52	≥ 0.5
BLE	Low	2402	0.68	≥ 0.5
	Middle	2440	0.68	≥ 0.5
	High	2480	0.68	≥ 0.5

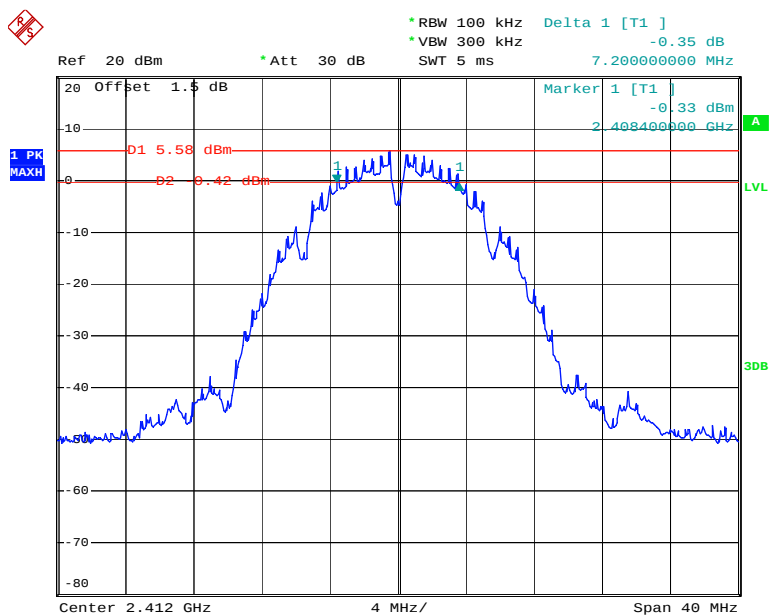802.11b Low Channel


Date: 16.JAN.2018 19:39:13

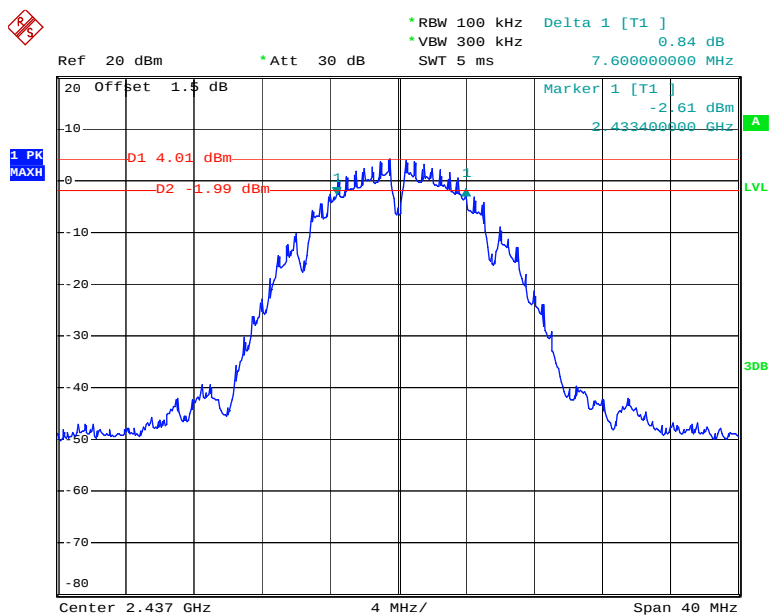802.11b Middle Channel


Date: 16.JAN.2018 19:42:58

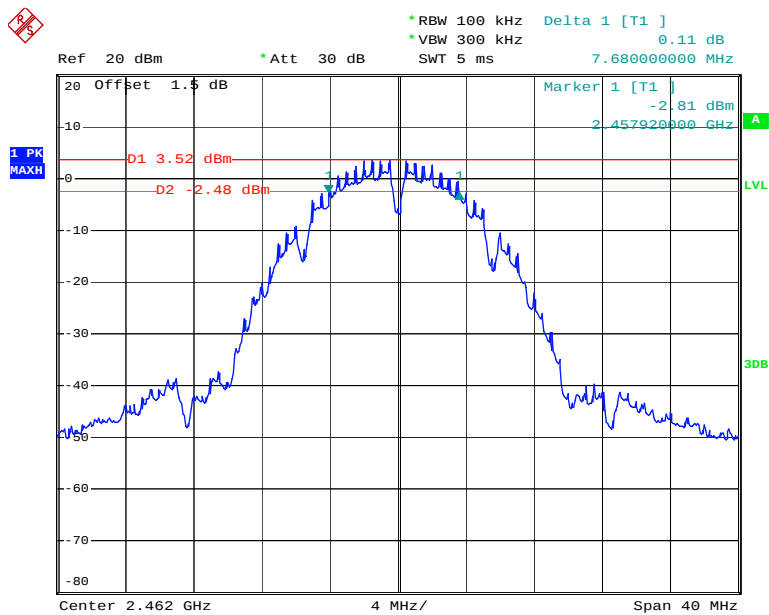802.11b High Channel


Date: 16.JAN.2018 19:45:22

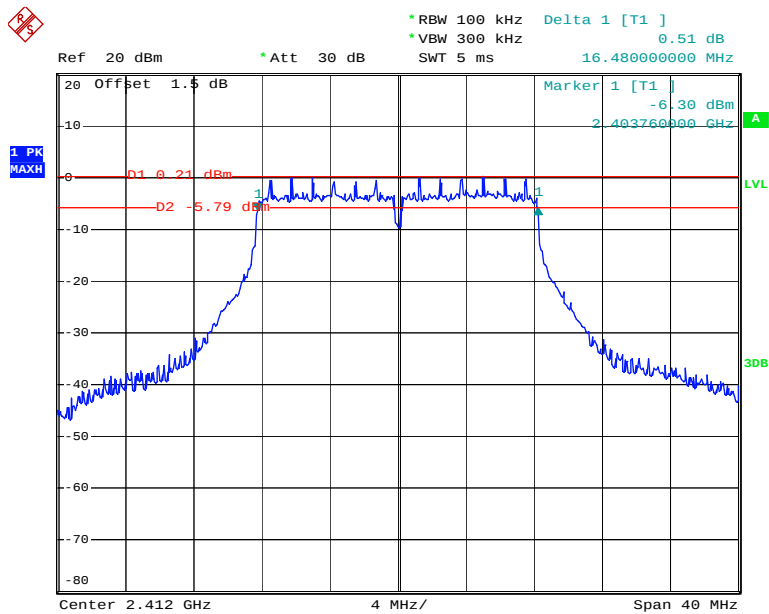802.11g Low Channel

Date: 16.JAN.2018 19:56:42

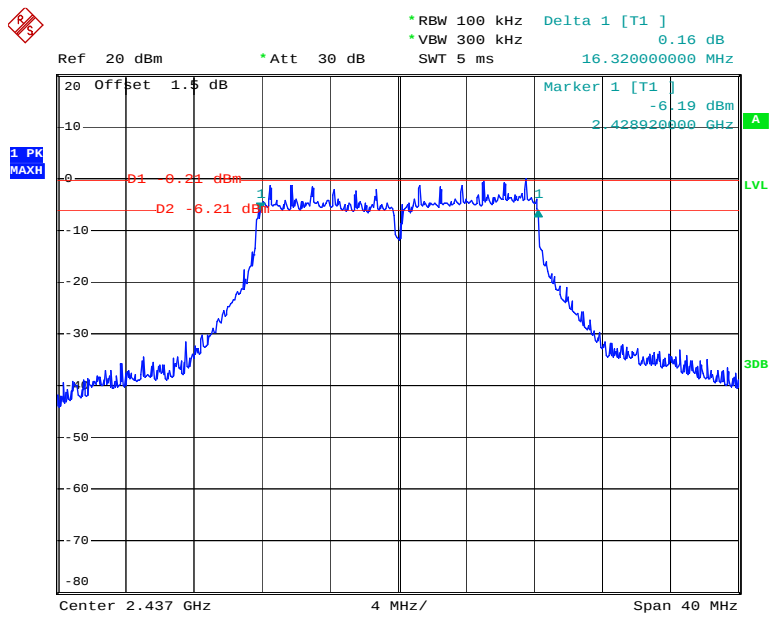
802.11g Middle Channel

Date: 16.JAN.2018 19:53:32

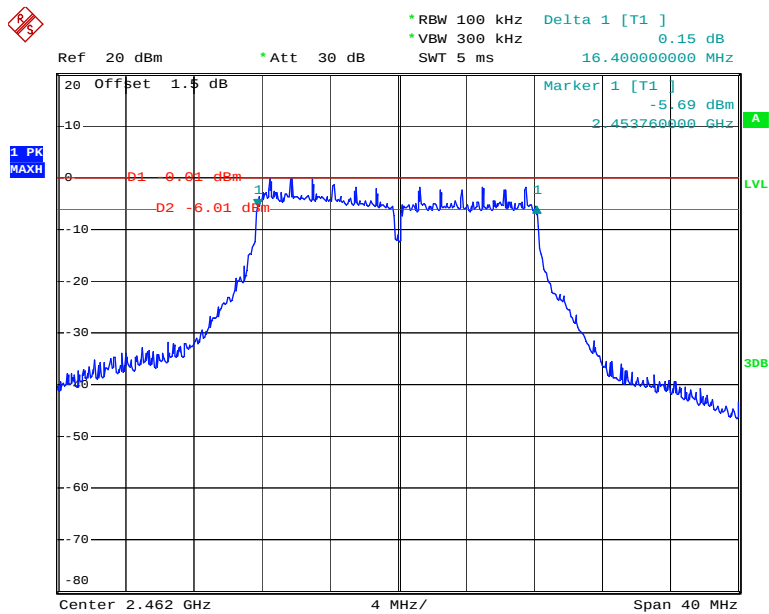802.11g High Channel


Date: 16.JAN.2018 19:48:28

802.11n ht20 Low Channel

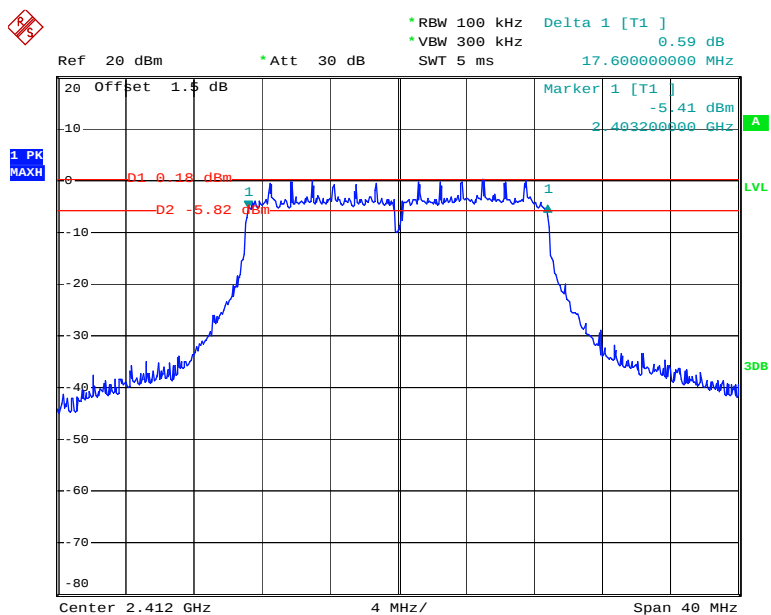


Date: 16.JAN.2018 19:59:40

802.11n ht20 Middle Channel

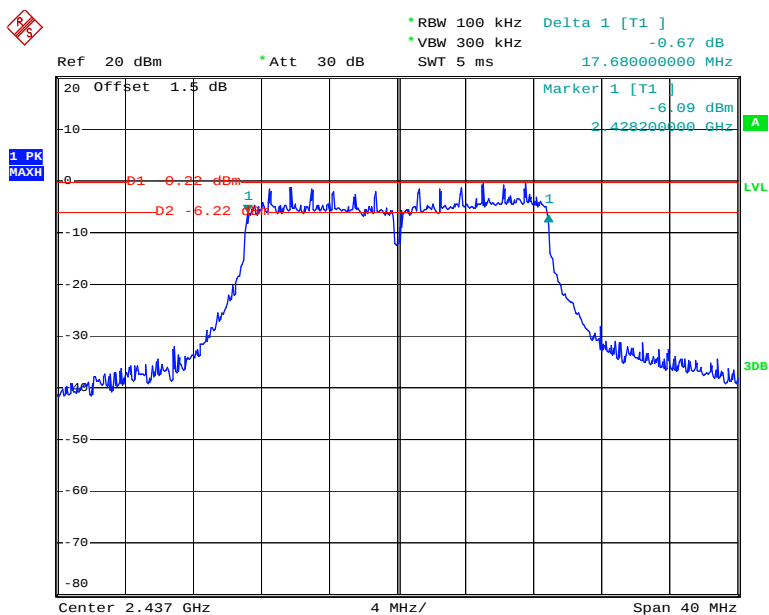


Date: 16.JAN.2018 20:03:42

802.11n ht20 High Channel

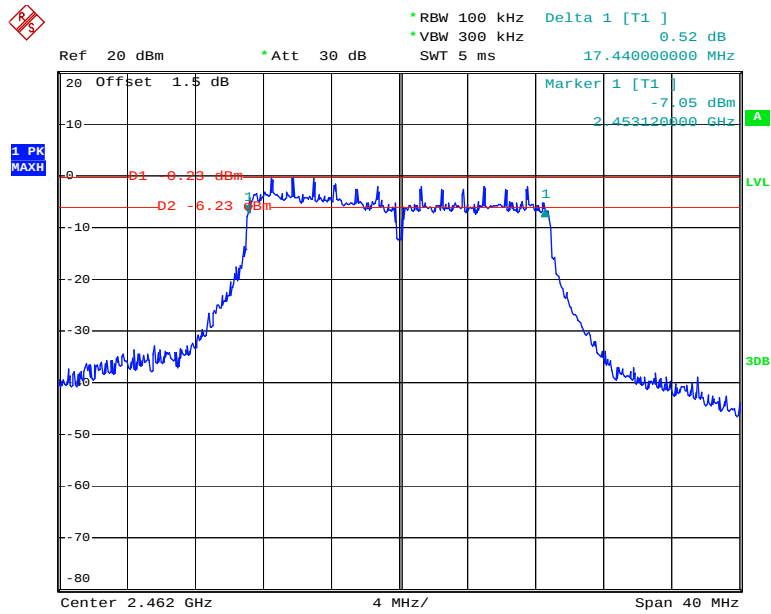


Date: 16.JAN.2018 20:07:17

802.11n ht40 Low Channel

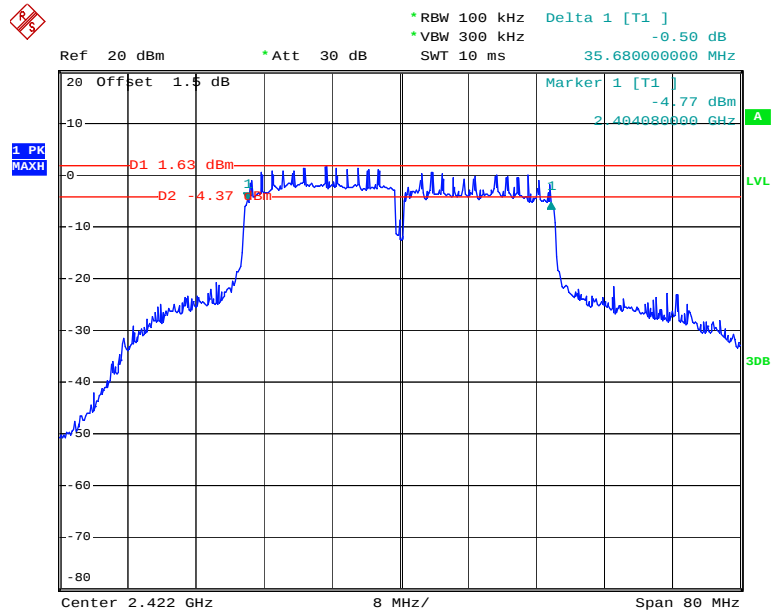


Date: 16.JAN.2018 20:12:45

802.11n ht40 Middle Channel

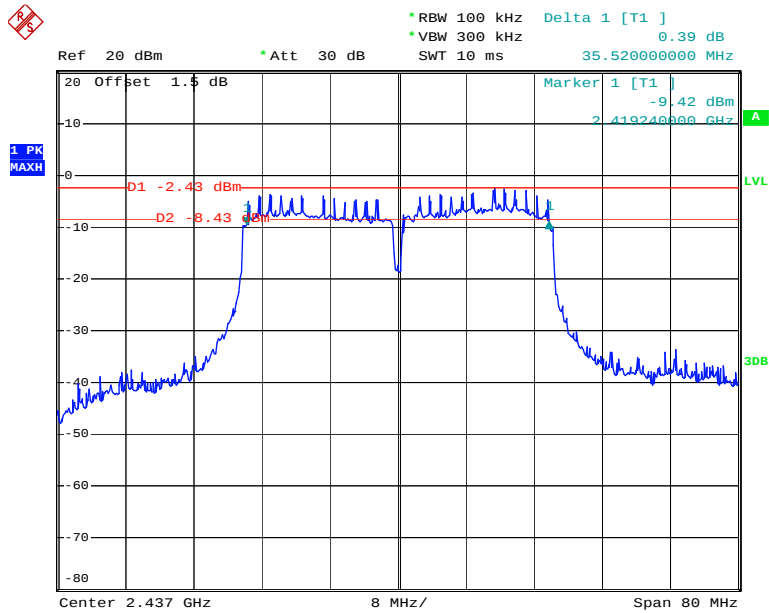


Date: 16.JAN.2018 20:18:18

802.11n ht40 High Channel

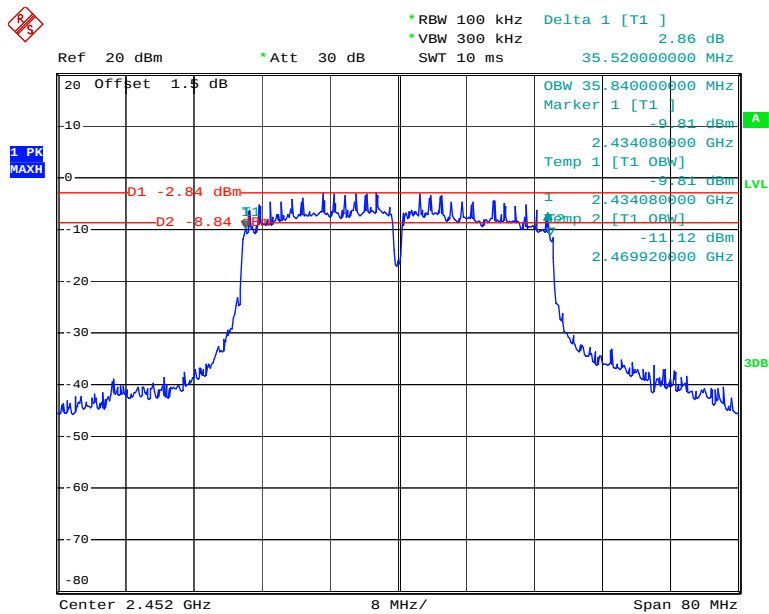


Date: 16.JAN.2018 20:23:30

BLE Low Channel

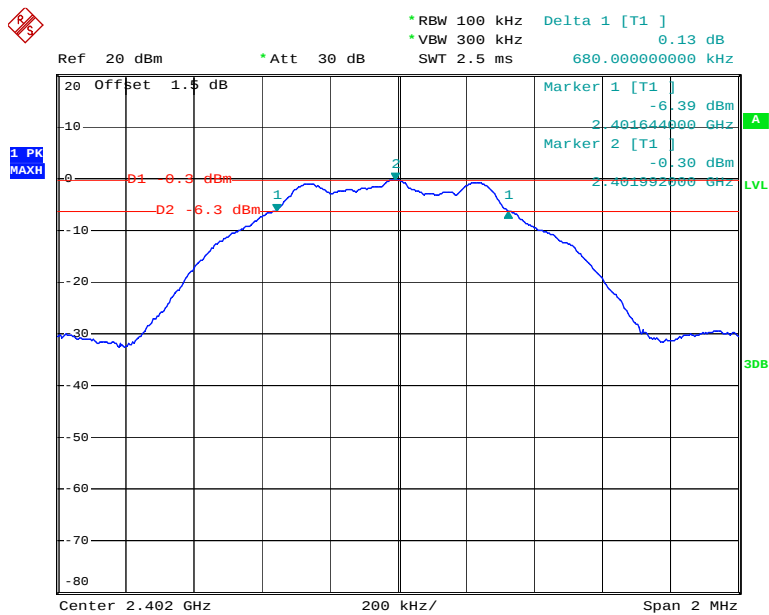


Date: 16.JAN.2018 13:44:31

BLE Middle Channel

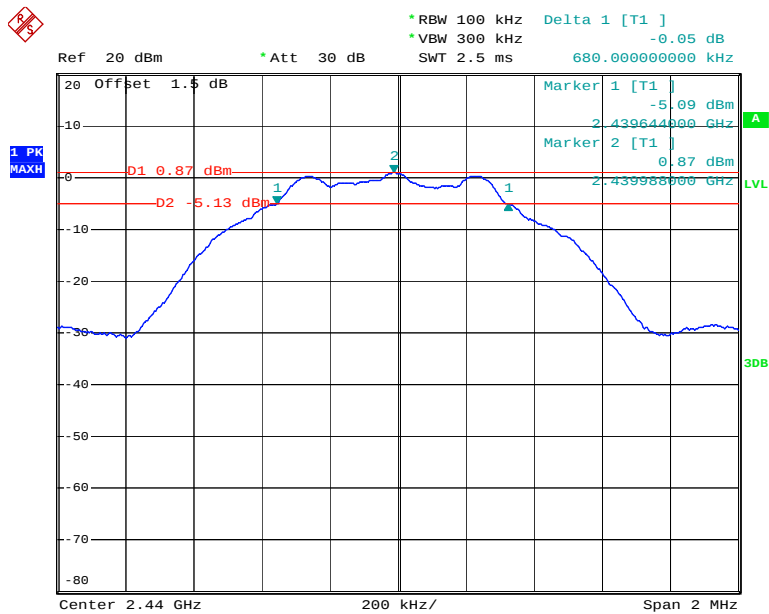

Date: 16.JAN.2018 13:46:39

BLE High Channel

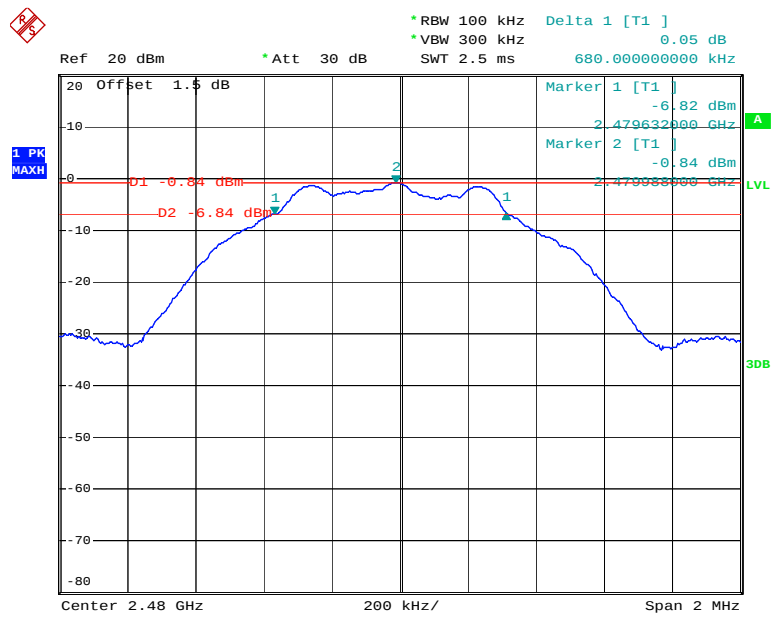


Date: 16.JAN.2018 13:48:33

FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER**Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power Meter to test Peak output power, record the result as peak power.
5. Set the power meter to test average output power, record the result as average power.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2017-11-03	2018-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2017-11-03	2018-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2017-11-03	2018-11-03
N/A	Coaxial Cable	C-SJ00-0010	C0010/01	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.8 °C
Relative Humidity:	37 %
ATM Pressure:	101.6 kPa

* The testing was performed by Mark Pan and Swim Lv on 2018-01-16.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Test mode	Channel	Frequency (MHz)	Max Peak Conducted Output Power (dBm)	Limit (dBm)
802.11b	Low	2412	15.47	30
	Middle	2437	14.22	30
	High	2462	14.1	30
802.11g	Low	2412	19.31	30
	Middle	2437	18.15	30
	High	2462	18.21	30
802.11n20	Low	2412	19.37	30
	Middle	2437	18.31	30
	High	2462	17.99	30
802.11n40	Low	2422	19.35	30
	Middle	2437	18.71	30
	High	2452	18.48	30
BLE	Low	2402	0.01	30
	Middle	2440	1.17	30
	High	2480	-0.51	30

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

According to FCC§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
N/A	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	24.8 °C
Relative Humidity:	37 %
ATM Pressure:	101.6 kPa

** The testing was performed by Mark Pan and Swim Lv on 2018-01-16.*

Test mode: Transmitting


Test Result: Compliant.

802.11b: Band Edge, Left Side

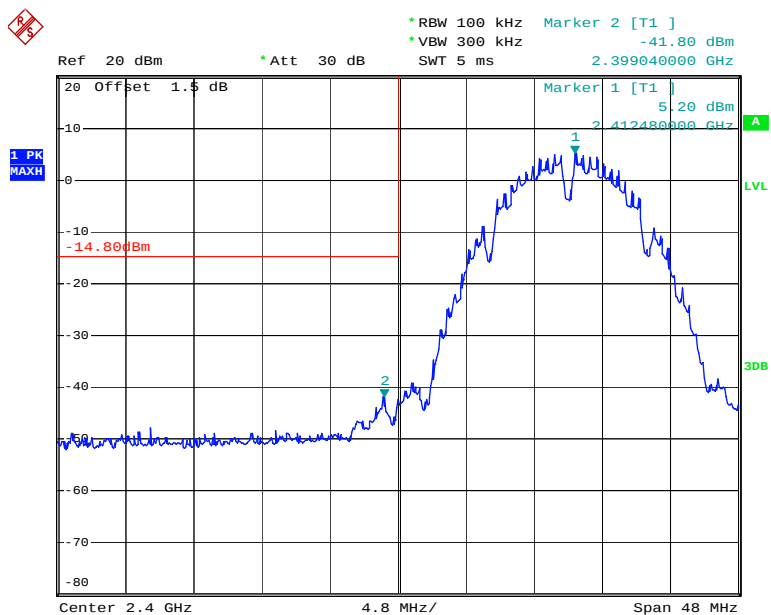

Date: 16.JAN.2018 19:41:19

802.11b: Band Edge, Right Side

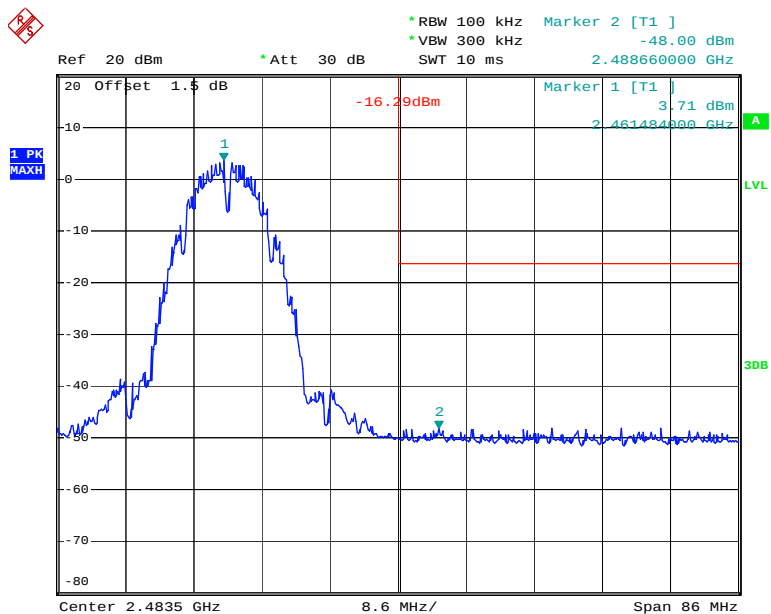


Date: 16.JAN.2018 19:47:34


Ref 20 dBm
 Att 30 dB
 RBW 100 kHz
 VBW 300 kHz
 SWT 5 ms
 Marker 2 [T1]
 -34.02 dBm
 2.398848000 GHz

20 Offset 1.5 dB
 1 PK MAXH
 -20.00 dBm
 -30
 -40
 -50
 -60
 -70
 -80
 Center 2.4 GHz
 4.8 MHz/
 Span 48 MHz
 Marker 1 [T1]
 -0.00 dBm
 2.416992000 GHz
 1
 2
 LVL
 3DB


802.11g: Band Edge, Right Side

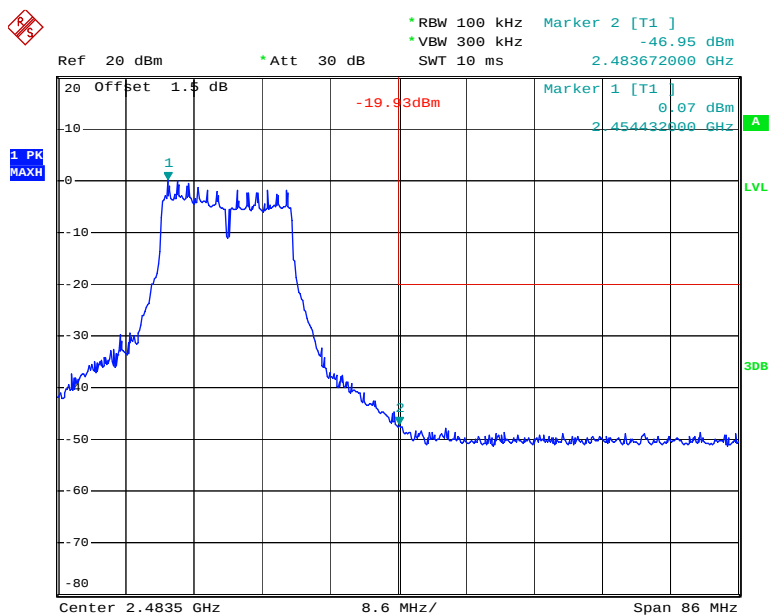

Page 56 of 68

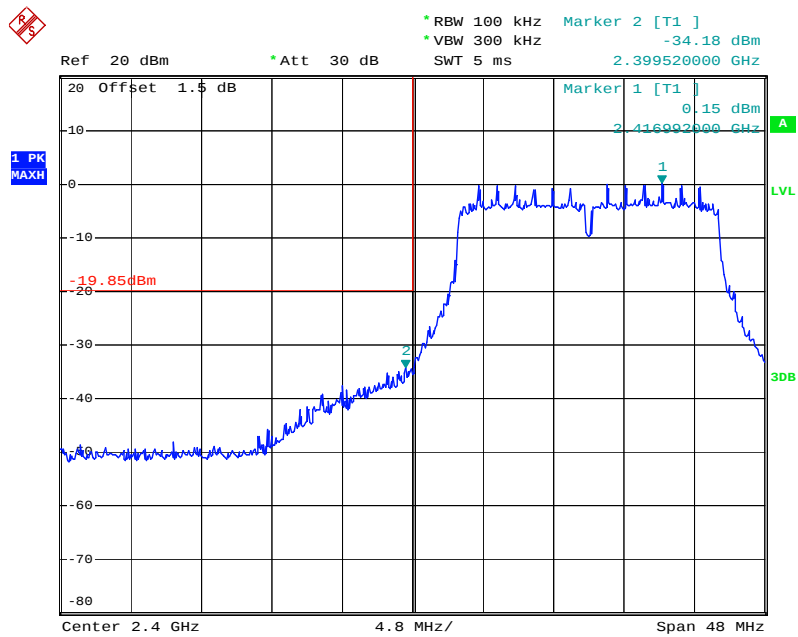
802.11n ht20 Band Edge, Left Side

Date: 16.JAN.2018 20:02:42

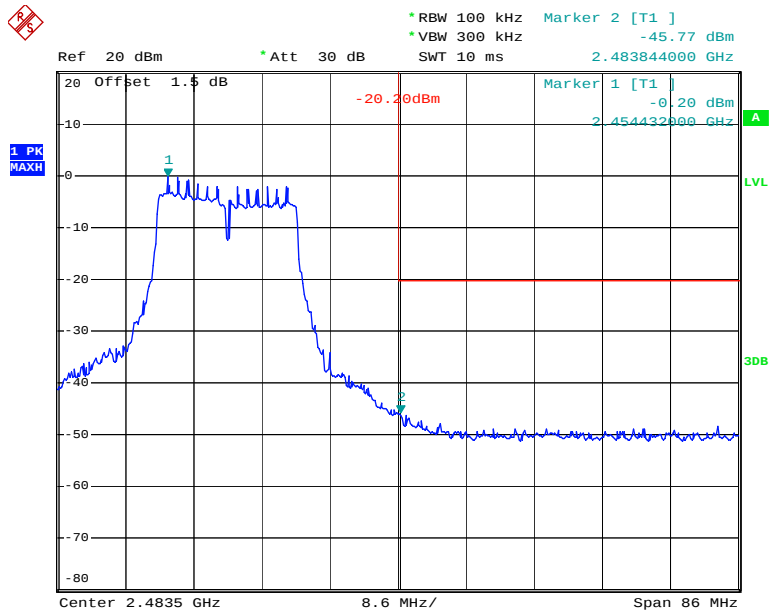802.11n ht20 Band Edge, Right Side


Date: 16.JAN.2018 20:11:26

802.11n ht40 Band Edge, Left Side

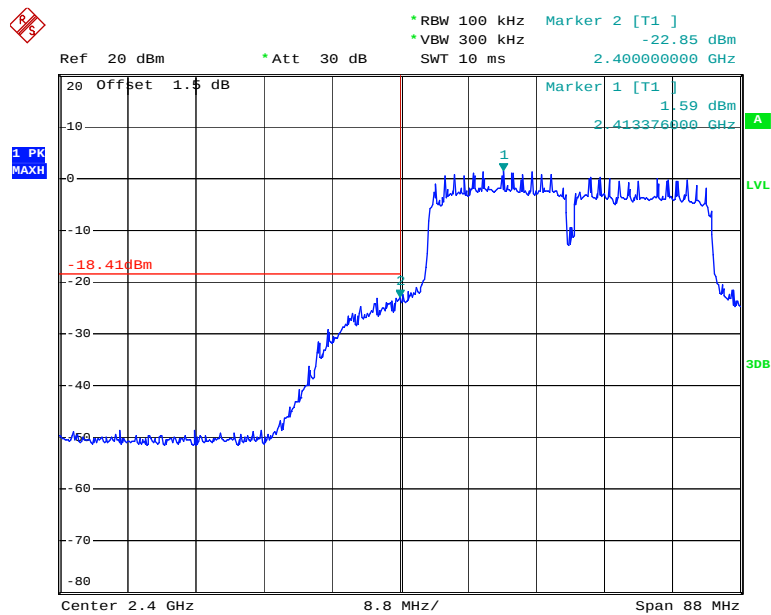


Date: 16.JAN.2018 20:17:27

802.11n ht40 Band Edge, Right Side

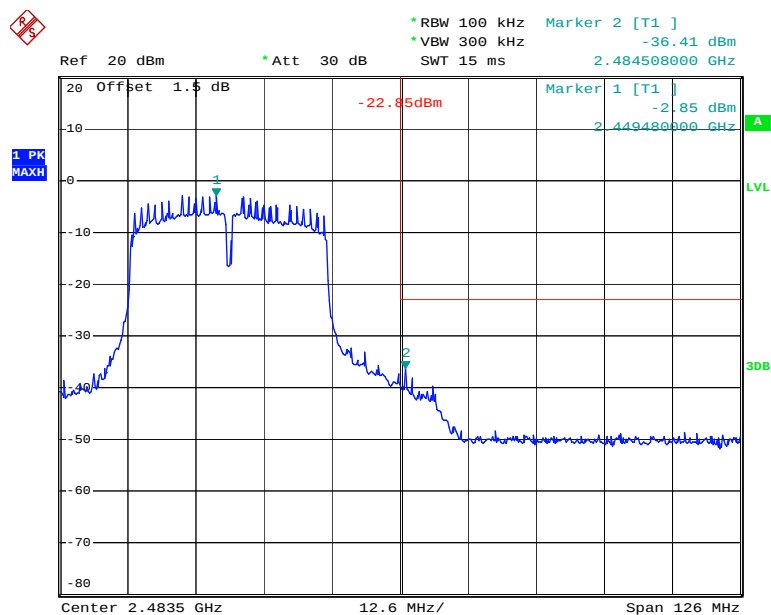


Date: 16.JAN.2018 20:27:58

BLE Band Edge, Left Side

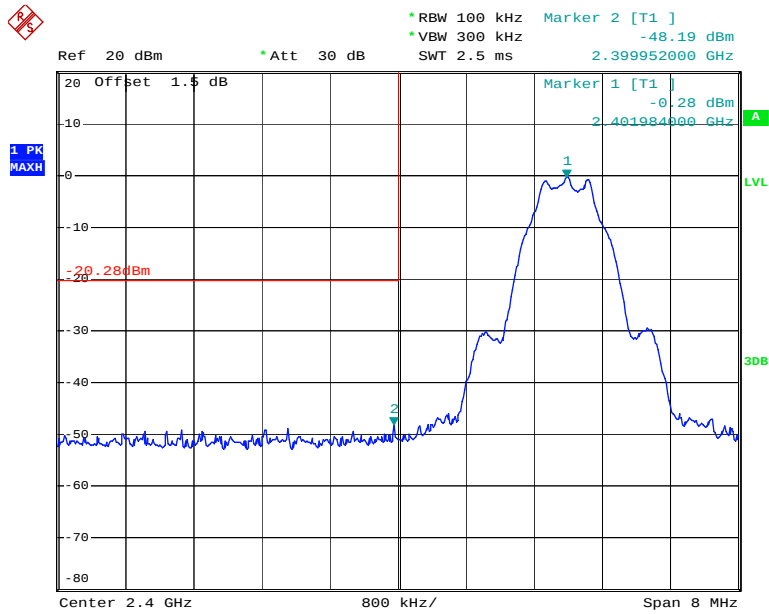

Date: 16.JAN.2018 13:46:02

BLE Band Edge, Right Side

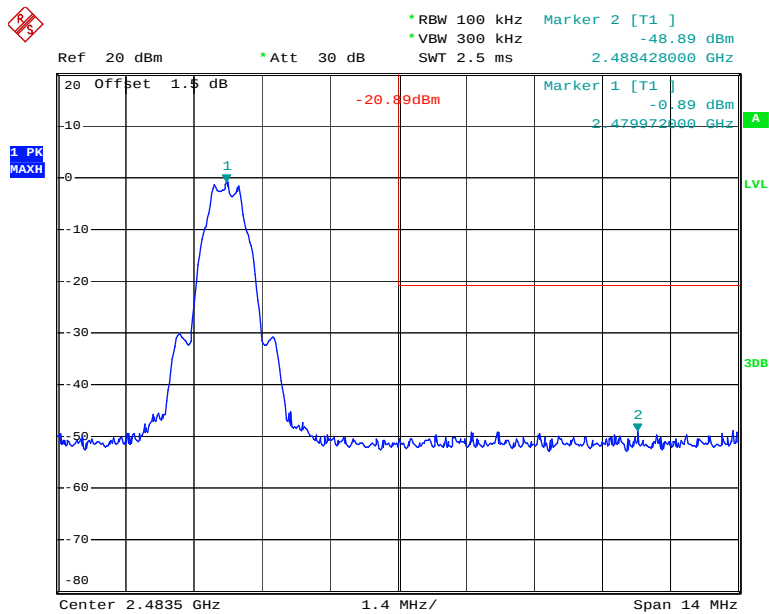

Date: 16.JAN.2018 13:49:51

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
R&S	EMI Test Receiver	ESPI	100120	2017-12-11	2018-12-11
N/A	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	24.8~27.2 °C
Relative Humidity:	37~66 %
ATM Pressure:	101.1~101.6 kPa

* The testing was performed by Mark Pan and Swim Lv on 2018-01-16 and 2018-05-09.


Test Result: Compliance*Test Mode: Transmitting**Test Result: Compliant. Please refer to the following table and plots*

Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	Low	2412	-8.78	≤ 8
	Middle	2437	-9.60	≤ 8
	High	2462	-10.04	≤ 8
802.11g	Low	2412	-13.38	≤ 8
	Middle	2437	-13.98	≤ 8
	High	2462	-13.62	≤ 8
802.11n20	Low	2412	-13.63	≤ 8
	Middle	2437	-13.00	≤ 8
	High	2462	-14.70	≤ 8
802.11n40	Low	2422	-16.77	≤ 8
	Middle	2437	-16.21	≤ 8
	High	2452	-16.98	≤ 8
BLE	Low	2402	-15.47	≤ 8
	Middle	2440	-14.33	≤ 8
	High	2480	-15.94	≤ 8

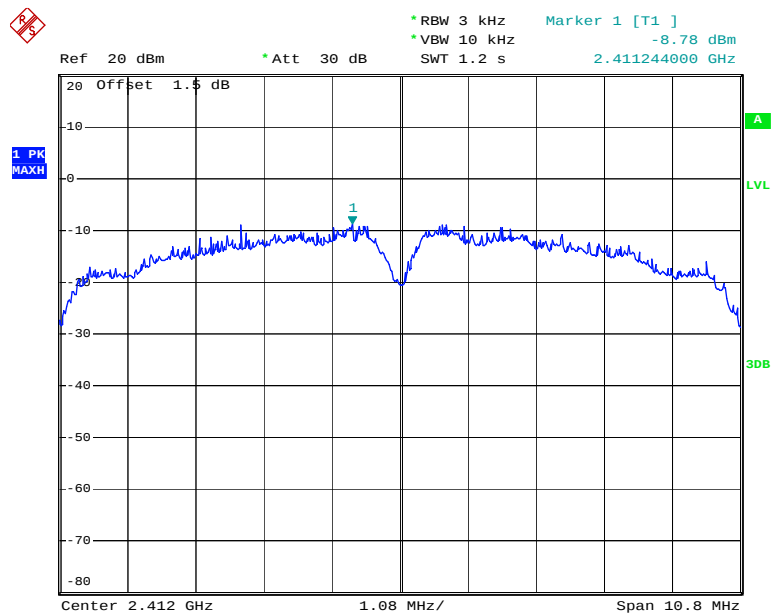Power Spectral Density, 802.11b Low Channel


Date: 16.JAN.2018 19:40:52

Power Spectral Density, 802.11b Middle Channel

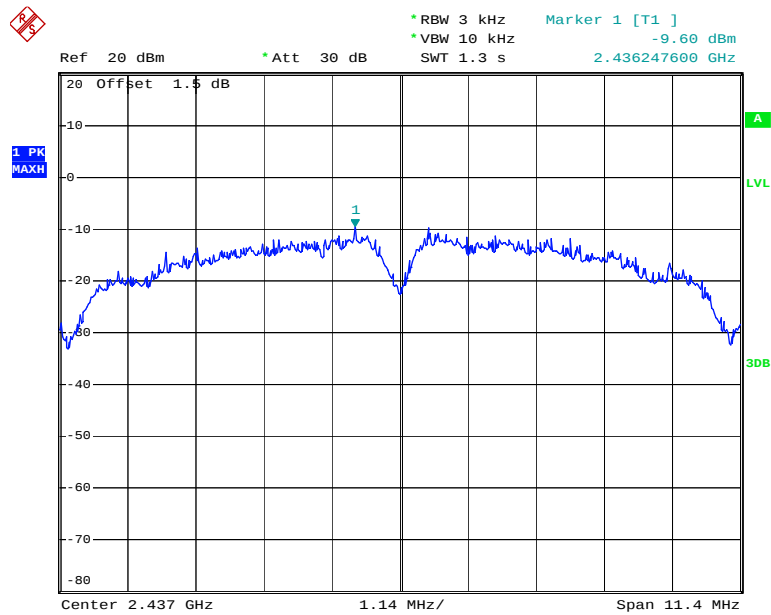


Date: 16.JAN.2018 19:44:18


Power Spectral Density, 802.11b High Channel

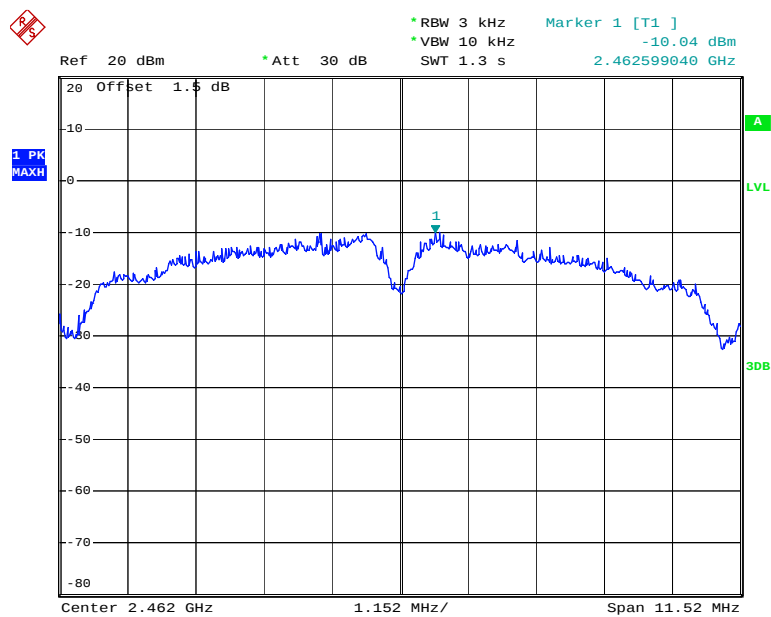

Date: 16.JAN.2018 19:47:00

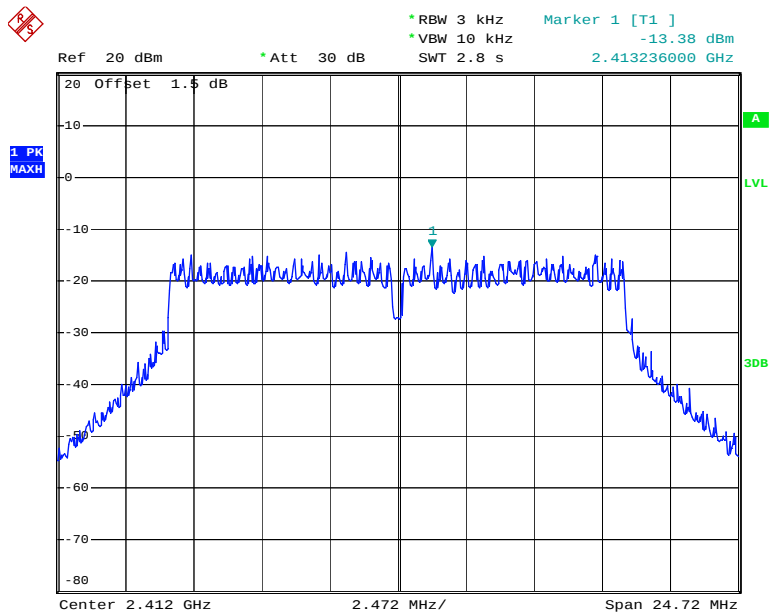
Power Spectral Density, 802.11g Low Channel

Date: 16.JAN.2018 19:58:09

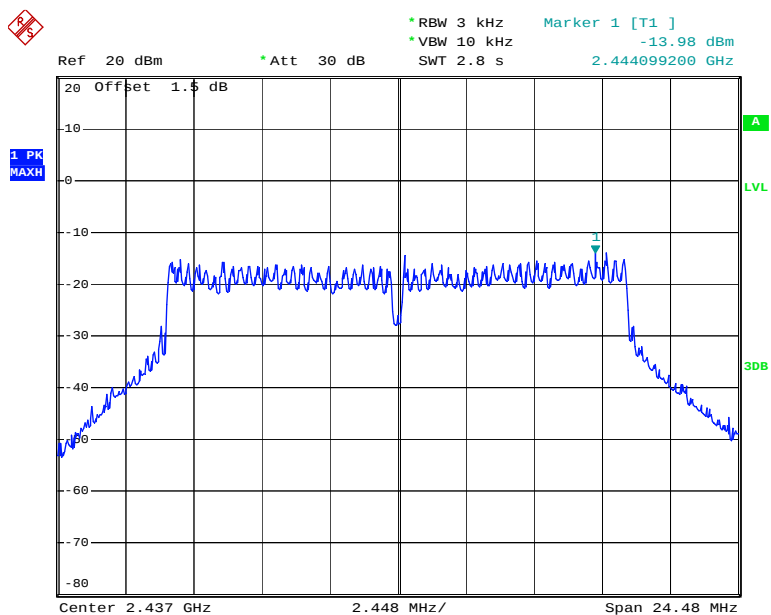Power Spectral Density, 802.11g Middle Channel


Date: 16.JAN.2018 19:55:35

Power Spectral Density, 802.11g High Channel

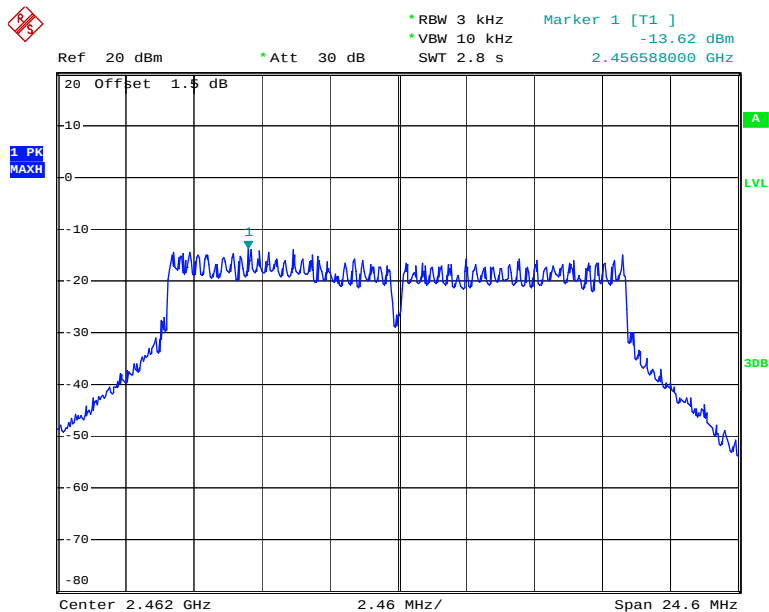


Date: 16.JAN.2018 19:51:35

Power Spectral Density, 802.11n ht20 Low Channel

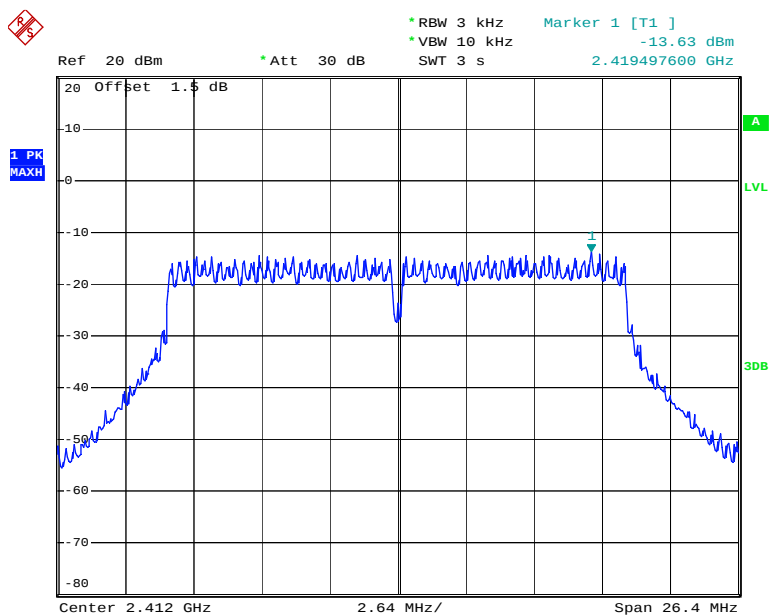


Date: 16.JAN.2018 20:02:15

Power Spectral Density, 802.11n ht20 Middle Channel

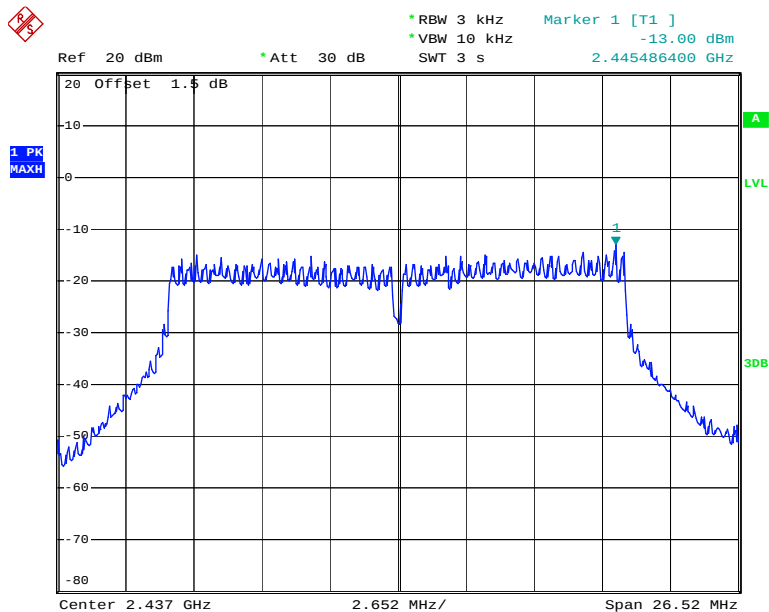


Date: 16.JAN.2018 20:06:18

Power Spectral Density, 802.11n ht20 High Channel

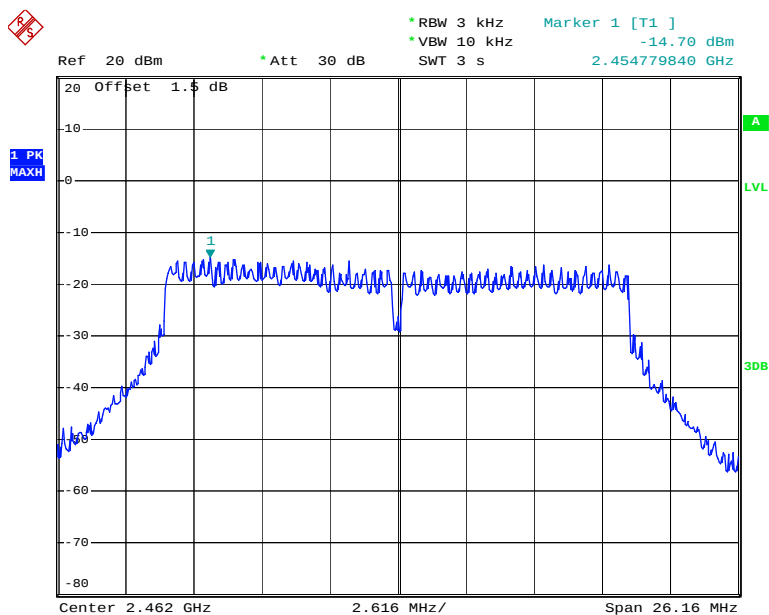


Date: 16.JAN.2018 20:10:51

Power Spectral Density, 802.11n ht40 Low Channel

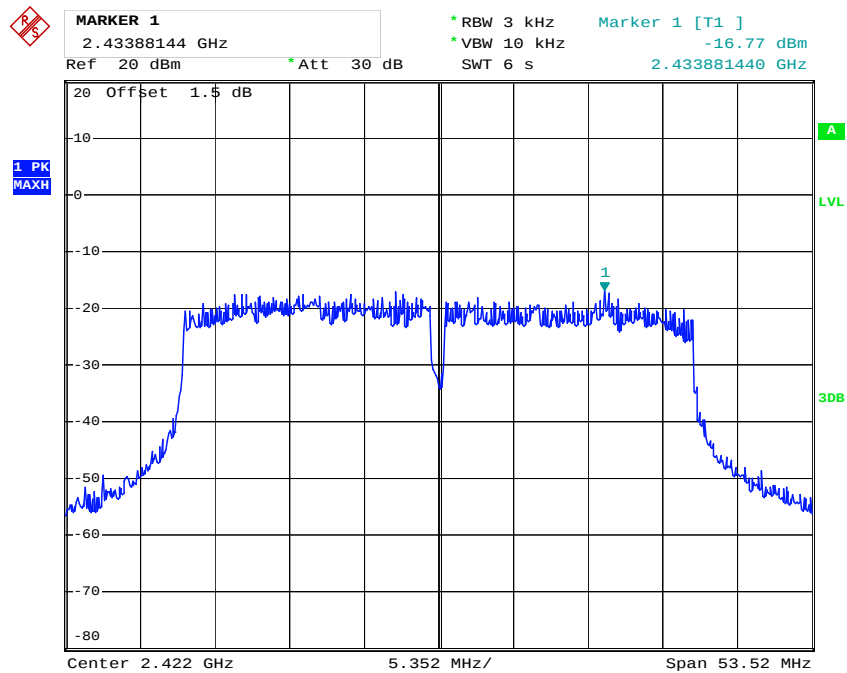


Date: 9.MAY.2018 17:52:49

Power Spectral Density, 802.11n ht40 Middle Channel

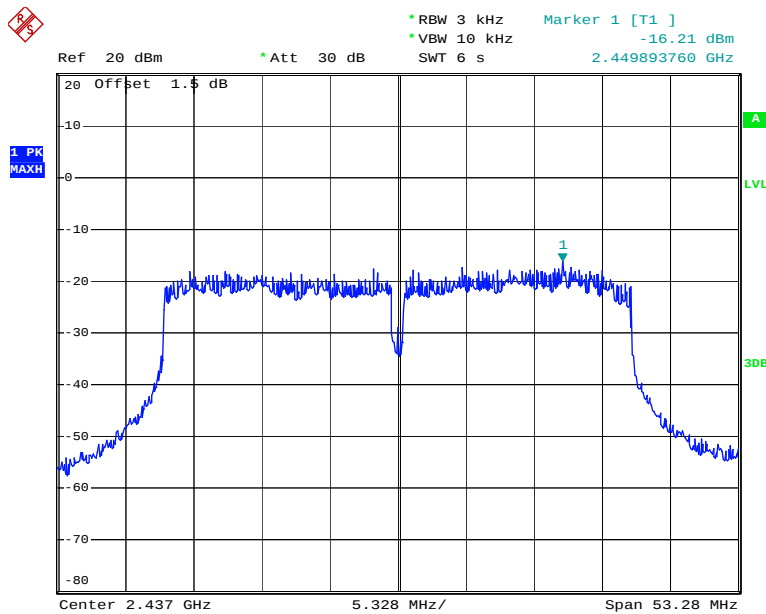


Date: 16.JAN.2018 20:21:28

Power Spectral Density, 802.11n ht40 High Channel

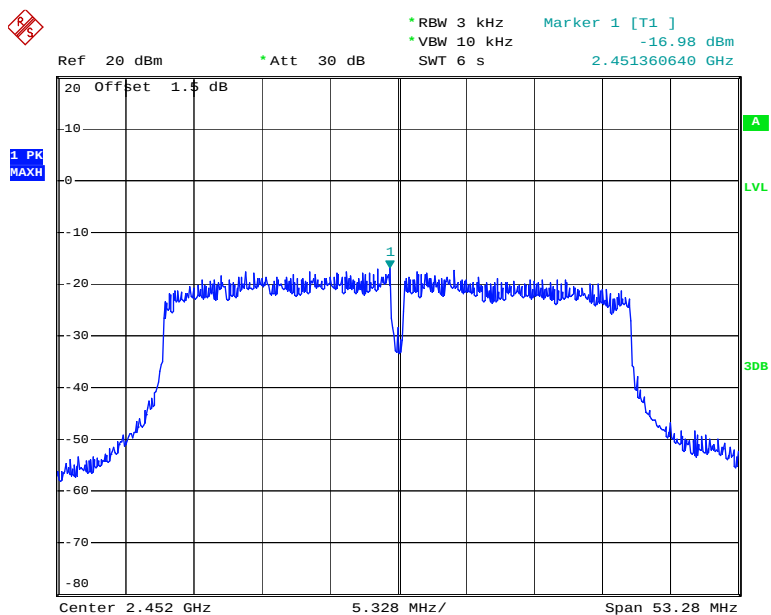


Date: 16.JAN.2018 20:27:24

Power Spectral Density, BLE Low Channel

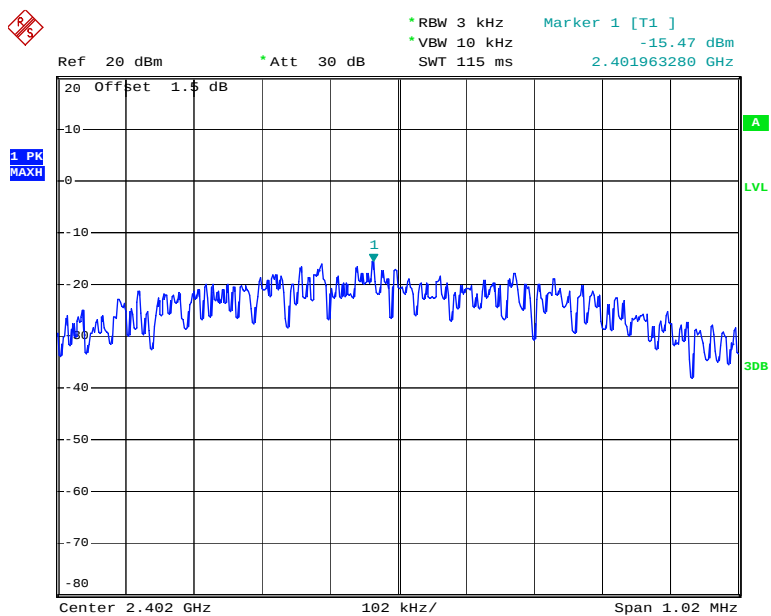


Date: 16.JAN.2018 13:45:11

Power Spectral Density, BLE Middle Channel

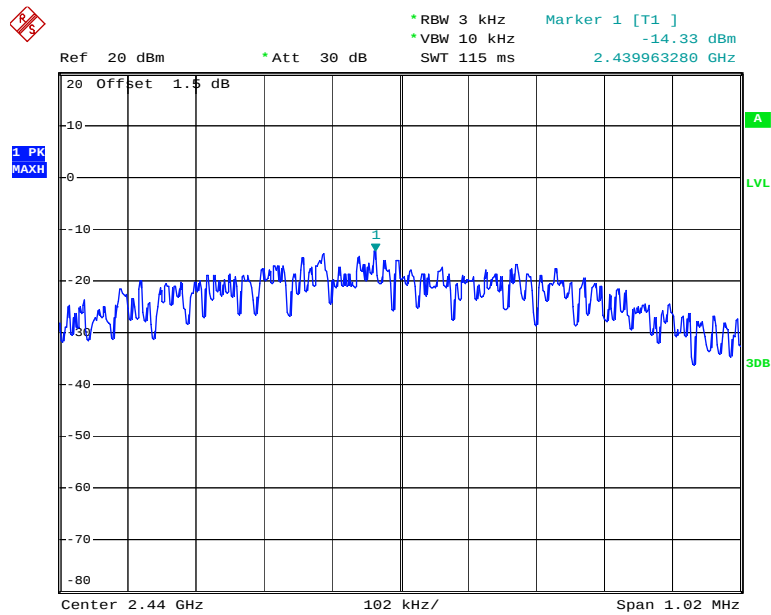

Date: 16.JAN.2018 13:47:17

Power Spectral Density, BLE High Channel

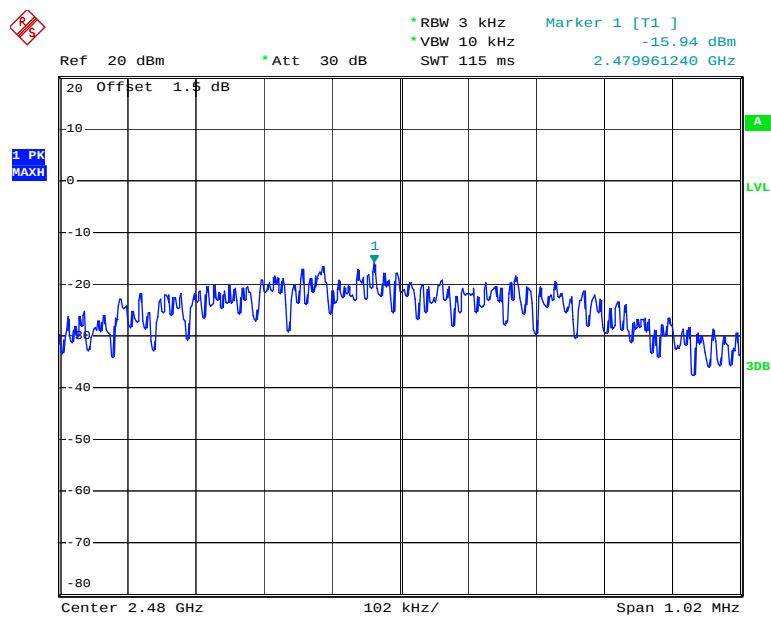

Date: 16.JAN.2018 13:49:12

***** END OF REPORT *****