




Appendix C. Test Result and Data (1GHz ~ 40GHz)

SISO ANT A -B5

Test Mode : 1TX 11a CH01 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

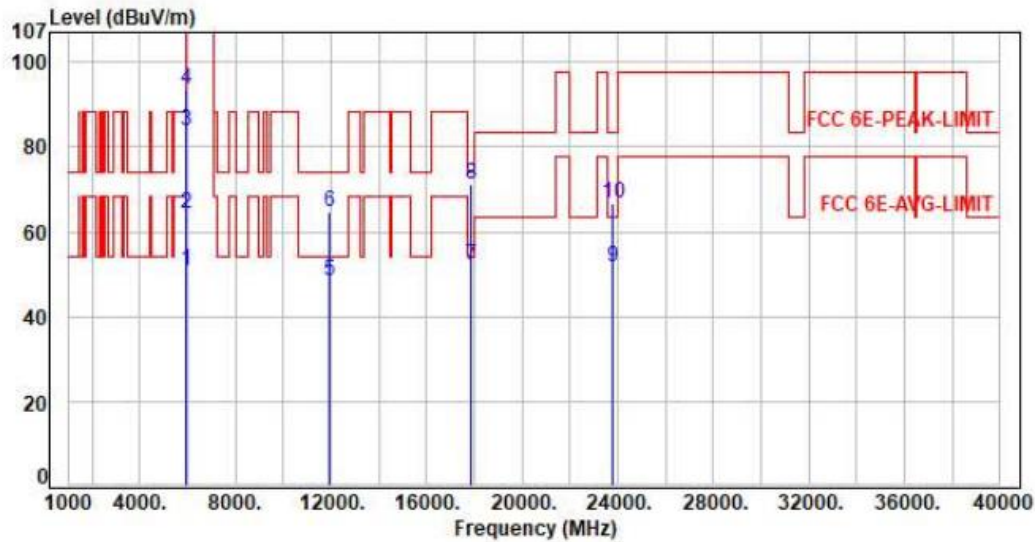

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.98	50.71	68.20	-17.49	Average	267	19	P
2	5925.00	7.73	56.71	64.44	88.20	-23.76	Peak	267	19	P
3	5955.00	7.79	75.92	83.71	200.00	-116.29	Average	267	19	P
4	5955.00	7.79	85.72	93.51	200.00	-106.49	Peak	267	19	P
5	11910.00	16.61	31.82	48.43	54.00	-5.57	Average	100	185	P
6	11910.00	16.61	47.97	64.58	74.00	-9.42	Peak	100	185	P
7	17865.00	26.42	25.55	51.97	54.00	-2.03	Average	100	229	P
8	17865.00	26.42	44.82	71.24	74.00	-2.76	Peak	100	229	P
9	23820.00	9.80	41.82	51.62	63.54	-11.92	Average	150	360	P
10	23820.00	9.80	56.74	66.54	83.54	-17.00	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH01 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

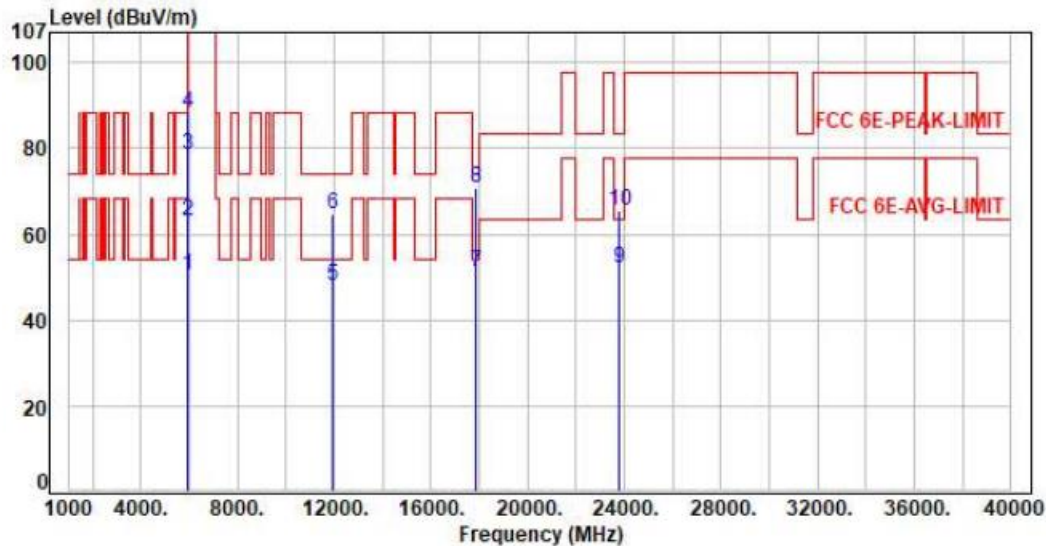

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.75	50.48	68.20	-17.72	Average	107	72	P
2	5925.00	7.73	55.22	62.95	88.20	-25.25	Peak	107	72	P
3	5955.00	7.79	70.80	78.59	200.00	-121.41	Average	107	72	P
4	5955.00	7.79	80.68	88.47	200.00	-111.53	Peak	107	72	P
5	11910.00	16.61	31.28	47.89	54.00	-6.11	Average	100	151	P
6	11910.00	16.61	47.89	64.50	74.00	-9.50	Peak	100	151	P
7	17865.00	26.42	24.96	51.38	54.00	-2.62	Average	100	231	P
8	17865.00	26.42	44.29	70.71	74.00	-3.29	Peak	100	231	P
9	23820.00	9.80	42.38	52.18	63.54	-11.36	Average	150	360	P
10	23820.00	9.80	55.79	65.59	83.54	-17.95	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH45 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

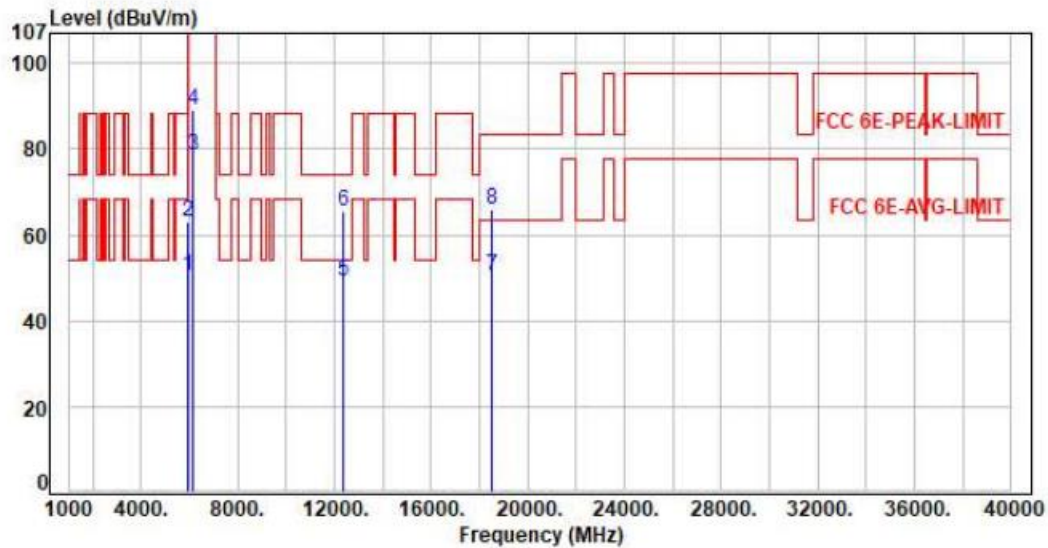

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.85	50.58	68.20	-17.62	Average	248	20	P
2	5925.00	7.73	55.51	63.24	88.20	-24.96	Peak	248	20	P
3	6175.00	8.36	70.29	78.65	200.00	-121.35	Average	248	20	P
4	6175.00	8.36	80.62	88.98	200.00	-111.02	Peak	248	20	P
5	12350.00	16.58	32.51	49.09	54.00	-4.91	Average	100	152	P
6	12350.00	16.58	48.95	65.53	74.00	-8.47	Peak	100	152	P
7	18525.00	9.06	41.22	50.28	63.54	-13.26	Average	150	360	P
8	18525.00	9.06	56.67	65.73	83.54	-17.81	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH45 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

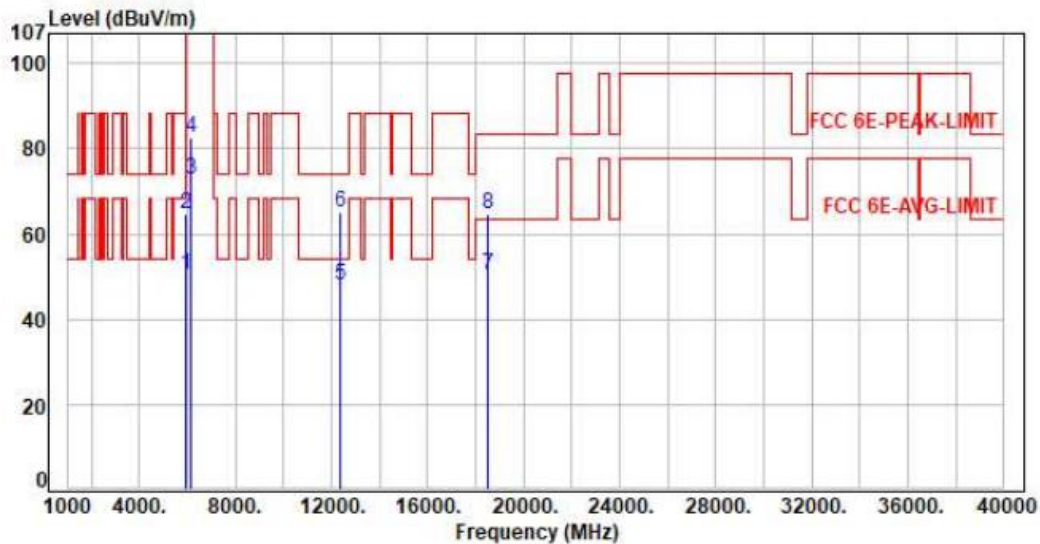

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.78	50.51	68.20	-17.69	Average	100	70	P
2	5925.00	7.73	56.86	64.59	88.20	-23.61	Peak	100	70	P
3	6175.00	8.36	64.63	72.99	200.00	-127.01	Average	100	70	P
4	6175.00	8.36	74.34	82.70	200.00	-117.30	Peak	100	70	P
5	12350.00	16.58	31.52	48.10	54.00	-5.90	Average	100	186	P
6	12350.00	16.58	48.41	64.99	74.00	-9.01	Peak	100	186	P
7	18525.00	9.06	41.47	50.53	63.54	-13.01	Average	150	360	P
8	18525.00	9.06	55.73	64.79	83.54	-18.75	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH93 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

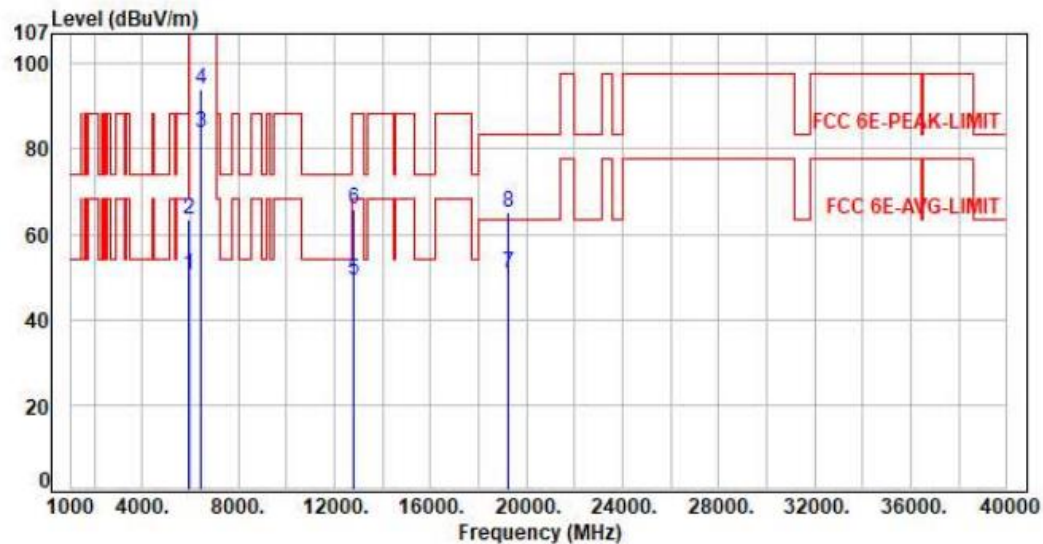

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.64	50.37	68.20	-17.83	Average	243	39	P
2	5925.00	7.73	55.79	63.52	88.20	-24.68	Peak	243	39	P
3	6415.00	8.42	75.25	83.67	200.00	-116.33	Average	243	39	P
4	6415.00	8.42	85.42	93.84	200.00	-106.16	Peak	243	39	P
5	12830.00	17.78	31.42	49.20	68.20	-19.00	Average	100	153	P
6	12830.00	17.78	48.30	66.08	88.20	-22.12	Peak	100	153	P
7	19245.00	9.42	41.57	50.99	63.54	-12.55	Average	150	360	P
8	19245.00	9.42	55.83	65.25	83.54	-18.29	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH93 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

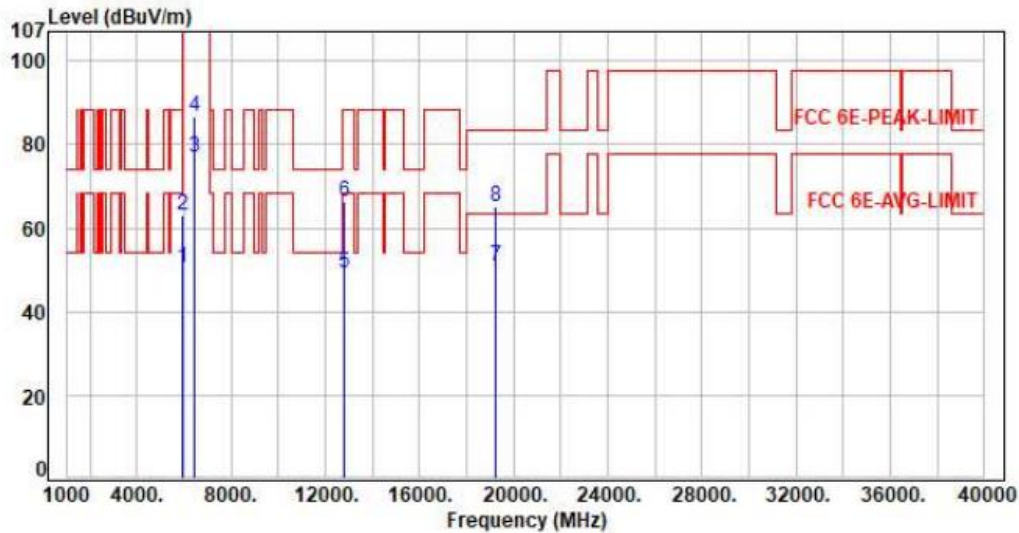

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.83	50.56	68.20	-17.64	Average	100	55	P
2	5925.00	7.73	55.13	62.86	88.20	-25.34	Peak	100	55	P
3	6415.00	8.42	68.54	76.96	200.00	-123.04	Average	100	55	P
4	6415.00	8.42	78.25	86.67	200.00	-113.33	Peak	100	55	P
5	12830.00	17.78	31.28	49.06	68.20	-19.14	Average	100	188	P
6	12830.00	17.78	48.69	66.47	88.20	-21.73	Peak	100	188	P
7	19245.00	9.42	41.53	50.95	63.54	-12.59	Average	150	360	P
8	19245.00	9.42	55.73	65.15	83.54	-18.39	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO ANT A-B6

Test Mode : 1TX 11a CH97 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

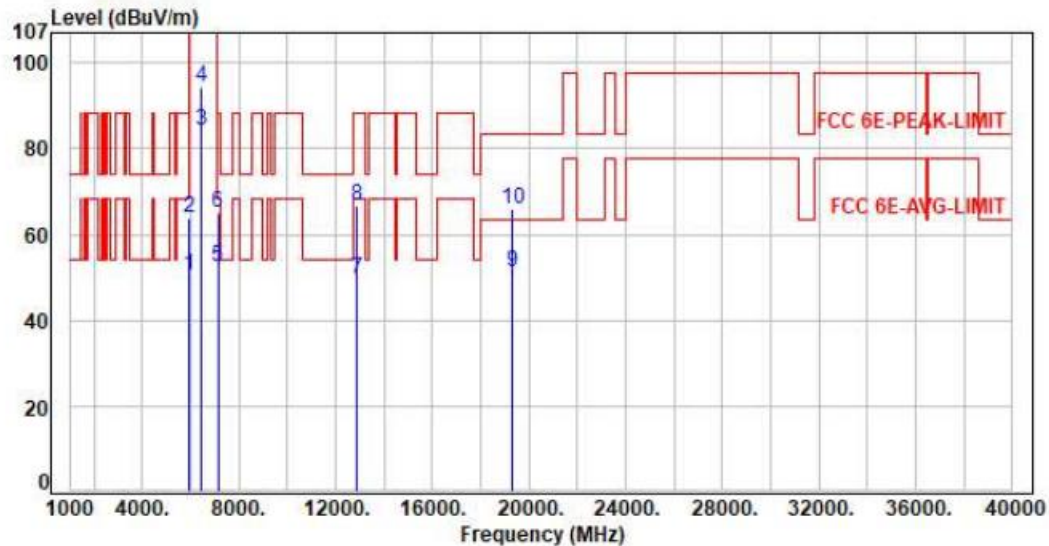

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.77	50.50	68.20	-17.70	Average	229	319	P
2	5925.00	7.73	56.22	63.95	88.20	-24.25	Peak	229	319	P
3	6435.00	8.36	75.79	84.15	200.00	-115.85	Average	229	319	P
4	6435.00	8.36	86.02	94.38	200.00	-105.62	Peak	229	319	P
5	7125.00	9.92	42.56	52.48	68.20	-15.72	Average	229	319	P
6	7125.00	9.92	55.28	65.20	88.20	-23.00	Peak	229	319	P
7	12870.00	17.98	31.49	49.47	68.20	-18.73	Average	100	159	P
8	12870.00	17.98	48.58	66.56	88.20	-21.64	Peak	100	159	P
9	19305.00	9.63	41.58	51.21	63.54	-12.33	Average	150	360	P
10	19305.00	9.63	56.47	66.10	83.54	-17.44	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH97 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

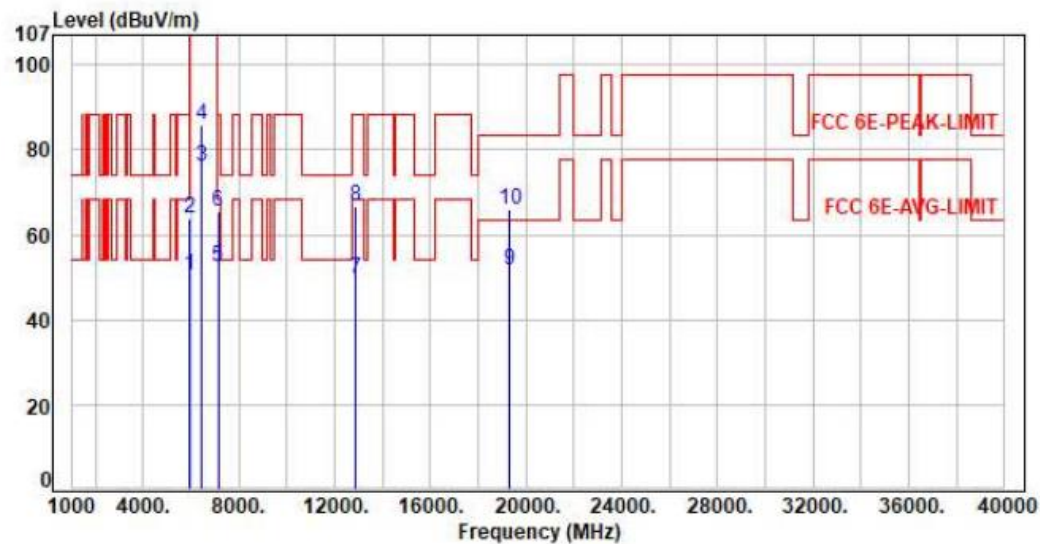

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.75	50.48	68.20	-17.72	Average	108	56	P
2	5925.00	7.73	56.04	63.77	88.20	-24.43	Peak	108	56	P
3	6435.00	8.36	67.87	76.23	200.00	-123.77	Average	108	56	P
4	6435.00	8.36	77.62	85.98	200.00	-114.02	Peak	108	56	P
5	7125.00	9.92	42.56	52.48	68.20	-15.72	Average	108	56	P
6	7125.00	9.92	55.49	65.41	88.20	-22.79	Peak	108	56	P
7	12870.00	17.98	31.66	49.64	68.20	-18.56	Average	100	179	P
8	12870.00	17.98	48.93	66.91	88.20	-21.29	Peak	100	179	P
9	19305.00	9.63	41.88	51.51	63.54	-12.03	Average	150	360	P
10	19305.00	9.63	56.29	65.92	83.54	-17.62	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH105 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

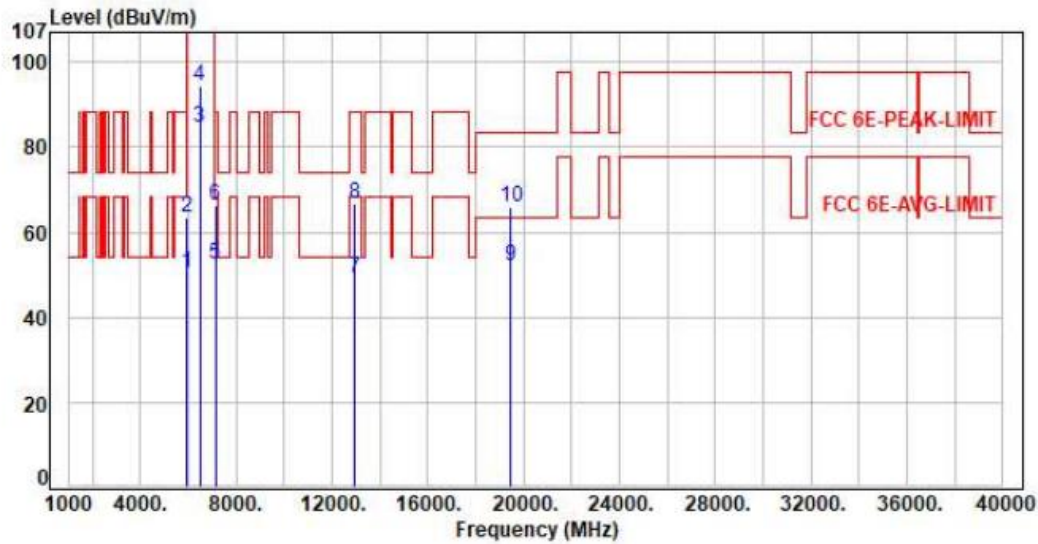

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.76	50.49	68.20	-17.71	Average	217	319	P
2	5925.00	7.73	55.66	63.39	88.20	-24.81	Peak	217	319	P
3	6475.00	8.34	76.26	84.60	200.00	-115.40	Average	217	319	P
4	6475.00	8.34	86.12	94.46	200.00	-105.54	Peak	217	319	P
5	7125.00	9.92	42.57	52.49	68.20	-15.71	Average	217	319	P
6	7125.00	9.92	56.25	66.17	88.20	-22.03	Peak	217	319	P
7	12950.00	18.39	30.90	49.29	68.20	-18.91	Average	100	154	P
8	12950.00	18.39	48.22	66.61	88.20	-21.59	Peak	100	154	P
9	19425.00	10.06	41.93	51.99	63.54	-11.55	Average	150	360	P
10	19425.00	10.06	55.73	65.79	83.54	-17.75	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH105 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

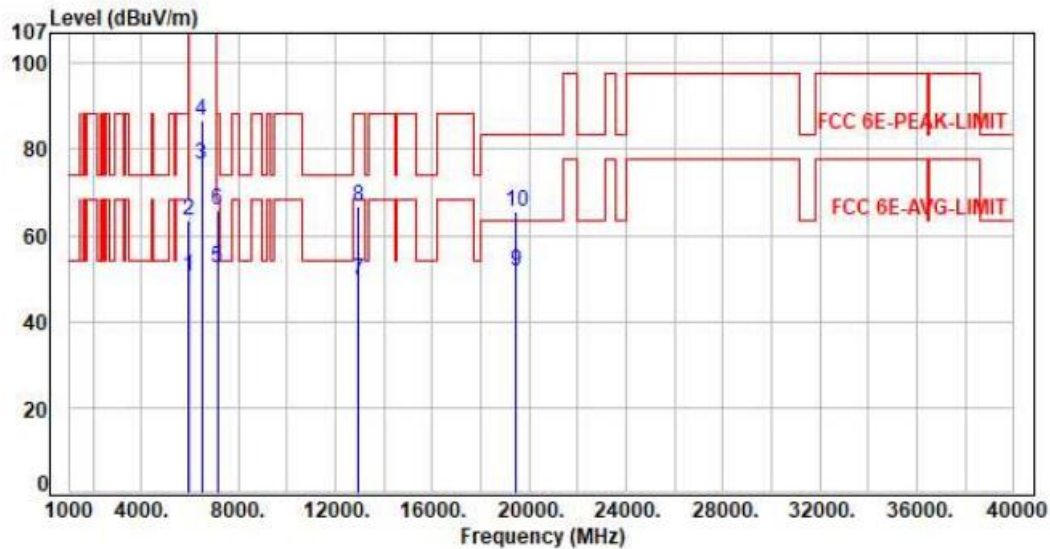

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.77	50.50	68.20	-17.70	Average	100	56	P
2	5925.00	7.73	55.59	63.32	88.20	-24.88	Peak	100	56	P
3	6475.00	8.34	68.00	76.34	200.00	-123.66	Average	100	56	P
4	6475.00	8.34	78.23	86.57	200.00	-113.43	Peak	100	56	P
5	7125.00	9.92	42.61	52.53	68.20	-15.67	Average	100	56	P
6	7125.00	9.92	55.80	65.72	88.20	-22.48	Peak	100	56	P
7	12950.00	18.39	31.36	49.75	68.20	-18.45	Average	100	188	P
8	12950.00	18.39	48.49	66.88	88.20	-21.32	Peak	100	188	P
9	19425.00	10.06	41.71	51.77	63.54	-11.77	Average	150	360	P
10	19425.00	10.06	55.34	65.40	83.54	-18.14	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH113 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

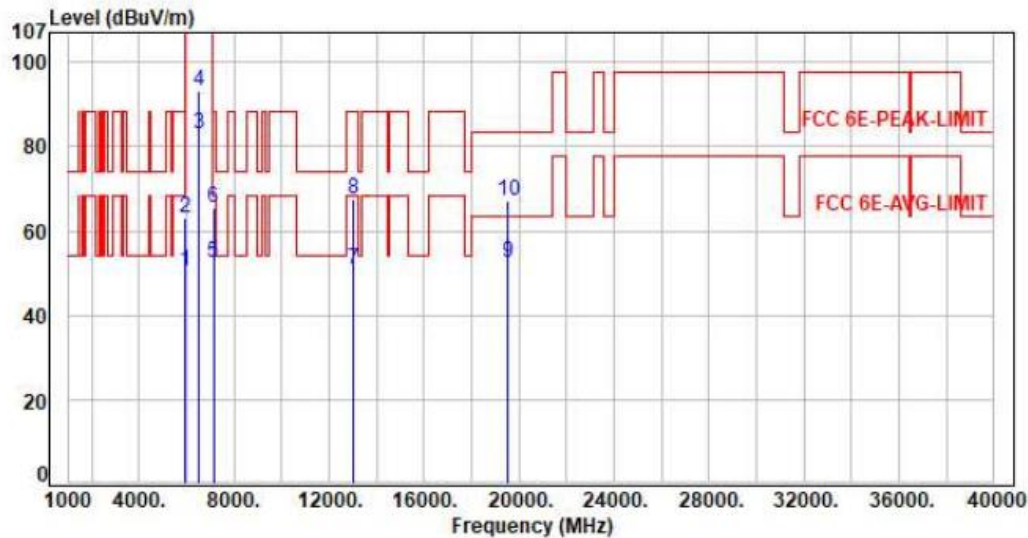

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.72	50.45	68.20	-17.75	Average	221	324	P
2	5925.00	7.73	55.46	63.19	88.20	-25.01	Peak	221	324	P
3	6515.00	8.45	74.47	82.92	200.00	-117.08	Average	221	324	P
4	6515.00	8.45	84.66	93.11	200.00	-106.89	Peak	221	324	P
5	7125.00	9.92	42.61	52.53	68.20	-15.67	Average	221	324	P
6	7125.00	9.92	55.71	65.63	88.20	-22.57	Peak	221	324	P
7	13030.00	18.71	32.10	50.81	68.20	-17.39	Average	100	159	P
8	13030.00	18.71	48.85	67.56	88.20	-20.64	Peak	100	159	P
9	19545.00	10.24	42.10	52.34	63.54	-11.20	Average	150	360	P
10	19545.00	10.24	56.74	66.98	83.54	-16.56	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH113 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

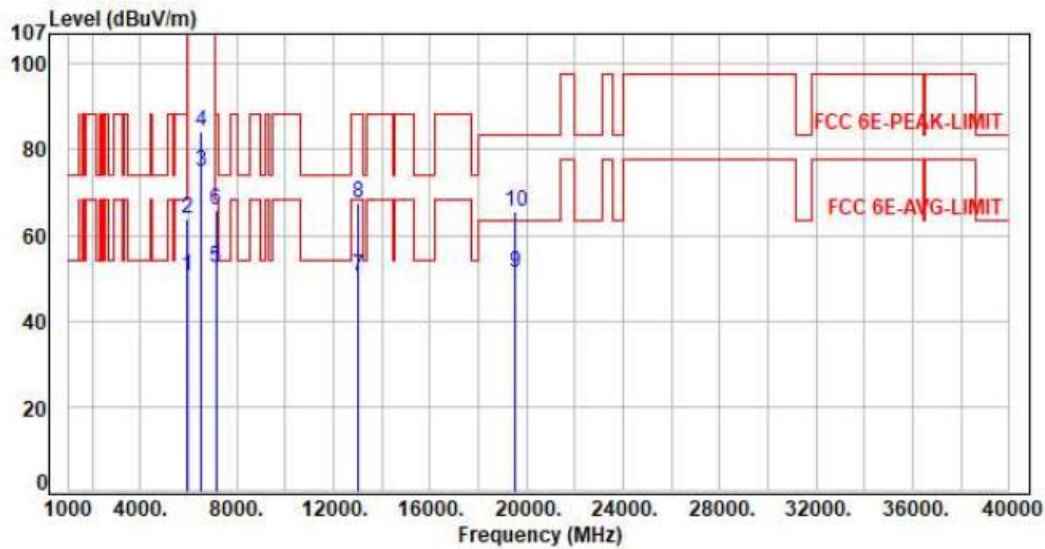

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.77	50.50	68.20	-17.70	Average	100	53	P
2	5925.00	7.73	56.30	64.03	88.20	-24.17	Peak	100	53	P
3	6515.00	8.45	66.21	74.66	200.00	-125.34	Average	100	53	P
4	6515.00	8.45	75.64	84.09	200.00	-115.91	Peak	100	53	P
5	7125.00	9.92	42.67	52.59	68.20	-15.61	Average	100	53	P
6	7125.00	9.92	55.87	65.79	88.20	-22.41	Peak	100	53	P
7	13030.00	18.71	31.55	50.26	68.20	-17.94	Average	100	184	P
8	13030.00	18.71	48.79	67.50	88.20	-20.70	Peak	100	184	P
9	19545.00	10.24	41.22	51.46	63.54	-12.08	Average	150	360	P
10	19545.00	10.24	55.42	65.66	83.54	-17.88	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO ANT A-B7

Test Mode : 1TX 11a CH17 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

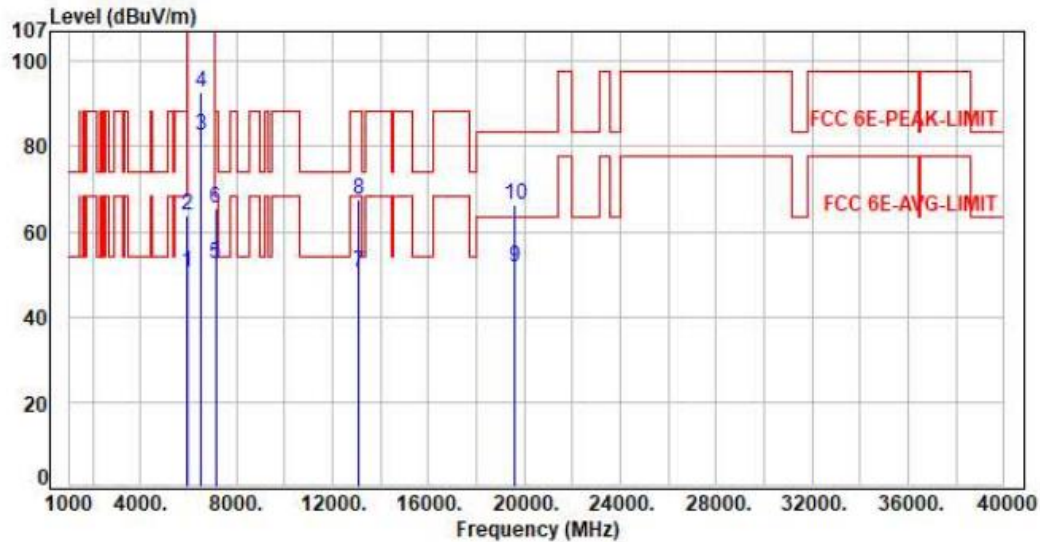

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.77	50.50	68.20	-17.70	Average	216	319	P
2	5925.00	7.73	56.14	63.87	88.20	-24.33	Peak	216	319	P
3	6535.00	8.57	74.22	82.79	200.00	-117.21	Average	216	319	P
4	6535.00	8.57	84.25	92.82	200.00	-107.18	Peak	216	319	P
5	7125.00	9.92	42.60	52.52	68.20	-15.68	Average	216	319	P
6	7125.00	9.92	55.52	65.44	88.20	-22.76	Peak	216	319	P
7	13070.00	18.92	31.51	50.43	68.20	-17.77	Average	100	152	P
8	13070.00	18.92	48.59	67.51	88.20	-20.69	Peak	100	152	P
9	19605.00	10.26	41.30	51.56	63.54	-11.98	Average	150	360	P
10	19605.00	10.26	56.19	66.45	83.54	-17.09	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH117 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

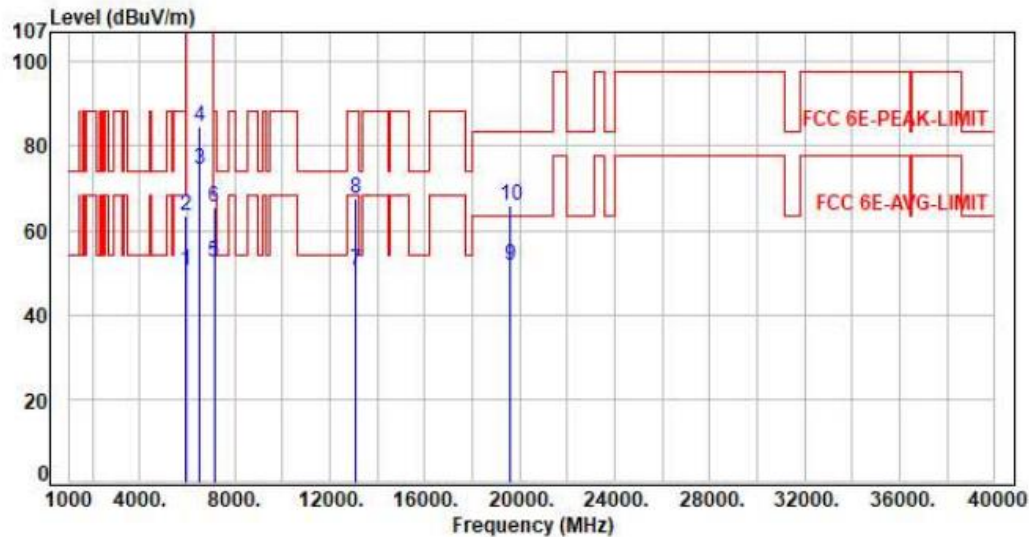

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.88	50.61	68.20	-17.59	Average	373	64	P
2	5925.00	7.73	55.89	63.62	88.20	-24.58	Peak	373	64	P
3	6535.00	8.57	65.93	74.50	200.00	-125.50	Average	373	64	P
4	6535.00	8.57	75.99	84.56	200.00	-115.44	Peak	373	64	P
5	7125.00	9.92	42.66	52.58	68.20	-15.62	Average	373	64	P
6	7125.00	9.92	55.74	65.66	88.20	-22.54	Peak	373	64	P
7	13070.00	18.92	31.57	50.49	68.20	-17.71	Average	100	186	P
8	13070.00	18.92	48.59	67.51	88.20	-20.69	Peak	100	186	P
9	19605.00	10.26	41.41	51.67	63.54	-11.87	Average	150	360	P
10	19605.00	10.26	55.68	65.94	83.54	-17.60	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH153 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

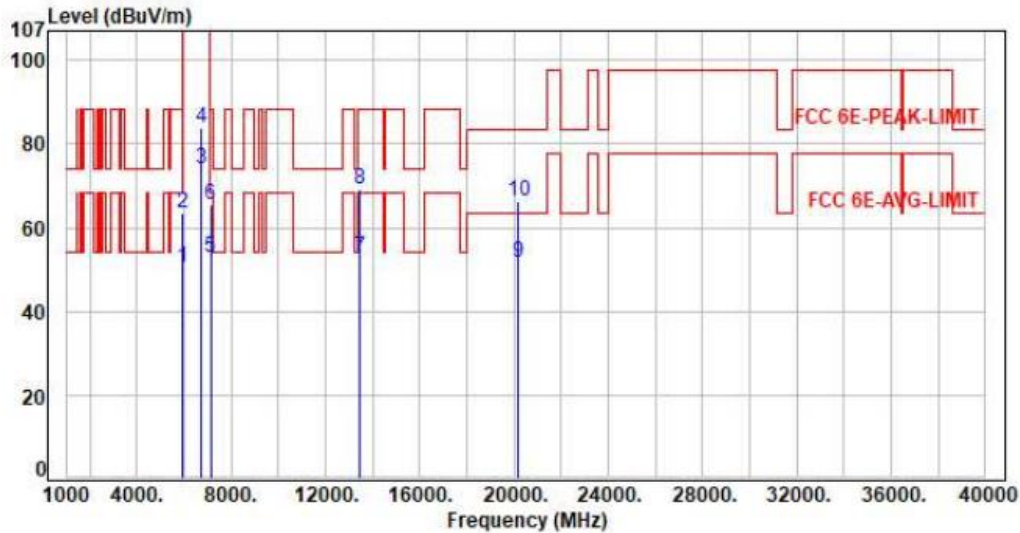

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.77	50.50	68.20	-17.70	Average	222	18	P
2	5925.00	7.73	55.62	63.35	88.20	-24.85	Peak	222	18	P
3	6715.00	9.20	64.68	73.88	200.00	-126.12	Average	222	18	P
4	6715.00	9.20	74.67	83.87	200.00	-116.13	Peak	222	18	P
5	7125.00	9.92	42.85	52.77	68.20	-15.43	Average	222	18	P
6	7125.00	9.92	55.52	65.44	88.20	-22.76	Peak	222	18	P
7	13430.00	20.57	32.18	52.75	68.20	-15.45	Average	100	159	P
8	13430.00	20.57	48.75	69.32	88.20	-18.88	Peak	100	159	P
9	20145.00	10.14	41.40	51.54	63.54	-12.00	Average	150	360	P
10	20145.00	10.14	56.15	66.29	83.54	-17.25	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH153 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

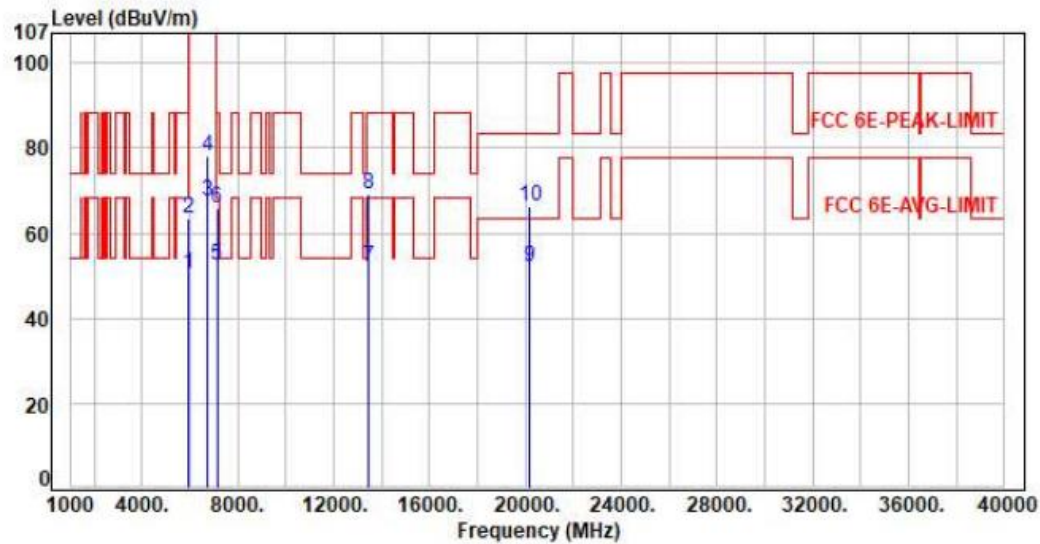

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.80	50.53	68.20	-17.67	Average	224	63	P
2	5925.00	7.73	55.74	63.47	88.20	-24.73	Peak	224	63	P
3	6715.00	9.20	58.32	67.52	200.00	-132.48	Average	224	63	P
4	6715.00	9.20	68.83	78.03	200.00	-121.97	Peak	224	63	P
5	7125.00	9.92	42.69	52.61	68.20	-15.59	Average	224	63	P
6	7125.00	9.92	56.05	65.97	88.20	-22.23	Peak	224	63	P
7	13430.00	20.57	31.49	52.06	68.20	-16.14	Average	100	190	P
8	13430.00	20.57	48.56	69.13	88.20	-19.07	Peak	100	190	P
9	20145.00	10.14	41.84	51.98	63.54	-11.56	Average	150	360	P
10	20145.00	10.14	56.35	66.49	83.54	-17.05	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH181 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

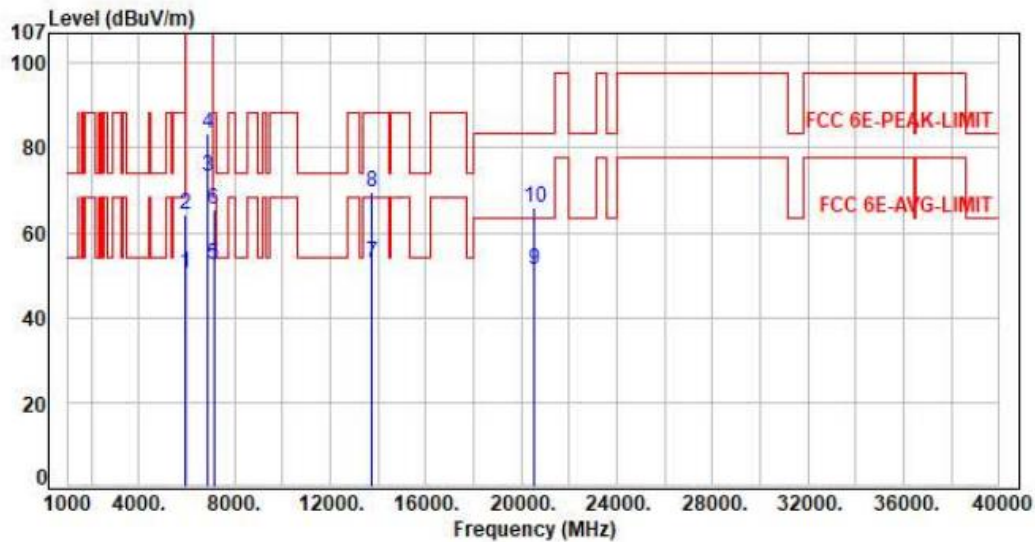

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.85	50.58	68.20	-17.62	Average	196	345	P
2	5925.00	7.73	56.48	64.21	88.20	-23.99	Peak	196	345	P
3	6855.00	9.48	63.91	73.39	200.00	-126.61	Average	196	345	P
4	6855.00	9.48	73.96	83.44	200.00	-116.56	Peak	196	345	P
5	7125.00	9.92	42.62	52.54	68.20	-15.66	Average	196	345	P
6	7125.00	9.92	55.59	65.51	88.20	-22.69	Peak	196	345	P
7	13710.00	21.36	31.53	52.89	68.20	-15.31	Average	100	155	P
8	13710.00	21.36	48.30	69.66	88.20	-18.54	Peak	100	155	P
9	20565.00	9.83	41.39	51.22	63.54	-12.32	Average	150	360	P
10	20565.00	9.83	55.94	65.77	83.54	-17.77	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH181 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

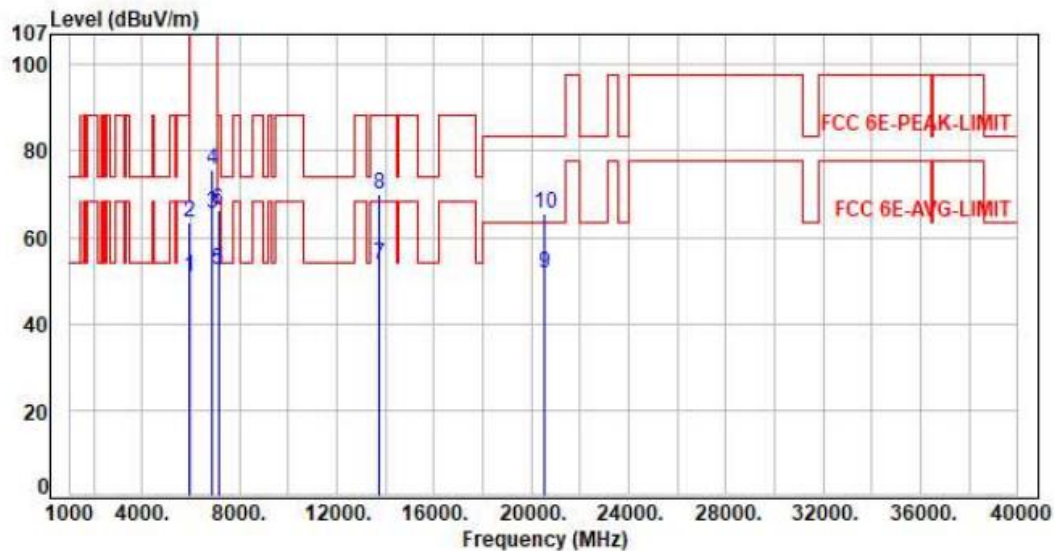

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.99	50.72	68.20	-17.48	Average	175	141	P
2	5925.00	7.73	55.73	63.46	88.20	-24.74	Peak	175	141	P
3	6855.00	9.48	56.18	65.66	200.00	-134.34	Average	175	141	P
4	6855.00	9.48	66.17	75.65	200.00	-124.35	Peak	175	141	P
5	7125.00	9.92	42.66	52.58	68.20	-15.62	Average	175	141	P
6	7125.00	9.92	56.46	66.38	88.20	-21.82	Peak	175	141	P
7	13710.00	21.36	32.24	53.60	68.20	-14.60	Average	100	186	P
8	13710.00	21.36	48.80	70.16	88.20	-18.04	Peak	100	186	P
9	20565.00	9.83	41.77	51.60	63.54	-11.94	Average	150	360	P
10	20565.00	9.83	55.62	65.45	83.54	-18.09	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO ANT A-B8

Test Mode : 1TX 11a CH189 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

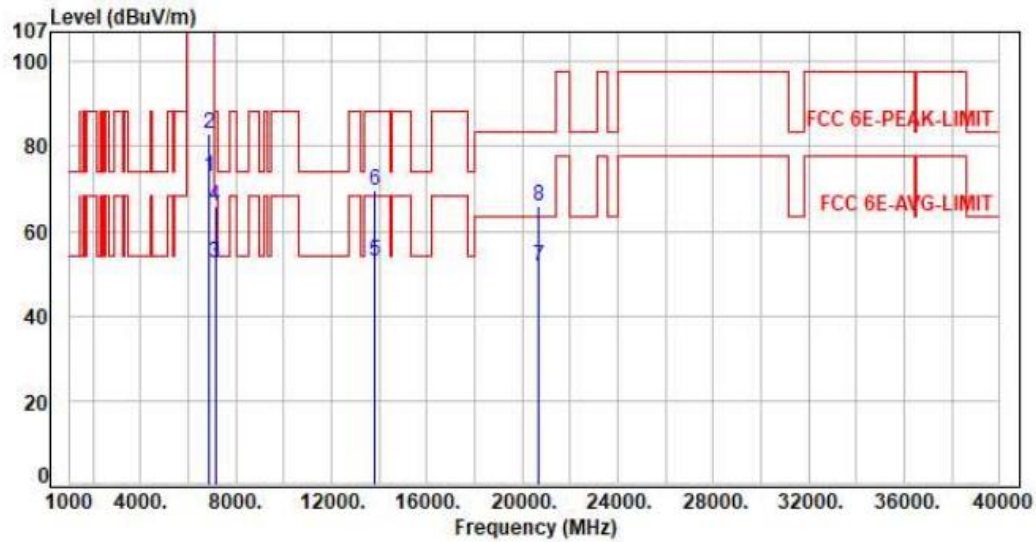

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	63.41	72.89	200.00	-127.11	Average	135	343	P
2	6895.00	9.48	73.66	83.14	200.00	-116.86	Peak	135	343	P
3	7125.00	9.92	42.71	52.63	68.20	-15.57	Average	135	343	P
4	7125.00	9.92	55.81	65.73	88.20	-22.47	Peak	135	343	P
5	13790.00	21.66	31.04	52.70	68.20	-15.50	Average	100	151	P
6	13790.00	21.66	48.10	69.76	88.20	-18.44	Peak	100	151	P
7	20685.00	9.82	41.93	51.75	63.54	-11.79	Average	150	360	P
8	20685.00	9.82	56.20	66.02	83.54	-17.52	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH189 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

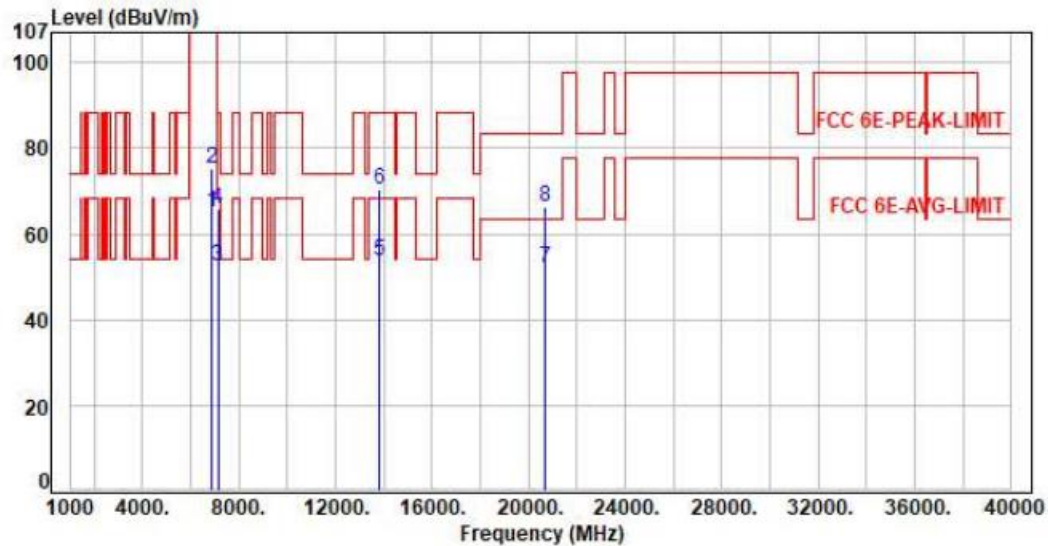

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	55.47	64.95	200.00	-135.05	Average	241	51	P
2	6895.00	9.48	65.98	75.46	200.00	-124.54	Peak	241	51	P
3	7125.00	9.92	42.69	52.61	68.20	-15.59	Average	241	51	P
4	7125.00	9.92	55.83	65.75	88.20	-22.45	Peak	241	51	P
5	13790.00	21.66	32.16	53.82	68.20	-14.38	Average	100	184	P
6	13790.00	21.66	48.92	70.58	88.20	-17.62	Peak	100	184	P
7	20685.00	9.82	42.16	51.98	63.54	-11.56	Average	150	360	P
8	20685.00	9.82	56.30	66.12	83.54	-17.42	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH213 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

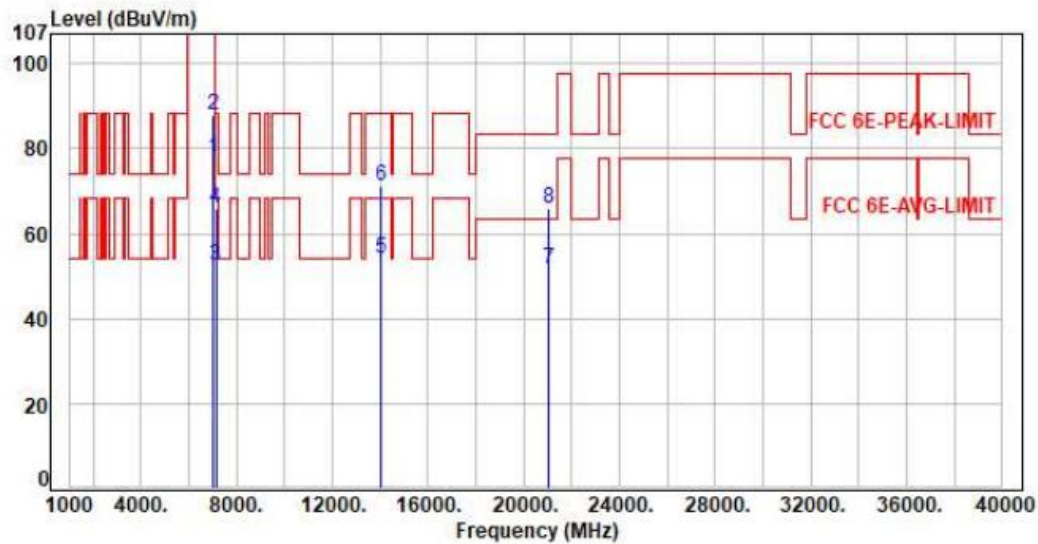

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.59	68.08	77.67	200.00	-122.33	Average	172	348	P
2	7015.00	9.59	78.36	87.95	200.00	-112.05	Peak	172	348	P
3	7125.00	9.92	42.58	52.50	68.20	-15.70	Average	172	348	P
4	7125.00	9.92	55.85	65.77	88.20	-22.43	Peak	172	348	P
5	14030.00	22.33	31.74	54.07	68.20	-14.13	Average	100	159	P
6	14030.00	22.33	48.92	71.25	88.20	-16.95	Peak	100	159	P
7	21045.00	10.28	41.37	51.65	63.54	-11.89	Average	150	360	P
8	21045.00	10.28	55.68	65.96	83.54	-17.58	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH213 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

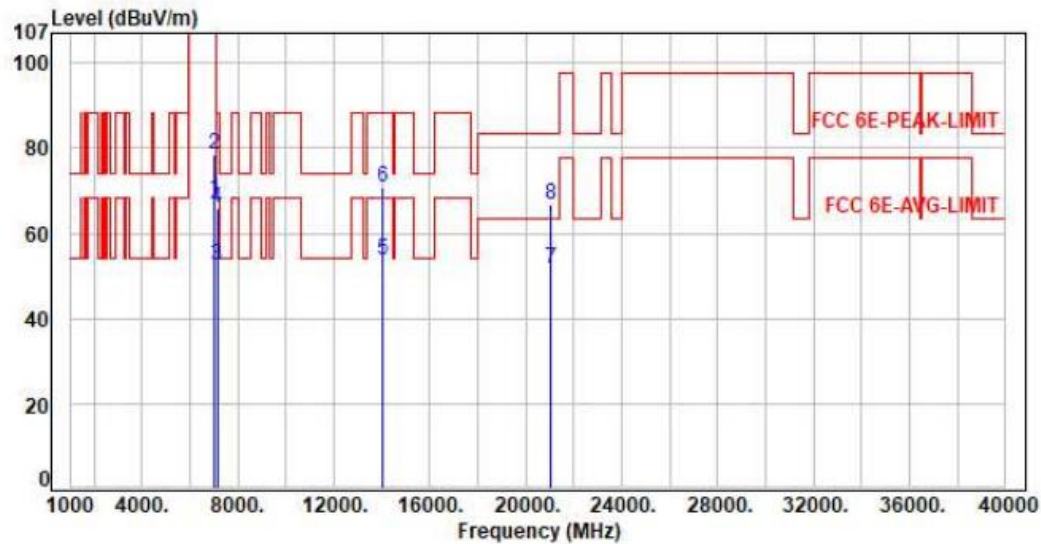

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.59	58.48	68.07	200.00	-131.93	Average	238	52	P
2	7015.00	9.59	68.92	78.51	200.00	-121.49	Peak	238	52	P
3	7125.00	9.92	42.57	52.49	68.20	-15.71	Average	238	52	P
4	7125.00	9.92	55.84	65.76	88.20	-22.44	Peak	238	52	P
5	14030.00	22.33	31.21	53.54	68.20	-14.66	Average	100	185	P
6	14030.00	22.33	48.42	70.75	88.20	-17.45	Peak	100	185	P
7	21045.00	10.28	41.57	51.85	63.54	-11.69	Average	150	360	P
8	21045.00	10.28	56.25	66.53	83.54	-17.01	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH229 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

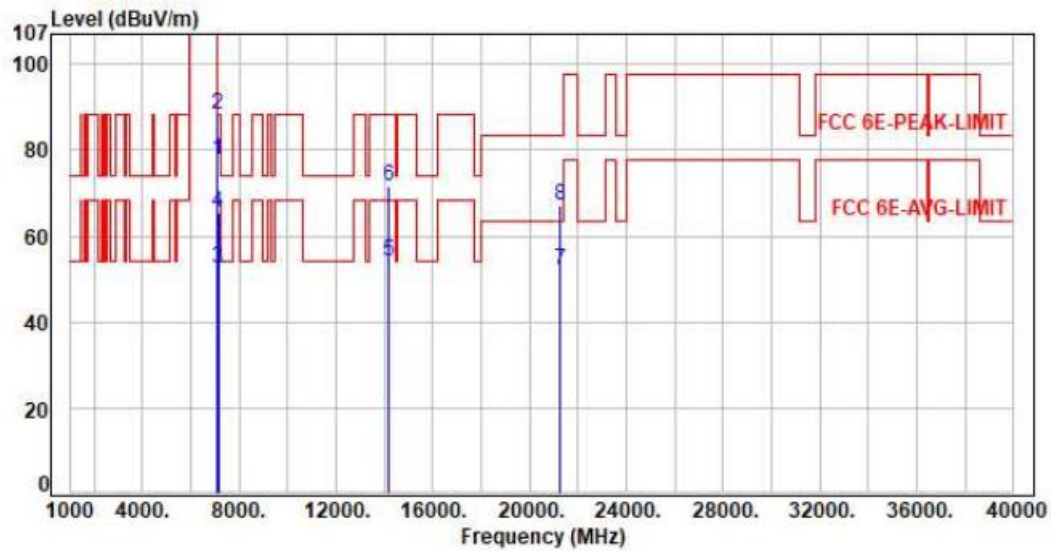

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.79	68.11	77.90	200.00	-122.10	Average	170	350	P
2	7095.00	9.79	78.46	88.25	200.00	-111.75	Peak	170	350	P
3	7125.00	9.92	42.74	52.66	68.20	-15.54	Average	170	350	P
4	7125.00	9.92	55.65	65.57	88.20	-22.63	Peak	170	350	P
5	14190.00	22.77	31.52	54.29	68.20	-13.91	Average	100	153	P
6	14190.00	22.77	48.93	71.70	88.20	-16.50	Peak	100	153	P
7	21285.00	10.94	41.27	52.21	63.54	-11.33	Average	150	360	P
8	21285.00	10.94	56.38	67.32	83.54	-16.22	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH229 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

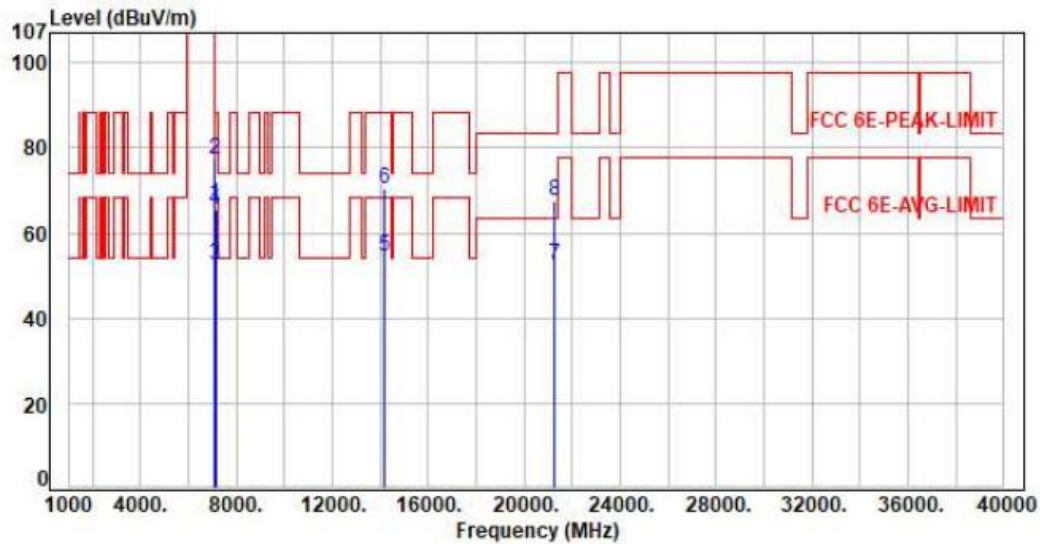

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.79	57.00	66.79	200.00	-133.21	Average	100	238	P
2	7095.00	9.79	67.58	77.37	200.00	-122.63	Peak	100	238	P
3	7125.00	9.92	42.58	52.50	68.20	-15.70	Average	100	238	P
4	7125.00	9.92	55.42	65.34	88.20	-22.86	Peak	100	238	P
5	14190.00	22.77	31.74	54.51	68.20	-13.69	Average	100	188	P
6	14190.00	22.77	47.69	70.46	88.20	-17.74	Peak	100	188	P
7	21285.00	10.94	41.38	52.32	63.54	-11.22	Average	150	360	P
8	21285.00	10.94	56.58	67.52	83.54	-16.02	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH233 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

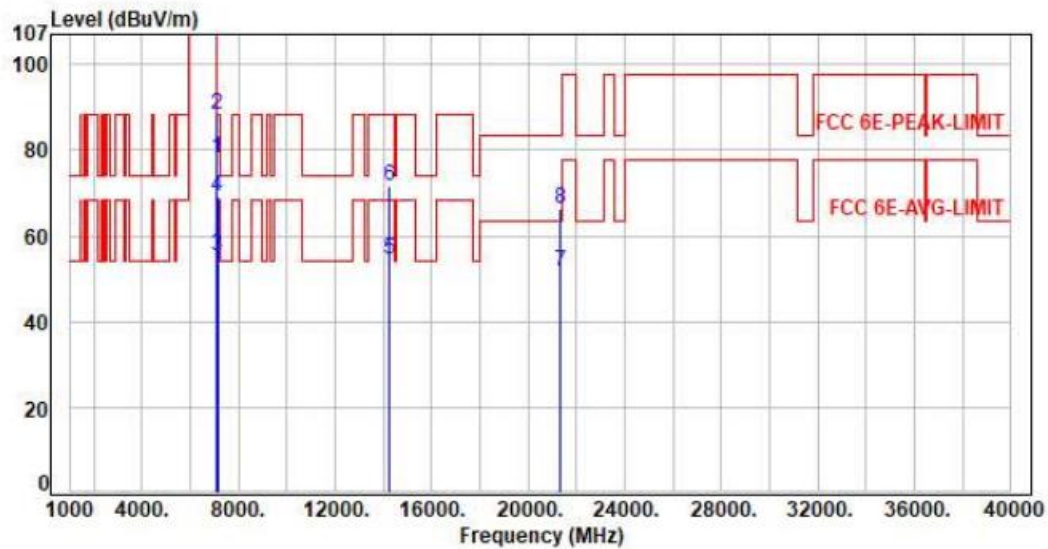

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	9.87	68.25	78.12	200.00	-121.88	Average	172	353	P
2	7115.00	9.87	78.25	88.12	200.00	-111.88	Peak	172	353	P
3	7125.00	9.92	45.35	55.27	68.20	-12.93	Average	172	353	P
4	7125.00	9.92	59.15	69.07	88.20	-19.13	Peak	172	353	P
5	14230.00	22.90	31.45	54.35	68.20	-13.85	Average	100	153	P
6	14230.00	22.90	48.53	71.43	88.20	-16.77	Peak	100	153	P
7	21345.00	10.74	41.12	51.86	63.54	-11.68	Average	150	360	P
8	21345.00	10.74	55.73	66.47	83.54	-17.07	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH233 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

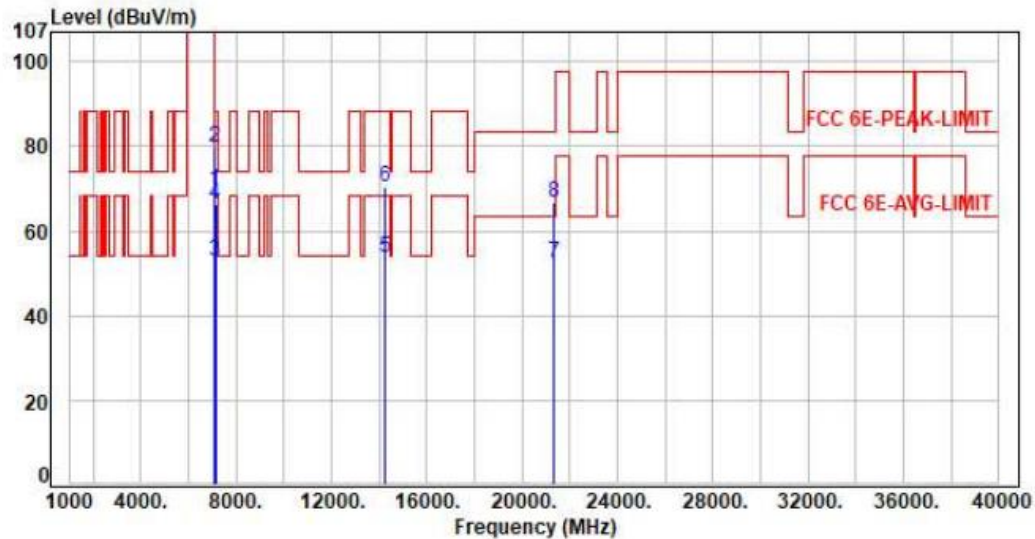

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	9.87	59.90	69.77	200.00	-130.23	Average	179	141	P
2	7115.00	9.87	70.00	79.87	200.00	-120.13	Peak	179	141	P
3	7125.00	9.92	42.88	52.80	68.20	-15.40	Average	179	141	P
4	7125.00	9.92	56.26	66.18	88.20	-22.02	Peak	179	141	P
5	14230.00	22.90	30.87	53.77	68.20	-14.43	Average	100	186	P
6	14230.00	22.90	47.40	70.30	88.20	-17.90	Peak	100	186	P
7	21345.00	10.74	41.55	52.29	63.54	-11.25	Average	150	360	P
8	21345.00	10.74	55.89	66.63	83.54	-16.91	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH185 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

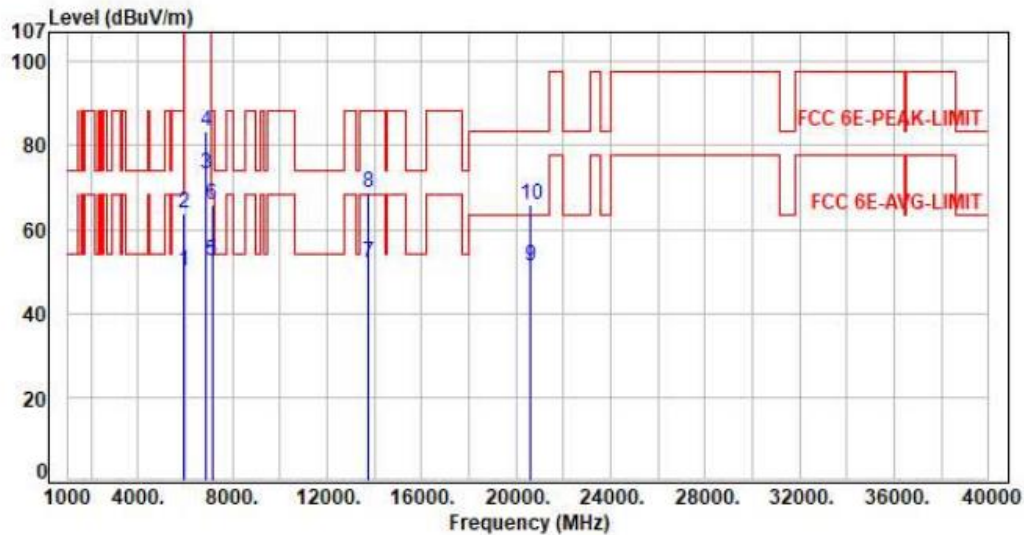

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.27	50.00	68.20	-18.20	Average	261	342	P
2	5925.00	7.73	56.13	63.86	88.20	-24.34	Peak	261	342	P
3	6875.00	9.47	63.60	73.07	200.00	-126.93	Average	261	342	P
4	6875.00	9.47	74.11	83.58	200.00	-116.42	Peak	261	342	P
5	7125.00	9.92	42.70	52.62	68.20	-15.58	Average	261	342	P
6	7125.00	9.92	55.91	65.83	88.20	-22.37	Peak	261	342	P
7	13750.00	21.47	30.68	52.15	68.20	-16.05	Average	100	155	P
8	13750.00	21.47	47.48	68.95	88.20	-19.25	Peak	100	155	P
9	20625.00	9.65	41.44	51.09	63.54	-12.45	Average	150	360	P
10	20625.00	9.65	56.37	66.02	83.54	-17.52	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH185 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

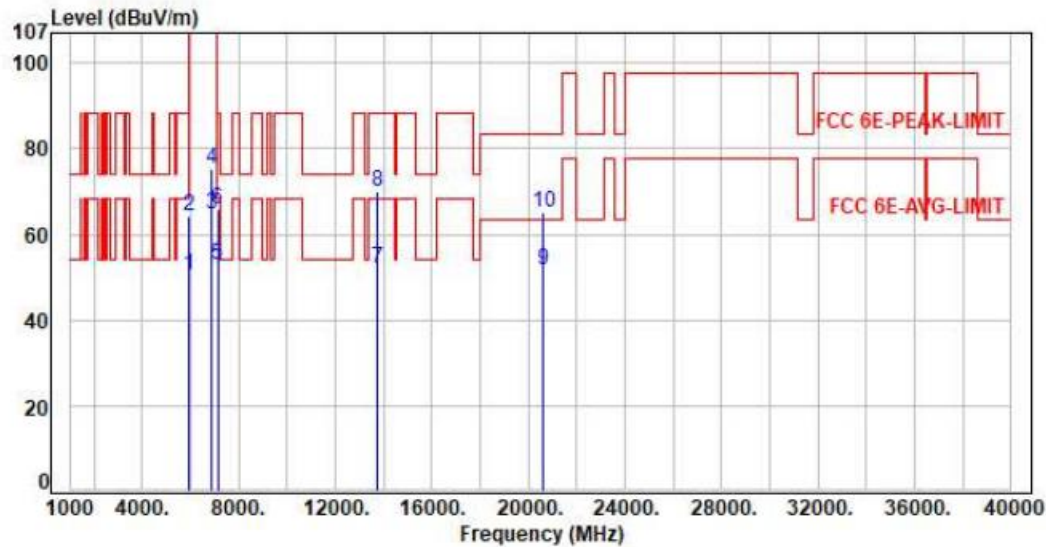

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.63	50.36	68.20	-17.84	Average	100	51	P
2	5925.00	7.73	56.49	64.22	88.20	-23.98	Peak	100	51	P
3	6875.00	9.47	55.27	64.74	200.00	-135.26	Average	100	51	P
4	6875.00	9.47	65.61	75.08	200.00	-124.92	Peak	100	51	P
5	7125.00	9.92	42.93	52.85	68.20	-15.35	Average	100	51	P
6	7125.00	9.92	56.08	66.00	88.20	-22.20	Peak	100	51	P
7	13750.00	21.47	30.74	52.21	68.20	-15.99	Average	100	189	P
8	13750.00	21.47	48.49	69.96	88.20	-18.24	Peak	100	189	P
9	20625.00	9.65	41.96	51.61	63.54	-11.93	Average	150	360	P
10	20625.00	9.65	55.50	65.15	83.54	-18.39	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO-B5

Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

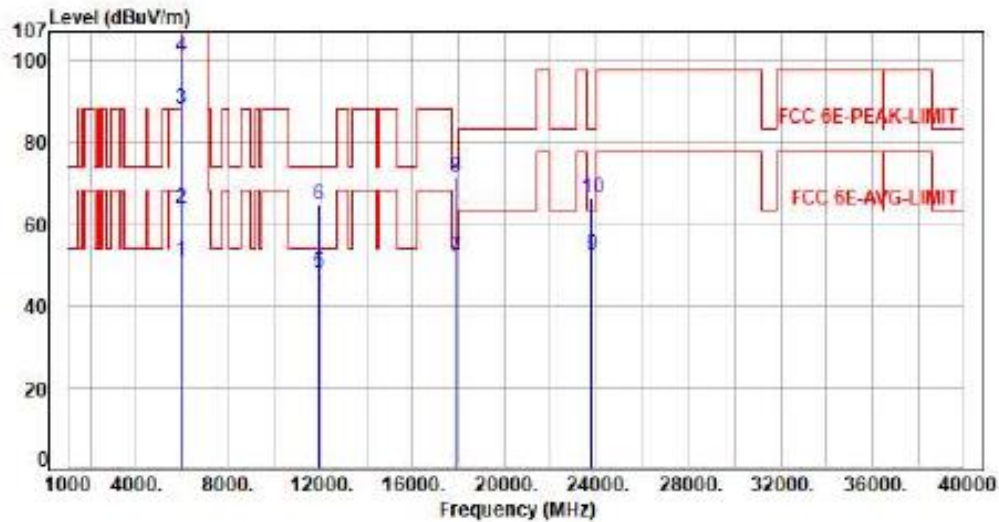

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.11	50.84	68.20	-17.36	Average	274	146	P
2	5925.00	7.73	56.26	63.99	88.20	-24.21	Peak	274	146	P
3	5955.00	7.79	80.55	88.34	200.00	-111.66	Average	274	146	P
4	5955.00	7.79	93.01	100.80	200.00	-99.20	Peak	274	146	P
5	11910.00	16.61	31.46	48.07	54.00	-5.93	Average	100	116	P
6	11910.00	16.61	47.98	64.59	74.00	-9.41	Peak	100	116	P
7	17865.00	26.42	25.47	51.89	54.00	-2.11	Average	100	158	P
8	17865.00	26.42	45.34	71.76	74.00	-2.24	Peak	100	158	P
9	23820.00	9.80	42.57	52.37	63.54	-11.17	Average	150	360	P
10	23820.00	9.80	56.43	66.23	83.54	-17.31	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

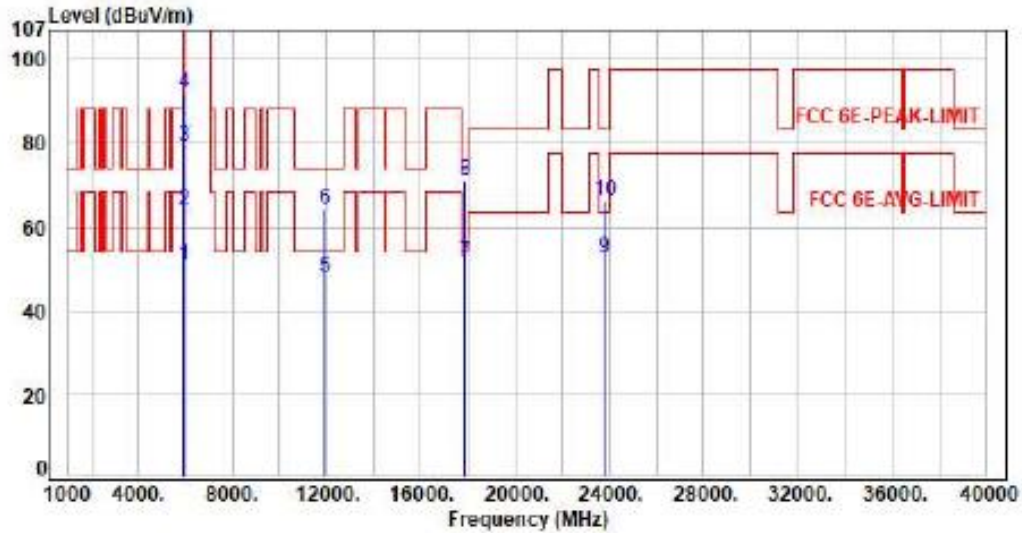

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.08	50.81	68.20	-17.39	Average	145	149	P
2	5925.00	7.73	56.29	64.02	88.20	-24.18	Peak	145	149	P
3	5955.00	7.79	71.62	79.41	200.00	-120.59	Average	145	149	P
4	5955.00	7.79	84.30	92.09	200.00	-107.91	Peak	145	149	P
5	11910.00	16.61	31.57	48.18	54.00	-5.82	Average	100	219	P
6	11910.00	16.61	47.87	64.48	74.00	-9.52	Peak	100	219	P
7	17865.00	26.42	25.29	51.71	54.00	-2.29	Average	100	39	P
8	17865.00	26.42	44.89	71.31	74.00	-2.69	Peak	100	39	P
9	23820.00	9.80	42.65	52.45	63.54	-11.09	Average	150	360	P
10	23820.00	9.80	56.71	66.51	83.54	-17.03	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11mx20 CH45 N551 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

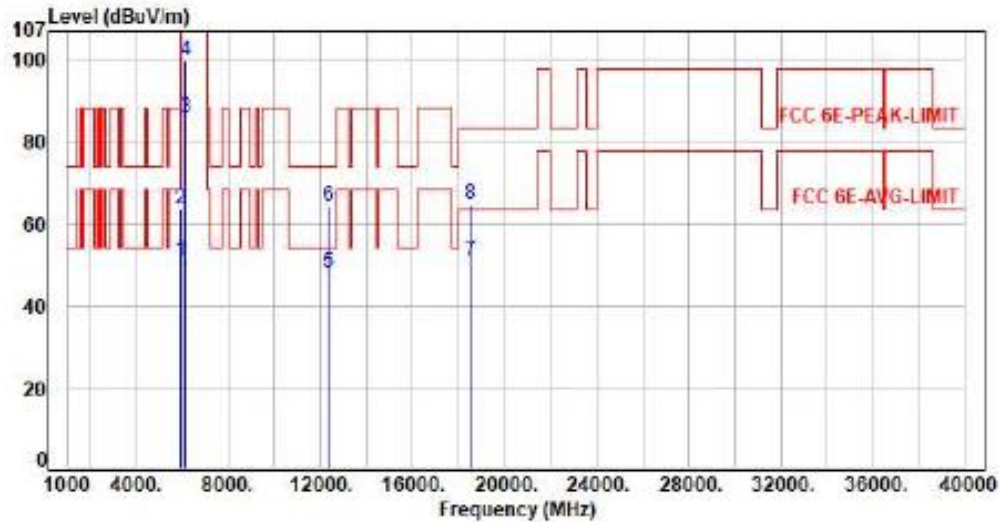

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.05	50.78	68.20	-17.42	Average	262	146	P
2	5925.00	7.73	55.92	63.65	88.20	-24.55	Peak	262	146	P
3	6175.00	8.36	77.41	85.77	200.00	-114.23	Average	262	146	P
4	6175.00	8.36	91.51	99.87	200.00	-100.13	Peak	262	146	P
5	12350.00	16.58	31.44	48.02	54.00	-5.98	Average	100	117	P
6	12350.00	16.58	47.52	64.10	74.00	-9.90	Peak	100	117	P
7	18525.00	9.06	41.74	50.80	63.54	-12.74	Average	150	360	P
8	18525.00	9.06	55.69	64.75	83.54	-18.79	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ex20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

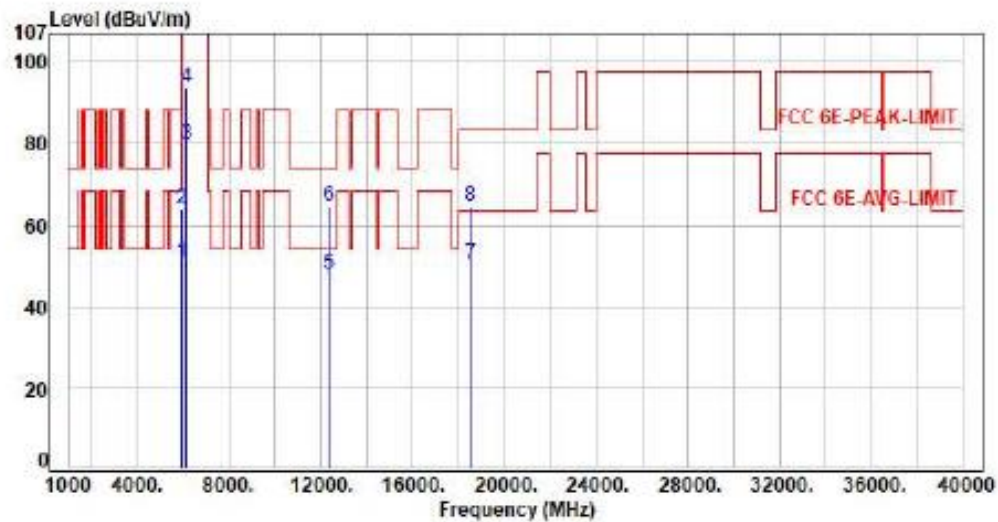

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.16	50.89	68.20	-17.31	Average	184	148	P
2	5925.00	7.73	56.20	63.93	88.20	-24.27	Peak	184	148	P
3	6175.00	8.36	71.21	79.57	200.00	-120.43	Average	184	148	P
4	6175.00	8.36	85.31	93.67	200.00	-106.33	Peak	184	148	P
5	12350.00	16.58	31.57	48.15	54.00	-5.85	Average	100	215	P
6	12350.00	16.58	48.24	64.82	74.00	-9.18	Peak	100	215	P
7	18525.00	9.06	41.32	50.38	63.54	-13.16	Average	150	360	P
8	18525.00	9.06	55.52	64.58	83.54	-18.96	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

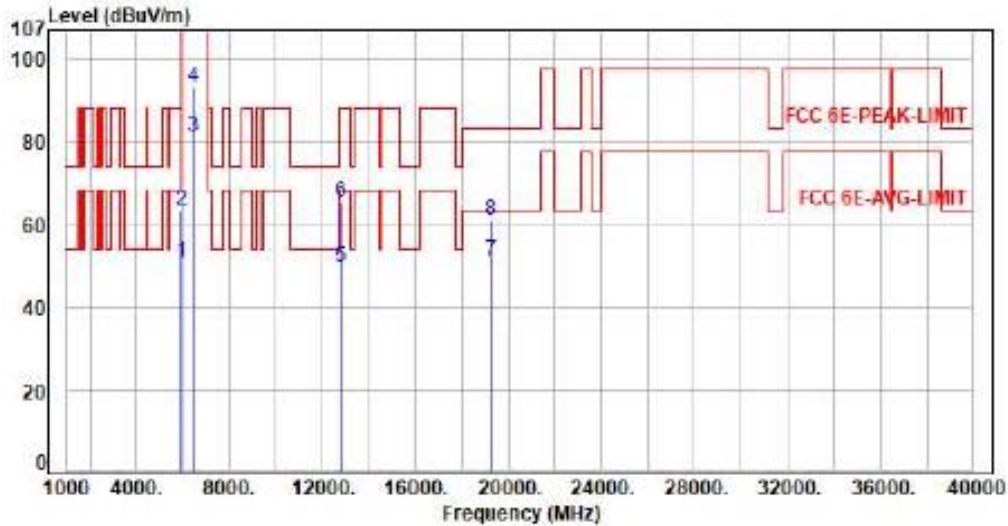

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.19	50.92	68.20	-17.28	Average	390	49	P
2	5925.00	7.73	55.69	63.42	88.20	-24.78	Peak	390	49	P
3	6415.00	8.42	72.83	81.25	200.00	-118.75	Average	390	49	P
4	6415.00	8.42	84.66	93.08	200.00	-106.92	Peak	390	49	P
5	12830.00	17.78	32.05	49.83	68.20	-18.37	Average	100	112	P
6	12830.00	17.78	47.52	65.30	88.20	-22.90	Peak	100	112	P
7	19245.00	9.42	41.86	51.28	63.54	-12.26	Average	150	360	P
8	19245.00	9.42	51.58	61.00	83.54	-22.54	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

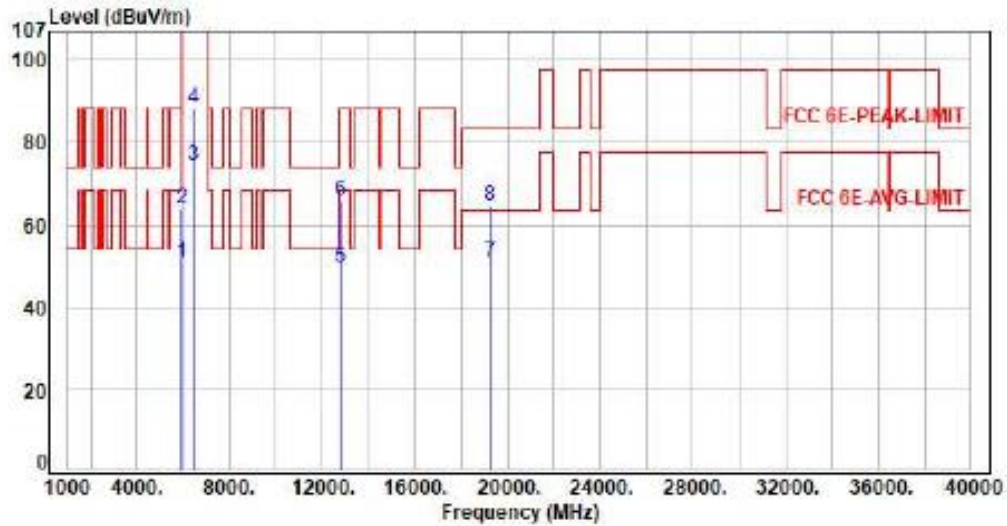

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.12	50.85	68.20	-17.35	Average	100	241	P
2	5925.00	7.73	56.21	63.94	88.20	-24.26	Peak	100	241	P
3	6415.00	8.42	66.16	74.58	200.00	-125.42	Average	100	241	P
4	6415.00	8.42	79.97	88.39	200.00	-111.61	Peak	100	241	P
5	12830.00	17.78	31.69	49.47	68.20	-18.73	Average	100	218	P
6	12830.00	17.78	48.16	65.94	88.20	-22.26	Peak	100	218	P
7	19245.00	9.42	41.47	50.89	63.54	-12.65	Average	150	3600	P
8	19245.00	9.42	55.41	64.83	83.54	-18.71	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

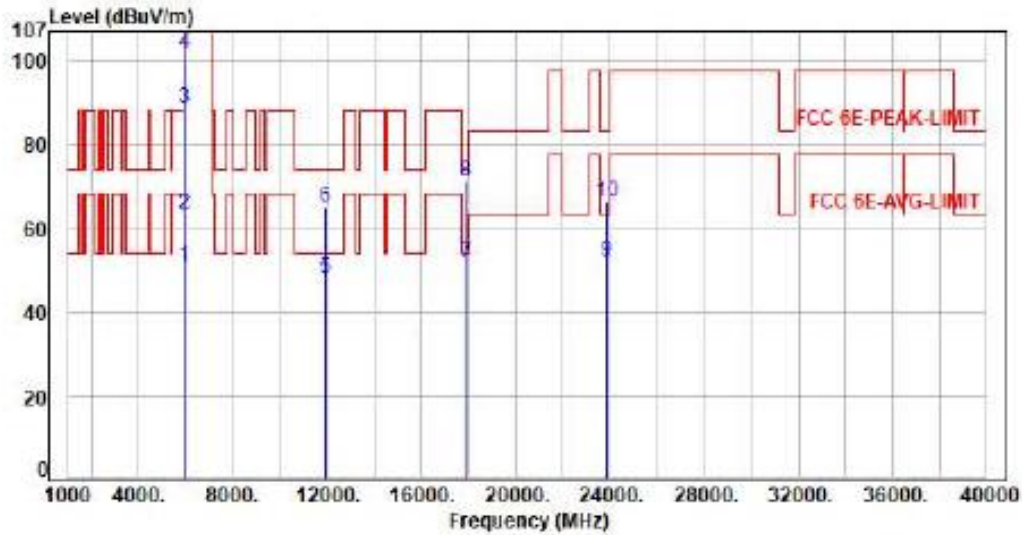

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.08	50.81	68.20	-17.39	Average	274	146	P
2	5925.00	7.73	55.68	63.41	88.20	-24.79	Peak	274	146	P
3	5965.00	7.79	80.84	88.63	200.00	-111.37	Average	274	146	P
4	5965.00	7.79	93.94	101.73	200.00	-98.27	Peak	274	146	P
5	11930.00	16.61	31.59	48.20	54.00	-5.80	Average	100	117	P
6	11930.00	16.61	48.49	65.10	74.00	-8.90	Peak	100	117	P
7	17895.00	26.47	25.14	51.61	54.00	-2.39	Average	100	159	P
8	17895.00	26.47	44.77	71.24	74.00	-2.76	Peak	100	159	P
9	23860.00	9.86	42.33	52.19	63.54	-11.35	Average	150	360	P
10	23860.00	9.86	56.28	66.14	83.54	-17.40	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

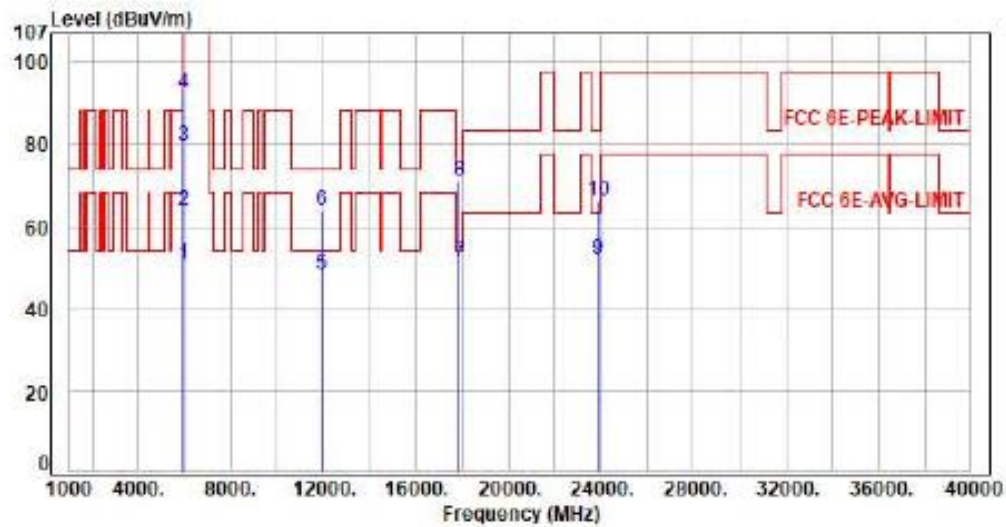

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.11	50.84	68.20	-17.36	Average	193	240	P
2	5925.00	7.73	56.12	63.85	88.20	-24.35	Peak	193	240	P
3	5965.00	7.79	71.86	79.65	200.00	-120.35	Average	193	240	P
4	5965.00	7.79	84.68	92.47	200.00	-107.53	Peak	193	240	P
5	11930.00	16.61	31.73	48.34	54.00	-5.66	Average	100	220	P
6	11930.00	16.61	47.15	63.76	74.00	-10.24	Peak	100	220	P
7	17895.00	26.47	24.96	51.43	54.00	-2.57	Average	100	42	P
8	17895.00	26.47	44.85	71.32	74.00	-2.68	Peak	100	42	P
9	23860.00	9.86	42.18	52.04	63.54	-11.50	Average	150	360	P
10	23860.00	9.86	56.55	66.41	83.54	-17.13	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

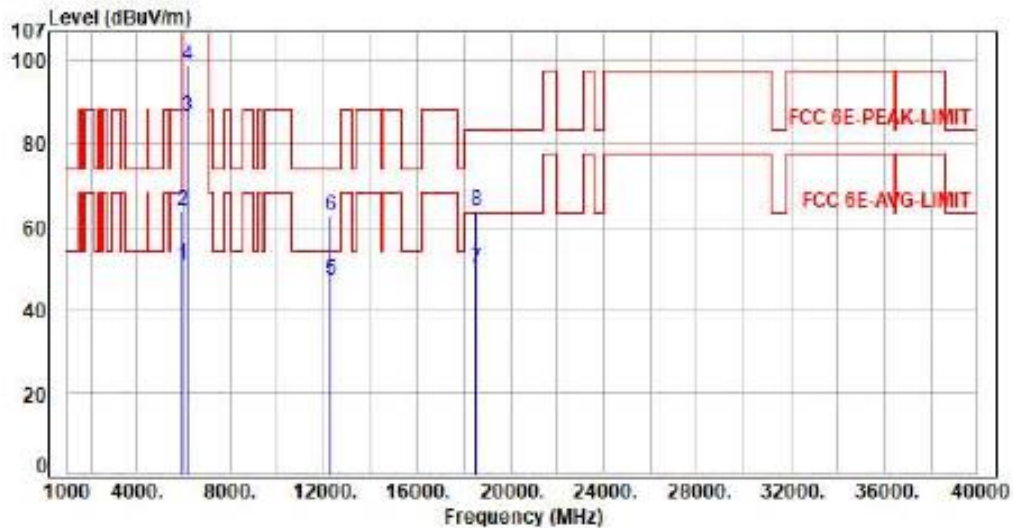

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azinuth (deg)	P/F
1	5925.00	7.73	43.06	50.79	68.20	-17.41	Average	240	143	P
2	5925.00	7.73	56.04	63.77	88.20	-24.43	Peak	240	143	P
3	6165.00	8.36	78.41	86.77	200.00	-113.23	Average	240	143	P
4	6165.00	8.36	90.35	98.71	200.00	-101.29	Peak	240	143	P
5	12330.00	16.54	30.58	47.12	54.00	-6.88	Average	100	115	P
6	12330.00	16.54	46.28	62.82	74.00	-11.18	Peak	100	115	P
7	18495.00	8.94	41.18	50.12	63.54	-13.42	Average	150	360	P
8	18495.00	8.94	54.76	63.70	83.54	-19.84	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

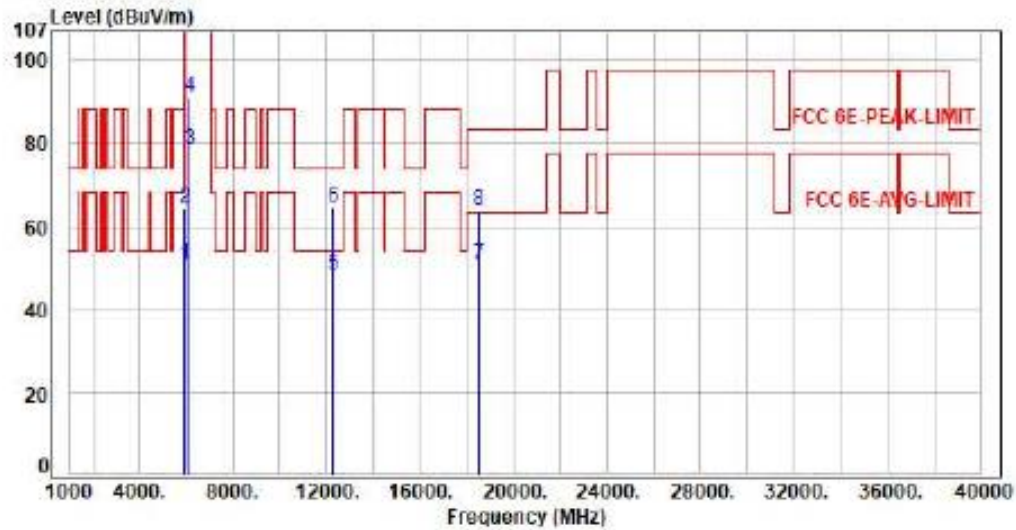

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.14	50.87	68.20	-17.33	Average	182	147	P
2	5925.00	7.73	56.47	64.20	88.20	-24.00	Peak	182	147	P
3	6165.00	8.36	70.20	78.56	200.00	-121.44	Average	182	147	P
4	6165.00	8.36	82.75	91.11	200.00	-108.89	Peak	182	147	P
5	12330.00	16.54	31.86	48.40	54.00	-5.60	Average	100	213	P
6	12330.00	16.54	48.20	64.74	74.00	-9.26	Peak	100	213	P
7	18495.00	8.94	41.85	50.79	63.54	-12.75	Average	150	360	P
8	18495.00	8.94	54.93	63.87	83.54	-19.67	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH91 N551 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

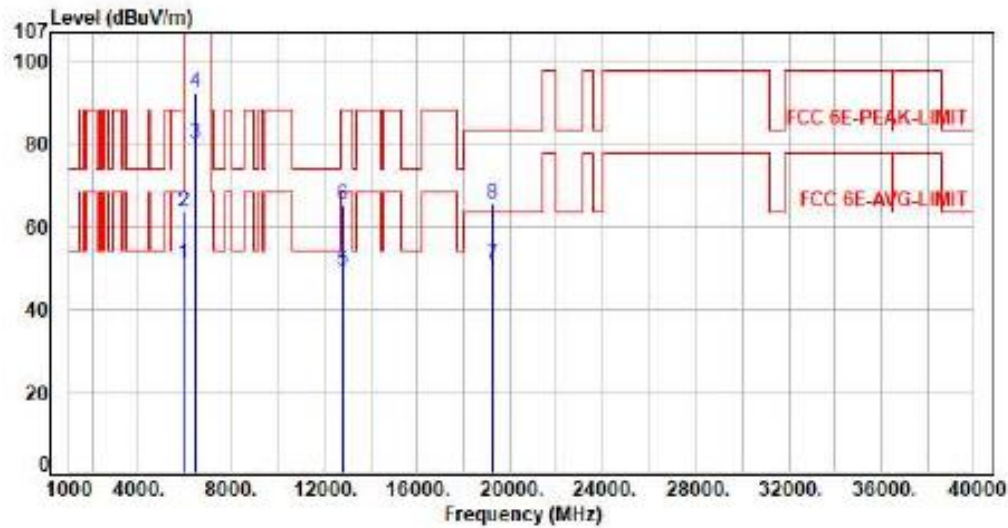

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.95	50.68	68.20	-17.52	Average	246	278	P
2	5925.00	7.73	55.92	63.65	88.20	-24.55	Peak	246	278	P
3	6405.00	8.45	71.65	80.10	200.00	-119.90	Average	246	278	P
4	6405.00	8.45	83.84	92.29	200.00	-107.71	Peak	246	278	P
5	12810.00	17.66	31.44	49.10	68.20	-19.10	Average	100	118	P
6	12810.00	17.66	47.54	65.20	88.20	-23.00	Peak	100	118	P
7	19215.00	9.53	41.18	50.71	63.54	-12.83	Average	150	360	P
8	19215.00	9.53	55.87	65.40	83.54	-18.14	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11mx40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

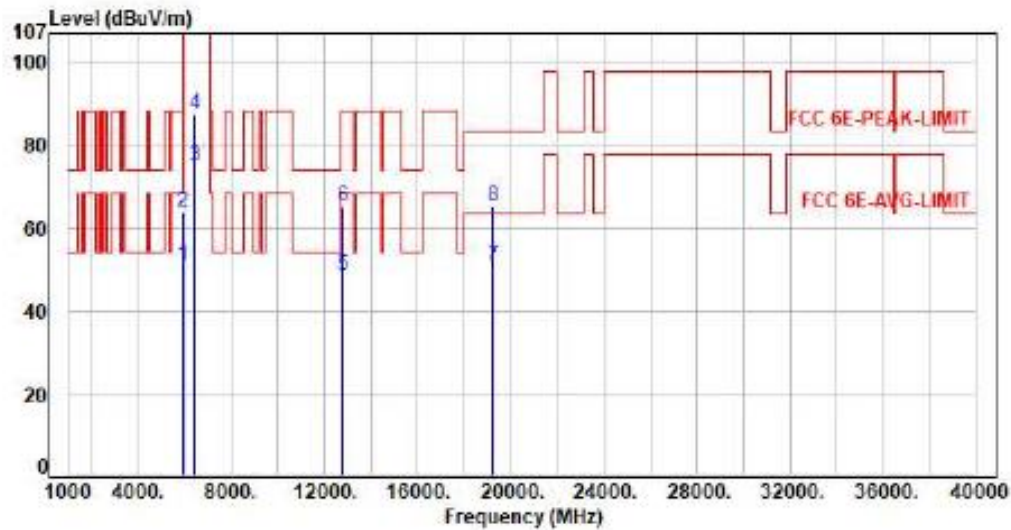

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.08	50.81	68.20	-17.39	Average	177	305	P
2	5925.00	7.73	56.31	64.04	88.20	-24.16	Peak	177	305	P
3	6405.00	8.45	66.57	75.02	200.00	-124.98	Average	177	305	P
4	6405.00	8.45	79.02	87.47	200.00	-112.53	Peak	177	305	P
5	12810.00	17.66	30.83	48.49	68.20	-19.71	Average	100	216	P
6	12810.00	17.66	47.39	65.05	88.20	-23.15	Peak	100	216	P
7	19215.00	9.53	41.31	50.84	63.54	-12.70	Average	150	360	P
8	19215.00	9.53	55.63	65.16	83.54	-18.38	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

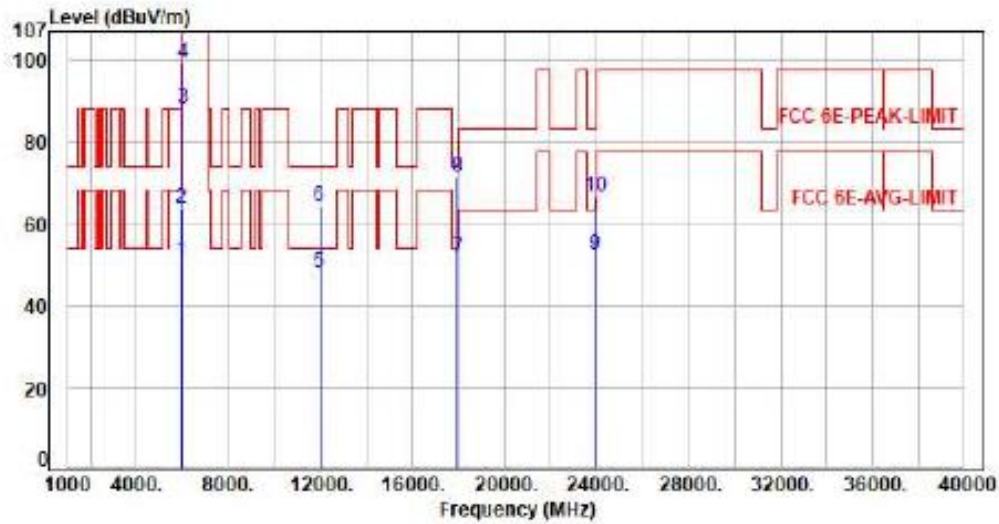

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.31	51.04	68.20	-17.16	Average	268	147	P
2	5925.00	7.73	56.22	63.95	88.20	-24.25	Peak	268	147	P
3	5985.00	7.80	80.54	88.34	200.00	-111.66	Average	268	147	P
4	5985.00	7.80	91.64	99.44	200.00	-100.56	Peak	268	147	P
5	11970.00	16.55	31.59	48.14	54.00	-5.86	Average	100	114	P
6	11970.00	16.55	47.74	64.29	74.00	-9.71	Peak	100	114	P
7	17955.00	26.31	25.51	51.82	54.00	-2.18	Average	100	158	P
8	17955.00	26.31	45.47	71.78	74.00	-2.22	Peak	100	158	P
9	23940.00	9.85	42.68	52.53	63.54	-11.01	Average	150	360	P
10	23940.00	9.85	56.69	66.54	83.54	-17.00	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

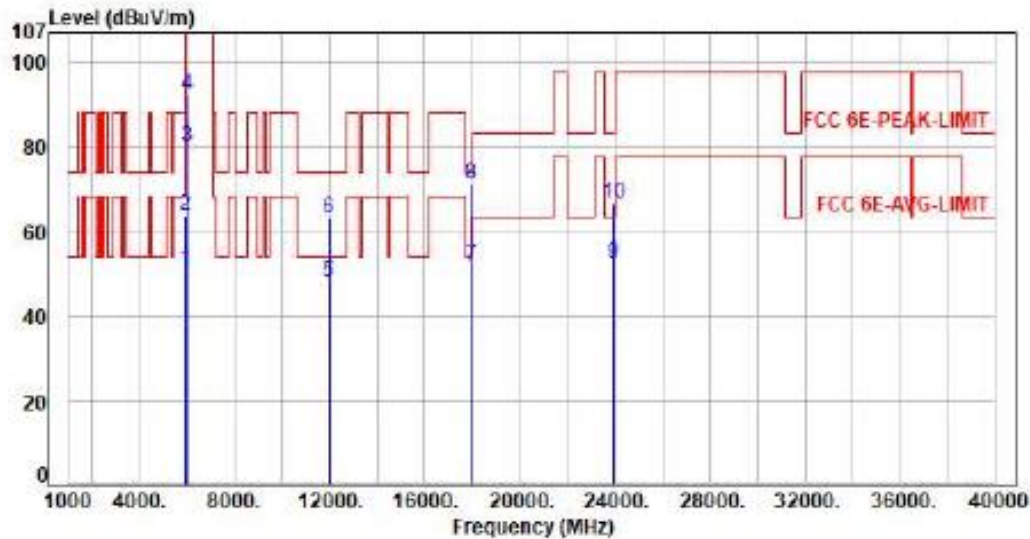

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.04	50.77	68.20	-17.43	Average	227	240	P
2	5925.00	7.73	56.07	63.80	88.20	-24.40	Peak	227	240	P
3	5985.00	7.80	72.44	80.24	200.00	-119.76	Average	227	240	P
4	5985.00	7.80	84.37	92.17	200.00	-107.83	Peak	227	240	P
5	11970.00	16.55	31.29	47.84	54.00	-6.16	Average	100	221	P
6	11970.00	16.55	46.58	63.13	74.00	-10.87	Peak	100	221	P
7	17955.00	26.31	25.66	51.97	54.00	-2.03	Average	100	42	P
8	17955.00	26.31	44.85	71.16	74.00	-2.84	Peak	100	42	P
9	23940.00	9.85	42.61	52.46	63.54	-11.08	Average	150	360	P
10	23940.00	9.85	56.73	66.58	83.54	-16.96	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

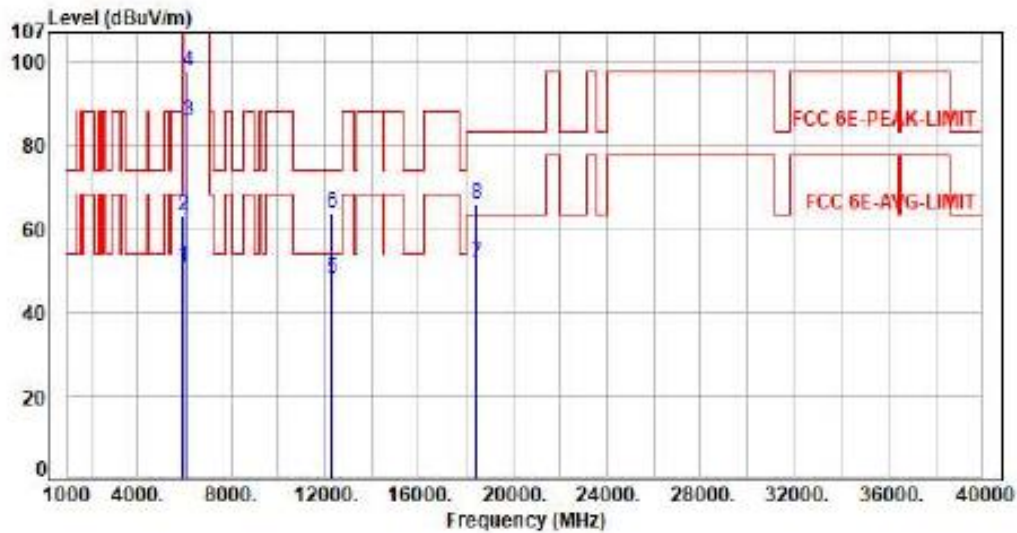

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.17	50.90	68.20	-17.30	Average	270	147	P
2	5925.00	7.73	55.51	63.24	88.20	-24.96	Peak	270	147	P
3	6145.00	8.33	77.50	85.83	200.00	-114.17	Average	270	147	P
4	6145.00	8.33	89.20	97.53	200.00	-102.47	Peak	270	147	P
5	12290.00	16.49	31.38	47.87	54.00	-6.13	Average	100	116	P
6	12290.00	16.49	47.42	63.91	74.00	-10.09	Peak	100	116	P
7	18435.00	8.88	42.60	51.48	63.54	-12.06	Average	150	360	P
8	18435.00	8.88	56.87	65.75	83.54	-17.79	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter (AC120V/60Hz)
Pol : Horizontal

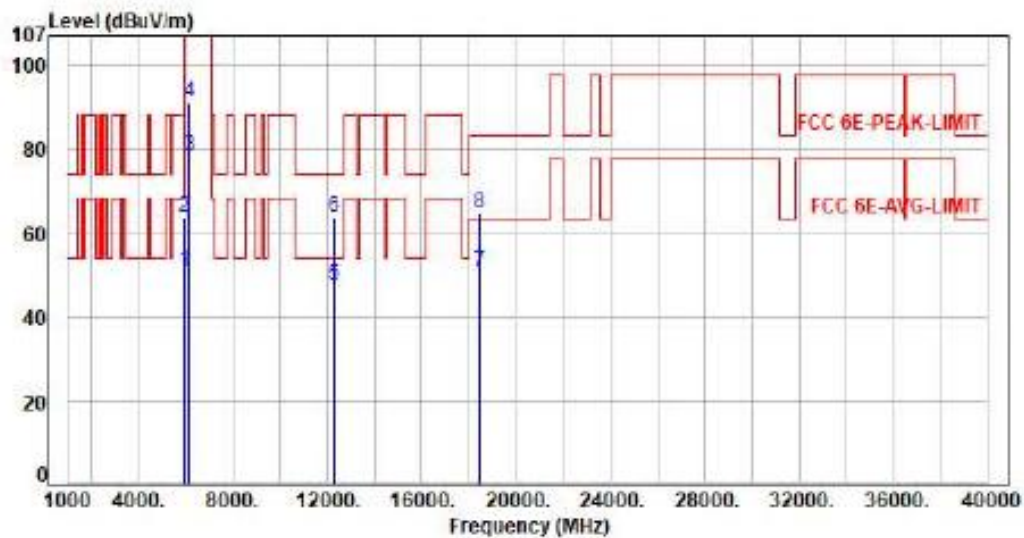

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.97	50.70	68.20	-17.50	Average	189	147	P
2	5925.00	7.73	56.32	64.05	88.20	-24.15	Peak	189	147	P
3	6145.00	8.33	70.25	78.58	200.00	-121.42	Average	189	147	P
4	6145.00	8.33	82.61	90.94	200.00	-109.06	Peak	189	147	P
5	12290.00	16.49	31.27	47.76	54.00	-6.24	Average	100	219	P
6	12290.00	16.49	47.58	64.07	74.00	-9.93	Peak	100	219	P
7	18435.00	8.88	41.85	50.73	63.54	-12.81	Average	150	360	P
8	18435.00	8.88	55.72	64.60	83.54	-18.94	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

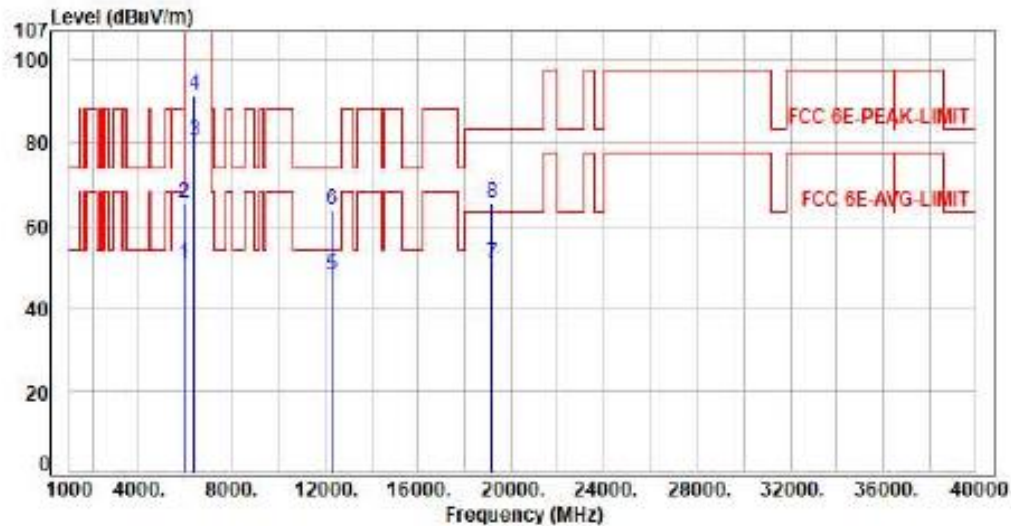

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.05	50.78	68.20	-17.42	Average	390	57	P
2	5925.00	7.73	57.88	65.61	88.20	-22.59	Peak	390	57	P
3	6385.00	8.45	72.06	80.51	200.00	-119.49	Average	390	57	P
4	6385.00	8.45	83.11	91.56	200.00	-108.44	Peak	390	57	P
5	12270.00	16.50	31.52	48.02	54.00	-5.98	Average	100	114	P
6	12270.00	16.50	47.29	63.79	74.00	-10.21	Peak	100	114	P
7	19155.00	9.76	41.15	50.91	63.54	-12.63	Average	150	360	P
8	19155.00	9.76	55.68	65.44	83.54	-18.10	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH87 NSS1 MC50
Voltage : From Adepter (AC120V/60Hz)
Pol : Horizontal

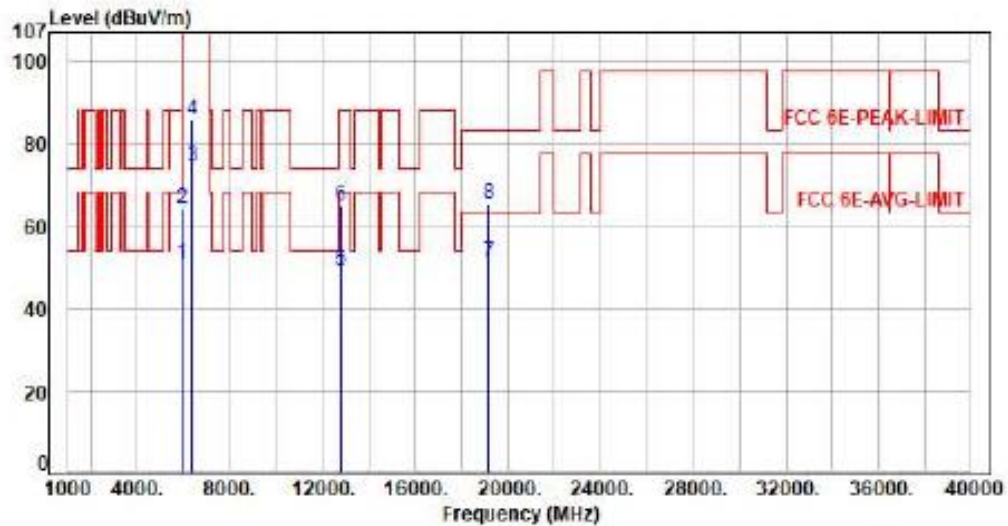

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.03	50.76	68.20	-17.44	Average	140	148	P
2	5925.00	7.73	56.47	64.20	88.20	-24.00	Peak	140	148	P
3	6385.00	8.45	66.12	74.57	200.00	-125.43	Average	140	148	P
4	6385.00	8.45	77.48	85.93	200.00	-114.07	Peak	140	148	P
5	12770.00	17.49	31.58	49.07	68.20	-19.13	Average	100	215	P
6	12770.00	17.49	47.53	65.02	88.20	-23.18	Peak	100	215	P
7	19155.00	9.76	41.70	51.46	63.54	-12.08	Average	150	360	P
8	19155.00	9.76	55.84	65.60	83.54	-17.94	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

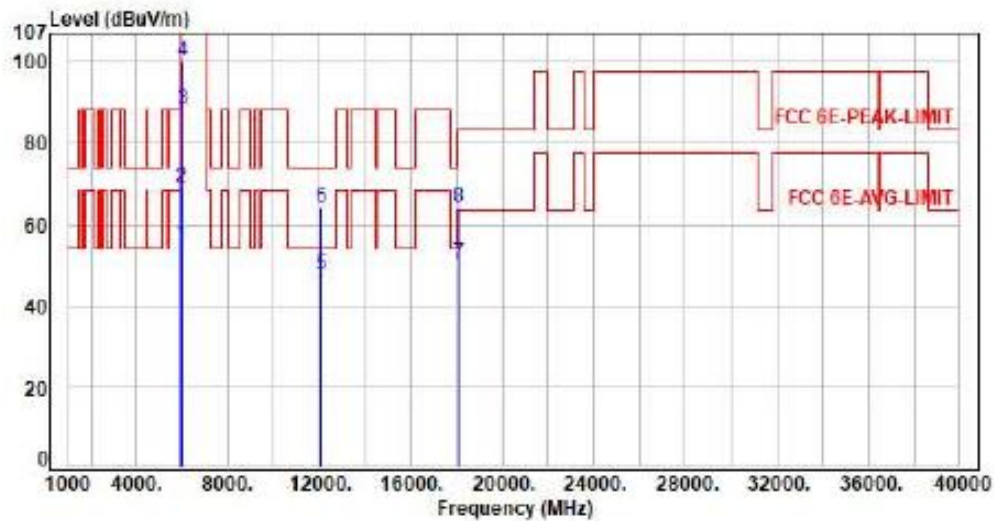

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	47.25	54.98	68.20	-13.22	Average	271	147	P
2	5925.00	7.73	61.32	69.05	88.20	-19.15	Peak	271	147	P
3	6025.00	7.92	80.30	88.22	200.00	-111.78	Average	271	147	P
4	6025.00	7.92	92.14	100.06	200.00	-99.94	Peak	271	147	P
5	12050.00	16.46	31.21	47.67	54.00	-6.33	Average	100	114	P
6	12050.00	16.46	47.90	64.36	74.00	-9.64	Peak	100	114	P
7	18075.00	8.61	41.83	50.44	63.54	-13.10	Average	150	360	P
8	18075.00	8.61	55.83	64.44	83.54	-19.10	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

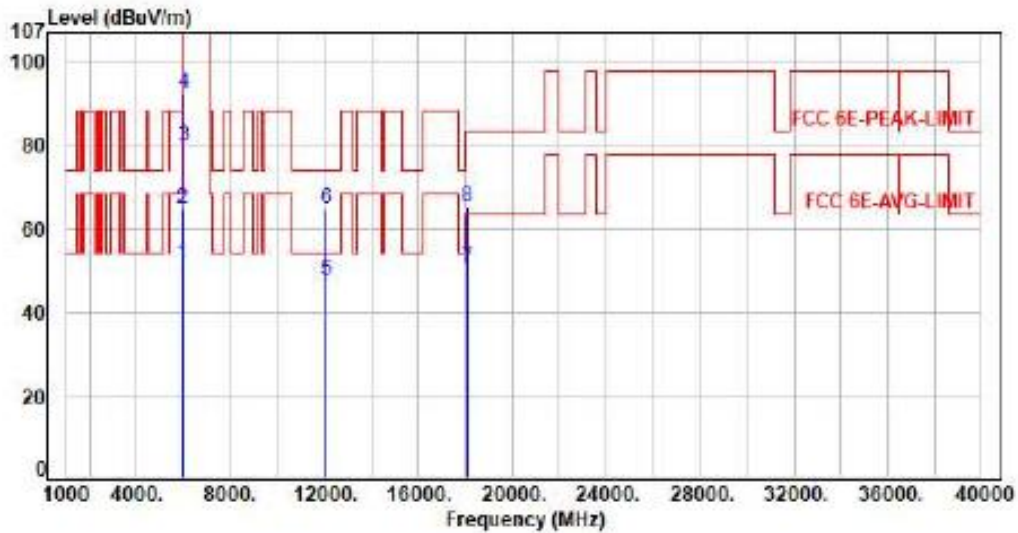

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	44.06	51.79	68.20	-16.41	Average	222	241	P
2	5925.00	7.73	56.96	64.69	88.20	-23.51	Peak	222	241	P
3	6025.00	7.92	71.82	79.74	200.00	-120.26	Average	222	241	P
4	6025.00	7.92	84.48	92.40	200.00	-107.60	Peak	222	241	P
5	12050.00	16.46	30.96	47.42	54.00	-6.58	Average	100	216	P
6	12050.00	16.46	48.28	64.74	74.00	-9.26	Peak	100	216	P
7	18075.00	8.61	41.93	50.54	63.54	-13.00	Average	150	360	P
8	18075.00	8.61	56.47	65.08	83.54	-18.46	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11bx160 CH47 N551 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

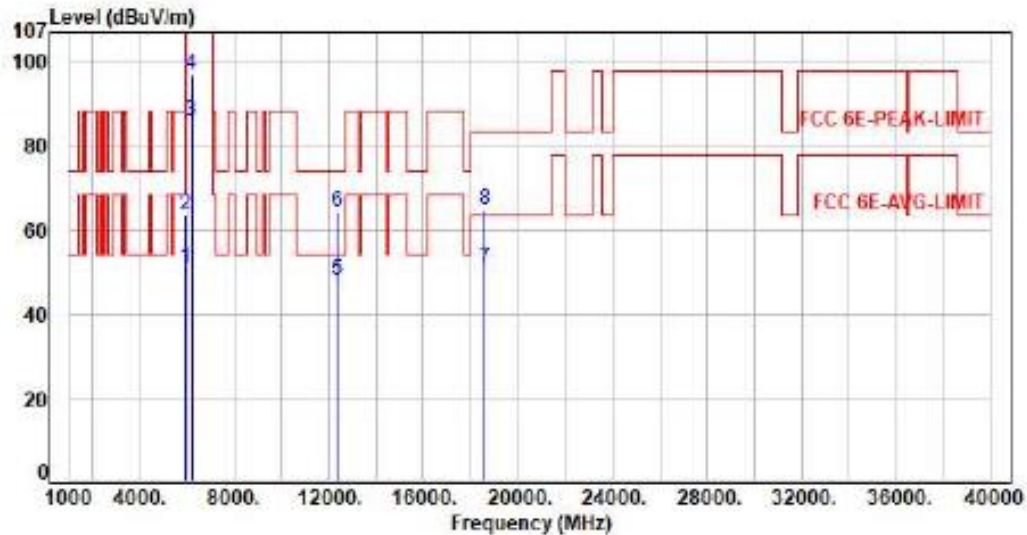

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.18	50.91	68.20	-17.29	Average	267	149	P
2	5925.00	7.73	55.93	63.66	88.20	-24.54	Peak	267	149	P
3	6185.00	8.37	77.29	85.66	200.00	-114.34	Average	267	149	P
4	6185.00	8.37	88.36	96.73	200.00	-103.27	Peak	267	149	P
5	12370.00	16.61	31.36	47.97	54.00	-6.03	Average	100	117	P
6	12370.00	16.61	47.82	64.43	74.00	-9.57	Peak	100	117	P
7	18555.00	9.17	41.82	50.99	63.54	-12.55	Average	150	360	P
8	18555.00	9.17	55.33	64.50	83.54	-19.04	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

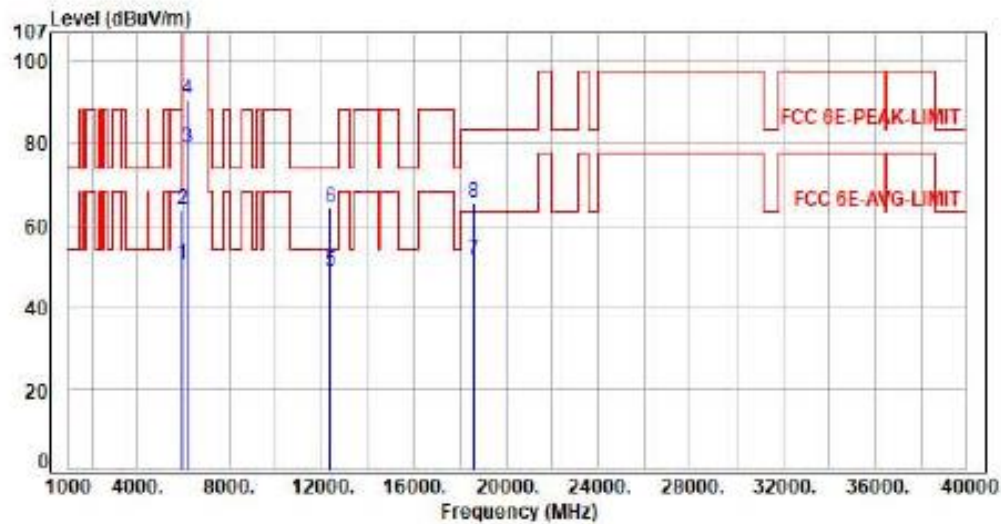

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.88	50.61	68.20	-17.59	Average	186	147	P
2	5925.00	7.73	56.26	63.99	88.20	-24.21	Peak	186	147	P
3	6185.00	8.37	70.57	78.94	200.00	-121.06	Average	186	147	P
4	6185.00	8.37	82.45	90.82	200.00	-109.18	Peak	186	147	P
5	12370.00	16.61	32.27	48.88	54.00	-5.12	Average	100	217	P
6	12370.00	16.61	47.68	64.29	74.00	-9.71	Peak	100	217	P
7	18555.00	9.17	42.70	51.87	63.54	-11.67	Average	150	360	P
8	18555.00	9.17	56.29	65.46	83.54	-18.08	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

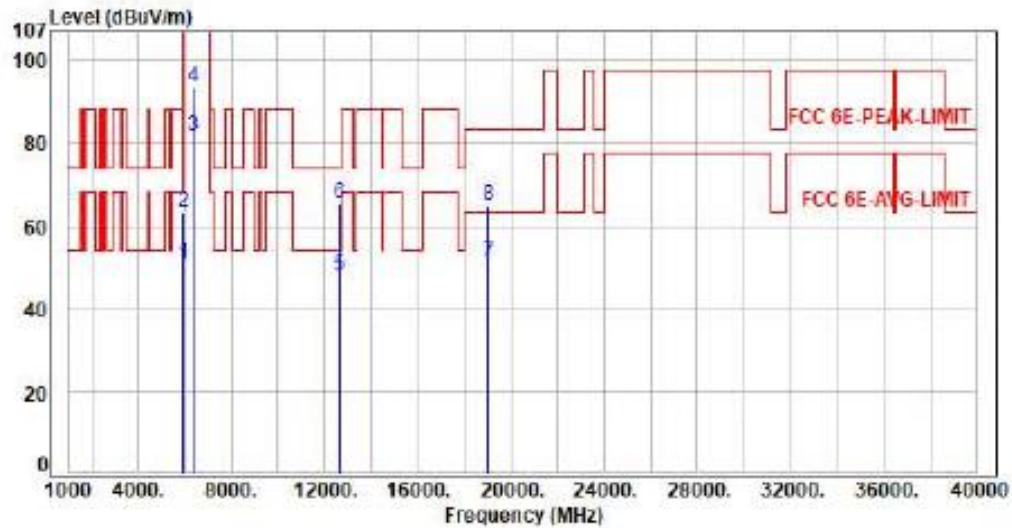

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.05	50.78	68.20	-17.42	Average	396	63	P
2	5925.00	7.73	55.83	63.56	88.20	-24.64	Peak	396	63	P
3	6345.00	8.41	73.27	81.68	200.00	-118.32	Average	396	63	P
4	6345.00	8.41	85.21	93.62	200.00	-106.38	Peak	396	63	P
5	12690.00	17.20	30.96	48.16	54.00	-5.84	Average	100	112	P
6	12690.00	17.20	48.19	65.39	74.00	-8.61	Peak	100	112	P
7	19035.00	9.45	41.79	51.24	63.54	-12.30	Average	150	360	P
8	19035.00	9.45	55.58	65.03	83.54	-18.51	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

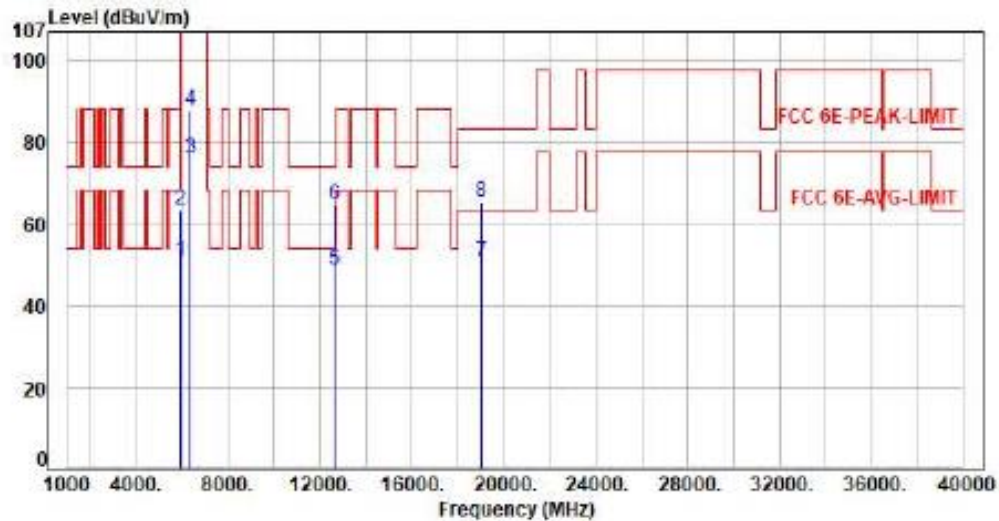

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.81	50.74	68.20	-17.46	Average	138	147	P
2	5925.00	7.73	55.75	63.48	88.20	-24.72	Peak	138	147	P
3	6345.00	8.41	67.77	76.18	200.00	-123.82	Average	138	147	P
4	6345.00	8.41	79.58	87.99	200.00	-112.01	Peak	138	147	P
5	12690.00	17.20	31.49	48.69	54.00	-5.31	Average	100	211	P
6	12690.00	17.20	47.65	64.85	74.00	-9.15	Peak	100	211	P
7	19035.00	9.45	41.54	50.99	63.54	-12.55	Average	150	360	P
8	19035.00	9.45	55.93	65.38	83.54	-18.16	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO-B6

Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

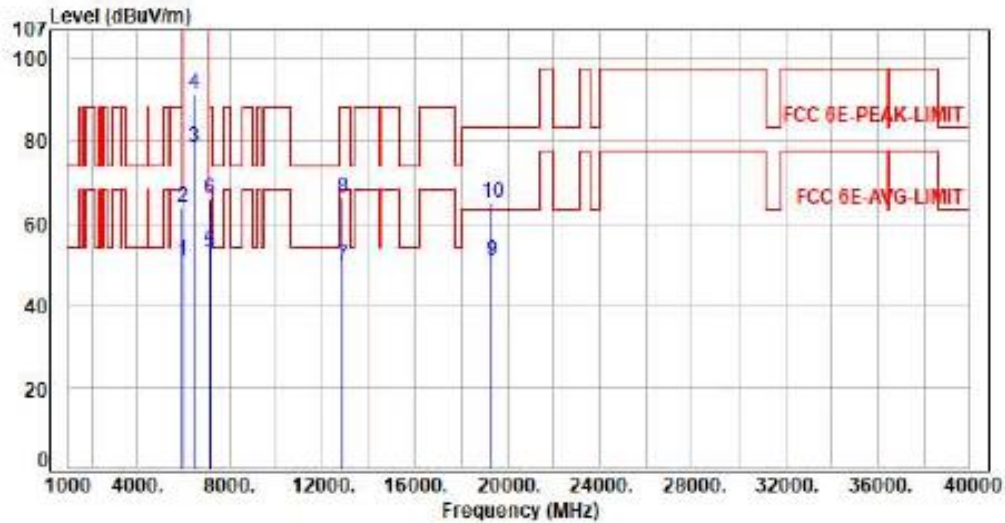

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.97	50.70	68.20	-17.50	Average	398	271	P
2	5925.00	7.73	55.95	63.68	88.20	-24.52	Peak	398	271	P
3	6435.00	8.36	70.34	78.70	200.00	-121.30	Average	398	271	P
4	6435.00	8.36	83.30	91.66	200.00	-108.34	Peak	398	271	P
5	7125.00	9.92	42.88	52.80	68.20	-15.40	Average	398	271	P
6	7125.00	9.92	56.00	65.92	88.20	-22.28	Peak	398	271	P
7	12870.00	17.98	31.52	49.50	68.20	-18.70	Average	100	118	P
8	12870.00	17.98	48.32	66.30	88.20	-21.90	Peak	100	118	P
9	19305.00	9.63	41.37	51.00	63.54	-12.54	Average	150	360	P
10	19305.00	9.63	55.28	64.91	83.54	-18.63	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

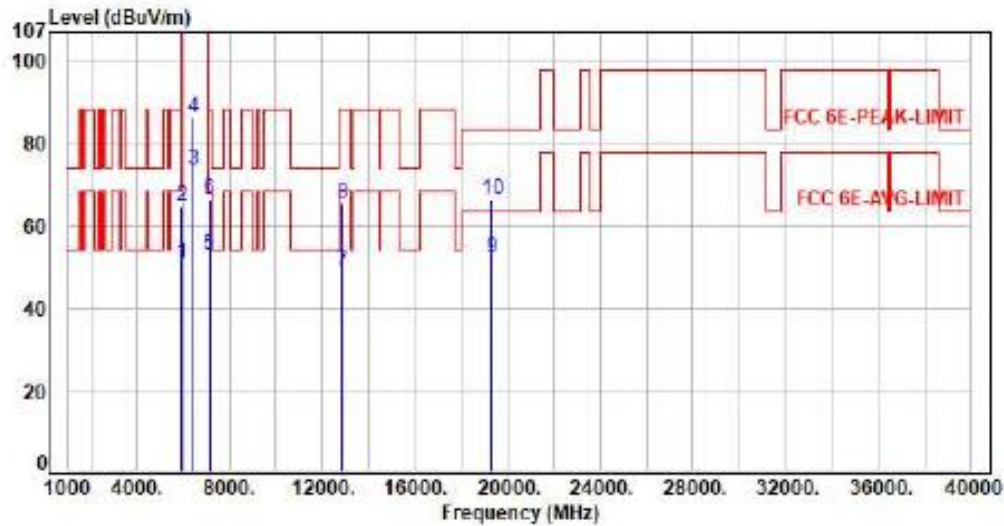

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.96	50.69	68.20	-17.51	Average	110	240	P
2	5925.00	7.73	56.90	64.63	88.20	-23.57	Peak	110	240	P
3	6435.00	8.36	65.14	73.50	200.00	-126.50	Average	110	240	P
4	6435.00	8.36	77.94	86.30	200.00	-113.70	Peak	110	240	P
5	7125.00	9.92	42.92	52.84	68.20	-15.36	Average	110	240	P
6	7125.00	9.92	56.36	66.28	88.20	-21.92	Peak	110	240	P
7	12870.00	17.98	30.79	48.77	68.20	-19.43	Average	100	220	P
8	12870.00	17.98	47.58	65.56	88.20	-22.64	Peak	100	220	P
9	19305.00	9.63	42.46	52.09	63.54	-11.45	Average	150	360	P
10	19305.00	9.63	56.69	66.32	83.54	-17.22	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ex20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

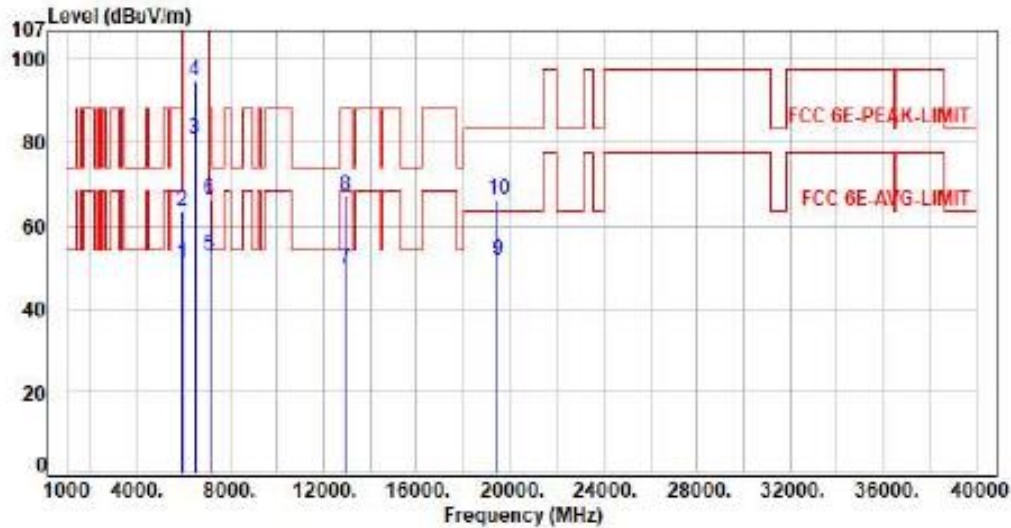

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.00	50.73	68.20	-17.47	Average	188	346	P
2	5925.00	7.73	55.66	63.39	88.20	-24.81	Peak	188	346	P
3	6475.00	8.34	72.69	81.03	200.00	-118.97	Average	188	346	P
4	6475.00	8.34	86.37	94.71	200.00	-105.29	Peak	188	346	P
5	7125.00	9.92	42.82	52.74	68.20	-15.46	Average	188	346	P
6	7125.00	9.92	56.48	66.40	88.20	-21.80	Peak	188	346	P
7	12950.00	18.39	31.38	49.77	68.20	-18.43	Average	100	114	P
8	12950.00	18.39	48.57	66.96	88.20	-21.24	Peak	100	114	P
9	19425.00	10.06	41.68	51.74	63.54	-11.80	Average	150	360	P
10	19425.00	10.06	56.29	66.35	83.54	-17.19	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

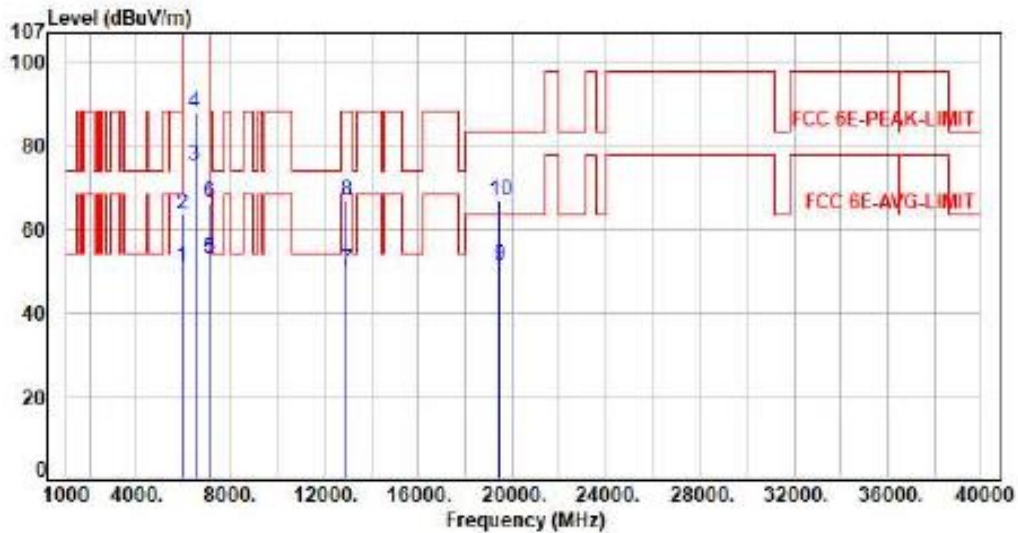

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.94	50.67	68.20	-17.53	Average	100	240	P
2	5925.00	7.73	55.72	63.45	88.20	-24.75	Peak	100	240	P
3	6475.00	8.34	66.73	75.07	200.00	-124.93	Average	100	240	P
4	6475.00	8.34	79.58	87.92	200.00	-112.08	Peak	100	240	P
5	7125.00	9.92	42.92	52.84	68.20	-15.36	Average	100	240	P
6	7125.00	9.92	56.32	66.24	88.20	-21.96	Peak	100	240	P
7	12950.00	18.39	31.47	49.86	68.20	-18.34	Average	100	215	P
8	12950.00	18.39	48.52	66.91	88.20	-21.29	Peak	100	215	P
9	19425.00	10.06	41.37	51.43	63.54	-12.11	Average	150	360	P
10	19425.00	10.06	56.68	66.74	83.54	-16.80	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

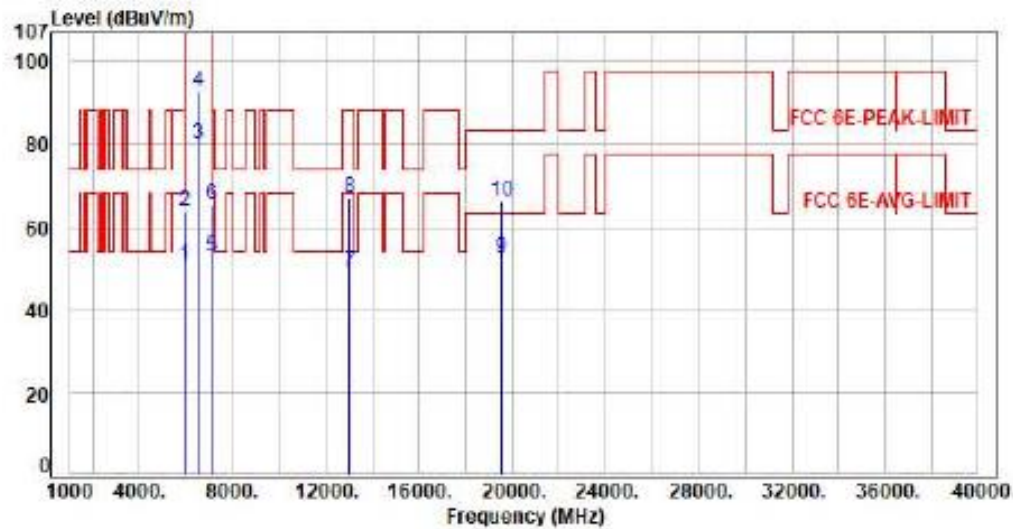

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.08	50.81	68.20	-17.39	Average	198	341	P
2	5925.00	7.73	56.25	63.98	88.20	-24.22	Peak	198	341	P
3	6515.00	8.45	71.73	80.18	200.00	-119.82	Average	198	341	P
4	6515.00	8.45	84.16	92.61	200.00	-107.39	Peak	198	341	P
5	7125.00	9.92	42.84	52.76	68.20	-15.44	Average	198	341	P
6	7125.00	9.92	55.69	65.61	88.20	-22.59	Peak	198	341	P
7	13030.00	18.71	30.60	49.31	68.20	-18.89	Average	100	119	P
8	13030.00	18.71	48.28	66.99	88.20	-21.21	Peak	100	119	P
9	19545.00	10.24	42.10	52.34	63.54	-11.20	Average	150	360	P
10	19545.00	10.24	55.93	66.17	83.54	-17.37	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

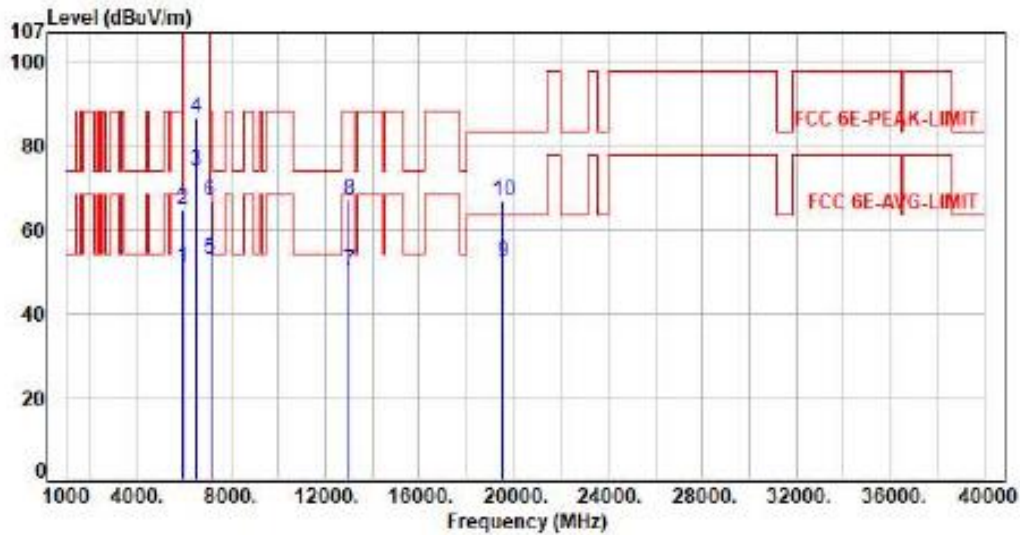

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.02	50.75	68.20	-17.45	Average	106	241	P
2	5925.00	7.73	57.11	64.84	88.20	-23.36	Peak	106	241	P
3	6515.00	8.45	65.45	73.90	200.00	-126.10	Average	106	241	P
4	6515.00	8.45	78.34	86.79	200.00	-113.21	Peak	106	241	P
5	7125.00	9.92	42.85	52.77	68.20	-15.43	Average	106	241	P
6	7125.00	9.92	56.78	66.70	88.20	-21.50	Peak	106	241	P
7	13030.00	18.71	31.30	50.01	68.20	-18.19	Average	100	217	P
8	13030.00	18.71	48.59	67.30	88.20	-20.90	Peak	100	217	P
9	19545.00	10.24	41.83	52.07	63.54	-11.47	Average	150	360	P
10	19545.00	10.24	56.50	66.74	83.54	-16.80	Peak	150	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

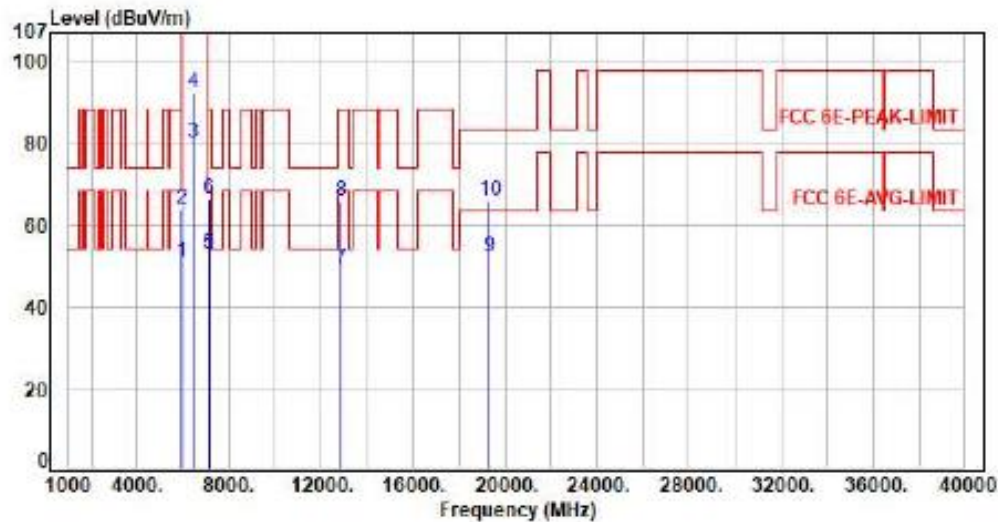

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	42.93	50.66	68.20	-17.54	Average	186	345	P
2	5925.00	7.73	56.03	63.76	88.20	-24.44	Peak	186	345	P
3	6445.00	8.33	71.71	80.04	200.00	-119.96	Average	186	345	P
4	6445.00	8.33	83.93	92.26	200.00	-107.74	Peak	186	345	P
5	7125.00	9.92	42.88	52.80	68.20	-15.40	Average	186	345	P
6	7125.00	9.92	56.32	66.24	88.20	-21.96	Peak	186	345	P
7	12890.00	18.06	31.08	49.14	68.20	-19.06	Average	100	116	P
8	12890.00	18.06	47.80	65.86	88.20	-22.34	Peak	100	116	P
9	19335.00	9.70	42.48	52.18	63.54	-11.36	Average	150	360	P
10	19335.00	9.70	56.39	66.09	83.54	-17.45	Peak	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor