

47 CFR PART 15 SUBPART C/ RSS-247 TEST REPORT

for

Wireless Refrigerant Scale

Model No.: RSR47D Remote

FCC ID: 2ALHR010

IC: 22518-BT010

of

Applicant: Fieldpiece Instruments, Inc

Address: 1636 WEST COLLINS AVE ORANGE, CA 92867 USA

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A



Report No.: W6M22205-21887-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com




Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	2
1.1	NOTES	2
1.2	TESTING LABORATORY	3
1.2.1	Location	3
1.2.2	Details of accreditation status	3
1.3	DETAILS OF APPROVAL HOLDER	3
1.4	APPLICATION DETAILS.....	4
1.5	GENERAL INFORMATION OF TEST ITEM.....	4
1.6	TEST STANDARDS	5
2	TECHNICAL TEST.....	6
2.1	SUMMARY OF TEST RESULTS.....	6
2.2	TEST ENVIRONMENT	6
2.3	TEST EQUIPMENT LIST.....	7
2.4	GENERAL TEST PROCEDURE.....	10
3	TEST RESULTS (ENCLOSURE)	12
3.1	PEAK OUTPUT POWER (TRANSMITTER).....	13
3.2	EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)	16
3.3	EXEMPTION LIMITS FOR ROUTINE EVALUATION ACCORDING TO FCC KDB PUBLICATION.....	16
3.4	EQUIVALENT ISOTROPIC RADIATED POWER (EIRP).....	17
3.5	EXEMPTION LIMITS FOR ROUTINE EVALUATION ACCORDING TO RSS-102.....	17
3.6	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS	18
3.7	SPURIOUS EMISSIONS (TX).....	19
3.8	RADIATED EMISSION ON THE BAND EDGE.....	21
3.9	MINIMUM 6 DB BANDWIDTH	23
3.10	PEAK POWER SPECTRAL DENSITY	28
3.11	RADIATED EMISSION FROM RECEIVER PART	31
3.12	POWER LINE CONDUCTED EMISSION	32
	APPENDIX.....	33



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

Laboratory disclaimer-

1. The test results of this test report relate exclusively to the item tested as specified in 1.5.
2. The test report may only be reproduced or published in full.
3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.
4. Antenna gain is provided by applicant and laboratory issue relevant data and results.

Tester:

July 27, 2022

Spencer Yang

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

July 27, 2022

Kevin Wang

Date

WTS

Name

Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

1.2 Testing laboratory

1.2.1 Location

10m OATS

No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,
New Taipei City 207, Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6613-0228

Worldwide Testing Services (Taiwan) Co., Ltd.

6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6606-8877

1.2.2 Details of accreditation status

Accredited testing laboratory

FCC filed test laboratory Reg. No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.

Accredited number: ./.

Street: ./.

Town: ./.

Country: ./.

1.3 Details of approval holder

Name: Fieldpiece Instruments, Inc

Street: 1636 WEST COLLINS AVE ORANGE,

Town: CA 92867

Country: USA



Registration number: W6M22205-21887-C-1
FCC ID: 2ALHR010
IC: 22518-BT010

1.4 Application details

Date of receipt of test item: June 29, 2022
Date of test: from June 30, 2022 to July 22, 2022

1.5 General information of Test item


Type of test item: Wireless Refrigerant Scale
Model number: RSR47D Remote
Brand name: Fieldpiece
Multi-listing model number: ./.
Sample no.: #01

Technical data

Frequency band: 2402 MHz – 2480 MHz
Frequency (ch 0 or A): 2402 MHz
Frequency (ch 19 or B): 2440 MHz
Frequency (ch 39 or C): 2480 MHz
Number of channels: 40
Operation modes: Duplex
Modulation type: GFSK

Fixed point-to-point operation: ☐ Yes / ☒ No
Type of antenna: PCB antenna
Antenna gain: -0.38 dBi
Power supply: Battery 9Vd.c.
Emission designator: 1M05G1D
Host device: none
Classification:

Fixed Device	☐
Mobile Device (Human Body distance > 20cm)	☐
Portable Device (Human Body distance < 20cm)	☒



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

Transmitter

Unom

Power (ch 0 or A):

Conducted: 5.86 dBm

Power (ch 19 or B):

Conducted: 5.61 dBm

Power (ch 39 or C):

Conducted: 5.40 dBm

Manufacturer: (if applicable)

Name:

CHY FIREMATE CO., LTD.

Street:

No.3 Sheng-Li 1st Street, Xintian Village, Rende District,

Town:

Tainan City,

Country:

Taiwan R.O.C.

1.6 Test standards

47 CFR PART 15 SUBPART C § 15.247 (2020-10)

RSS-247 Issue 2 (2017-02)



Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed. ☒

or

The deviations were ascertained in the course of the tests performed. ☐

2.2 Test environment

Relative humidity content: 20 ... 75 %


Air pressure: 86 ... 103 kPa

Power supply: Battery 9Vd.c.

Extreme conditions parameters: ./.

Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Emission (Power Line Conducted Emission)	Expanded Uncertainty : AMN : 1.03 dB Voltage probe : 1.05 dB
Estimation Result of Uncertainty of Radiated Emission(3M) (Transmitter Radiated Emissions in Restricted Bands , Spurious Emissions (tx), Radiated Emission from Receiver Part)	Expanded Uncertainty : 0.009-30 MHz : 3.48 dB 30-1000 MHz : 4.48 dB 1-18 GHz : 4.15 dB 18-40 GHz : 3.78 dB
Estimation Result of Uncertainty of Bandwidth Measurement (Minimum 6 dB Bandwidth)	Expanded Uncertainty : 0.45 kHz
Estimation Result of Uncertainty of Conducted Output Power Measurement (Peak Output Power (transmitter))	Expanded Uncertainty : 3.07 dB
Estimation Result of Uncertainty of Power Density Measurement (Peak Power Spectral Density)	Expanded Uncertainty : 3.63 dB
Estimation Result of Uncertainty of Band Edge Measurement (Radiated Emission on the band edge)	Expanded Uncertainty : 0.67 dBc

The decision rule is: Measurement uncertainty is not included in the calculation of test results.



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2022/6/22	2023/6/21
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2021/11/9	2022/11/8
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2021/9/22	2022/9/21
ETSTW-CE 008	HF-EICHELITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2022/7/18	2023/7/17
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2021/11/8	2022/11/7
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2022/7/18	2023/7/17
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2022/6/21	2023/6/20
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2021/9/28	2022/9/27
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2021/8/4	2022/8/3
ETSTW-RE 019	MICROWAVE HORN ANTENNA	22240-25	121074	FM	2022/6/13	2023/6/12
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2022/6/22	2023/6/21
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2022/5/23	2023/5/22
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2022/3/4	2023/3/3
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2022/6/28	2023/6/27
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2022/7/1	2023/6/30
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2022/2/18	2023/2/17
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2022/2/18	2023/2/17
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2022/2/18	2023/2/17
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2022/3/28	2023/3/27
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2022/2/18	2023/2/17
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2022/5/13	2023/5/12
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2021/10/27	2022/10/26
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2021/9/17	2022/9/16
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2022/6/9	2023/6/8
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2022/2/18	2023/2/17
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2022/1/5	2023/1/4
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	2021/10/29	2022/10/28
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2022/6/20	2023/6/19
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2021/8/6	2022/8/5
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2021/8/6	2022/8/5
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2022/2/18	2023/2/17
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2021/8/6	2022/8/5
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2021/8/6	2022/8/5
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2022/5/13	2023/5/12
ETSTW-RE 146	Preamplifier	JPA-10MIG	15090004	JPT	2022/5/27	2023/5/26
ETSTW-RE 152	Bi-log Hybrid Antenna	MCTD 2786B	BLB20J04029	ETC	2021/10/5	2022/10/4
ETSTW-RE 153	Signal Analyzer	FSV40	101929	R&S	2021/10/6	2022/10/5
ETSTW-RE 159	Bi-log Hybrid Antenna (30M~1000 MHz)	MCTD 2786B	BLB21N04035	ETC	2021/12/06	2022/12/05
ETSTW-RF 002	Electromagnetic field probe	LF-30	K-0007	STT	2022/6/15	2023/6/14
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2022/6/10	2023/6/9
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2022/3/28	2023/3/27
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2022/5/9	2023/5/8
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2021/10/29	2022/10/28
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2022/1/5	2023/1/4
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2022/1/5	2023/1/4
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2022/1/5	2023/1/4
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2022/1/5	2023/1/4
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2021/9/7	2022/9/6
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2022/5/3	2023/5/2
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2021/8/6	2022/8/5
ETSTW-Cable 011	SMA to N type Cable	RGU-400	None	THERMAX	Pre-test Use NCR	
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2022/2/18	2023/2/17
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2022/2/18	2023/2/17
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2022/2/18	2023/2/17
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2022/2/18	2023/2/17
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2022/6/15	2023/6/14
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2022/5/6	2023/5/5
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2021/9/17	2022/9/16
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2021/9/17	2022/9/16
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2022/2/18	2023/2/17




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2022/5/13	2023/5/12
ETSTW-Cable 047	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2022/7/1	2023/6/30
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2022/5/27	2023/5/26
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2022/5/13	2023/5/12
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM- NM-25000	170239	EMCI	2022/5/27	2023/5/26
ETSTW-Cable 072	SMA type cable (8m)	SUCOFLEX 104	805800/4	HUBER+SUHNER	2022/5/13	2023/5/12
ETSTW-Cable 074	SMA type cable (2m)	SUCOFLEX 104	802563/4	HUBER+SUHNER	2022/5/13	2023/5/12
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1 Version EMEC-3A1+	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	
ETSTW-TH 002	Thermohygrometer	608-H1	45204317	Testo	2021/10/18	2022/10/17
ETSTW-TH 003	Wireless weather station	GAIA	N/A	TFA	2021/10/18	2022/10/17



Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 5.2 using a 50 μ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.10-2013 6.4 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:


Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dB μ V + 10.36 dB + 6 dB = 36.36 dB μ V/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 6.3.1. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:


Average = Peak + Duty Factor

Duty Factor = $20 \log (\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22205-21887-C-1


FCC ID: 2ALHR010

IC: 22518-BT010

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b) IC RSS-247 5.2	☒	☒	☐
Equivalent isotropically radiated Power	15.247(b) IC RSS-247 5.4	☒	☒	☐
Spurious Emissions radiated – Transmitter operating	15.247(d): 15.209 IC RSS-247 5.5	☒	☒	☐
Band Edge Measurement	15.247(d) IC RSS-247 5.5	☒	☒	☐
Minimum 6 dB Bandwidth	15.247(a)(2) IC RSS-247 5.2	☒	☒	☐
Peak Power Spectral Density	15.247(e) IC RSS-247 5.2	☒	☒	☐
Radiated Emission from Receiver part	15.109 IC RSS-247 5.5 IC RSS-Gen Table 2	☐	☐	☐
Power Line Conducted Emission	15.207 IC RSS-Gen	☐	☐	☐

The following is intentionally left blank.



Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(b)(3)


This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

Test date: July 12, 2022

Temperature: 25.1 °C


Humidity: 49.0 %

Tester: Spencer

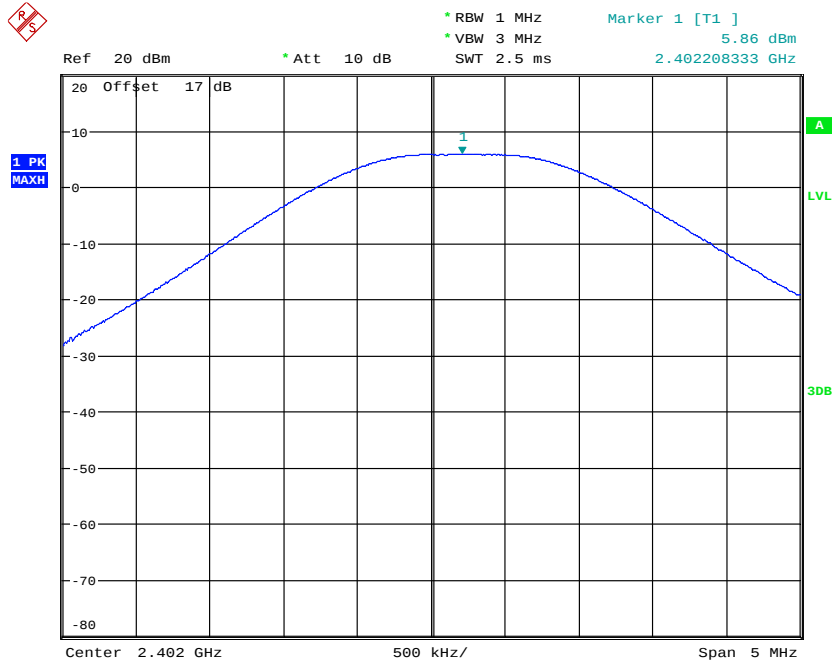

MAX OUTPUT POWER BT4.0 CH00

Date: 12.JUL.2022 08:19:50




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22205-21887-C-1


FCC ID: 2ALHR010

IC: 22518-BT010

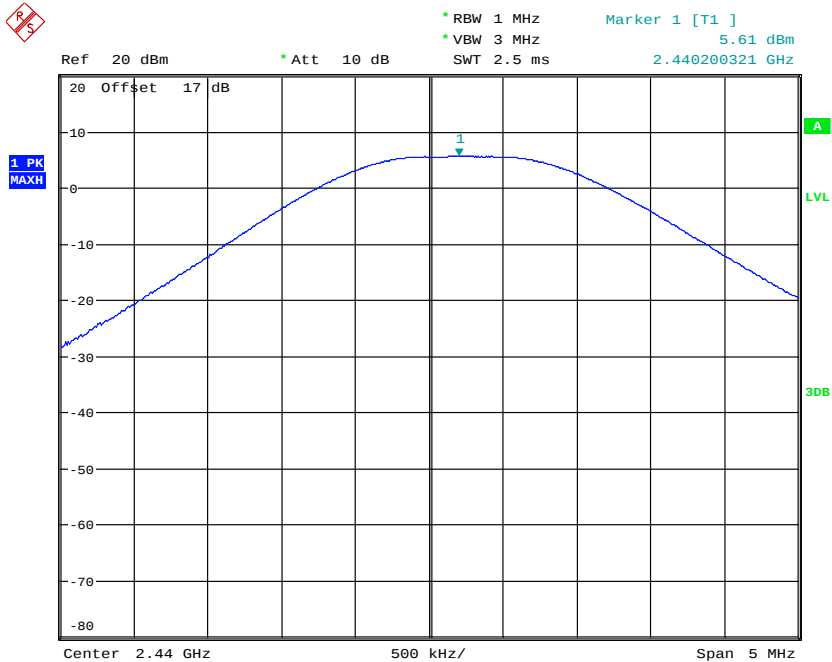


MAX OUTPUT POWER BT4.0 CH19

Date: 12.JUL.2022 08:21:52

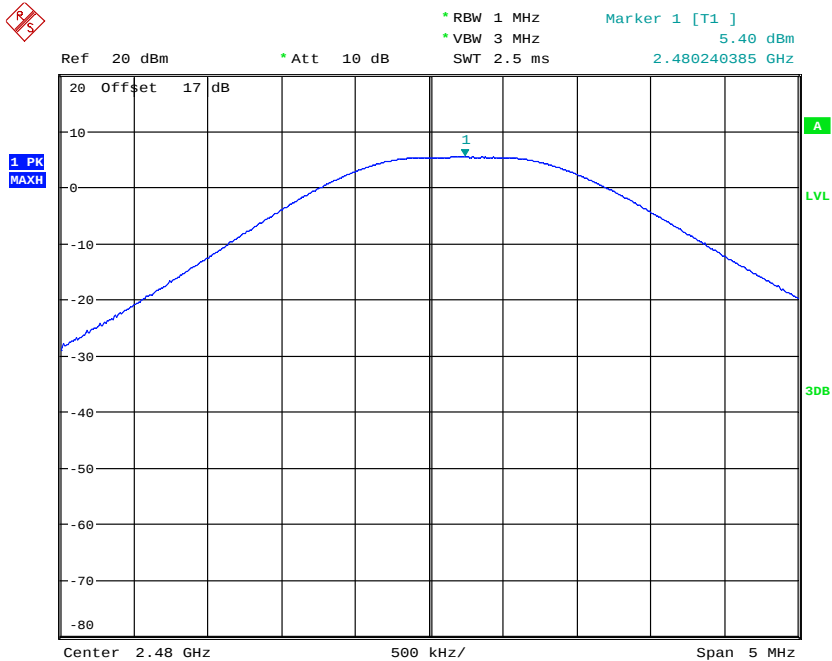

MAX OUTPUT POWER BT4.0 CH39

Date: 12.JUL.2022 08:22:30



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010


IC: 22518-BT010

Limits:

Frequency MHz	Power dBm
902 - 928	30
2400 – 2483.5	30
5725 – 5850	30

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to point operation consider §15.247 (b)(4)

Test equipment used: ETSTW-RE 055, ETSTW-RE 050, ETSTW-RE 064



Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

3.2 Equivalent Isotropic Radiated Power (EIRP)

FCC Rule: 15.247(b)(3)

EIRP = max. conducted output power + antenna gain

EIRP = 5.86 dBm + (-0.38 dBi [antenna gain claimed by manufacturer]) = 5.48 dBm = 3.5318 mW

3.3 Exemption Limits for Routine Evaluation according to FCC KDB Publication

RESULT:

Test standard : FCC KDB Publication
447498 D01 General RF Exposure Guidance v06

3.3.1 Exemption Limits for Routine Evaluation – SAR Evaluation

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table .

Table: SAR evaluation — Exemption limits for routine evaluation based on frequency and separation distance

MHz	5	10	15	20	25	mm
2402	10.09	19.26	29.35	38.52	48.52	SAR Test Exclusion Threshold (mW)

MHz	30	35	40	45	50	mm
2402	57.70	67.79	77.87	87.05	97.13	SAR Test Exclusion Threshold (mW)


Output power level shall be the higher of the maximum conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power.

Established separation distance is 5 mm.

Operating frequency band : 2402-2480 MHz

Max. output power level at 5 mm separation distance at 2402 MHz
according to table is: 10.09 mW

The product is exempt from SAR Evaluation/Testing because the output power of 3.5318 mW is below the exemption limit of 10.09 mW.



Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

3.4 Equivalent Isotropic Radiated Power (EIRP)

EIRP = max. conducted output power + antenna gain

EIRP = 5.86 dBm + (-0.38 dBi [antenna gain claimed by manufacturer]) = 5.48 dBm = 3.5318 mW

3.5 Exemption Limits for Routine Evaluation according to RSS-102

All transmitters are exempt from routine SAR and RF exposure evaluations provided that they comply with the requirements of sections 2.5.1 (Exemption Limits for Routine Evaluation – SAR Evaluation) or 2.5.2 (Exemption Limits for Routine Evaluation – RF Exposure Evaluation).

If the equipment under test (EUT) meets the requirements of sections 2.5.1 or 2.5.2, applicants are only required to submit a properly signed declaration of compliance (see Annex C). The information contained in the RF exposure technical brief may be limited to the value(s) of the maximum output power, the information that demonstrates how the maximum output power of the transmitter was derived and the rationale for the separation distances applied (see Table 1), which must be based on the most conservative exposure condition for the applicable module or host platform test procedure requirements.

If the EUT does not meet the appropriate exemption limit, a complete SAR or RF exposure evaluation shall be performed.

3.5.1 Exemption Limits for Routine Evaluation – SAR Evaluation

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1.

Table 1: SAR evaluation — Exemption limits for routine evaluation based on frequency and separation distance

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
2402	4.26 mW	7.26 mW	15.26 mW	30.05 mW	52.70 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
2480	3.94 mW	6.97 mW	15.03 mW	30.06 mW	52.09 mW
5735	1.03 mW	6 mW	15.03 mW	27.14 mW	41.40 mW

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥50 mm
≤300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	177 mW	195 mW	213 mW
835	80 mW	92 mW	105 mW	117 mW	130 mW
2402	84.40 mW	125.62 mW	177.54 mW	242.07 mW	319.65 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	83.09 mW	123.03 mW	172.91 mW	234.71 mW	308.46 mW
5735	56.85 mW	72.50 mW	87.40 mW	100.62 mW	111.20 mW


Output power level shall be the higher of the maximum conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power.

Established separation distance is 5 mm.

Operating frequency band: 2402-2480 MHz

Max. output power level at 5 mm separation distance at 2402 MHz according to table 1 is: 4.26 mW

The product is exempt from SAR Evaluation/Testing because the output power of 3.5318 mW is below the exemption limit of 4.26 mW.



Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

3.6 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (d), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26500 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency $\leq$ 1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements)

Frequency $>$ 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements)

Frequency $>$ 1 GHz , RBW:1 MHz , VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:


“If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = $20 \log (\text{dwell time} / 100\text{ms})$

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: See attached diagrams in Appendix.



Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

3.7 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(d), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies above 1GHz (Peak measurements).

Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements).

Max. reading – 20dB

Max. reading – 20 dB


Guidance on Measurement of Digit Transmission Systems:

“If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = $20 \log (\text{dwell time}/100\text{ms})$

Note: No duty cycle correction was added to the reading of EUT.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Correction Factor".

Summary table with radiated data of the test plots

Model: RSR47D Remote

Date: --

Mode: --

Temperature: --

°C

Engineer: --

Polarization: --

Humidity: --

%

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--


Frequency (MHz)	Reading (dBuV)		Factor (dB)	Result (dBuV/m)		Limit (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (m)
	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

Note

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. After evaluated, the test result in this report adopt the worst case to measure, please see attached diagrams in appendix.

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 030, ETSTW-RE 111, ETSTW-RE 088, ETSTW-RE 018, ETSTW-RE 064



Registration number: W6M22205-21887-C-1
FCC ID: 2ALHR010
IC: 22518-BT010

3.8 Radiated Emission on the band edge

According to FCC rules part 15 subpart C §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.


In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

Test date: July 12, 2022


Temperature: 25.1 °C

Humidity: 49.0 %


Tester: Spencer

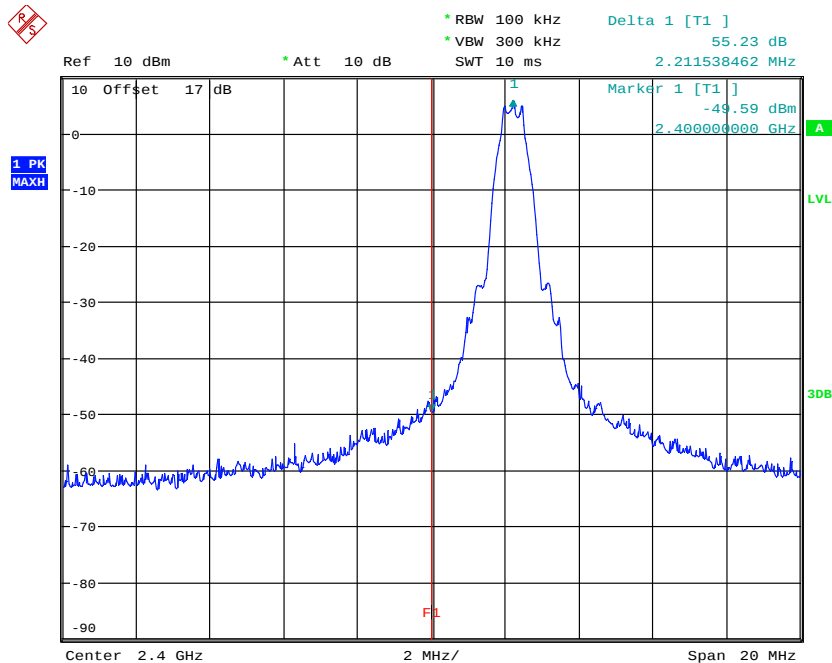

BANDEDGE BT4.0 CH00
Date: 12.JUL.2022 08:20:18



Registration number: W6M22205-21887-C-1
FCC ID: 2ALHR010
IC: 22518-BT010

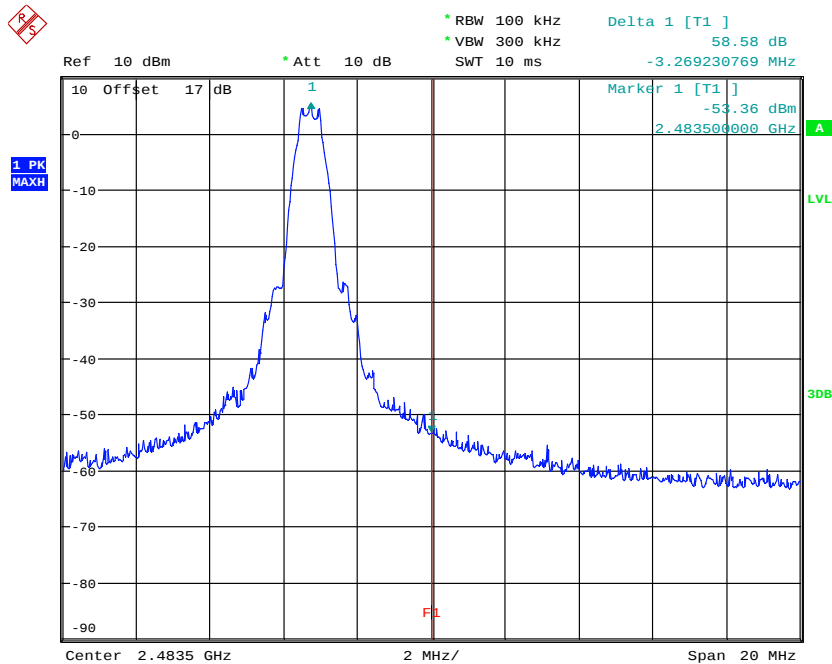

BANDEDGE BT4.0 CH39
Date: 12.JUL.2022 08:22:58


Limit:

Frequency Range / MHz	Limit
902 – 928 2400 – 2483.5 5725 - 5850	- 20 dB

Test equipment used: ETSTW-RE 055, ETSTW-RE 050, ETSTW-RE 064

Explanation: Radiated Emission diagrams please see appendix.






Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22205-21887-C-1


FCC ID: 2ALHR010

IC: 22518-BT010

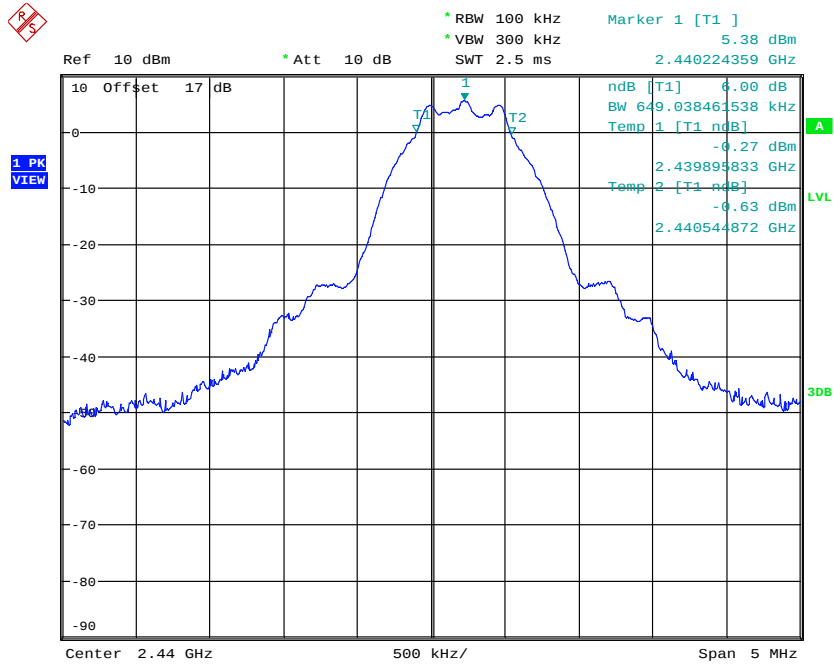


6DB BANDWIDTH BT4.0 CH19

Date: 12.JUL.2022 08:22:02

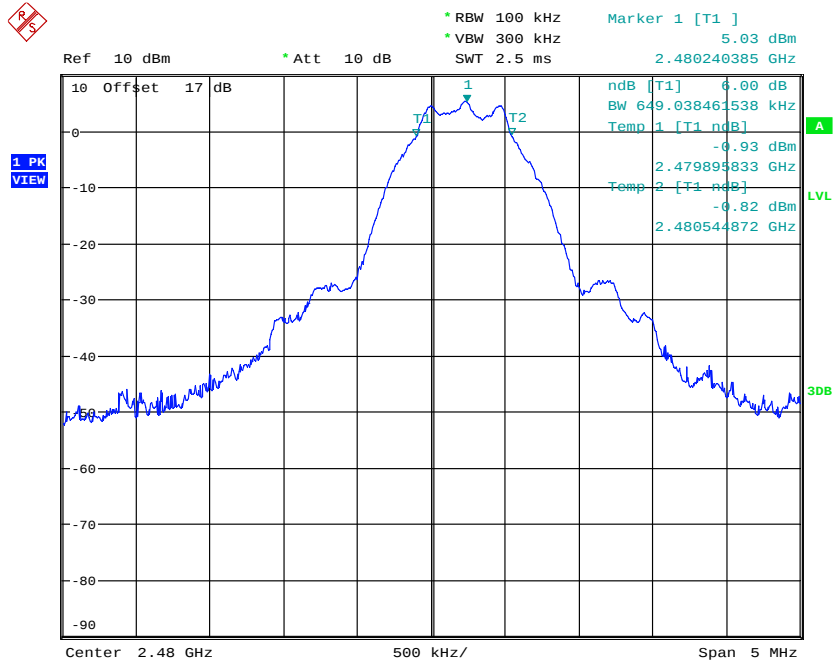

6DB BANDWIDTH BT4.0 CH39

Date: 12.JUL.2022 08:22:40



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010


Occupied bandwidth

Test date: July 12, 2022

Temperature: 25.1 °C


Humidity: 49.0 %

Tester: Spencer

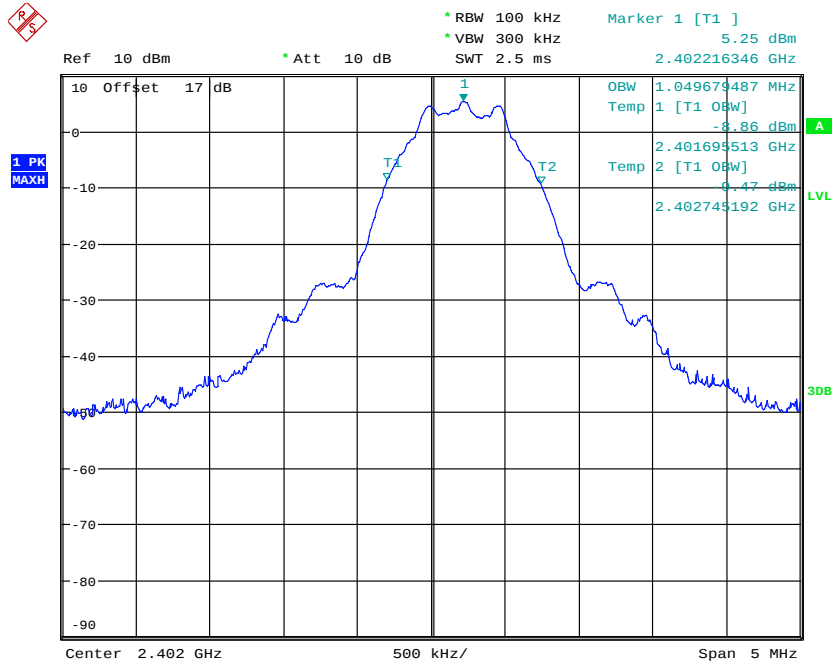

OCCUPIED BANDWIDTH BT4.0 CH0

Date: 12.JUL.2022 08:27:49




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22205-21887-C-1


FCC ID: 2ALHR010

IC: 22518-BT010

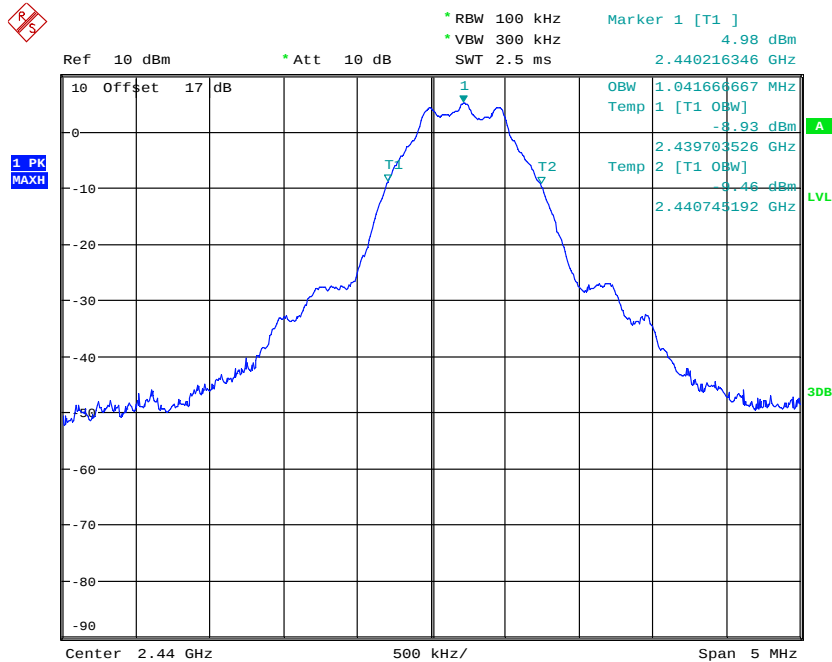


OCCUPIED BANDWIDTH BT4.0 CH19

Date: 12.JUL.2022 08:27:16

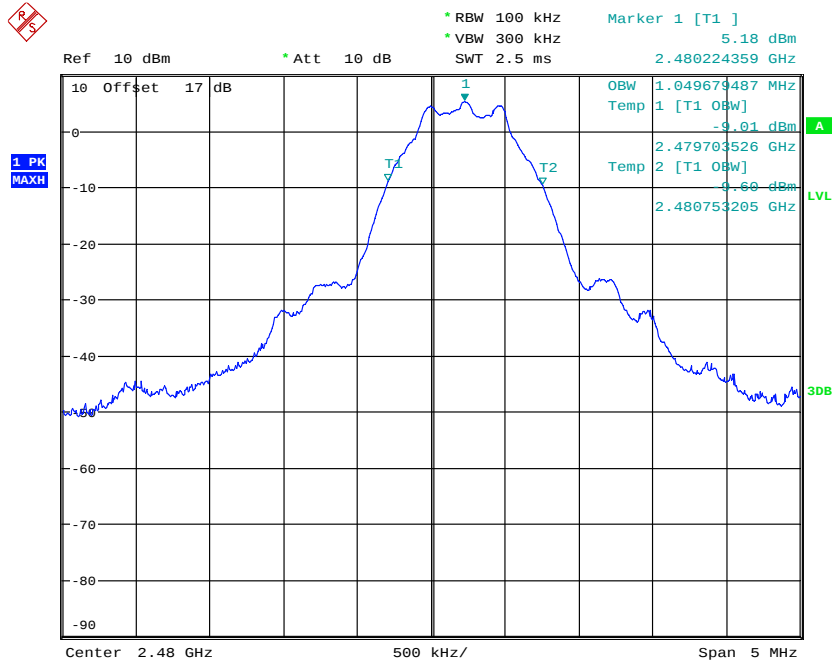

OCCUPIED BANDWIDTH BT4.0 CH39

Date: 12.JUL.2022 08:26:44



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22205-21887-C-1


FCC ID: 2ALHR010

IC: 22518-BT010

Limits:

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

3.10 Peak Power Spectral Density

Peak Power Spectral density is a measured at low, middle and high channel.


The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.

Test date: July 12, 2022

Temperature: 25.1 °C


Humidity: 49.0 %

Tester: Spencer

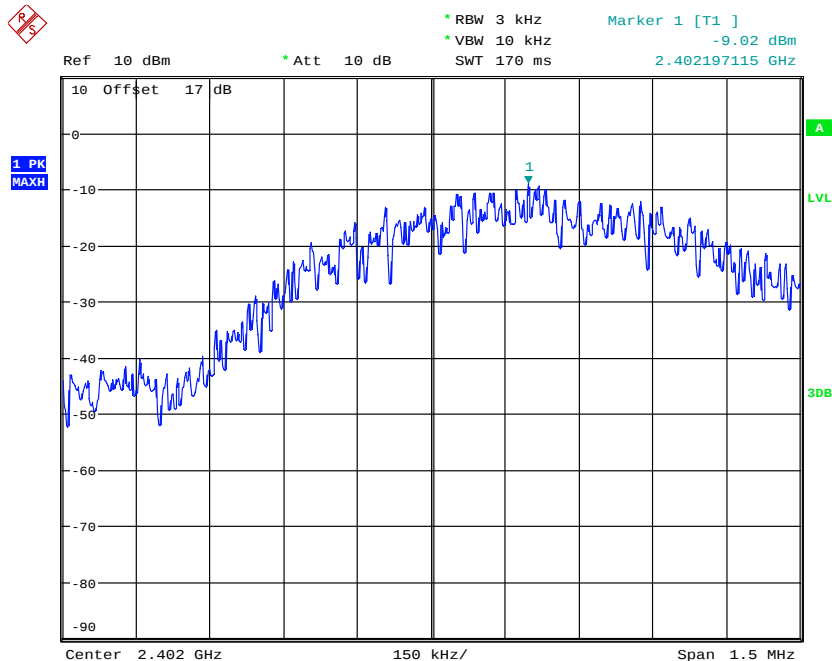


POWER DENSITY BT4.0 CH00


Date: 12.JUL.2022 08:20:10



Registration number: W6M22205-21887-C-1
FCC ID: 2ALHR010
IC: 22518-BT010

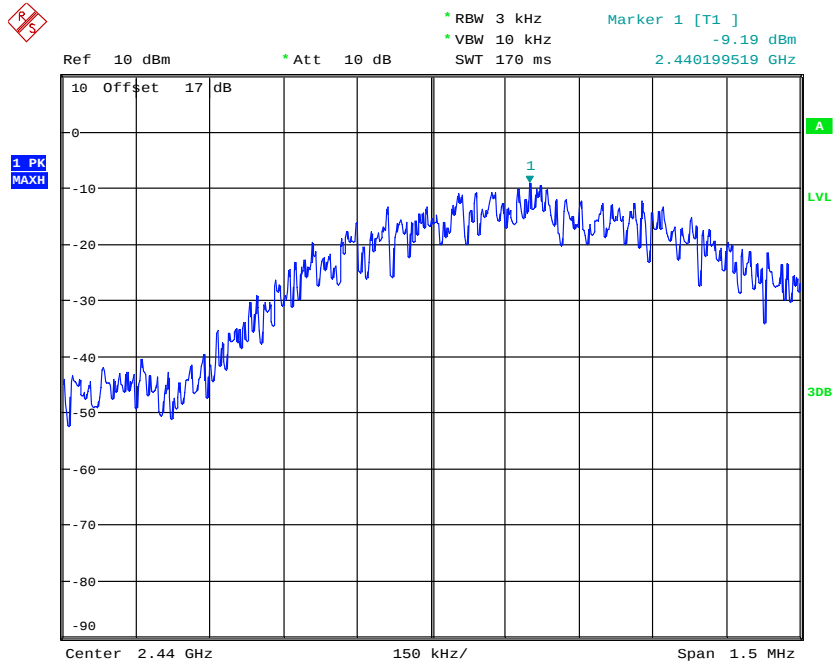

POWER DENSITY BT4.0 CH19
Date: 12.JUL.2022 08:22:12

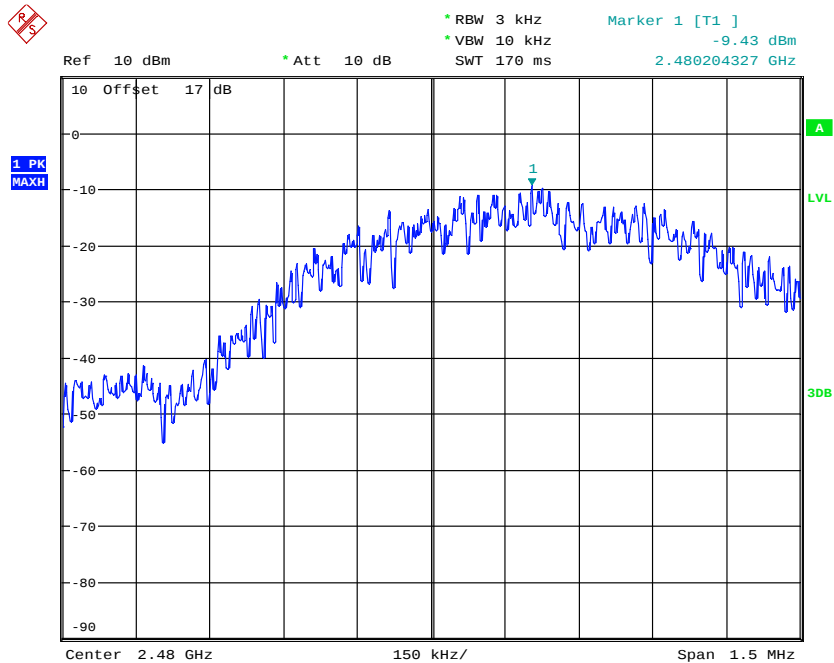

POWER DENSITY BT4.0 CH39
Date: 12.JUL.2022 08:22:50



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22205-21887-C-1


FCC ID: 2ALHR010

IC: 22518-BT010

Limits:

Frequency Range MHz	dBm
902-928	8
2400-2483.5	8
5725-5850	8

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

3.11 Radiated Emission from Receiver Part


FCC Rule: 15.109

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 030, ETSTW-RE 055, ETSTW-RE 064, ETSTW-RE 111

Explanation: Please refer to separated test report no.: W6M22205-21887-P-15B.



Registration number: W6M22205-21887-C-1

FCC ID: 2ALHR010

IC: 22518-BT010

3.12 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.


This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

- Note:**
- 1. The formula of measured value as: Test Result = Reading + Correction Factor**
 - 2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss**
 - 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
 - 4. All not in the table noted test results are more than 20 dB below the relevant limits.**
 - 5. Up Line: QP Limit Line, Down Line: Ave Limit Line.**
 - 6. The test is not required because the EUT is powered by battery.**

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045.



Registration number: W6M22205-21887-C-1
FCC ID: 2ALHR010
IC: 22518-BT010

Appendix

Measurement diagrams

1. Spurious Emissions radiated
2. Bandedge



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 1_BLE_TX 2402MHz

Data : #1


Date: 2022/7/15

Temperature: 26.8 °C

80.0 dBuV/m

Time: 下午 11:49:12

Humidity: 45.7 %

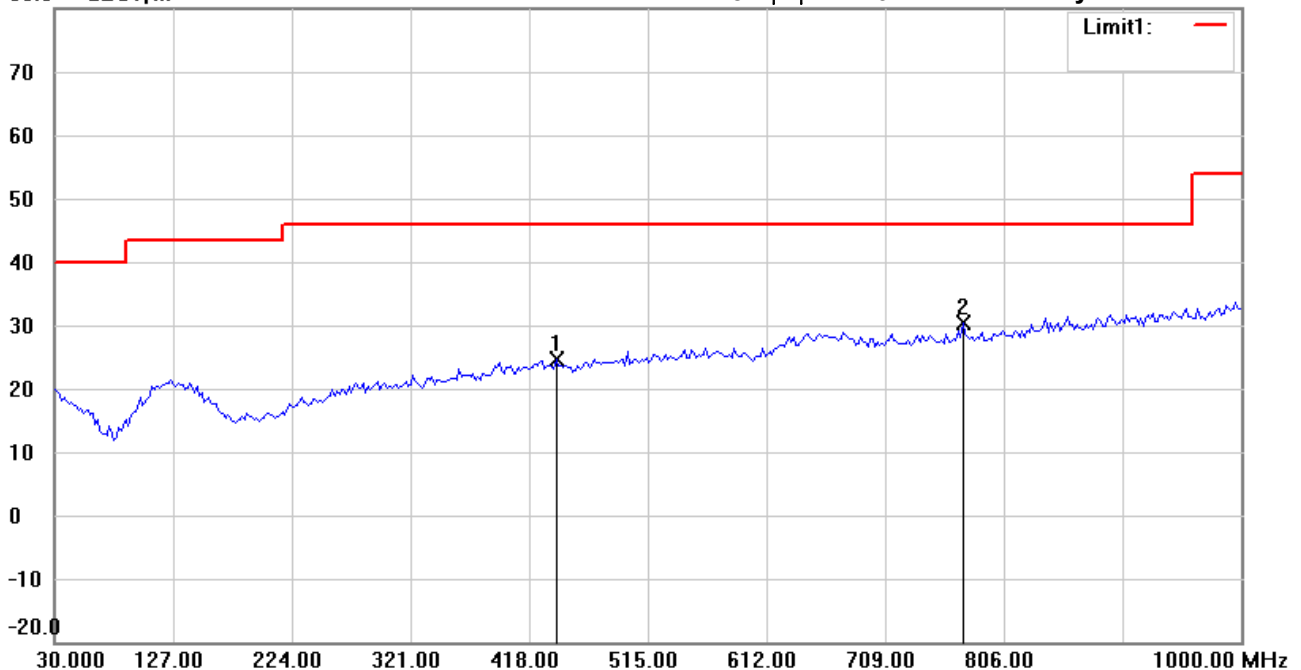

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22205-21887

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	440.1603	28.13	peak	-3.43	24.70	46.00	102	322	-21.30	
*	772.5651	29.49	peak	0.95	30.44	46.00	101	259	-15.56	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 1_BLE_TX 2402MHz

Data : #2


Date: 2022/7/15

Temperature: 26.8 °C

80.0 dBuV/m

Time: 下午 11:50:12

Humidity: 45.7 %

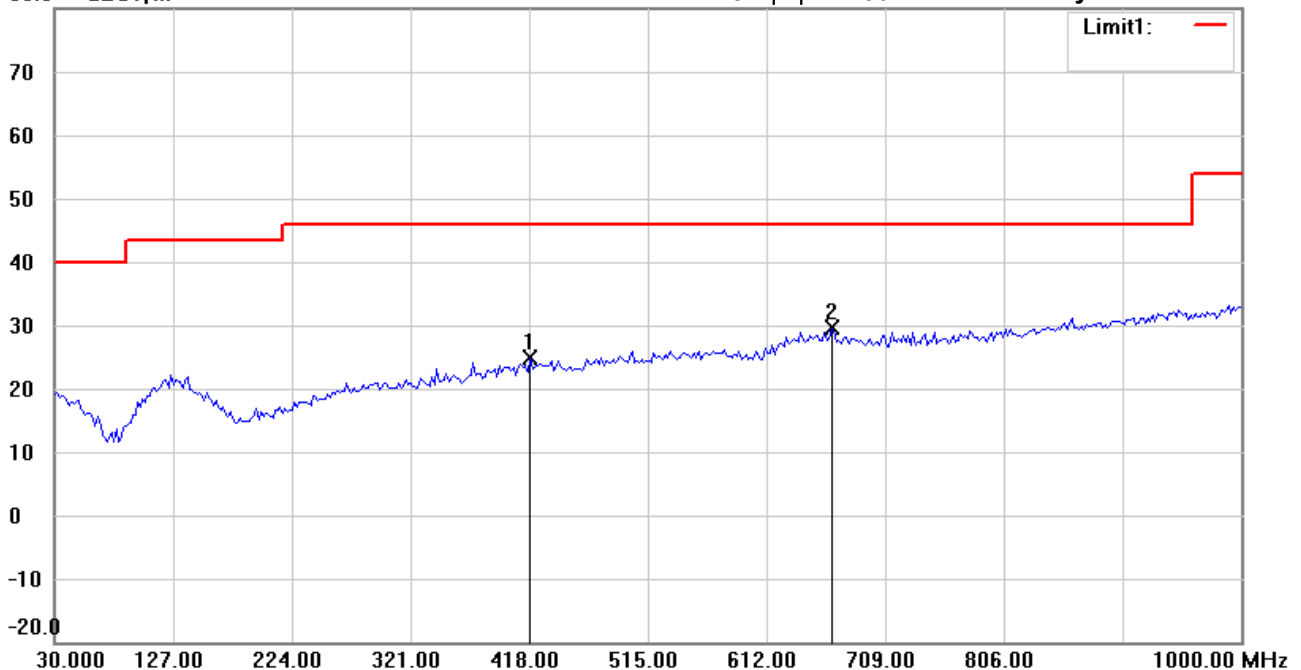

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22205-21887

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	418.7776	28.66	peak	-3.66	25.00	46.00	100	123	-21.00	
*	665.6513	28.98	peak	0.58	29.56	46.00	101	268	-16.44	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #1


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 10:52:27

Humidity: 47.9 %

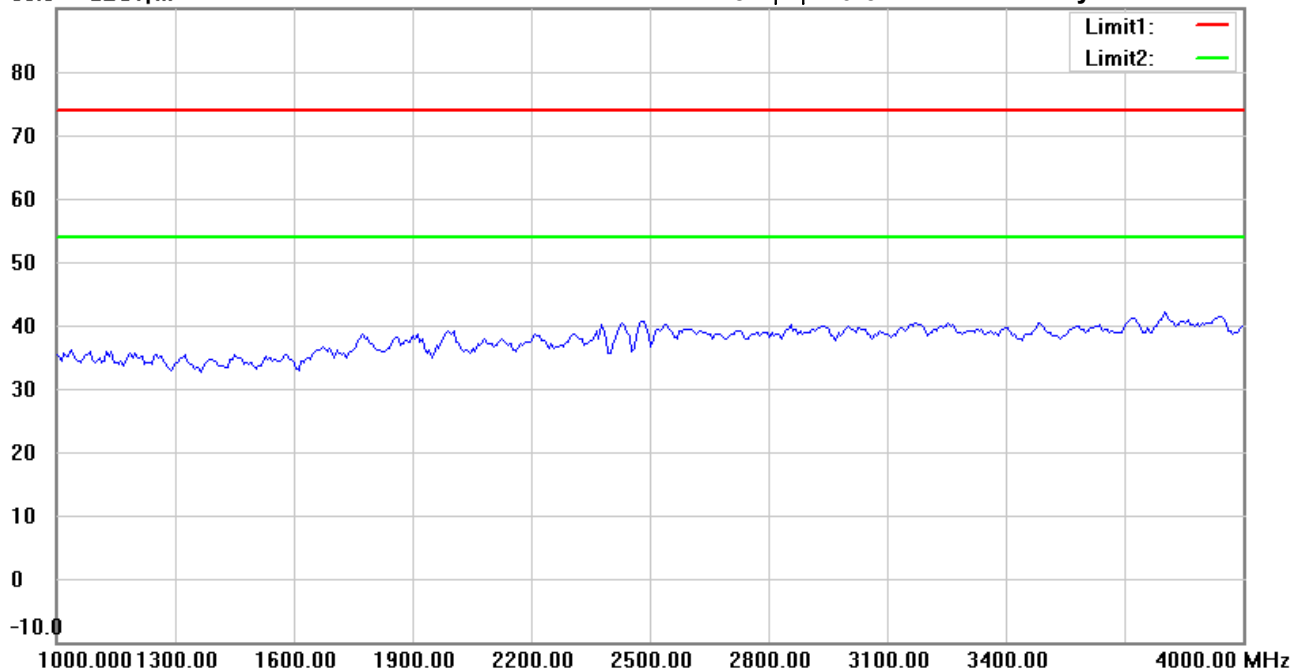

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #6


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 10:55:58

Humidity: 47.9 %

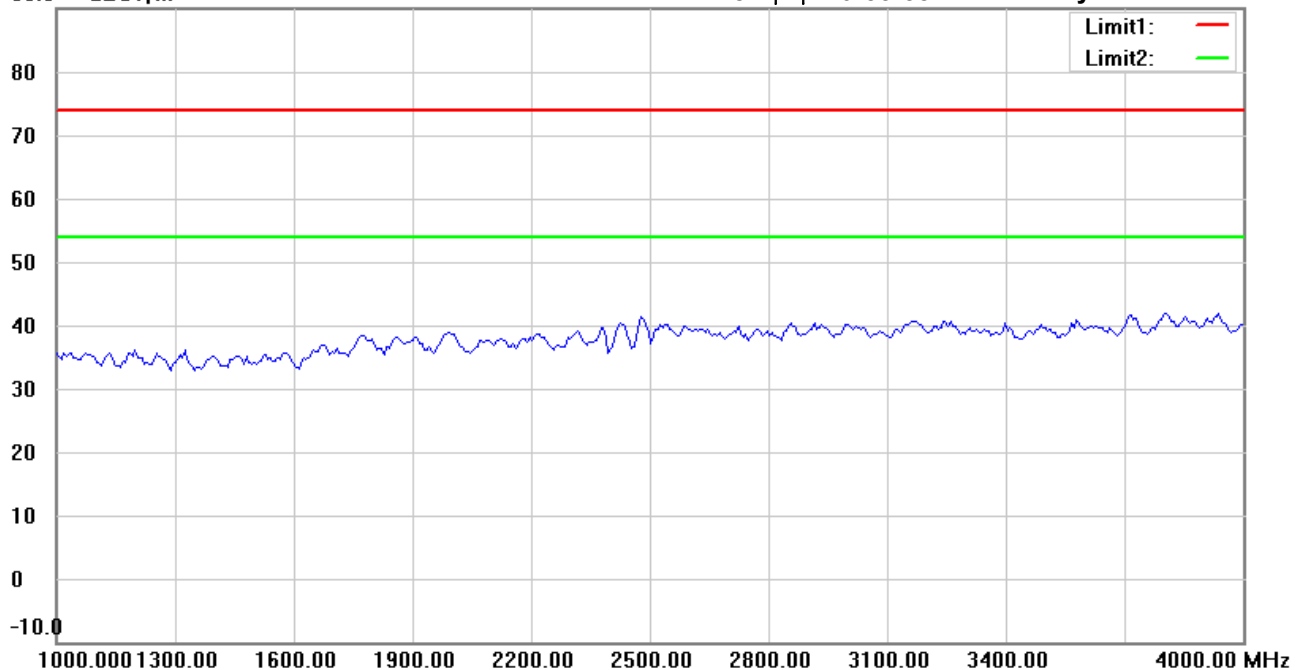

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Vertical*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #2


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 10:53:27

Humidity: 47.9 %

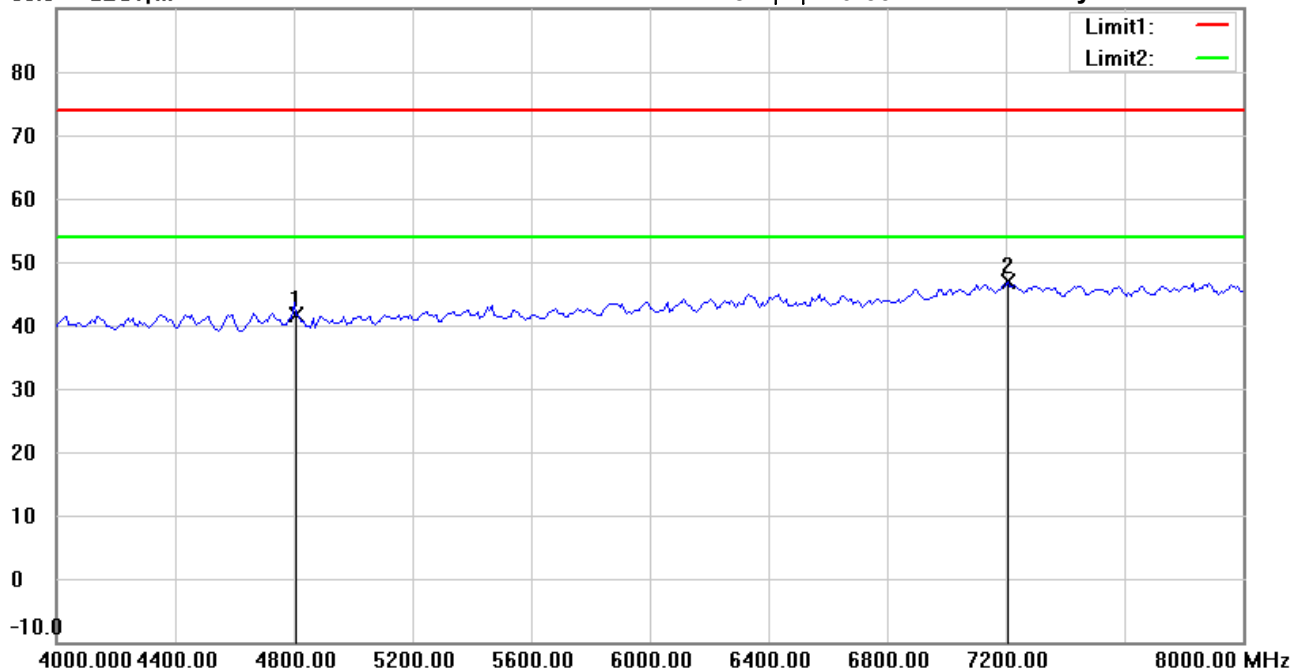

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4804.000	42.32	peak	-0.75	41.57	74.00	150	123	-32.43	
*	7206.000	41.58	peak	5.22	46.80	74.00	150	268	-27.20	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #7


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 10:56:59

Humidity: 47.9 %

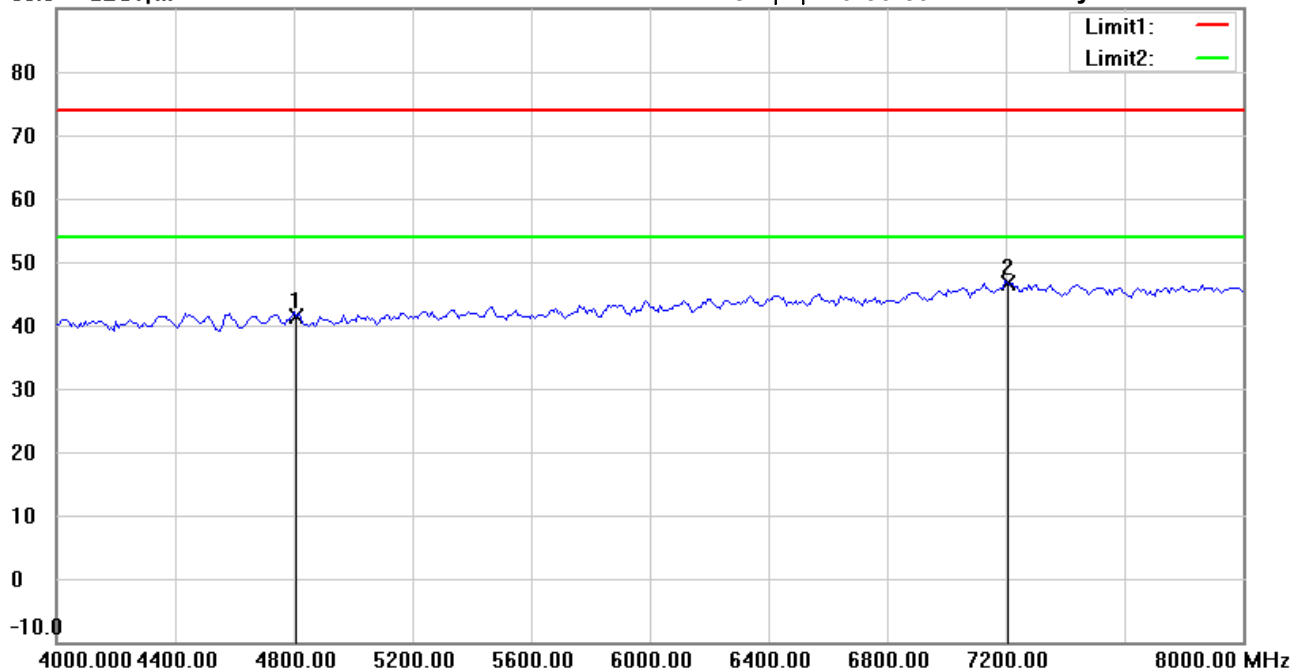

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4804.000	42.16	peak	-0.75	41.41	74.00	150	324	-32.59	
*	7206.000	41.45	peak	5.22	46.67	74.00	150	197	-27.33	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#3


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 10:54:34

Humidity: 47.9 %

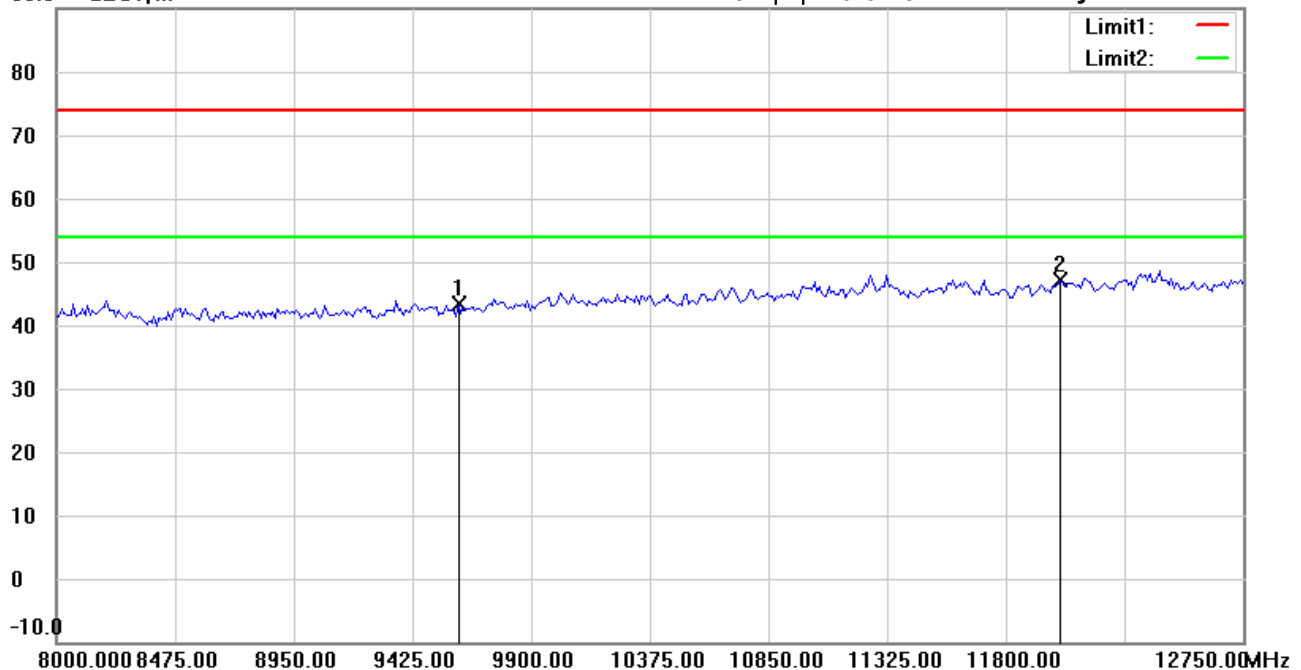

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	36.34	peak	7.15	43.49	74.00	150	274	-30.51	
*	12010.000	35.09	peak	11.92	47.01	74.00	150	163	-26.99	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#8


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 10:57:58

Humidity: 47.9 %

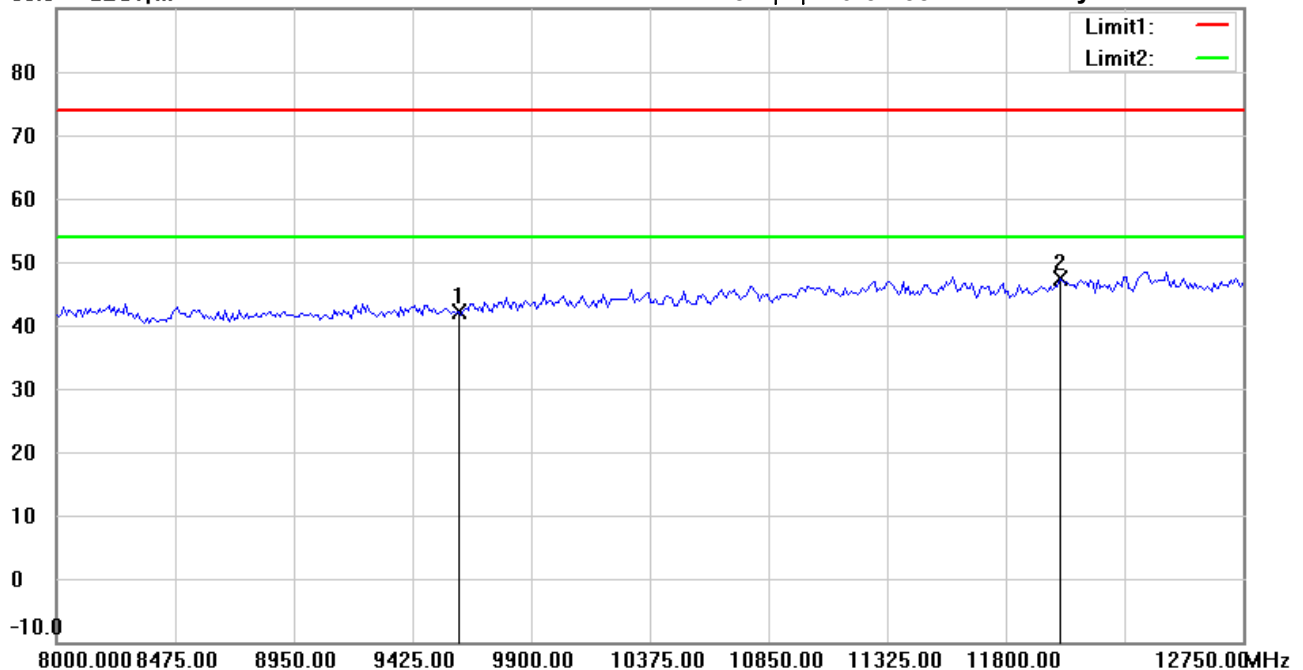

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	34.96	peak	7.15	42.11	74.00	150	124	-31.89	
*	12010.000	35.38	peak	11.92	47.30	74.00	150	261	-26.70	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #4


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 10:54:48

Humidity: 47.9 %

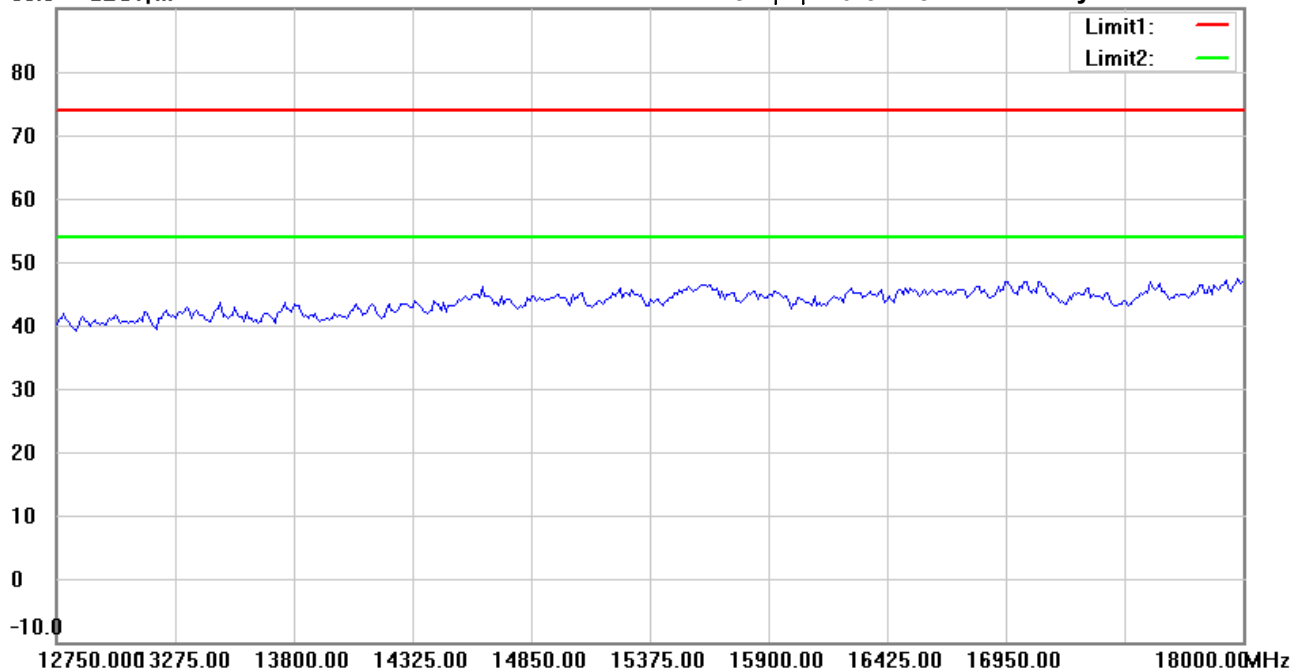

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #9


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 10:58:12

Humidity: 47.9 %

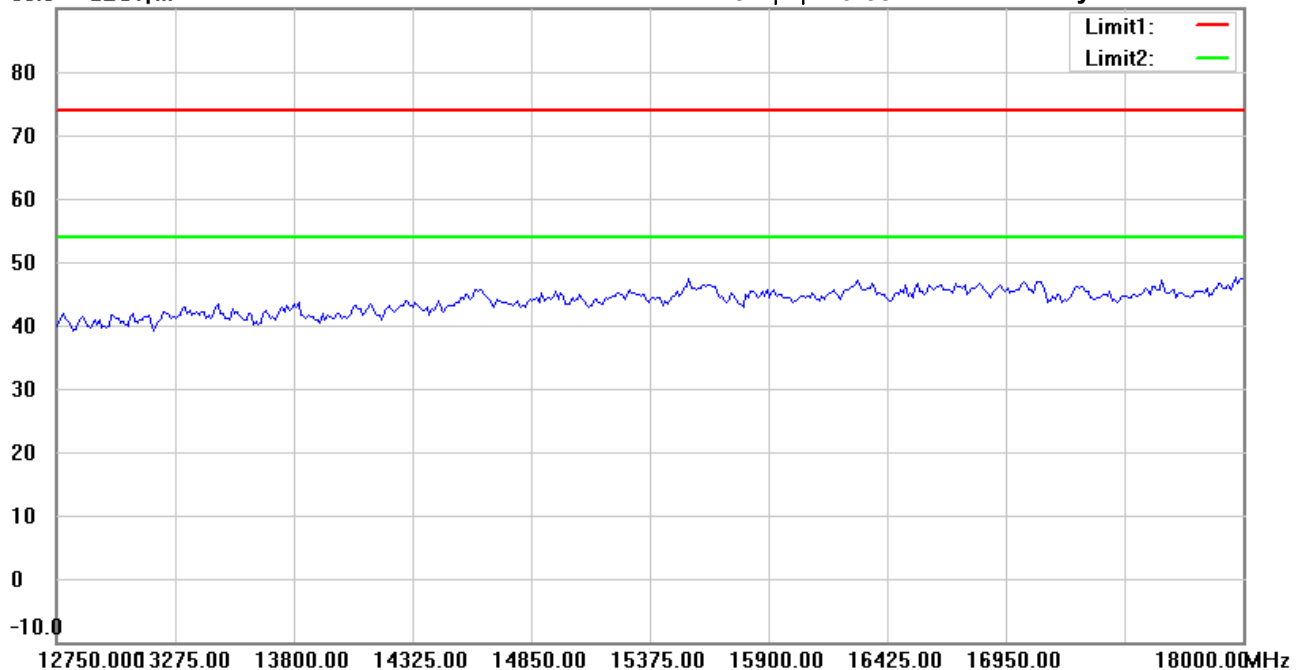

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Vertical*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#5


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 10:54:58

Humidity: 47.9 %

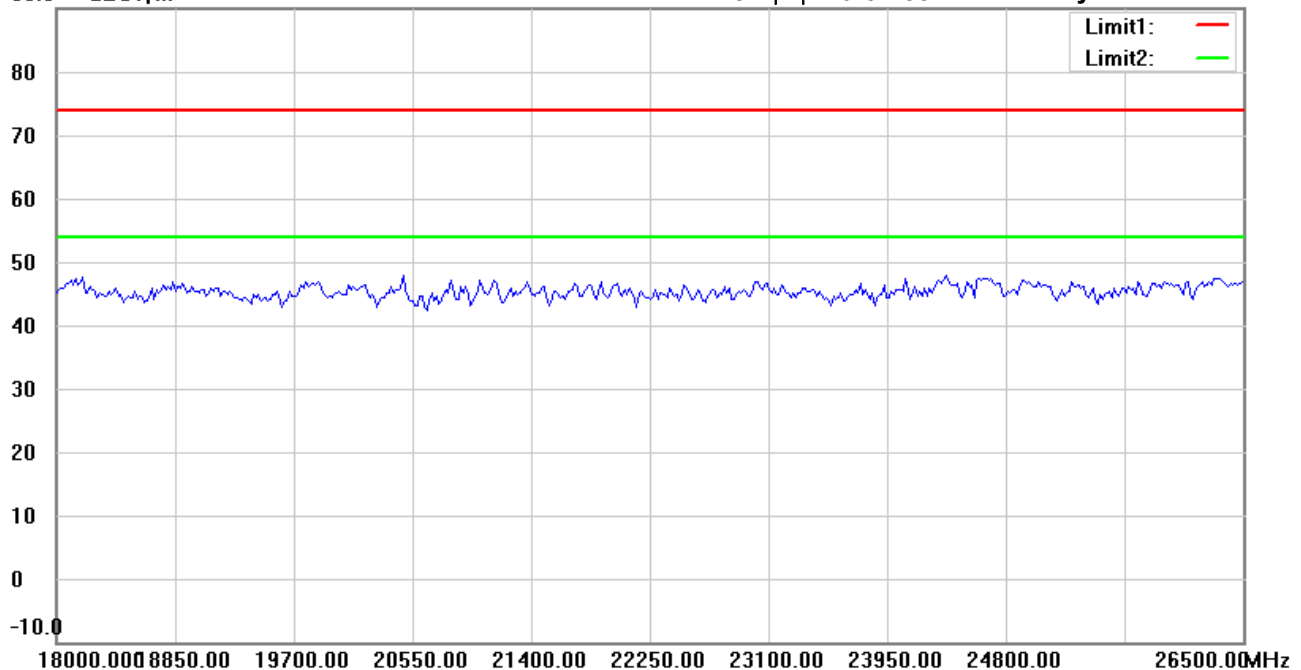

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Horizontal

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#10


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 10:58:22

Humidity: 47.9 %

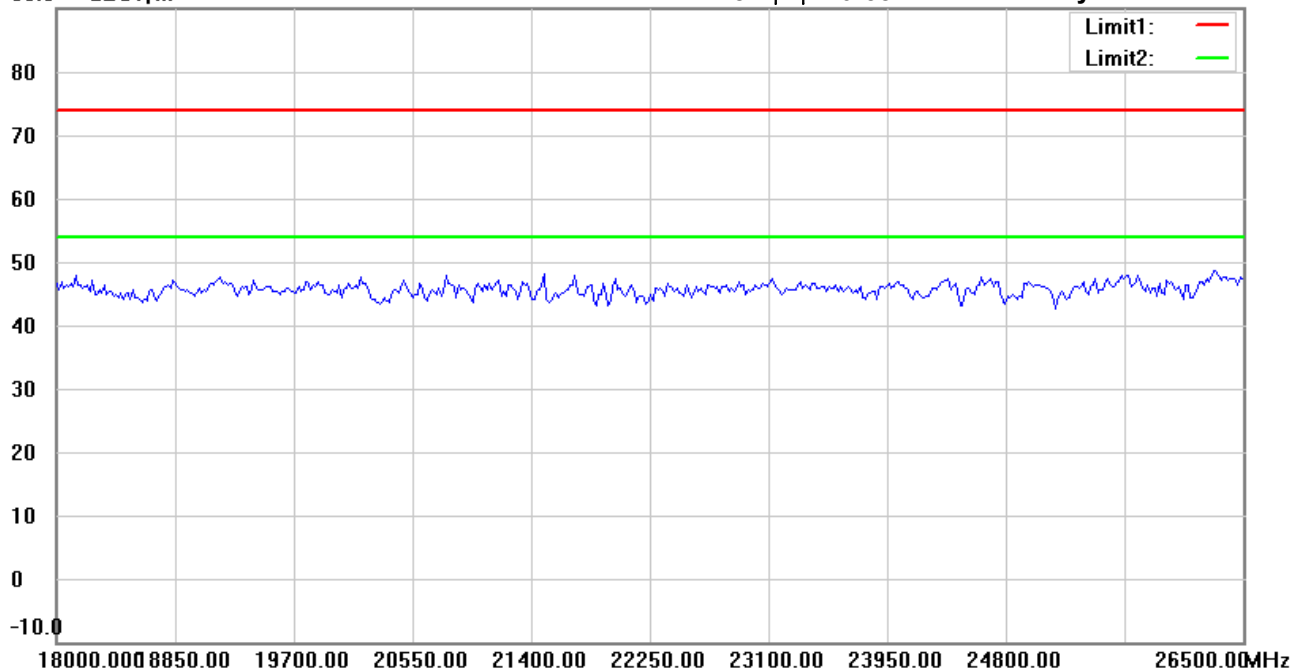

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #1


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:12:31

Humidity: 47.9 %

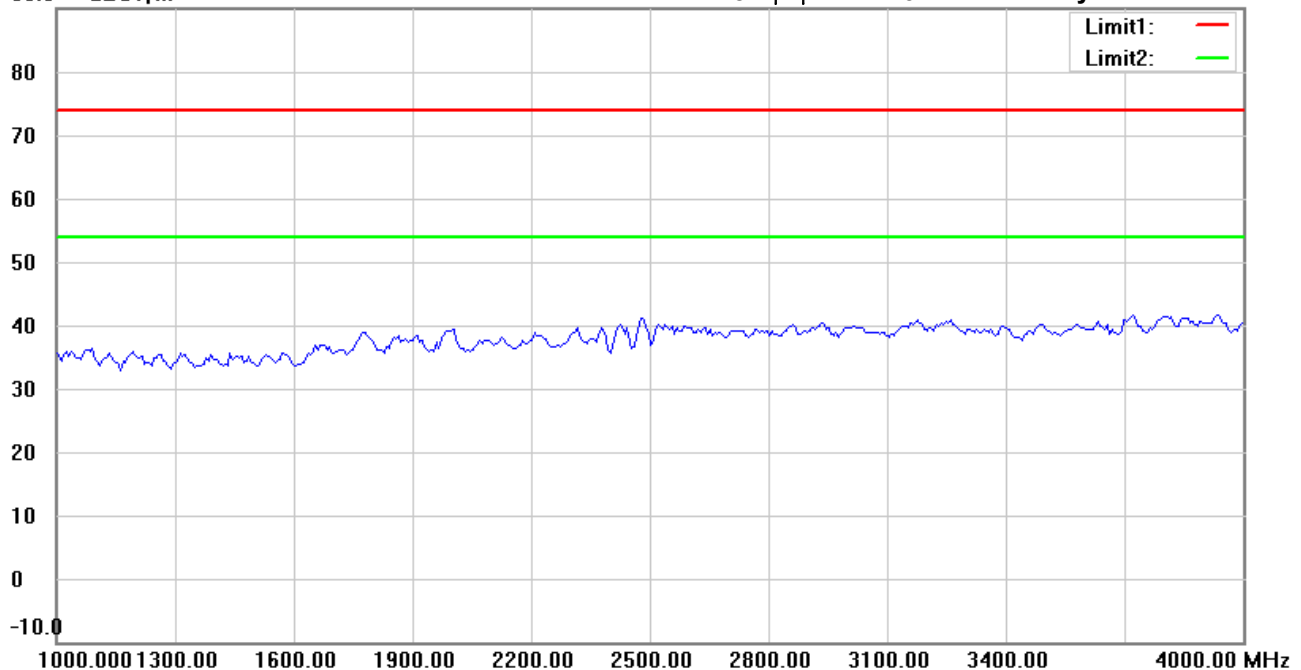

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #6


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:16:02

Humidity: 47.9 %

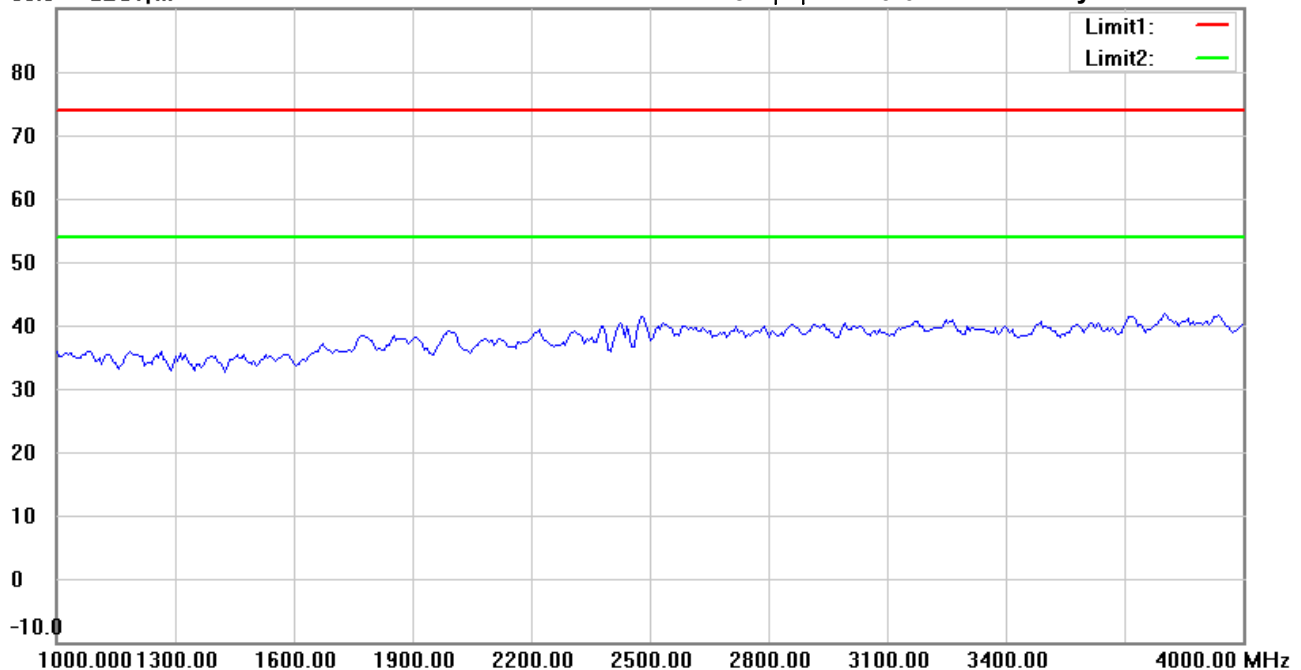

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #2


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:13:32

Humidity: 47.9 %

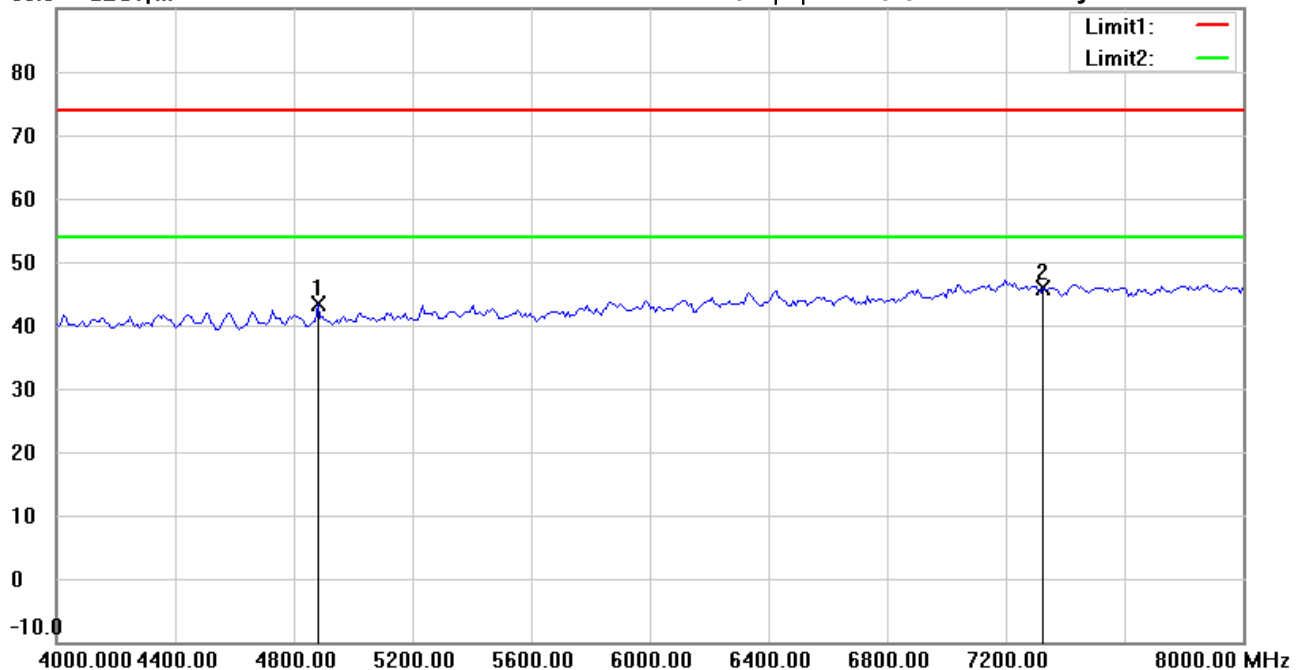

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4880.000	44.01	peak	-0.55	43.46	74.00	150	62	-30.54	
*	7320.000	40.55	peak	5.22	45.77	74.00	150	134	-28.23	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #7


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:17:03

Humidity: 47.9 %

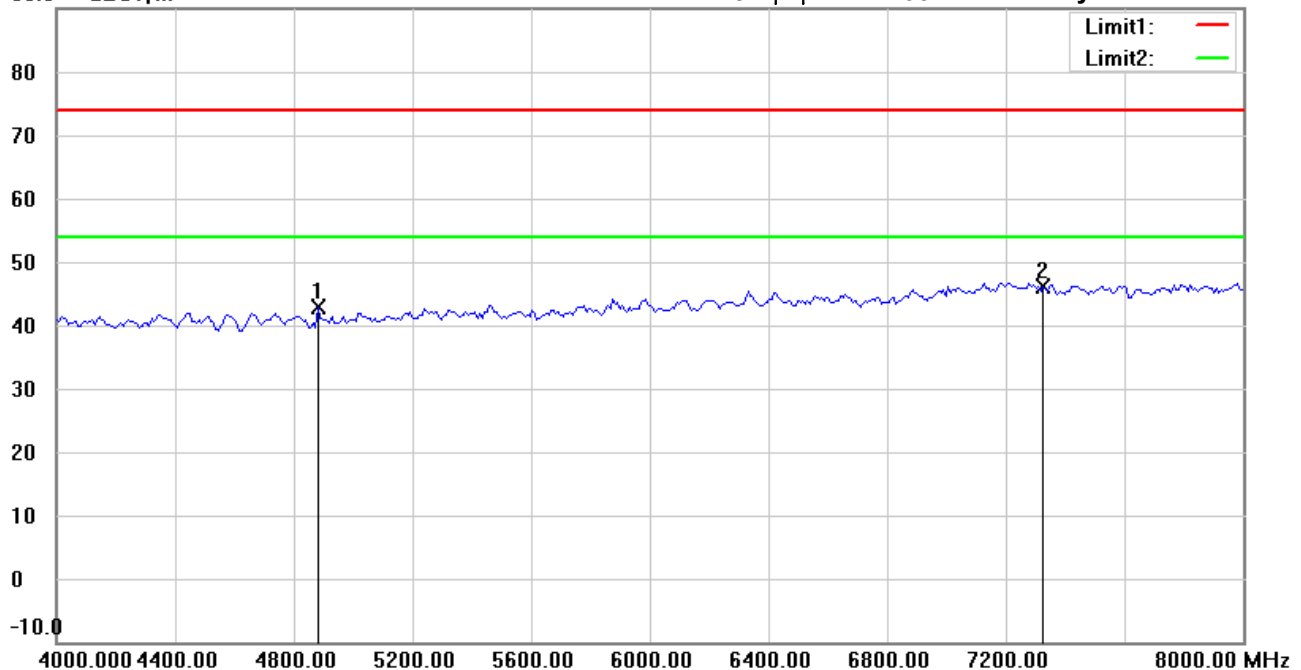

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4880.000	43.50	peak	-0.55	42.95	74.00	150	317	-31.05	
*	7320.000	40.84	peak	5.22	46.06	74.00	150	44	-27.94	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#3


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:14:38

Humidity: 47.9 %

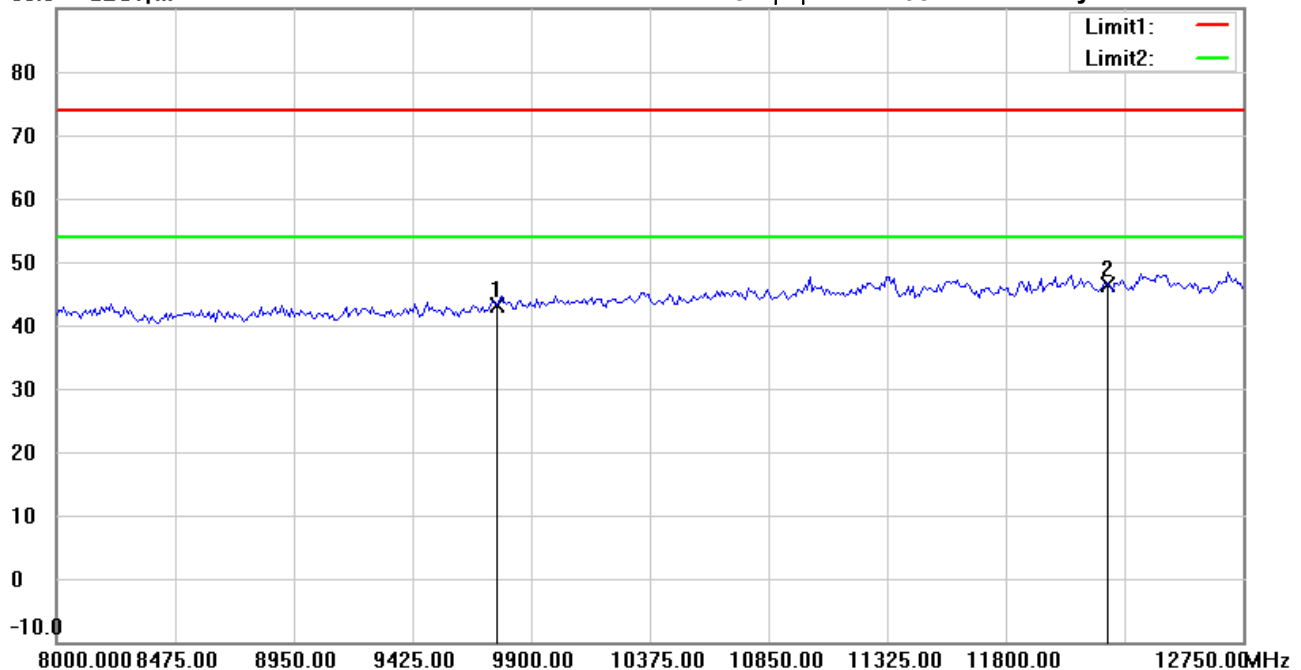

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	35.46	peak	7.69	43.15	74.00	150	129	-30.85	
*	12200.000	33.41	peak	13.05	46.46	74.00	150	274	-27.54	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#8


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:18:03

Humidity: 47.9 %

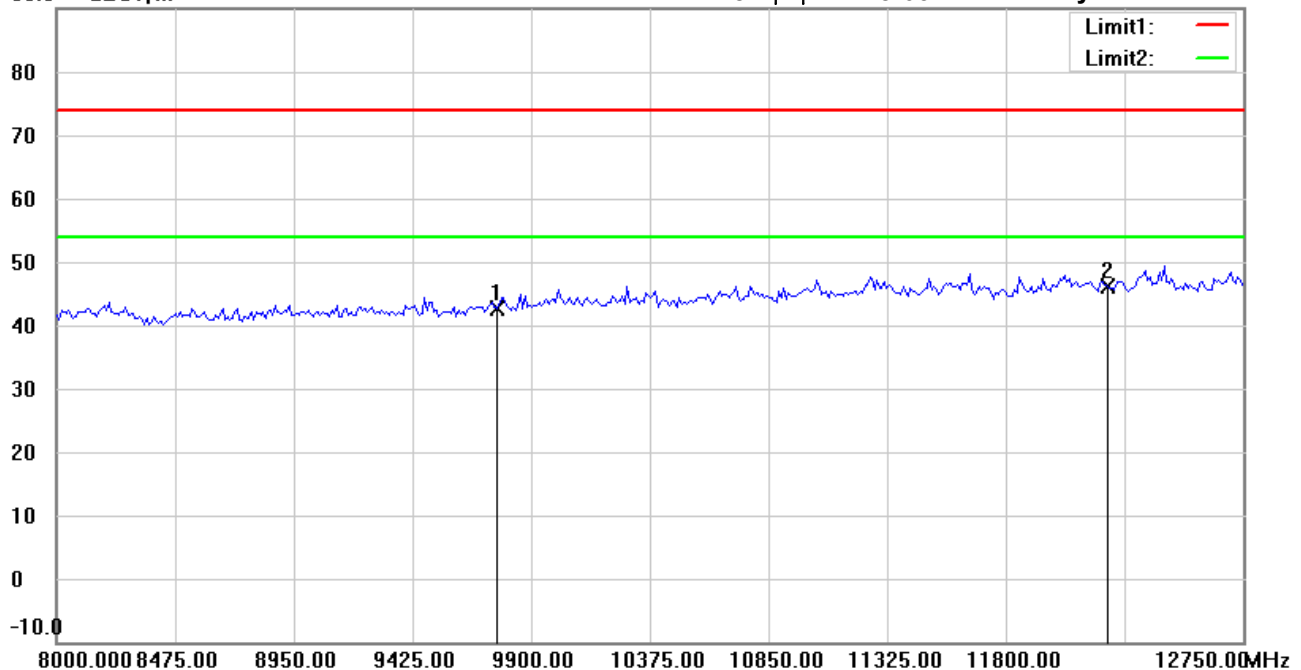

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	34.92	peak	7.69	42.61	74.00	150	142	-31.39	
*	12200.000	33.09	peak	13.05	46.14	74.00	150	226	-27.86	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #4


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:14:52

Humidity: 47.9 %

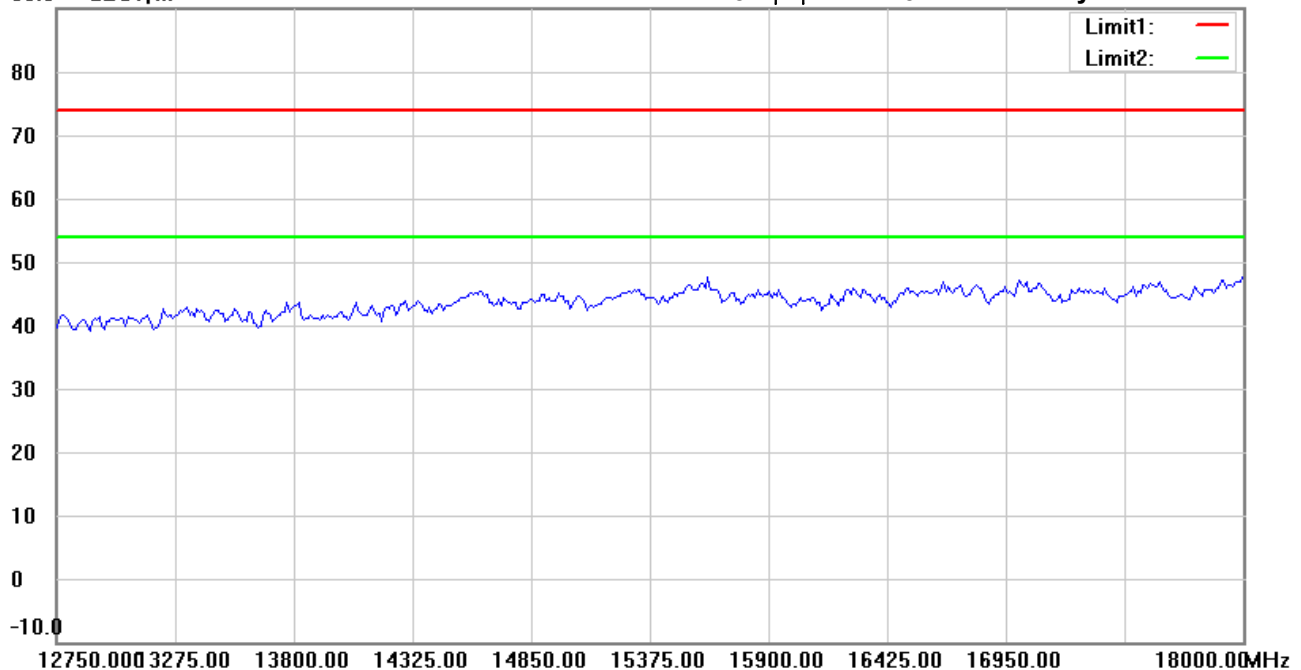

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #9


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:18:17

Humidity: 47.9 %

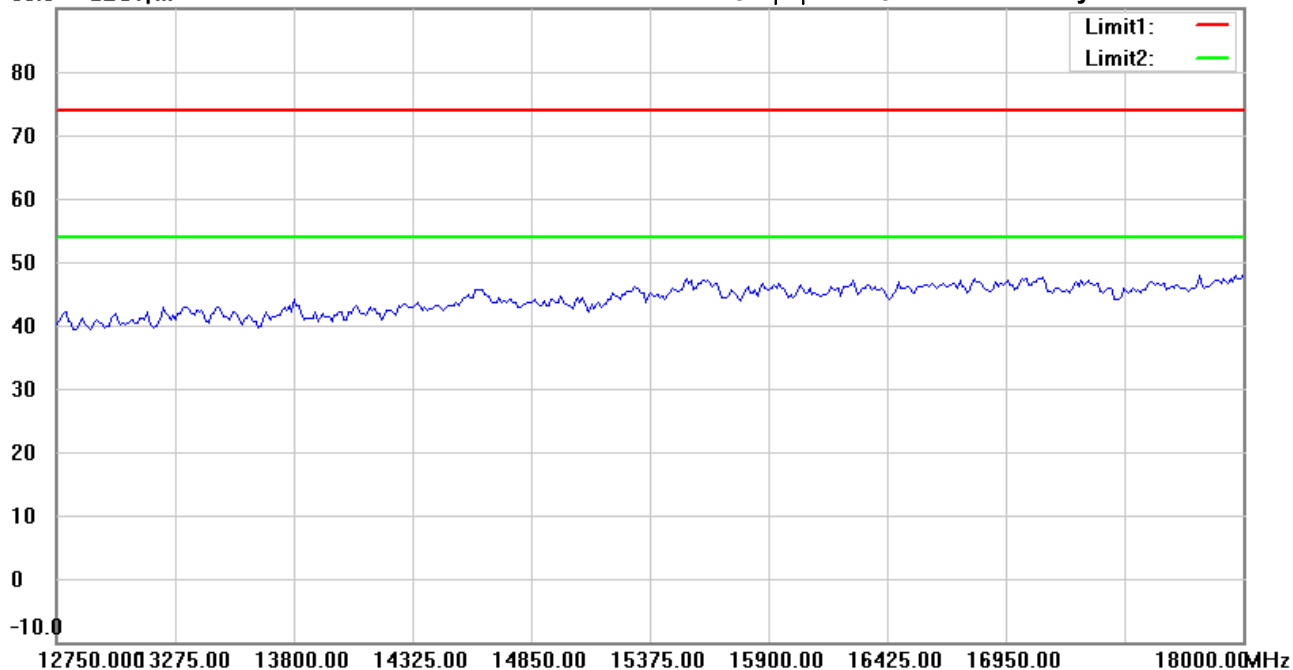

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Vertical*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#5


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:15:02

Humidity: 47.9 %

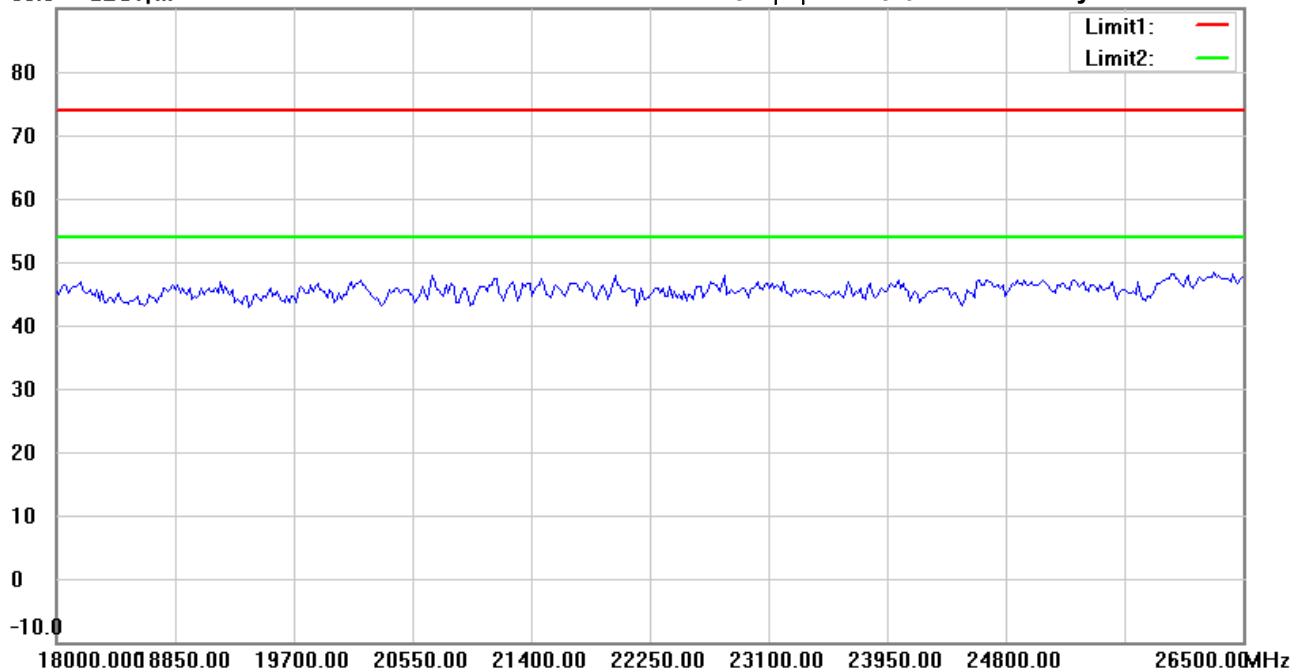

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Horizontal

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#10


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:18:27

Humidity: 47.9 %

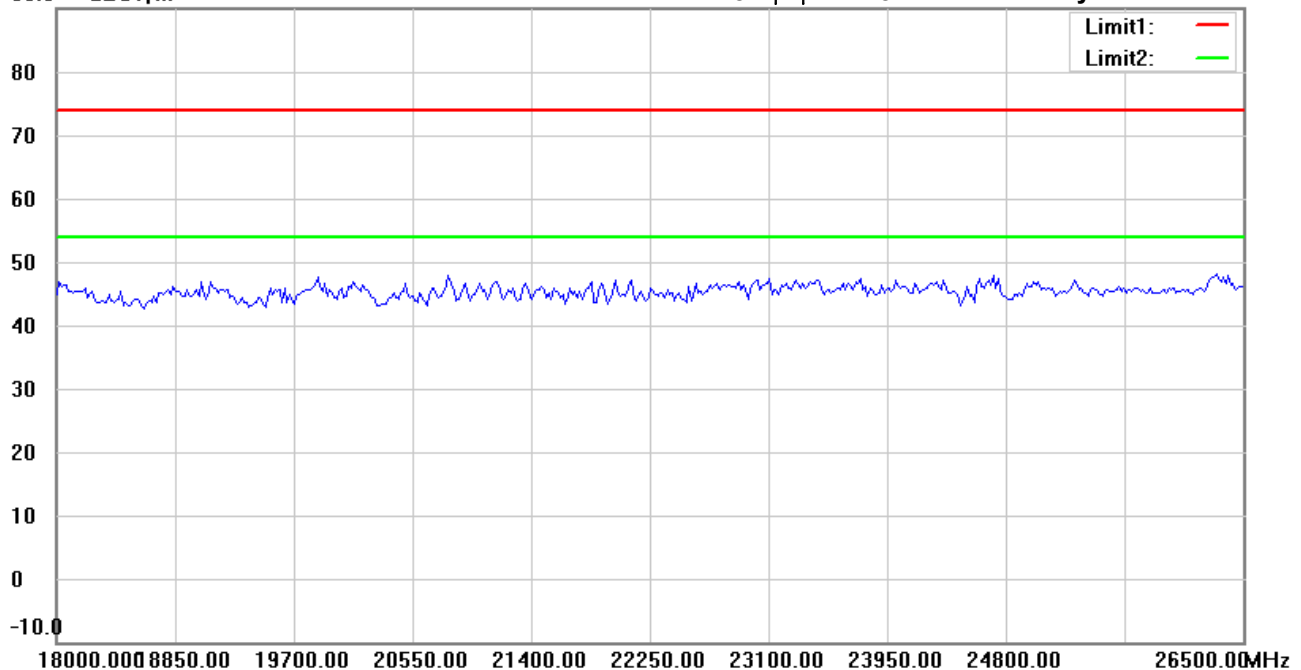

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #1


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:24:23

Humidity: 47.9 %

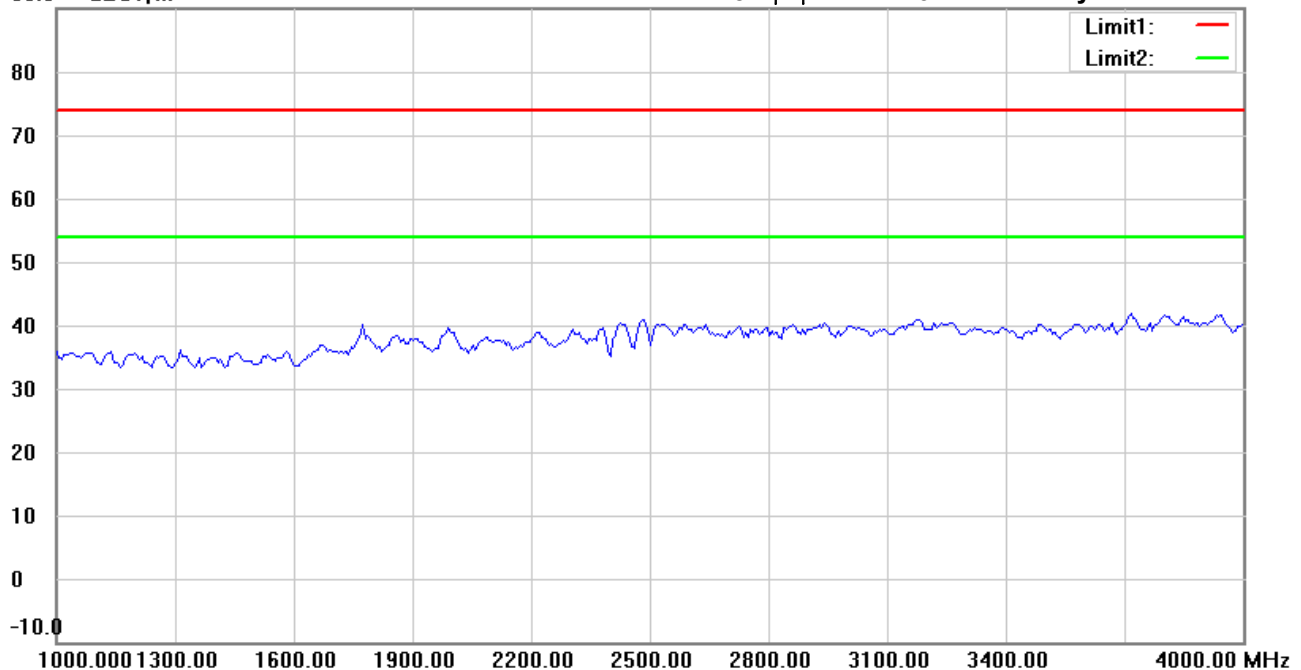

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #6


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:27:54

Humidity: 47.9 %

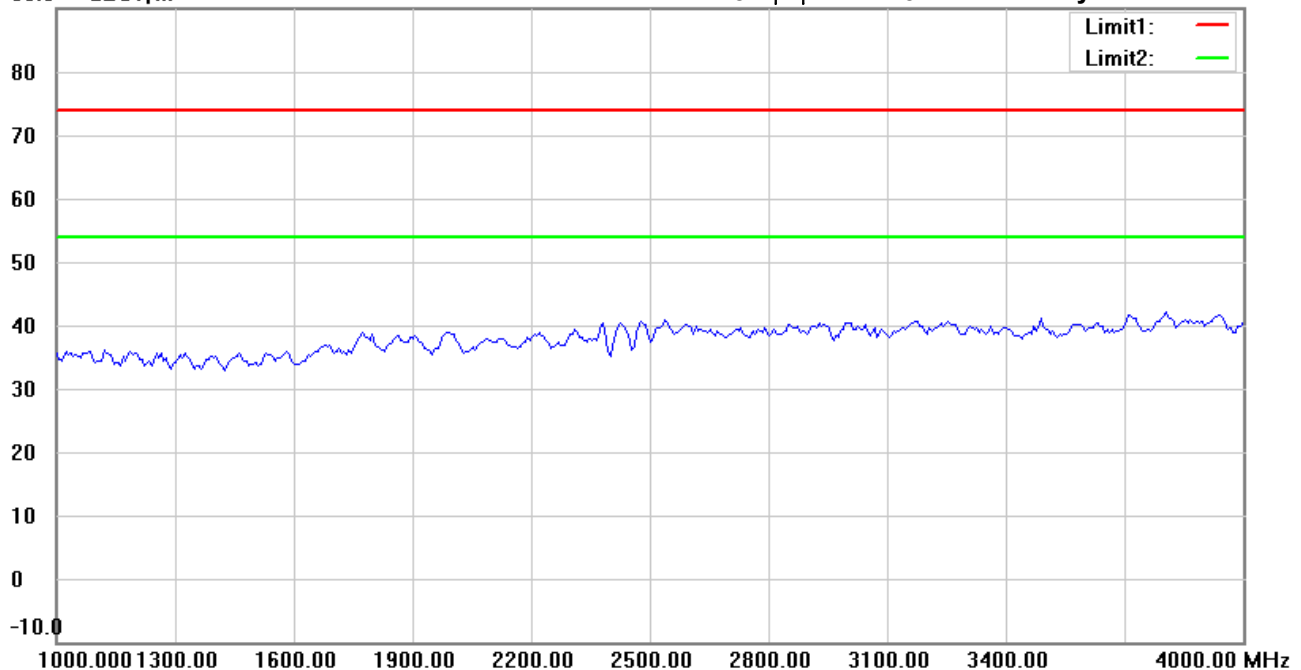

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Vertical*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#2


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:25:23

Humidity: 47.9 %

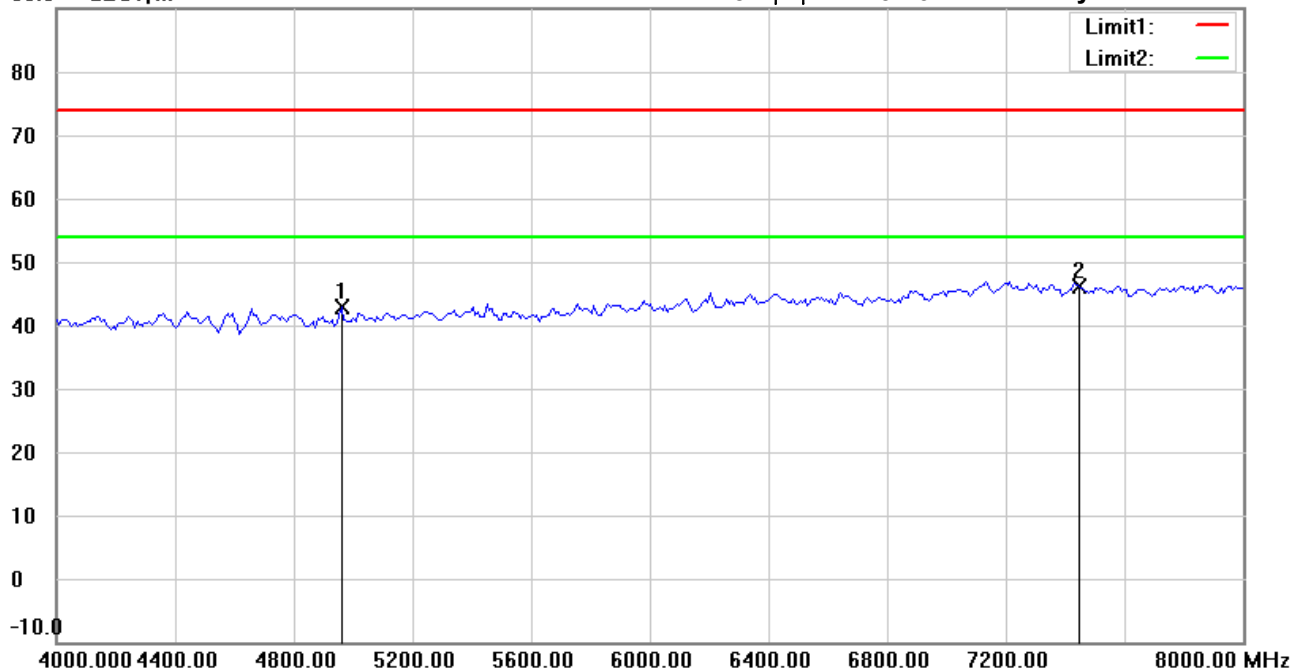

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	43.31	peak	-0.36	42.95	74.00	150	110	-31.05	
*	7440.000	41.37	peak	4.84	46.21	74.00	150	74	-27.79	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #7


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:28:55

Humidity: 47.9 %

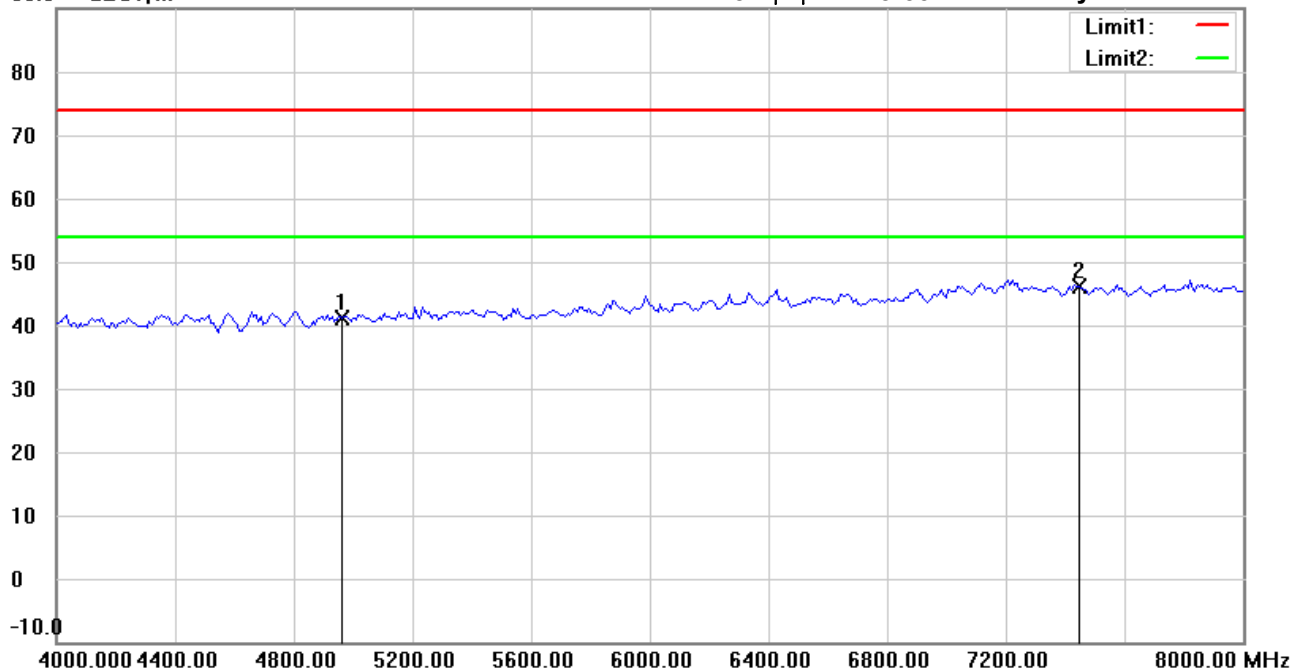

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Vertical**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	41.53	peak	-0.36	41.17	74.00	150	184	-32.83	
*	7440.000	41.36	peak	4.84	46.20	74.00	150	236	-27.80	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#3


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:26:30

Humidity: 47.9 %

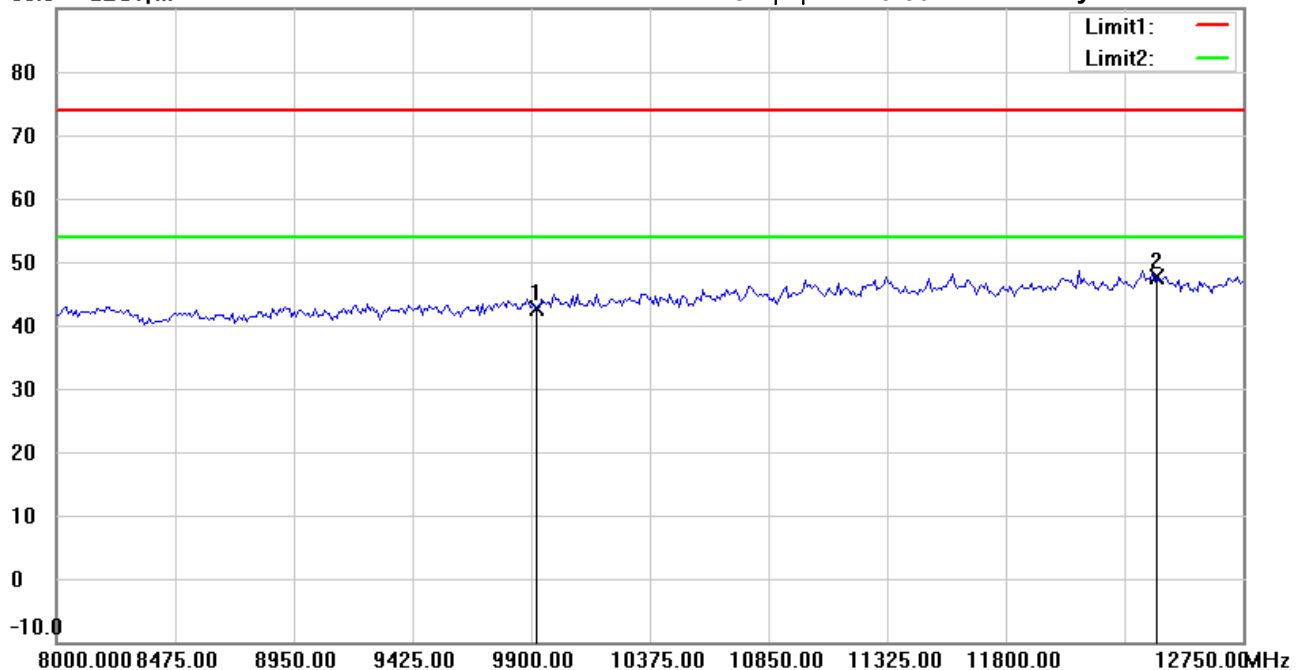

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	34.74	peak	7.91	42.65	74.00	150	254	-31.35	
*	12400.000	33.94	peak	13.58	47.52	74.00	150	139	-26.48	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #8


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:29:54

Humidity: 47.9 %

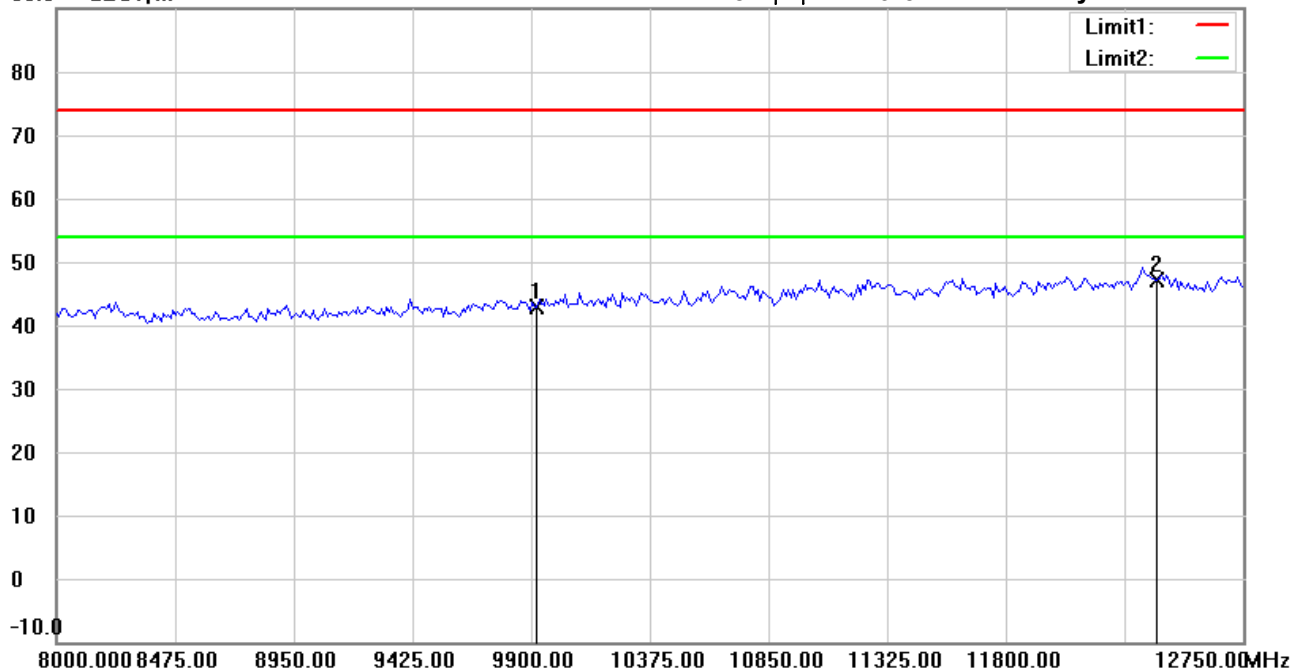

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	35.09	peak	7.91	43.00	74.00	150	149	-31.00	
*	12400.000	33.54	peak	13.58	47.12	74.00	150	216	-26.88	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#4


Date: 2022/7/14

Temperature:27.9 °C

90.0 dBuV/m

Time: 下午 11:26:44

Humidity:47.9 %

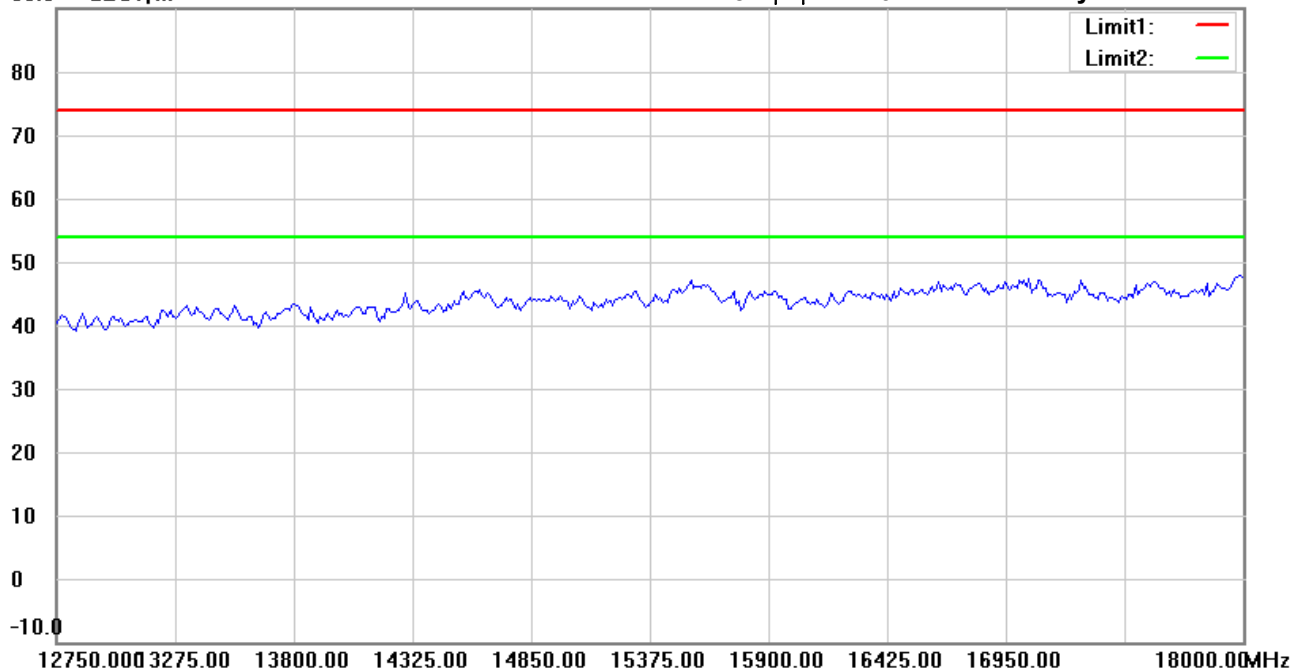

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #9


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:30:08

Humidity: 47.9 %

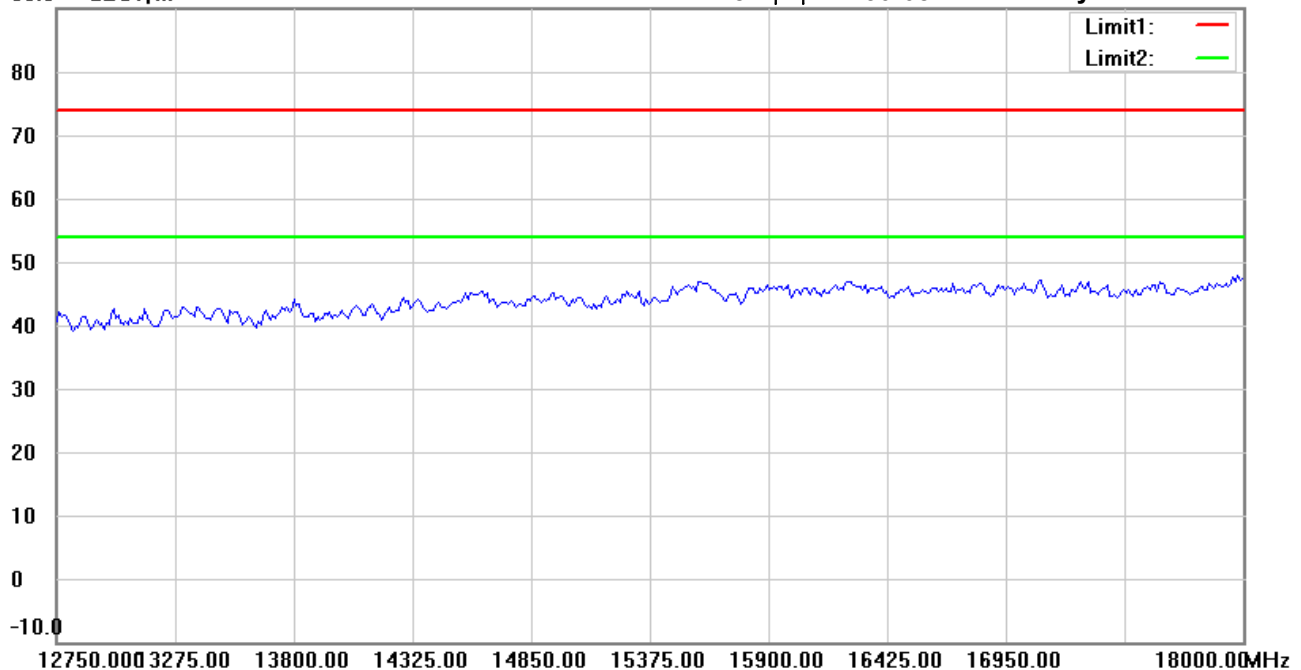

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Vertical*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#5


Date: 2022/7/14

Temperature: 27.9 °C

90.0 dBuV/m

Time: 下午 11:26:54

Humidity: 47.9 %

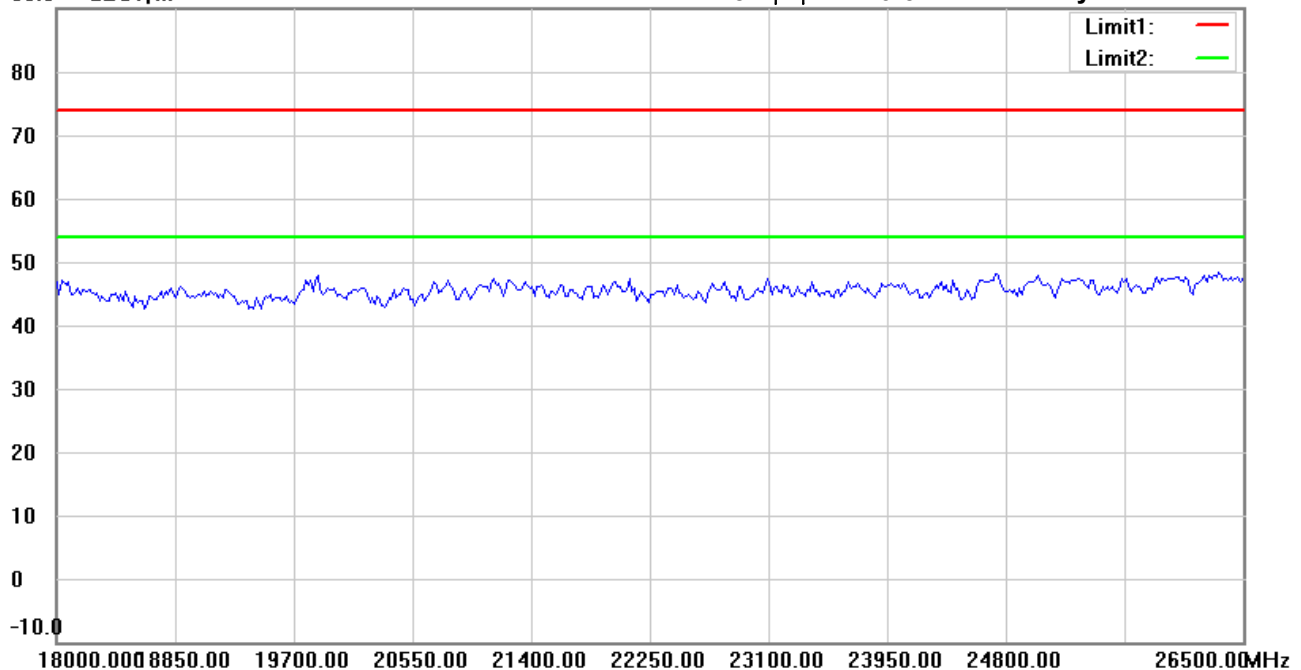

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #10


Date: 2022/7/14

Temperature: 27.9 °C

Time: 下午 11:30:18

Humidity: 47.9 %

90.0 dBuV/m

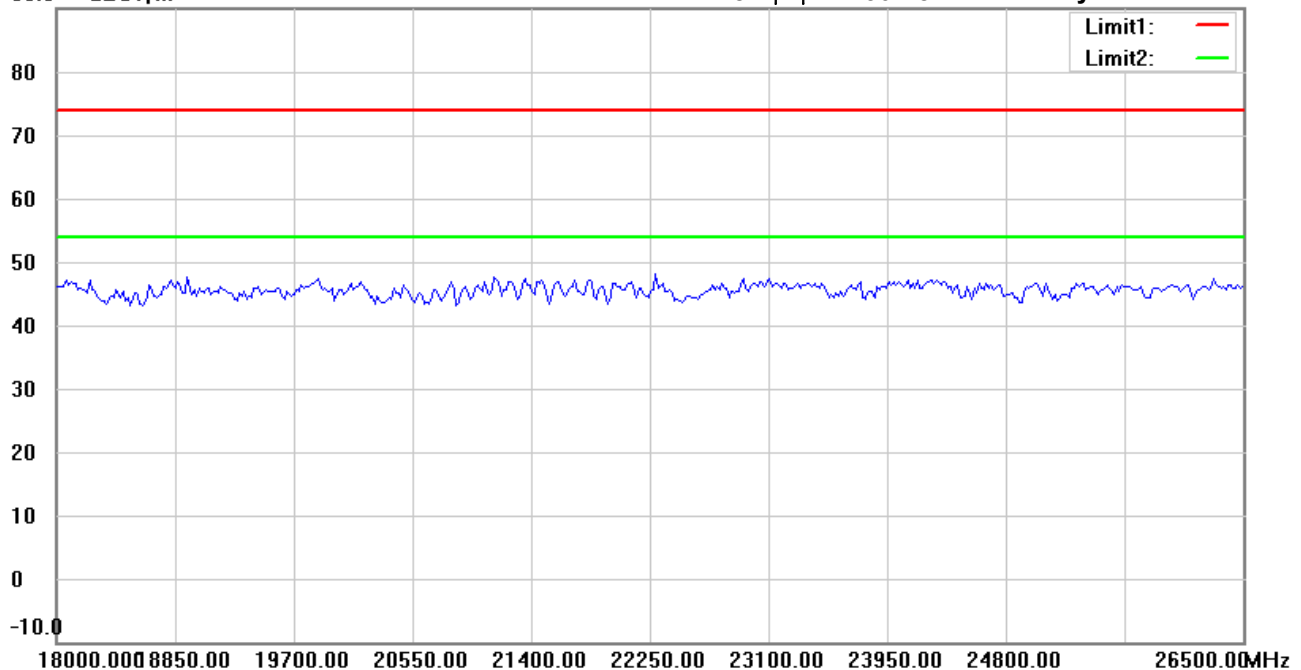

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Vertical*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #1


Date: 2022/7/15

Temperature: 27.9 °C

90.0 dBuV/m

Time: 上午 12:05:27

Humidity: 47.9 %

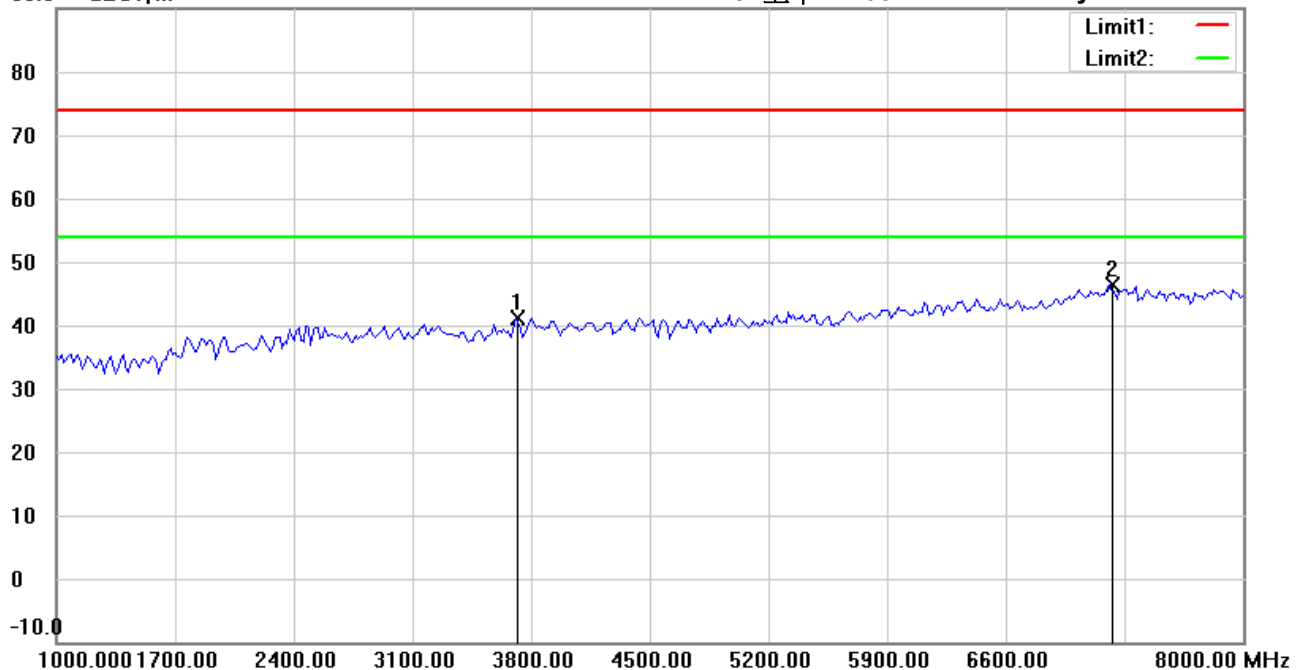

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3707.415	42.55	peak	-1.38	41.17	74.00	150	174	-32.83	
*	7214.429	41.14	peak	5.23	46.37	74.00	150	326	-27.63	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #5


Date: 2022/7/15

Temperature: 27.9 °C

90.0 dBuV/m

Time: 上午 12:06:21

Humidity: 47.9 %

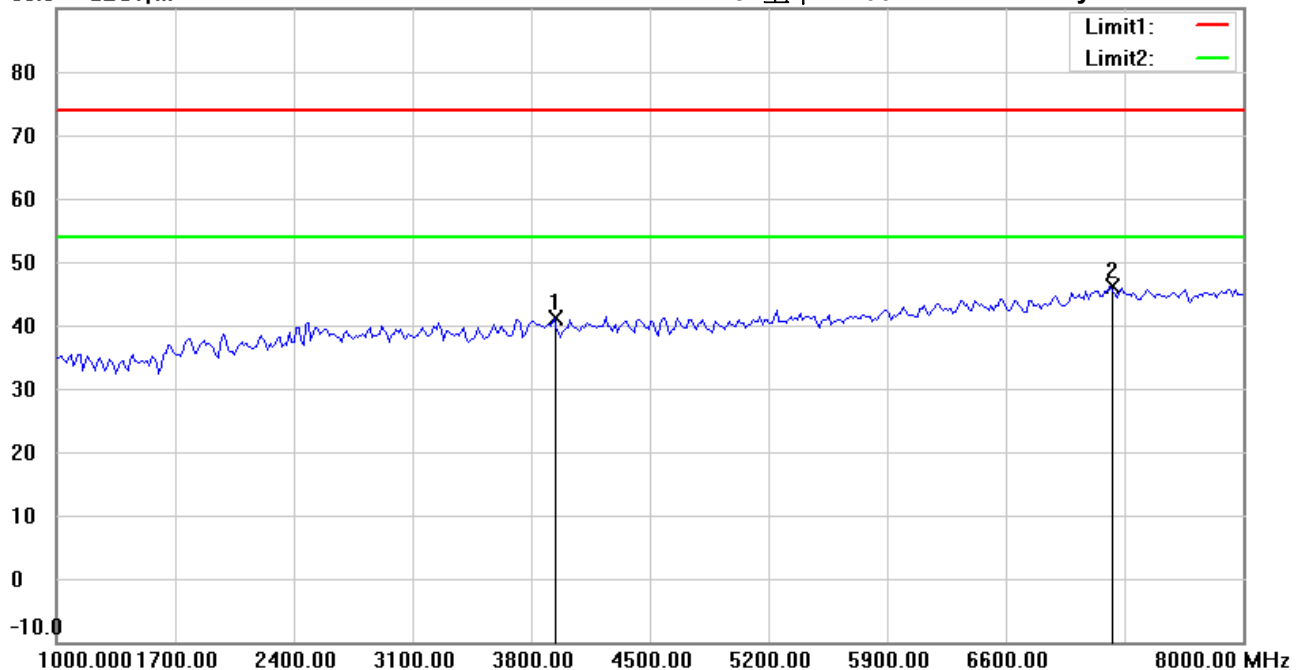

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3931.864	41.59	peak	-0.53	41.06	74.00	150	132	-32.94	
*	7214.429	40.78	peak	5.23	46.01	74.00	150	284	-27.99	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #2


Date: 2022/7/15

Temperature: 27.9 °C

90.0 dBuV/m

Time: 上午 12:05:39

Humidity: 47.9 %

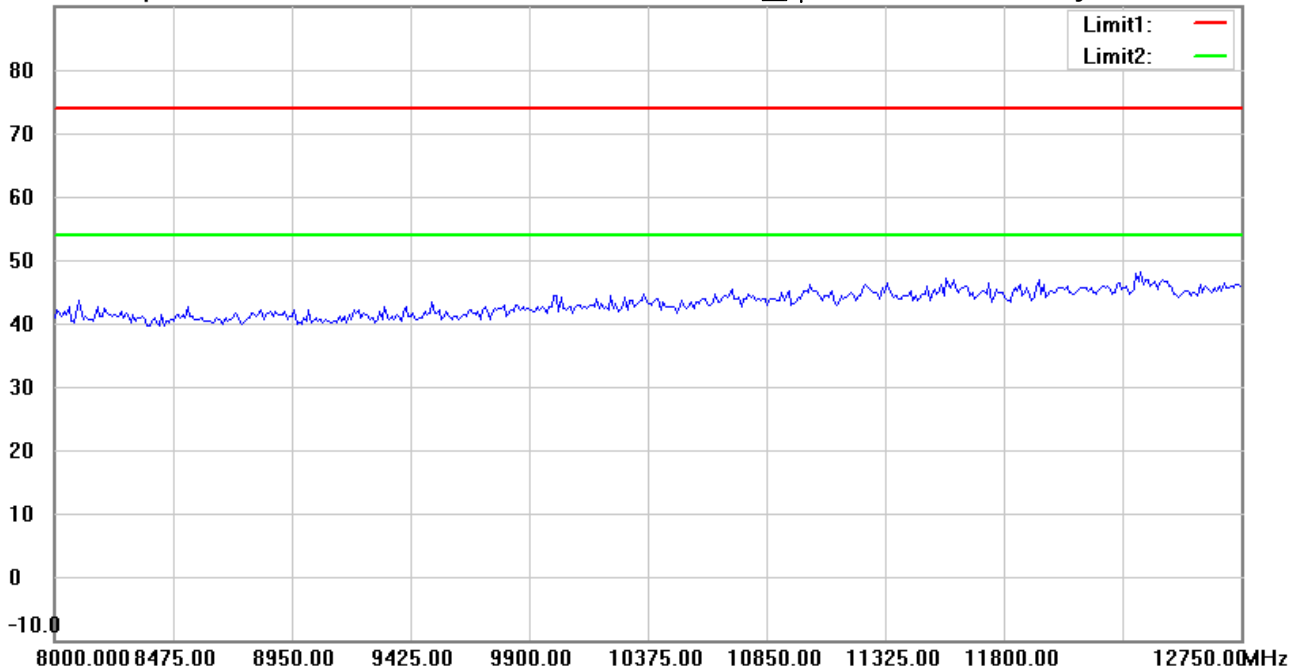

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #6


Date: 2022/7/15

Temperature: 27.9 °C

90.0 dBuV/m

Time: 上午 12:06:34

Humidity: 47.9 %

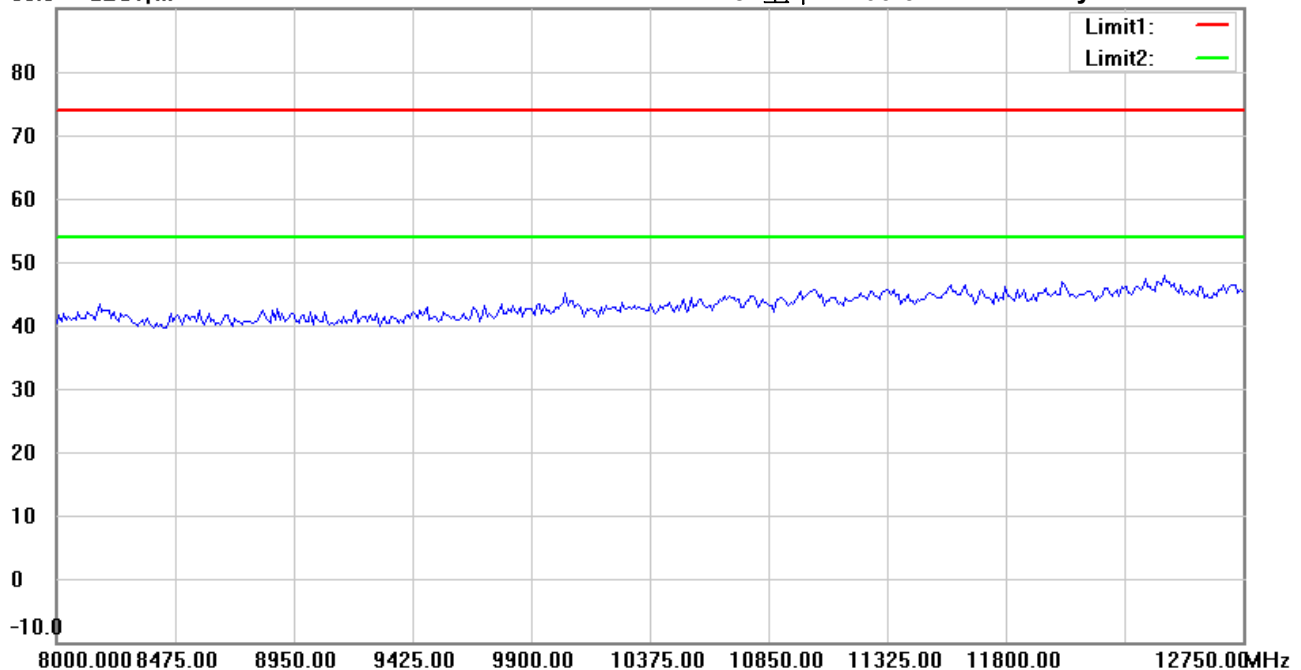

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #3


Date: 2022/7/15

Temperature: 27.9 °C

90.0 dBuV/m

Time: 上午 12:06:01

Humidity: 47.9 %

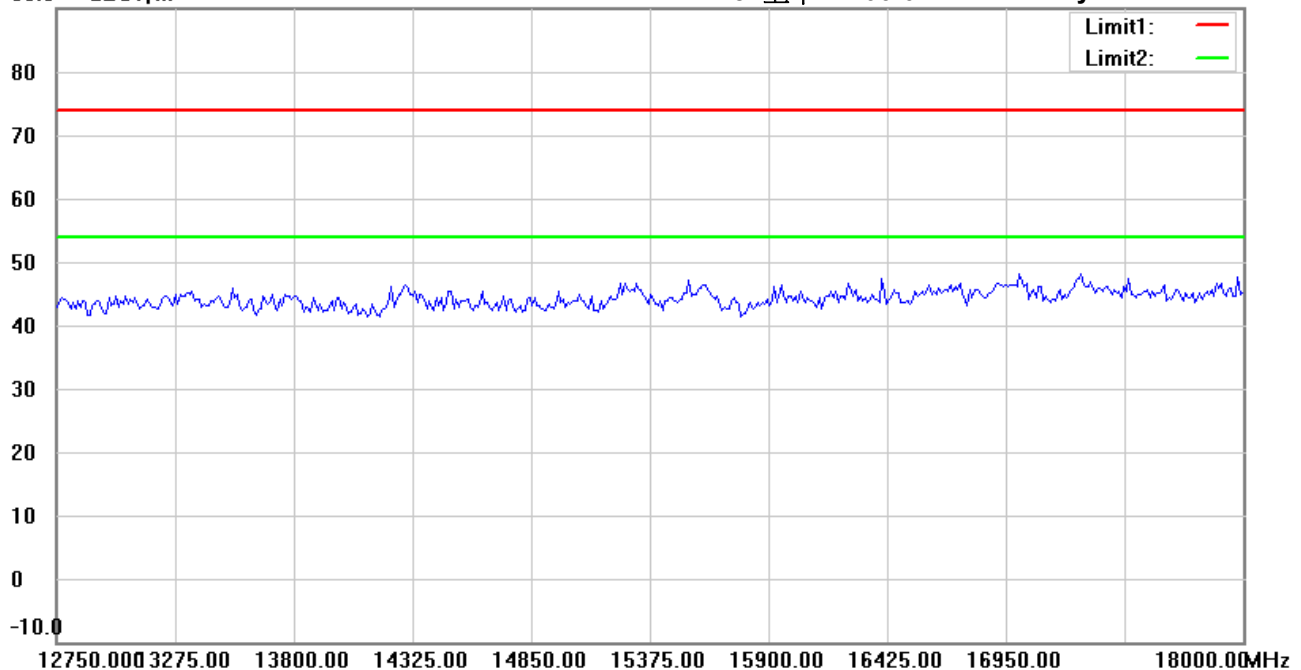

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: Horizontal

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#7


Date: 2022/7/15

Temperature:27.9 °C

90.0 dBuV/m

Time: 上午 12:06:56

Humidity:47.9 %

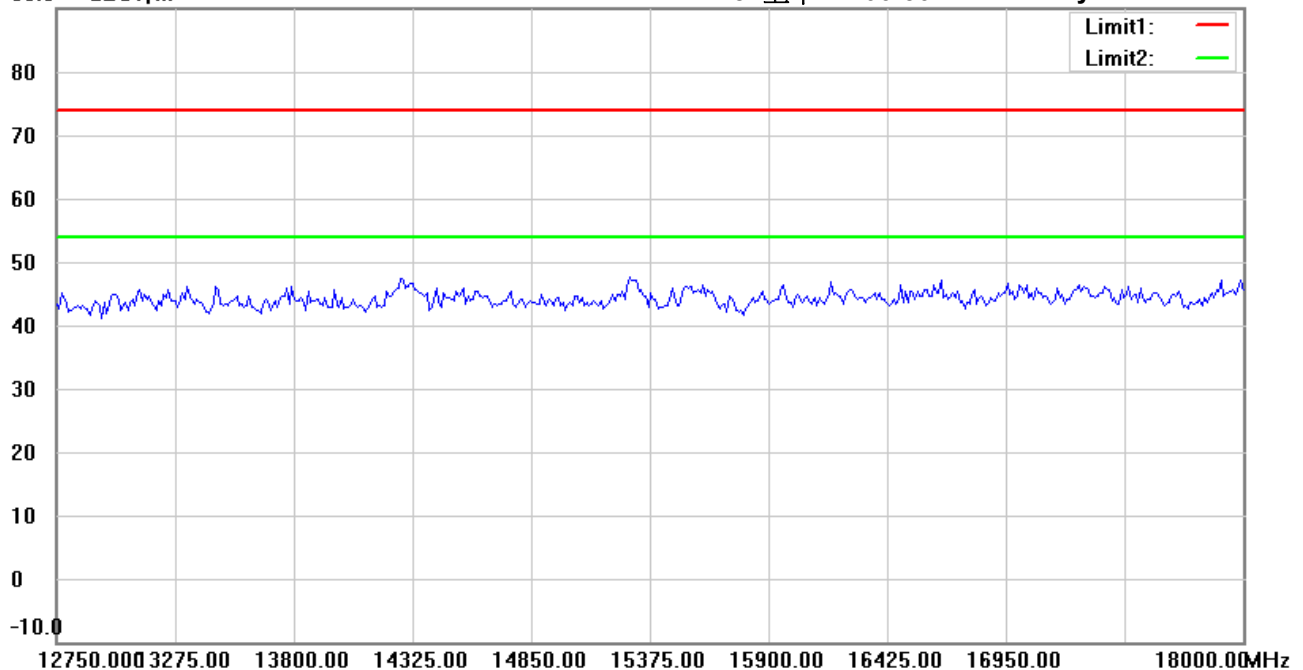

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#4


Date: 2022/7/15

Temperature: 27.9 °C

90.0 dBuV/m

Time: 上午 12:06:09

Humidity: 47.9 %

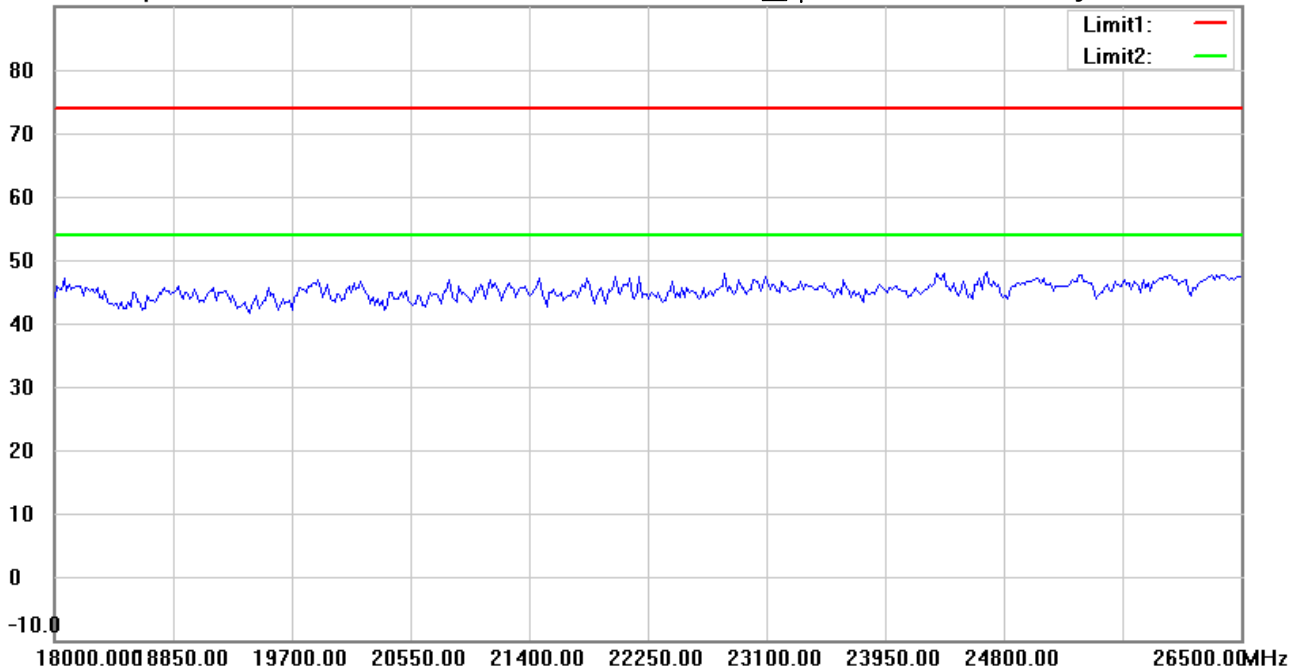

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#8


Date: 2022/7/15

Temperature:27.9 °C

90.0 dBuV/m

Time: 上午 12:07:03

Humidity:47.9 %

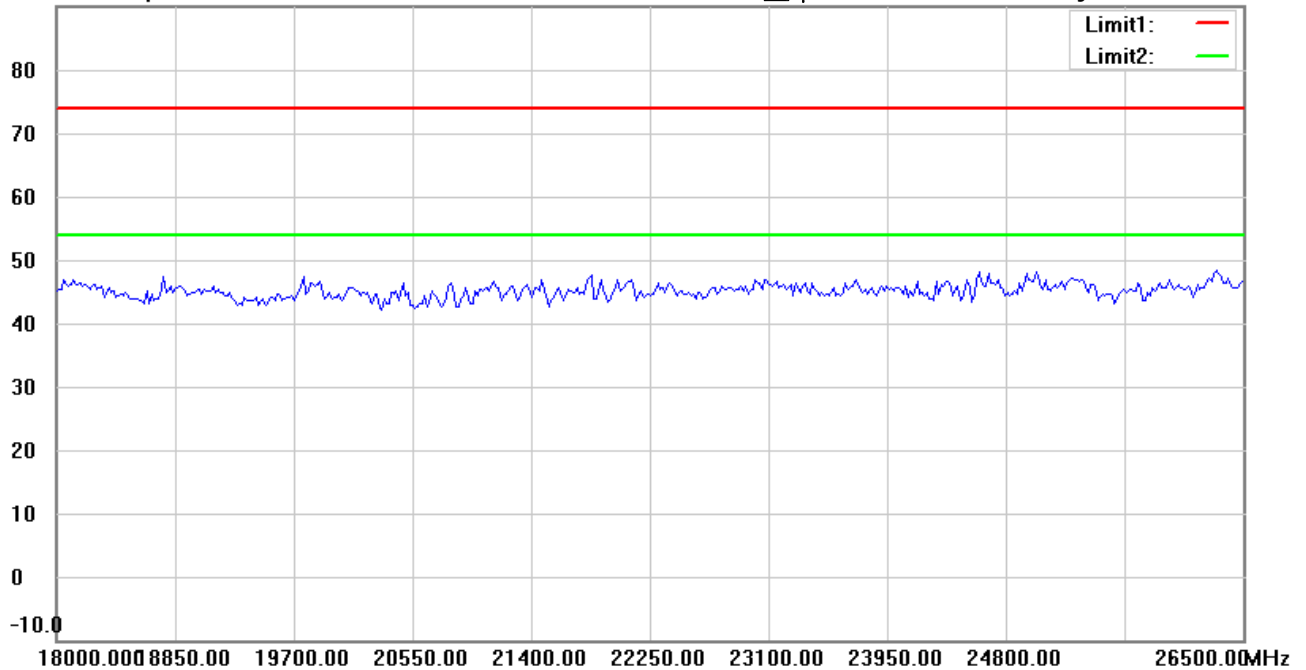

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #1


Date: 2022/7/15

Temperature: 27.9 °C

90.0 dBuV/m

Time: 上午 12:10:19

Humidity: 47.9 %

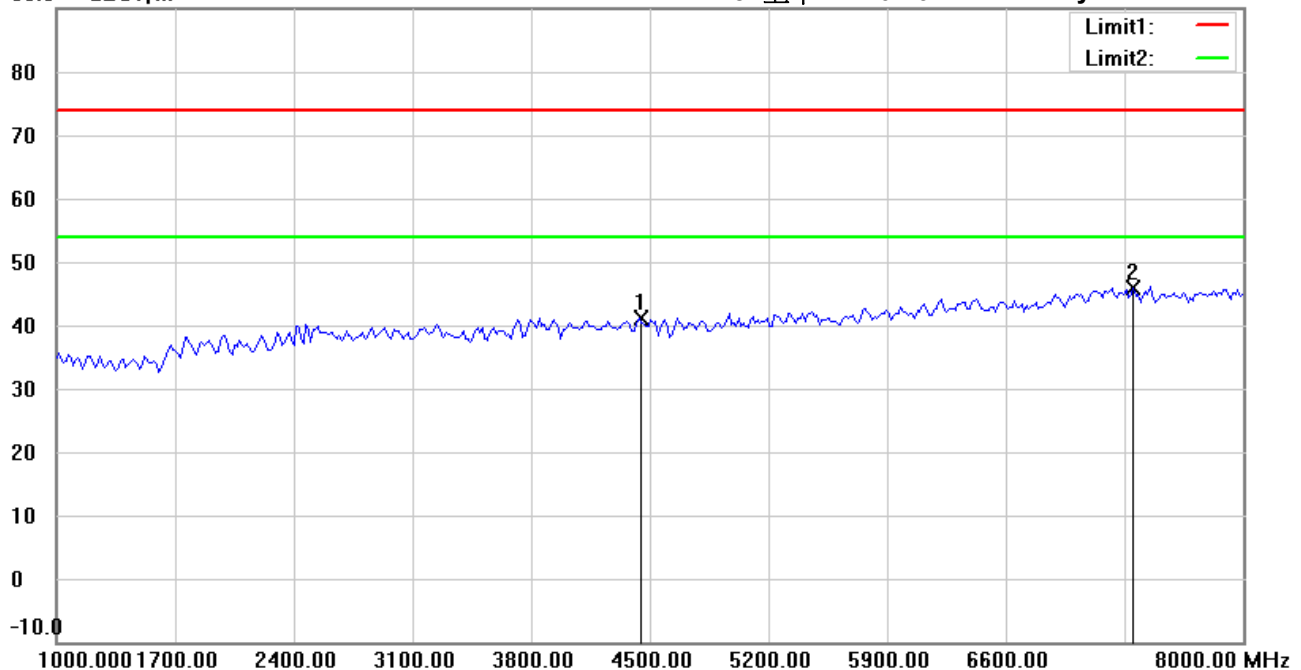

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: **Horizontal**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4436.874	42.43	peak	-1.21	41.22	74.00	150	90	-32.78	
*	7354.709	40.77	peak	5.07	45.84	74.00	150	218	-28.16	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #5


Date: 2022/7/15

Temperature: 27.9 °C

90.0 dBuV/m

Time: 上午 12:11:13

Humidity: 47.9 %

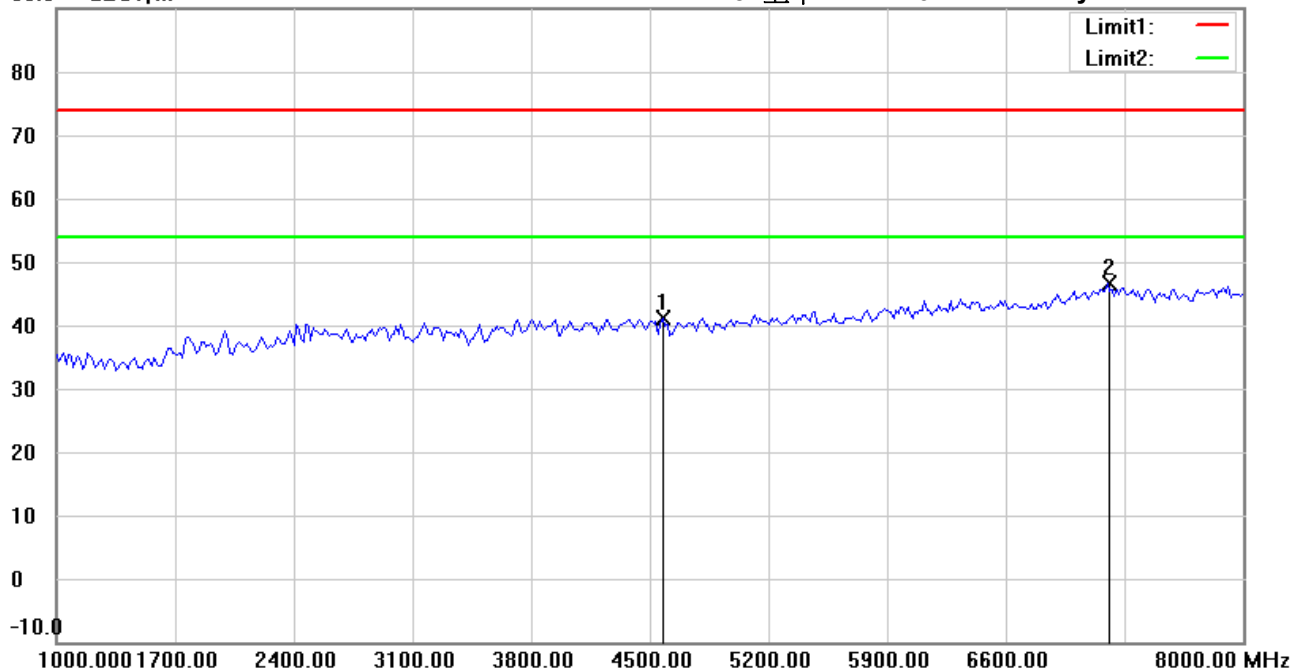

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4577.154	42.30	peak	-1.17	41.13	74.00	150	228	-32.87	
*	7200.401	41.45	peak	5.22	46.67	74.00	150	173	-27.33	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#2


Date: 2022/7/15

Temperature:27.9 °C

90.0 dBuV/m

Time: 上午 12:10:32

Humidity:47.9 %

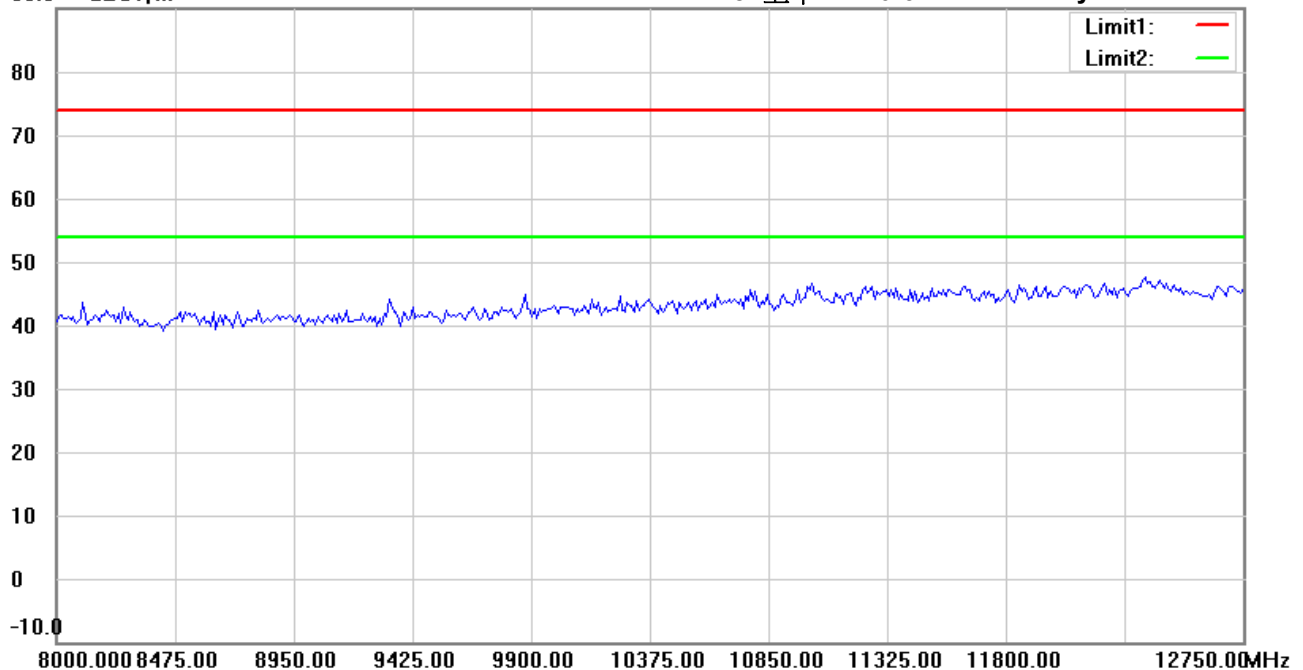

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #6


Date: 2022/7/15

Temperature: 27.9 °C

90.0 dBuV/m

Time: 上午 12:11:26

Humidity: 47.9 %

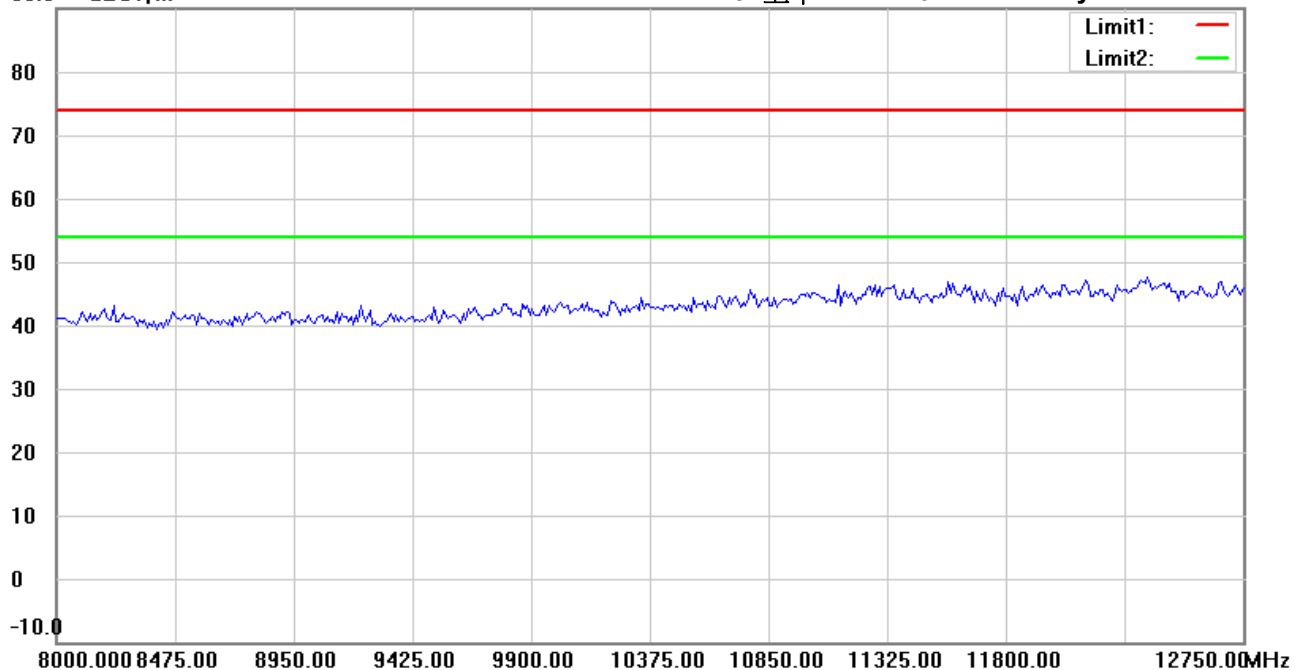

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #3


Date: 2022/7/15

Temperature: 27.9 °C

90.0 dBuV/m

Time: 上午 12:10:54

Humidity: 47.9 %

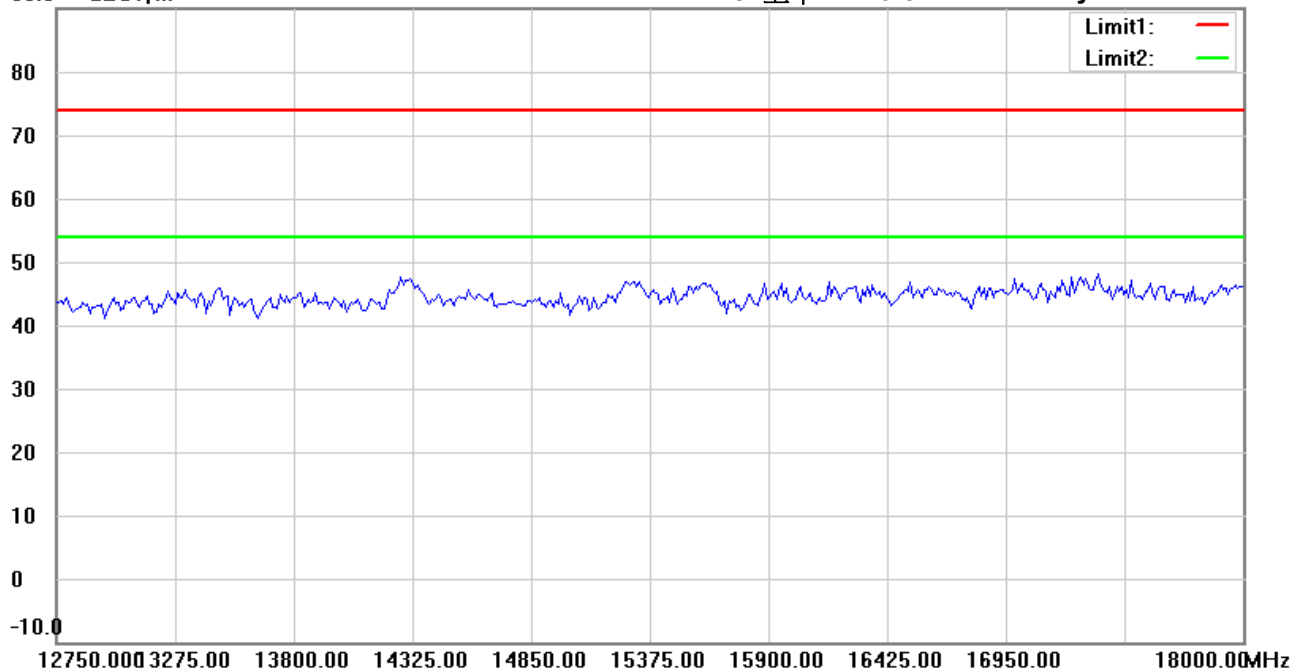

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: Horizontal

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#7


Date: 2022/7/15

Temperature:27.9 °C

90.0 dBuV/m

Time: 上午 12:11:49

Humidity:47.9 %

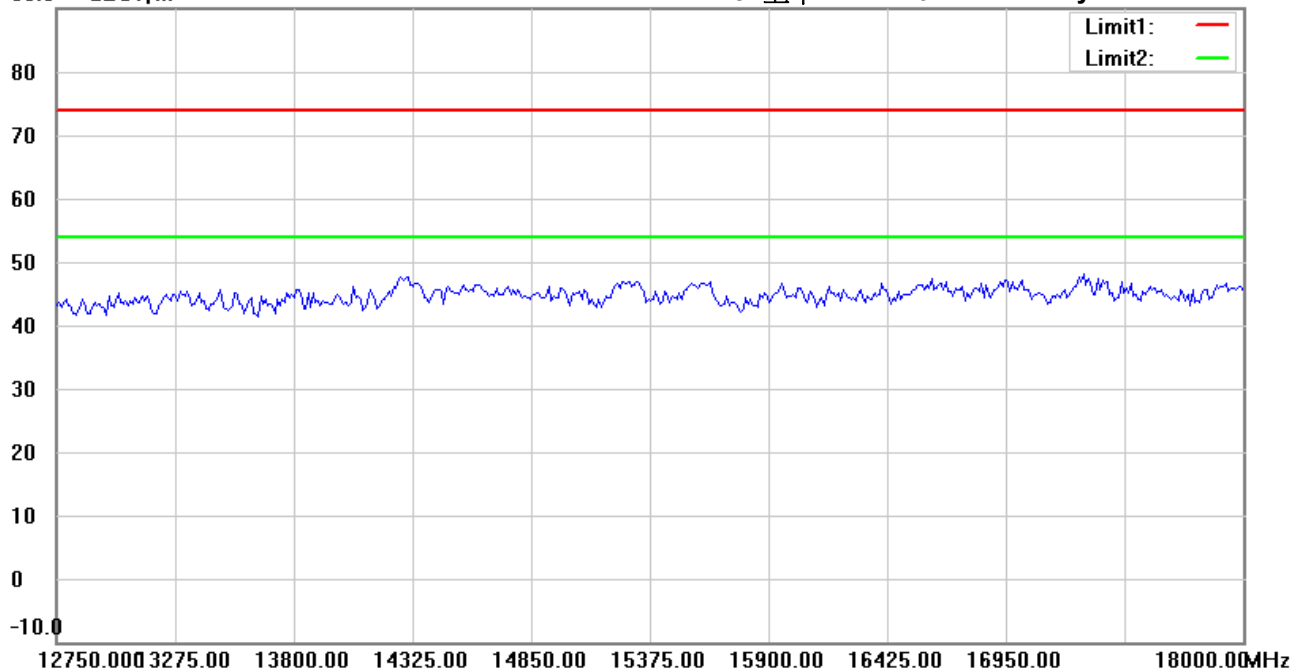

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#4


Date: 2022/7/15

Temperature: 27.9 °C

90.0 dBuV/m

Time: 上午 12:11:01

Humidity: 47.9 %

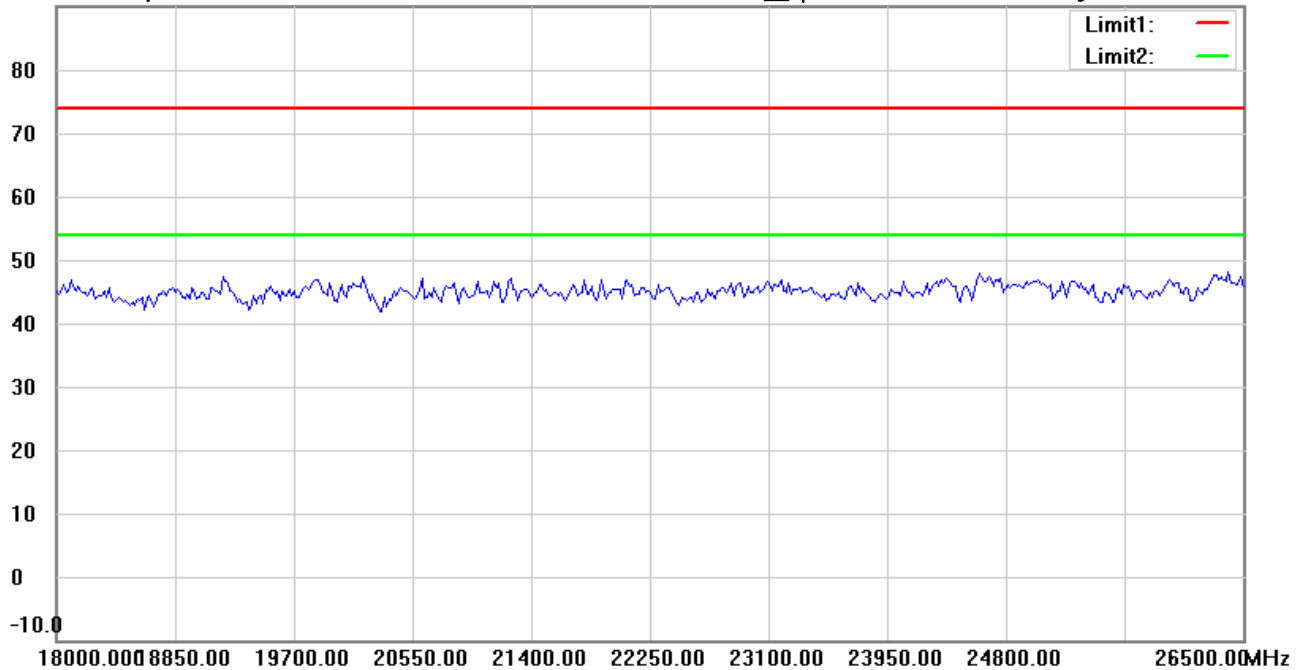

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#8


Date: 2022/7/15

Temperature:27.9 °C

90.0 dBuV/m

Time: 上午 12:11:56

Humidity:47.9 %

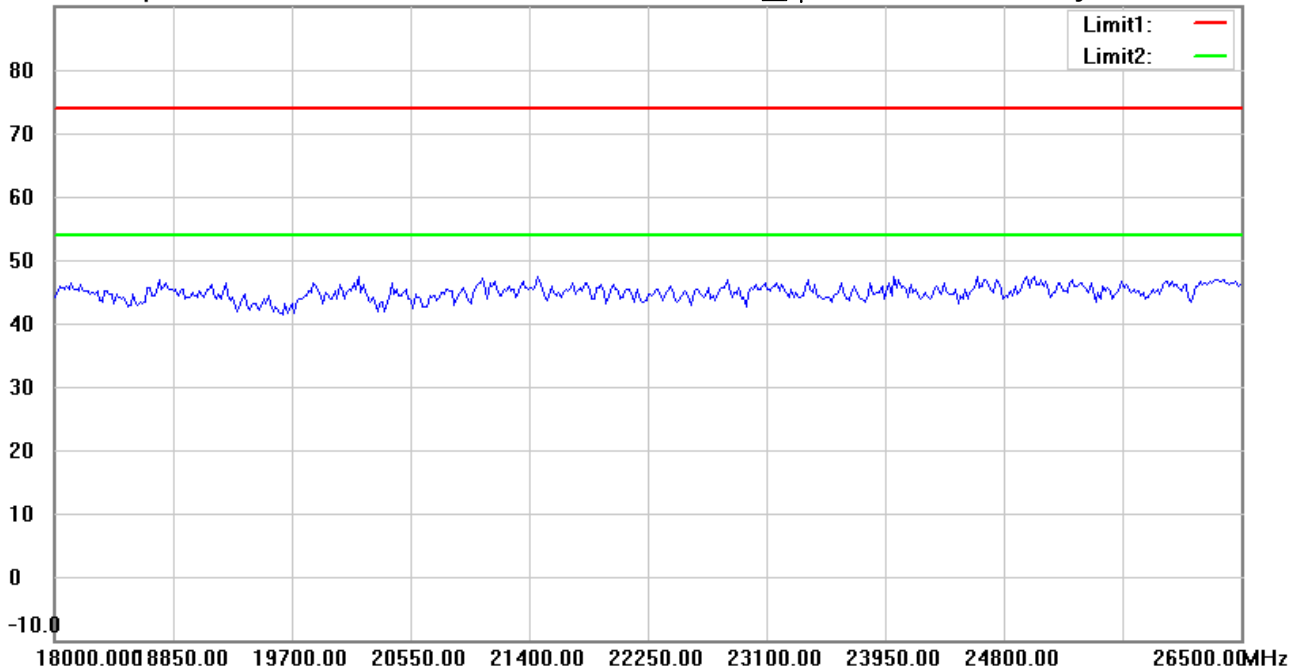

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #1


Date: 2022/7/15

Temperature: 27.9 °C

90.0 dBuV/m

Time: 上午 12:13:10

Humidity: 47.9 %

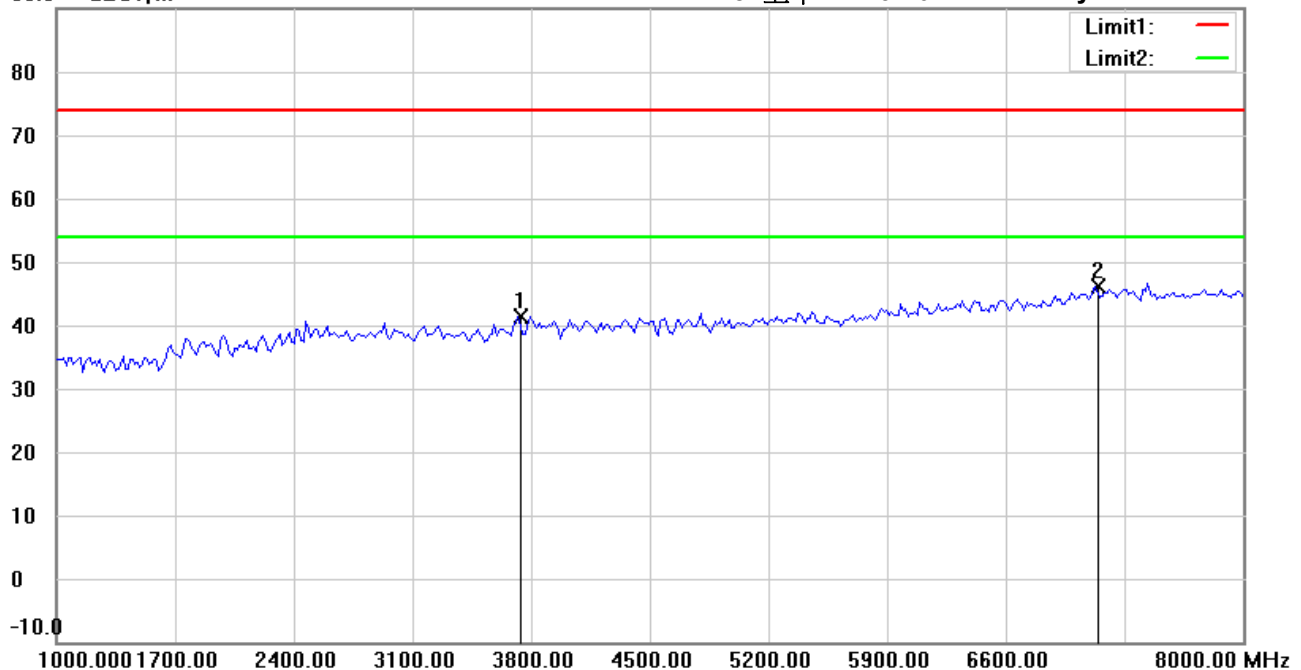

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3721.443	42.71	peak	-1.30	41.41	74.00	150	162	-32.59	
*	7130.261	41.21	peak	4.86	46.07	74.00	150	70	-27.93	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #5


Date: 2022/7/15

Temperature: 27.9 °C

90.0 dBuV/m

Time: 上午 12:14:04

Humidity: 47.9 %

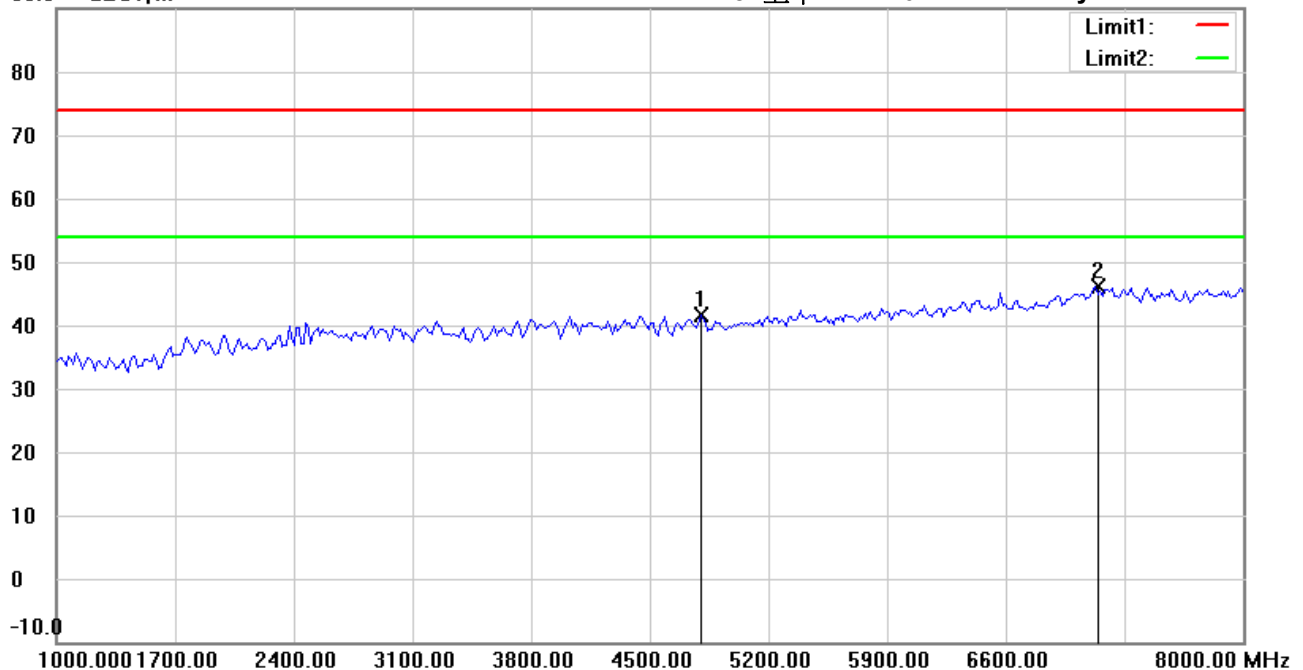

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: **Vertical**

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4801.603	42.28	peak	-0.76	41.52	74.00	150	247	-32.48	
*	7130.261	41.30	peak	4.86	46.16	74.00	150	185	-27.84	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : 3

Data : #2


Date: 2022/7/15

Temperature: 27.9 °C

90.0 dBuV/m

Time: 上午 12:13:23

Humidity: 47.9 %

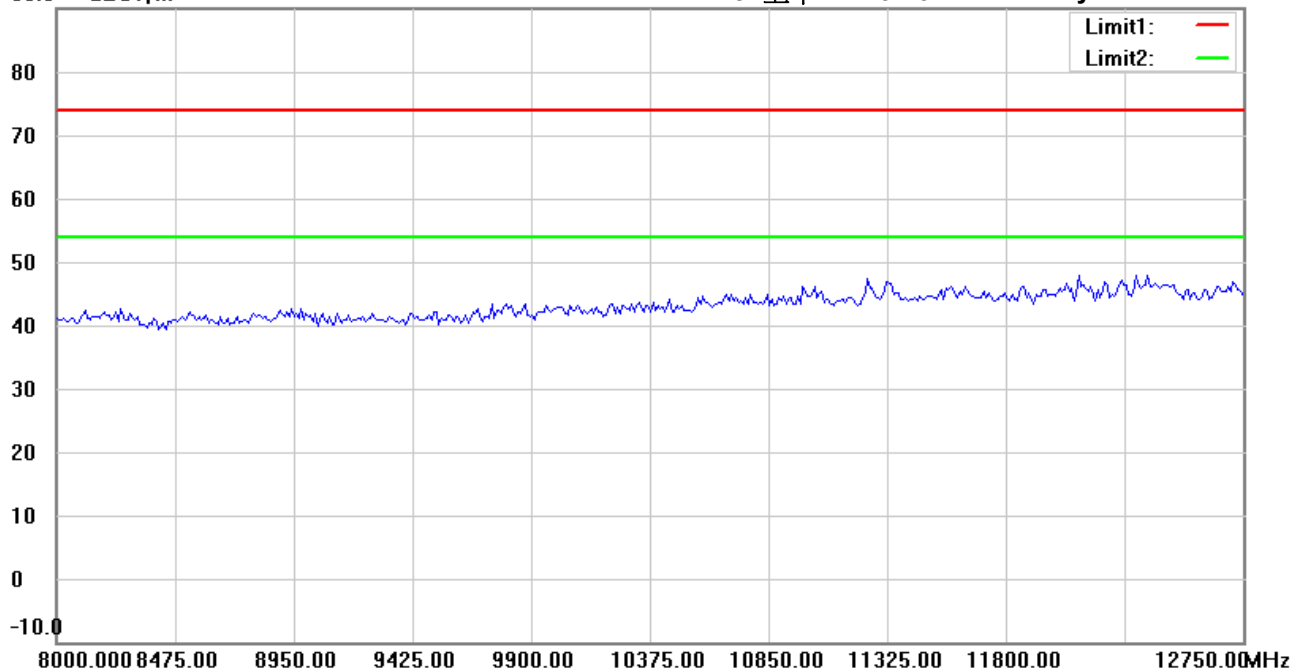

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: Horizontal

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#6


Date: 2022/7/15

Temperature:27.9 °C

90.0 dBuV/m

Time: 上午 12:14:17

Humidity:47.9 %

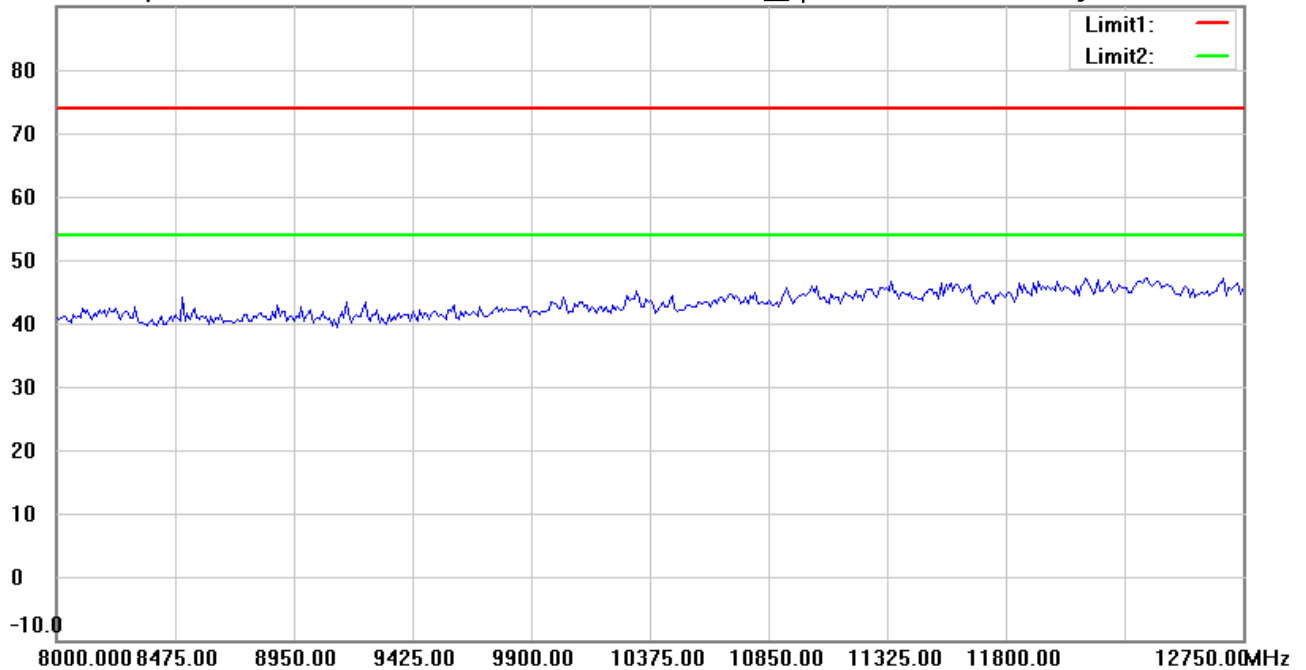

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#3


Date: 2022/7/15

Temperature:27.9 °C

90.0 dBuV/m

Time: 上午 12:13:45

Humidity:47.9 %

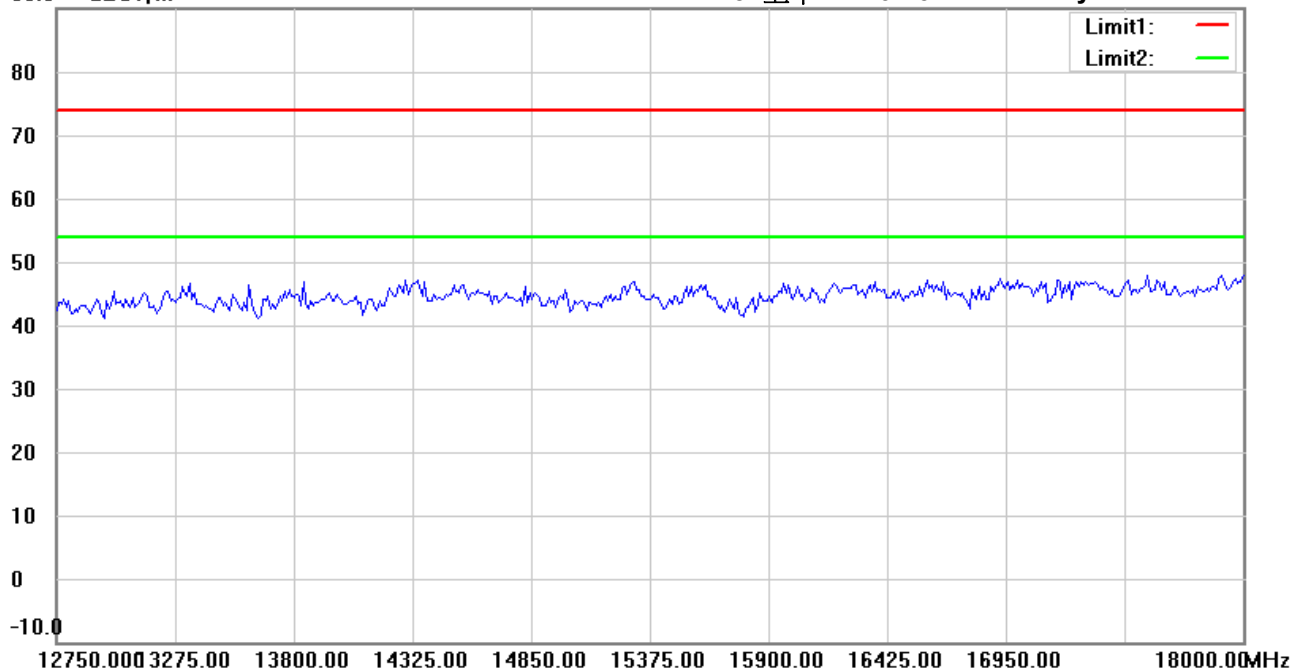

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: Horizontal

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#7


Date: 2022/7/15

Temperature:27.9 °C

90.0 dBuV/m

Time: 上午 12:14:40

Humidity:47.9 %

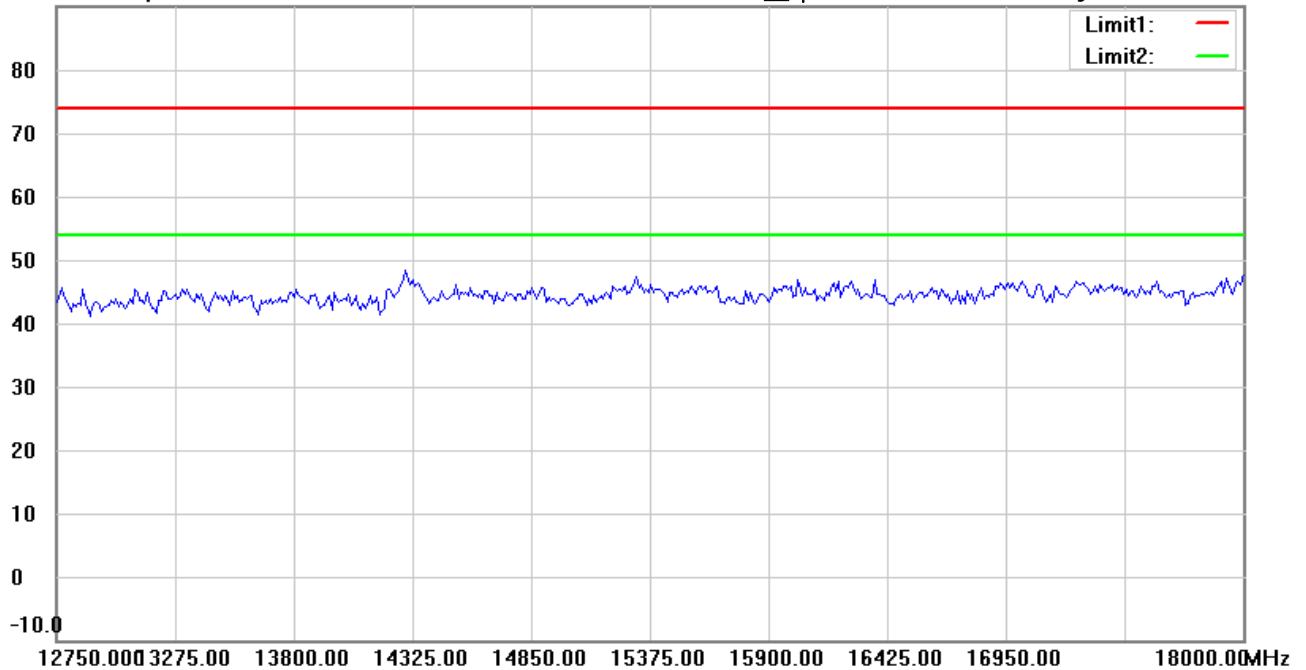

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#4


Date: 2022/7/15

Temperature: 27.9 °C

90.0 dBuV/m

Time: 上午 12:13:52

Humidity: 47.9 %

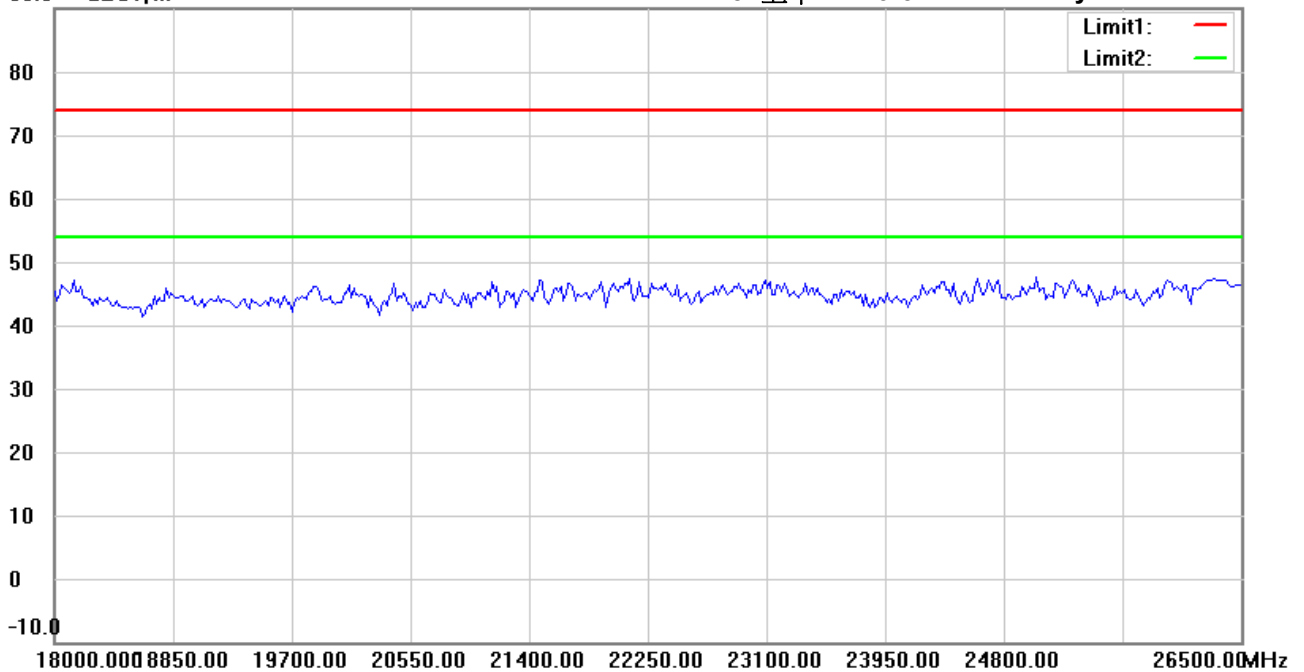

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File :3

Data :#8


Date: 2022/7/15

Temperature:27.9 °C

90.0 dBuV/m

Time: 上午 12:14:47

Humidity:47.9 %

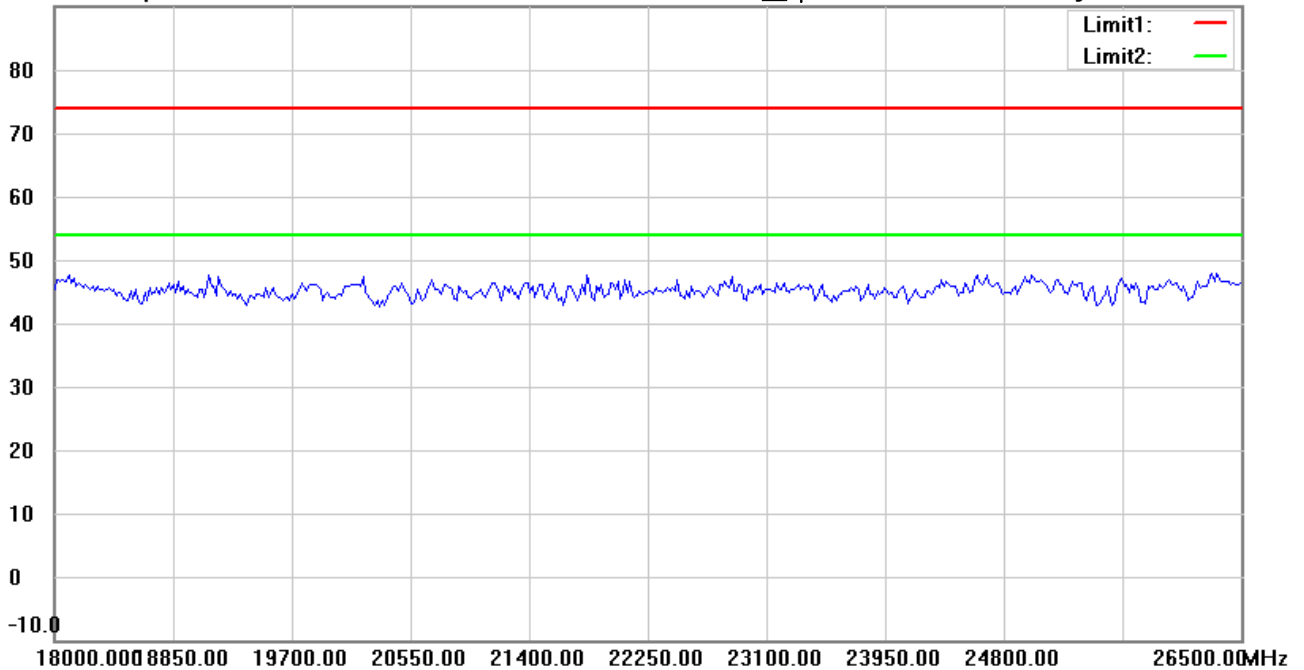

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M22205-21887

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: *Vertical*

Power : 9 Vd.c.


Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

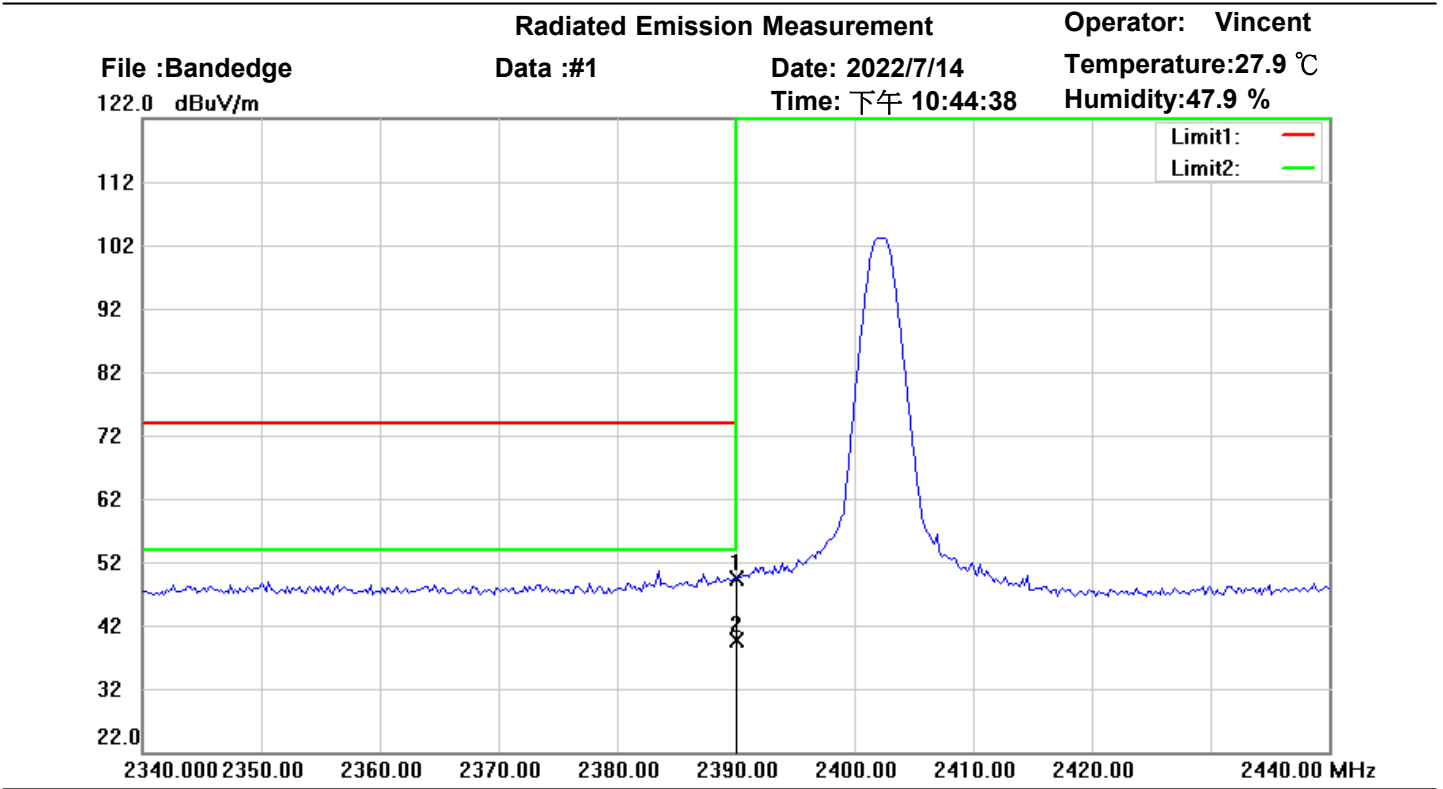

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22205-21887

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Horizontal

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	12.46	peak	36.94	49.40	74.00	161	53	-24.60	
*	2390.000	2.67	AVG	36.94	39.61	54.00	161	53	-14.39	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : Bandedge

Data : #2


Date: 2022/7/14

Temperature: 27.9 °C

122.0 dBuV/m

Time: 下午 10:49:19

Humidity: 47.9 %

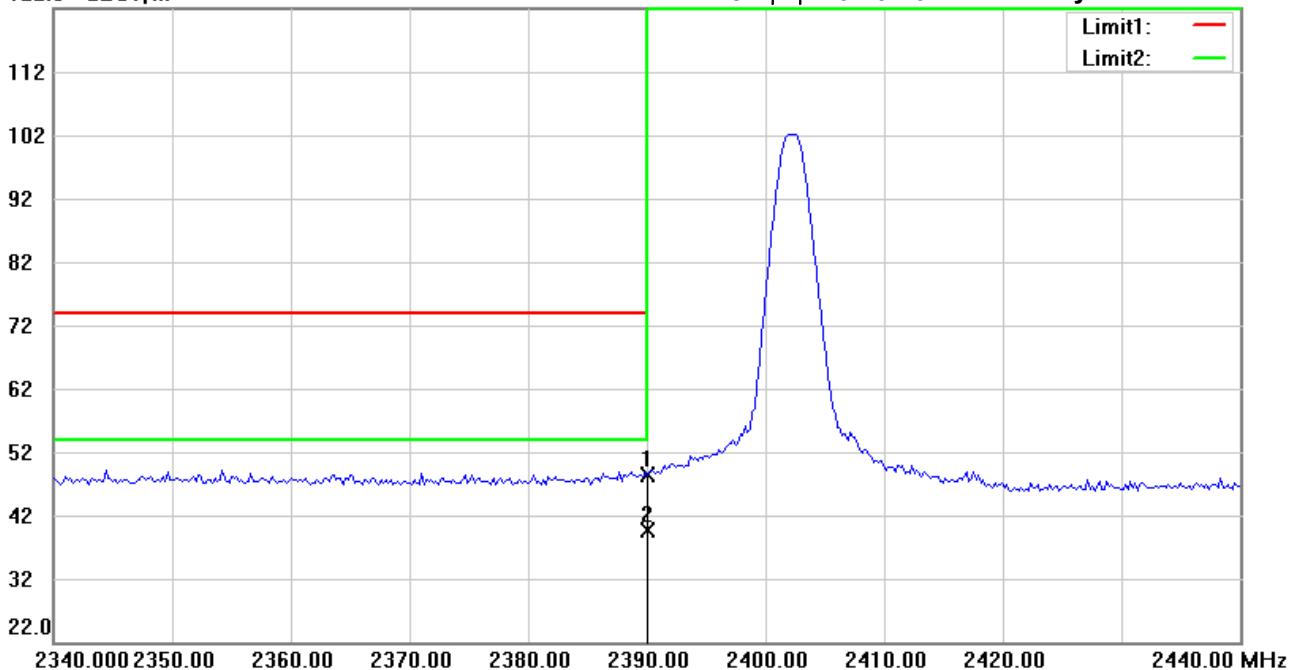

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22205-21887

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	11.45	peak	36.94	48.39	74.00	365	15	-25.61	
*	2390.000	2.71	AVG	36.94	39.65	54.00	365	15	-14.35	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : Bandedge

Data : #1


Date: 2022/7/14

Temperature: 27.9 °C

122.0 dBuV/m

Time: 下午 11:44:05

Humidity: 47.9 %

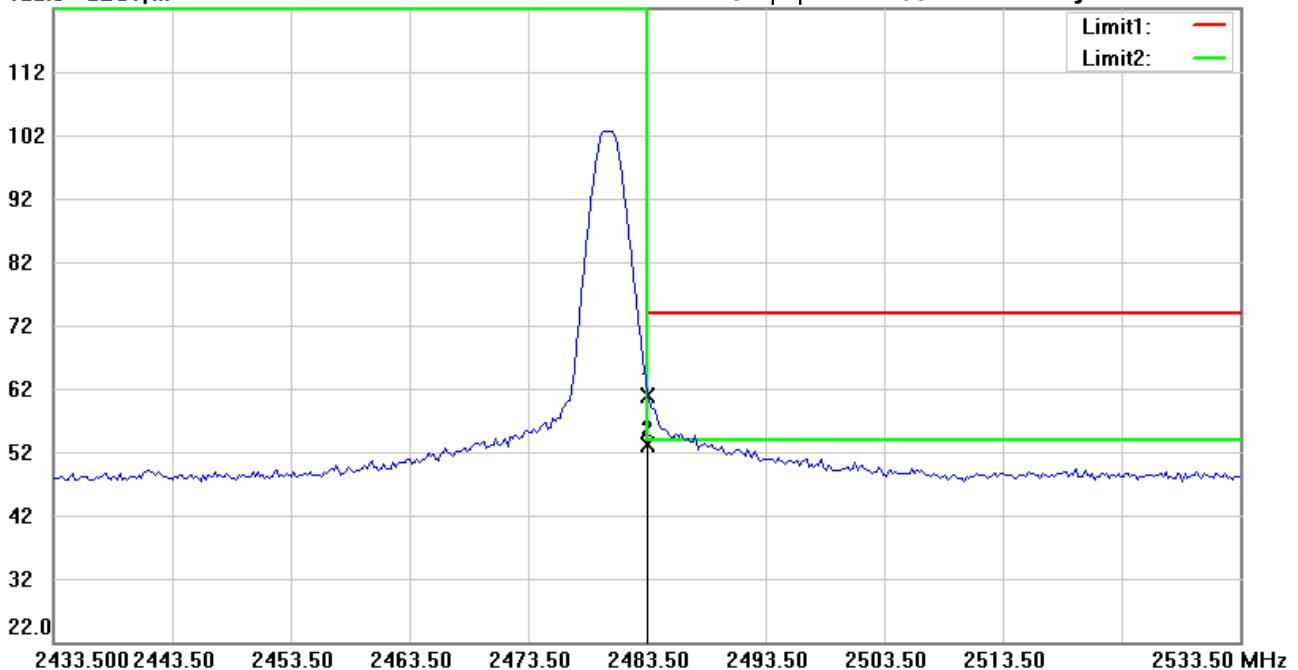

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22205-21887

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 9 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	22.92	peak	38.03	60.95	74.00	160	49	-13.05	
*	2483.500	15.15	AVG	38.03	53.18	54.00	160	49	-0.82	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Vincent

File : Bandedge

Data : #2


Date: 2022/7/14

Temperature: 27.9 °C

122.0 dBuV/m

Time: 下午 11:48:53

Humidity: 47.9 %

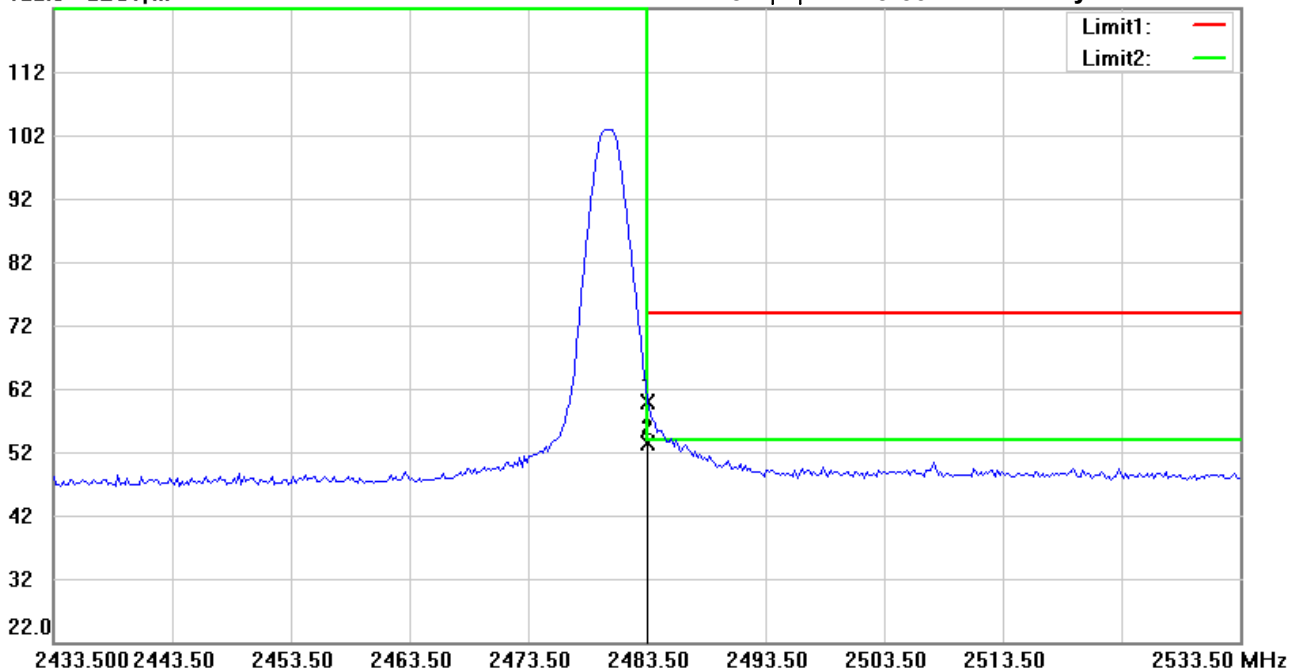

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

Polarization: Vertical

EUT : W6M22205-21887

Power : 9 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	21.74	peak	38.03	59.77	74.00	268	339	-14.23	
*	2483.500	15.42	AVG	38.03	53.45	54.00	268	339	-0.55	

*:Maximum data x:Over limit !:over margin