

# FCC TEST REPORT

## (PART 27)



Applicant:	Shenzhen Jimi IoT Co., Ltd.
Address:	3-4/F, Block A, Building #7, Shenzhen International Innovation Valley, Dashi 1st Road, Nanshan District, Shenzhen, Guangdong, China

Manufacturer or Supplier:	Shenzhen Jimi IoT Co., Ltd.
Address:	3-4/F, Block A, Building #7, Shenzhen International Innovation Valley, Dashi 1st Road, Nanshan District, Shenzhen, Guangdong, China
Product:	Global container monitoring terminal
Brand Name:	JimiloT
Model Name:	LL306R LL306Pro
FCC ID	2AMLF-LL306R
Date of tests	Mar. 10, 2025 ~ Apr. 03, 2025

The tests have been carried out according to the requirements of the following standard:

<input checked="" type="checkbox"/> <b>FCC Part 27</b>	<input checked="" type="checkbox"/> <b>ANSI/TIA/EIA-603-E</b>
<input checked="" type="checkbox"/> <b>ANSI/TIA/EIA-603-D</b>	<input checked="" type="checkbox"/> <b>ANSI C63.26-2015</b>
<input checked="" type="checkbox"/> <b>FCC Part 2</b>	

**CONCLUSION:** The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
	
Date: Apr. 03, 2025	Date: Apr. 03, 2025

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



## TABLE OF CONTENTS

<b>1. SUMMARY OF TEST RESULTS .....</b>	<b>4</b>
1.1 MEASUREMENT UNCERTAINTY .....	6
1.2 TEST SITE AND INSTRUMENTS .....	7
<b>2. GENERAL INFORMATION.....</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF EUT .....	8
2.2 CONFIGURATION OF SYSTEM UNDER TEST .....	11
2.3 DESCRIPTION OF SUPPORT UNITS .....	12
2.4 TEST ITEM AND TEST CONFIGURATION.....	13
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	17
<b>3. TEST TYPES AND RESULTS .....</b>	<b>18</b>
3.1 OUTPUT POWER MEASUREMENT.....	18
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT.....	18
3.1.2 TEST PROCEDURES .....	18
3.1.3 TEST SETUP .....	19
3.1.4 TEST RESULTS .....	20
3.2 FREQUENCY STABILITY MEASUREMENT.....	30
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT.....	30
3.2.2 TEST PROCEDURE.....	30
3.2.3 TEST SETUP .....	30
3.2.3 TEST RESULTS .....	31
3.3 OCCUPIED BANDWIDTH MEASUREMENT .....	32
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT .....	32
3.3.2 TEST SETUP.....	32
3.3.3 TEST PROCEDURES .....	32
3.3.4 TEST RESULTS .....	32
3.4 BAND EDGE MEASUREMENT.....	33
3.4.1 LIMITS OF BAND EDGE MEASUREMENT .....	33
3.4.2 TEST SETUP.....	34
3.4.3 TEST PROCEDURES .....	35
3.4.4 TEST RESULTS .....	35
3.5 CONDUCTED SPURIOUS EMISSIONS .....	36
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT .....	36
3.5.2 TEST PROCEDURE.....	37
3.5.3 TEST SETUP .....	37
3.5.4 TEST RESULTS .....	37
3.6 RADIATED EMISSION MEASUREMENT .....	38
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	38
3.6.2 TEST PROCEDURES .....	39
3.6.3 DEVIATION FROM TEST STANDARD .....	39
3.6.4 TEST SETUP.....	40
3.6.5 TEST RESULTS .....	42
3.7 PEAK TO AVERAGE RATIO.....	68
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT.....	68
3.7.2 TEST SETUP.....	68
3.7.3 TEST PROCEDURES .....	68
3.7.4 TEST RESULTS .....	68
<b>4 INFORMATION ON THE TESTING LABORATORIES .....</b>	<b>69</b>
<b>5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB</b>	<b>70</b>
<b>6 APPENDIX .....</b>	<b>71</b>



Test Report No.: PSU-QSZ2503050113RF03

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-QSZ2503050113RF03	Original release	Apr. 03, 2025



# 1. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 27 & PART 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	TEST LAB*
§2.1046	Conducted Output Power	Compliance	A
§27.50(c)(10) §27.50(b)(10)	Effective Radiated Power (Band 12) (Band 17)	Compliance	A
§27.50(d)(4) §27.50(h)(2)	Equivalent Isotropically Radiated Power (Band 7)	Compliance	A
§2.1055 §27.54	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§2.1051 §27.53(c)(2) §27.53(g) §27.53(h) §27.53(m)(4)	Conducted Band Edge Measurements (Band 7) (Band 12)(Band 17)	Compliance	A
§2.1051 §27.53(g) §27.53(c)(2) §27.53(f) §27.53(h) §27.53(m)(4)	Conducted Spurious Emissions (Band 7) (Band 12)(Band 17)	Compliance	A
§2.1053 §27.53(c)(2) §27.53(f) §27.53(g) §27.53(h) §27.53(m)(4)	Radiated Spurious Emissions (Band 7) (Band 12)(Band 17)	Compliance	A
§27.50	Peak to average ratio*	Compliance	A

\* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.



**\*Test Lab Information Reference**

**Lab A:**

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

**Lab Address:**

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province, China

**Accredited Test Lab Cert 6613.01**

The FCC Site Registration No. is 434559; The Designation No. is CN1325.




## 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions & Radiated Power (30MHz~1GHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GHz ~6GHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GHz ~18GHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GHz ~40GHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

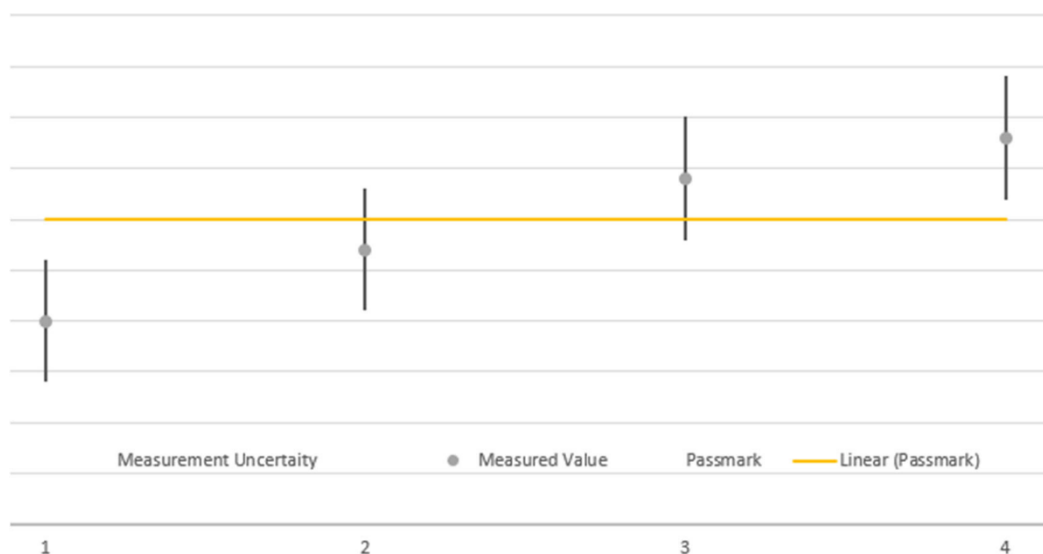

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.



## 1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.29,24	Aug.28,26
Pre-Amplifier	R&S	SCU08F1	101028	Sep.15,24	Sep.14,26
Vector Signal Generator	R&S	SMBV100B	102176	Feb.15,24	Feb.14,26
Signal Generator	R&S	SMB100A	182185	Feb.15,24	Feb.14,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Feb.24,24	Feb.23,26
EMI TEST Receiver	R&S	ESW44	101973	Feb.24,24	Feb.23,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.27,24	Feb.26,26
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.21,24	Aug.20,26
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.22,24	Feb.21,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.21,24	Aug.20,26
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.22,24	Feb.21,26
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.26,24	Jun.25,26
Test Software	EMC32	EMC32	N/A	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	Sep.30,24	Sep.29,26
DC Source	HYELEC	HY3010B	551016	Aug.30,24	Aug.29,26
Hygrothermograph	DELI	20210528	SZ014	Sep.05,24	Sep.04,26
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Oct.26,24	Apr.25,25
CABLE	R&S	W12.14	N/A	Oct.26,24	Apr.25,25
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Oct.26,24	Apr.25,25
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Oct.26,24	Apr.25,25
Temperature Chamber	votsch	VT4002	58566078100050	May.30,24	May.29,26

### NOTE:

1. The calibration interval of the above test instruments is 6 months or 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT*</b>	Global container monitoring terminal	
<b>BRAND NAME*</b>	JimiloT	
<b>MODEL NAME*</b>	LL306R LL306Pro	
<b>NOMINAL VOLTAGE*</b>	3.7Vdc(Battery) 5Vdc(Adapter)	
<b>MODULATION TECHNOLOGY</b>	<b>LTE</b>	QPSK,16QAM
<b>FREQUENCY RANGE</b>	<b>LTE Band 7 Channel Bandwidth: 5MHz</b>	2502.5MHz ~ 2567.5MHz
	<b>LTE Band 7 Channel Bandwidth: 10MHz</b>	2505MHz ~ 2565MHz
	<b>LTE Band 7 Channel Bandwidth: 15MHz</b>	2507.5MHz ~ 2562.5MHz
	<b>LTE Band 7 Channel Bandwidth: 20MHz</b>	2510MHz ~ 2560MHz
	<b>LTE Band 12 Channel Bandwidth: 1.4MHz</b>	699.7MHz ~ 715.3MHz
	<b>LTE Band 12 Channel Bandwidth: 3MHz</b>	700.5MHz ~ 714.5MHz
	<b>LTE Band 12 Channel Bandwidth: 5MHz</b>	701.5MHz ~ 713.5MHz
	<b>LTE Band 12 Channel Bandwidth: 10MHz</b>	704MHz ~ 711MHz
	<b>LTE Band 17 Channel Bandwidth: 5MHz</b>	706.5MHz ~ 713.5MHz
	<b>LTE Band 17 Channel Bandwidth: 10MHz</b>	709MHz ~ 711 MHz
	<b>LTE Band 7 Channel Bandwidth: 5MHz</b>	197.24mW
<b>MAX. ERP POWER</b>	<b>LTE Band 7 Channel Bandwidth: 10MHz</b>	197.24mW
	<b>LTE Band 7 Channel Bandwidth: 15MHz</b>	200.91mW
	<b>LTE Band 7 Channel Bandwidth: 20MHz</b>	205.12mW
	<b>LTE Band 12 Channel Bandwidth: 1.4MHz</b>	31.05mW
	<b>LTE Band 12 Channel Bandwidth: 3MHz</b>	31.33mW
	<b>LTE Band 12 Channel Bandwidth: 5MHz</b>	31.26mW
	<b>LTE Band 12 Channel Bandwidth: 5MHz</b>	31.26mW





	LTE Band 12 Channel Bandwidth: 10MHz	31.99mW
	LTE Band 17 Channel Bandwidth: 5MHz	32.89mW
	LTE Band 17 Channel Bandwidth: 10MHz	33.65mW
EMISSION DESIGNATOR GOGN	LTE Band 7 Channel Bandwidth: 5MHz	QPSK: 4M49G7D 16QAM: 4M49W7D
	LTE Band 7 Channel Bandwidth: 10MHz	QPSK: 8M93G7D 16QAM: 5M30W7D
	LTE Band 7 Channel Bandwidth: 15MHz	QPSK: 13M6G7D 16QAM: 5M01W7D
	LTE Band 7 Channel Bandwidth: 20MHz	QPSK: 18M1G7D 16QAM: 5M09W7D
	LTE Band 12 Channel Bandwidth: 1.4MHz	QPSK: 1M09G7D 16QAM: 1M11W7D
	LTE Band 12 Channel Bandwidth: 3MHz	QPSK: 2M70G7D 16QAM: 2M69W7D
	LTE Band 12 Channel Bandwidth: 5MHz	QPSK: 4M49G7D 16QAM: 4M49W7D
	LTE Band 12 Channel Bandwidth: 10MHz	QPSK: 8M95G7D 16QAM: 5M26W7D
	LTE BAND7	1.32dBi
	LTE BAND12	-4.92dBi
	LTE BAND17	-4.92dBi
ANTENNA TYPE*	PIFA	
HW VERSION*	CT10R_MB_V1.0	
SW VERSION*	LL306_LL306_WAAP_XQGL_V1.0_240517.1101	
I/O PORTS*	Refer to user's manual	
CABLE SUPPLIED*	N/A	
EXTREME TEMPERATURE*	High Temperature: 60°C Low Temperature: -30°C	



<b>EXTREME VOLTAGE*</b>	High Voltage: 4.2V Low Voltage: 3.4V
-------------------------	-----------------------------------------

**NOTE:**

- \*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receivers.

MODULATION MODE	TX FUNCTION
LTE	1TX/1RX


- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in the test report.
- To meet different market demands, LL306R and LL306Pro differ only in model names, with all other aspects being identical.
- List of Accessory:**

ACCESSORIES	Brand	MODEL / SPECIFICATION
Internal battery	N/A	Modle Name : 122960L Power Rating: 5Vdc, 2Ah
External battery	N/A	KR301_S_GO01_F010 Power Rating: 5Vdc, 2Ah



## 2.2 CONFIGURATION OF SYSTEM UNDER TEST

### FOR RADIATION EMISSION TEST

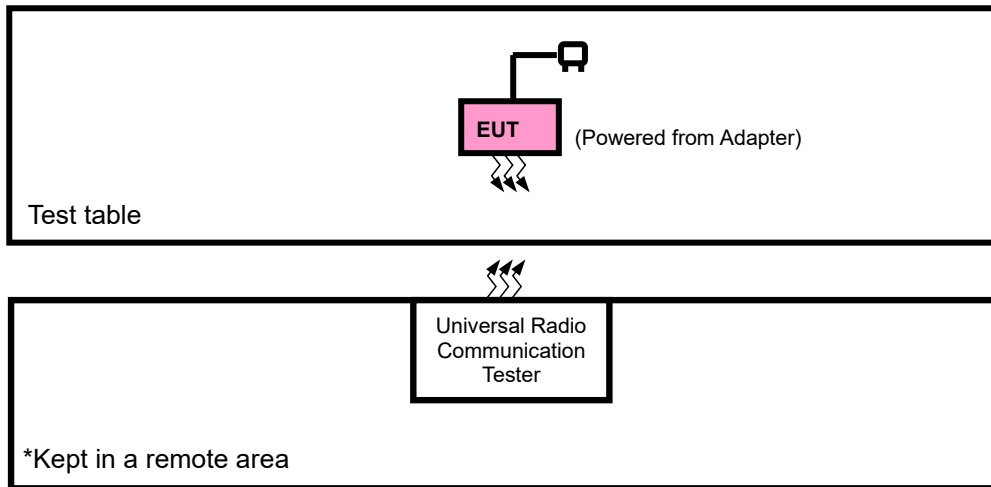



## 2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Laptop	Lenovo	ThinkPad E14	HRSW00024	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

**2.4 TEST ITEM AND TEST CONFIGURATION**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
<b>A</b>	EUT + Adapter with LTE link
<b>B</b>	EUT + DC Supply with LTE link

LTE BAND 7 MODE						
EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
<b>A</b>	EIRP	20775 to 21425	20775, 21100, 21425	5MHz	QPSK, 16QAM	1 RB / 0 RB offset
		20800 to 21400	20800, 21100, 21400	10MHz	QPSK, 16QAM	1 RB / 0RB offset
		20825 to 21375	20825, 21100, 21375	15MHz	QPSK, 16QAM	1 RB / 0 RB offset
		20850 to 21350	20850, 21100, 21350	20MHz	QPSK, 16QAM	1 RB / 0 RB offset
<b>B</b>	FREQUENCY STABILITY	20850 to 21350	20850, 21100, 21350	20MHz	QPSK	100 RB / 0 RB offset
<b>A</b>	OCCUPIED BANDWIDTH	20775 to 21425	20775, 21100, 21425	5MHz	QPSK, 16QAM	25 RB / 0 RB offset
		20800 to 21400	20800, 21100, 21400	10MHz	QPSK, 16QAM	50 RB / 0 RB offset
		20825 to 21375	20825, 21100, 21375	15MHz	QPSK, 16QAM	75 RB / 0 RB offset
		20850 to 21350	20850, 21100, 21350	20MHz	QPSK, 16QAM	100 RB / 0 RB offset
<b>A</b>	PEAK TO AVERAGE RATIO	20850 to 21350	20850, 21100, 21350	20MHz	QPSK, 16QAM	1 RB / 0 RB offset 100 RB / 0 RB offset
<b>A</b>	BAND EDGE	20775 to 21425	20775	5MHz	QPSK, 16QAM	1 RB / 0 RB offset 25 RB / 0 RB offset
			21425	5MHz	QPSK, 16QAM	1 RB / 24 RB offset 25 RB / 0 RB offset
		20800 to 21400	20800	10MHz	QPSK, 16QAM	1 RB / 0 RB offset 50 RB / 0 RB offset
			21400	10MHz	QPSK, 16QAM	1 RB / 49 RB offset 50 RB / 0 RB offset
		20825 to 21375	20825	15MHz	QPSK, 16QAM	1 RB / 0 RB offset 75 RB / 0 RB offset
			21375	15MHz	QPSK, 16QAM	1 RB / 74 RB offset



		20850 to 21350				75 RB / 0 RB offset
			20850	20MHz	QPSK, 16QAM	1 RB / 0 RB offset
						100 RB / 0 RB offset
			21350	20MHz	QPSK, 16QAM	1 RB / 99 RB offset
						100 RB / 0 RB offset
<b>A</b>	CONDCUETED EMISSION	20775 to 21425	20775, 21100, 21425	5MHz	QPSK	1 RB / 0 RB offset
		20800 to 21400	20800, 21100, 21400	10MHz	QPSK	1 RB / 0 RB offset
		20825 to 21375	20825, 21100, 21375	15MHz	QPSK	1 RB / 0 RB offset
		20850 to 21350	20850, 21100, 21350	20MHz	QPSK	1 RB / 0 RB offset
<b>A</b>	RADIATED EMISSION	20775 to 21425	21100	5MHz	QPSK	1 RB / 0 RB offset
		20800 to 21400	21100	10MHz	QPSK	1 RB / 0 RB offset
		20825 to 21375	21100	15MHz	QPSK	1 RB / 0 RB offset
		20850 to 21350	20850,21100,21350	20MHz	QPSK	1 RB / 0 RB offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE BAND 12 MODE						
EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
<b>A</b>	ERP	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM	1 RB / 0 RB offset
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM	1 RB / 0 RB offset
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM	1 RB / 0 RB offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM	1 RB / 0 RB offset
<b>B</b>	FREQUENCY STABILITY	23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM	50 RB / 0 RB offset
<b>A</b>	OCCUPIED BANDWIDTH	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM	6 RB / 0 RB offset
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM	15 RB / 0 RB offset
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM	25 RB / 0 RB offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM	50 RB / 0 RB offset
<b>A</b>	PEAK TO AVERAGE RATIO	23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM	1 RB / 0 RB offset 50 RB / 0 RB offset
<b>A</b>	BAND EDGE	23017 to 23173	23017	1.4MHz	QPSK, 16QAM	1 RB / 0 RB offset 6 RB / 0 RB offset
			23173	1.4MHz	QPSK, 16QAM	1 RB / 5 RB offset 6 RB / 0 RB offset
		23025 to 23165	23025	3MHz	QPSK, 16QAM	1 RB / 0 RB offset 15 RB / 0 RB offset



			23165	3MHz	QPSK, 16QAM	1 RB / 14 RB offset
						15 RB / 0 RB offset
		23035 to 23155	23035	5MHz	QPSK, 16QAM	1 RB / 0 RB offset
						25 RB / 0 RB offset
		23155	23155	5MHz	QPSK, 16QAM	1 RB / 24 RB offset
						25 RB / 0 RB offset
		23060 to 23130	23060	10MHz	QPSK, 16QAM	1 RB / 0 RB offset
						50 RB / 0 RB offset
<b>A</b>	CONDCUDED EMISSION	23017 to 23173	23017, 23095, 23173	1.4MHz	QPSK	1 RB / 0 RB offset
		23025 to 23165	23025, 23095, 23165	3MHz	QPSK	1 RB / 0 RB offset
		23035 to 23155	23035, 23095, 23155	5MHz	QPSK	1 RB / 0 RB offset
		23060 to 23130	23060, 23095, 23130	10MHz	QPSK	1 RB / 0 RB offset
<b>A</b>	RADIATED EMISSION	23017 to 23173	23095	1.4MHz	QPSK	1 RB / 0 RB offset
		23025 to 23165	23025, 23095, 23165	3MHz	QPSK	1 RB / 0 RB offset
		23035 to 23155	23095	5MHz	QPSK	1 RB / 0 RB offset
		23060 to 23130	23095	10MHz	QPSK	1 RB / 0 RB offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE BAND 17 MODE						
EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
<b>A</b>	ERP	23755 to 23825	23755, 23790, 23825	5MHz	QPSK, 16QAM	1 RB / 0 RB offset
		23780 to 23800	23780, 23790, 23800	10MHz	QPSK, 16QAM	1 RB / 0 RB offset

**Note:**

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. LTE Band 17 are covered by LTE Band 12, Because it is a subset of LTE Band 12 with the same output power and supported bandwidths, So the conducted test data and RSE test data please refer to LTE Band 12.



<b><u>TEST CONDITION</u></b>			
<b>TEST ITEM</b>	<b>ENVIRONMENTAL CONDITIONS</b>	<b>INPUT POWER</b>	<b>TESTED BY</b>
ERP	23deg. C, 70%RH	DC 3.7V By Battery	Hanwen Xu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 3.4V/ 3.7V/ 4.2V By DC Source	Hanwen Xu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	DC 3.7V By Battery	Hanwen Xu
BAND EDGE	23deg. C, 70%RH	DC 3.7V By Battery	Hanwen Xu
CONDCUDED EMISSION	23deg. C, 70%RH	DC 3.7V By Battery	Hanwen Xu
RADIATED EMISSION	23deg. C, 70%RH	AC 120V/60Hz	Hanwen Xu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	DC 3.7V By Battery	Hanwen Xu





## **2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 27**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-D**

**ANSI/TIA/EIA-603-E**

**ANSI C63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.



### 3. TEST TYPES AND RESULTS

#### 3.1 OUTPUT POWER MEASUREMENT

##### 3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1-watt EIRP.

According to the specific rule Part 27.50(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698–746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

Part 27.50(b)(10): Portable stations (hand-held devices) transmitting in the 746–757 MHz, 776–788 MHz, and 805–806 MHz bands are limited to 3 watts ERP.

##### 3.1.2 TEST PROCEDURES

###### EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_T$  = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.


###### CONDUCTED POWER MEASUREMENT:

- The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



### 3.1.3 TEST SETUP

#### CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).



### 3.1.4 TEST RESULTS

LTE Band 7						
Band/BW	Modulation	RB Size	RB offset	Low CH 20775	Mid CH 21100	High CH 21425
				Frequency 2502.5 MHz	Frequency 2535 MHz	Frequency 2567.5 MHz
7/ 5	QPSK	1	0	19.93	20.27	20.02
		1	12	21.21	21.63	21.35
		1	24	20.61	21.04	20.86
		12	0	19.14	19.54	19.10
		12	6	19.39	19.76	19.41
		12	13	19.40	19.90	19.43
		25	0	19.71	19.94	19.70
	16QAM	1	0	18.97	19.38	19.21
		1	12	20.41	20.74	20.52
		1	24	19.74	20.14	19.84
		12	0	19.13	19.64	19.36
		12	6	19.44	19.78	19.55
		12	13	19.53	19.90	19.56
		25	0	19.76	20.08	19.55
Band/BW	Modulation	RB Size	RB offset	Low CH 20800	Mid CH 21100	High CH 21400
				Frequency 2505 MHz	Frequency 2535 MHz	Frequency 2565 MHz
7/ 10	QPSK	1	0	19.92	20.21	20.13
		1	24	21.25	21.63	21.38
		1	49	20.57	20.94	20.74
		25	0	19.16	19.56	19.09
		25	12	19.33	19.90	19.45
		25	25	19.36	19.87	19.42
		50	0	19.67	19.91	19.57
	16QAM	1	0	18.96	19.51	19.32
		1	24	20.33	20.77	20.53
		1	49	19.78	20.30	19.84
		12	0	19.12	19.52	19.36
		12	18	19.54	19.92	19.57
		12	37	19.46	19.98	19.64
		27	0	19.68	19.96	19.51



LTE Band 7						
Band/BW	Modulation	RB Size	RB offset	Low CH 20825	Mid CH 21100	High CH 21375
				Frequency 2507.5 MHz	Frequency 2535 MHz	Frequency 2562.5 MHz
7/ 15	QPSK	1	0	20.11	20.14	20.01
		1	0	21.25	21.71	21.32
		1	37	20.67	20.96	20.83
		1	74	19.27	19.46	19.24
		36	0	19.30	19.94	19.47
		36	19	19.55	19.85	19.42
		36	39	19.64	19.96	19.50
	16QAM	75	0	18.99	19.47	19.39
		1	0	20.47	20.75	20.68
		1	37	19.78	20.27	19.86
		1	74	19.10	19.57	19.30
		12	0	19.42	19.85	19.65
		12	31	19.40	19.90	19.60
		12	62	19.63	19.90	19.60
Band/BW	Modulation	RB Size	RB offset	Low CH 20850	Mid CH 21100	High CH 21350
				Frequency 2510 MHz	Frequency 2535 MHz	Frequency 2560 MHz
7/ 20	QPSK	1	0	20.22	20.45	20.27
		1	50	<b>21.47</b>	<b>21.80</b>	<b>21.53</b>
		1	99	20.81	21.21	21.01
		50	0	19.41	19.74	19.35
		50	25	19.60	20.05	19.71
		50	50	<b>19.67</b>	<b>20.10</b>	<b>19.72</b>
		100	0	19.86	<b>20.19</b>	19.80
	16QAM	1	0	19.19	19.68	19.49
		1	50	20.58	21.04	20.83
		1	99	19.97	20.44	20.15
		12	0	19.37	19.74	19.53
		12	43	19.64	20.05	19.75
		12	87	19.66	20.10	19.87
		27	0	19.88	20.19	19.79



LTE Band 12						
Band/BW	Modulation	RB Size	RB offset	Low CH 23017	Mid CH 23095	High CH 23173
				Frequency 699.7 MHz	Frequency 707.5 MHz	Frequency 715.3 MHz
12/ 1.4	QPSK	1	0	20.60	20.92	21.01
		1	2	21.74	21.99	21.84
		1	5	20.58	20.92	20.61
		3	0	20.75	21.01	20.91
		3	1	21.53	21.78	21.52
		3	3	20.45	20.71	20.81
		6	0	20.68	20.87	20.99
	16QAM	1	0	20.15	20.23	20.29
		1	2	21.06	21.37	21.17
		1	5	19.78	20.11	20.14
		3	0	19.60	20.09	19.94
		3	1	20.69	20.89	20.79
		3	3	19.36	19.78	19.62
		6	0	19.63	19.91	19.89
		1	0	20.15	20.23	20.29
Band/BW	Modulation	RB Size	RB offset	Low CH 23025	Mid CH 23095	High CH 23165
				Frequency 700.5 MHz	Frequency 707.5 MHz	Frequency 714.5 MHz
12/ 3	QPSK	1	0	20.69	21.06	20.90
		1	7	21.75	22.03	21.86
		1	14	20.67	20.91	20.61
		8	0	20.80	21.19	20.89
		8	3	20.59	20.94	20.64
		8	7	20.49	20.85	20.78
		15	0	20.75	20.95	20.95
	16QAM	1	0	20.08	20.23	20.13
		1	7	21.20	21.26	21.21
		1	14	19.89	20.22	20.22
		8	0	19.63	20.02	19.94
		8	3	19.56	19.88	19.64
		8	7	19.33	19.62	19.63
		15	0	19.62	20.01	19.78



LTE Band 12						
Band/BW	Modulation	RB Size	RB offset	Low CH 23035	Mid CH 23095	High CH 23155
				Frequency 701.5 MHz	Frequency 707.5 MHz	Frequency 713.5 MHz
12/ 5	QPSK	1	0	20.78	20.99	21.01
		1	12	21.61	22.02	21.94
		1	24	20.69	20.89	20.71
		12	0	20.86	21.12	20.94
		12	6	20.74	21.01	20.76
		12	13	20.44	20.85	20.82
		25	0	20.58	21.06	20.87
	16QAM	1	0	20.10	20.33	20.21
		1	12	21.13	21.42	21.16
		1	24	19.84	20.22	20.09
		12	0	19.70	20.09	19.96
		12	6	19.45	19.85	19.75
		12	13	19.33	19.78	19.66
		25	0	19.75	19.87	19.71
Band/BW	Modulation	RB Size	RB offset	Low CH 23060	Mid CH 23095	High CH 23130
				Frequency 704 MHz	Frequency 707.5 MHz	Frequency 711 MHz
12/ 10	QPSK	1	0	20.78	21.10	21.06
		1	24	<b>21.81</b>	<b>22.12</b>	<b>21.99</b>
		1	49	20.70	20.92	20.71
		25	0	<b>20.91</b>	<b>21.21</b>	<b>21.02</b>
		25	12	20.78	21.03	20.84
		25	25	20.54	20.89	20.83
		50	0	20.74	21.06	<b>21.07</b>
	16QAM	1	0	20.14	20.39	20.32
		1	24	21.22	21.42	21.37
		1	49	19.94	20.29	20.24
		12	0	19.76	20.13	20.02
		12	18	19.58	19.96	19.82
		12	37	19.51	19.83	19.66
		27	0	19.77	20.00	19.88



LTE Band 17						
Band/BW	Modulation	RB Size	RB offset	Low CH 23035	Mid CH 23095	High CH 23155
				Frequency 701.5 MHz	Frequency 707.5 MHz	Frequency 713.5 MHz
17/ 5	QPSK	1	0	21.26	21.37	20.96
		1	12	22.12	22.24	22.11
		1	24	20.61	20.59	20.42
		12	0	21.15	21.07	20.82
		12	6	21.06	21.21	21.02
		12	13	21.13	21.08	20.79
		25	0	21.23	21.24	21.09
	16QAM	1	0	20.28	20.44	20.24
		1	12	21.44	21.44	21.26
		1	24	20.01	20.04	19.78
		12	0	19.87	20.12	19.73
		12	6	19.93	20.22	19.96
		12	13	20.04	20.03	19.97
		25	0	20.05	20.21	19.93
Band/BW	Modulation	RB Size	RB offset	Low CH 23060	Mid CH 23095	High CH 23130
				Frequency 704 MHz	Frequency 707.5 MHz	Frequency 711 MHz
17/ 10	QPSK	1	0	21.32	21.43	21.13
		1	24	<b>22.32</b>	<b>22.34</b>	<b>22.16</b>
		1	49	20.61	20.80	20.62
		25	0	21.17	21.16	21.00
		25	12	<b>21.22</b>	<b>21.25</b>	<b>21.07</b>
		25	25	21.12	21.22	20.99
		50	0	21.28	<b>21.32</b>	21.09
	16QAM	1	0	20.42	20.54	20.26
		1	24	21.43	21.64	21.38
		1	49	20.12	20.13	20.02
		12	0	19.95	20.16	19.91
		12	18	20.03	20.23	19.98
		12	37	20.15	20.24	20.09
		27	0	20.14	20.20	19.92





EIRP						
LTE BAND 7						
5MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20775	2502.5	21.21	1.32	22.53	179.06	2
21100	2535	21.63	1.32	22.95	197.24	2
21425	2567.5	21.35	1.32	22.67	184.93	2

5MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20775	2502.5	20.41	1.32	21.73	148.94	2
21100	2535	20.74	1.32	22.06	160.69	2
21425	2567.5	20.52	1.32	21.84	152.76	2

10MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20800	2505	21.25	1.32	22.57	180.72	2
21100	2535	21.63	1.32	22.95	197.24	2
21400	2565	21.38	1.32	22.70	186.21	2

10MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20800	2505	20.33	1.32	21.65	146.22	2
21100	2535	20.77	1.32	22.09	161.81	2
21400	2565	20.53	1.32	21.85	153.11	2

15MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20825	2507.5	21.25	1.32	22.57	180.72	2
21100	2535	21.71	1.32	23.03	200.91	2
21375	2562.5	21.32	1.32	22.64	183.65	2

15MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20825	2507.5	20.47	1.32	21.79	151.01	2
21100	2535	20.75	1.32	22.07	161.06	2
21375	2562.5	20.68	1.32	22.00	158.49	2



20MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20850	2510	21.47	1.32	22.79	190.11	2
21100	2535	21.80	1.32	23.12	205.12	2
21350	2560	21.53	1.32	22.85	192.75	2

20MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20850	2510	20.58	1.32	21.90	154.88	2
21100	2535	21.04	1.32	22.36	172.19	2
21350	2560	20.83	1.32	22.15	164.06	2



**LTE BAND 12**

**1.4MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23017	699.7	21.74	-4.92	14.67	29.31	3
23095	707.5	21.99	-4.92	14.92	31.05	3
23173	715.3	21.84	-4.92	14.77	29.99	3

**1.4MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23017	699.7	21.06	-4.92	13.99	25.06	3
23095	707.5	21.37	-4.92	14.30	26.92	3
23173	715.3	21.17	-4.92	14.10	25.70	3

**3MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23025	700.5	21.75	-4.92	14.68	29.38	3
23095	707.5	22.03	-4.92	14.96	31.33	3
23165	714.5	21.86	-4.92	14.79	30.13	3

**3MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23025	700.5	21.20	-4.92	14.13	25.88	3
23095	707.5	21.26	-4.92	14.19	26.24	3
23165	714.5	21.21	-4.92	14.14	25.94	3

**5MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23035	701.5	21.61	-4.92	14.54	28.44	3
23095	707.5	22.02	-4.92	14.95	31.26	3
23155	713.5	21.94	-4.92	14.87	30.69	3

**5MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23035	701.5	21.13	-4.92	14.06	25.47	3
23095	707.5	21.42	-4.92	14.35	27.23	3
23155	713.5	21.16	-4.92	14.09	25.64	3



10MHz QPSK						
Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23060	704	21.81	-4.92	14.74	29.79	3
23095	707.5	22.12	-4.92	15.05	31.99	3
23130	711	21.99	-4.92	14.92	31.05	3

10MHz 16QAM						
Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23060	704	21.22	-4.92	14.15	26.00	3
23095	707.5	21.42	-4.92	14.35	27.23	3
23130	711	21.37	-4.92	14.30	26.92	3

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



## LTE BAND 17

## 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23755	706.5	22.12	-4.92	15.05	31.99	3
23790	710	22.24	-4.92	15.17	32.89	3
23825	713.5	22.11	-4.92	15.04	31.92	3

## 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23755	706.5	21.44	-4.92	14.37	27.35	3
23790	710	21.44	-4.92	14.37	27.35	3
23825	713.5	21.26	-4.92	14.19	26.24	3

## 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23780	709	22.32	-4.92	15.25	33.50	3
23790	710	22.34	-4.92	15.27	33.65	3
23800	711	22.16	-4.92	15.09	32.28	3

## 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23780	709	21.43	-4.92	14.36	27.29	3
23790	710	21.64	-4.92	14.57	28.64	3
23800	711	21.38	-4.92	14.31	26.98	3

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



## 3.2 FREQUENCY STABILITY MEASUREMENT

### 3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

### 3.3.3 TEST SETUP

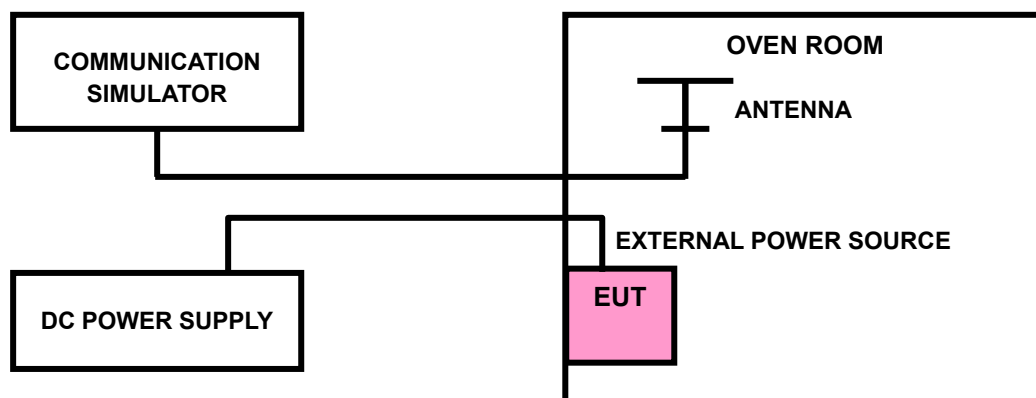



### 3.2.3 TEST RESULTS

Please Refer to Appendix of this test report.




### 3.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

#### 3.3.2 TEST SETUP

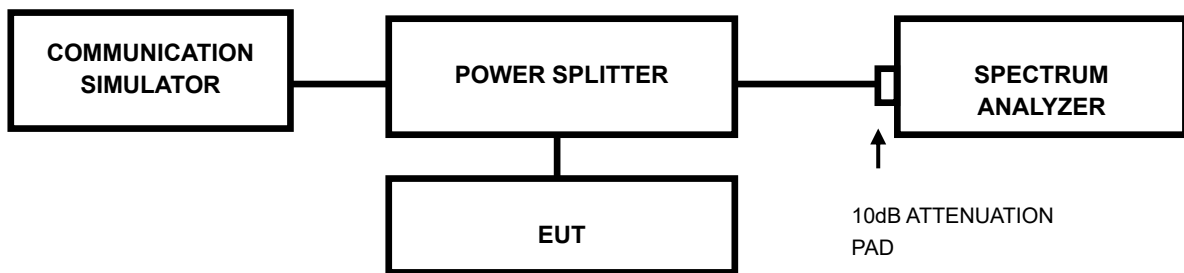

#### 3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

#### 3.3.4 TEST RESULTS

Please Refer to Appendix of this test report.





### 3.4 BAND EDGE MEASUREMENT

#### 3.4.1 LIMITS OF BAND EDGE MEASUREMENT

According to FCC 27.53(g) specified that For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

According to FCC 27.53(h) specified that For operations in the 1710-1755 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


According to FCC 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1-megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.

47 CFR 27.53(c)(2) : On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

47 CFR 27.53(f) : For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.



### 3.4.2 TEST SETUP

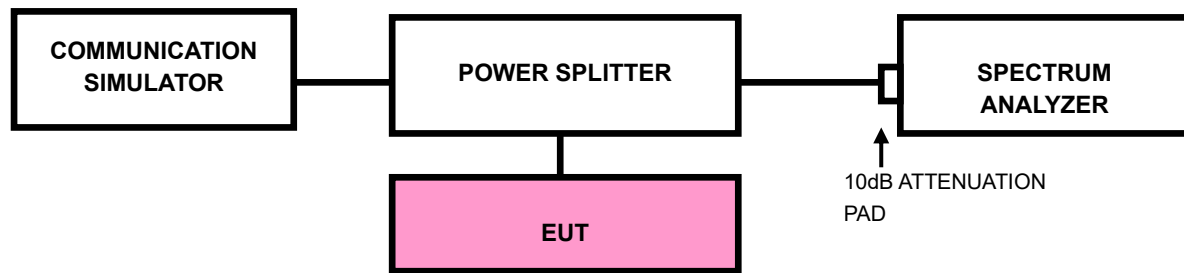



### 3.4.3 TEST PROCEDURES

- a) All measurements were done at low and high operational frequency range
- b) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- c) Tune the analyzer to the nominal center frequency of the emission bandwidth  
(EBW)
- d) .Set the resolution bandwidth (RBW)  $\geq 1\%$  EBW in the 1MHz band immediately outside and adjacent to the band edge.
- e) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- f) Set the video bandwidth (VBW) to  $\geq 3 \times$  RBW.
- g) Select the average power (RMS) display detector.
- h) Set the number of measurement points to  $\geq 1001$ .
- i) Use auto-coupled sweep time.
- j) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- k) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- l) Record the max trace plot into the test report.

### 3.4.4 TEST RESULTS

Please Refer to Appendix of this test report.



## **CONDUCTED SPURIOUS EMISSIONS**

### **3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT**

According to FCC 27.53(g) specified that For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

According to FCC 27.53(h) specified that For operations in the 1710-1755 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

According to FCC 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1-megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.

47 CFR 27.53(c)(2) : On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;


47 CFR 27.53(f) : For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.



### 3.5.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9kHz up to a frequency including its 10<sup>th</sup> harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

### 3.5.3 TEST SETUP

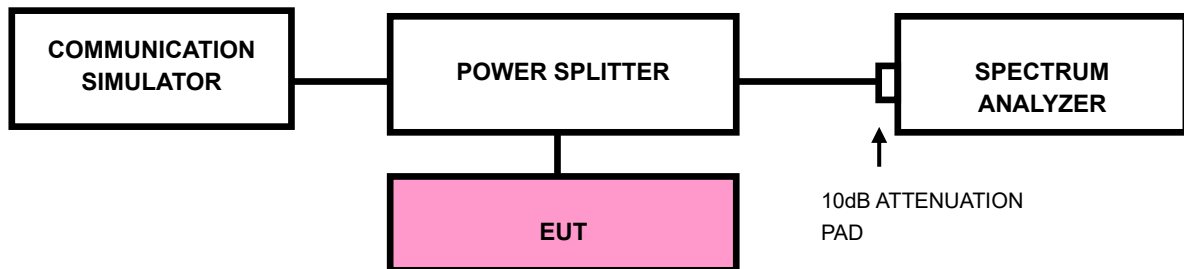

### 3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix of this test report.



### 3.6 RADIATED EMISSION MEASUREMENT

#### 3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to FCC 27.53(g) specified that For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

According to FCC 27.53(h) specified that For operations in the 1710-1755 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

According to FCC 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1-megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.

47 CFR 27.53(c)(2) : On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

47 CFR 27.53(f) : For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.



### 3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  
$$\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}.$$

**NOTE:** The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.


### 3.6.3 DEVIATION FROM TEST STANDARD

No deviation




### 3.6.4 TEST SETUP


#### < Frequency Range below 30MHz >

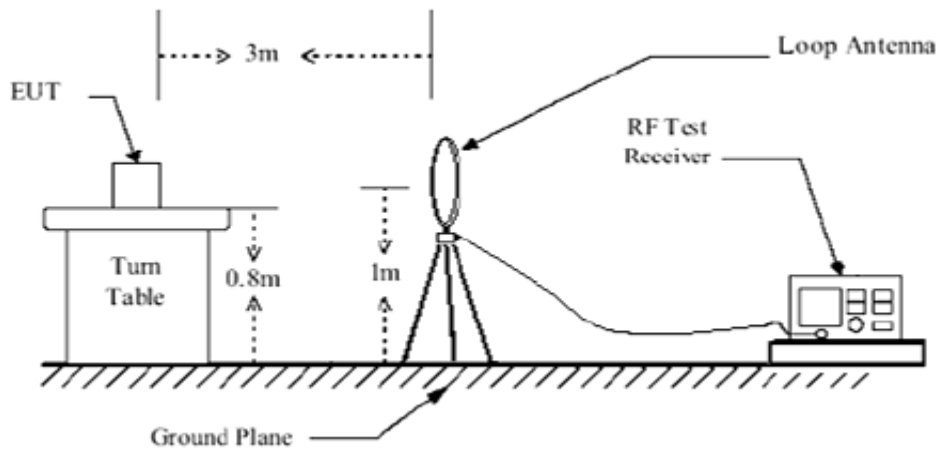

#### < Frequency Range 30MHz~1GHz >

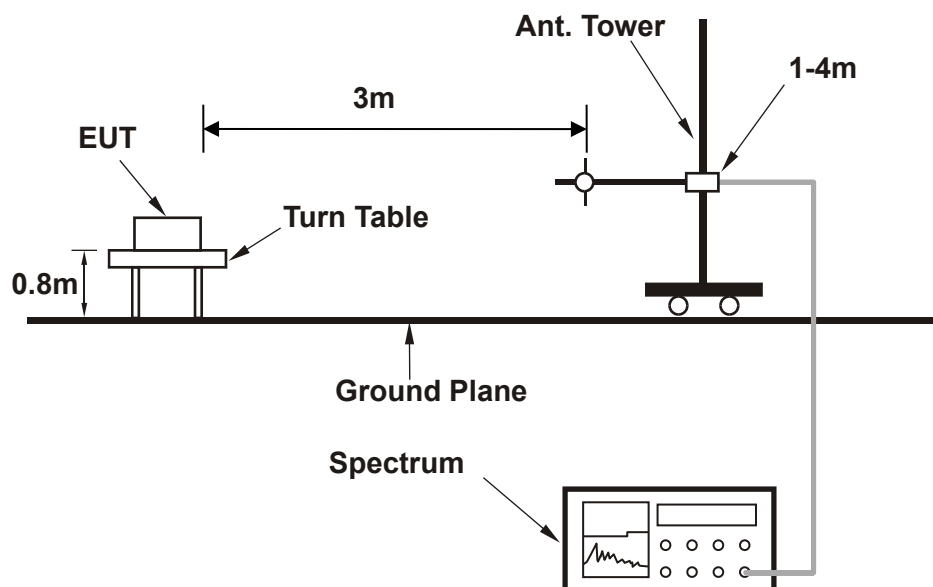



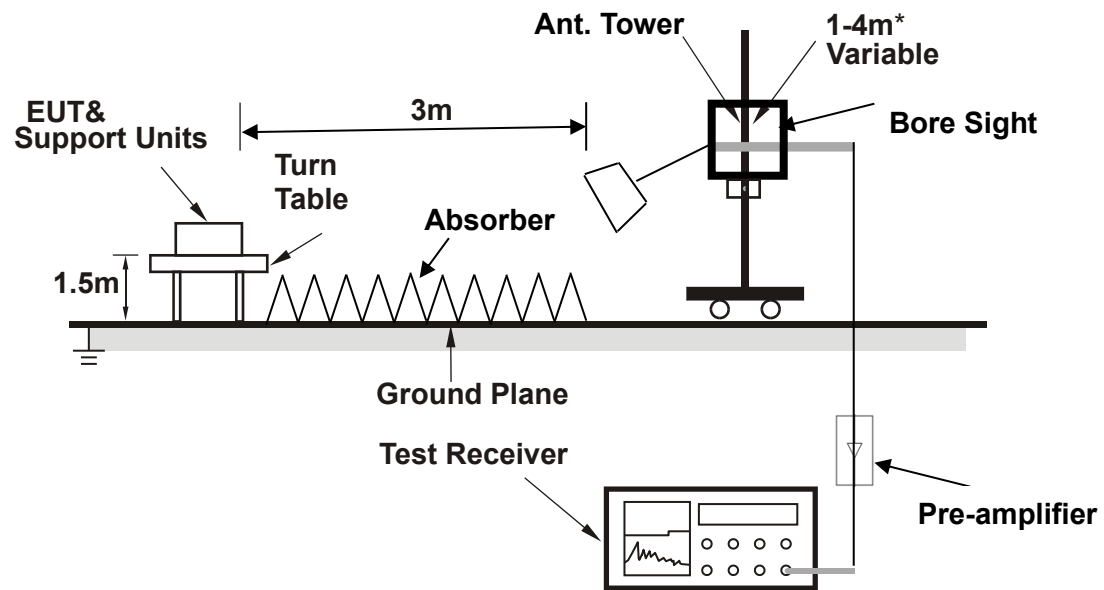

**Note:** Above 1G is a directional antenna depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.


For the actual test configuration, please refer to the attached file (Test Setup Photo).



### 3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

#### BELOW 1GHz WORST-CASE DATA

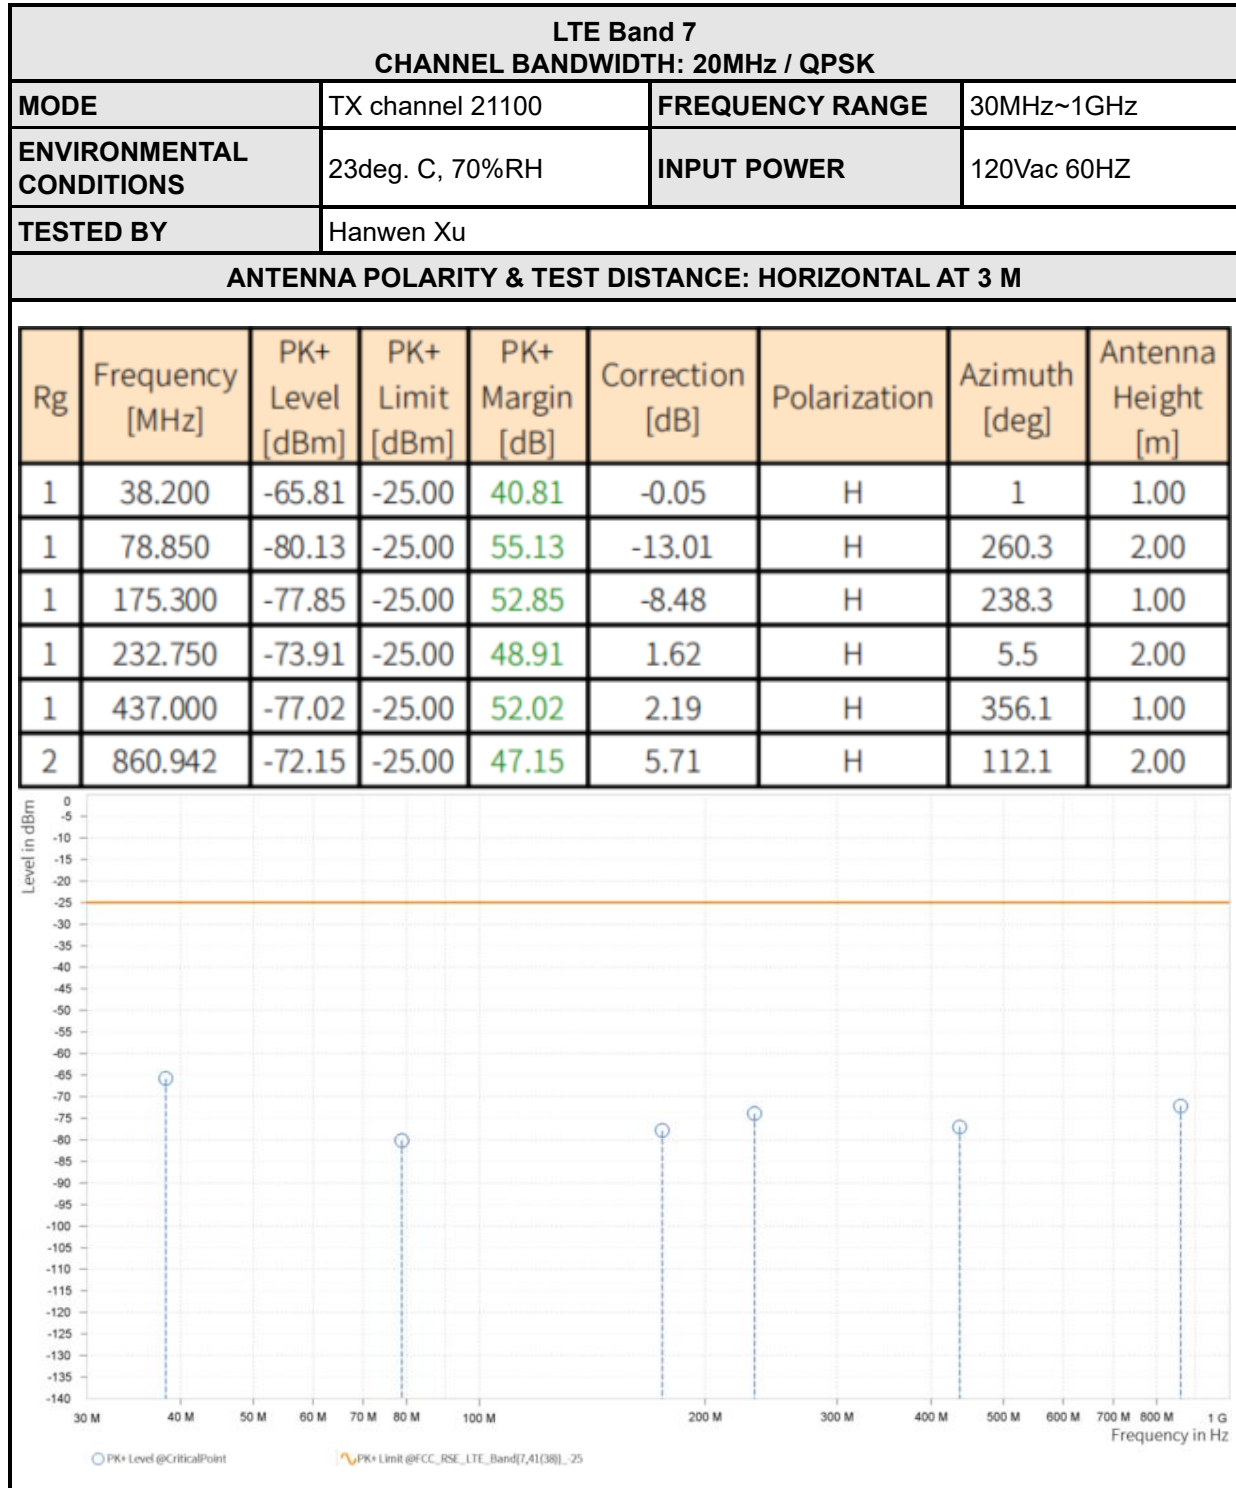




MODE	TX channel 21100	FREQUENCY RANGE	30MHz~1GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	120Vac 60HZ
TESTED BY	Hanwen Xu		

## ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	38.100	-75.72	-25.00	50.72	-8.27	V	97.3	1.00
1	58.600	-72.89	-25.00	47.89	-3.51	V	359.1	1.00
1	100.000	-62.89	-25.00	37.89	4.52	V	1	1.00
1	179.150	-81.95	-25.00	56.95	-9.73	V	298.2	1.00
1	351.750	-77.39	-25.00	52.39	-0.17	V	353.4	1.00
2	592.129	-76.69	-25.00	51.69	0.56	V	247.2	2.00

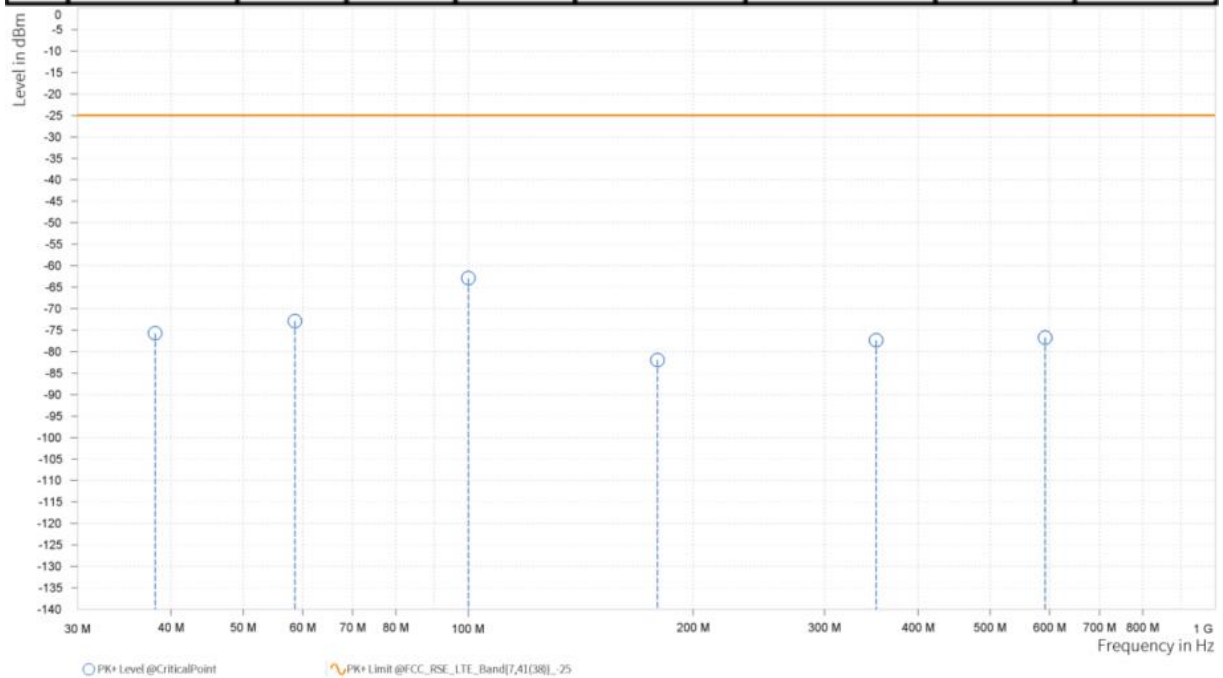



**ABOVE 1GHz**


**Note:** For higher frequency, the emission is too low to be detected

**LTE Band 7**

<b>CHANNEL BANDWIDTH</b>	5MHz / QPSK	<b>MODE</b>	TX channel 21100
<b>FREQUENCY RANGE</b>	Above 1000MHz	<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH
<b>INPUT POWER</b>	120Vac 60HZ	<b>TESTED BY</b>	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,065.500	-34.11	-25.00	9.11	23.81	H	76.3	2.00
5	7,598.000	-47.70	-25.00	22.70	27.56	H	0.9	2.00

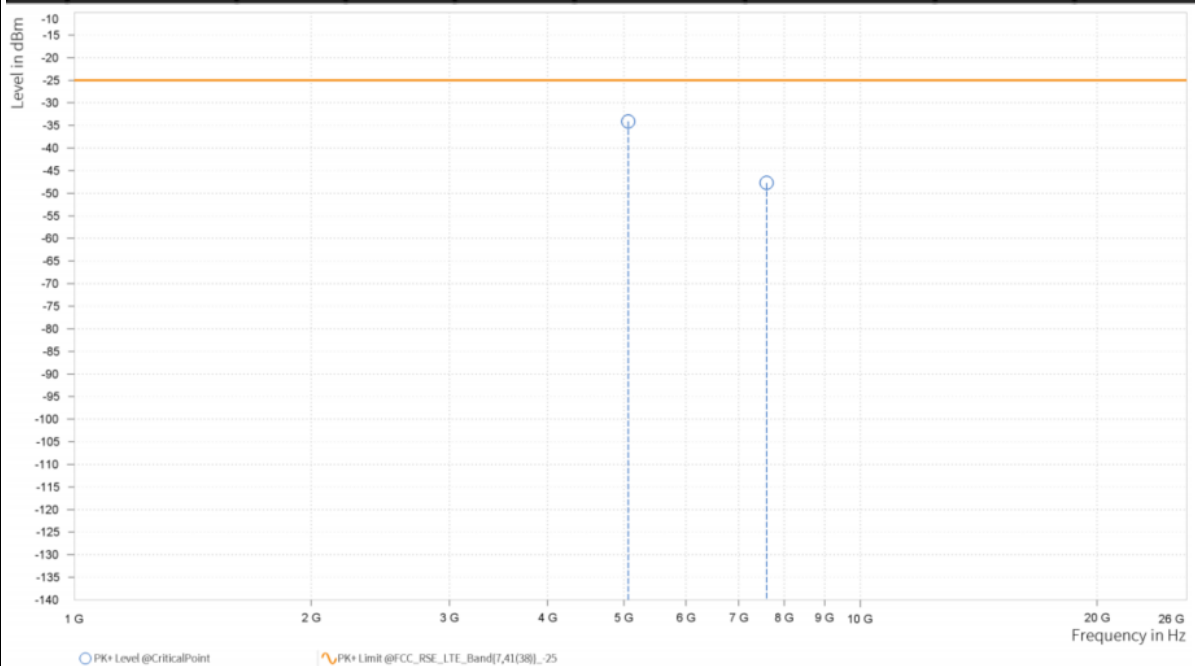




CHANNEL BANDWIDTH	5MHz / QPSK	MODE	TX channel 21100
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,065.500	-33.22	-25.00	8.22	24.26	V	93.3	1.00
5	7,598.500	-45.31	-25.00	20.31	27.35	V	1	1.00

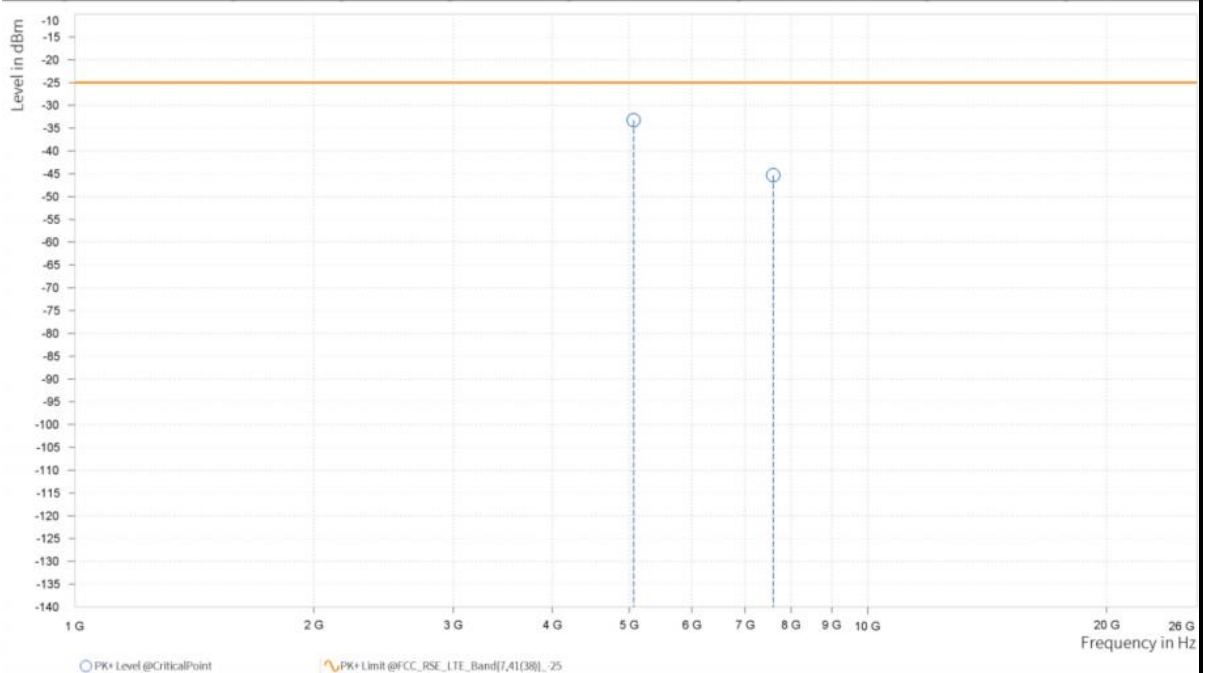




CHANNEL BANDWIDTH	10MHz / QPSK	MODE	TX channel 21100
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,061.500	-38.65	-25.00	13.65	23.86	H	280.8	1.00
5	7,591.000	-46.57	-25.00	21.57	27.52	H	359	2.00

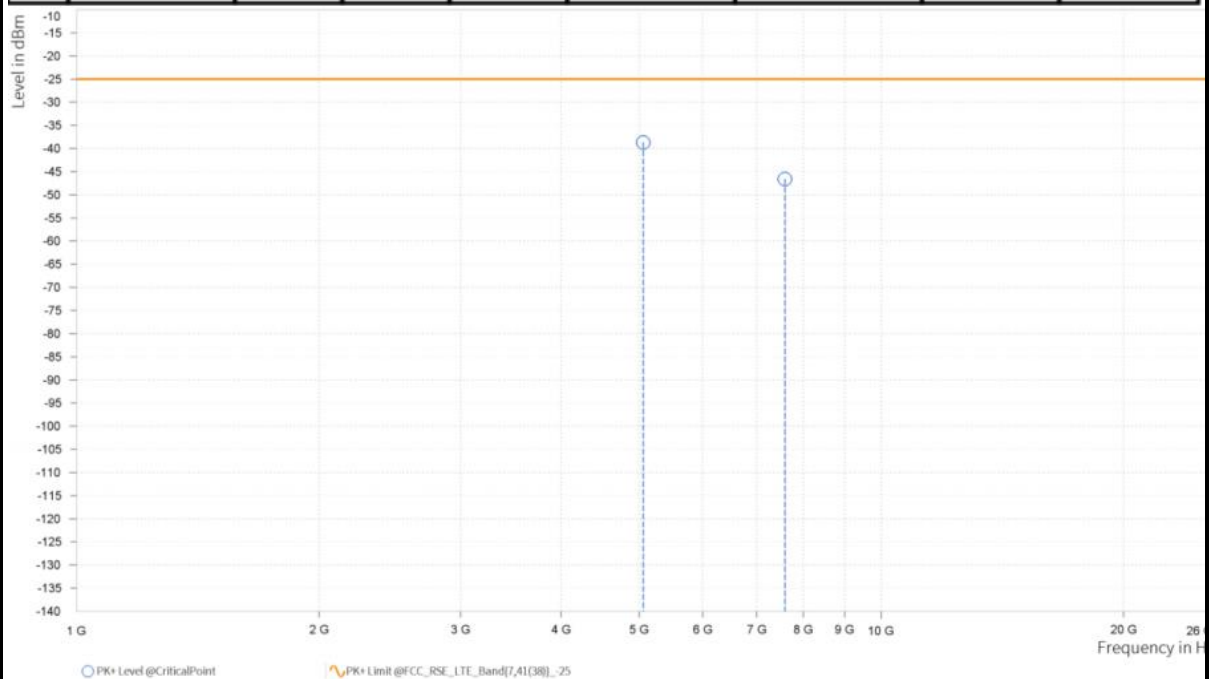




CHANNEL BANDWIDTH	10MHz / QPSK	MODE	TX channel 21100
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,061.500	-31.64	-25.00	6.64	24.30	V	77.8	2.00
5	7,591.500	-46.21	-25.00	21.21	27.30	V	359.1	1.00

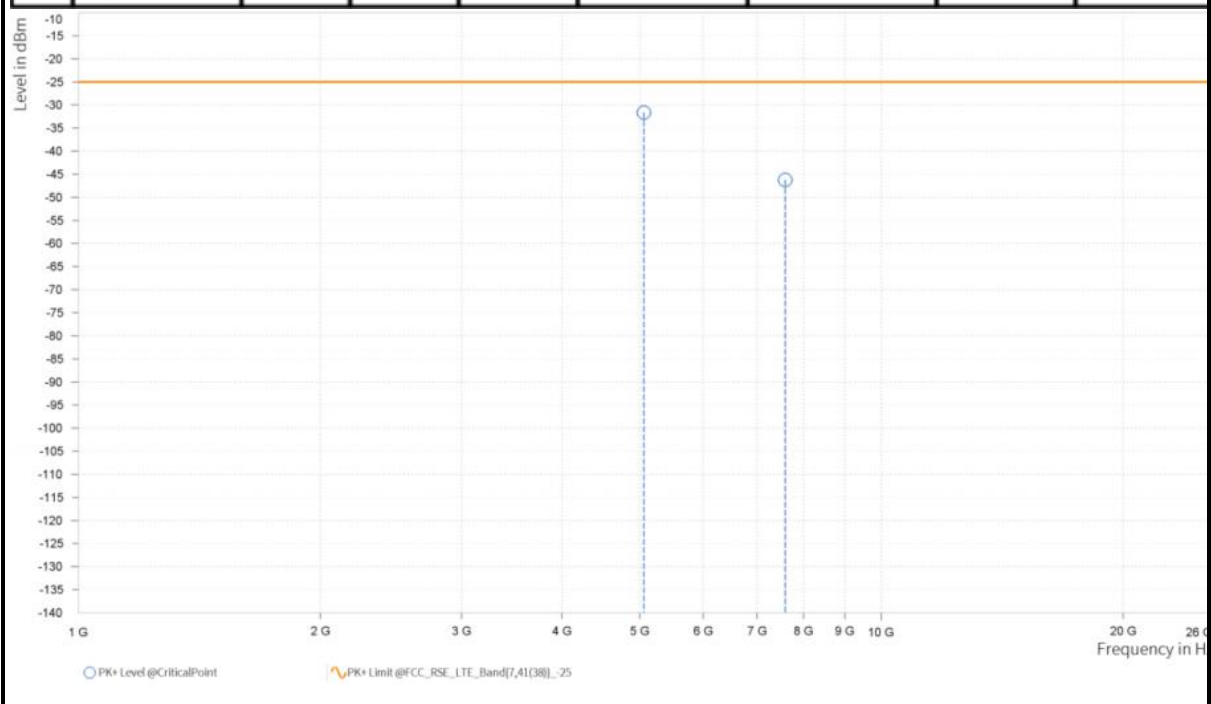




CHANNEL BANDWIDTH	15MHz / QPSK	MODE	TX channel 21100
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,056.500	-38.29	-25.00	13.29	23.92	H	1	1.00
5	7,584.000	-45.84	-25.00	20.84	27.48	H	259.6	1.00

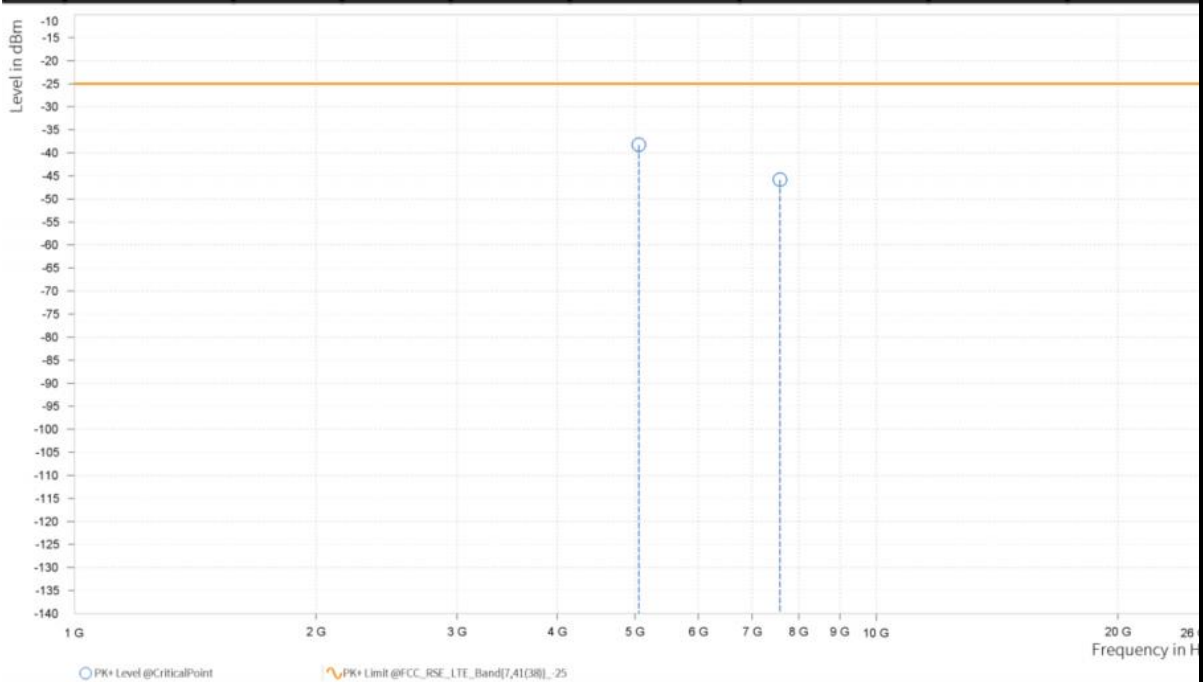






CHANNEL BANDWIDTH	15MHz / QPSK	MODE	TX channel 21100
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,057.000	-34.28	-25.00	9.28	24.34	V	73.5	2.00
5	7,584.500	-46.56	-25.00	21.56	27.26	V	1	1.00

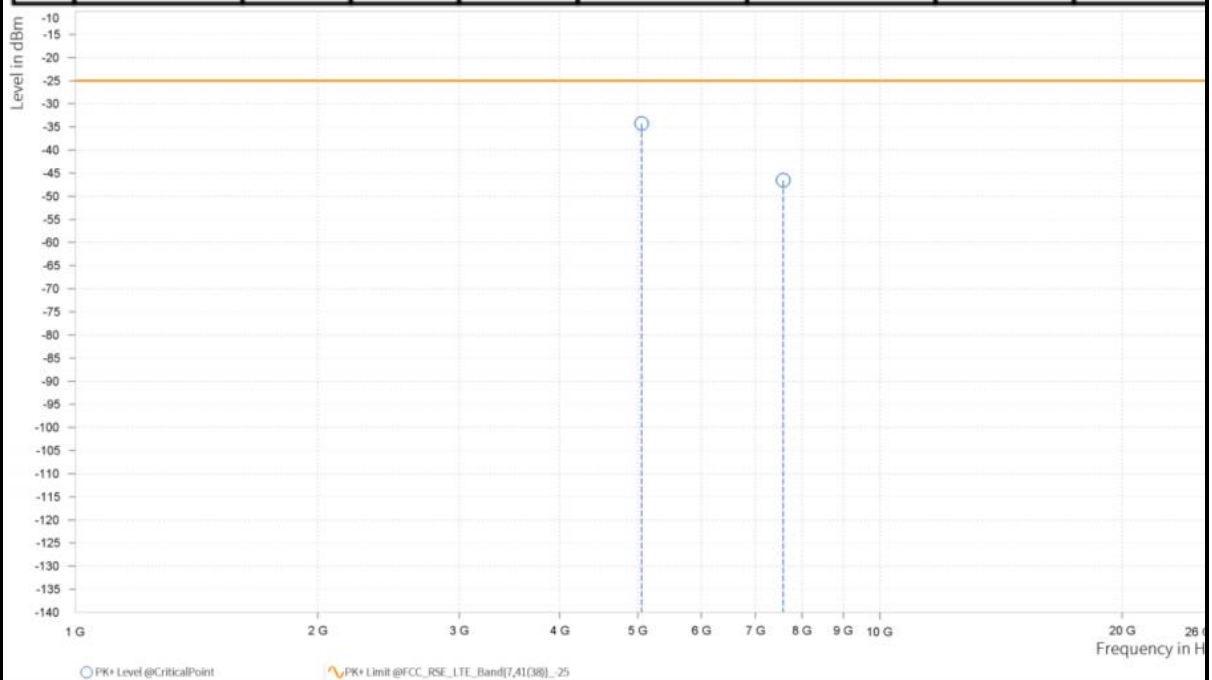




<b>CHANNEL BANDWIDTH</b>	20MHz / QPSK	<b>MODE</b>	TX channel 20850
<b>FREQUENCY RANGE</b>	Above 1000MHz	<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH
<b>INPUT POWER</b>	120Vac 60HZ	<b>TESTED BY</b>	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,002.000	-31.93	-25.00	6.93	23.66	H	285.8	1.00
5	7,503.000	-45.10	-25.00	20.10	27.41	H	293.6	1.00

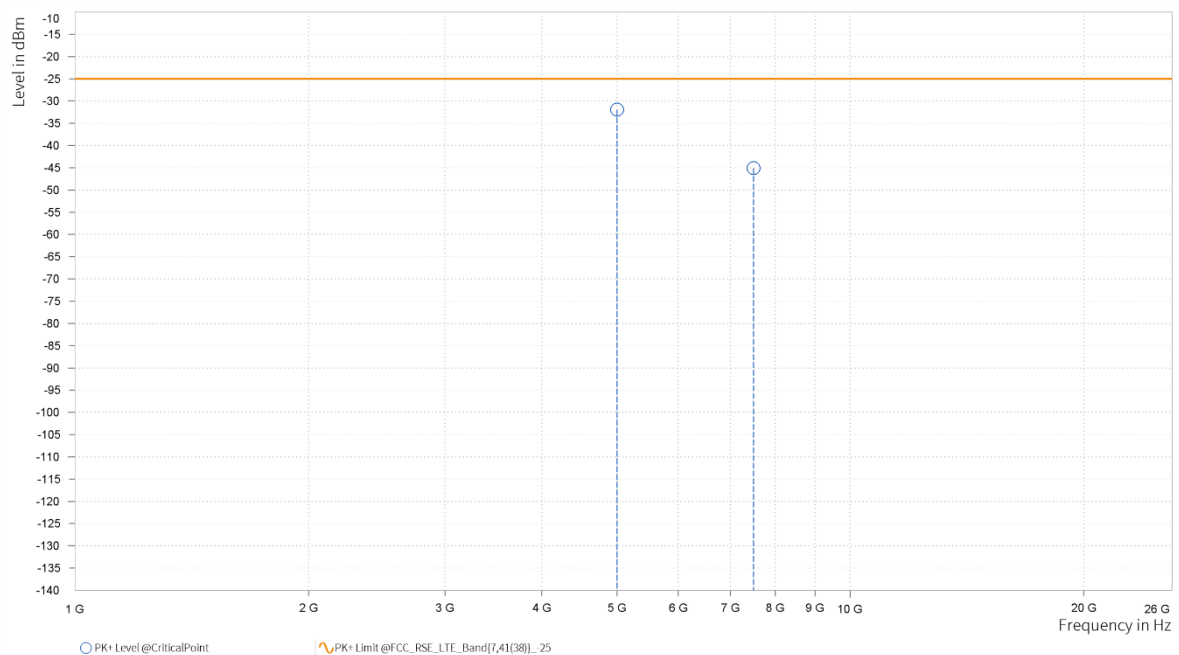




CHANNEL BANDWIDTH	20MHz / QPSK	MODE	TX channel 20850
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,002.500	-32.48	-25.00	7.48	23.89	V	94.6	1.00
5	7,503.000	-44.76	-25.00	19.76	27.39	V	236.2	2.00

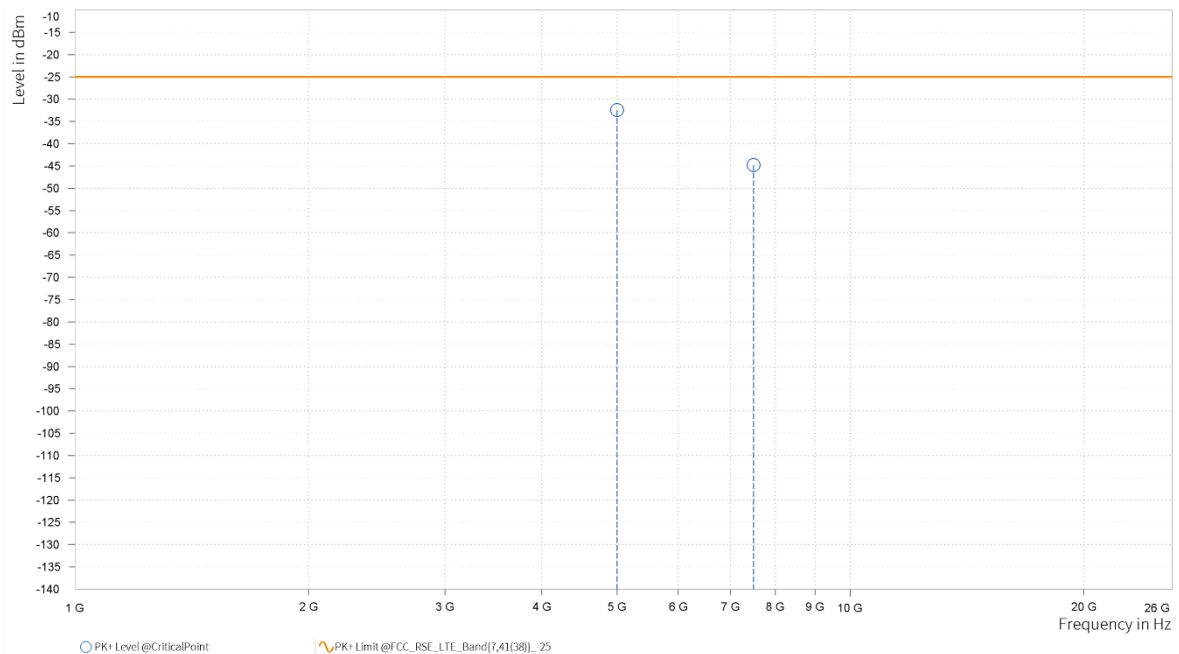




**BUREAU VERITAS** Test Report No.: PSU-QSZ2503050113RF03

CHANNEL BANDWIDTH	20MHz / QPSK	MODE	TX channel 21100
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,052.000	-33.21	-25.00	8.21	23.97	H	73.5	2.00
5	7,578.000	-45.01	-25.00	20.01	27.48	H	115.9	2.00

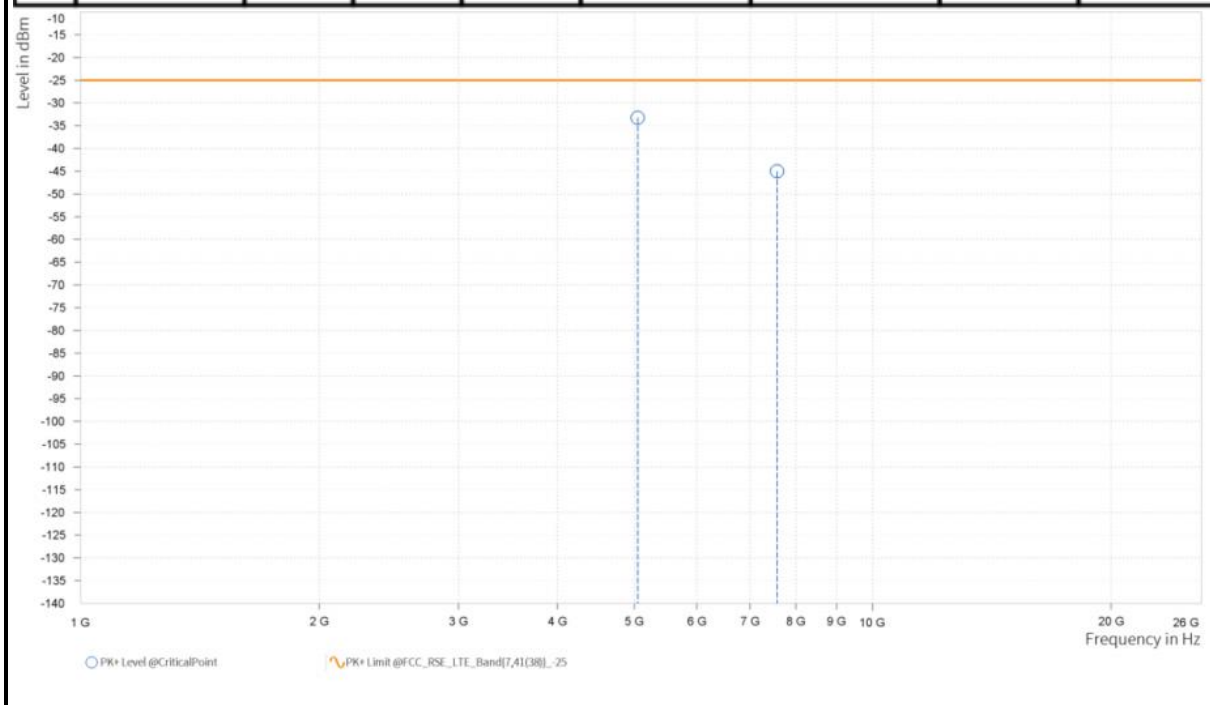




CHANNEL BANDWIDTH	20MHz / QPSK	MODE	TX channel 21100
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,052.500	-29.80	-25.00	4.80	24.38	V	93.4	1.00
5	7,578.000	-46.15	-25.00	21.15	27.27	V	190.3	1.00

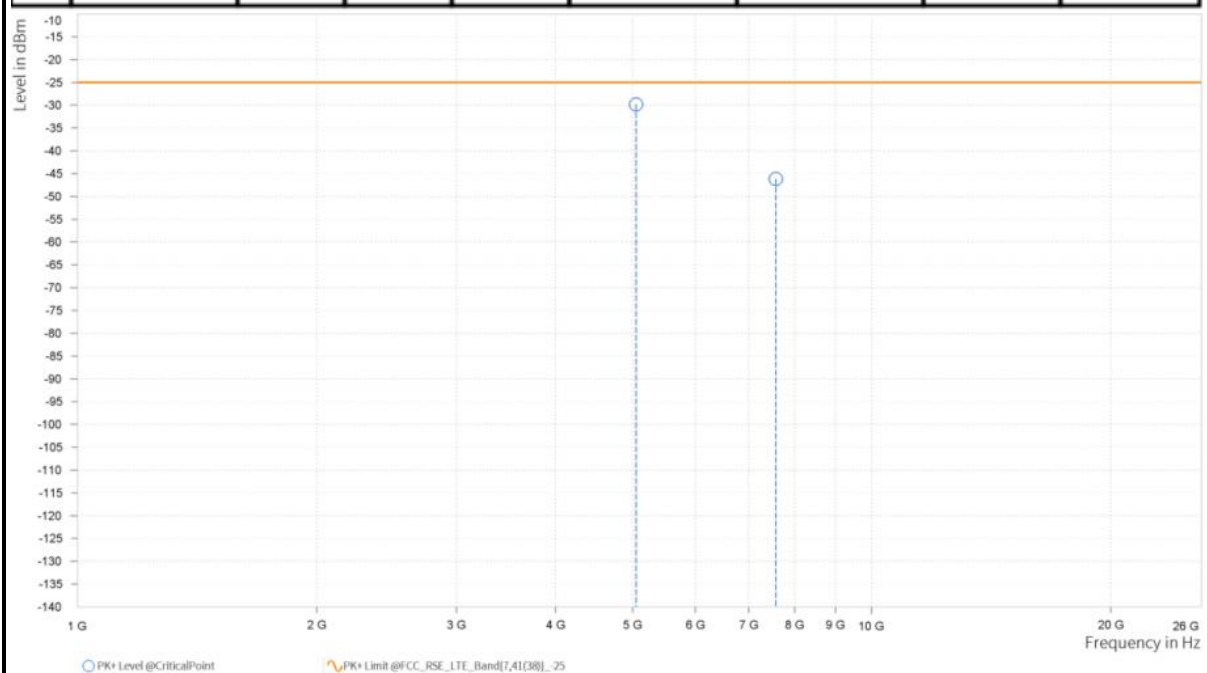




CHANNEL BANDWIDTH	20MHz / QPSK	MODE	TX channel 21350
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,102.500	-34.16	-25.00	9.16	23.43	H	287.9	1.00
5	7,653.000	-45.39	-25.00	20.39	27.89	H	194.6	1.00

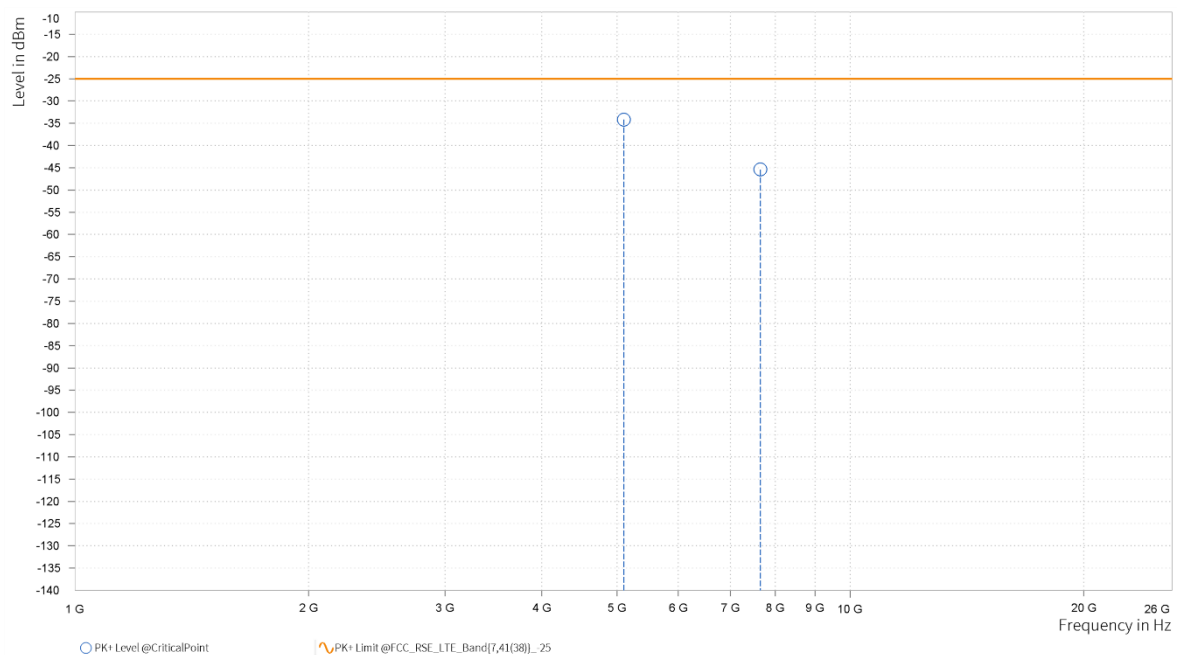





CHANNEL BANDWIDTH	20MHz / QPSK	MODE	TX channel 21350
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,102.000	-36.02	-25.00	11.02	23.96	V	99.8	1.00
5	7,653.000	-47.41	-25.00	22.41	27.73	V	266	1.00

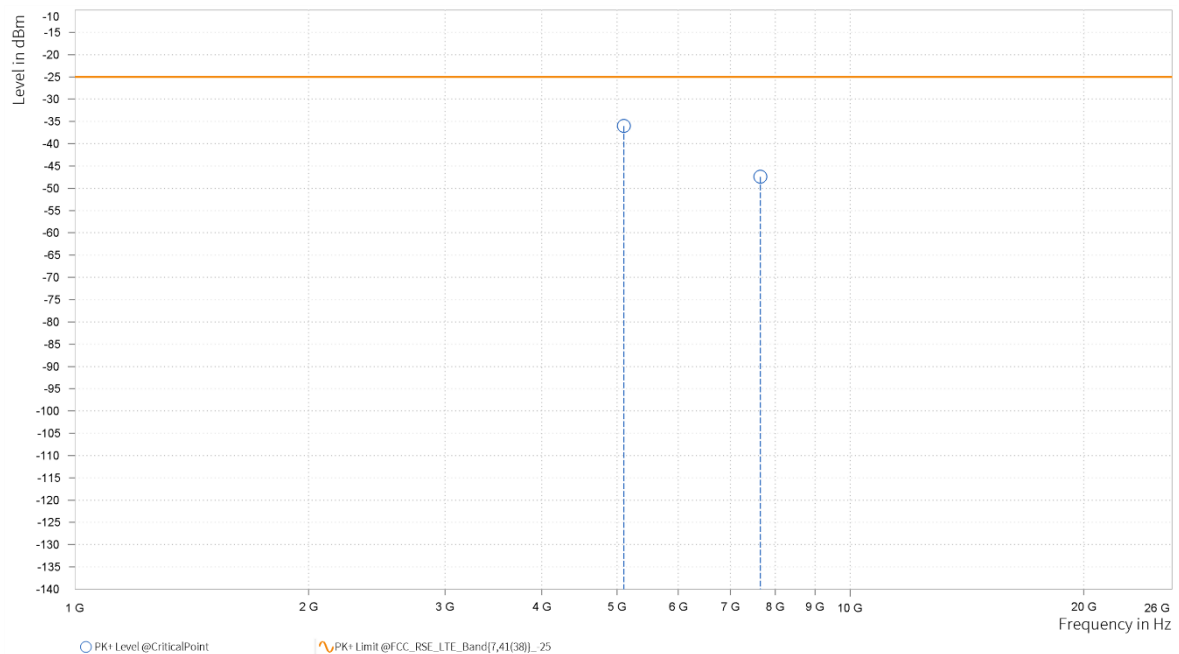

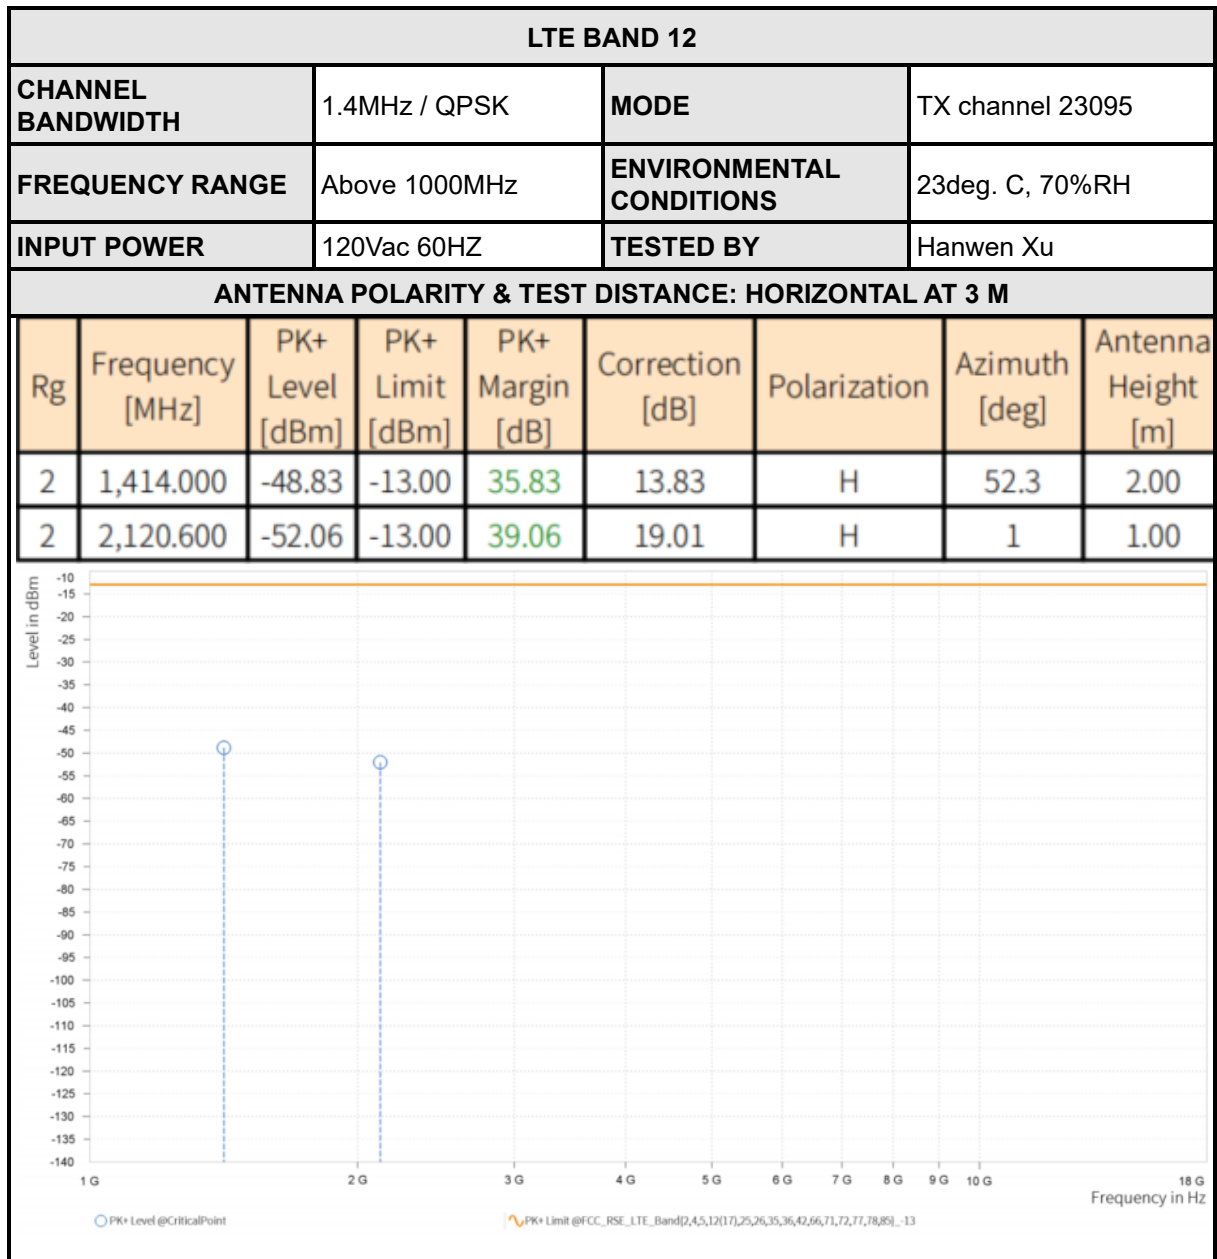






CHANNEL BANDWIDTH	1.4MHz / QPSK	MODE	TX channel 23095
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,413.700	-54.88	-13.00	41.88	13.43	V	113.8	2.00
2	2,120.600	-52.07	-13.00	39.07	19.61	V	359	2.00

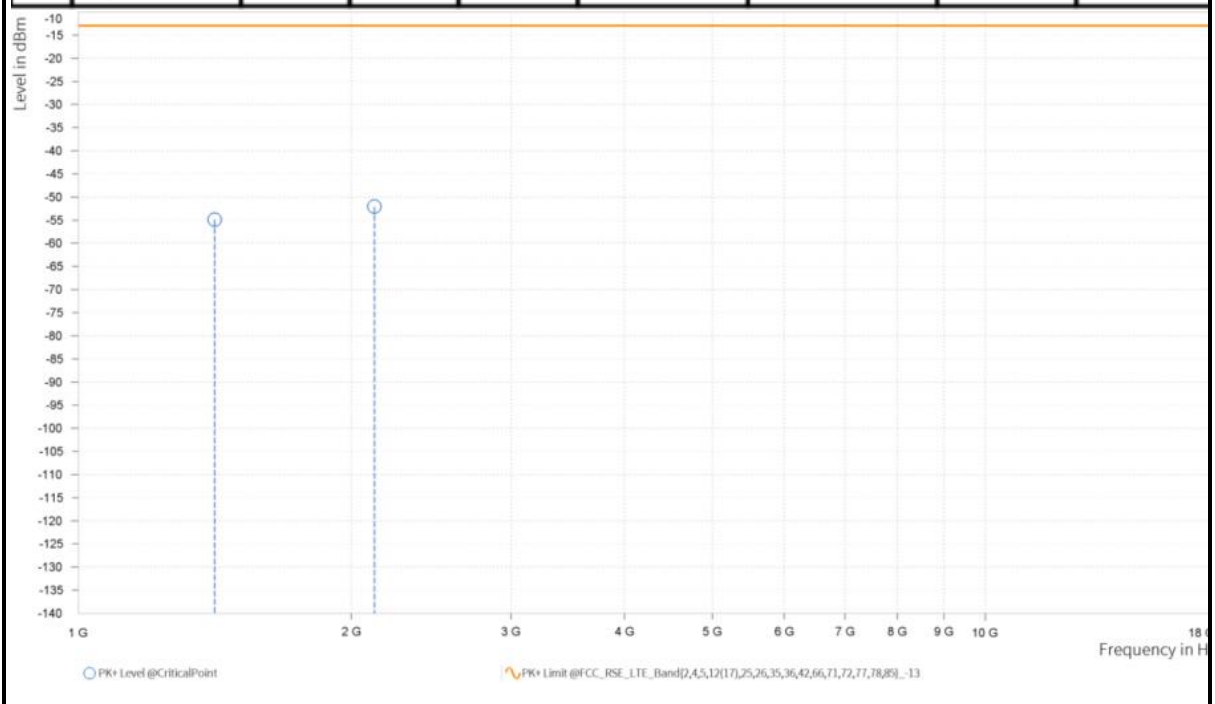




CHANNEL BANDWIDTH	3MHz / QPSK	MODE	TX channel 23025
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,390.000	-53.15	-13.00	40.15	13.08	H	176.1	2.00
2	2,097.500	-53.01	-13.00	40.01	18.45	H	358.6	1.00

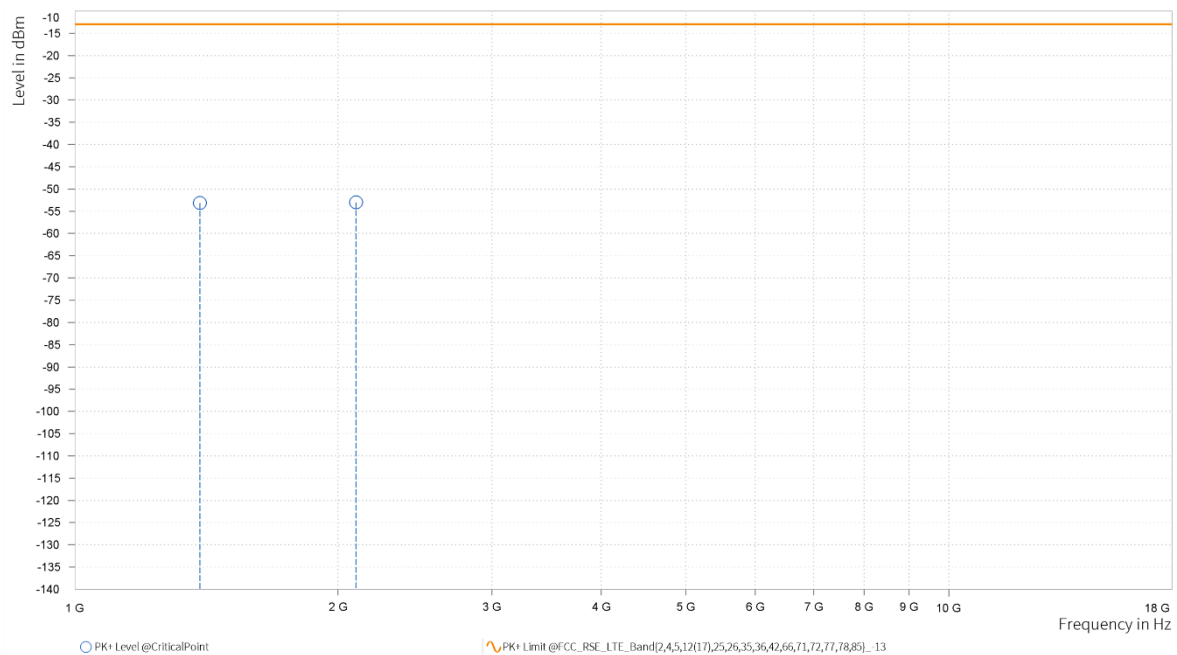




<b>CHANNEL BANDWIDTH</b>	3MHz / QPSK	<b>MODE</b>	TX channel 23025
<b>FREQUENCY RANGE</b>	Above 1000MHz	<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH
<b>INPUT POWER</b>	120Vac 60HZ	<b>TESTED BY</b>	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,398.000	-54.82	-13.00	41.82	13.67	V	310.5	1.00
2	2,097.500	-49.05	-13.00	36.05	19.48	V	111	2.00

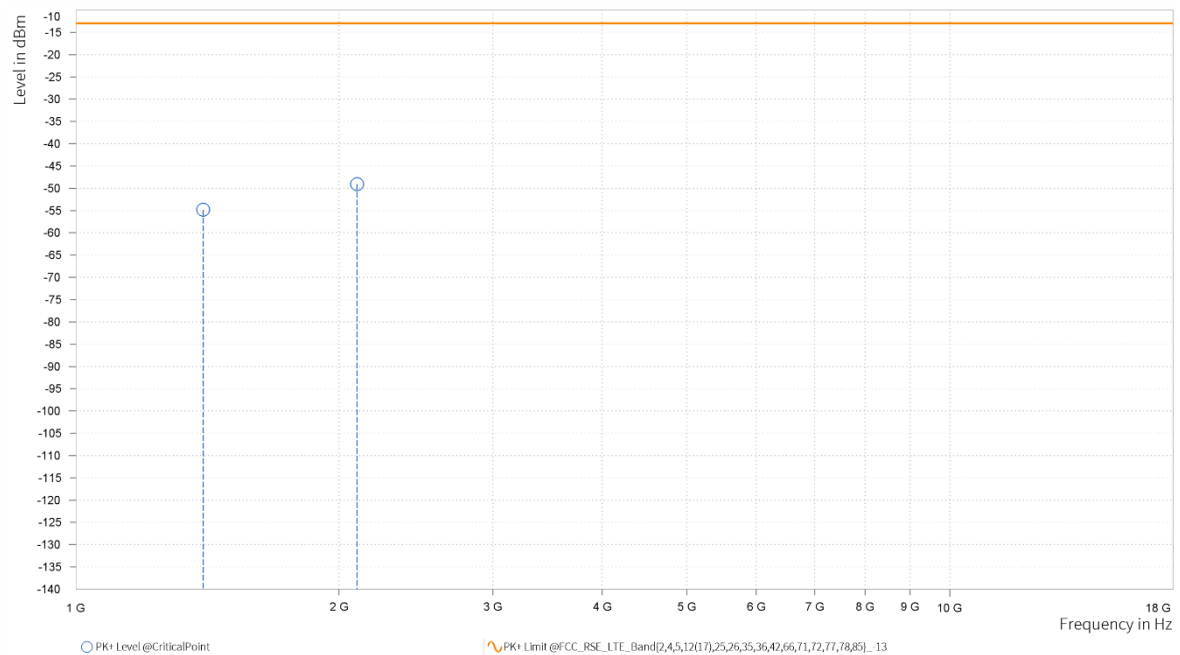




CHANNEL BANDWIDTH	3MHz / QPSK	MODE	TX channel 23095
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,412.500	-45.54	-13.00	32.54	13.78	H	113.1	2.00
2	2,118.500	-51.75	-13.00	38.75	19.01	H	113.1	2.00

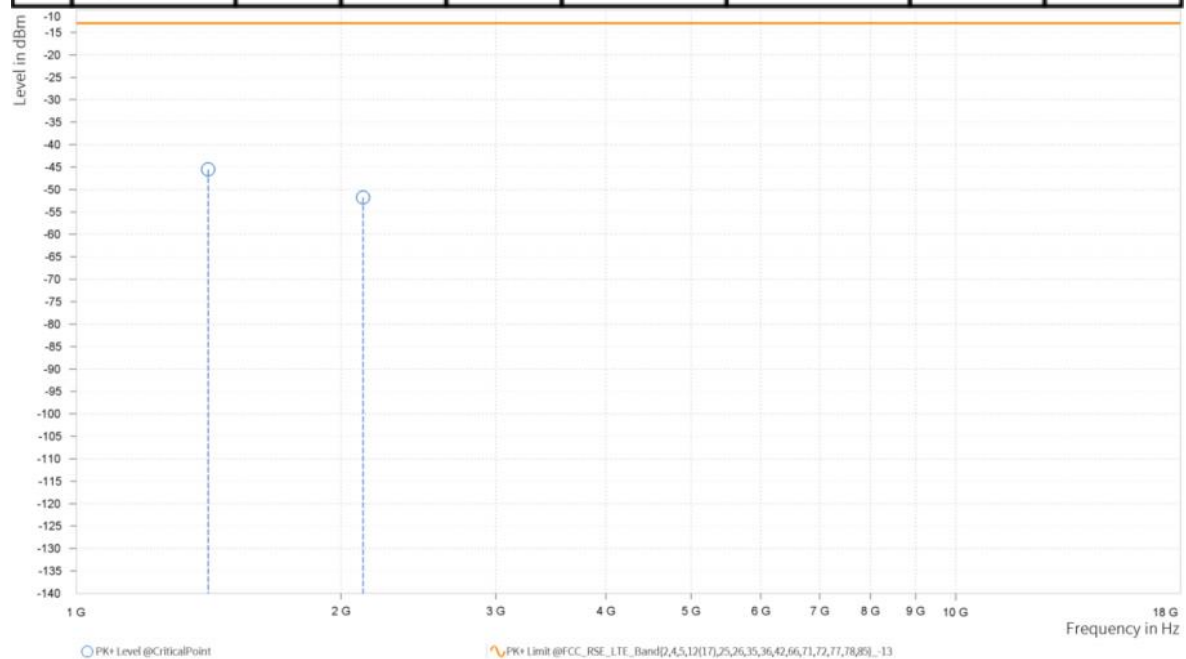




<b>CHANNEL BANDWIDTH</b>	3MHz / QPSK	<b>MODE</b>	TX channel 23095
<b>FREQUENCY RANGE</b>	Above 1000MHz	<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH
<b>INPUT POWER</b>	120Vac 60HZ	<b>TESTED BY</b>	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,412.500	-51.55	-13.00	38.55	13.46	V	182.5	1.00
2	2,118.500	-51.39	-13.00	38.39	19.62	V	48.7	2.00

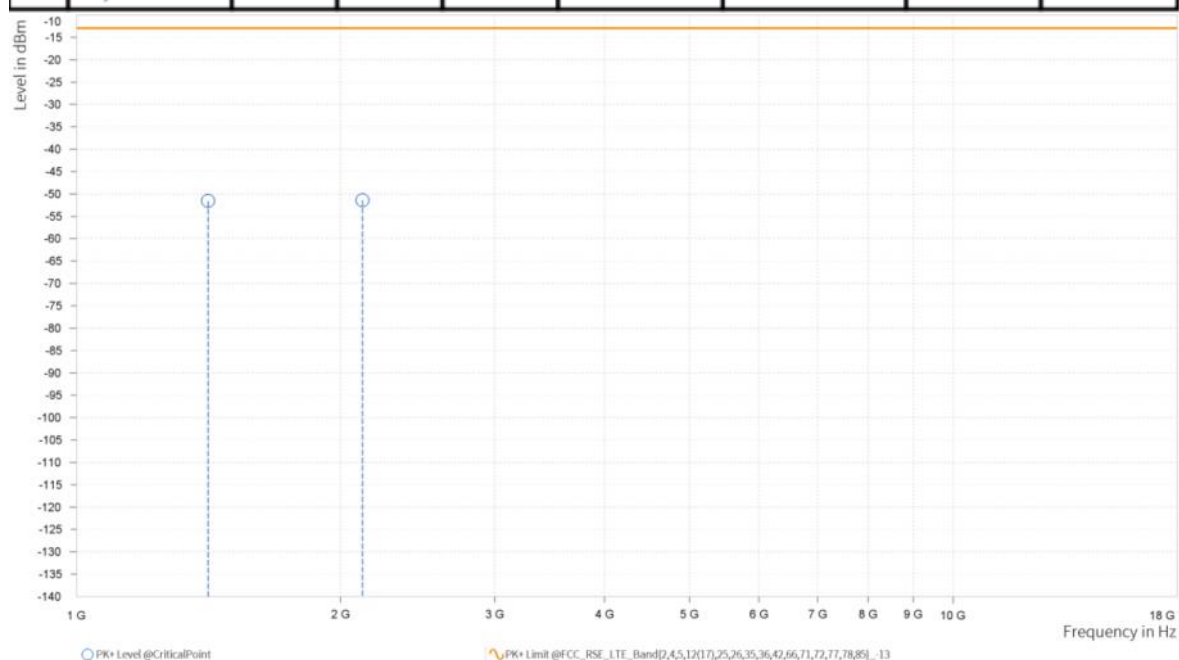




CHANNEL BANDWIDTH	3MHz / QPSK	MODE	TX channel 23165
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,426.000	-42.20	-13.00	29.20	13.78	H	109.5	2.00
2	2,139.500	-52.65	-13.00	39.65	19.38	H	314.8	1.00

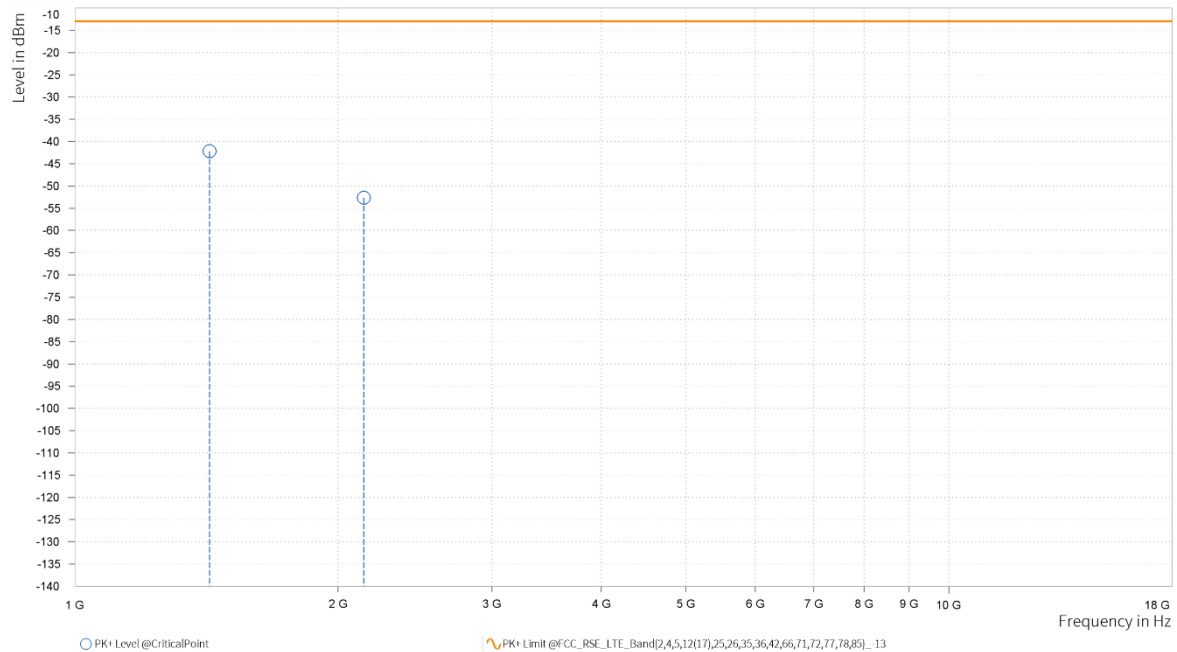




<b>CHANNEL BANDWIDTH</b>	3MHz / QPSK	<b>MODE</b>	TX channel 23165
<b>FREQUENCY RANGE</b>	Above 1000MHz	<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH
<b>INPUT POWER</b>	120Vac 60HZ	<b>TESTED BY</b>	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,426.500	-52.08	-13.00	39.08	13.24	V	34.6	1.00
2	2,139.500	-52.80	-13.00	39.80	19.24	V	34.6	1.00

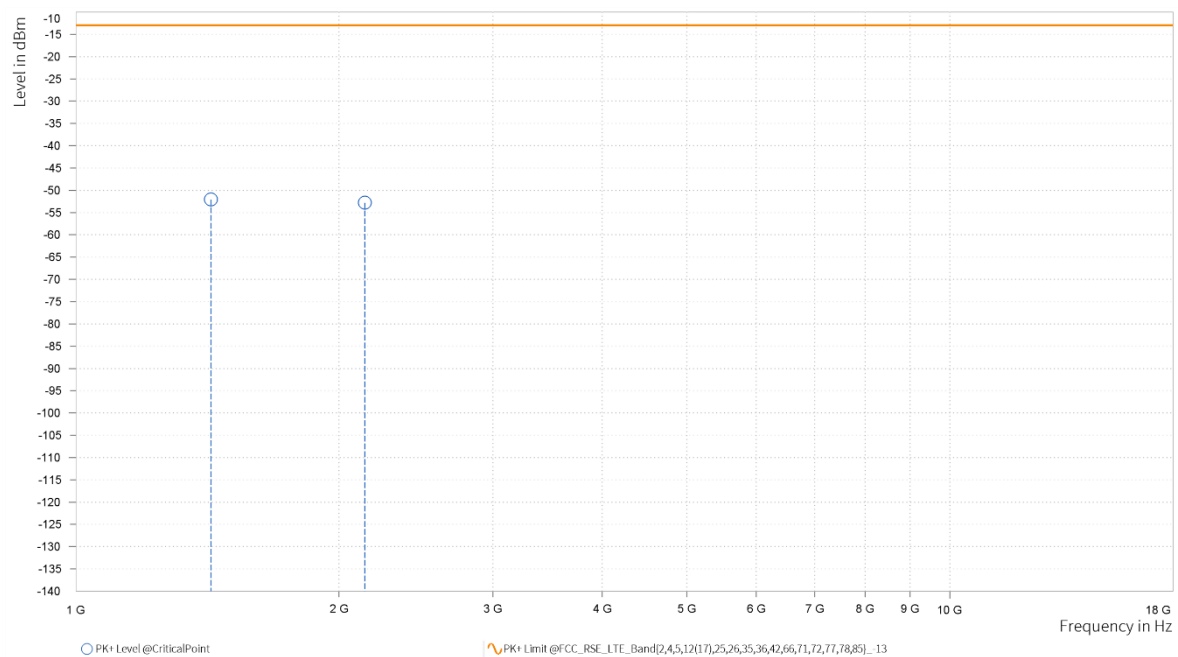




<b>CHANNEL BANDWIDTH</b>	5MHz / QPSK	<b>MODE</b>	TX channel 23095
<b>FREQUENCY RANGE</b>	Above 1000MHz	<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH
<b>INPUT POWER</b>	120Vac 60HZ	<b>TESTED BY</b>	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,410.500	-48.71	-13.00	35.71	13.71	H	113.1	2.00
2	2,115.800	-52.97	-13.00	39.97	18.99	H	312.6	1.00

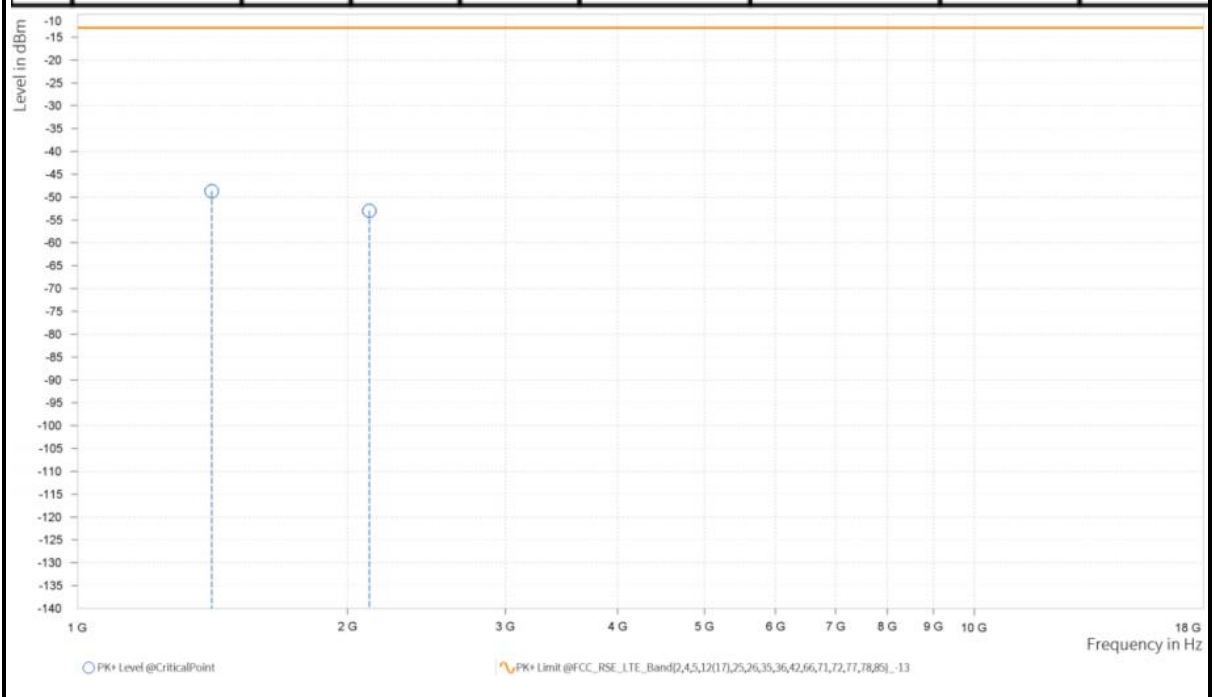






CHANNEL BANDWIDTH	5MHz / QPSK	MODE	TX channel 23095
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,411.000	-51.77	-13.00	38.77	13.51	V	183.9	1.00
2	2,115.800	-51.23	-13.00	38.23	19.63	V	358.6	1.00

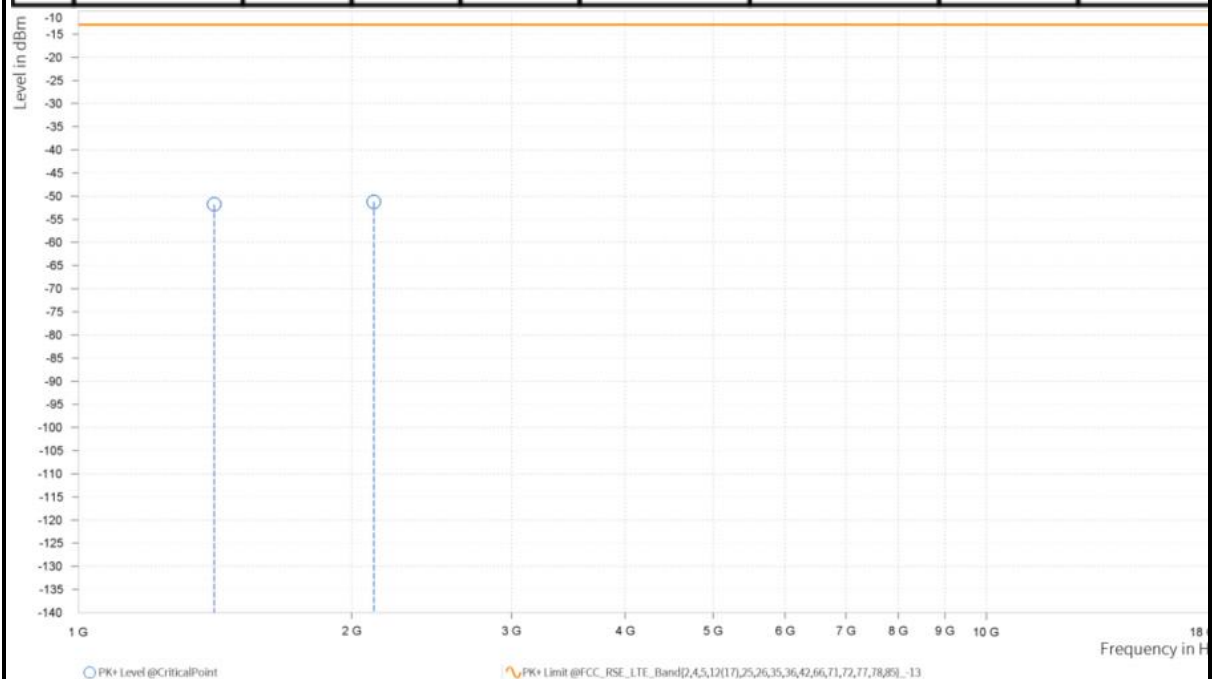




CHANNEL BANDWIDTH	10MHz / QPSK	MODE	TX channel 23095
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,406.000	-48.55	-13.00	35.55	13.52	H	359	2.00
2	2,109.000	-51.86	-13.00	38.86	18.95	H	307	1.00

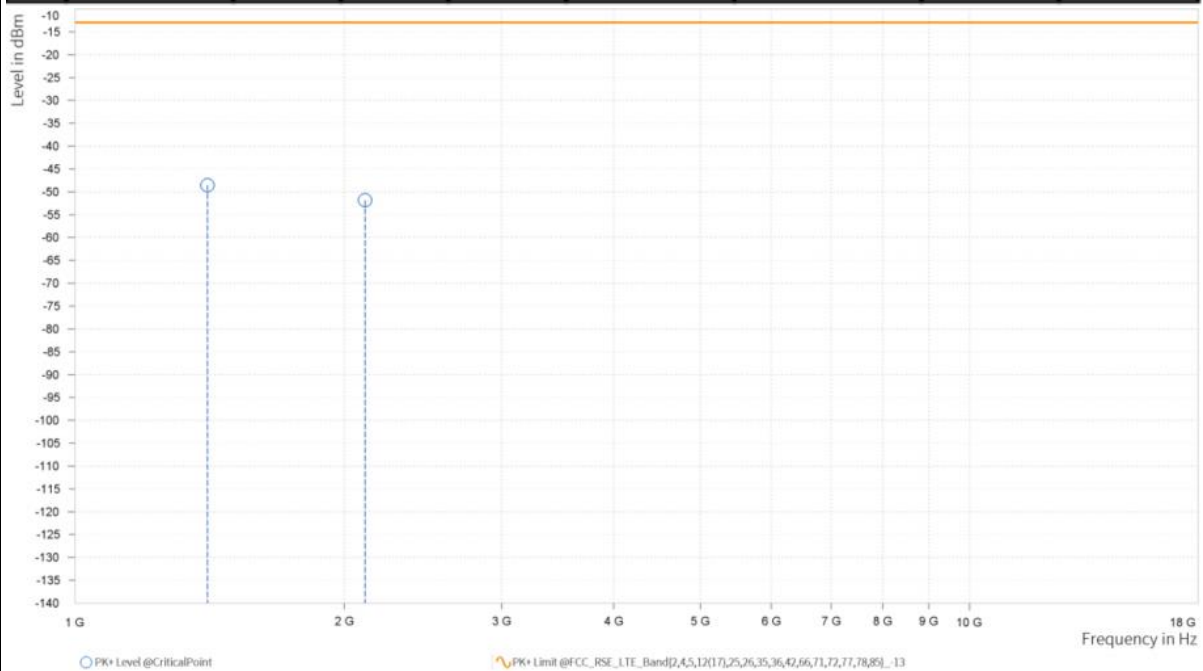




CHANNEL BANDWIDTH	10MHz / QPSK	MODE	TX channel 23095
FREQUENCY RANGE	Above 1000MHz	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Hanwen Xu

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,406.000	-54.12	-13.00	41.12	13.64	V	303.5	1.00
2	2,109.000	-51.07	-13.00	38.07	19.65	V	359	2.00

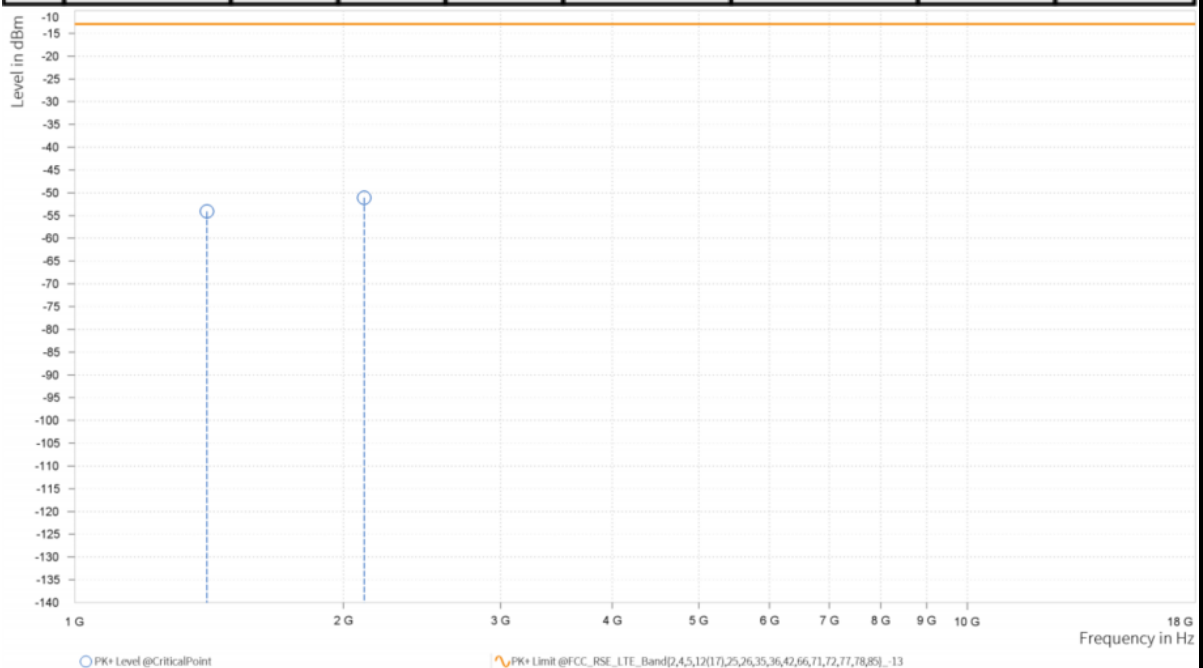




### 3.7 PEAK TO AVERAGE RATIO

#### 3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

#### 3.7.2 TEST SETUP

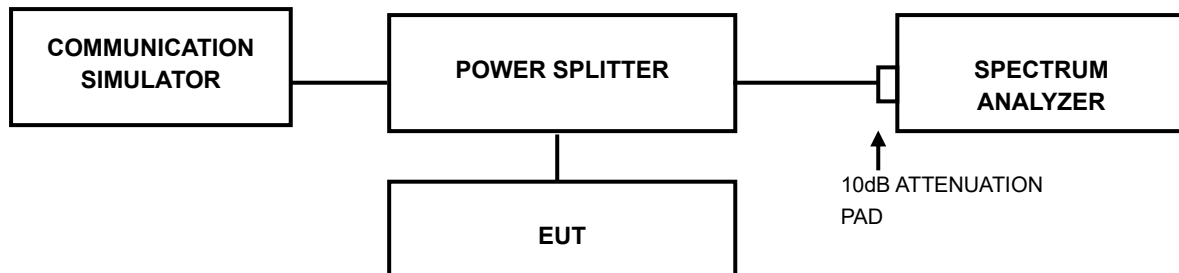

#### 3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

#### 3.7.4 TEST RESULTS

Please Refer to Appendix of this test report.



## 4 INFORMATION ON THE TESTING LABORATORIES

We, Huarui 7layers High Technology (Suzhou) Co., Ltd. ,were founded in 2020 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01

If you have any comments, please feel free to contact us at the following:

**Suzhou EMC/RF Lab:**

Tel: +86 (0557) 368 1008



## **5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.



## 6 Appendix

### LTE B7


### Peak-to-Average Ratio(CCDF)

#### Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band7	20MHz	QPSK	20850	1RB#0	5.40	13	PASS
Band7	20MHz	QPSK	20850	100RB#0	5.71	13	PASS
Band7	20MHz	QPSK	21100	1RB#0	4.99	13	PASS
Band7	20MHz	QPSK	21100	100RB#0	5.51	13	PASS
Band7	20MHz	QPSK	21350	1RB#0	5.45	13	PASS
Band7	20MHz	QPSK	21350	100RB#0	5.70	13	PASS
Band7	20MHz	16QAM	20850	1RB#0	5.88	13	PASS
Band7	20MHz	16QAM	20850	27RB#0	6.51	13	PASS
Band7	20MHz	16QAM	21100	1RB#0	5.85	13	PASS
Band7	20MHz	16QAM	21100	27RB#0	6.42	13	PASS
Band7	20MHz	16QAM	21350	1RB#0	6.02	13	PASS
Band7	20MHz	16QAM	21350	27RB#0	6.66	13	PASS




## Test Graphs

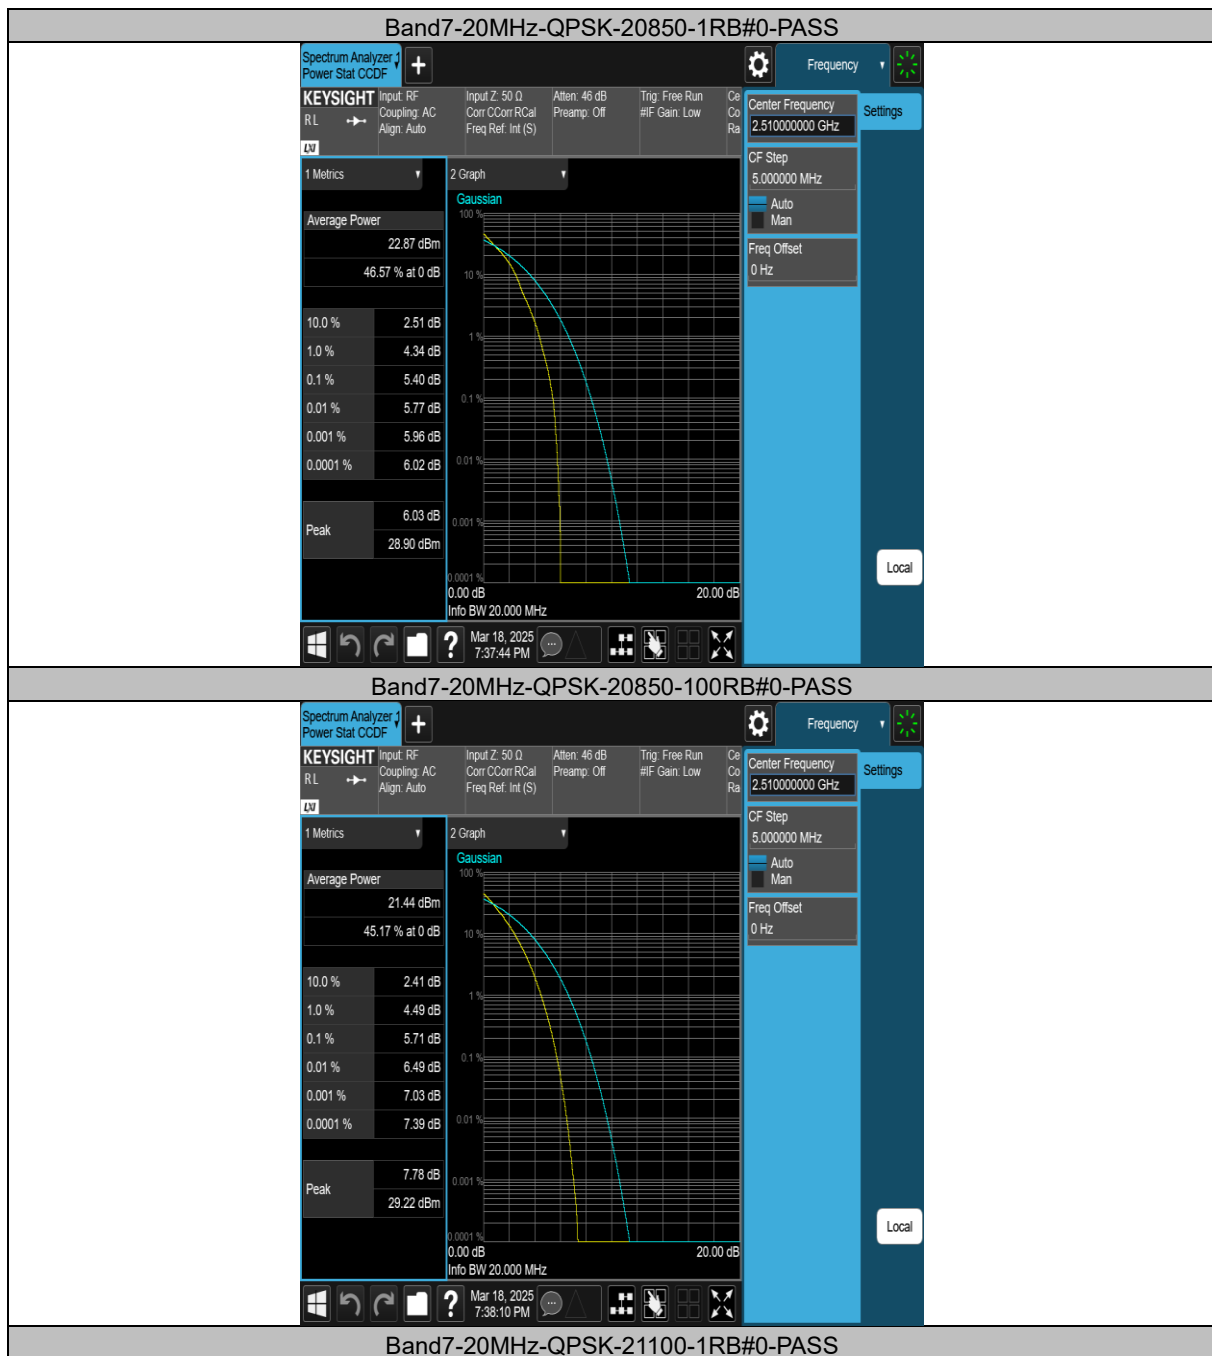






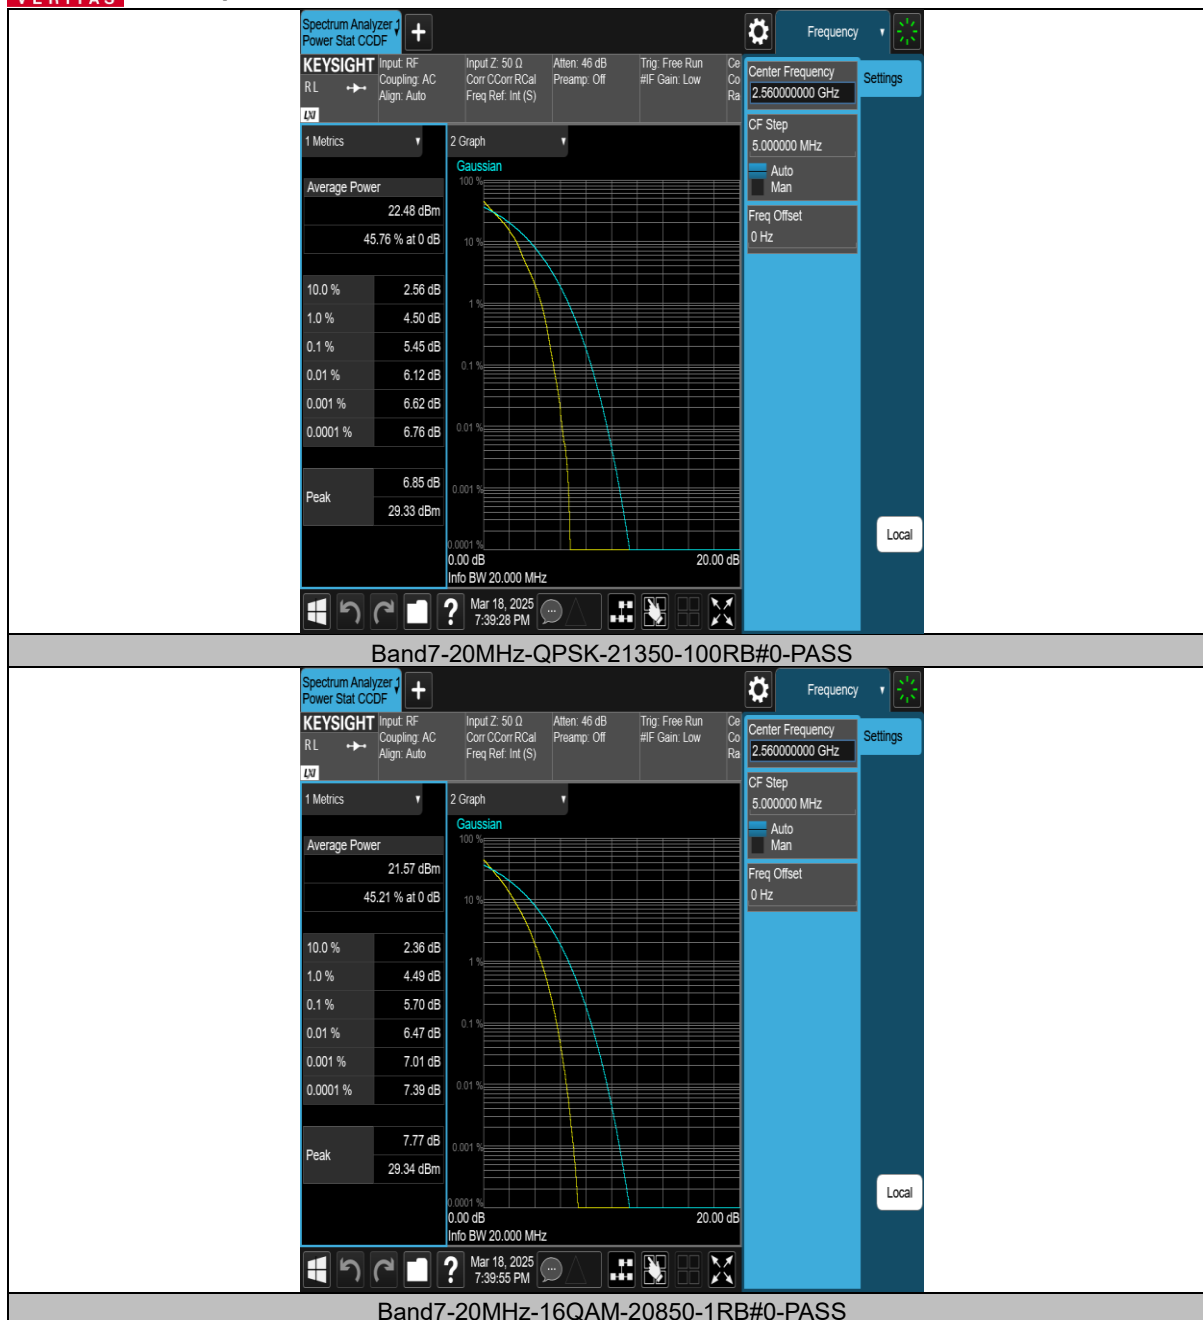





**BUREAU VERITAS** Test Report No.: PSU-QSZ2503050113RF03

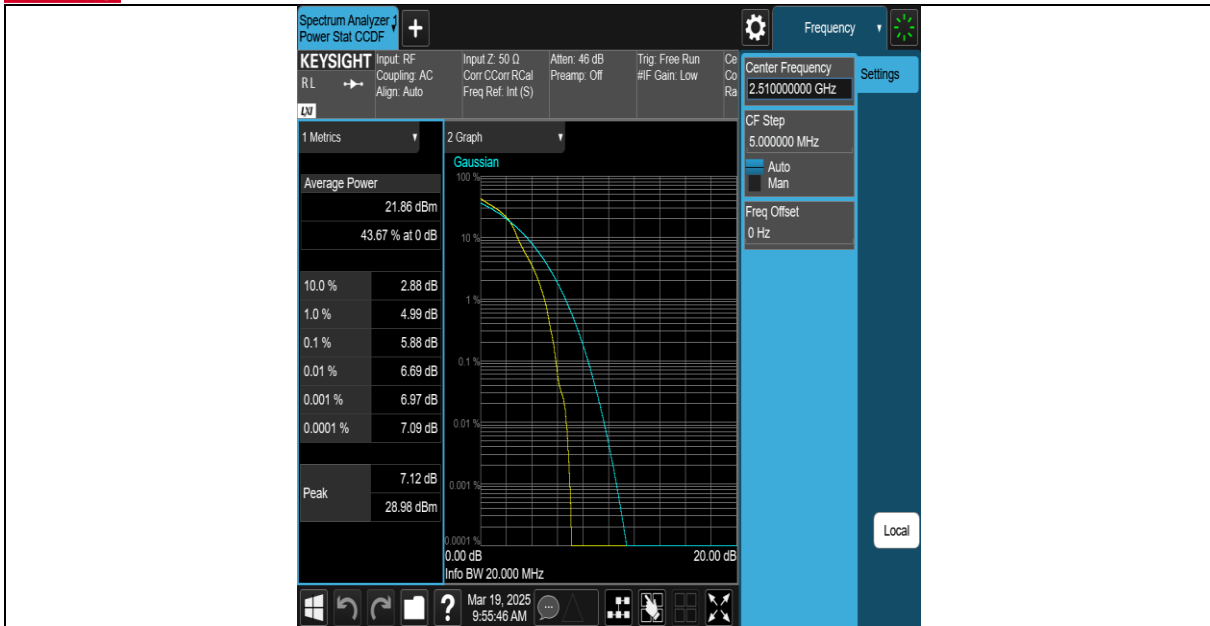


Band7-20MHz-16QAM-20850-27RB#0-PASS

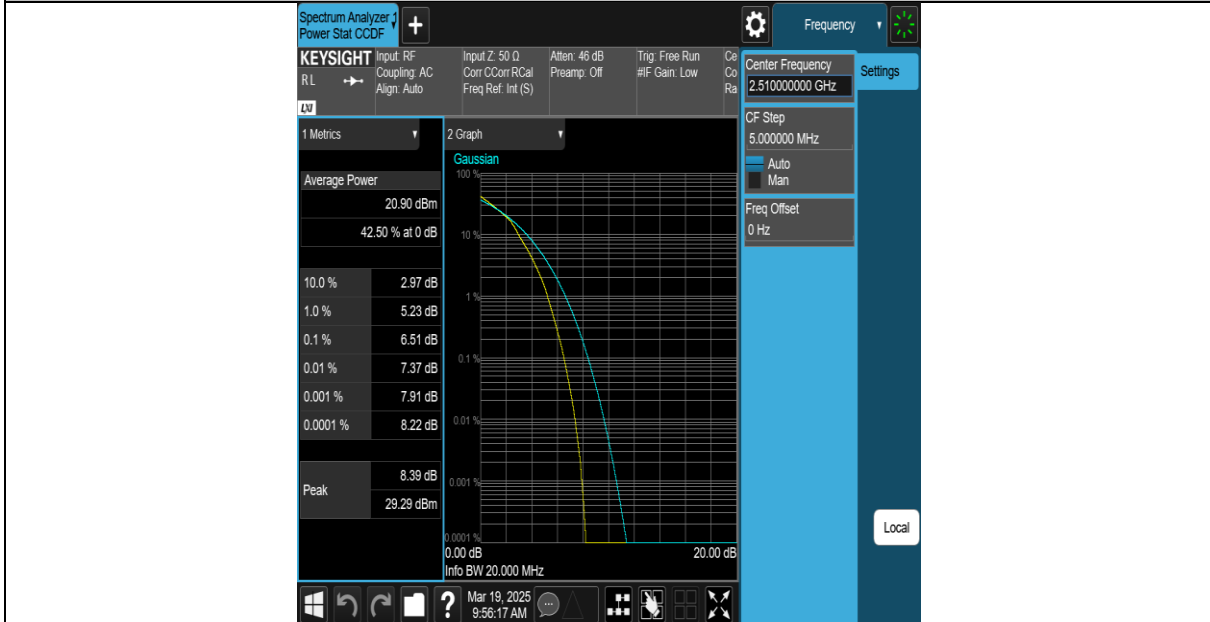

Band7-20MHz-16QAM-21100-1RB#0-PASS

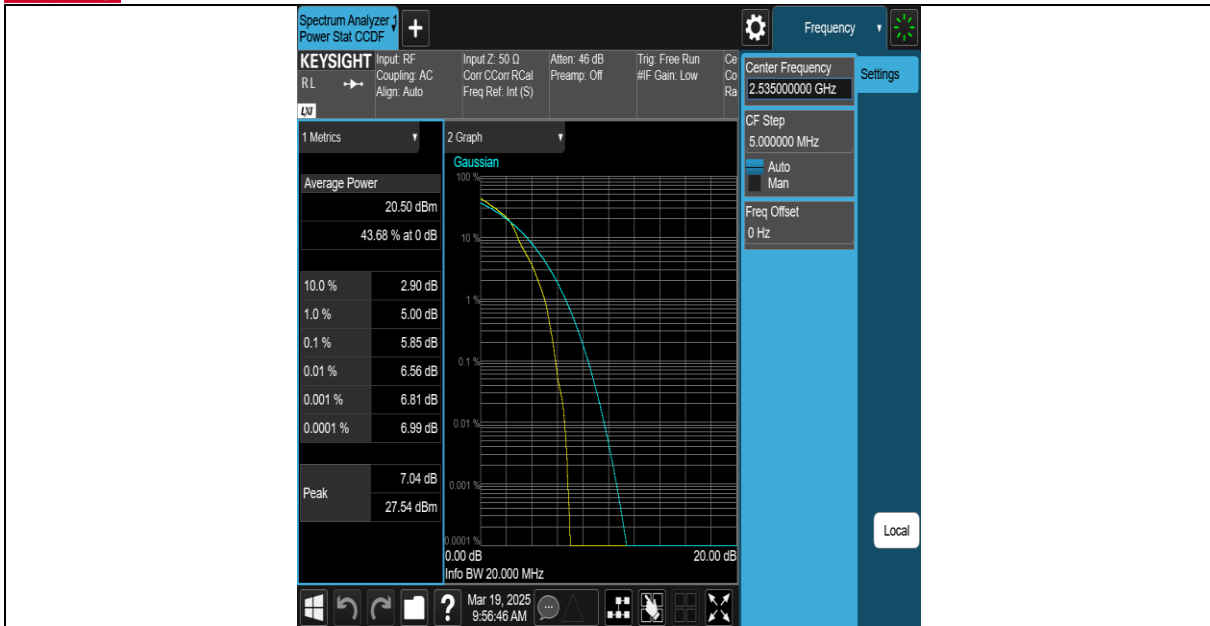


Band7-20MHz-16QAM-21100-27RB#0-PASS

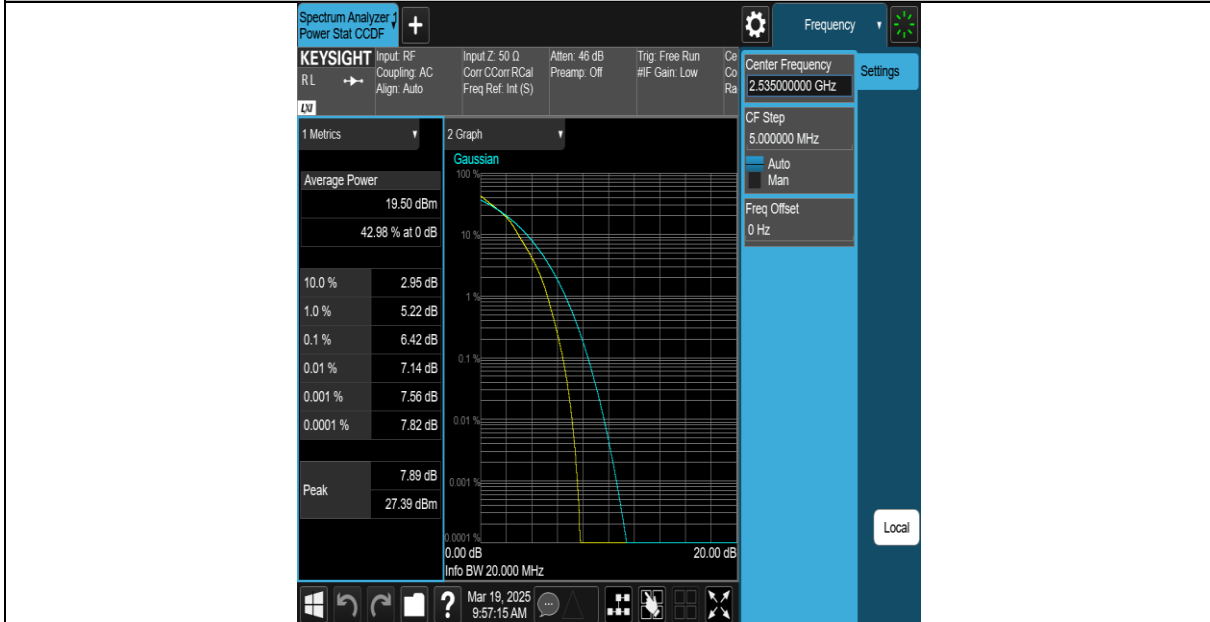


Band7-20MHz-16QAM-21350-1RB#0-PASS



**BUREAU VERITAS** Test Report No.: PSU-QSZ2503050113RF03

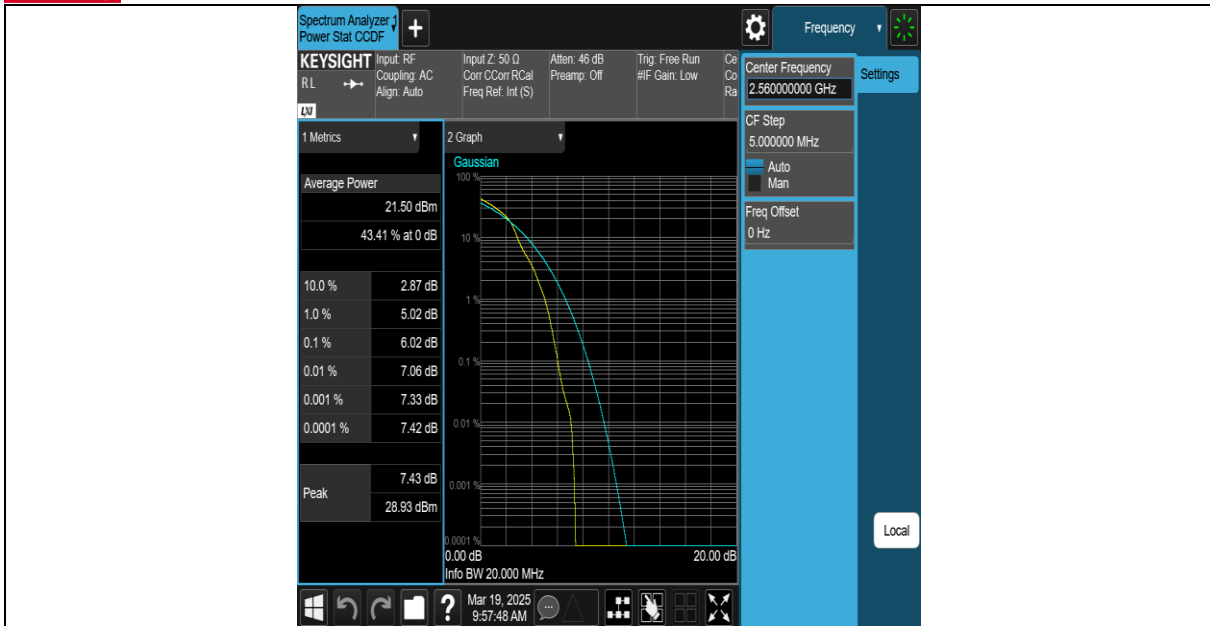

**Band7-20MHz-16QAM-21350-27RB#0-PASS**

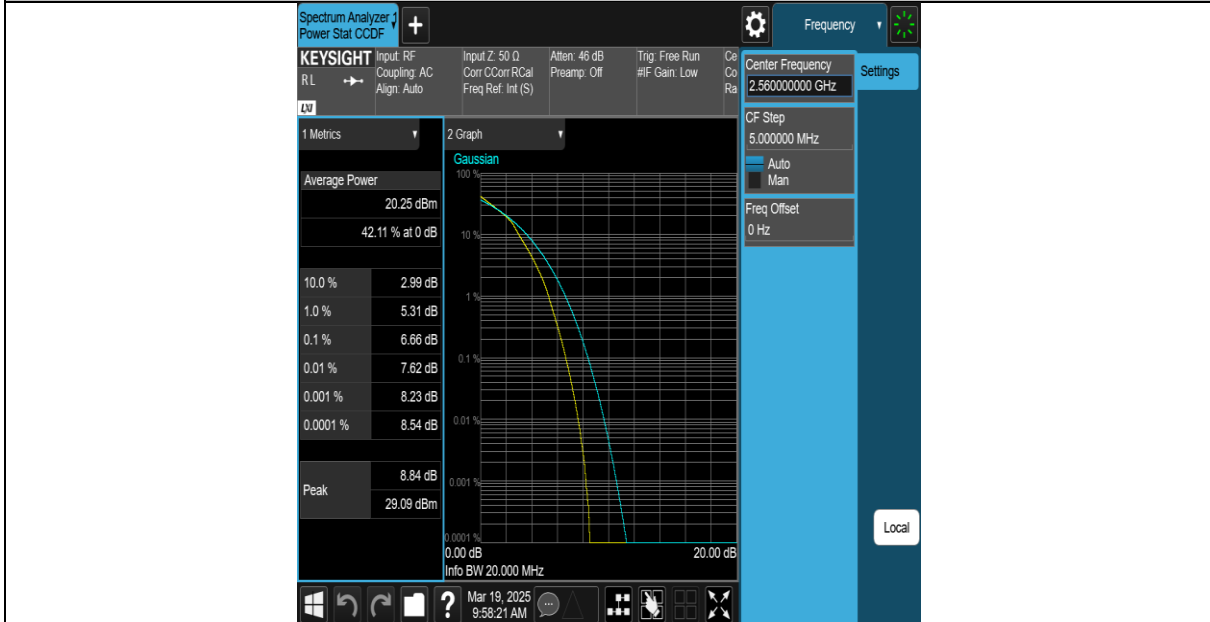




## APPENDIX : 26DB BANDWIDTH AND OCCUPIED BANDWIDTH


### Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band7	5MHz	QPSK	20775	25RB#0	4.4830	5.095	PASS
Band7	5MHz	QPSK	21100	25RB#0	4.4807	5.071	PASS
Band7	5MHz	QPSK	21425	25RB#0	4.4918	7.081	PASS
Band7	5MHz	16QAM	20775	25RB#0	4.4794	5.132	PASS
Band7	5MHz	16QAM	21100	25RB#0	4.4864	5.137	PASS
Band7	5MHz	16QAM	21425	25RB#0	4.4860	5.094	PASS
Band7	10MHz	QPSK	20800	50RB#0	8.9342	9.643	PASS
Band7	10MHz	QPSK	21100	50RB#0	8.9094	9.649	PASS
Band7	10MHz	QPSK	21400	50RB#0	8.9251	9.747	PASS
Band7	10MHz	16QAM	20800	27RB#0	5.1733	7.529	PASS
Band7	10MHz	16QAM	21100	27RB#0	5.2301	8.173	PASS
Band7	10MHz	16QAM	21400	27RB#0	5.2958	8.336	PASS
Band7	15MHz	QPSK	20825	75RB#0	13.549	16.52	PASS
Band7	15MHz	QPSK	21100	75RB#0	13.503	16.34	PASS
Band7	15MHz	QPSK	21375	75RB#0	13.552	16.57	PASS
Band7	15MHz	16QAM	20825	27RB#0	5.0039	5.929	PASS
Band7	15MHz	16QAM	21100	27RB#0	5.0054	5.935	PASS
Band7	15MHz	16QAM	21375	27RB#0	4.9906	5.916	PASS
Band7	20MHz	QPSK	20850	100RB#0	18.037	21.38	PASS
Band7	20MHz	QPSK	21100	100RB#0	17.966	20.80	PASS
Band7	20MHz	QPSK	21350	100RB#0	18.063	21.31	PASS
Band7	20MHz	16QAM	20850	27RB#0	5.0877	6.602	PASS
Band7	20MHz	16QAM	21100	27RB#0	5.0465	6.240	PASS
Band7	20MHz	16QAM	21350	27RB#0	5.0760	6.729	PASS



## Test Graphs

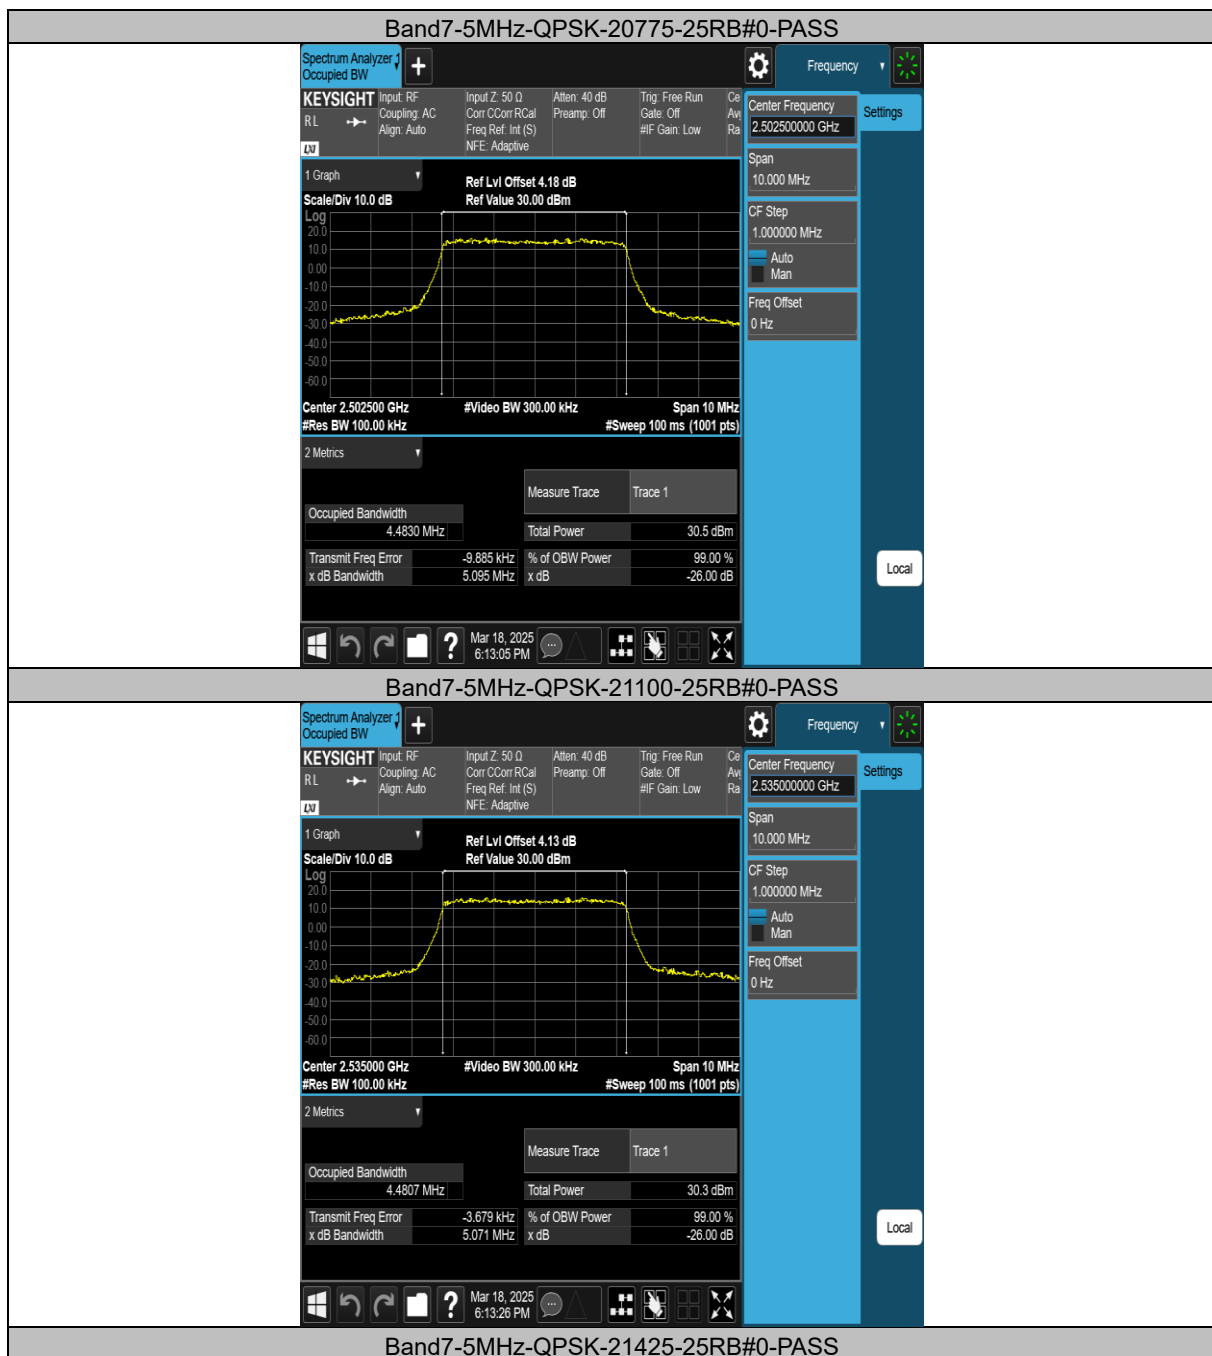


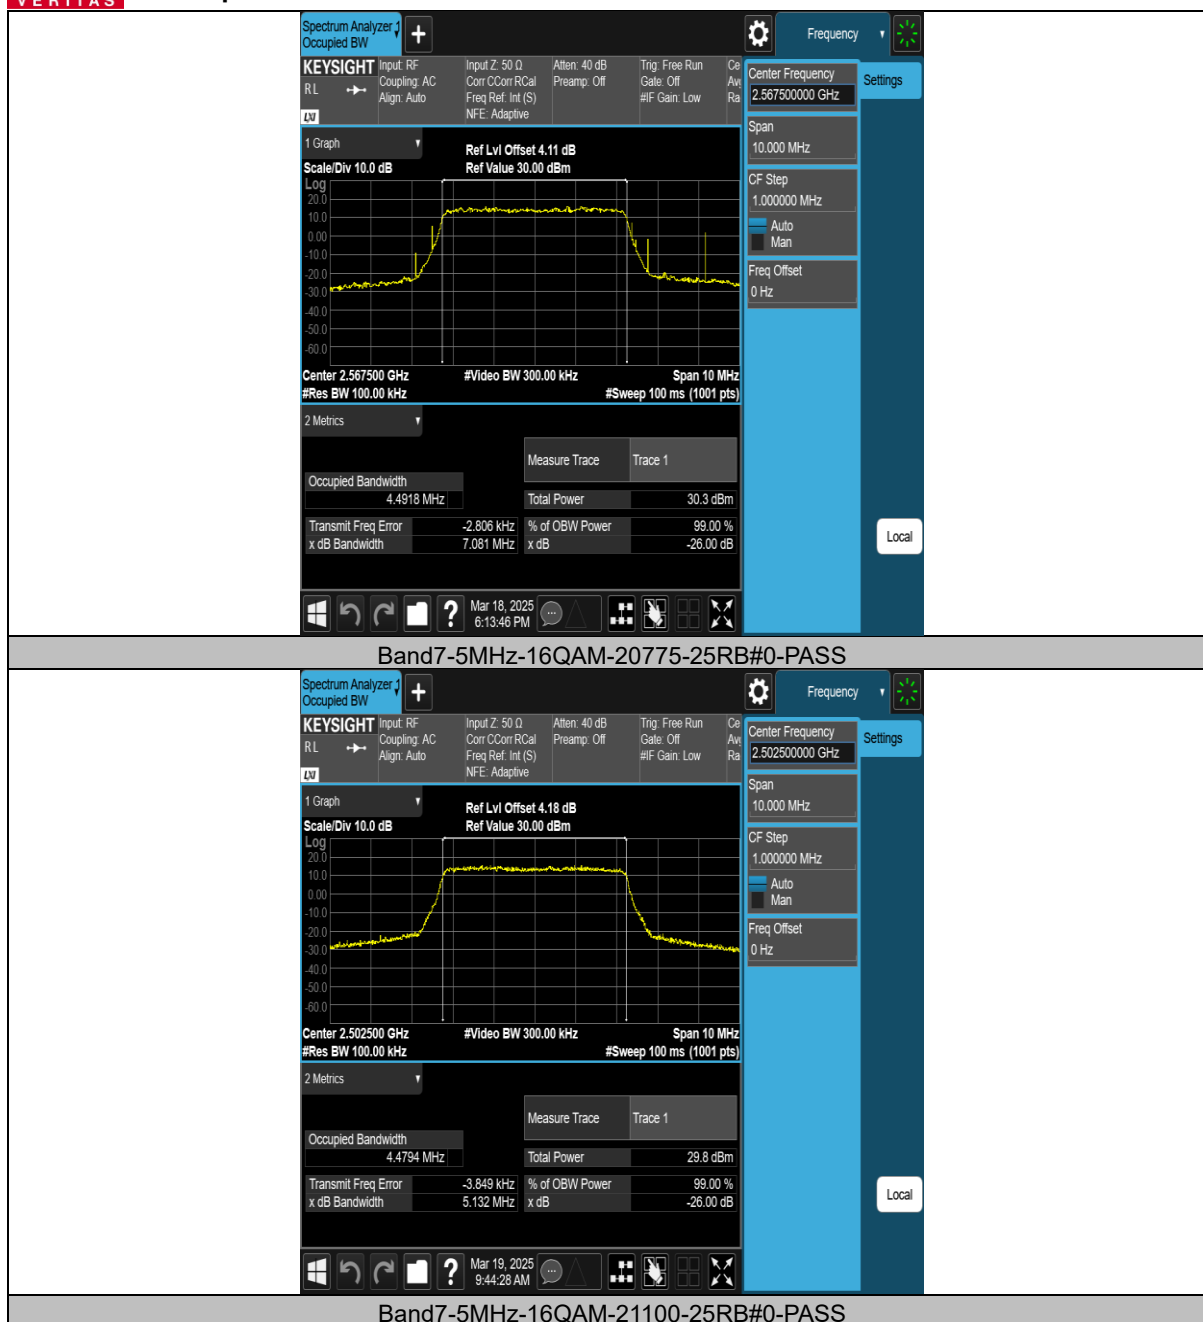





Band7-5MHz-16QAM-21425-25RB#0-PASS

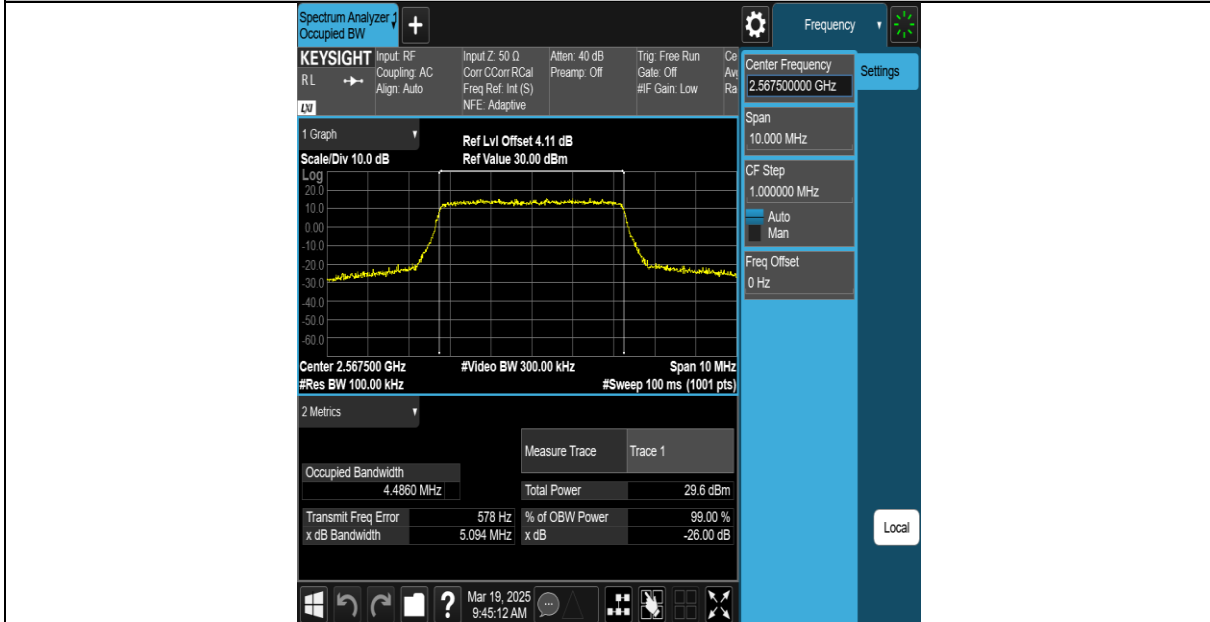

Band7-10MHz-QPSK-20800-50RB#0-PASS

