

TEST REPORT

REPORT NUMBER: I22W00046-WCDMA-WWAN

ON

Type of Equipment: LTE Module
Type of Designation: L508
Brand Name: LYNQ
Manufacturer: Shanghai MobileTek Communication Ltd.
FCC ID: 2AK9DL508

ACCORDING TO

FCC CFR Part 2, FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS;
GENERAL RULES AND REGULATIONS, e-CFR, 2019
PART 22, PUBLIC MOBILE SERVICES, e-CFR, 2019
PART 24, PERSONAL COMMUNICATIONS SERVICES, e-CFR, 2019
PART 27, MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES, e-CFR, 2019
ANSI C63.26-2015

Chongqing Academy of Information and Communications Technology

Month date, year

Jun, 27, 2022

Signature



Xiang Luoyong
Director

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of Chongqing Academy of Information and Communications Technology.



Report No.: I22W00046-WCDMA-WWAN

Revision Version

Report Number	Revision	Date	Memo
I22W00046-WCDMA-WWAN	00	2022-06-27	Initial creation of test report

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

CONTENTS

1. Test Laboratory	5
1.1. Testing Location	5
1.2. Testing Environment	5
1.3. Project data	5
1.4. Signature	5
2. Client Information	6
2.1. Applicant Information	6
2.2. Manufacturer Information	6
3. Equipment under Test (EUT) and Ancillary Equipment (AE)	7
3.1. About EUT	7
3.2. Internal Identification of EUT used during the test	7
3.3. Outline of Equipment under Test	8
3.4. Internal Identification of AE used during the test	8
4. Reference Documents	9
4.1. Documents supplied by applicant	9
4.2. Reference Documents for testing	9
5. Test Equipments Utilized	10
5.1. RF Test System	10
5.2. RSE Test System	10
5.3. Climate Chamber	10
5.4. Vibration table	10
5.5. Test software	10
6. Test Results	12
6.1. Summary of Test Results	12
6.2. Conducted RF Power Output	13
6.2.1 Conducted RF Power Output Results	15

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

6.3. ERP and EIRP	18
6.3.1 WCDMA Band 2 result	19
6.3.2 WCDMA Band 4 result	21
6.4. Occupied Bandwidth	23
6.4.1 occupied bandwidth Results	24
6.5. Conducted spurious emissions	40
6.5.1 Conducted Spurious Emission Results	42
6.6. Radiated Spurious Emission	46
6.6.1 WCDMA Radiated Spurious Emission Results	48
6.7. Band Edge	51
6.8. Frequency Stability	55
6.8.1 Frequency Stability over Temperature Variation Results	57
6.9. Peak to Average Ratio	58
Annex A EUT Photos	63
ANNEX B Deviations from Prescribed Test Methods	64

1. Test Laboratory

1.1. Testing Location

Name:	Chongqing Academy of Information and Communications Technology
FCC Registration Number:	CN1239
Address:	No.19 East Road, Xiantao Big-data Valley, Yubei District, Chongqing, People's Republic of China
Postal Code:	401336
Telephone:	0086-23-88069965
Fax:	0086-23-88608777

1.2. Testing Environment

Normal Temperature:	15-35°C
Relative Humidity:	30-60%

1.3. Project data

Testing Start Date:	2022-06-09
Testing End Date:	2022-06-24

1.4. Signature



2022-06-27

Dong Junxin
(Prepared this test report)


Date



2022-06-27

Li Xu
(Reviewed this test report)

Date



2022-06-27

Xiang Luoyong
Director of the laboratory
(Approved this test report)

Date

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

2. Client Information

2.1. Applicant Information

Company name:	Shanghai MobileTek Communication Ltd.
Address /Post:	Free Trade Zone No. 33, No. 17 building 6H3 Xiya Road China (Shanghai)
City:	Shanghai
Country:	China
Telephone:	15821966417
Fax:	--
Email:	qh.zhang@mobiletek.cn
Contact Person:	Qinghua Zhang

2.2. Manufacturer Information

Company Name:	Shanghai MobileTek Communication Ltd.
Address /Post:	Free Trade Zone No. 33, No. 17 building 6H3 Xiya Road China (Shanghai)
City:	Shanghai
Country:	China
Telephone:	15821966417
Fax:	--
Email:	qh.zhang@mobiletek.cn
Contact Person:	Qinghua Zhang

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

3. Equipment under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	LTE Module
Model name	L508
Brand name	LYNQ
GSM Frequency Band	2/5
WCDMA Frequency Band	2/4/5
LTE Frequency Band	2/4/5/7/66
Type of modulation	GMSK/8PSK/QPSK/16QAM
Extreme Temperature	-40/+85°C
Nominal Voltage	3.8
Extreme High Voltage	4.6
Extreme Low Voltage	3.2

Note: Photographs of EUT are shown in ANNEX A of this test report.

Note: High and low voltage values in extreme condition test are given by manufacturer.

3.2. Internal Identification of EUT used during the test

EUT ID	SN or IMEI	HW Version	SW Version	Date of receipt
S1	864788050910772	V2	L508v01.01b02.00	2022-06-08
S3	864788050032635	V2	L508v01.01b02.00	2022-06-08

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Outline of Equipment under Test

Technology	Band	UL Freq.(MHz)	DL Freq.(MHz)	Note
GSM	B2	1850.2-1909.8	1930.2-1989.8	--
	B5	824.2-848.8	869.2-893.8	--
WCDMA	B2	1852.4-1907.6	1932.4-1987.6	--
	B4	1712.4-1752.6	2112.4-2152.6	--
	B5	826.4-846.6	871.4-891.6	--
LTE	B2	1850-1909.9	1930-1989.9	--
	B4	1710-1754.9	2110-2154.9	--
	B5	824-848.9	869-893.9	--
	B7	2500-2569.9	2620-2689.9	--
	B66	1710-1780	2110-2200	--

3.4. Internal Identification of AE used during the test

AE ID*	Description	dB*
AE1	--	--

*AE ID: is used to identify the test sample in the lab internally.

dB*: is provided customer.

4. Reference Documents

4.1. Documents supplied by applicant

PICS/PIXIT, referring to Annex B for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC CFR Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS, e-CFR	2019
PART 22	PUBLIC MOBILE SERVICES	2019
PART 24	PERSONAL COMMUNICATIONS SERVICES, e-CFR	2019
PART 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES, e-CFR	2019
ANSI C63.26	--	2015

5. Test Equipments Utilized

5.1. RF Test System

No.	Equipment	Model	SN	HW Version	SW Version	Manufac ture	Cal.Due Date
1	spectrum analyzer	FSQ 26	201137/026	--	--	R&S	2023-06-29
2	DC Power Supply	3303D	801128	--	--	Topward	2023-06-29
3	Universal Radio Communicatio n Tester	CMW500	152395	--	--	R&S	2023-06-29

5.2. RSE Test System

No.	Equipment	Model	SN	HW Version	SW Version	Manufactu re	Cal.Due Date
1	Test Receiver	ESU26	100367	01	4.43 SP3	R&S	2023-06-29
2	Ultra-wideband Log Periodic Antenna	VULB 9163	01392	--	--	Schwarzbeck	2024-05-04
3	Double Ridged Guide Antenna	HF907	100357	--	--	R&S	2023-02-10
4	Universal Radio Communication Tester	CMW500	128181	--	--	R&S	2023-06-29

5.3. Climate Chamber

No.	Name	Type	SN	Manufacture	Cal.Due Date
1	Climate chamber	SH-241	92010759	ESPEC	2023-06-29
2	Fully-Anechoic Chamber	FACT3-2	--	ETS	2025-04-29

5.4. Vibration table

No.	Name	Type	SN	Manufacture	Cal.Due Date
--	--	--	--	--	--

Anechoic chamber

Fully anechoic chamber by ETS-LINDGREN.

5.5. Test software

No.	Name	version	SN	Manufacture
-----	------	---------	----	-------------

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

1	EMC32	V 8.51.00	--	R&S
2	T-RFS500	V2.0	--	Manufacturer:Beijing Zhiwang Xince Technology Co., Ltd.

6. Test Results

6.1. Summary of Test Results

A brief summary of the tests carried out is shown as following.

FCC Rules	Name of Test	Result
2.1046,22.913(a),24.232(c),27.50,	Conducted RF Power Output	Pass
2.1046,22.913(a),24.232(c),27.50	ERP and EIRP	Pass
2.1049,22.917(b), 24.238(b)	Occupied Bandwidth	*Note 1
2.1051,24.238,2.1053,22.917, 27.53	Conducted spurious emissions	Pass
2.1051,24.238,2.1053,22.917, 27.53	Radiated Spurious Emission	Pass
2.1051,24.238, 2.1053, 22.917, 27.53	Band Edge	Pass
2.1055, 22.355,24.235, 27.54	Frequency Stability	Pass
24.232, 27.50	Peak to Average Ratio	Pass
Note 1: No applicable performance criteria. Note 2: Explanation of worst-case configuration The worst-case scenario for all measurements is based on the conducted output power. Output power was measured on QPSK,16QAM modulations. It was found that QPSK was the worst case. All testing was performed using QPSK modulations to represent the worst case unless otherwise stated. The test results shown in the following sections represent the worst case emission.According to the product change description of the product, Only the following test cases were repeated , Other test results refer to the reference report I22W00023-WCDMA-WWAN_Rev1.		

6.2. Conducted RF Power Output

Specifications:	FCC Part 2.1046, 24.232(c), 27.50
DUT Serial Number:	864788050910772
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60% Air pressure: 86-106kPa
Test Results:	Pass

Limit Level Construction:

According to Part 24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.


According to Part 27.50(d), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz Band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz Bands are limited to 1 watt EIRP.

Measurement Uncertainty:

Item	Uncertainty
Expanded Uncertainty	0.62 dB (k=2)

Test Setup:

During the test, the EUT was controlled via the Wireless Telecommunications Test Set to ensure max power transmission and proper modulation and measured by spectrum analyzer.

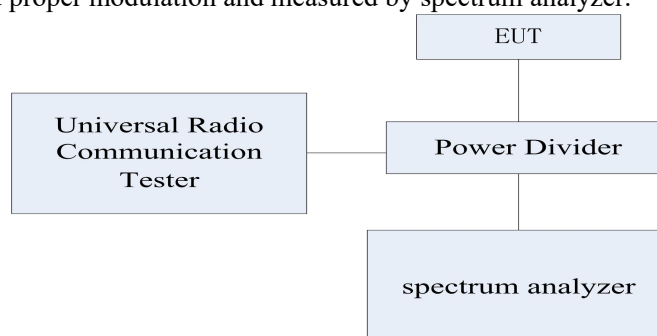

Test Method:

- 1) The EUT was coupled to the spectrum analyzer and the Wireless Telecommunications Test Set through a power divider. The loss of the RF cables of the test system is calibrated to correct the readings.
- 2) For RMS power test, the spectrum analyzer was set to RMS Detector function and Maximum hold mode.
- 3) For Peak power test, the spectrum analyzer was set to Maxpeak Detector function and Maximum hold

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777



Report No.: I22W00046-WCDMA-WWAN

mode.

4) The resolution Bandwidth of the spectrum analyzer was comparable to the emission Bandwidth.

Note: --

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

6.2.1 Conducted RF Power Output Results

WCDMA Band 2

Mode	Subtest	Channel	Frequency (MHz)	Modulation	output power (dBm)	peak power (dBm)
RMC	-	9262	1852.4	QPSK	22.39	22.39
RMC	-	9400	1880	QPSK	22.58	22.59
RMC	-	9538	1907.6	QPSK	22.43	22.43
HSDPA	1	9262	1852.4	QPSK	21.37	21.49
HSDPA	2	9262	1852.4	QPSK	19.69	21.19
HSDPA	3	9262	1852.4	QPSK	18.33	20.66
HSDPA	4	9262	1852.4	QPSK	18.02	20.60
HSDPA	1	9400	1880	QPSK	22.16	22.31
HSDPA	2	9400	1880	QPSK	20.06	21.87
HSDPA	3	9400	1880	QPSK	18.86	21.37
HSDPA	4	9400	1880	QPSK	17.87	21.34
HSDPA	1	9538	1907.6	QPSK	22.10	22.18
HSDPA	2	9538	1907.6	QPSK	20.27	21.82
HSDPA	3	9538	1907.6	QPSK	18.49	21.36
HSDPA	4	9538	1907.6	QPSK	18.51	21.26
HSUPA	1	9262	1852.4	QPSK	18.71	18.98
HSUPA	1	9262	1852.4	Q16	18.65	18.93
HSUPA	2	9262	1852.4	QPSK	20.09	20.36
HSUPA	2	9262	1852.4	Q16	20.07	20.33
HSUPA	3	9262	1852.4	QPSK	16.06	16.26
HSUPA	3	9262	1852.4	Q16	16.08	16.31
HSUPA	4	9262	1852.4	QPSK	21.08	21.23
HSUPA	4	9262	1852.4	Q16	21.08	21.21
HSUPA	5	9262	1852.4	QPSK	21.45	21.53
HSUPA	5	9262	1852.4	Q16	21.45	21.52
HSUPA	1	9400	1880	QPSK	20.46	22.52
HSUPA	1	9400	1880	Q16	20.61	22.38
HSUPA	2	9400	1880	QPSK	21.42	22.25
HSUPA	2	9400	1880	Q16	21.09	22.18
HSUPA	3	9400	1880	QPSK	18.45	21.88
HSUPA	3	9400	1880	Q16	18.98	21.85
HSUPA	4	9400	1880	QPSK	22.11	22.24
HSUPA	4	9400	1880	Q16	22.09	22.20

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

HSUPA	5	9400	1880	QPSK	22.32	22.43
HSUPA	5	9400	1880	Q16	22.31	22.44
HSUPA	1	9538	1907.6	QPSK	20.06	22.13
HSUPA	1	9538	1907.6	Q16	20.36	22.10
HSUPA	2	9538	1907.6	QPSK	20.90	22.05
HSUPA	2	9538	1907.6	Q16	20.89	22.03
HSUPA	3	9538	1907.6	QPSK	18.83	21.65
HSUPA	3	9538	1907.6	Q16	18.83	21.65
HSUPA	4	9538	1907.6	QPSK	21.90	22.08
HSUPA	4	9538	1907.6	Q16	21.89	22.03
HSUPA	5	9538	1907.6	QPSK	22.16	22.24
HSUPA	5	9538	1907.6	Q16	22.17	22.26

WCDMA Band 4

Mode	Subtest	Channel	Frequency (MHz)	Modulation	output power (dBm)	peak power (dBm)
RMC	-	1312	1712.4	QPSK	22.01	22.03
RMC	-	1412	1732.4	QPSK	22.10	22.12
RMC	-	1513	1752.6	QPSK	21.85	21.89
HSDPA	1	1312	1712.4	QPSK	21.72	21.82
HSDPA	2	1312	1712.4	QPSK	19.49	21.15
HSDPA	3	1312	1712.4	QPSK	18.34	20.64
HSDPA	4	1312	1712.4	QPSK	18.01	20.60
HSDPA	1	1412	1732.4	QPSK	21.65	21.77
HSDPA	2	1412	1732.4	QPSK	19.76	21.21
HSDPA	3	1412	1732.4	QPSK	18.04	20.85
HSDPA	4	1412	1732.4	QPSK	18.16	20.82
HSDPA	1	1513	1752.6	QPSK	21.43	21.58
HSDPA	2	1513	1752.6	QPSK	19.49	20.97
HSDPA	3	1513	1752.6	QPSK	18.20	20.56
HSDPA	4	1513	1752.6	QPSK	17.42	20.49
HSUPA	1	1312	1712.4	QPSK	18.79	19.00
HSUPA	1	1312	1712.4	Q16	18.76	18.95
HSUPA	2	1312	1712.4	QPSK	20.14	20.44
HSUPA	2	1312	1712.4	Q16	20.12	20.42
HSUPA	3	1312	1712.4	QPSK	16.15	16.44
HSUPA	3	1312	1712.4	Q16	16.15	16.43
HSUPA	4	1312	1712.4	QPSK	21.57	21.68
HSUPA	4	1312	1712.4	Q16	21.55	21.65

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

HSUPA	5	1312	1712.4	QPSK	21.34	21.48
HSUPA	5	1312	1712.4	Q16	21.36	21.50
HSUPA	1	1412	1732.4	QPSK	18.68	18.95
HSUPA	1	1412	1732.4	Q16	18.72	19.00
HSUPA	2	1412	1732.4	QPSK	20.29	20.55
HSUPA	2	1412	1732.4	Q16	20.28	20.55
HSUPA	3	1412	1732.4	QPSK	16.15	16.40
HSUPA	3	1412	1732.4	Q16	16.17	16.41
HSUPA	4	1412	1732.4	QPSK	21.59	21.67
HSUPA	4	1412	1732.4	Q16	21.58	21.66
HSUPA	5	1412	1732.4	QPSK	21.61	21.67
HSUPA	5	1412	1732.4	Q16	21.60	21.66
HSUPA	1	1513	1752.6	QPSK	18.53	18.73
HSUPA	1	1513	1752.6	Q16	18.51	18.65
HSUPA	2	1513	1752.6	QPSK	19.89	20.23
HSUPA	2	1513	1752.6	Q16	19.88	20.22
HSUPA	3	1513	1752.6	QPSK	15.83	16.22
HSUPA	3	1513	1752.6	Q16	15.91	16.21
HSUPA	4	1513	1752.6	QPSK	21.34	21.47
HSUPA	4	1513	1752.6	Q16	21.35	21.43
HSUPA	5	1513	1752.6	QPSK	21.42	21.50
HSUPA	5	1513	1752.6	Q16	21.35	21.44

6.3. ERP and EIRP

Limit Level Construction:

This is the test for the maximum radiated power from the EUT.

According to Part 24.232(c),"Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power"and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

According to Part 27.50(d), "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP"

Conducted RF Power (dBm) +Antenna Gain (dBi) =EIRP (dBm)

Conducted RF Power (dBm) +Antenna Gain (dBi) -2.15dB=ERP (dBm)

Note:Antenna Gain is supplied by customer.

Frequency Band	AntennaGain (dBi)	AntennaGain (dBd)
WCDMA Band2	5	--
WCDMA Band4	5	--
WCDMA Band5	3	--

6.3.1 WCDMA Band 2 result

WCDMA Band 2

Limits 32dBm(2w)

Max EIRP:27.58dBm

Mode	Subtest	Channel	Frequency (MHz)	Modulation	output power (dBm)	Radiated Power(dBm) G _T = 5dBi
RMC	-	9262	1852.4	QPSK	22.39	27.39
RMC	-	9400	1880	QPSK	22.58	27.58
RMC	-	9538	1907.6	QPSK	22.43	27.43
HSDPA	1	9262	1852.4	QPSK	21.37	26.37
HSDPA	2	9262	1852.4	QPSK	19.69	24.69
HSDPA	3	9262	1852.4	QPSK	18.33	23.33
HSDPA	4	9262	1852.4	QPSK	18.02	23.02
HSDPA	1	9400	1880	QPSK	22.16	27.16
HSDPA	2	9400	1880	QPSK	20.06	25.06
HSDPA	3	9400	1880	QPSK	18.86	23.86
HSDPA	4	9400	1880	QPSK	17.87	22.87
HSDPA	1	9538	1907.6	QPSK	22.10	27.10
HSDPA	2	9538	1907.6	QPSK	20.27	25.27
HSDPA	3	9538	1907.6	QPSK	18.49	23.49
HSDPA	4	9538	1907.6	QPSK	18.51	23.51
HSUPA	1	9262	1852.4	QPSK	18.71	23.71
HSUPA	1	9262	1852.4	Q16	18.65	23.65
HSUPA	2	9262	1852.4	QPSK	20.09	25.09
HSUPA	2	9262	1852.4	Q16	20.07	25.07
HSUPA	3	9262	1852.4	QPSK	16.06	21.06
HSUPA	3	9262	1852.4	Q16	16.08	21.08
HSUPA	4	9262	1852.4	QPSK	21.08	26.08
HSUPA	4	9262	1852.4	Q16	21.08	26.08
HSUPA	5	9262	1852.4	QPSK	21.45	26.45
HSUPA	5	9262	1852.4	Q16	21.45	26.45
HSUPA	1	9400	1880	QPSK	20.46	25.46
HSUPA	1	9400	1880	Q16	20.61	25.61
HSUPA	2	9400	1880	QPSK	21.42	26.42

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

HSUPA	2	9400	1880	Q16	21.09	26.09
HSUPA	3	9400	1880	QPSK	18.45	23.45
HSUPA	3	9400	1880	Q16	18.98	23.98
HSUPA	4	9400	1880	QPSK	22.11	27.11
HSUPA	4	9400	1880	Q16	22.09	27.09
HSUPA	5	9400	1880	QPSK	22.32	27.32
HSUPA	5	9400	1880	Q16	22.31	27.31
HSUPA	1	9538	1907.6	QPSK	20.06	25.06
HSUPA	1	9538	1907.6	Q16	20.36	25.36
HSUPA	2	9538	1907.6	QPSK	20.90	25.90
HSUPA	2	9538	1907.6	Q16	20.89	25.89
HSUPA	3	9538	1907.6	QPSK	18.83	23.83
HSUPA	3	9538	1907.6	Q16	18.83	23.83
HSUPA	4	9538	1907.6	QPSK	21.90	26.90
HSUPA	4	9538	1907.6	Q16	21.89	26.89
HSUPA	5	9538	1907.6	QPSK	22.16	27.16
HSUPA	5	9538	1907.6	Q16	22.17	27.17

6.3.2 WCDMA Band 4 result

WCDMA Band 4

Limits 33dBm(w)

Max EIRP:27.10dBm

Mode	Subtest	Channel	Frequency (MHz)	Modulation	output power (dBm)	Radiated Power(dBm) G _T = 5dBi
RMC	-	1312	1712.4	QPSK	22.01	27.01
RMC	-	1412	1732.4	QPSK	22.10	27.10
RMC	-	1513	1752.6	QPSK	21.85	26.85
HSDPA	1	1312	1712.4	QPSK	21.72	26.72
HSDPA	2	1312	1712.4	QPSK	19.49	24.49
HSDPA	3	1312	1712.4	QPSK	18.34	23.34
HSDPA	4	1312	1712.4	QPSK	18.01	23.01
HSDPA	1	1412	1732.4	QPSK	21.65	26.65
HSDPA	2	1412	1732.4	QPSK	19.76	24.76
HSDPA	3	1412	1732.4	QPSK	18.04	23.04
HSDPA	4	1412	1732.4	QPSK	18.16	23.16
HSDPA	1	1513	1752.6	QPSK	21.43	26.43
HSDPA	2	1513	1752.6	QPSK	19.49	24.49
HSDPA	3	1513	1752.6	QPSK	18.20	23.20
HSDPA	4	1513	1752.6	QPSK	17.42	22.42
HSUPA	1	1312	1712.4	QPSK	18.79	23.79
HSUPA	1	1312	1712.4	Q16	18.76	23.76
HSUPA	2	1312	1712.4	QPSK	20.14	25.14
HSUPA	2	1312	1712.4	Q16	20.12	25.12
HSUPA	3	1312	1712.4	QPSK	16.15	21.15
HSUPA	3	1312	1712.4	Q16	16.15	21.15
HSUPA	4	1312	1712.4	QPSK	21.57	26.57
HSUPA	4	1312	1712.4	Q16	21.55	26.55
HSUPA	5	1312	1712.4	QPSK	21.34	26.34
HSUPA	5	1312	1712.4	Q16	21.36	26.36
HSUPA	1	1412	1732.4	QPSK	18.68	23.68
HSUPA	1	1412	1732.4	Q16	18.72	23.72
HSUPA	2	1412	1732.4	QPSK	20.29	25.29
HSUPA	2	1412	1732.4	Q16	20.28	25.28

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777


HSUPA	3	1412	1732.4	QPSK	16.15	21.15
HSUPA	3	1412	1732.4	Q16	16.17	21.17
HSUPA	4	1412	1732.4	QPSK	21.59	26.59
HSUPA	4	1412	1732.4	Q16	21.58	26.58
HSUPA	5	1412	1732.4	QPSK	21.61	26.61
HSUPA	5	1412	1732.4	Q16	21.60	26.60
HSUPA	1	1513	1752.6	QPSK	18.53	23.53
HSUPA	1	1513	1752.6	Q16	18.51	23.51
HSUPA	2	1513	1752.6	QPSK	19.89	24.89
HSUPA	2	1513	1752.6	Q16	19.88	24.88
HSUPA	3	1513	1752.6	QPSK	15.83	20.83
HSUPA	3	1513	1752.6	Q16	15.91	20.91
HSUPA	4	1513	1752.6	QPSK	21.34	26.34
HSUPA	4	1513	1752.6	Q16	21.35	26.35
HSUPA	5	1513	1752.6	QPSK	21.42	26.42
HSUPA	5	1513	1752.6	Q16	21.35	26.35

6.4. Occupied Bandwidth

Specifications:	FCC Part 2.1049, 24.238(b)
DUT Serial Number:	864788050910772
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60% Air pressure: 86-106kPa
Test Results:	--

Test Setup

During the test, the EUT was controlled via the Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by spectrum analyzer.

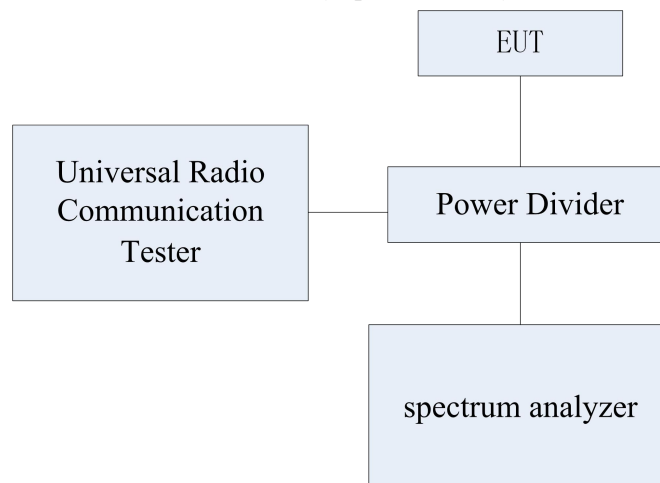

Measurement Uncertainty:

Item	Uncertainty
Expanded Uncertainty	500 kHz (k=2)

Test Method

The 99% occupied Bandwidth was calculated from the spectrum analyzer. Markers in the spectrum analyzer were then placed between the calculated frequencies to show the calculated 99% power Band. The 26dB Bandwidth was also measured and recorded.

Note: --

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777


6.4.1 occupied bandwidth Results

WCDMA Band 2 (99%)-QPSK

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)
1852.4	4.167
1880	4.167
1907.6	4.167

WCDMA Band 2 (99%)

Channel 9262-Occupied Bandwidth (99% BW)

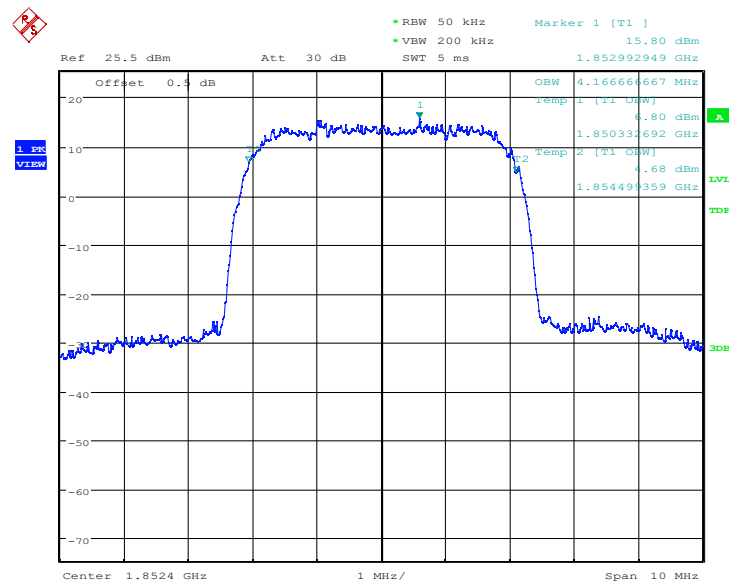


Date: 15.JUN.2022 00:18:59

Channel 9400-Occupied Bandwidth (99% BW)


Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

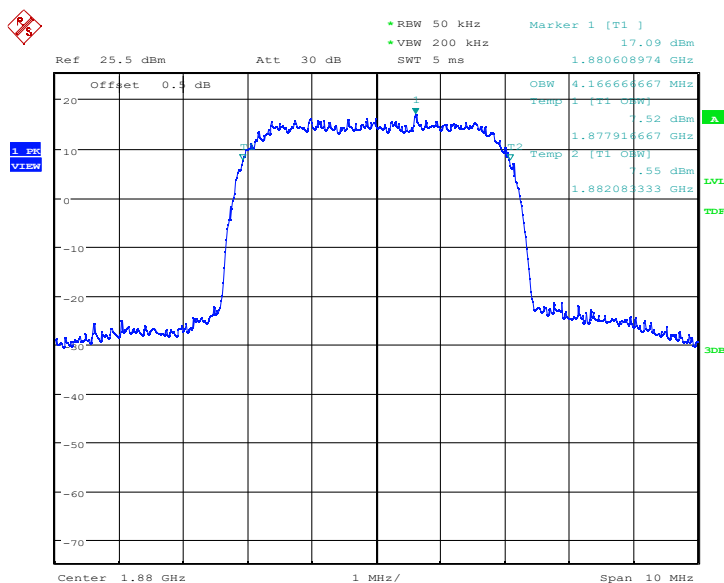

Date: 15.JUN.2022 00:19:54

Channel 9538-Occupied Bandwidth (99% BW)

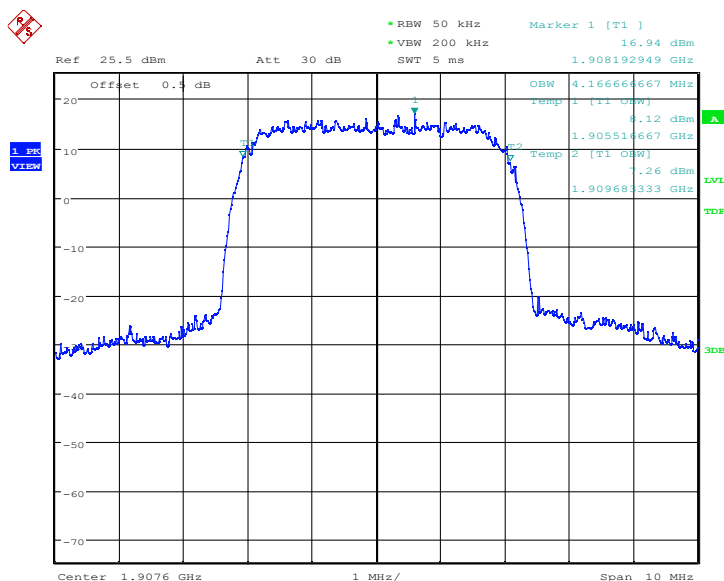

Date: 15.JUN.2022 00:20:44

WCDMA Band 2 (99%)-16QAM


Frequency (MHz)	Occupied Bandwidth (99%) (MHz)
1852.4	4.167
1880	4.167
1907.6	4.151

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777


WCDMA Band 2 (99%)

Channel 9262-Occupied Bandwidth (99% BW)

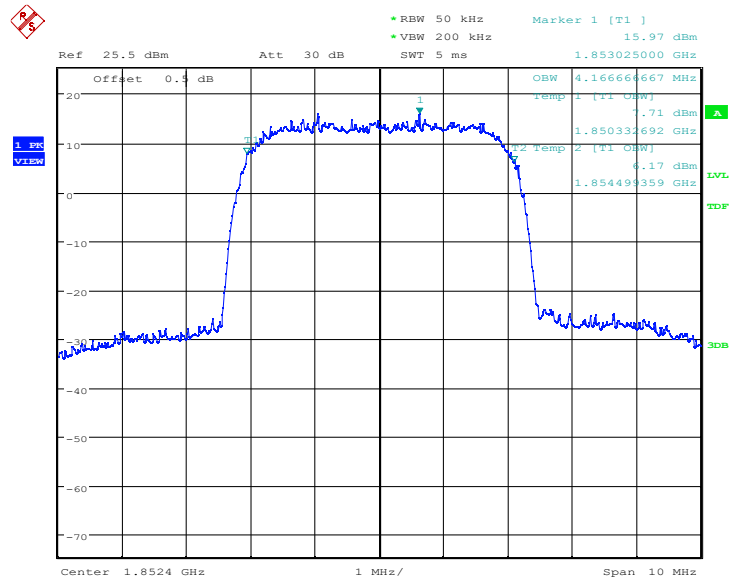

Date: 15.JUN.2022 00:19:29

Channel 9400-Occupied Bandwidth (99% BW)

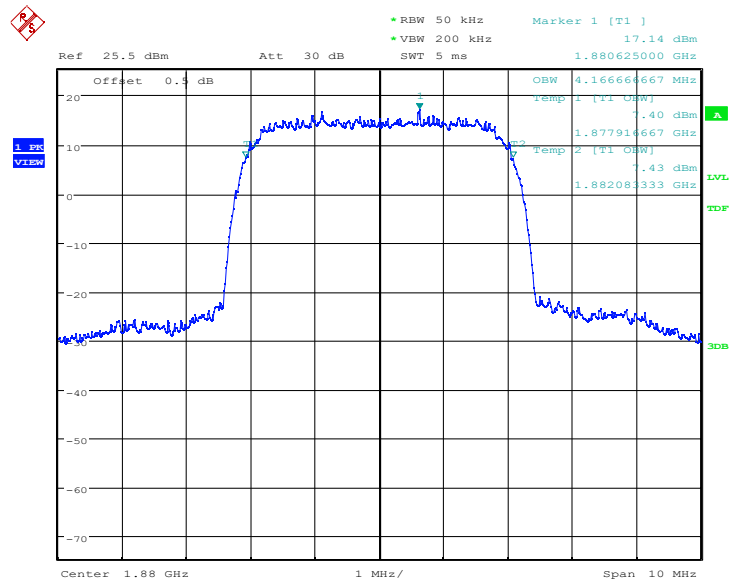


Date: 15.JUN.2022 00:20:17

Channel 9538-Occupied Bandwidth (99% BW)

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

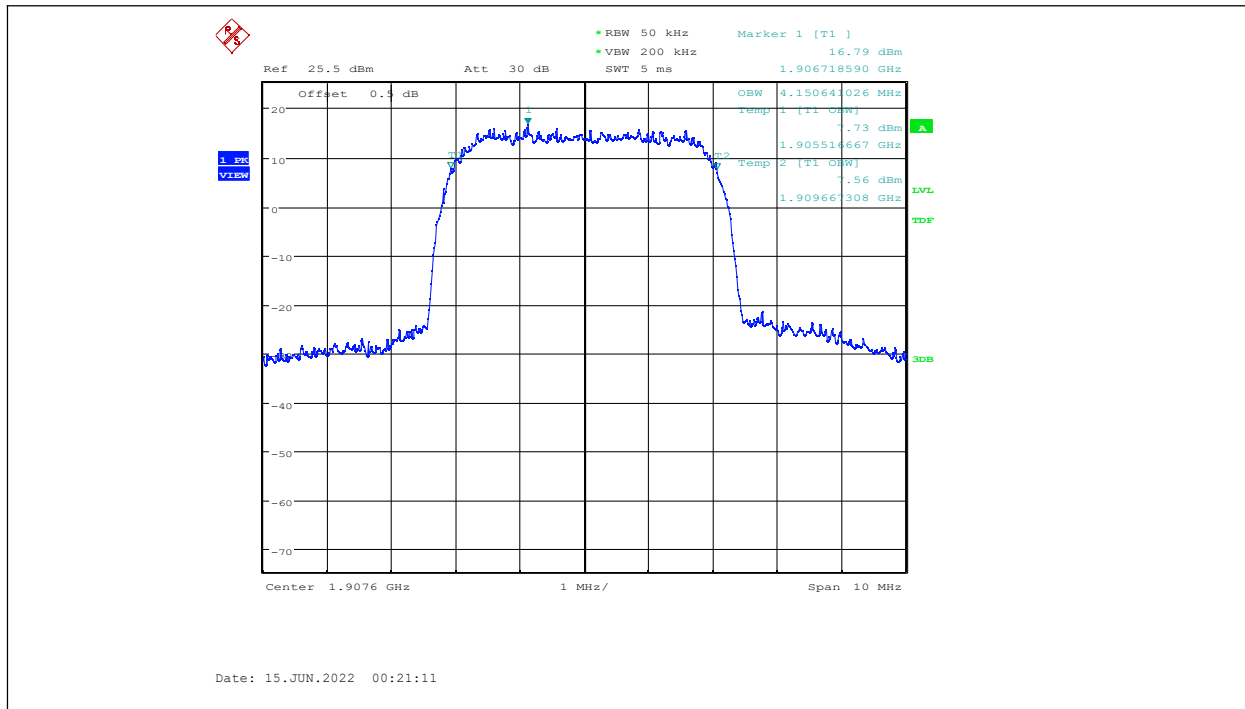


WCDMA Band 4 (99%)-QPSK

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)
1712.4	4.183
1732.4	4.151
1752.6	4.167


WCDMA Band 4 (99%)

Channel 1312-Occupied Bandwidth (99% BW)

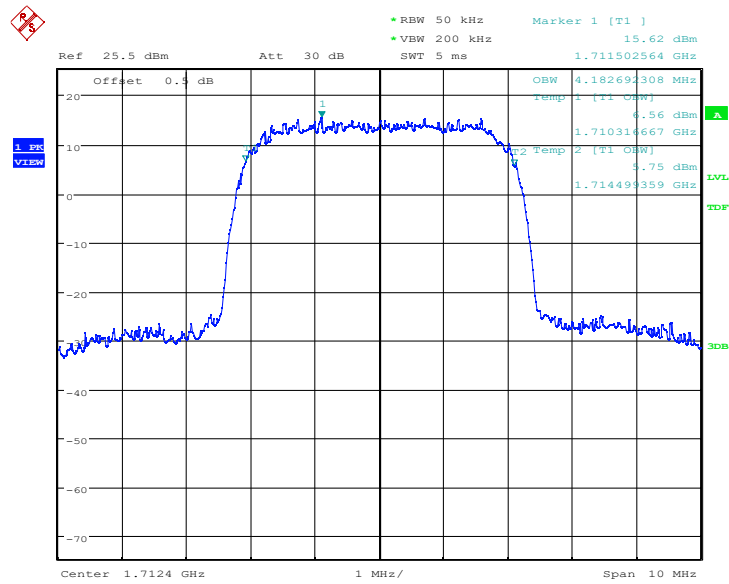

Date: 15.JUN.2022 00:21:45

Channel 1412-Occupied Bandwidth (99% BW)

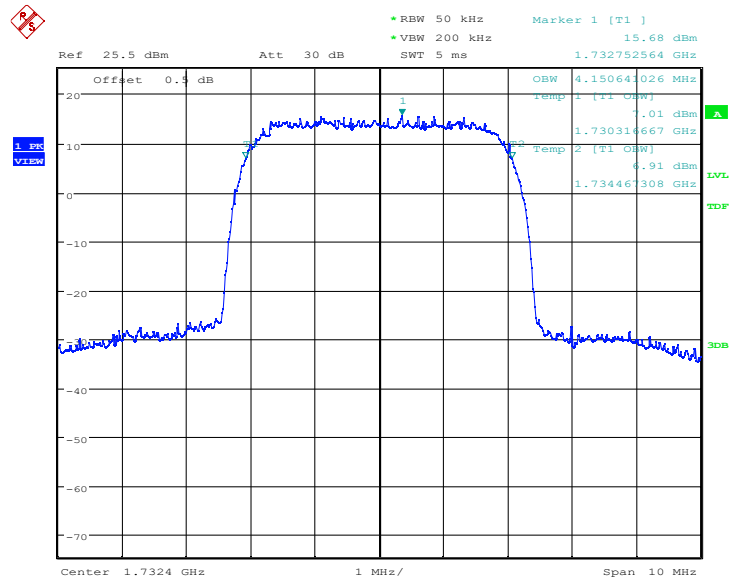


Date: 15.JUN.2022 00:22:42

Channel 1513-Occupied Bandwidth (99% BW)

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

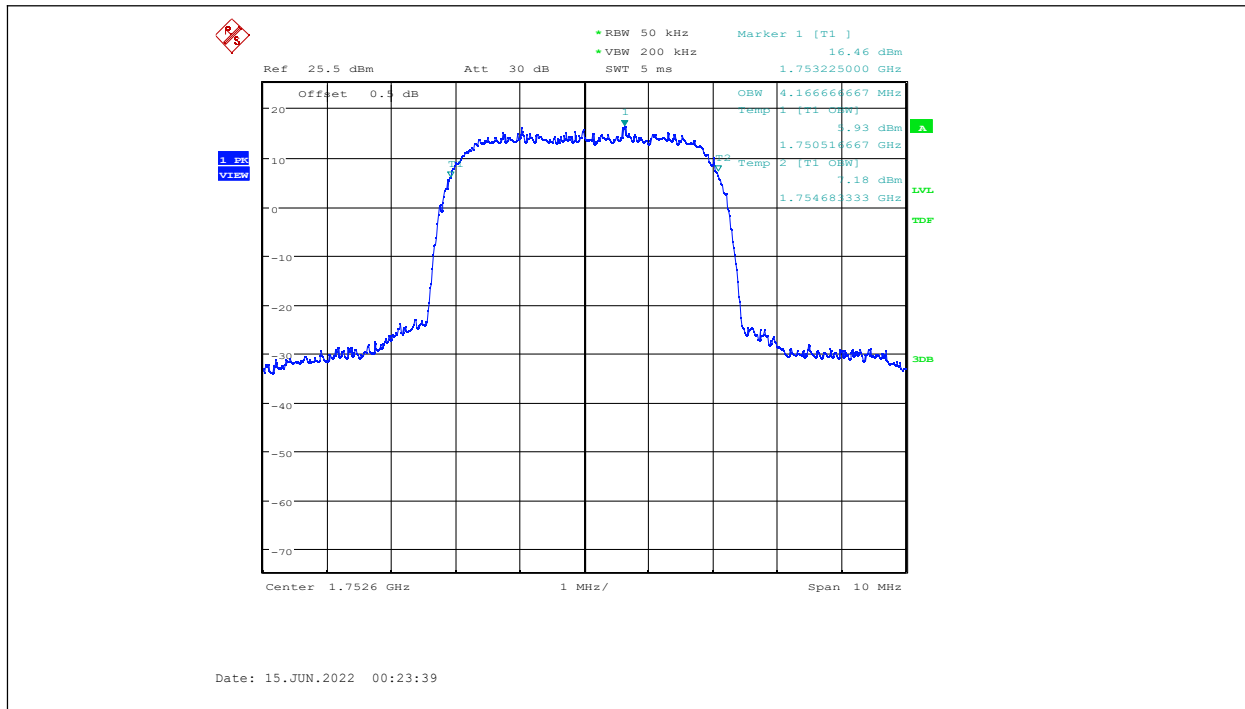


WCDMA Band 4 (99%)-16QAM

Frequency (MHz)	Occupied Bandwidth (99%) (MHz)
1712.4	4.183
1732.4	4.151
1752.6	4.167


WCDMA Band 4 (99%)

Channel 1312-Occupied Bandwidth (99% BW)

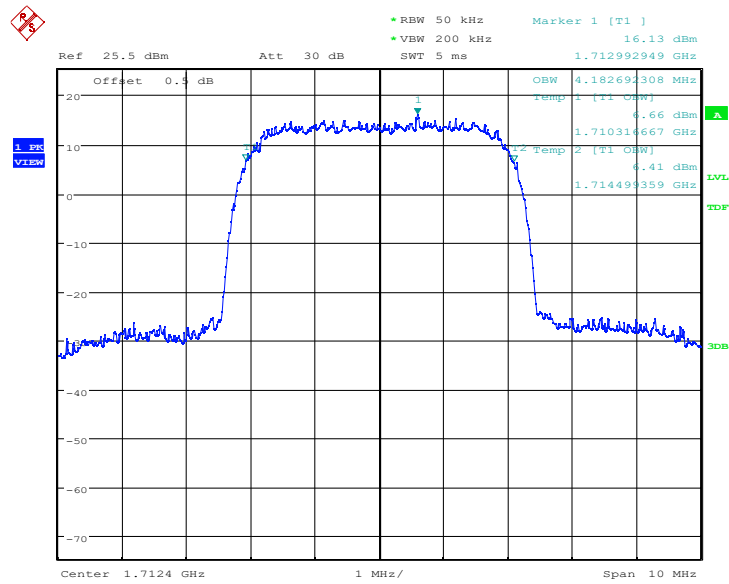

Date: 15.JUN.2022 00:22:15

Channel 1412-Occupied Bandwidth (99% BW)

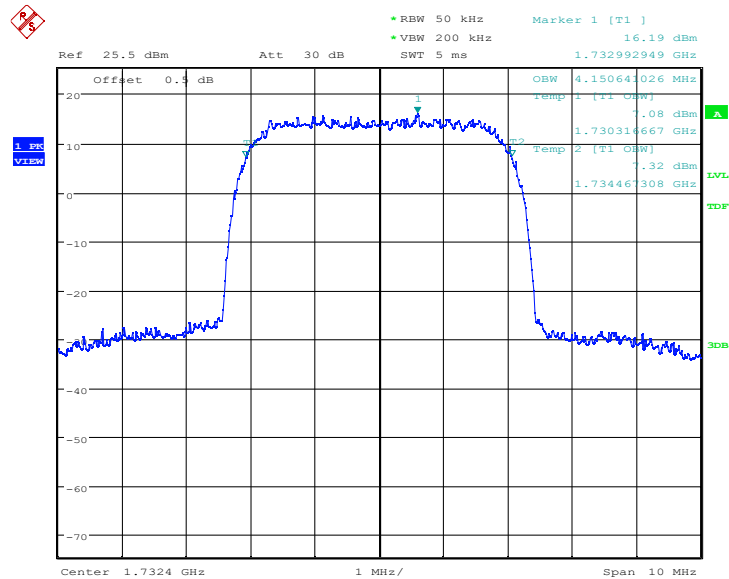


Date: 15.JUN.2022 00:23:09

Channel 1513-Occupied Bandwidth (99% BW)

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

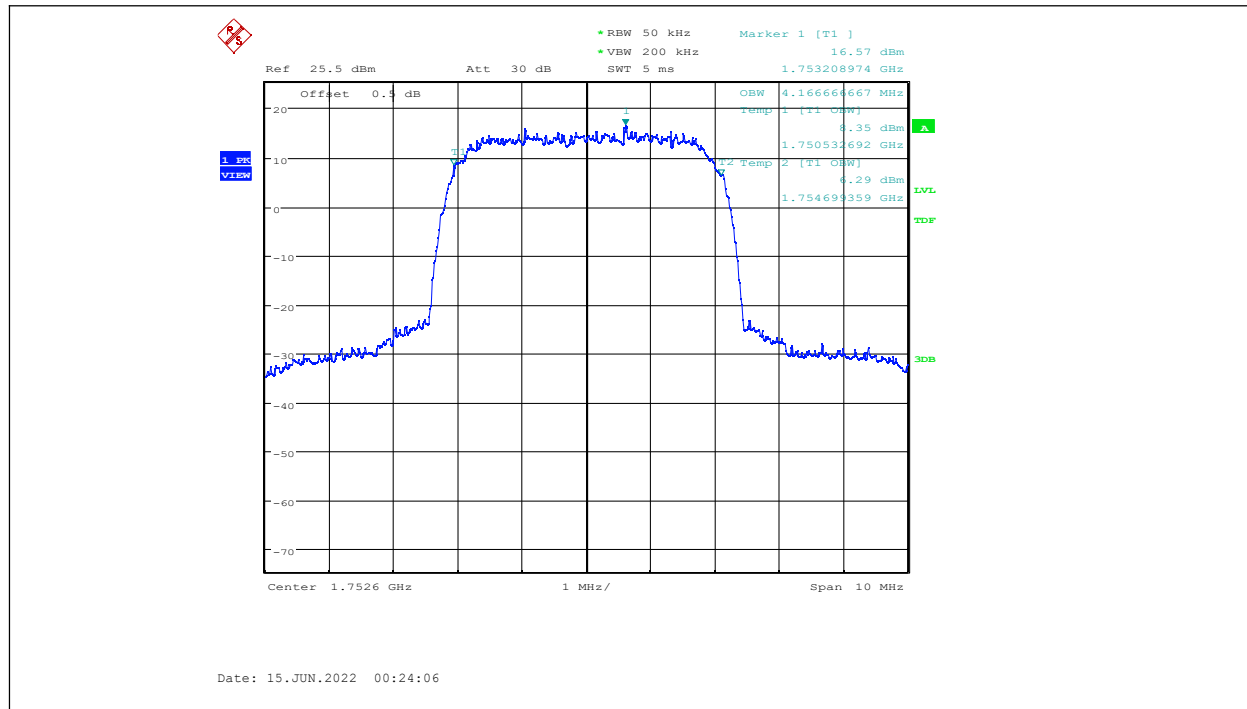


WCDMA Band 2 (-26dBc)-QPSK

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)
1852.4	4.696
1880	4.679
1907.6	4.679


WCDMA Band 2 (-26dBc)

Channel 9262-Emission Bandwidth (-26dBc BW)

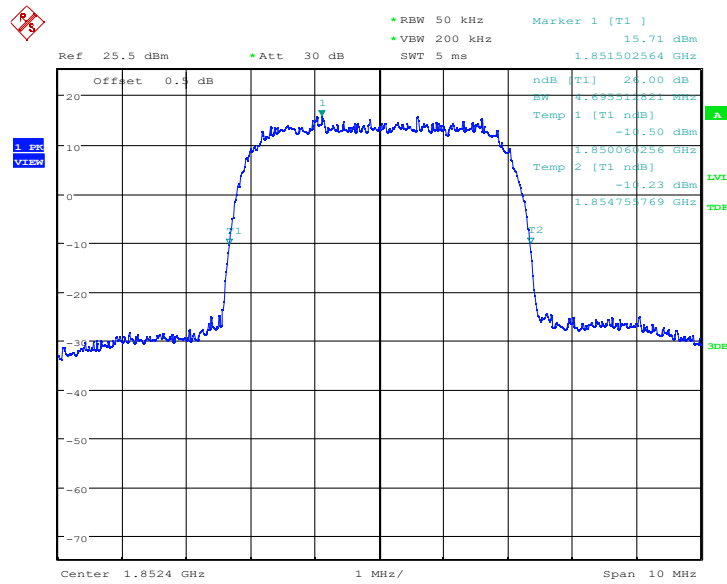

Date: 15.JUN.2022 04:38:32

Channel 9400-Emission Bandwidth (-26dBc BW)

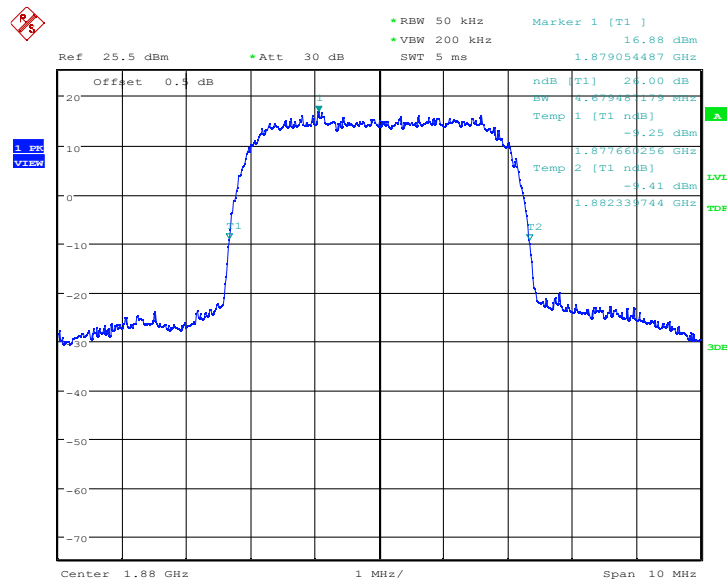


Date: 15.JUN.2022 04:39:24

Channel 9538-Emission Bandwidth (-26dBc BW)

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

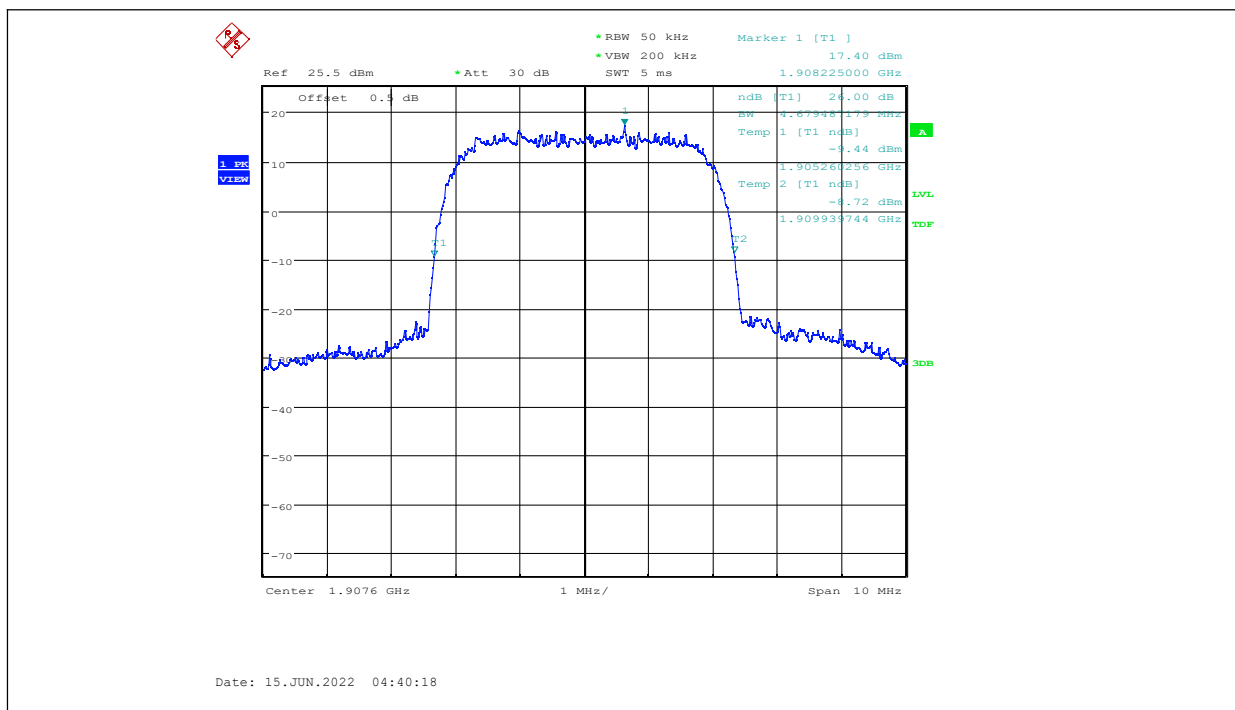


WCDMA Band 2 (-26dBc)-16QAM

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)
1852.4	4.696
1880	4.679
1907.6	4.679


WCDMA Band 2 (-26dBc)

Channel 9262-Emission Bandwidth (-26dBc BW)

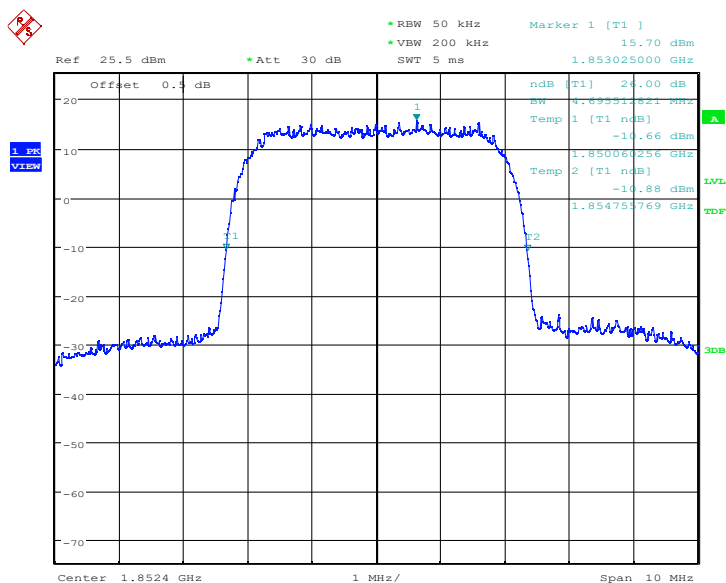

Date: 15.JUN.2022 04:38:59

Channel 9400-Emission Bandwidth (-26dBc BW)

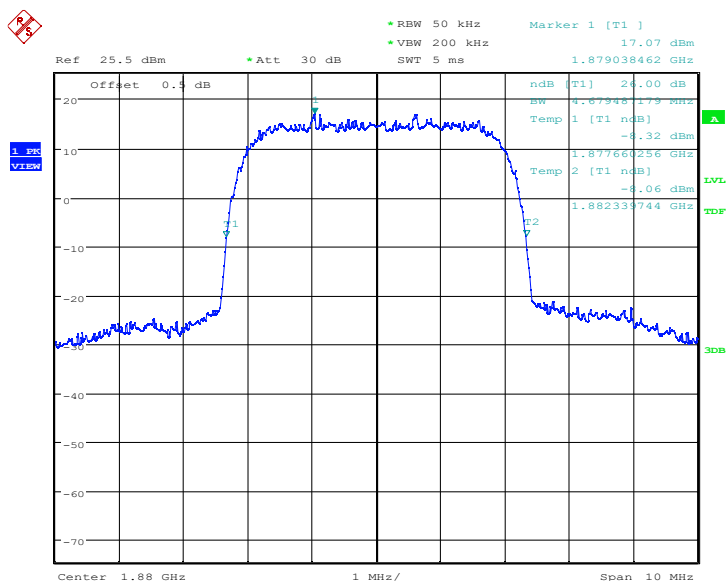


Date: 15.JUN.2022 04:39:51

Channel 9538-Emission Bandwidth (-26dBc BW)

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

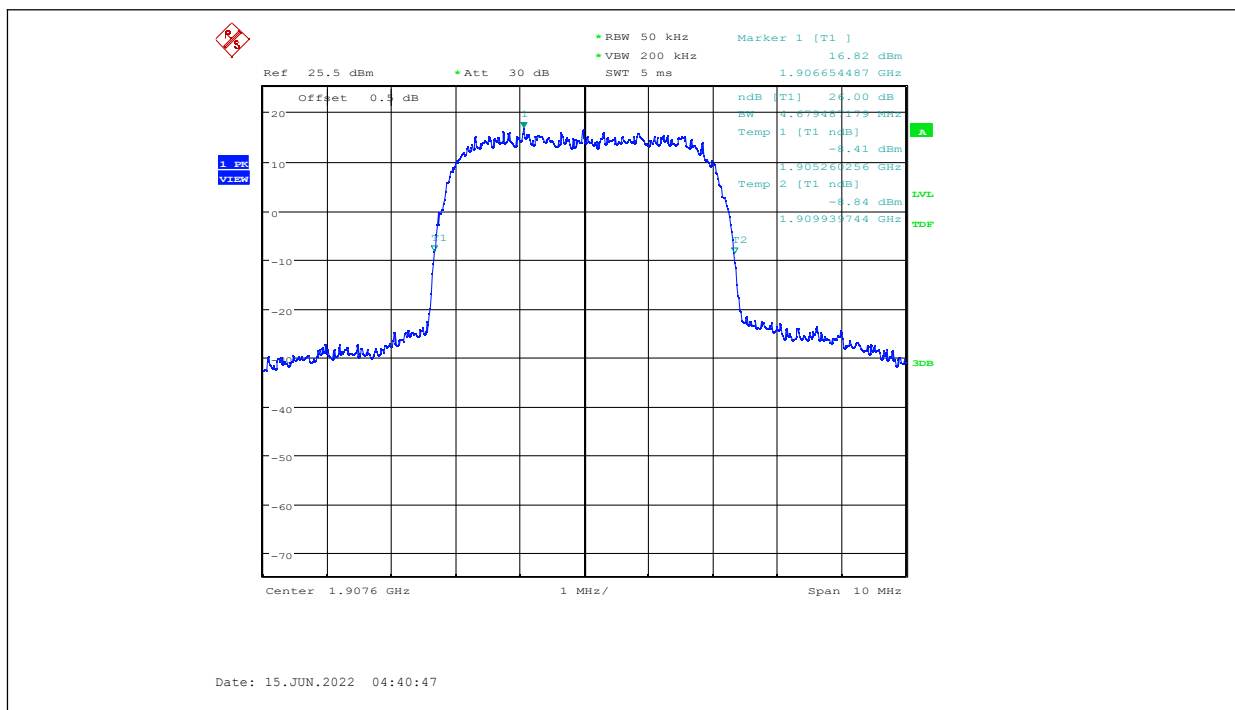


WCDMA Band 4 (-26dBc)-QPSK

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)
1712.4	4.679
1732.4	4.679
1752.6	4.696


WCDMA Band 4 (-26dBc)

Channel 1312-Emission Bandwidth (-26dBc BW)

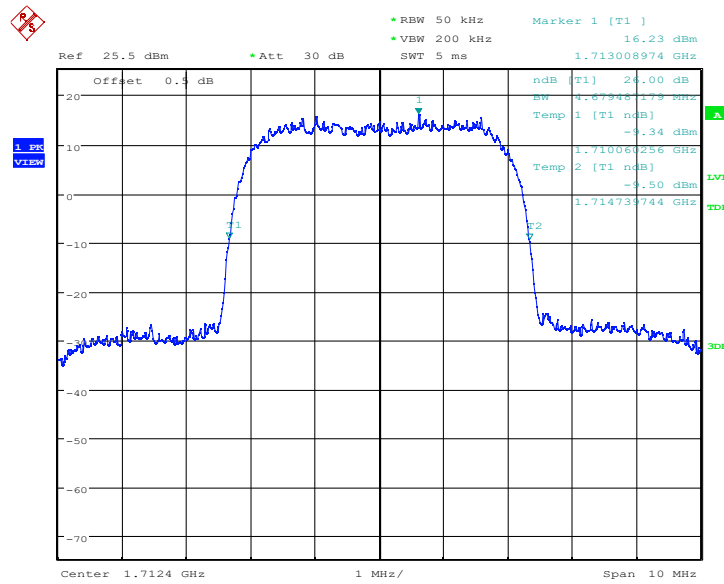

Date: 15.JUN.2022 04:41:24

Channel 1412-Emission Bandwidth (-26dBc BW)

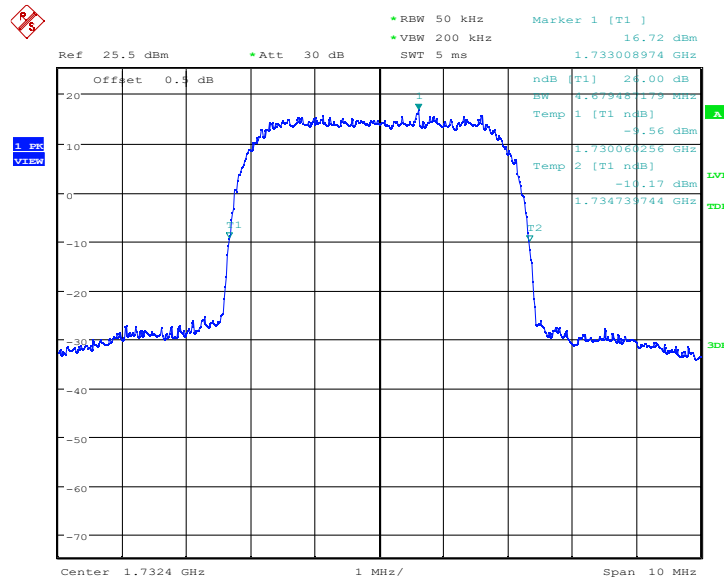


Date: 15.JUN.2022 04:42:23

Channel 1513-Emission Bandwidth (-26dBc BW)

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

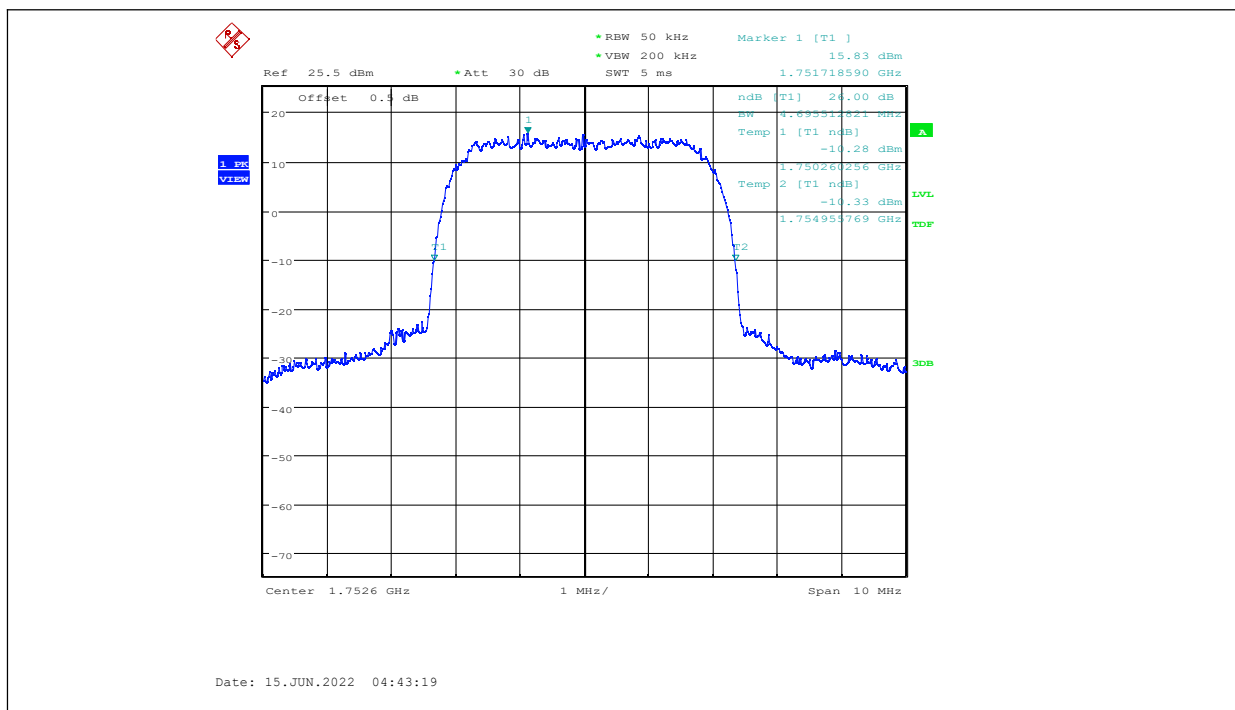


WCDMA Band 4 (-26dBc)-16QAM

Frequency (MHz)	Emission Bandwidth (-26dBc)(MHz)
1712.4	4.712
1732.4	4.679
1752.6	4.696


WCDMA Band 4 (-26dBc)

Channel 1312-Emission Bandwidth (-26dBc BW)

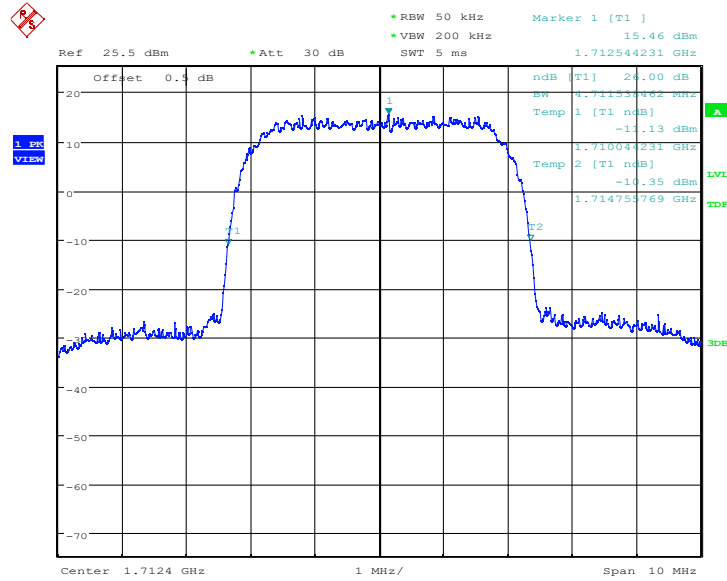

Date: 15.JUN.2022 04:41:56

Channel 1412-Emission Bandwidth (-26dBc BW)

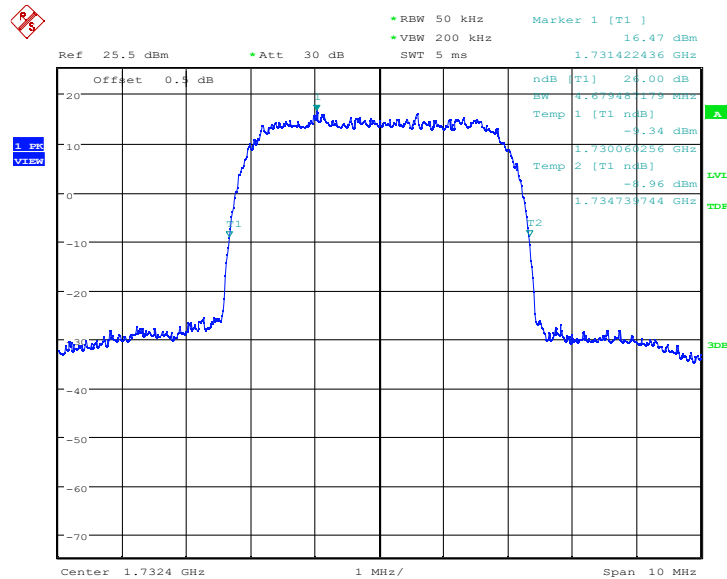

Date: 15.JUN.2022 04:42:51

Channel 1513-Emission Bandwidth (-26dBc BW)

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777



The screenshot displays a spectrum analyzer interface. At the top left, there is a red diamond icon with the letters 'R' and 'S'. The main plot area shows a blue trace of a signal centered at 1.75 GHz. The y-axis represents power in dBm, ranging from -70 to 20. The x-axis represents frequency in MHz, with labels for Center (1.7526 GHz), Span (10 MHz), and Offset (0.5 dB). A green cursor labeled 'T1' points to the peak of the signal at approximately 1.7526 GHz. To the right of the plot, a panel displays various parameters: Ref 25.5 dBm, Att 30 dB, SWT 5 ms, Marker 1 [T1] 16.30 dBm, BW 4.69551821 MHz, Temp 1 [T1 nB] -9.88 dBm, Temp 2 [T1 nB] -10.28 dBm, and 1.75495769 GHz. On the far right, there are several colored buttons: a green button labeled 'A', a yellow button labeled 'LVL', a red button labeled 'TDF', and a green button labeled 'JDB'. Below the plot area, there are three input fields: 'Center 1.7526 GHz', 'Span 10 MHz', and 'Offset 0.5 dB'. A small red box with the text '1.8G VIEW' is located on the left side of the plot area.

6.5. Conducted spurious emissions

Specifications:	FCC Part 2.1051, 24.238, 2.1053, 27.53
DUT Serial Number:	864788050910772
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60% Air pressure: 86-106kPa
Test Results:	Pass

Limit Level Construction:

According to Part 24.238 (a), i.e., Out of Band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB, so the limit level is: $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13\text{dBm}$.

According to Part 27.53(h):

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 Bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

Measurement Uncertainty:


Item	Uncertainty	
Expanded Uncertainty	$9\text{kHz} < f \leq 4\text{GHz}$	0.71 dB (k=2)
	$4\text{GHz} \leq f < 12.75\text{GHz}$	0.74 dB (k=2)
	$12.75\text{GHz} \leq f < 26\text{GHz}$	2.70 dB (k=2)

Test Setup:

During the test, the EUT was controlled via the Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by spectrum analyzer.

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

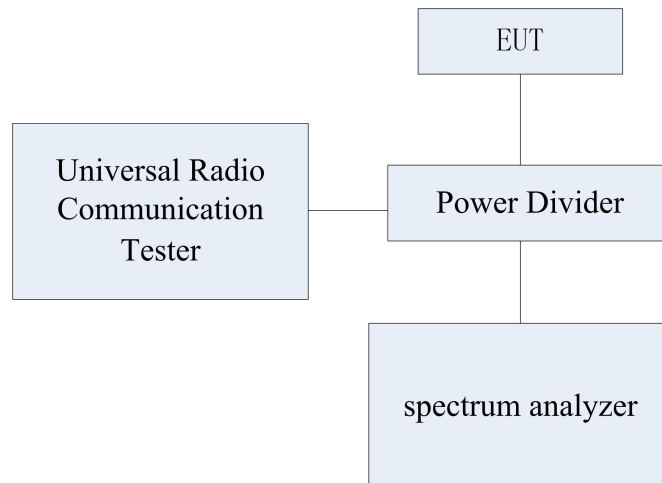**Test Method:**


The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-Band emissions, if any, up to 10th harmonic. The EUT was scanned for spurious emissions from 30MHz to 20GHz with sufficient Bandwidth and video resolution. The spectrum analyzer was set to Maximum hold mode to ensure that the worst-case emissions were captured.

Note: --

6.5.1 Conducted Spurious Emission Results WCDMA Band 2-QPSK

Channel 9262:30MHZ - 17550MHZ

NOTE: peak above the limit line is the carrier frequency.

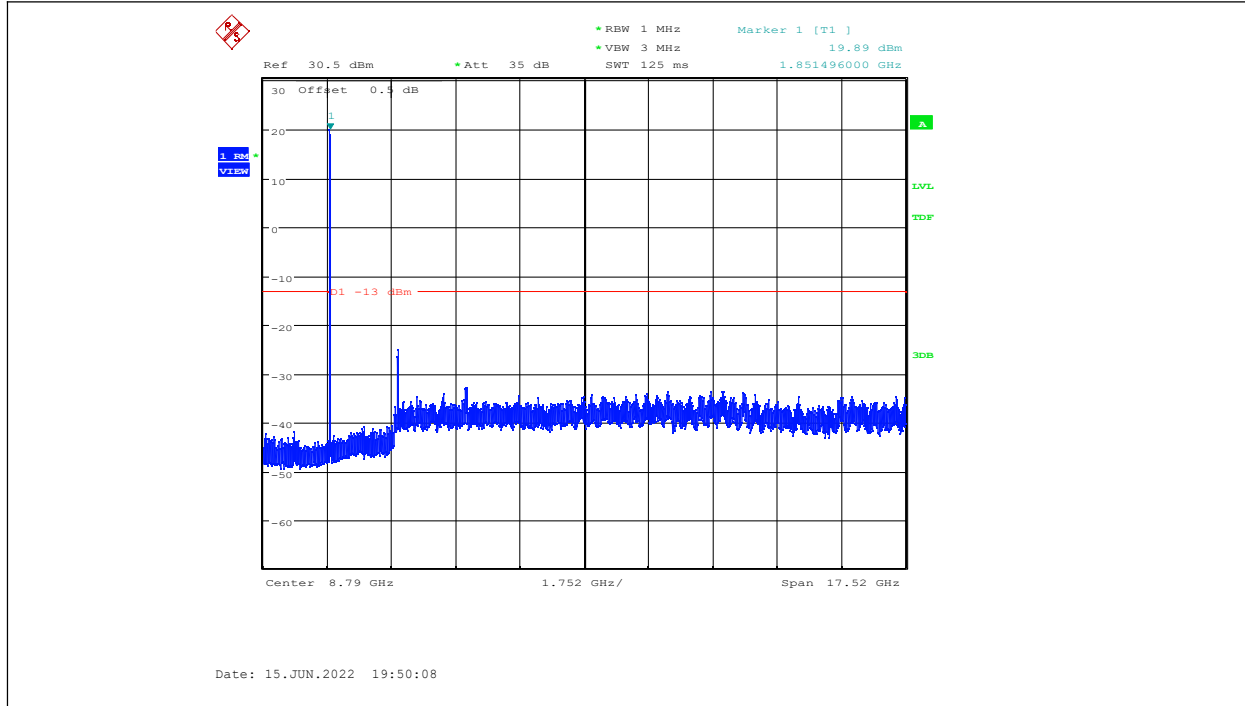


Channel 9400:30MHZ - 17550MHZ

NOTE: peak above the limit line is the carrier frequency.


Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

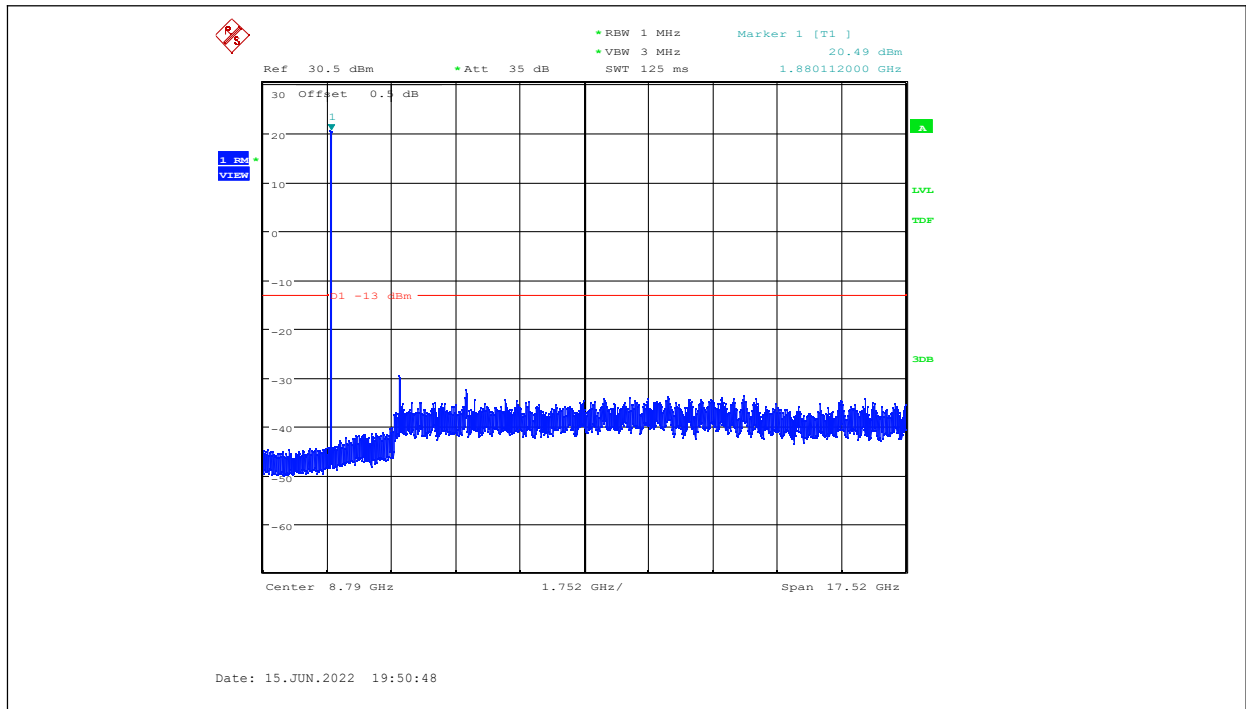

Channel 9538:30MHZ - 17550MHZ

NOTE: peak above the limit line is the carrier frequency.

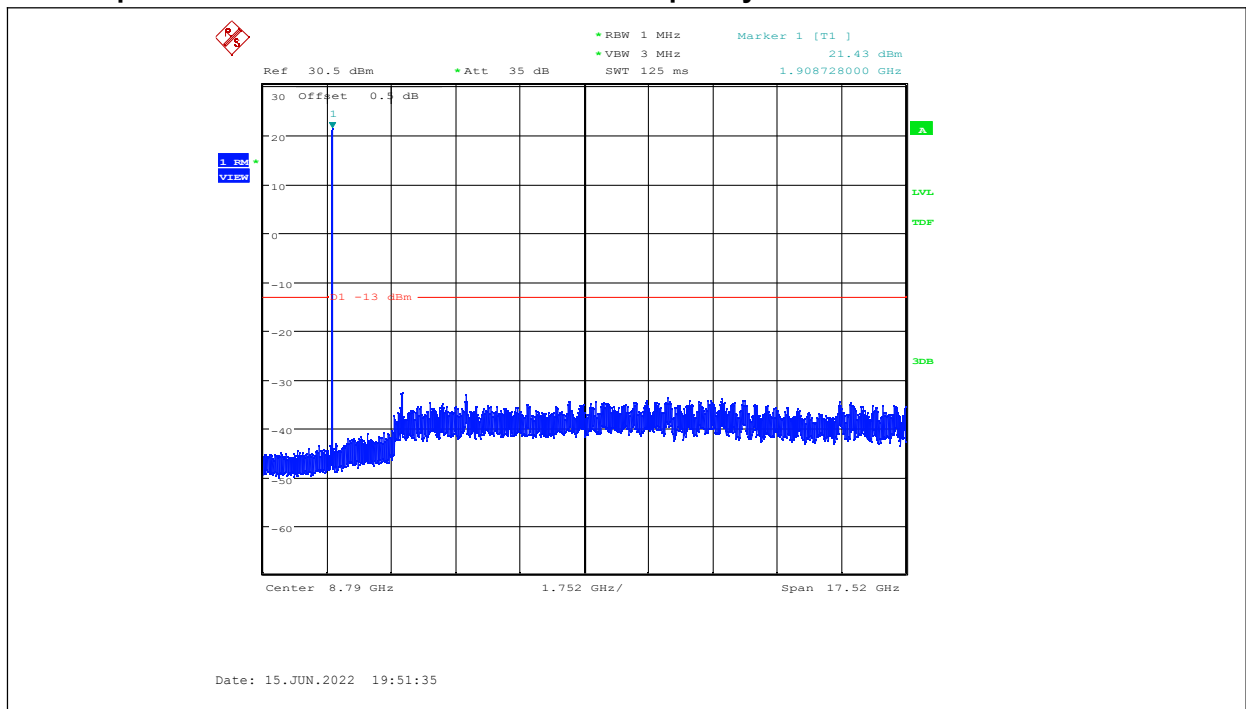


WCDMA Band 4-QPSK

Channel 1312:30MHZ - 17550MHZ

Chongqing Academy of Information and Communication Technology


Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

NOTE: peak above the limit line is the carrier frequency.

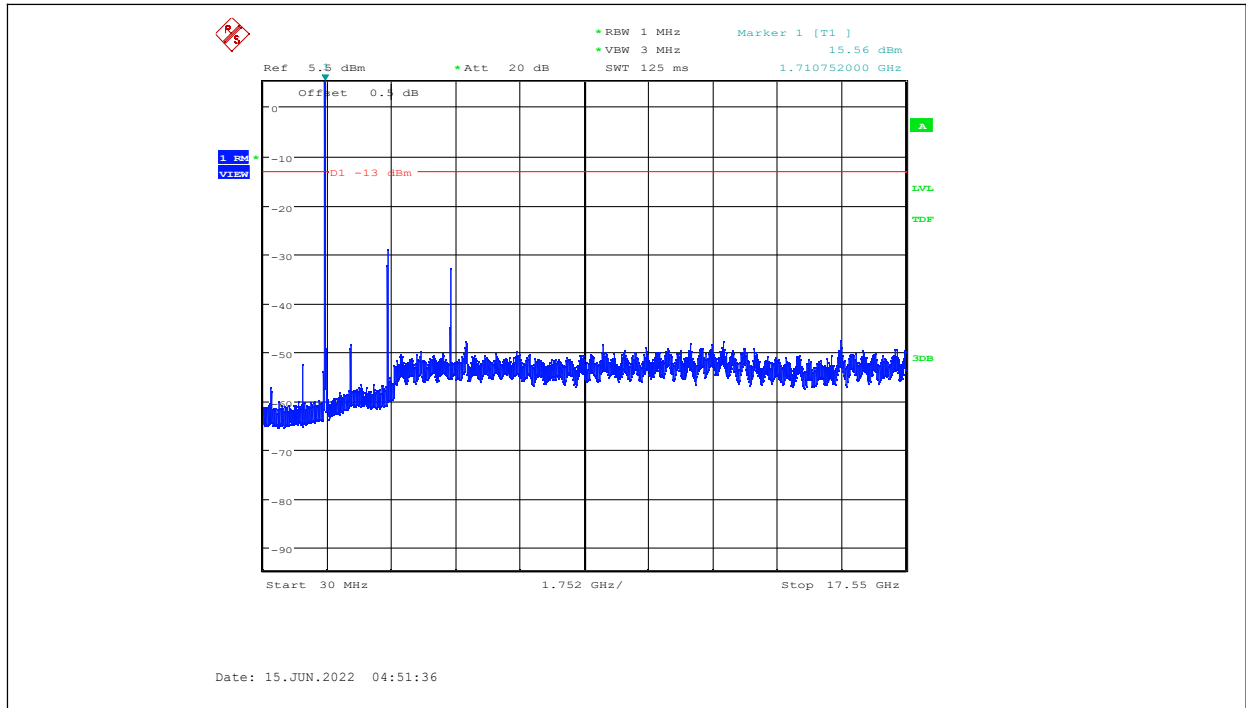

Channel 1412:30MHZ - 17550MHZ

NOTE: peak above the limit line is the carrier frequency.

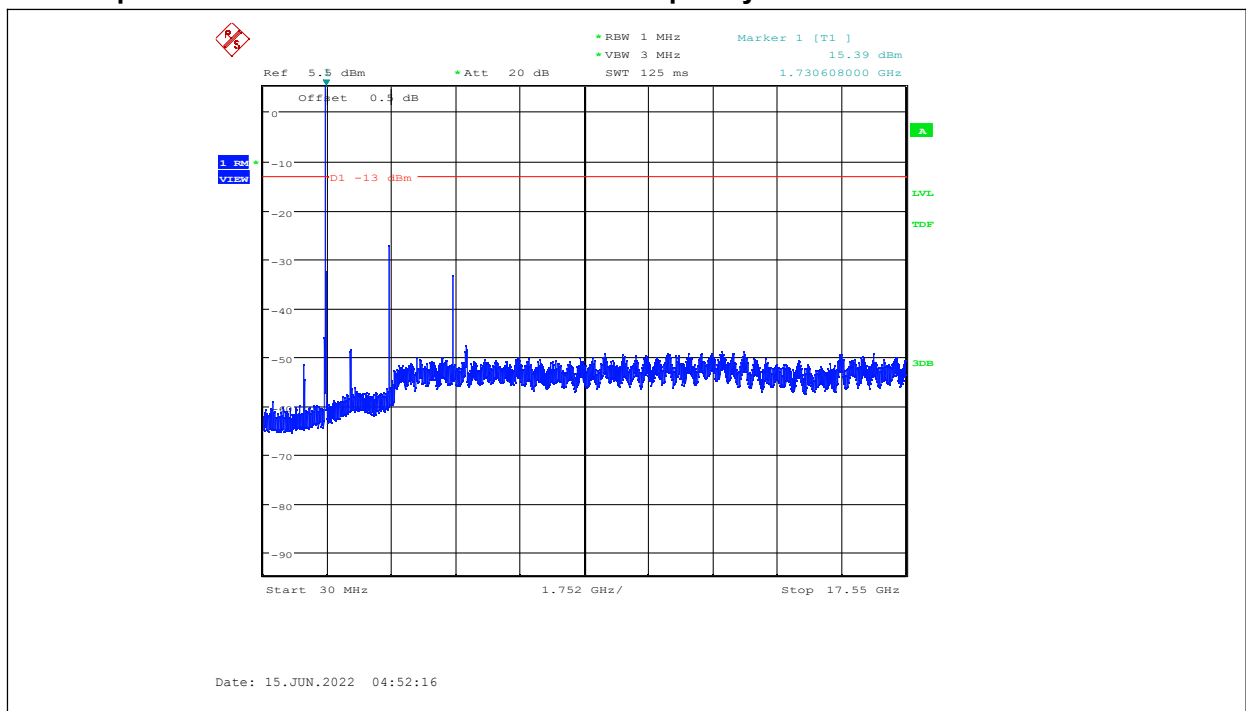


Channel 1513:30MHZ - 17550MHZ

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

NOTE: peak above the limit line is the carrier frequency.

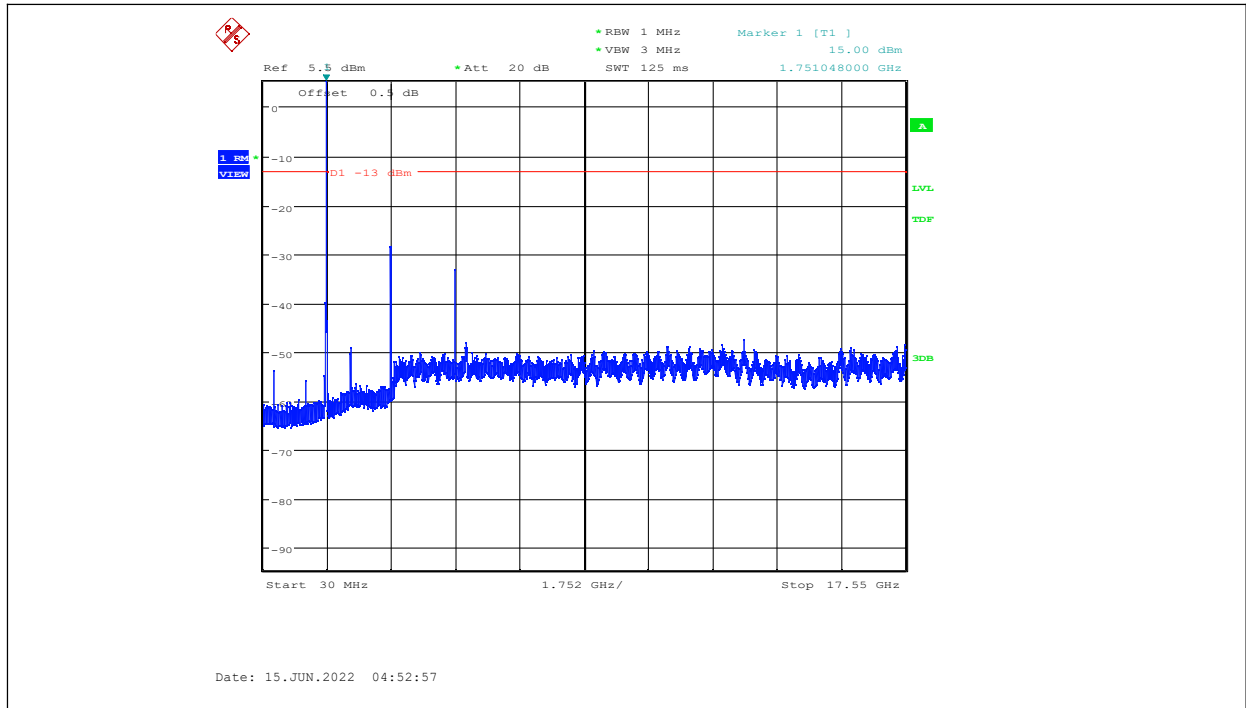

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

6.6. Radiated Spurious Emission

Specifications:	FCC Part 2.1051, 2.1053, 24.238, 27.53
DUT Serial Number:	864788050032635
Test conditions:	Ambient Temperature:24.1°C-28.8°C Relative Humidity:47%-59% Air pressure: 96.0-97.6kPa
Test Results:	Pass

Limit Level Construction:

According to Part 24.238 (a), i.e., Out of Band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB, so the limit level is: $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13\text{dBm}$.

According to Part 27.53(h):

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 Bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

Measurement Uncertainty:

Item	Uncertainty
Expanded Uncertainty (30MHz-150MHz)	5.15 dB (k=2)
Expanded Uncertainty (150MHz-1GHz)	4.09dB (k=2)
Expanded Uncertainty (1GHz-3GHz)	2.92dB (k=2)
Expanded Uncertainty (3GHz-6GHz)	2.93dB (k=2)
Expanded Uncertainty (3GHz-12.75GHz)	2.69dB (k=2)

Test Setup:

The EUT was placed in an anechoic chamber. The Wireless Communications Test Set was used to set the TX channel and power level and modulate the TX signal with different bit patterns.


Test Method:

The measurement method is substitution method accordance with section 2.2.12 of ANSI/TIA-603-E: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.


(a) Connect the equipment as illustrated and measure the spurious emissions as the method as above. The distance from the device to the antenna is 3 m .

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

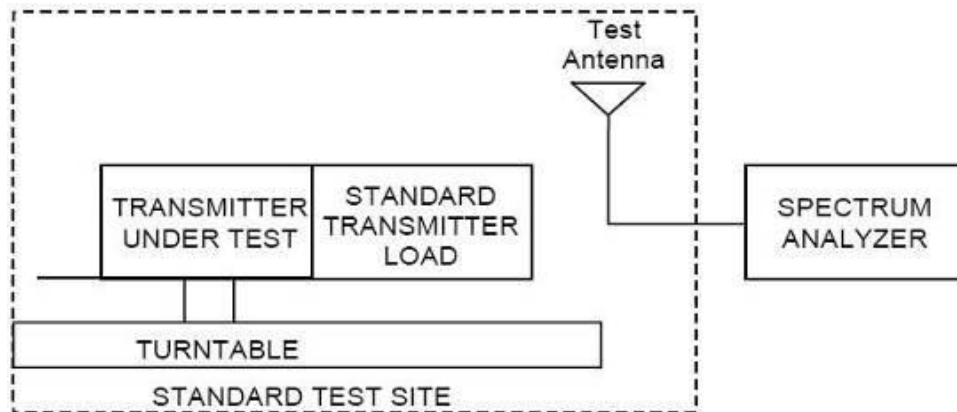

(b) Reconnect the equipment as illustrated.

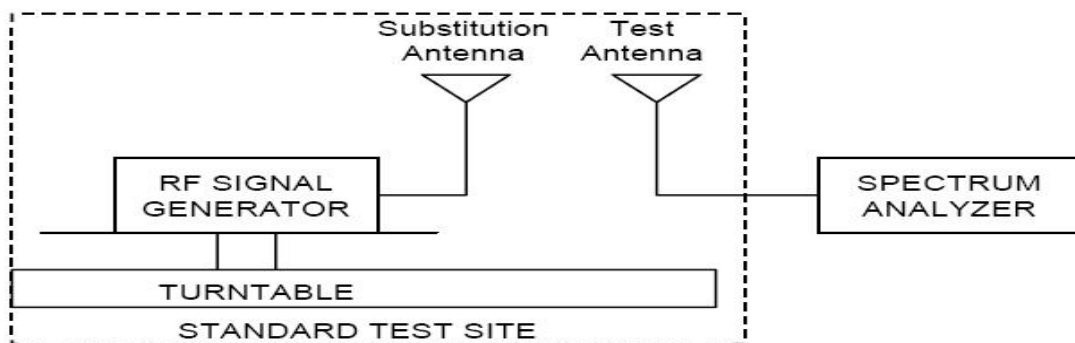

(c) Remove the transmitter and replace it with a substitution antenna. The center of the substitution antenna should be approximately at the same location as the center of the transmitter.

(d) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized, and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.

(e) Repeat step d) with both antennas vertically polarized for each spurious frequency.

(f) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps d) and e) by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

where:

P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

Note: The evaluation of radiated spurious emission under the simultaneous transmission of WWAN & WLAN.

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

6.6.1 WCDMA Radiated Spurious Emission Results

WCDMA B2 Radiated Spurious Emission Results

Test Data (QPSK Mode channel 9262)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
3704.8	-64.1	1.6	8.9	-56.8	V
5557.2	-63.0	2.2	10.5	-54.7	V
7409.6	-60.0	2.5	11.9	-50.6	V
9262.0	-58.2	3.1	11.5	-49.8	V
11114.4	-55.7	3.4	12.1	-47.0	V
12966.8	-52.1	3.7	12.4	-43.4	V

Test Data (QPSK Mode channel 9400)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
3760.0	-58.4	1.6	9.3	-56.5	V
5640.0	-62.7	2.2	10.3	-54.2	V
7520.0	-61.3	2.5	11.7	-50.5	V
9400.0	-60.6	3.1	12.4	-49.0	V
11280.0	-60.5	3.4	13.8	-47.0	V
13160.0	-56.8	3.7	14.1	-43.1	V

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

Test Data (QPSK Mode channel 9538)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
3815.2	-64.5	1.6	9.2	-56.9	V
5722.8	-62.8	2.2	10.5	-54.5	V
7630.4	-60.0	2.5	11.9	-50.6	V
9538.0	-59.5	3.1	11.8	-50.8	V
11445.6	-57.8	3.4	12.2	-49.0	V
13353.2	-56.1	3.5	12.4	-47.2	V

WCDMA B4 Radiated Spurious Emission Results

Test Data (QPSK Mode channel 1312)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
3424.8	-64.0	1.5	9.0	-56.5	V
5137.2	-60.6	2.0	9.8	-52.8	V
6849.6	-59.2	2.5	11.4	-50.3	V
8562.0	-58.1	3.0	12.2	-48.9	V
10274.4	-57.3	3.5	13.2	-47.6	V
11986.8	-53.9	3.7	14.0	-43.6	V

Test Data (QPSK Mode channel 1412)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
3464.8	-65.5	1.5	8.9	-58.1	V
5197.2	-60.3	2.0	9.9	-52.4	V
6929.6	-59.5	2.5	11.9	-50.1	V

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

Report No.: I22W00046-WCDMA-WWAN

8662.0	-57.1	3.0	11.2	-48.9	V
10394.4	-53.9	3.5	12.2	-45.2	V
12126.8	-51.2	3.7	12.2	-42.7	V

Test Data (QPSK Mode channel 1513)

Frequency [MHz]	Generator output power(Pg) [dBm]	Cable loss [dB]	Antenna Gain [dB]	Spurious Emission Power (Pd) [dBm]	Antenna Polarization [H/V]
3505.2	-60.3	1.5	8.9	-52.9	V
5257.8	-60.4	2.0	9.9	-52.5	V
7010.4	-57.0	2.5	11.9	-47.6	V
8763.0	-51.6	3.0	11.2	-43.4	V
10515.6	-51.9	3.5	12.2	-43.2	V
12268.2	-48.7	3.7	12.2	-40.2	V

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

6.7. Band Edge

Specifications:	FCC Part 2.1051, 24.238, 2.1053, 27.53
DUT Serial Number:	864788050910772
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60% Air pressure: 86-106kPa
Test Results:	Pass

Limit Level Construction:

According to Part 24.238 (a), i.e., Out of Band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB, so the limit level is: $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13\text{dBm}$.

According to Part 27.53(h):

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 Bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

Measurement Uncertainty:


Item	Uncertainty	
Expanded Uncertainty	$9\text{kHz} < f \leq 4\text{GHz}$	0.71 dB (k=2)
	$4\text{GHz} \leq f < 12.75\text{GHz}$	0.74 dB (k=2)
	$12.75\text{GHz} \leq f < 26\text{GHz}$	2.70 dB (k=2)

Test Setup:

During the test, the EUT was controlled via the Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by spectrum analyzer.

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

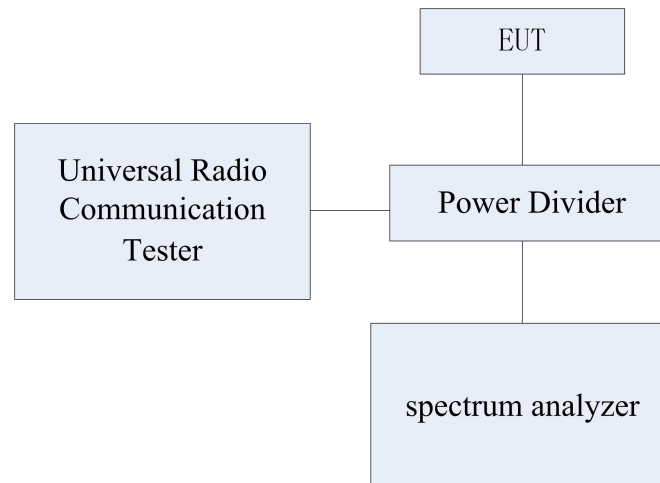**Test Method:**


- 1) The EUT was coupled to the EMI test receiver analyzer mode and the base station simulator through a power divider. The loss of the cables the test system is calibrated to correct the readings.
- 2) The spectrum analyzer was set to Average Detector function and Maximum hold mode.
- 3) The resolution Bandwidth of the spectrum analyzer was a little greater than 1% of the 26dB emission Bandwidth.

Note: In the graphical result description (X, Y), X represents the number of RB, Y represents the RB offset.

6.7.1 Band Edge Results


WCDMA Band 2-QPSK

Channel 9262

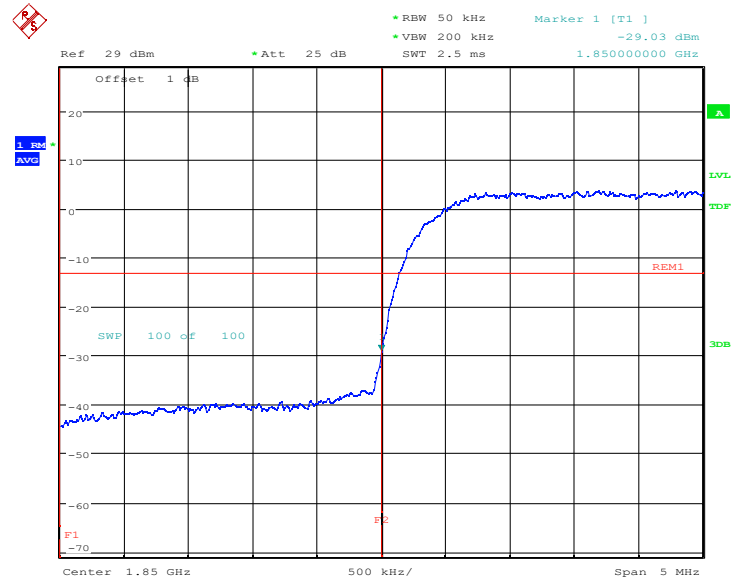

Date: 15.JUN.2022 04:45:18

Channel 9538

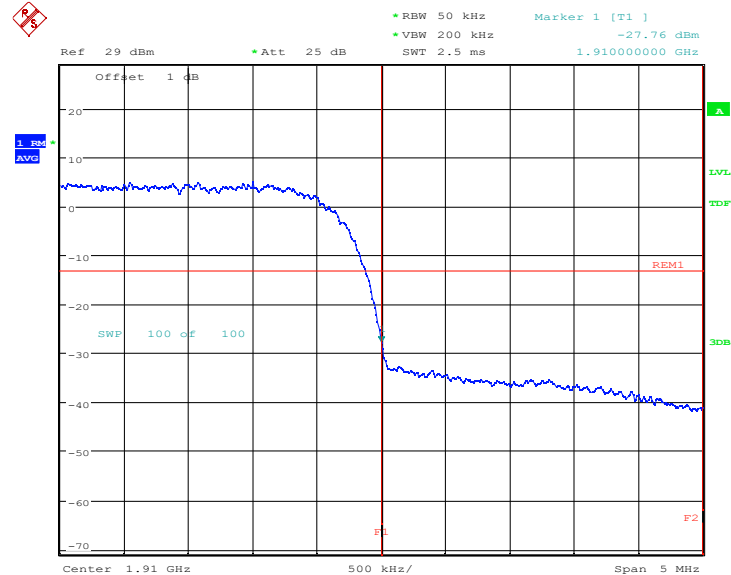

Date: 15.JUN.2022 04:46:10

WCDMA Band 4-QPSK


Channel 1312

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

[illegible]

Channel 1513

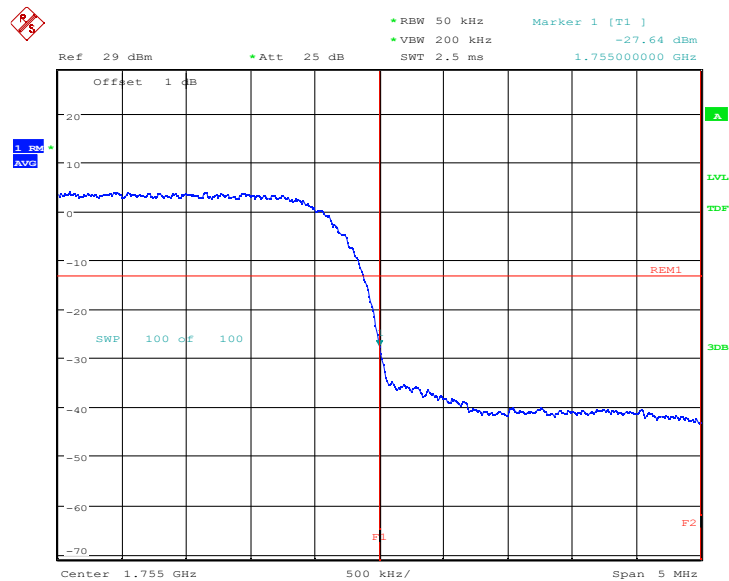

Chongqing Academy of Information and Communication Technology

Page 54 of 64

6.8. Frequency Stability

Specifications:	FCC Part 2.1055, 24.235, 27.54
DUT Serial Number:	864788050910772
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60% Air pressure: 86-106kPa
Test Results:	Pass

Limit	
Frequency deviation [ppm]	±2.5

Measurement Uncertainty:

Item	Uncertainty
Expanded Uncertainty	1.54 Hz (k=2)

Test Method

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage. Two reference points are established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as FL and FH respectively.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of CMW500.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500, and in a simulated call on middle channel for each LTE band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the center channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

6.8.1 Frequency Stability over Temperature Variation Results

WCDMA Band 2-QPSK

Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.8	1850.130	1909.890		
50				2.64	0.0028
40				3.00	0.0032
30				0.35	0.0004
10				-2.08	0.0022
0				0.20	0.0002
-10				3.80	0.0040
-20				1.53	0.0016
-30				4.22	0.0045

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.2	20	1850.130	1909.890	7.24	0.0077
4.6				4.20	0.0045

WCDMA Band 4-QPSK

Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
20	3.8	1710.120	1754.890		
50				-4.78	0.0055
40				-2.71	0.0031
30				-3.00	0.0035
10				1.37	0.0016
0				-1.73	0.0020
-10				2.35	0.0027
-20				-6.17	0.0071
-30				-1.88	0.0022

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	FL(MHz)	FH(MHz)	Offset(Hz)	Frequency error(ppm)
3.2	20	1710.120	1754.890	1.19	0.0014
4.6				2.25	0.0026

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

6.9. Peak to Average Ratio


Specifications:	FCC Part 24.232, 27.50
DUT Serial Number:	864788050910772
Test conditions:	Ambient Temperature:15°C-35°C Relative Humidity:30%-60% Air pressure: 86-106kPa
Test Results:	Pass

Limit

The EUT meets the requirement of having a peak to average ratio of less than 13dB.

Test Setup

During the test, the EUT was controlled via the Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by spectrum analyzer.

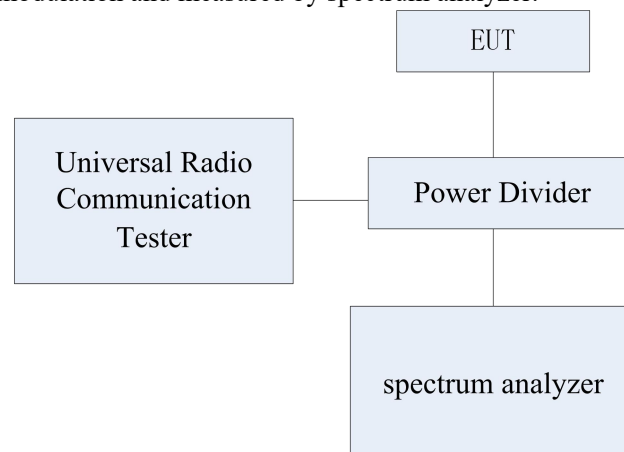

Measurement Uncertainty:

Item	Uncertainty
Expanded Uncertainty	0.62 dB (k=2)

Test Method

The transmitter output was connected to a CMW500 through a coaxial RF cable and directional coupler, and configured to operate at maximum power. The peak to average ratio was measured at the required operating frequencies in each Band on the Spectrum Analyzer.

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777


6.9.1 Peak to Average Ratio Results

WCDMA Band 2-QPSK

Measurement result

CH	Frequency (MHz)	PAPR (dB)
9400	1880	3.14

Channel 9400-1880MHz

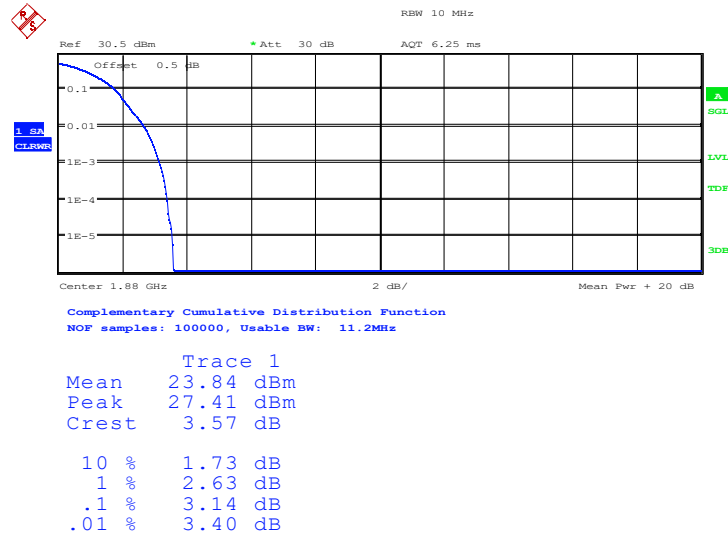


Date: 15.JUN.2022 04:54:01

WCDMA Band 2-16QAM

Measurement result

CH	Frequency (MHz)	PAPR (dB)
9400	1880	5.51

Channel 9400-1880MHz

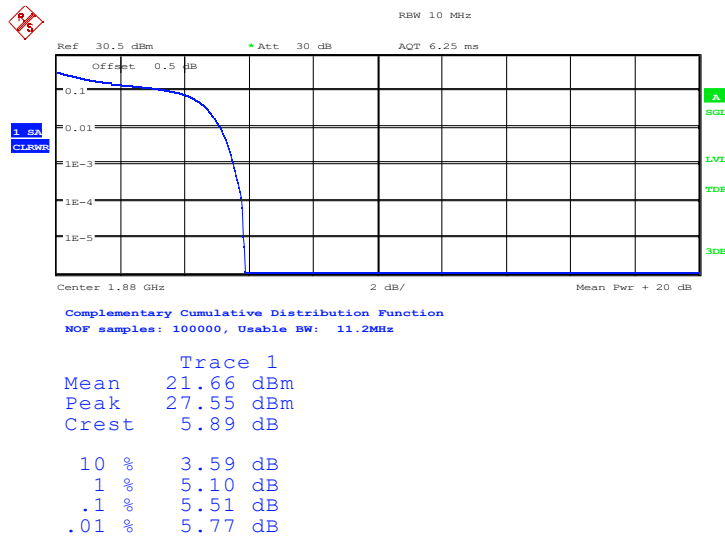

Date: 15.JUN.2022 04:54:59

Chongqing Academy of Information and Communication Technology


Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777

WCDMA Band 4-QPSK

Measurement result

CH	Frequency (MHz)	PAPR (dB)
1412	1732.4	3.08

Channel 1412-1732.4MHz

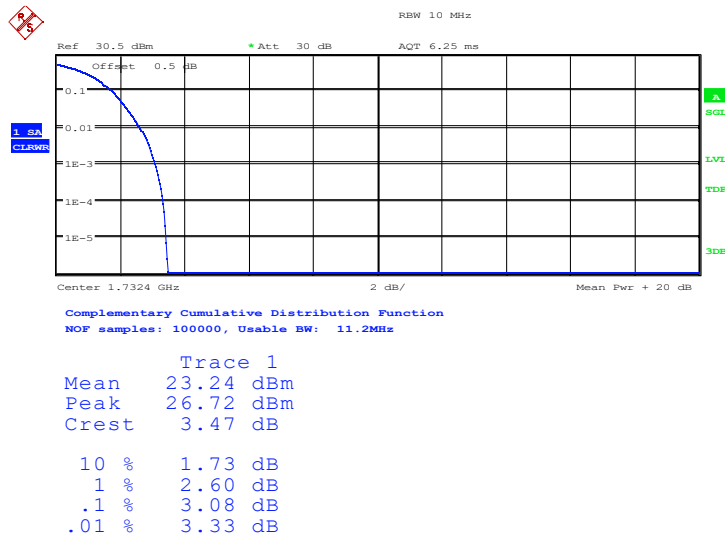

Date: 15.JUN.2022 04:57:58

Chongqing Academy of Information and Communication Technology


Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777

WCDMA Band 4-16QAM

Measurement result

CH	Frequency (MHz)	PAPR (dB)
1412	1732.4	5.03

Channel 1412-1732.4MHz

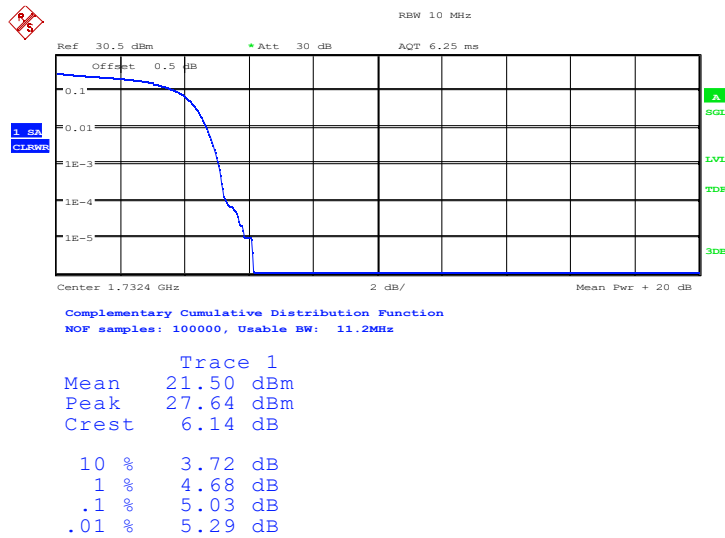

Date: 15.JUN.2022 04:58:54

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336
Tel: 0086-23-88069965 FAX:0086-23-88608777



Report No.: I22W00046-WCDMA-WWAN

Annex A EUT Photos

See the document "I22W00046-External Photos".

See the document "I22W00046-Internal Photos".

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777



Report No.: I22W00046-WCDMA-WWAN

ANNEX B Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

*****END OF REPORT*****

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336
Tel: 0086-23-88069965 FAX: 0086-23-88608777