

FCC Test Firm Designation Number: FR0014

Matériel testé :
Equipment under test:

WIZZILAB / WM205X
(Trademark / Marketing name or product reference)

Client / Demandeur:
Customer / Applicant :

WIZZILAB SAS
29, boulevard Romain Rolland
92120 MONTROUGE – France

Rapport délivré à :
Issued to:

WIZZILAB SAS
M. Yordan TABAKOV
29, boulevard Romain Rolland
92120 MONTROUGE – France

Numéro d'affaire :
Work number :

11522

Référence de la proposition :
Proposal number:

012018-22879-1

Date de l'essai :
Date of test:

13 et 14 décembre 2018
December 13th and 14th, 2018

Objectif des essais :
Test purpose:

EMC qualification accordingly to following standards:
- CFR 47, FCC Part 15, Subpart C
(Chapter 15.247 - Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz)
- Industry Canada RSS-247, Issue 2
(Digital Transmission Systems Operating in the Bands 2400-2483.5 MHz)

Lieu du test:
Test location:

SMEE, Rue de Taille
38500 VOIRON - France

Test réalisé par :
Test realized by:

Laurent CHAPUS

Conclusion :
Conclusion:

L'équipement satisfait aux prescriptions des normes citées en référence.
The appliance complies with requirements of above mentioned standards.

Ed.	Date	Modifications Pages	Written by : Visa	Approved by: Visa
1	March 29 th , 2019	Initial Edition	Laurent Chapus	Régis ANCEL
2	May 15 th , 2019	TCB review (ATCB023799)	 Signature numérique de Chapus Laurent	 Signature numérique de Ancel Régis

La copie de ce document n'est permise que sous sa forme intégrale. Ce document est le résultat d'essais effectués sur un échantillon. Il ne préjuge pas de la conformité de l'ensemble des produits fabriqués à l'objet essayé.

This document shall not be reproduced, except in full. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the item tested.



Accréditation
N° 1-6356
Portée disponible sur :
Scope available on :
www.cofrac.fr

COORDONNEES

SMEE
Rue de Taille – ZI Des Blanchisseries
38500 VOIRON - France

TEL : 04 76 65 76 50
FAX : 04 76 66 18 30

SAS au capital de 50 000 € / RC Grenoble B534 796 453 / SIRET 534 796 453 00015 / code APE 7490B / n° TVA : FR 59 534 796 453

Contents

1. NORMATIVES REFERENCES	3
2. TEST SYNTHESIS.....	4
3. EQUIPMENT UNDER TEST (EUT).....	5
4. TEST CONDITIONS.....	5
5. MODIFICATIONS OF THE EUT.....	6
6. SPECIAL ACCESSORY	6
7. MEASUREMENT UNCERTAINTY	6
8. FIELD STRENGTH CALCULATION.....	6
9. CONDUCTED EMISSION MEASUREMENT (150KHZ-30MHZ).....	7
10. CHANNEL SEPARATION.....	10
11. NUMBER OF HOPPING CHANNELS.....	16
12. AVERAGE TIME OF OCCUPANCY	18
13. FUNDAMENTAL EMISSION OUTPUT POWER.....	21
14. MAXIMUM POWER SPECTRAL DENSITY LEVEL IN THE FUNDAMENTAL EMISSION.....	25
15. UNWANTED SPURIOUS EMISSIONS (CONDUCTED EMISSIONS)	29
16. UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS (RADIATED EMISSIONS)	36
17. UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS.....	44
18. OCCUPIED BANDWIDTH (99%).....	57

1. Normatives References

FCC qualification according to:		
Standards	Applied	Title
ANSI C63.4 (2014)	X	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ANSI C63.10 (2013)	X	American National Standard for Testing Unlicensed Wireless Devices
CFR47, Part 15	X	Telecommunication – Federal Communication Commission – Radio frequency devices, Sections 15.109 / 15.209 / 15.247

ISED qualification according to:		
Standards	Applied	Title
ICES-003 (Issue 6/2016)	X	Information Technology Equipment (ITE) – Limits and methods of measurement
RSS-Gen (Issue 5/2018)	X	General Requirements and Information for the Certification of Radio Apparatus
RSS-247 (Issue2/2017)	X	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

Note: Following guidance are used

- DTS Measurement Guidance 558074 D01 v05
- Determining ERP and EIRP Guidance 412172 D01 v01r01

Deviation from standard: None

2. Test synthesis

Requirement for Hybrid systems (DSS)

TEST	Paragraph number FCC Part 15 / IC RSS-247 / RSS-GEN	Spec. FCC Part 15 / IC RSS-247 / RSS-GEN	RESULTS (comments)
Conducted emissions test	15.207 (a) RSS-Gen § 8.8	Table 15.107 (a) Table 4 / RSS-Gen	PASS
20dB Bandwidth	15.247 (a) (1) RSS-247 § 5.1	No requirements	PASS
Hopping channel separation	15.247 (a) (1) / RSS-247 5.1 a) b)	Minimum separation 25kHz or the two-third 20dB bandwidth whichever is greater	PASS
Number of hopping frequencies	15.247 (a) (1) / RSS-247 5.1 c)	No requirements for hybrid systems	PASS
Time of occupancy	15.247 (f) / RSS-247 5.3 a)	Maximum 400ms per channel within 3.2s (8 channels used)	PASS
Maximum Conducted Output Power	15.247 (b) (3) RSS-247 § 5.4 (d)	1W max / 30dBm (Conducted) 4W max / 36dBm (EIRP)	PASS
Maximum Power Spectral Density	15.247 (e) RSS-247 § 5.2 (b)	8dBm in a 3kHz band segment	PASS
Unwanted emissions into Non Restricted Frequency Bands	15.247 (d) / RSS-247 § 5.5	-30dBc in any 100kHz outside frequency band.	PASS
Unwanted emissions into Restricted Frequency Bands	15.209 (a) / 15.247 (d) / 15.205 (a) RSS-GEN § 7.1, §8.9, § 8.10 / RSS-247 § 5.5	Measure at 300m 9-490kHz: 2400µV/m/F(kHz) Measure at 30m 0.490-1.705: 24000µV/m/F(kHz) 1.705-30MHz: 30µV/m Measure at 3m 30MHz-88MHz : 40 dBµV/m 88MHz-216MHz : 43.5 dBµV/m 216MHz-960MHz : 46.0 dBµV/m Above 960MHz : 54.0 dBµV/m	PASS
Occupied Bandwidth	RSS-GEN § 6.7	BW at 99%	PASS

- General conclusion:**

Measures and tests performed on the sample of the product **WIZZILAB / WM205X**, in configuration and description presented in this test report, show compliance with standards FCC CFR 47, PART 15, Subpart C and ISSED RSS-Gen & RSS-247.

3. Equipment Under Test (EUT)

**Nom /
Identification**

WIZZILAB / WM205X
(Trademark / Marketing name or product reference)

Sn: 001BC50C70000F88
& 001BC50C70000F93

**FCC ID:
Model:**

FCC ID: 2ARZVWM
HVIN: WM205X

**Alimentation /
Power supply**

3V DC (RF module via test board)

**Auxiliaires /
Auxiliaries**

- Battery pack 3V
- DC power supply GOODWILL PPT3615G (ALI-101-005)

**Entrées-Sorties /
Input / Output**

	Câbles pour essai / Cables for test	Blindé / Shielded	Prévu pour >3m / Intended for >3m
3V DC power input	2 wires, 0.3m	No	No

**Version programme /
Firmware version**

N.C

**Mode de fonctionnement /
Running mode**

The tested sample is able to:

- Transmit a continuous (100% duty cycle) carrier frequency on low, and high channels with all modulation schemes (LORA and FSK) on lower band (B1) and higher band (B2)
- Be in normal timing operation mode (hybrid mode) on lower or upper bands with LORA (SF is taken at 10 as worst case) or FSK modulation

**Programme de test /
Test program /**

None

**Fréquence max interne EST /
Max internal EUT frequency**

25MHz (Except RF frequency)

**Information sur l'équipement /
Equipment information**

- Frequency band: 902 to 928MHz (Tx & Rx)
- Operating channel: Lower band B1: 903.9 / 904.1 / 904.3 / 904.5 / 904.7 / 904.9 / 905.1 / 905.3 MHz
Lower band B2: 906.9 / 907.1 / 907.3 / 907.5 / 907.7 / 907.9 / 908.1 / 908.3 MHz
- Modulation: MOD1: LORA (125kHz / SF 6 to 10)
MOD2: FSK (1.8bpsk / 55kbps)
- Rated peak output power: 13dBm
- Channel speacing for hybrid mode: 200kHz
- Antenna #1: 1/4 Wave Antenna with maximum gain -1.3dBi (LINX / ANT-916-CW-RH)
- Antenna #2: 1/2 Wave Antenna with maximum gain 2.2dBi (LINX / ANT-916-OC-LG)
- Module powered by 3V DC from test board

4. Test conditions

Power supply voltage:

3V DC

Equipment under test:

Auxiliaries:

110V/60Hz (Conducted emission)

5. Modifications of the EUT

None

6. Special accessory

None

7. Measurement Uncertainty

Test Description	Expanded uncertainty
Conducted emissions test (150k-30MHz, AC mains)	± 3.5dB
Radiated emission test (9kHz-30MHz, electric field)	± 4.0dB
Radiated emission test (30-300MHz, OATS)	± 5.6dB
Radiated emission test (300-1000MHz, OATS)	± 5.3dB
Radiated emission test (1-40GHz, OATS / FAC)	± 5.6dB
Conducted RF output power at antenna port	± 1.6dB
Radiated RF output power (Peak, Power density)	± 5.6dB
DTS Bandwidth, 99% OBW	±4%
Temperature	± 1°C
Time and duty cycle calculation	±1%
AC and DC voltage	±1%

Note: Expanded uncertainty at 95% confidence (k=2)

8. Field Strength Calculation

The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follow:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength (Level)

RA = Receiver Amplitude (Meter Reading)

AF = Antenna Factor

CF = Cable Factor

AG = Amplifier Gain

Margin value = Emission level – Limit value

Example:

RA: 14.0dBμV / AF: 16.5 dBm⁻¹ / CF: 3.5dB / AG: 15dB

→ Total factor: 5dBm⁻¹


→ Field level: 19.0dBμV/m (-21.0dB for margin if limit is 40dBμV/m)

9. Conducted Emission Measurement (150kHz-30MHz)

TEST: Limits for conducted disturbance 150kHz – 30MHz				Verdict
<u>Method:</u> The LISN is placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane. This distance was between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment were at least 0,8 m from the AMN. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on lines were made at the output of the LISN. The EUT is 80cm above the ground reference plane and 40cm from the vertical ground plane. The AC power cable is 1m length.				Pass
Laboratory Parameters:		Required prior to the test		During the test
Ambient Temperature		20 to 30 °C		22°C ± 2
Relative Humidity		25 to 70 %		35% ± 5
Fully configured sample scanned over the following frequency range		Frequency range on each side of line		Measurement Point
		150kHz to 30MHz		AC input port (110V)
Limits				
Frequency (MHz)	Limit dB (µV)			
	Quasi-Peak	Result	Average	Result
0.15 – 0.50	66 \ 56	PASS	56 \ 46	PASS
0.50 - 5	56	PASS	46	PASS
5 – 30	60	PASS	50	PASS
Supplementary information: Test location: SMEE Test date: December 14 th , 2018. Tested by L. CHAPUS Power supply voltage: AC mains 110V/60Hz				

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Attenuator / limiter	SMEE	ATT#2	ATT-171-010	2018/6	2019/6
Cable RF	Div	1m	CAB-101-021	2018/4	2019/4
LISN (50Ω / 50µH) (Meas.)	AFJ	LS16C	RSI-101-001	2017/6	2019/6
Measuring receiver	Rohde&Schwarz	ESRP	REC-151-002	2017/5	2019/5
EMC Software	NEXIO	BAT EMC V3.8	SOF-101-001	-	-
AC power supply	PACIFIC POWER	AMX-125	ALI-101-002	-	-
DC power supply	GOODWILL	PPT3615G	ALI-101-005	-	-
Multimeter	FLUKE	287	MUL-131-005	2017/7	2019/7


Test Setup for conducted emission

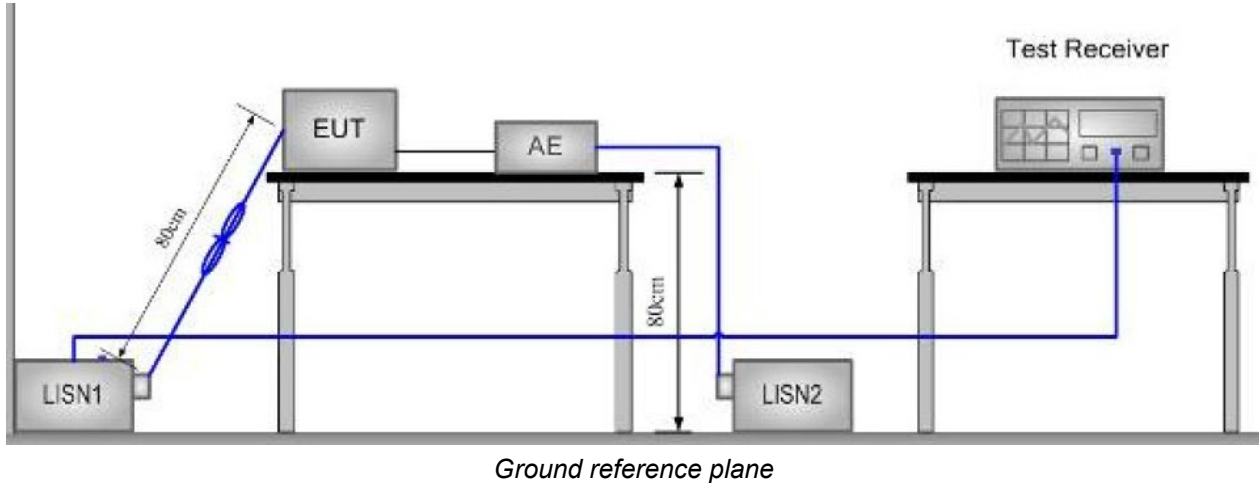

Tabulated Results for Mains Terminal Disturbance Voltage on AC port

FREQ	Meas. PK	Mes. QP	LIMIT QP	Margin QP	Mes. AV	LIMIT AV	Margin AV	Line
(MHz)	(dBμV)	(dBμV)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1770	47.0	42.0	64.6	-22.6	41.1	54.6	-13.5	L1
0.1795	47.5	43.2	64.6	-21.4	42.5	54.6	-12.1	N
RBW:			9kHz					
Voltage:			110V/60Hz					
Limit:			FCC Part 15.209 a) / RSS-Gen: Issue 5, §8.8 Table 4					
Final measurement detector:			Quasi-Peak and CISPR Average (AV)					
RESULT:			PASS					
Measured value calculation:			The measured value (level) is calculated by adding the Cable Factor, the Transient suppressor attenuation and LISN attenuation from the receiver amplitude reading. The basic equation is as follow: $\text{Meas.} = \text{RA} + \text{CF} + \text{ATT}_{\text{TRAN}} + \text{ATT}_{\text{LISN}}$ Where Meas. = Level (dBμV) RA = Receiver Amplitude CF = Cable Factor ATT_{TRAN} = Transient suppressor attenuation ATT_{LISN} = LISN attenuation Margin value = Emission level – Limit value (A negative margin shows compliance to limit)					

Graphical representation of Conducted Disturbance Measurement (Peak and Average detection) AC port, Line L1

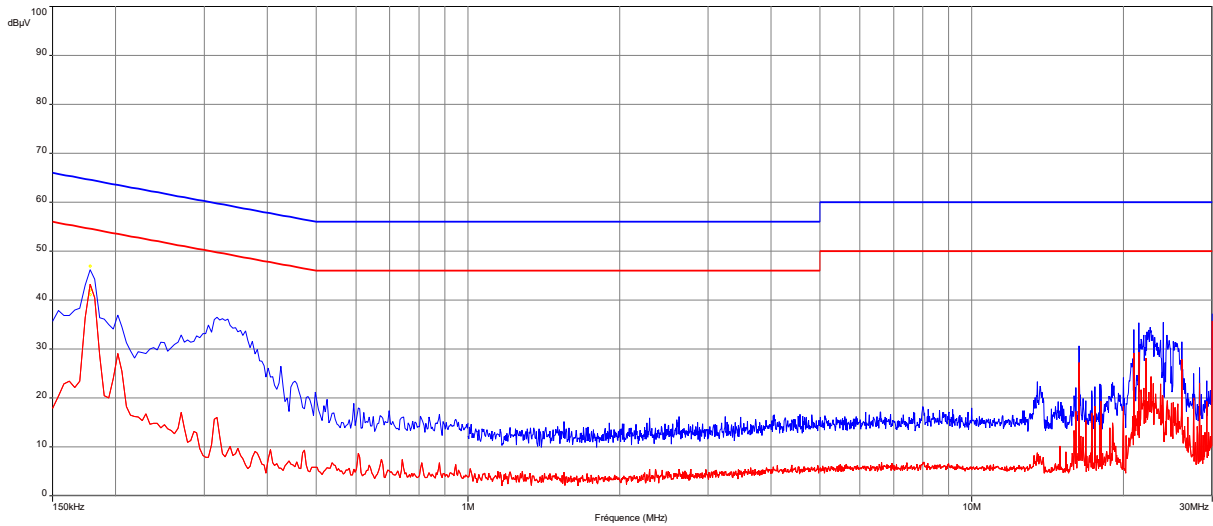


Note : Same result for all transmit modes on all channels.

----: Peak

----: Average

Graphical representation of Conducted Disturbance Measurement (Peak and Average detection) AC port, Line Neutral

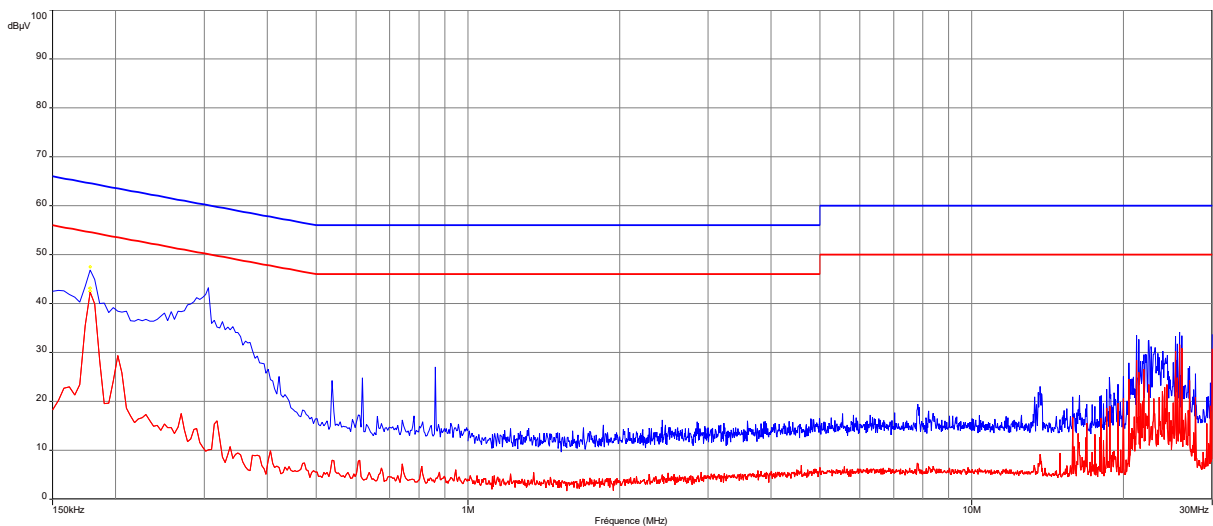

Note : Same result for all transmit modes on all channels.


----: Peak

----: Average

10. Channel Separation

TEST: Hopping channel measurement (Separation)			Verdict
Method: The Equipment under test is connected to the measuring receiver with suitable mean. The SPAN is adapted to see the frequency band of operation. The spectrum analyzer RBW was 100kHz and VBW was 100kHz. The channel separation is measured with the hopping function enable on the EUT. Limits: Minimum separation between channels shall be 25kHz or the two-third 20dB bandwidth, whichever is greater.			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	20 to 30 °C	22°C ± 2	
Relative Humidity	25 to 70 %	35% ± 5	
Supplementary information: Test location: SMEE. Test date: December 13th, 2018. Tested by L. CHAPUS			


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Attenuator	Mini-Circuit	BW-N10W5+	ATT-171-008	2018/4	2019/4
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2017/5	2019/5

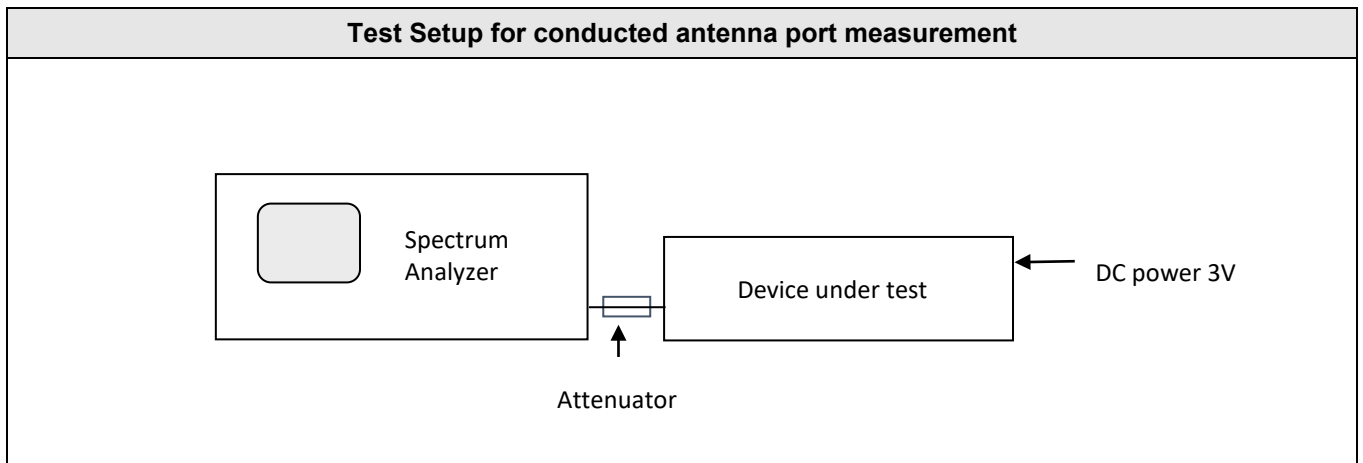


Tabulated Results for Hopping Channel Separation (Hybrid mode)

Channel frequency	Adjacent channel separation	20dB Bandwidth	Minimum limit	Result
(MHz)	(kHz)	(kHz)	(kHz)	
903.9 / LORA-B1	200.0	138.00	92.000	PASS
905.3 / LORA-B1		138.00	92.000	PASS
906.9 / LORA-B2		137.75	91.833	PASS
908.3 / LORA-B2		137.70	91.800	PASS
903.9 / FSK-B1	199.3	178.85	119.233	PASS
905.3 / FSK-B1		178.85	119.233	PASS
906.9 / FSK-B2		179.05	119.367	PASS
908.3 / FSK-B2		178.20	118.800	PASS


Graphical representation of 20dB Bandwidth & Hopping channel separation LORA/B1

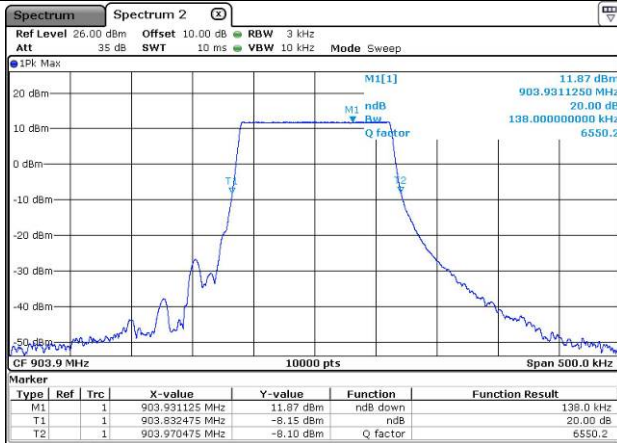

Low channel

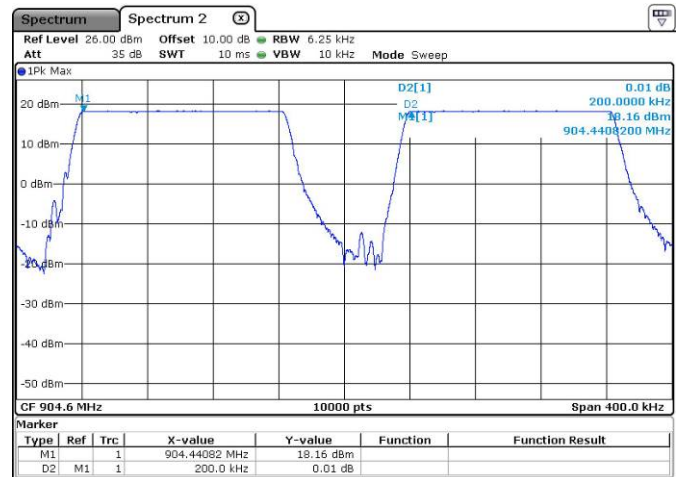


Channel separation

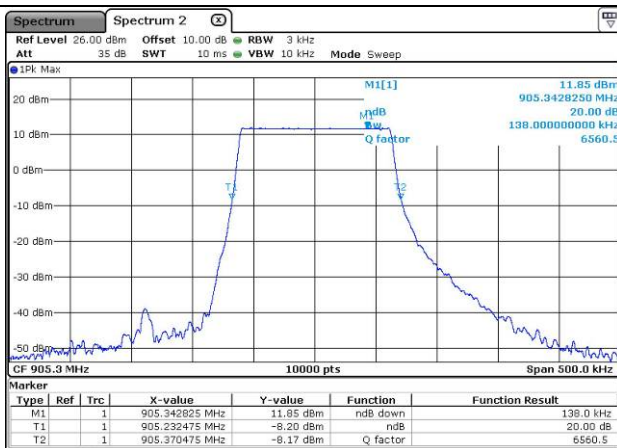


High channel


Graphical representation of 20dB Bandwidth & Hopping channel separation LORA/B2

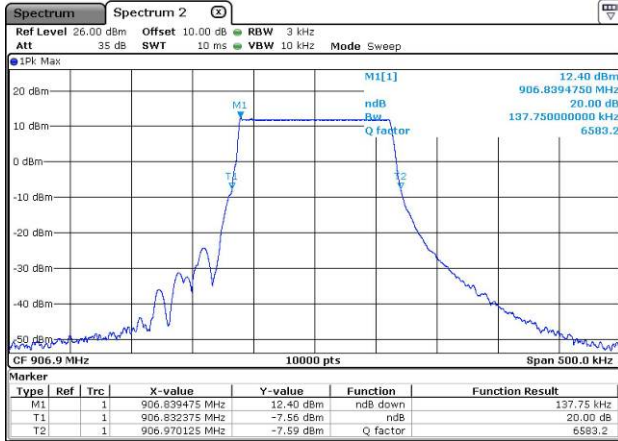

Low channel

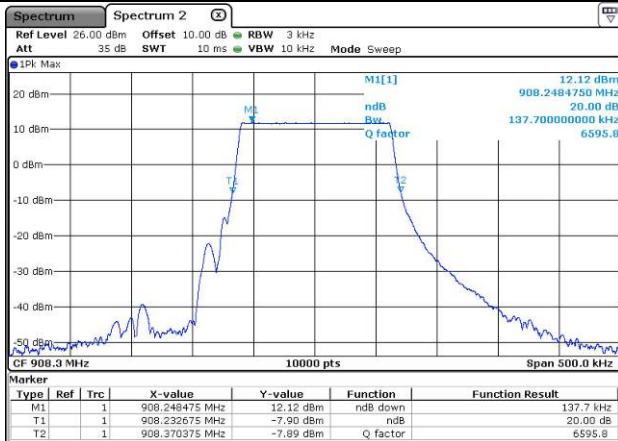


High channel

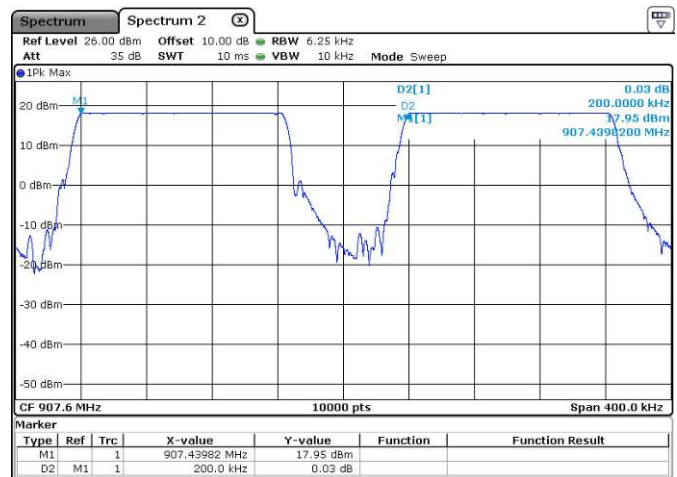


Channel separation


Graphical representation of 20dB Bandwidth & Hopping channel separation FSK/B1

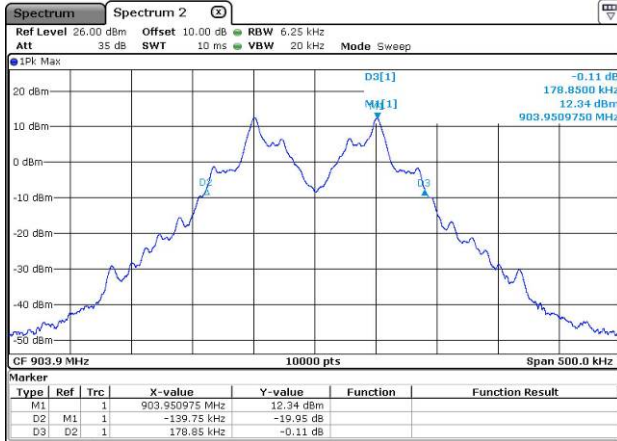

Low channel

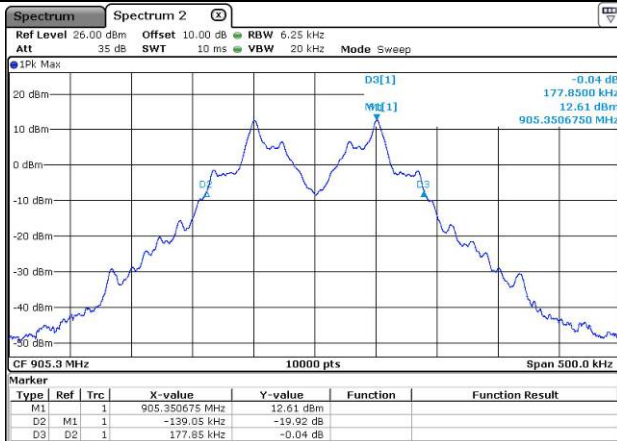


High channel

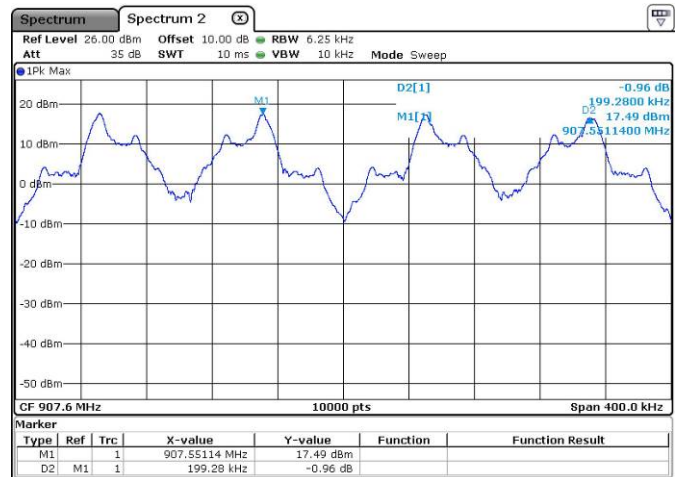


Channel separation


Graphical representation of 20dB Bandwidth & Hopping channel separation FSK/B2

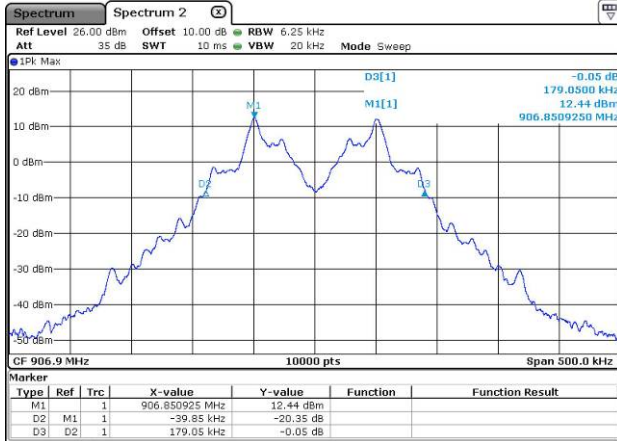

Low channel

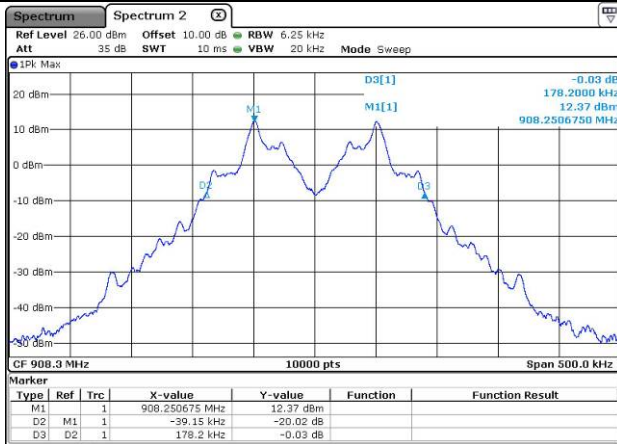

High channel

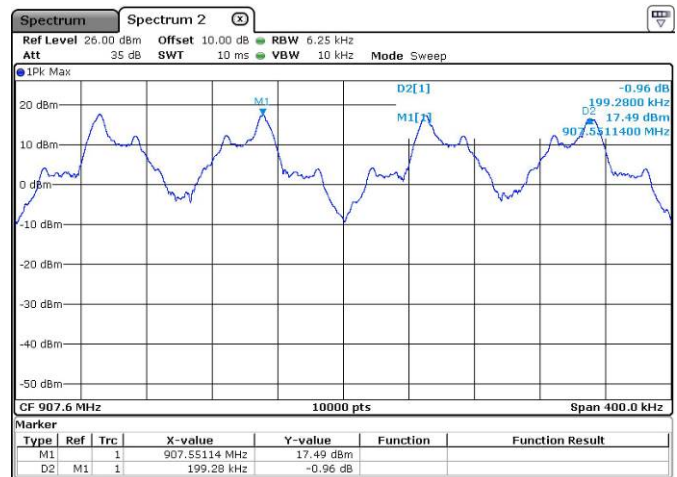


Channel separation

11. Number of hopping channels

TEST: Number of hopping channels			Verdict
Method: The Equipment under test is connected to the measuring receiver with suitable mean. The SPAN is adapted to see the frequency band of operation. The spectrum analyzer RBW was 10kHz and VBW was 100kHz. The EUT has its hopping function enable. Limits: At least 15 channels frequencies shall be used and equally spaced, in the band 2400-2483MHz.			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	20 to 30 °C	22°C ± 2	
Relative Humidity	25 to 70 %	35% ± 5	
Supplementary information: Test location: SMEE. Test date: December 13 th , 2018. Tested by L. CHAPUS			


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Attenuator	Mini-Circuit	BW-N10W5+	ATT-171-008	2018/4	2019/4
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2017/5	2019/5

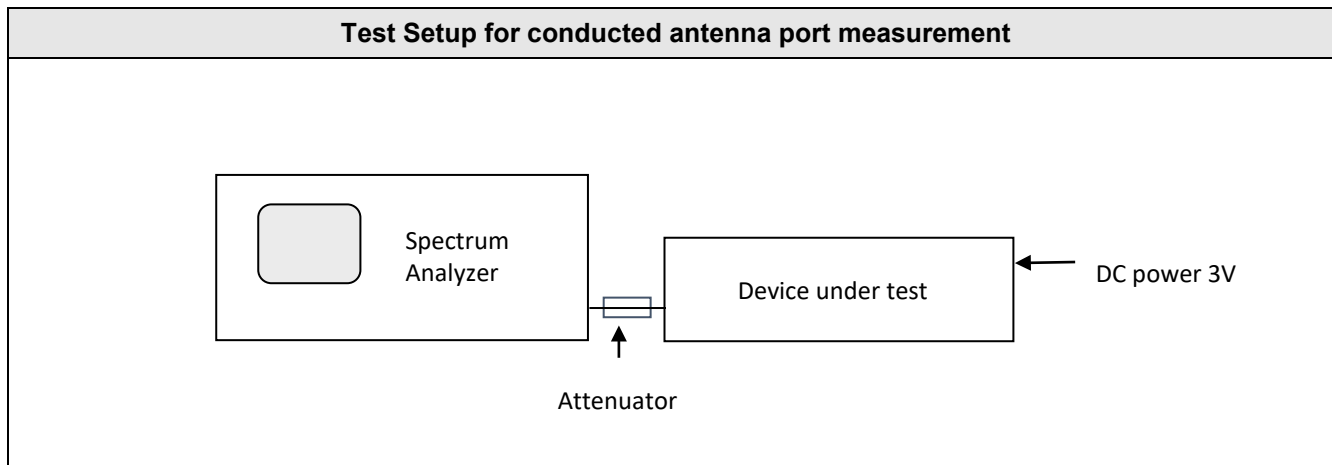


Tabulated Results for Number of Hopping Channel

Number of channels	Minimum number of channels	Result
8	-	PASS


Graphical representation for Number of Hopping Channel

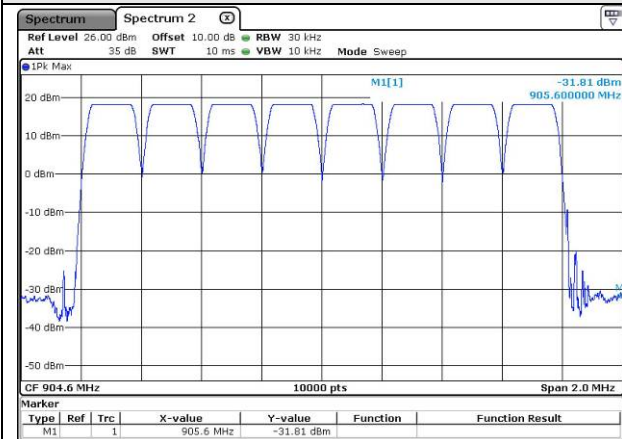


LORA / B1

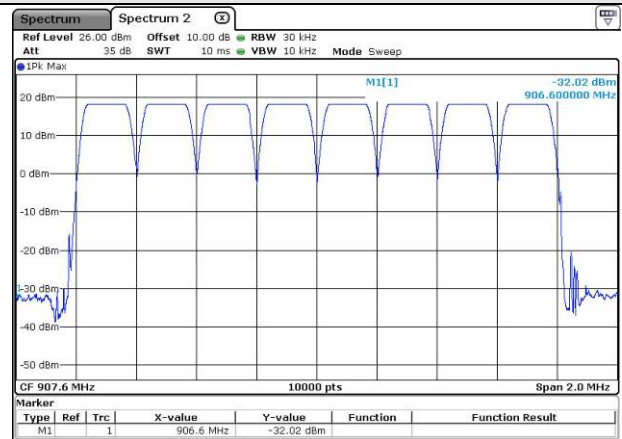

LORA / B2

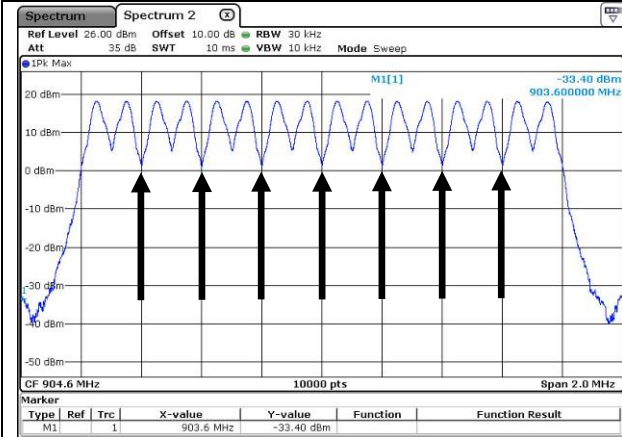

FSK / B1

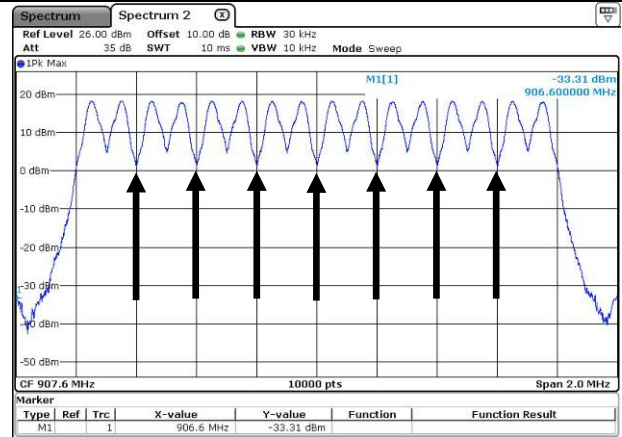


FSK / B1

12. Average Time of occupancy

TEST: Time of occupancy			Verdict
Method: The Equipment under test is connected to the measuring receiver with suitable mean. The spectrum analyser is set to zero-span. The EUT has its hopping function enable. Limits: 400ms of transmission by channel on a period 3.2s. (8 channels used)			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	20 to 30 °C	22°C ± 2	
Relative Humidity	25 to 70 %	35% ± 5	
Supplementary information: Test location: SMEE. Test date: December 13 th . 2018. Tested by L. CHAPUS			

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Attenuator	Mini-Circuit	BW-N10W5+	ATT-171-008	2018/4	2019/4
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2017/5	2019/5

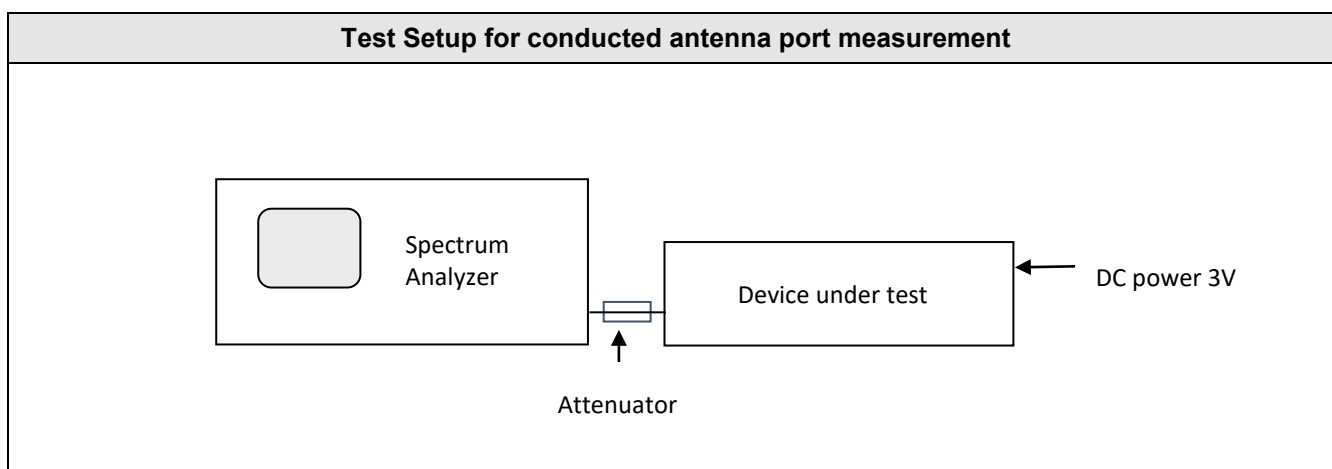


Tabulated Results for Dwell time

Modulation	Number of pulses per 3.2s period (1)	Length of 1 pulse (ms)	Average Time of occupancy (ms)	Limit (ms)	Result
LORA	1	346.01	346.01	400ms	PASS
FSK	6	66.00	396.00	400ms	PASS


Additional information:

(1): Period of 3.2s (0.4s x 8 channels)

Graphical representation for dwell time (LORA B1 & B2)

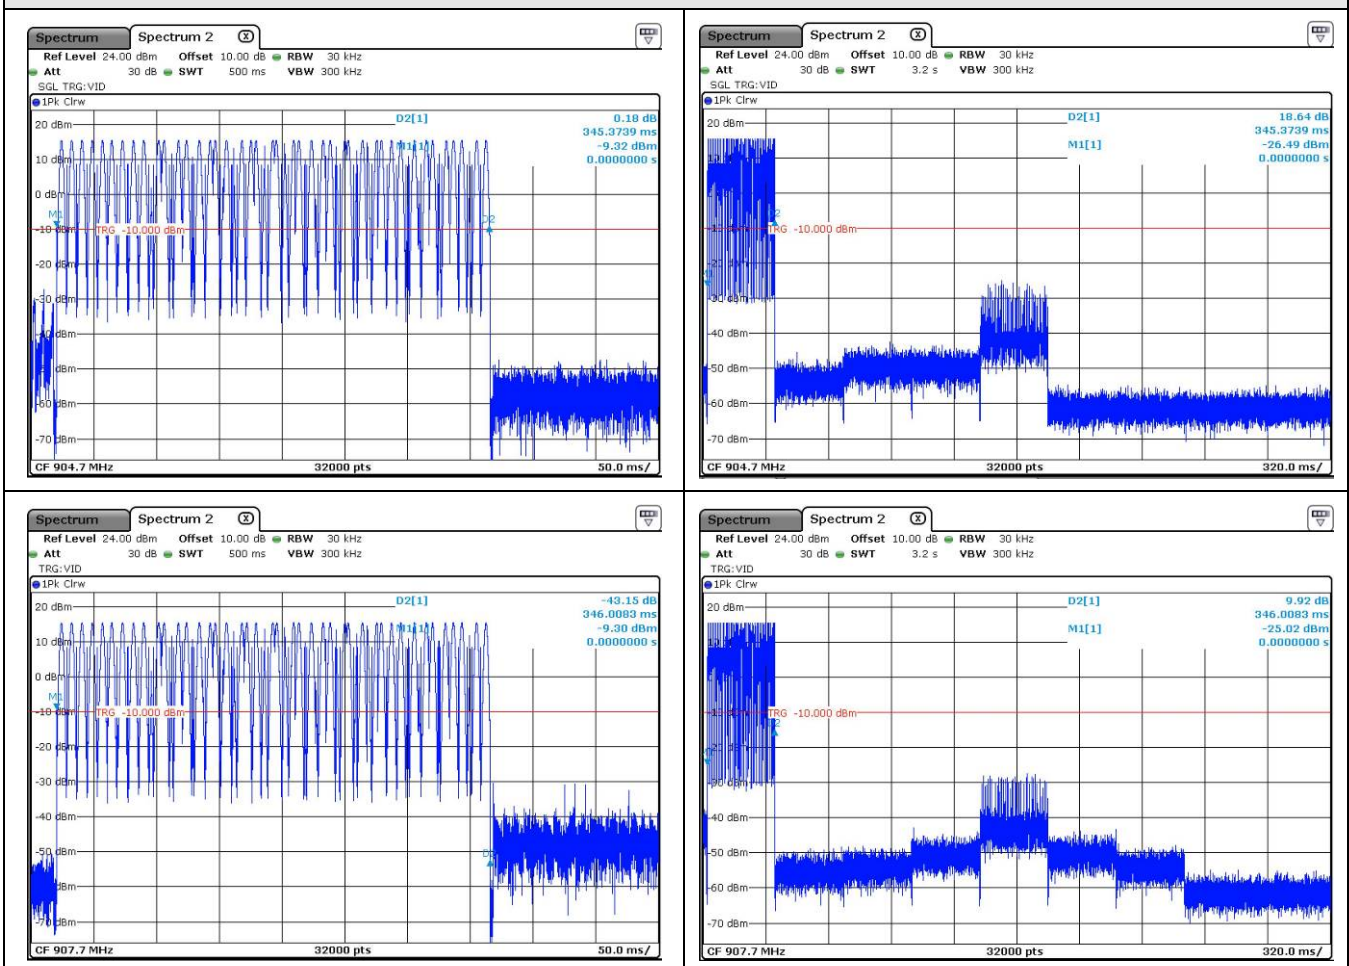


Graphical representation for dwell time (FSK B1 & B2)

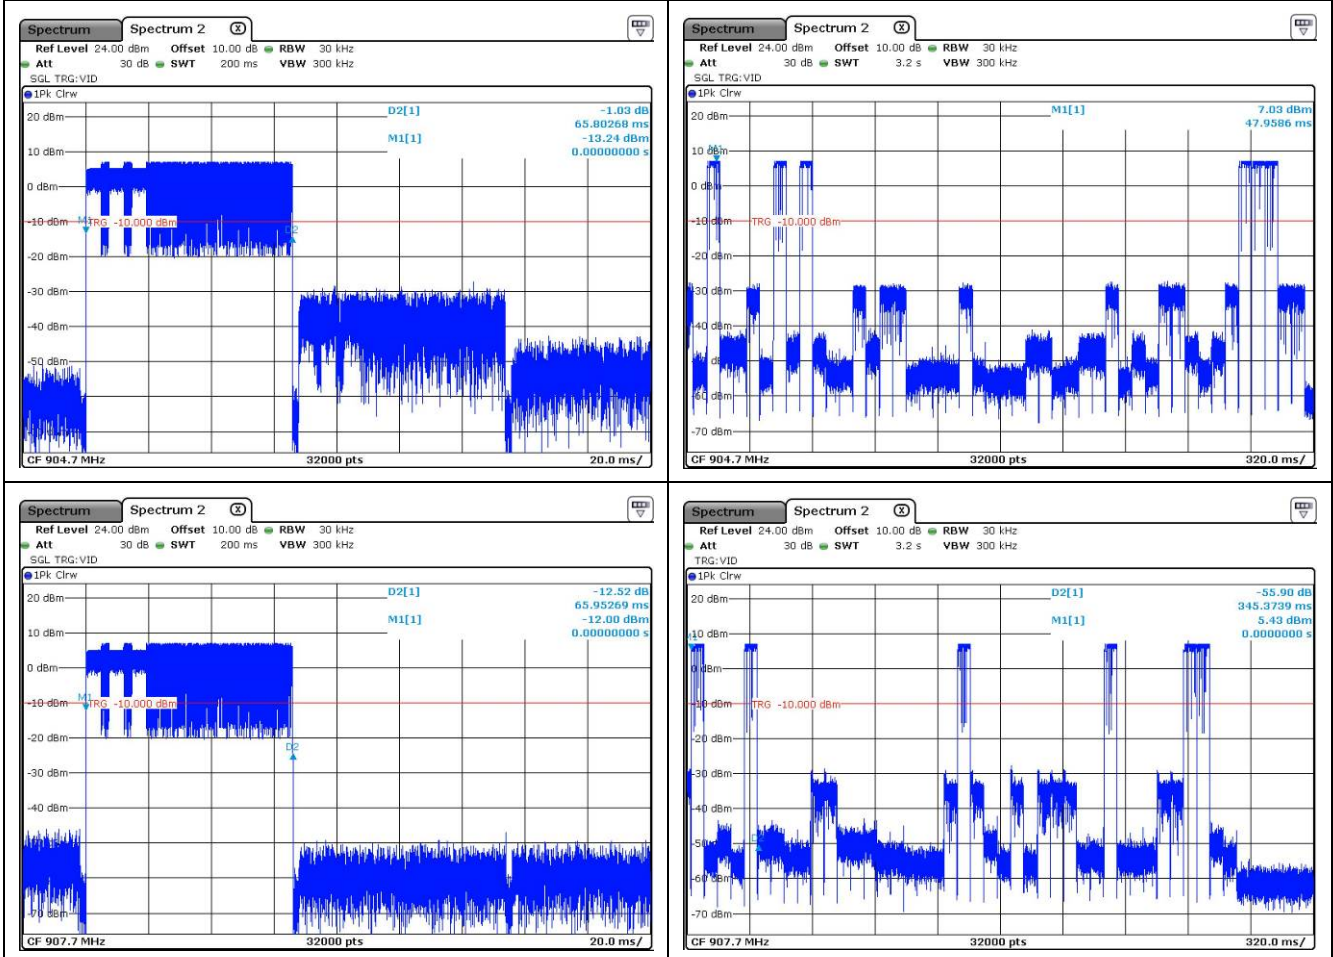

13. Fundamental emission output power

TEST: Maximum conducted output power			Verdict
Method: The setup is in an anechoic chamber. The spectrum analyzer is connected to the antenna port of the device under test. A conducted measurement is performed. The tested equipment is set to transmit operation with modulation on low and high channels.			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	10 to 40 °C	22°C ± 2	
Relative Humidity	10 to 90 %	35% ± 5	
Limits – FCC Part 15.247 (b) / RSS-247 §5.4			
Frequency (MHz)	Limits		
	Level	Results	
903.9 to 905.3 (LORA / FSK)	30 dBm (Conducted) 36 dBm (Radiated, EIRP)	Pass	
906.9 to 908.3 (LORA / FSK)		Pass	
Supplementary information: Test location: SMEE. Test date: December 13 th , 2018. Tested by L. CHAPUS			

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Attenuator	Mini-Circuit	BW-N10W5+	ATT-171-008	2018/4	2019/4
Measuring receiver	Rohde&Schwarz	ESRP	REC-151-003	2017/5	2019/5

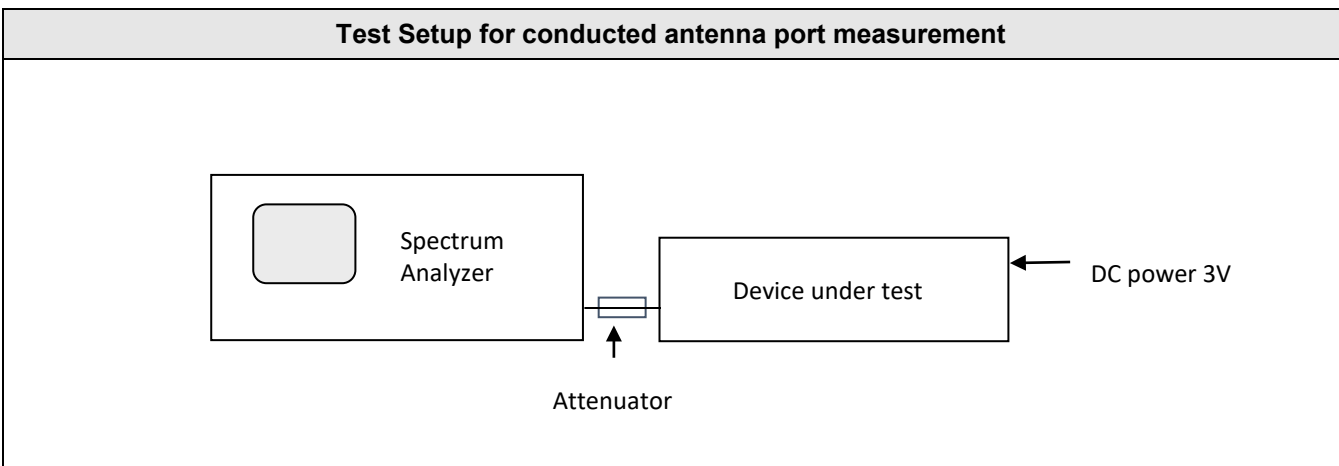


Tabulated Results for Maximum (Average) output power (Conducted)

FREQ (MHz)	Measured conducted power (dBm)	Duty cycle factor (dB)	Maximum output power (dBm)	Limit (dBm)	Result
903.9 / LORA-B1	13.1	NA	13.1	30.0	Pass
905.3 / LORA-B1	13.1	NA	13.1	30.0	Pass
906.9 / LORA-B2	13.1	NA	13.1	30.0	Pass
908.3 / LORA-B2	13.1	NA	13.1	30.0	Pass
903.9 / FSK-B1	13.0	NA	13.0	30.0	Pass
905.3 / FSK-B1	13.2	NA	13.2	30.0	Pass
906.9 / FSK-B2	13.1	NA	13.1	30.0	Pass
908.3 / FSK-B2	13.2	NA	13.2	30.0	Pass
RESULT:		PASS			
Note:		- Method used is AVGSA-1 - Duty cycle factor is $10 \cdot \log(1/x)$ where x is the duty cycle			


Tabulated Results for Maximum (Average) output power (Radiated)

FREQ (MHz)	Maximum output power Conducted (dBm)	Max Antenna Gain (dBi)	Maximum output power Radiated (dBm)	Limit (dBm)	Result
903.9 / LORA-B1	13.1	2.2	15.3	36.0	Pass
905.3 / LORA-B1	13.1	2.2	15.3	36.0	Pass
906.9 / LORA-B2	13.1	2.2	15.3	36.0	Pass
908.3 / LORA-B2	13.1	2.2	15.3	36.0	Pass
903.9 / FSK-B1	13.0	2.2	15.2	36.0	Pass
905.3 / FSK-B1	13.2	2.2	15.4	36.0	Pass
906.9 / FSK-B2	13.1	2.2	15.3	36.0	Pass
908.3 / FSK-B2	13.2	2.2	15.4	36.0	Pass
RESULT:		PASS			


Graphical representation of Conducted output power

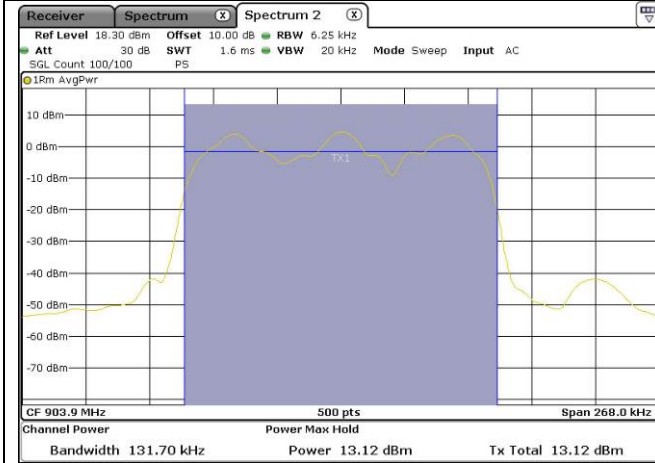


903.9 / LORA

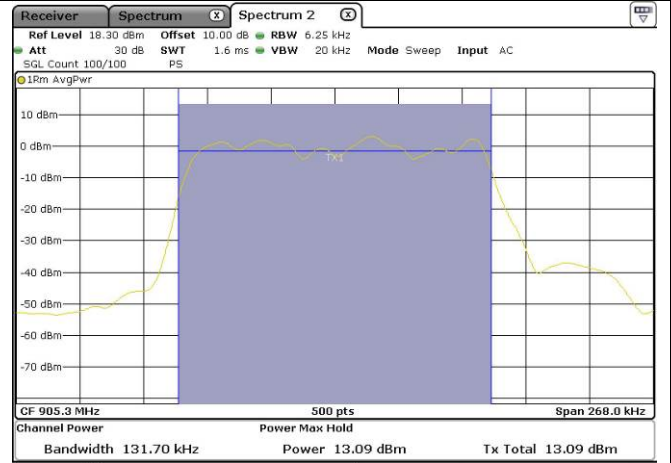

905.3 / LORA

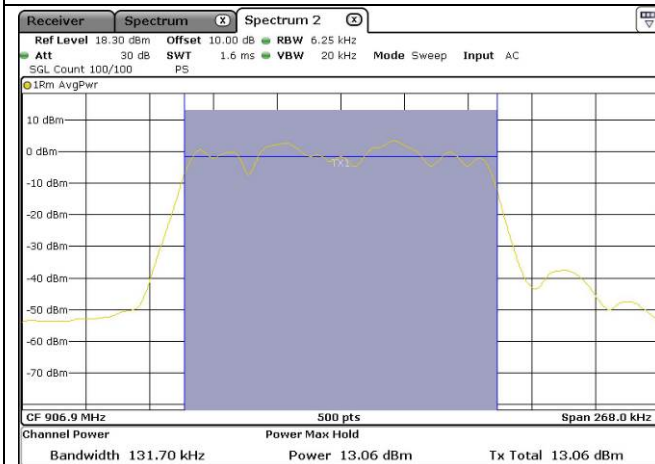


906.9 / LORA

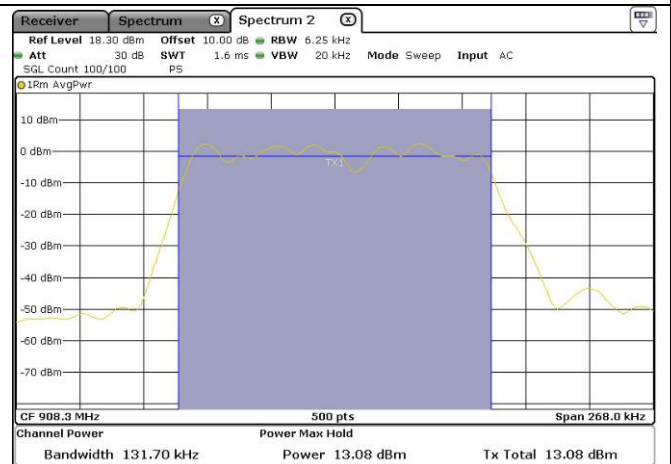


908.3 / LORA


Graphical representation of Conducted output power

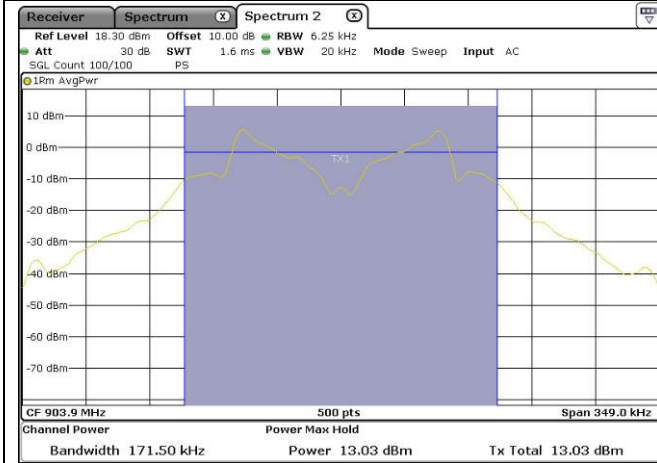


903.9 / FSK

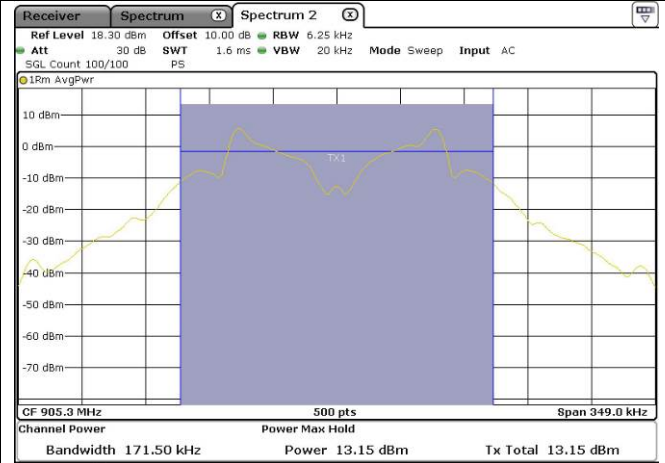

905.3 / FSK

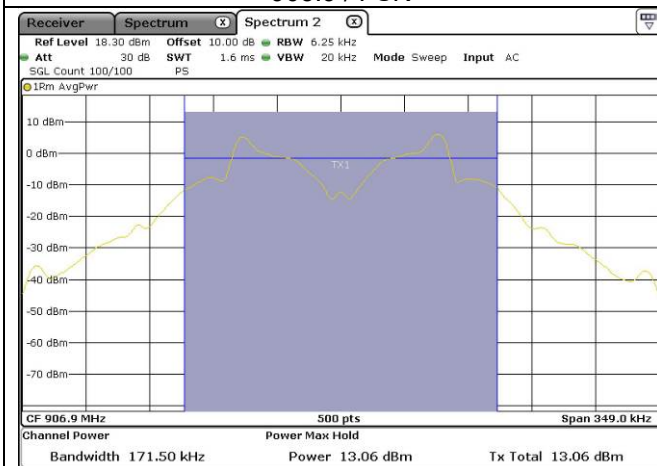

906.9 / FSK

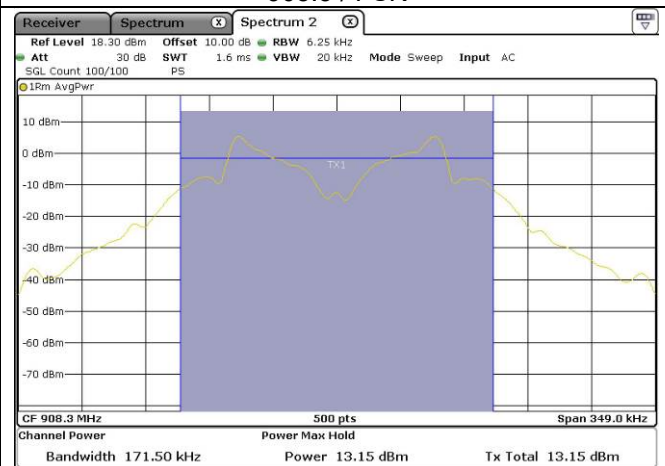


908.3 / FSK

14. Maximum Power Spectral Density Level in the fundamental emission

TEST: Maximum Peak Power Spectral Density			Verdict
Method: A radiated measurement is performed. The SPAN is wide enough to capture all products of the modulation process. Radiated field strength of RF Output Power is measured at 3m in a Full Anechoic Chamber (FAC) that complies with ANSI C63.10. Maximum field strength is performed by rotating the EUT 360°. All frequencies were investigated in both horizontal and vertical antenna polarity. Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength, with a 60° rotation on each axis. (Clause 6.6.5 of ANSI C63.10). The tested equipment is set to transmit operation with modulation on low, mid and high channels.			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	20 to 30 °C	22°C ± 2	
Relative Humidity	25 to 70 %	35% ± 5	
Limits – FCC Part 15.247 (e) / RSS-247 §5.2 (b)			
Frequency (MHz)	Level (Detector)	Limit	
2441.75	8 dBm/3kHz (Pk)	Pass	
Supplementary information: Test location: SMEE. Test date: December 13 th , 2018. Tested by L. CHAPUS			


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Attenuator	Mini-Circuit	BW-N10W5+	ATT-171-008	2018/4	2019/4
Measuring receiver	Rohde&Schwarz	ESRP	REC-151-003	2017/5	2019/5

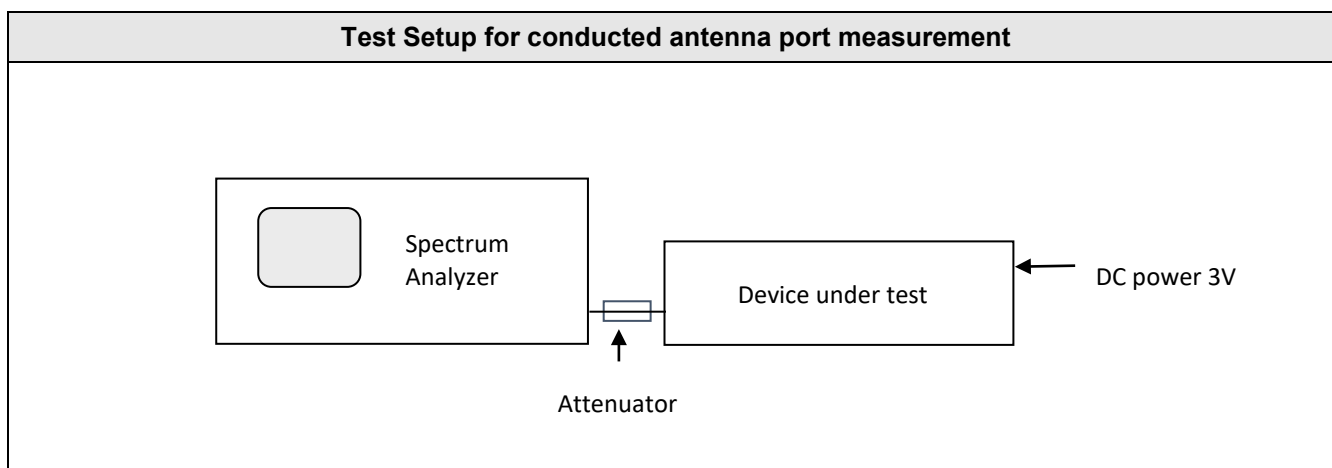


Tabulated Results for Maximum Conducted Power Spectral Density

Frequency (MHz)	PSD (dBm/3kHz)	Limit	Result
903.9 / LORA-B1	-0.3	8dBm/3kHz	Pass
905.3 / LORA-B1	-0.2	8dBm/3kHz	Pass
906.9 / LORA-B2	-0.3	8dBm/3kHz	Pass
908.3 / LORA-B2	-0.6	8dBm/3kHz	Pass
903.9 / FSK-B1	3.6	8dBm/3kHz	Pass
905.3 / FSK-B1	4.0	8dBm/3kHz	Pass
906.9 / FSK-B2	3.6	8dBm/3kHz	Pass
908.3 / FSK-B2	3.9	8dBm/3kHz	Pass
RBW:		3kHz	
Limit:		FCC Part 15.247 / RSS-247	
RESULT:		PASS	
Note:		Method used is AVGPS-1	


Graphical representation for Maximum Power Spectral Density

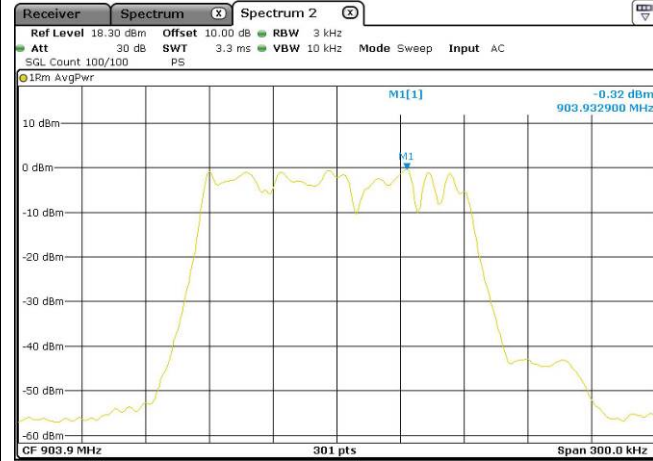


903.9 / LORA

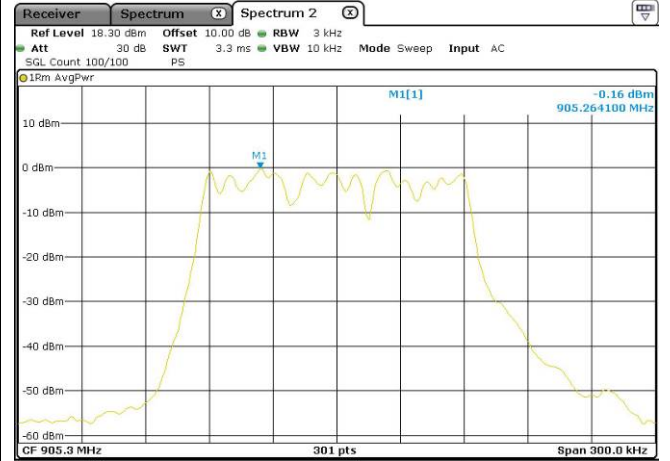

905.3 / LORA

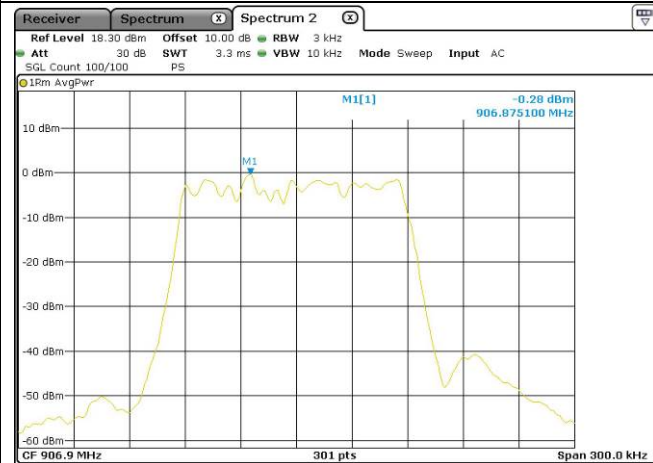


906.9 / LORA

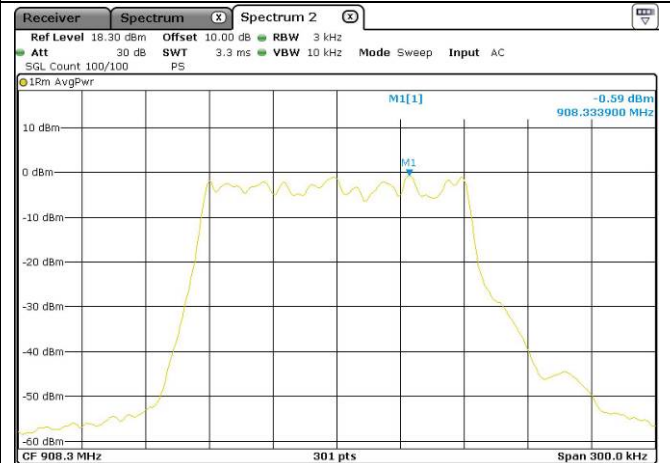


908.3 / LORA


RBW :	3kHz
Limit:	FCC Part 15.247 / RSS-247
RESULT:	PASS

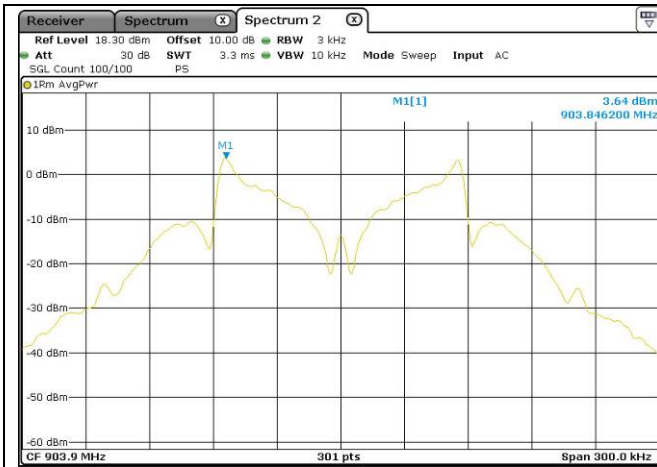


903.9 / FSK

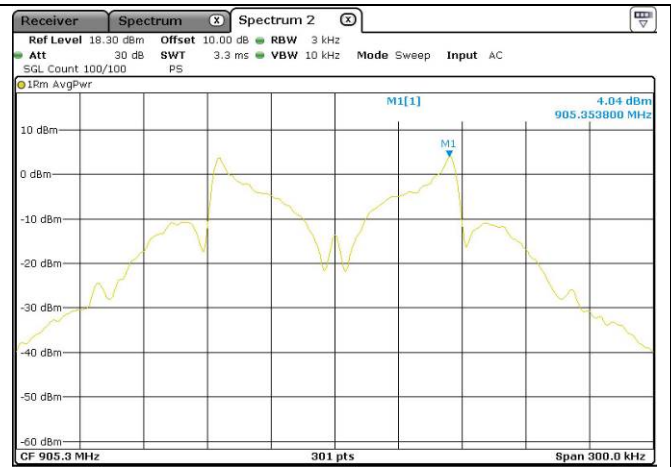

905.3 / FSK

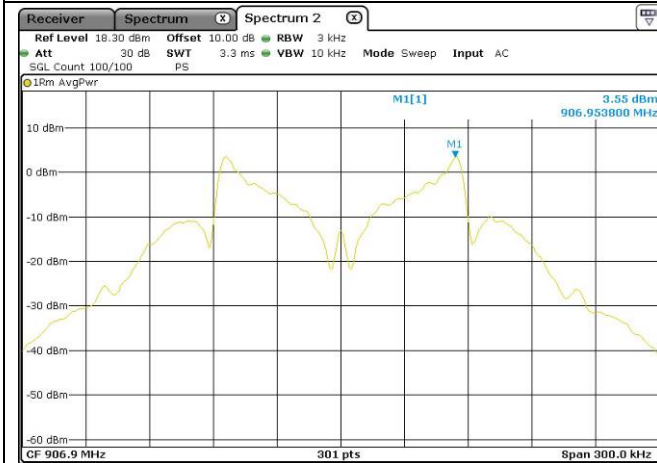

906.9 / FSK

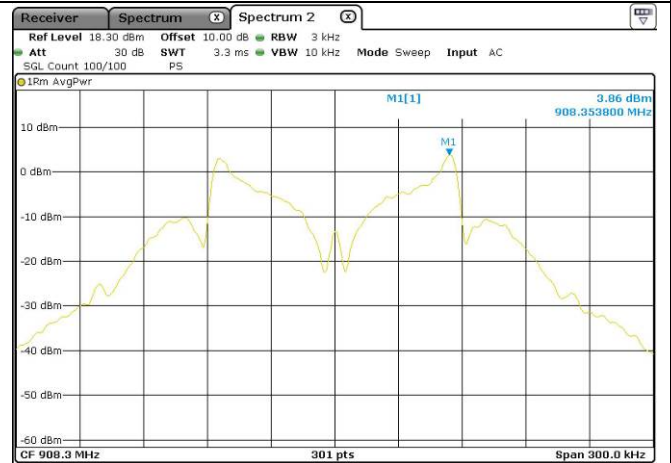


908.3 / FSK

RBW :	3kHz
Limit:	FCC Part 15.247 / RSS-247
RESULT:	PASS



15. Unwanted Spurious Emissions (Conducted emissions)

TEST: Conducted Spurious emissions			Verdict
Method: The setup is in an anechoic chamber. The spectrum analyzer is connected to the antenna port of the device under test. A conducted measurement is performed. The tested equipment is set to transmit operation with modulation on low, mid and high channels.			Pass
Laboratory Parameters:	Required prior to the test		During the test
Ambient Temperature	20 to 30 °C		22°C ± 2
Relative Humidity	25 to 70 %		35% ± 5
Fully configured sample scanned over the following frequency range	Frequency range on each side of line		Measurement Point
	30MHz – 10GHz		Antenna port
Limits – FCC Part 15.247 (d) / RSS-247 § 5.5			
Frequency (MHz)	Limits (dBµV/m)		
	Detector / Analyser RBW	Limit	Results
30 to 10000	Pk / 100kHz	30dB below the maximum Peak level	Pass
Supplementary information: Test location: SMEE. Test date: December 14 th , 2018. Tested by L. CHAPUS			

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Attenuator	Mini-Circuit	BW-N10W5+	ATT-171-008	2018/4	2019/4
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2017/5	2019/5


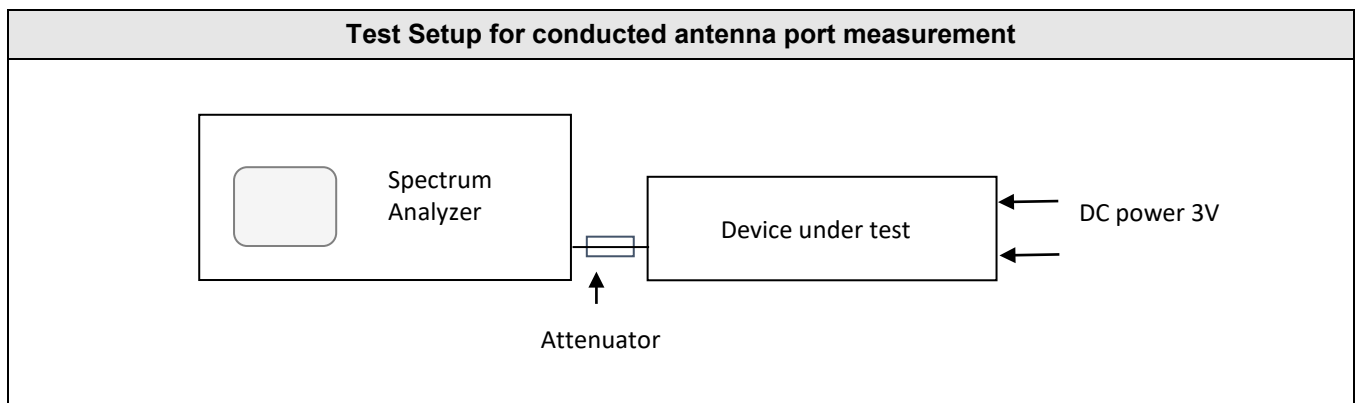


Graphical representation of Conducted Spurious emissions (LORA mode / Low and High channels,B1)

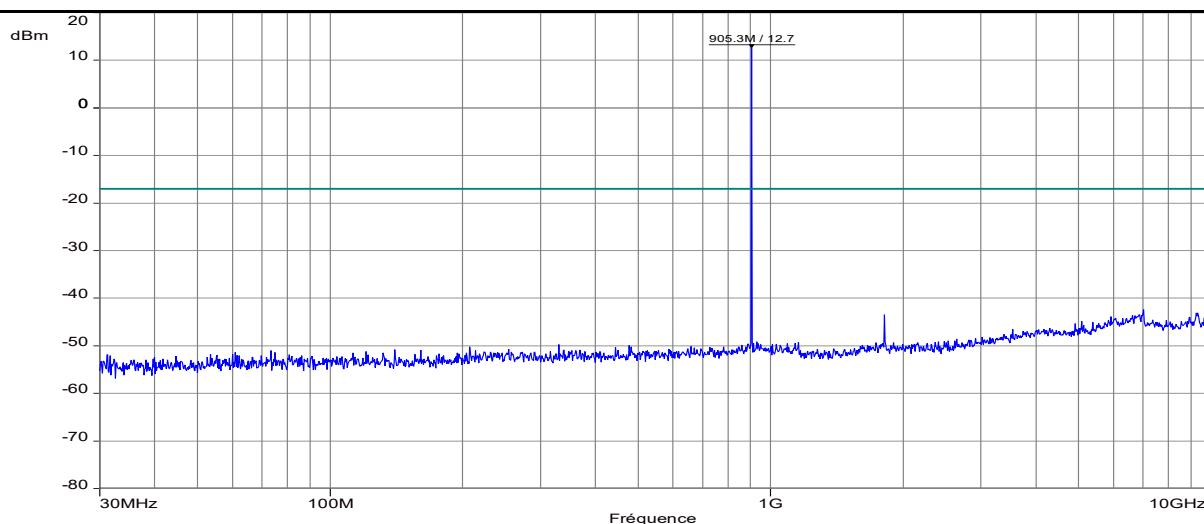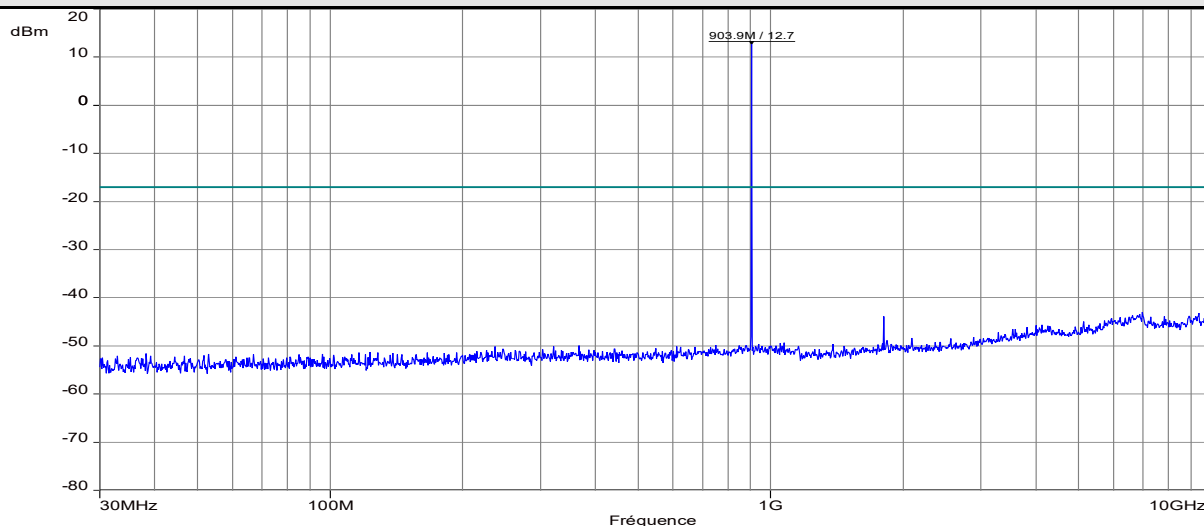



Frequency band investigated:	30MHz-10GHz
Unit :	dBm
RBW :	100kHz (Frequency step 50kHz)
Measurement detector:	Peak
Limit:	-17.3dBm

Graphical representation of Conducted Spurious emissions (LORA mode / Low and High channels,B2)

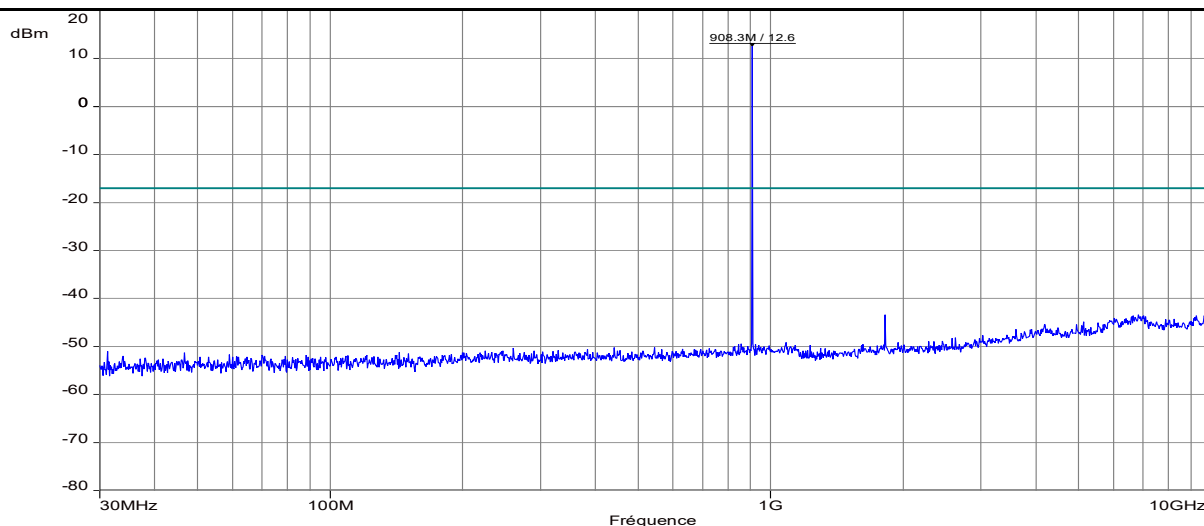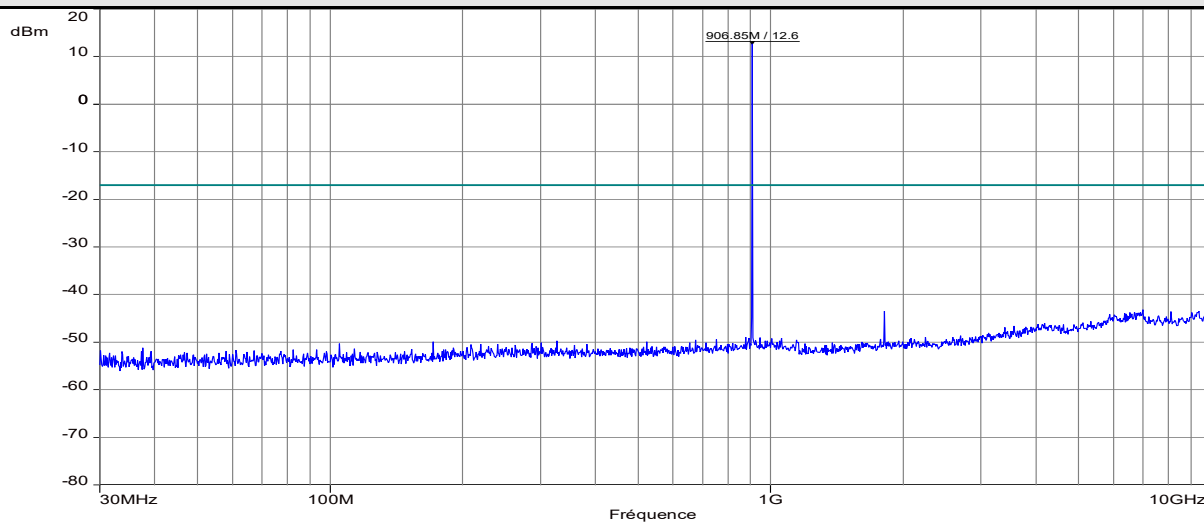



Frequency band investigated:	30MHz-10GHz
Unit :	dBm
RBW :	100kHz (Frequency step 50kHz)
Measurement detector:	Peak
Limit:	-17.4dBm

Graphical representation of Conducted Spurious emissions (FSK mode / Low and High channels,B1)

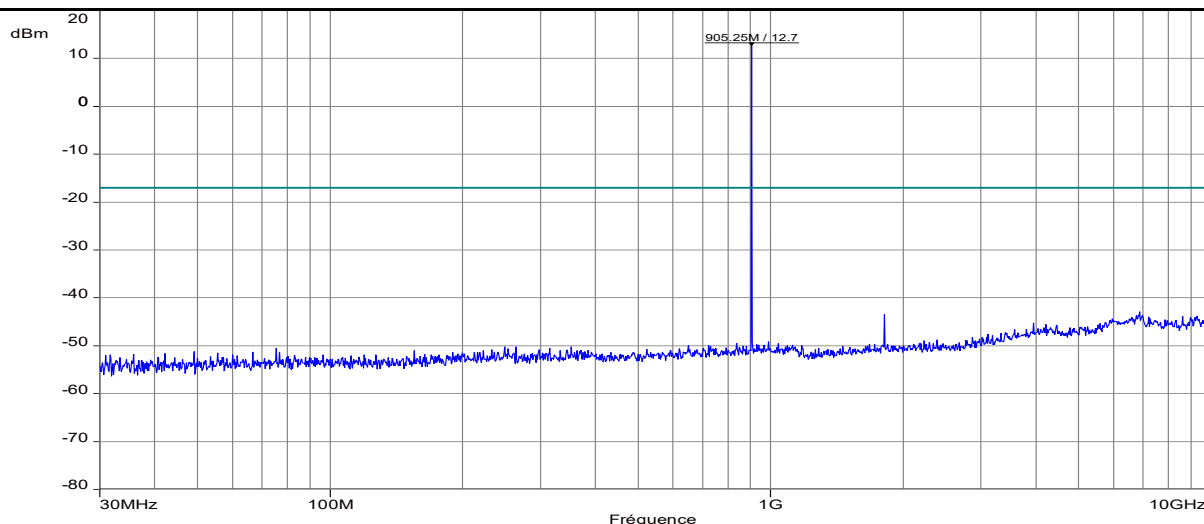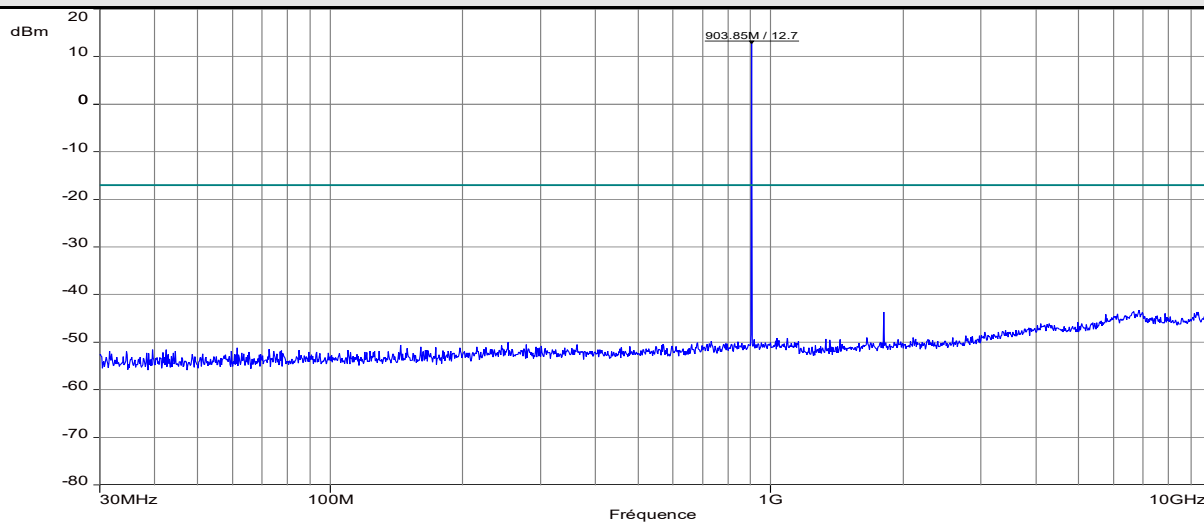

Frequency band investigated:	30MHz-10GHz
Unit :	dBm
RBW :	100kHz (Frequency step 50kHz)
Measurement detector:	Peak
Limit:	-17.3dBm


Graphical representation of Conducted Spurious emissions (FSK mode / Low and High channels,B2)

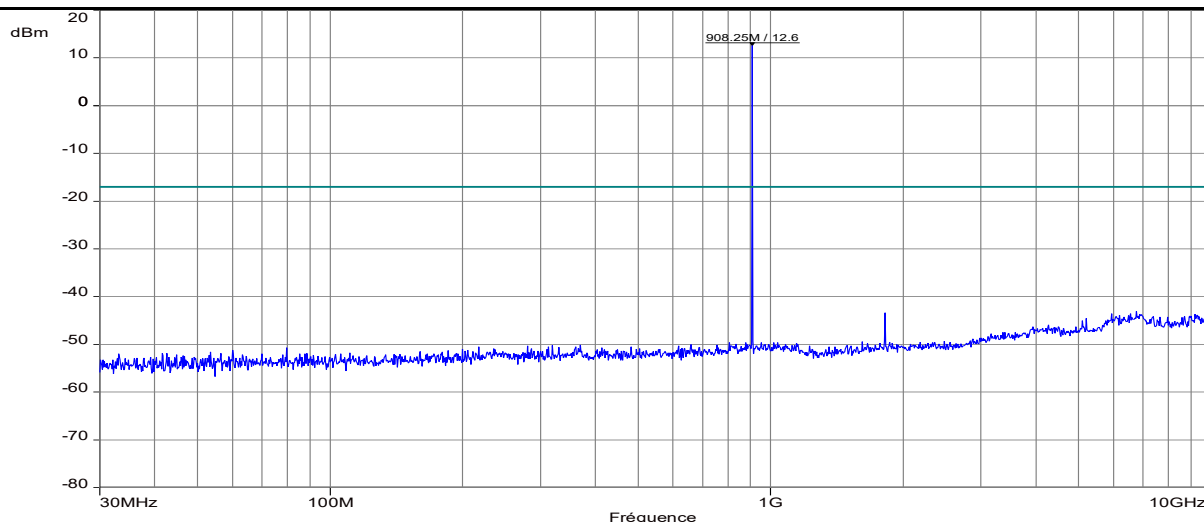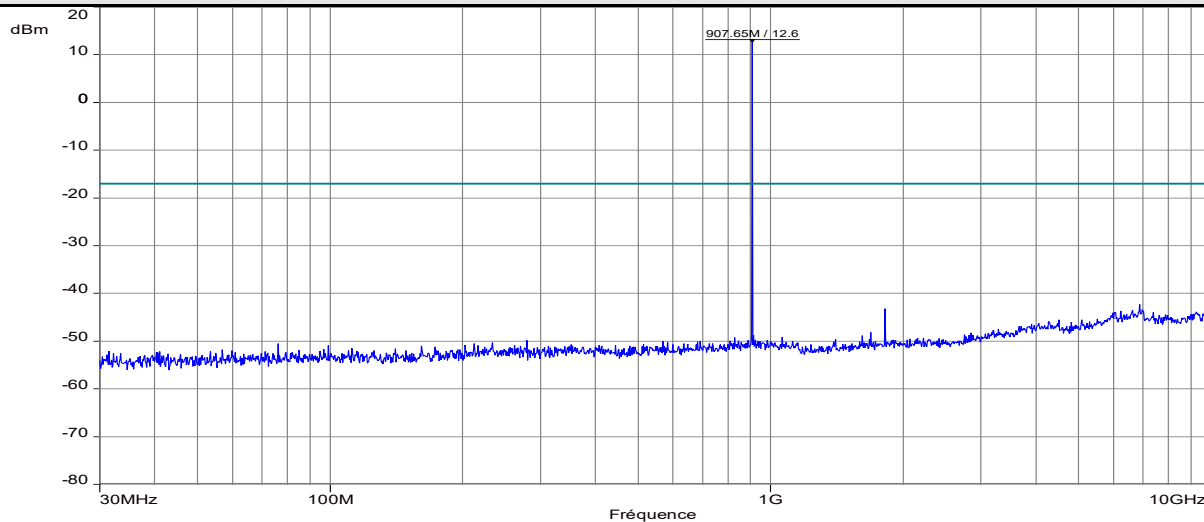


Frequency band investigated:	30MHz-10GHz
Unit :	dBm
RBW :	100kHz (Frequency step 50kHz)
Measurement detector:	Peak
Limit:	-17.4dBm

Graphical representation of Band-edge compliance (LOW)


LORA / Hopping Disable

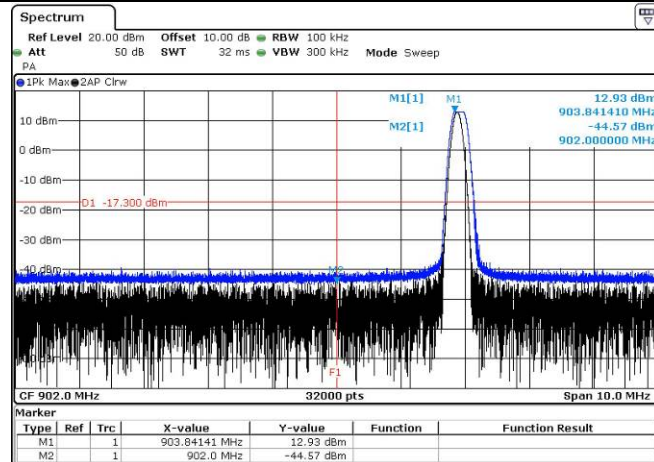


LORA / Hopping Enabled

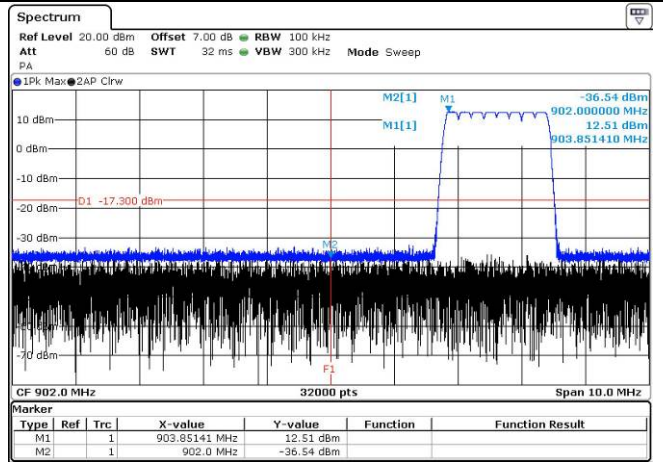

FSK / Hopping Disable

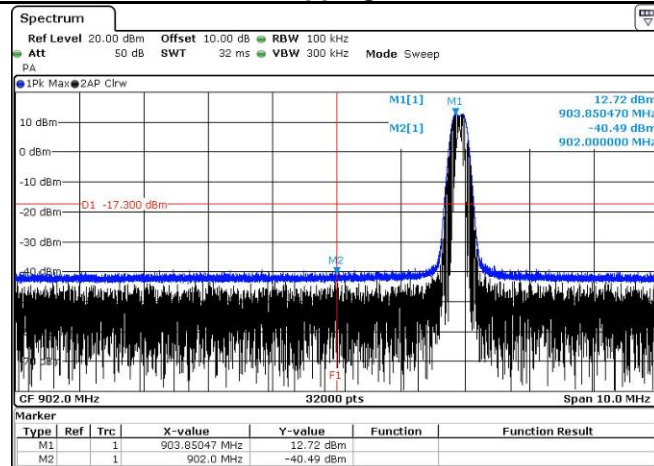


FSK / Hopping Enabled

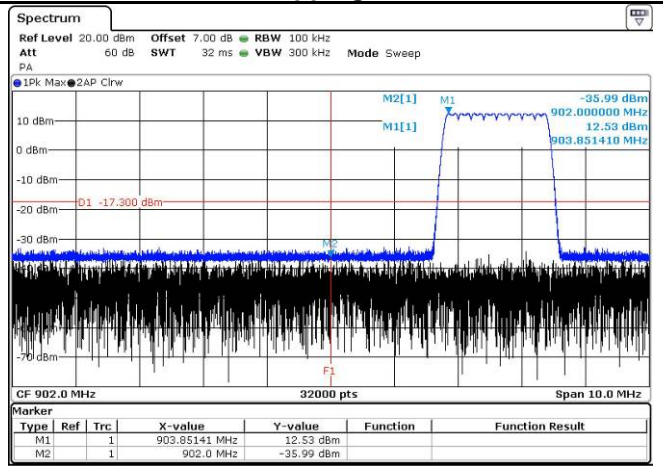


Unit :	dBm
RBW :	100kHz
Measurement detector:	Peak
Limit:	-17.4dBm
Note:	F1 is 902MHz

Graphical representation of Band-edge compliance (High)


LORA / Hopping Disable

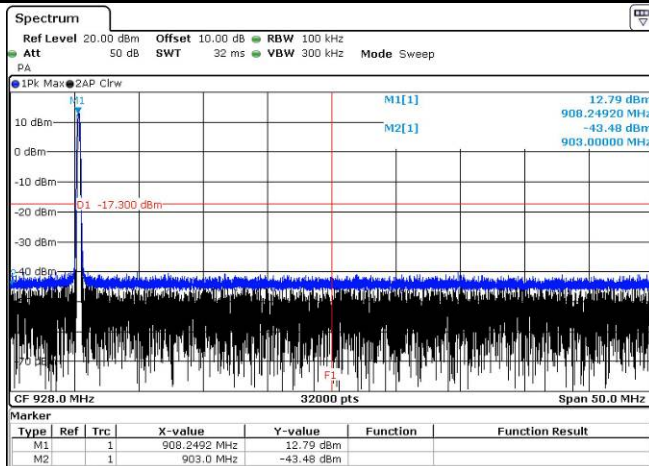


LORA / Hopping Enabled

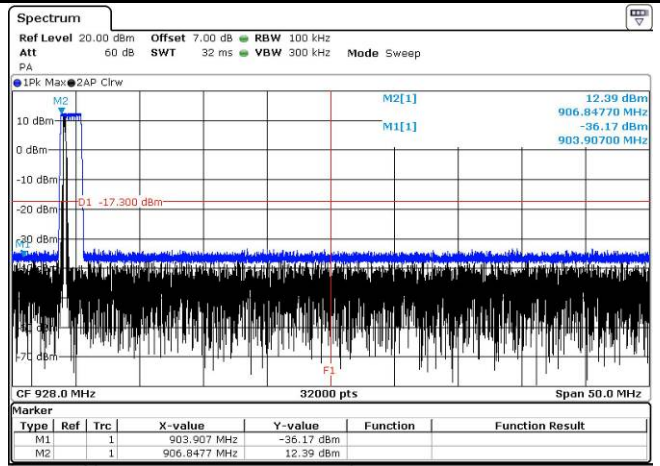

FSK / Hopping Disable

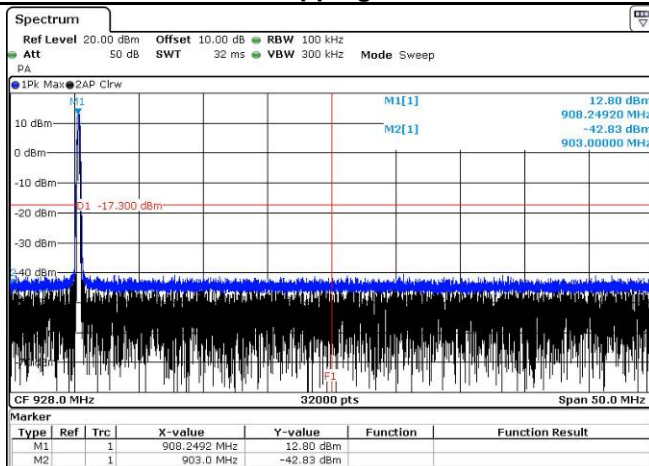

FSK / Hopping Enabled

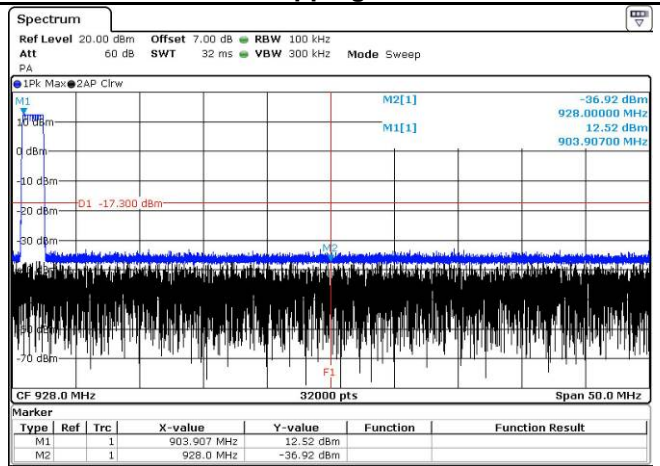

Unit :	dBm
RBW :	100kHz
Measurement detector:	Peak
Limit:	-17.4dBm
Note:	F1 is 902MHz


16. Unwanted emissions in Non-Restricted Frequency bands (Radiated emissions)

TEST: Unwanted emissions in Non-Restricted Frequency Bands			Verdict
Method: Measurements were performed on a 3-meter Open Area Test Site (OATS) for frequency below 1GHz. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (Peak) were then performed by rotating the EUT on 360° and adjusting the receive antenna height from 1 to 4 m For frequency above 1GHz, final measurements were made at 3m in a Full Anechoic Chamber (FAC) that complies with ANSI C63.10. Measurements were performed at an antenna to EUT separation distance of 3 meter. The EUT was rotated 360° about its azimuth with the receive antenna in horizontal and vertical polarities. Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength, with 60° rotation on each axis. (Clause 6.6.5 of ANSI C63.10). A pre-scan frequency identification of the EUT has been performed in full anechoic chamber. The measured radiated field of the EUT is performed (or corrected) at 3-meters of distance. Antenna is 1.25-meters high. The pre-characterization graphs are obtained in PEAK detection with 360° continuous rotation of the device under test.			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	20 to 30 °C	22°C ± 2	
Relative Humidity	25 to 70 %	35% ± 5	
Fully configured sample scanned over the following frequency range	Frequency range on each side of line	Measurement Point	
	30MHz – 10GHz	3 m measurement distance	
Limits – FCC Part 15.247 (d) / RSS-247 § 5.5			
Frequency (MHz)	Limits (dBµV/m)		
	Detector / Analyser RBW	Limit	Results
30 to 10000	Pk / 100kHz	30dB below the maximum Peak level	Pass
Supplementary information: Test location: SMEE. Test date: December 14 th , 2018. Tested by L. CHAPUS			


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Log-periodic antenna	TDK	PLP3003	ANT-101-001	2017/5	2019/5
Biconnic antenna	COM-POWER	AB- 900	ANT-101-003	2017/5	2019/5
BiConiLog antenna	EMCO	3142B	ANT-101-010	2017/7	2019/7
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2018/10	2021/10
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2017/5	2019/5
RF cable	Div	OATS/25m	CAB-101-017	2018/4	2019/4
RF cable	Pasternack RF	PE302-120	CAB-131-024	2018/4	2019/4
RF cable	HUBER+SUHNER	RG214U	CAB-141-026	2018/4	2019/4
RF cable	HUBER+SUHNER	RG214U	CAB-141-029	2018/4	2019/4
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2018/4	2019/4

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber	COMTEST	214263	CAG-141-001	2017/6	2020/6
Antenna mast	Innco- Systems	MA4000EP	MAT-101-001	-	-
Turntable	Innco- Systems	DS1200S	PLA-101-001	-	-
Turntable	Innco- Systems	CT0800	PLA-141-001		
Pre-amplifier	Pasternack RF	1524	PRE-101-002	2018/4	2019/4
Measuring receiver	Rohde&Schwarz	ESRP	REC-151-003	2017/5	2019/5
OATS	Div	10m	SIT-101-001	2017/7	2020/7
EMC Software	NEXIO	BAT EMC V3.8	SOF-101-001	-	-

Test Setup for radiated emission

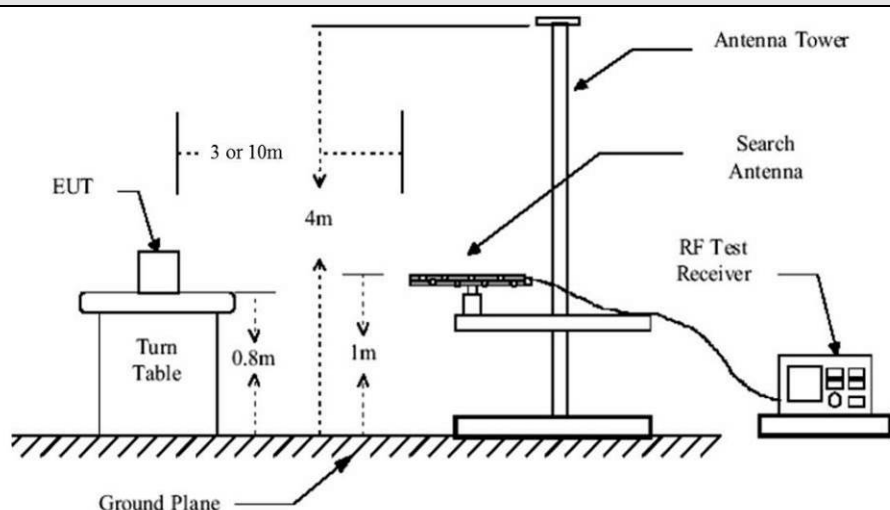

Test setup for 30-1000MHz

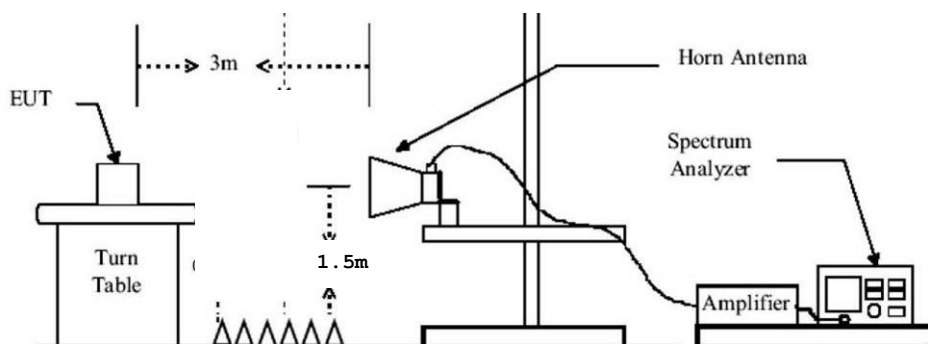

Test setup for 1-10GHz


Tabulated Results for Peak Output Radiated level (Antenna #1)	
FREQ (MHz)	Field Strength 3m (dBμV/m)
903.9 / LORA-B1	111.0
905.3 / LORA-B1	111.0
906.9 / LORA-B2	111.4
908.3 / LORA-B2	111.4
903.9 / FSK-B1	111.0
905.3 / FSK-B1	111.0
906.9 / FSK-B2	111.4
908.3 / FSK-B2	111.4
RBW:	100kHz
Measurement distance:	3m
Limit:	Ref. level only – For 15.247 (d) / RSS-247 § 5.5
Final measurement detector:	Peak
Note:	(1): Only for identification of limit in non-restricted band Limit is 81.0 dBμV/m Peak for out-of-band frequencies in Non-Restricted bands (with a 100kHz RBW on the spectrum analyser)

Tabulated Results for Peak Output Radiated level (Antenna #2)	
FREQ (MHz)	Field Strength 3m (dBμV/m)
903.9 / LORA-B1	113.0
905.3 / LORA-B1	113.0
906.9 / LORA-B2	113.4
908.3 / LORA-B2	113.4
903.9 / FSK-B1	113.0
905.3 / FSK-B1	113.0
906.9 / FSK-B2	113.4
908.3 / FSK-B2	113.4
RBW:	100kHz
Measurement distance:	3m
Limit:	Ref. level only – For 15.247 (d) / RSS-247 § 5.5
Final measurement detector:	Peak
Note:	(1): Only for identification of limit in non-restricted band Limit is 83.0 dBμV/m Peak for out-of-band frequencies in Non-Restricted bands (with a 100kHz RBW on the spectrum analyser)


Tabulated Results for Unwanted emissions in Non-Restricted bands				
FREQ (MHz)	Field Strength 3m (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Result (dBμV/m)
Levels are at least 10 dB below the -30dBc limit				
RBW:	100kHz			
Measurement distance:	3m			
Limit:	15.247 / RSS-247			
Final measurement detector:	Peak			
RESULT:	PASS			
Note:	(1): The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follow: $FS = RA + AF + CF - AG$ Where FS = Field Strength RA = Receiver Amplitude AF = Antenna Factor CF = Cable Factor AG = Amplifier Gain Total factor (dB) is $AF + CF - AG$ Margin value = Emission level – Limit value (2): Peak pre-scans not performed at 3-meters distance are corrected as follow: $M@3m = M@D_m + 20 \times \log(D_m / 3m)$ Where D is the measurement distance in meter (3): All frequencies not specified have margin < -10dB (4): 3-axis measurement performed for device under test.			

Graphical representation of Band-edge compliance (LOW) / Antenna #1


LORA / Hopping Disable

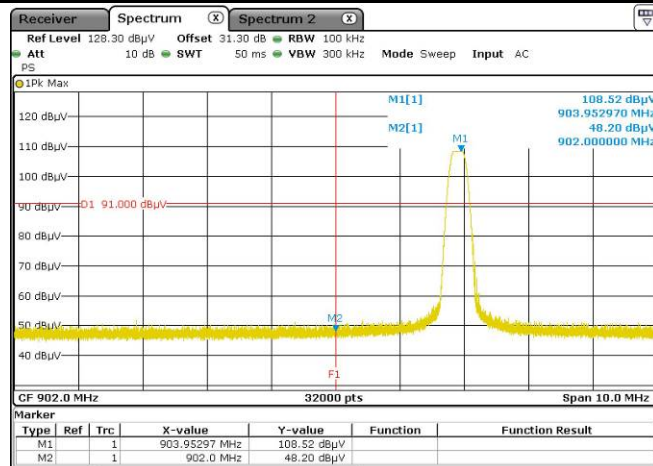


LORA / Hopping Enabled

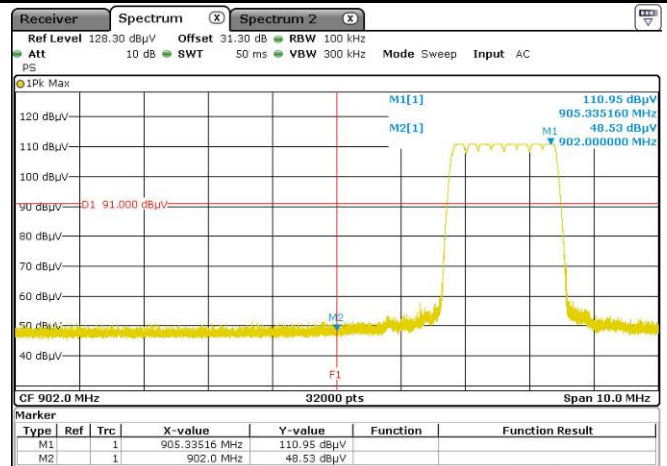

FSK / Hopping Disable

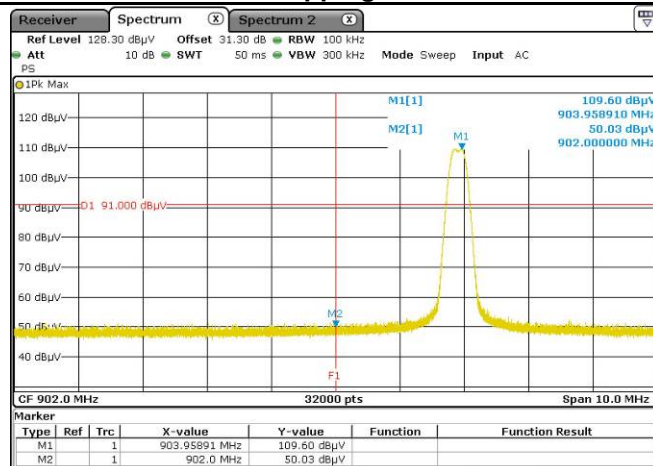


FSK / Hopping Enabled

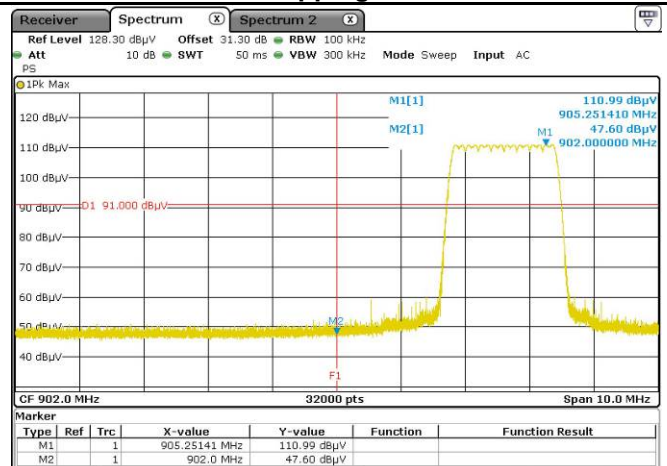


Unit :	dBm
RBW :	100kHz
Measurement detector:	Peak
Note:	F1 is 902MHz

Graphical representation of Band-edge compliance (High) / Antenna #1


LORA / Hopping Disable

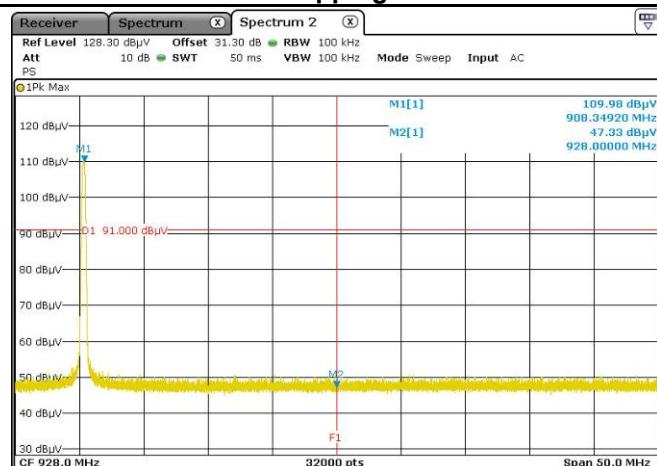


LORA / Hopping Enabled

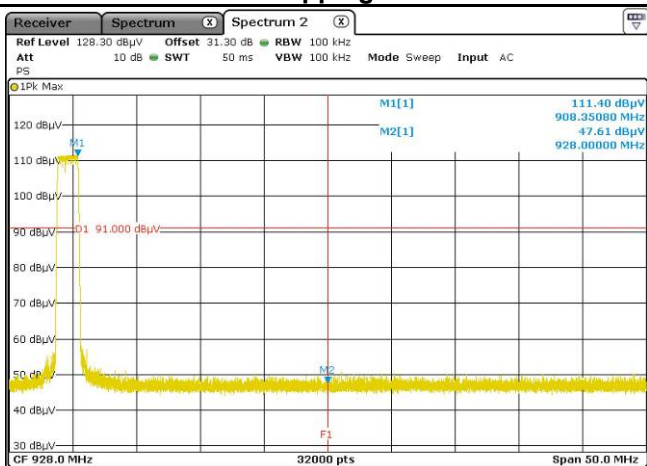

FSK / Hopping Disable

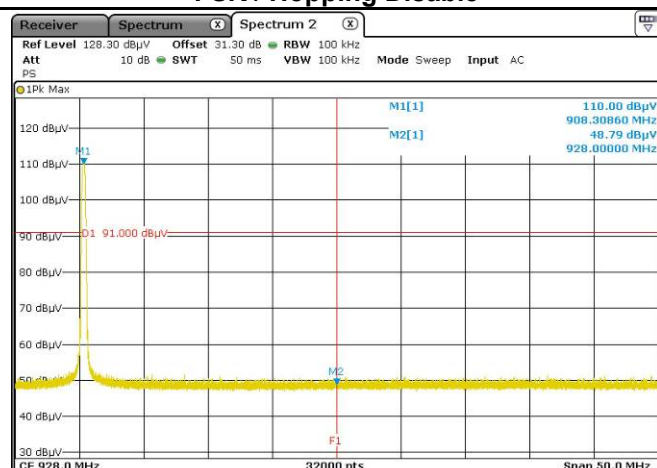


FSK / Hopping Enabled

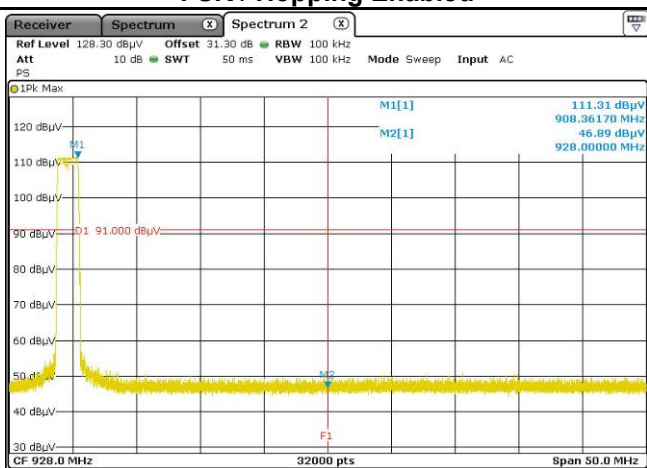


Unit :	dBm
RBW :	100kHz
Measurement detector:	Peak
Note:	F1 is 928MHz

Graphical representation of Band-edge compliance (LOW) / Antenna #2


LORA / Hopping Disable

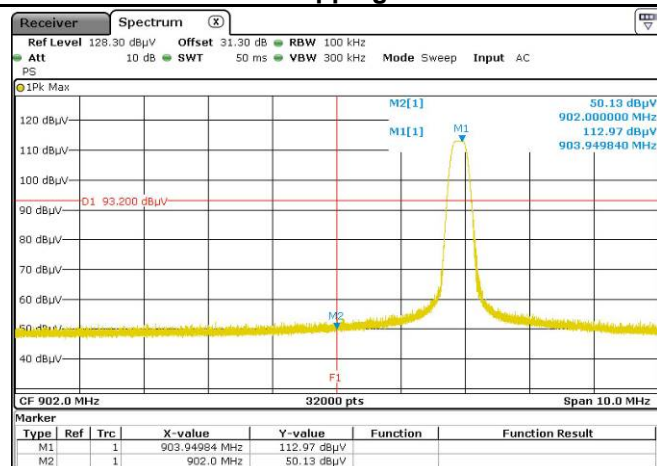


LORA / Hopping Enabled

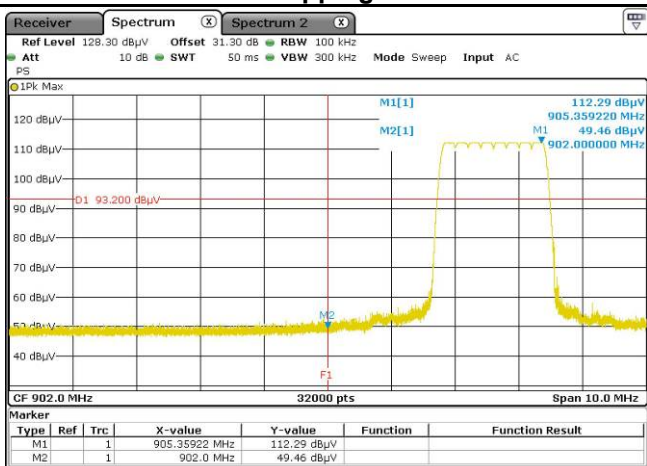

FSK / Hopping Disable

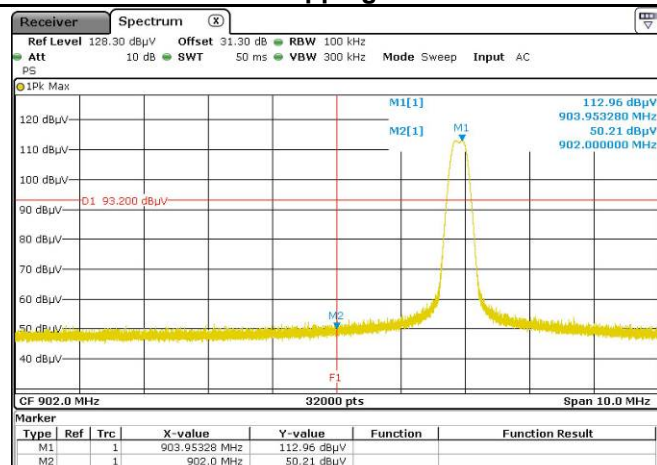


FSK / Hopping Enabled

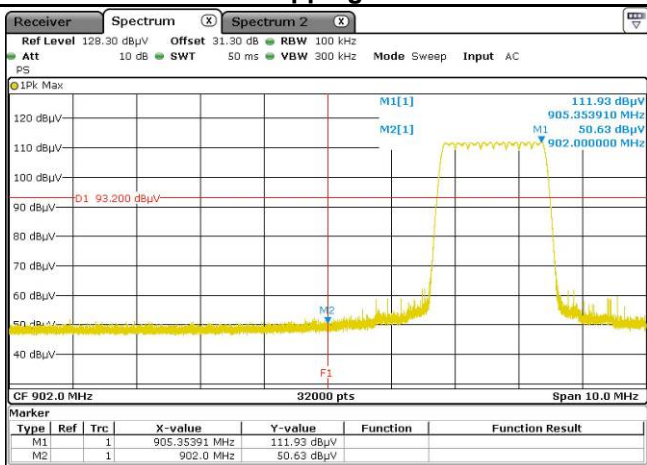


Unit :	dBm
RBW :	100kHz
Measurement detector:	Peak
Note:	F1 is 902MHz

Graphical representation of Band-edge compliance (High) / Antenna #2


LORA / Hopping Disable

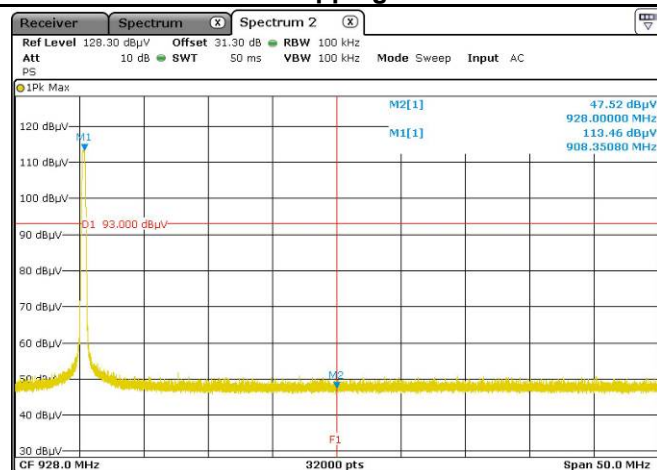


LORA / Hopping Enabled

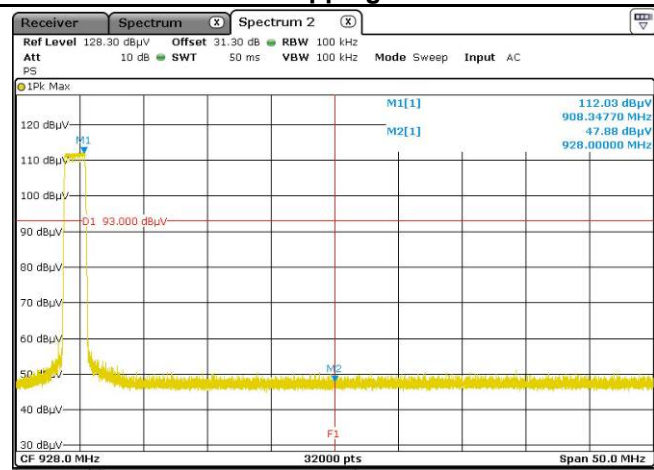

FSK / Hopping Disable

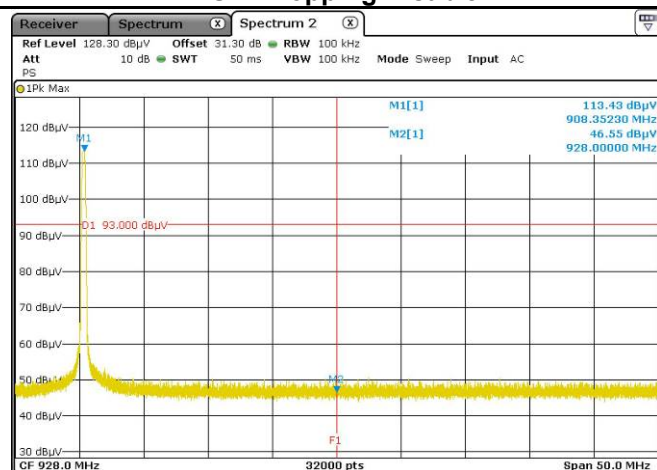

FSK / Hopping Enabled

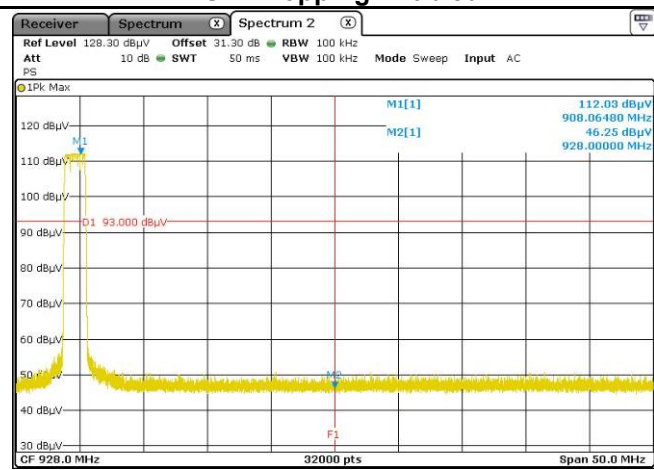


Unit :	dBm
RBW :	100kHz
Measurement detector:	Peak
Note:	F1 is 928MHz

17. Unwanted emissions in Restricted Frequency bands


TEST: Unwanted emissions into Restricted Frequency Bands			Verdict
<u>Method:</u> Measurements were performed on a 10 or 3-meter Open Area Test Site (OATS) for frequency below 1GHz. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (Peak) were then performed by rotating the EUT on 360° and adjusting the receive antenna height from 1 to 4 m for frequency between 30MHz to 1GHz. For frequency above 1GHz, final measurements were made at 3m in a Full Anechoic Chamber (FAC) that complies with ANSI C63.10. Measurements were performed at an antenna to EUT separation distance of 3 meter. The EUT was rotated 360° about its azimuth with the receive antenna in horizontal and vertical polarities. Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength, with 60° rotation on each axis.(Clause 6.6.5 of ANSI C63.10). A pre-scan frequency identification of the EUT has been performed in full anechoic chamber. The measured radiated field of the EUT is performed (or corrected) at 3-meters of distance. Antenna is 1.25-meters high. The pre-characterization graphs are obtained in PEAK detection with 360° continuous rotation of the device under test.			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	20 to 30 °C	22°C ± 2	
Relative Humidity	25 to 70 %	35% ± 5	
Fully configured sample scanned over the following frequency range	Frequency range on each side of line	Measurement Point	
	9kHz – 30MHz	10 m measurement distance	
	30MHz – 10GHz	3 m measurement distance	
Limits – FCC Part 15.205, 15.209 (a), 15.247 (d) / RSS-GEN §8.9, §8.10, RSS-247 §5.5			
Frequency (MHz)	Limits (dBµV/m)		
	Level / Detector / Distance	Results	
0.009 to 0.090	107.6 – 87.6 / AV / 10m 127.6 – 107.6 / PK / 10m	Pass	
0.090 to 0.110	87.6 – 85.9 / QP / 10m	Pass	
0.110 to 0.490	85.7 – 72.9 / AV / 10m 105.7 – 92.9 / PK / 10m	Pass	
0.490 to 1.705	52.9 – 42.1 / QP / 10m	Pass	
1.705 to 30	48.6 / QP / 10m	Pass	
30 to 88	40.0 / QP / 3m	Pass	
88 to 216	43.5 / QP / 3m	Pass	
216 to 960	46.0 / QP / 3m	Pass	
960-1000	54.0 / QP / 3m	Pass	
Above 1GHz	54.0 / AV / 3m 74.0 / PK / 3m	Pass	
Supplementary information: Test location: SMEE. Test date: December 14 th , 2018. Tested by L. CHAPUS			

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Log-periodic antenna	TDK	PLP3003	ANT-101-001	2017/5	2019/5
Biconnic antenna	COM-POWER	AB- 900	ANT-101-003	2017/5	2019/5
Loop antenna	EMCO	6502	ANT-101-009	2017/8	2019/8
BiConiLog antenna	EMCO	3142B	ANT-101-010	2017/7	2019/7
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2018/10	2021/10
Horn antenna	ETS-LINDGREN	3116	ANT-161-014	2017/12	2022/12
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2017/5	2019/5
RF cable	Div	OATS/25m	CAB-101-017	2018/4	2019/4
RF cable	Pasternack RF	PE302-120	CAB-131-024	2018/4	2019/4
RF cable	HUBER+SUHNER	RG214U	CAB-141-026	2018/4	2019/4
RF cable	HUBER+SUHNER	RG214U	CAB-141-029	2018/4	2019/4
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2018/4	2019/4
RF cable	HUBER+SUHNER	SF102 (K/2m)	CAB-171-034	2017/5	2019/5
RF cable	HUBER+SUHNER	SF102 (K/3m)	CAB-171-034	2017/5	2019/5
Anechoic chamber	COMTEST	214263	CAG-141-001	2017/6	2020/6
Antenna mast	Innco- Systems	MA4000EP	MAT-101-001	-	-
Turntable	Innco- Systems	DS1200S	PLA-101-001	-	-
Turntable	Innco- Systems	CT0800	PLA-141-001		
Pre-amplifier	Pasternack RF	1524	PRE-101-002	2018/4	2019/4
Pre-amplifier	SMEE	18-40GHz	PRE-171-004	2017/12	2018/12
Measuring receiver	Rohde&Schwarz	ESRP	REC-151-003	2017/5	2019/5
OATS	Div	10m	SIT-101-001	2017/7	2020/7
EMC Software	NEXIO	BAT EMC V3.8	SOF-101-001	-	-


Test Setup for radiated emission

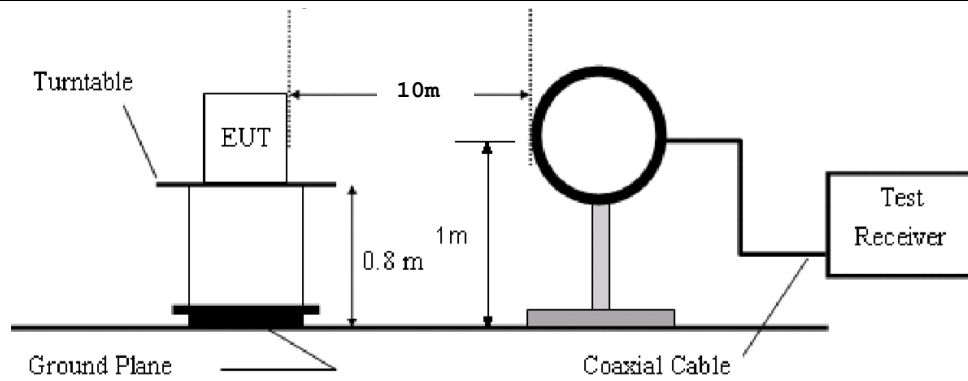

Test setup for 9k-30MHz

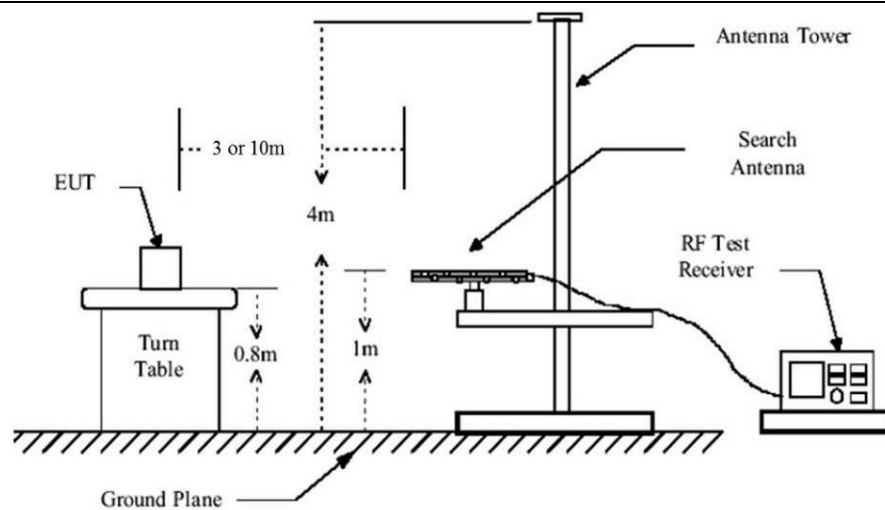

Test setup for 30-1000MHz

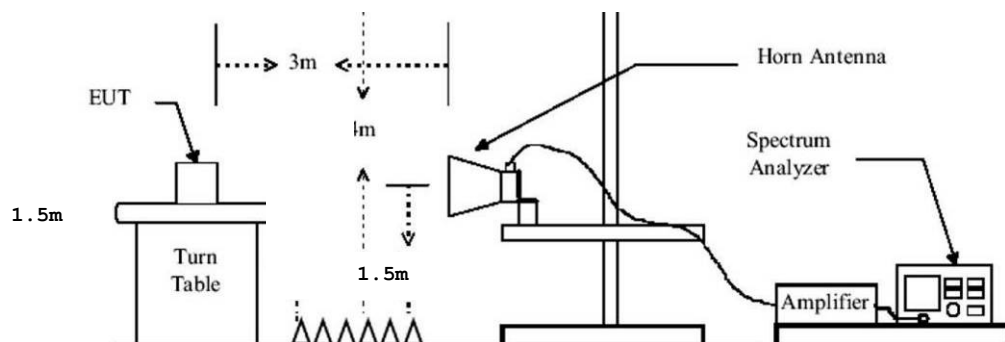


Test setup for 1-10GHz

Tabulated Results for Unwanted emissions (9kHz-30MHz)						
FREQ	RF field @ 30m	Limit @ 30m	Margin	Antenna angle	Table angle	Correc. Fact. (CF)
MHz	(QP) dBμV/m	(QP) dBμV/m	dB	Degree	Degree	dB
Margin < -10dB						
Supplementary information: Frequency list measured on the Open Area Test Site has been created with pre-scan results.						
Frequency band investigated:		9kHz-30MHz				
RBW:		200Hz (9kHz-150kHz)				
		9kHz (150kHz-30MHz)				
Measurement distance:		10m				
Limit:		FCC Part 15.205 - 15.209 / RSS-GEN				
Final measurement detector:		Peak / Quasi-Peak / Average				
Note:		CF: Correction factor = Antenna factor + Cable loss *1: Measure have been done at 10m distance and corrected according to requirements of 15.209.e) (M@30m = M@10m-19.1dB)				

Tabulated Results for Unwanted emissions (30MHz-1GHz)										
FREQ	Meter reading	Meter reading	Total factor	Field level	Field level	Pol	Antenna height	Table angle	Limit	Margin
MHz	(QP) dBμV	(Pk) dBμV	dB	(QP) dBμV/m	(Pk) dBμV/m		cm	Degré	(QP) dBμV/m	dB
Margin < -10dB										
Supplementary information: Frequency list measured on the Open Area Test Site has been created with pre-scan results.										
Frequency band investigated:		30MHz-1GHz								
RBW:		120kHz								
Measurement distance:		3m								
Limit:		FCC Part 15.205 - 15.209 / RSS-GEN								
Final measurement detector:		Quasi-Peak								
RESULT:		PASS								
Field Strength Calculation:		The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follow: $FS = RA + AF + CF - AG$ Where FS = Field Strength RA = Receiver Amplitude AF = Antenna Factor CF = Cable Factor AG = Amplifier Gain Total factor (dB) is AF + CF - AG Margin value = Emission level - Limit value								

Tabulated Results for Unwanted emissions (1GHz-10GHz)					
FREQ (MHz)	Field Strength 3m (dBμV/m)	Detector	Limit (dBμV/m)	Margin (dBμV/m)	Result
LORA MODE					
7255.2	60.1	Pk	74	-13.9	Pass
7255.2	50.5	Avg	54	-3.5	Pass
7266.4	60.3	Pk	74	-13.7	Pass
7266.4	51.0	Avg	54	-3.0	Pass
FSK MODE					
7255.2	60.1	Pk	74	-13.9	Pass
7255.2	50.5	Avg	54	-3.5	Pass
7266.4	60.3	Pk	74	-13.7	Pass
7266.4	51.0	Avg	54	-3.0	Pass
RBW		1MHz			
Measurement distance:		3m			
Limit:		FCC Part 15.205, 15.209, 15.247 / RSS-Gen, RSS-247			
Final measurement detector:		Peak / CISPR Average			
RESULT:		PASS			
Notes:		(1): The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follow: $FS = RA + AF + CF - AG$ Where FS = Field Strength RA = Receiver Amplitude AF = Antenna Factor CF = Cable Factor AG = Amplifier Gain Total factor (dB) is $AF + CF - AG$ Margin value = Emission level – Limit value (2): All frequencies not specified have margin < -10dB (for peak and average detector)			

Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 9kHz-30MHz / 3m / Parallel & Perpendicular antenna position / Transmit mode)


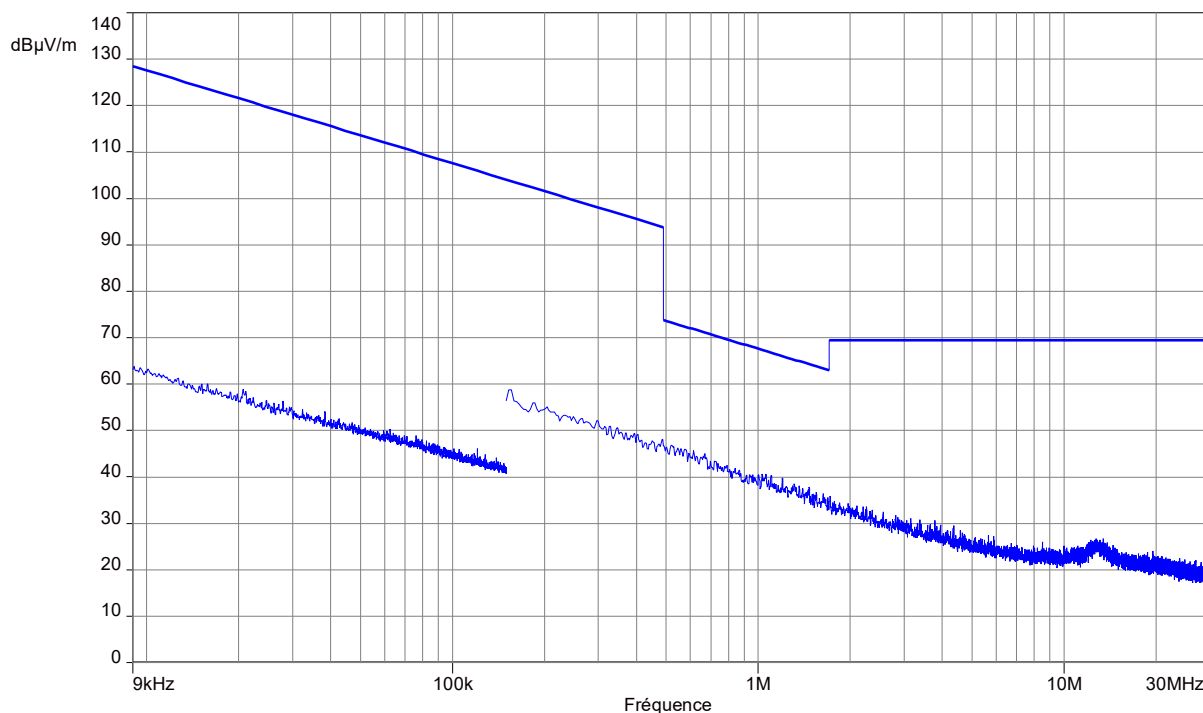


Notes: Pre-scan graph only for identification purpose.

Same result for all transmit modes on all channels with antenna #1 and #2.

Frequency band investigated:	9kHz-30MHz
Unit :	dBμV/m
RBW :	200Hz (9kHz-150kHz) 9kHz (150kHz-30MHz)
Antenna polarization :	Parallel & Perpendicular to measurement axis
Measurement detector:	Peak

Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 30MHz-1GHz / 3m / Horizontal & Vertical / Mid channel. Antenna #1.

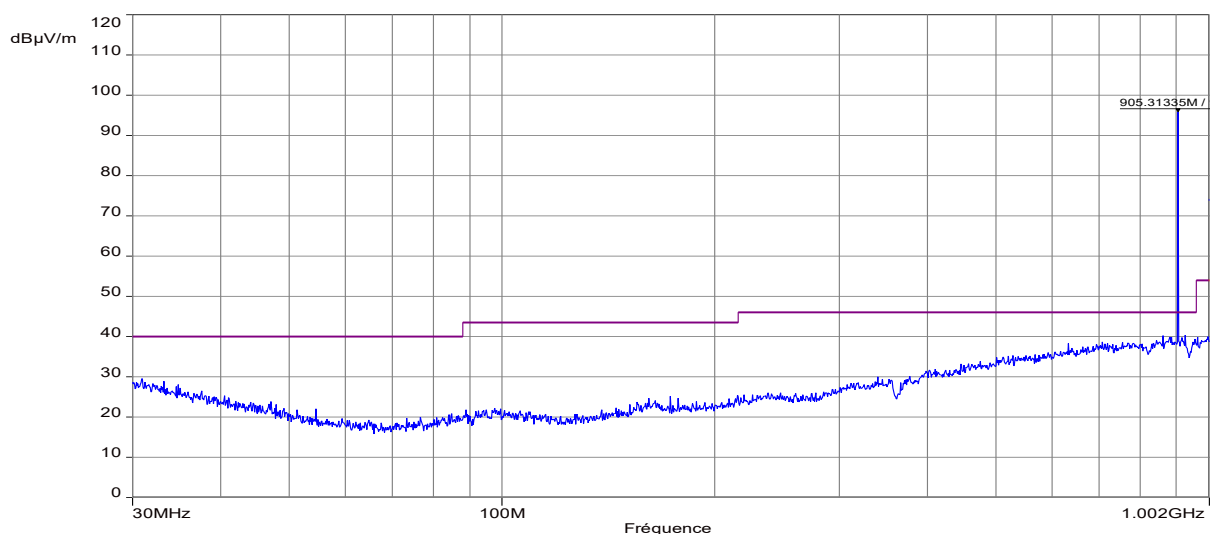
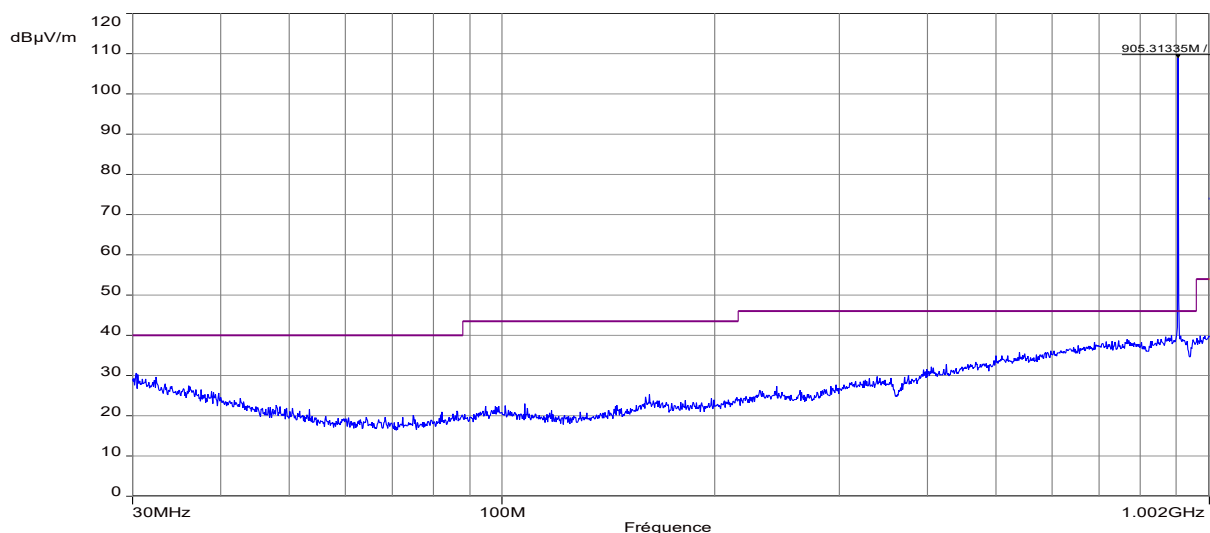


Note: Pre-scan graph only for identification purpose.

Same results for LORA or FSK modes. Pre-scan performed on the mid channel of the whole frequency band.

Frequency band investigated:		30MHz-1GHz			
Unit :		dBμV/m			
RBW :		100kHz			
Antenna polarization :		Horizontal & Vertical			
Limit:		FCC 15.247 / RSS-247			
Measurement detector:		Peak			
PEAK LIST FROM PRE-SCAN					
Frequency (MHz)	Peak Level (dBμV/m)	Angle (°)	Limit (dBμV/m)	Polarization	Comments
None	-	-	-	-	-

Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 30MHz-1GHz / 3m / Horizontal & Vertical / Mid channel. Antenna #2.

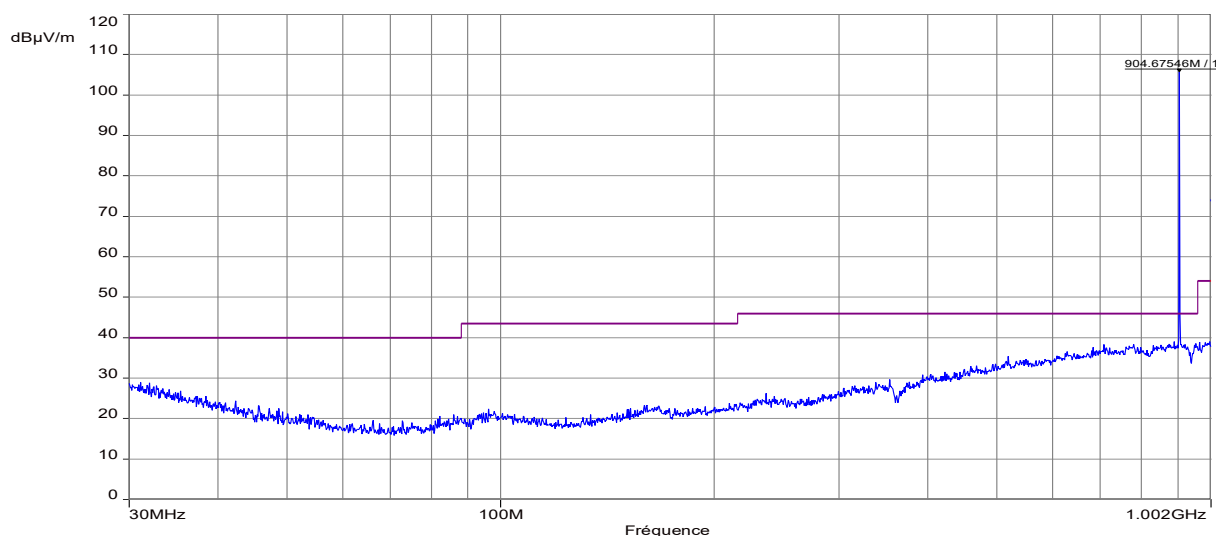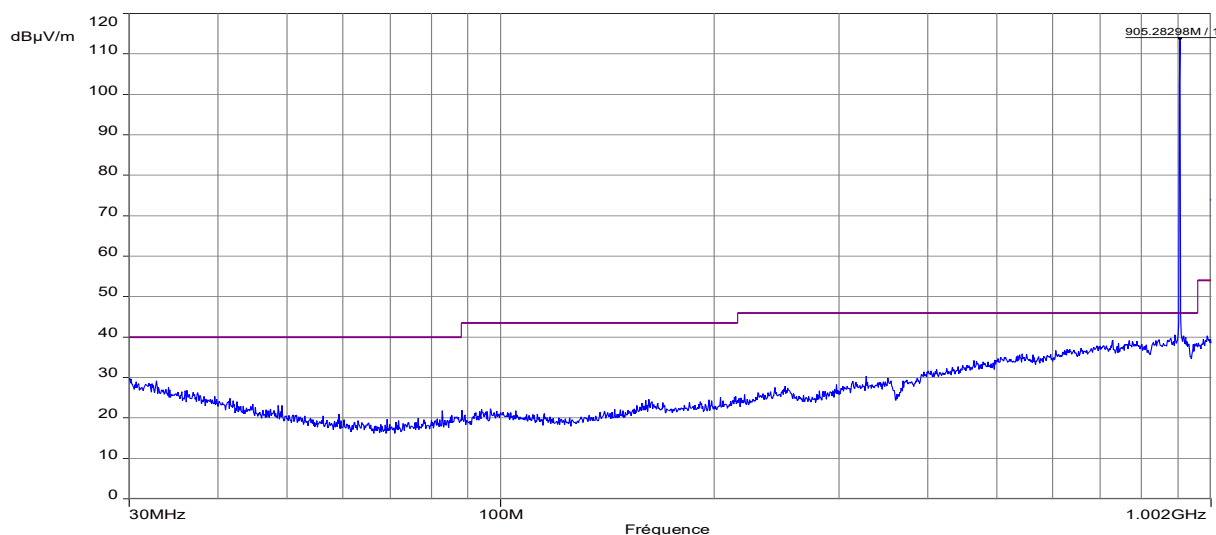

Note: Pre-scan graph only for identification purpose.



Same results for LORA or FSK modes. Pre-scan performed on the mid channel of the whole frequency band.

Frequency band investigated:	30MHz-1GHz
Unit :	dBμV/m
RBW :	100kHz
Antenna polarization :	Horizontal & Vertical
Limit:	FCC 15.247 / RSS-247
Measurement detector:	Peak

PEAK LIST FROM PRE-SCAN

Frequency (MHz)	Peak Level (dBμV/m)	Angle (°)	Limit (dBμV/m)	Polarization	Comments
None	-	-	-	-	-

Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 1GHz-10GHz / 3m / Horizontal & Vertical) – Low channel / Lora mode / Antenna #1

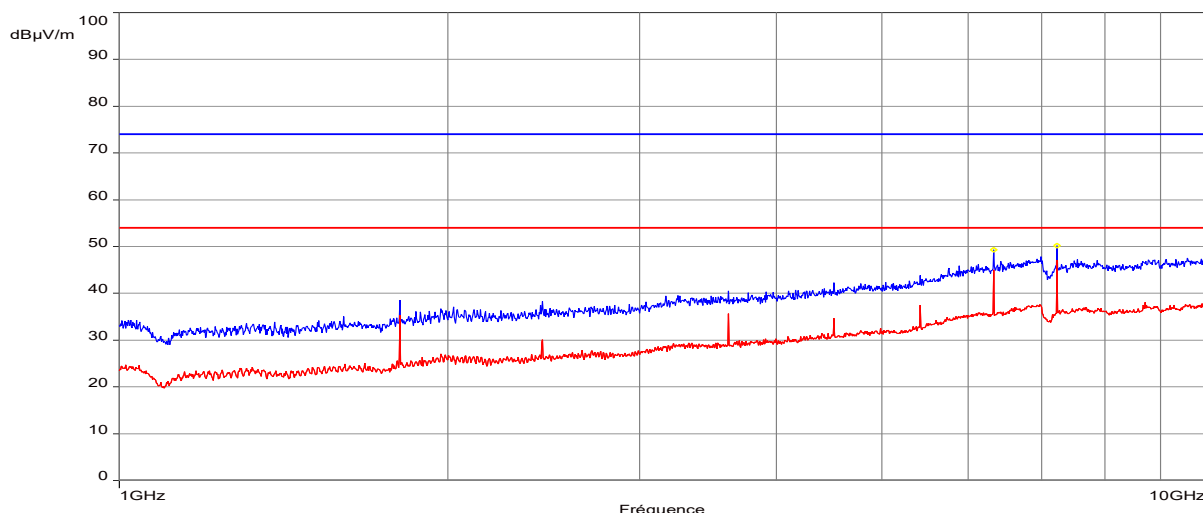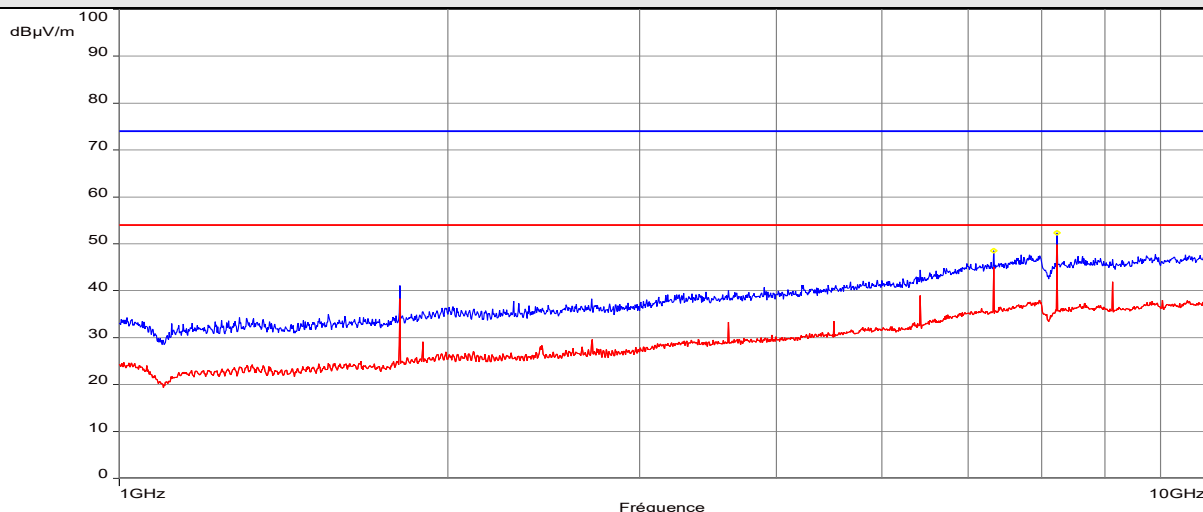



Note: Pre-scan graph only for identification purpose.

----- : Peak measure	----- : Average measure
Frequency band investigated:	1GHz-10GHz
Unit :	dBμV/m
RBW :	1MHz
Antenna polarization :	Horizontal & Vertical
Limit:	FCC 15.247 / RSS-247
Measurement detector:	Peak / Average

PEAK LIST FROM PRE-SCAN

Frequency (MHz)	Peak Level (dBμV/m)	Angle (°)	Average Limit (dBμV/m)	Polarization	Comments
6327.04	48.58	125.4	54.0	H	-
7231.01	52.33	57	54.0	H	-
6327.6	49.28	182.8	54.0	V	-
7231.29	50.19	182.8	54.0	V	-

Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 1GHz-10GHz / 3m / Horizontal & Vertical) – High channel / Lora mode / Antenna #1

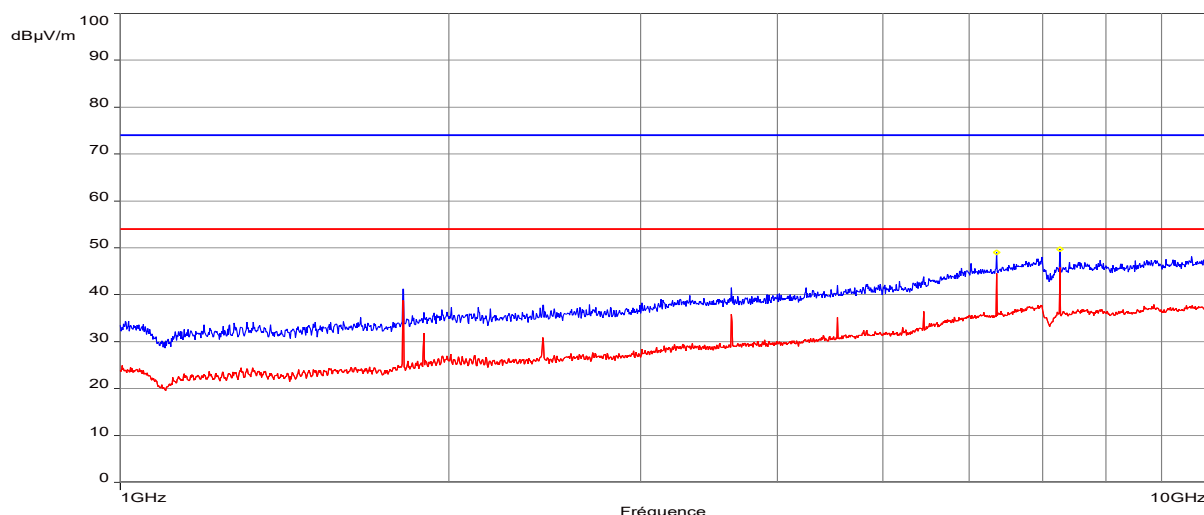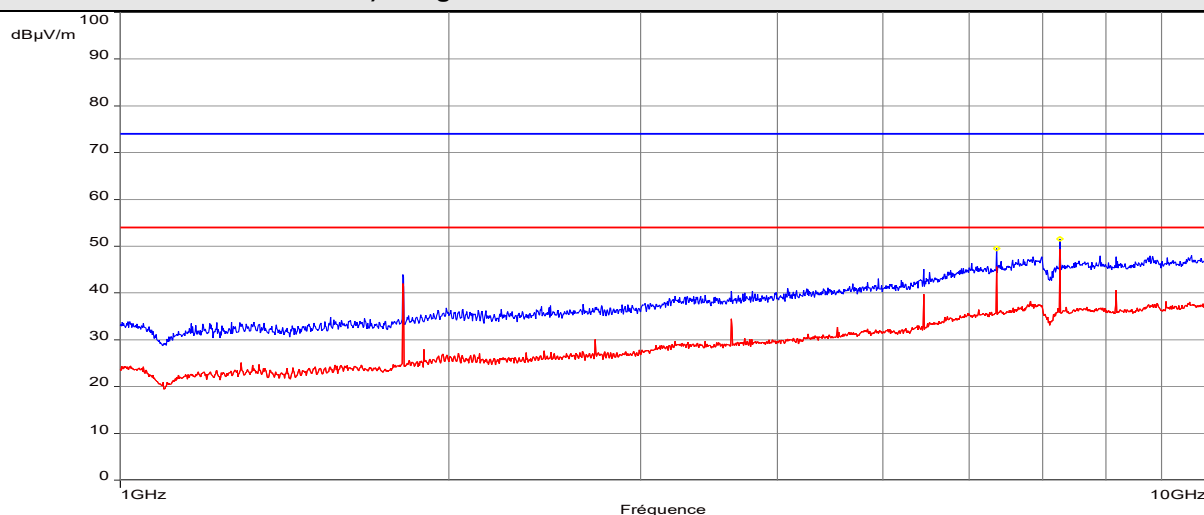


Note: Pre-scan graph only for identification purpose.

----- : Peak measure	----- : Average measure
Frequency band investigated:	1GHz-10GHz
Unit :	dBμV/m
RBW :	1MHz
Antenna polarization :	Horizontal & Vertical
Limit:	FCC 15.247 / RSS-247
Measurement detector:	Peak / Average

PEAK LIST FROM PRE-SCAN

Frequency (MHz)	Peak Level (dBμV/m)	Angle (°)	Average Limit (dBμV/m)	Polarization	Comments
6357.98	49.47	139.3	54.0	H	-
7266.73	51.59	153	54.0	H	-
6358.26	49.06	151.1	54.0	V	-
7266.73	49.71	206	54.0	V	-


Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 1GHz-10GHz / 3m / Horizontal & Vertical) – Low channel / FSK mode / Antenna #1

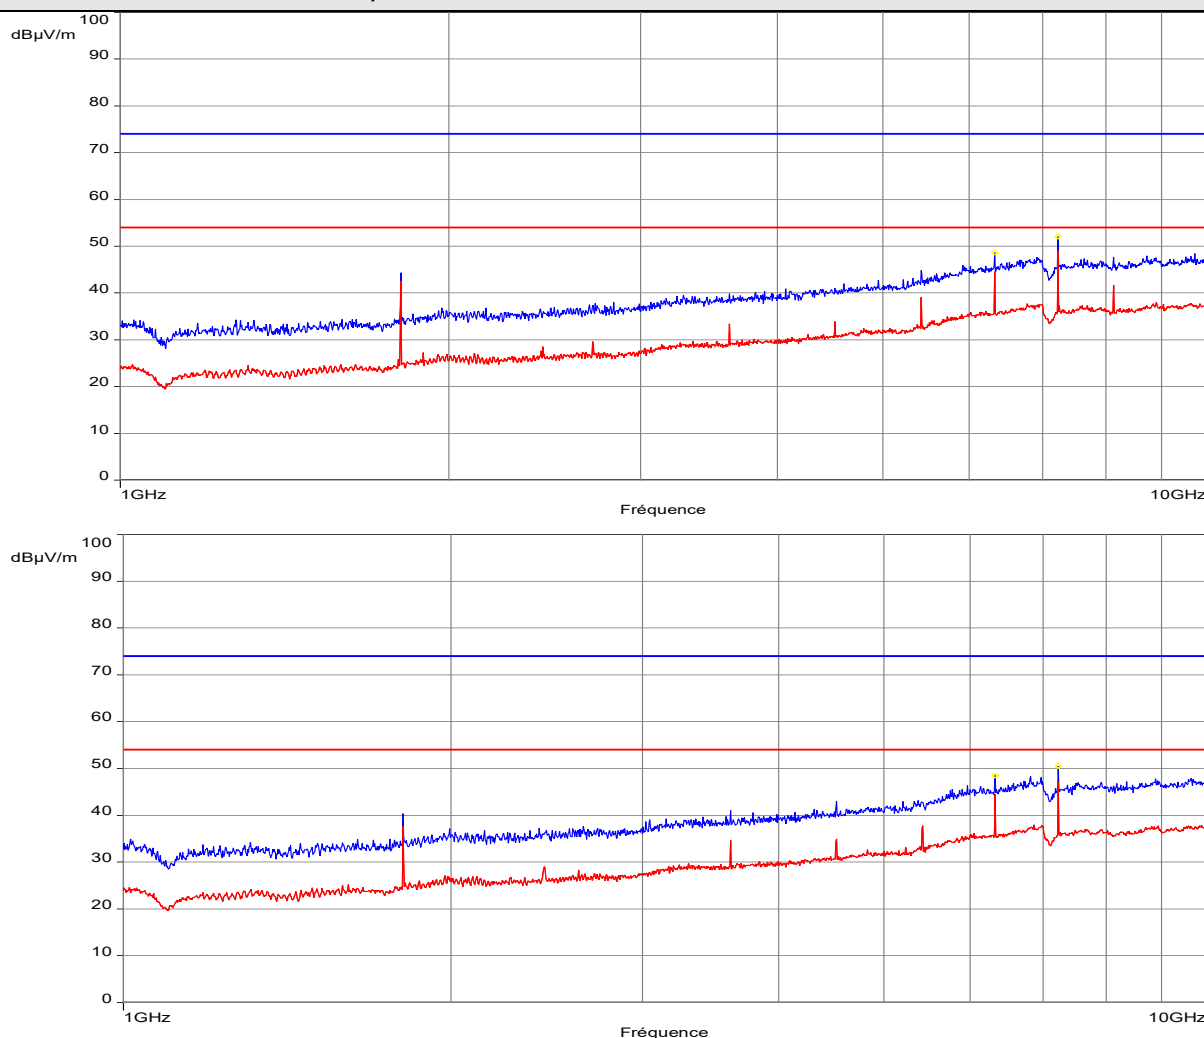

Note: Pre-scan graph only for identification purpose.

----- : Peak measure		----- : Average measure			
Frequency band investigated:		1GHz-10GHz			
Unit :		dBµV/m			
RBW :		1MHz			
Antenna polarization :		Horizontal & Vertical			
Limit:		FCC 15.247 / RSS-247			
Measurement detector:		Peak / Average			
PEAK LIST FROM PRE-SCAN					
Frequency (MHz)	Peak Level (dBµV/m)	Angle (°)	Average Limit (dBµV/m)	Polarization	Comments
6326.76	48.68	83.2	54.0	H	-
7231.85	52.02	110.6	54.0	H	-
6326.76	48.68	83.2	54.0	V	-
7231.85	52.02	110.6	54.0	V	-

Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 1GHz-10GHz / 3m / Horizontal & Vertical) – High channel / FSK mode / Antenna #1

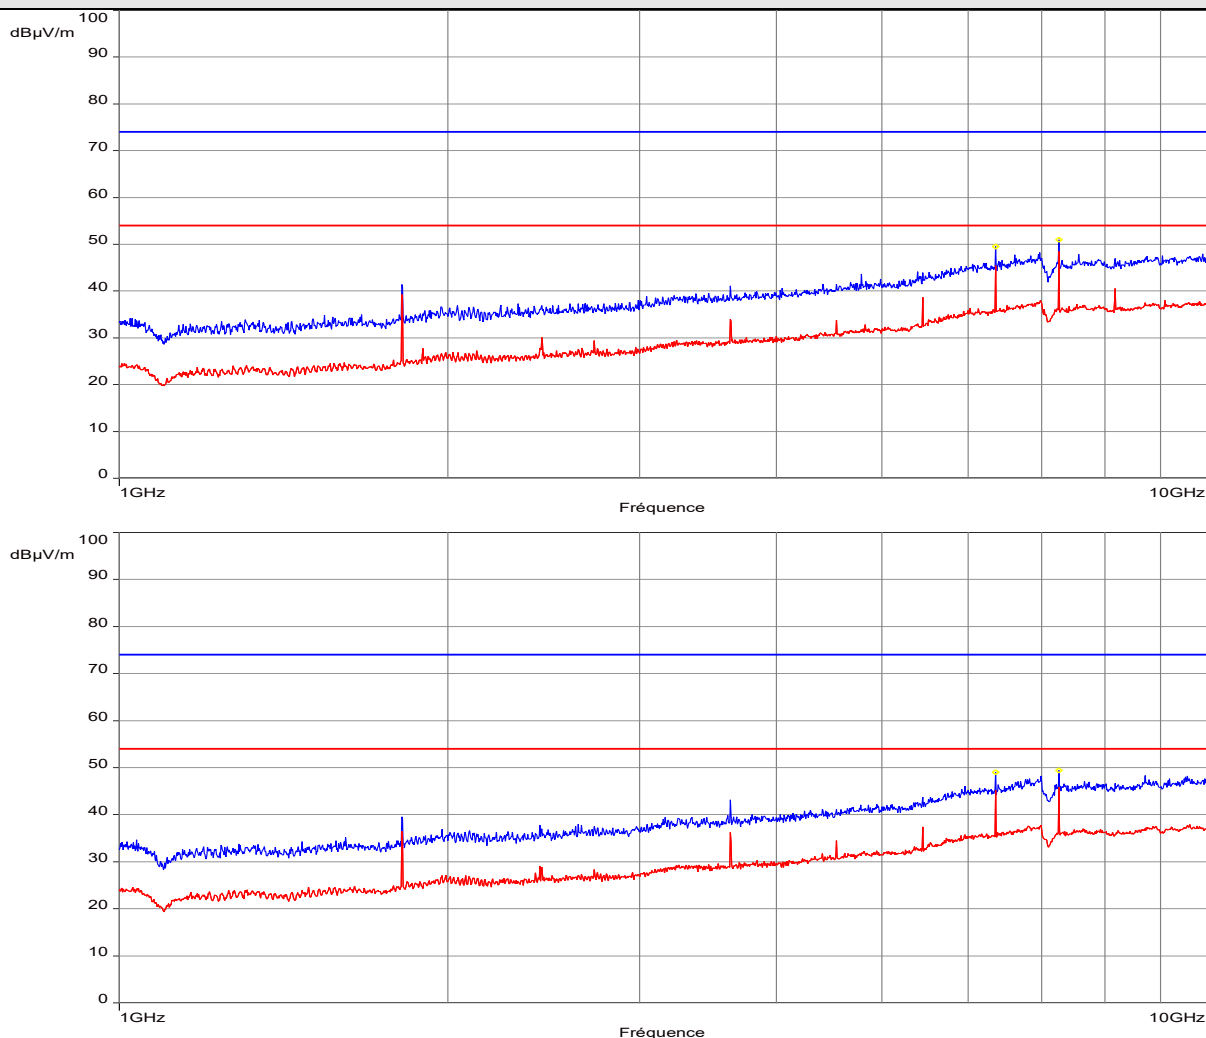



Note: Pre-scan graph only for identification purpose.

----- : Peak measure	----- : Average measure
Frequency band investigated:	1GHz-10GHz
Unit :	dBμV/m
RBW :	1MHz
Antenna polarization :	Horizontal & Vertical
Limit:	FCC 15.247 / RSS-247
Measurement detector:	Peak / Average

PEAK LIST FROM PRE-SCAN

Frequency (MHz)	Peak Level (dBμV/m)	Angle (°)	Average Limit (dBμV/m)	Polarization	Comments
6358.54	49.52	69.2	54.0	H	-
7265.88	51.01	69.2	54.0	H	-
6358.26	48.99	154.1	54.0	V	-
7267.01	49.45	207.9	54.0	V	-

Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 1GHz-10GHz / 3m / Horizontal & Vertical) – Mid channel / Antenna #2

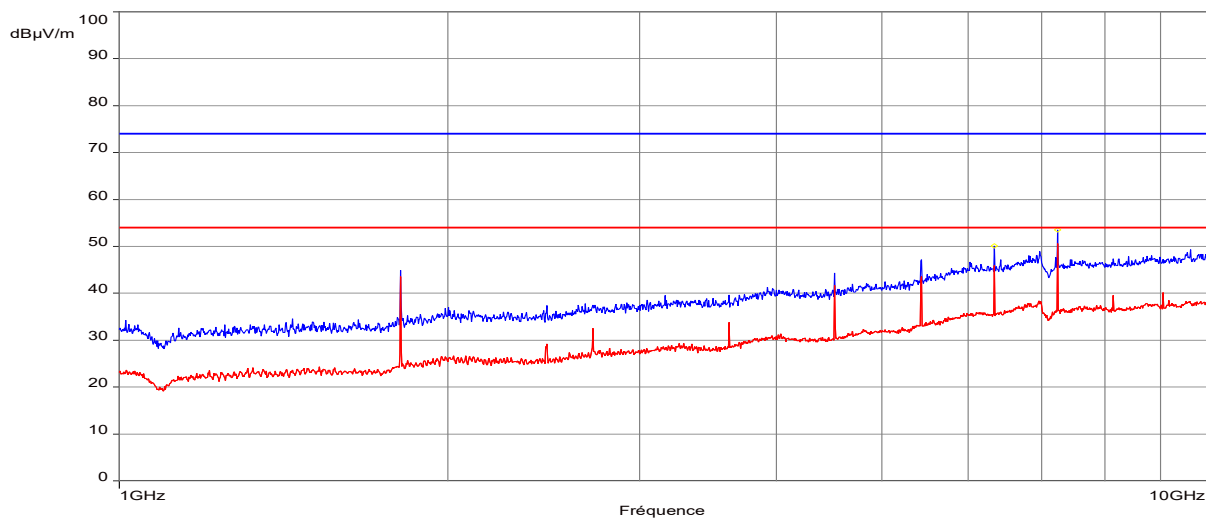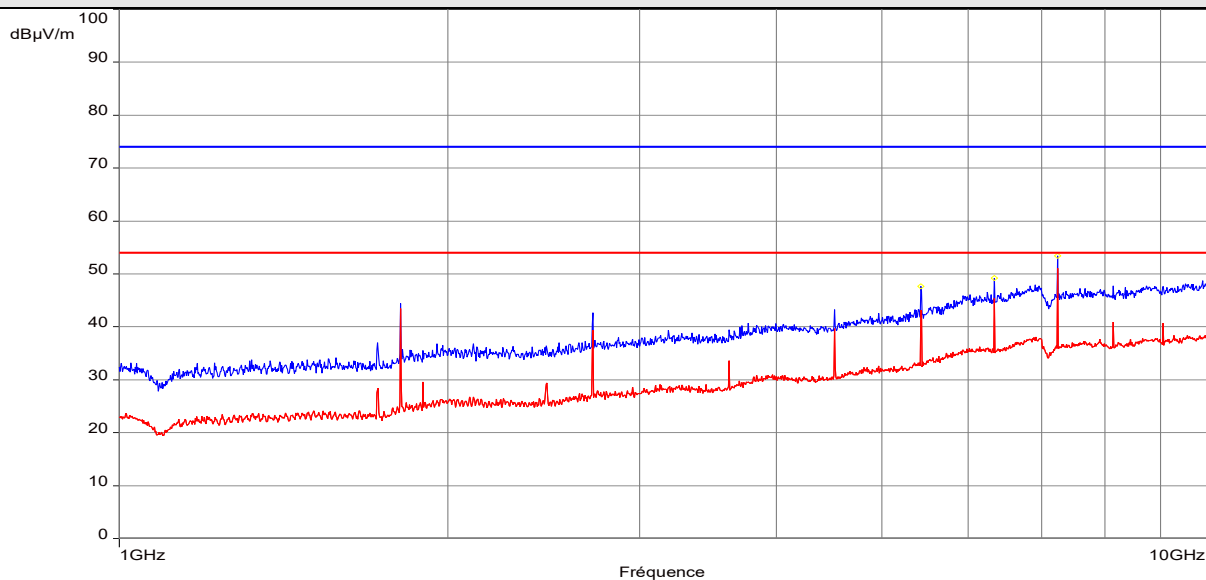


Note: Pre-scan graph only for identification purpose.
Same results for LORA/ FSK mode.

----- : Peak measure		----- : Average measure			
Frequency band investigated:		1GHz-10GHz			
Unit :		dBμV/m			
RBW :		1MHz			
Antenna polarization :		Horizontal & Vertical			
Limit:		FCC 15.247 / RSS-247			
Measurement detector:		Peak / Average			
PEAK LIST FROM PRE-SCAN					
Frequency (MHz)	Peak Level (dBμV/m)	Angle (°)	Average Limit (dBμV/m)	Polarization	Comments
6337.45	50.08	127.5	54.0	H	-
7242.82	53.51	93.7	54.0	H	-
6336.6	49.25	176.3	54.0	V	-
7242.82	53.44	159.3	54.0	V	-

18. Occupied bandwidth (99%)

TEST: Occupied bandwidth (99%) / RSS-GEN			Verdict
Method: The setup is in an anechoic chamber. The spectrum analyzer is connected to the measuring antenna. A radiated measurement is performed. The RBW is set in the range of 1% to 5% of the occupied bandwidth, with VBW ≥ 3 x RBW. The SPAN is wide enough to capture all products of the modulation process. A Sample detector is used. Measure is performed with OBW 99% function of the spectrum analyser. The tested equipment is set to transmit operation with modulation on low and high channels for both bands.			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	20 to 30 °C	22°C ± 2	
Relative Humidity	25 to 70 %	35% ± 5	
Supplementary information: Test location: SMEE. Test date: December 13th, 2018. Tested by L. CHAPUS			


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Attenuator	Mini-Circuit	BW-N10W5+	ATT-171-008	2018/4	2019/4
Measuring receiver	Rohde&Schwarz	ESRP	REC-151-003	2017/5	2019/5

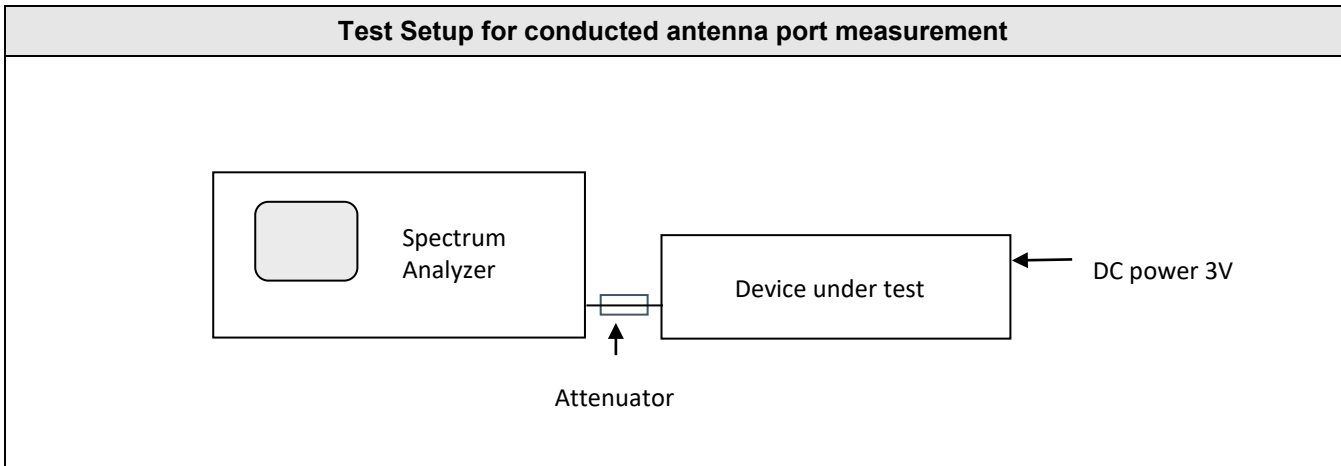

Tabulated Results for Occupied Bandwidth

Frequency (MHz)	99% Occupied Bandwidth (kHz)
903.9 / LORA-B1	130.6
905.3 / LORA-B1	131.7
906.9 / LORA-B2	130.5
908.3 / LORA-B2	130.2
903.9 / FSK-B1	171.5
905.3 / FSK-B1	171.6
906.9 / FSK-B2	171.5
908.3 / FSK-B2	171.4

Graphical representation of Occupied Bandwidth

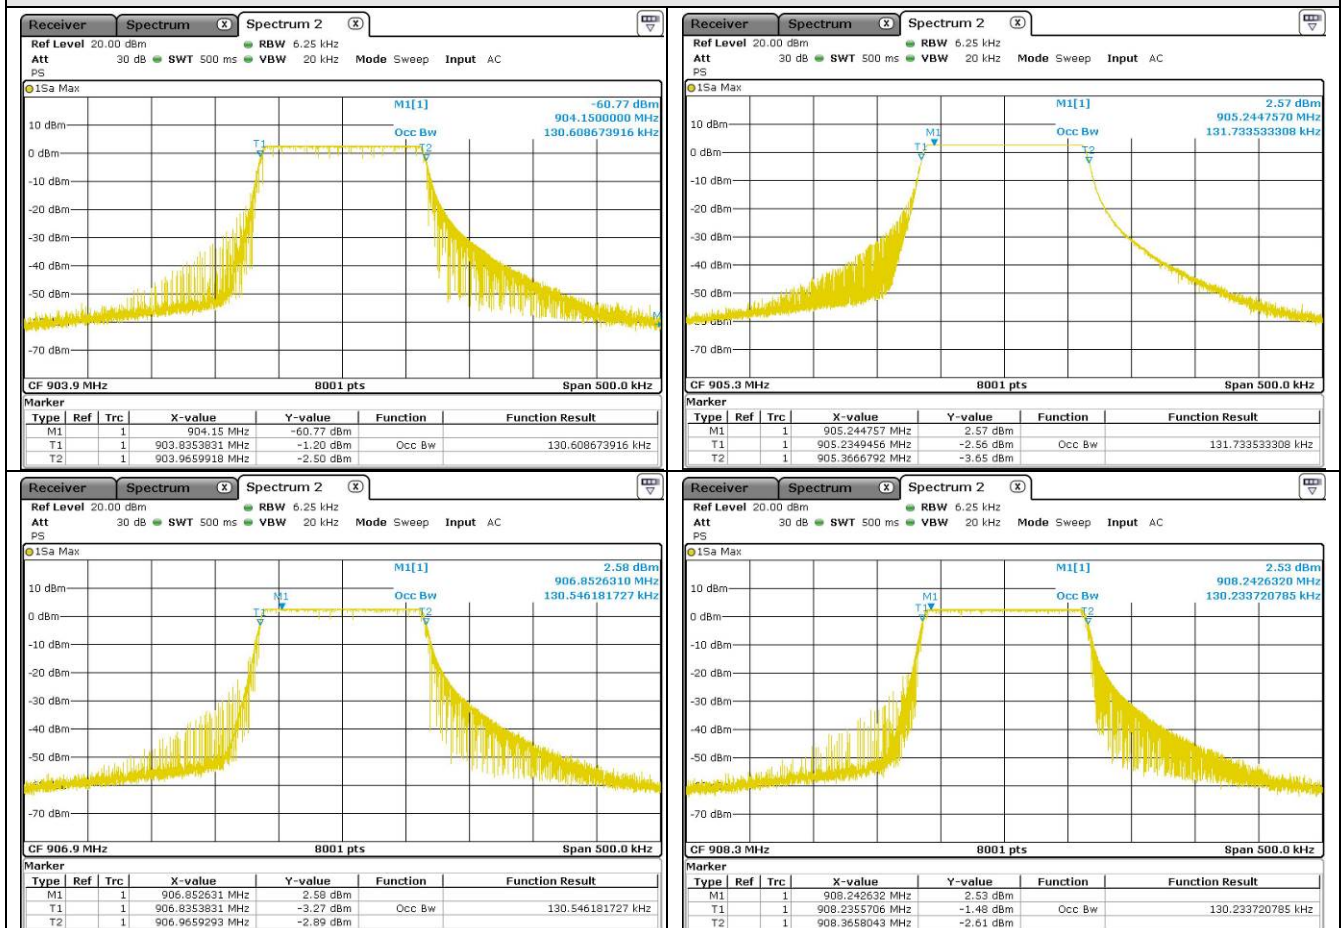

Graphical representation of Occupied Bandwidth

