

Test Report

Product Name	Bluetooth Headset
Model No.	HSC190W
FCC ID	BCE-HSC190W

Applicant	GN Audio USA Inc.
Address	900 Chelmsfort St, Tower 2, Floor 8 , Lowell, Massachusetts, 01851 United States

Date of Receipt	Nov. 28, 2022
Issued Date	Feb. 03, 2023
Report No.	22B0954R-RFUSBLEV01-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.


Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report




Product Name	Bluetooth Headset
Applicant	GN Audio USA Inc.
Address	900 Chelmsfort St, Tower 2, Floor 8 , Lowell, Massachusetts, 01851 United States
Manufacturer	GN Audio A/S
Model No.	HSC190W
FCC ID	BCE-HSC190W
EUT Rated Voltage	DC 5V by USB or DC 3.8V by Battery
EUT Test Voltage	DC 5V by USB
Trade Name	Jabra
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :



(Senior Project Specialist / April Chen)

Tested By :



(Senior Engineer / Bill Lin)

Approved By :



(Senior Engineer / Alan Chen)

TABLE OF CONTENTS

1. General Information.....	6
1.1. EUT Description.....	6
1.2. Tested System Details.....	8
1.3. Configuration of Tested System	8
1.4. EUT Exercise Software	8
1.5. Test Facility	9
1.6. List of Test Equipment.....	10
1.7. Uncertainty	11
2. Conducted Emission	12
2.1. Test Setup	12
2.2. Limits.....	12
2.3. Test Procedure	13
2.4. Test Result of Conducted Emission.....	14
3. Peak Power Output.....	15
3.1. Test Setup	15
3.2. Limit	15
3.3. Test Procedure	15
3.4. Test Result of Peak Power Output.....	16
4. Radiated Emission	18
4.1. Test Setup	18
4.2. Limits.....	19
4.3. Test Procedure	20
4.4. Test Result of Radiated Emission	22
5. RF Antenna Conducted Test	26
5.1. Test Setup	26
5.2. Limits.....	26
5.3. Test Procedure	26
5.4. Test Result of RF Antenna Conducted Test.....	27
6. Band Edge	29
6.1. Test Setup	29
6.2. Limit	30
6.3. Test Procedure	30

6.4.	Test Result of Band Edge	32
7.	6dB Bandwidth	36
7.1.	Test Setup	36
7.2.	Limits.....	36
7.3.	Test Procedure	36
7.4.	Test Result of 6dB Bandwidth.....	37
8.	Power Density.....	39
8.1.	Test Setup	39
8.2.	Limits.....	39
8.3.	Test Procedure	39
8.4.	Test Result of Power Density	40
9.	Duty Cycle	42
9.1.	Test Setup	42
9.2.	Test Procedure	42
9.3.	Test Result of Duty Cycle.....	43
10.	EMI Reduction Method During Compliance Testing	45
Appendix 1: EUT Test Photographs		
Appendix 2: Product Photos-Please refer to the file: 22B0954R -Product Photos		

Revision History

Report No.	Version	Description	Issued Date
22B0954R-RFUSBLEV01-A	V1.0	Initial issue of report.	Feb. 03, 2023

1. General Information

1.1. EUT Description

Product Name	Bluetooth Headset
Trade Name	Jabra
Model No.	HSC190W
FCC ID	BCE-HSC190W
Frequency Range	2402 - 2480 MHz
Channel Number	Bluetooth V5.1: 40 CH
Type of Modulation	Bluetooth V5.1: GFSK(1 Mbps, 2 Mbps)
Antenna Type	PIFA
Channel Control	Auto
Antenna Gain	Refer to the Antenna List
Type C to Type C Cable	Shielded, 1.2m
Type C to USB Cable	Shielded, 1.2m
Bluetooth USB Dongle	MFR: GN Audio A/S, M/N: END050W, FCC ID: BCE-END050W
Bluetooth USB Dongle	MFR: GN Audio A/S, M/N: END060W, FCC ID: BCE-END060W
Wireless charger	MFR: GN Audio A/S, M/N: 5190004, FCC ID: BCE-5190004
Wireless charger	MFR: GN Audio A/S, M/N: WH-WI-022, FCC ID: BCE-WH-WI-022

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	GN Audio A/S	Jabra Evolve2 65 Flex	PIFA	2.66 dBi for 2400 MHz

Note: The antenna of EUT is conforming to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	01	2404	02	2406	03	2408
04	2410	05	2412	06	2414	07	2416
08	2418	09	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

Note:

1. The EUT is a Bluetooth Headset with built-in Bluetooth transceiver, this report for Bluetooth V5.1.
2. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. DEKRA has evaluated each test mode. Only the worst case is shown in the report.
5. These tests were conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.

Test Mode	Mode 1	Transmit - 1 Mbps-BLE
		Transmit - 2 Mbps-BLE


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	Latitude 5580	GDZN7H2	N/A

Cable Type		Cable Description
A	Type C to USB Cable	Non-Shielded, 1.2m

1.3. Configuration of Tested System

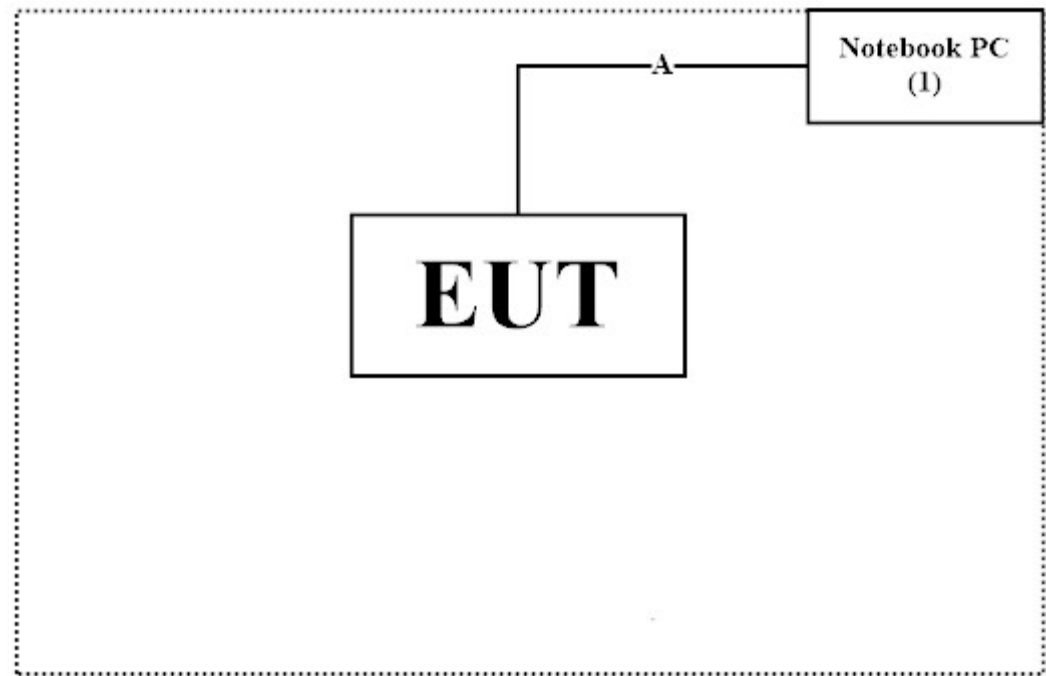

1.4. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.3.
- (2) Execute software 'Bluetest3 Ver.3.3.5' on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	23.4 °C
	Humidity (%RH)	10~90 %	55.2 %
Radiated Emission	Temperature (°C)	10~40 °C	20.2 °C
	Humidity (%RH)	10~90 %	65.8 %
Conductive	Temperature (°C)	10~40 °C	22.0 °C
	Humidity (%RH)	10~90 %	55.0 %

USA : FCC Registration Number: TW0033

Canada : CAB Identifier Number: TW3023 / Company Number: 26930

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd

Address : No. 5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan

Performed Location : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.

Phone Number : +886-3-275-7255

Fax Number : +886-3-327-8031

Email Address : info.tw@dekra.comWebsite : <http://www.dekra.com.tw>

1.6. List of Test Equipment

For Conduction Measurements /HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	EMI Test Receiver	R&S	ESR7	101601	2022/06/23	2023/06/22
V	Two-Line V-Network	R&S	ENV216	101306	2022/05/23	2023/05/22
V	Two-Line V-Network	R&S	ENV216	101307	2022/05/04	2023/05/03
V	Coaxial Cable	SUHNER	RG400 BNC	RF001	2022/05/24	2023/05/23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version : E3 210616 dekra V9.

For Conducted Measurements /HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Spectrum Analyzer	R&S	FSV40	101149	2022/10/03	2023/03/24
V	Peak Power Analyzer	KEYSIGHT	8990B	MY51000410	2022/08/06	2023/08/05
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY56080003	2022/08/05	2023/08/04
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY56080004	2022/08/05	2023/08/04

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version : RF Conducted Test Tools R3 V3.0.1.14.

For Radiated Measurements /HY-CB03

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
	Loop Antenna	AMETEK	HLA6121	49611	2022/03/18	2023/03/17
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2021/08/11	2023/08/10
V	Horn Antenna	RF SPIN	DRH18-E	210503A18ES	2022/06/08	2023/06/07
V	Horn Antenna	Com-Power	AH-840	101100	2021/10/04	2023/10/03
V	Pre-Amplifier	SGH	0301-9	20211007-11	2022/02/22	2023/02/21
V	Pre-Amplifier	SGH	PRAMP118	20200701	2022/07/28	2023/07/27
V	Pre-Amplifier	EMCI	EMC05820SE	980310	2022/07/28	2023/07/27
	Pre-Amplifier	EMCI	EMC184045SE	980369		
	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314	2022/05/12	2023/05/11
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242		
V	Filter	MICRO TRONICS	BRM50702	G269	2022/07/31	2023/07/30
	Filter	MICRO TRONICS	BRM50716	G196	2022/07/27	2023/07/26
V	EMI Test Receiver	R&S	ESR	102793	2022/12/05	2023/12/04
V	Spectrum Analyzer	R&S	FSV3044	101114	2022/02/11	2023/02/10
	Coaxial Cable	SGH	SGH18	2021005-1		
	Coaxial Cable	SGH	SGH18	202108-4		
	Coaxial Cable	SGH	HA800	GD20110223-1	2022/3/18	2023/03/17
	Coaxial Cable	SGH	HA800	GD20110222-3		

Note:

1. Bi-Log Antenna and Horn Antenna(AH-840) is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version : E3 210616 dekra V9.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system but are based on the results of the compliance measurement.

Test item	Uncertainty	
Conducted Emission	± 3.42 dB	
Peak Power Output	± 0.89 dB	
Radiated Emission	Under 1 GHz ± 4.05 dB	Above 1 GHz ± 3.73 dB
RF Antenna Conducted Test	± 2.06 dB	
Band Edge	Under 1 GHz ± 4.05 dB	Above 1 GHz ± 3.73 dB
6dB Bandwidth	± 1544.74 Hz	
Power Density	± 2.06 dB	
Duty Cycle	± 2.31 ms	

2. Conducted Emission

2.1. Test Setup

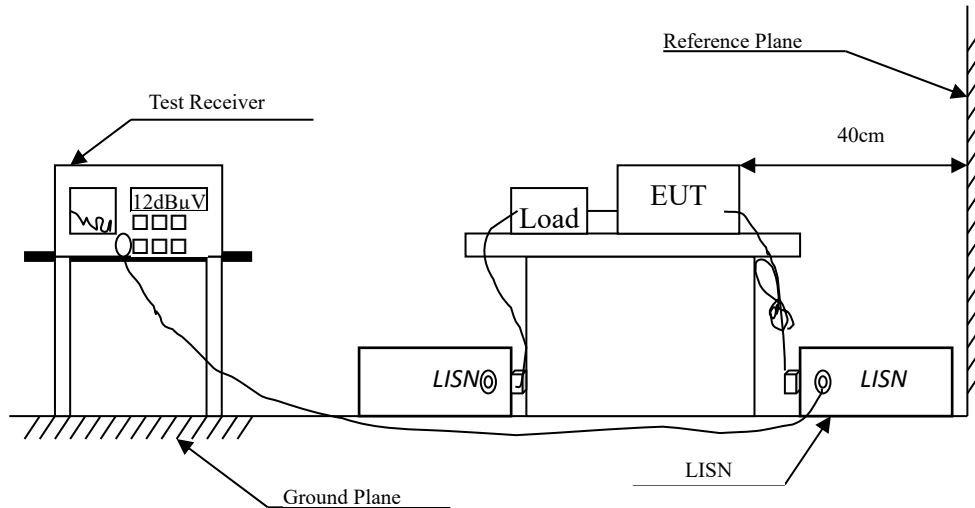

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure


The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz.


The EUT was setup to ANSI C63.4, 2014; tested to DTS test procedure of FCC KDB-558074 for compliance to FCC 47CFR Subpart C requirements.

2.4. Test Result of Conducted Emission

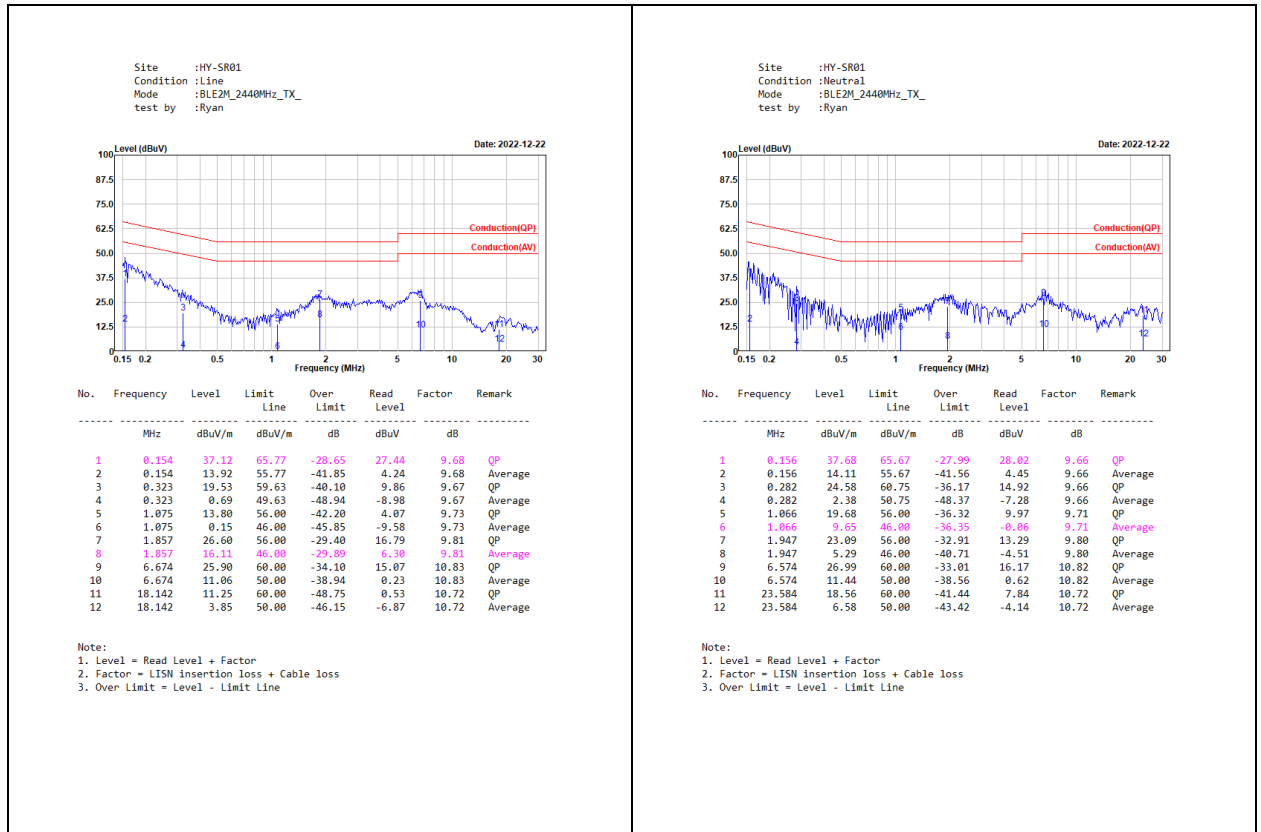

3. Peak Power Output

3.1. Test Setup

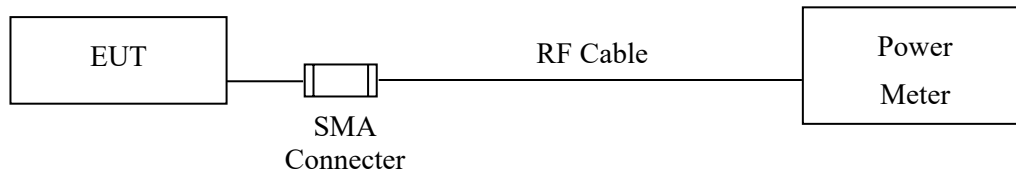

3.2. Limit

The maximum peak power shall be less 1 Watt.

3.3. Test Procedure

The EUT was tested according to C63.10:2013 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using C63.10:2013 Section 11.9.1.3 PKPM1 Peak power meter method.

3.4. Test Result of Peak Power Output

Product : Bluetooth Headset
Test Item : Peak Power Output
Test Mode : Transmit - 1 Mbps-BLE
Test Date : 2022/12/06

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
00	2402	7.26	1 Watt= 30 dBm	Pass
19	2440	7.20	1 Watt= 30 dBm	Pass
39	2480	7.16	1 Watt= 30 dBm	Pass


Product : Bluetooth Headset
Test Item : Peak Power Output
Test Mode : Transmit - 2 Mbps-BLE
Test Date : 2022/12/06

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
00	2402	7.26	1 Watt= 30 dBm	Pass
19	2440	7.20	1 Watt= 30 dBm	Pass
39	2480	7.16	1 Watt= 30 dBm	Pass


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30 MHz

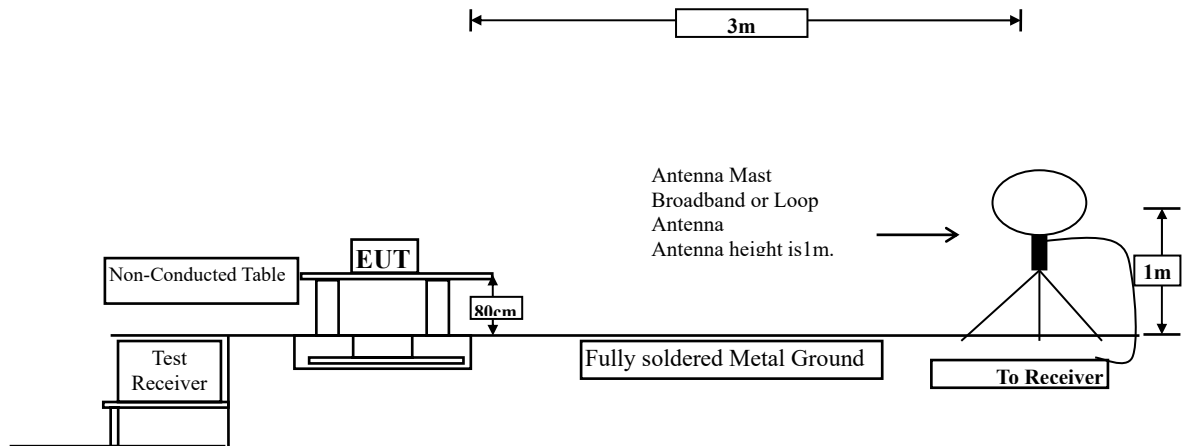

Radiated Emission Below 1 GHz

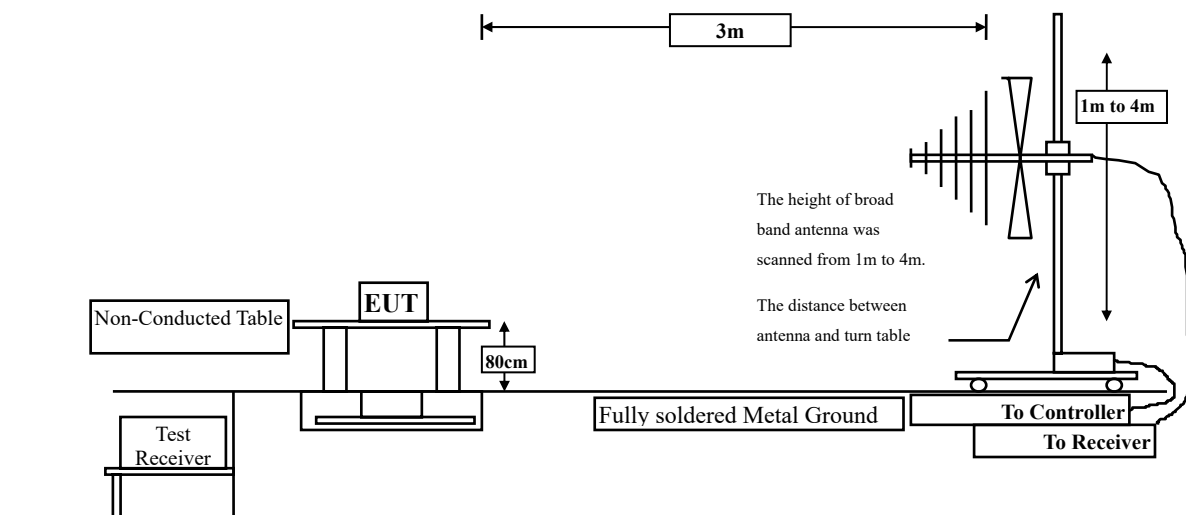

Radiated Emission Above 1 GHz

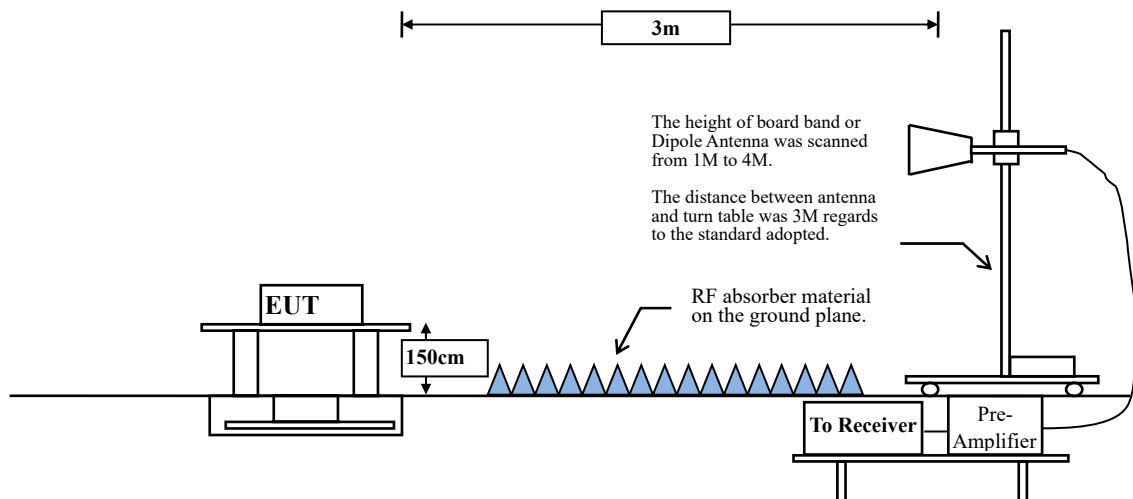

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks:

1. RF Voltage (dBμV) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1 GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1 GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30 MHz setting on the field strength meter is 9 kHz and 30 MHz~1 GHz is 120 kHz and above 1 GHz is 1 MHz.

Radiated emission measurements below 30 MHz are made using Loop Antenna and 30 MHz~1 GHz are made using broadband Bilog antenna and above 1 GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9 kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1 MHz.

$VBW = 10 \text{ Hz}$, when duty cycle $\geq 98 \%$


$VBW \geq 1/T$, when duty cycle $< 98 \%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
BLE (1 Mbps)	84.80	2.1200	472	500
BLE (2 Mbps)	56.38	1.0600	943	1000

Note: Duty Cycle Refer to Section 9.

4.4. Test Result of Radiated Emission

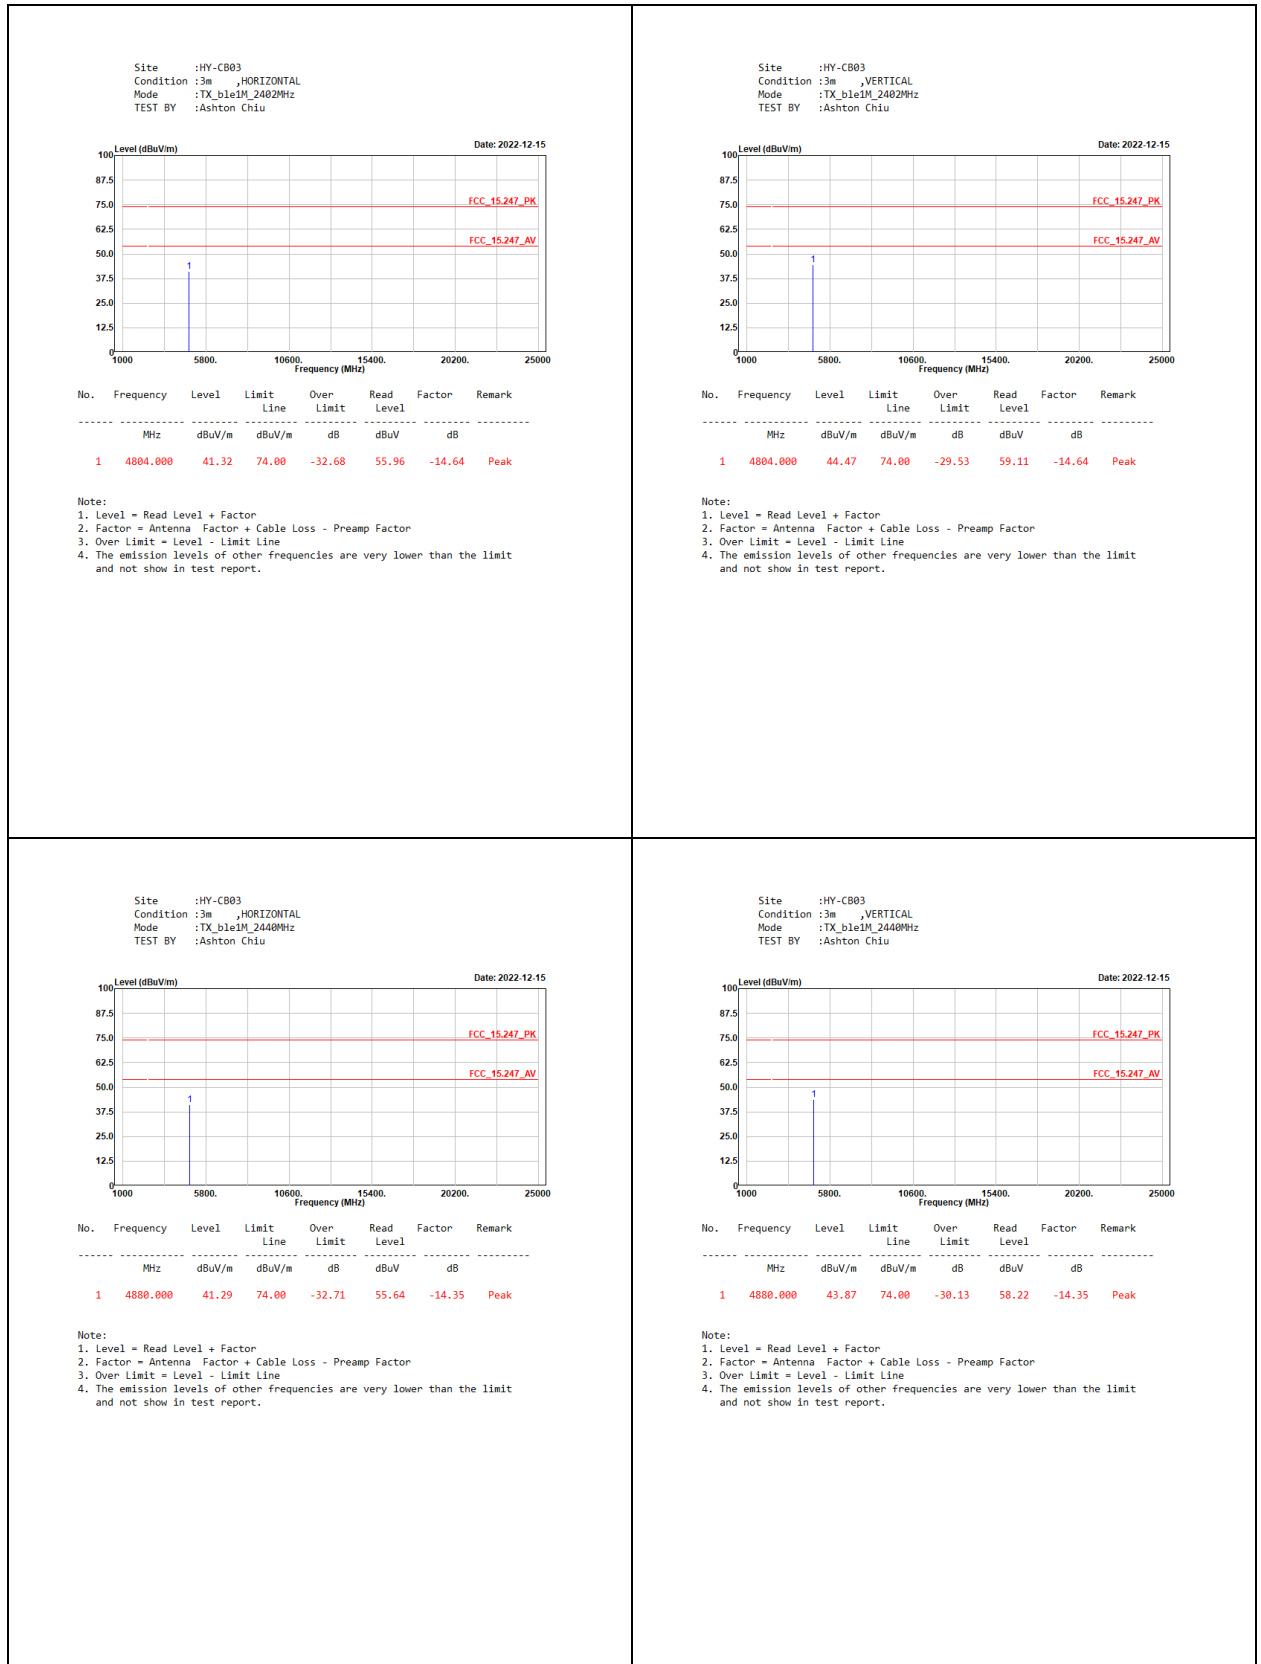


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_ble1M_2400MHz
TEST BY :Ashton Chiu

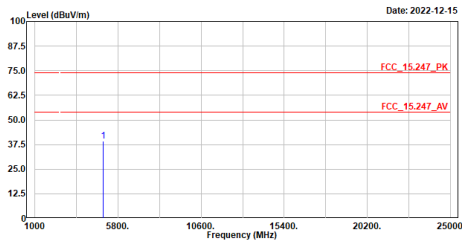

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4960.000	39.38	74.00	-34.62	53.34	-13.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_ble1M_2400MHz
TEST BY :Ashton Chiu

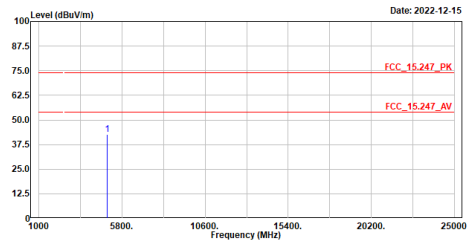

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4960.000	42.49	74.00	-31.51	56.45	-13.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,HORIZONTAL
Mode :TX_ble2M_2402MHz
TEST BY :Ashton Chiu

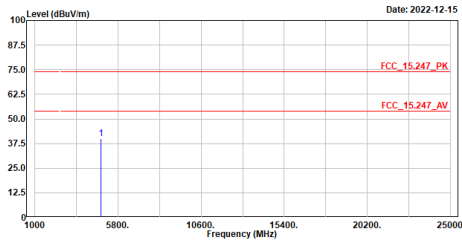

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4804.000	39.84	74.00	-34.16	54.48	-14.64	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_ble2M_2402MHz
TEST BY :Ashton Chiu

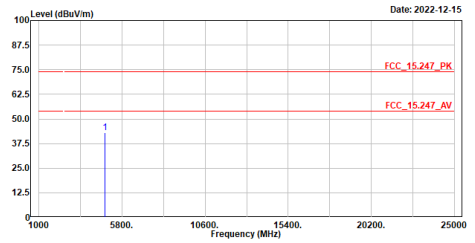

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4804.000	42.99	74.00	-31.01	57.63	-14.64	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,HORIZONTA
Mode :TX_ble2M_2440MHz
TEST BY :Ashton Chiu

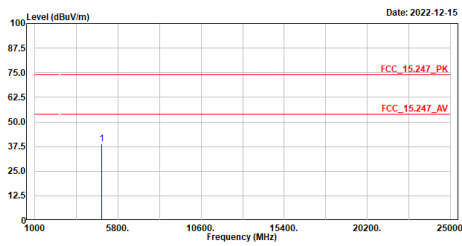

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4880.000	38.68	74.00	-35.32	53.03	-14.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_ble2M_2440MHz
TEST BY :Ashton Chiu

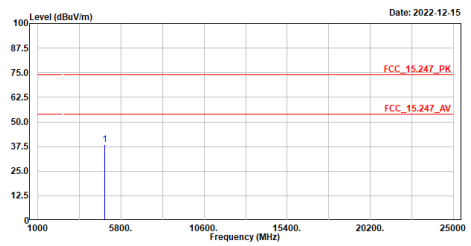

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4880.000	38.43	74.00	-35.57	52.78	-14.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,HORIZONTA
Mode :TX_ble2M_2480MHz
TEST BY :Ashton Chiu

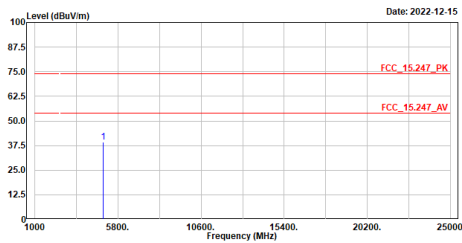

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4960.000	39.41	74.00	-34.59	53.37	-13.96	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,VERTICAL
Mode :TX_ble2M_2480MHz
TEST BY :Ashton Chiu

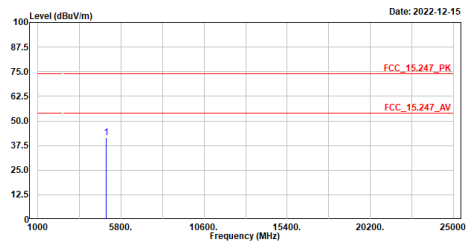


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4960.000	41.62	74.00	-32.38	55.58	-13.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

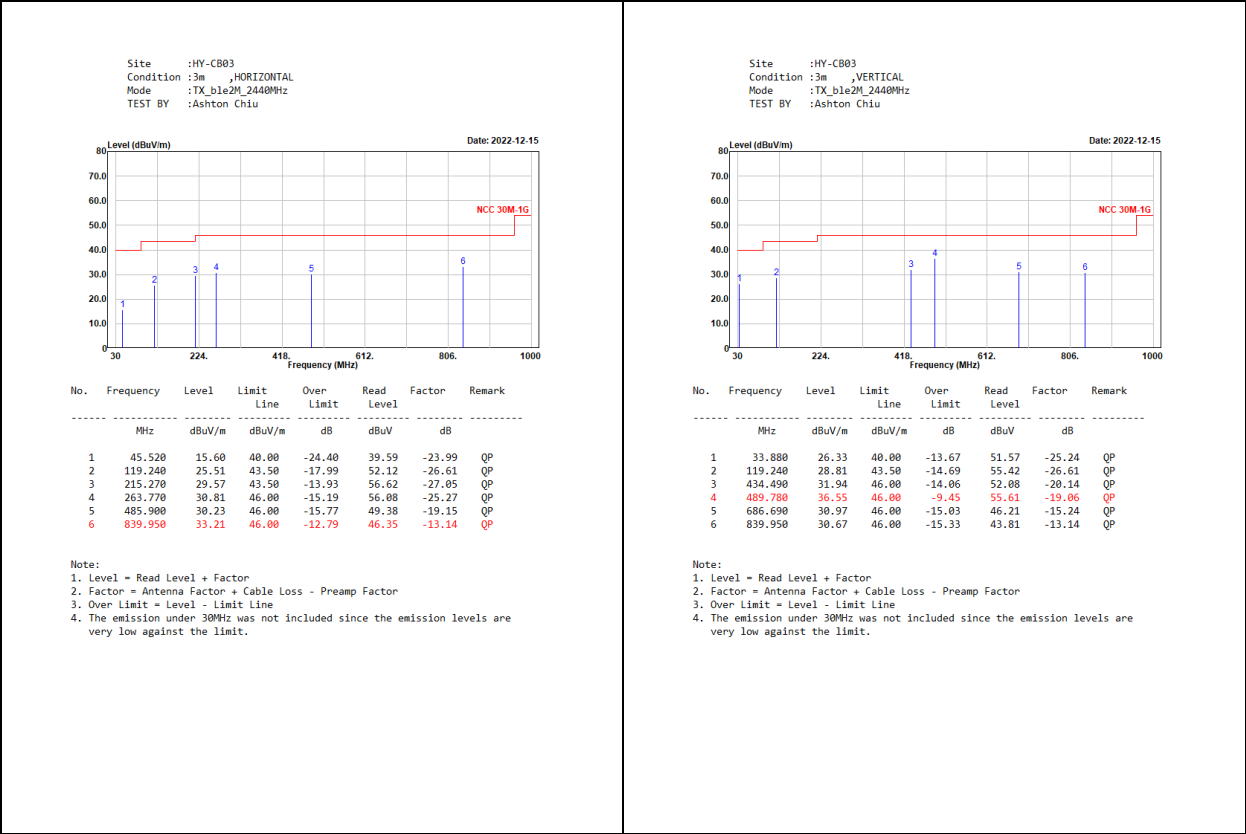

5. RF Antenna Conducted Test

5.1. Test Setup

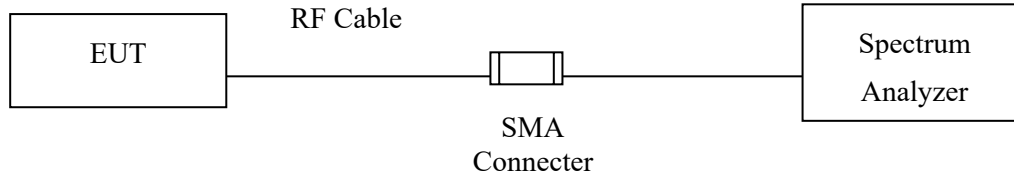

5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure


The EUT was tested according to C63.10:2013 Section 11.11 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.4. Test Result of RF Antenna Conducted Test

Product : Bluetooth Headset
Test Item : RF Antenna Conducted Test
Test Mode : Transmit - 1 Mbps-BLE
Test Date : 2022/12/12


Figure Channel 39:

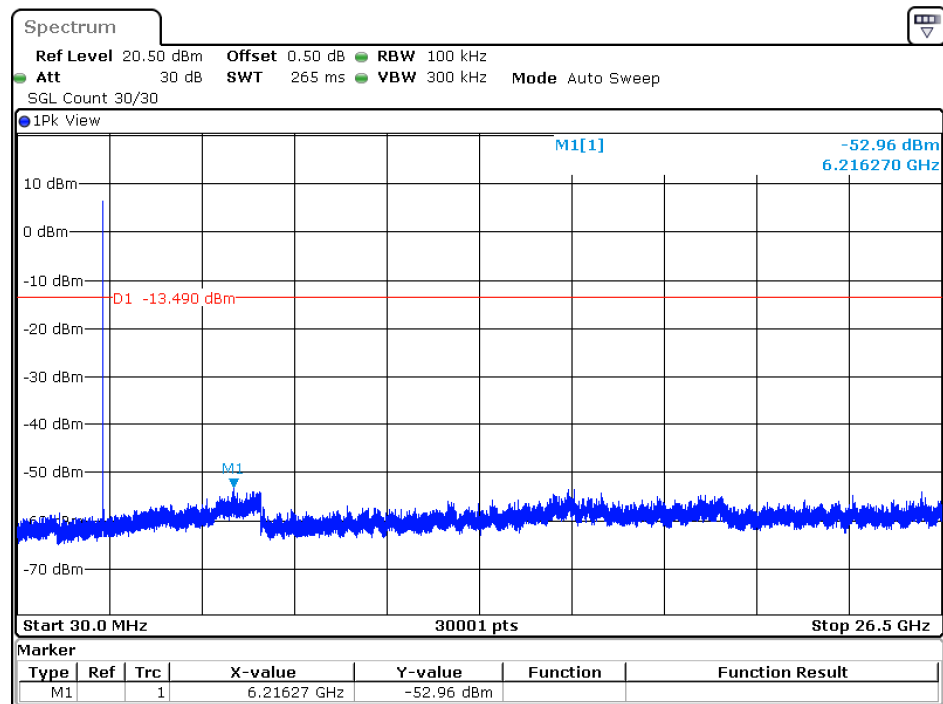

Date: 12.DEC.2022 12:10:12

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Bluetooth Headset
Test Item : RF Antenna Conducted Test
Test Mode : Transmit - 2 Mbps-BLE
Test Date : 2022/12/12

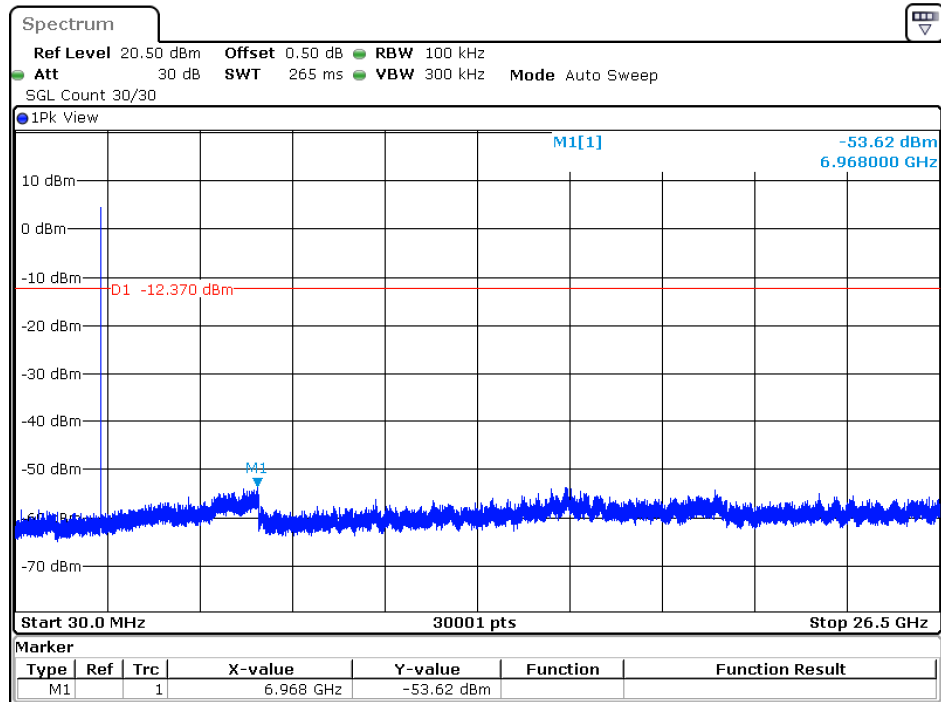Figure Channel 39:


Date: 12.DEC.2022 12:16:30

Note: The above test pattern is synthesized by multiple of the frequency range.


6. Band Edge

6.1. Test Setup

RF Conducted Measurement

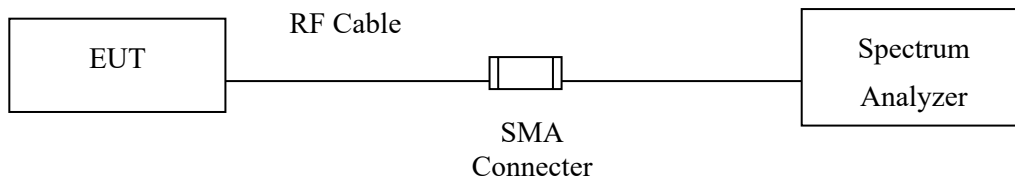

RF Radiated Measurement:

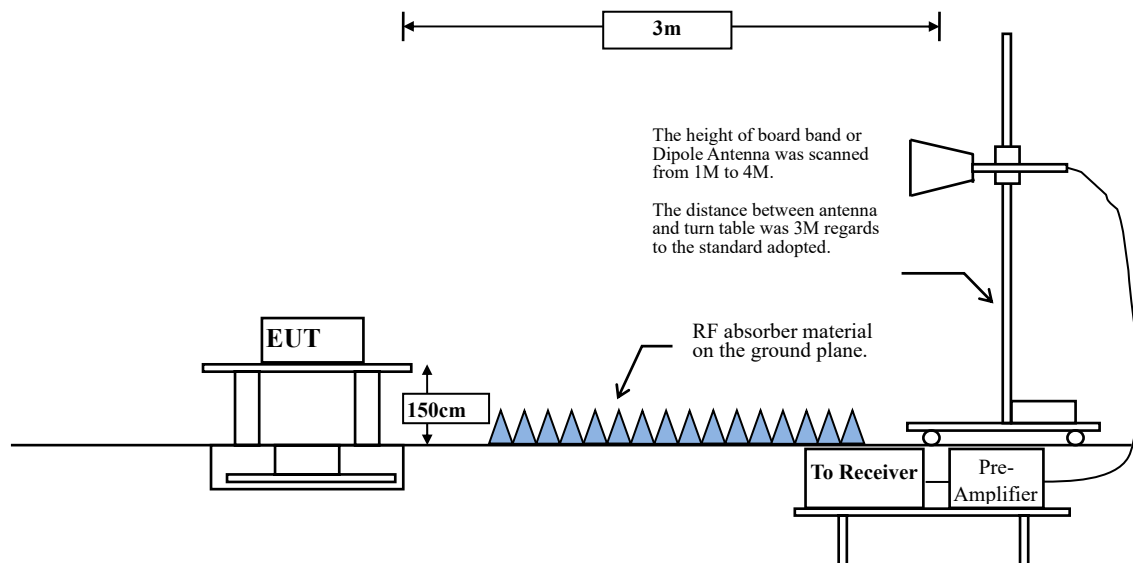

6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1 MHz.

$VBW = 10 \text{ Hz}$, when duty cycle $\geq 98 \%$


$VBW \geq 1/T$, when duty cycle $< 98 \%$


(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
BLE (1 Mbps)	84.80	2.1200	472	500
BLE (2 Mbps)	56.38	1.0600	943	1000

Note: Duty Cycle Refer to Section 9.


6.4. Test Result of Band Edge

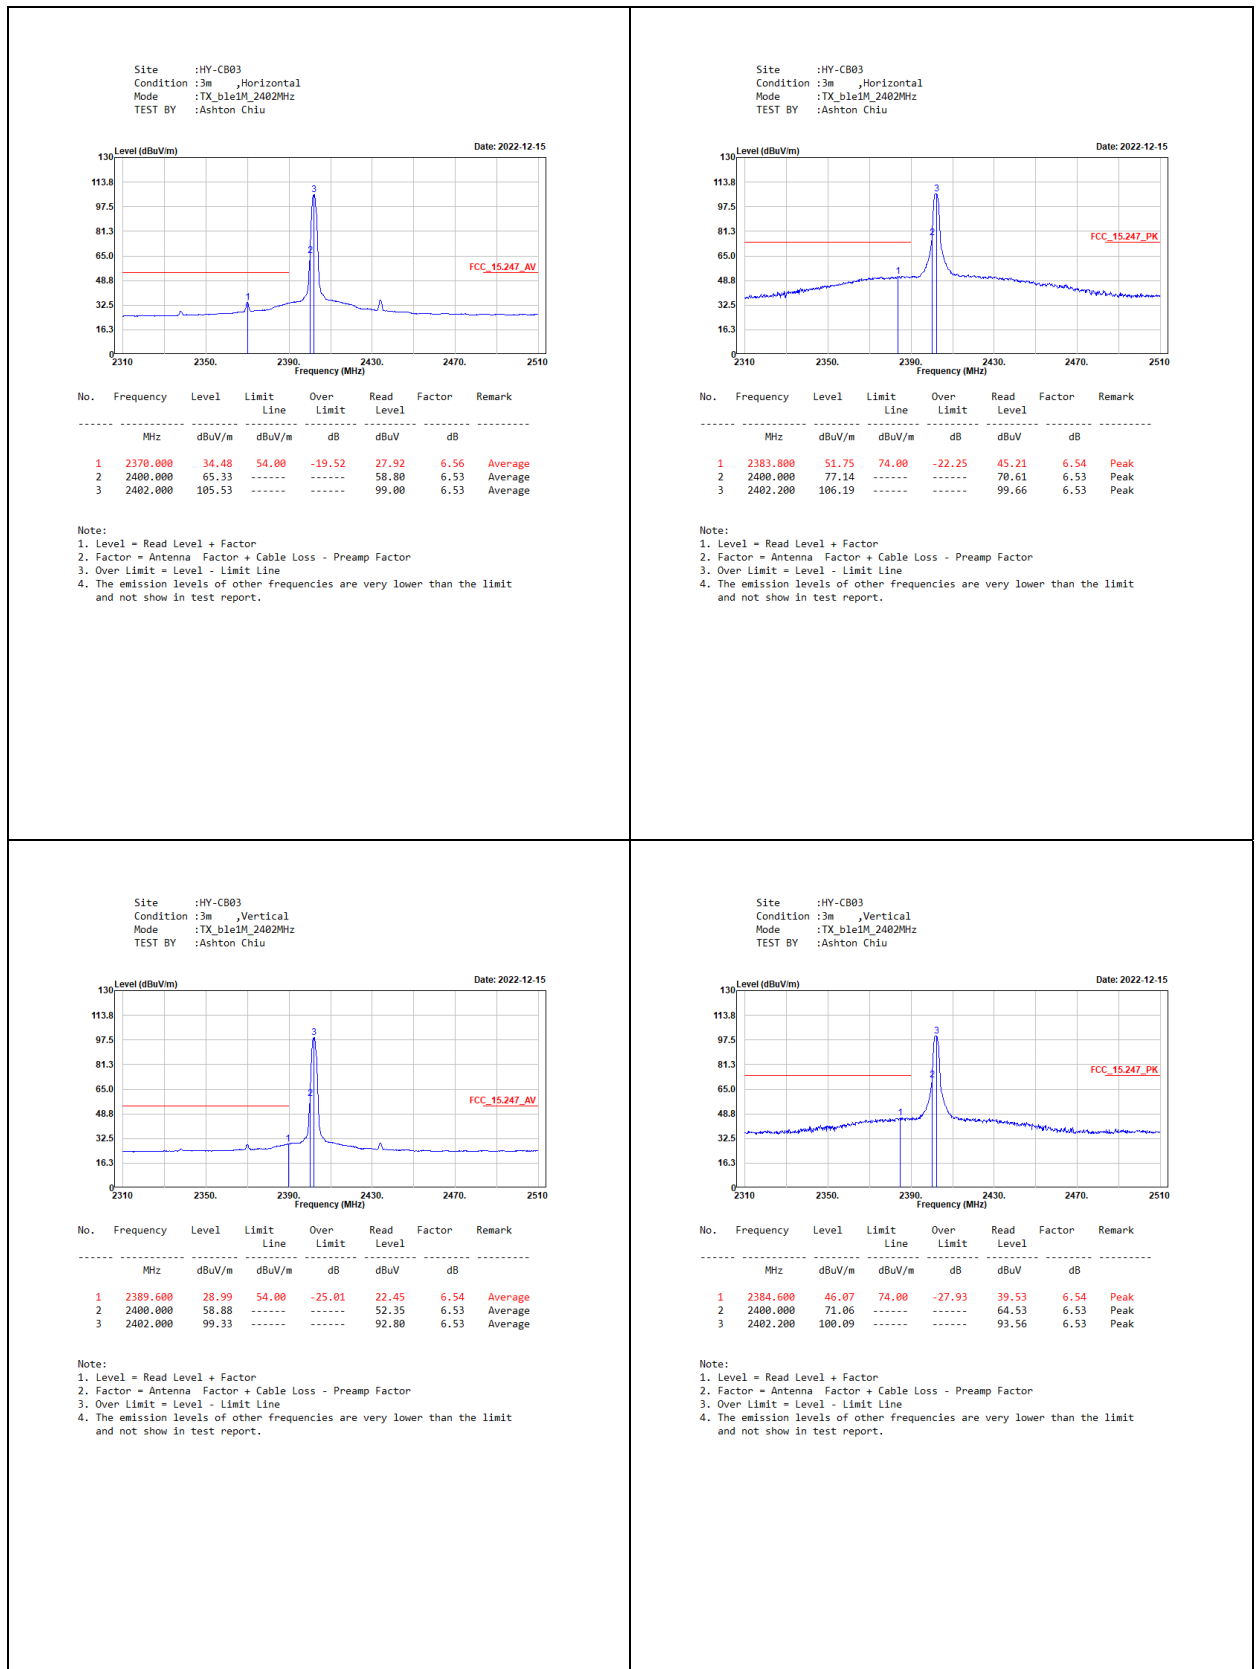

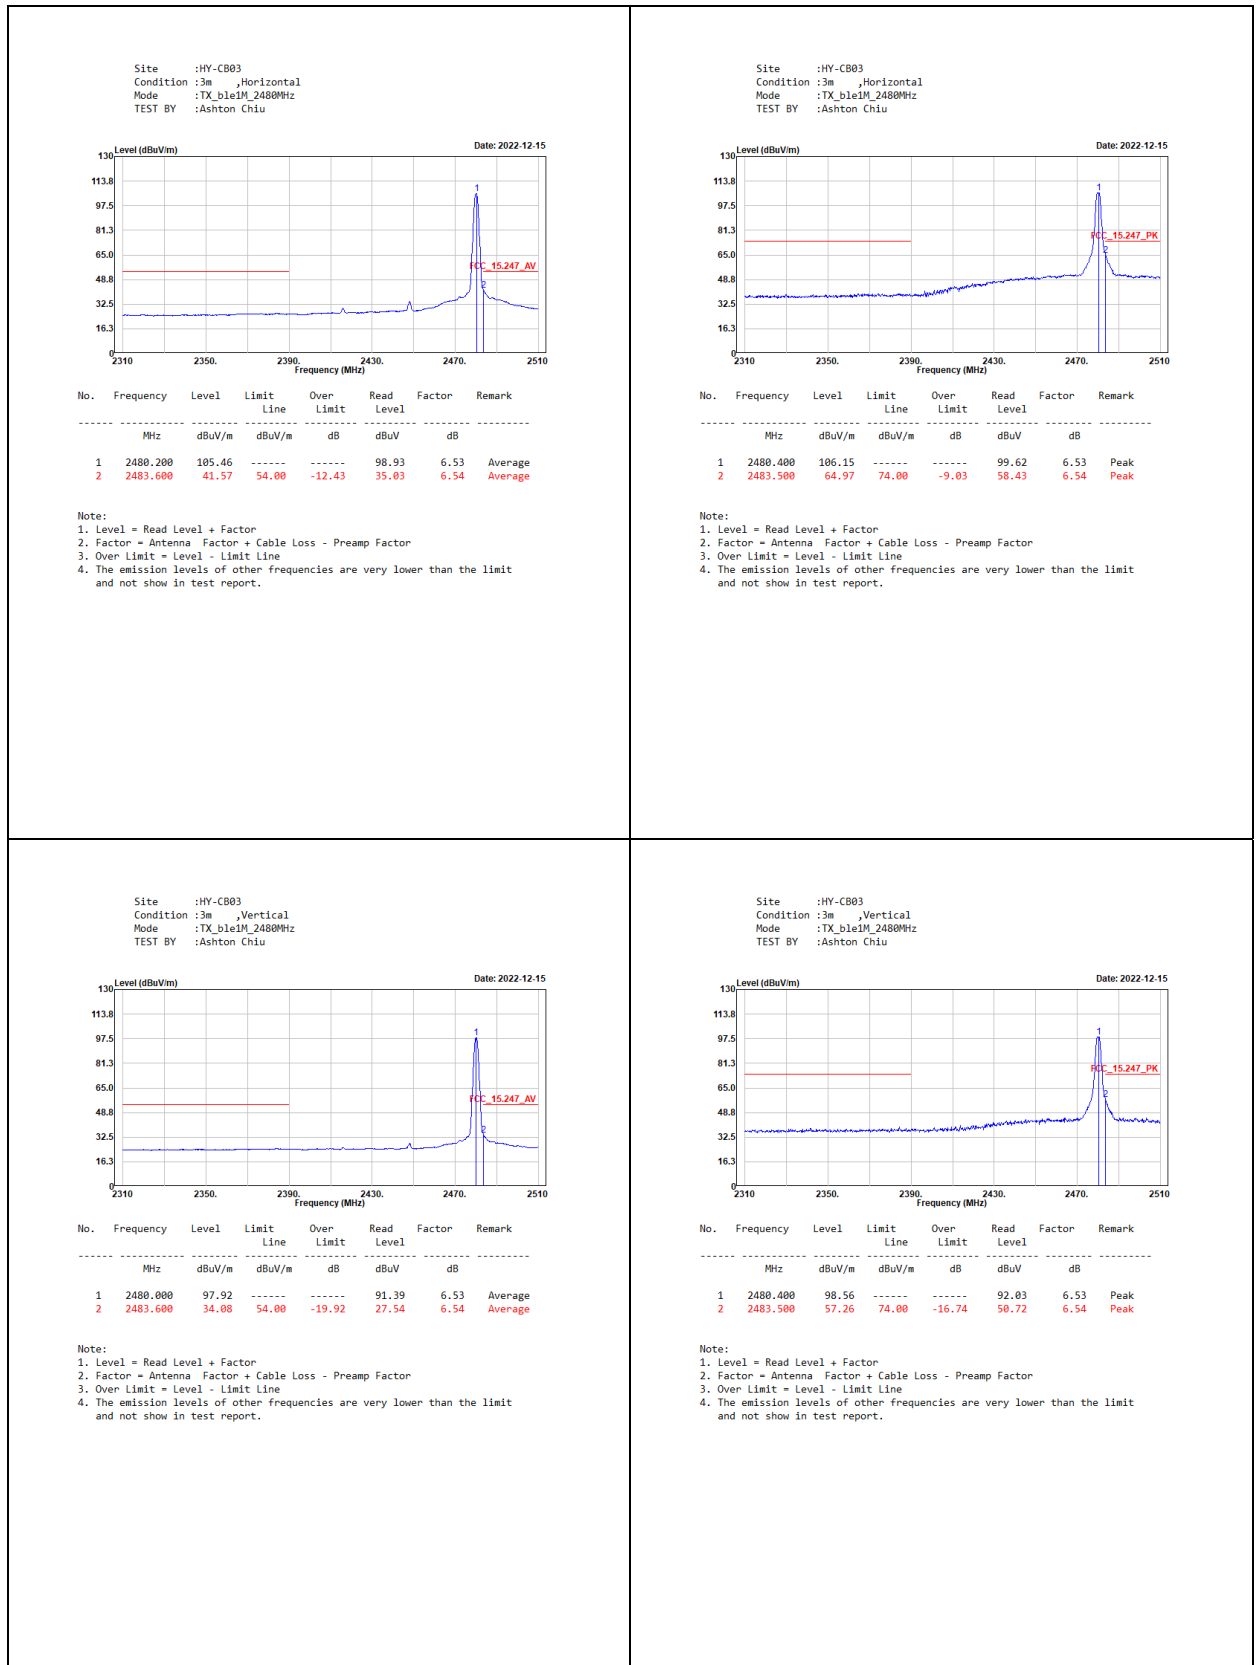


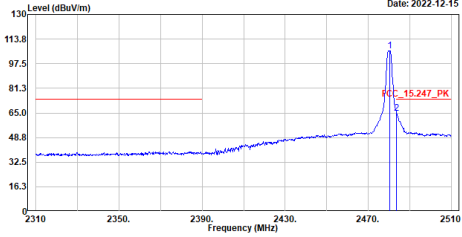Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_ble1M_2480MHz TEST BY :Ashton Chiu Date: 2022-12-15							
							
No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2480.400	106.15	-----	-----	99.62	6.53	Peak
2	2483.500	64.97	74.00	-9.03	58.43	6.54	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

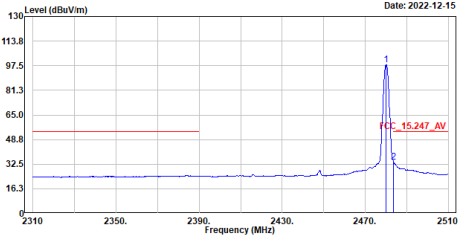
Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ble1M_2480MHz TEST BY :Ashton Chiu Date: 2022-12-15							
							
No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2480.000	97.92	-----	-----	91.39	6.53	Average
2	2483.600	34.08	54.00	-19.92	27.54	6.54	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

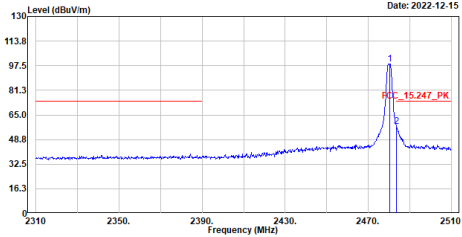Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ble1M_2480MHz TEST BY :Ashton Chiu Date: 2022-12-15							
							
No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2480.400	98.56	-----	-----	92.03	6.53	Peak
2	2483.500	57.26	74.00	-16.74	50.72	6.54	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

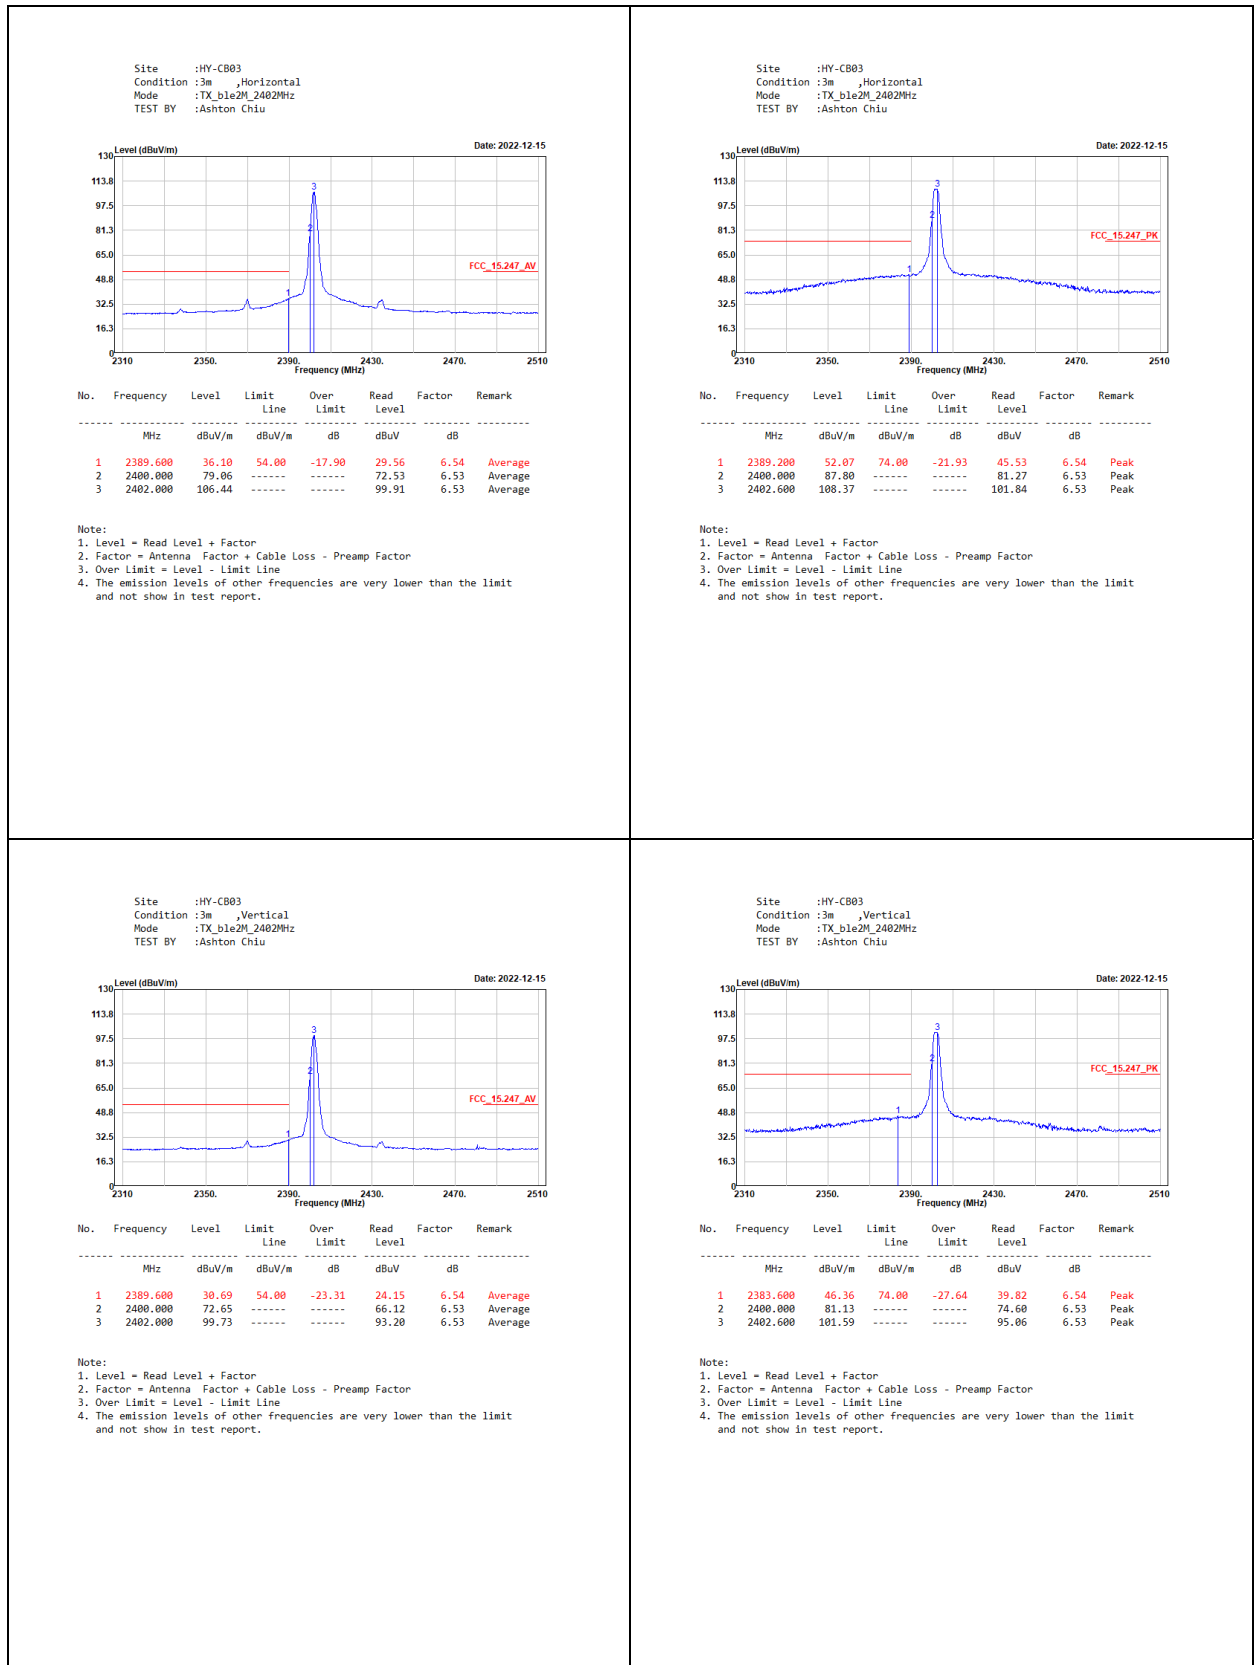

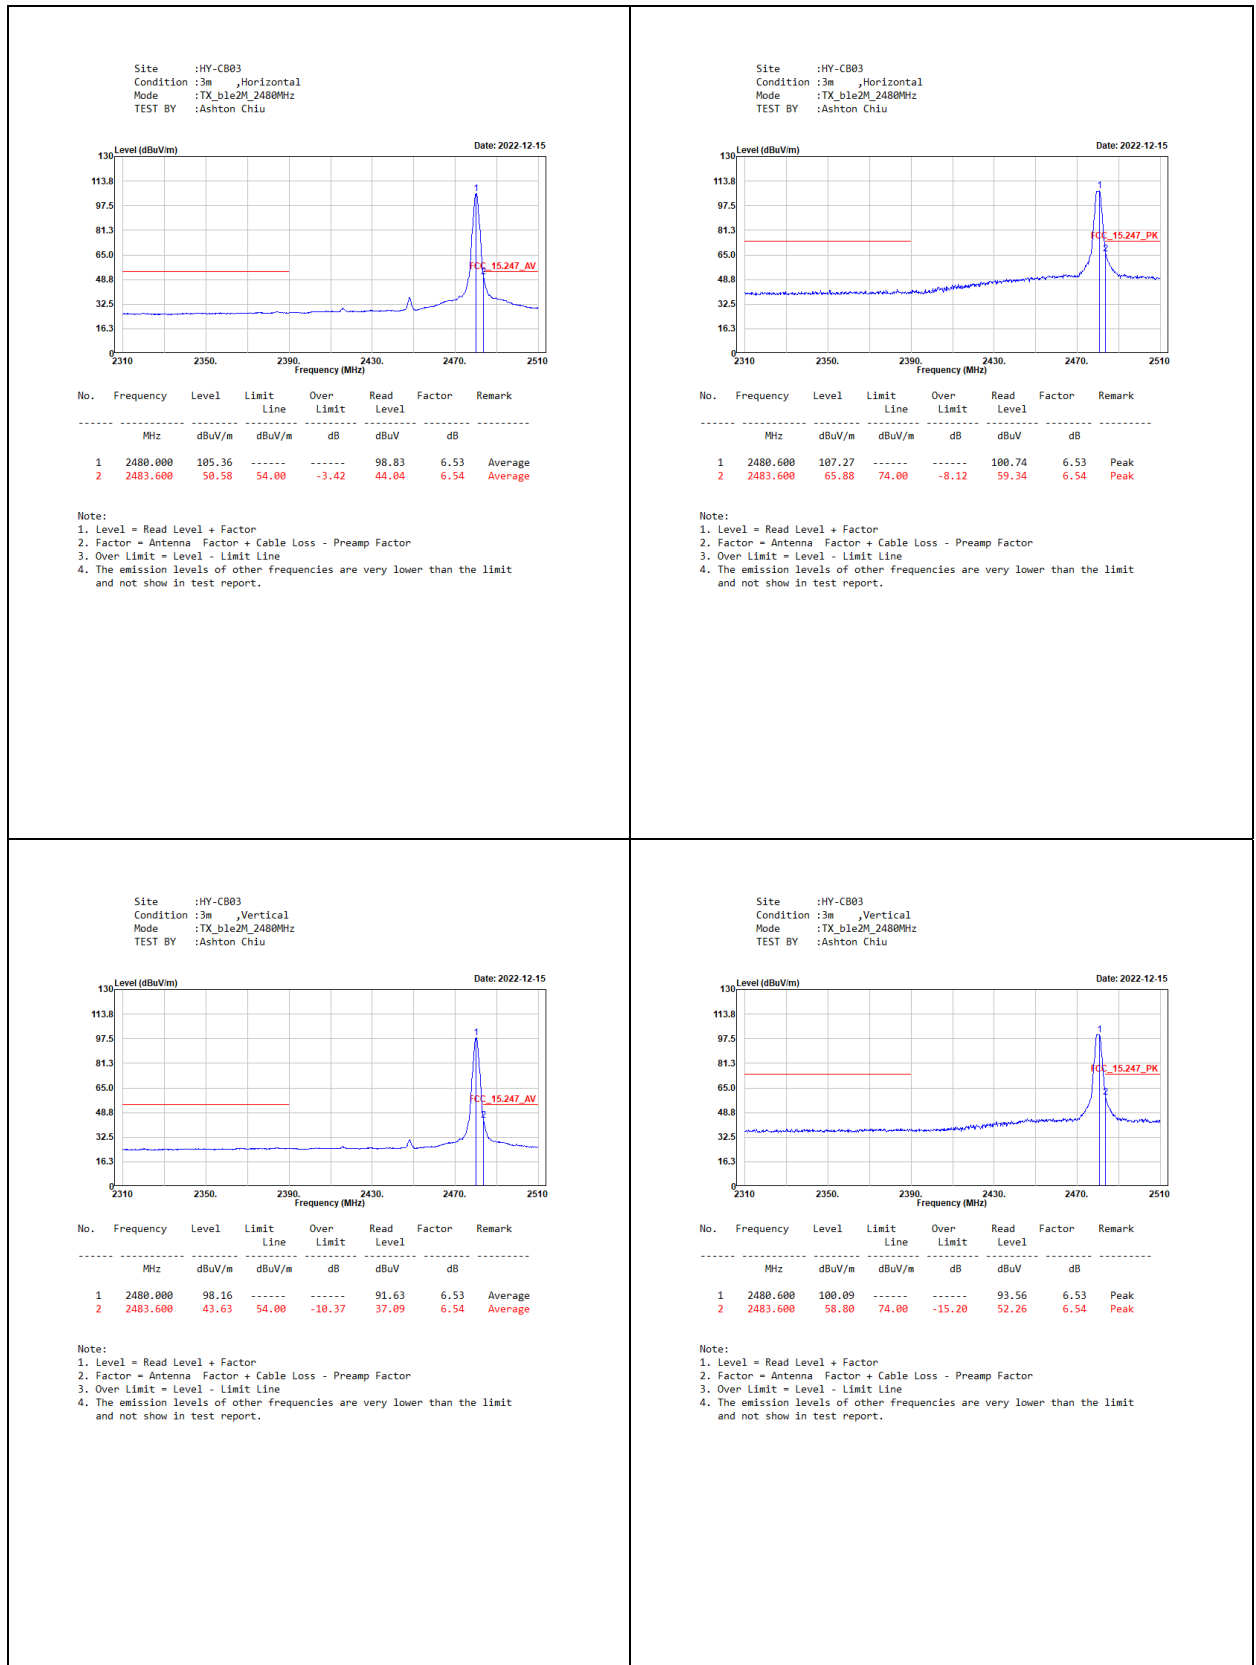

7. 6dB Bandwidth

7.1. Test Setup

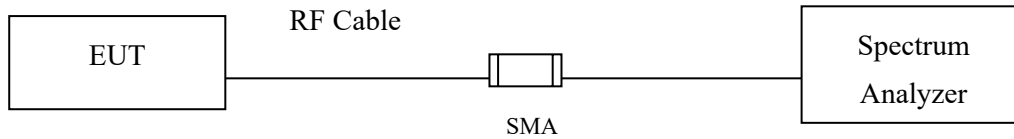

7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

7.3. Test Procedure


The EUT was setup according to ANSI C63.4, 2014; tested according to ANSI C63.10 Section 11.8 for compliance to FCC 47CFR 15.247 requirements.

7.4. Test Result of 6dB Bandwidth

Product : Bluetooth Headset
 Test Item : 6dB Bandwidth Data
 Test Mode : Transmit - 1 Mbps-BLE
 Test Date : 2022/12/12

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	709	>500	Pass
19	2440	704	>500	Pass
39	2480	704	>500	Pass

Figure Channel 39:

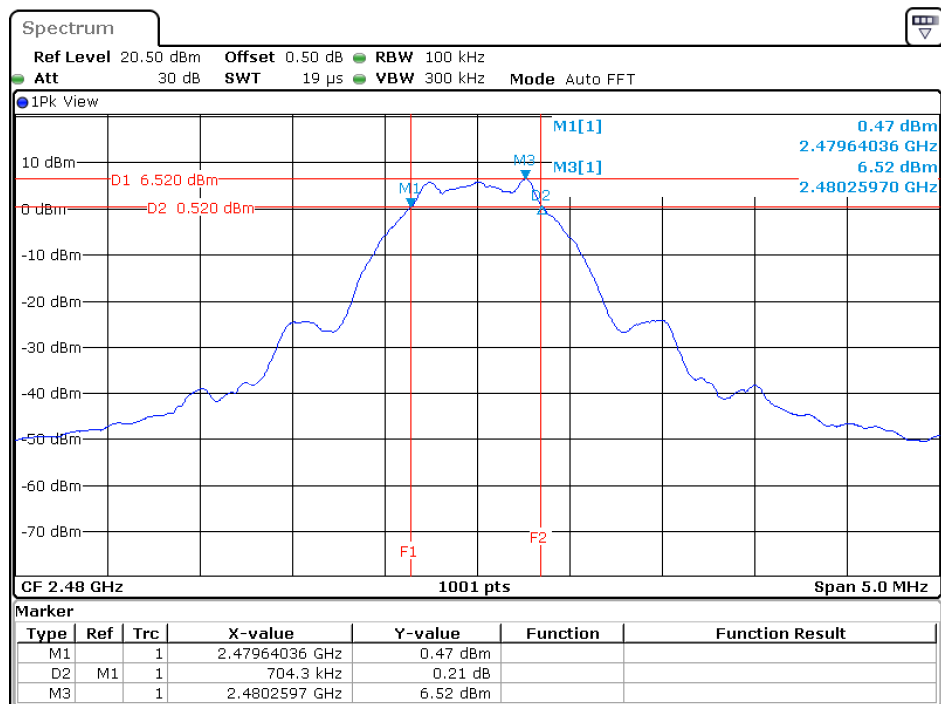


Date: 12.DEC.2022 12:09:14

Product : Bluetooth Headset
 Test Item : 6dB Bandwidth Data
 Test Mode : Transmit - 2 Mbps-BLE
 Test Date : 2022/12/12

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1268	>500	Pass
19	2440	1268	>500	Pass
39	2480	1268	>500	Pass


Figure Channel 39:

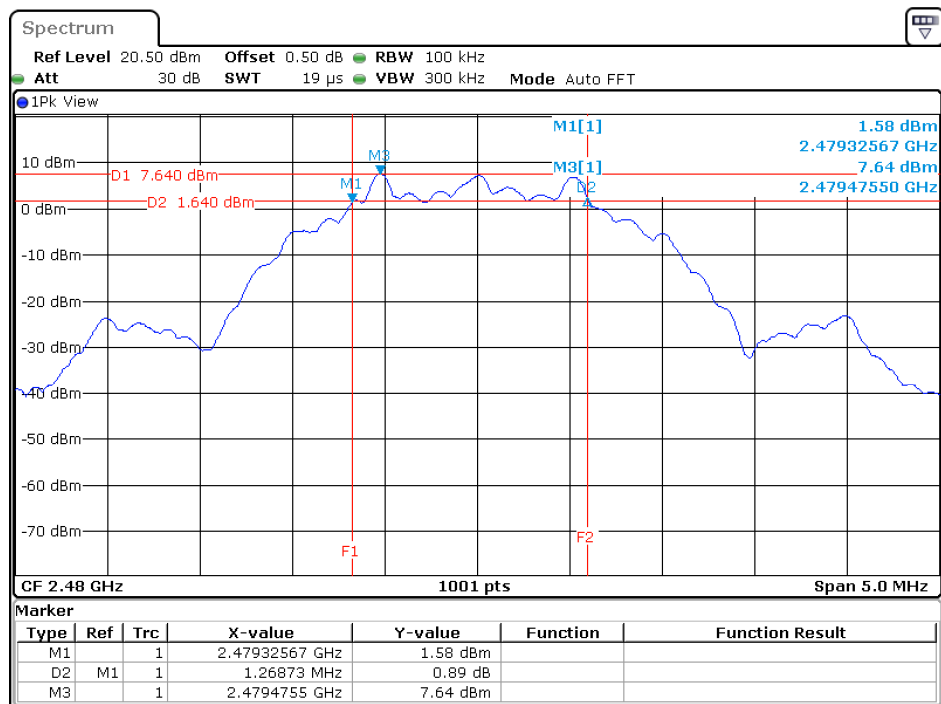

Date: 12.DEC.2022 12:15:31

8. Power Density

8.1. Test Setup

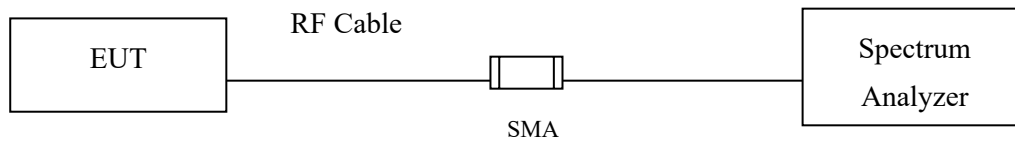

8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3 kHz bandwidth.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


The maximum power spectral density using C63.10 Section 11.10.2 Method PKPSD (peak PSD)

8.4. Test Result of Power Density

Product : Bluetooth Headset
 Test Item : Power Density Data
 Test Mode : Transmit - 1 Mbps-BLE
 Test Date : 2022/12/12

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
00	2402	-10.32	$\leq 8\text{dBm}$	Pass
19	2440	-10.17	$\leq 8\text{dBm}$	Pass
39	2480	-10.02	$\leq 8\text{dBm}$	Pass

Figure Channel 39:

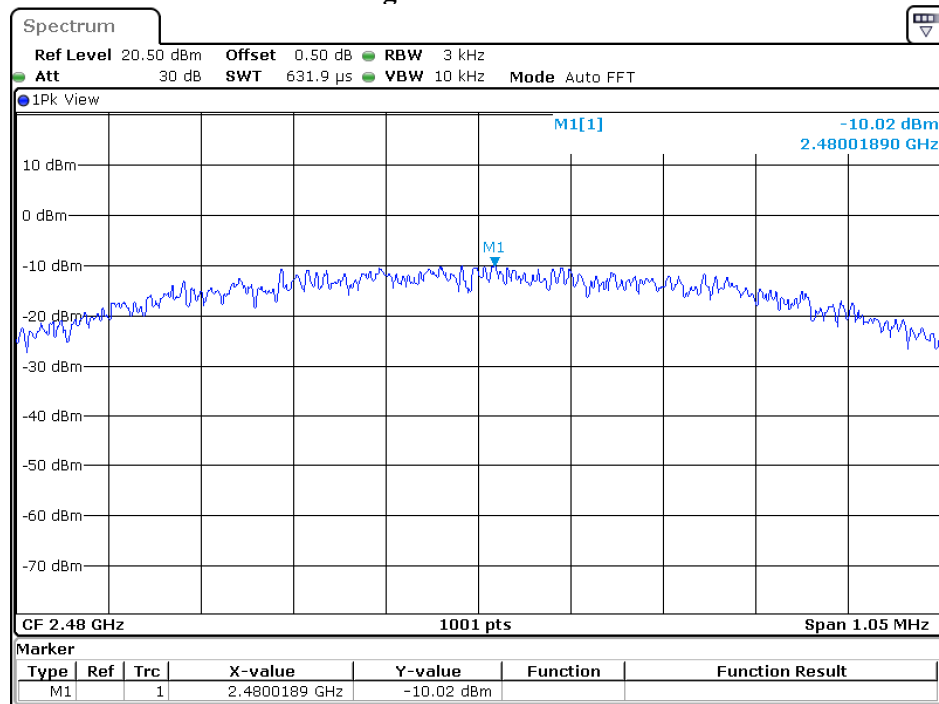


Date: 12.DEC.2022 12:09:24

Product : Bluetooth Headset
 Test Item : Power Density Data
 Test Mode : Transmit - 2 Mbps-BLE
 Test Date : 2022/12/12

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
00	2402	-11.49	≤ 8 dBm	Pass
19	2440	-11.17	≤ 8 dBm	Pass
39	2480	-11.12	≤ 8 dBm	Pass


Figure Channel 39:

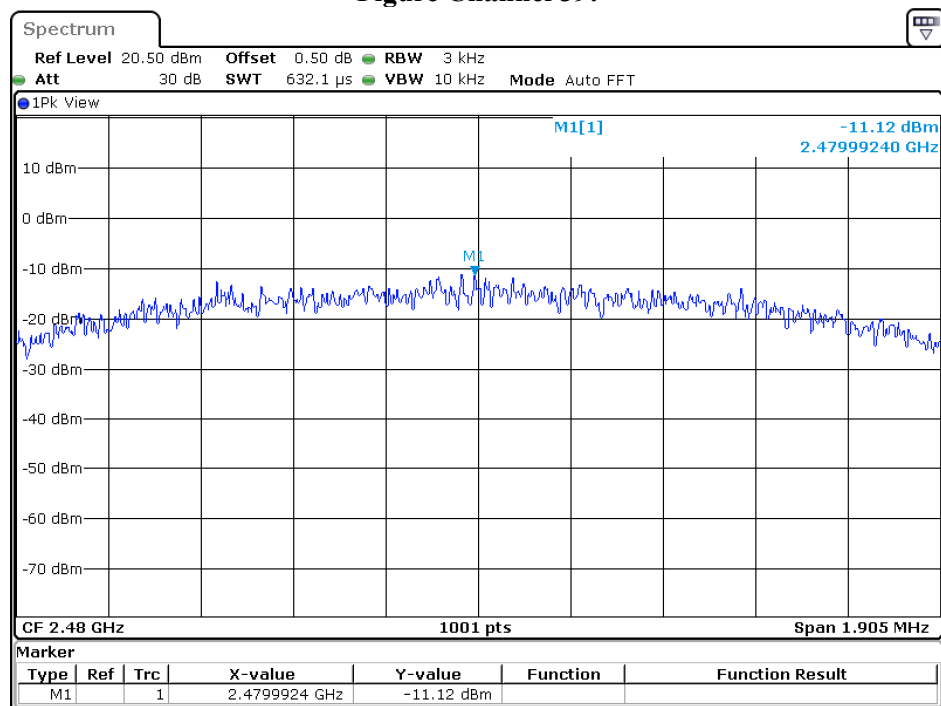

Date: 12.DEC.2022 12:15:42

9. Duty Cycle

9.1. Test Setup

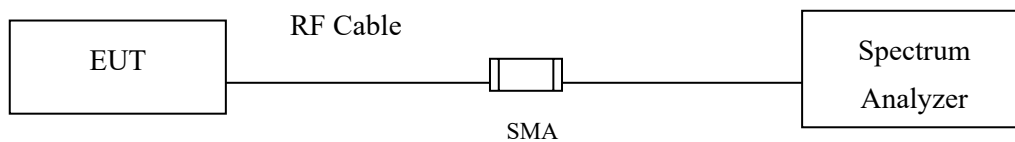

9.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

9.3. Test Result of Duty Cycle

Product : Bluetooth Headset
Test Item : Duty Cycle
Test Mode : Transmit


Formula:

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$

$$\text{Duty Factor} = 10 \text{ Log } (1/\text{Duty Cycle})$$


2.4GHz Band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
BLE (1 Mbps)	2.1200	2.5000	84.80	0.72
BLE (2 Mbps)	1.0600	1.8800	56.38	2.49

BLE 1M

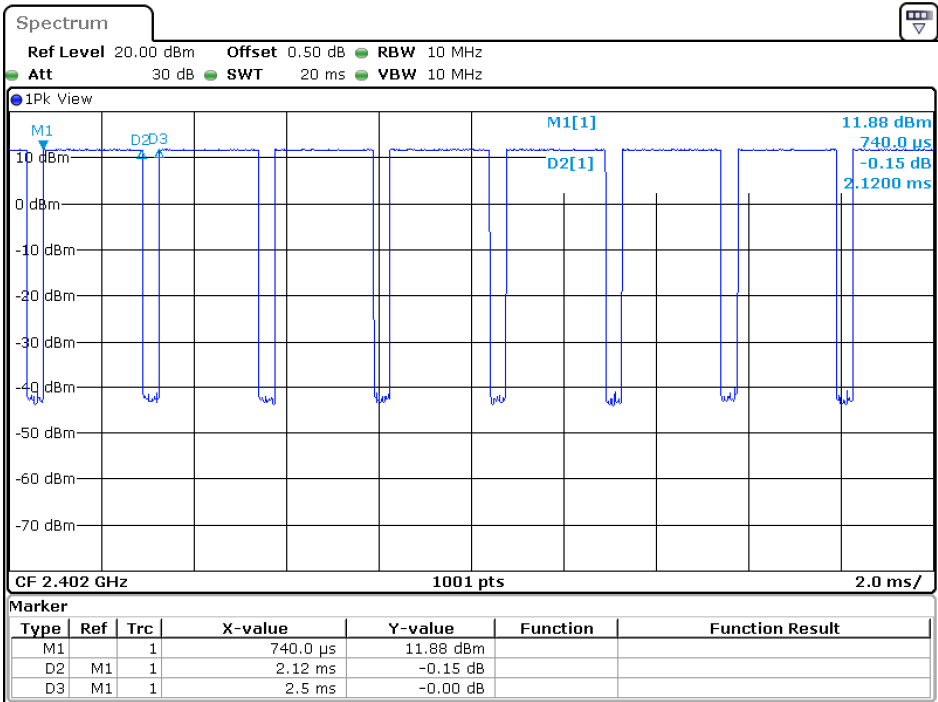

Date: 5.DEC.2022 14:45:12

BLE 2M

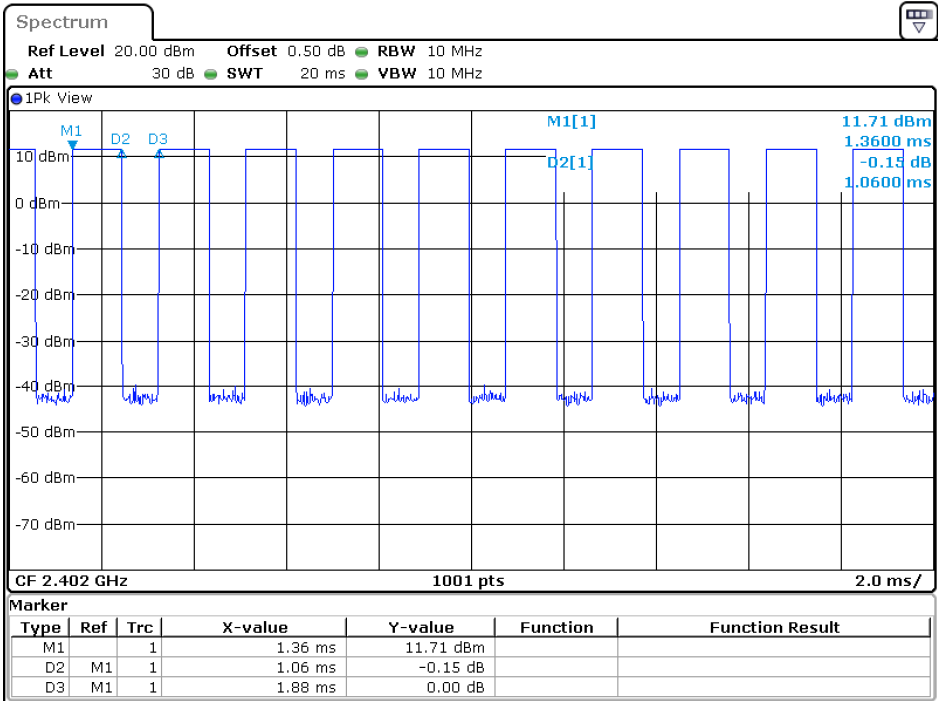

Date: 5.DEC.2022 14:52:28

10. EMI Reduction Method During Compliance Testing

No modification was made during testing.