

## DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

### Test Lab

#### **CELLTECH LABS INC.**

Testing and Engineering Services  
1955 Moss Court  
Kelowna, B.C.  
Canada V1Y 9L3  
Phone: 250-448-7047  
Fax: 250-448-7046  
e-mail: info@celltechlabs.com  
web site: www.celltechlabs.com

### Applicant Information

#### **ITRONIX CORPORATION**

801 South Stevens Street  
Spokane, WA 99210-0179

|                                   |                                                                                                                                                                                                                 |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Rule Part(s):</b>              | FCC 47 CFR §2.1093; IC RSS-102 Issue 1 (Provisional)                                                                                                                                                            |
| <b>Test Procedure(s):</b>         | FCC OET Bulletin 65, Supplement C (01-01)                                                                                                                                                                       |
| <b>FCC Device Classification:</b> | PCS Licensed Transmitter (PCB)                                                                                                                                                                                  |
| <b>IC Device Classification:</b>  | 2GHz Personal Communication Services (RSS-133 Issue 2)<br>800MHz CDMA Cellular Transmitter (RSS-129 Issue 2)                                                                                                    |
| <b>FCC ID:</b>                    | KBCIX260MPIA555BT                                                                                                                                                                                               |
| <b>Model(s):</b>                  | IX260                                                                                                                                                                                                           |
| <b>Device Type:</b>               | Rugged Laptop PC with Sierra Wireless AirCard 555/550 Dual-Band<br>PCS/Cellular CDMA PCMCIA Modem Card co-located with Cisco Systems<br>MPI-350 Mini-PCI DSSS WLAN Card & Mitsumi WML-C11 Bluetooth Transmitter |
| <b>Tx Frequency Range(s):</b>     | 1851.25 - 1908.75 MHz (PCS CDMA)<br>824.70 - 848.31 MHz (Cellular CDMA)<br>2412 - 2462 MHz (WLAN)<br>2402 - 2480 MHz (Bluetooth)                                                                                |
| <b>RF Output Power Tested:</b>    | 23.0 dBm Conducted (PCS CDMA)<br>23.0 dBm Conducted (Cellular CDMA)                                                                                                                                             |
| <b>Antenna Type(s):</b>           | External Dipole (PCS/Cellular CDMA Modem)<br>Internal - upper right edge of LCD display (WLAN)<br>Internal - upper left edge of LCD display (Bluetooth)                                                         |
| <b>Battery Type:</b>              | 11.1V Lithium-Ion, 6.0Ah (Model: A2121-2)                                                                                                                                                                       |
| <b>Max. SAR Measured:</b>         | 1.24 W/kg (PCS CDMA) / 0.512 W/kg (Cellular CDMA)                                                                                                                                                               |

Celltech Labs Inc. declares under its sole responsibility that this wireless device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and Industry Canada RSS-102 Issue 1 (Provisional) for the General Population / Uncontrolled Exposure environment. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.



**Russell Pipe**  
Senior Compliance Technologist  
Celltech Labs Inc.



| TABLE OF CONTENTS                                       |                                   |       |
|---------------------------------------------------------|-----------------------------------|-------|
| 1.0                                                     | INTRODUCTION.....                 | 3     |
| 2.0                                                     | DESCRIPTION OF DUT.....           | 3     |
| 3.0                                                     | SAR MEASUREMENT SYSTEM .....      | 4     |
| 4.0                                                     | MEASUREMENT SUMMARY .....         | 5-6   |
| 5.0                                                     | DETAILS OF SAR EVALUATION.....    | 7     |
| 6.0                                                     | EVALUATION PROCEDURES.....        | 7-8   |
| 7.0                                                     | SYSTEM PERFORMANCE CHECK.....     | 9     |
| 8.0                                                     | SIMULATED EQUIVALENT TISSUES..... | 10    |
| 9.0                                                     | SAR LIMITS.....                   | 10    |
| 10.0                                                    | SYSTEM SPECIFICATIONS.....        | 11    |
| 11.0                                                    | PROBE SPECIFICATION.....          | 12    |
| 12.0                                                    | SAM PHANTOM.....                  | 12    |
| 13.0                                                    | DEVICE HOLDER.....                | 12    |
| 14.0                                                    | TEST EQUIPMENT LIST.....          | 13    |
| 15.0                                                    | MEASUREMENT UNCERTAINTIES.....    | 14-15 |
| 16.0                                                    | REFERENCES.....                   | 16    |
| APPENDIX A - SAR MEASUREMENT DATA.....                  |                                   | 17    |
| APPENDIX B - SYSTEM PERFORMANCE CHECK DATA.....         |                                   | 18    |
| APPENDIX C - SYSTEM VALIDATION.....                     |                                   | 19    |
| APPENDIX D - PROBE CALIBRATION.....                     |                                   | 20    |
| APPENDIX E - MEASURED FLUID DIELECTRIC PARAMETERS.....  |                                   | 21    |
| APPENDIX F - SAM PHANTOM CERTIFICATE OF CONFORMITY..... |                                   | 22    |
| APPENDIX G - SAR TEST SETUP PHOTOGRAPHS.....            |                                   | 23    |

## 1.0 INTRODUCTION

This measurement report demonstrates that the ITRONIX CORPORATION Model: IX260 FCC ID: KBCIX260MPIA555BT Rugged Laptop PC with Sierra Wireless AirCard 555/550 Dual-Band PCS/Cellular CDMA PCMCIA Modem Card co-located with Cisco Systems MPI-350 Mini-PCI DSSS WLAN Card and Mitsumi WML-C11 Bluetooth Transmitter complies with the RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada Safety Code 6 (see reference [2]) for the General Population environment. The test procedures described in FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]) and IC RSS-102 Issue 1 (Provisional) (see reference [4]) were employed. A description of the product, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

## 2.0 DESCRIPTION of Device Under Test (DUT)

|                                  |                                                                                                                                                                                                             |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>FCC Rule Part(s)</b>          | 47 CFR §2.1093                                                                                                                                                                                              |
| <b>IC Rule Part(s)</b>           | IC RSS-102 Issue 1 (Provisional)                                                                                                                                                                            |
| <b>Test Procedure(s)</b>         | FCC OET Bulletin 65, Supplement C (01-01)                                                                                                                                                                   |
| <b>FCC Device Classification</b> | PCS Licensed Transmitter (PCB)                                                                                                                                                                              |
| <b>IC Device Classification</b>  | 2GHz Personal Communication Services (RSS-133 Issue 2)<br>800MHz CDMA Cellular Transmitter (RSS-129 Issue 2)                                                                                                |
| <b>Device Type</b>               | Rugged Laptop PC with Sierra Wireless AirCard 555/550 Dual-Band PCS/Cellular CDMA PCMCIA Modem Card co-located with Cisco Systems MPI-350 Mini-PCI DSSS WLAN Card and Mitsumi WML-C11 Bluetooth Transmitter |
| <b>FCC ID</b>                    | KBCIX260MPIA555BT                                                                                                                                                                                           |
| <b>Model(s)</b>                  | IX260                                                                                                                                                                                                       |
| <b>Serial No.</b>                | ZZGEG3135ZZ1409 (Identical Prototype)                                                                                                                                                                       |
| <b>Modulation</b>                | QPSK                                                                                                                                                                                                        |
| <b>Tx Frequency Range</b>        | 1851.25 - 1908.75 MHz (PCS CDMA)<br>824.70 - 848.31 MHz (Cellular CDMA)<br>2412 - 2462 MHz (WLAN)<br>2402 - 2480 MHz (Bluetooth)                                                                            |
| <b>RF Output Power Tested</b>    | 23.0 dBm Conducted (PCS CDMA)<br>23.0 dBm Conducted (Cellular CDMA)<br>21.2 dBm Peak Conducted (WLAN)<br>14.5 dBm Peak Conducted (Bluetooth)                                                                |
| <b>Antenna Type(s)</b>           | External Dipole (Dual-Band CDMA)<br>Internal - upper right edge of LCD display (WLAN)<br>Internal - upper left edge of LCD display (Bluetooth)                                                              |
| <b>Battery Type</b>              | 11.1V Lithium-Ion, 6.0Ah (Model: A2121-2)                                                                                                                                                                   |

### 3.0 SAR MEASUREMENT SYSTEM

Celltech Labs SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY system is comprised of the robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card. The DAE3 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



DASY3 SAR Measurement System with SAM phantom

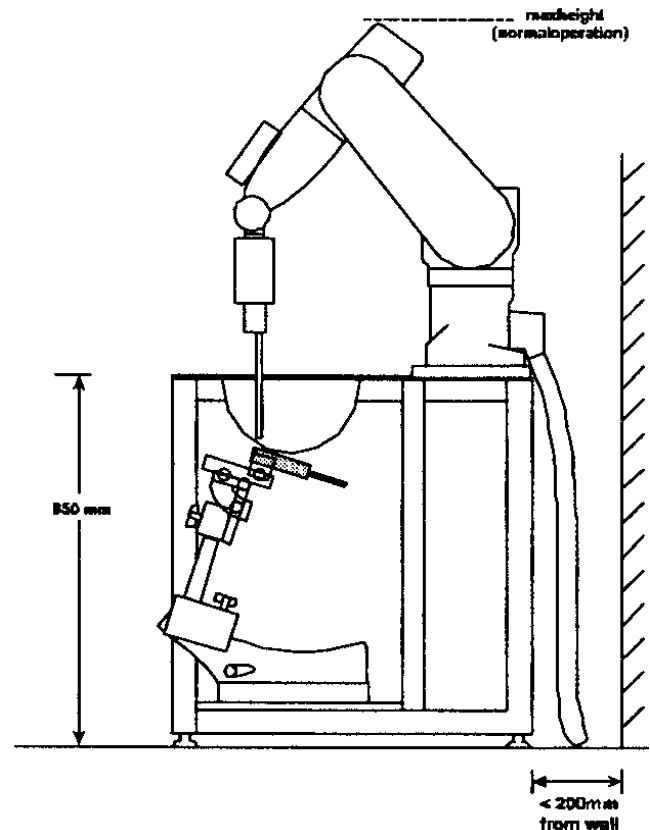


Figure 1. DASY3 Compact Version - Side View

## 4.0 MEASUREMENT SUMMARY

| BODY SAR MEASUREMENT RESULTS - PCS CDMA                                                                                                     |             |       |               |                       |          |                                    |                                      |                                            |                        |       |                      |       |
|---------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|---------------|-----------------------|----------|------------------------------------|--------------------------------------|--------------------------------------------|------------------------|-------|----------------------|-------|
| Transmit Mode                                                                                                                               | Freq. (MHz) | Chan. | Battery Type  | Conducted Power (dBm) |          | Antenna Position to Planar Phantom | Laptop PC Position to Planar Phantom | Separation Distance to Planar Phantom (cm) | Measured SAR 1g (W/kg) |       | Scaled SAR 1g (W/kg) |       |
|                                                                                                                                             |             |       |               | Before                | After    |                                    |                                      |                                            |                        |       |                      |       |
| PCS CDMA                                                                                                                                    | 1880.00     | 600   | Lithium-ion   | 23.0                  | 22.9     | Parallel (Stowed)                  | Back of LCD (LCD Closed)             | 0.0                                        | P                      | 1.21  | P                    | 1.24  |
|                                                                                                                                             |             |       |               |                       |          |                                    |                                      |                                            | S                      | 1.07  | S                    | 1.09  |
| PCS CDMA                                                                                                                                    | 1851.25     | 25    | Lithium-ion   | 23.0                  | 22.9     | Parallel (Stowed)                  | Back of LCD (LCD Closed)             | 0.0                                        | P                      | 0.770 | P                    | 0.787 |
|                                                                                                                                             |             |       |               |                       |          |                                    |                                      |                                            | S                      | 0.693 | S                    | 0.710 |
| PCS CDMA                                                                                                                                    | 1909.75     | 1175  | Lithium-ion   | 23.0                  | 22.9     | Parallel (Stowed)                  | Back of LCD (LCD Closed)             | 0.0                                        | P                      | 0.920 | P                    | 0.942 |
|                                                                                                                                             |             |       |               |                       |          |                                    |                                      |                                            | S                      | 0.869 | S                    | 0.889 |
| PCS CDMA & DSSS WLAN                                                                                                                        | 1880.00     | 600   | Lithium-ion   | 23.0                  | 22.8     | Parallel (Stowed)                  | Back of LCD (LCD Closed)             | 0.0                                        | P                      | 1.12  | P                    | 1.17  |
|                                                                                                                                             |             |       |               |                       |          |                                    |                                      |                                            | S                      | 1.06  | S                    | 1.11  |
| PCS CDMA, DSSS WLAN, & Bluetooth                                                                                                            | 1880.00     | 600   | Lithium-ion   | 23.0                  | 22.8     | Parallel (Stowed)                  | Back of LCD (LCD Closed)             | 0.0                                        | P                      | 1.13  | P                    | 1.18  |
|                                                                                                                                             |             |       |               |                       |          |                                    |                                      |                                            | S                      | 1.08  | S                    | 1.13  |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>BODY: 1.6 W/kg (averaged over 1 gram)<br>Spatial Peak - Uncontrolled Exposure / General Population |             |       |               |                       |          |                                    |                                      |                                            |                        |       |                      |       |
| Test Date(s)                                                                                                                                |             |       | 08/27/03      |                       |          |                                    | Relative Humidity                    |                                            | 45 %                   |       |                      |       |
| Measured Mixture Type                                                                                                                       |             |       | 1900 MHz Body |                       |          |                                    | Atmospheric Pressure                 |                                            | 101.5 kPa              |       |                      |       |
| Dielectric Constant<br>ε <sub>r</sub>                                                                                                       |             |       | IEEE Target   |                       | Measured |                                    | Ambient Temperature                  |                                            | 24.7 °C                |       |                      |       |
|                                                                                                                                             |             |       | 53.3 ±5%      |                       | 51.1     |                                    | Fluid Temperature                    |                                            | 22.4 °C                |       |                      |       |
| Conductivity<br>σ (mho/m)                                                                                                                   |             |       | IEEE Target   |                       | Measured |                                    | Fluid Depth                          |                                            | ≥ 15 cm                |       |                      |       |
|                                                                                                                                             |             |       | 1.52 ±5%      |                       | 1.52     |                                    | ρ (Kg/m <sup>3</sup> )               |                                            | 1000                   |       |                      |       |

### Notes:

- The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
- The DUT was tested with the LCD display lid in the closed position, which was determined to be the worst-case configuration based on the internal transmitters transmitting when the LCD display lid is closed.
- All secondary peak SAR locations within 2 dB of the primary peak value were evaluated and reported (P = Primary, S = Secondary).
- Scaled SAR results are reported to show SAR values without conducted power drift. The conducted power drifts were added to the measured SAR values in dB.
- Co-located transmitter SAR is reported only for mid channel to demonstrate any cumulative effects in SAR relative to the single-transmit peak SAR data at the worst-case channel.
- The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures listed in the table shown above were consistent for all measurement periods.
- The dielectric properties of the simulated body fluid were measured prior to the evaluation using an 85070C Dielectric Probe Kit and an 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters).

## MEASUREMENT SUMMARY (Cont.)

| BODY SAR MEASUREMENT RESULTS - CELLULAR CDMA                                                                                                                     |             |       |              |                       |            |                                    |                                      |                                            |                        |                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|--------------|-----------------------|------------|------------------------------------|--------------------------------------|--------------------------------------------|------------------------|----------------------|
| Transmit Mode                                                                                                                                                    | Freq. (MHz) | Chan. | Battery Type | Conducted Power (dBm) |            | Antenna Position to Planar Phantom | Laptop PC Position to Planar Phantom | Separation Distance to Planar Phantom (cm) | Measured SAR 1g (W/kg) | Scaled SAR 1g (W/kg) |
|                                                                                                                                                                  |             |       |              | Before Test           | After Test |                                    |                                      |                                            |                        |                      |
| Cellular CDMA                                                                                                                                                    | 835.89      | 363   | Lithium-ion  | 23.0                  | 22.8       | Parallel (Stowed)                  | Back of LCD (LCD Closed)             | 0.0                                        | 0.489                  | 0.512                |
| Cellular CDMA & DSSS WLAN                                                                                                                                        | 835.89      | 363   | Lithium-ion  | 23.0                  | 22.9       | Parallel (Stowed)                  | Back of LCD (LCD Closed)             | 0.0                                        | 0.496                  | 0.507                |
| Cellular CDMA, DSSS WLAN, & Bluetooth                                                                                                                            | 835.89      | 363   | Lithium-ion  | 23.0                  | 23.0       | Parallel (Stowed)                  | Back of LCD (LCD Closed)             | 0.0                                        | 0.482                  | 0.482                |
| <b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b><br><b>BODY: 1.6 W/kg (averaged over 1 gram)</b><br><b>Spatial Peak - Uncontrolled Exposure / General Population</b> |             |       |              |                       |            |                                    |                                      |                                            |                        |                      |
| Test Date(s)                                                                                                                                                     |             |       |              | 08/28/03              |            |                                    | Relative Humidity                    |                                            | 55 %                   |                      |
| Measured Mixture Type                                                                                                                                            |             |       |              | 835 MHz Body          |            |                                    | Atmospheric Pressure                 |                                            | 102.0 kPa              |                      |
| Dielectric Constant $\epsilon_r$                                                                                                                                 |             |       |              | IEEE Target           |            | Measured                           |                                      | Ambient Temperature                        |                        | 23.9 °C              |
|                                                                                                                                                                  |             |       |              | 55.2 ±5%              |            | 55.3                               |                                      | Fluid Temperature                          |                        | 23.2 °C              |
| Conductivity $\sigma$ (mho/m)                                                                                                                                    |             |       |              | IEEE Target           |            | Measured                           |                                      | Fluid Depth                                |                        | ≥ 15 cm              |
|                                                                                                                                                                  |             |       |              | 0.97 ±5%              |            | 1.00                               |                                      | $\rho$ (Kg/m <sup>3</sup> )                |                        | 1000                 |

### Notes:

- The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
- If the SAR measurements performed at the middle channel were ≥ 3dB below the SAR limit, SAR evaluation for the low and high channels was optional (per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3])).
- Scaled SAR results are reported to show SAR values without conducted power drift. The conducted power drifts were added to the measured SAR values in dB.
- The DUT was tested with the LCD display lid in the closed position, which was determined to be the worst-case configuration based on internal transmitters transmitting when the LCD display lid is closed.
- The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures listed in the table shown above were consistent for all measurement periods.
- The dielectric properties of the simulated body fluid were measured prior to the evaluation using an 85070C Dielectric Probe Kit and an 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters).

## 5.0 DETAILS OF SAR EVALUATION

The ITRONIX CORPORATION Model: IX260 FCC ID: KBCIX260MPIA555BT Rugged Laptop PC with Sierra Wireless AirCard 555/550 Dual-Band PCS/Cellular CDMA PCMCIA Modem Card co-located with Cisco Systems MPI-350 Mini-PCI DSSS WLAN Card and Mitsumi WML-C11 Bluetooth Transmitter was found to be compliant for localized Specific Absorption Rate based on the following test provisions and conditions described below. The detailed test setup photographs are shown in Appendix G.

1. The DUT was tested for body SAR with the LCD display closed and the back of the LCD display facing parallel to the outer surface of the SAM phantom (planar section) with a 0.0 cm separation distance. The DUT was tested with the dipole antenna in the parallel (stowed) position to the outer surface of the SAM phantom (planar section).
2. All secondary peak SAR locations within 2 dB of the primary peak value were evaluated (see SAR Plots - Appendix A).
3. Due to the dimensions of the DUT the initial coarse scans did not cover the entire area of the Laptop PC. Subsequently, a second coarse scan was performed for the highest SAR configurations to show there were no secondary peak SAR locations within 2 dB of the primary peak values.
4. Due to the dimensions of the DUT, a stack of low-density, low-loss dielectric foamed polystyrene was used in place of the device holder.
5. The conducted power levels were measured before and after each test using a Gigatronics 8652A Universal Power Meter according to the procedures described in FCC 47 CFR §2.1046.
6. For the co-located simultaneous transmit tests the Cisco MPI-350 DSSS WLAN Card was set to the maximum conducted power level (21.2 dBm) at the mid channel (2437MHz) with a CW signal and the right side internal antenna transmitting. The Mitsumi WML-C11 Bluetooth transmitter was set to the maximum conducted power level (14.5 dBm) at the mid channel (2441MHz) with a modulated signal and the left side internal antenna transmitting.
7. The DUT was controlled in test mode via internal software. SAR measurements were performed with the DUT transmitting continuously at maximum power in the "always up" power control mode with a modulated CDMA signal.
8. The DUT was tested with a fully charged battery.

## 6.0 EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated in accordance with FCC OET Bulletin 65, Supplement C (Edition 01-01) using the SAM phantom.  
(ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY3 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 20mm x 20mm.
- c. Based on the area scan data, the area of maximum absorption was determined by spline interpolation. Around this point, a volume of 40 x 40 x 35 mm (fine resolution volume scan, zoom scan) was assessed by measuring 5 x 5 x 7 points.
- d. The 1g and 10g spatial peak SAR was determined as follows:
  1. The first step was an extrapolation to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix D). The extrapolation was based on a least square algorithm [W. Gander, Computermathematik, p.168-180] (see reference [6]). Through the points in the first 3 cm in all z-axis, polynomials of the fourth order were calculated. This polynomial was then used to evaluate the points between the surface and the probe tip.
  2. The next step used 3D-spline interpolation to get all points within the measured volume in a 1mm grid (35000 points). The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff] (see reference [6]).
  3. The maximal interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-spline interpolation algorithm. 8000 points (20x20x20) were interpolated to calculate the average.

## EVALUATION PROCEDURES (Cont.)

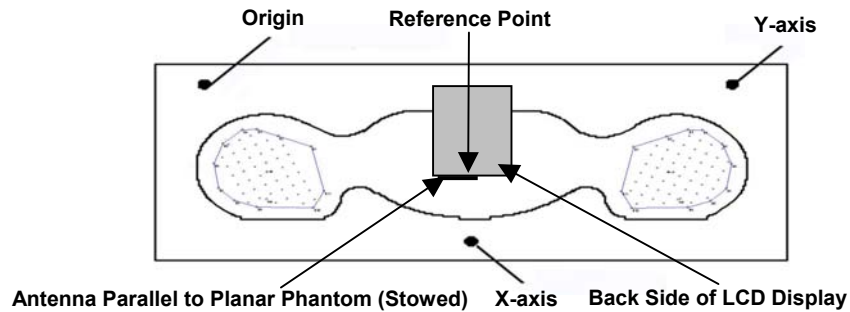


Figure 2. Phantom Reference Point & DUT Positioning  
Back Side of LCD Display (Closed) - Cube Scan

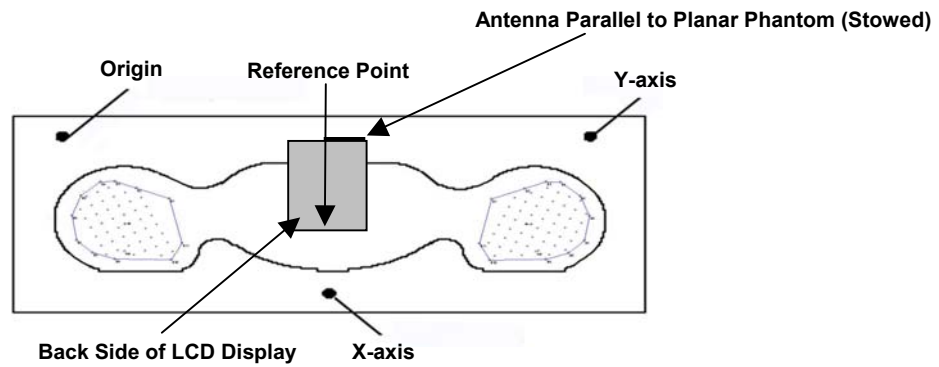


Figure 3. Phantom Reference Point & DUT Positioning  
2<sup>nd</sup> Half of the Back Side LCD Display (Closed) - Coarse Scan

## 7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluation a system check was performed at the planar section of the SAM phantom with an 1800MHz dipole and a 900MHz dipole (see Appendix C for system validation procedures). The fluid dielectric parameters were measured prior to the system check using an 85070C Dielectric Probe Kit and an 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters). A forward power of 250mW was applied to the dipole and the system was verified to a tolerance of  $\pm 10\%$  (see Appendix B for system check test plots).

| SYSTEM PERFORMANCE CHECK |               |                 |          |                                  |          |                               |          |                             |               |             |              |
|--------------------------|---------------|-----------------|----------|----------------------------------|----------|-------------------------------|----------|-----------------------------|---------------|-------------|--------------|
| Test Date                | Equiv. Tissue | SAR 1g (W/kg)   |          | Dielectric Constant $\epsilon_r$ |          | Conductivity $\sigma$ (mho/m) |          | $\rho$ (Kg/m <sup>3</sup> ) | Ambient Temp. | Fluid Temp. | Fluid Depth  |
|                          |               | IEEE Target     | Measured | IEEE Target                      | Measured | IEEE Target                   | Measured |                             |               |             |              |
| 08/27/03                 | 1800MHz Brain | 9.53 $\pm 10\%$ | 9.37     | 40.0 $\pm 5\%$                   | 39.6     | 1.40 $\pm 5\%$                | 1.34     | 1000                        | 24.0 °C       | 22.8 °C     | $\geq 15$ cm |
| 08/28/03                 | 900MHz Brain  | 2.70 $\pm 10\%$ | 2.52     | 41.5 $\pm 5\%$                   | 40.5     | 0.97 $\pm 5\%$                | 0.97     | 1000                        | 23.5 °C       | 22.7 °C     | $\geq 15$ cm |

Note(s):

1. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the system performance check. The temperatures listed in the table above were consistent for all measurement periods.

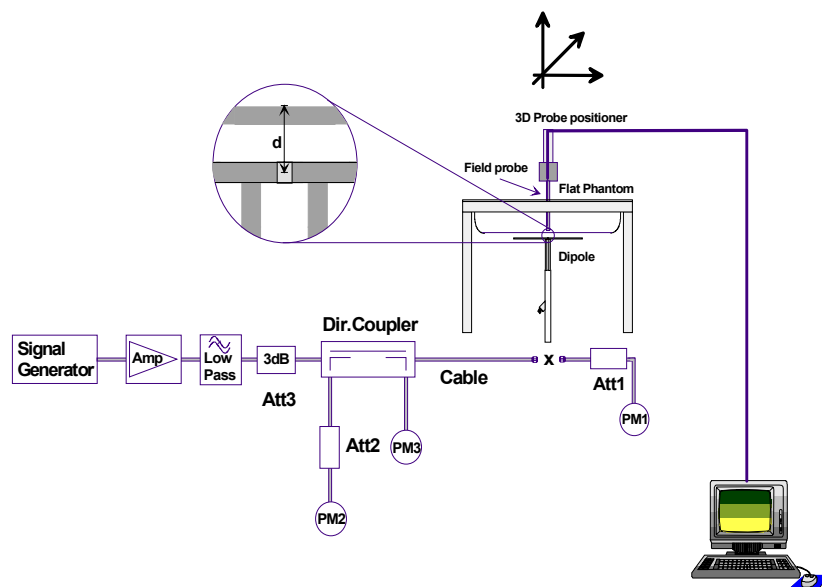


Figure 4. System Performance Check Setup Diagram



1800MHz Dipole Setup



900MHz Dipole Setup

## 8.0 EQUIVALENT TISSUES

The 1800MHz and 1900 MHz simulated tissue mixtures consist of Glycol-monobutyl, water, and salt. The 835MHz and 900MHz simulated tissue mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and sugar / saline solution. Preservation with a bactericide was added and visual inspection was made to ensure air bubbles were not trapped during the mixing process. The fluids were prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

| 1800MHz & 1900MHz TISSUE MIXTURES (1 Liter Yields) |                                  |                                   |
|----------------------------------------------------|----------------------------------|-----------------------------------|
| INGREDIENT                                         | 1800 MHz Brain<br>(System Check) | 1900 MHz Body<br>(DUT Evaluation) |
| Water                                              | 548.0 g                          | 716.60 g                          |
| Glycol Monobutyl                                   | 448.5 g                          | 300.70 g                          |
| Salt                                               | 3.20 g                           | 3.10 g                            |

| 835MHz & 900MHz TISSUE MIXTURES |                                 |                                  |
|---------------------------------|---------------------------------|----------------------------------|
| INGREDIENT                      | 900 MHz Brain<br>(System Check) | 835 MHz Body<br>(DUT Evaluation) |
| Water                           | 40.71 %                         | 53.70 %                          |
| Sugar                           | 56.63 %                         | 45.10 %                          |
| Salt                            | 1.48 %                          | 0.97 %                           |
| HEC                             | 1.00 %                          | 0.13%                            |
| Bactericide                     | 0.18 %                          | 0.10 %                           |

## 9.0 SAR SAFETY LIMITS

| EXPOSURE LIMITS                                                  | SAR (W/kg)                                                     |                                                        |
|------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------|
|                                                                  | (General Population /<br>Uncontrolled Exposure<br>Environment) | (Occupational /<br>Controlled Exposure<br>Environment) |
| Spatial Average<br>(averaged over the whole body)                | 0.08                                                           | 0.4                                                    |
| Spatial Peak<br>(averaged over any 1 g of tissue)                | 1.60                                                           | 8.0                                                    |
| Spatial Peak<br>(hands/wrists/feet/ankles<br>averaged over 10 g) | 4.0                                                            | 20.0                                                   |

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

## 10.0 ROBOT SYSTEM SPECIFICATIONS

### Specifications

**POSITIONER:** Stäubli Unimation Corp. Robot Model: RX60L  
**Repeatability:** 0.02 mm  
**No. of axis:** 6

### Data Acquisition Electronic (DAE) System

#### Cell Controller

**Processor:** Pentium III  
**Clock Speed:** 450 MHz  
**Operating System:** Windows NT  
**Data Card:** DASY3 PC-Board

#### Data Converter

**Features:** Signal Amplifier, multiplexer, A/D converter, and control logic  
**Software:** DASY3 software  
**Connecting Lines:** Optical downlink for data and status info.  
Optical uplink for commands and clock

### PC Interface Card

**Function:** 24 bit (64 MHz) DSP for real time processing  
Link to DAE3  
16-bit A/D converter for surface detection system  
serial link to robot  
direct emergency stop output for robot

### E-Field Probe

**Model:** ET3DV6  
**Serial No.:** 1387  
**Construction:** Triangular core fiber optic detection system  
**Frequency:** 10 MHz to 6 GHz  
**Linearity:**  $\pm 0.2$  dB (30 MHz to 3 GHz)

### Phantom

**Type:** SAM V4.0C  
**Shell Material:** Fiberglass  
**Thickness:**  $2.0 \pm 0.1$  mm  
**Volume:** Approx. 20 liters

## 11.0 PROBE SPECIFICATION (ET3DV6)


|                    |                                                                                                                                                              |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction:      | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g. glycol) |
| Calibration:       | In air from 10 MHz to 2.5 GHz<br>In brain simulating tissue at frequencies of 900 MHz<br>and 1.8 GHz (accuracy $\pm 8\%$ )                                   |
| Frequency:         | 10 MHz to >6 GHz; Linearity: $\pm 0.2$ dB<br>(30 MHz to 3 GHz)                                                                                               |
| Directivity:       | $\pm 0.2$ dB in brain tissue (rotation around probe axis)<br>$\pm 0.4$ dB in brain tissue (rotation normal to probe axis)                                    |
| Dynamic Range:     | 5 $\mu$ W/g to >100 mW/g; Linearity: $\pm 0.2$ dB                                                                                                            |
| Surface Detection: | $\pm 0.2$ mm repeatability in air and clear liquids over<br>diffuse reflecting surfaces                                                                      |
| Dimensions:        | Overall length: 330 mm<br>Tip length: 16 mm<br>Body diameter: 12 mm<br>Tip diameter: 6.8 mm<br>Distance from probe tip to dipole centers: 2.7 mm             |
| Application:       | General dosimetry up to 3 GHz<br>Compliance tests of mobile phone                                                                                            |



ET3DV6 E-Field Probe

## 12.0 SAM PHANTOM V4.0C

The SAM phantom V4.0C is a fiberglass shell phantom with a 2.0 mm shell thickness for left and right head and flat planar area integrated in a wooden table. The shape of the fiberglass shell corresponds to the phantom defined by SCC34-SC2. The device holder positions are adjusted to the standard measurement positions in the three sections.



SAM Phantom

## 13.0 DEVICE HOLDER

The DASY3 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.



Device Holder

## 14.0 TEST EQUIPMENT LIST

| SAR MEASUREMENT SYSTEM                                                                                                                                                                                                                                                                                      |                                                                                  |                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| EQUIPMENT                                                                                                                                                                                                                                                                                                   | SERIAL NO.                                                                       | CALIBRATION DATE                                                                                          |
| <b>DASY3 System</b><br>-Robot<br>-ET3DV6 E-Field Probe<br>-300MHz Validation Dipole<br>-450MHz Validation Dipole<br>-900MHz Validation Dipole<br>-1800MHz Validation Dipole<br>-2450MHz Validation Dipole<br>-SAM Phantom V4.0C<br>-Small Planar Phantom<br>-Medium Planar Phantom<br>-Large Planar Phantom | 599396-01<br>1387<br>135<br>136<br>054<br>247<br>150<br>N/A<br>N/A<br>N/A<br>N/A | N/A<br>Feb 2003<br>Oct 2002<br>Oct 2002<br>June 2003<br>June 2003<br>Oct 2002<br>N/A<br>N/A<br>N/A<br>N/A |
| <b>85070C Dielectric Probe Kit</b>                                                                                                                                                                                                                                                                          | N/A                                                                              | N/A                                                                                                       |
| <b>Gigatronics 8652A Power Meter</b><br>-Power Sensor 80701A<br>-Power Sensor 80701A                                                                                                                                                                                                                        | 1835272<br>1833535<br>1833542                                                    | Feb 2003<br>Feb 2003<br>Feb 2003                                                                          |
| <b>Pasternack Attenuator (30dB, 2W)</b>                                                                                                                                                                                                                                                                     | PE7014-30                                                                        | N/A                                                                                                       |
| <b>E4408B Spectrum Analyzer</b>                                                                                                                                                                                                                                                                             | US39240170                                                                       | Dec 2002                                                                                                  |
| <b>8594E Spectrum Analyzer</b>                                                                                                                                                                                                                                                                              | 3543A02721                                                                       | Feb 2003                                                                                                  |
| <b>8753E Network Analyzer</b>                                                                                                                                                                                                                                                                               | US38433013                                                                       | Feb 2003                                                                                                  |
| <b>8648D Signal Generator</b>                                                                                                                                                                                                                                                                               | 3847A00611                                                                       | Feb 2003                                                                                                  |
| <b>5S1G4 Amplifier Research Power Amplifier</b>                                                                                                                                                                                                                                                             | 26235                                                                            | N/A                                                                                                       |

## 15.0 MEASUREMENT UNCERTAINTIES

| UNCERTAINTY BUDGET FOR DEVICE EVALUATION |                         |                          |         |             |                                 |                    |
|------------------------------------------|-------------------------|--------------------------|---------|-------------|---------------------------------|--------------------|
| Error Description                        | Uncertainty Value<br>±% | Probability Distribution | Divisor | $C_i$<br>1g | Standard Uncertainty<br>±% (1g) | $v_i$ or $v_{eff}$ |
| <b>Measurement System</b>                |                         |                          |         |             |                                 |                    |
| Probe calibration                        | ± 4.8                   | Normal                   | 1       | 1           | ± 4.8                           | ∞                  |
| Axial isotropy of the probe              | ± 4.7                   | Rectangular              | √3      | (1- $C_p$ ) | ± 1.9                           | ∞                  |
| Spherical isotropy of the probe          | ± 9.6                   | Rectangular              | √3      | ( $C_p$ )   | ± 3.9                           | ∞                  |
| Spatial resolution                       | ± 0.0                   | Rectangular              | √3      | 1           | ± 0.0                           | ∞                  |
| Boundary effects                         | ± 5.5                   | Rectangular              | √3      | 1           | ± 3.2                           | ∞                  |
| Probe linearity                          | ± 4.7                   | Rectangular              | √3      | 1           | ± 2.7                           | ∞                  |
| Detection limit                          | ± 1.0                   | Rectangular              | √3      | 1           | ± 0.6                           | ∞                  |
| Readout electronics                      | ± 1.0                   | Normal                   | 1       | 1           | ± 1.0                           | ∞                  |
| Response time                            | ± 0.8                   | Rectangular              | √3      | 1           | ± 0.5                           | ∞                  |
| Integration time                         | ± 1.4                   | Rectangular              | √3      | 1           | ± 0.8                           | ∞                  |
| RF ambient conditions                    | ± 3.0                   | Rectangular              | √3      | 1           | ± 1.7                           | ∞                  |
| Mech. constraints of robot               | ± 0.4                   | Rectangular              | √3      | 1           | ± 0.2                           | ∞                  |
| Probe positioning                        | ± 2.9                   | Rectangular              | √3      | 1           | ± 1.7                           | ∞                  |
| Extrapolation & integration              | ± 3.9                   | Rectangular              | √3      | 1           | ± 2.3                           | ∞                  |
| <b>Test Sample Related</b>               |                         |                          |         |             |                                 |                    |
| Device positioning                       | ± 6.0                   | Normal                   | √3      | 1           | ± 6.7                           | 12                 |
| Device holder uncertainty                | ± 5.0                   | Normal                   | √3      | 1           | ± 5.9                           | 8                  |
| Power drift                              | ± 5.0                   | Rectangular              | √3      |             | ± 2.9                           | ∞                  |
| <b>Phantom and Setup</b>                 |                         |                          |         |             |                                 |                    |
| Phantom uncertainty                      | ± 4.0                   | Rectangular              | √3      | 1           | ± 2.3                           | ∞                  |
| Liquid conductivity (target)             | ± 5.0                   | Rectangular              | √3      | 0.6         | ± 1.7                           | ∞                  |
| Liquid conductivity (measured)           | ± 5.0                   | Rectangular              | √3      | 0.6         | ± 1.7                           | ∞                  |
| Liquid permittivity (target)             | ± 5.0                   | Rectangular              | √3      | 0.6         | ± 1.7                           | ∞                  |
| Liquid permittivity (measured)           | ± 5.0                   | Rectangular              | √3      | 0.6         | ± 1.7                           | ∞                  |
| <b>Combined Standard Uncertainty</b>     |                         |                          |         |             |                                 |                    |
|                                          |                         |                          |         |             | ± 13.3                          |                    |
| <b>Expanded Uncertainty (k=2)</b>        |                         |                          |         |             |                                 |                    |
|                                          |                         |                          |         |             | ± 26.6                          |                    |

Measurement Uncertainty Table in accordance with IEEE Std 1528-200X (Draft - see Reference [5])

## 15.0 MEASUREMENT UNCERTAINTIES (Cont.)

| UNCERTAINTY BUDGET FOR SYSTEM VALIDATION |                         |                          |         |             |                                 |                    |
|------------------------------------------|-------------------------|--------------------------|---------|-------------|---------------------------------|--------------------|
| Error Description                        | Uncertainty Value<br>±% | Probability Distribution | Divisor | $C_i$<br>1g | Standard Uncertainty<br>±% (1g) | $v_i$ or $v_{eff}$ |
| <b>Measurement System</b>                |                         |                          |         |             |                                 |                    |
| Probe calibration                        | ± 4.8                   | Normal                   | 1       | 1           | ± 4.8                           | ∞                  |
| Axial isotropy of the probe              | ± 4.7                   | Rectangular              | √3      | (1- $C_p$ ) | ± 1.9                           | ∞                  |
| Spherical isotropy of the probe          | ± 9.6                   | Rectangular              | √3      | ( $C_p$ )   | ± 3.9                           | ∞                  |
| Spatial resolution                       | ± 0.0                   | Rectangular              | √3      | 1           | ± 0.0                           | ∞                  |
| Boundary effects                         | ± 5.5                   | Rectangular              | √3      | 1           | ± 3.2                           | ∞                  |
| Probe linearity                          | ± 4.7                   | Rectangular              | √3      | 1           | ± 2.7                           | ∞                  |
| Detection limit                          | ± 1.0                   | Rectangular              | √3      | 1           | ± 0.6                           | ∞                  |
| Readout electronics                      | ± 1.0                   | Normal                   | 1       | 1           | ± 1.0                           | ∞                  |
| Response time                            | ± 0.8                   | Rectangular              | √3      | 1           | ± 0.5                           | ∞                  |
| Integration time                         | ± 1.4                   | Rectangular              | √3      | 1           | ± 0.8                           | ∞                  |
| RF ambient conditions                    | ± 3.0                   | Rectangular              | √3      | 1           | ± 1.7                           | ∞                  |
| Mech. constraints of robot               | ± 0.4                   | Rectangular              | √3      | 1           | ± 0.2                           | ∞                  |
| Probe positioning                        | ± 2.9                   | Rectangular              | √3      | 1           | ± 1.7                           | ∞                  |
| Extrapolation & integration              | ± 3.9                   | Rectangular              | √3      | 1           | ± 2.3                           | ∞                  |
| <b>Dipole</b>                            |                         |                          |         |             |                                 |                    |
| Dipole Axis to Liquid Distance           | ± 2.0                   | Rectangular              | √3      | 1           | ± 1.2                           | ∞                  |
| Input Power                              | ± 4.7                   | Rectangular              | √3      | 1           | ± 2.7                           | ∞                  |
| <b>Phantom and Setup</b>                 |                         |                          |         |             |                                 |                    |
| Phantom uncertainty                      | ± 4.0                   | Rectangular              | √3      | 1           | ± 2.3                           | ∞                  |
| Liquid conductivity (target)             | ± 5.0                   | Rectangular              | √3      | 0.6         | ± 1.7                           | ∞                  |
| Liquid conductivity (measured)           | ± 5.0                   | Rectangular              | √3      | 0.6         | ± 1.7                           | ∞                  |
| Liquid permittivity (target)             | ± 5.0                   | Rectangular              | √3      | 0.6         | ± 1.7                           | ∞                  |
| Liquid permittivity (measured)           | ± 5.0                   | Rectangular              | √3      | 0.6         | ± 1.7                           | ∞                  |
| <b>Combined Standard Uncertainty</b>     |                         |                          |         |             |                                 |                    |
|                                          |                         |                          |         |             | ± 9.9                           |                    |
| <b>Expanded Uncertainty (k=2)</b>        |                         |                          |         |             |                                 |                    |
|                                          |                         |                          |         |             | ± 19.8                          |                    |

Measurement Uncertainty Table in accordance with IEEE Std 1528-200X (Draft - see Reference [5])

---

## 16.0 REFERENCES

- [1] Federal Communications Commission, "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada, "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6.
- [3] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada, "Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields", Radio Standards Specification RSS-102 Issue 1 (Provisional): September 1999.
- [5] IEEE Standards Coordinating Committee 34, Std 1528-200X, "DRAFT Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques".
- [6] W. Gander, *Computermathematick*, Birkhaeuser, Basel: 1992.

---

## APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

08/27/03

## System Performance Check - 1800MHz Dipole

SAM Phantom; Flat Section

Probe: ET3DV6 - SN1387; ConvF(5.20,5.20,5.20); Crest factor: 1.0; Brain 1800 MHz:  $\sigma = 1.34$  mho/m  $\epsilon_r = 39.6$   $\rho = 1.00$  g/cm<sup>3</sup>


Cube 5x5x7: Peak: 16.4 mW/g, SAR (1g): 9.37 mW/g, SAR (10g): 5.02 mW/g, (Worst-case extrapolation)

Penetration depth: 9.1 (9.0, 9.5) [mm]; Powerdrift: -0.01 dB

Ambient Temp. 24.0°C; Fluid Temp. 22.8°C

Forward Conducted Power: 250 mW

Date Tested: August 27, 2003

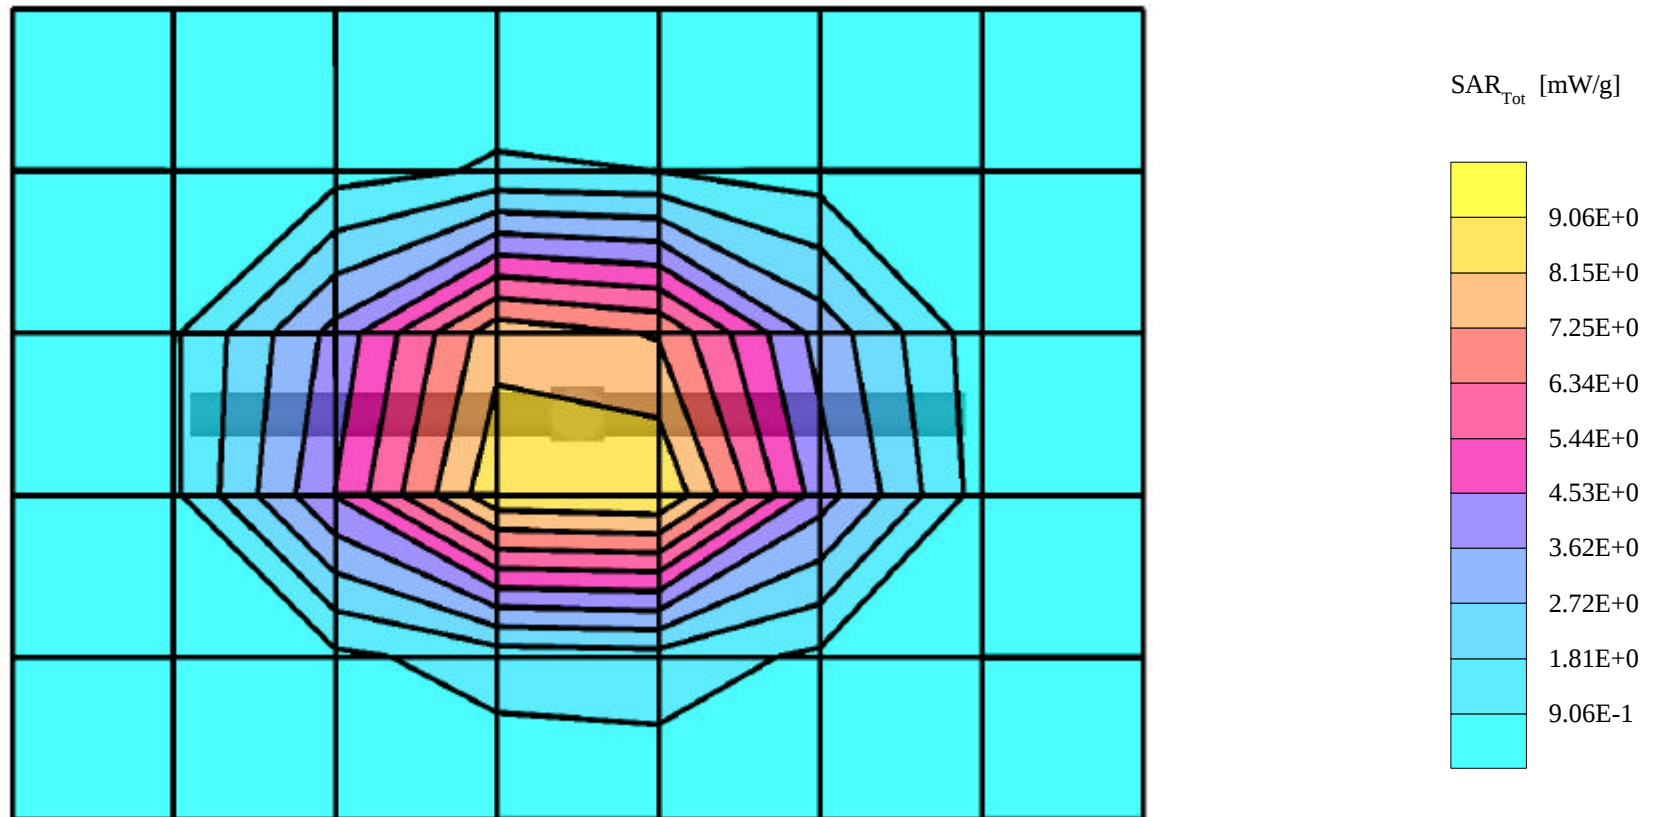

08/28/03

## System Performance Check - 900MHz Dipole

SAM Phantom; Flat Section

Probe: ET3DV6 - SN1387; ConvF(6.60,6.60,6.60); Crest factor: 1.0; Brain 900 MHz:  $\sigma = 0.97$  mho/m  $\epsilon_r = 40.5$   $\rho = 1.00$  g/cm<sup>3</sup>


Cube 5x5x7: Peak: 3.85 mW/g, SAR (1g): 2.52 mW/g, SAR (10g): 1.62 mW/g, (Worst-case extrapolation)

Penetration depth: 12.1 (11.7, 12.7) [mm]; Powerdrift: -0.03 dB

Ambient Temp. 23.5°C; Fluid Temp. 22.7°C

Conducted Power: 250mW

Date Tested: August 28, 2003

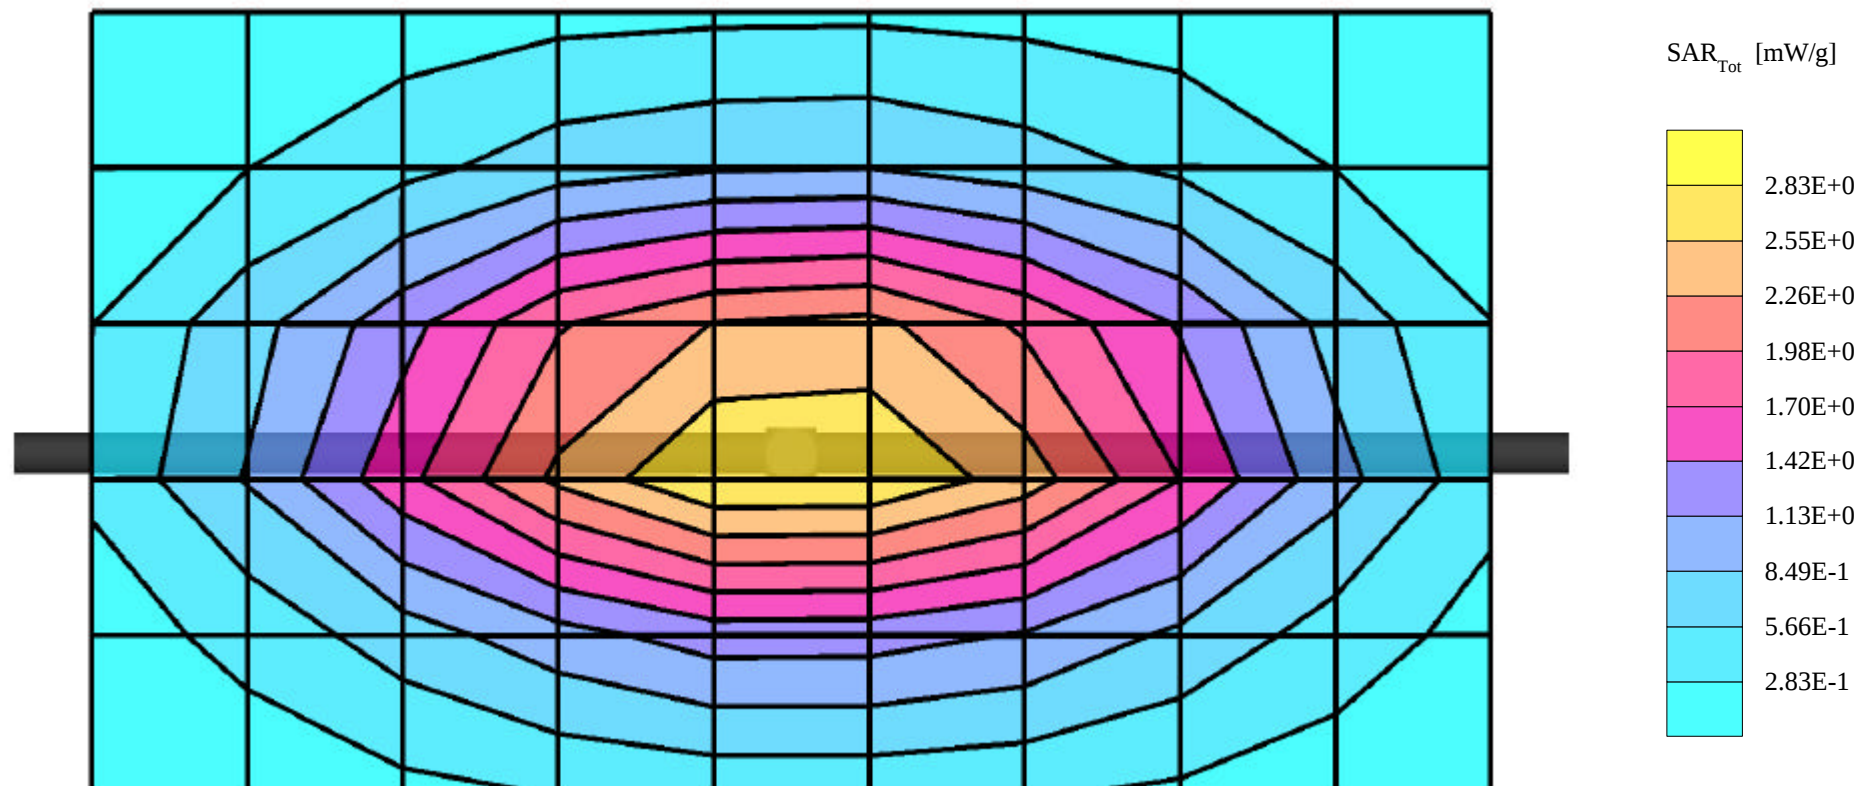

---

## APPENDIX E - MEASURED FLUID DIELECTRIC PARAMETERS

# 1800MHz System Performance Check

## Measured Fluid Dielectric Parameters (Brain)

August 27, 2003

| Frequency       | $\epsilon'$ | $\epsilon''$ |
|-----------------|-------------|--------------|
| 1.700000000 GHz | 40.0880     | 13.1522      |
| 1.710000000 GHz | 40.0471     | 13.1692      |
| 1.720000000 GHz | 40.0052     | 13.1931      |
| 1.730000000 GHz | 39.9538     | 13.2194      |
| 1.740000000 GHz | 39.9102     | 13.2568      |
| 1.750000000 GHz | 39.8514     | 13.2816      |
| 1.760000000 GHz | 39.8037     | 13.3123      |
| 1.770000000 GHz | 39.7688     | 13.3415      |
| 1.780000000 GHz | 39.7277     | 13.3532      |
| 1.790000000 GHz | 39.6755     | 13.3747      |
| 1.800000000 GHz | 39.6314     | 13.3975      |
| 1.810000000 GHz | 39.5857     | 13.4154      |
| 1.820000000 GHz | 39.5257     | 13.4180      |
| 1.830000000 GHz | 39.4887     | 13.4461      |
| 1.840000000 GHz | 39.4568     | 13.4561      |
| 1.850000000 GHz | 39.4248     | 13.4692      |
| 1.860000000 GHz | 39.3981     | 13.4792      |
| 1.870000000 GHz | 39.3651     | 13.4871      |
| 1.880000000 GHz | 39.3404     | 13.5019      |
| 1.890000000 GHz | 39.3223     | 13.5394      |
| 1.900000000 GHz | 39.2959     | 13.5434      |

# 1900MHz DUT Evaluation (Body)

## Measured Fluid Dielectric Parameters (Muscle)

August 27, 2003

| Frequency       | $\epsilon'$ | $\epsilon''$ |
|-----------------|-------------|--------------|
| 1.800000000 GHz | 51.3842     | 14.1994      |
| 1.810000000 GHz | 51.3440     | 14.2362      |
| 1.820000000 GHz | 51.2918     | 14.2477      |
| 1.830000000 GHz | 51.2573     | 14.2696      |
| 1.840000000 GHz | 51.2239     | 14.2908      |
| 1.850000000 GHz | 51.1961     | 14.3039      |
| 1.860000000 GHz | 51.1636     | 14.3178      |
| 1.870000000 GHz | 51.1334     | 14.3406      |
| 1.880000000 GHz | 51.1123     | 14.3556      |
| 1.890000000 GHz | 51.0918     | 14.3774      |
| 1.900000000 GHz | 51.0838     | 14.3954      |
| 1.910000000 GHz | 51.0668     | 14.4214      |
| 1.920000000 GHz | 51.0447     | 14.4555      |
| 1.930000000 GHz | 51.0351     | 14.4857      |
| 1.940000000 GHz | 51.0222     | 14.5260      |
| 1.950000000 GHz | 50.9981     | 14.5518      |
| 1.960000000 GHz | 50.9769     | 14.5787      |
| 1.970000000 GHz | 50.9472     | 14.6100      |
| 1.980000000 GHz | 50.9162     | 14.6570      |
| 1.990000000 GHz | 50.8943     | 14.7311      |
| 2.000000000 GHz | 50.8311     | 14.7696      |

# 900MHz System Performance Check

## Measured Fluid Dielectric Parameters (Brain)

August 28, 2063

| Frequency       | $\epsilon'$ | $\epsilon''$ |
|-----------------|-------------|--------------|
| 800.000000 MHz  | 41.7244     | 19.8699      |
| 810.000000 MHz  | 41.6004     | 19.8359      |
| 820.000000 MHz  | 41.4801     | 19.7808      |
| 830.000000 MHz  | 41.3409     | 19.7592      |
| 840.000000 MHz  | 41.1931     | 19.7097      |
| 850.000000 MHz  | 41.0304     | 19.6664      |
| 860.000000 MHz  | 40.9130     | 19.6223      |
| 870.000000 MHz  | 40.7859     | 19.6030      |
| 880.000000 MHz  | 40.6905     | 19.5756      |
| 890.000000 MHz  | 40.5734     | 19.5655      |
| 900.000000 MHz  | 40.5106     | 19.4411      |
| 910.000000 MHz  | 40.3959     | 19.4180      |
| 920.000000 MHz  | 40.3042     | 19.3794      |
| 930.000000 MHz  | 40.2158     | 19.3264      |
| 940.000000 MHz  | 40.0558     | 19.3443      |
| 950.000000 MHz  | 39.9641     | 19.3231      |
| 960.000000 MHz  | 39.8389     | 19.2755      |
| 970.000000 MHz  | 39.7111     | 19.2396      |
| 980.000000 MHz  | 39.5972     | 19.2378      |
| 990.000000 MHz  | 39.4926     | 19.1971      |
| 1.000000000 GHz | 39.4103     | 19.1460      |

# 835MHz DUT Evaluation (Body)

## Measured Fluid Dielectric Parameters (Muscle)

August 28, 2003

| Frequency      | e'      | e''     |
|----------------|---------|---------|
| 735.000000 MHz | 56.2067 | 22.2946 |
| 745.000000 MHz | 56.1512 | 22.2054 |
| 755.000000 MHz | 56.0348 | 22.1383 |
| 765.000000 MHz | 55.9371 | 22.0425 |
| 775.000000 MHz | 55.8270 | 22.0001 |
| 785.000000 MHz | 55.7452 | 21.9255 |
| 795.000000 MHz | 55.6820 | 21.8916 |
| 805.000000 MHz | 55.6271 | 21.8379 |
| 815.000000 MHz | 55.5351 | 21.7813 |
| 825.000000 MHz | 55.3990 | 21.7310 |
| 835.000000 MHz | 55.3001 | 21.6629 |
| 845.000000 MHz | 55.1709 | 21.6353 |
| 855.000000 MHz | 55.0737 | 21.5639 |
| 865.000000 MHz | 54.9744 | 21.5056 |
| 875.000000 MHz | 54.8748 | 21.4917 |
| 885.000000 MHz | 54.7720 | 21.4584 |
| 895.000000 MHz | 54.7553 | 21.3390 |
| 905.000000 MHz | 54.6827 | 21.2851 |
| 915.000000 MHz | 54.5955 | 21.2641 |
| 925.000000 MHz | 54.5415 | 21.1887 |
| 935.000000 MHz | 54.4292 | 21.1641 |

---

## APPENDIX F - SAM PHANTOM CERTIFICATE OF CONFORMITY

# Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

## Certificate of conformity / First Article Inspection

|                       |                                                                          |
|-----------------------|--------------------------------------------------------------------------|
| Item                  | SAM Twin Phantom V4.0                                                    |
| Type No               | QD 000 P40 BA                                                            |
| Series No             | TP-1002 and higher                                                       |
| Manufacturer / Origin | Untersee Composites<br>Hauptstr. 69<br>CH-8559 Fruthwilen<br>Switzerland |

### Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

| Test                 | Requirement                                                                             | Details                                                              | Units tested                |
|----------------------|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------|-----------------------------|
| Shape                | Compliance with the geometry according to the CAD model.                                | IT'IS CAD File (*)                                                   | First article, Samples      |
| Material thickness   | Compliant with the requirements according to the standards                              | 2mm +/- 0.2mm in specific areas                                      | First article, Samples      |
| Material parameters  | Dielectric parameters for required frequencies                                          | 200 MHz – 3 GHz<br>Relative permittivity < 5<br>Loss tangent < 0.05. | Material sample<br>TP 104-5 |
| Material resistivity | The material has been tested to be compatible with the liquids defined in the standards | Liquid type HSL 1800 and others according to the standard.           | Pre-series, First article   |

### Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9


(\*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

### Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date 18.11.2001

Signature / Stamp



**Schmid & Partner  
Engineering AG**



Zeughausstrasse 43, CH-8004 Zurich  
Tel. +41 1 245 97 00, Fax +41 1 245 97 79