

FCC Test Report

Client Name : Shenzhen Radiomaster Technology Co.,Ltd

Client Address : 4F Yang Tian Building, Area 72 Xing Dong
community, Xin An Street, Bao An district,
Shen Zhen city, Guangdong Province, China

Product Name : BOXER

Report Date : Apr. 03, 2023

Shenzhen Anbotek Compliance Laboratory Limited



Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotek.com

Code: AB-RF-05-b



Hotline

400-003-0500

www.anbotek.com.cn



Contents

1. General Information	6
1.1. Client Information	6
1.2. Description of Device (EUT)	6
1.3. Auxiliary Equipment Used During Test	7
1.4. Description of Test Configuration	7
1.5. Description Of Test Setup	9
1.6. Test Equipment List	10
1.7. Measurement Uncertainty	11
1.8. Description of Test Facility	11
2. Summary of Test Results	12
3. Conducted Emission Test	13
3.1. Test Standard and Limit	13
3.2. Test Setup	13
3.3. Test Procedure	13
3.4. Test Data	13
4. Radiation Spurious Emission and Band Edge	22
4.1. Test Standard and Limit	22
4.2. Test Setup	22
4.3. Test Procedure	23
4.4. Test Data	24
5. Maximum Peak Output Power Test	53
5.1. Test Standard and Limit	53
5.2. Test Setup	53
5.3. Test Procedure	53
5.4. Test Data	53
6. 20DB Occupy Bandwidth Test	54
6.1. Test Standard	54
6.2. Test Setup	54
6.3. Test Procedure	54
6.4. Test Data	54
7. Carrier Frequency Separation Test	55
7.1. Test Standard and Limit	55
7.2. Test Setup	55
7.3. Test Procedure	55
7.4. Test Data	55
8. Number of Hopping Channel Test	56
8.1. Test Standard and Limit	56



8.2. Test Setup	56
8.3. Test Procedure	56
8.4. Test Data	56
9. Dwell Time Test	57
9.1. Test Standard and Limit	57
9.2. Test Setup	57
9.3. Test Procedure	57
9.4. Test Data	57
10. 100kHz Bandwidth of Frequency Band Edge Requirement	58
10.1. Test Standard and Limit	58
10.2. Test Setup	58
10.3. Test Procedure	58
10.4. Test Data	58
11. Antenna Requirement	59
11.1. Test Standard and Requirement	59
11.2. Antenna Connected Construction	59
APPENDIX I -- TEST SETUP PHOTOGRAPH	60
APPENDIX II -- EXTERNAL PHOTOGRAPH	60
APPENDIX III -- INTERNAL PHOTOGRAPH	60



TEST REPORT

Applicant : Shenzhen Radiomaster Technology Co.,Ltd
Manufacturer : Shenzhen Radiomaster Technology Co.,Ltd
Product Name : BOXER
Model No. : BOXER 4IN1, BOXER 4IN1 MAX, BOXER 4IN1 MAX PRO, BOXER CC2500,
BOXER SE, BOXER 4IN1 PRO, BOXER 4IN1 LITE, BOXER MAX, BOXER
MAXPRO
Trade Mark : Radiomaster
Rating(s) : Input: DC 6.6-8.4V
Test Standard(s) : FCC Part15 Subpart C, Section 15.247
Test Method(s) : ANSI C63.10: 2020

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of receipt

Nov. 22, 2022

Date of Test

Nov. 22~Dec. 28, 2022

Prepared by

Tu Tu Hong

(TuTu Hong)

Approved & Authorized Signer

Kingkong Jin

(Kingkong Jin)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Apr. 03, 2023



1. General Information

1.1. Client Information

Applicant	:	Shenzhen Radiomaster Technology Co.,Ltd
Address	:	4F Yang Tian Building, Area 72 Xing Dong community, Xin An Street, Bao An district, Shen Zhen city, Guangdong Province, China
Manufacturer	:	Shenzhen Radiomaster Technology Co.,Ltd
Address	:	4F Yang Tian Building, Area 72 Xing Dong community, Xin An Street, Bao An district, Shen Zhen city, Guangdong Province, China
Factory	:	Shenzhen Radiomaster Technology Co.,Ltd
Address	:	4F Yang Tian Building, Area 72 Xing Dong community, Xin An Street, Bao An district, Shen Zhen city, Guangdong Province, China

1.2. Description of Device (EUT)

Product Name	:	BOXER
Model No.	:	BOXER 4IN1, BOXER 4IN1 MAX, BOXER 4IN1 MAX PRO, BOXER CC2500, BOXER SE, BOXER 4IN1 PRO, BOXER 4IN1 LITE, BOXER MAX, BOXER MAXPRO (Note: All samples are the same except the model number, so we prepare "BOXER 4IN1" for test only.)
Trade Mark	:	Radiomaster
Test Power Supply	:	AC 120V/60Hz for Adapter
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A
RF Specification		
Operation Mode	:	☐ DSSS ☒ FHSS
Operation Frequency	:	2403.94~2472.94 MHz (for module: CC2500/D8) 2403.5~2473 MHz (for module: A7105/flysky) 2403~2479 MHz (for module: 6936/mlink) 2422~2464 MHz (for module: 24L01/BUGSMINI)
Number of Channel	:	47 Channels (for module: CC2500/D8) 16 Channels (for module: A7105/flysky) 39 Channels (for module: 6936/mlink) 15 Channels (for module: 24L01/BUGSMINI)
Modulation Type	:	GFSK



Antenna Type	:	External antenna
Antenna Gain(Peak)	:	4.11dBi (Provided by customer)
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
Adapter:	M/N: A2023 Input: AC 100-240V 0.7A 50-60Hz USB1 Output: 5V $\equiv$ 2.4A USB1 Output: 5V $\equiv$ 2.4A

1.4. Description of Test Configuration

for module: CC2500/D8

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2403.94	11	2418.94	21	2433.94	31	2448.94	41	2463.94
02	2405.44	12	2420.44	22	2435.44	32	2450.44	42	2465.44
03	2406.94	13	2421.94	23	2436.94	33	2451.94	43	2466.94
04	2408.44	14	2423.44	24	2438.44	34	2453.44	44	2468.44
05	2409.94	15	2424.94	25	2439.94	35	2454.94	45	2469.94
06	2411.44	16	2426.44	26	2441.44	36	2456.44	46	2471.44
07	2412.94	17	2427.94	27	2442.94	37	2457.94	47	2472.94
08	2414.44	18	2429.44	28	2444.44	38	2459.44		
09	2415.94	19	2430.94	29	2445.94	39	2460.94		
10	2417.44	20	2432.44	30	2447.44	40	2462.44		

for module: A7105/flysky

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2403.50	05	2423.00	09	2443.00	13	2458.00		
02	2408.00	06	2428.00	10	2448.00	14	2463.00		
03	2413.00	07	2433.00	11	2488.00	15	2468.00		
04	2418.00	08	2438.00	12	2453.00	16	2473.00		



for module: 6936/mlink

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2403.00	09	2419.00	17	2435.00	25	2451.00	33	2467.00
02	2405.00	10	2421.00	18	2437.00	26	2453.00	34	2469.00
03	2407.00	11	2423.00	19	2439.00	27	2455.00	35	2471.00
04	2409.00	12	2425.00	20	2441.00	28	2457.00	36	2473.00
05	2411.00	13	2427.00	21	2443.00	29	2459.00	37	2475.00
06	2413.00	14	2429.00	22	2445.00	30	2461.00	38	2477.00
07	2415.00	15	2431.00	23	2447.00	31	2463.00	39	2479.00
08	2417.00	16	2433.00	24	2449.00	32	2465.00		

for module: 24L01/BUGSMINI

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2422.00	04	2431.00	07	2440.00	10	2449.00	13	2458.00
02	2425.00	05	2434.00	08	2443.00	11	2452.00	14	2461.00
03	2428.00	06	2437.00	09	2446.00	12	2455.00	15	2464.00


Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT was tested with channel 01, 24 and 47 for for module CC2500/D8.
EUT was tested with channel 01, 08 and 16 for for module A7105/flysky.
EUT was tested with channel 01, 20 and 39 for for module 6936/mlink.
EUT was tested with channel 01, 07 and 15 for for module 24L01/BUGSMINI.




1.5. Description Of Test Setup

CE

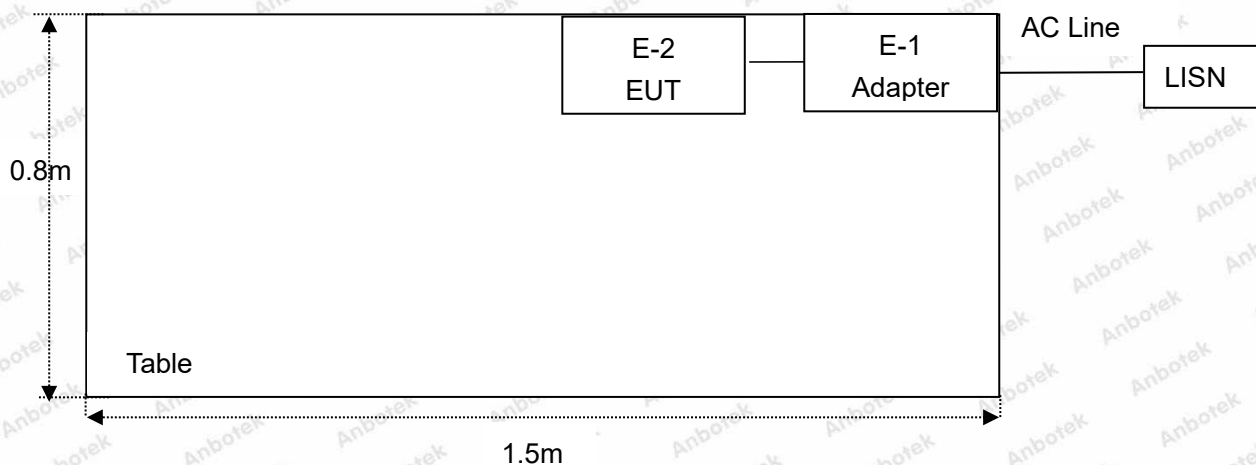

RE

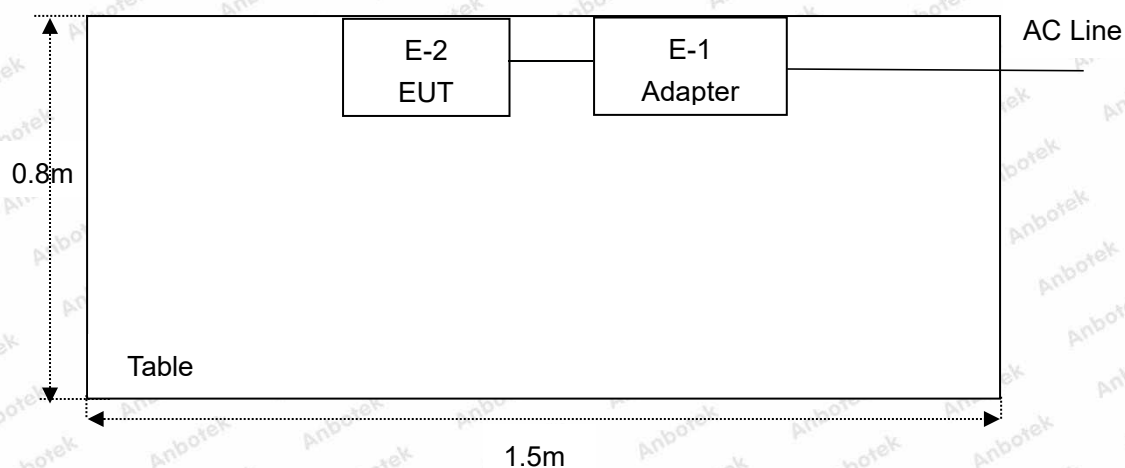

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 23, 2022	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul. 05, 2022	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 13, 2022	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 23, 2022	1 Year
5.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2022	1 Year
6.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 13, 2022	1 Year
7.	EMI Preamplifier	SKET Electronic	LNPA-0118G-45	SKET-PA-002	Oct. 13, 2022	1 Year
8.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 23, 2022	1 Year
10.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 23, 2022	1 Year
11.	Horn Antenna	A-INFO	LB-180400-KF	J211060628	Oct. 23, 2022	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	Oct. 23, 2022	1 Year
13.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
14.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 13, 2022	1 Year
15.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 13, 2022	1 Year
16.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 13, 2022	1 Year
17.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2022	1 Year
18.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 19, 2022	1 Year



1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(1)	Conducted Peak Output Power	PASS
15.247(a)(1)	20dB Occupied Bandwidth	PASS
15.247(a)(1)	Carrier Frequencies Separation	PASS
15.247(a)(1)(iii)	Number of Hopping Channel	PASS
15.247(a)(1)(iii)	Dwell Time	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

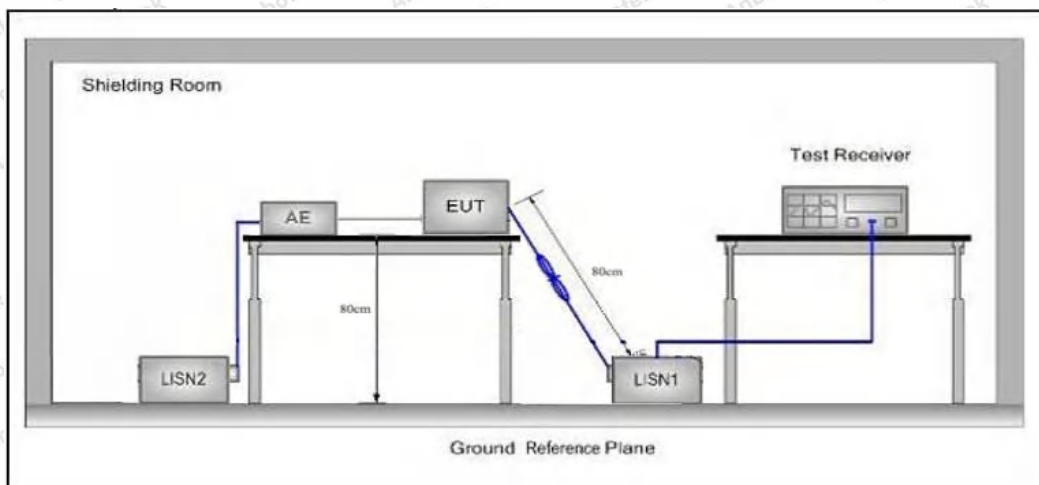

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

PASS

During the test, pre-scan all modes, only the worst case is recorded in the report.


AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case AC 120V/60Hz.

Please to see the following pages.



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 2403.94MHz for module CC2500/D8
Test Specification: AC 120V/60Hz for Adapter
Comment: Live Line
Temp.(°C)/Hum.(%RH): 22.8°C/51%RH

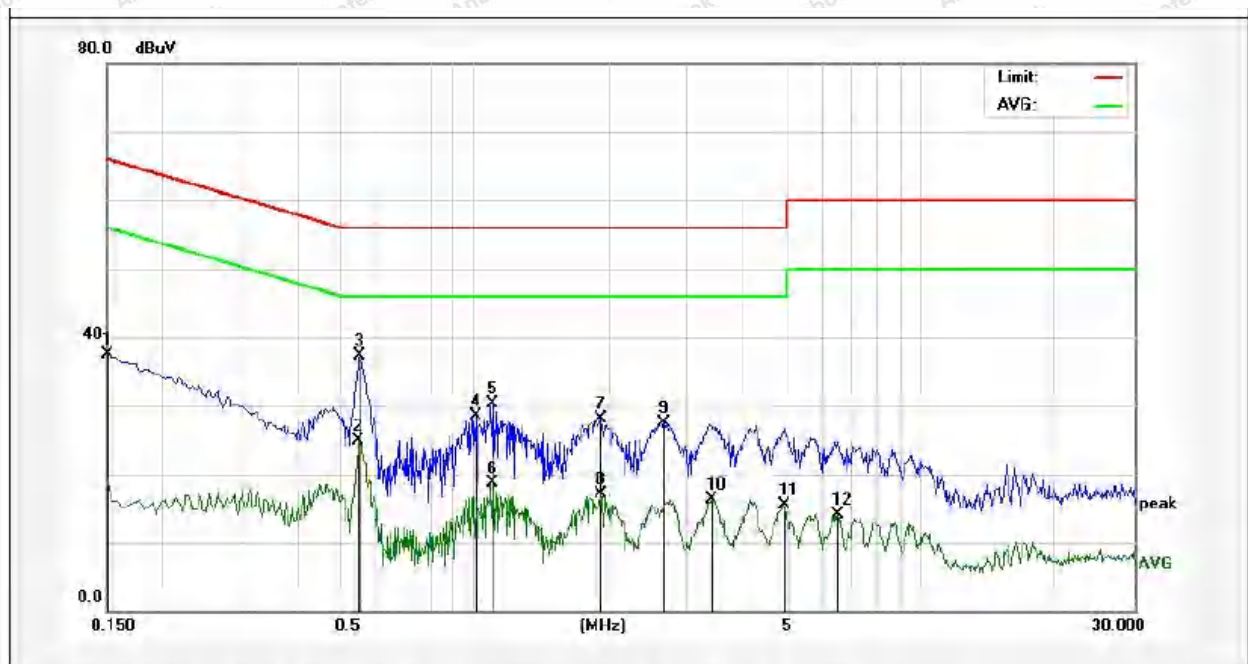


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	27.77	9.82	37.59	65.99	-28.40	QP	
2	0.5500	15.05	9.86	24.91	46.00	-21.09	AVG	
3	0.5540	27.37	9.86	37.23	56.00	-18.77	QP	
4	1.0100	18.60	9.86	28.46	56.00	-27.54	QP	
5	1.0980	20.46	9.86	30.32	56.00	-25.68	QP	
6	1.0980	8.79	9.86	18.65	46.00	-27.35	AVG	
7	1.9140	18.27	9.85	28.12	56.00	-27.88	QP	
8	1.9140	7.16	9.85	17.01	46.00	-28.99	AVG	
9	2.6619	17.61	9.85	27.46	56.00	-28.54	QP	
10	3.3860	6.42	9.85	16.27	46.00	-29.73	AVG	
11	4.9140	5.70	9.86	15.56	46.00	-30.44	AVG	
12	6.5140	4.20	9.89	14.09	50.00	-35.91	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 2403.94MHz for module CC2500/D8
Test Specification: AC 120V/60Hz for Adapter
Comment: Neutral Line
Temp.(°C)/Hum.(%RH): 22.8°C/51%RH

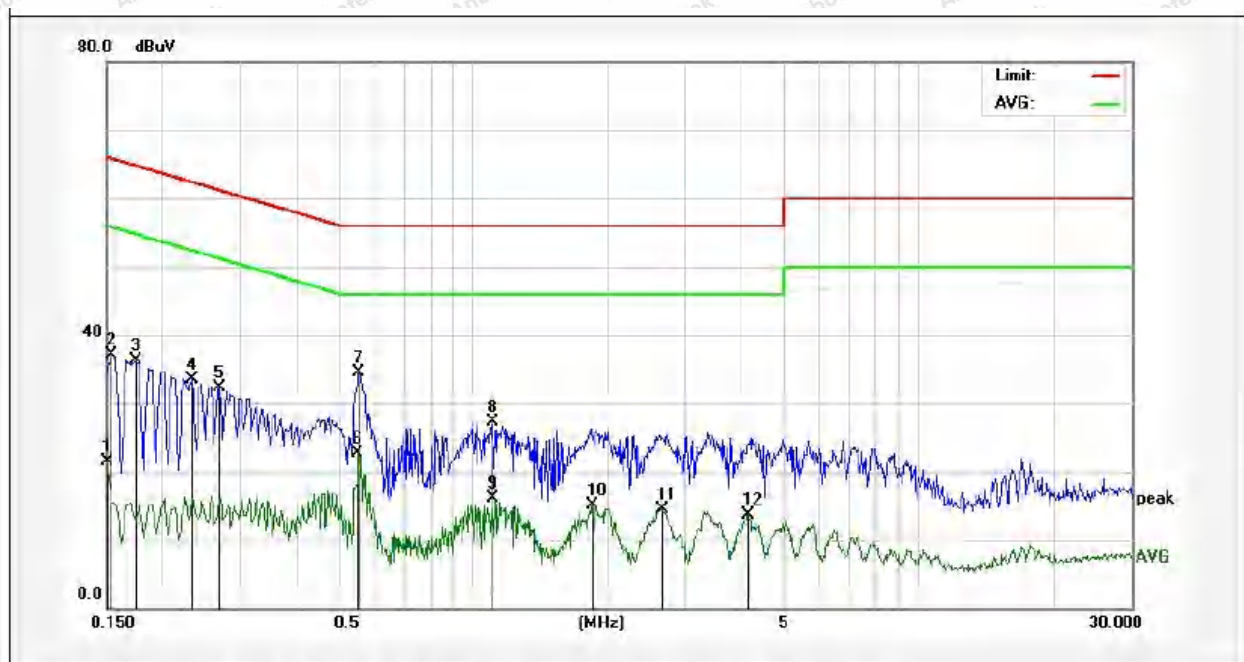


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	11.70	9.82	21.52	55.99	-34.47	AVG	
2	0.1539	27.35	9.83	37.18	65.78	-28.60	QP	
3	0.1740	26.38	9.83	36.21	64.76	-28.55	QP	
4	0.2340	23.71	9.82	33.53	62.30	-28.77	QP	
5	0.2700	22.42	9.84	32.26	61.12	-28.86	QP	
6	0.5500	12.85	9.86	22.71	46.00	-23.29	AVG	
7	0.5540	24.71	9.86	34.57	56.00	-21.43	QP	
8	1.1060	17.51	9.86	27.37	56.00	-28.63	QP	
9	1.1060	6.17	9.86	16.03	46.00	-29.97	AVG	
10	1.8580	5.23	9.85	15.08	46.00	-30.92	AVG	
11	2.6580	4.71	9.85	14.56	46.00	-31.44	AVG	
12	4.1140	3.85	9.85	13.70	46.00	-32.30	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 2403.5MHz for module A7105/flysky
Test Specification: AC 120V/60Hz for Adapter
Comment: Live Line
Temp.(°C)/Hum.(%RH): 22.8°C/51%RH

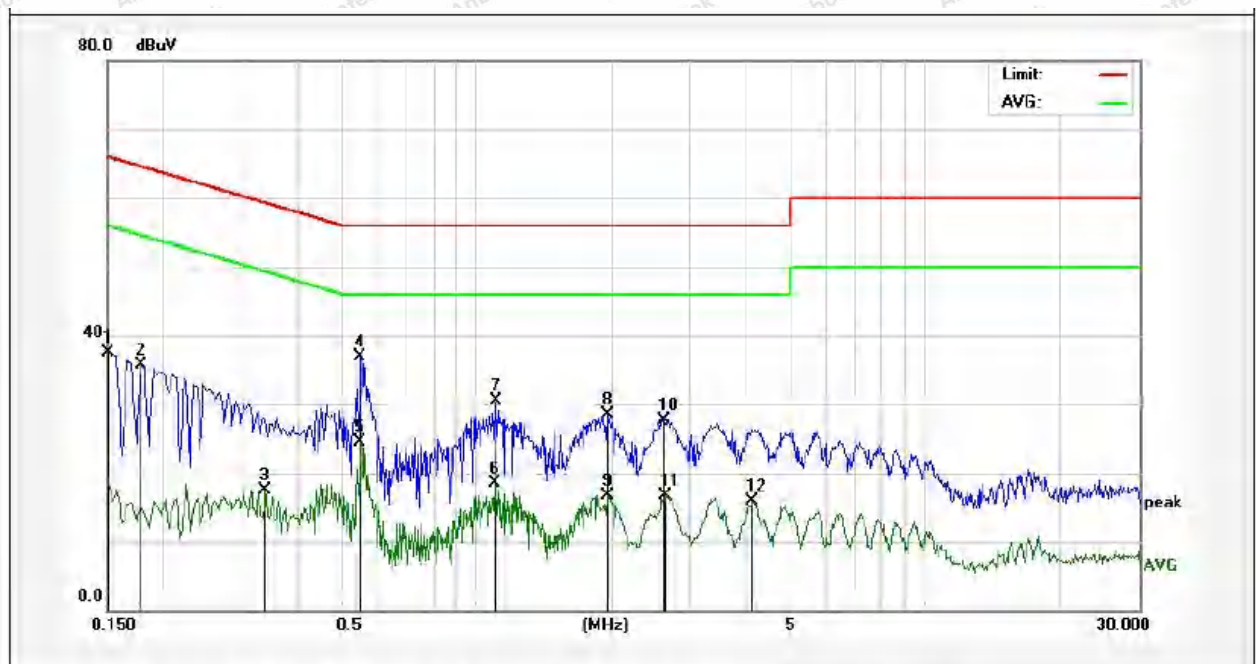


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	27.76	9.82	37.58	65.99	-28.41	QP	
2	0.1780	25.89	9.82	35.71	64.57	-28.86	QP	
3	0.3379	7.77	9.83	17.60	49.25	-31.65	AVG	
4	0.5500	26.98	9.86	36.84	56.00	-19.16	QP	
5	0.5500	14.62	9.86	24.48	46.00	-21.52	AVG	
6	1.0980	8.68	9.86	18.54	46.00	-27.46	AVG	
7	1.1100	20.55	9.86	30.41	56.00	-25.59	QP	
8	1.9500	18.56	9.85	28.41	56.00	-27.59	QP	
9	1.9500	6.79	9.85	16.64	46.00	-29.36	AVG	
10	2.6140	17.95	9.85	27.80	56.00	-28.20	QP	
11	2.6619	6.91	9.85	16.76	46.00	-29.24	AVG	
12	4.1300	6.06	9.85	15.91	46.00	-30.09	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 2403.5MHz for module A7105/flysky
Test Specification: AC 120V/60Hz for Adapter
Comment: Neutral Line
Temp.(°C)/Hum.(%RH): 22.8°C/51%RH

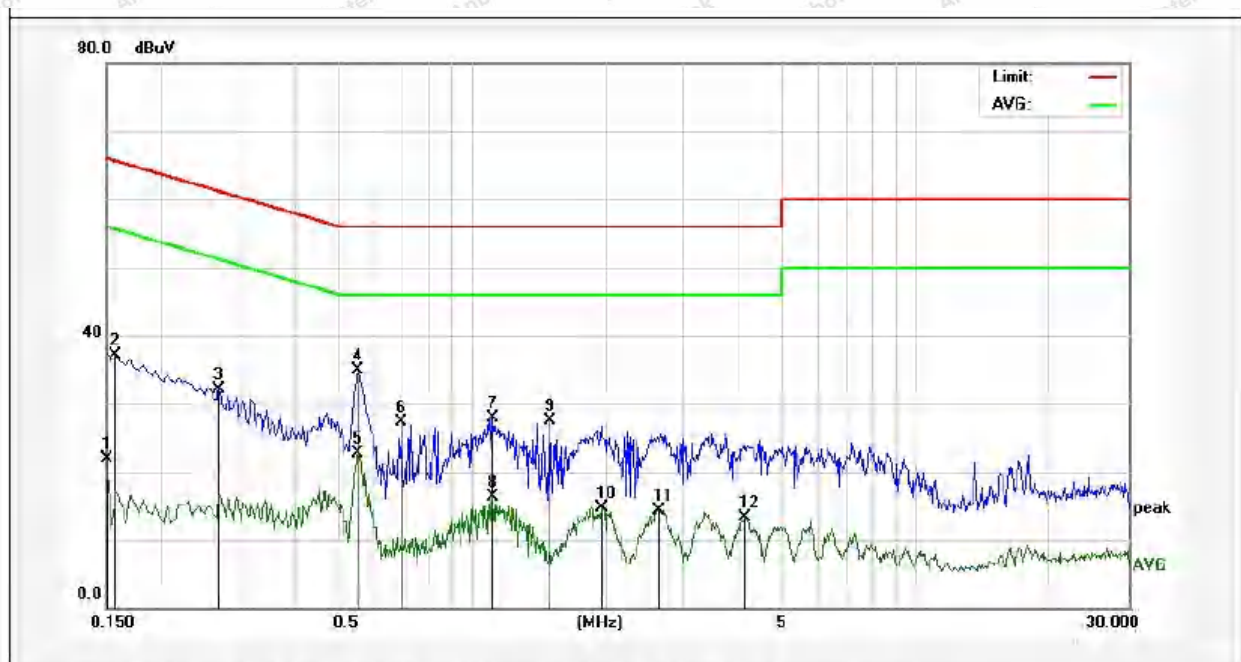


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	12.13	9.82	21.95	55.99	-34.04	AVG	
2	0.1580	27.35	9.83	37.18	65.56	-28.38	QP	
3	0.2700	22.36	9.84	32.20	61.12	-28.92	QP	
4	0.5540	25.00	9.86	34.86	56.00	-21.14	QP	
5	0.5540	12.80	9.86	22.66	46.00	-23.34	AVG	
6	0.6940	17.36	9.87	27.23	56.00	-28.77	QP	
7	1.1140	18.09	9.86	27.95	56.00	-28.05	QP	
8	1.1140	6.40	9.86	16.26	46.00	-29.74	AVG	
9	1.5020	17.67	9.85	27.52	56.00	-28.48	QP	
10	1.9540	4.89	9.85	14.74	46.00	-31.26	AVG	
11	2.6300	4.49	9.85	14.34	46.00	-31.66	AVG	
12	4.1340	3.48	9.85	13.33	46.00	-32.67	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 2403MHz for module 6936/mlink
Test Specification: AC 120V/60Hz for Adapter
Comment: Live Line
Temp.(°C)/Hum.(%RH): 22.8°C/51%RH

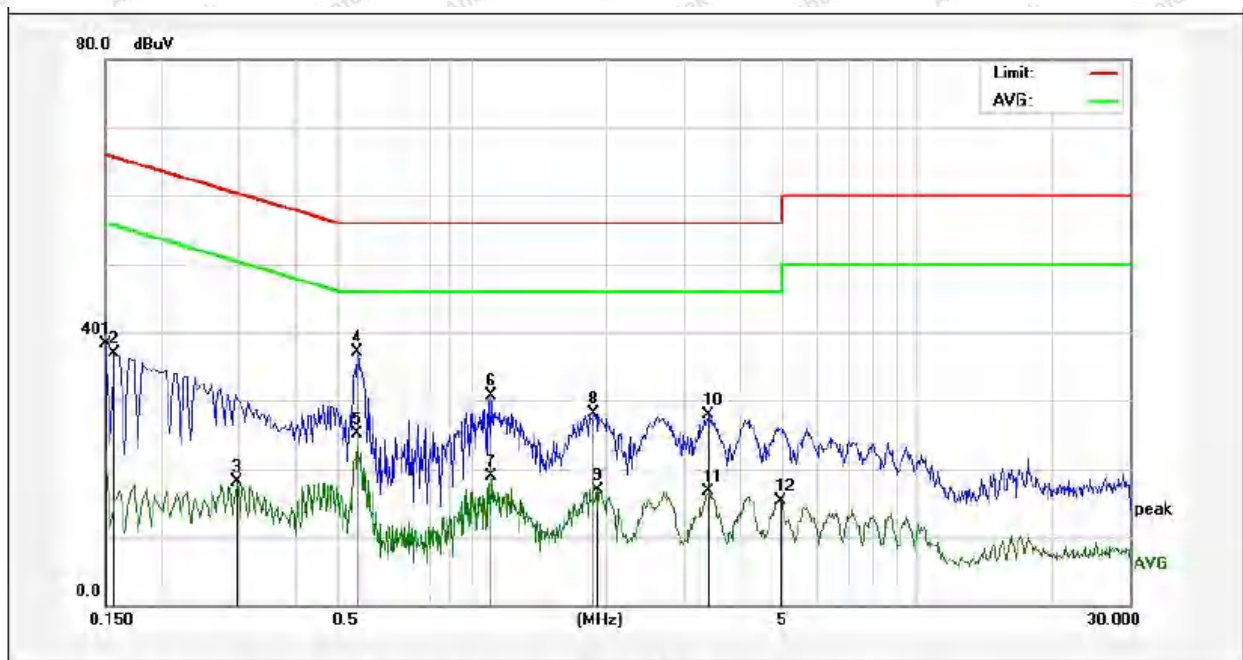


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	28.48	9.82	38.30	65.99	-27.69	QP	
2	0.1580	26.98	9.83	36.81	65.56	-28.75	QP	
3	0.2980	8.21	9.84	18.05	50.30	-32.25	AVG	
4	0.5540	27.24	9.86	37.10	56.00	-18.90	QP	
5	0.5540	15.18	9.86	25.04	46.00	-20.96	AVG	
6	1.1019	20.91	9.86	30.77	56.00	-25.23	QP	
7	1.1019	9.05	9.86	18.91	46.00	-27.09	AVG	
8	1.8820	18.30	9.85	28.15	56.00	-27.85	QP	
9	1.9180	7.07	9.85	16.92	46.00	-29.08	AVG	
10	3.4140	18.02	9.85	27.87	56.00	-28.13	QP	
11	3.4140	6.85	9.85	16.70	46.00	-29.30	AVG	
12	4.9420	5.48	9.86	15.34	46.00	-30.66	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 2403MHz for module 6936/mlink
Test Specification: AC 120V/60Hz for Adapter
Comment: Neutral Line
Temp.(°C)/Hum.(%RH): 22.8°C/51%RH

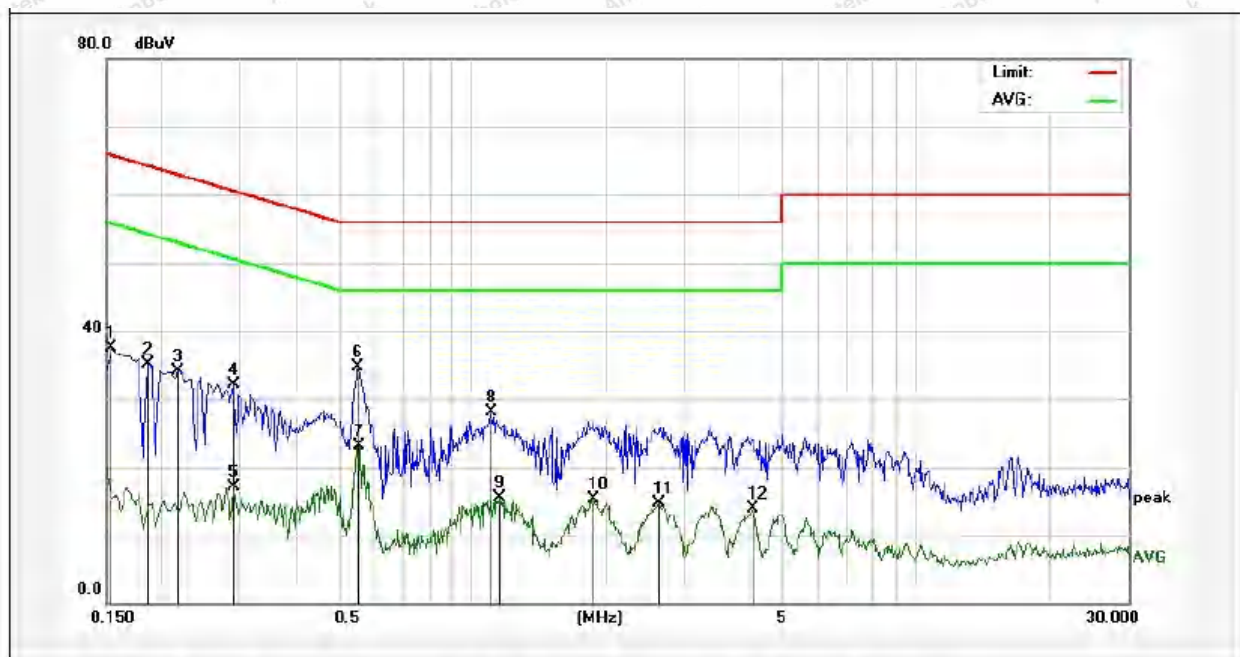


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	27.64	9.83	37.47	65.78	-28.31	QP	
2	0.1860	25.26	9.82	35.08	64.21	-29.13	QP	
3	0.2180	24.32	9.82	34.14	62.89	-28.75	QP	
4	0.2900	22.21	9.84	32.05	60.52	-28.47	QP	
5	0.2900	7.21	9.84	17.05	50.52	-33.47	AVG	
6	0.5540	24.84	9.86	34.70	56.00	-21.30	QP	
7	0.5580	13.24	9.86	23.10	46.00	-22.90	AVG	
8	1.1019	18.20	9.86	28.06	56.00	-27.94	QP	
9	1.1539	5.62	9.86	15.48	46.00	-30.52	AVG	
10	1.8780	5.53	9.85	15.38	46.00	-30.62	AVG	
11	2.6340	4.78	9.85	14.63	46.00	-31.37	AVG	
12	4.2740	4.05	9.85	13.90	46.00	-32.10	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 2464MHz for module 24L01/BUGSMINI
Test Specification: AC 120V/60Hz for Adapter
Comment: Live Line
Temp.(°C)/Hum.(%RH): 22.8°C/51%RH

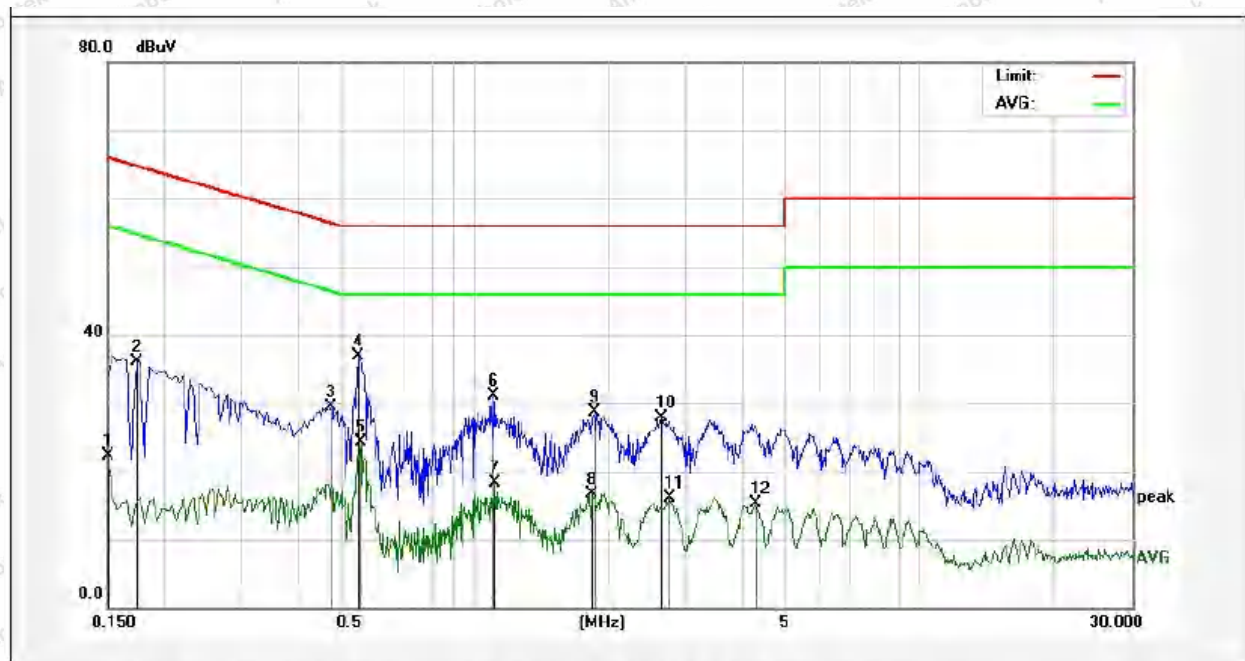


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	12.45	9.82	22.27	55.99	-33.72	AVG	
2	0.1740	26.35	9.83	36.18	64.76	-28.58	QP	
3	0.4780	19.67	9.85	29.52	56.37	-26.85	QP	
4	0.5500	27.04	9.86	36.90	56.00	-19.10	QP	
5	0.5580	14.49	9.86	24.35	46.00	-21.65	AVG	
6	1.1019	21.28	9.86	31.14	56.00	-24.86	QP	
7	1.1140	8.49	9.86	18.35	46.00	-27.65	AVG	
8	1.8300	6.94	9.86	16.80	46.00	-29.20	AVG	
9	1.8660	18.94	9.85	28.79	56.00	-27.21	QP	
10	2.6380	18.11	9.85	27.96	56.00	-28.04	QP	
11	2.7500	6.35	9.85	16.20	46.00	-29.80	AVG	
12	4.2900	5.55	9.85	15.40	46.00	-30.60	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 2464MHz for module 24L01/BUGSMINI
Test Specification: AC 120V/60Hz for Adapter
Comment: Neutral Line
Temp.(°C)/Hum.(%RH): 22.8°C/51%RH

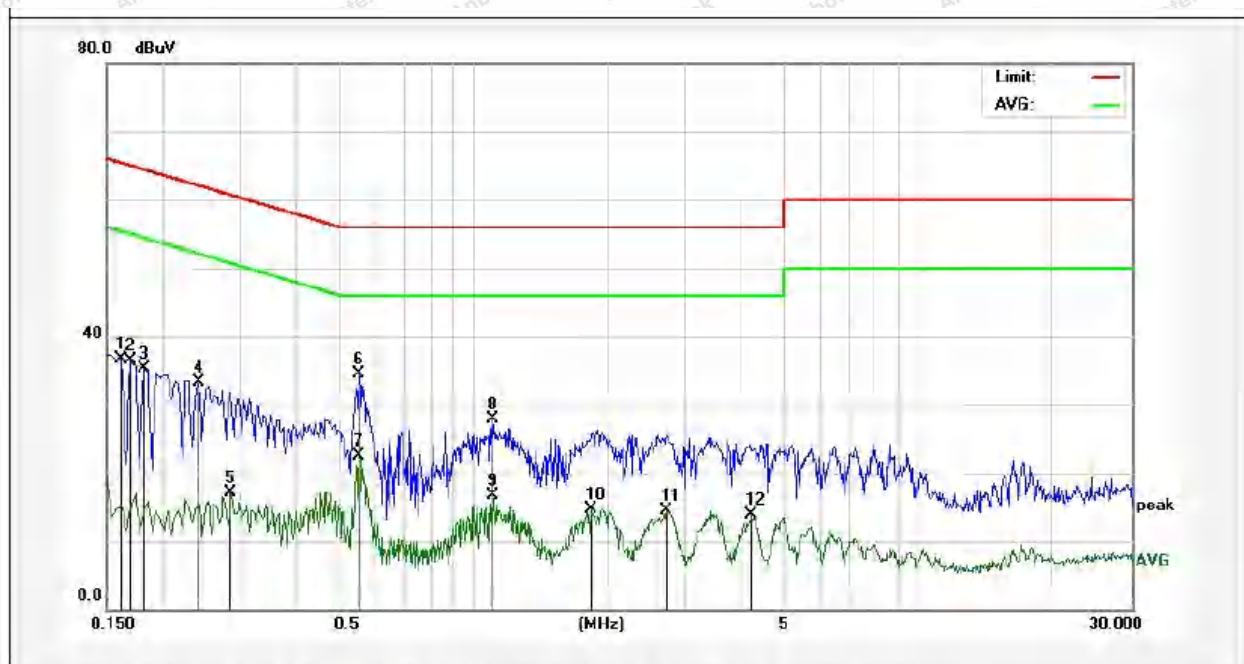

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1620	26.96	9.83	36.79	65.36	-28.57	QP	
2	0.1700	26.60	9.83	36.43	64.96	-28.53	QP	
3	0.1819	25.49	9.82	35.31	64.39	-29.08	QP	
4	0.2420	23.43	9.82	33.25	62.02	-28.77	QP	
5	0.2860	7.24	9.84	17.08	50.64	-33.56	AVG	
6	0.5540	24.69	9.86	34.55	56.00	-21.45	QP	
7	0.5540	12.62	9.86	22.48	46.00	-23.52	AVG	
8	1.1019	18.11	9.86	27.97	56.00	-28.03	QP	
9	1.1019	6.80	9.86	16.66	46.00	-29.34	AVG	
10	1.8300	4.89	9.86	14.75	46.00	-31.25	AVG	
11	2.7139	4.61	9.85	14.46	46.00	-31.54	AVG	
12	4.2180	3.97	9.85	13.82	46.00	-32.18	AVG	



4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

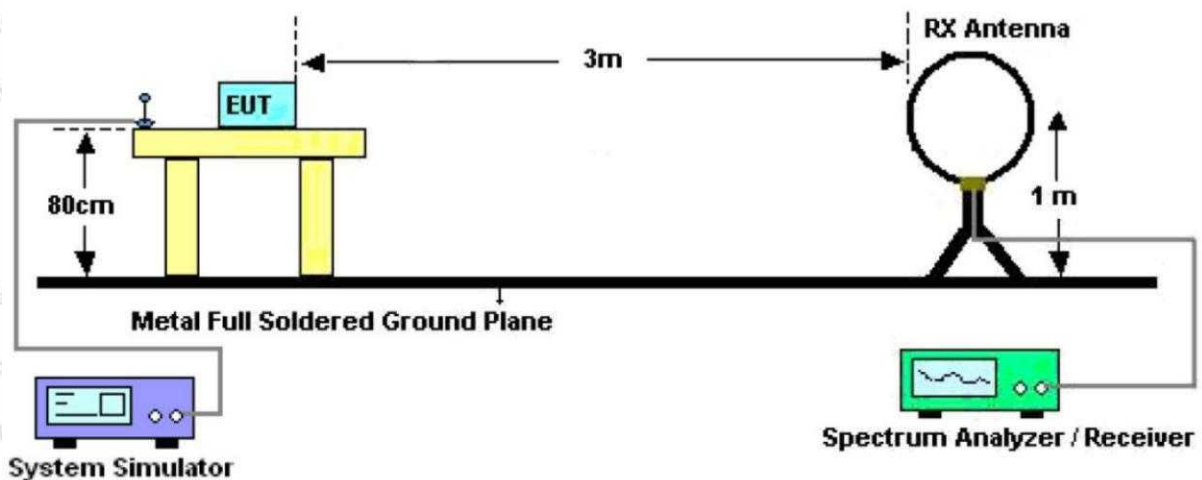


Figure 1. Below 30MHz



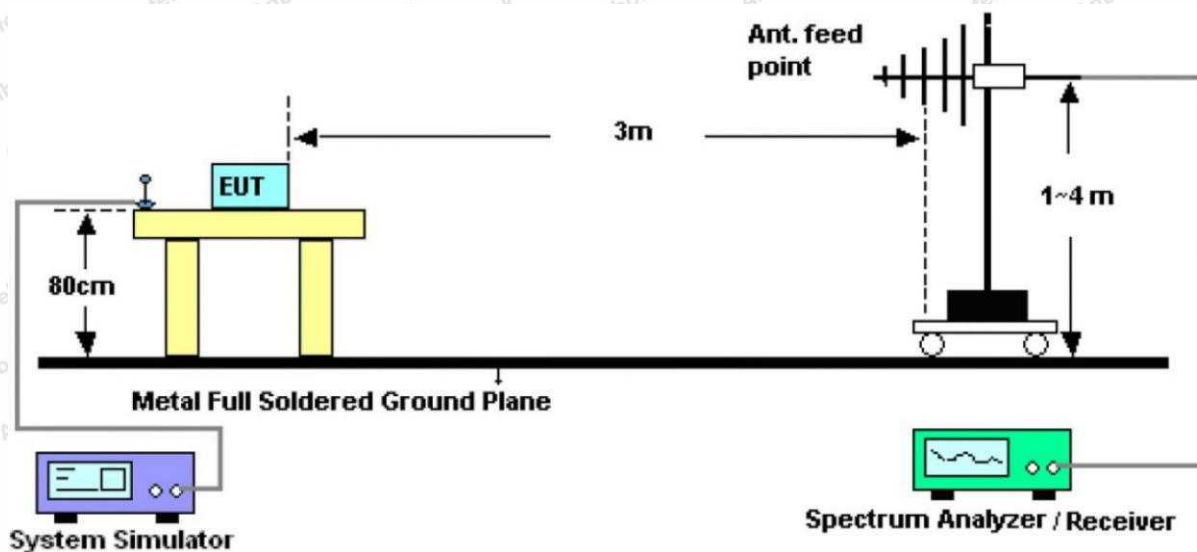


Figure 2. 30MHz to 1GHz

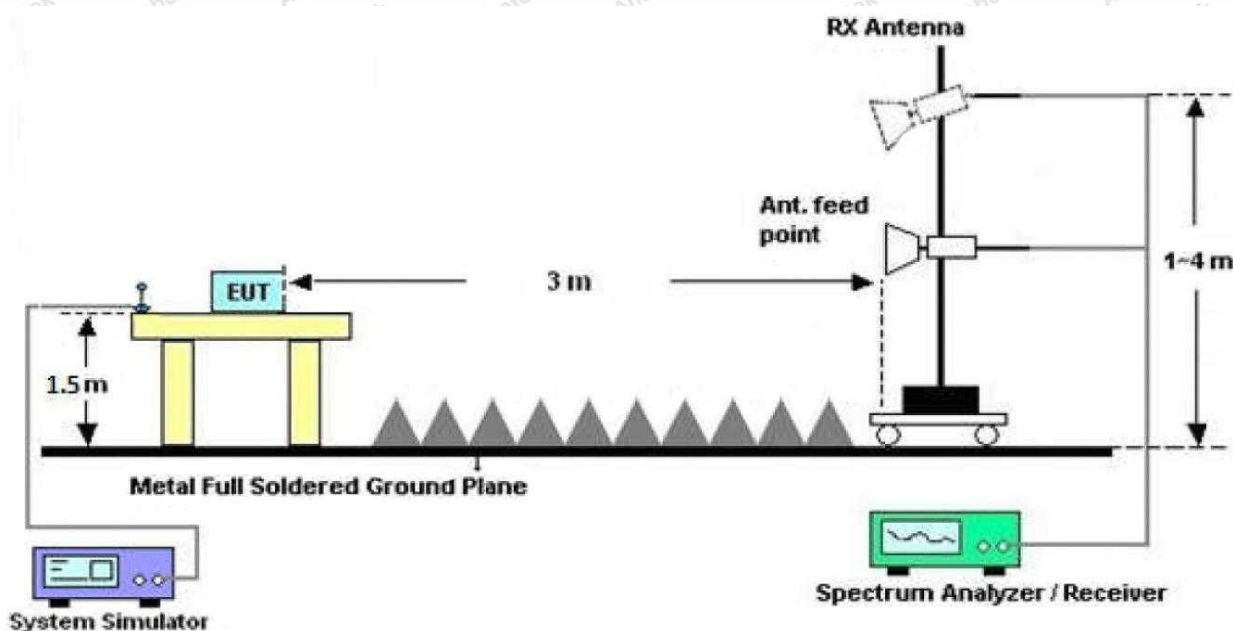


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.



For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 120kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

For average measurement: use duty cycle correction factor method (DCCF)

Average level = Peak level + DCCF

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, only the worst case is recorded in the report.




Test Results (30~1000MHz)

Test Mode: 2403.94MHz for module CC2500/D8

Power Source: AC 120V/60Hz for Adapter

Polarization: Vertical

Temp.(°C)/Hum.(%RH): 24.1°C/48%RH

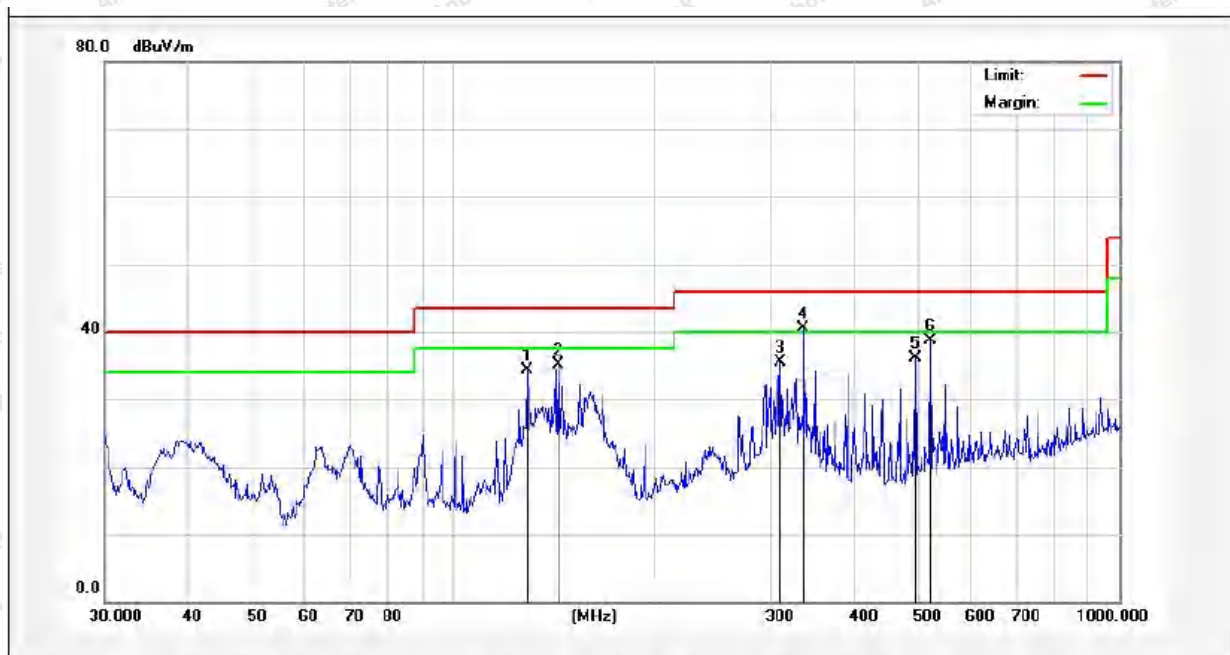

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	129.0146	55.59	-21.32	34.27	43.50	-9.23	QP			
2	143.8295	57.20	-22.15	35.05	43.50	-8.45	QP			
3	309.9977	51.48	-16.00	35.48	46.00	-10.52	QP			
4	336.0352	55.81	-15.35	40.46	46.00	-5.54	QP			
5	494.1984	48.53	-12.39	36.14	46.00	-9.86	QP			
6	520.8882	50.83	-12.03	38.80	46.00	-7.20	QP			




Test Results (30~1000MHz)

Test Mode: 2403.94MHz for module CC2500/D8

Power Source: AC 120V/60Hz for Adapter

Polarization: Horizontal

Temp.(°C)/Hum.(%RH): 24.1°C/48%RH

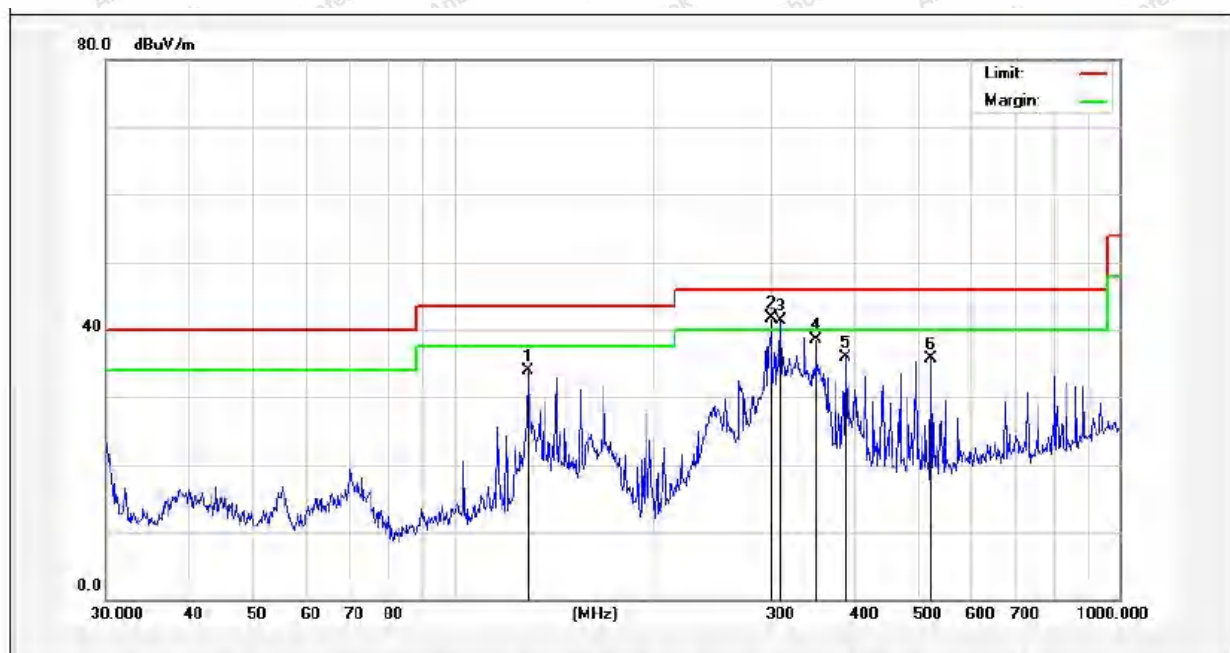

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	129.0146	56.54	-22.64	33.90	43.50	-9.60	QP			
2	299.3158	58.85	-17.22	41.63	46.00	-4.37	QP			
3	309.9977	58.32	-16.92	41.40	46.00	-4.60	QP			
4	349.2500	54.45	-16.01	38.44	46.00	-7.56	QP			
5	387.9920	52.07	-16.10	35.97	46.00	-10.03	QP			
6	520.8881	48.69	-12.93	35.76	46.00	-10.24	QP			



Test Results (30~1000MHz)

Test Mode: 2403.5MHz for module A7105/flysky

Power Source: AC 120V/60Hz for Adapter

Polarization: Vertical

Temp.(°C)/Hum.(%RH): 24.1°C/48%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	154.8204	50.99	-21.88	29.11	43.50	-14.39	QP			
2	309.9977	46.92	-16.00	30.92	46.00	-15.08	QP			
3	336.0352	54.73	-15.35	39.38	46.00	-6.62	QP			
4	494.1984	46.69	-12.39	34.30	46.00	-11.70	QP			
5	520.8882	49.81	-12.03	37.78	46.00	-8.22	QP			
6	547.0977	42.82	-11.79	31.03	46.00	-14.97	QP			




Test Results (30~1000MHz)

Test Mode: 2403.5MHz for module A7105/flysky

Power Source: AC 120V/60Hz for Adapter

Polarization: Horizontal

Temp.(°C)/Hum.(%RH): 24.1°C/48%RH

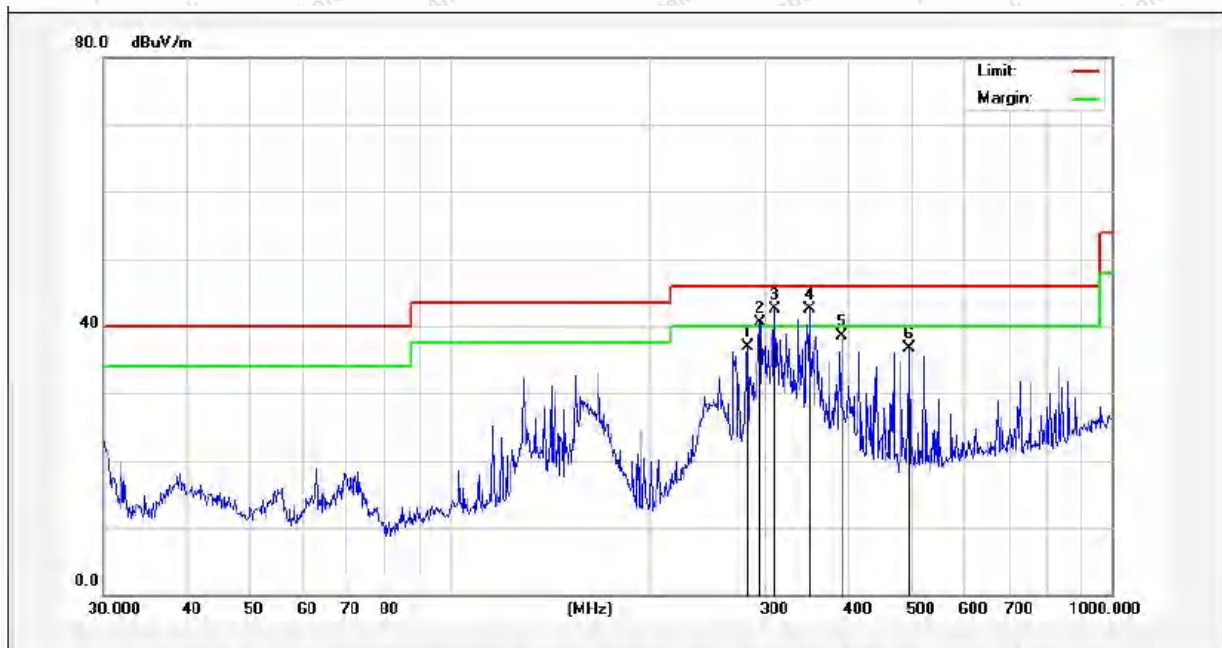

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	281.9946	55.73	-18.73	37.00	46.00	-9.00	QP			
2	294.1137	58.11	-17.67	40.44	46.00	-5.56	QP			
3	309.9977	59.51	-16.92	42.59	46.00	-3.41	QP			
4	349.2500	58.42	-16.01	42.41	46.00	-3.59	QP			
5	390.7226	54.64	-16.12	38.52	46.00	-7.48	QP			
6	494.1983	50.66	-13.96	36.70	46.00	-9.30	QP			




Test Results (30~1000MHz)

Test Mode: 2403MHz for module 6936/mlink

Power Source: AC 120V/60Hz for Adapter

Polarization: Vertical

Temp.(°C)/Hum.(%RH): 24.1°C/48%RH

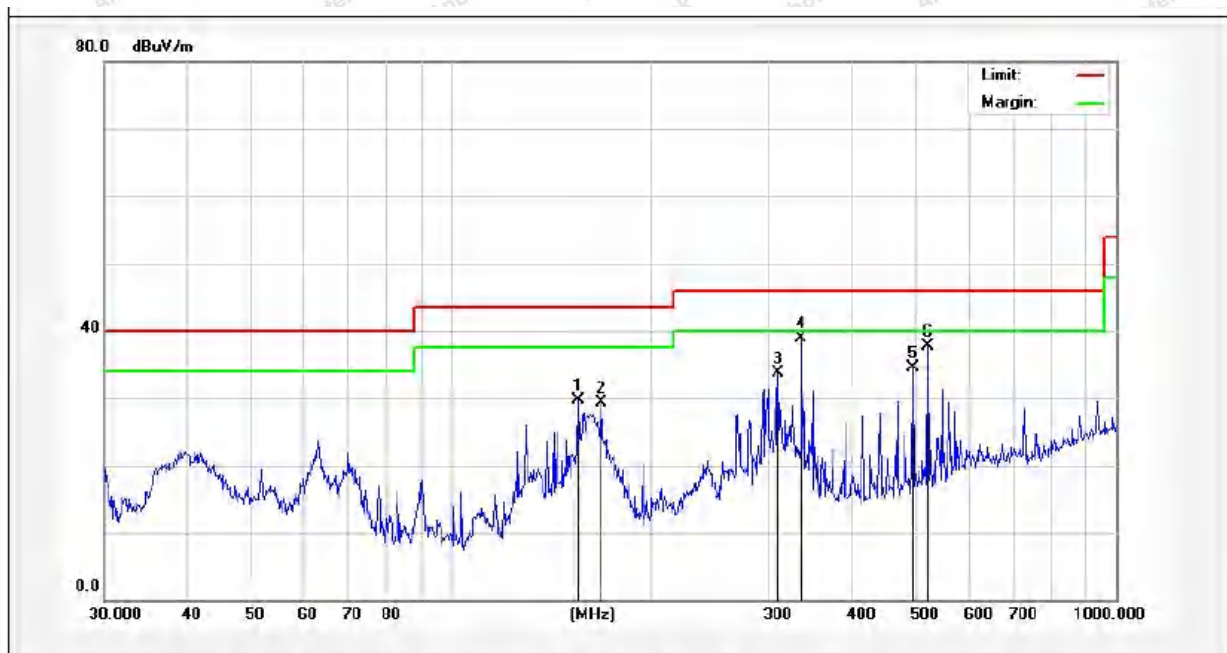

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	154.8204	51.62	-21.88	29.74	43.50	-13.76	QP			
2	167.8243	50.55	-21.23	29.32	43.50	-14.18	QP			
3	309.9977	49.70	-16.00	33.70	46.00	-12.30	QP			
4	336.0352	54.24	-15.35	38.89	46.00	-7.11	QP			
5	494.1984	46.98	-12.39	34.59	46.00	-11.41	QP			
6	520.8882	49.81	-12.03	37.78	46.00	-8.22	QP			




Test Results (30~1000MHz)

Test Mode: 2403MHz for module 6936/mlink

Power Source: AC 120V/60Hz for Adapter

Polarization: Horizontal

Temp.(°C)/Hum.(%RH): 24.1°C/48%RH

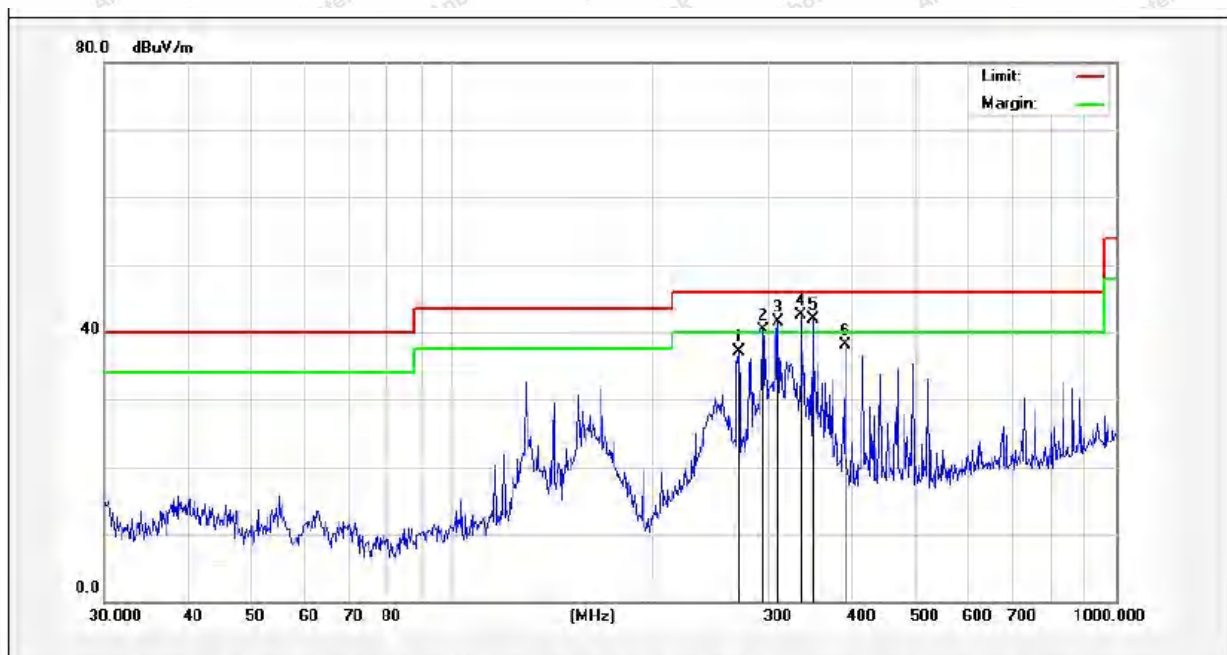

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	270.3748	56.77	-19.72	37.05	46.00	-8.95	QP			
2	294.1137	57.96	-17.67	40.29	46.00	-5.71	QP			
3	309.9977	58.44	-16.92	41.52	46.00	-4.48	QP			
4	336.0351	58.88	-16.32	42.56	46.00	-3.44	QP			
5	349.2500	57.87	-16.01	41.86	46.00	-4.14	QP			
6	390.7226	54.18	-16.12	38.06	46.00	-7.94	QP			




Test Results (30~1000MHz)

Test Mode: 2464MHz for module 24L01/BUGSMINI

Power Source: AC 120V/60Hz for Adapter

Polarization: Vertical

Temp.(°C)/Hum.(%RH): 24.1°C/48%RH

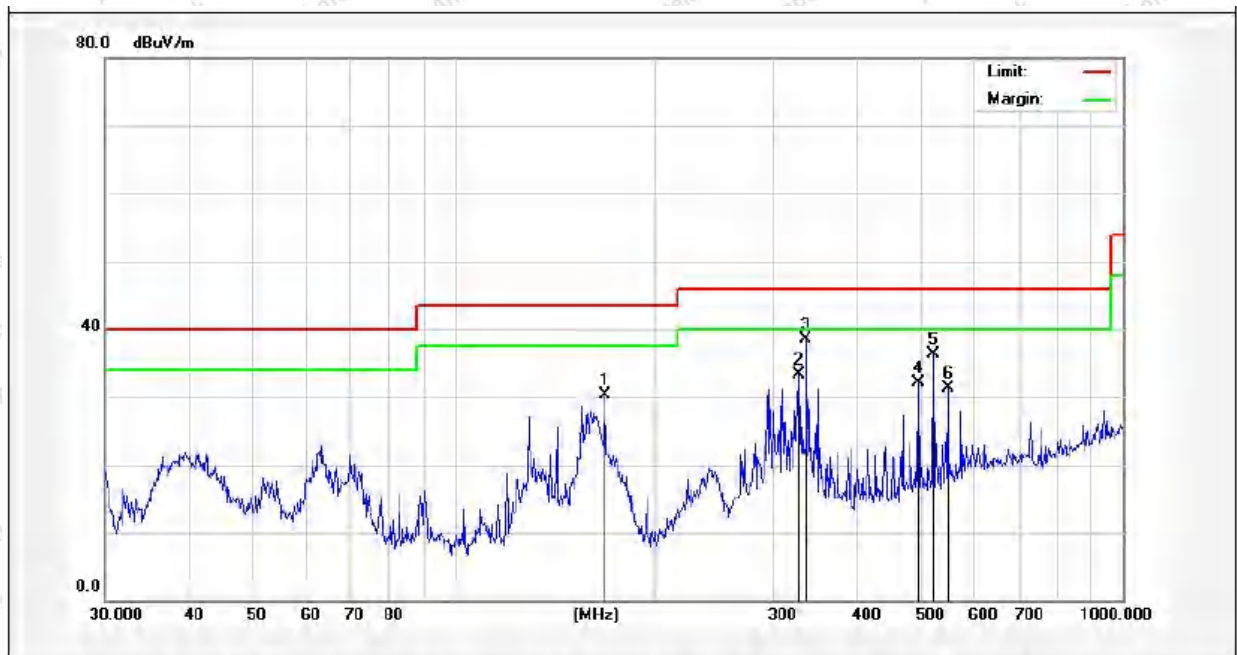

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	167.8243	51.63	-21.24	30.39	43.50	-13.11	QP			
2	327.8873	48.93	-15.56	33.37	46.00	-12.63	QP			
3	336.0352	53.94	-15.35	38.59	46.00	-7.41	QP			
4	494.1984	44.57	-12.39	32.18	46.00	-13.82	QP			
5	520.8882	48.37	-12.03	36.34	46.00	-9.66	QP			
6	547.0977	43.19	-11.79	31.40	46.00	-14.60	QP			




Test Results (30~1000MHz)

Test Mode: 2464MHz for module 24L01/BUGSMINI

Power Source: AC 120V/60Hz for Adapter

Polarization: Horizontal

Temp.(°C)/Hum.(%RH): 24.1°C/48%RH

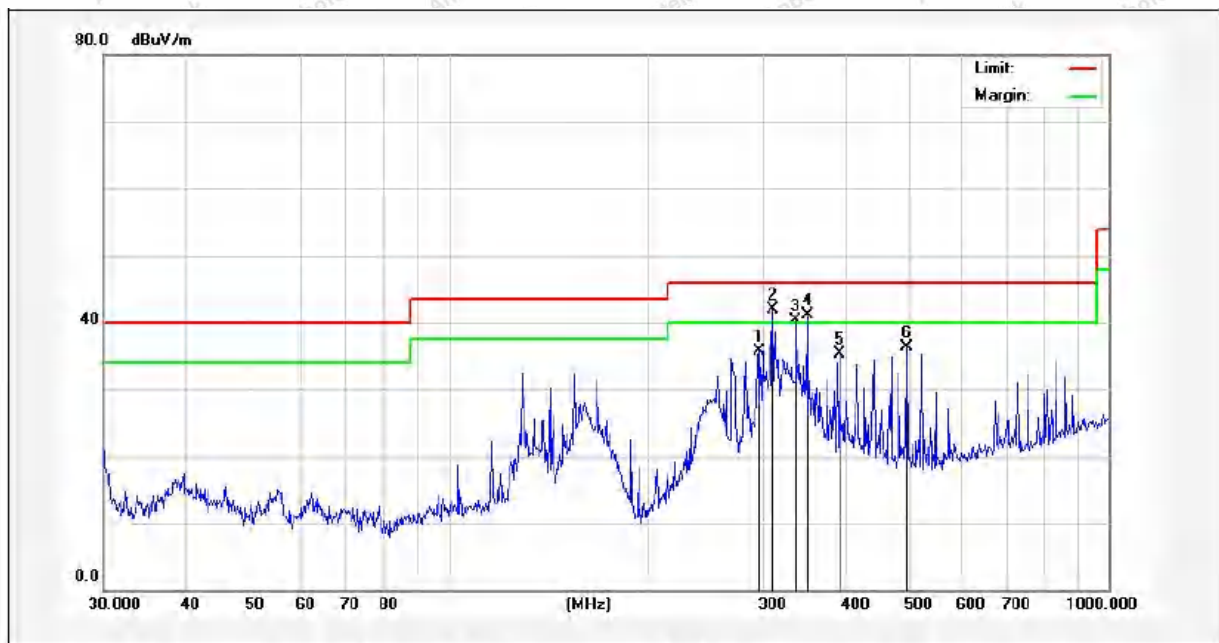

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	295.1469	53.33	-17.59	35.74	46.00	-10.26	QP			
2	309.9977	58.89	-16.92	41.97	46.00	-4.03	QP			
3	336.0351	56.59	-16.32	40.27	46.00	-5.73	QP			
4	349.2500	57.07	-16.01	41.06	46.00	-4.94	QP			
5	390.7226	51.44	-16.12	35.32	46.00	-10.68	QP			
6	494.1984	50.23	-13.96	36.27	46.00	-9.73	QP			



For module: CC2500/D8**Test Results (1GHz-25GHz)**

Test channel: Lowest

Peak value:

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4807.88	28.02	15.27	43.29	74.00	-30.71	Vertical
7211.82	29.22	18.09	47.31	74.00	-26.69	Vertical
9615.76	30.19	23.76	53.95	74.00	-20.06	Vertical
12019.70	*			74.00		Vertical
14423.64	*			74.00		Vertical
4807.88	28.42	15.27	43.69	74.00	-30.31	Horizontal
7211.82	29.13	18.09	47.22	74.00	-26.78	Horizontal
9615.76	28.74	23.76	52.50	74.00	-21.50	Horizontal
12019.70	*			74.00		Horizontal
14423.64	*			74.00		Horizontal

Average value:

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4807.88	17.40	15.27	32.67	54.00	-21.33	Vertical
7211.82	18.25	18.09	36.34	54.00	-17.66	Vertical
9615.76	19.21	23.76	42.97	54.00	-11.04	Vertical
12019.70	*			54.00		Vertical
14423.64	*			54.00		Vertical
4807.88	16.77	15.27	32.04	54.00	-21.96	Horizontal
7211.82	18.19	18.09	36.28	54.00	-17.72	Horizontal
9615.76	18.05	23.76	41.81	54.00	-12.19	Horizontal
12019.70	*			54.00		Horizontal
14423.64	*			54.00		Horizontal



Test Results (1GHz-25GHz)

Test channel: Middle						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4876.88	28.04	15.42	43.46	74.00	-30.54	Vertical
7315.32	29.07	18.02	47.09	74.00	-26.91	Vertical
9753.76	29.20	23.80	53.00	74.00	-21.01	Vertical
12192.20	*			74.00		Vertical
14630.64	*			74.00		Vertical
4876.88	28.12	15.42	43.54	74.00	-30.46	Horizontal
7315.32	29.12	18.02	47.14	74.00	-26.86	Horizontal
9753.76	28.44	23.80	52.24	74.00	-21.76	Horizontal
12192.20	*			74.00		Horizontal
14630.64	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4876.88	17.13	15.42	32.55	54.00	-21.45	Vertical
7315.32	18.35	18.02	36.37	54.00	-17.63	Vertical
9753.76	19.07	23.80	42.87	54.00	-11.14	Vertical
12192.20	*			54.00		Vertical
14630.64	*			54.00		Vertical
4876.88	16.68	15.42	32.10	54.00	-21.90	Horizontal
7315.32	17.75	18.02	35.77	54.00	-18.23	Horizontal
9753.76	18.56	23.80	42.36	54.00	-11.64	Horizontal
12192.20	*			54.00		Horizontal
14630.64	*			54.00		Horizontal



Test Results (1GHz-25GHz)

Test channel: Highest						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4945.88	28.31	15.58	43.89	74.00	-30.11	Vertical
7418.82	29.08	17.93	47.01	74.00	-26.99	Vertical
9891.76	29.75	23.83	53.58	74.00	-20.43	Vertical
12364.70	*			74.00		Vertical
14837.64	*			74.00		Vertical
4945.88	28.19	15.58	43.77	74.00	-30.23	Horizontal
7418.82	29.15	17.93	47.08	74.00	-26.92	Horizontal
9891.76	29.12	23.83	52.95	74.00	-21.05	Horizontal
12364.70	*			74.00		Horizontal
14837.64	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4945.88	18.25	15.58	33.83	54.00	-20.17	Vertical
7418.82	19.36	17.93	37.29	54.00	-16.71	Vertical
9891.76	19.62	23.83	43.45	54.00	-10.56	Vertical
12364.70	*			54.00		Vertical
14837.64	*			54.00		Vertical
4945.88	18.12	15.58	33.70	54.00	-20.30	Horizontal
7418.82	19.12	17.93	37.05	54.00	-16.95	Horizontal
9891.76	18.46	23.83	42.29	54.00	-11.71	Horizontal
12364.70	*			54.00		Horizontal
14837.64	*			54.00		Horizontal

Remark:

1. Result = Reading + Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



For module: A7105/flysky**Test Results (1GHz-25GHz)**

Test channel: Lowest

Peak value:

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4807.00	27.90	15.27	43.17	74.00	-30.83	Vertical
7210.50	29.10	18.09	47.19	74.00	-26.81	Vertical
9614.00	30.04	23.76	53.80	74.00	-20.21	Vertical
12017.50	*			74.00		Vertical
14421.00	*			74.00		Vertical
4807.00	28.30	15.27	43.57	74.00	-30.43	Horizontal
7210.50	29.01	18.09	47.10	74.00	-26.90	Horizontal
9614.00	28.68	23.76	52.44	74.00	-21.56	Horizontal
12017.50	*			74.00		Horizontal
14421.00	*			74.00		Horizontal

Average value:

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4807.00	17.28	15.27	32.55	54.00	-21.45	Vertical
7210.50	18.13	18.09	36.22	54.00	-17.78	Vertical
9614.00	19.06	23.76	42.82	54.00	-11.19	Vertical
12017.50	*			54.00		Vertical
14421.00	*			54.00		Vertical
4807.00	16.65	15.27	31.92	54.00	-22.08	Horizontal
7210.50	18.07	18.09	36.16	54.00	-17.84	Horizontal
9614.00	17.99	23.76	41.75	54.00	-12.25	Horizontal
12017.50	*			54.00		Horizontal
14421.00	*			54.00		Horizontal



Test Results (1GHz-25GHz)

Test channel: Middle						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4876.00	27.92	15.42	43.34	74.00	-30.66	Vertical
7314.00	28.95	18.02	46.97	74.00	-27.03	Vertical
9752.00	29.05	23.80	52.85	74.00	-21.16	Vertical
12190.00	*			74.00		Vertical
14628.00	*			74.00		Vertical
4876.00	28.00	15.42	43.42	74.00	-30.58	Horizontal
7314.00	29.00	18.02	47.02	74.00	-26.98	Horizontal
9752.00	28.38	23.80	52.18	74.00	-21.82	Horizontal
12190.00	*			74.00		Horizontal
14628.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4876.00	17.01	15.42	32.43	54.00	-21.57	Vertical
7314.00	18.23	18.02	36.25	54.00	-17.75	Vertical
9752.00	18.92	23.80	42.72	54.00	-11.29	Vertical
12190.00	*			54.00		Vertical
14628.00	*			54.00		Vertical
4876.00	16.56	15.42	31.98	54.00	-22.02	Horizontal
7314.00	17.63	18.02	35.65	54.00	-18.35	Horizontal
9752.00	18.50	23.80	42.30	54.00	-11.70	Horizontal
12190.00	*			54.00		Horizontal
14628.00	*			54.00		Horizontal



Test Results (1GHz-25GHz)

Test channel: Highest						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4946.00	28.19	15.58	43.77	74.00	-30.23	Vertical
7419.00	28.96	17.93	46.89	74.00	-27.11	Vertical
9892.00	29.60	23.83	53.43	74.00	-20.58	Vertical
12365.00	*			74.00		Vertical
14838.00	*			74.00		Vertical
4946.00	28.07	15.58	43.65	74.00	-30.35	Horizontal
7419.00	29.03	17.93	46.96	74.00	-27.04	Horizontal
9892.00	29.06	23.83	52.89	74.00	-21.11	Horizontal
12365.00	*			74.00		Horizontal
14838.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4946.00	18.13	15.58	33.71	54.00	-20.29	Vertical
7419.00	19.24	17.93	37.17	54.00	-16.83	Vertical
9892.00	19.47	23.83	43.30	54.00	-10.71	Vertical
12365.00	*			54.00		Vertical
14838.00	*			54.00		Vertical
4946.00	18.00	15.58	33.58	54.00	-20.42	Horizontal
7419.00	19.00	17.93	36.93	54.00	-17.07	Horizontal
9892.00	18.40	23.83	42.23	54.00	-11.77	Horizontal
12365.00	*			54.00		Horizontal
14838.00	*			54.00		Horizontal

Remark:

1. Result = Reading + Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



For module: 6936/mlink**Test Results (1GHz-25GHz)**

Test channel: Lowest

Peak value:

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4806.00	27.72	15.27	42.99	74.00	-31.01	Vertical
7209.00	28.93	18.09	47.02	74.00	-26.98	Vertical
9612.00	29.82	23.76	53.58	74.00	-20.42	Vertical
12015.00	*			74.00		Vertical
14418.00	*			74.00		Vertical
4806.00	28.12	15.27	43.39	74.00	-30.61	Horizontal
7209.00	28.84	18.09	46.93	74.00	-27.07	Horizontal
9612.00	28.58	23.76	52.34	74.00	-21.66	Horizontal
12015.00	*			74.00		Horizontal
14418.00	*			74.00		Horizontal

Average value:

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4806.00	17.10	15.27	32.37	54.00	-21.63	Vertical
7209.00	17.96	18.09	36.05	54.00	-17.95	Vertical
9612.00	18.84	23.76	42.60	54.00	-11.40	Vertical
12015.00	*			54.00		Vertical
14418.00	*			54.00		Vertical
4806.00	16.47	15.27	31.74	54.00	-22.26	Horizontal
7209.00	17.90	18.09	35.99	54.00	-18.01	Horizontal
9612.00	17.89	23.76	41.65	54.00	-12.35	Horizontal
12015.00	*			54.00		Horizontal
14418.00	*			54.00		Horizontal



Test Results (1GHz-25GHz)

Test channel: Middle						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4882.00	27.74	15.42	43.16	74.00	-30.84	Vertical
7323.00	28.78	18.02	46.80	74.00	-27.20	Vertical
9764.00	28.83	23.80	52.63	74.00	-21.37	Vertical
12205.00	*			74.00		Vertical
14646.00	*			74.00		Vertical
4882.00	27.82	15.42	43.24	74.00	-30.76	Horizontal
7323.00	28.83	18.02	46.85	74.00	-27.15	Horizontal
9764.00	28.28	23.80	52.08	74.00	-21.92	Horizontal
12205.00	*			74.00		Horizontal
14646.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4882.00	16.83	15.42	32.25	54.00	-21.75	Vertical
7323.00	18.06	18.02	36.08	54.00	-17.92	Vertical
9764.00	18.70	23.80	42.50	54.00	-11.50	Vertical
12205.00	*			54.00		Vertical
14646.00	*			54.00		Vertical
4882.00	16.38	15.42	31.80	54.00	-22.20	Horizontal
7323.00	17.46	18.02	35.48	54.00	-18.52	Horizontal
9764.00	18.40	23.80	42.20	54.00	-11.80	Horizontal
12205.00	*			54.00		Horizontal
14646.00	*			54.00		Horizontal



Test Results (1GHz-25GHz)

Test channel: Highest						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4958.00	28.01	15.58	43.59	74.00	-30.41	Vertical
7437.00	28.79	17.93	46.72	74.00	-27.28	Vertical
9916.00	29.38	23.83	53.21	74.00	-20.79	Vertical
12395.00	*			74.00		Vertical
14874.00	*			74.00		Vertical
4958.00	27.89	15.58	43.47	74.00	-30.53	Horizontal
7437.00	28.86	17.93	46.79	74.00	-27.21	Horizontal
9916.00	28.96	23.83	52.79	74.00	-21.21	Horizontal
12395.00	*			74.00		Horizontal
14874.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4958.00	17.95	15.58	33.53	54.00	-20.47	Vertical
7437.00	19.07	17.93	37.00	54.00	-17.00	Vertical
9916.00	19.25	23.83	43.08	54.00	-10.92	Vertical
12395.00	*			54.00		Vertical
14874.00	*			54.00		Vertical
4958.00	17.82	15.58	33.40	54.00	-20.60	Horizontal
7437.00	18.83	17.93	36.76	54.00	-17.24	Horizontal
9916.00	18.30	23.83	42.13	54.00	-11.87	Horizontal
12395.00	*			54.00		Horizontal
14874.00	*			54.00		Horizontal

Remark:

1. Result = Reading + Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



For module: 24L01/BUGSMINI**Test Results (1GHz-25GHz)**

Test channel: Lowest

Peak value:

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4844.00	27.63	15.27	42.90	74.00	-31.10	Vertical
7266.00	28.84	18.09	46.93	74.00	-27.07	Vertical
9688.00	29.71	23.76	53.47	74.00	-20.53	Vertical
12110.00	*			74.00		Vertical
14532.00	*			74.00		Vertical
4844.00	28.03	15.27	43.30	74.00	-30.70	Horizontal
7266.00	28.76	18.09	46.85	74.00	-27.15	Horizontal
9688.00	28.53	23.76	52.29	74.00	-21.71	Horizontal
12110.00	*			74.00		Horizontal
14532.00	*			74.00		Horizontal

Average value:

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4844.00	17.01	15.27	32.28	54.00	-21.72	Vertical
7266.00	17.87	18.09	35.96	54.00	-18.04	Vertical
9688.00	18.73	23.76	42.49	54.00	-11.51	Vertical
12110.00	*			54.00		Vertical
14532.00	*			54.00		Vertical
4844.00	16.38	15.27	31.65	54.00	-22.35	Horizontal
7266.00	17.82	18.09	35.91	54.00	-18.09	Horizontal
9688.00	17.84	23.76	41.60	54.00	-12.40	Horizontal
12110.00	*			54.00		Horizontal
14532.00	*			54.00		Horizontal



Test Results (1GHz-25GHz)

Test channel: Middle						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	27.65	15.42	43.07	74.00	-30.93	Vertical
7320.00	28.69	18.02	46.71	74.00	-27.29	Vertical
9760.00	28.72	23.80	52.52	74.00	-21.48	Vertical
12200.00	*			74.00		Vertical
14640.00	*			74.00		Vertical
4880.00	27.73	15.42	43.15	74.00	-30.85	Horizontal
7320.00	28.75	18.02	46.77	74.00	-27.23	Horizontal
9760.00	28.23	23.80	52.03	74.00	-21.97	Horizontal
12200.00	*			74.00		Horizontal
14640.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	16.74	15.42	32.16	54.00	-21.84	Vertical
7320.00	17.97	18.02	35.99	54.00	-18.01	Vertical
9760.00	18.59	23.80	42.39	54.00	-11.61	Vertical
12200.00	*			54.00		Vertical
14640.00	*			54.00		Vertical
4880.00	16.29	15.42	31.71	54.00	-22.29	Horizontal
7320.00	17.38	18.02	35.40	54.00	-18.60	Horizontal
9760.00	18.35	23.80	42.15	54.00	-11.85	Horizontal
12200.00	*			54.00		Horizontal
14640.00	*			54.00		Horizontal



Test Results (1GHz-25GHz)

Test channel: Highest						
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4928.00	27.92	15.58	43.50	74.00	-30.50	Vertical
7392.00	28.70	17.93	46.63	74.00	-27.37	Vertical
9856.00	29.27	23.83	53.10	74.00	-20.90	Vertical
12320.00	*			74.00		Vertical
14784.00	*			74.00		Vertical
4928.00	27.80	15.58	43.38	74.00	-30.62	Horizontal
7392.00	28.78	17.93	46.71	74.00	-27.29	Horizontal
9856.00	28.91	23.83	52.74	74.00	-21.26	Horizontal
12320.00	*			74.00		Horizontal
14784.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4928.00	17.86	15.58	33.44	54.00	-20.56	Vertical
7392.00	18.98	17.93	36.91	54.00	-17.09	Vertical
9856.00	19.14	23.83	42.97	54.00	-11.03	Vertical
12320.00	*			54.00		Vertical
14784.00	*			54.00		Vertical
4928.00	17.73	15.58	33.31	54.00	-20.69	Horizontal
7392.00	18.75	17.93	36.68	54.00	-17.32	Horizontal
9856.00	18.25	23.83	42.08	54.00	-11.92	Horizontal
12320.00	*			54.00		Horizontal
14784.00	*			54.00		Horizontal

Remark:


1. Result = Reading + Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.




Radiated Band Edge:

For module: CC2500/D8

Test Mode: Lowest

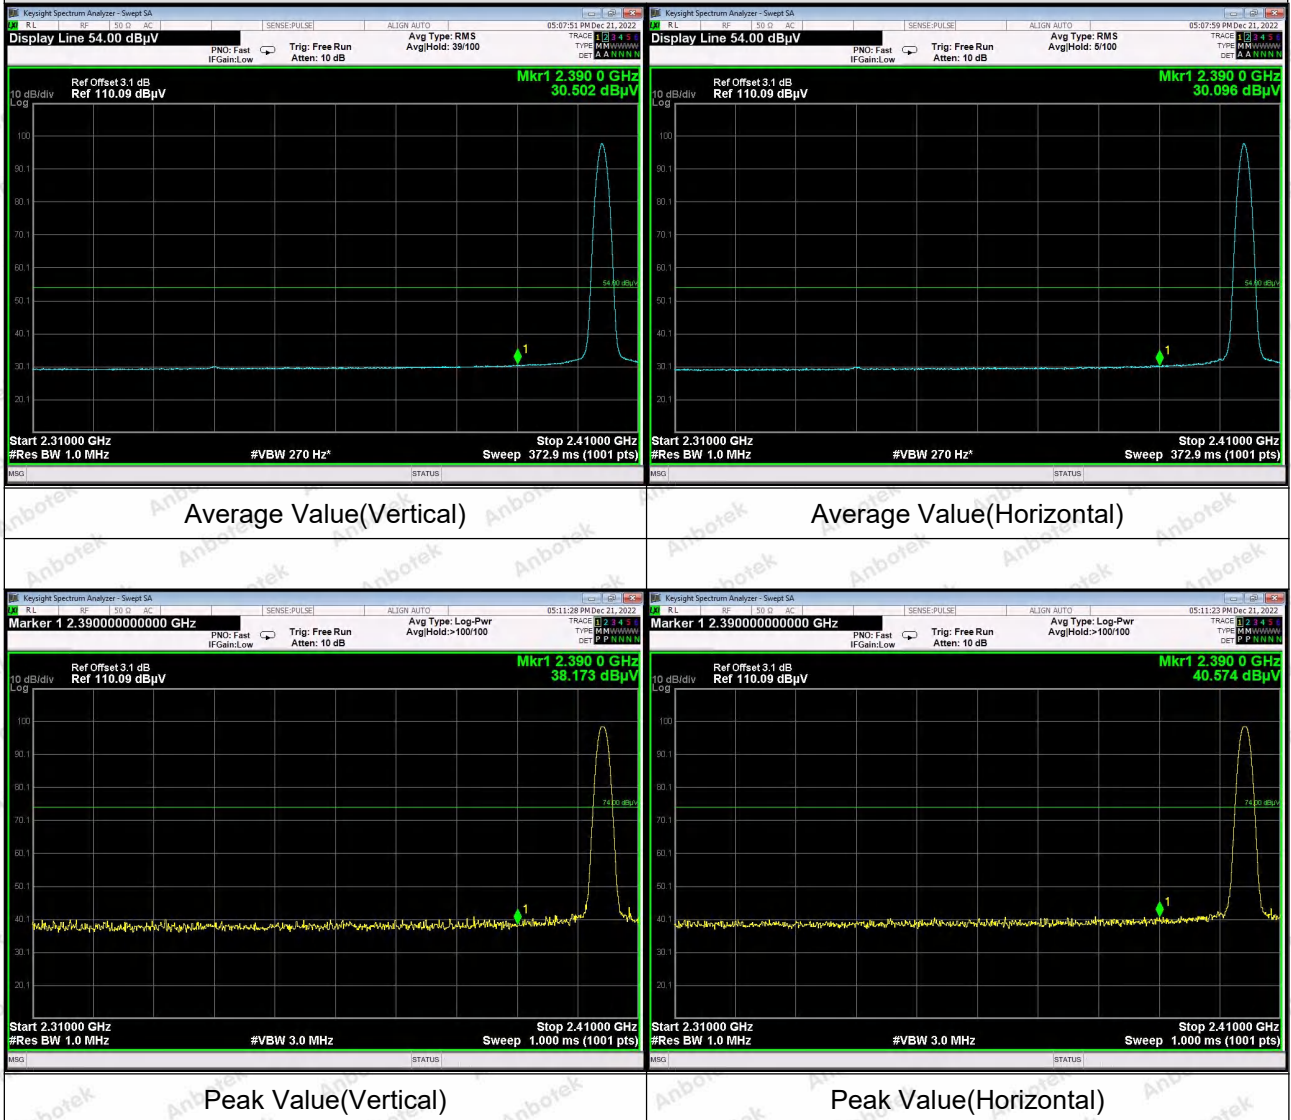


Test Mode: Highest

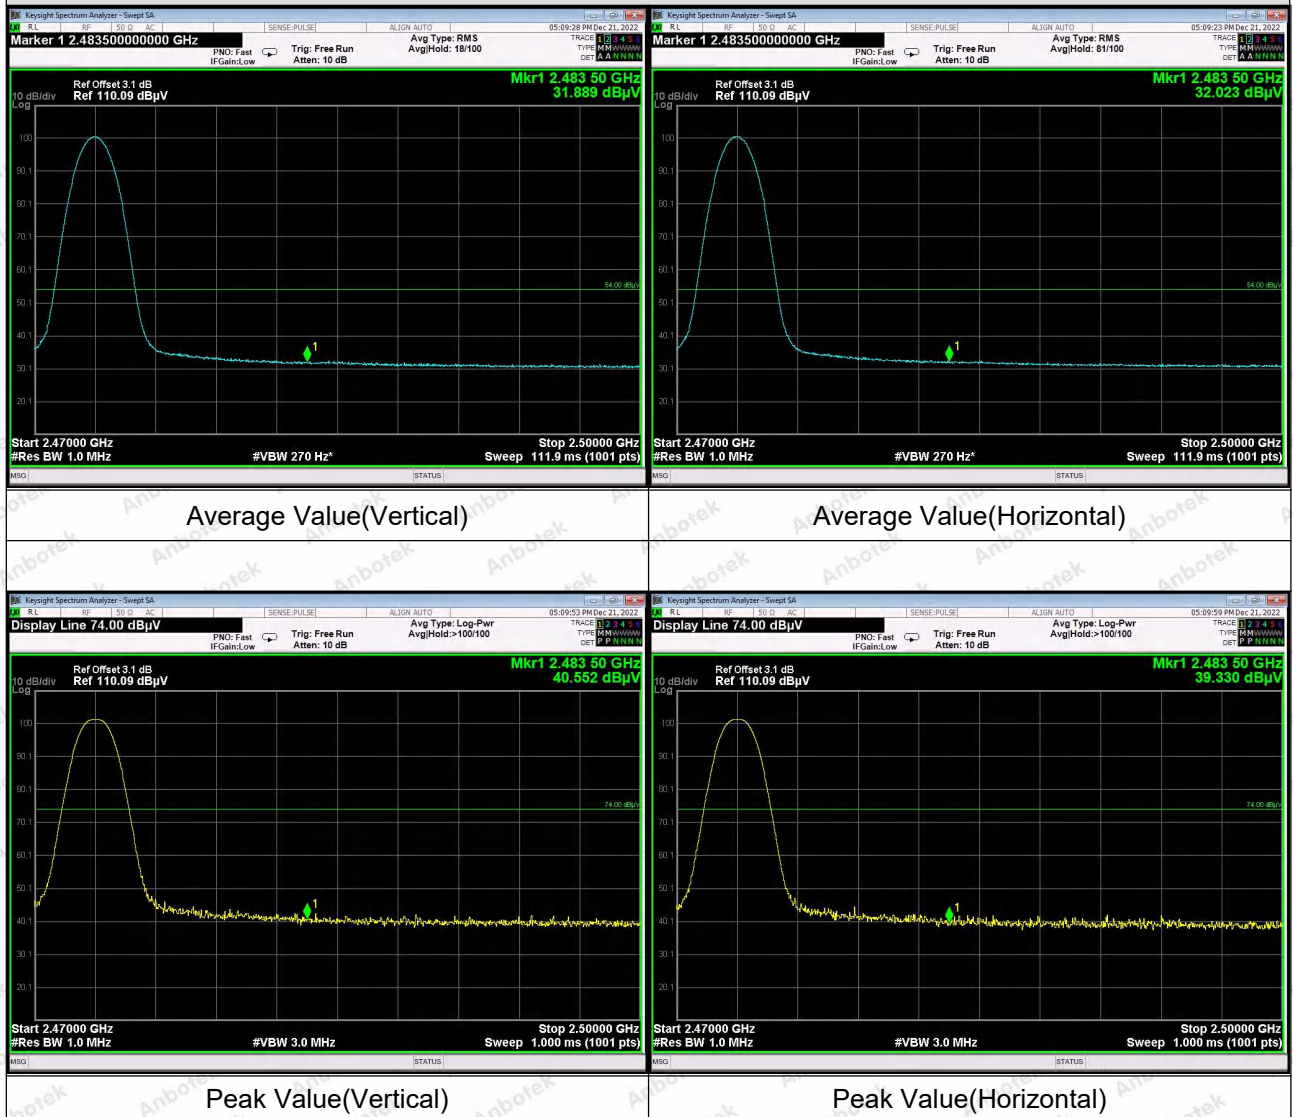


For module: A7105/flysky

Test Mode: Lowest

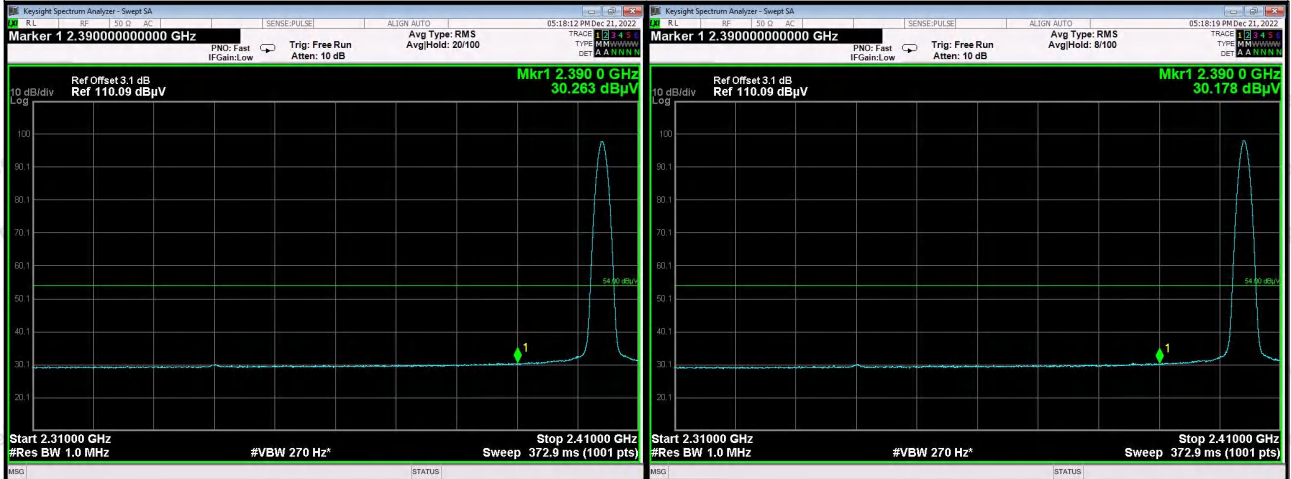

Average Value(Vertical)

Average Value(Horizontal)

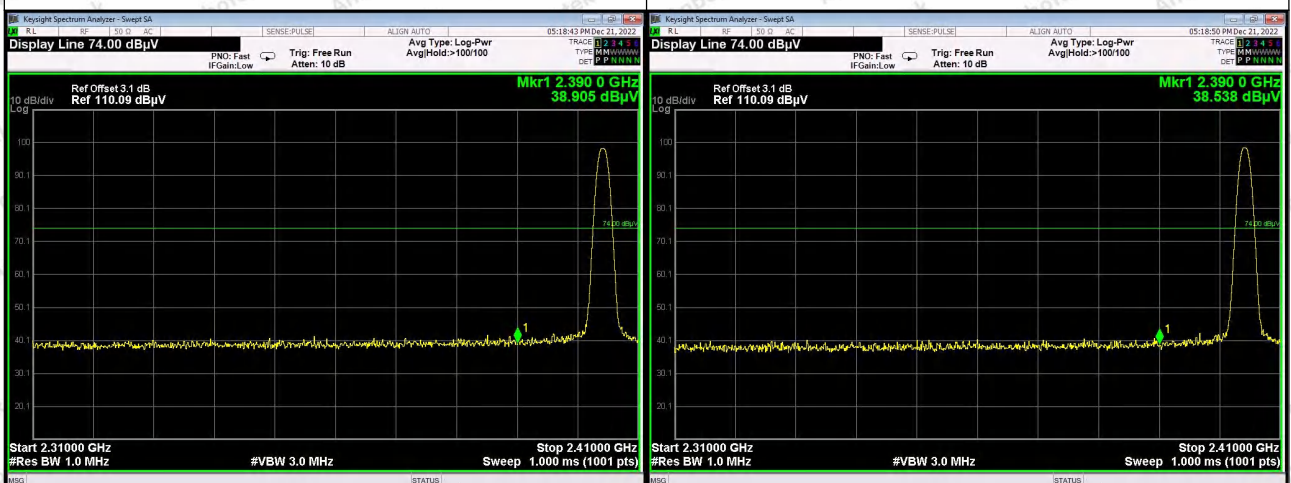


Peak Value(Vertical)

Peak Value(Horizontal)




Test Mode: Highest

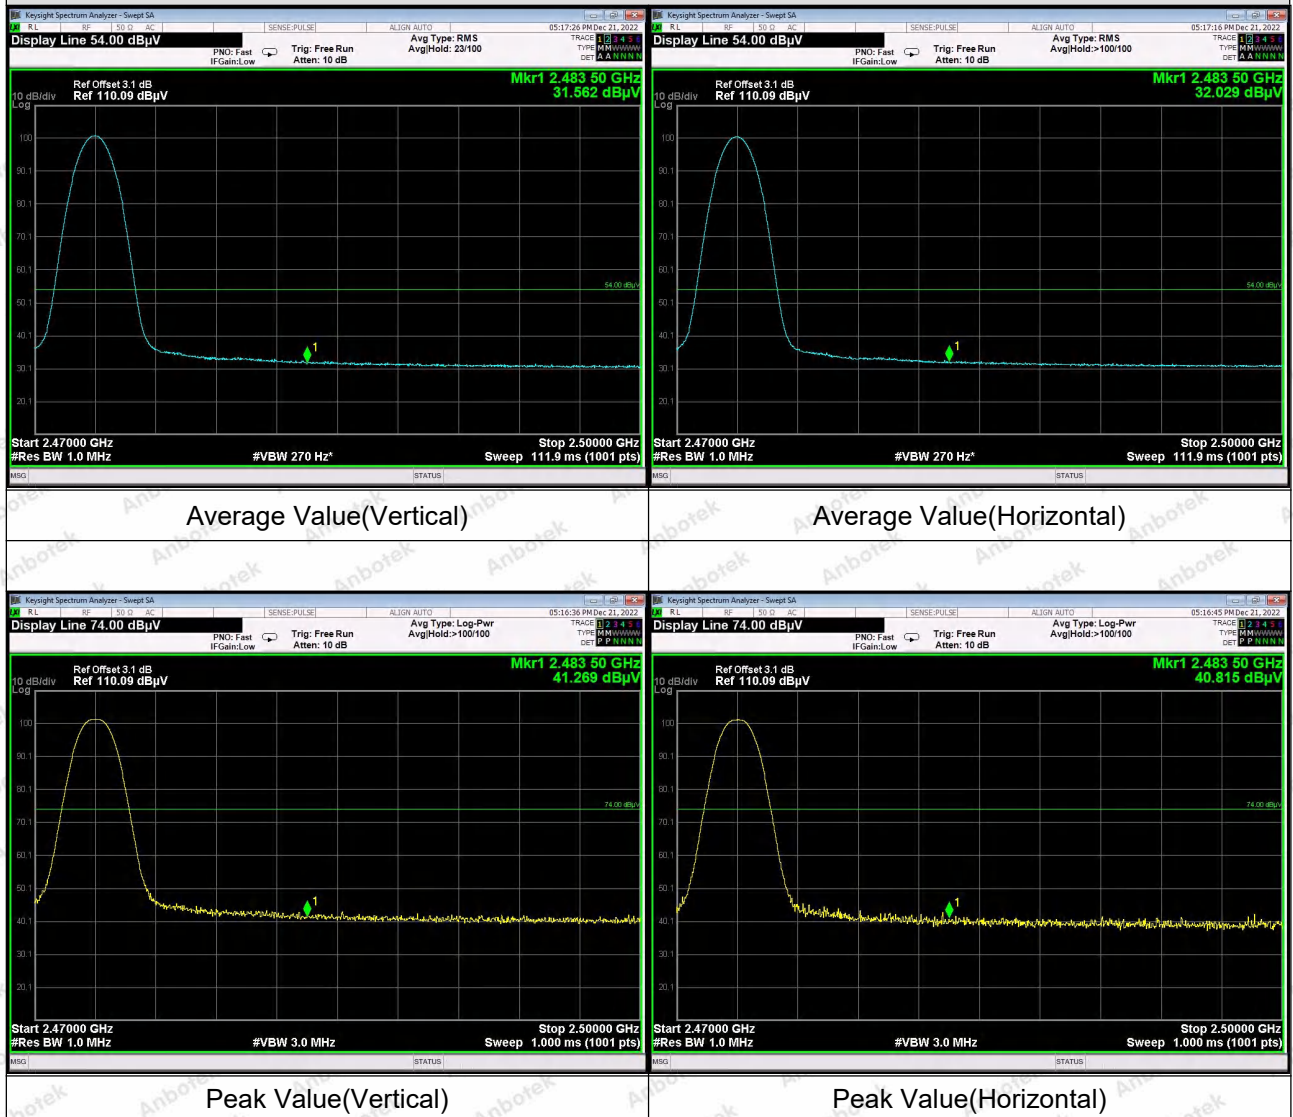


For module: 6936/mlink

Test Mode: Lowest

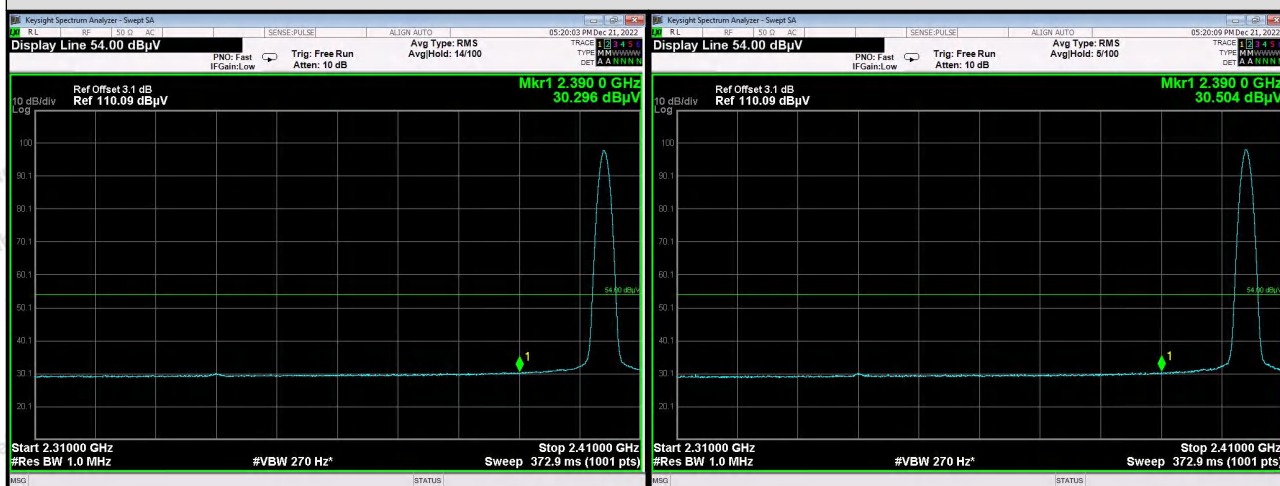

Average Value(Vertical)

Average Value(Horizontal)

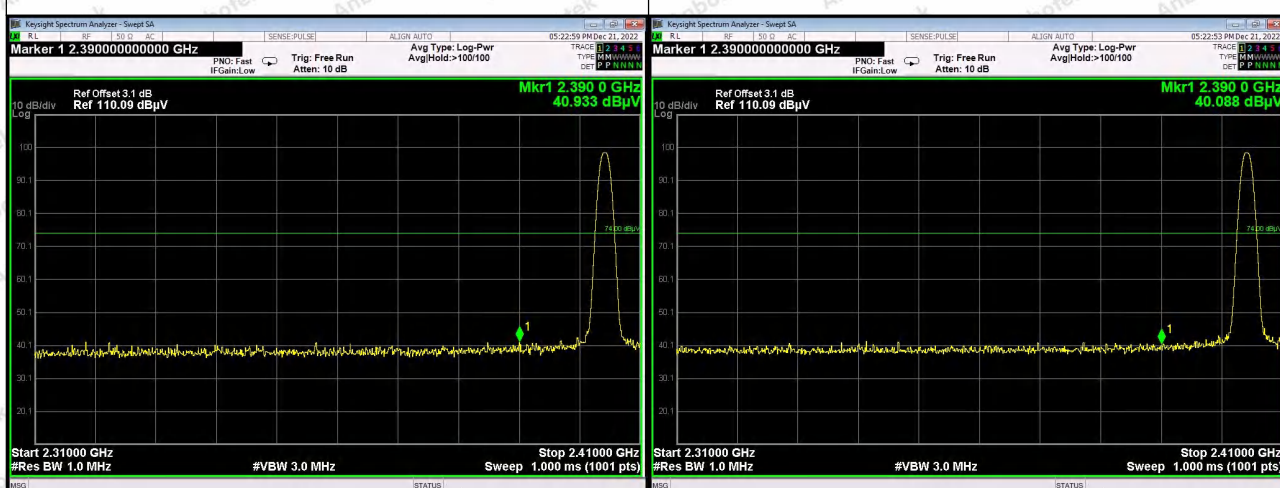


Peak Value(Vertical)

Peak Value(Horizontal)




Test Mode: Highest

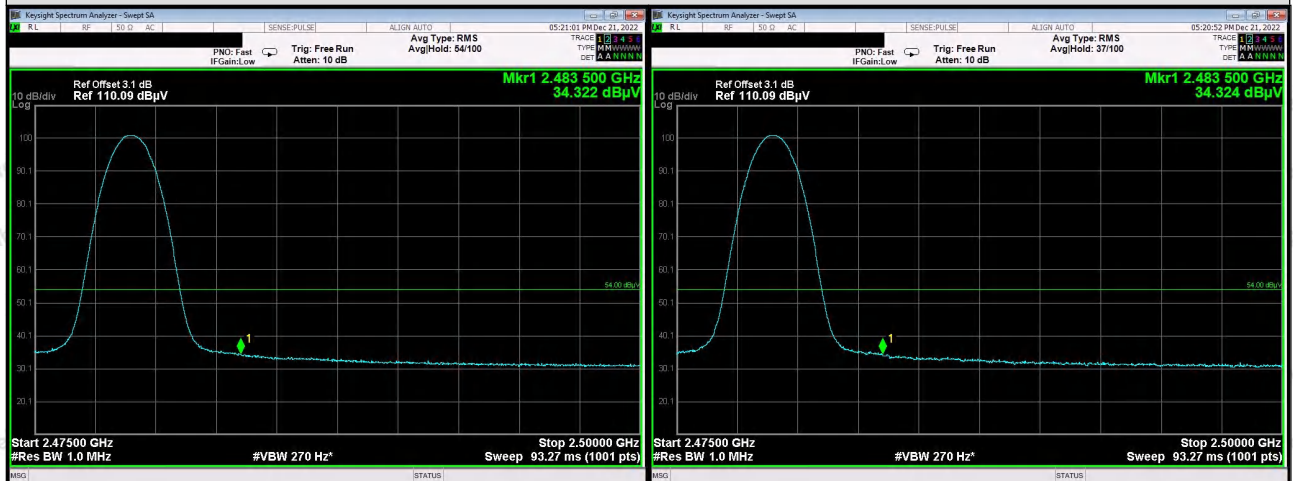

Average Value(Vertical)

Average Value(Horizontal)

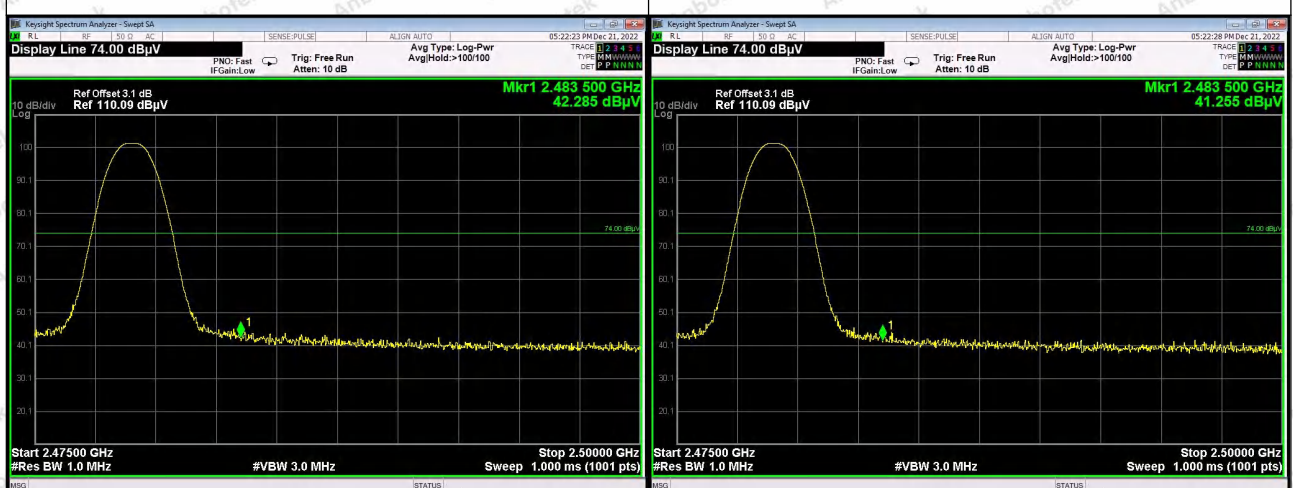


Peak Value(Vertical)

Peak Value(Horizontal)




For module: 24L01/BUGSMINI

Test Mode: Lowest

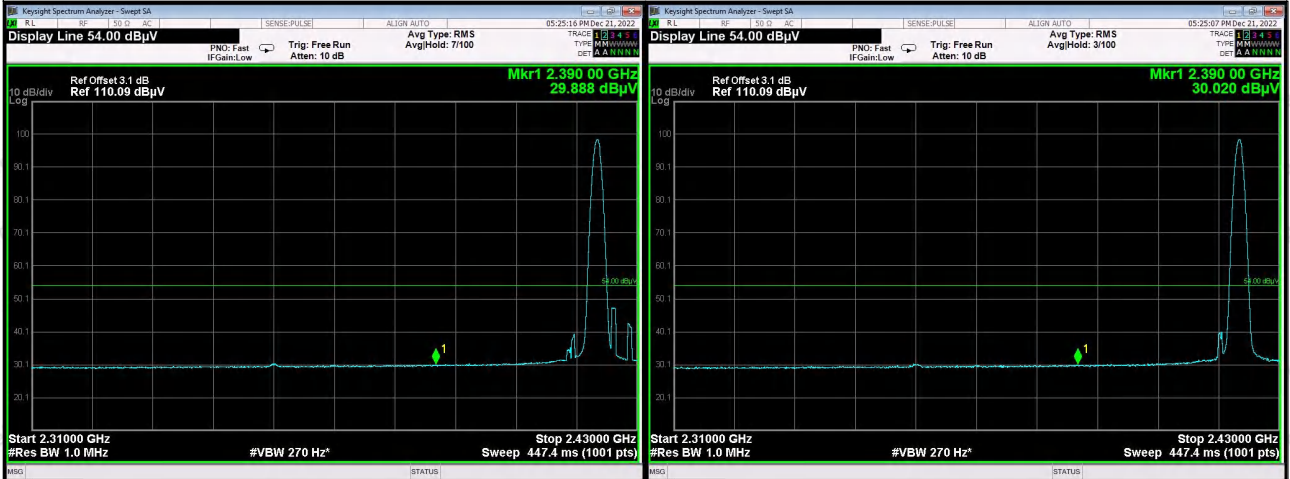

Average Value(Vertical)

Average Value(Horizontal)

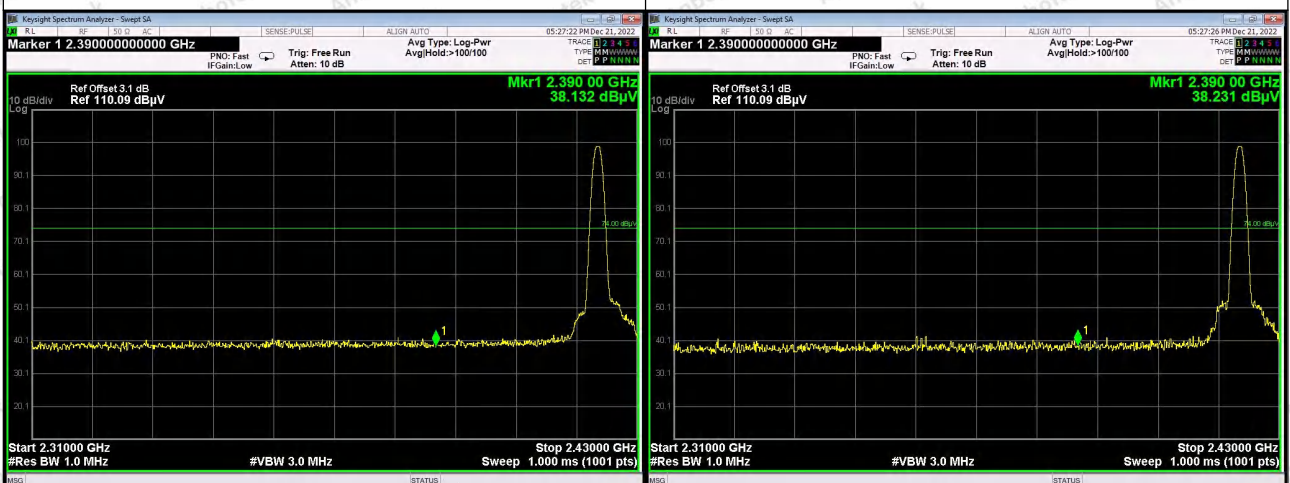


Peak Value(Vertical)

Peak Value(Horizontal)




Test Mode: Highest

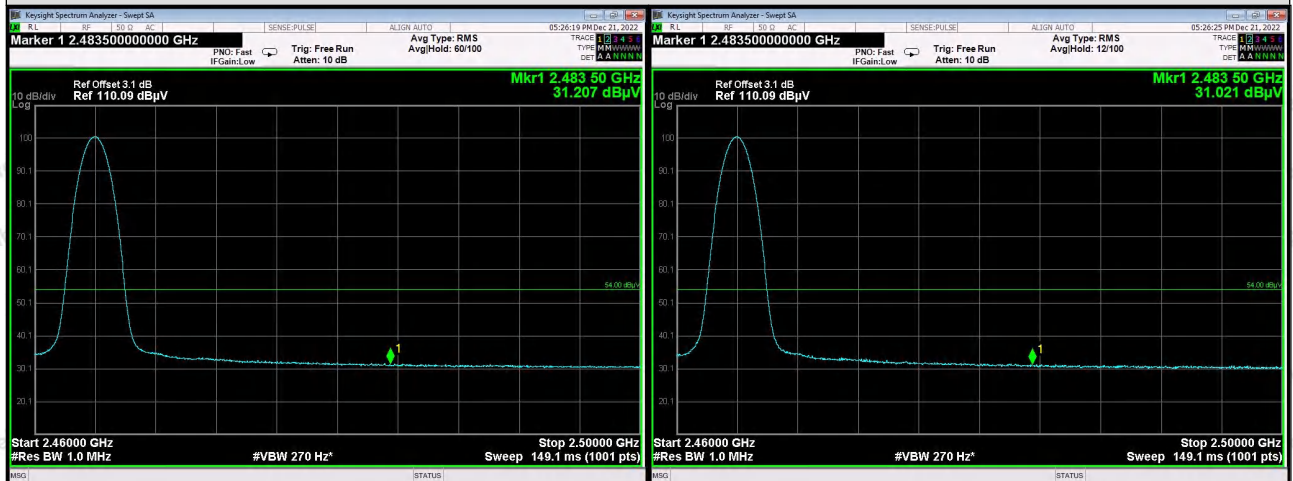

Average Value(Vertical)

Average Value(Horizontal)

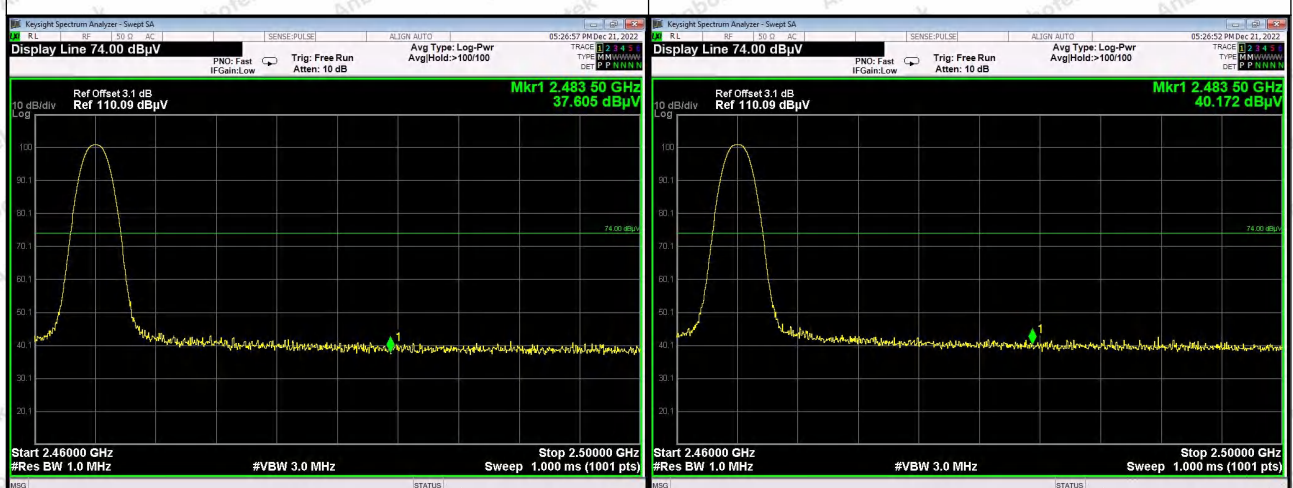

Peak Value(Vertical)

Peak Value(Horizontal)




5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(1)
Test Limit	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.2. Test Setup



5.3. Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW ≥ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold

5.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.




6. 20DB Occupy Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

6.2. Test Setup



6.3. Test Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW $\geq 1\%$ of the 20 dB bandwidth.
3. Set the VBW $\geq$ RBW
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

6.4. Test Data

Pass

Please refer to Appendix A of the Appendix Test Data.




7. Carrier Frequency Separation Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W.

7.2. Test Setup



7.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW =approximately 30% of the channel spacing.
3. Set the VBW $\geq$ RBW.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

7.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.




8. Number of Hopping Channel Test

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Limit	>15 channels

8.2. Test Setup



8.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. Set the VBW $\geq$ RBW.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

8.4. Test Data

Pass

Please refer to Appendix F of the Appendix Test Data.




9. Dwell Time Test

9.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Limit	0.4 s

9.2. Test Setup



9.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW $\geq$ RBW.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.4. Test Data

Pass

Please refer to Appendix E of the Appendix Test Data.




10. 100kHz Bandwidth of Frequency Band Edge Requirement

10.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

10.2. Test Setup



10.3. Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

10.4. Test Data

Pass

Please refer to Appendix G & Appendix H of the Appendix Test Data.



11. Antenna Requirement

11.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

11.2. Antenna Connected Construction

The antenna is External antenna which permanently attached, and the best case gain of the antenna is 4.11dBi. It complies with the standard requirement.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

