

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 1 of 51

Applicant : Shanghai Goodview Electronics Technology Co., Ltd.
Address of Applicant : Room 866, NO.888, West Huanhu 2
Road, Nanhui Xincheng Town, Pudong, 201306

Product Name : LCD DIGITAL DISPLAY
Model No. : PF*****
Sample No. : E19120045-01#02
FCC ID : 2AVB8PFHL

Standards : FCC CFR47 Part 15, Subpart C

Date of Receipt : 2020-1-06
Date of Test : 2020-1-06 ~ 2020-4-23
Date of Issue : 2020-4-23

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by: Jennifer Zhou
(Jennifer Zhou)

Reviewed by: jesse
(jesse)

Approved by: Guoyou Chi
(Authorized signatory: Guoyou Chi)

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 2 of 51

Revision Record			
Version	Date	Revisions	Revised By
1.0	2019-10-31	Original	--

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 3 of 51

Contents

1	GENERAL INFORMATION.....	4
1.1	TESTING LABORATORY.....	4
1.2	DETAILS OF APPLICATION.....	4
1.3	DETAILS OF EUT.....	4
1.4	TEST METHODOLOGY.....	5
2	TEST CONDITION.....	6
2.1	TEST FACILITY.....	6
2.2	ENVIRONMENTAL CONDITIONS.....	6
2.3	EQUIPMENT LIST.....	6
2.4	MEASUREMENT UNCERTAINTY.....	6
3	TEST SET-UP AND OPERATION MODES.....	7
3.1	DETAILS OF TEST MODE.....	7
3.2	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	8
3.3	SUPPORT SOFTWARE.....	8
3.4	TEST SETUP DIAGRAM.....	9
4	TEST RESULTS.....	11
4.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	11
4.1.1	<i>Antenna Requirement.....</i>	<i>11</i>
4.1.2	<i>Peak Output Power and E.I.R.P.....</i>	<i>12</i>
4.1.3	<i>6dB Bandwidth and 99% Bandwidth.....</i>	<i>13</i>
4.1.4	<i>Power Spectral Density.....</i>	<i>19</i>
4.1.5	<i>Conducted Spurious Emission & Authorized-band band-edge.....</i>	<i>25</i>
4.1.6	<i>Spurious Emission.....</i>	<i>46</i>
4.1.7	<i>Band Edge (Restricted-band band-edge).....</i>	<i>48</i>
4.2	MAINS EMISSIONS.....	49
4.2.1	<i>Conducted Emission on AC Mains.....</i>	<i>49</i>

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 4 of 51

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Services (Shanghai) Co., Ltd.
Address	155 Pingbei Rd, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Company Name	Shanghai Goodview Electronics Technology Co., Ltd.
Address	Room 866,NO.888,West Huanhu 2 Road,NanhuiXincheng Town,Pudong,201306
Contact Person	Hongyue.Xu
Telephone	n.a
Email	xuhongyue@goodview.com

1.3 Details of EUT

Product Name	LCD DIGITAL DISPLAY
Brand Name	GOODVIEW
Model No.	PF*****
serial model	(*=A to Z, 0 to 9,blank,just difference in appearance color,sales area customer code)
Mode of Operation	WLAN 802.11b/g/n(20M)
Frequency Range	802.11b/g/n(20M): 2412-2462MHz
Number of Channels	802.11b/g/n(20M): 11 Channels;
Modulation Type	802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g/n(20M): OFDM(64QAM, 16QAM, QPSK, BPSK)
Antenna Type	internal Antenna
Antenna Gain	4 dBi
Extreme Temperature Range	+10℃~ +40℃
Test Voltage	AC 100~240V
Adaptive	Adaptive device
Antenna Type	internal Antenna
Receiver Categories	1

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 5 of 51

1.4 Test Methodology

47 CFR Part 15, Subpart C (10-1-16 Edition)	Miscellaneous Wireless Communications Services
KDB Publication 558074 D01 v05r02	15.247 Meas Guidance.
KDB Publication 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
RSS-Gen (Issue 5, March 2019)	General Requirements for Compliance of Radio Apparatus
RSS-247 (Issue 2, February 2017)	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 6 of 51

2 Test Condition

2.1 Test Facility

2.2 Environmental conditions

Temperature (°C)	18-25
Humidity (%RH)	40-65
Barometric Pressure (mbar)	960-1060

2.3 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Due Date
Spectrum Analyzer	Keysight	N9020B	MY59260184	2020-07-28
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2020-06-24
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2020-06-19
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2020-06-19
V-network	SCHWARZBECK	NSLK 8127	8127-902	2021-02-20
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	100687	2020-08-22
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2020-06-06
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2020-06-06
Loop Antenna	SCHWARZBECK	FMZB 1513	N/A	2021-03-19
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2020-07-26
EMC chamber 9*6*6 (L*W*H)	CHANGNING	966	N/A	2020-06-26
Shielded Enclosure 8*5*4 (L*W*H)	CHANGNING	854	N/A	2020-08-28
Test Software	BL	BL410_E	N/A	N/A

2.4 Measurement Uncertainty

Parameter	Frequency	Uncertainty
Antenna Port Conducted Emission	< 1GHz	± 1.5 dB
	> 1GHz	± 1.5 dB
Radiated Emission	30 MHz – 1 GHz	± 3 dB
	> 1GHz	± 3 dB

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 7 of 51

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Using test software was control EUT work in continuous transmitter and receiver mode. Select test channel as below:
For 802.11b/g/n (HT20)

Channel	Frequency
The lowest channel(CH1)	2412MHz
The middle channel(CH6)	2437MHz
The Highest channel(CH11)	2462MHz

Through Pre-scan under all rate at lowest channel, the data rate as below table described is the worst case, so we choose these data rate for test.

Type	Data rate
802.11b	11Mbps
802.11g	54Mbps
802.11n(20M)	MCS7

The basic operation modes are:

- A. On
 - 1. WLAN mode
 - a. Transmitting
 - i. Low Channel
 - ii. Middle Channel
 - iii. High Channel
 - b. Receiving
- B. Standby
- C. Off

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 8 of 51

3.2 Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Serial No.
Laptop	Lenovo	TP00083A	N/A

3.3 Support Software

Description	Manufacturer	Software Name
Software	/	RF Test Tool

TEST REPORT


Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 9 of 51


3.4 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

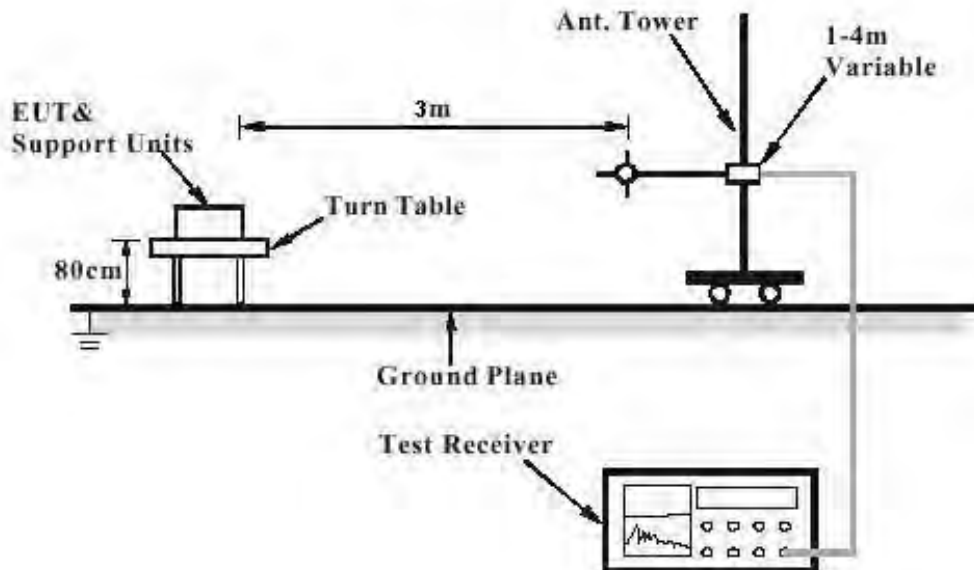

Note: Measurements above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Conduction Measurement

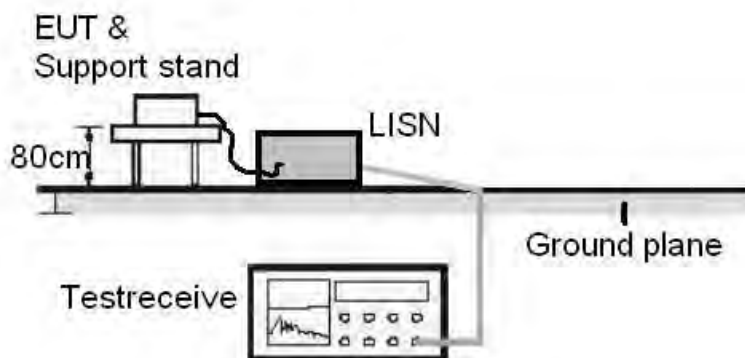


TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 10 of 51

Diagram of Measurement Equipment Configuration for Transmitter Measurement

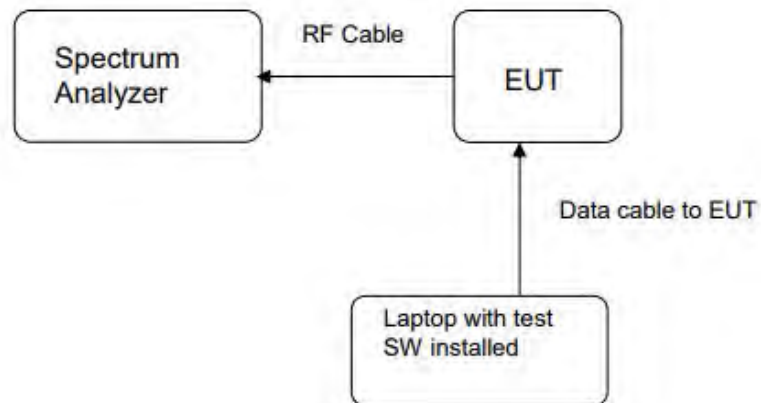

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 11 of 51

4 Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Antenna Requirement

RESULT:

PASS

Test standard : FCC Part 15.247(b)(4), Part 15.203
RSS-247 5.4(6)

Requirement : The use of approved antennas only with directional
gains that do not exceed 6 dBi

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 3 dBi. The antenna is an internal antenna with no possibility of replacement with a non-approved antenna by the end-user.

Therefore, the EUT is considered to comply with this provision.

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 12 of 51

4.1.2 Peak Output Power and E.I.R.P

RESULT:

PASS

Test standard : FCC Part 15.247(b)(3)
RSS-247 5.4(4)
Requirement : ANSI C63.10-2013, KDB 558074
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 25°C
Relative humidity : 52%

Table 1: Peak Output Power

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(mW)	
802.11b	2412	12.83	19.19	< 1
	2437	12.22	16.67	
	2462	12.27	16.87	
802.11g	2412	11.50	14.13	
	2437	10.98	12.53	
	2462	11.31	13.52	
802.11n(HT20)	2412	10.43	11.04	
	2437	9.88	9.73	
	2462	10.15	10.35	

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 13 of 51

4.1.3 6dB Bandwidth and 99% Bandwidth

RESULT:

PASS

Test standard : FCC Part 15.247(a)(2)
RSS-247 5.2(1)
RSS-Gen 6.6
Requirement : ANSI C63.10-2013, KDB 558074
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 25°C
Relative humidity : 52%

Table 2: 6dB Bandwidth and 99% Bandwidth

Test Mode	Test Channel (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limit (MHz)
802.11b	2412	7.12	11.99	0.5
	2437	7.73	11.89	
	2462	7.24	11.87	
802.11g	2412	15.06	16.31	
	2437	14.44	16.34	
	2462	16.05	16.33	
802.11n(HT20)	2412	15.38	17.51	
	2437	15.08	17.48	
	2462	16.35	17.52	

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 14 of 51

Figure 1: 6dB Bandwidth and 99% Bandwidth, 802.11b, 2412MHz

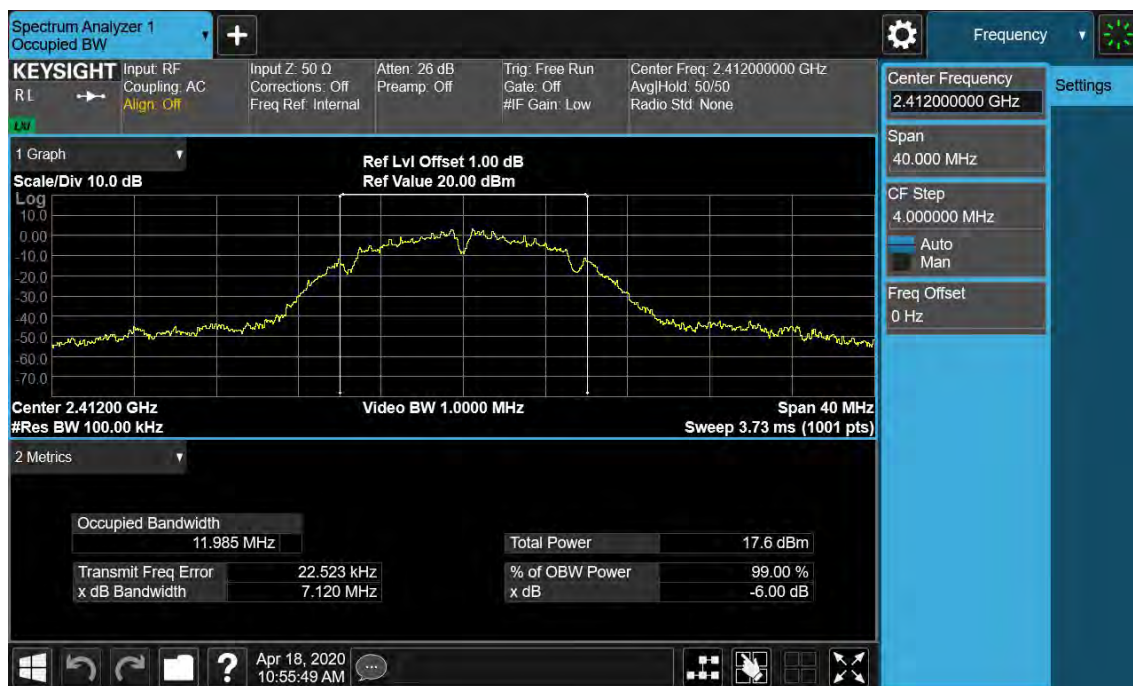


Figure 2: 6dB Bandwidth and 99% Bandwidth, 802.11b, 2437MHz



TEST REPORT

Report No.: SHE19120045-01FE


Date: 2020-4-23

Page 15 of 51

Figure 3: 6dB Bandwidth and 99% Bandwidth, 802.11b, 2462MHz



Figure 4: 6dB Bandwidth and 99% Bandwidth, 802.11g, 2412MHz

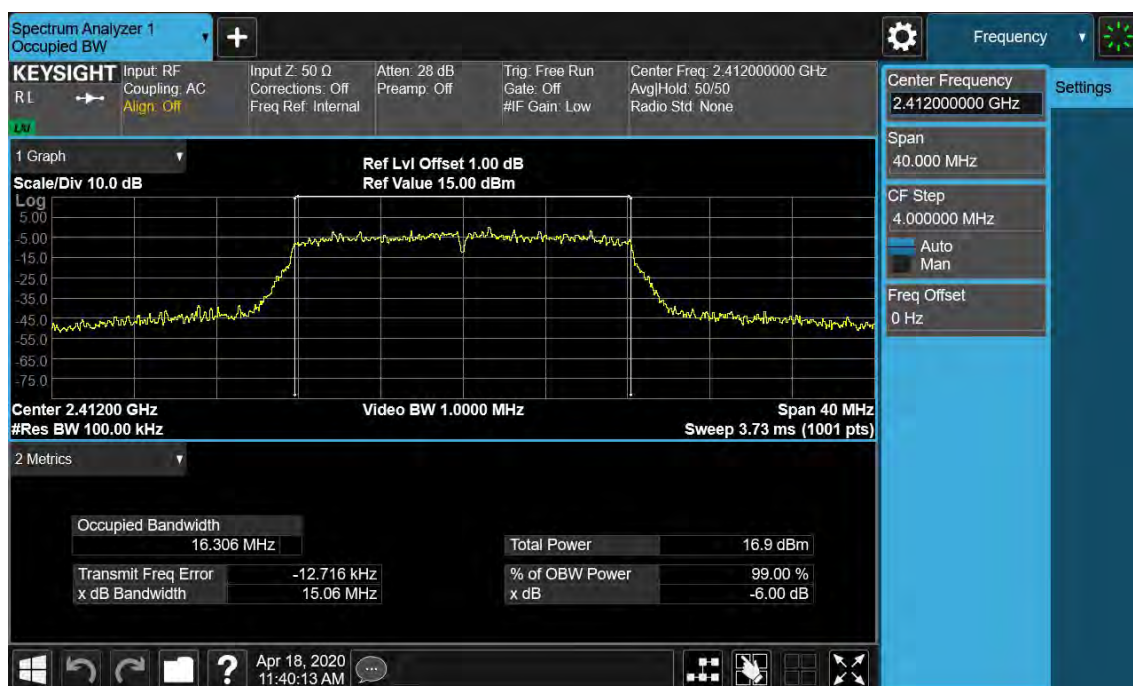

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 16 of 51

Figure 5: 6dB Bandwidth and 99% Bandwidth, 802.11g, 2437MHz


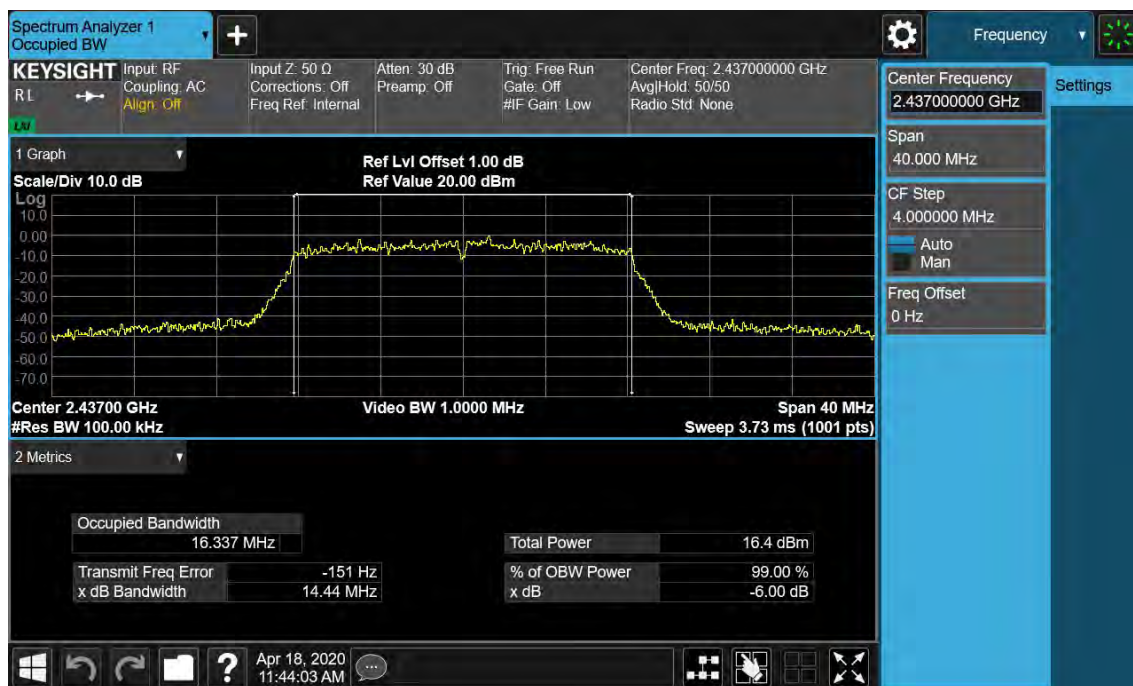


Figure 6: 6dB Bandwidth and 99% Bandwidth, 802.11g, 2462MHz

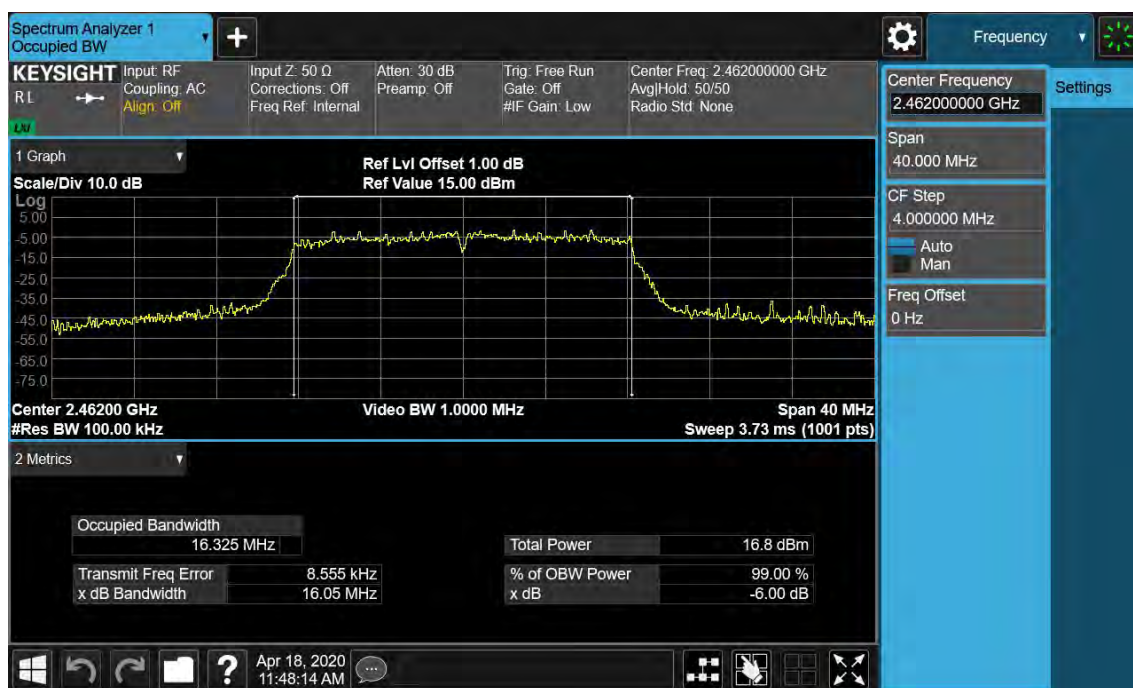

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 17 of 51

Figure 7: 6dB Bandwidth and 99% Bandwidth, 802.11n(HT20), 2412MHz


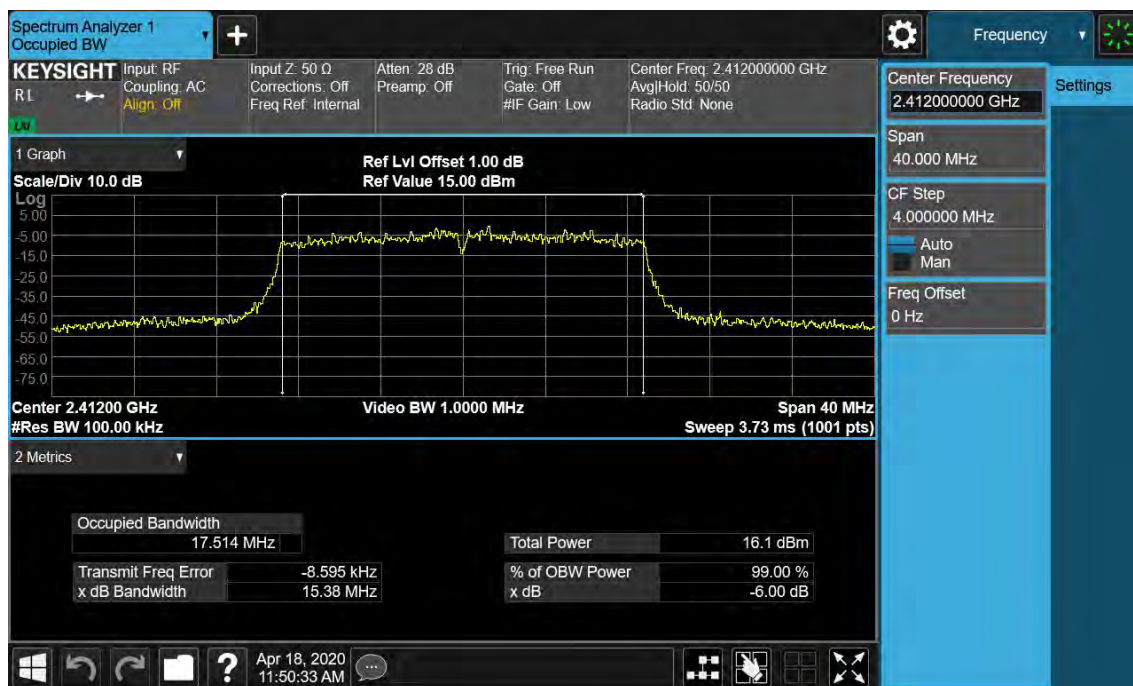


Figure 8: 6dB Bandwidth and 99% Bandwidth, 802.11n(HT20), 2437MHz

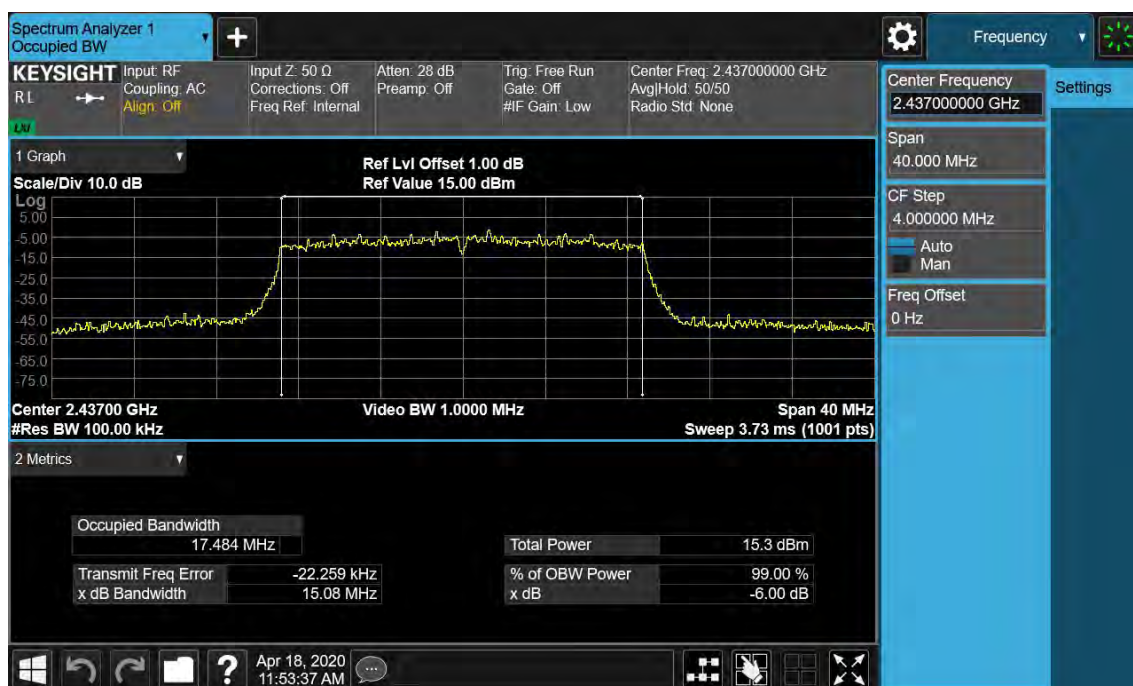


TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 18 of 51

Figure 9: 6dB Bandwidth and 99% Bandwidth, 802.11n(HT20), 2462MHz

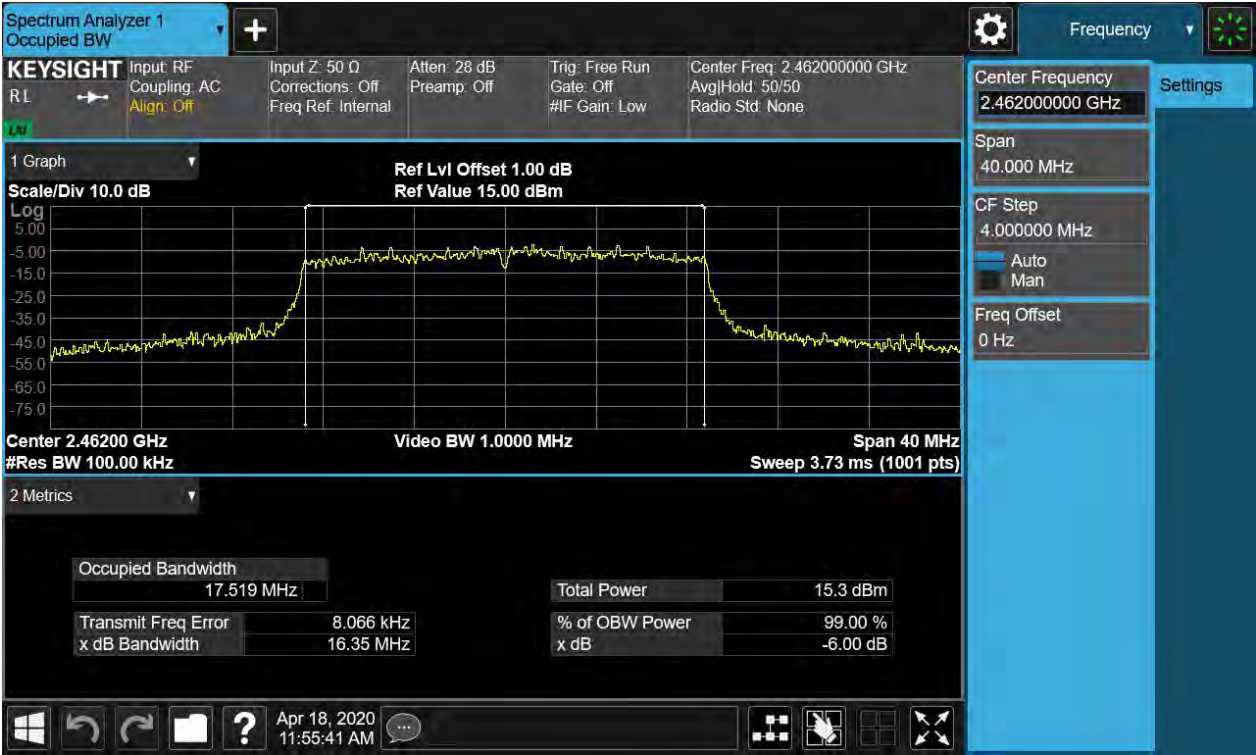

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 19 of 51

4.1.4 Power Spectral Density

RESULT:

PASS

Test standard : FCC Part 15.247(e)
RSS-247 5.2(2)
Requirement : ANSI C63.10-2013, KDB 558074
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High
Operation Mode : A.1.a
Ambient temperature : 25°C
Relative humidity : 52%

Table 3: Power Spectral Density

Test Mode	Test Channel (MHz)	Measured Result (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	2412	-12.56	8
	2437	-12.58	
	2462	-12.91	
802.11g	2412	-13.43	
	2437	-13.67	
	2462	-13.43	
802.11n(HT20)	2412	-16.58	
	2437	-16.49	
	2462	-16.56	

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 20 of 51

Figure 10: Power Spectral Density, 802.11b, 2412MHz



Figure 11: Power Spectral Density, 802.11b, 2437MHz



TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 21 of 51

Figure 12: Power Spectral Density, 802.11b, 2462MHz



Figure 13: Power Spectral Density, 802.11g, 2412MHz



TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 22 of 51

Figure 14: Power Spectral Density, 802.11g, 2437MHz

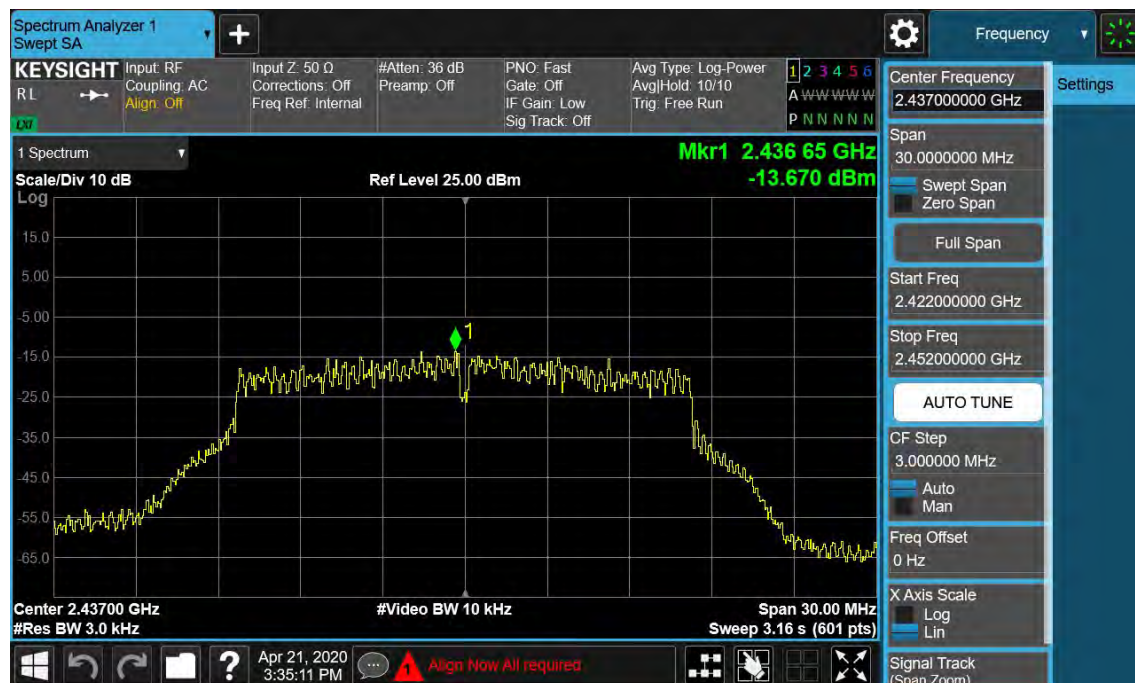


Figure 15: Power Spectral Density, 802.11g, 2462MHz



TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 23 of 51

Figure 16: Power Spectral Density, 802.11n(HT20), 2412MHz


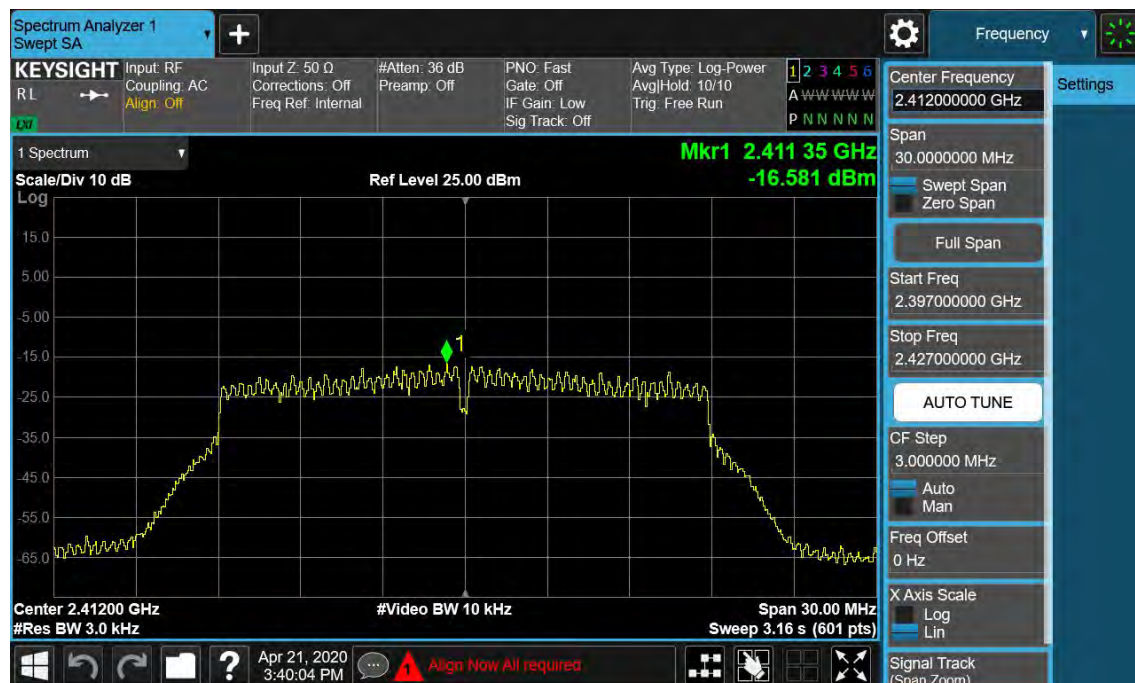


Figure 17: Power Spectral Density, 802.11n(HT20), 2437MHz

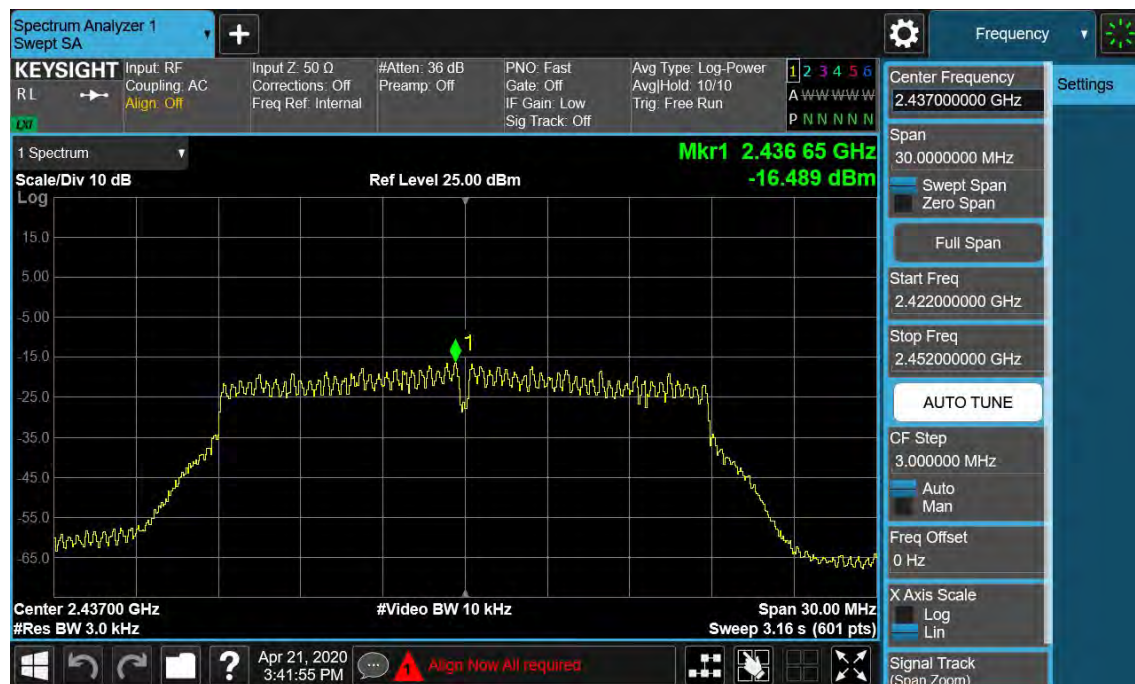


TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 24 of 51

Figure 18: Power Spectral Density, 802.11n(HT20), 2462MHz

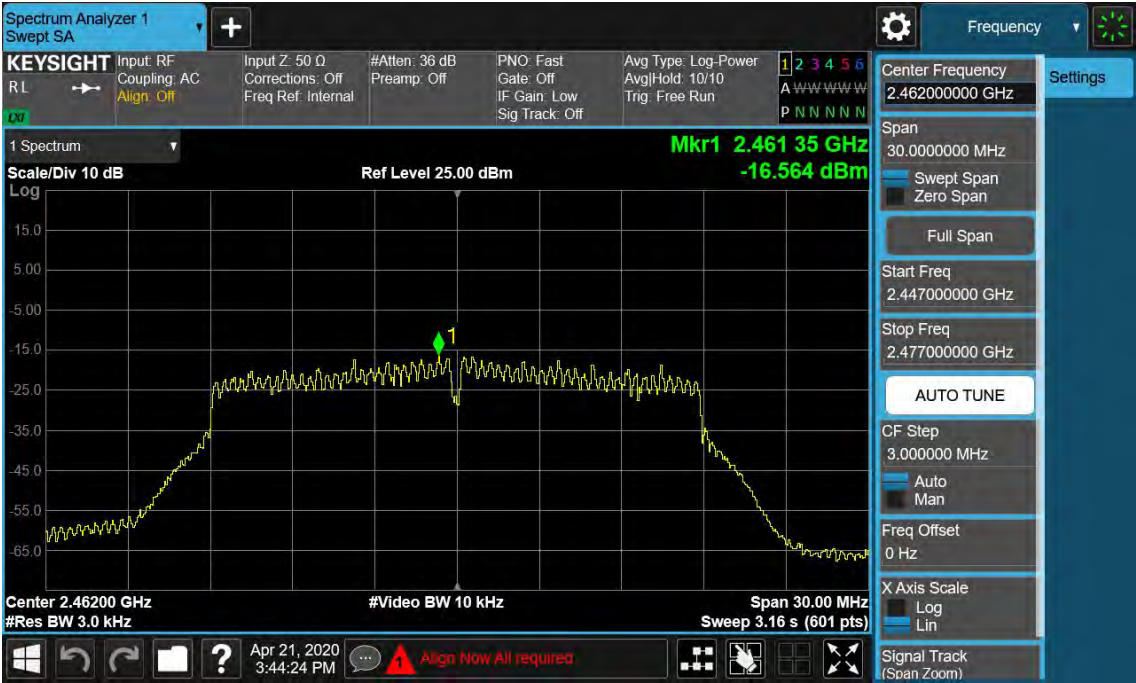

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 25 of 51

4.1.5 Conducted Spurious Emission & Authorized-band band-edge

RESULT:

PASS

Test standard : FCC Part 15.247(d), 15.209
RSS-247 5.5
RSS-Gen 8.9
Requirement : ANSI C63.10-2013, KDB 558074
Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High for spurious, Low/High for Band
Edge
Operation Mode : A.1.a
Ambient temperature : 25°C
Relative humidity : 52%

For details refer to following test plot.

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 26 of 51

Figure 19: Conducted Spurious Emission & Authorized-band band-edge, 802.11b, 2412MHz Carrier Level



Band Edge




TEST REPORT


Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 27 of 51

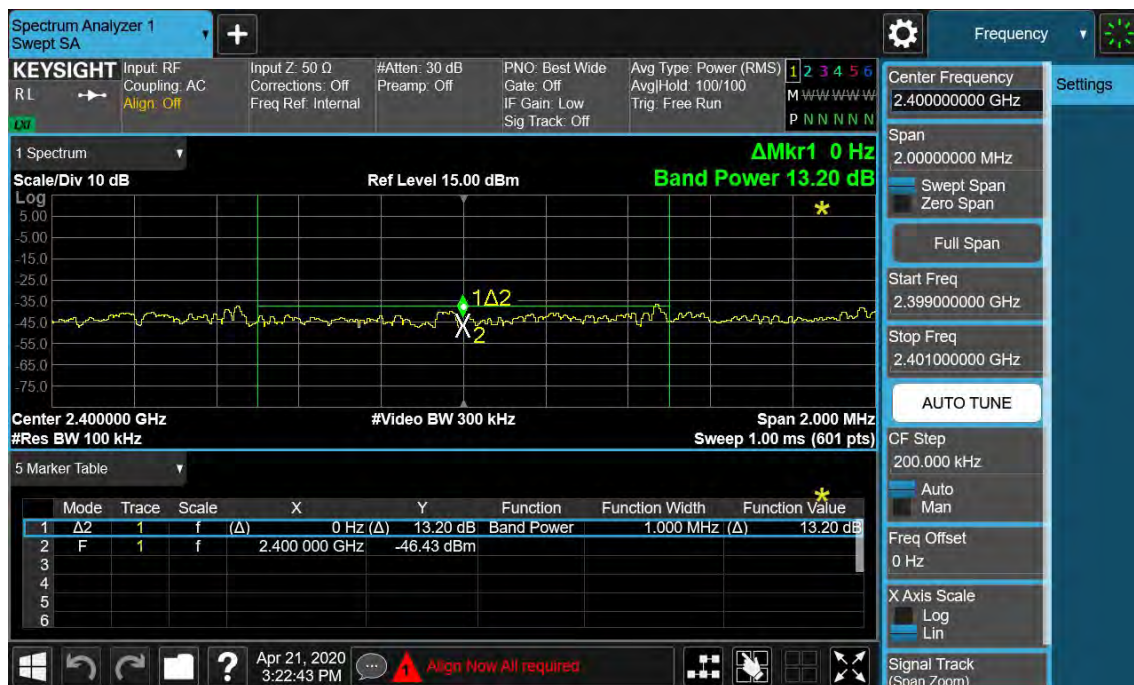

Conducted spurious emissions 30MHz-25GHz

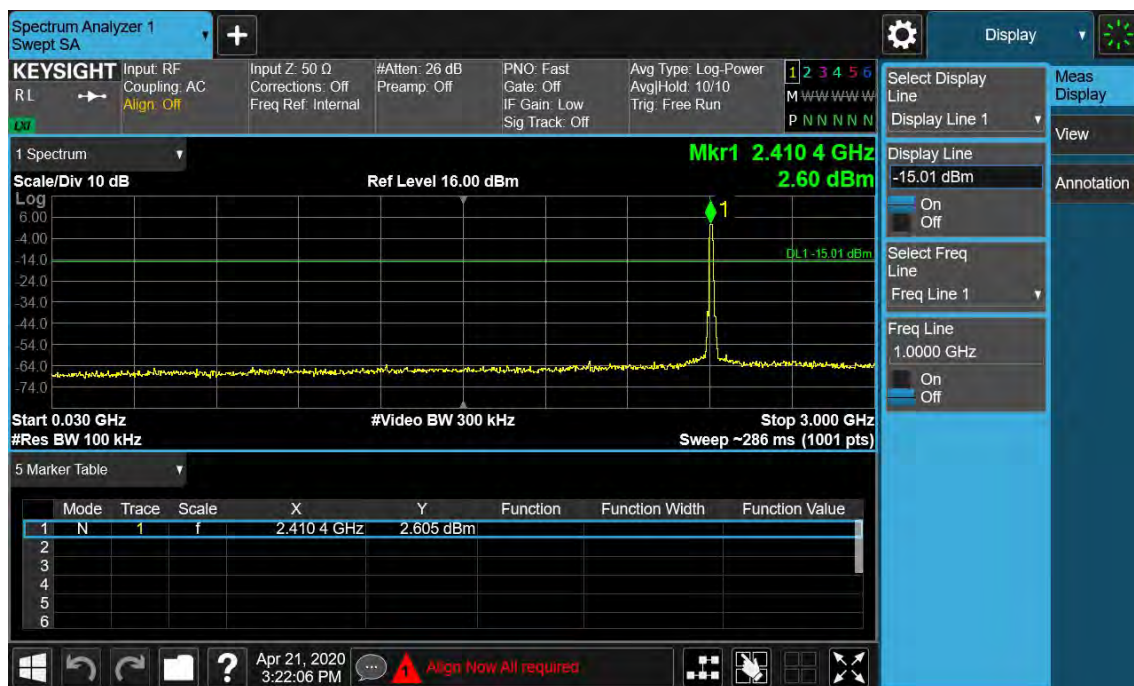

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 28 of 51



Figure 20: Conducted Spurious Emission & Authorized-band band-edge, 802.11b, 2437MHz Carrier Level



TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 29 of 51

Conducted spurious emissions 30MHz-25GHz



TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 30 of 51

Figure 21: Conducted Spurious Emission & Authorized-band band-edge, 802.11b, 2462MHz Carrier Level



Band Edge



TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 31 of 51



Conducted spurious emissions 30MHz-25GHz



TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 32 of 51



Figure 22: Conducted Spurious Emission & Authorized-band band-edge, 802.11g, 2412MHz Carrier Level




TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 33 of 51

Band Edge

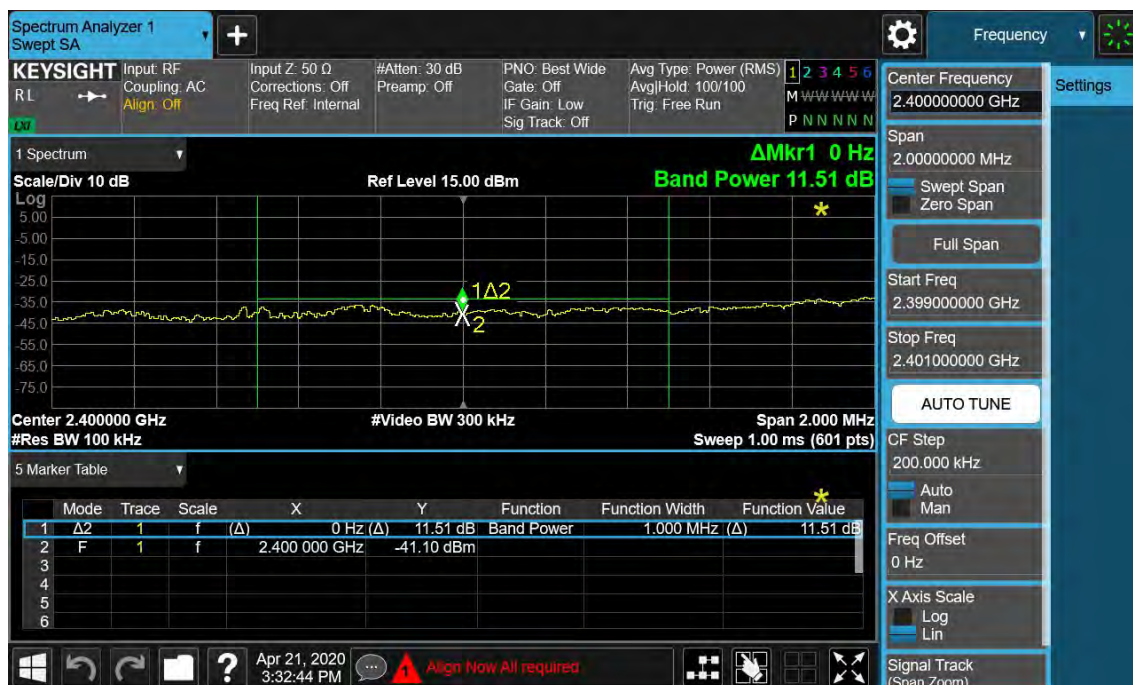


TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 34 of 51

Conducted spurious emissions 30MHz-25GHz

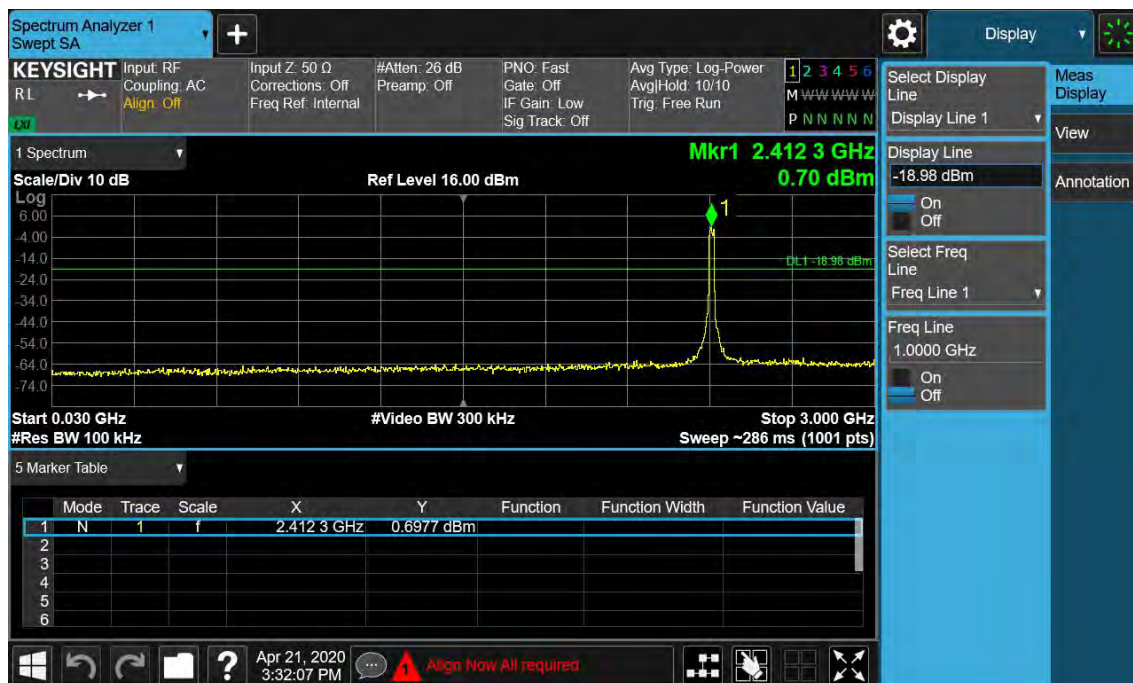

TEST REPORT

Report No.: SHE19120045-01FE


Date: 2020-4-23

Page 35 of 51

Figure 23: Conducted Spurious Emission & Authorized-band band-edge, 802.11g, 2437MHz Carrier Level



Conducted spurious emissions 30MHz-25GHz

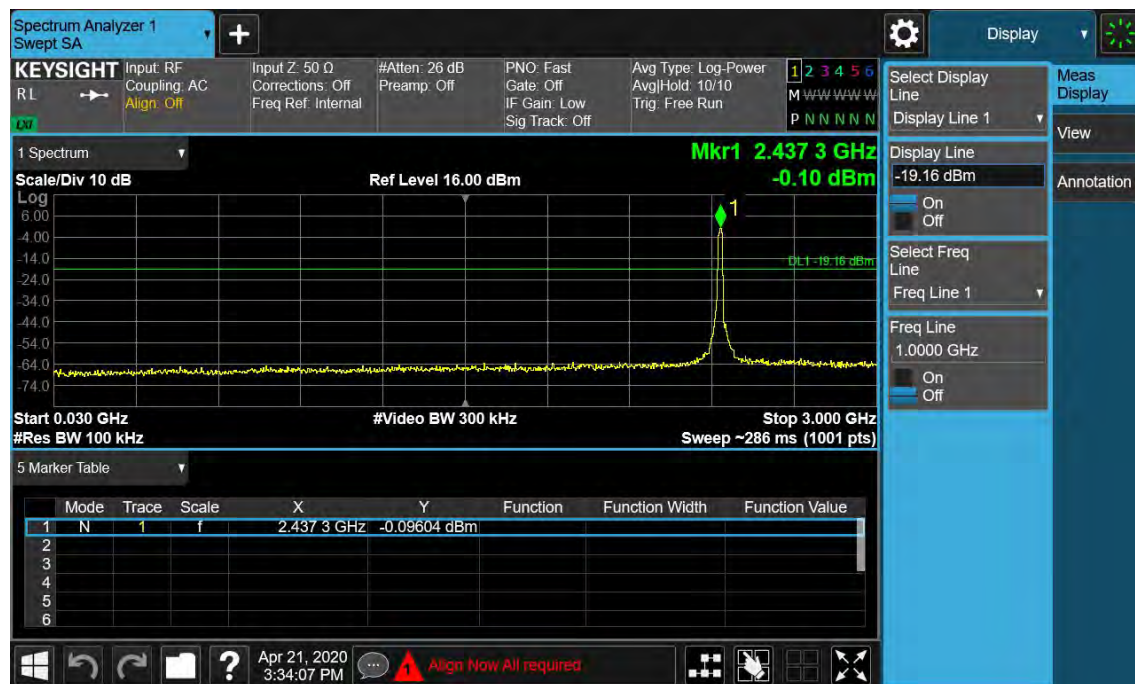

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 36 of 51



Figure 24: Conducted Spurious Emission & Authorized-band band-edge, 802.11g, 2462MHz Carrier Level




TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 37 of 51

Band Edge

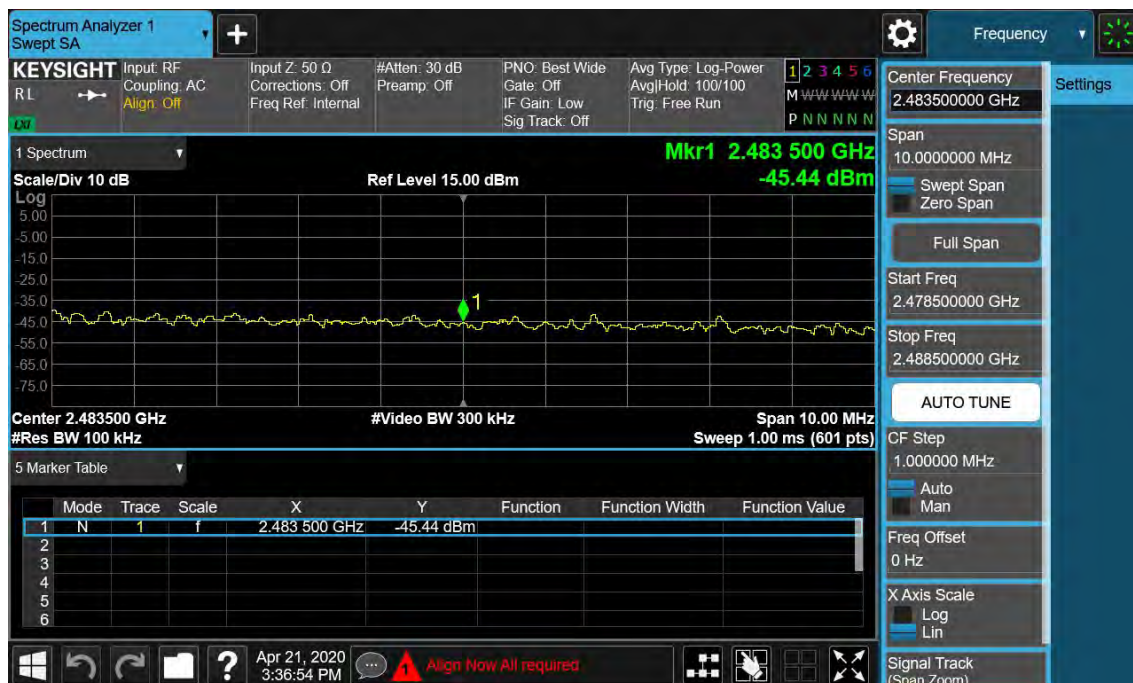


TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 38 of 51

Conducted spurious emissions 30MHz-25GHz

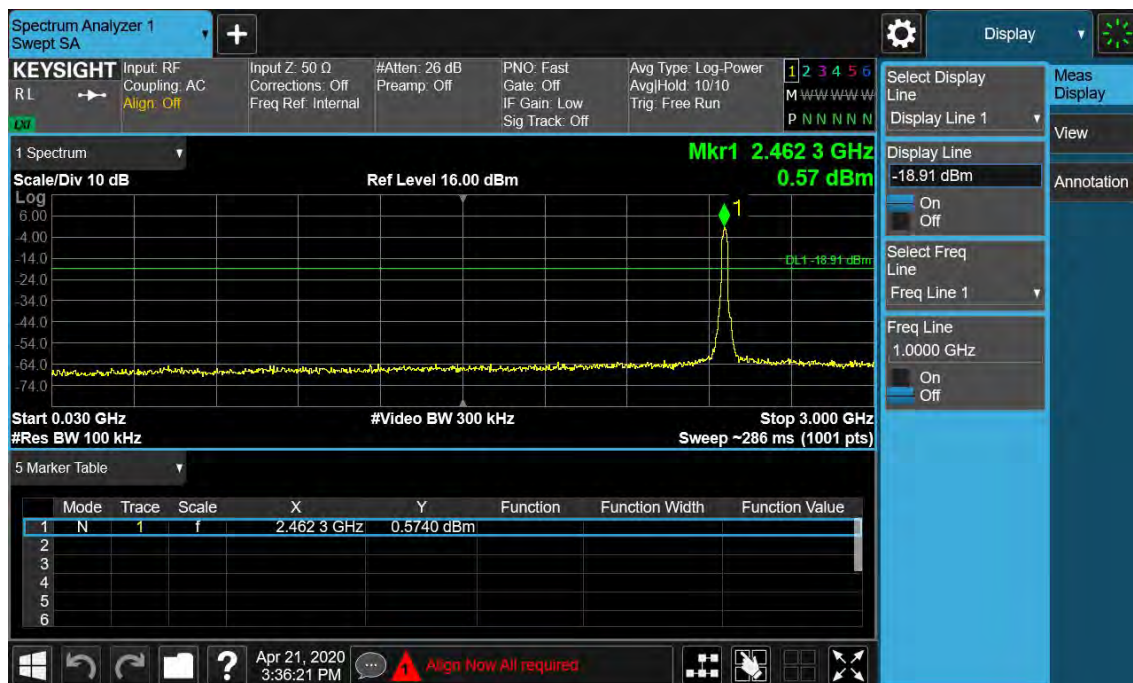

TEST REPORT

Report No.: SHE19120045-01FE


Date: 2020-4-23

Page 39 of 51

Figure 25: Conducted Spurious Emission & Authorized-band band-edge, 802.11n(HT20), 2412MHz Carrier Level



Band Edge

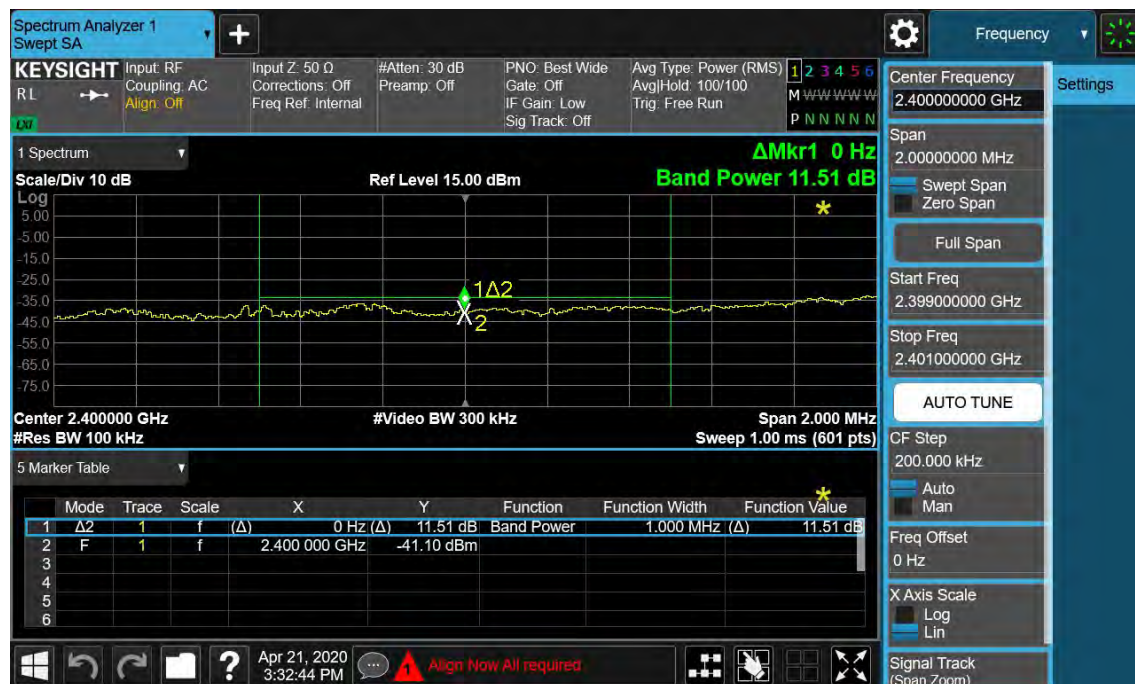

TEST REPORT


Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 40 of 51



Conducted spurious emissions 30MHz-25GHz

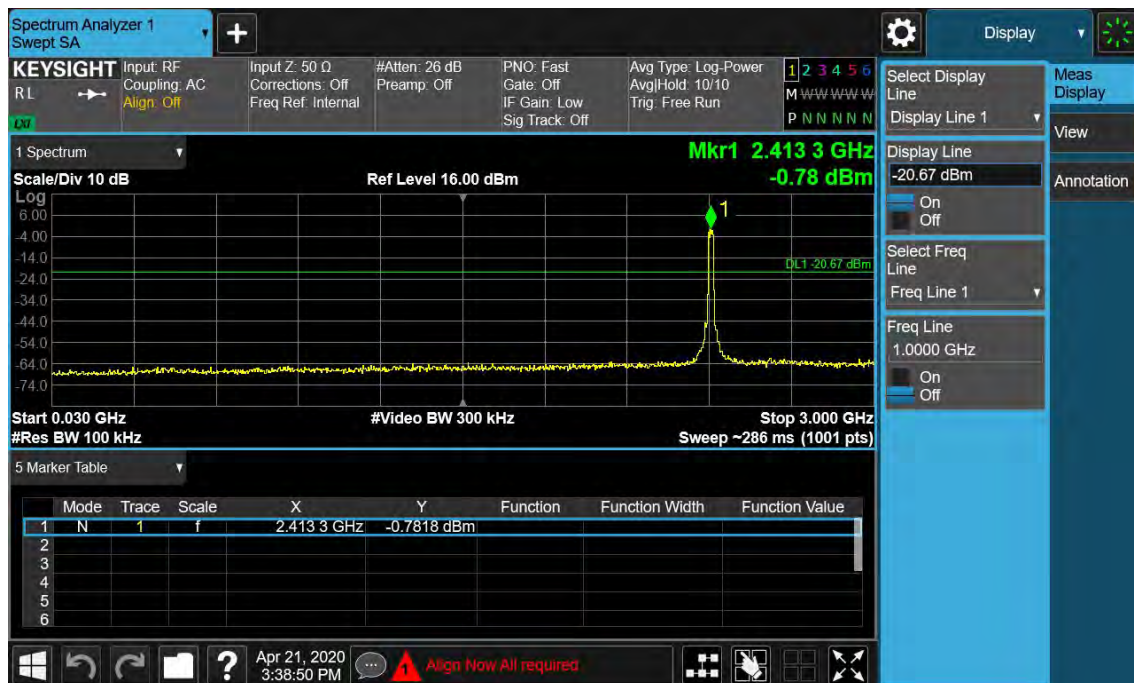

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 41 of 51



Figure 26: Conducted Spurious Emission & Authorized-band band-edge, 802.11n(HT20), 2437MHz Carrier Level




TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 42 of 51

Conducted spurious emissions 30MHz-25GHz

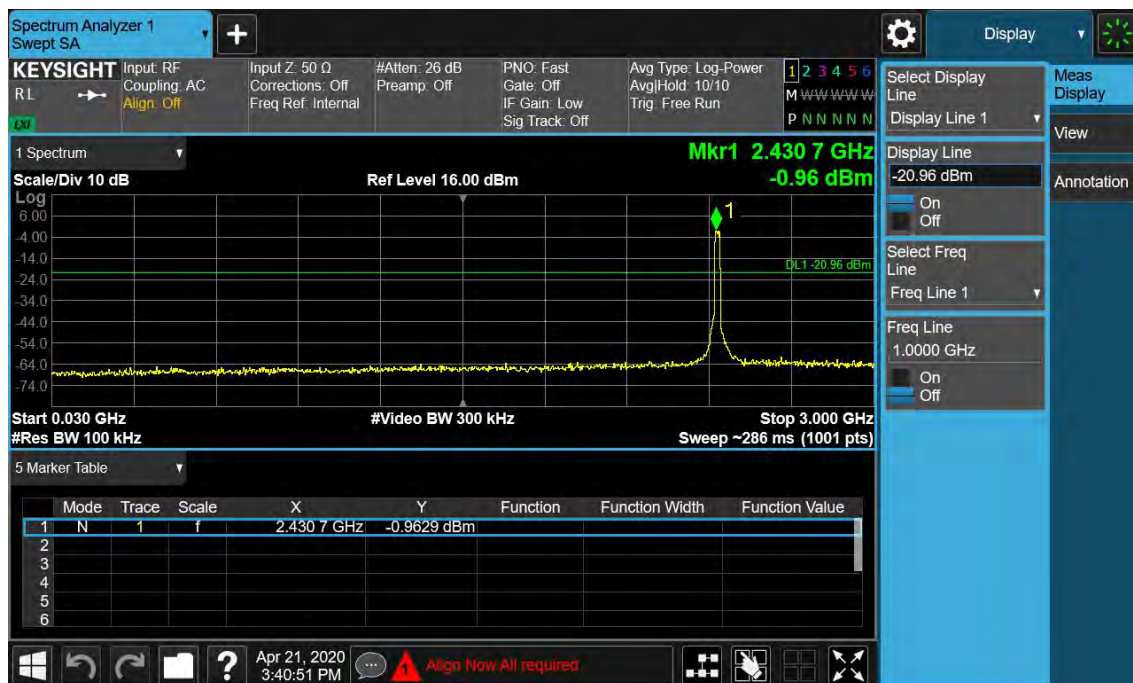

TEST REPORT

Report No.: SHE19120045-01FE


Date: 2020-4-23

Page 43 of 51

Figure 27: Conducted Spurious Emission & Authorized-band band-edge, 802.11n(HT20), 2462MHz Carrier Level



Band Edge

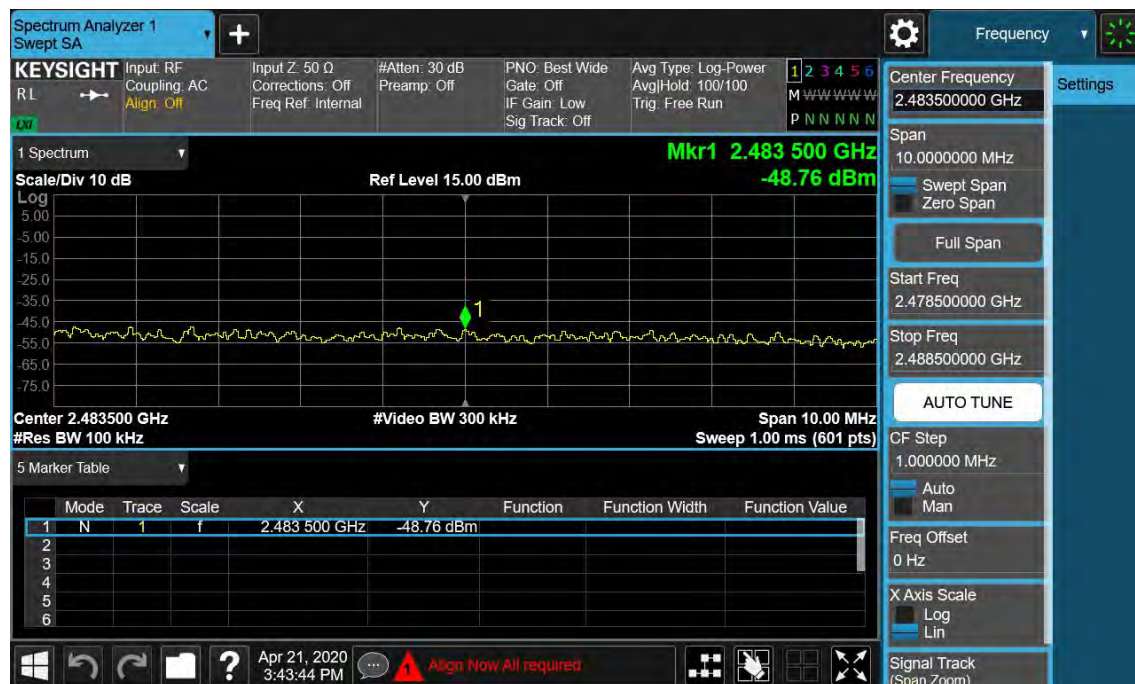


TEST REPORT


Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 44 of 51

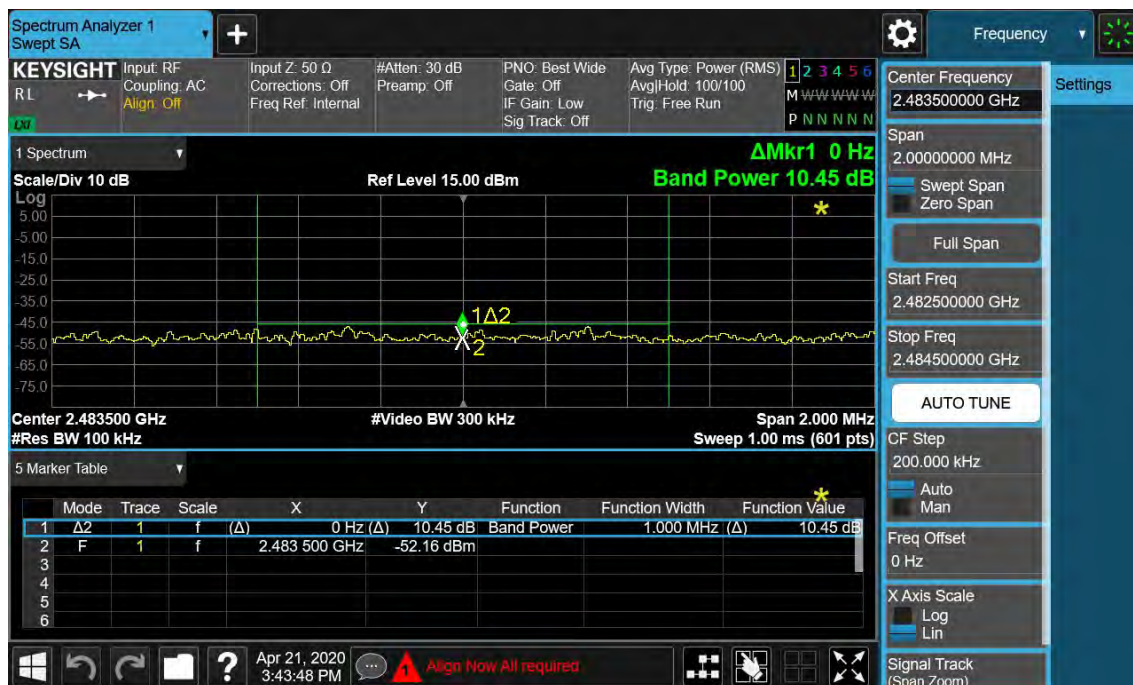

Conducted spurious emissions 30MHz-25GHz

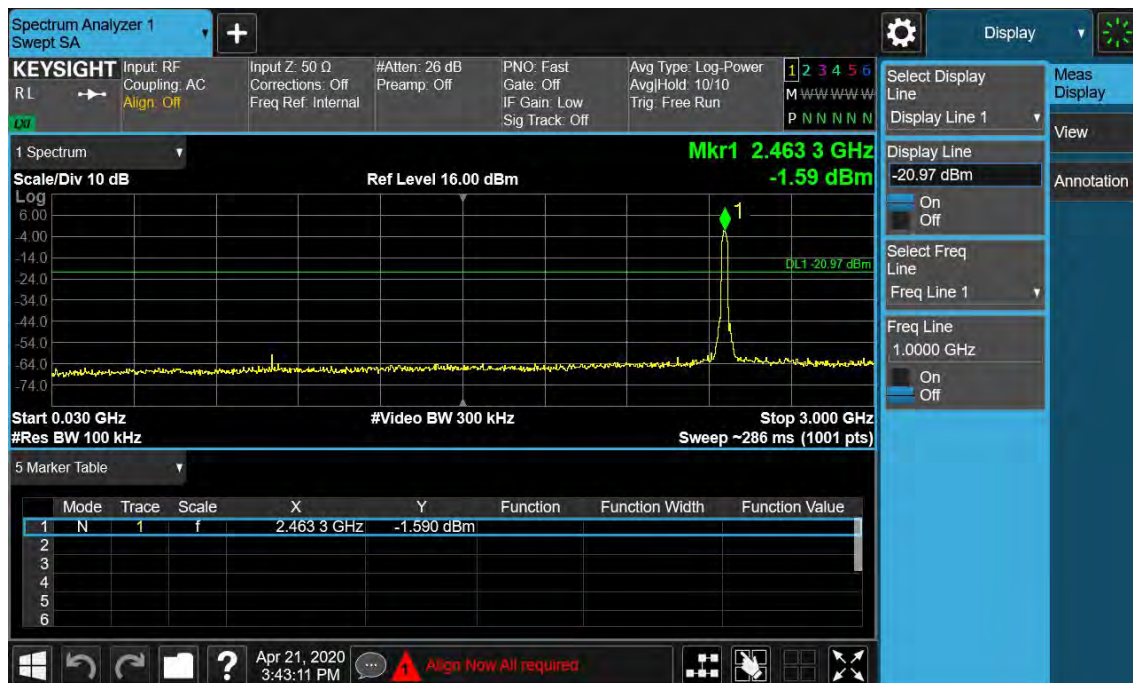

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 45 of 51



TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 46 of 51

4.1.6 Spurious Emission

RESULT:

PASS

Test standard : FCC Part 15.247(d), 15.205, 15.209
RSS-247 5.5
Requirement : ANSI C63.10-2013, KDB 558074
Kind of test site : 3m Semi-Anechoic Chamber

Test setup

Test Channel : Low/Middle/High
Operation Mode : A
Ambient temperature : 25°C
Relative humidity : 52%

For details refer to following test plot.

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 47 of 51

Notes:

1. For 9 kHz ~ 30 MHz, the amplitude of spurious emissions that are attenuated by more than 20dB below the permissible. The value has no need to be reported.
2. The spurious above 18GHz is noise only and 20dB below the limit. The value has no need to be reported.
3. The EUT is working in the Normal link mode below 1 GHz.
4. Test plots please refer to the annex document "Annex A WIFI TX RADIATED SPURIOUS EMISSION DATA of SHE19120045-01FE".

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 48 of 51

4.1.7 Band Edge (Restricted-band band-edge)

RESULT:

PASS

Test standard	: FCC Part 15.247(d), 15.205, 15.209 RSS-247 5.5
Requirement	: ANSI C63.10-2013, KDB 558074
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A.1
Ambient temperature	: 25°C
Relative humidity	: 52%

For details refer to following test plot.

1. Test plots please refer to the annex document "Annex A WIFI TX RADIATED SPURIOUS EMISSION DATA of SHE19120045-01FE".

TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 49 of 51

4.2 Mains Emissions

4.2.1 Conducted Emission on AC Mains

RESULT:

PASS

Test standard	: FCC Part 15.207(a) RSS-Gen 8.8
Requirement	: ANSI C63.10-2013
Kind of test site	: Shielded room

Test setup

Input Voltage	: AC 120V, 60Hz; AC 240V, 50Hz
Operation Mode	: A
Earthing	: Not Connected
Ambient temperature	: 25°C
Relative humidity	: 52%

For details refer to following test plot.

TEST REPORT

Report No.: SHE19120045-01FE


Date: 2020-4-23

Page 50 of 51

Note:

The all configurations were tested respectively, but only the worst configuration shown here.

Figure 28: Conducted Emission on AC Mains, L Phase

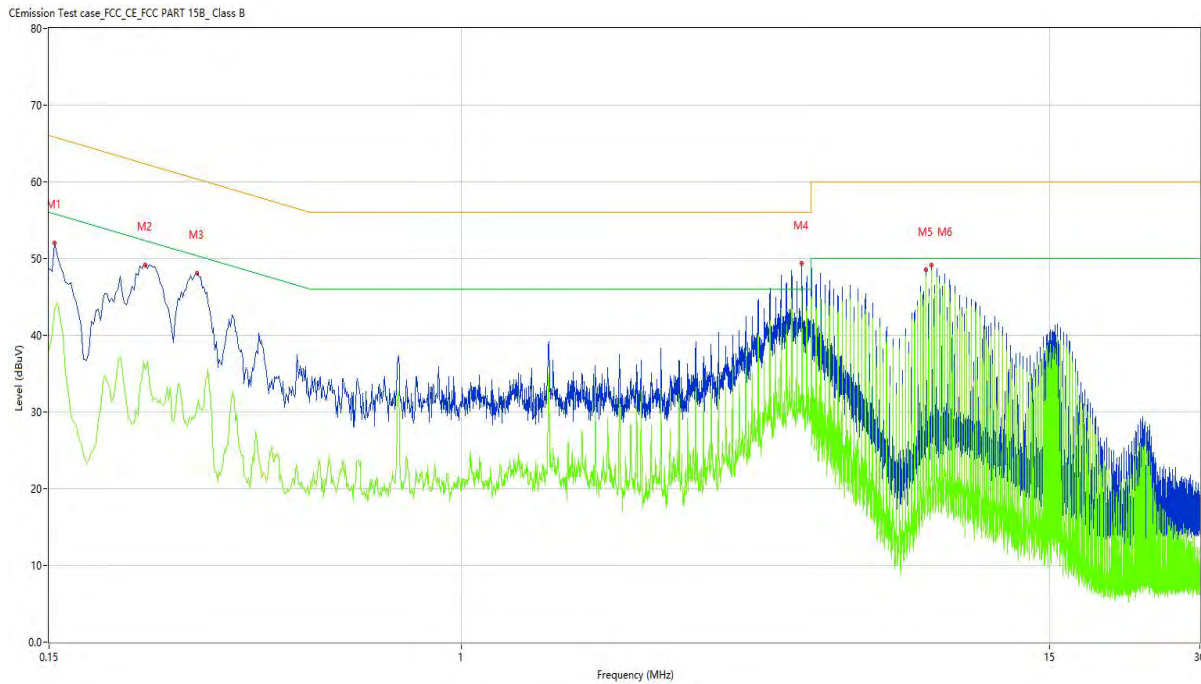

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	51.41	10.15	66.00	-14.59	Peak	L	Pass
1*	0.150	47.53	10.15	66.00	-18.47	QP	L	Pass
1**	0.150	38.07	10.15	56.00	-17.93	AV	L	Pass
2	0.234	49.87	10.14	62.31	-12.44	Peak	L	Pass
2*	0.234	46.55	10.14	62.31	-15.76	QP	L	Pass
2**	0.234	35.58	10.14	52.31	-16.73	AV	L	Pass
3	0.296	48.97	10.14	60.35	-11.38	Peak	L	Pass
3*	0.296	46.01	10.14	60.35	-14.34	QP	L	Pass
3**	0.296	30.36	10.14	50.35	-19.99	AV	L	Pass
4	4.800	50.39	10.25	56.00	-5.61	Peak	L	Pass
4*	4.800	46.91	10.25	56.00	-9.09	QP	L	Pass
4**	4.800	45.63	10.25	46.00	-0.37	AV	L	Pass
5	8.508	48.63	10.35	60.00	-11.37	Peak	L	Pass
5*	8.508	47.28	10.35	60.00	-12.72	QP	L	Pass
5**	8.508	47.71	10.35	50.00	-2.29	AV	L	Pass
6	8.726	49.49	10.35	60.00	-10.51	Peak	L	Pass
6*	8.726	47.92	10.35	60.00	-12.08	QP	L	Pass
6**	8.726	48.41	10.35	50.00	-1.59	AV	L	Pass


TEST REPORT

Report No.: SHE19120045-01FE

Date: 2020-4-23

Page 51 of 51

Figure 29: Conducted Emission on AC Mains, N Phase

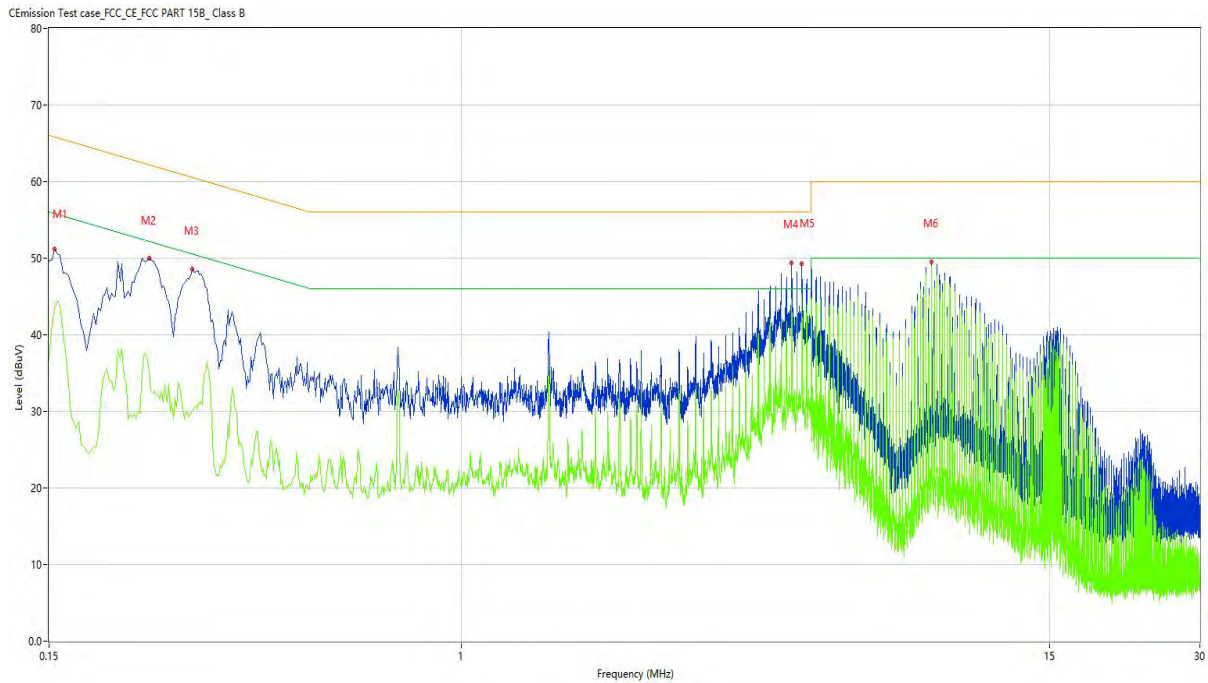

No.	Frequency (MHz)	Results (dBUV)	Factor (dB)	Limit (dBUV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	51.29	10.15	66.00	-14.71	Peak	N	Pass
1*	0.150	47.82	10.15	66.00	-18.18	QP	N	Pass
1**	0.150	36.72	10.15	56.00	-19.28	AV	N	Pass
2	0.238	50.60	10.14	62.17	-11.57	Peak	N	Pass
2*	0.238	47.43	10.14	62.17	-14.74	QP	N	Pass
2**	0.238	35.23	10.14	52.17	-16.94	AV	N	Pass
3	0.290	49.19	10.14	60.52	-11.33	Peak	N	Pass
3*	0.290	45.92	10.14	60.52	-14.60	QP	N	Pass
3**	0.290	30.16	10.14	50.52	-20.36	AV	N	Pass
4	4.582	50.31	10.25	56.00	-5.69	Peak	N	Pass
4*	4.582	47.08	10.25	56.00	-8.92	QP	N	Pass
4**	4.582	44.69	10.25	46.00	-1.31	AV	N	Pass
5	4.800	50.51	10.25	56.00	-5.49	Peak	N	Pass
5*	4.800	47.07	10.25	56.00	-8.93	QP	N	Pass
5**	4.800	45.17	10.25	46.00	-0.83	AV	N	Pass
6	8.728	49.93	10.35	60.00	-10.07	Peak	N	Pass
6*	8.728	48.84	10.35	60.00	-11.16	QP	N	Pass
6**	8.728	48.89	10.35	50.00	-1.11	AV	N	Pass

End of the report