



REPORT No.: SZ23040144W07

TEST REPORT

APPLICANT : Rhino Mobility LLC

PRODUCT NAME : Tablet

MODEL NAME : T100

BRAND NAME : RHINO

FCC ID : 2AUOUT100

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2023-05-08

TEST DATE : 2023-05-28 to 2023-07-17

ISSUE DATE : 2023-07-27



Edited by:

Su Xiaoxian

Su Xiaoxian (Rapporteur)

Approved by:

Shen Junsheng

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	11
2.4. Test Configuration of EUT	12
2.5. Test Conditions	12
2.6. Test Setup Layout Diagram	13
3. Test Results	16
3.1. Antenna Requirement	16
3.2. Duty Cycle of Test Signal	17
3.3. Maximum Peak and Average Conducted Output Power	18
3.4. 6 dB Bandwidth	19
3.5. Conducted Spurious Emissions and Band Edge	20
3.6. Power Spectral Density	21
3.7. Conducted Emission	22
3.8. Restricted Frequency Bands	23
3.9. Radiated Emission	24
Annex A Test Data and Result	26



REPORT No.: SZ23040144W07

Change History		
Version	Date	Reason for change
1.0	2023-07-27	First edition

1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	May. 28, 2023	Su Xiaoxian	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	Jul. 14, 2023	Su Xiaoxian	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	Jul. 14, 2023	Su Xiaoxian	PASS	No deviation
5	15.247(a)	Bandwidth	May. 28, 2023	Su Xiaoxian	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	May. 28, 2023	Su Xiaoxian	PASS	No deviation
7	15.247(e)	Power Spectral Density	May. 28, 2023	Su Xiaoxian	PASS	No deviation
8	15.207	Conducted Emission	Jul. 11, 2023	Fan Zehang	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	Jul. 10, 2023	Lin Hanbin	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	Jul. 14, 2023	Lin Hanbin	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v05r02.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2023.02.27	2024.02.26
Power Sensor	MY54180008	U2021XA	Agilent	2022.10.11	2023.10.10
Attenuator	MTJ6004-20	VAT-10+	MTJ Cooperation	N/A	N/A
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2022.07.06	2023.07.05
				2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR V1.2	Morlab	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2022.07.06	2023.07.05
				2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2022.07.13	2025.07.12
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2022.07.14	2025.07.13
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2022.07.08	2023.07.07
				2023.06.26	2024.06.27
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2022.07.08	2023.07.07
				2023.06.26	2024.06.27
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2022.07.23	2023.07.22
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2022.07.08	2023.07.07
				2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2022.07.08	2023.07.07
				2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2022.07.08	2023.07.07
				2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2022.07.08	2023.07.07
				2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2022.07.08	2023.07.07
				2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2022.07.08	2023.07.07
				2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	$\pm 2.22\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 2.22\text{dB}$	Confidence levels of 95%
Bandwidth	$\pm 5\%$	Confidence levels of 95%
Conducted Spurious Emission	$\pm 2.77\text{dB}$	Confidence levels of 95%
Restricted Frequency Bands	$\pm 5\%$	Confidence levels of 95%
Radiated Emission	$\pm 2.95\text{dB}$	Confidence levels of 95%
Conducted Emission	$\pm 2.44\text{dB}$	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Rhino Mobility LLC
Applicant Address	8 The Green, Suite A, Dover, Delaware, 19901, USA
Manufacturer	Rhino Mobility LLC
Manufacturer Address	8 The Green, Suite A, Dover, Delaware, 19901, USA

2.2. Information of EUT

Product Name:	Tablet	
Sample No.:	5#	
Hardware Version:	T8005_V1.0	
Software Version:	T100(001)_20230610	
Modulation Technology:	DSSS, OFDM	
Modulation Type:	Refer to section 1.3	
Wireless Technology:	802.11b, 802.11g, 802.11n (HT20), 802.11n (HT40)	
Operating Frequency Range:	2412MHz–2462MHz	
Antenna Type:	PIFA Antenna	
Antenna Gain:	0.71dBi	
Accessory Information:	Battery	
	Brand Name:	N/A
	Model No.:	BPT100
	Serial No.:	N/A
	Capacity:	6000mAh
	Rated Voltage:	3.85V
	Charge Limit:	4.4V
	Manufacturer:	Huizhou Highpower Technology Co., Ltd.



Accessory Information:	AC Adapter	
	Brand Name:	RHINO
	Model No.:	TPA-10S120150UU01
	Serial No.:	N/A
	Rated Input:	100-240V~50/60Hz, 0.6A
	Rated Output:	3.6V-6.0V=3A or 6.0V-9.0V=2.0A or 9.0V-12.0V=1.5A
	Manufacturer:	Shenzhen Tianyin Electronics Co., Ltd.
	USB Cable 1	
	Model:	188.123022001-09
	Manufacturer:	Yibin Ruirun Electronics Co., Ltd.
	USB Cable 2	
	Model:	188.123022002-09
	Manufacturer:	Yibin Ruirun Electronics Co., Ltd.
	USB Cable 3	
	Model:	USB TYPE A TO C 2.0 Cable 2.0m
	Manufacturer:	HUIZHOU WASHIN ELECTRONICTS CO.,LTD.
	USB Cable 4	
	Model:	USB TYPE A TO C 2.0 Cable 1.0m
	Manufacturer:	HUIZHOU WASHIN ELECTRONICTS CO.,LTD.

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.3.Channel List of EUT

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11b/g/n (HT20)	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432		
	6	2437		
	7	2442		
Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11n (HT40)	3	2422	8	2447
	4	2427	9	2452
	5	2432		
	6	2437		
	7	2442		

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT

2.4.1. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate	RU Size
802.11b	20	DSSS	DBPSK	1/2/5.5/11Mbps	N/A
			DQPSK		
			CCK		
802.11g	20	OFDM	BPSK	6/9/12/18/24/36/48/54 Mbps	N/A
			QPSK		
			16QAM		
			64QAM		
802.11n	20/40 (HT20/40)	OFDM	BPSK	MCS0~MCS7	N/A
			QPSK		
			16QAM		
			64QAM		

Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

Note2: The RF signal transmission of EUT is controlled by the build-in engineering mode which is provided by the manufacturer. The recorded power setting value is the maximum that the engineering mode has configuration during testing.


2.5. Test Conditions

Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106


2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement


Power item

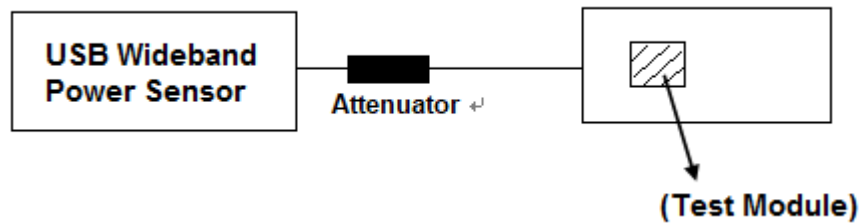

Other items

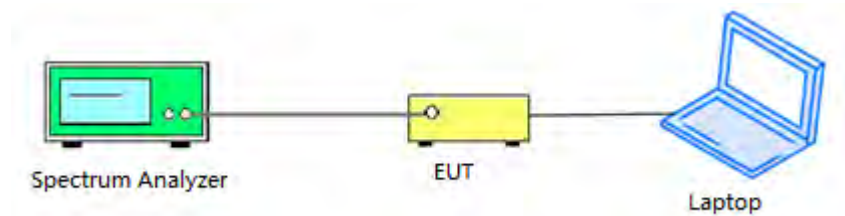


2.6.2. Conducted Emission Measurement

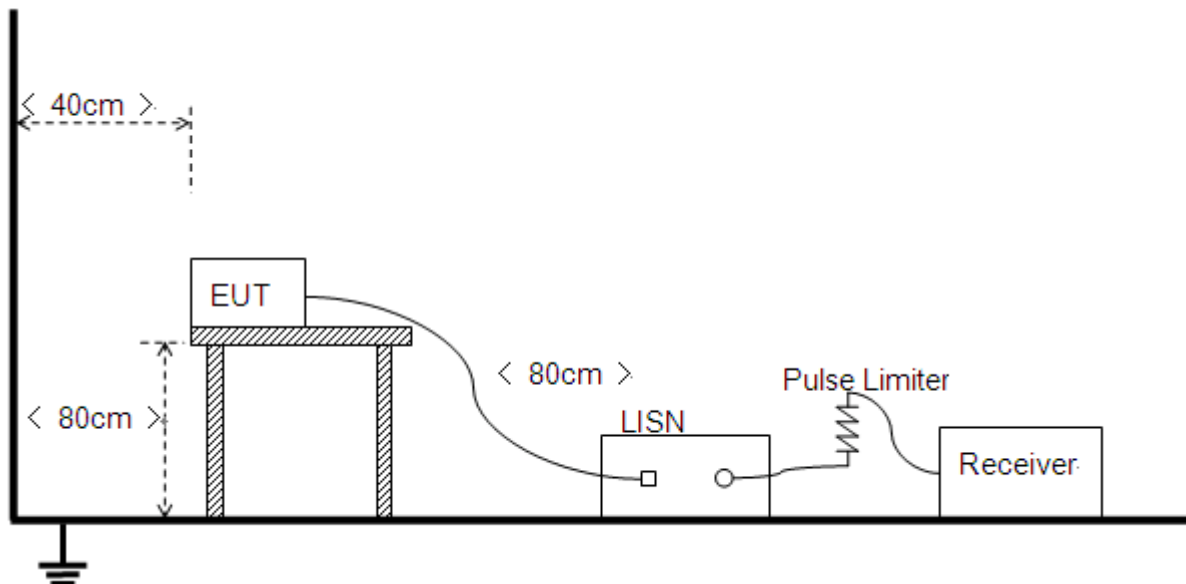


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

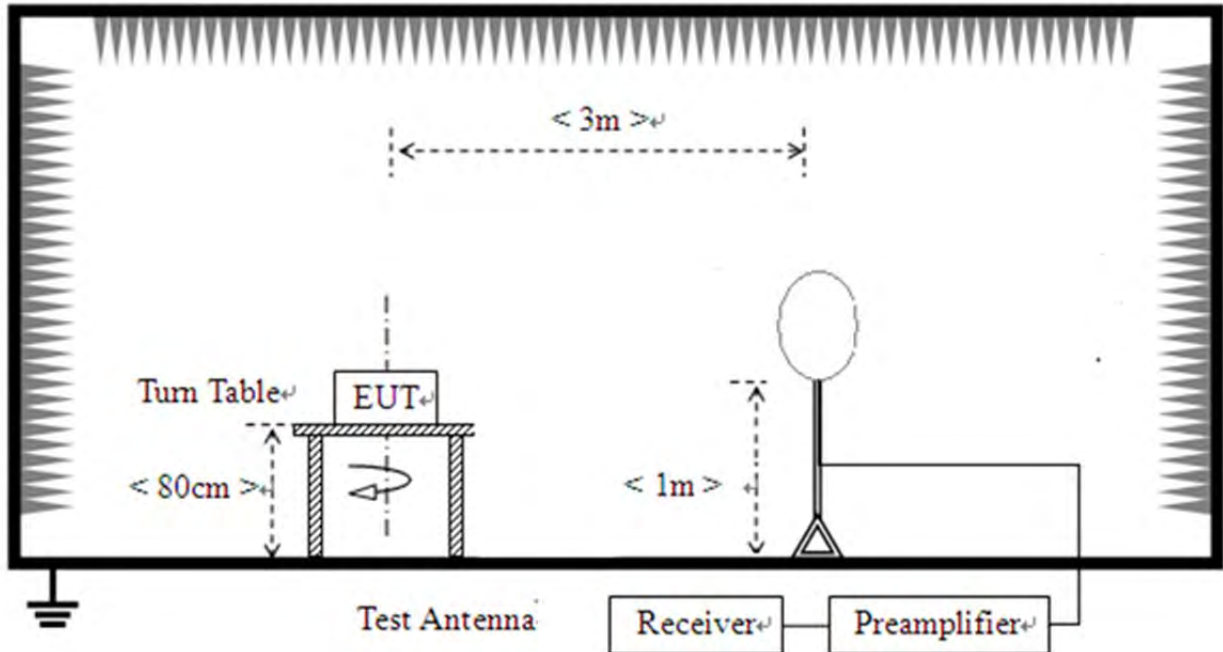

2) For radiated emissions from 30MHz to 1GHz

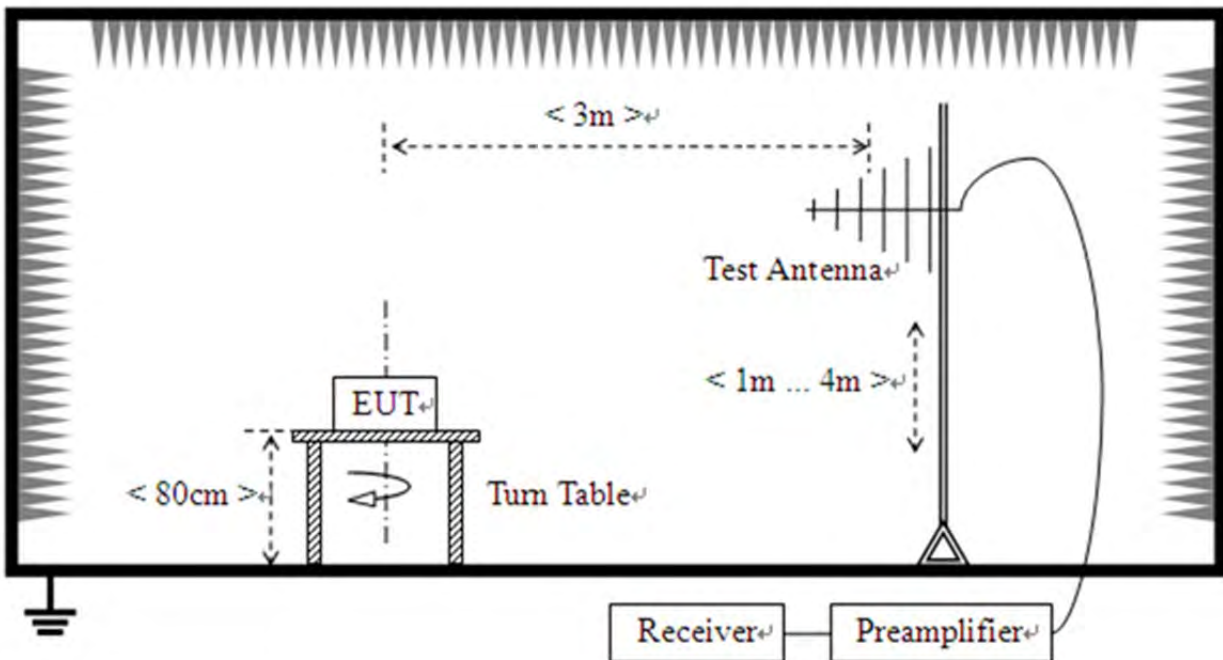

3) For radiated emissions above 1GHz

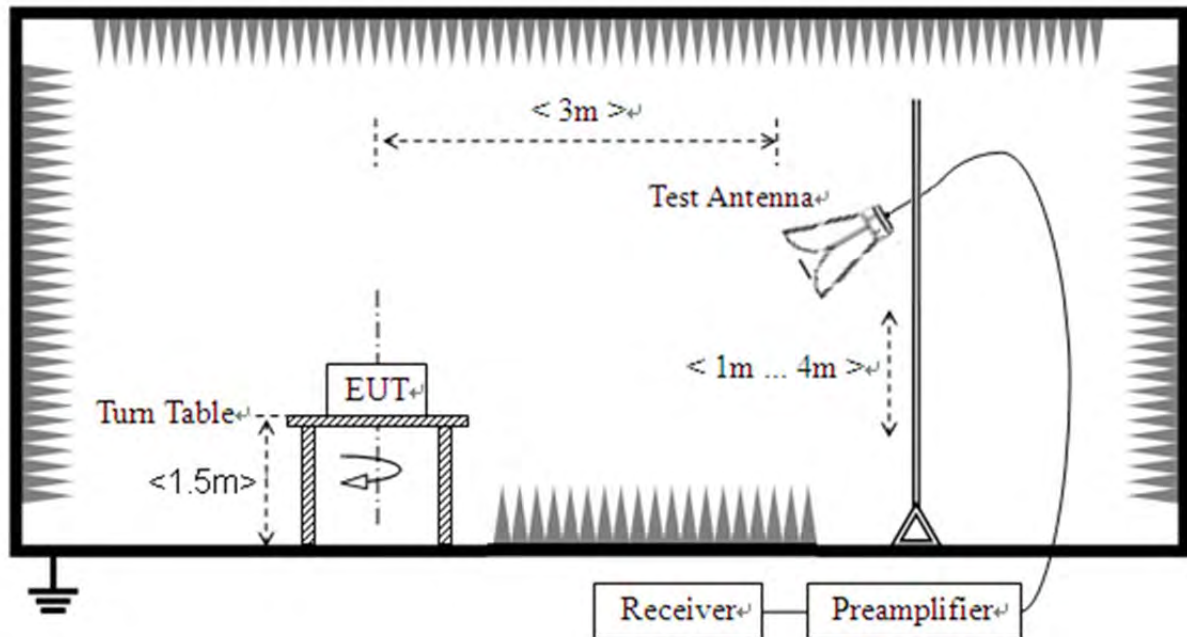



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Inside of the EUT has a PIFA antenna coupled with the metal shrapnel. Please refer to the EUT photos.

3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak and Average Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 and A.3 in this report.



3.4.6 dB Bandwidth

3.4.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.4.1.Test Procedures

KDB 558074 Section 8.2 was used in order to prove compliance.

3.4.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.3.Test Result

Refer to Annex A.4 in this report.



3.5. Conducted Spurious Emissions and Band Edge

3.5.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.5.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.5 and A.6 in this report.



3.6. Power Spectral Density

3.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.6.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 30kHz
- d) Set VBW to 100kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level and recorded as PD
- j) Use below formula to calculate the Conducted PSD value that at specified RBW:

Conducted PSD = PD - 10lg(30k/3k)

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.7 in this report.

3.7. Conducted Emission

3.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.7.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.7.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.7.4. Test Result

Refer to Annex A.8 in this report.



3.8.Restricted Frequency Bands

3.8.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.8.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.8.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.8.4.Test Result

Refer to Annex A.9 in this report.



3.9. Radiated Emission

3.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.9.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.10 in this report.



Annex A Test Data and Result


A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	98.55	0.06	0.08
NVNT	b	2437	Ant1	98.47	0.07	0.08
NVNT	b	2462	Ant1	98.55	0.06	0.08
NVNT	g	2412	Ant1	98.26	0.08	0.49
NVNT	g	2437	Ant1	98.26	0.08	0.49
NVNT	g	2462	Ant1	98.26	0.08	0.49
NVNT	n20	2412	Ant1	98.13	0.08	0.53
NVNT	n20	2437	Ant1	98.13	0.08	0.53
NVNT	n20	2462	Ant1	98.13	0.08	0.53
NVNT	n40	2422	Ant1	94.89	0.23	1.08
NVNT	n40	2437	Ant1	94.89	0.23	1.08
NVNT	n40	2452	Ant1	94.89	0.23	1.08




Test Graphs

Duty Cycle NVNT b 2412MHz Ant1

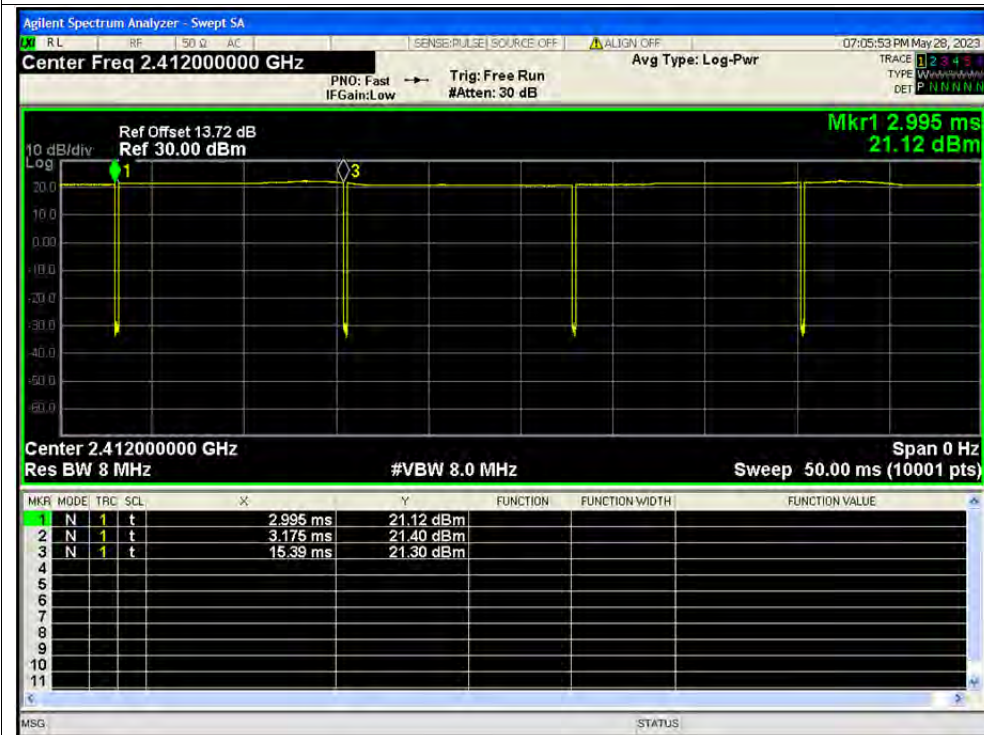


Duty Cycle NVNT b 2437MHz Ant1

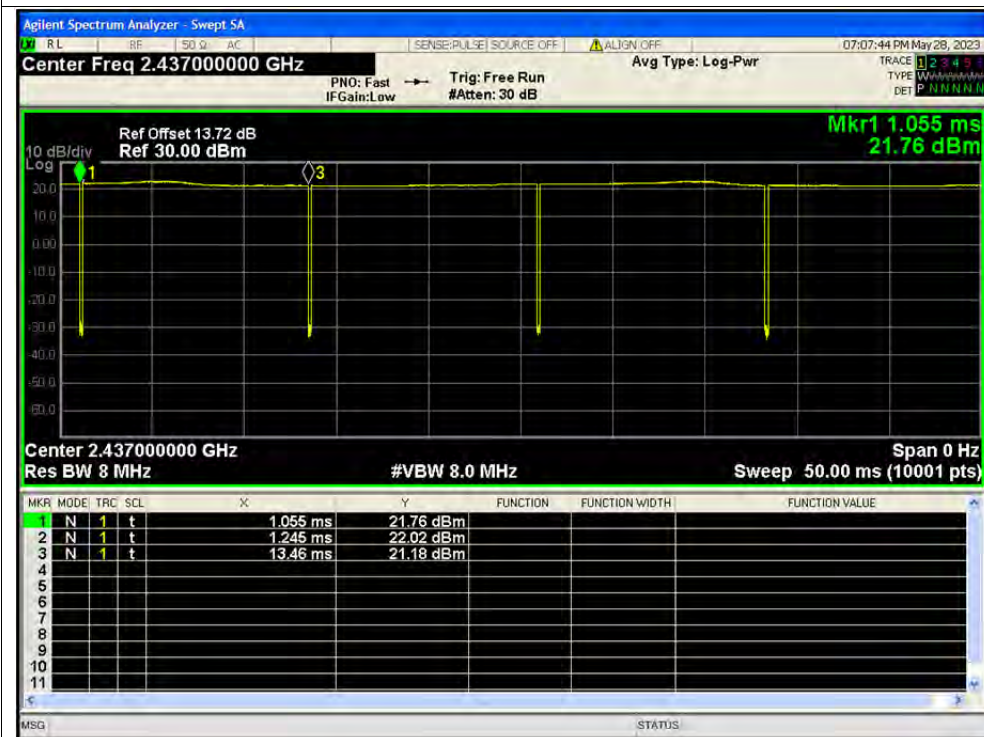




Duty Cycle NVNT b 2462MHz Ant1

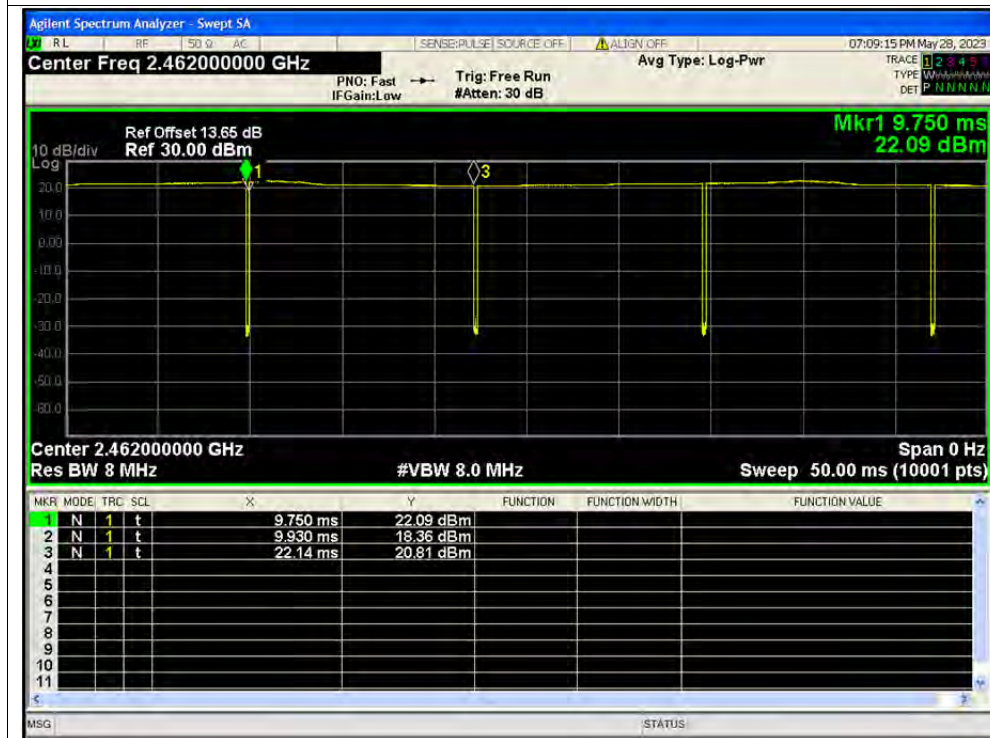


Duty Cycle NVNT g 2412MHz Ant1

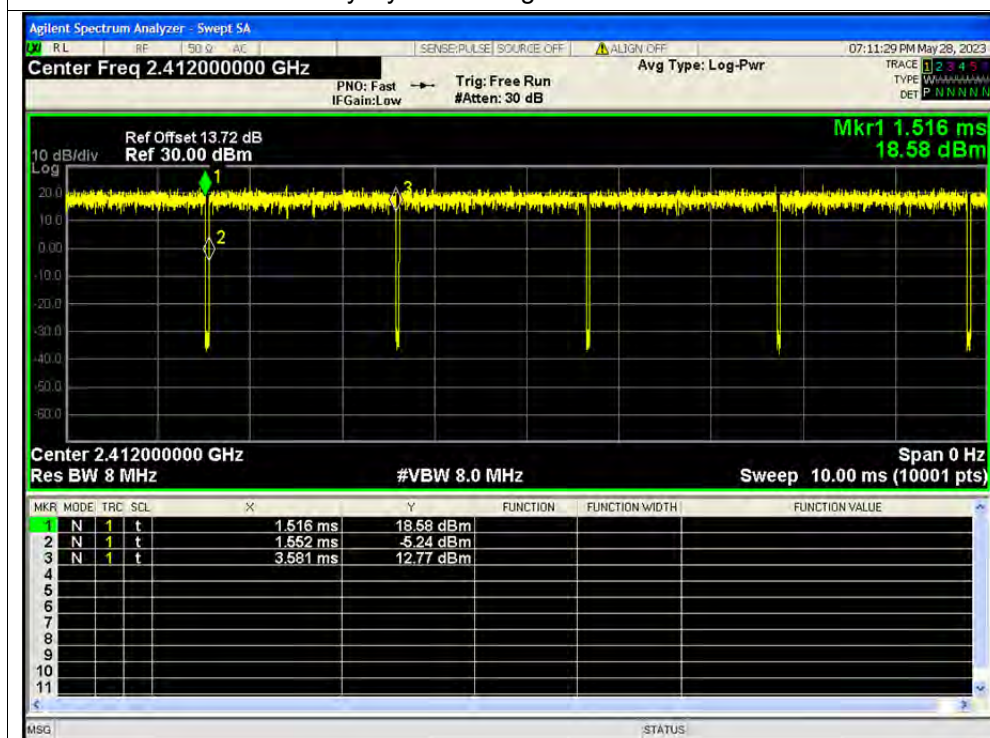




Duty Cycle NVNT g 2437MHz Ant1

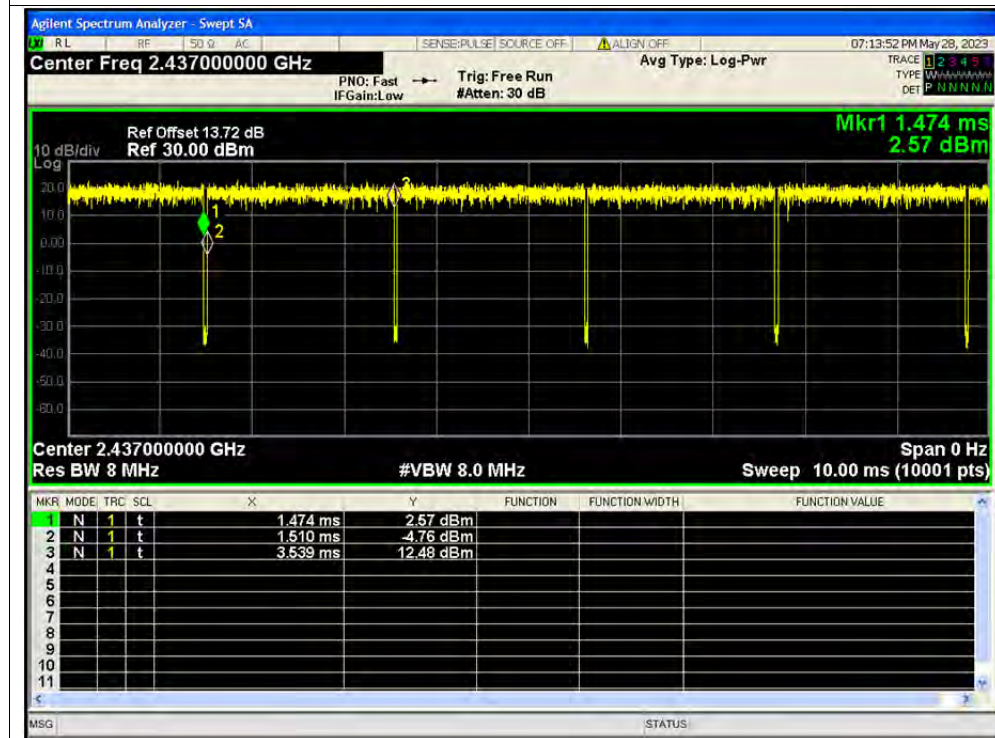


Duty Cycle NVNT g 2462MHz Ant1

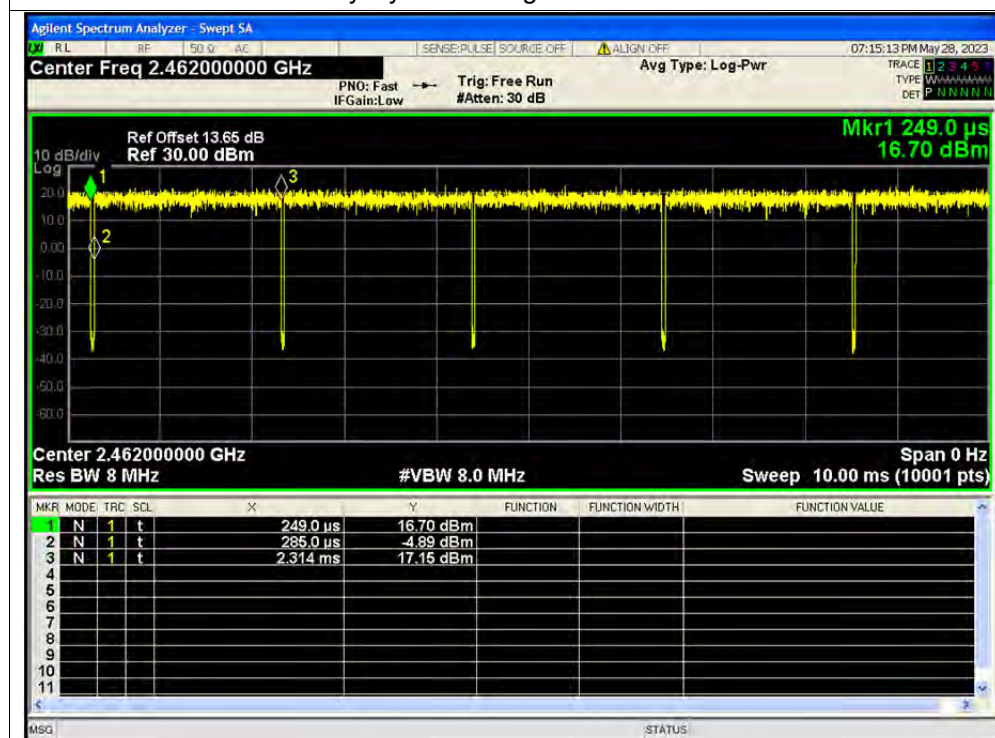




Duty Cycle NVNT n20 2412MHz Ant1

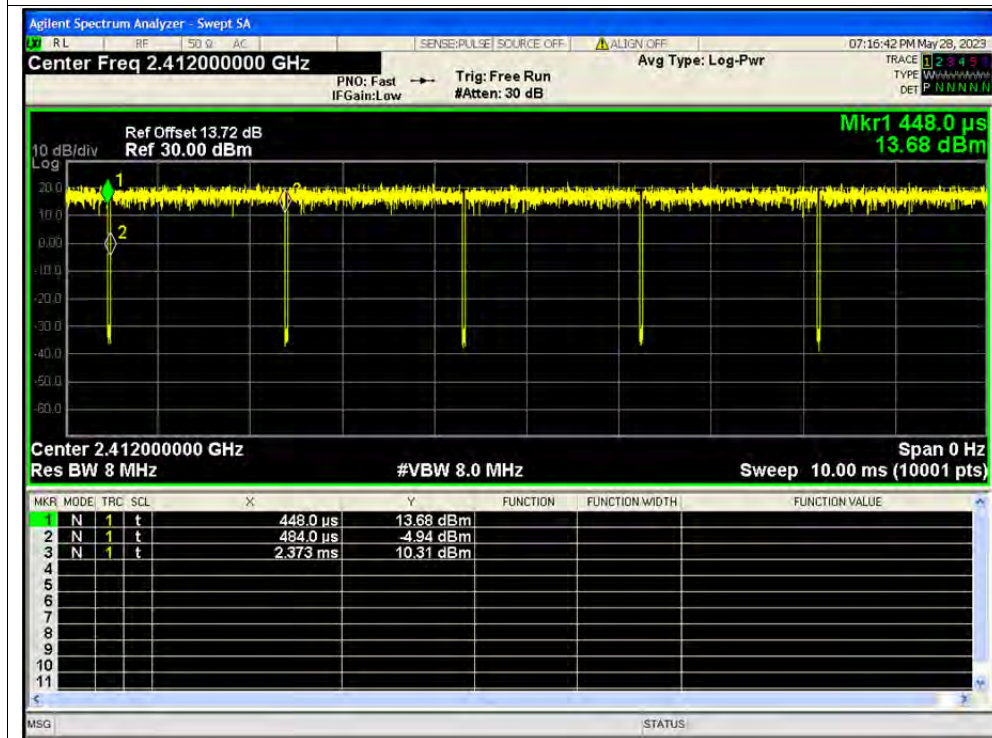


Duty Cycle NVNT n20 2437MHz Ant1

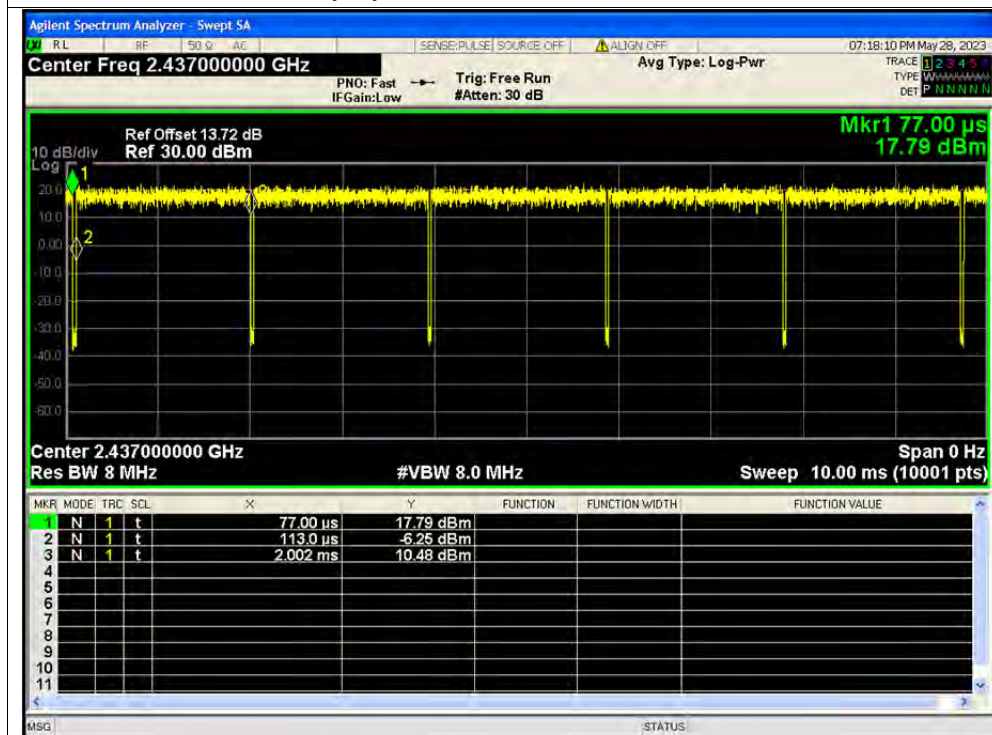




Duty Cycle NVNT n20 2462MHz Ant1

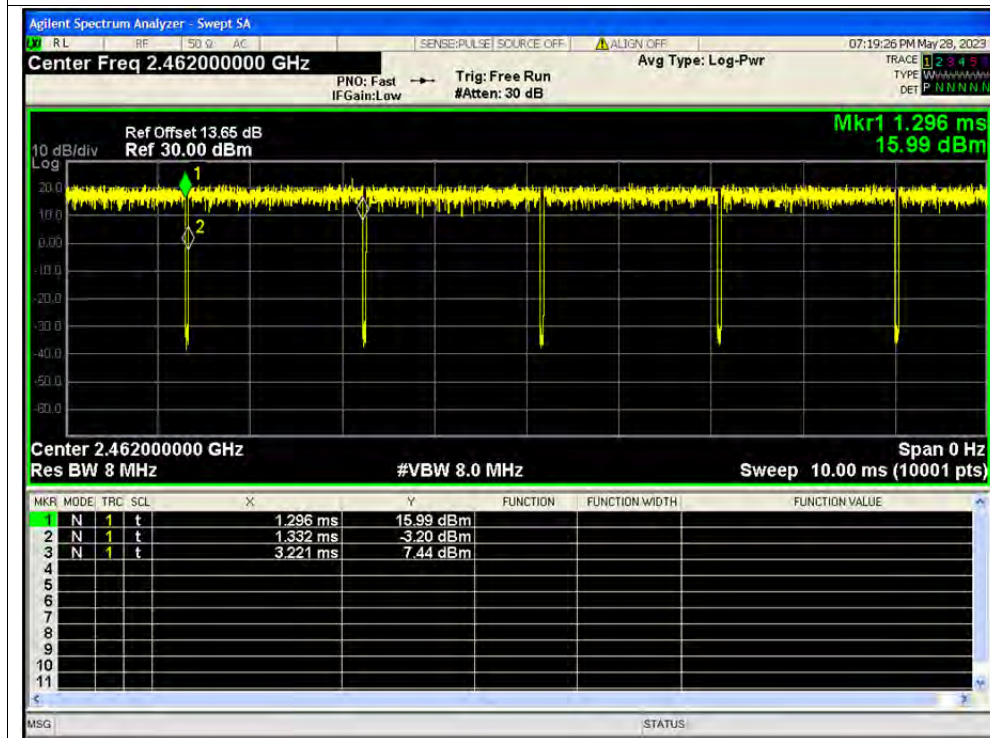


Duty Cycle NVNT n40 2422MHz Ant1

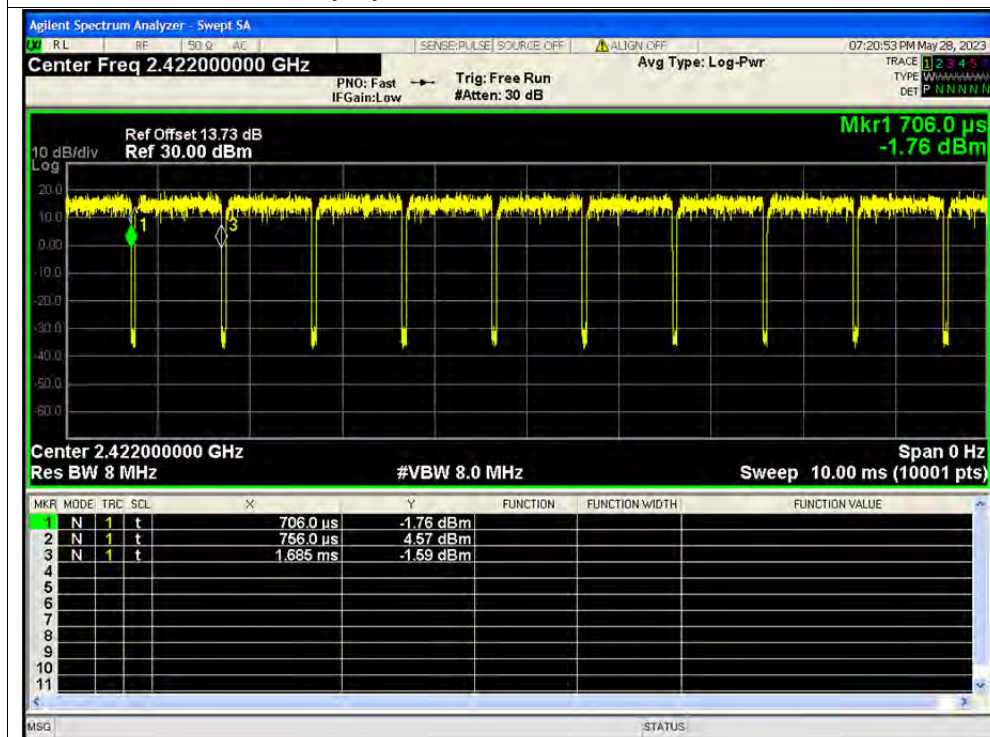




Duty Cycle NVNT n40 2437MHz Ant1

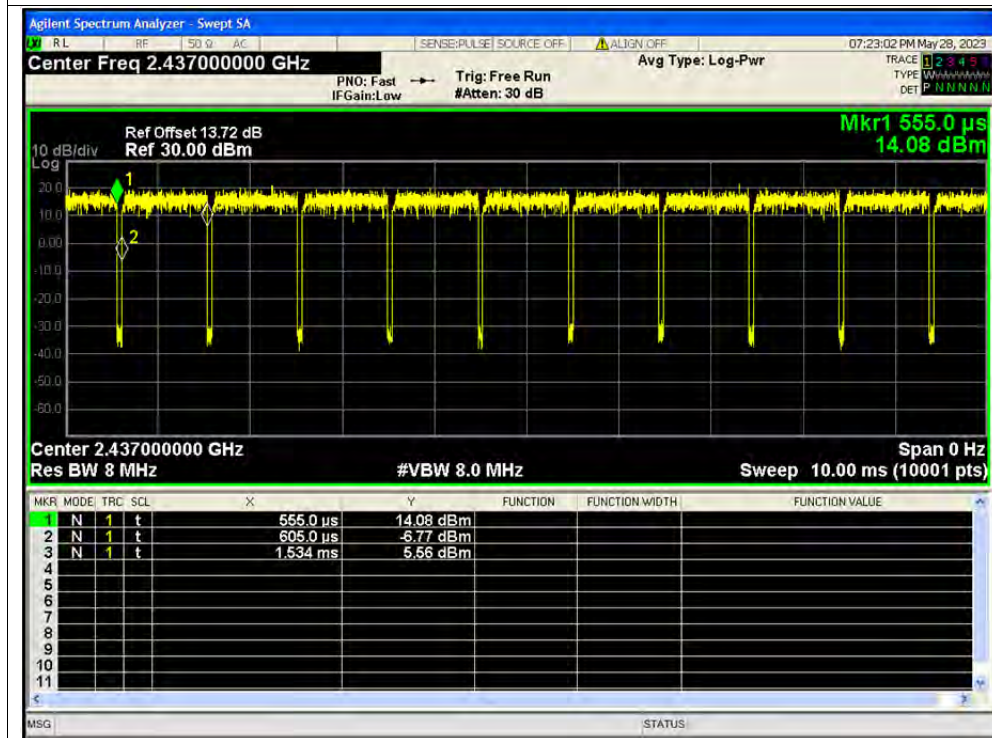

Duty Cycle NVNT n40 2452MHz Ant1

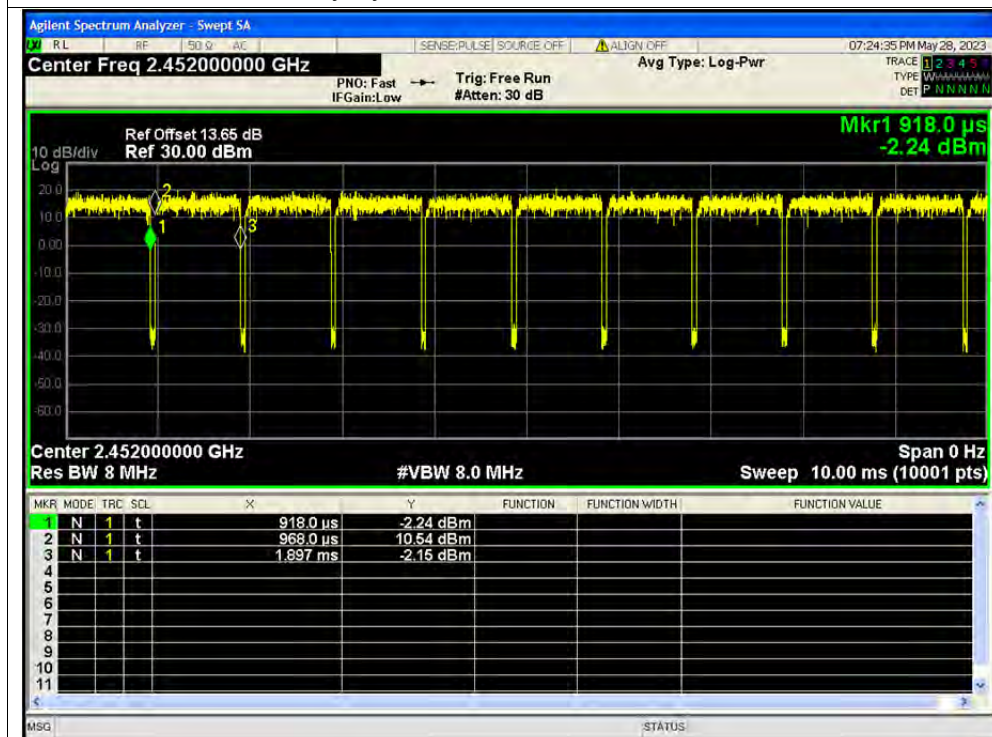


**A.2. Maximum Peak Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (mW)	Limit Conducted (dBm)	Verdict
NVNT	b	2412	Ant1	11.9	0	11.9	15.49	30	Pass
NVNT	b	2437	Ant1	13.01	0	13.01	20	30	Pass
NVNT	b	2462	Ant1	12.37	0	12.37	17.26	30	Pass
NVNT	g	2412	Ant1	16.27	0	16.27	42.36	30	Pass
NVNT	g	2437	Ant1	17.3	0	17.3	53.7	30	Pass
NVNT	g	2462	Ant1	16.98	0	16.98	49.89	30	Pass
NVNT	n20	2412	Ant1	16.46	0	16.46	44.26	30	Pass
NVNT	n20	2437	Ant1	17.1	0	17.1	51.29	30	Pass
NVNT	n20	2462	Ant1	16.73	0	16.73	47.1	30	Pass
NVNT	n40	2422	Ant1	15.67	0	15.67	36.9	30	Pass
NVNT	n40	2437	Ant1	17.17	0	17.17	52.12	30	Pass
NVNT	n40	2452	Ant1	17.33	0	17.33	54.08	30	Pass




Test Graphs


Peak Power NVNT b 2412MHz Ant1

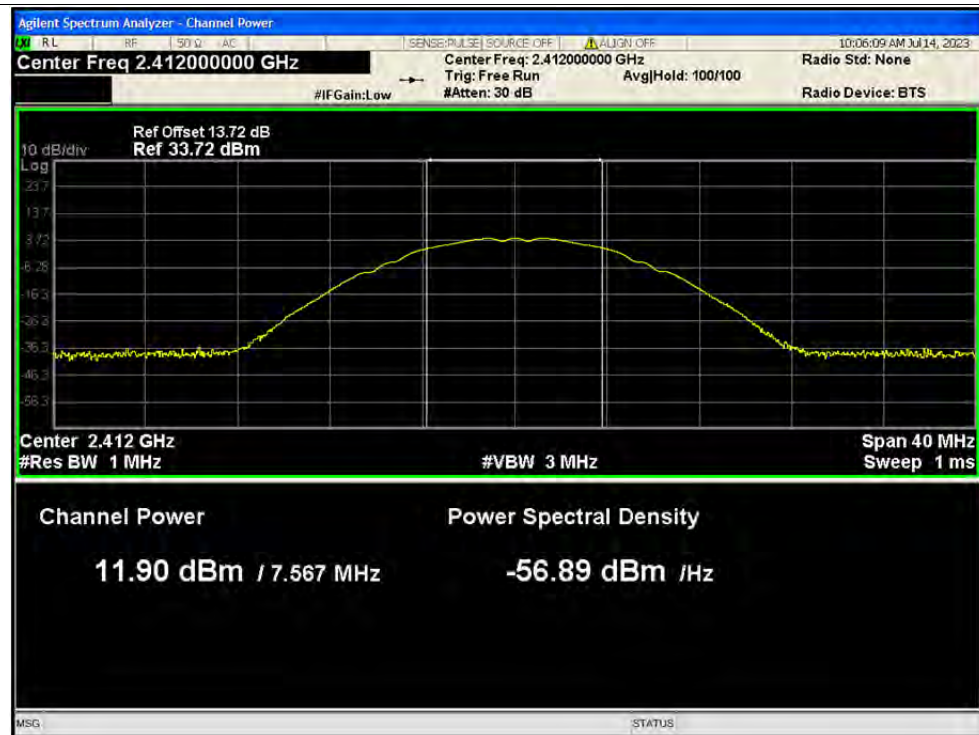


Peak Power NVNT b 2437MHz Ant1

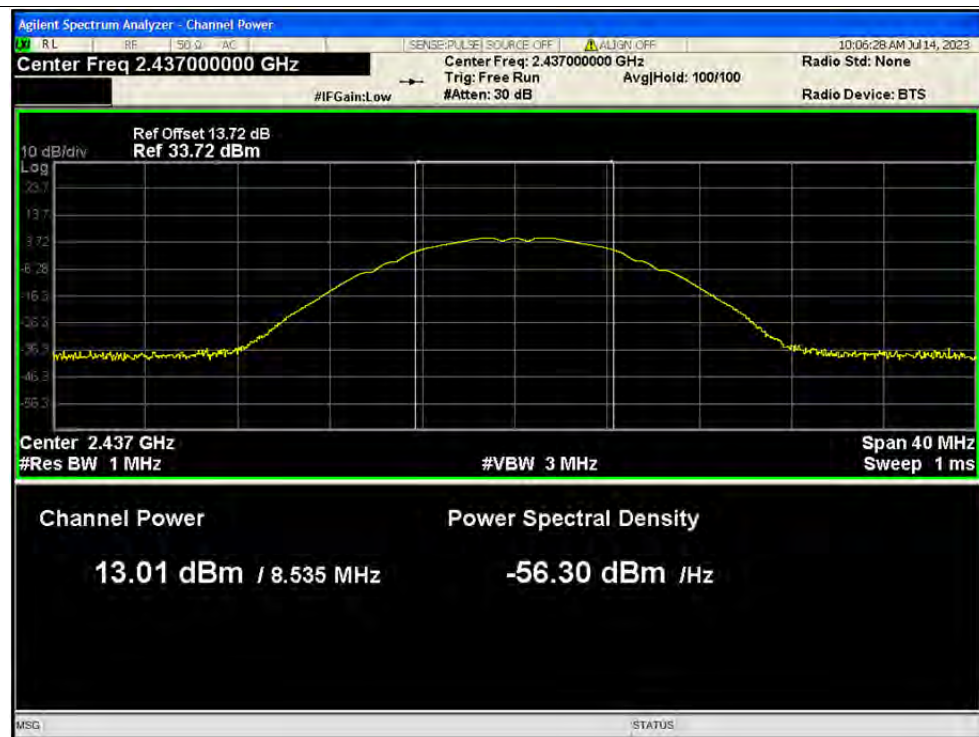


Peak Power NVNT b 2462MHz Ant1

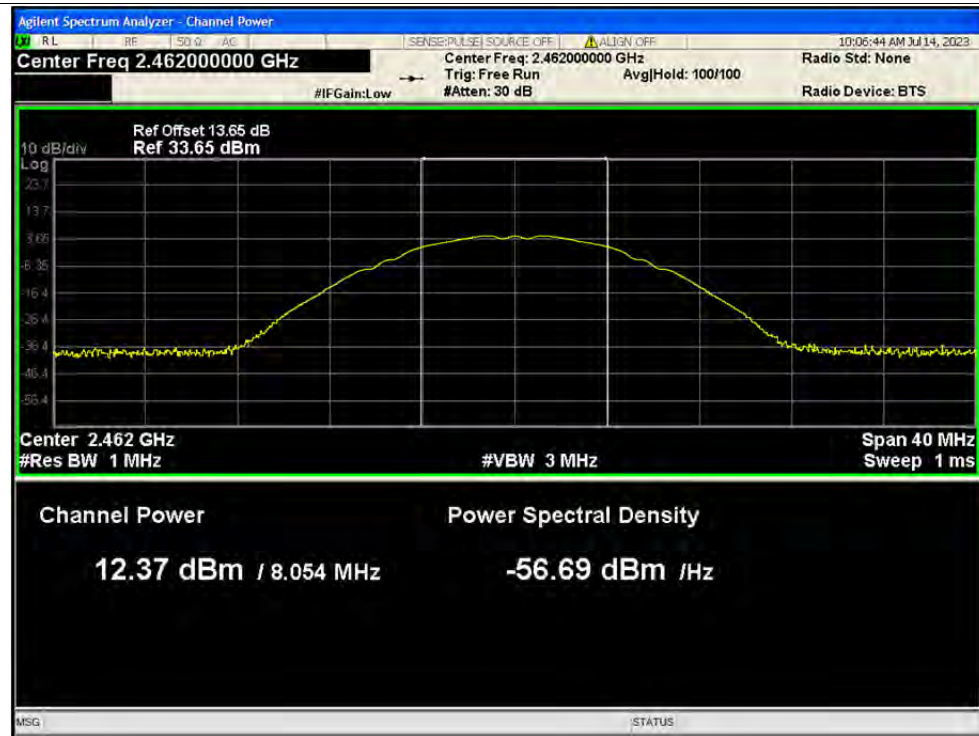


Peak Power NVNT g 2412MHz Ant1

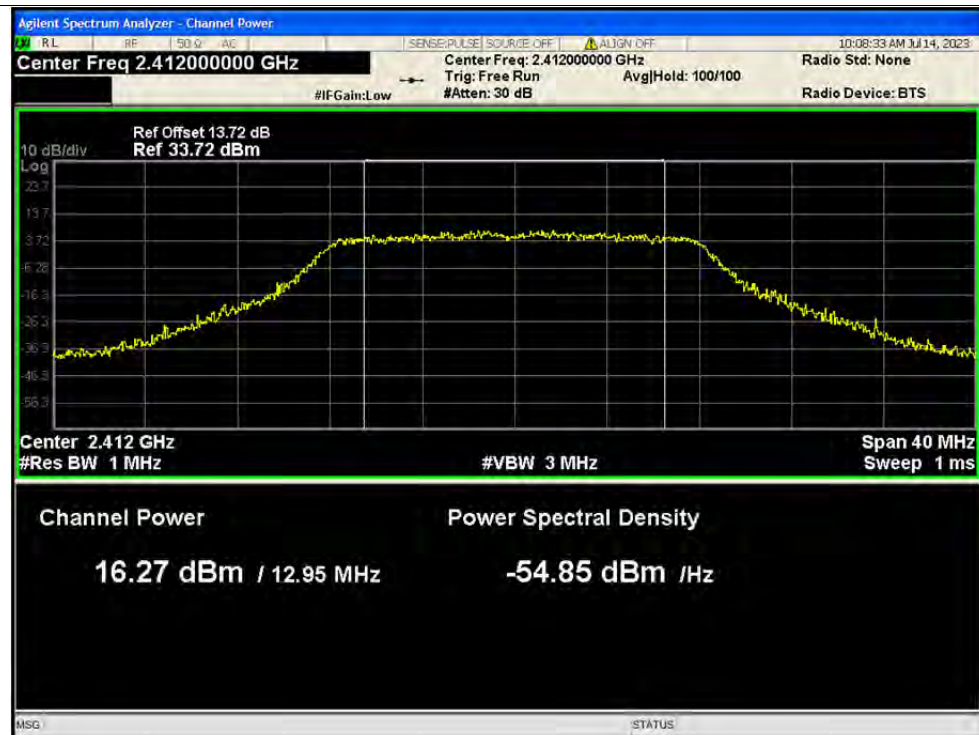


Peak Power NVNT g 2437MHz Ant1

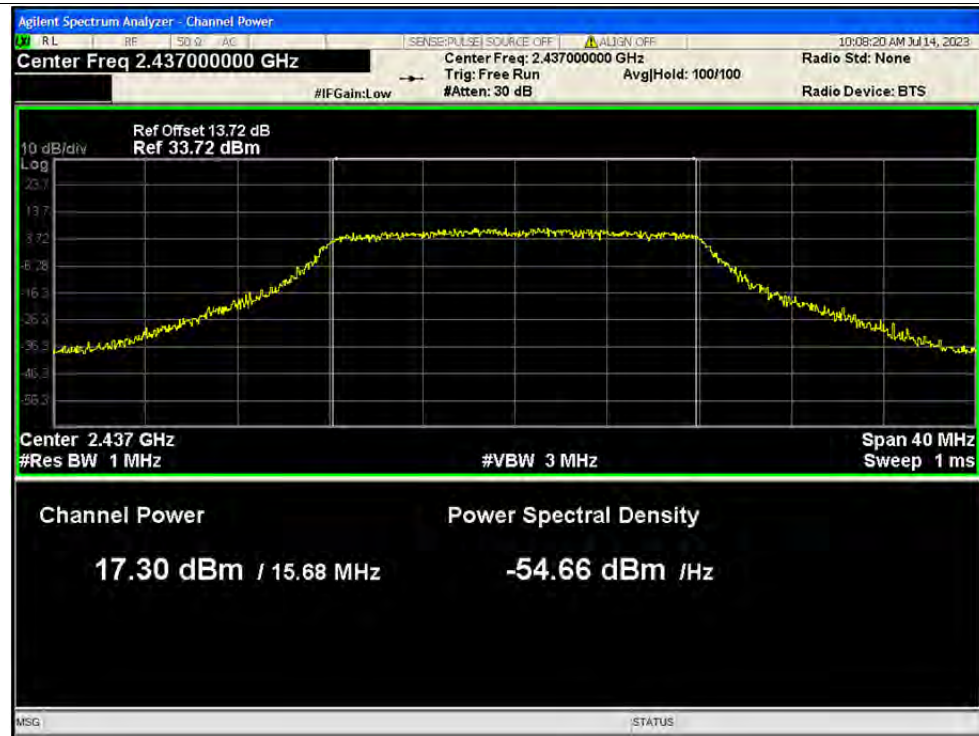


Peak Power NVNT g 2462MHz Ant1

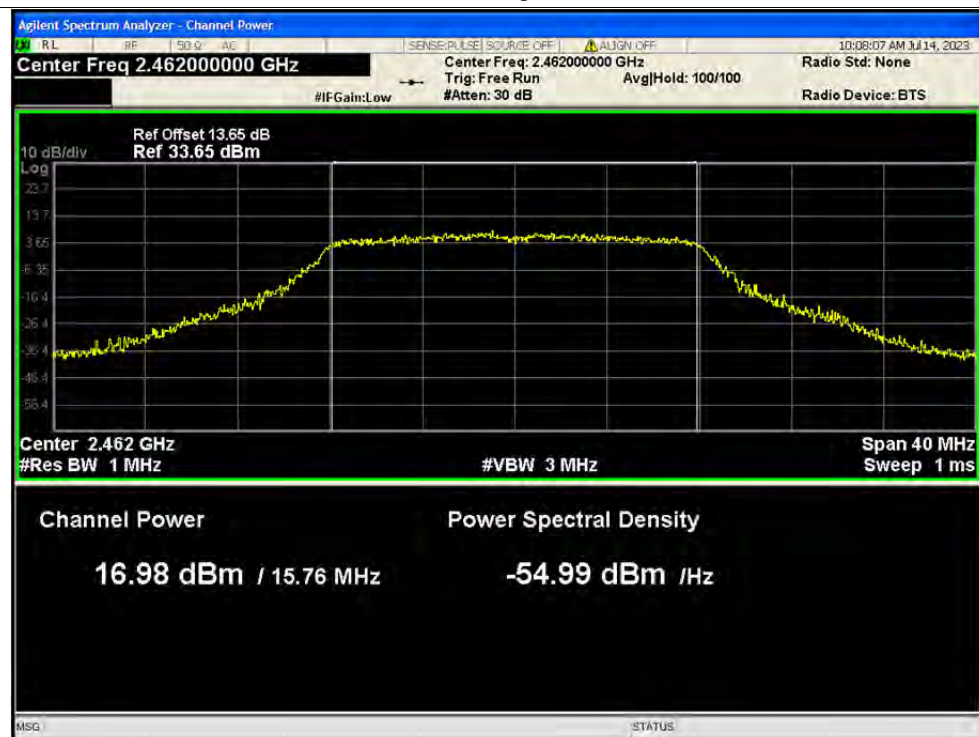

Peak Power NVNT n20 2412MHz Ant1

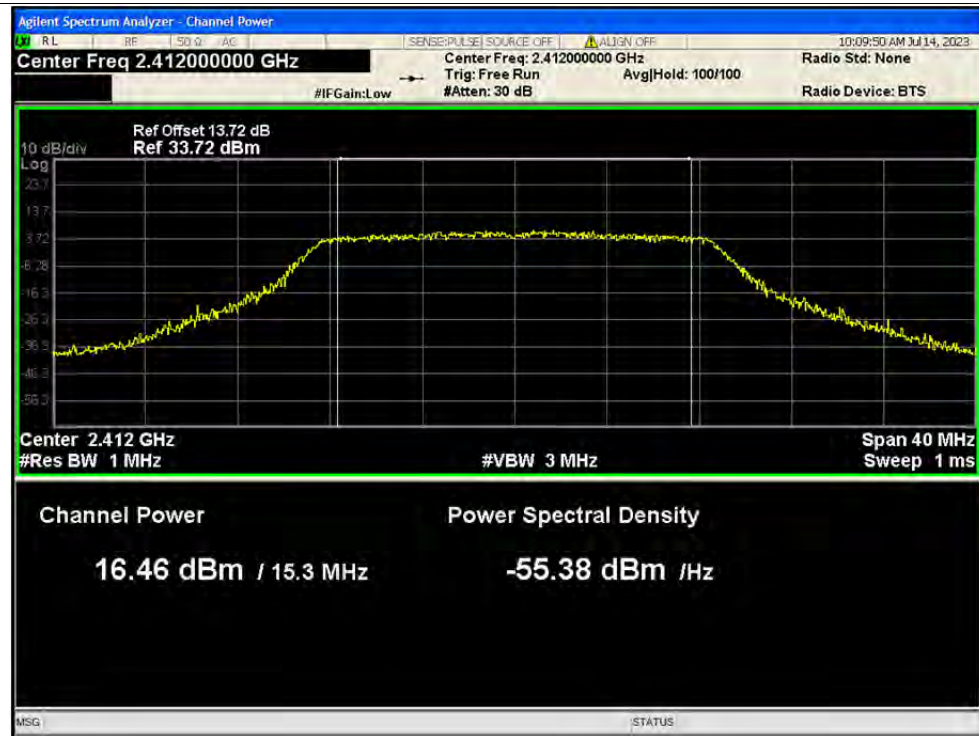

Peak Power NVNT n20 2437MHz Ant1

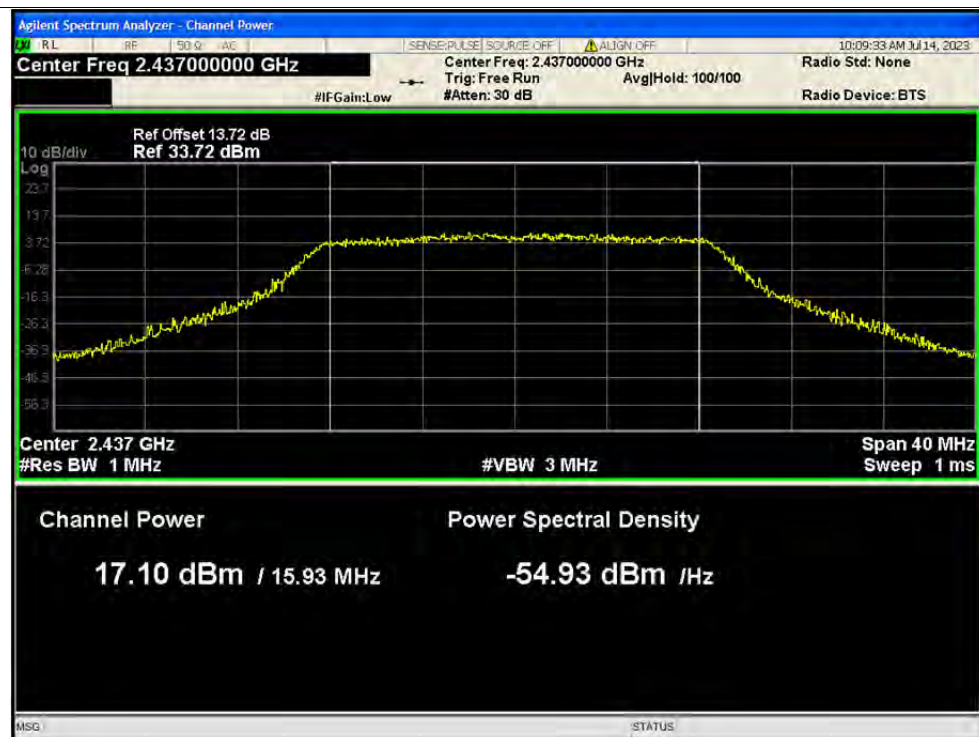




Peak Power NVNT n20 2462MHz Ant1




Peak Power NVNT n40 2422MHz Ant1

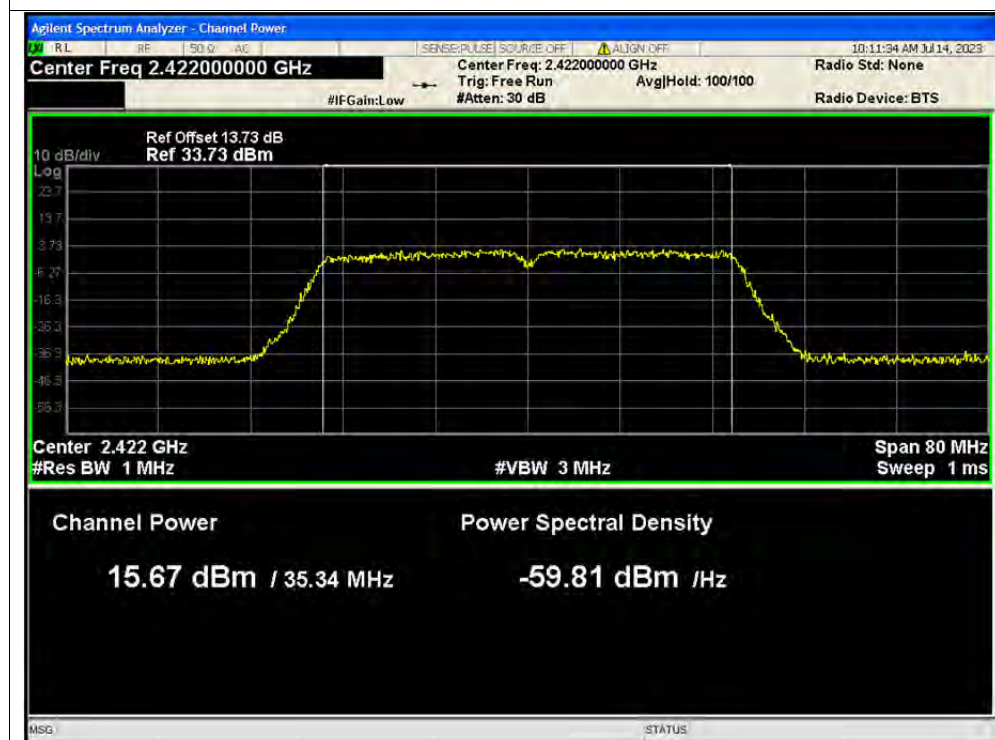



Peak Power NVNT n40 2437MHz Ant1

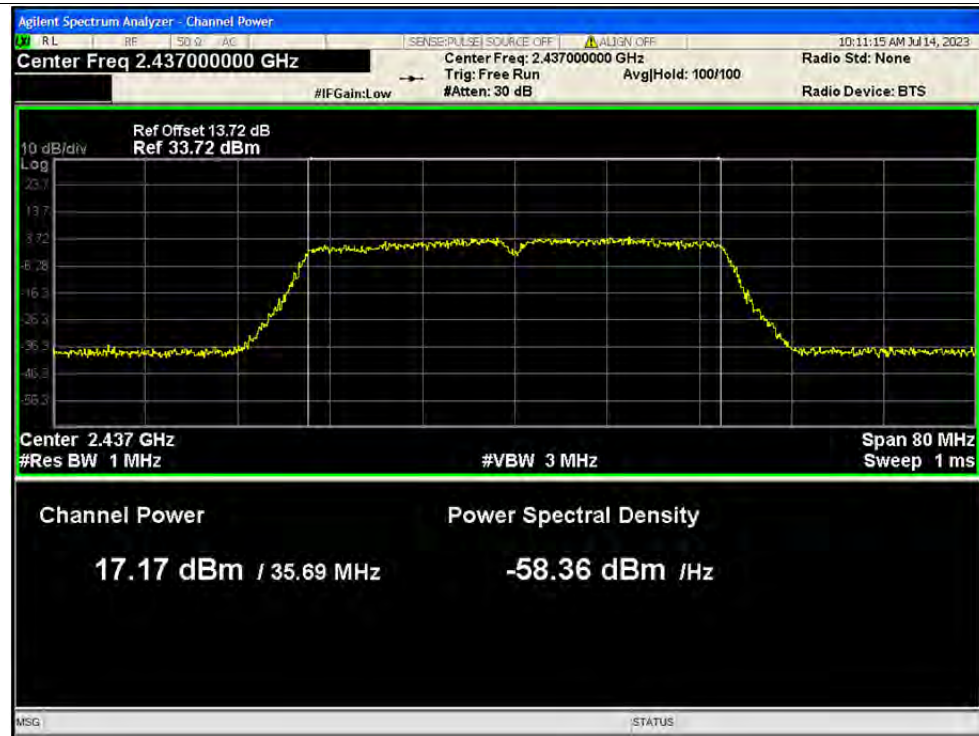

Peak Power NVNT n40 2452MHz Ant1




**A.3. Maximum Average Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (mW)	Limit Conducted (dBm)	Verdict
NVNT	b	2412	Ant1	9.69	0.06	9.75	9.44	30	Pass
NVNT	b	2437	Ant1	10.54	0.07	10.61	11.51	30	Pass
NVNT	b	2462	Ant1	10.01	0.06	10.07	10.16	30	Pass
NVNT	g	2412	Ant1	9.68	0.08	9.76	9.46	30	Pass
NVNT	g	2437	Ant1	10.2	0.08	10.28	10.67	30	Pass
NVNT	g	2462	Ant1	9.76	0.08	9.84	9.64	30	Pass
NVNT	n20	2412	Ant1	9.53	0.08	9.61	9.14	30	Pass
NVNT	n20	2437	Ant1	10.06	0.08	10.14	10.33	30	Pass
NVNT	n20	2462	Ant1	9.62	0.08	9.7	9.33	30	Pass
NVNT	n40	2422	Ant1	8.26	0.23	8.49	7.06	30	Pass
NVNT	n40	2437	Ant1	9.71	0.23	9.94	9.86	30	Pass
NVNT	n40	2452	Ant1	9.9	0.23	10.13	10.3	30	Pass




Test Graphs

Average Power NVNT b 2412MHz Ant1

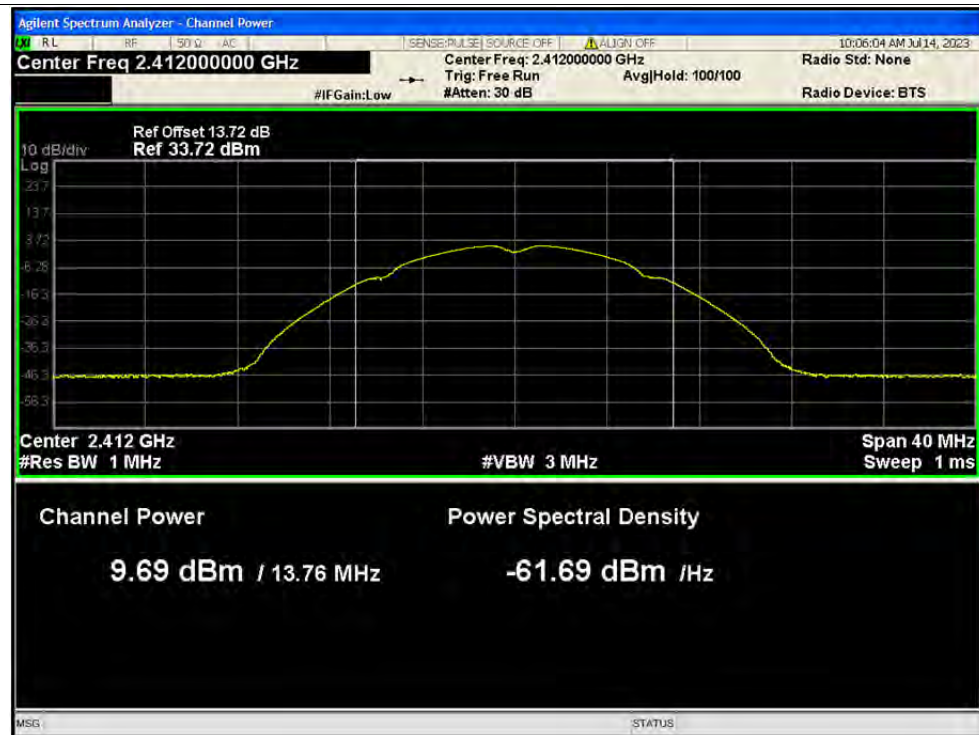


Average Power NVNT b 2437MHz Ant1

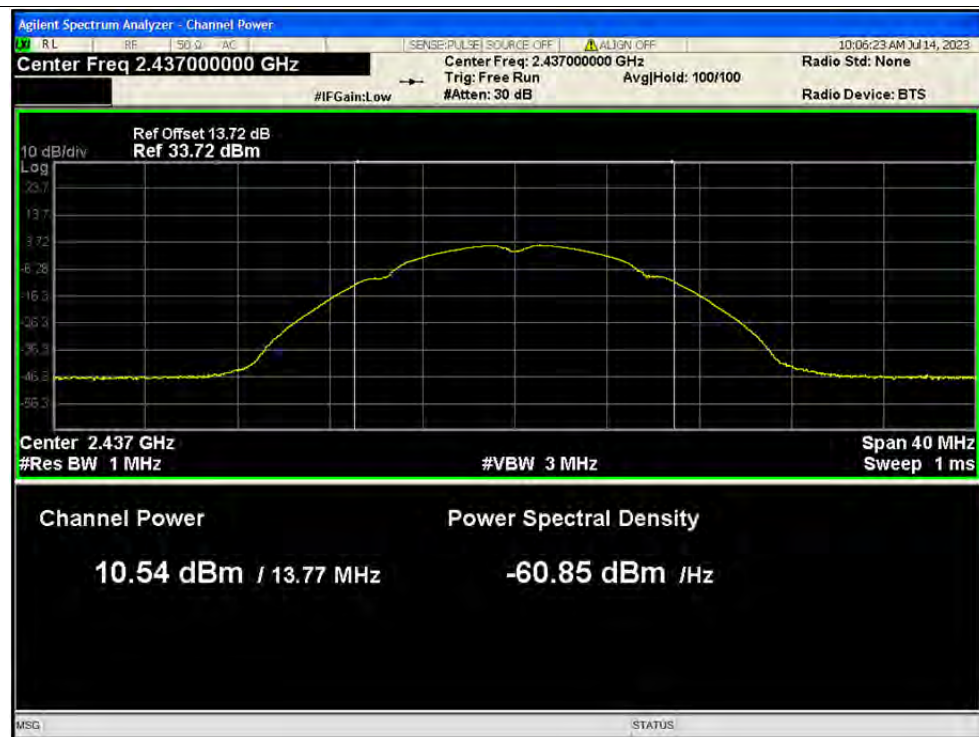





Average Power NVNT b 2462MHz Ant1

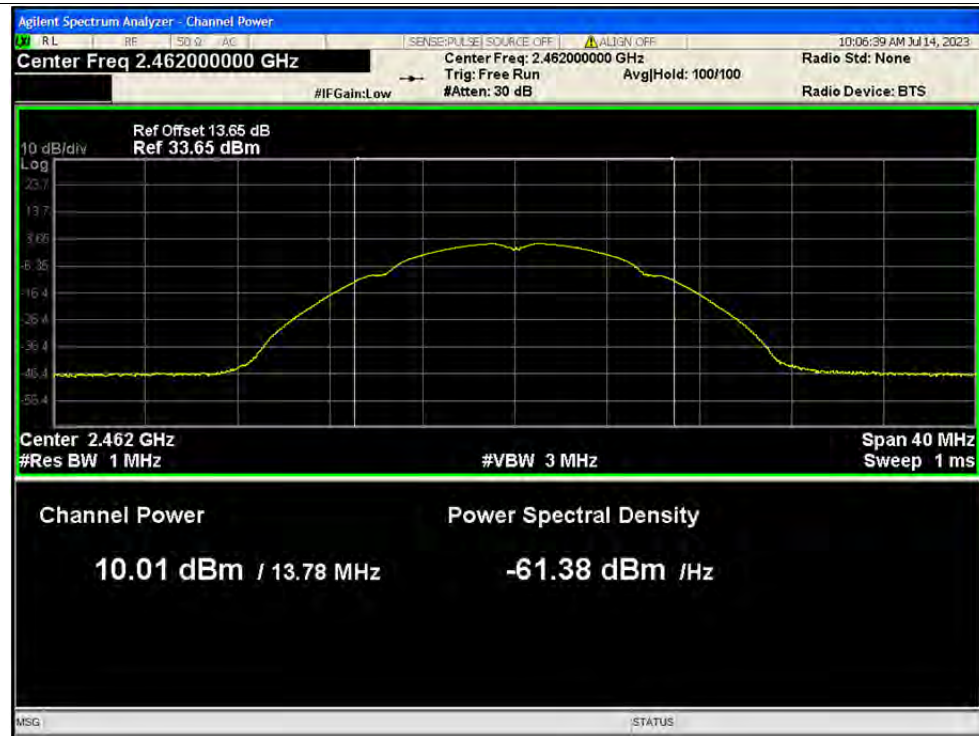


Average Power NVNT g 2412MHz Ant1

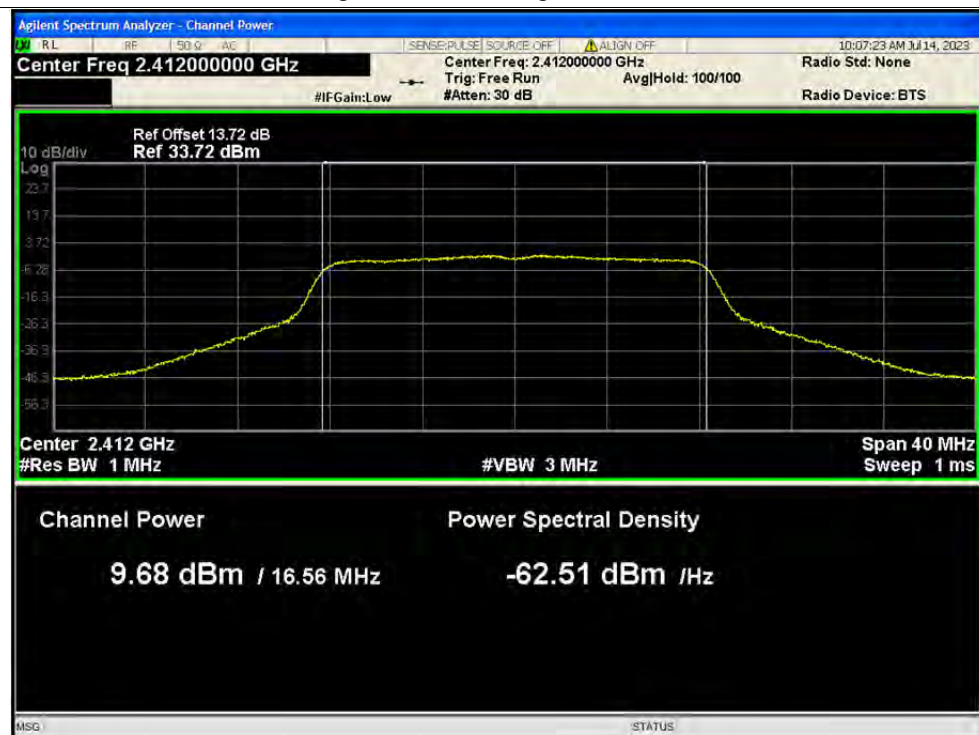

Average Power NVNT g 2437MHz Ant1

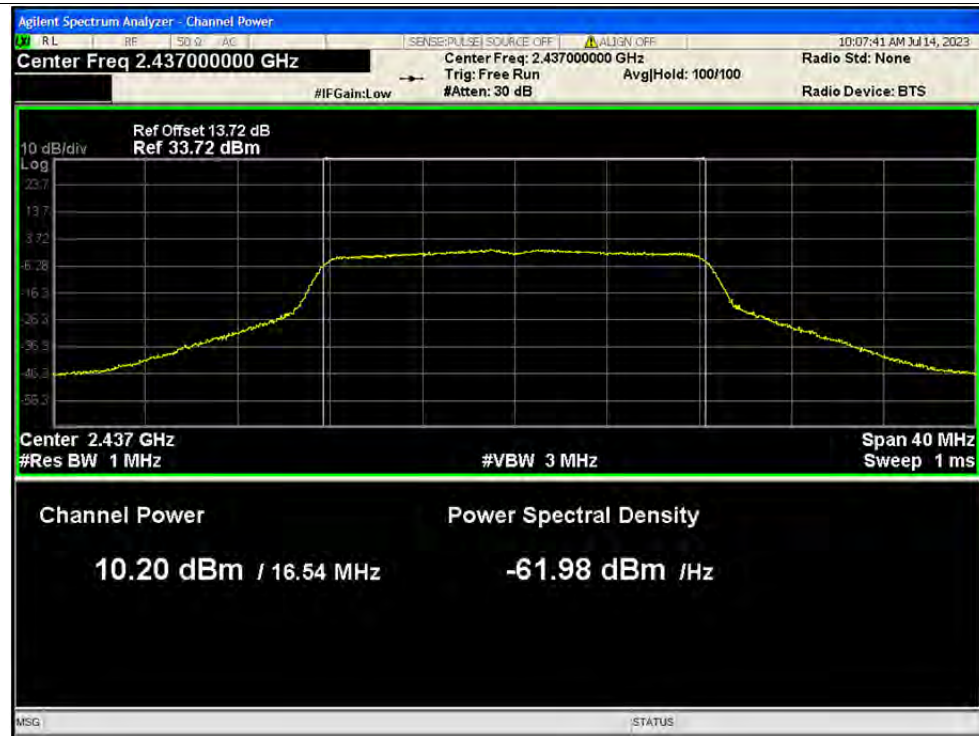


Average Power NVNT g 2462MHz Ant1

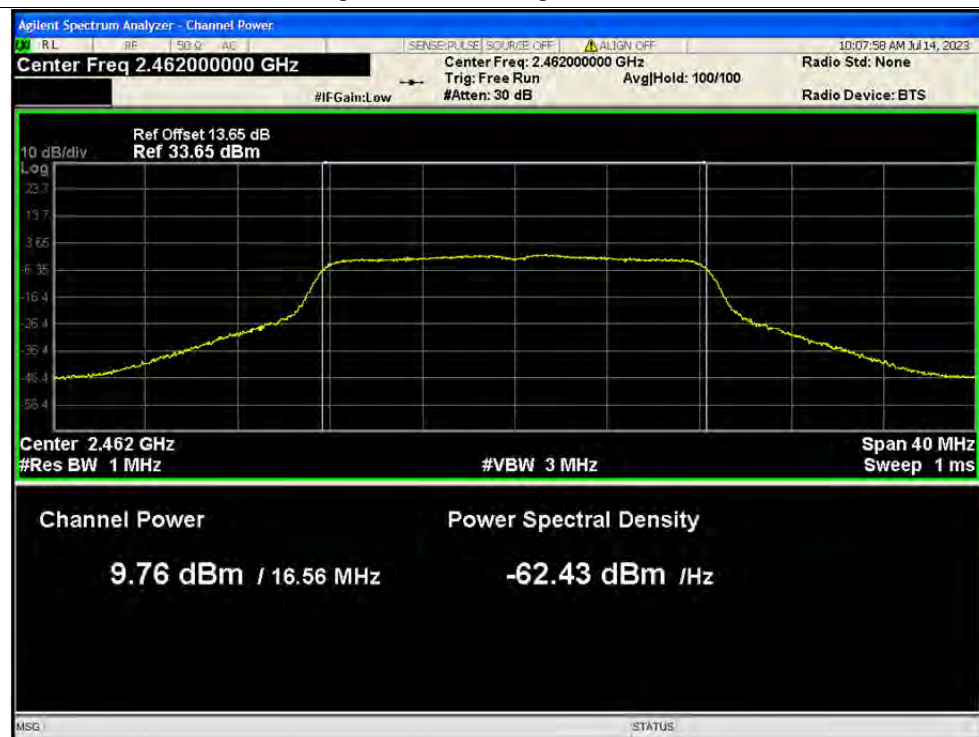



Average Power NVNT n20 2412MHz Ant1

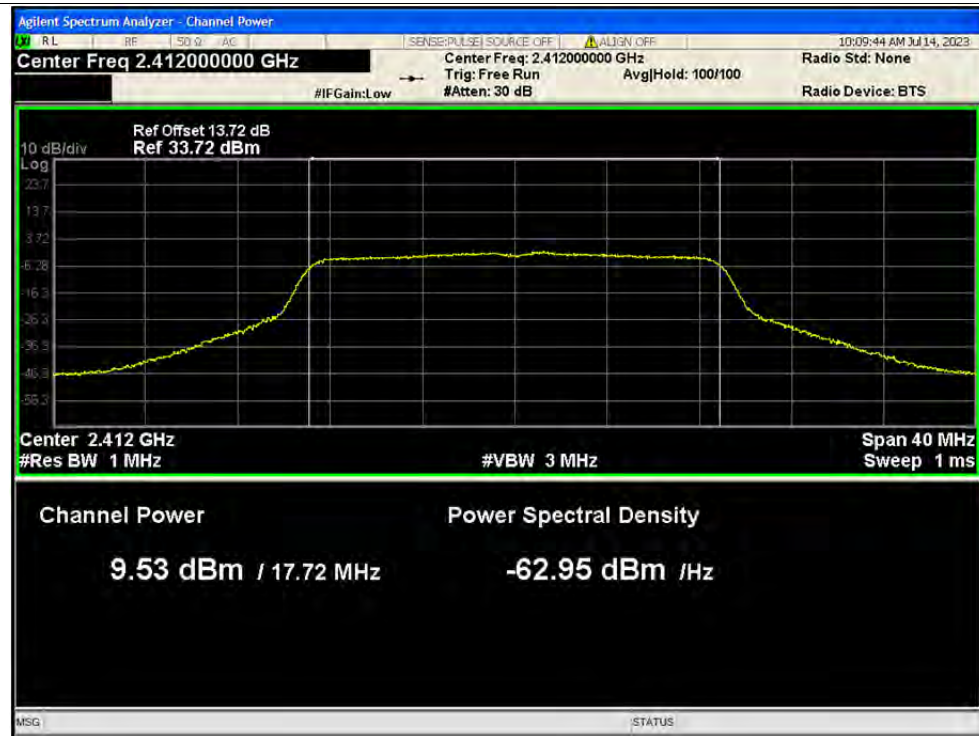


Average Power NVNT n20 2437MHz Ant1





Average Power NVNT n20 2462MHz Ant1

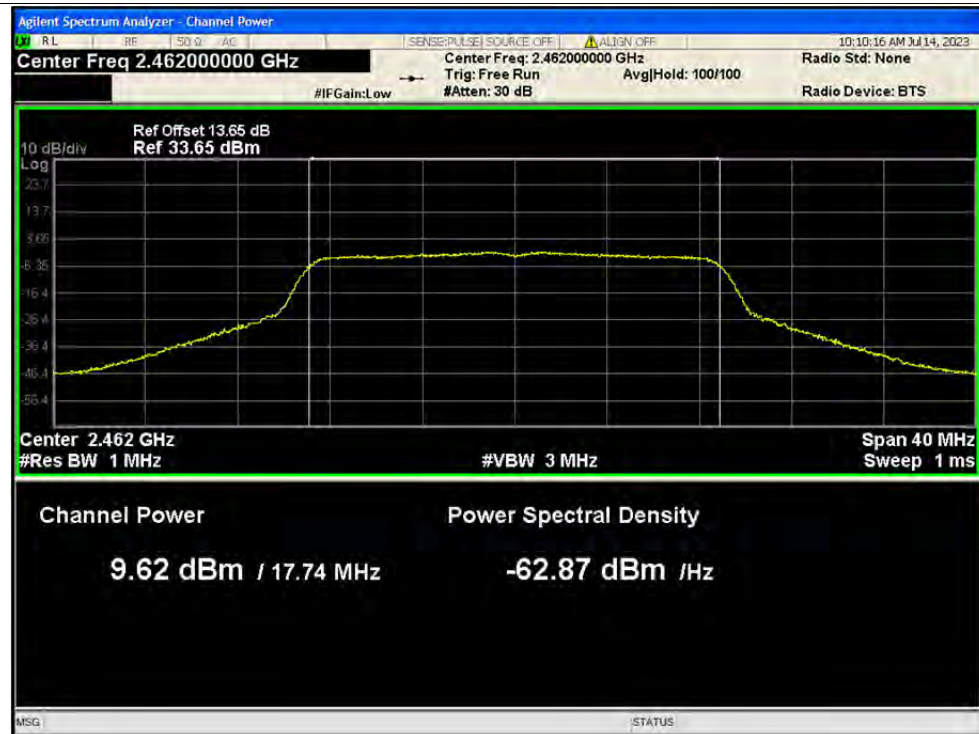


Average Power NVNT n40 2422MHz Ant1






Average Power NVNT n40 2437MHz Ant1

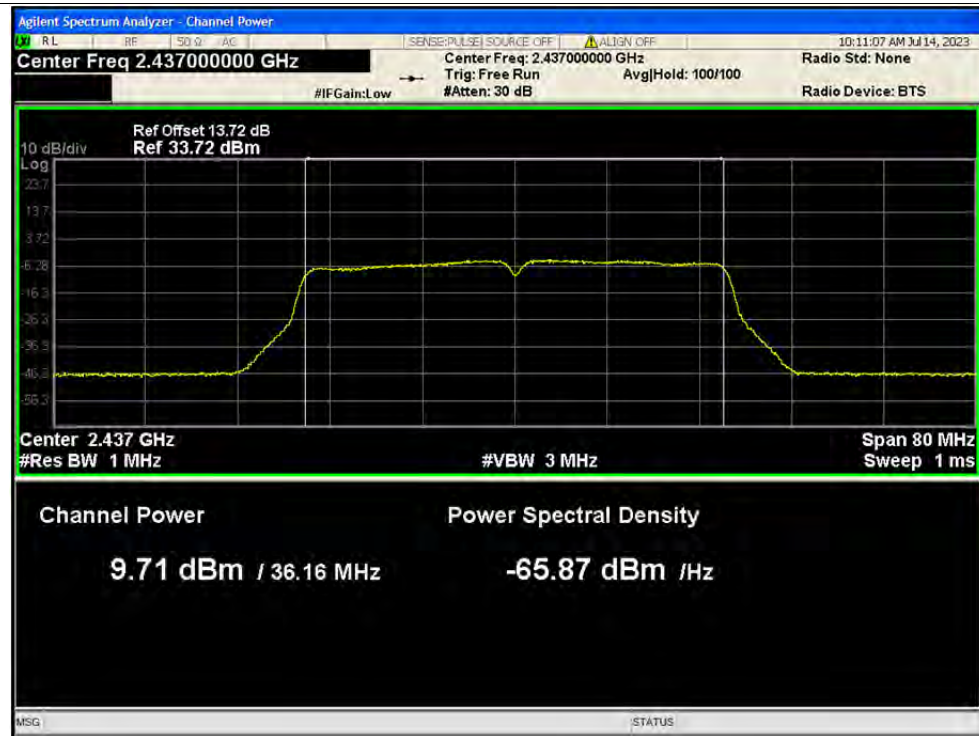

Average Power NVNT n40 2452MHz Ant1

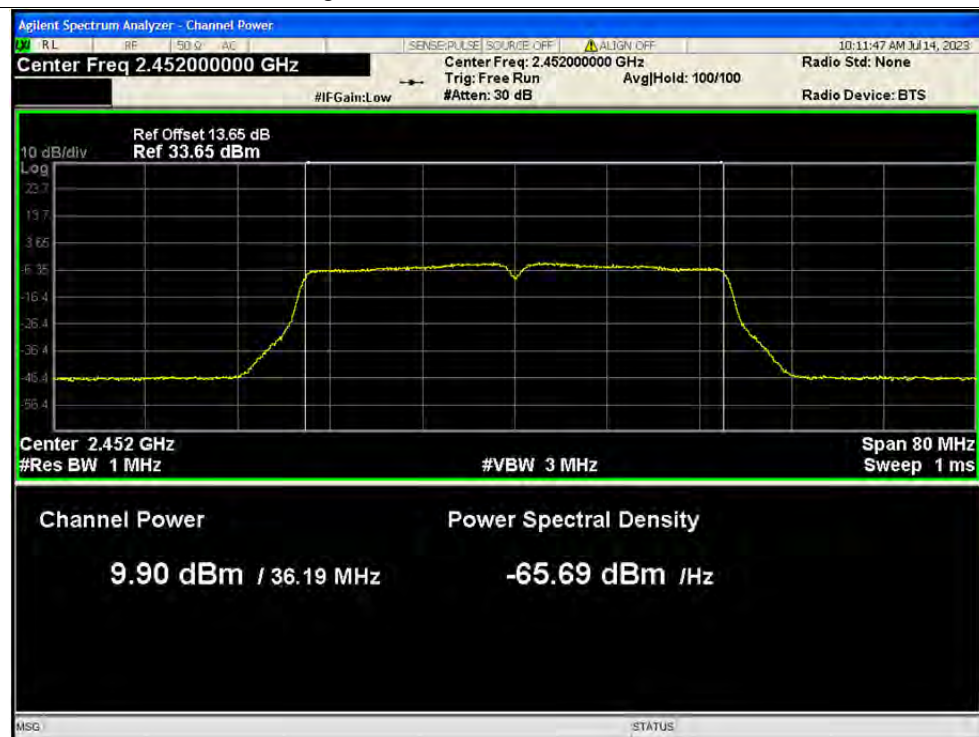

**A.4. 6 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	7.567	0.5	Pass
NVNT	b	2437	Ant1	8.535	0.5	Pass
NVNT	b	2462	Ant1	8.054	0.5	Pass
NVNT	g	2412	Ant1	12.946	0.5	Pass
NVNT	g	2437	Ant1	15.682	0.5	Pass
NVNT	g	2462	Ant1	15.76	0.5	Pass
NVNT	n20	2412	Ant1	15.3	0.5	Pass
NVNT	n20	2437	Ant1	15.927	0.5	Pass
NVNT	n20	2462	Ant1	16.502	0.5	Pass
NVNT	n40	2422	Ant1	35.341	0.5	Pass
NVNT	n40	2437	Ant1	35.693	0.5	Pass
NVNT	n40	2452	Ant1	35.934	0.5	Pass



Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1



-6dB Bandwidth NVNT b 2437MHz Ant1






-6dB Bandwidth NVNT b 2462MHz Ant1




-6dB Bandwidth NVNT g 2412MHz Ant1



-6dB Bandwidth NVNT g 2437MHz Ant1

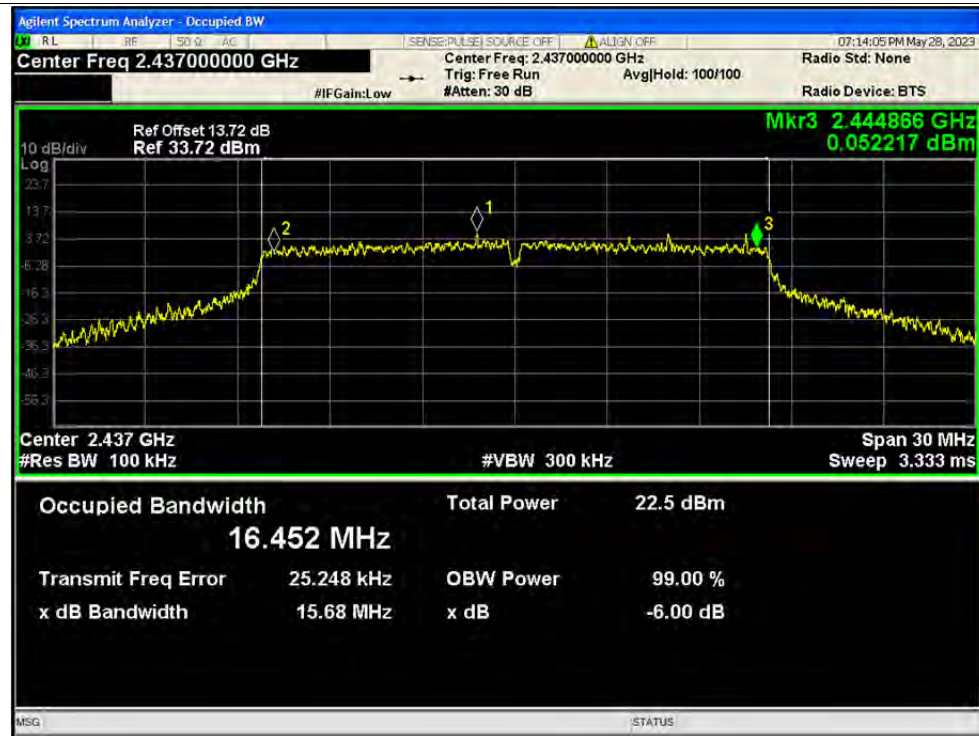


-6dB Bandwidth NVNT g 2462MHz Ant1

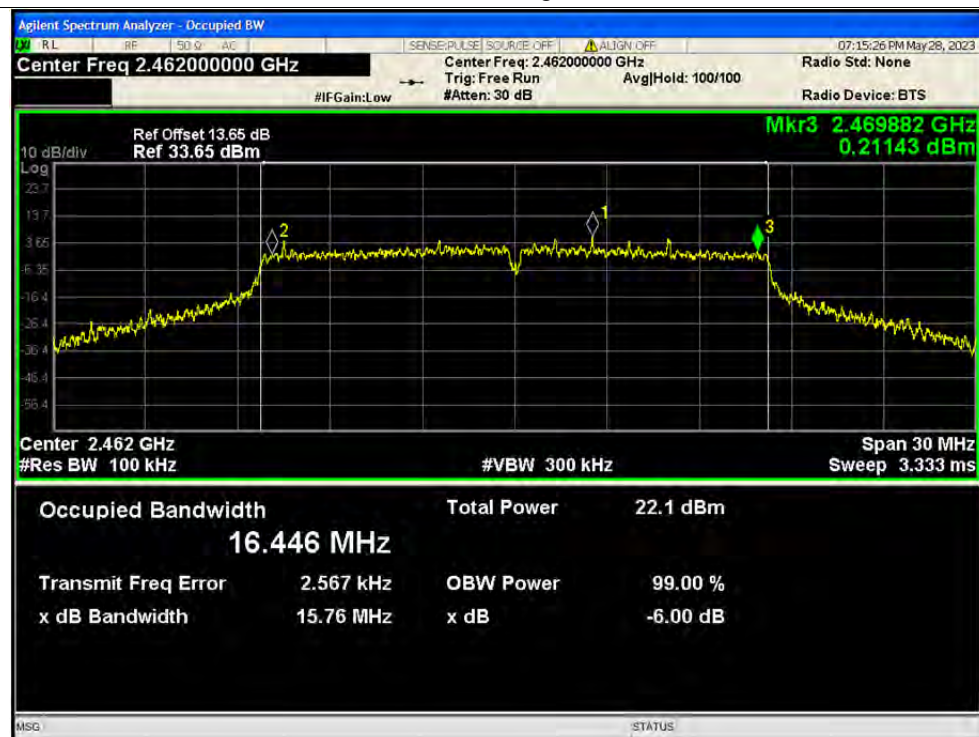




-6dB Bandwidth NVNT n20 2412MHz Ant1

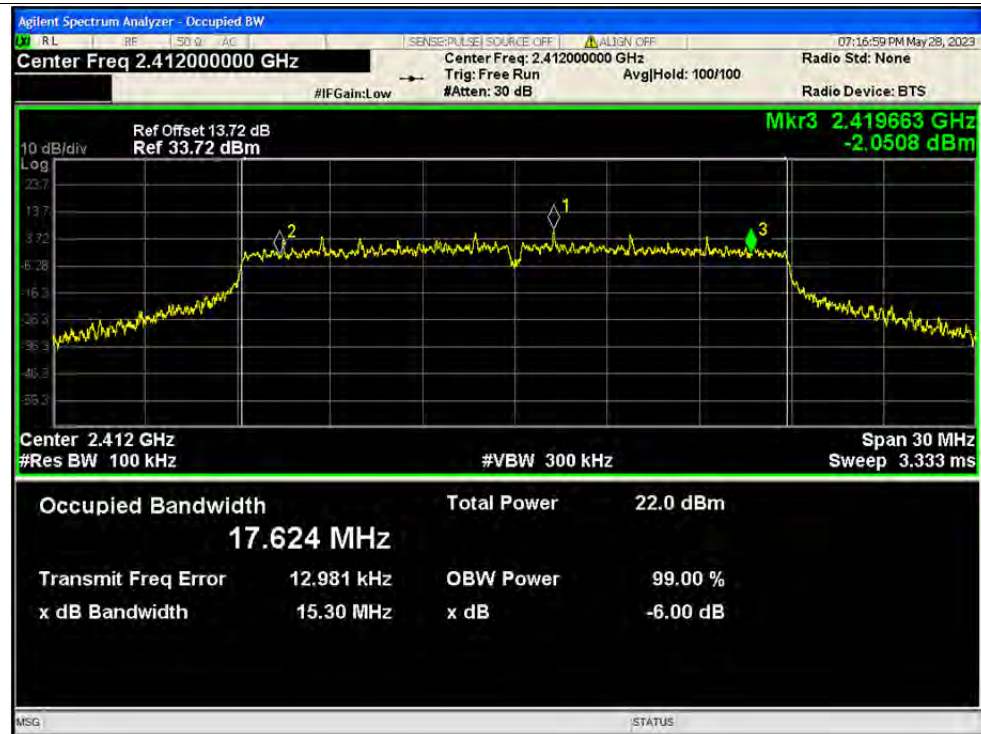


-6dB Bandwidth NVNT n20 2437MHz Ant1

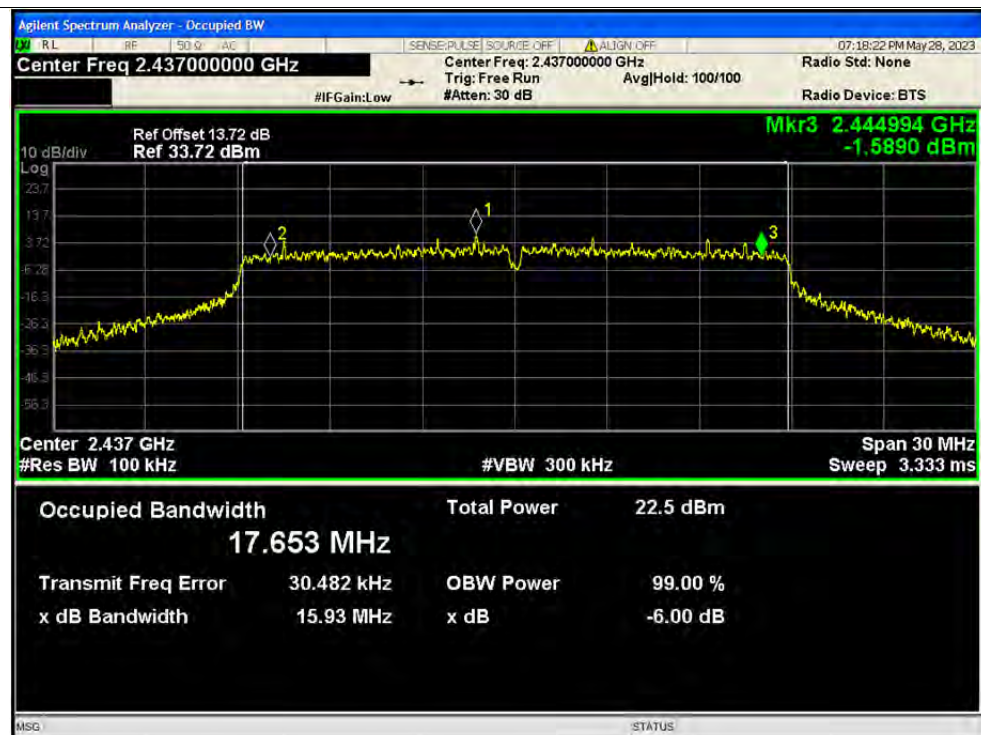





-6dB Bandwidth NVNT n20 2462MHz Ant1

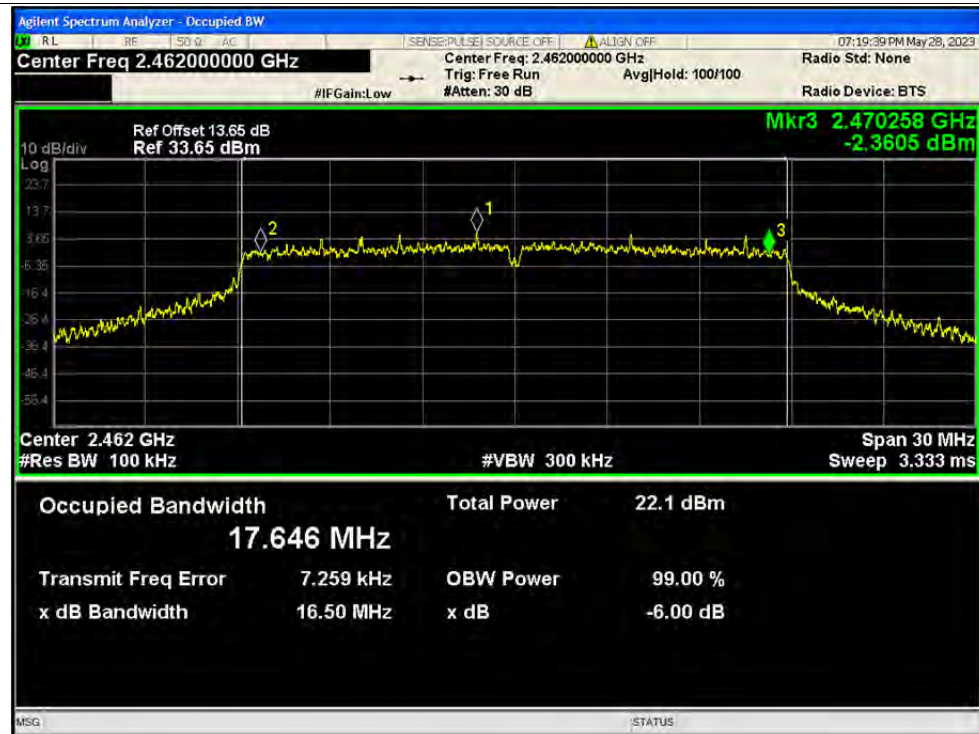


-6dB Bandwidth NVNT n40 2422MHz Ant1

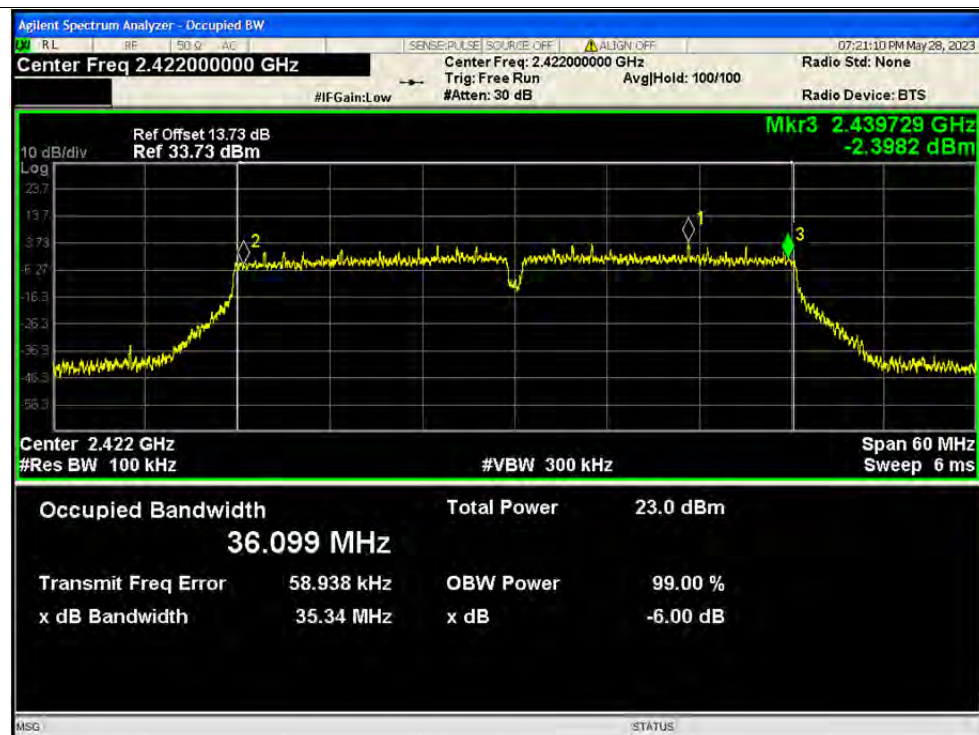

-6dB Bandwidth NVNT n40 2437MHz Ant1

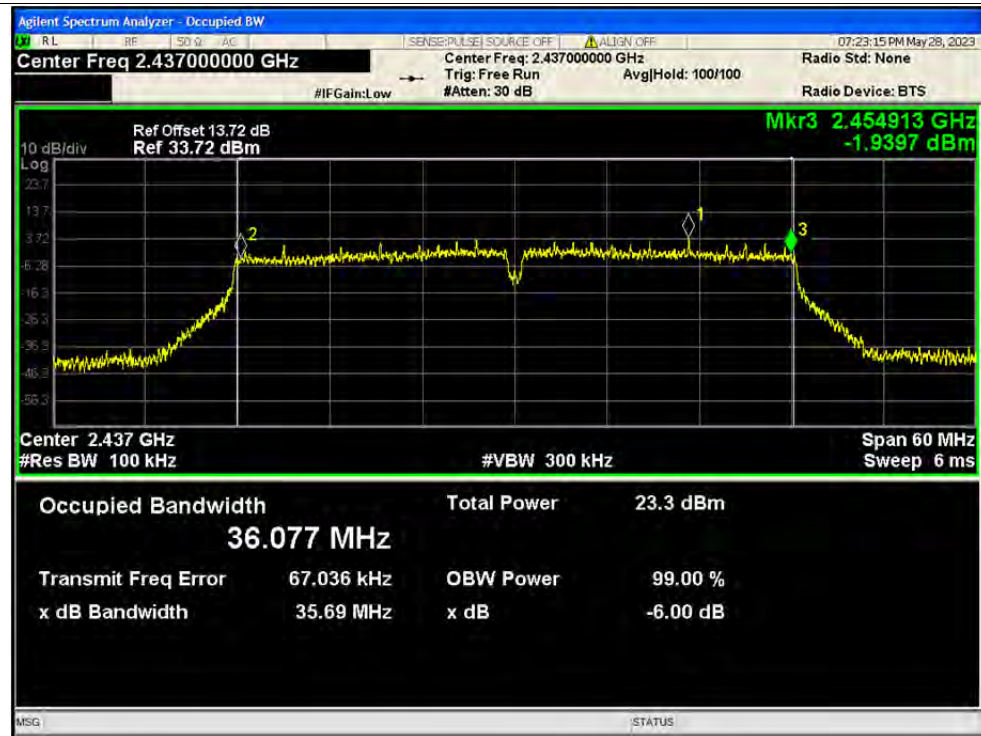

-6dB Bandwidth NVNT n40 2452MHz Ant1

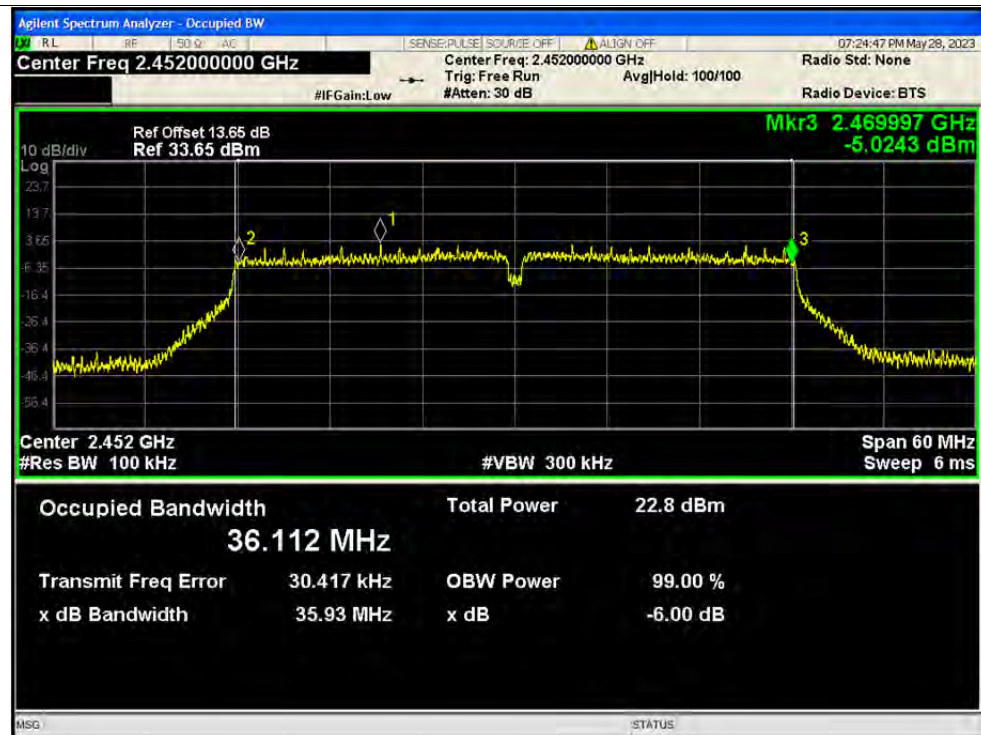

**A.5. Conducted Spurious Emissions**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-36.59	-20	Pass
NVNT	b	2437	Ant1	-37.69	-20	Pass
NVNT	b	2462	Ant1	-37.89	-20	Pass
NVNT	g	2412	Ant1	-34.17	-20	Pass
NVNT	g	2437	Ant1	-33.46	-20	Pass
NVNT	g	2462	Ant1	-33.74	-20	Pass
NVNT	n20	2412	Ant1	-33.25	-20	Pass
NVNT	n20	2437	Ant1	-34.42	-20	Pass
NVNT	n20	2462	Ant1	-34.08	-20	Pass
NVNT	n40	2422	Ant1	-31.34	-20	Pass
NVNT	n40	2437	Ant1	-32.9	-20	Pass
NVNT	n40	2452	Ant1	-31.02	-20	Pass

Test Graphs

Tx. Spurious NVNT b 2412MHz Ant1 Ref



Tx. Spurious NVNT b 2412MHz Ant1 Emission

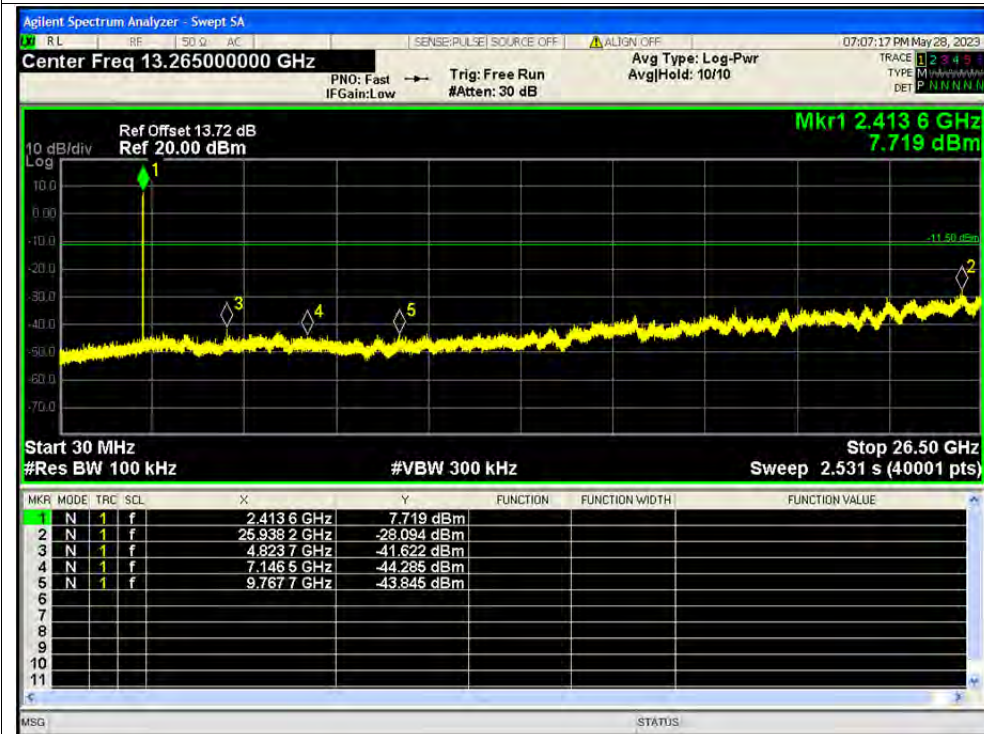




Tx. Spurious NVNT b 2437MHz Ant1 Ref




Tx. Spurious NVNT b 2437MHz Ant1 Emission

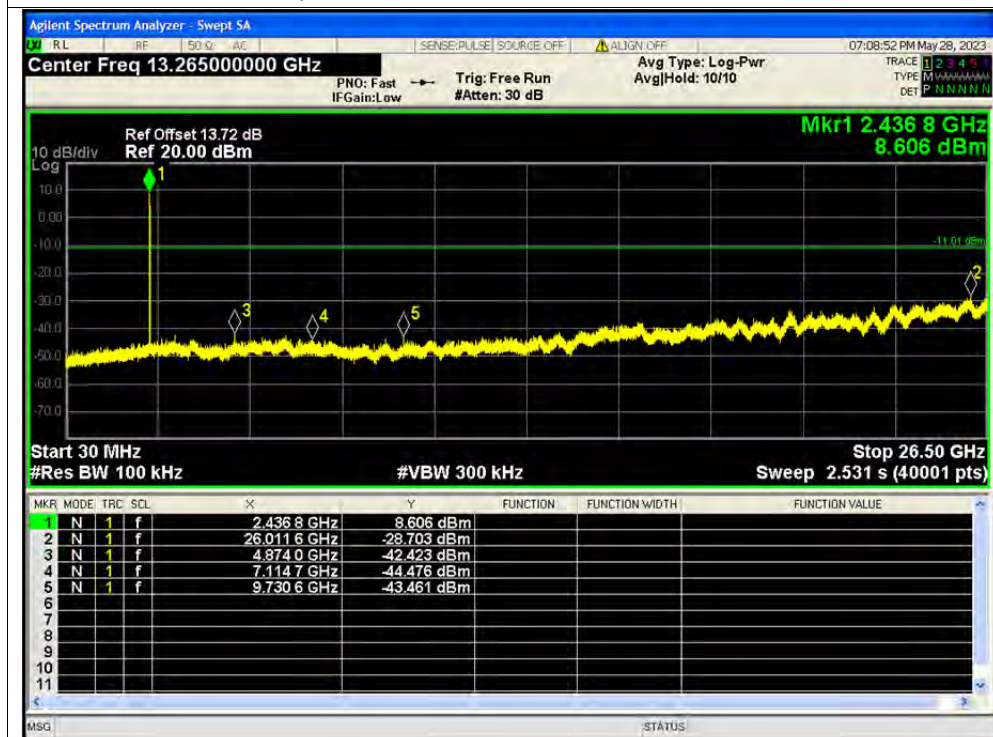

Tx. Spurious NVNT b 2462MHz Ant1 Ref




Tx. Spurious NVNT b 2462MHz Ant1 Emission

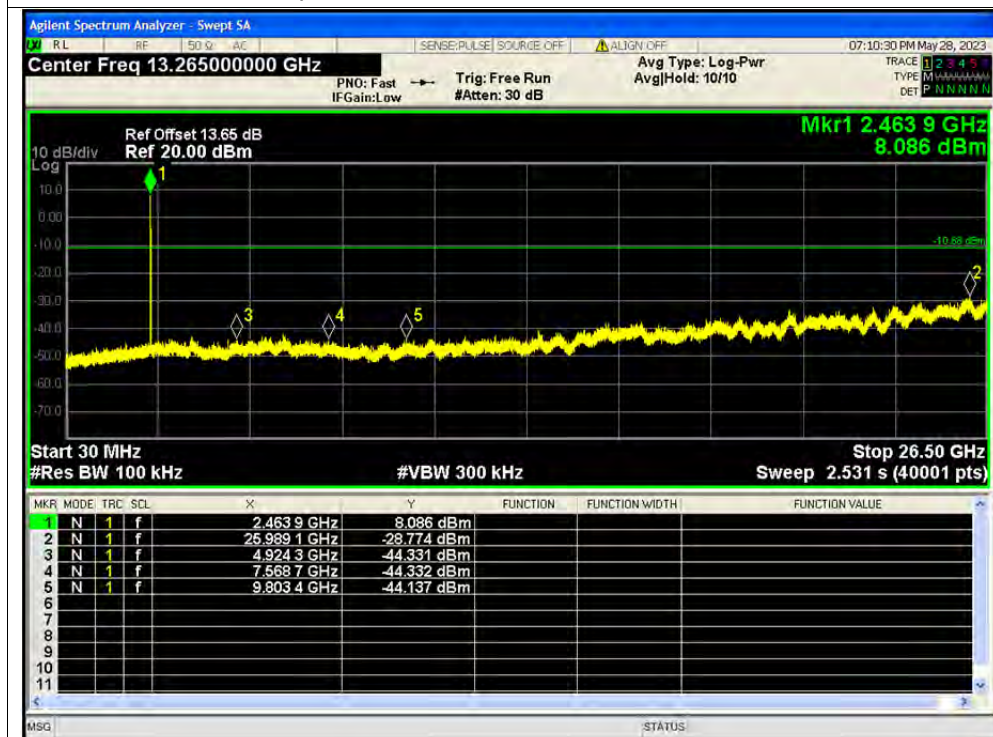




Tx. Spurious NVNT g 2412MHz Ant1 Ref

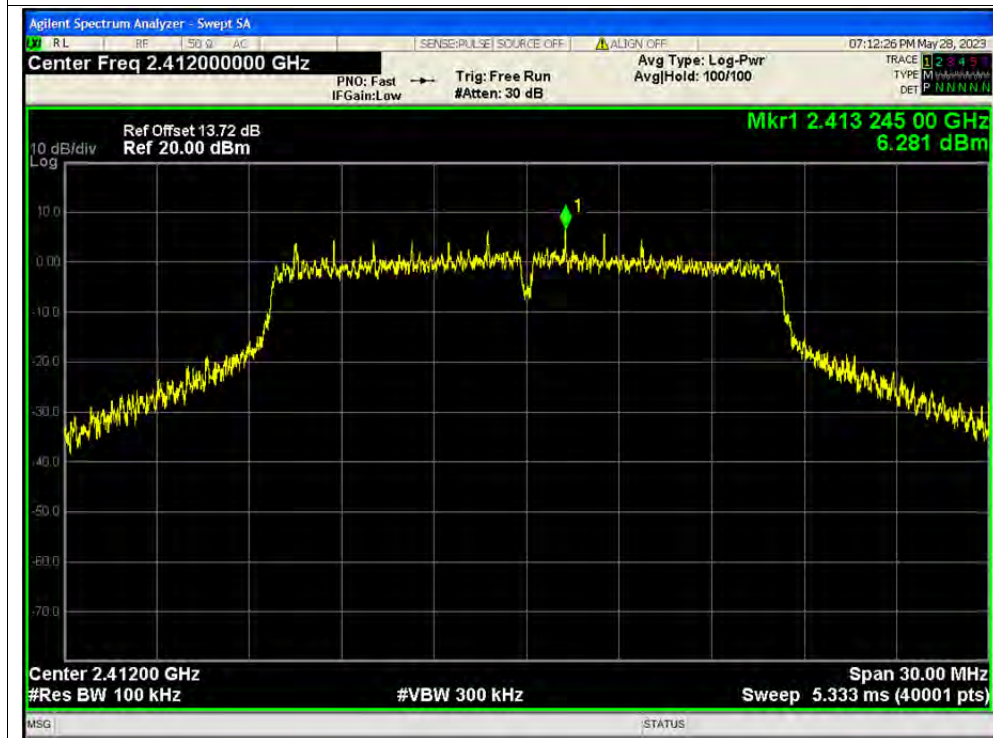


Tx. Spurious NVNT g 2412MHz Ant1 Emission

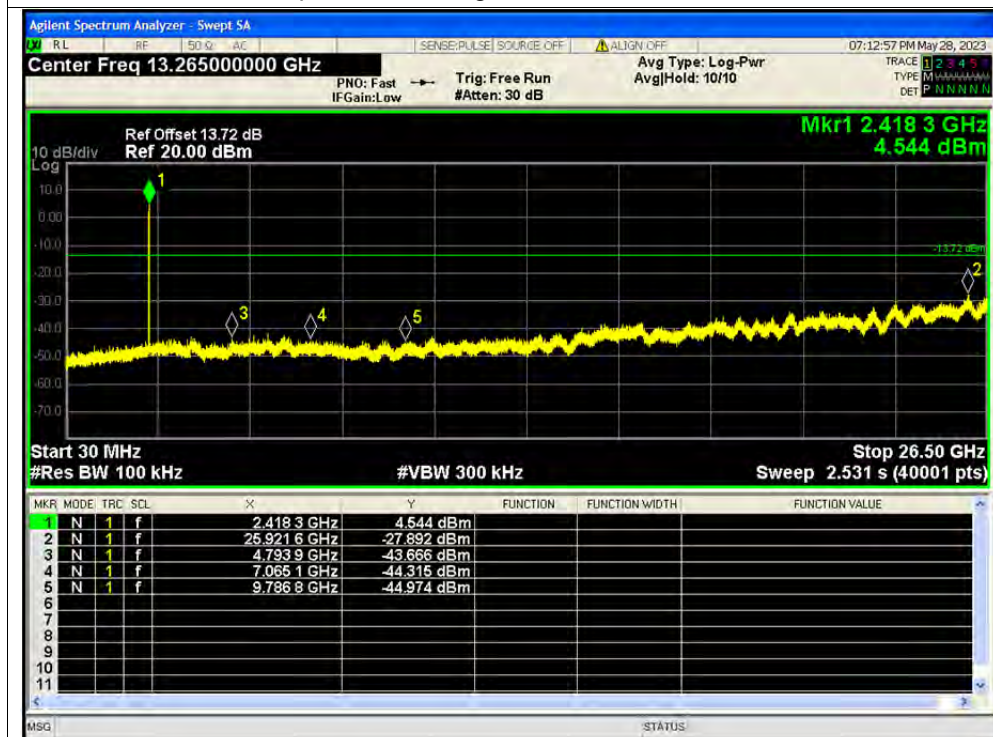

Tx. Spurious NVNT g 2437MHz Ant1 Ref



Tx. Spurious NVNT g 2437MHz Ant1 Emission

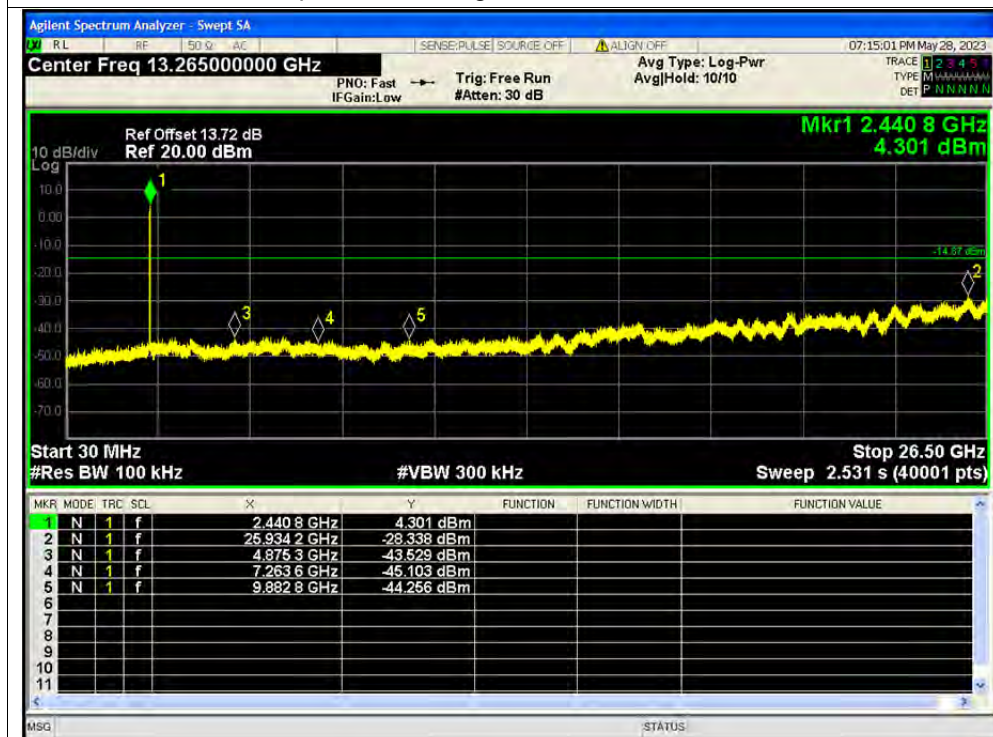




Tx. Spurious NVNT g 2462MHz Ant1 Ref



Tx. Spurious NVNT g 2462MHz Ant1 Emission

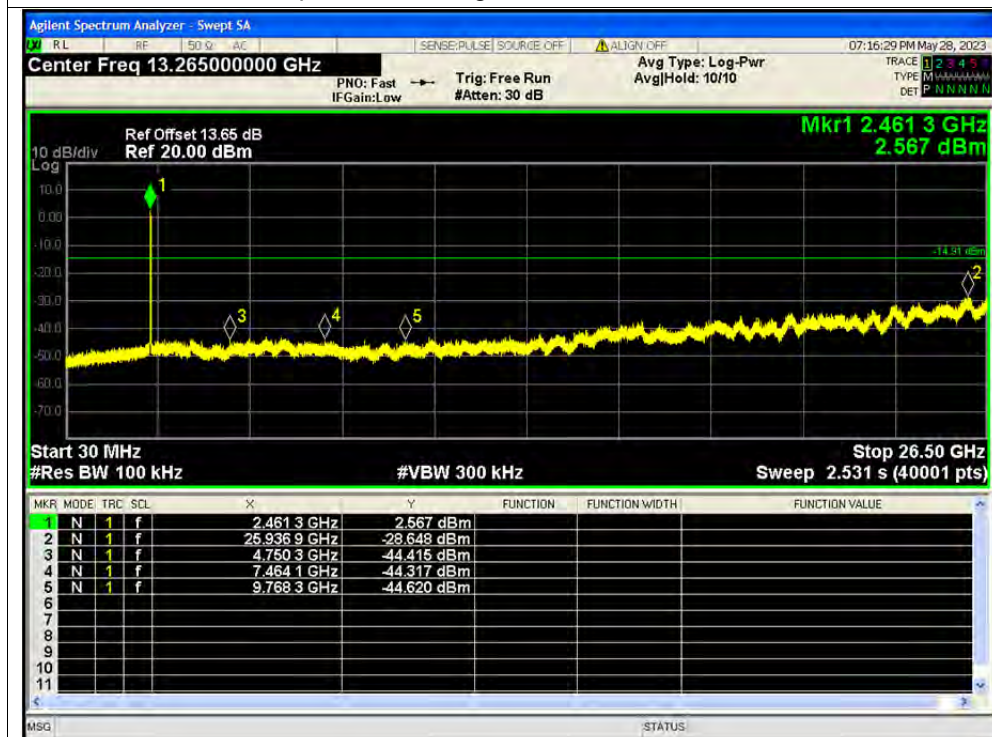




Tx. Spurious NVNT n20 2412MHz Ant1 Ref



Tx. Spurious NVNT n20 2412MHz Ant1 Emission

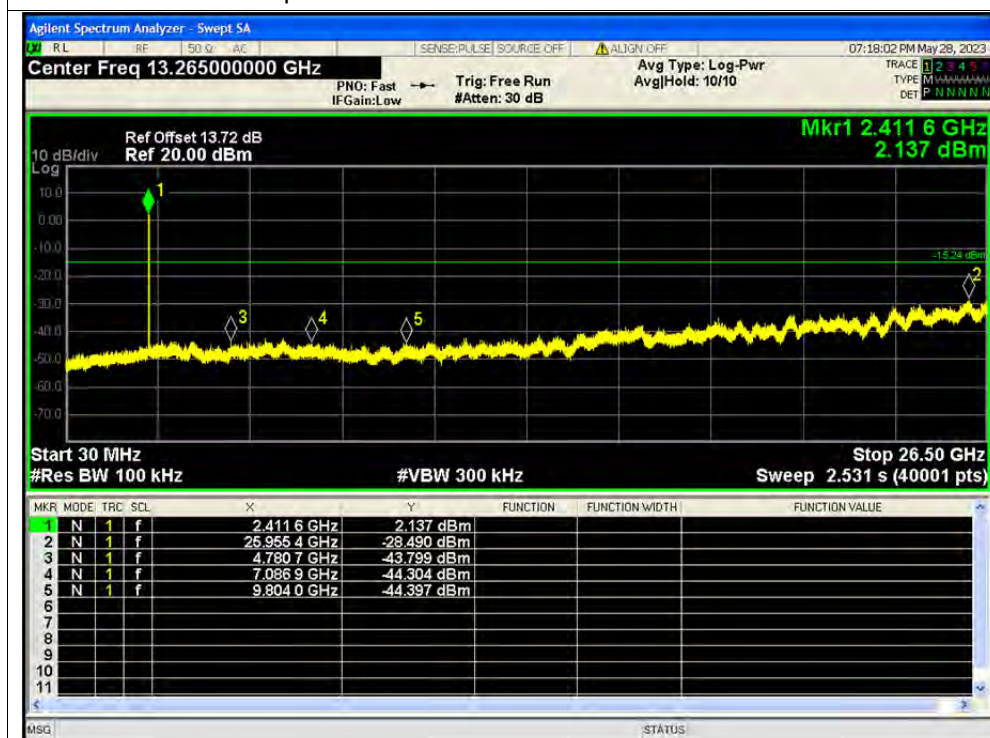




The screenshot displays an Agilent Spectrum Analyzer interface. The top status bar shows 'Agilent Spectrum Analyzer - Swept SA' and '07:18:46 PM May 28, 2023'. The main display area shows a spectrum plot with a yellow trace. A peak is marked with a green diamond and labeled '1'. The plot has a grid. The bottom status bar shows 'Center 2.43700 GHz', 'Span 30.00 MHz', and 'Sweep 5.333 ms (40001 pts)'. The top right corner shows 'Mkr1 2.438 230 00 GHz' and '6.159 dBm'. The bottom left corner shows 'Ref Offset 13.72 dB' and 'Ref 20.00 dBm'. The bottom right corner shows 'PNO: Fast', 'Trig: Free Run', and '#Atten: 30 dB'.


[illegible]



Tx. Spurious NVNT n20 2462MHz Ant1 Ref

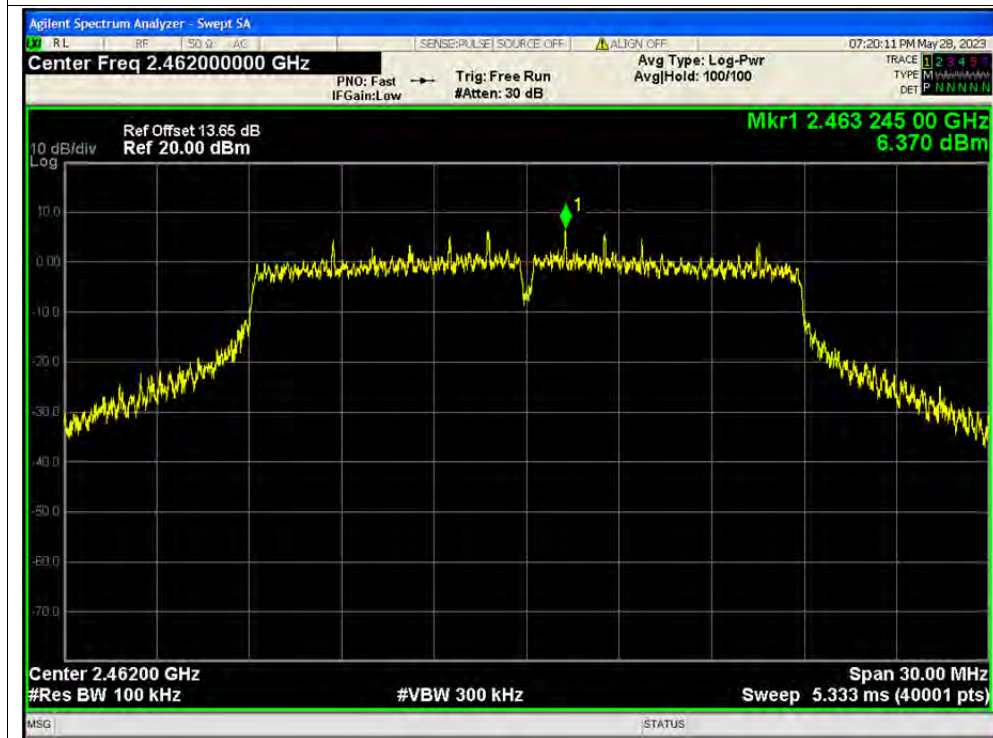

Tx. Spurious NVNT n20 2462MHz Ant1 Emission

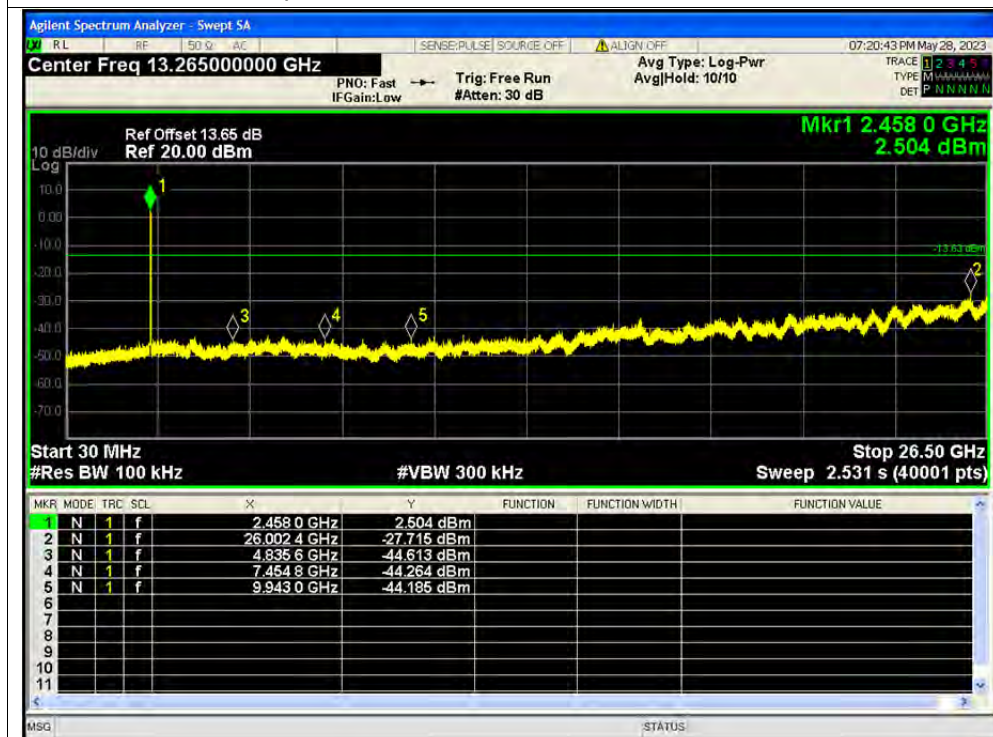





Tx. Spurious NVNT n40 2422MHz Ant1 Ref




Tx. Spurious NVNT n40 2422MHz Ant1 Emission

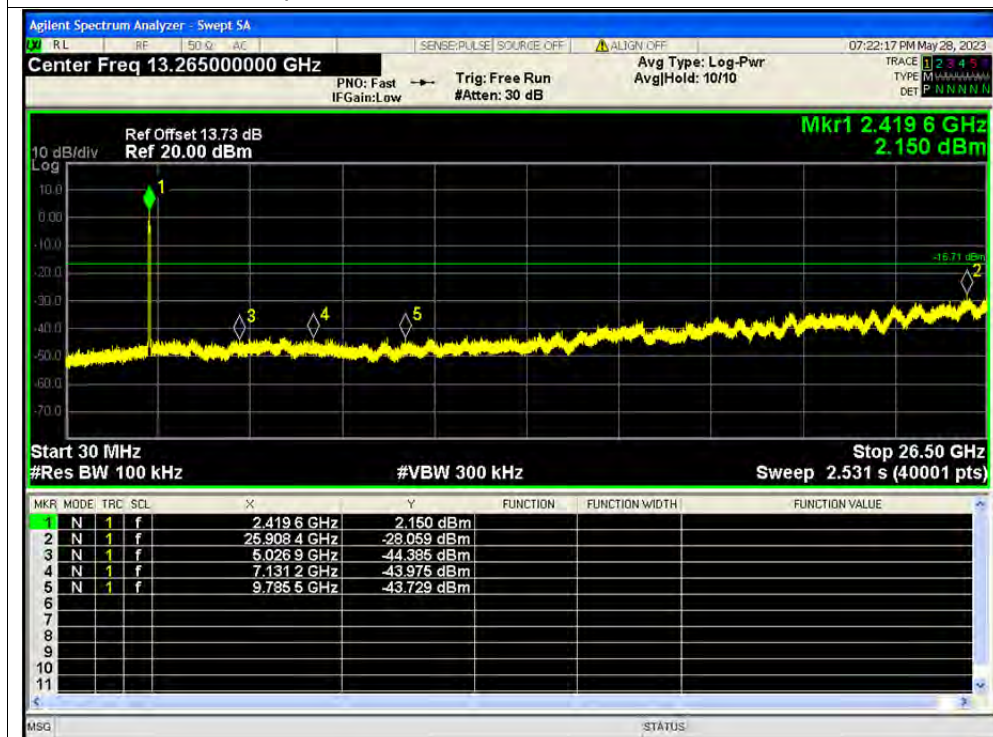

Tx. Spurious NVNT n40 2437MHz Ant1 Ref

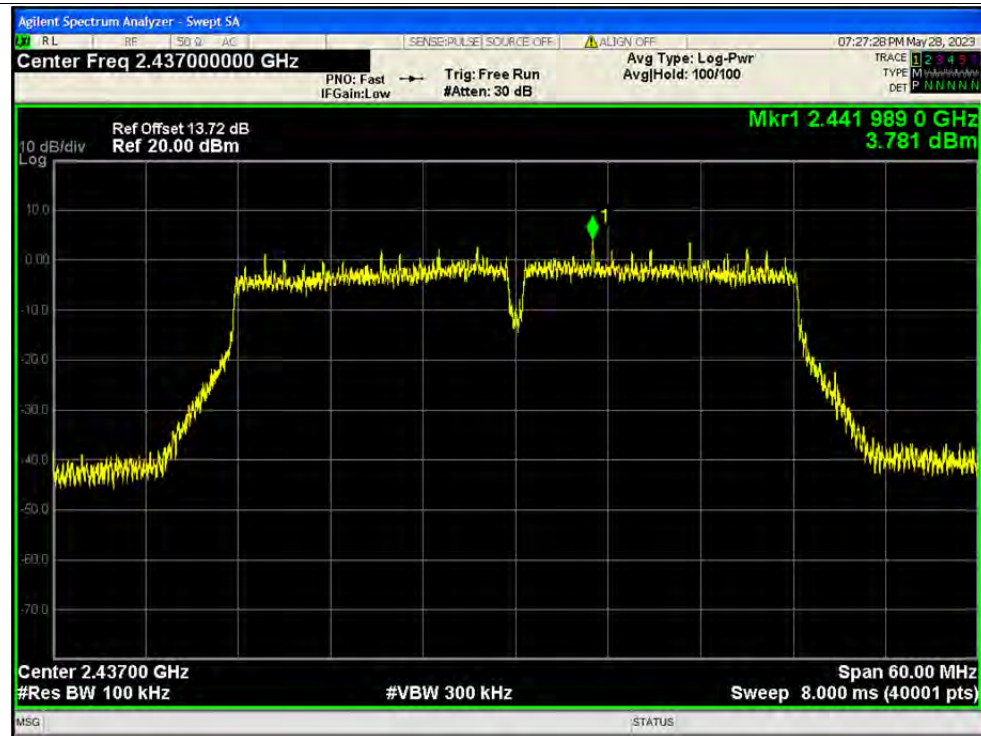

Tx. Spurious NVNT n40 2437MHz Ant1 Emission

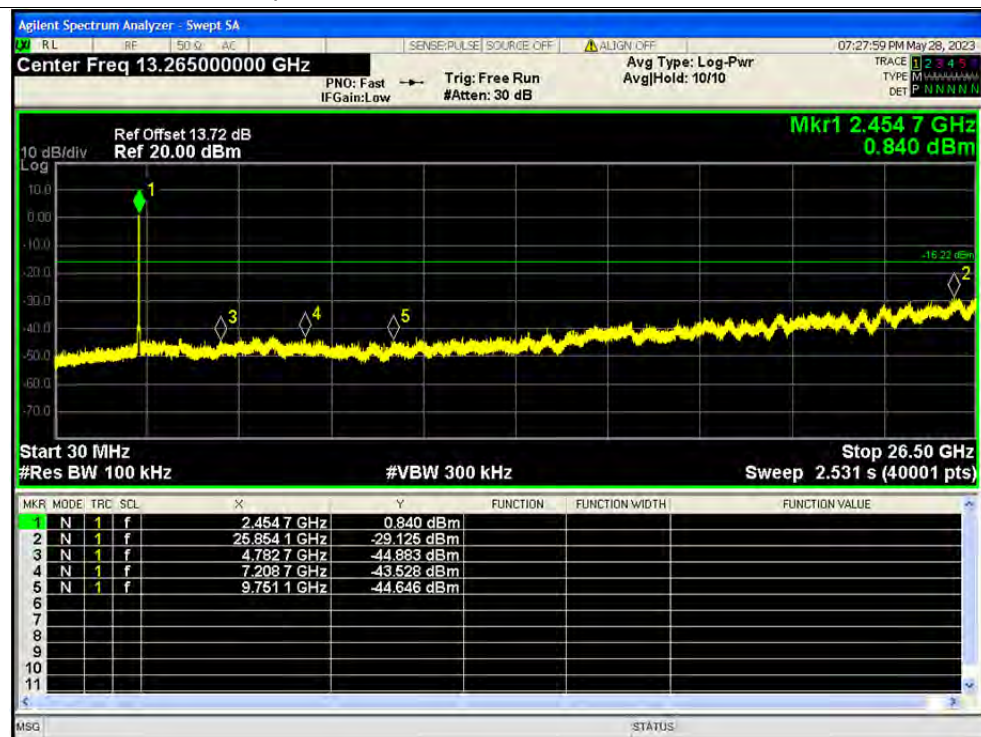




Tx. Spurious NVNT n40 2452MHz Ant1 Ref



Tx. Spurious NVNT n40 2452MHz Ant1 Emission

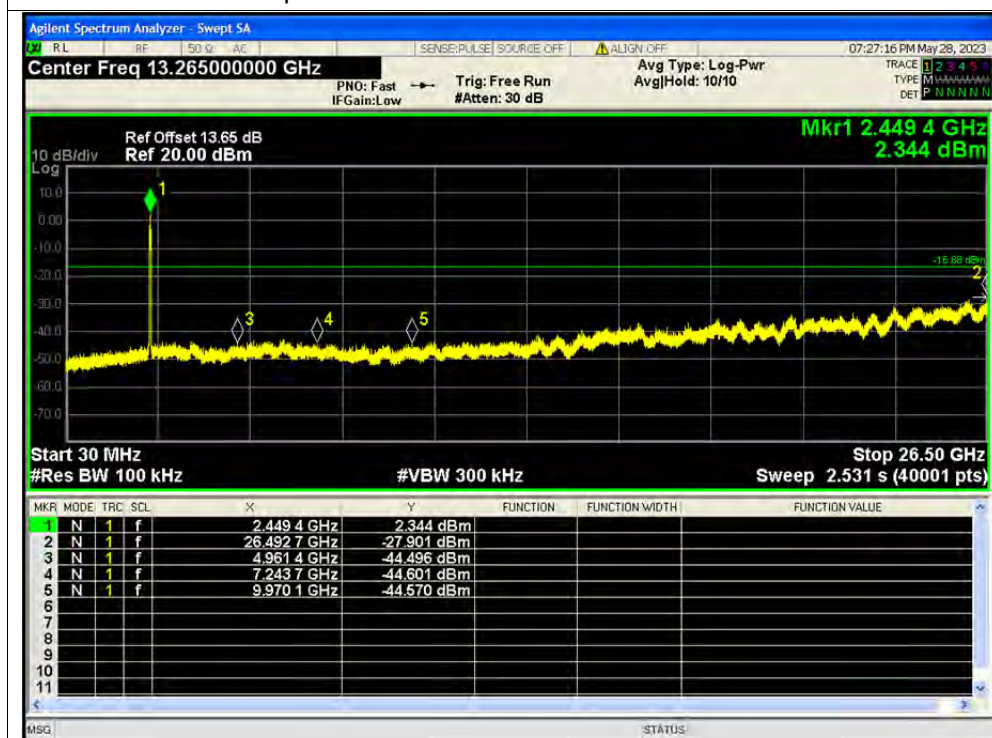

**A.6. Band Edge**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-48.46	-20	Pass
NVNT	b	2462	Ant1	-53.16	-20	Pass
NVNT	g	2412	Ant1	-32.1	-20	Pass
NVNT	g	2462	Ant1	-50.26	-20	Pass
NVNT	n20	2412	Ant1	-30.4	-20	Pass
NVNT	n20	2462	Ant1	-51.37	-20	Pass
NVNT	n40	2422	Ant1	-37.8	-20	Pass
NVNT	n40	2452	Ant1	-42.34	-20	Pass

Test Graphs

Band Edge NVNT b 2412MHz Ant1 Ref




Band Edge NVNT b 2412MHz Ant1 Emission

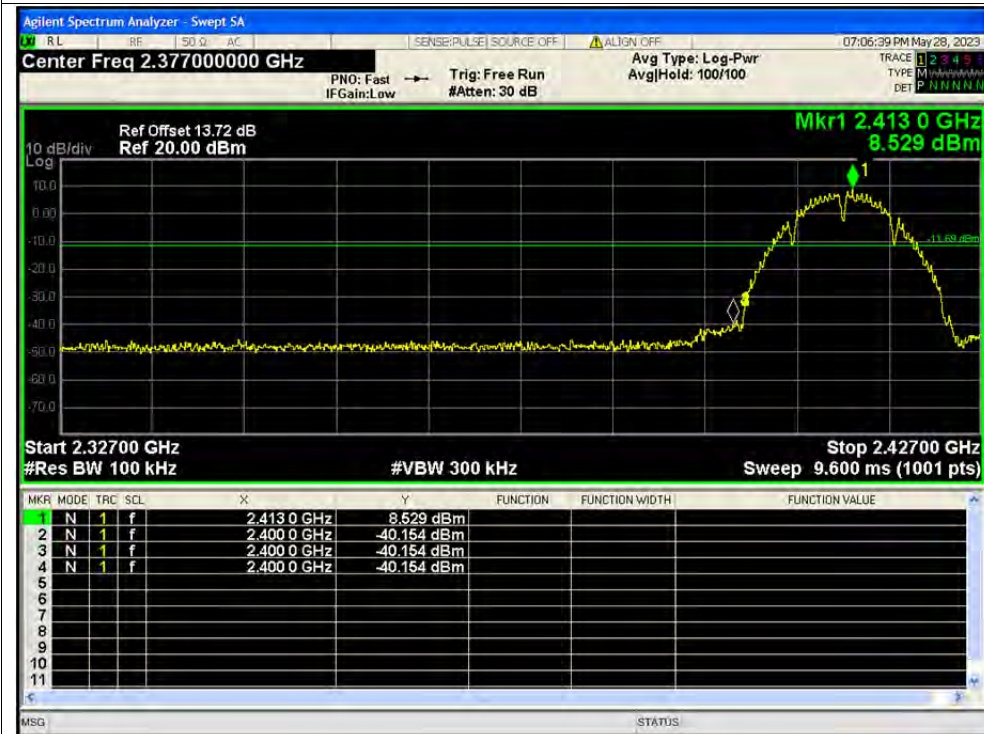

Band Edge NVNT b 2462MHz Ant1 Ref



Band Edge NVNT b 2462MHz Ant1 Emission

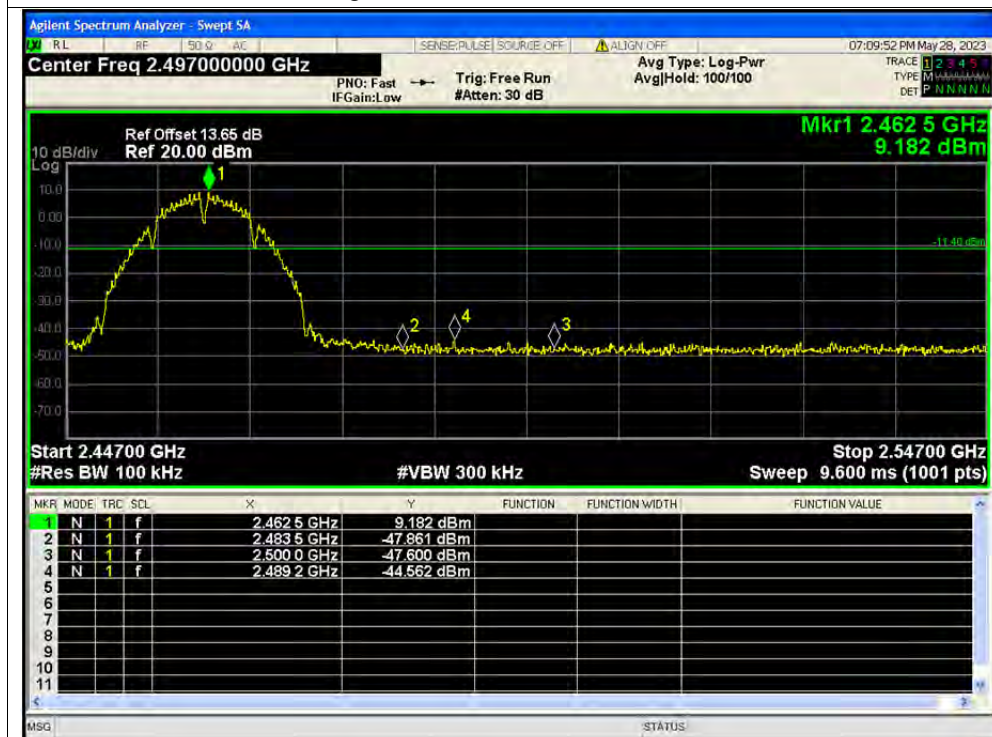




Band Edge NVNT g 2412MHz Ant1 Ref



Band Edge NVNT g 2412MHz Ant1 Emission

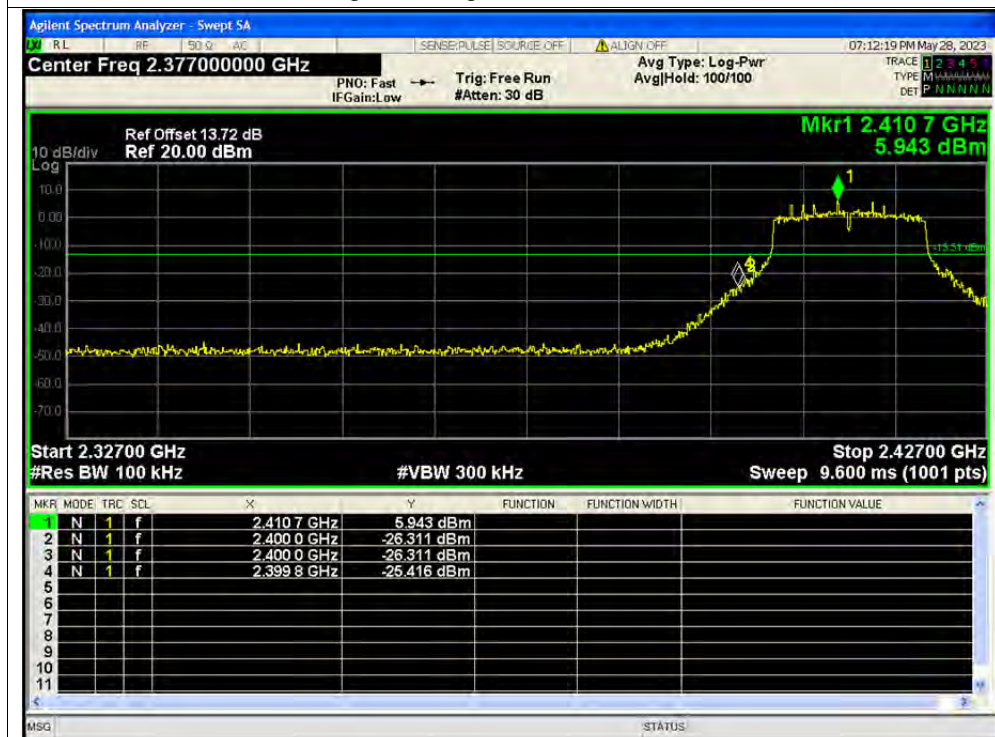

Band Edge NVNT g 2462MHz Ant1 Ref



Band Edge NVNT g 2462MHz Ant1 Emission






Band Edge NVNT n20 2412MHz Ant1 Ref



Band Edge NVNT n20 2412MHz Ant1 Emission

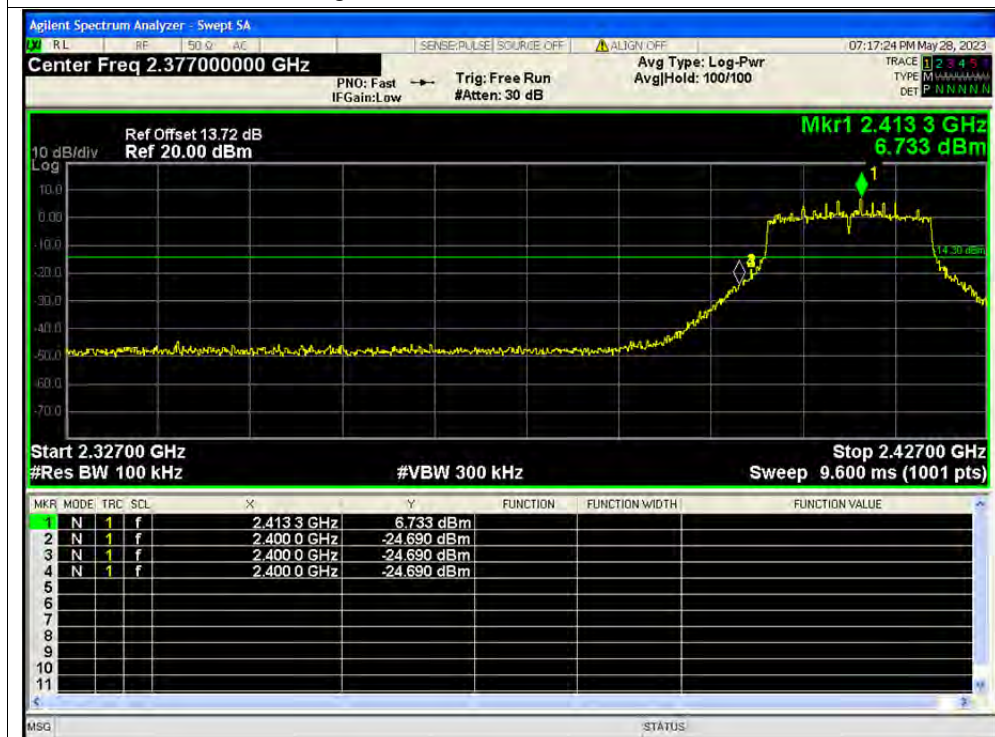




Band Edge NVNT n20 2462MHz Ant1 Ref



Band Edge NVNT n20 2462MHz Ant1 Emission

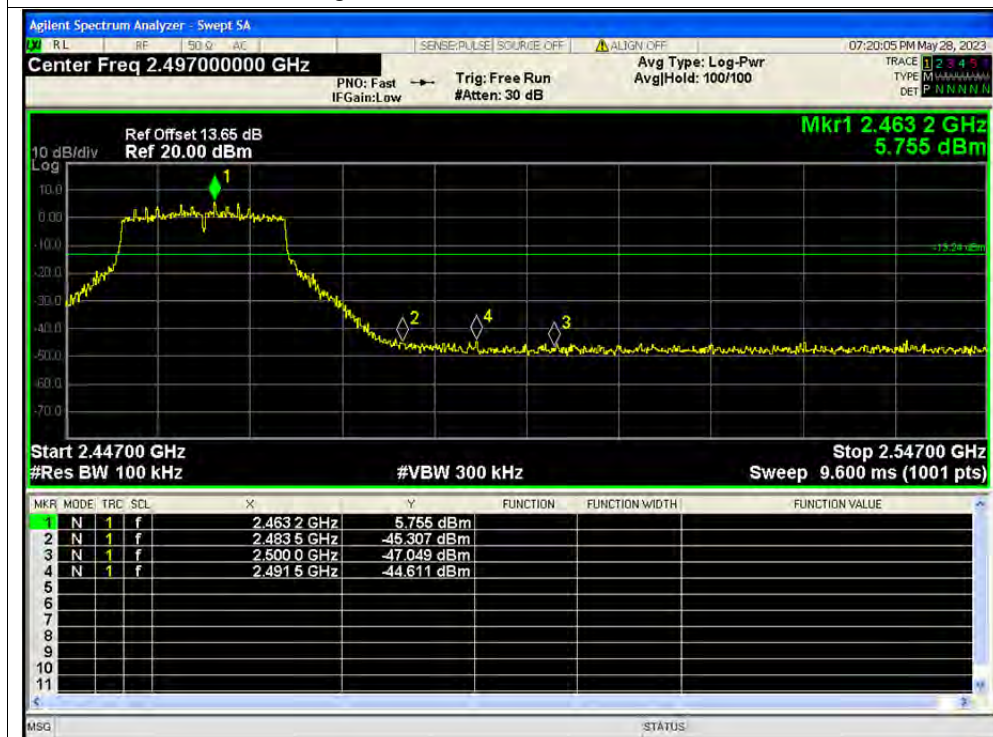




Band Edge NVNT n40 2422MHz Ant1 Ref



Band Edge NVNT n40 2422MHz Ant1 Emission

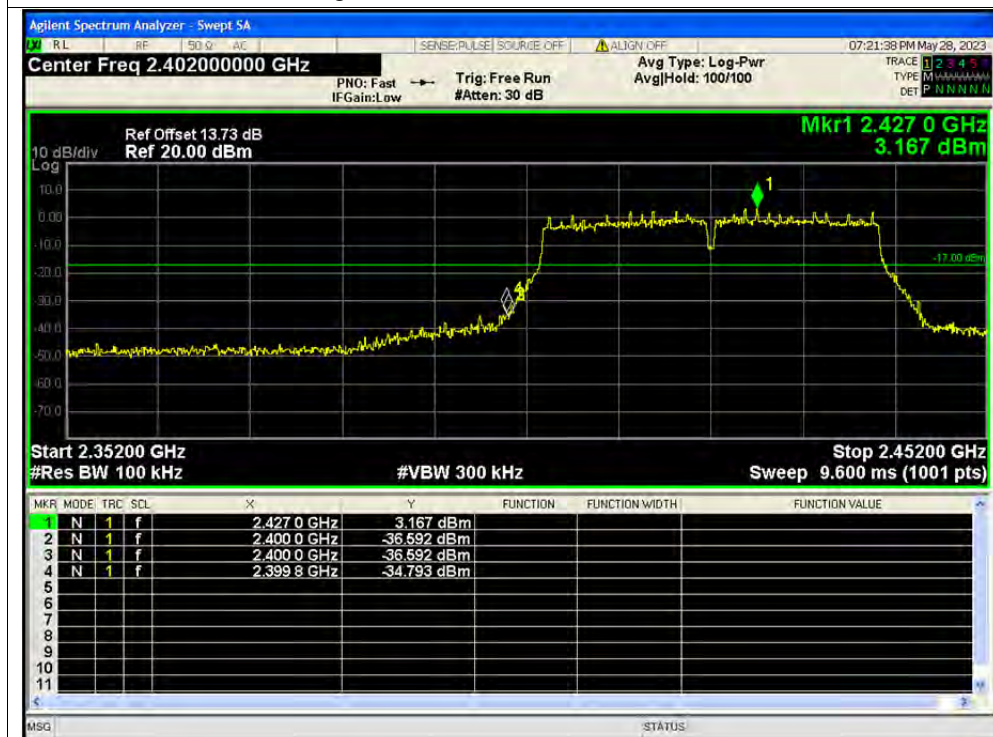

Band Edge NVNT n40 2452MHz Ant1 Ref



Band Edge NVNT n40 2452MHz Ant1 Emission



**A.7. Power Spectral Density**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-5.72	0	-5.72	8	Pass
NVNT	b	2437	Ant1	-4.6	0	-4.6	8	Pass
NVNT	b	2462	Ant1	-5.56	0	-5.56	8	Pass
NVNT	g	2412	Ant1	-9.04	0	-9.04	8	Pass
NVNT	g	2437	Ant1	-9.16	0	-9.16	8	Pass
NVNT	g	2462	Ant1	-8.92	0	-8.92	8	Pass
NVNT	n20	2412	Ant1	-8.21	0	-8.21	8	Pass
NVNT	n20	2437	Ant1	-7.72	0	-7.72	8	Pass
NVNT	n20	2462	Ant1	-8.29	0	-8.29	8	Pass
NVNT	n40	2422	Ant1	-12.02	0	-12.02	8	Pass
NVNT	n40	2437	Ant1	-11.27	0	-11.27	8	Pass
NVNT	n40	2452	Ant1	-11.24	0	-11.24	8	Pass



Test Graphs

PSD NVNT b 2412MHz Ant1



PSD NVNT b 2437MHz Ant1






PSD NVNT b 2462MHz Ant1




PSD NVNT g 2412MHz Ant1

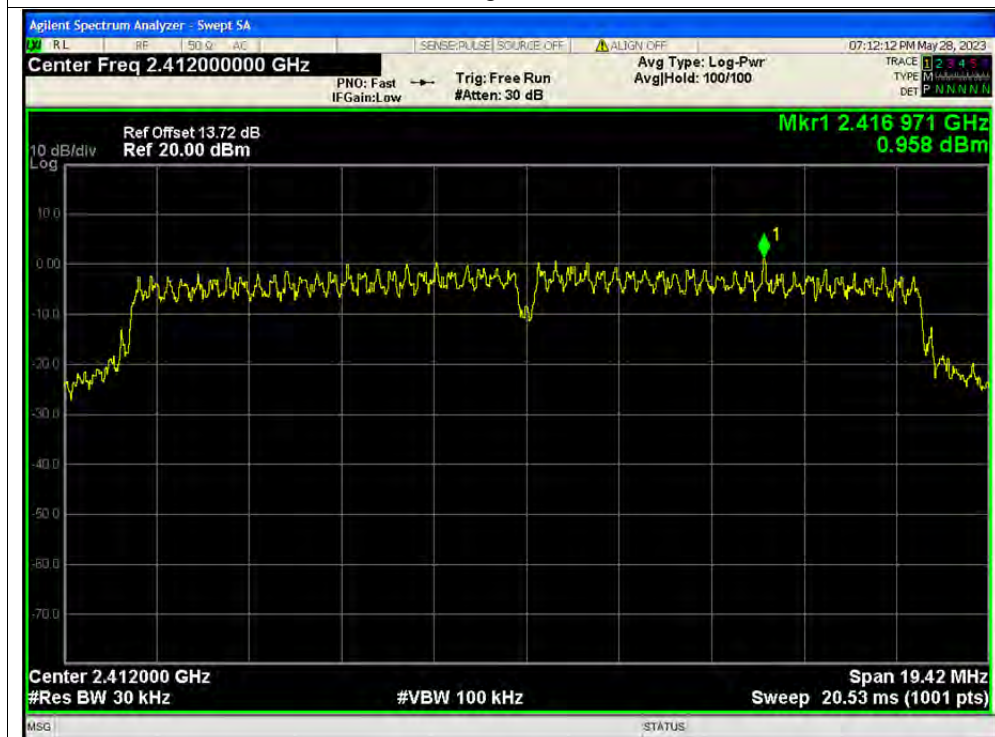



PSD NVNT g 2437MHz Ant1

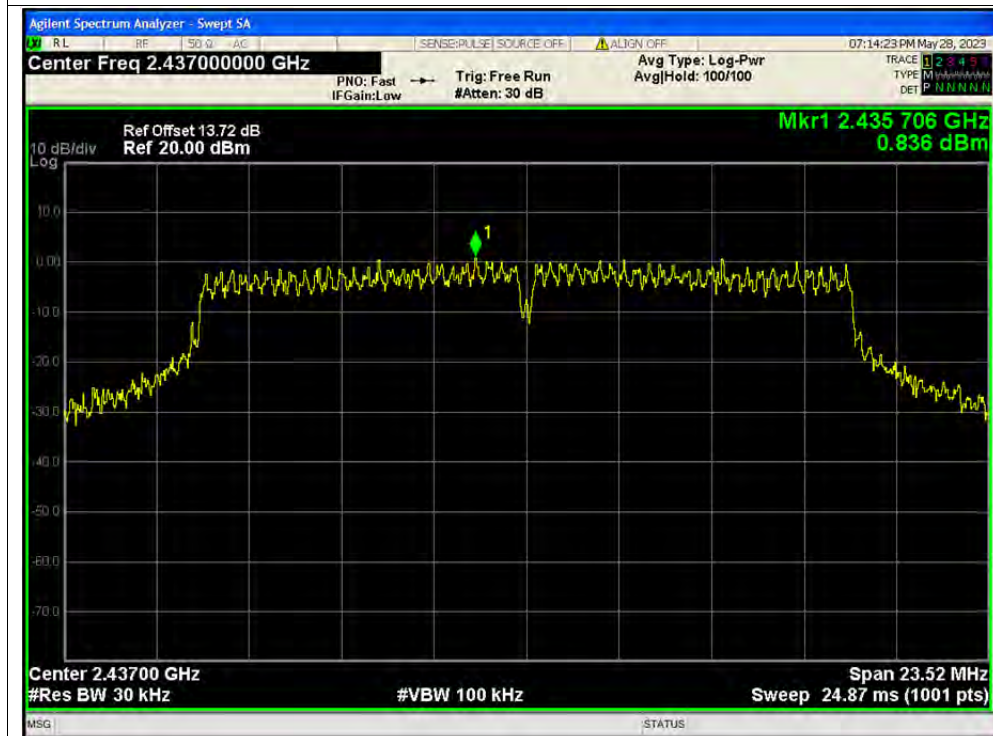


PSD NVNT g 2462MHz Ant1





PSD NVNT n20 2412MHz Ant1

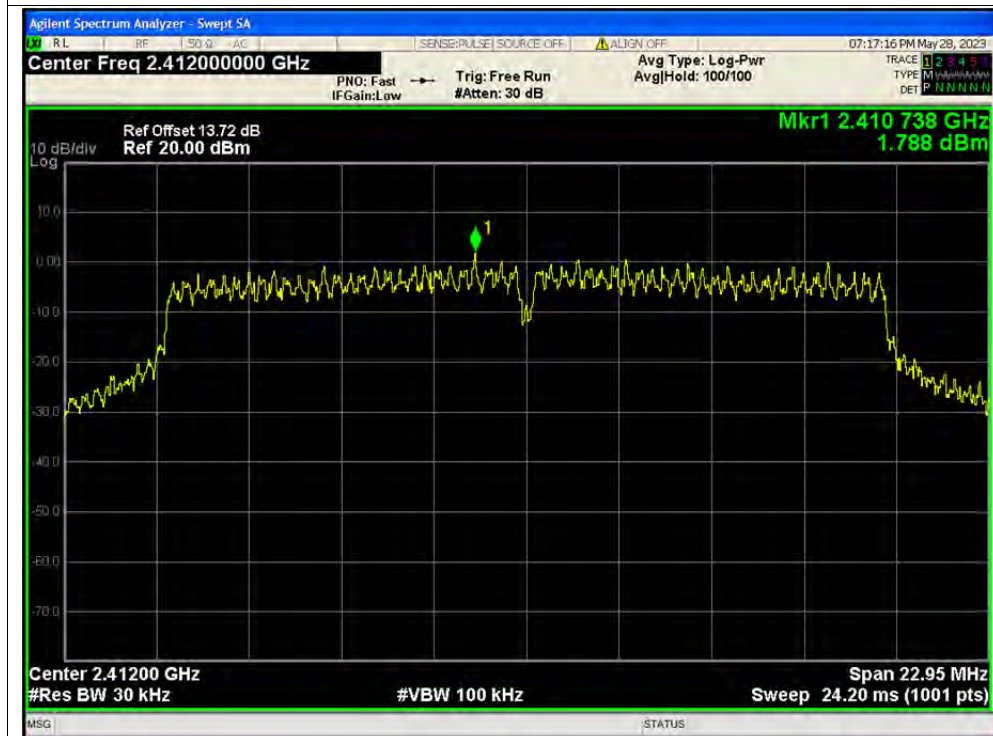

PSD NVNT n20 2437MHz Ant1





PSD NVNT n20 2462MHz Ant1



PSD NVNT n40 2422MHz Ant1






PSD NVNT n40 2437MHz Ant1



PSD NVNT n40 2452MHz Ant1

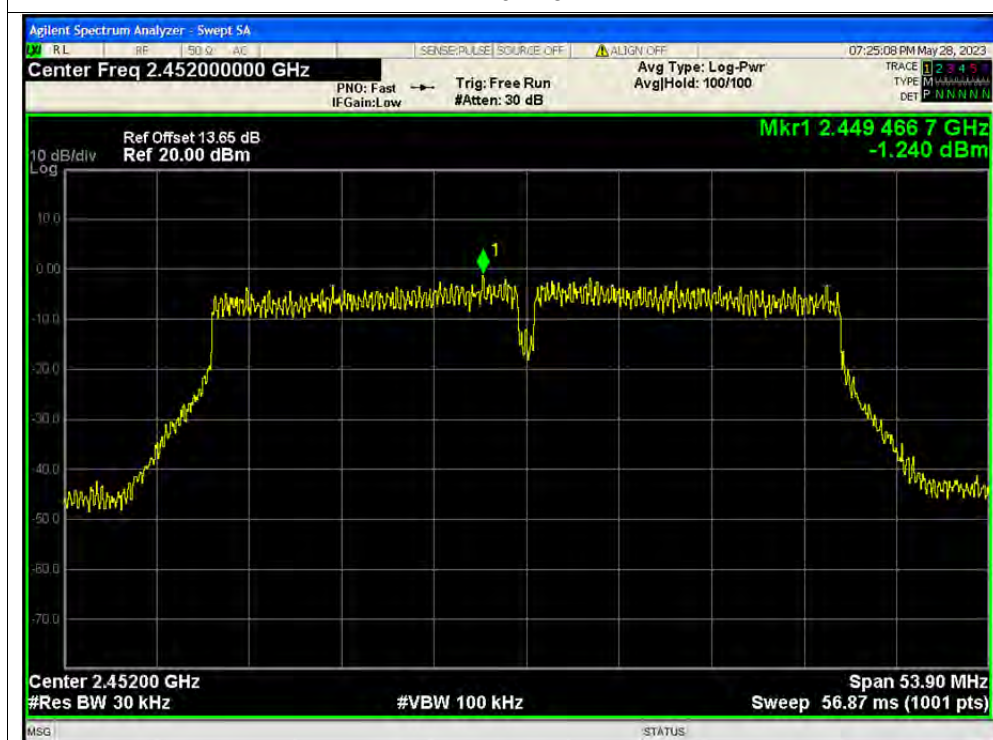



A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + Adapter + USB cable + Earphone + WIFI TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

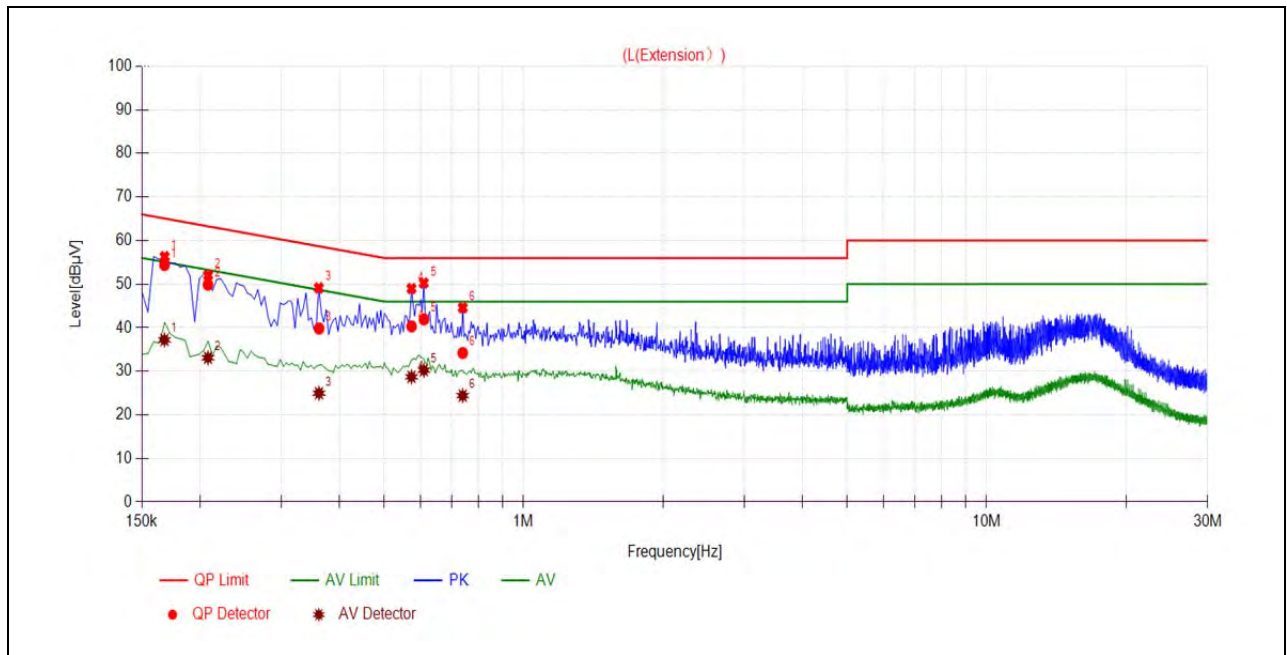

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1678	54.38	37.20	65.07	55.07	Line	PASS
2	0.2083	49.89	33.09	63.27	53.27		PASS
3	0.3618	39.82	24.97	58.69	48.69		PASS
4	0.5731	40.31	28.72	56.00	46.00		PASS
5	0.6095	41.91	30.24	56.00	46.00		PASS
6	0.7391	34.19	24.41	56.00	46.00		PASS

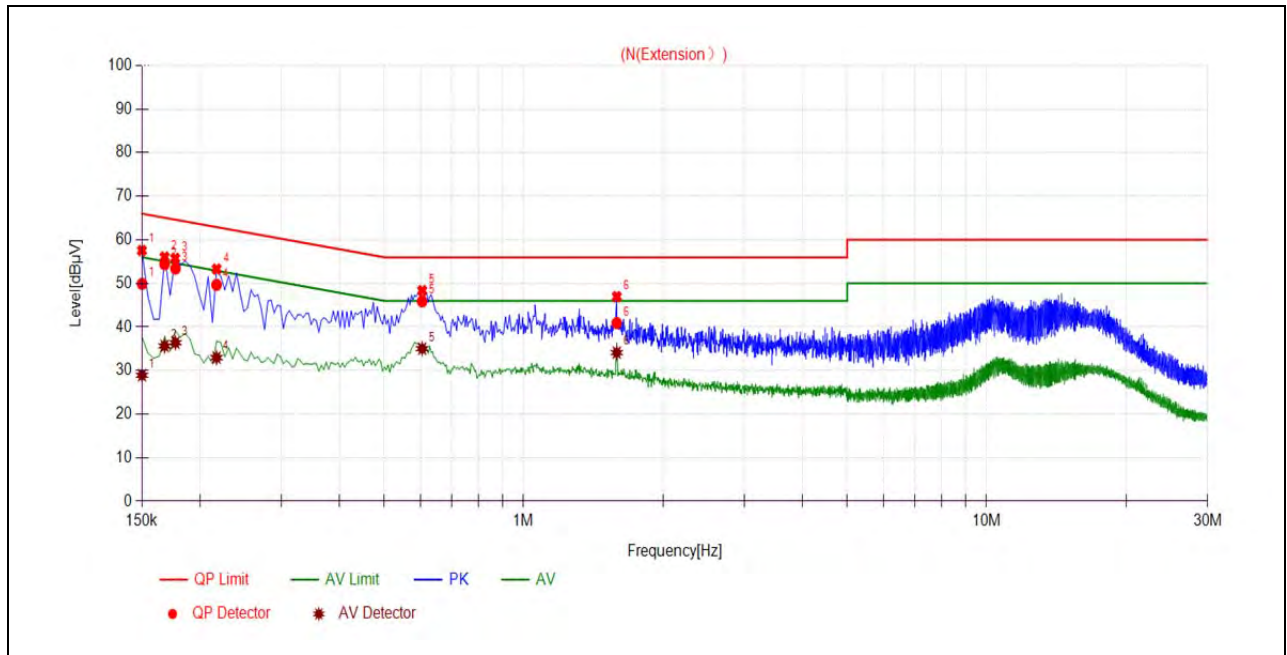

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1501	49.90	28.91	65.99	55.99	Neutral	PASS
2	0.1679	54.40	35.63	65.06	55.06		PASS
3	0.1772	53.40	36.39	64.62	54.62		PASS
4	0.2174	49.66	32.96	62.92	52.92		PASS
5	0.6042	45.88	35.02	56.00	46.00		PASS
6	1.5900	40.89	34.11	56.00	46.00		PASS



A.9. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

802.11b Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2366.86	PK	23.83	6.74	27.20	57.77	74	PASS
1	2389.71	AV	10.87	6.74	27.20	44.81	54	PASS
11	2483.50	PK	23.224	6.74	27.20	57.16	74	PASS
11	2487.80	AV	11.035	6.74	27.20	44.98	54	PASS

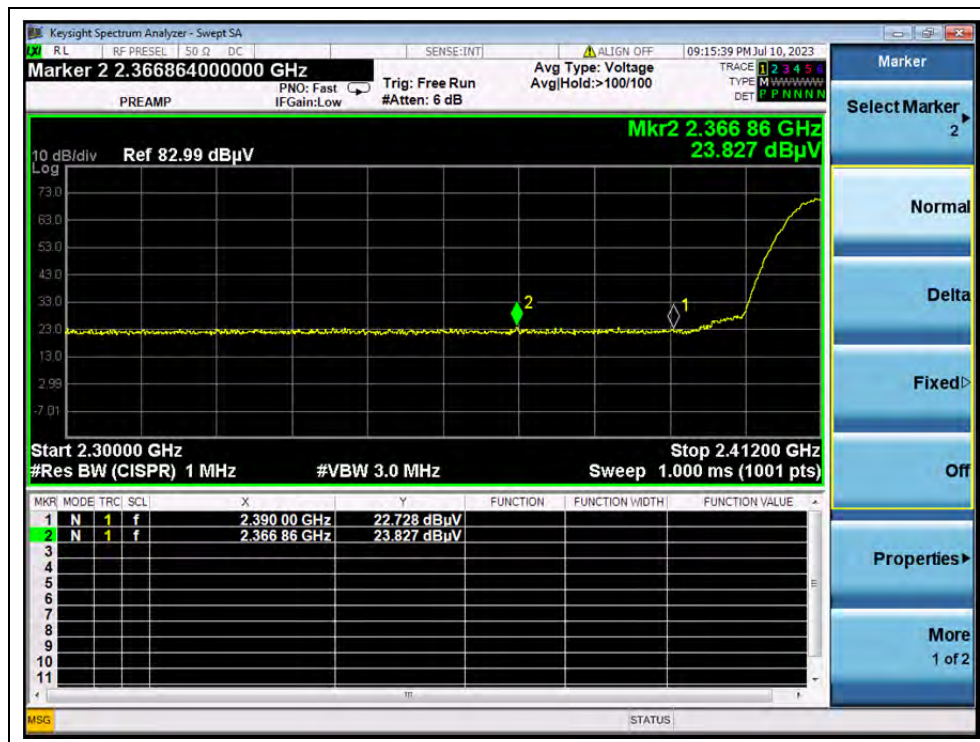

(PEAK, Channel 1, 802.11b)

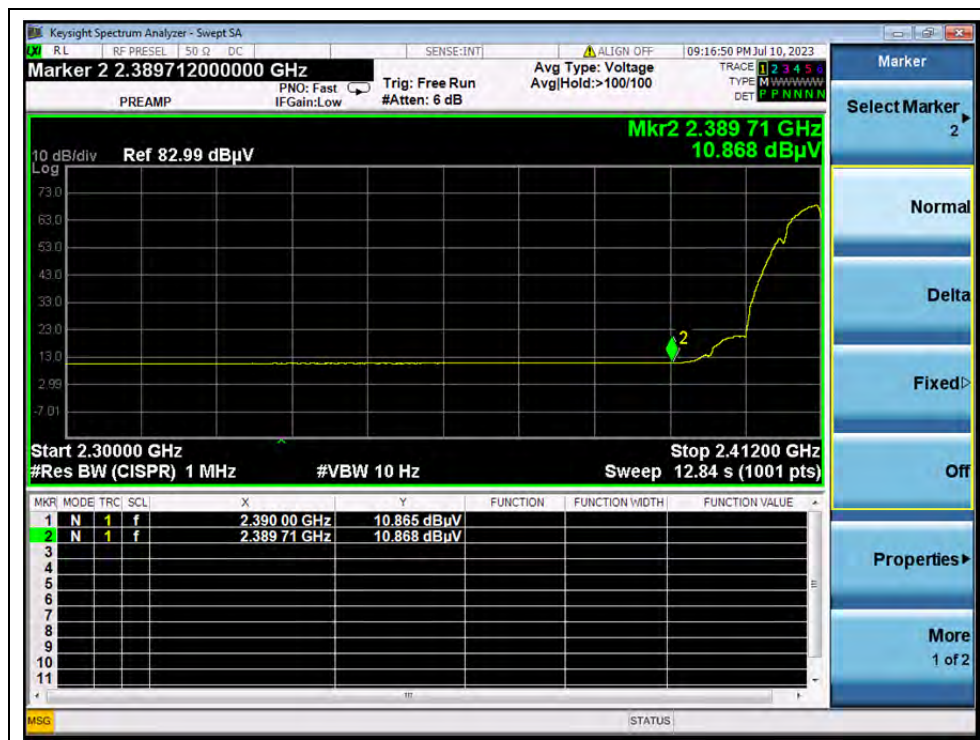

(AVERAGE, Channel 1, 802.11b)

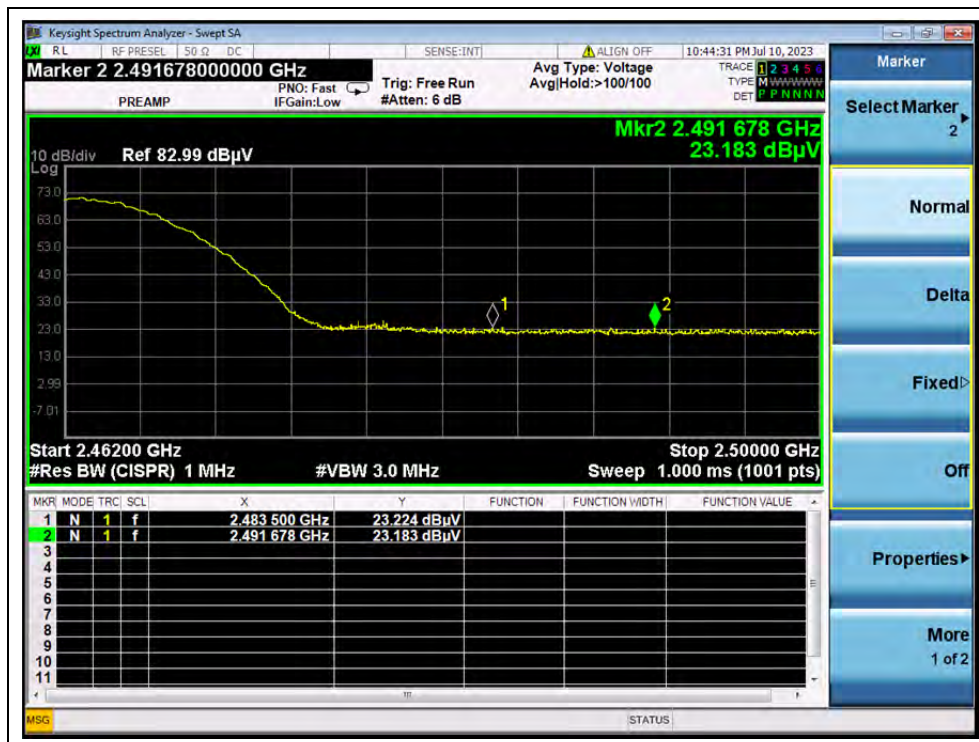

(PEAK, Channel 11, 802.11b)




(AVERAGE, Channel 11, 802.11b)




802.11g Mode

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2389.82	PK	25.35	6.74	27.20	59.29	74	PASS
1	2390.00	AV	12.81	6.74	27.20	46.75	54	PASS
11	2484.50	PK	24.59	6.74	27.20	58.53	74	PASS
11	2483.50	AV	12.61	6.74	27.20	46.55	54	PASS

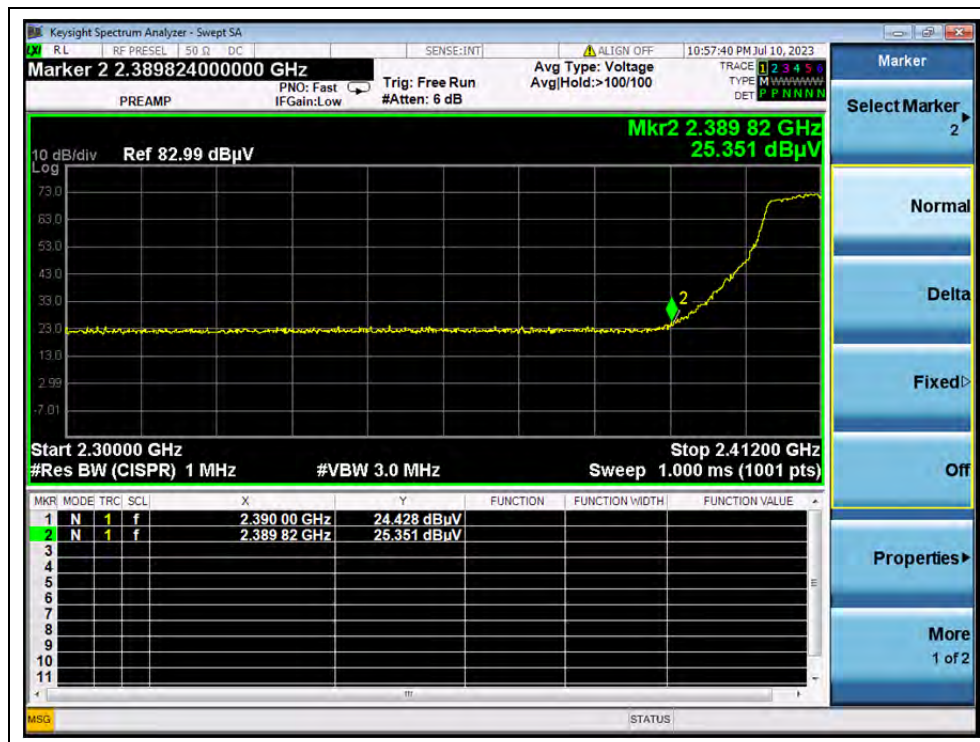


(PEAK, Channel 1, 802.11g)

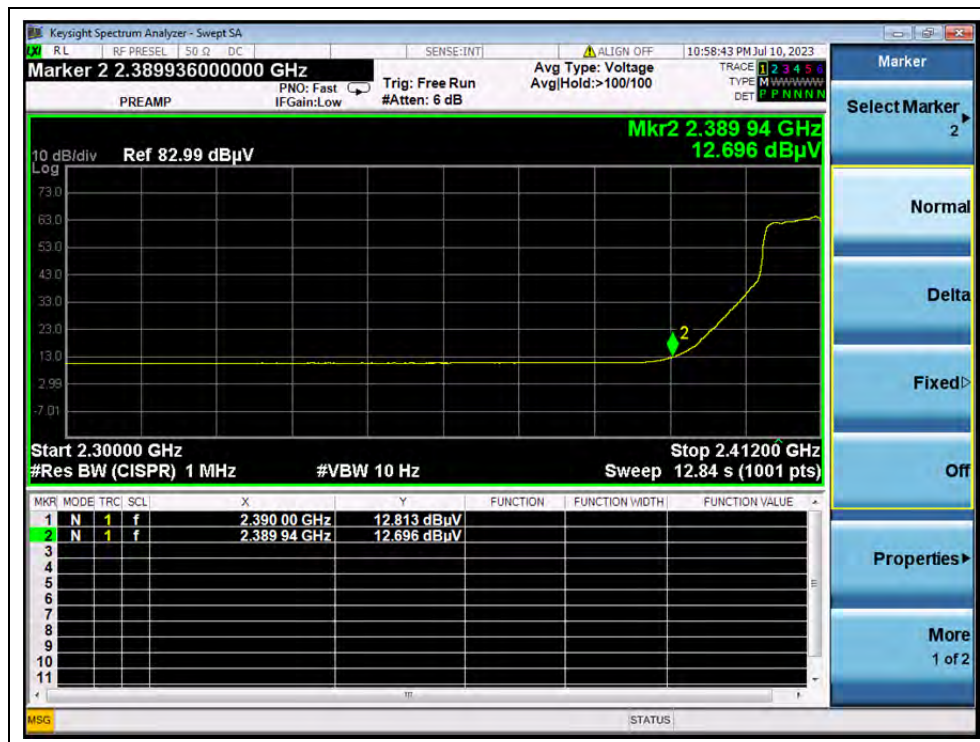

(AVERAGE, Channel 1, 802.11g)



(PEAK, Channel 11, 802.11g)

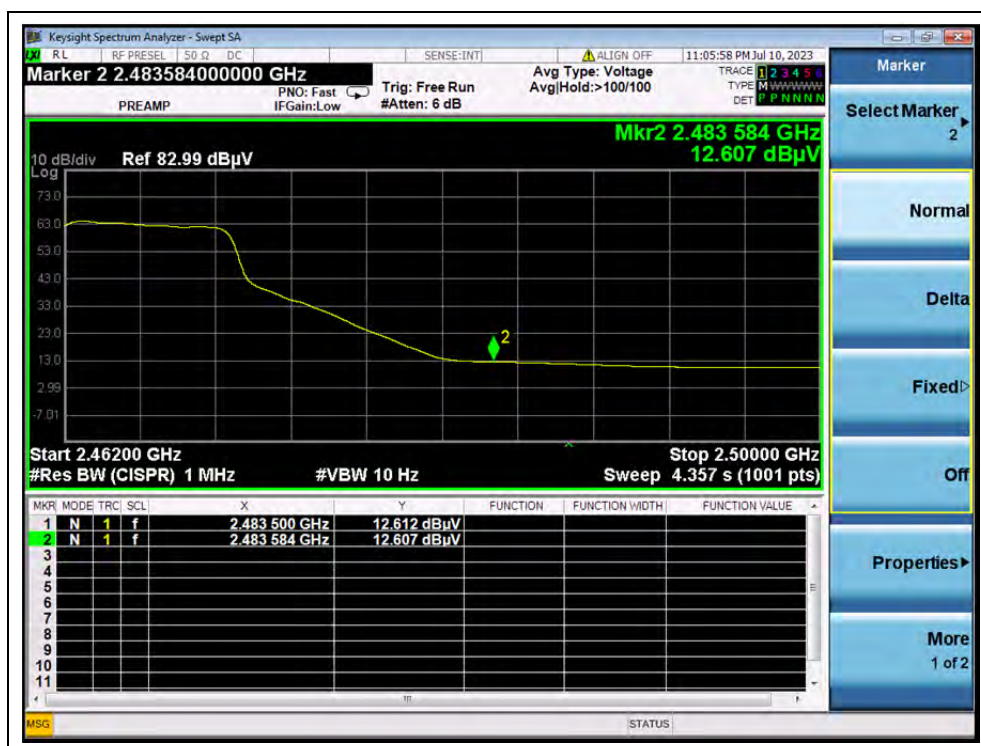


(AVERAGE, Channel 11, 802.11g)




802.11n (HT20) Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2389.82	PK	25.23	6.74	27.20	59.17	74	PASS
1	2390.00	AV	12.94	6.74	27.20	46.88	54	PASS
11	2484.42	PK	23.93	6.74	27.20	57.87	74	PASS
11	2483.50	AV	11.36	6.74	27.20	45.30	54	PASS

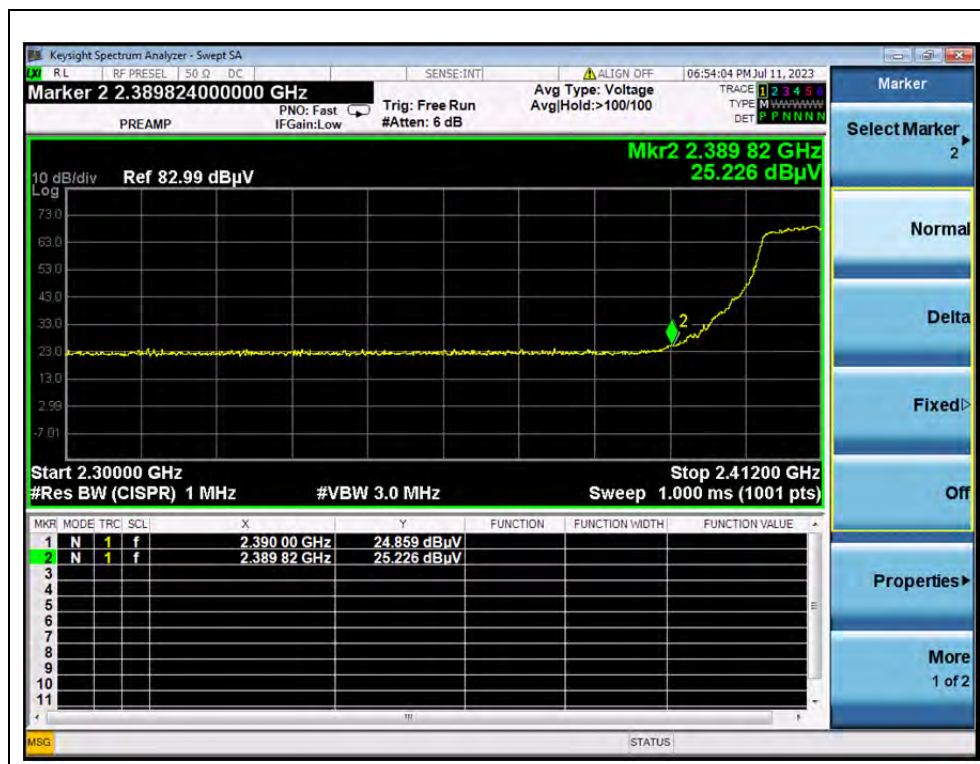


(PEAK, Channel 1, 802.11n (HT20))

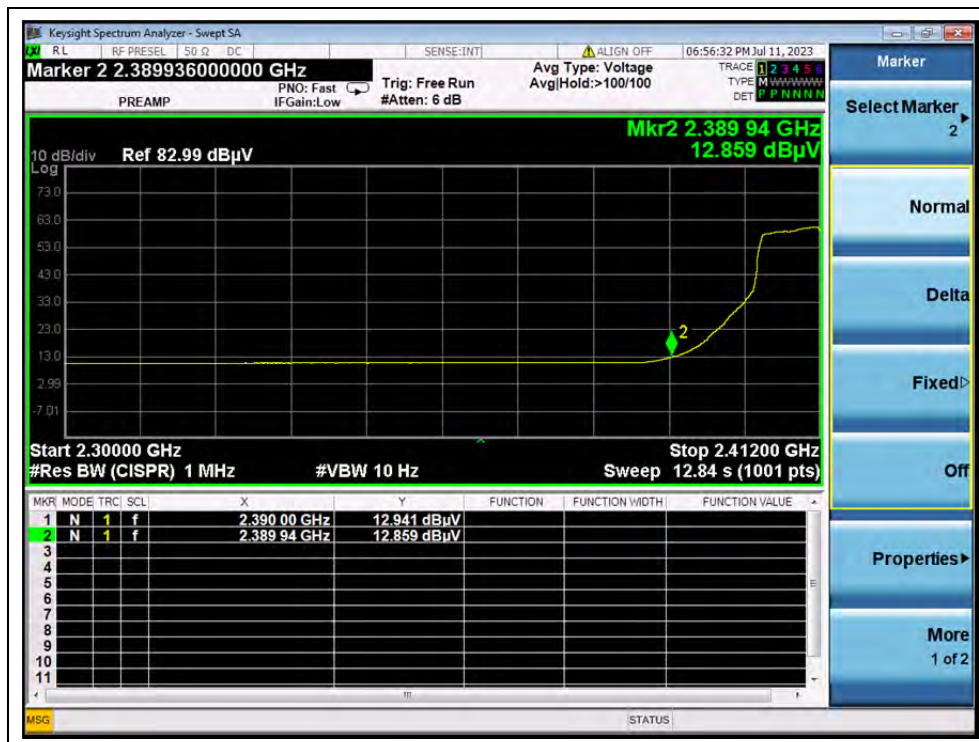

(AVERAGE, Channel 1, 802.11n (HT20))

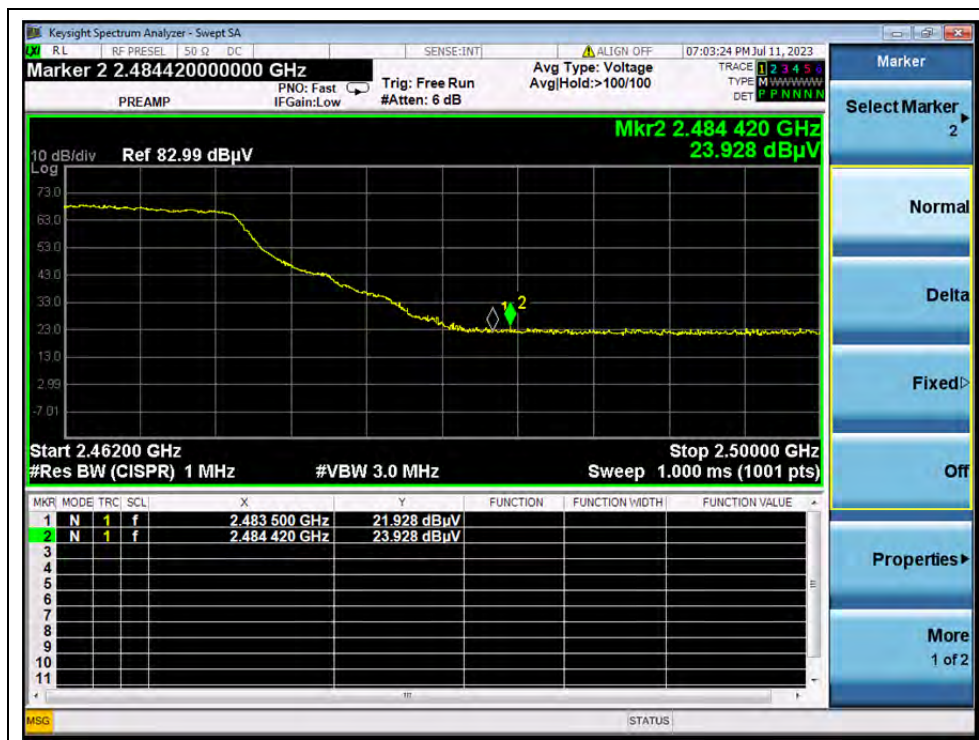

(PEAK, Channel 11, 802.11n (HT20))

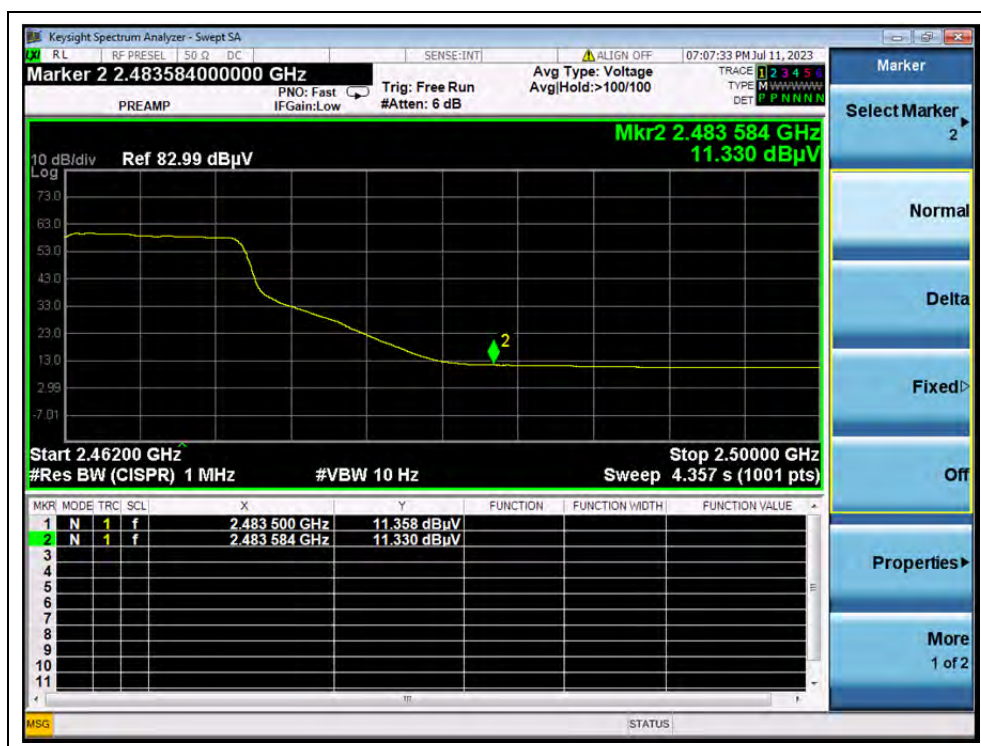


(AVERAGE, Channel 11, 802.11n (HT20))




802.11n (HT40) Mode

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
3	2389.91	PK	25.94	6.74	27.20	59.88	74	PASS
3	2390.00	AV	14.64	6.74	27.20	48.58	54	PASS
9	2484.21	PK	24.70	6.74	27.20	58.64	74	PASS
9	2483.87	AV	15.33	6.74	27.20	49.27	54	PASS

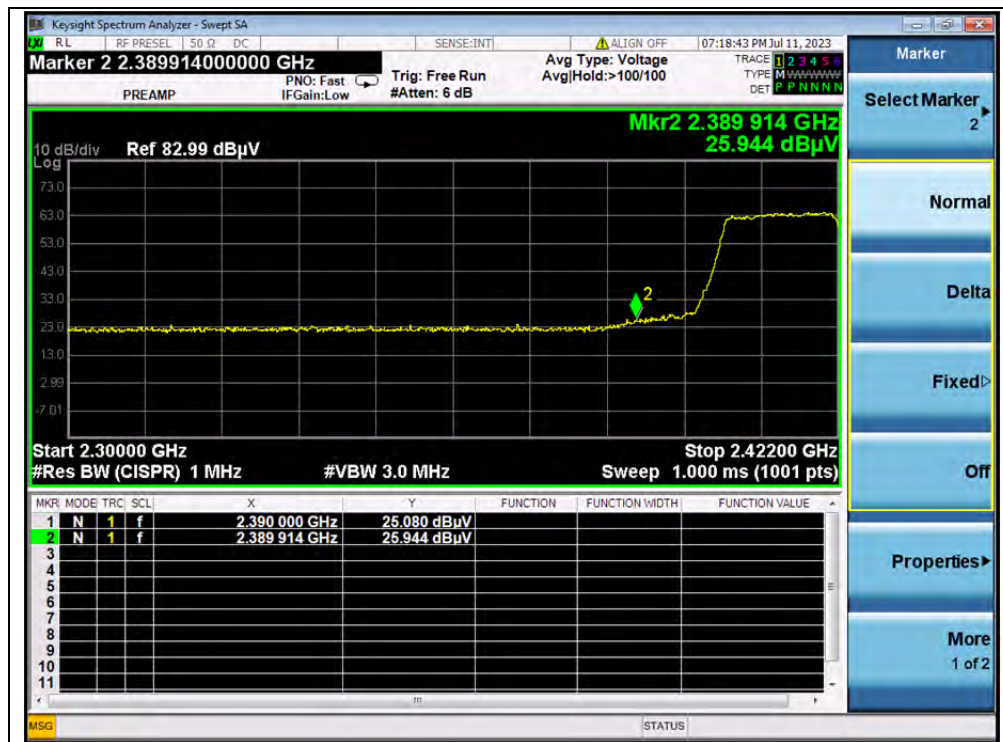


(PEAK, Channel 3, 802.11n (HT40))

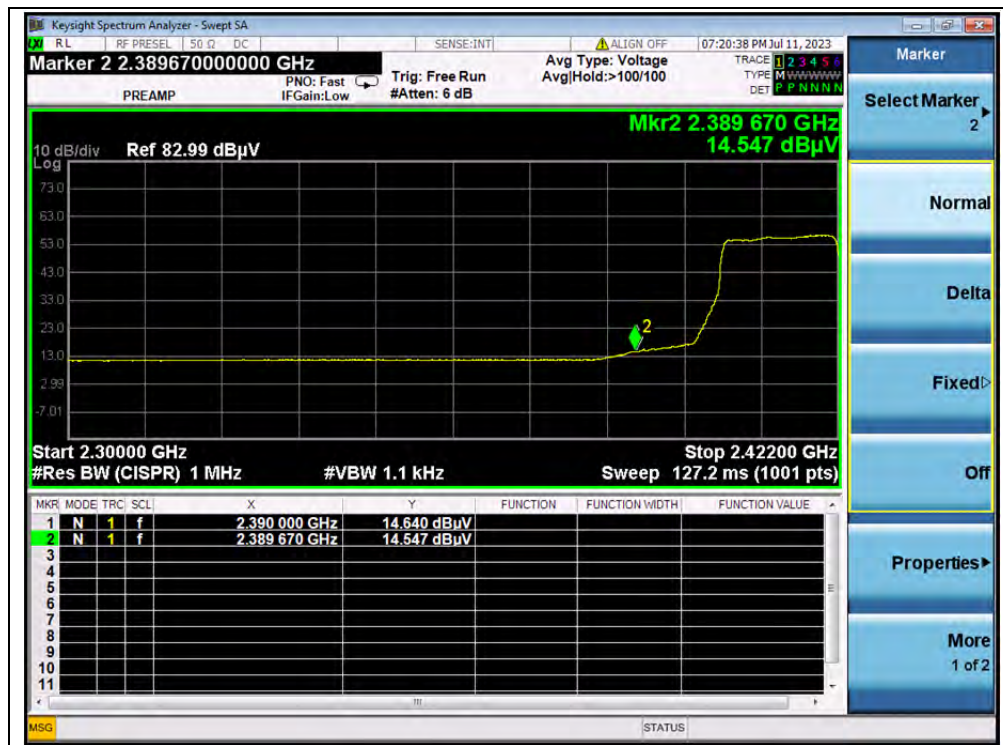

(AVERAGE, Channel 3, 802.11n (HT40))



(PEAK, Channel 9, 802.11n (HT40))

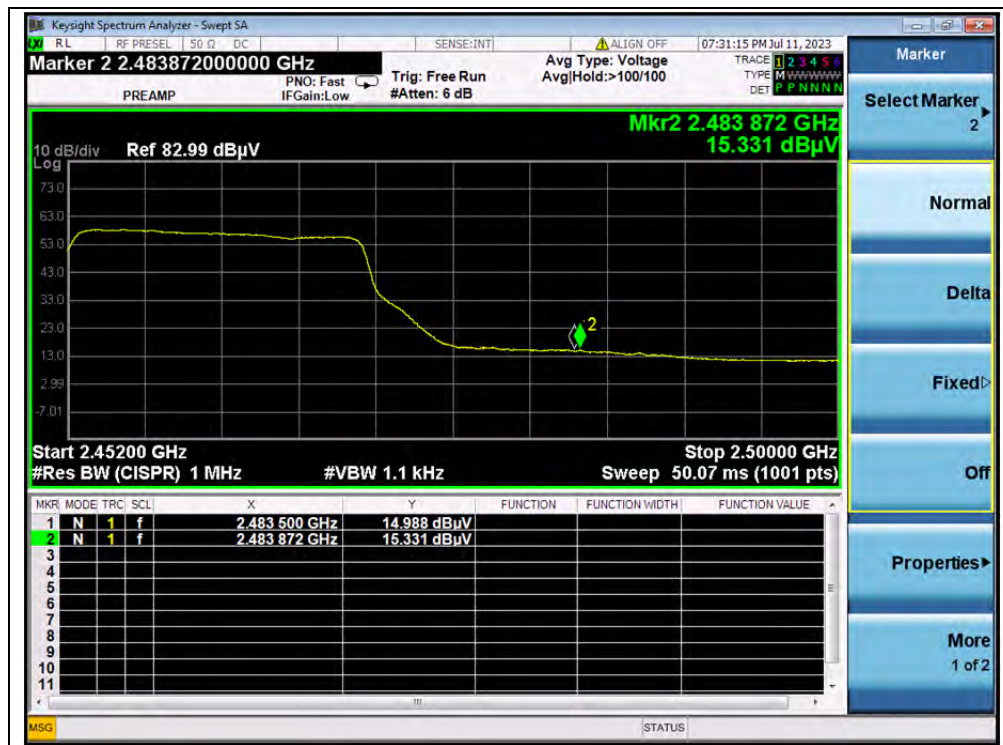

(AVERAGE, Channel 9, 802.11n (HT40))



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

**802.11b Mode**

Plot for Channel 1

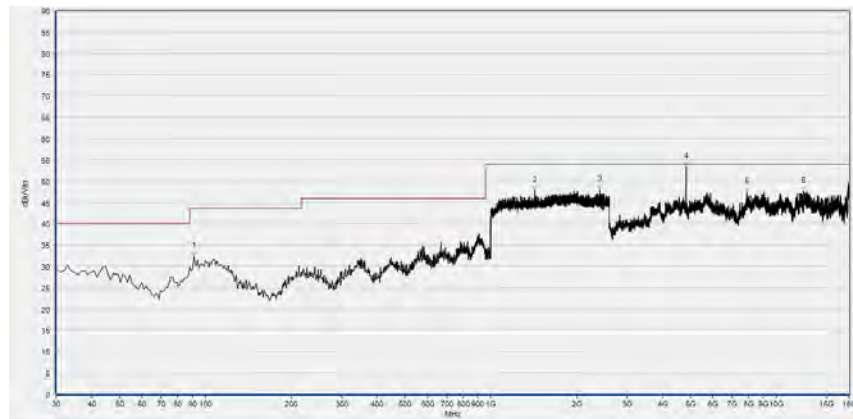

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
91.110	32.42	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1426.133	47.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2413.333	48.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4823.760	53.33	N/A	50.51	74.00	N/A	54.00	Horizontal	PASS
7885.280	47.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12480.640	47.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)




Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.810	32.82	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1942.933	48.28	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2416.533	47.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4823.760	50.15	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5760.080	47.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12677.760	47.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

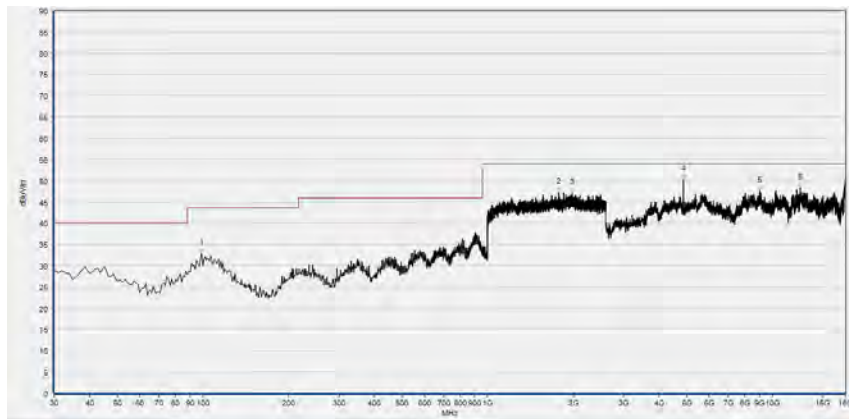

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
98.870	32.80	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1772.267	47.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
1981.867	47.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4873.040	50.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8991.000	47.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12529.920	48.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

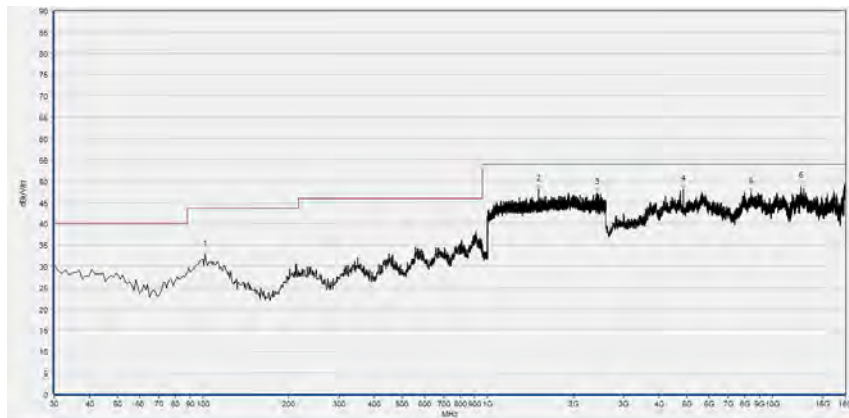


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
101.780	32.71	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1506.133	48.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2418.133	47.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4873.040	48.09	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8415.040	47.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12588.440	48.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



Plot for Channel 11

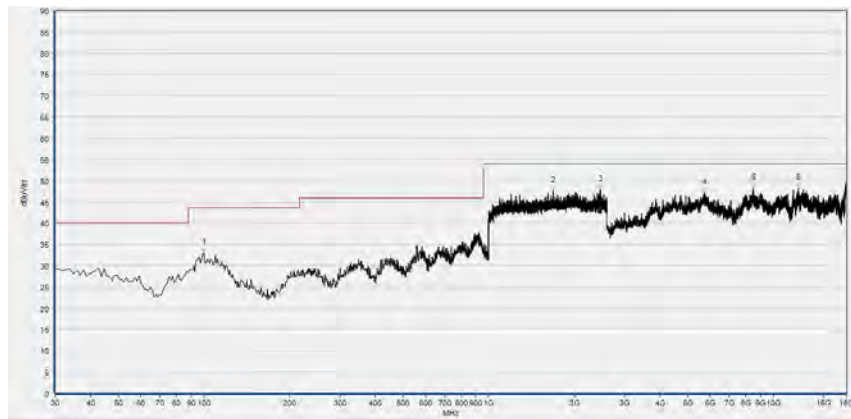

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.840	33.04	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1681.600	47.57	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2464.000	47.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5732.360	47.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8504.360	48.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12215.760	48.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)




Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
103.720	32.34	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2038.933	48.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2451.200	47.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5636.880	47.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8981.760	48.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12890.280	48.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

**802.11g Mode**

Plot for Channel 1

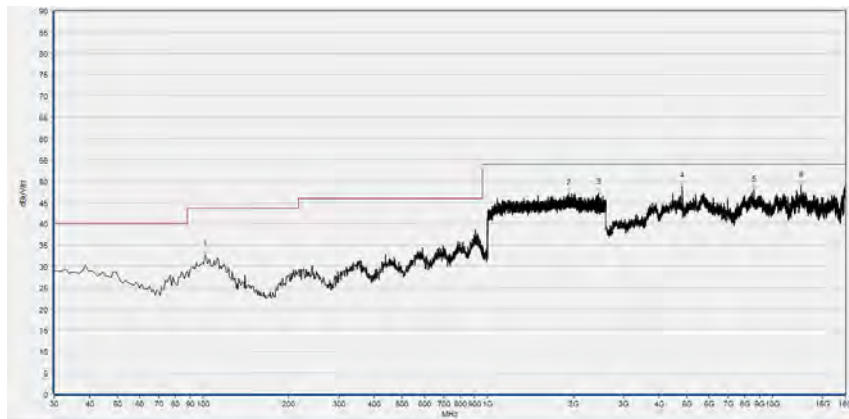

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
101.780	32.47	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1918.400	47.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2453.333	47.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4820.680	48.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8618.320	48.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12585.360	48.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)



Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
101.780	32.79	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1837.867	47.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2531.200	47.09	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5683.080	47.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7990.000	47.29	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12622.320	48.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 6

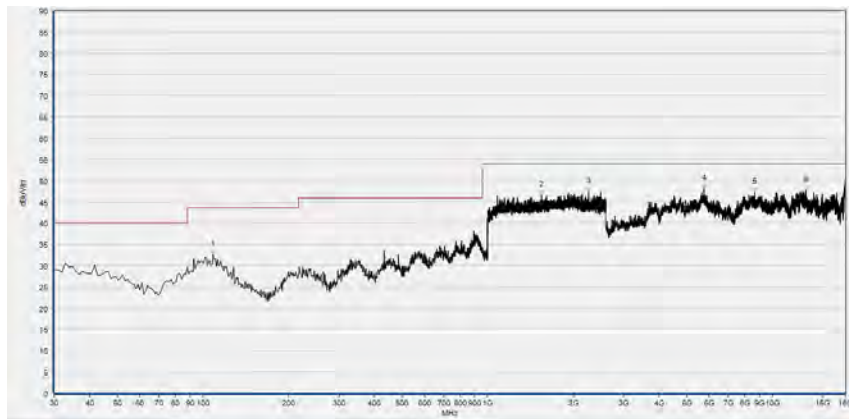

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.750	31.78	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2052.267	47.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2464.533	47.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5649.200	47.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8445.840	47.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16453.840	47.45	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

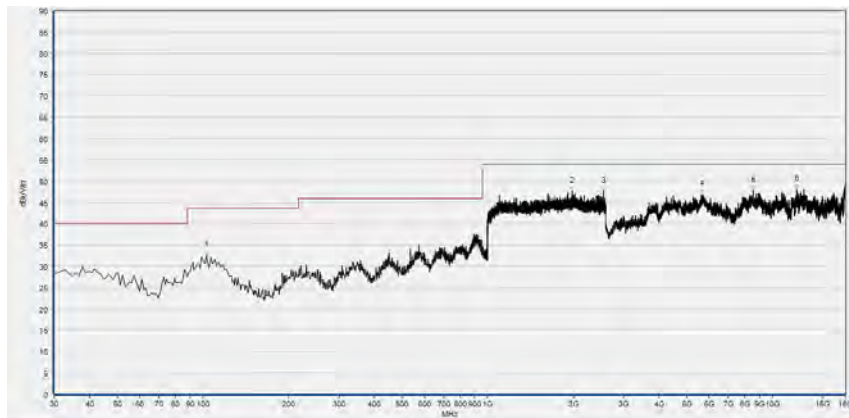


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.750	32.54	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1984.000	47.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2549.867	47.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5658.440	46.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8572.120	47.84	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12132.600	48.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 11

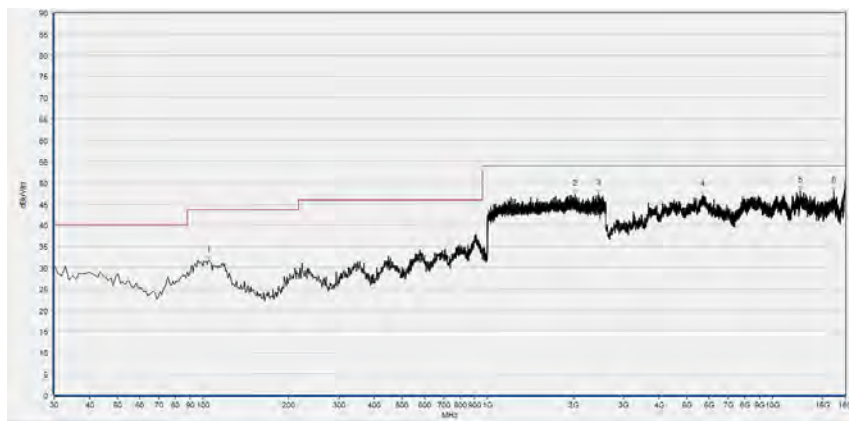

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
104.690	31.65	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2021.867	47.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2449.600	47.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5689.240	47.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12489.880	48.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16413.800	48.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

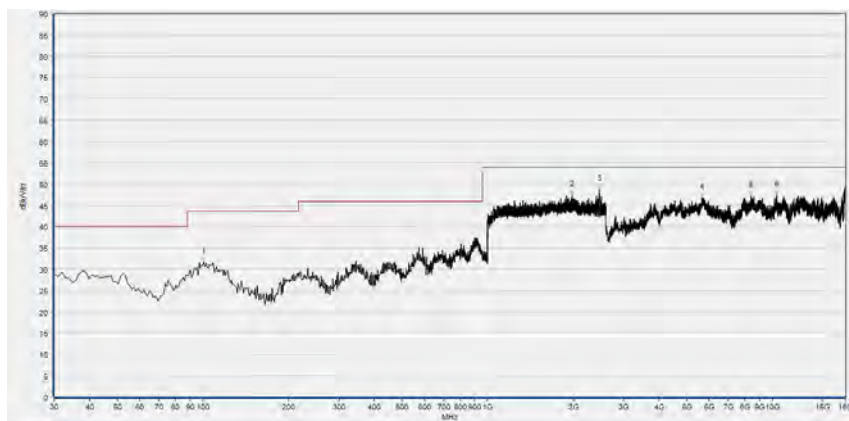


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.810	31.73	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1980.800	47.49	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2464.000	48.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5643.040	46.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8390.400	47.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10336.960	47.43	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

**802.11n (HT20) Mode**

Plot for Channel 1

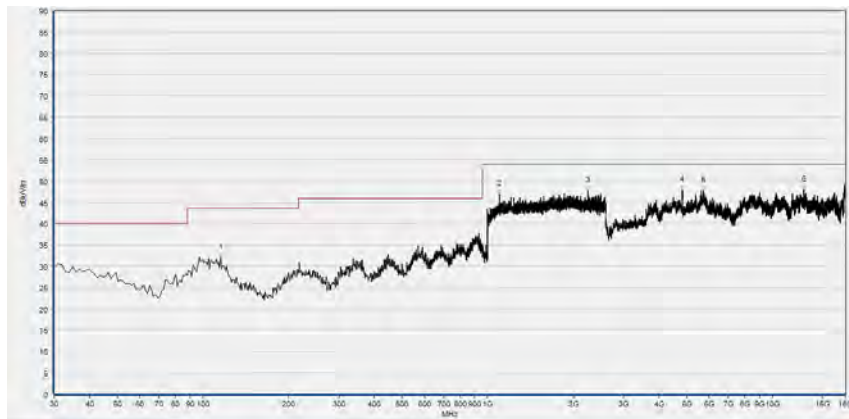

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
115.360	32.00	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1099.733	46.88	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2251.200	47.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4820.680	47.94	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5710.800	47.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12881.040	47.88	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)




Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.750	32.45	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1989.333	47.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2407.467	47.16	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5636.880	47.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8445.840	47.66	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12492.960	47.43	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

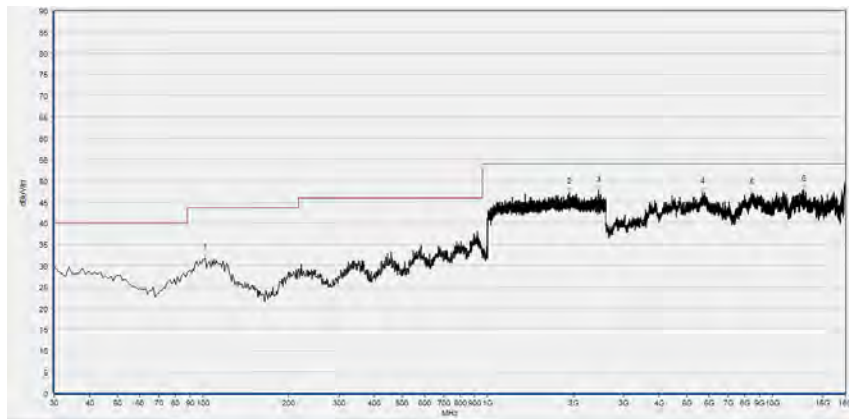

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
101.780	31.79	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1934.400	47.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2453.867	47.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5686.160	47.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8473.560	47.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12899.520	47.88	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

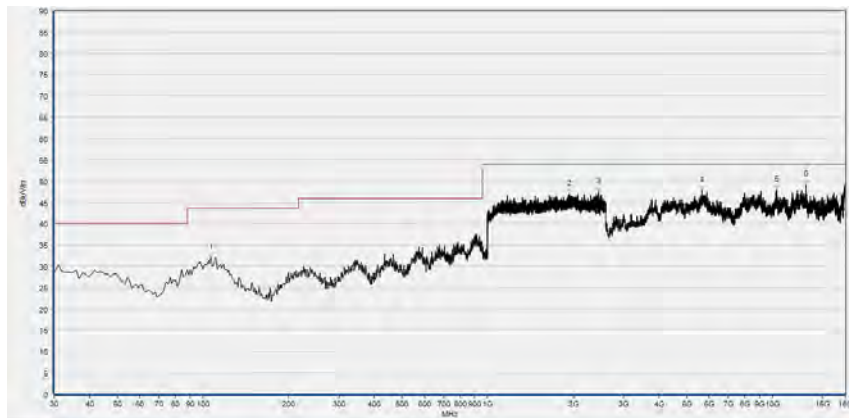

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
106.630	32.00	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1933.867	46.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2450.667	47.47	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5652.280	47.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10361.600	47.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13090.480	49.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 11

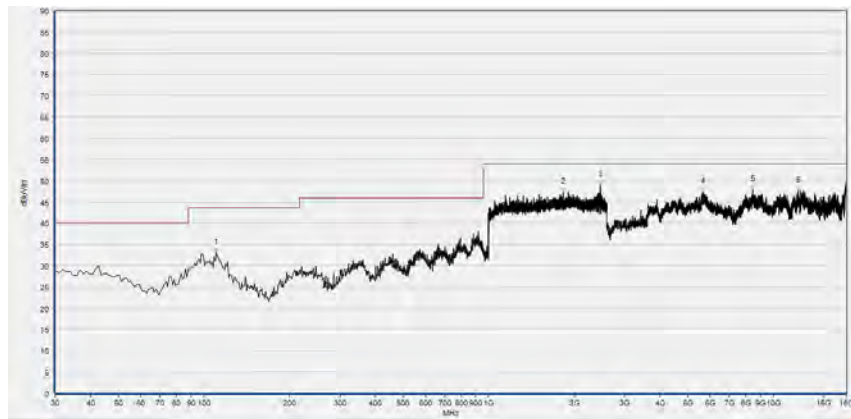

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	32.96	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1826.133	47.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2462.933	48.98	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5667.680	47.44	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8445.840	47.96	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12209.600	47.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

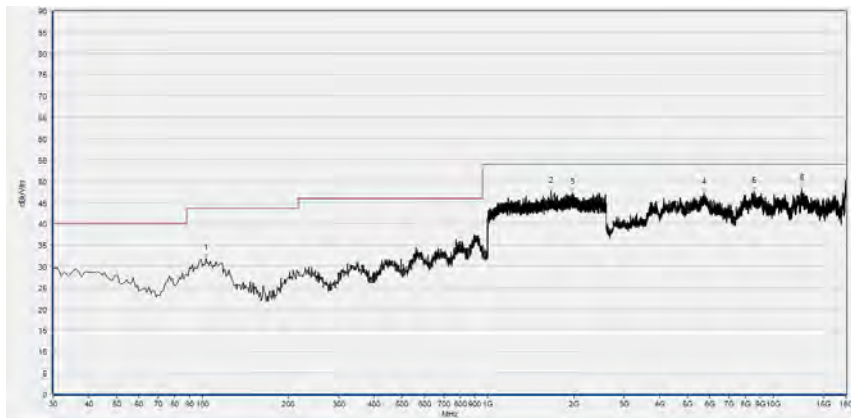


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.750	31.82	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1664.533	47.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
1984.533	47.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5707.720	47.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8559.800	47.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12594.600	48.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11n (HT40) Mode**

Plot for Channel 3

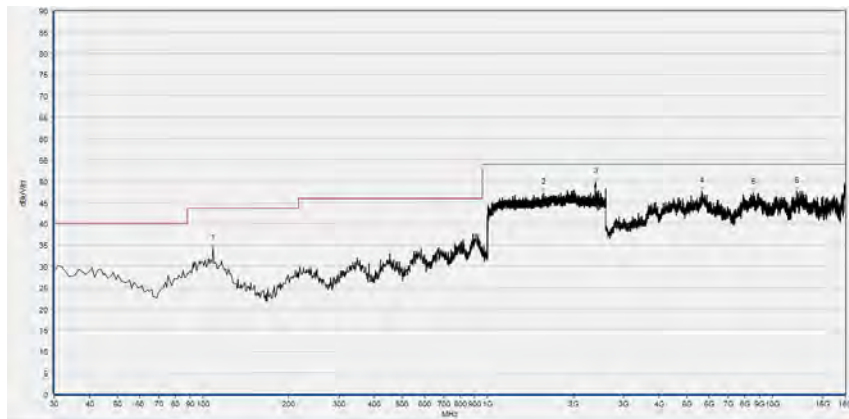

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	34.13	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1574.400	47.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2389.333	49.79	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5658.440	47.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8581.360	47.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12172.640	47.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

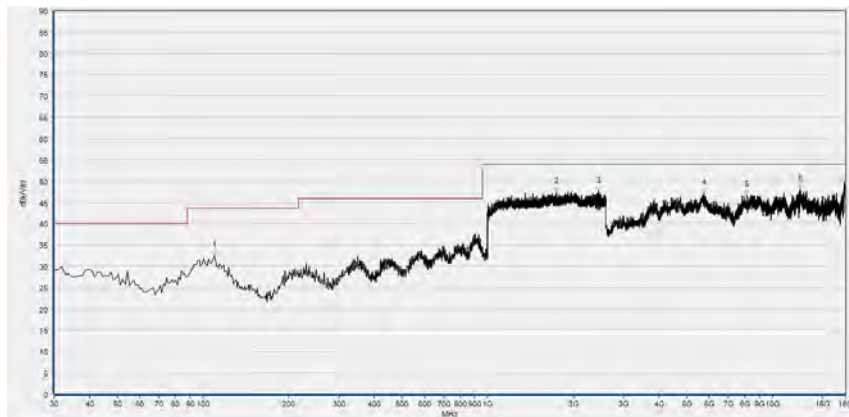

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	32.29	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1747.733	47.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2453.867	47.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5735.440	47.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8119.360	46.79	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12533.000	48.09	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 6

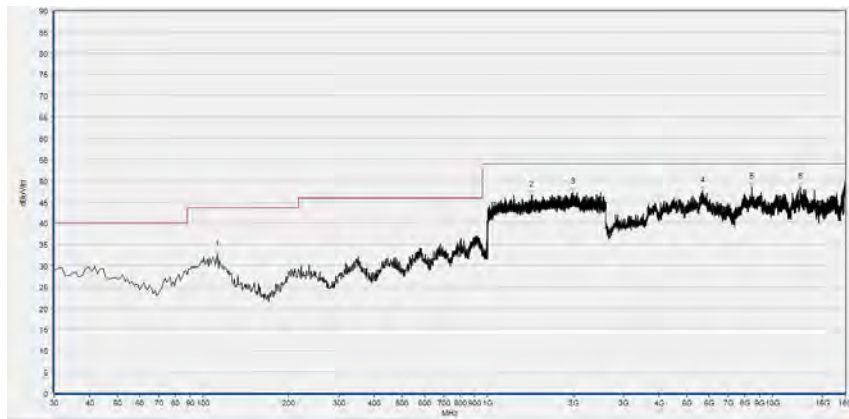

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
112.450	32.58	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1422.400	46.57	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
1993.600	47.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5692.320	47.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8455.080	48.47	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12545.320	48.49	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

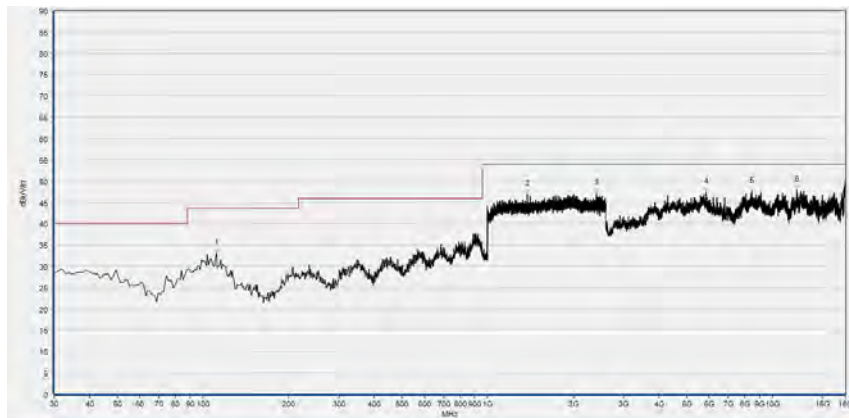


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
111.480	33.07	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1373.867	46.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2410.133	47.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5855.560	47.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8464.320	47.61	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12181.880	47.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



Plot for Channel 9

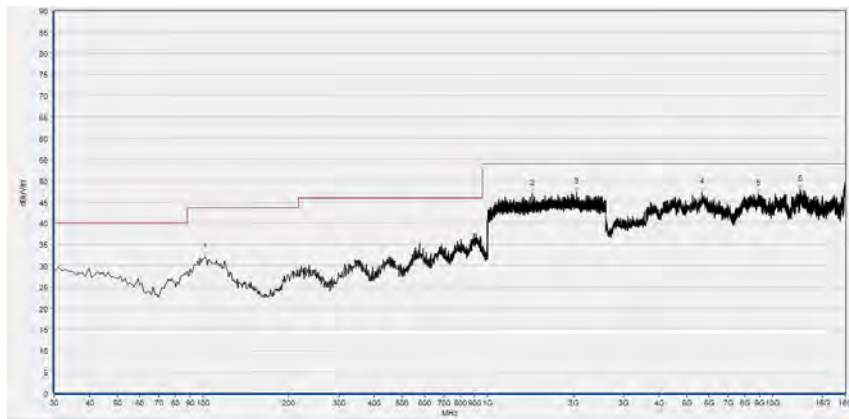

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
101.780	32.02	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1432.533	46.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2048.533	47.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5646.120	47.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8920.160	46.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12496.040	47.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)



Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.750	31.78	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2052.267	47.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2464.533	47.16	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5649.200	47.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8445.840	47.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
16453.840	47.45	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT