

# **FCC Test Report**

Report No.: AGC02762231107FR02

FCC ID : 2BCTG-FLIP2

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: 4G Feature Phone

**BRAND NAME** : ESCOLLS

**MODEL NAME** : Flip 2

**APPLICANT** : A.V. World of Technology Ltd

**DATE OF ISSUE** : Dec. 15, 2023

**STANDARD(S)**: FCC Part 22 Subpart H
FCC Part 24 Subpart E

**REPORT VERSION**: V1.0


Attestation of Global Compliance (Shenzhen) Co., Ltd.



Page 2 of 97

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec. 15, 2023	Valid	Initial Release





## **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Related Submittal(S) / Grant (S)	8
2.3 Test Methodology	
2.4 Device Capabilities	
2.5 Special Accessories	
2.6 Equipment Modifications	
2.7 Emission Designator	
3. Test Environment	10
3.1 Address of The Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	11
3.4 Measurement Uncertainty	11
3.5 List of Test Equipment	12
4. System Test Configuration	14
4.1 EUT Configuration	14
4.2 EUT Exercise	14
4.3 Configuration of EUT System	14
4.4 Equipment Used in Tested System	14
5. Summary of Test Results	15
5.1 Test Condition: Conducted Test	15
5.2 Test Condition: Radiated Test	15
6. Description of Test Modes	16
7. Conducted Output Power	
7.1 Provisions Applicable	18
7.2 Measurement Procedure	18
7.3 Measurement Setup	18
7.4 Measurement Result	19
8. Radiated Output Power	21
8.1 Provisions Applicable	21
8.2 Measurement Procedure	21
8.3 Measurement Setup	22
8.4 Measurement Result	24
9. Peak-to-Average Ratio	26
9.1 Provisions Applicable	26

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



## Report No.: AGC02762231107FR02 Page 4 of 97

9.2 Measurement Procedure	26
9.3 Measurement Setup	27
9.4 Measurement Result	28
10. 99% Occupied Bandwidth and 26dB Emission Bandwidth	29
10.1 Provisions Applicable	29
10.2 Measurement Procedure	29
10.3 Measurement Setup	29
10.4 Measurement Result	30
11. Band Edge Emissions at Antenna Terminal	39
11.1 Provisions Applicable	39
11.2 Measurement Procedure	39
11.3 Measurement Setup	39
11.4 Measurement Result	40
12. Spurious Emissions at Antenna Terminal	46
12.1 Provisions Applicable	46
12.2 Measurement Procedure	46
12.3 Measurement Setup	46
12.4 Measurement Result	47
13. Radiated Spurious Emission	66
13.1. Provisions Applicable	66
13.2. Measurement Procedure	66
13.3. Measurement Setup	68
13.4 Measurement Result	69
14. Frequency Stability / Variation of Ambient Temperature	77
14.1 Provisions Applicable	77
14.2 Measurement Procedure	77
14.3 Measurement Setup	78
14.4 Measurement Result	79
Appendix I: Photographs of Test Setup	97
Appendix II: Photographs of EUT	97



Page 5 of 97

## 1. General Information

Applicant	A.V. World of Technology Ltd
Address	Avinadav 3 Jerusalem Israel
Manufacturer	A.V. World of Technology Ltd
Address	Avinadav 3 Jerusalem Israel
Factory	N/A
Address	N/A
Product Designation	4G Feature Phone
Brand Name	ESCOLLS
Test Model	Flip 2
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Nov. 17, 2023
Date of Test	Nov. 17, 2023~Dec. 15, 2023
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-GSM&WCDMA-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo Zhang	
	Bibo Zhang (Project Engineer)	Dec. 15, 2023
Reviewed By	Calvin Lin	
	Calvin Liu (Reviewer)	Dec. 15, 2023
Approved By	Max Zhang	
	Max Zhang Authorized Officer	Dec. 15, 2023



Page 6 of 97

## 2. Product Information

## 2.1 Product Technical Description

Support Networks	GSM, GPRS, EGPRS, WCDMA, HSDPA, HSUPA				
Hardware Version	SF292 MMI_V00				
Software Version	V1.0				
	⊠GPRS 850	⊠PCS1900	⊠UMTS FDD Band II		
	UMTS FDD Band IV	⊠UMTS FDD Band V	(Non-U.S. Bands)		
Support Frequency Band	⊠GSM 900	⊠DCS 1800	⊠UMTS FDD Band I		
	⊠UMTS FDD Band VIII	(Non-U.S. Bands)			
	824.2MHz-848.8MHz (GSM/GPRS/EGPRS 850)				
_	1850.2MHz-1909.8MHz (G	SSM/GPRS/EGPRS 1900	)		
Frequency Range	1852.4MHz-1907.6MHz (V	VCDMA Band II)			
	826.4MHz-846.6 MHz (WC	CDMA Band V)			
T (14 1 1 1)	GMSK/8PSK Modulation F	or GSM/GPRS/EGPRS			
Type of Modulation	BPSK/QPSK Modulation F	or WCDMA/HSDPA/HSU	PA		
	GSM850:	248KGXW			
	GPRS 850:	0: 247KGXW			
	GPRS 850: 246KG7W				
	GSM 1900:	246KGXW			
	GPRS 1900:	RS 1900: 245KGXW			
Emission Designator	EGPRS 1900: 251KG7W				
Emilionion Boolghator	WCDMA Band II UMTS	4M16F9W			
	WCDMA Band II HSDPA	4M16F9W			
	WCDMA Band II HSUPA	4M17F9W			
	WCDMA Band V UMTS	4M16F9W			
	WCDMA Band V HSDPA	4M14F9W			
	WCDMA Band V HSUPA	CDMA Band V HSUPA 4M15F9W			
Antenna Designation	PIFA Antenna				
Antenna Gain	GSM850:1.01dBi	PCS1900: 1.71dBi			
7 intornia Gain	WCDMA850:1.01dBi	WCDMA1900:1.71dBi			
Power Supply	DC 3.8V by Built-in Li-ion Battery				
Dual Card	GSM /WCDMA Card Slot				
Extreme Vol. Limits DC3.23V to 4.35V (Normal: DC 3.8V)					
Extreme Temp. Tolerance	-30 °C to +50 °C				
Temperature Range	-20°C to +50°C				



Page 7 of 97

## **GSM/WCDMA SLOT 1:**

	Maximum ERP/EIRP	Max. Average		
	(dBm)	Burst Power (dBm)		
GSM 850	28.74	33.29		
PCS 1900	27.25	29.60		
UMTS BAND V	21.42	23.26		
UMTS BAND II	17.45	20.21		

## **GSM/WCDMA SLOT 2:**

	Maximum ERP/EIRP	Max. Average	
	(dBm)	Burst Power (dBm)	
GSM 850	31.79	32.25	
PCS 1900	27.15	28.11	
UMTS BAND V	20.86	21.99	
UMTS BAND II	18.28	19.34	



Report No.: AGC02762231107FR02 Page 8 of 97

## 2.2 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2BCTG-FLIP2**, filing to comply with Part 2, Part 22/24 of the Federal Communication Commission rules.

## 2.3 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1	47 CFR FCC Part 2	Frequency allocations and radio treaty matters, general rules and regulations.		
2	47 CFR FCC Part 22	Public Mobile Services.		
3	47 CFR FCC Part 24 Personal Communications Services.			
1	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters		
4		Used in Licensed Radio Services		
5	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and		
5	ANSI/11A-003-E-2010	Performance Standards		
6	KDB 971168	D01 v03r01 Measurement Guidance For Certification Of Licensed Digital		
0		Transmitters.		

## 2.4 Device Capabilities

850/1900 GSM/GPRS/EGPRS,850/1900 WCDMA/HSPA, Multi-Band LTE, Bluetooth (1X,EDR).

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

This device supports dual-SIM communication, and only the data corresponding to the worst card slot (SIM Card 1) is reflected in the report.

#### 2.5 Special Accessories

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

## 2.6 Equipment Modifications

Not available for this EUT intended for grant.



Page 9 of 97

## 2.7 Emission Designator

## **GSM Emission Designator**

#### **Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### **WCDMA Emission Designator**

#### **Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### **QAM Modulation**

## **Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## **EDGE Emission Designator**

#### **Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### **QPSK Modulation**

#### **Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand



Page 10 of 97

#### 3. Test Environment

#### 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

## A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

## IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 11 of 97

#### 3.3 Environmental Conditions

	Normal Conditions	Extreme Conditions	
Temperature range	<b>15~35</b> ℃	-20℃~50℃	
Humidty range	20 % to 75 %.	20 % to 75 %.	
Pressure range	86-106kPa	86-106kPa	
Power supply	DC 3.8V	DC 3.27V or 4.35V	

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

## 3.4 Measurement Uncertainty

Test	Measurement Uncertainty	
Transmitter power conducted	±0.57 dB	
Transmitter power Radiated	±2.20 dB	
Conducted spurious emission 9kHz-40 GHz	±2.20 dB	
Occupied Bandwidth	±0.01ppm	
Radiated Emission 30~1000MHz	±4.10dB	
Radiated Emission Above 1GHz	±4.32dB	
Conducted Disturbance:0.15~30MHz	±3.20dB	
Radio Frequency	± 6.5 x 10-8	
RF Power, Conducted	± 0.9 dB	

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Page 12 of 97

## 3.5 List of Test Equipment

• F	Radiated Spurious Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
$\boxtimes$	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31
$\boxtimes$	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMW500	120909	2023-07-05	2024-07-04
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
$\boxtimes$	AGC-EM-E005	Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	2023-01-05	2024-01-04
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22
$\boxtimes$	AGC-EM-E102	Broadband Ridged Horn Antenna	ETS	3117	00154520	2023-06-03	2024-06-02
$\boxtimes$	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03
	AGC-EM-E021	Pre-amplifier	MITEQ	AM-4A-000115	1465421	2022-06-08	2024-06-07
$\boxtimes$	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2023-06-01	2024-05-31
$\boxtimes$	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08
	AGC-EM-A090	High Pass Filter 1 (2500-18000MHz)	N/A	N/A	N/A	2023-06-01	2024-05-31
	AGC-EM-A091	High Pass Filter 2 (1200-18000MHz)	N/A	N/A	N/A	2023-06-01	2024-05-31
$\boxtimes$	AGC-EM-A113	Band Stop Filter (825-850MHz)	MICRO-TRONICS	BRC50717	N/A	2023-06-01	2024-05-31
$\boxtimes$	AGC-EM-A114	Band Stop Filter (880-915MHz)	MICRO-TRONICS	BRC50718	N/A	2023-06-01	2024-05-31
	AGC-EM-A115	Band Stop Filter (1710-1785MHz)	MICRO-TRONICS	BRC50719	N/A	2023-06-01	2024-05-31
$\boxtimes$	AGC-EM-A116	Band Stop Filter (1850-1950MHz)	MICRO-TRONICS	BRC50720	N/A	2023-06-01	2024-05-31
	AGC-EM-A117	Band Stop Filter (1920-1980MHz)	MICRO-TRONICS	BRC50721	N/A	2023-06-01	2024-05-31



Report No.: AGC02762231107FR02 Page 13 of 97

• [	RF Conducted	Test System					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
	AGC-ER-E087	Spectrum Analyzer	KEYSIGHT	N9020B	MY56101792	2023-06-01	2024-05-31
$\boxtimes$	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMW500	120909	2023-07-05	2024-07-04
$\boxtimes$	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMU200	113939	2023-06-01	2024-05-31
$\boxtimes$	AGC-ER-E075	Small Environmental Tester	SH-242	ESPEC	93008290	2022-08-03	2024-08-02
$\boxtimes$		Universal Switch Control Unit	Tonscend	JS	N/A	N/A	N/A
	AGC-ER-E033	RF Test Plat (DECT)	RTX	RTX-2012-HS-RF	N/A	2022-08-04	2024-08-03
$\boxtimes$		RF Connection Cable	N/A	1#	N/A	Each time	N/A
		RF Connection Cable	N/A	2#	N/A	Each time	N/A

• Tes	st Software				
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information
	AGC-ER-S006	GSM Test System	Tonscend	JS1120-4	2.1.6.0
	AGC-ER-S007	WCDMA Test System	Tonscend	JS1120-3	2.1.5.10
	AGC-EM-S011	RSE Test System	Tonscend	TS <sup>+</sup> Ver2.1(JS36-RSE)	4.0.0.0



Page 14 of 97

# 4. System Test Configuration

## 4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

## 4.2 EUT Exercise

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

## 4.3 Configuration of EUT System

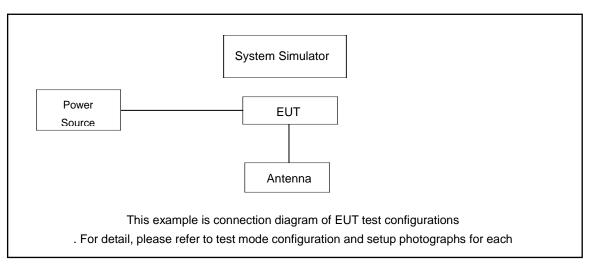


Table 2-1 Equipment Used in EUT System

#### 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

- ☐ Test Accessories Come From The Laboratory
- ☐ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Adapter	XT-252A-5055	Shenzhen Baijunda Electronic Co., Ltd.	Input: AC 100-240V 50/60Hz, 0.15A Output: DC 5V 0.55A	1.2m unshielded
2	Battery	C533955135L	Dongguan Veken Battery Co., Ltd.	DC 3.8V 1350mAh	N/A
3	Earphone	N/A	N/A	N/A	N/A



Page 15 of 97

# 5. Summary of Test Results

## **5.1 Test Condition: Conducted Test**

Item	Test Description	FCC Rules	Result
1	Occupied Bandwidth	§2.1049	Pass
2	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal	§2.1051, §22.917(a), §24.238(a)	Pass
3	Conducted Output Power	§2.1046	Pass
4	Frequency stability / variation of ambient temperature	§2.1055, § 22.355, §24.235	Pass
5	Peak- to- Average Ratio	§24.232(d)	Pass

## **5.2 Test Condition: Radiated Test**

Item	Test Description	FCC Rules	Result
1	Effective Radiated Power	§22.913(a)(5)	Pass
2	Equivalent Isotropic Radiated Power	§24.232(c)	Pass
3	Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a),	Pass



Page 16 of 97

# 6. Description of Test Modes

			RF Channel	
Bands	Tx/Rx Frequency	Low(L)	Middle(M)	High(H)
GSM/GPRS/	TX	Channel 128	Channel 190	Channel 251
EGPRS 850	(824 MHz ~ 849 MHz)	824.2 MHz	836.6 MHz	848.8 MHz
	TX	Channel 4132	Channel 4182	Channel 4233
WCDMA band V	(824 MHz ~ 849 MHz)	826.4 MHz	836.4 MHz	846.6 MHz

Bands	Tx/Rx Frequency	RF Channel		
Barias	17/10X 1 requestoy	Low(L)	Middle(M)	High(H)
GSM/GPRS/	TX	Channel 512	Channel 661	Channel 810
EGPRS 1900	(1850 MHz-1910 MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz
	TX	Channel 9262	Channel 9400	Channel 9538
WCDMA Band II	(1850 MHz-1910 MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
	GSM (GMSK, 1Tx-slot) Link	GSM (GMSK,1Tx-slot) Link
GSM/GPRS/	GPRS (GMSK, 1Tx-slot) Link	GPRS (GMSK, 1Tx-slot) Link
EDGE 850/1900	EGPRS (8PSK, 1Tx-slot) Link	EGPRS (8PSK, 1Tx-slot) Link
WCDMA Band II/V	RMC 12.2kbps Link	RMC 12.2kbps Link



Page 17 of 97

# According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH	0≤ CM≤3.5	MAX(CM-1,0)
HS-DPDCH,E-DPDCH and E-DPCCH	U≤ CIVI≤3.5	IVIAA(CIVI-1,0)
Note: CM=1 for $\beta_c/\beta_d$ =12/15, $\beta_{hs}/\beta_c$ =24/15.For all oth	er combinations of DPD	OCH, DPCCH, HS-DPCCH,

E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done. However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX\_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



Page 18 of 97

# 7. Conducted Output Power

## 7.1 Provisions Applicable

The conduction test is carried out in a shielded room. According to the test, connect the device under test to the antenna port on the non-conductive platform directly to the test device for evaluation and measurement (ANSI-C63.26-2015 Clause 5.4)


#### 7.2 Measurement Procedure

- The transmitter output port was connected to base station.
- > The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
- The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all mode (GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

#### 7.3 Measurement Setup

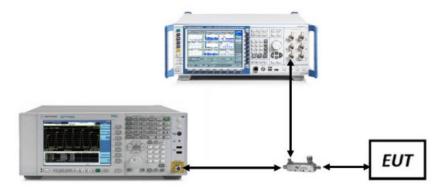




Page 19 of 97

#### 7.4 Measurement Result

	GSM 850 Maximum	Average Power (dBm)	
Channel	128	190	251
Frequency (MHz)	824.2 MHz	836.6 MHz	848.8 MHz
GSM (GMSK, 1Tx-slot)	33.06	33.24	33.29
GPRS (GMSK, 1Tx-slot)	32.96	33.04	33.06
GPRS (GMSK, 2Tx-slot)	30.10	30.24	30.17
GPRS (GMSK, 3Tx-slot)	28.74	28.63	28.41
GPRS (GMSK, 4Tx-slot)	26.37	26.55	26.17
EGPRS (8PSK, 1Tx-slot)	27.56	27.80	28.10
EGPRS (8PSK, 2Tx-slot)	25.16	25.63	25.43
EGPRS (8PSK, 3Tx-slot)	23.84	23.43	23.96
EGPRS (8PSK, 4Tx-slot)	21.93	21.05	21.11

	PCS 1900 Maximum	Average Power (dBm)	
Channel	512	661	810
Frequency (MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz
GSM (GMSK, 1Tx-slot)	28.32	29.00	29.57
GPRS (GMSK, 1Tx-slot)	28.46	29.07	29.60
GPRS (GMSK, 2Tx-slot)	27.32	26.96	27.12
GPRS (GMSK, 3Tx-slot)	25.14	25.33	25.26
GPRS (GMSK, 4Tx-slot)	23.25	23.27	23.01
EGPRS (8PSK, 1Tx-slot)	24.32	24.70	25.37
EGPRS (8PSK, 2Tx-slot)	22.26	22.36	22.46
EGPRS (8PSK, 3Tx-slot)	20.15	20.48	20.60
EGPRS (8PSK, 4Tx-slot)	18.74	18.63	18.44





WCDMA Band II Maximum Average Power (dBm)				
Channel	9262	9400	9538	
Frequency (MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz	
RMC 12.2kbps	18.39	19.53	20.21	
HSDPA Subtest-1	17.26	18.36	19.39	
HSDPA Subtest-2	16.76	17.88	18.86	
HSDPA Subtest-3	16.76	17.92	18.88	
HSDPA Subtest-4	16.82	17.90	18.88	
HSUPA Subtest-1	17.11	18.26	19.35	
HSUPA Subtest-2	15.83	16.75	17.82	
HSUPA Subtest-3	15.47	16.63	17.63	
HSUPA Subtest-4	15.27	16.43	17.44	
HSUPA Subtest-5	17.27	18.35	19.52	

	WCDMA Band V Maximum Average Power (dBm)							
Channel	4132	4182	4233					
Frequency(MHz)	826.4 MHz	836.4 MHz	846.6 MHz					
RMC 12.2kbps	23.24	23.26	23.25					
HSDPA Subtest-1	22.26	22.29	22.24					
HSDPA Subtest-2	21.83	21.81	21.72					
HSDPA Subtest-3	21.70	21.83	21.76					
HSDPA Subtest-4	21.69	21.79	21.75					
HSUPA Subtest-1	22.23	22.23	22.13					
HSUPA Subtest-2	20.77	20.81	20.74					
HSUPA Subtest-3	20.46	20.47	20.42					
HSUPA Subtest-4	20.22	20.24	20.18					
HSUPA Subtest-5	22.33	22.25	22.26					



Page 21 of 97

## 8. Radiated Output Power

## 8.1 Provisions Applicable

The radiation test is carried out in a semi-anechoic chamber.

According to the test, put the device under test on a non-conductive platform 3 meters away from the receiving antenna (ANSI/TIA-603-E-2016 Article 2.2.17).

The following rules are for the maximum radiated power limit requirements of the product:

Mode	Nominal Peak Power
GSM 850	< 7 Watts max. ERP (38.45dBm)
PCS 1900	< 2 Watts max. EIRP (33dBm)
WCDMA Band II	< 2 Watts max. EIRP (33dBm)
WCDMA Band V	< 7 Watts max. ERP (38.45dBm)

#### 8.2 Measurement Procedure

- 1. Radiated power measurements are performed using the signal analyzer's "channel power"
- 2. measurement capability for signals with continuous operation.
- 3. RBW = 1 5% of the expected OBW, not to exceed 1MHz
- 4. VBW  $\geq$  3 x RBW
- 5. Span = 1.5 times the OBW
- 6. No. of sweep points > 2 x span / RBW
- 7. Detector = RMS
- 8. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
- 9. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
- 10. Trace mode = trace averaging (RMS) over 100 sweeps
- 11. The trace was allowed to stabilize.



Page 22 of 97

#### Radiation Construction Method:


- 1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
- A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
- 3. The power is calculated by the following formula:


Pd(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dB)

- 4. Where: Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.
- 5. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
- 6. The EUT was tested in three orthogonal planes (X, Y, Z) and in all possible test configurations and positioning.
- 7. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.


## 8.3 Measurement Setup

#### Radiated Power 30MHz to 1GHz Test setup

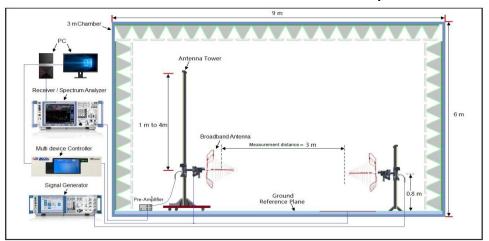







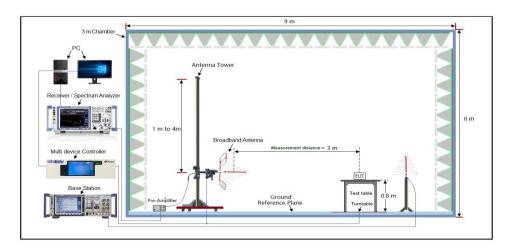

# **Radiated Power Above 1GHz Test setup**

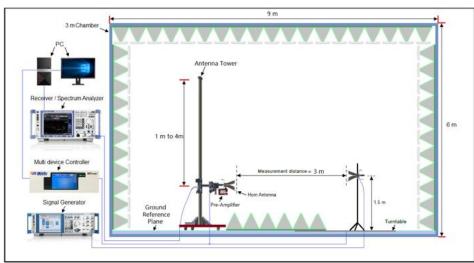

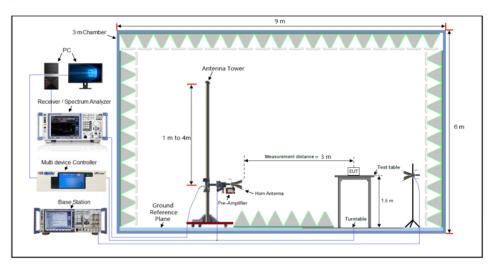

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 24 of 97

#### 8.4 Measurement Result

	Ch./ Freq.		Substitute	Ant. Gain			Limit	EF	RP
Mode	channel	Freq. (MHz)	Level (dBm)	(dBi)	C.L	Pol.	w	w	dBm
	128	824.2	23.43	5.90	1.21	Н		0.649	28.12
GSM850	190	836.6	24.01	5.90	1.22	Н		0.740	28.69
	251	848.8	24.09	5.90	1.25	Н		0.748	28.74
	128	824.2	22.33	5.90	1.21	Н		0.504	27.02
GPRS	190	836.6	21.90	5.90	1.22	Н		0.455	26.58
	251	848.8	21.84	5.90	1.25	Н		0.446	26.49
	128	824.2	21.53	5.90	1.21	Н	< 7.00	0.419	26.22
EGPRS	190	836.6	21.46	5.90	1.22	Н		0.411	26.14
	251	848.8	21.52	5.90	1.25	Н		0.414	26.17
	4132	826.4	16.73	5.90	1.21	Н		0.139	21.42
WCDMA850	4183	836.6	16.54	5.90	1.25	Н		0.132	21.19
	4233	846.6	16.69	5.90	1.24	Н		0.136	21.35
	4132	826.4	14.93	5.90	1.21	Н		0.092	19.62
HSDPA	4183	836.6	14.58	5.90	1.25	Н		0.084	19.23
	4233	846.6	15.36	5.90	1.24	Н		0.100	20.02
	4132	826.4	14.10	5.90	1.21	Н		0.076	18.79
HSUPA	4183	836.6	14.37	5.90	1.25	Н		0.080	19.02
	4233	846.6	14.27	5.90	1.24	Н		0.078	18.93





	Ch.	/ Freq.	Substitute	Ant. Gain (dBi)		Pol.	Limit	EII	RP
Mode	channel	Freq. (MHz)	Level (dBm)		C.L		w	w	dBm
	512	1850.2	20.68	8.6	2.11	Ι		0.521	27.17
PCS1900	661	1880.0	20.59	8.6	2.15	Η		0.506	27.04
	810	1909.8	20.80	8.6	2.15	Η		0.531	27.25
	512	1850.2	18.83	8.6	2.11	Η		0.340	25.32
GPRS	661	1880.0	18.69	8.6	2.15	Н		0.327	25.14
	810	1909.8	18.85	8.6	2.15	Н	< 2.00	0.339	25.30
	512	1850.2	18.87	8.6	2.15	Н		0.344	25.36
EGPRS	661	1880.0	18.49	8.6	2.15	Н		0.312	24.94
	810	1909.8	17.88	8.6	2.15	Н		0.271	24.33
MODMA	9262	1852.4	10.63	8.6	2.11	Н		0.052	17.12
WCDMA	9400	1880.0	10.88	8.6	2.15	Н		0.054	17.33
1900	9538	1907.6	11.00	8.6	2.15	Н		0.056	17.45
	9262	1852.4	9.40	8.6	2.11	Н	-	0.039	15.89
HSDPA	9400	1880.0	9.46	8.6	2.15	Н		0.039	15.91
	9538	1907.6	9.41	8.6	2.15	Н		0.039	15.86
	9262	1852.4	8.99	8.6	2.11	Н		0.035	15.48
HSUPA	9400	1880.0	8.94	8.6	2.15	Н		0.035	15.39
	9538	1907.6	9.36	8.6	2.15	Н		0.038	15.81

#### Note:

- 1. EIRP/ERP = Substitute Level (dBm) + Ant. Gain C.L (Cable Loss)
- 2. All polarizations and modes have been tested, only the worst mode is recorded in the report



Page 26 of 97

## 9. Peak-to-Average Ratio

## 9.1 Provisions Applicable

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

#### 9.2 Measurement Procedure

#### CCDF Procedure for PAPR:

- 1. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
- 2. Set the number of counts to a value that stabilizes the measured CCDF curve;
- 3. Set the measurement interval as follows:
  - for continuous transmissions, set to 1 ms,
  - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time
- 4. that is less than or equal to the burst duration.
- 5. Record the maximum PAPR level associated with a probability of 0.1%.

#### Alternate Procedure for PAPR:

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P<sub>Pk</sub> Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and recordas PAvg. Determine the P.A.R. from:

 $P.A.R(dB) = P_{Pk} (dBm) - P_{Avg} (dBm) (P_{Avg} = Average Power + Duty cycle Factor)$ 

Allow trace to fully stabilize.

Use the peak marker function to determine the peak amplitude level.

#### ■ Test Settings (Peak Power):

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq$  3 × RBW.

- Set the RBW ≥ OBW.
- 2. Set VBW ≥ 3 × RBW.
- 3. Set span ≥ 2 × OBW.




Report No.: AGC02762231107FR02 Page 27 of 97

- Detector = peak.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use the peak marker function to determine the peak amplitude level.

## Test Settings (Average Power)

- Set span to 2 x to 3 x the OBW.
- 2. Set RBW ≥ OBW.
- 3. Set VBW ≥ 3 x RBW.
- 4. Set number of measurement points in sweep ≥ 2 × span / RBW.
- 5. Sweep time: Set ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (Automation-compatible) measurement. The transmission period is the (on + off) time.
- 6. Detector = power averaging (rms).
- 7. Set sweep trigger to "free run."
- 8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. Add [10 log (1/duty cycle)] to the measured maximum power level to compute the average power during continuous transmission. For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is a constant 25%.

#### 9.3 Measurement Setup

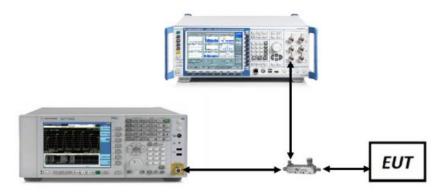



Page 28 of 97

#### 9.4 Measurement Result

Bands	Modulation	Peak-t	o-average rat	io (dB)	Limit	Result
Dalius	Wioddiation	Lowest	Middle	Highest	(dB)	Nesun
	GSM	2.64	2.63	2.64	13	Pass
GSM 850	GPRS	2.63	2.64	2.63	13	Pass
	EGPRS	5.68	5.66	5.67	13	Pass
	GSM	2.65	2.65	2.65	13	Pass
PCS 1900	GPRS	2.65	2.64	2.65	13	Pass
	EGPRS	5.70	5.72	5.72	13	Pass
WCDMA Band II	RMC 12.2kbps	2.82	2.97	2.99	13	Pass
WCDMA Band II	HSUPA	3.01	3.12	3.13	13	Pass
WCDMA Band II	HSDPA	4.13	4.20	4.22	13	Pass
WCDMA Band V	RMC 12.2kbps	3.04	3.00	2.99	13	Pass
WCDMA Band V	HSUPA	3.19	3.17	3.19	13	Pass
WCDMA Band V	HSDPA	4.13	4.2	4.22	13	Pass



Page 29 of 97

## 10. 99% Occupied Bandwidth and 26dB Emission Bandwidth

## **10.1 Provisions Applicable**

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### **10.2 Measurement Procedure**

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99%
- 2. Occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by
- 3. any intermediate power nulls in the fundamental emission.
- 4. RBW = 1 5% of the expected OBW
- 5. VBW  $\geq$  3 x RBW
- 6. Detector = Peak
- 7. Trace mode = max hold
- 8. Sweep = auto couple
- 9. The trace was allowed to stabilize
- 10. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
- 11. 1-5% of the 99% occupied bandwidth observed in Step 7

#### 10.3 Measurement Setup

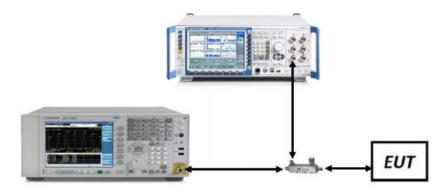



Page 30 of 97

#### 10.4 Measurement Result

Test Band	Test Mode	Test Channel	Occupied Bandwidth (kHz)	Emission Bandwidth (kHz)	Verdict
		LCH	247.7	317	Pass
	GSM	MCH	247.4	309	Pass
		HCH	243.0	313	Pass
	GPRS	LCH	246.5	320	Pass
GSM 850		MCH	245.0	317	Pass
		HCH	243.3	314	Pass
	EGPRS	LCH	245.3	307	Pass
		MCH	246.1	304	Pass
		HCH	246.2	312	Pass


Test Band	Test Mode	Test Channel	Occupied Bandwidth (kHz)	Emission Bandwidth (kHz)	Verdict
		LCH	242.4	307	Pass
	GSM	MCH	244.2	314	Pass
		HCH	246.3	307	Pass
	GPRS	LCH	245.4	313	PASS
PCS 1900		MCH	245.0	309	PASS
		HCH	243.3	315	PASS
	EGPRS	LCH	246.1	310	Pass
		MCH	251.0	303	Pass
		НСН	247.0	317	Pass







Test Band	Test Mode	Test Channel	Occupied Bandwidth (MHz)	Emission Bandwidth (MHz)	Verdict
		LCH	4.1401	4.722	Pass
	UMTS	MCH	4.1459	4.721	Pass
		HCH	4.1430	4.716	Pass
	HSDPA	LCH	4.1411	4.716	Pass
WCDMA 850		MCH	4.1448	4.707	Pass
050		HCH	4.1410	4.702	Pass
		LCH	4.1459	4.724	Pass
	HSUPA	MCH	4.1514	4.731	Pass
		HCH	4.1468	4.730	Pass

Test Band	Test Mode	Test Channel	Occupied Bandwidth (MHz)	Emission Bandwidth (MHz)	Verdict
		LCH	4.1632	4.752	Pass
	UMTS	MCH	4.1612	4.748	Pass
		HCH	4.1577	4.732	Pass
	HSDPA	LCH	4.1597	4.728	Pass
WCDMA 1900		MCH	4.1614	4.717	Pass
1300		HCH	4.1522	4.708	Pass
		LCH	4.1641	4.744	Pass
	HSUPA	MCH	4.1680	4.737	Pass
		НСН	4.1624	4.747	Pass







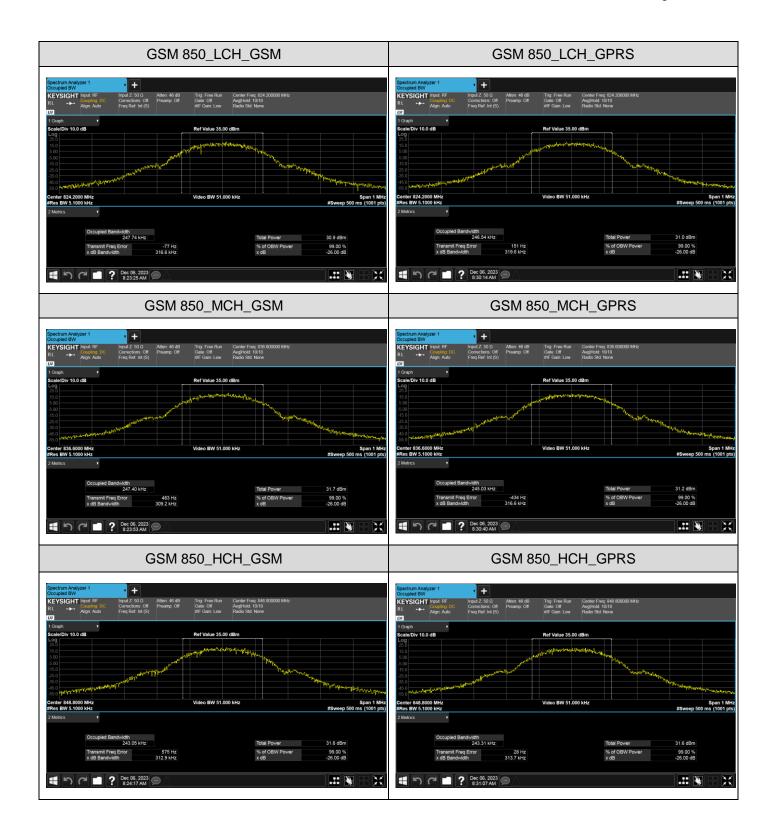







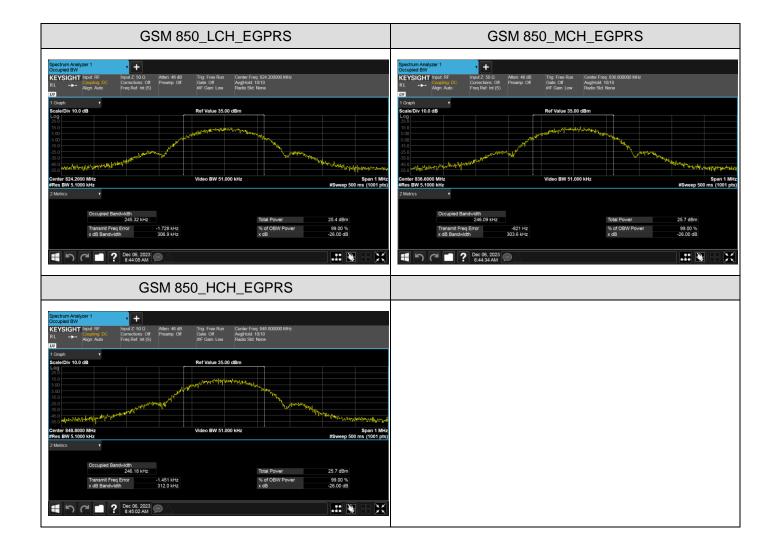







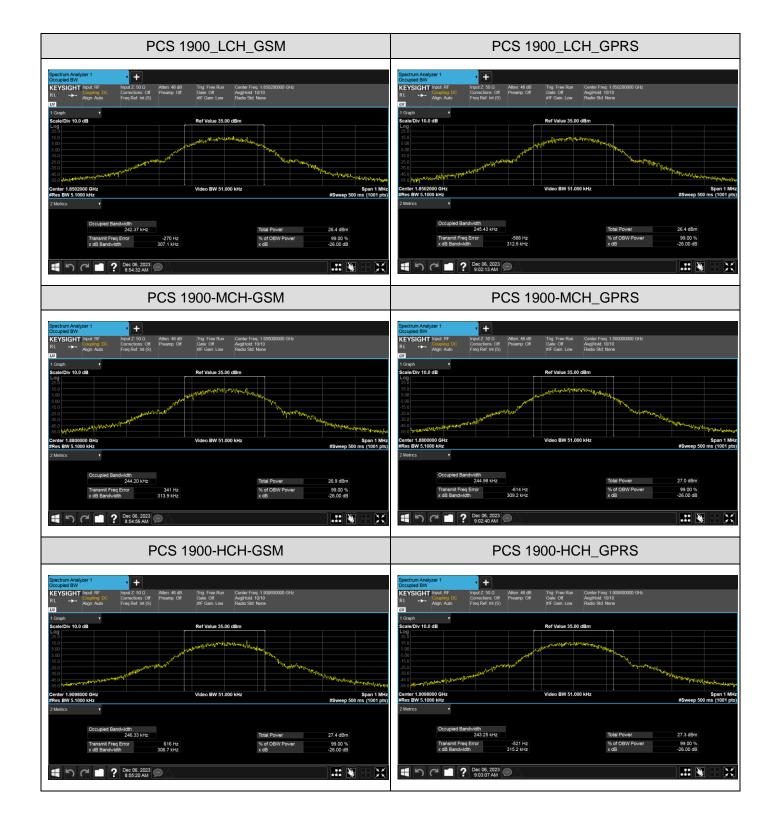






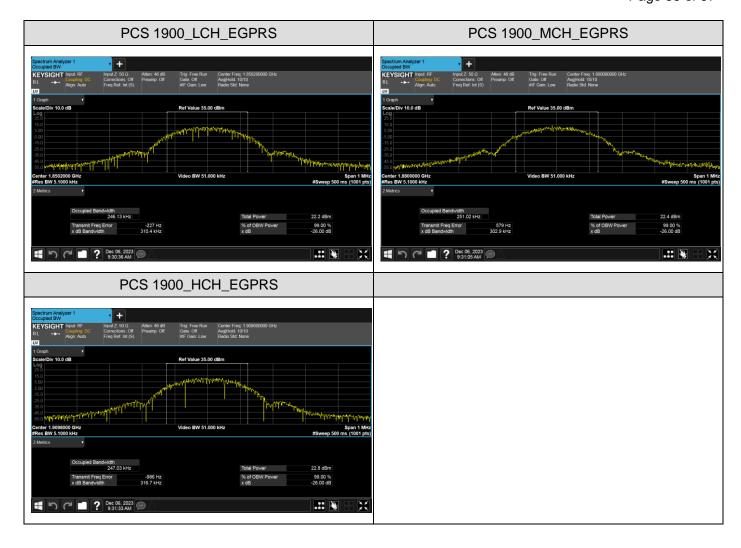






















Page 39 of 97

# 11. Band Edge Emissions at Antenna Terminal

## 11.1 Provisions Applicable

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


#### 11.2 Measurement Procedure


- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- 4.  $VBW > 3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

#### **Test Note**

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. All measurements were done at 2 channels(low and high operational frequency range.) The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.


#### 11.3 Measurement Setup

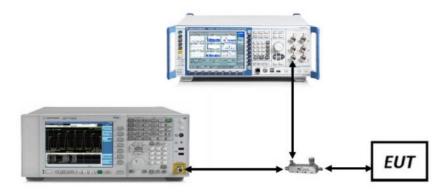








#### 11.4 Measurement Result

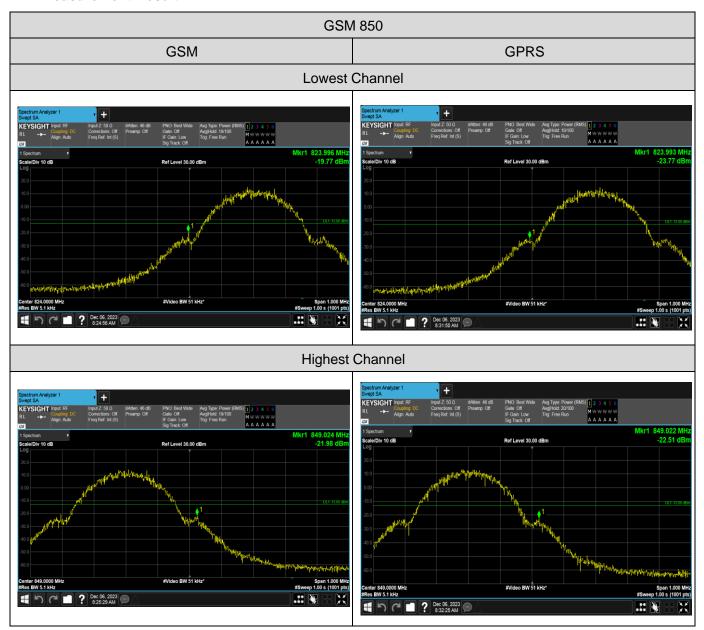







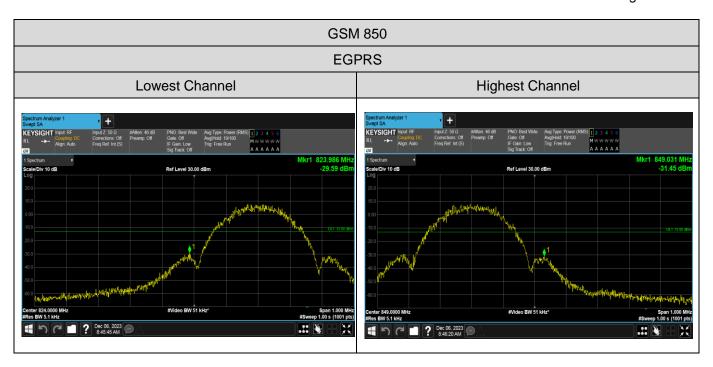


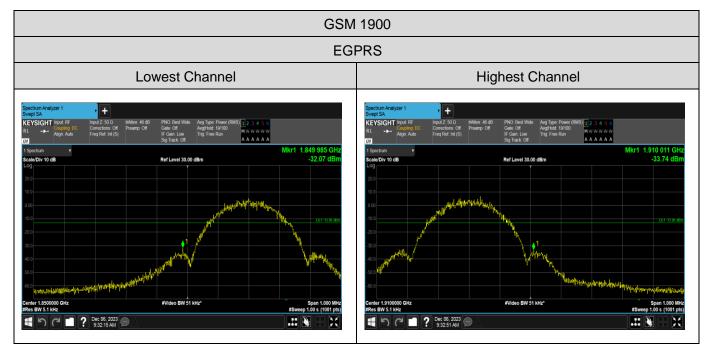







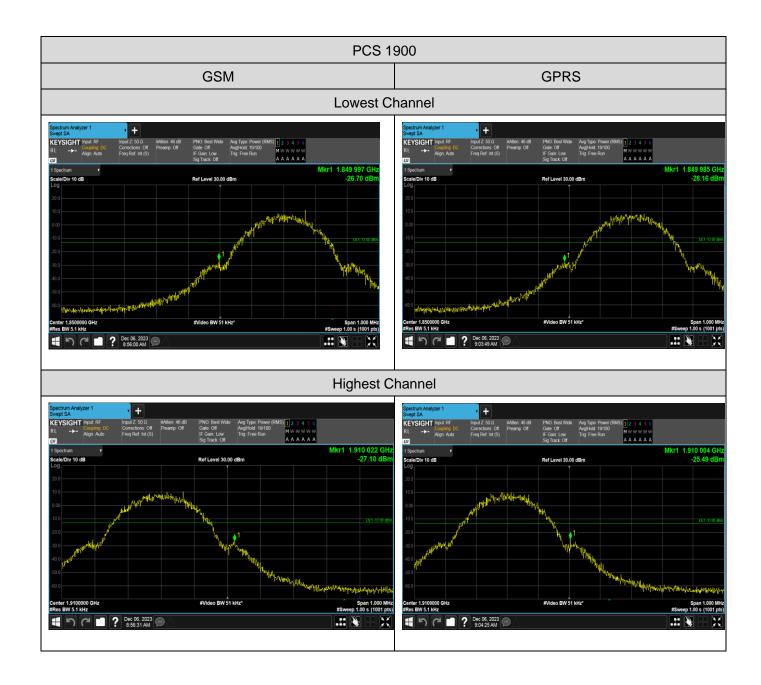







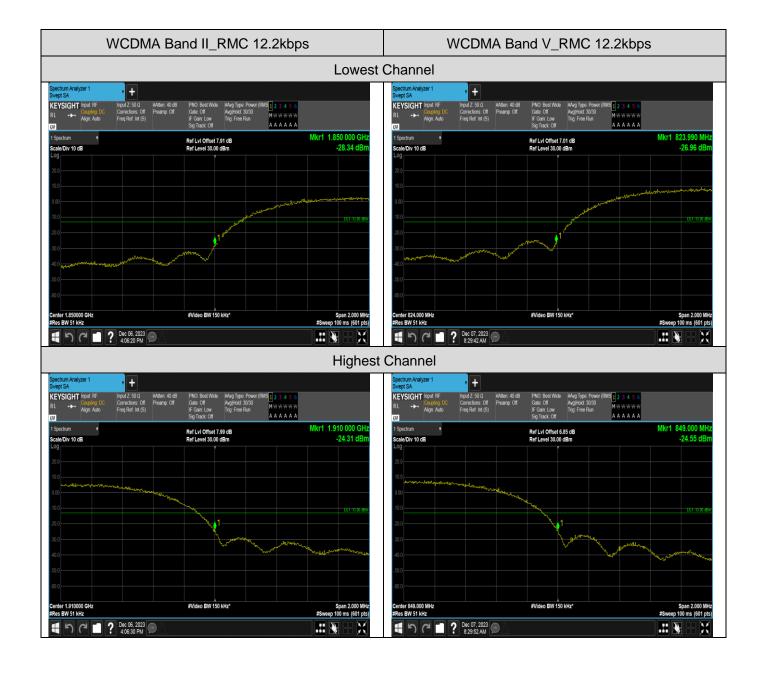






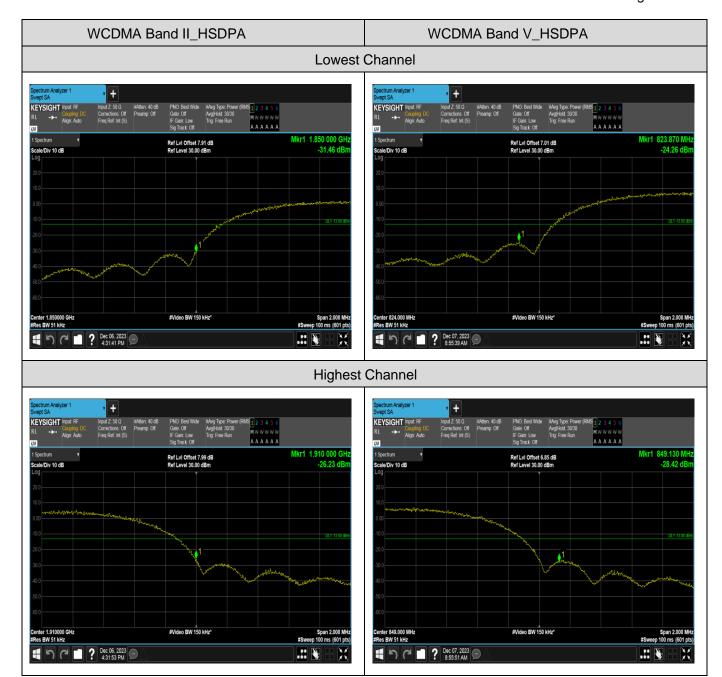





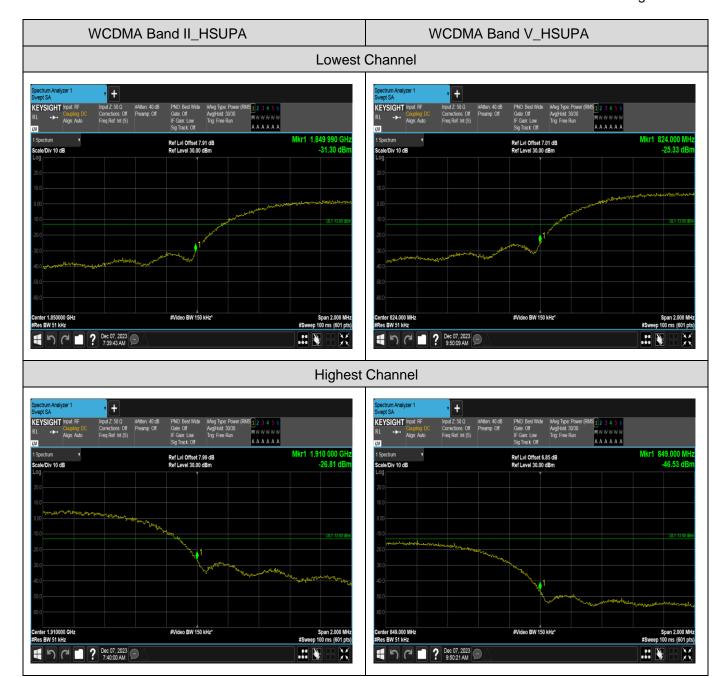



Page 46 of 97

# 12. Spurious Emissions at Antenna Terminal

## 12.1 Provisions Applicable

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **12.2 Measurement Procedure**

## ■ Test Settings (GSM)

- 1. RBW = 1 MHz
- 2. VBW ≥ 3 MHz
- 3. Detector = Peak
- 4. Trace Mode = max hold
- 5. Sweep time = auto
- 6. Number of points in sweep ≥ 2 x Span / RBW

## **■** Test Settings (WCDMA)

- 1. RBW = 1 MHz
- 2. VBW ≥ 3 MHz
- 3. Detector = RMS
- Trace Mode = trace average
- 5. Sweep time = auto
- 6. Number of points in sweep ≥ 2 x Span / RBW

#### 12.3 Measurement Setup

