

Report on Test Measurements

Measurements Report

The measurement report shows compliance information against the pertinent technical standards. Each parameter is measured generally at the low end, middle, and at the high end of the applicable frequency band. Each section of the report contains either verbiage or graphs which show compliance to applicable standards as required, explains testing method used, and indicates what the applicable specification is.

A list of test equipment for all sections, and certification signoff page are included at the end of the measurement report.

SUBMITTED MEASURED DATA -- INDEX

EXHIBIT DESCRIPTION

E1-1	RF Output-Data
E1-2	Occupied Bandwidth, Digital Emissions: Setup, Specifications, and Index
E1-2.1, 2, 3	Linear Simulcast Modulation (LSM)
E1-2.4, 5, 6	Compatible 4-Level Frequency Modulation (C4FM)
E1-2.7, 8, 9	H-DQPSK, P25 Two Slot TDMA Digital Modulation
E1-3	Conducted Spurious Emissions: Setup, Specifications, and Index
E1-3.1	LSM Conducted Spurious Harmonic Emissions, Power 90 Watts (Average)
E1-3.2	LSM Conducted Spurious Harmonic Emissions, Power 2 Watts (Average)
E1-3.3	C4FM Conducted Spurious Harmonic Emissions, Power 90 Watts
E1-3.4	C4FM Conducted Spurious Harmonic Emissions, Power 2 Watts
E1-3.5	H-DQPSK Conducted Spurious Harmonic Emissions, Power 90 Watts
E1-3.6	H-DQPSK Conducted Spurious Harmonic Emissions, Power 2 Watts
E1-3.7, 8, 9	Conducted Spurious Emission Spectrum, 200 MHz Span, Power Output at 90 Watts, LSM
E1-3.10, 11, 12	Conducted Spurious Emission Spectrum, 200 MHz Span, Power Output at 90 Watts, C4FM
E1-3.13, 14, 15	Conducted Spurious Emission Spectrum, 200 MHz Span, Power Output at 90 Watts, H-DQPSK
E1-4	Radiated Spurious Emissions: Setup, Specifications, and Index
E1-4.1	C4FM Radiated Spurious Harmonic Emissions, Power 90 Watts 851MHz
E1-4.2	C4FM Radiated Spurious Harmonic Emissions, Power 2 Watts 851MHz
E1-4.3	LSM Radiated Spurious Harmonic Emissions, Power 90 Watts 852MHz
E1-4.4	LSM Radiated Spurious Harmonic Emissions, Power 2 Watts 852MHz
E1-4.5	C4FM Radiated Spurious Harmonic Emissions, Power 90 Watts 859MHz
E1-4.6	C4FM Radiated Spurious Harmonic Emissions, Power 2 Watts 859MHz
E1-4.7	H-DQPSK Radiated Spurious Harmonic Emissions, Power 90 Watts 860MHz
E1-4.8	H-DQPSK Radiated Spurious Harmonic Emissions, Power 2 Watts 860MHz
E1-4.9	C4FM Radiated Spurious Harmonic Emissions, Power 90 Watts 869MHz

Report on Test Measurements

- E1-4.10 C4FM Radiated Spurious Harmonic Emissions, Power 2 Watts 869MHz
- E1-4.11 H-DQPSK Radiated Spurious Harmonic Emissions, Power 90 Watts
870MHz
- E1-4.12 H-DQPSK Radiated Spurious Harmonic Emissions, Power 2 Watts
870MHz

- E1-5 Frequency Stability: Setup, Specifications, and Index
 - E1-5.1 Frequency Stability Vs Temperature
 - E1-5.2 Frequency Stability Vs Voltage

- E1-6 Test Setup Details
- E1-7 Statement of Certification

Report on Test Measurements

RF Power Output Data

The RF power output was measured with the indicated voltage applied to the RF Site. The DC current indicated is the total for the site with 1 channel transmitting at the noted power at the top of rack. Max Power requested is 90W, Lower Power is 2W.

C4FM Modulation

Temperature	25°C				Remarks
Voltage (V)	48V				
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)	
851	1.87	37.34	85.66	47.55	
860	1.93	37.29	87.44	46.14	
870	1.91	37.32	86.50	46.74	

LSM Modulation

Temperature	25°C				Remarks
Voltage (V)	48V				
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)	
851	1.98	37.35	89.67	47.46	
860	1.98	37.28	88.81	46.01	
870	1.99	37.34	89.96	47.18	

H-DQPSK Modulation

Temperature	25°C				Remarks
Voltage (V)	48V				
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)	
851	1.90	37.40	86.59	47.01	
860	1.95	37.29	89.56	46.23	
870	1.93	37.32	87.6	46.97	

Report on Test Measurements

Occupied Bandwidth – Linear Simulcast Modulation (LSM), 12.5 kHz Channel Spacing

Linear Simulcast Modulation can be used in a system configuration based upon channel usage as described in Exhibit B. The 'D1E' emission designator provides usage for telephony, the 'D1D' provides usage for data / telecommand, and the 'D1W' provides for usage as a combination. All are spectrally identical. The occupied bandwidth charts reference the following setup and specification requirements.

Modulation Type: Linear Simulcast Modulation, LSM
Emission Designator: 8K70D1E, 8K70D1D, 8K70D1W
Channelization: 12.5 kHz
Power Setting: 90 Watts, Average

Specification Requirement 47 CFR §90.210(d) and IC RSS-119 section 5.8.3 - Emission Limits – “D-Mask”:
Emission Mask D. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth (f_0) to 5.625 kHz removed from f_0 : *Zero dB*
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: *At least $7.27 * (f_d - 2.88 \text{ kHz}) \text{ dB}$*
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: *At least 50 plus $10 \log_{10}(P) \text{ dB}$ or 70 dB, whichever is the lesser attenuation.*
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide to capture the true peak emission of the equipment under test. In order to show compliance with the emissions mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to ensure that the emission profile is developed.

Necessary Bandwidth Calculation: The necessary bandwidth of the modulation signal is not directly calculable per the composite modulation formulas defined in 47 CFR §2.202(g) / TRC-43 section 8. Quadrature Phase Shift Keying is used to modulate a carrier with a digital bit stream: Data Rate: $R = 9600 \text{ bps}$; Bits per Symbol: $S=4$; $B_n = 2\text{BK}$; $B = R/\log_2(s) = 9600/\log_2(4) = 4800$; $K=0.9$; $B_n = 2*4800*0.9$; $B_n = 8700 \text{ Hz}$. The necessary bandwidth of 8.70 kHz is based upon a 99% power measurement of the transmitter spectrum, per §2.202(a) / TRC-43 section 7(c).

Measurement Procedure and Instrument Settings:

<u>Emission Measurement Analyzer Settings</u>				<u>Measured Occupied Bandwidth</u>	
Horizontal:	12.5 kHz per Division	Resolution BW:	100 Hz	Resolution BW:	150 Hz
Vertical:	10 dB per Division	Video BW:	10 kHz	Span:	15 kHz
Sweep Time:	72 Seconds (<2 kHz/Sec)	Span:	125 kHz	Number of Points:	1601
Detector:	Peak			Integration Time:	14.8 ms

Test Procedure:

- 1) Adjust the spectrum analyzer per the values specified in the Emission Measurement Analyzer Settings.
- 2) Modulate the transmitter with the appropriate signaling pattern, (pseudorandom data) and key the transmitter at the full power rating. Allow the analyzer to sweep fully and store the sweep.
- 3) Use the band power marker function of the spectrum analyzer to measure the power of the carrier.
- 4) Use the carrier power value from the previous step to generate the emission mask limit.
- 5) Plot the resulting analyzer trace and the emission mask limit, add text and labeling as appropriate.
- 6) Adjust the signal analyzer resolution BW and span as indicated above, use the Occupied Bandwidth function to record the value.

EXHIBIT	DESCRIPTION	Meas Occ BW
E1-2.1	Occupied Bandwidth - Linear Simulcast Modulation (LSM), Low End of Band	8.93 kHz
E1-2.2	Occupied Bandwidth - Linear Simulcast Modulation (LSM), Middle of Band	8.90 kHz
E1-2.3	Occupied Bandwidth - Linear Simulcast Modulation (LSM), High End of Band	8.94 kHz

Report on Test Measurements

Occupied Bandwidth – Compatible 4-Level Frequency Modulation (C4FM), 12.5 kHz Channel Spacing

C4FM can be used in a system configuration based upon channel usage as described in Exhibit B. The 'F1E' emission designator provides usage for telephony, the 'F1D' provides usage for data / telecommand, and the 'F1W' provides for usage as a combination. All are spectrally identical. The occupied bandwidth charts reference the following setup and specification requirements.

Modulation Type: Compatible 4-Level Frequency Modulation, C4FM
Emission Designator: 8K10F1E, 8K10F1D, 8K10F1W
Channelization: 12.5 kHz
Power Setting: 90 Watts

Specification Requirement 47 CFR §90.210(d) and IC RSS-119 section 5.8.3 - Emission Limits – “D-Mask”:

Emission Mask D. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth (f_0) to 5.625 kHz removed from f_0 : *Zero dB*
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: *At least $7.27 * (f_d - 2.88 \text{ kHz})$ dB*
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: *At least 50 plus $10 \log_{10}(P)$ dB or 70 dB, whichever is the lesser attenuation.*
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide to capture the true peak emission of the equipment under test. In order to show compliance with the emissions mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to ensure that the emission profile is developed.

Necessary Bandwidth Calculation:

The necessary bandwidth of the modulation per the formulas defined in 47 CFR §2.202(g) / TRC-43 section 8 is as follows:

Max Mod Freq, $M = \frac{1}{2}B$	Max Deviation, D	$2M + 2DK (K=1)$	Nec BW
1.2 kHz	2.85 kHz	8.10 kHz	8K10

Measurement Procedure and Instrument Settings:

Emission Measurement Analyzer Settings				Measured Occupied Bandwidth	
Horizontal:	12.5 kHz per Division	Resolution BW:	100 Hz	Resolution BW:	150 Hz
Vertical:	10 dB per Division	Video BW:	10 kHz	Span:	15 kHz
Sweep Time:	72 Seconds (<2 kHz/Sec)	Span:	125 kHz	Number of Points:	1601
Detector:	Peak			Integration Time:	14.8 ms

Test Procedure:

- 1) Adjust the spectrum analyzer per the values specified in the Emission Measurement Analyzer Settings.
- 2) Modulate the transmitter with the appropriate signaling pattern, (pseudorandom data) and key the transmitter at the full power rating. Allow the analyzer to sweep fully and store the sweep.
- 3) Use the band power marker function of the spectrum analyzer to measure the power of the carrier.
- 4) Use the carrier power value from the previous step to generate the emission mask limit.
- 5) Plot the resulting analyzer trace and the emission mask limit, add text and labeling as appropriate.
- 6) Adjust the signal analyzer resolution BW and span as indicated above, use the Occupied Bandwidth function to record the value.

EXHIBIT	DESCRIPTION	Meas Occ BW
E1-2.4	Occupied Bandwidth - Compatible 4-Level Frequency Mod (C4FM), Low End of Band	7.89 kHz
E1-2.5	Occupied Bandwidth - Compatible 4-Level Frequency Mod (C4FM), Middle of Band	7.83 kHz
E1-2.6	Occupied Bandwidth - Compatible 4-Level Frequency Mod (C4FM), High End of Band	7.86 kHz

Report on Test Measurements

Occupied Bandwidth – H-DQPSK, P25 Two Slot TDMA Digital Modulation, 12.5 kHz Channel Spacing

H-DQPSK modulation can be used in a system configuration based upon channel usage as described in Exhibit B. The 'D7E' emission designator provides usage for telephony, the 'D7D' provides usage for data / telecommand, and the 'D7W' provides for usage as a combination. All are spectrally identical. The occupied bandwidth charts reference the following setup and specification requirements.

Modulation Type: H-DQPSK, P25 Two Slot TDMA Digital Modulation
Emission Designator: 9K80D7E, 9K80D7D, 9K80D7W
Channelization: 12.5 kHz
Power Setting: 90 Watts, Average

Specification Requirement 47 CFR §90.210(d) and IC RSS-119 section 5.8.3 - Emission Limits – "D-Mask":

Emission Mask D. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth (f_0) to 5.625 kHz removed from f_0 : *Zero dB*
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: *At least $7.27 * (f_d - 2.88 \text{ kHz}) \text{ dB}$*
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: *At least $50 \text{ plus } 10 \log_{10}(P) \text{ dB or } 70 \text{ dB, whichever is the lesser attenuation.}$*

(4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide to capture the true peak emission of the equipment under test. In order to show compliance with the emissions mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to ensure that the emission profile is developed.

Necessary Bandwidth Calculation: The necessary bandwidth of the modulation signal is not directly calculable per the composite modulation formulas defined in 47 CFR §2.202(g) / TRC-43 section 8. Quadrature Phase Shift Keying is used to modulate a carrier with a digital bit stream: Data Rate: $R = 12000 \text{ bps}$; Bits per Symbol: $S=4$; $B_n = 2BK$; $B = R/\log_2(s) = 12000/\log_2(4) = 6000$; $K=0.81$; $B_n = 2*6000*0.81$; $B_n = 9800 \text{ Hz}$. The necessary bandwidth of 9.80 kHz is based on a 99% power measurement of the transmitter spectrum, per §2.202(a) / TRC-43 section 7(c).

Measurement Procedure and Instrument Settings:Emission Measurement Analyzer Settings

Horizontal:	12.5 kHz per Division	Resolution BW:	100 Hz
Vertical:	10 dB per Division	Video BW:	10 kHz
Sweep Time:	72 Seconds (<2 kHz/Sec)	Span:	125 kHz
Detector:	Peak		

Measured Occupied Bandwidth

Resolution BW:	150 Hz
Span:	15 kHz
Number of Points:	1601
Integration Time:	14.8 ms


Test Procedure:

- 1) Adjust the spectrum analyzer per the values specified in the Emission Measurement Analyzer Settings.
- 2) Modulate the transmitter with the appropriate signaling pattern, (pseudorandom data) and key the transmitter at the full power rating. Allow the analyzer to sweep fully and store the sweep.
- 3) Use the band power marker function of the spectrum analyzer to measure the power of the carrier.
- 4) Use the carrier power value from the previous step to generate the emission mask limit.
- 5) Plot the resulting analyzer trace and the emission mask limit, add text and labeling as appropriate.
- 6) Adjust the signal analyzer resolution BW and span as indicated above, use the Occupied Bandwidth function to record the value.

EXHIBIT	DESCRIPTION	Meas Occ BW
E1-2.7	Occupied Bandwidth - H-DQPSK P25 Two Slot TDMA Digital Mod, Low End of Band	9.81 kHz
E1-2.8	Occupied Bandwidth - H-DQPSK P25 Two Slot TDMA Digital Mod, Middle of Band	9.80 kHz
E1-2.9	Occupied Bandwidth - H-DQPSK P25 Two Slot TDMA Digital Mod, High End of Band	9.80 kHz


Report on Test Measurements

Occupied Bandwidth – Linear Simulcast Modulation (LSM) – Emission Designator: 8K70D1E, 8K70D1D, 8K70D1W – Low End of Band

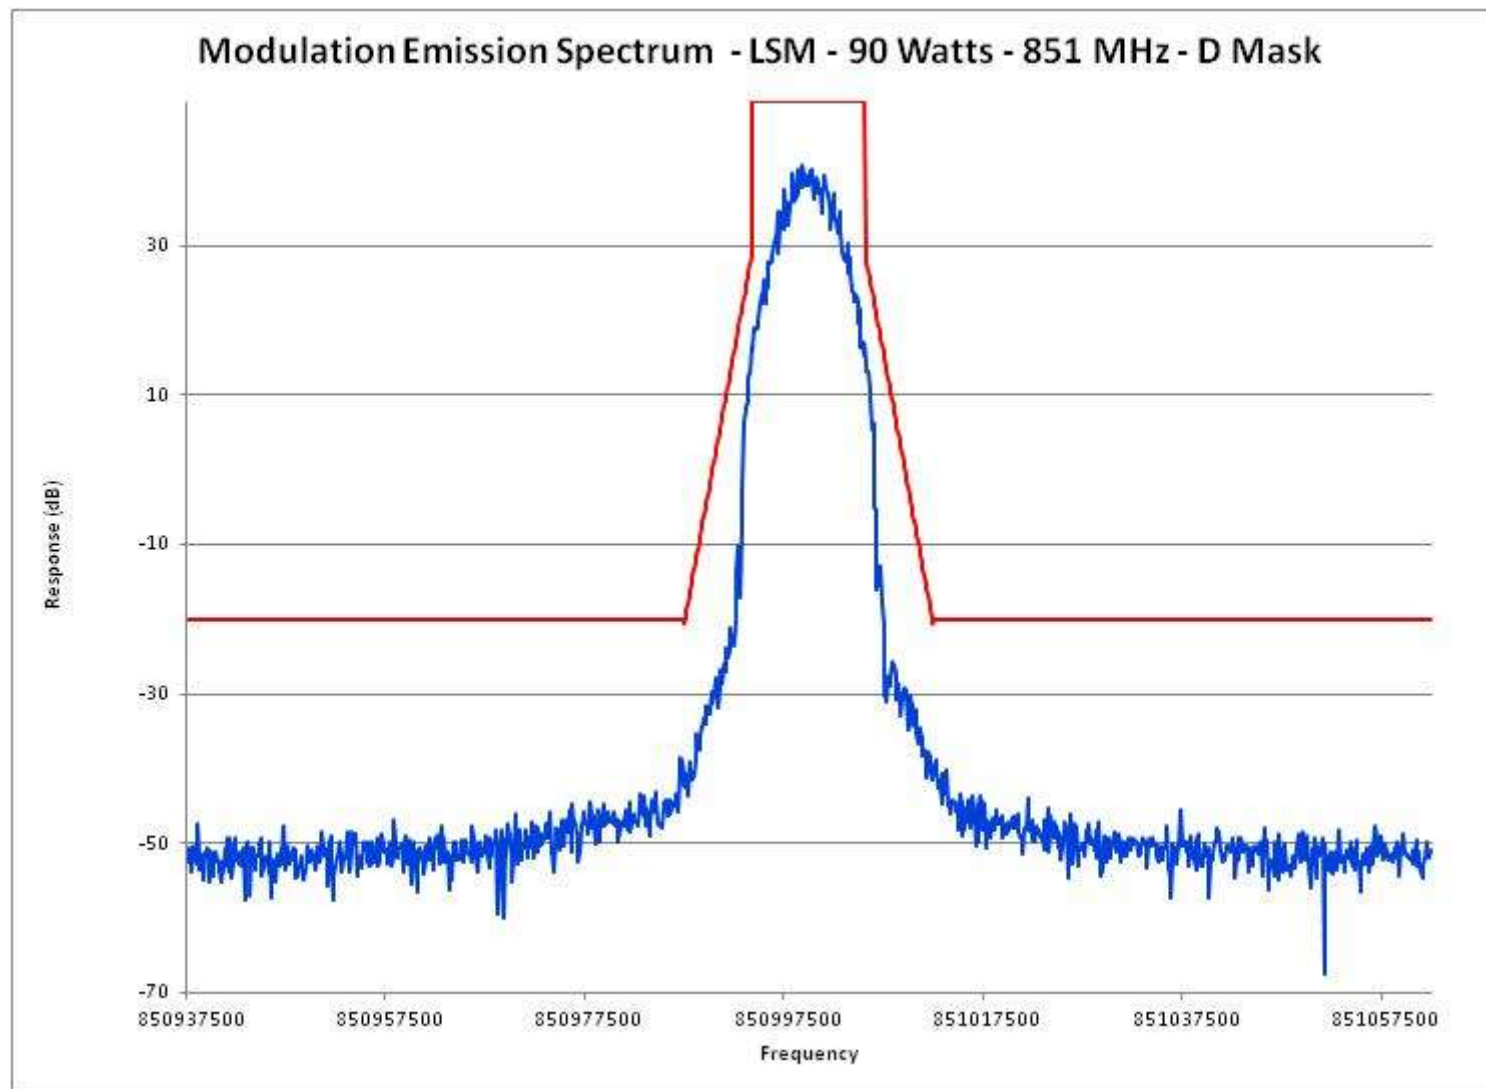


Report on Test Measurements

Occupied Bandwidth – Linear Simulcast Modulation (LSM) – Emission Designator: 8K70D1E, 8K70D1D, 8K70D1W – Middle of Band

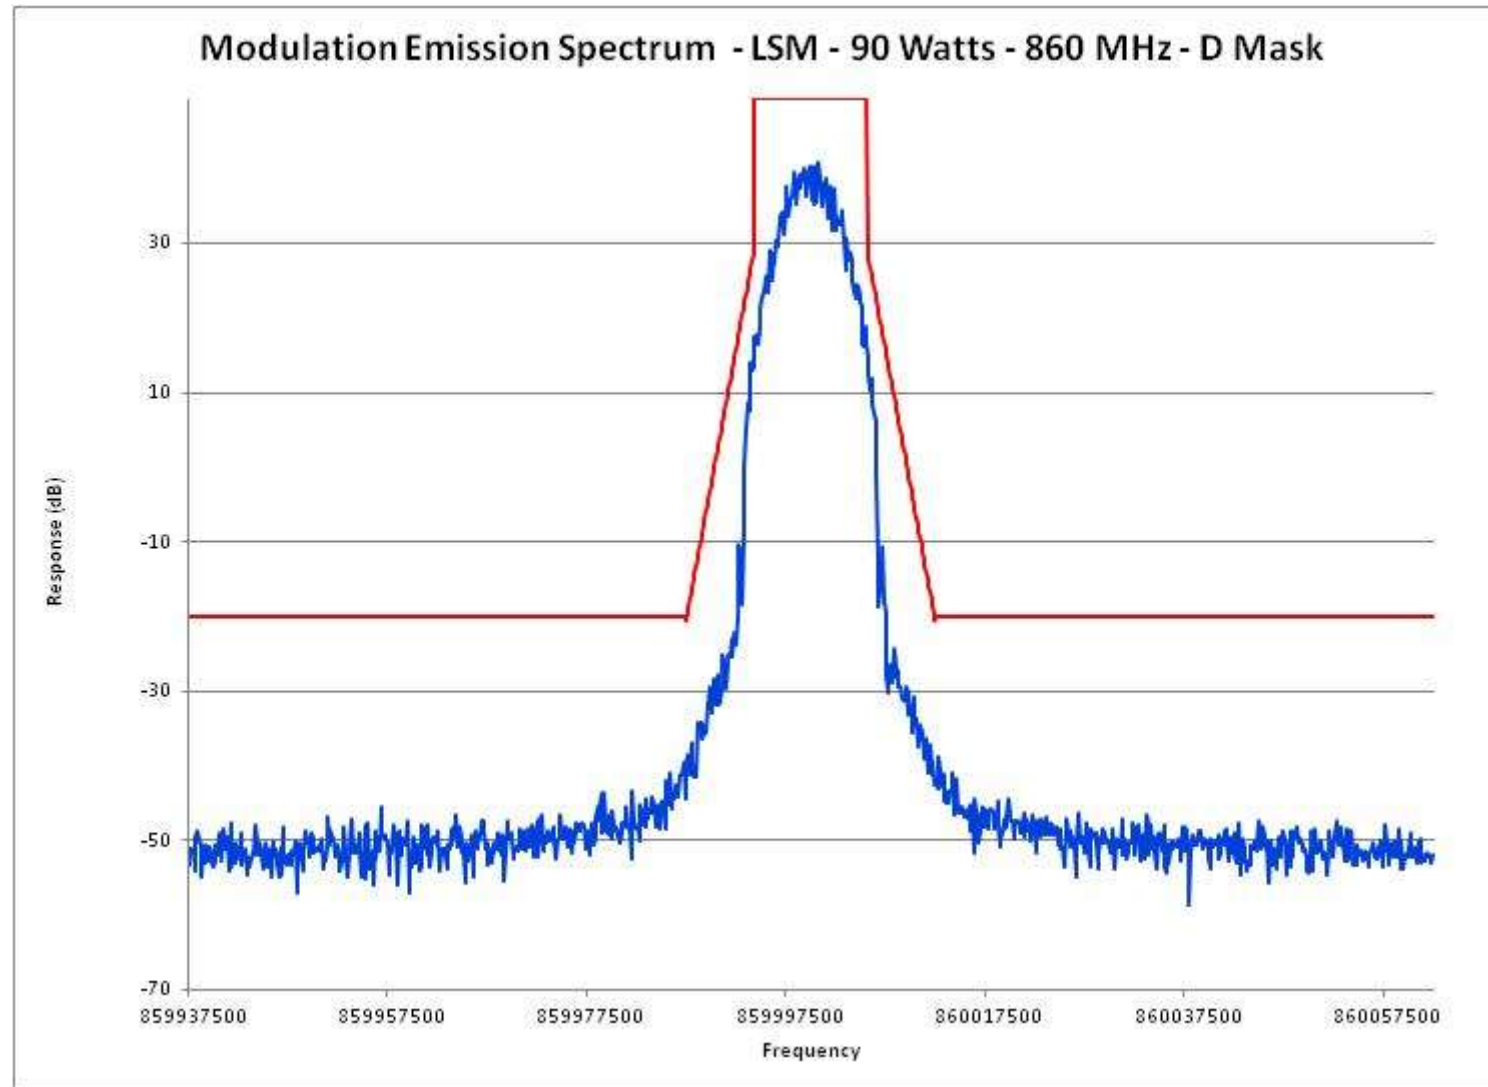


Report on Test Measurements

Occupied Bandwidth – Linear Simulcast Modulation (LSM) – Emission Designator: 8K70D1E, 8K70D1D, 8K70D1W – High End of Band

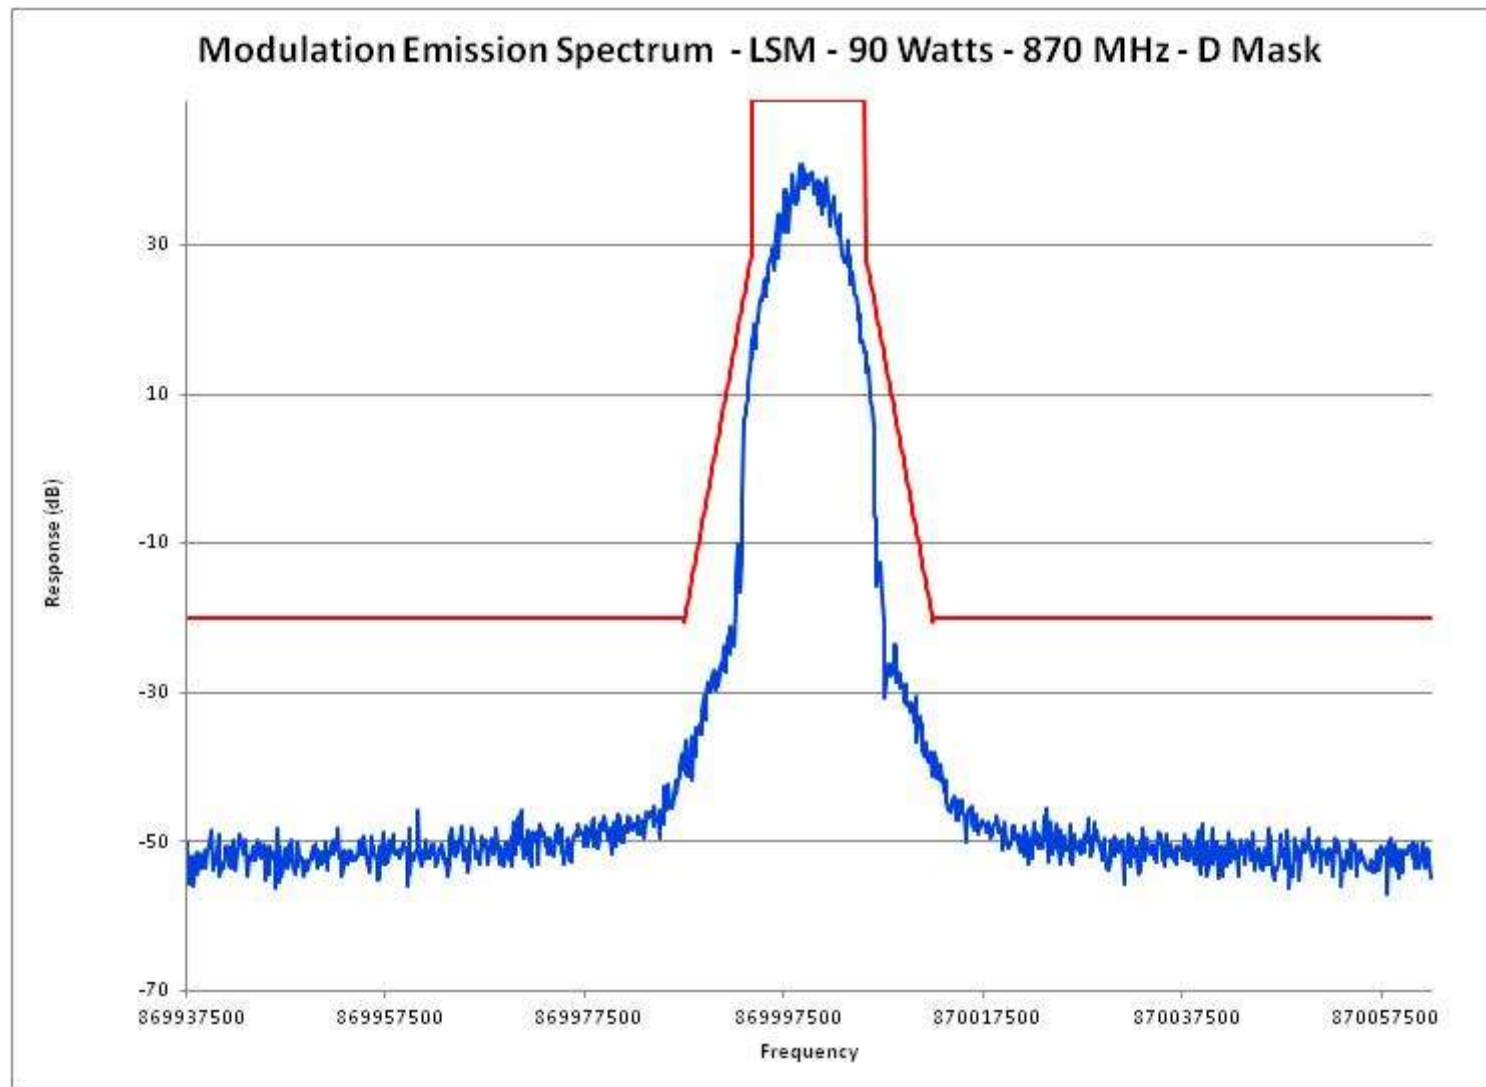


Report on Test Measurements

Occupied Bandwidth – Compatible 4-Level Frequency Modulation (C4FM) – Emission Designator: 8K10D1E, 8K10D1D, 8K10D1W, Low End of Band

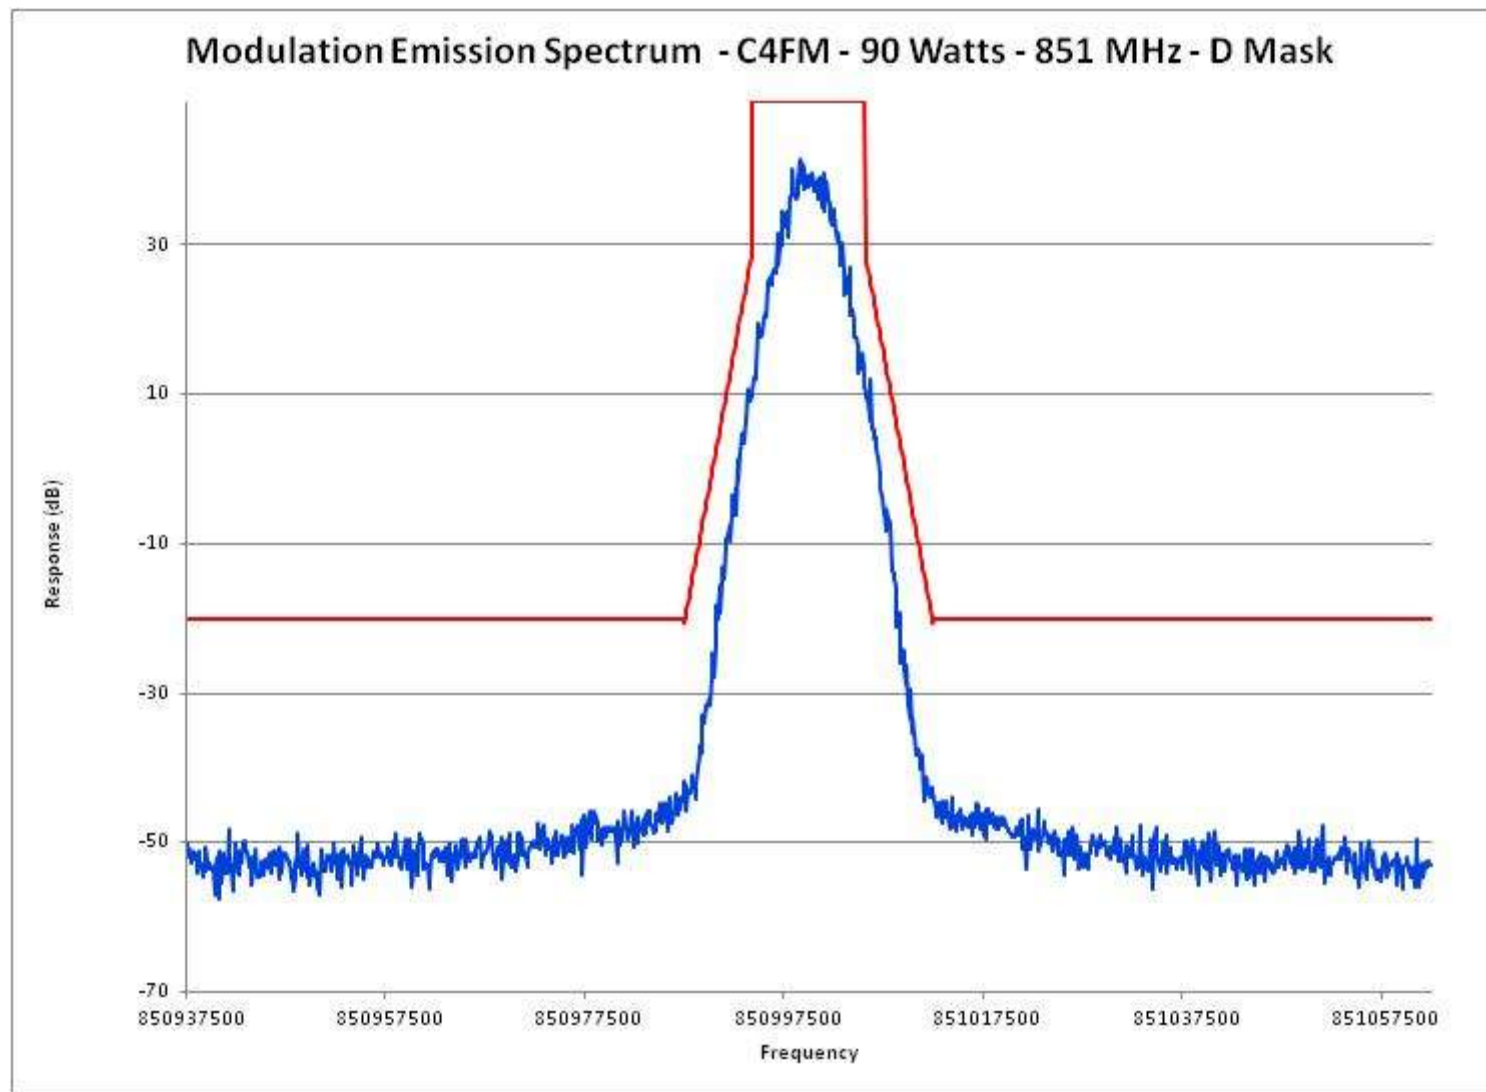


Report on Test Measurements

Occupied Bandwidth – Compatible 4-Level Frequency Modulation (C4FM) – Emission Designator: 8K10D1E, 8K10D1D, 8K10D1W, Middle of Band

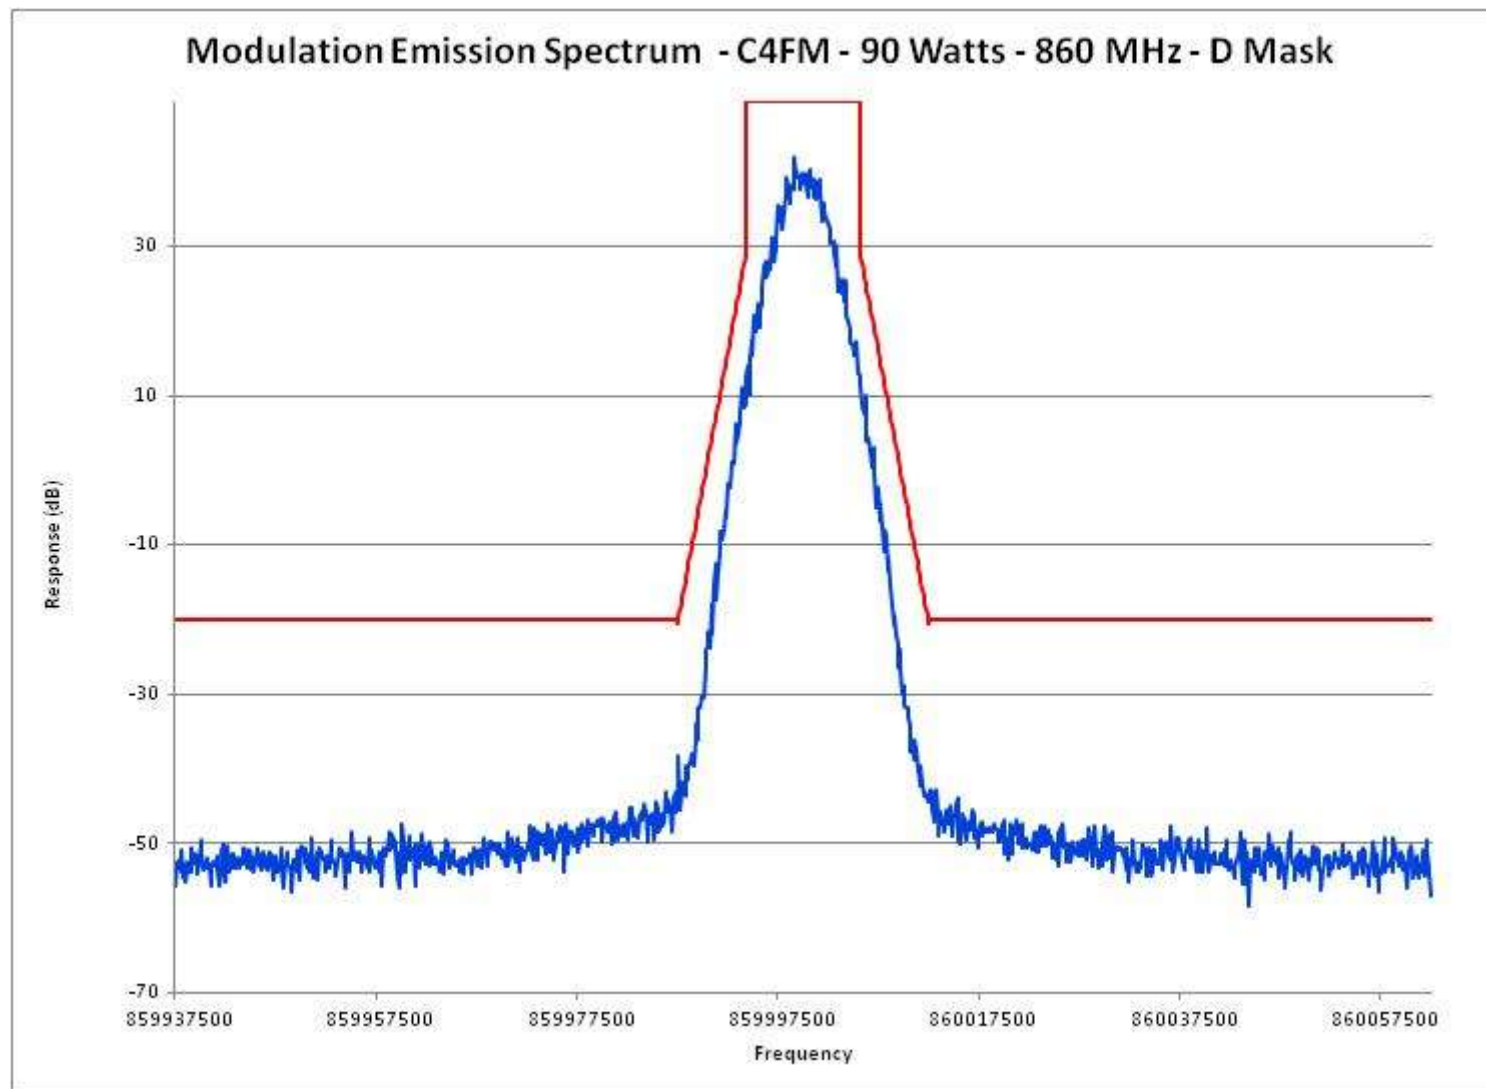


Report on Test Measurements

Occupied Bandwidth – Compatible 4-Level Frequency Modulation (C4FM) – Emission Designator: 8K10D1E, 8K10D1D, 8K10D1W, High End of Band

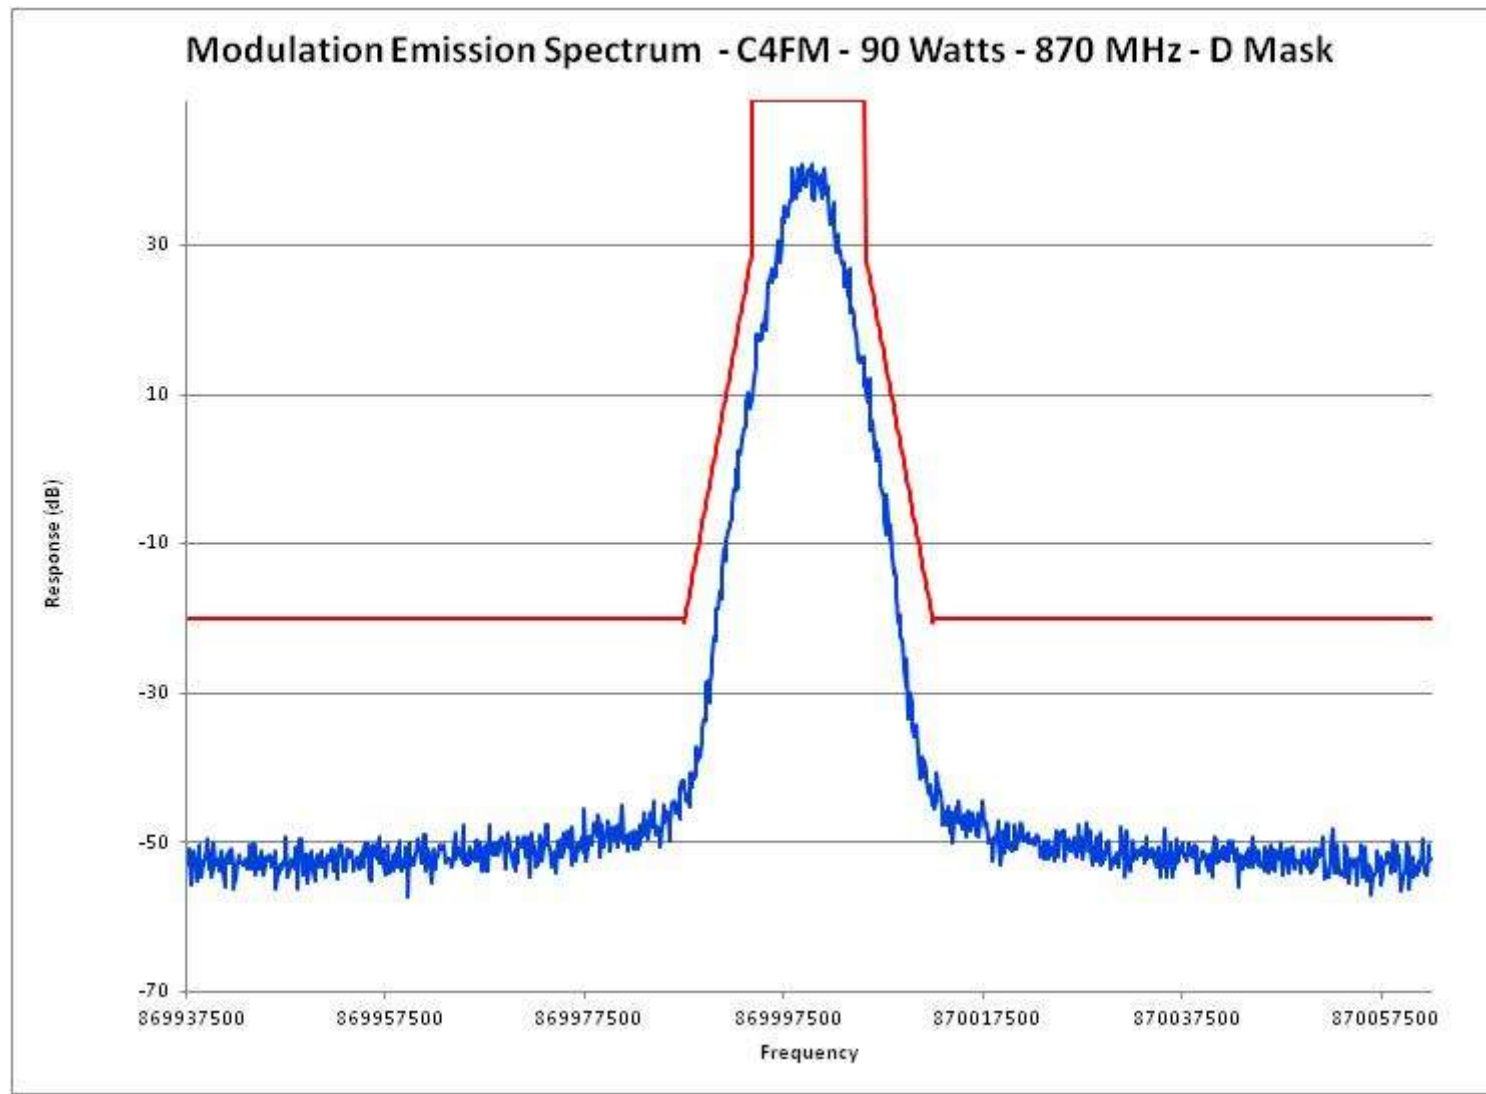


Report on Test Measurements

Occupied Bandwidth – H-DQPSK, P25 Two Slot TDMA Digital Modulation – Emission Designator: 9K80D7E, 9K80D7D, 9K80D7W, Low End of Band

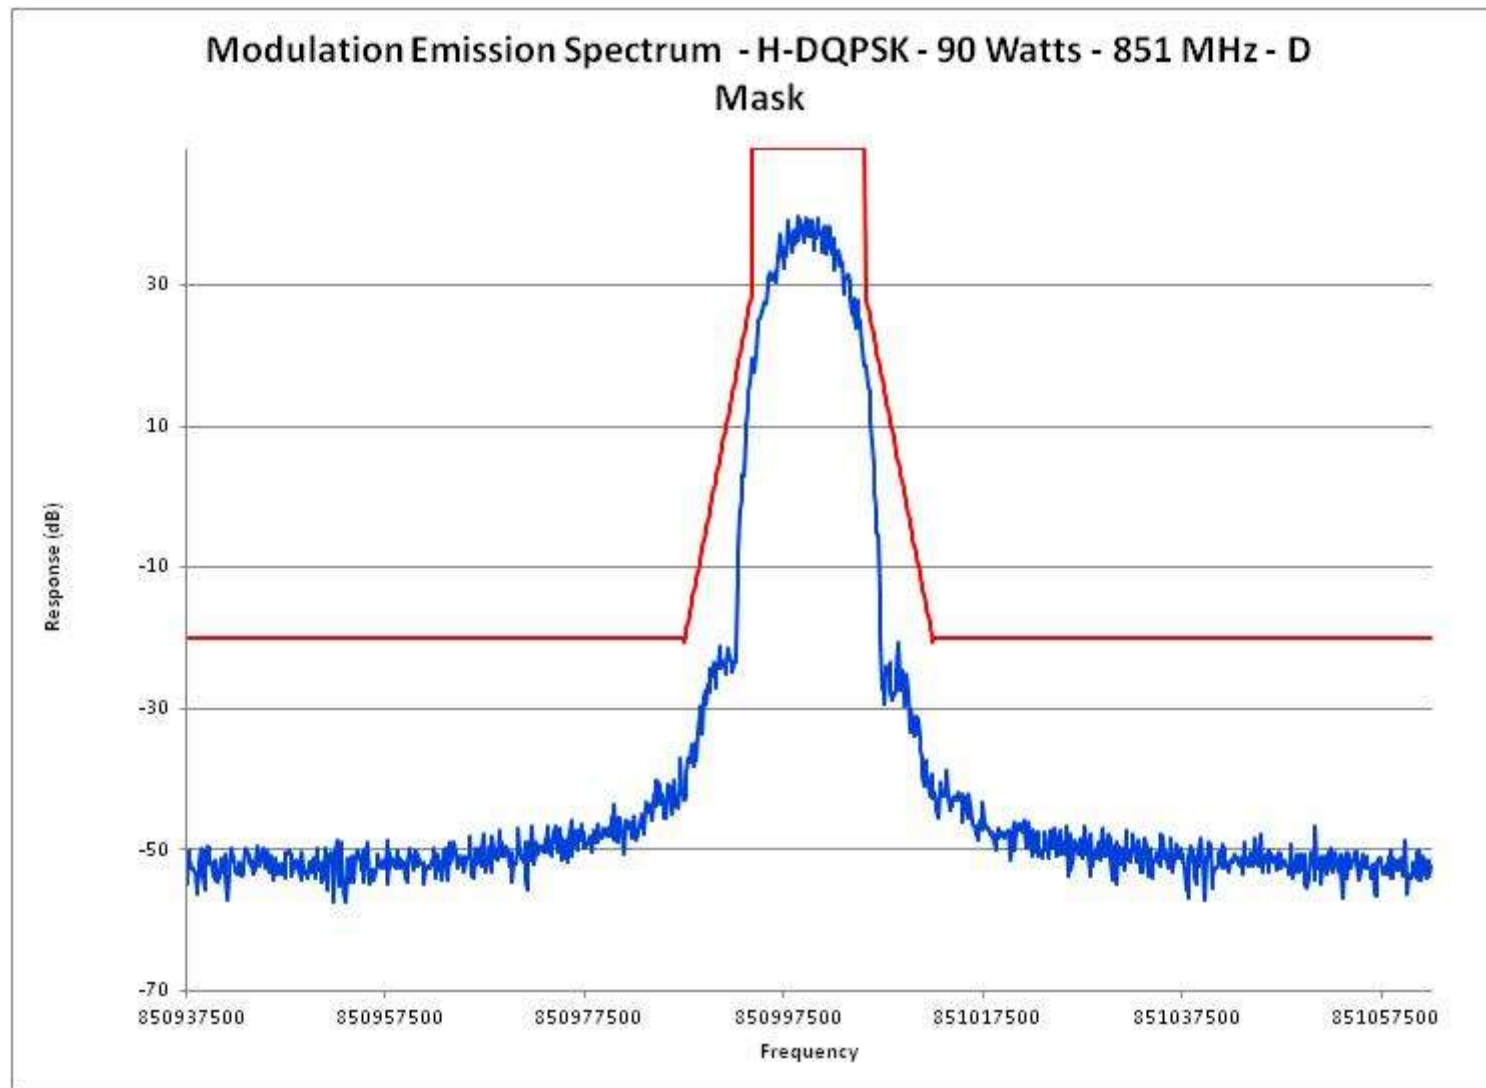


Report on Test Measurements

Occupied Bandwidth – H-DQPSK, P25 Two Slot TDMA Digital Modulation – Emission Designator: 9K80D7E, 9K80D7D, 9K80D7W, Middle of Band

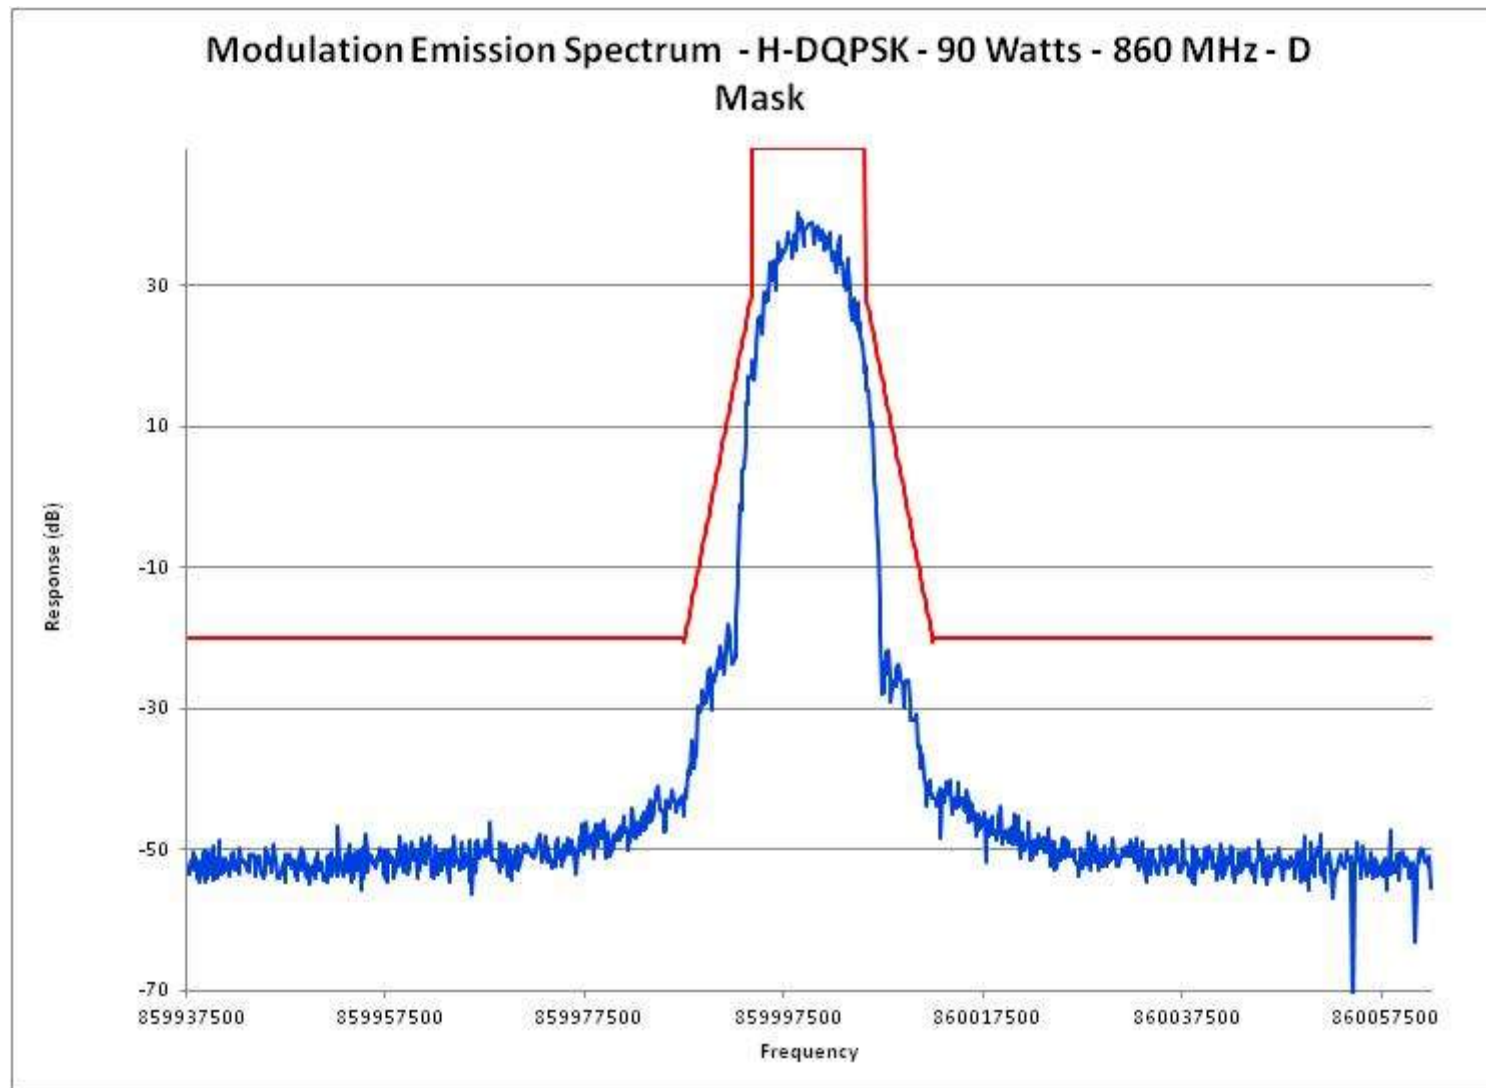

Report on Test Measurements

Occupied Bandwidth – H-DQPSK, P25 Two Slot TDMA Digital Modulation – Emission Designator: 9K80D7E, 9K80D7D, 9K80D7W, High End of Band

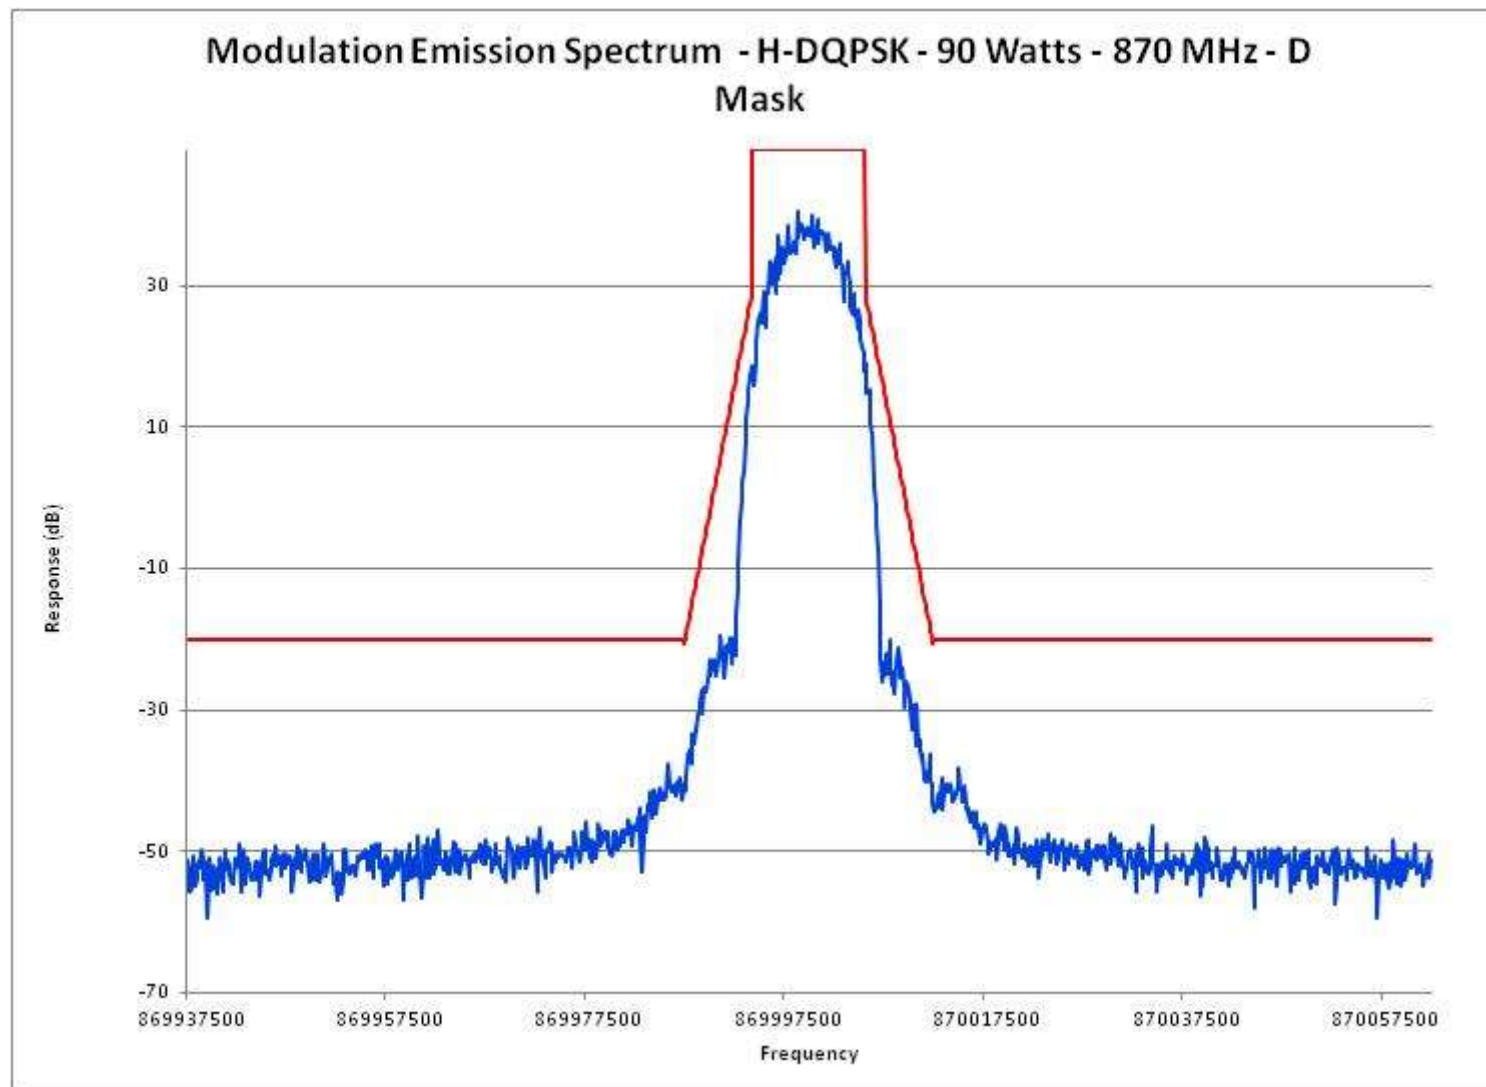

Report on Test Measurements

Conducted Spurious Emissions – Harmonics and Emission Spectrum

Specification Requirement 47 CFR §90.210(d) and IC RSS-119 section 5.8.3 - Emission Limits – “D-Mask”:

Emission Mask D: For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz:
- At least 50 plus $10 \log_{10}(P)$ dB or 70 dB, whichever is the lesser attenuation.*


Modulation: Linear Simulcast Modulation (LSM), Compatible 4-Level Frequency Modulation (C4FM) or P25 Two Slot TDMA Digital Modulation (H-DQPSK) as indicated

Carrier Frequencies: Carrier frequencies of 851, 860, and 870 MHz were measured for conducted carrier harmonics and conducted emission. These frequencies represent the low end, center, and high end of the 851-870 MHz band, and are representative of the full operating band.

EXHIBIT	DESCRIPTION
E1-3.1	Conducted Spurious Harmonic Emissions, Power Output 90 Watts (Average), LSM The specification limit is -69.5 dBc (-20dBm)
E1-3.2	Conducted Spurious Harmonic Emissions, Power Output 2 Watts (Average), LSM The specification limit is -53.0 dBc (-20dBm)
E1-3.3	Conducted Spurious Harmonic Emissions, Power Output 90 Watts, C4FM The specification limit is -69.5 dBc (-20dBm)
E1-3.4	Conducted Spurious Harmonic Emissions, Power Output 2 Watts, C4FM The specification limit is -53.0 dBc (-20dBm)
E1-3.5	Conducted Spurious Harmonic Emissions, Power Output 90 Watts, H-DQPSK The specification limit is -69.5 dBc (-20dBm)
E1-3.6	Conducted Spurious Harmonic Emissions, Power Output 2 Watts, H-DQPSK The specification limit is -53.0 dBc (-20dBm)
E1-3.7, 8, 9	Conducted Spurious Emission Spectrum, 200 MHz Span, Power Output at 90 Watts, LSM The specification limit is -69.5 dBc (-20dBm)
E1-3.10, 11, 12	Conducted Spurious Emission Spectrum, 200 MHz Span, Power Output at 90 Watts, C4FM The specification limit is -69.5dBc (-20dBm)
E1-3.13,14, 15	Conducted Spurious Emission Spectrum, 200 MHz Span, Power Output at 90 Watts, H-DQPSK The specification limit is -69.5dBc (-20dBm)


Report on Test Measurements

Conducted Spurious Harmonic Emissions – 90 Watts (Average) LSM

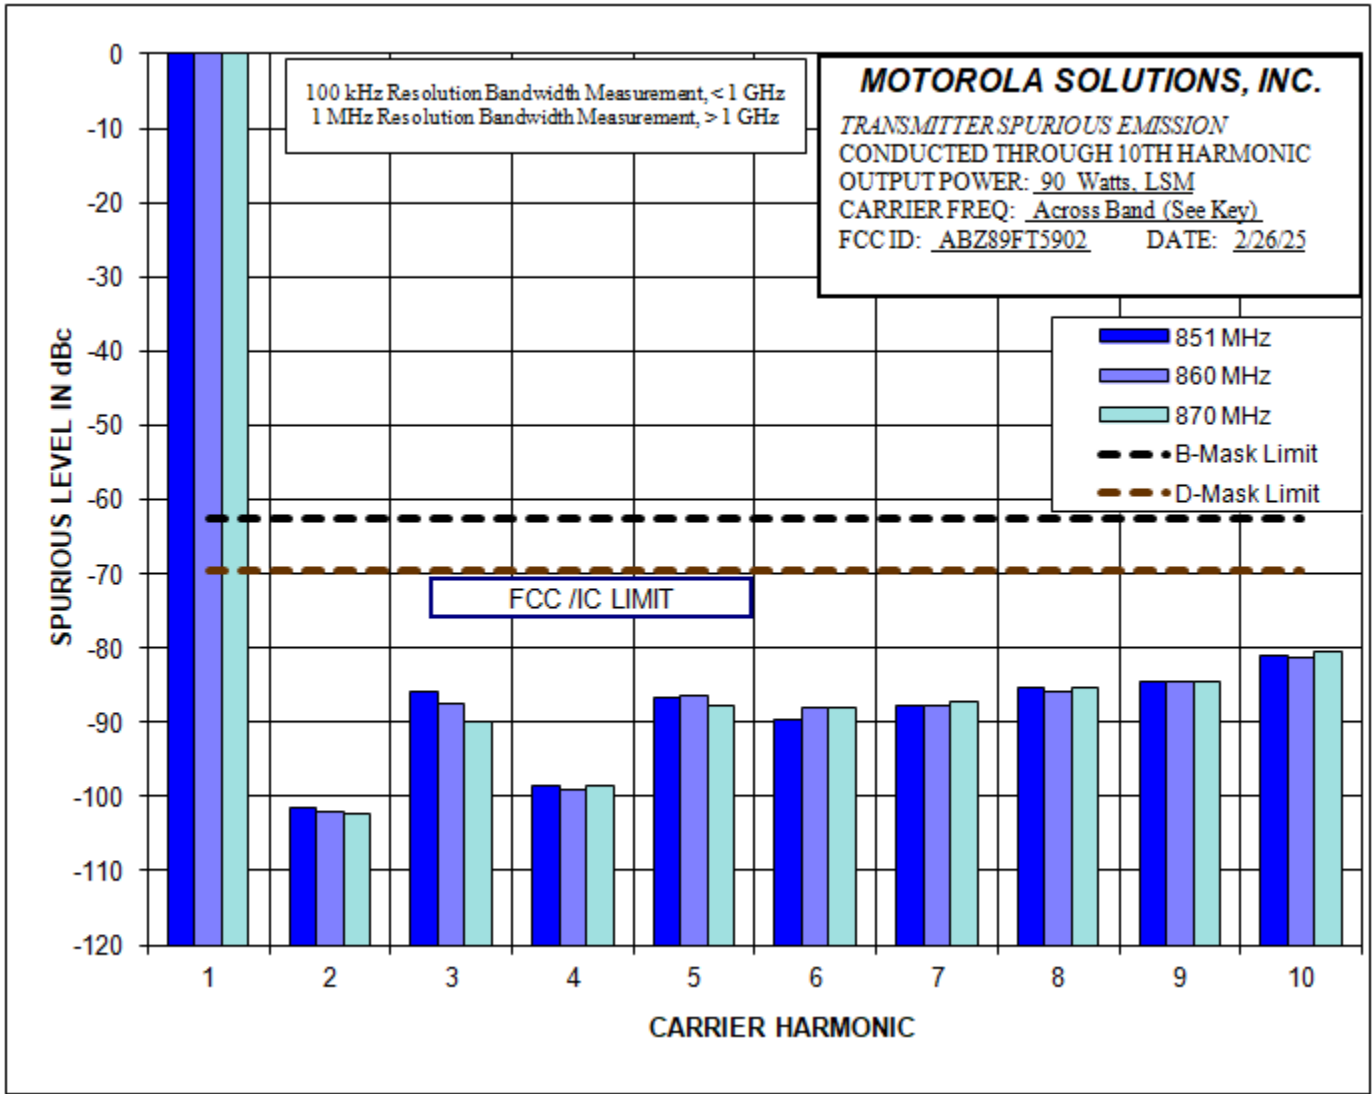


Report on Test Measurements

Conducted Spurious Harmonic Emissions – 2 Watts (Average) LSM

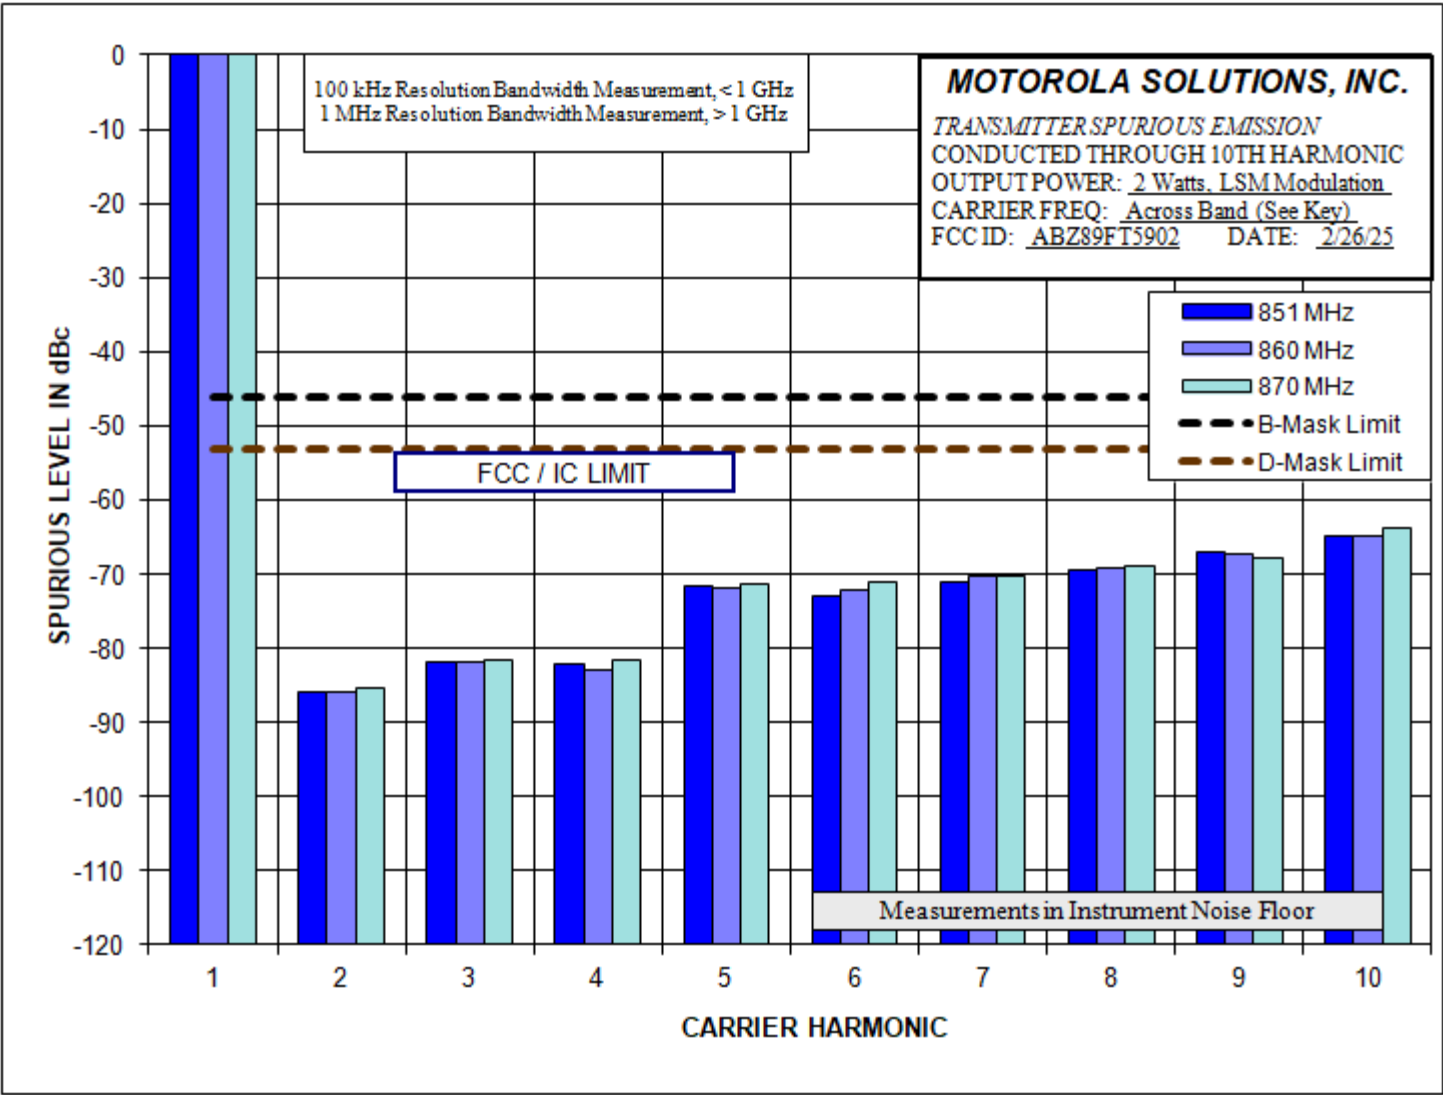


Report on Test Measurements

Conducted Spurious Harmonic Emissions – 90 Watts C4FM

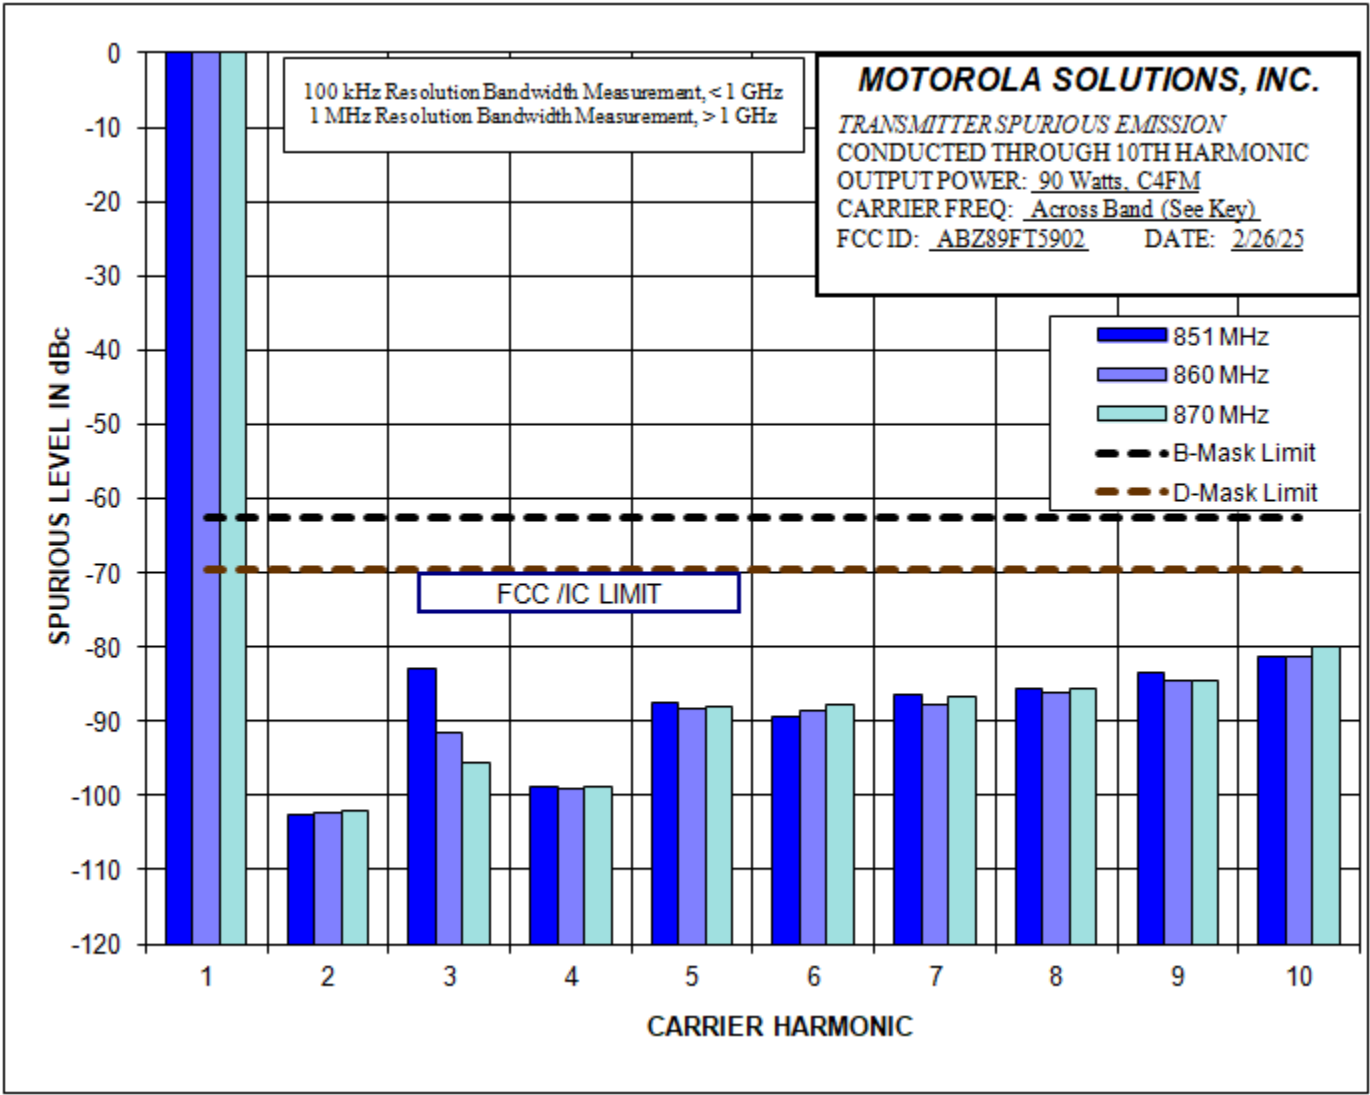


Report on Test Measurements

Conducted Spurious Harmonic Emissions – 2 Watts C4FM

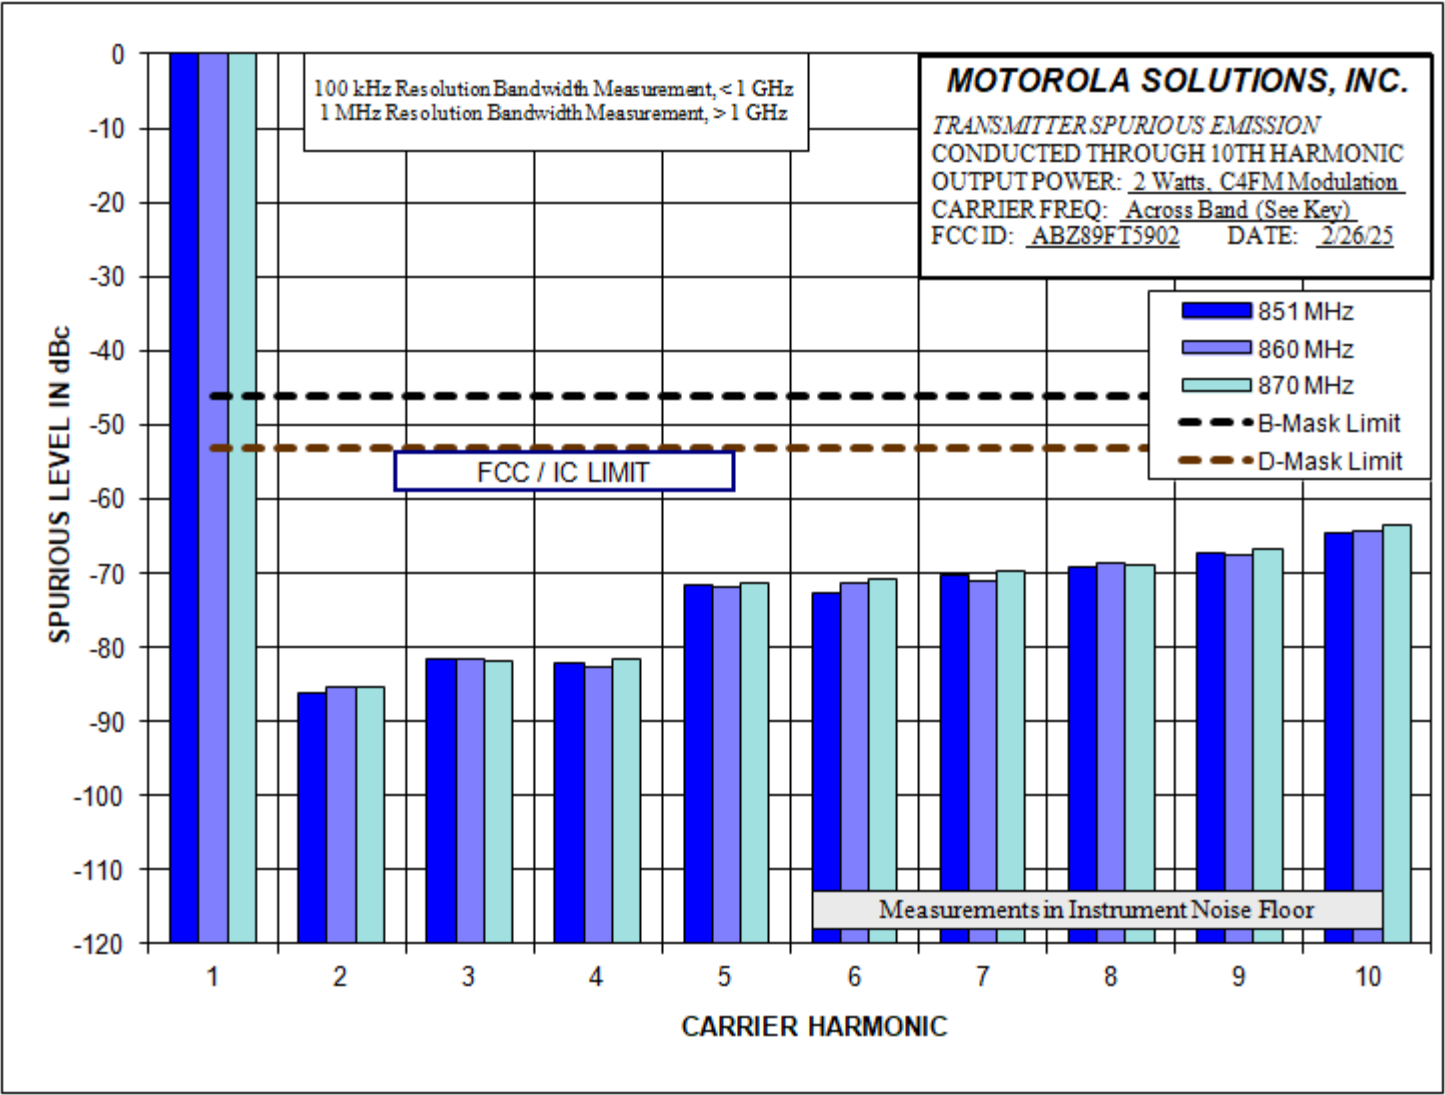


Report on Test Measurements

Conducted Spurious Harmonic Emissions – 90 Watts H-DQPSK

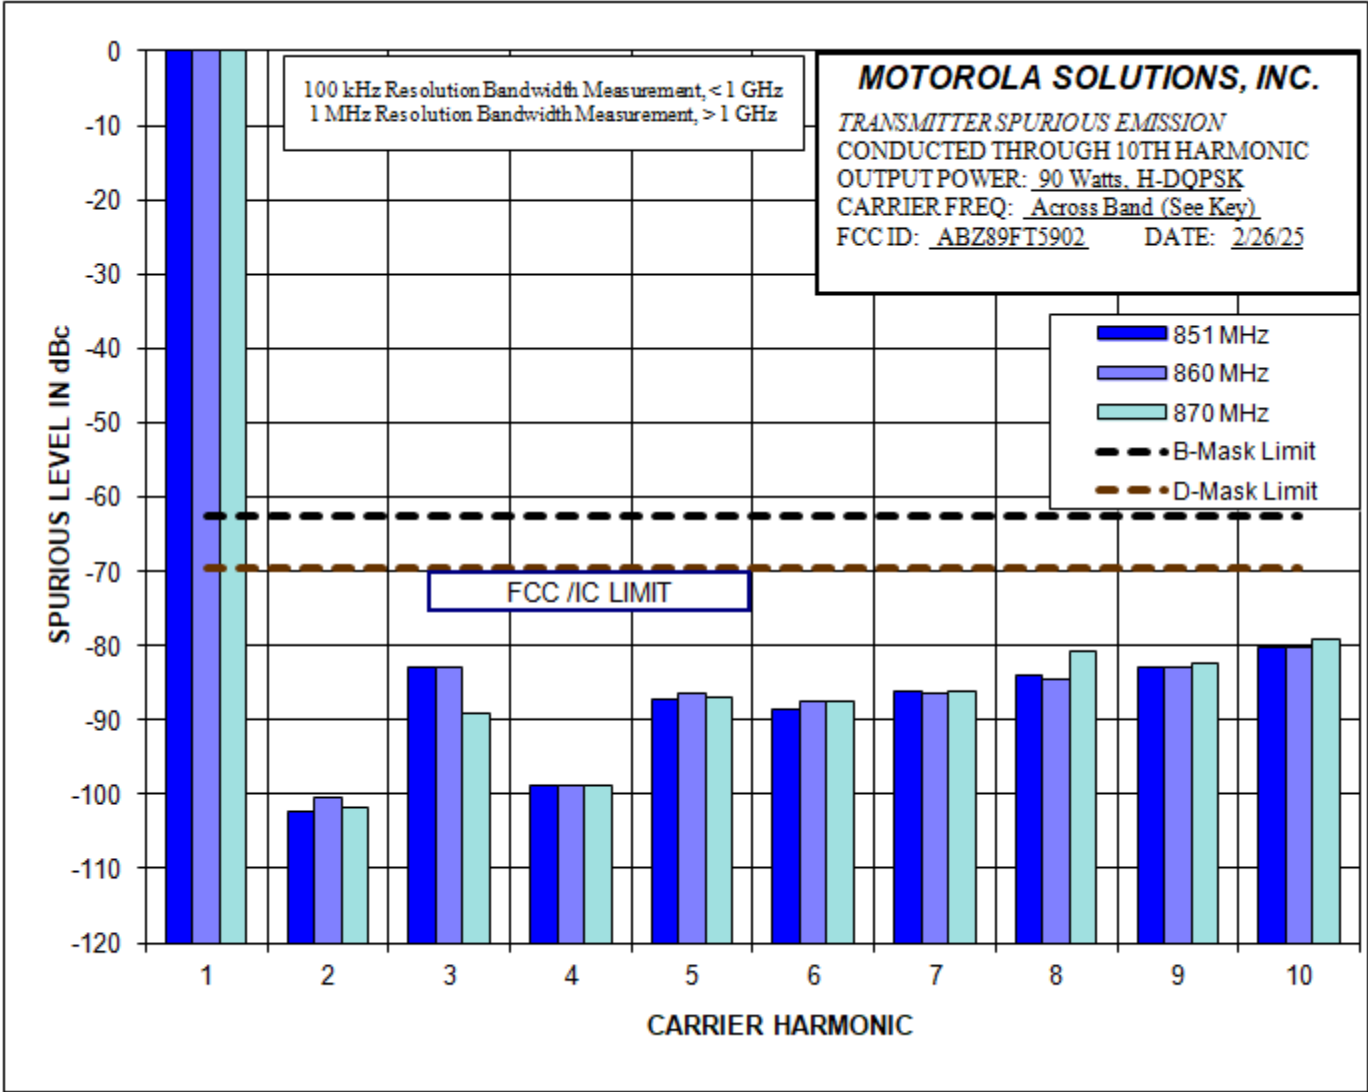


Report on Test Measurements

Conducted Spurious Harmonic Emissions – 2 Watts H-DQPSK

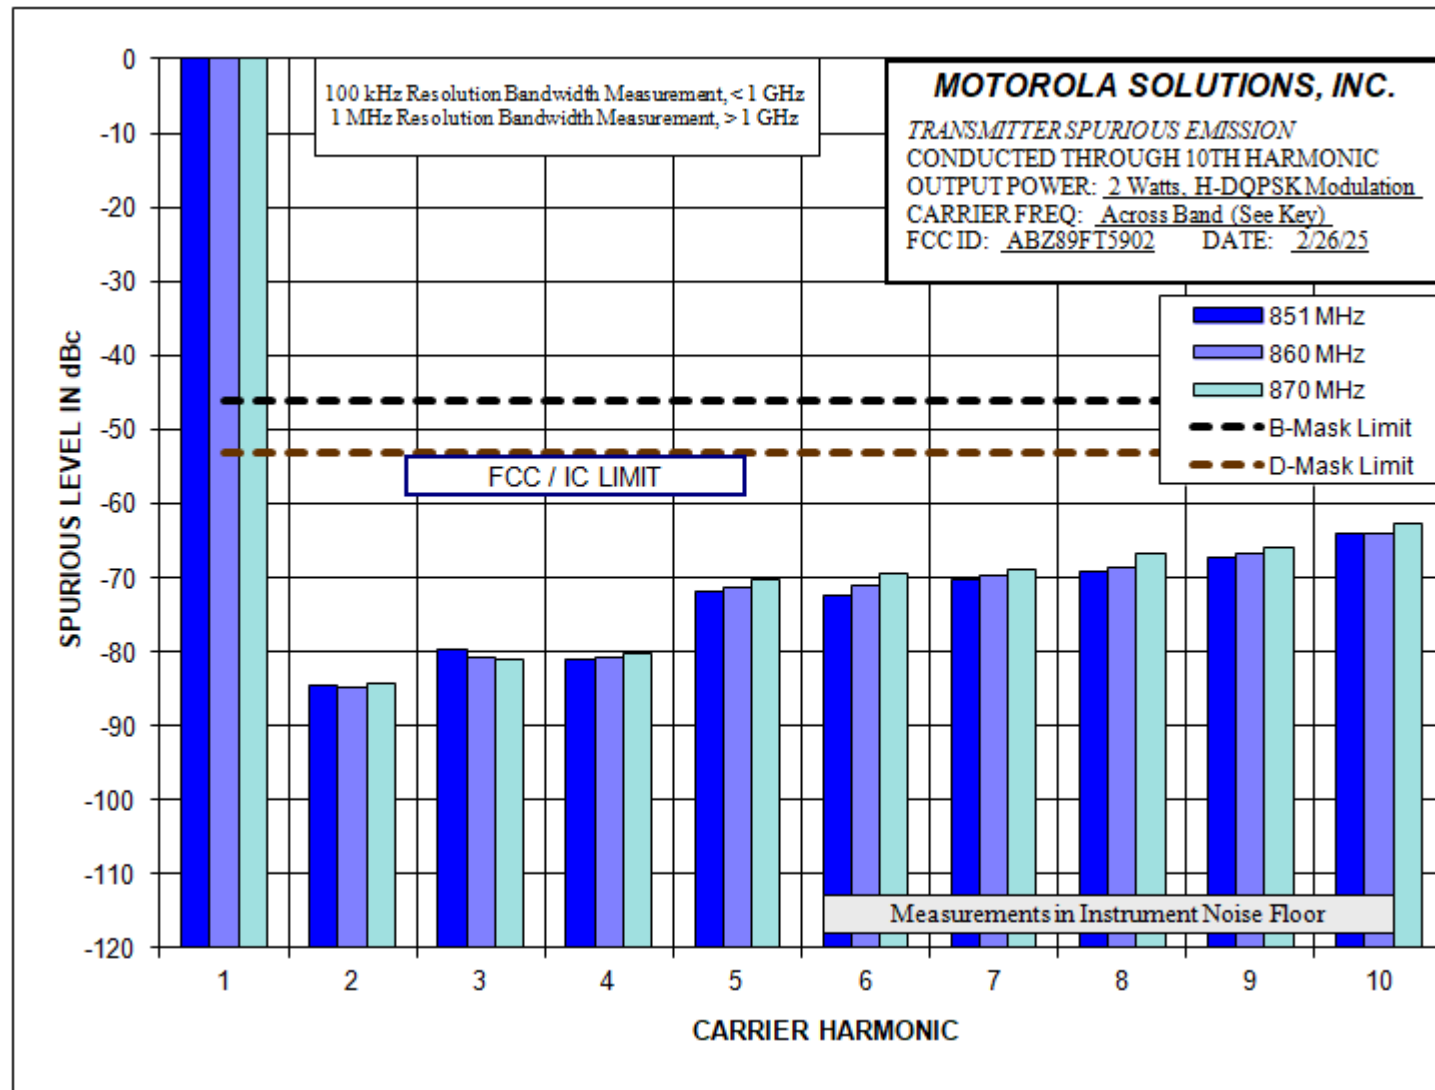


Report on Test Measurements

Conducted Spurious Emission Spectrum – 90Watts (Average) LSM – 200 MHz Span – Low End of Band

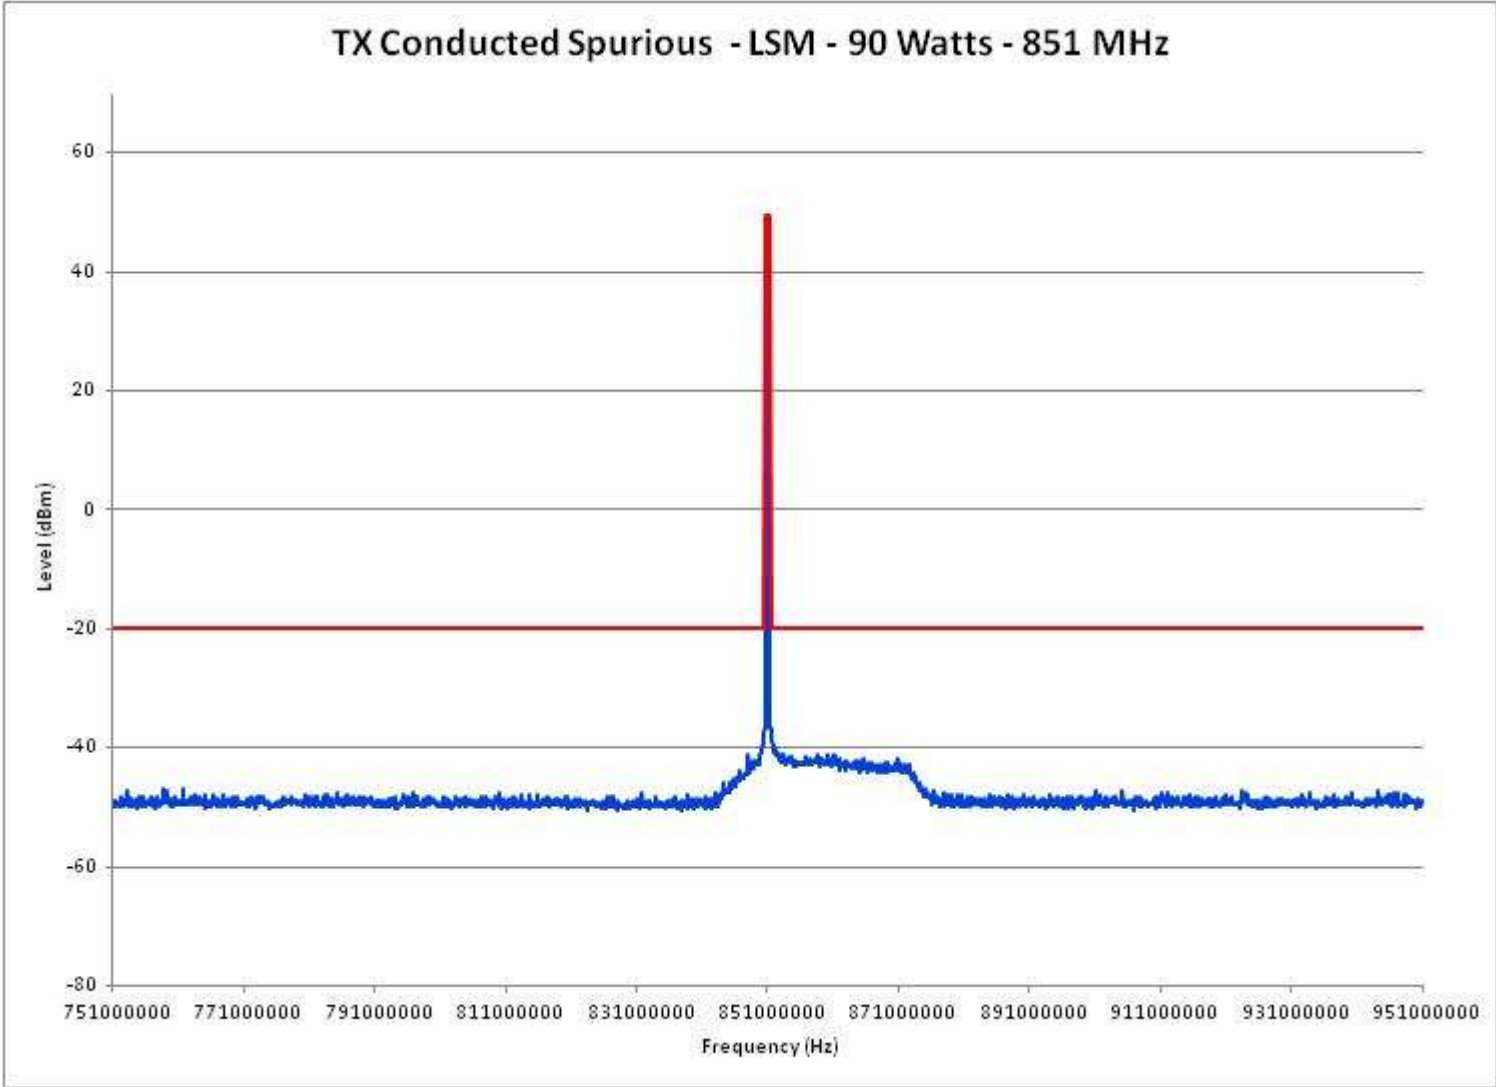


Report on Test Measurements

Conducted Spurious Emission Spectrum – 90 Watts (Average) LSM – 200 MHz Span – Middle of Band

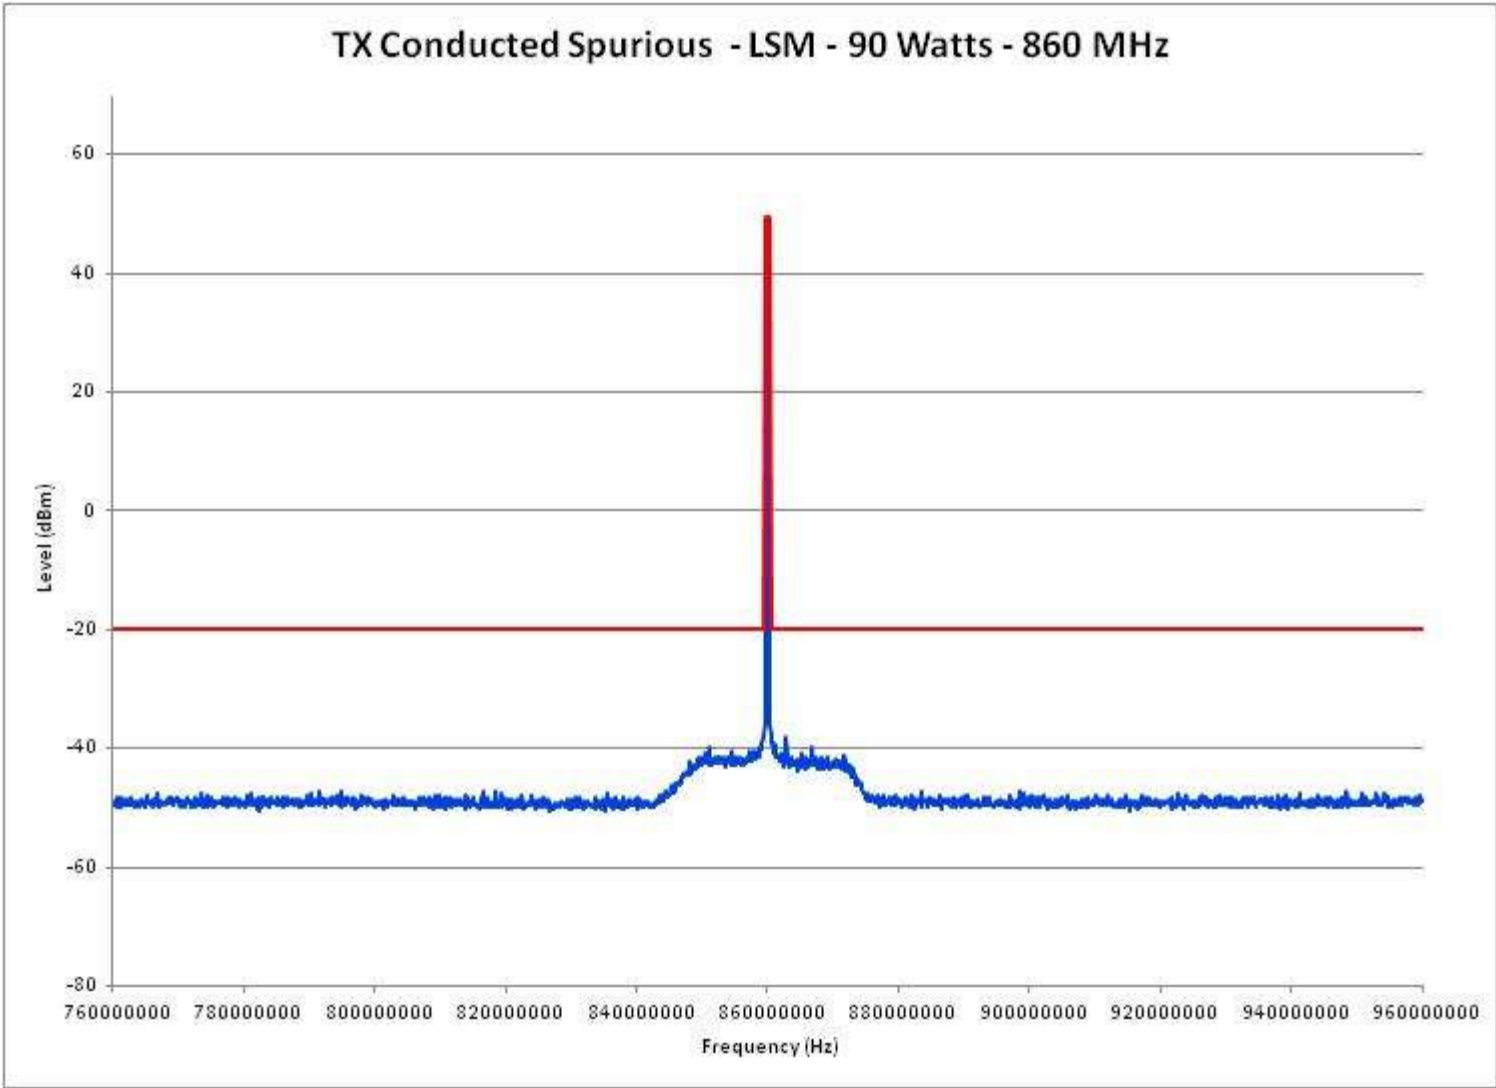


Report on Test Measurements

Conducted Spurious Emission Spectrum – 90Watts (Average) LSM – 200 MHz Span – High End of Band

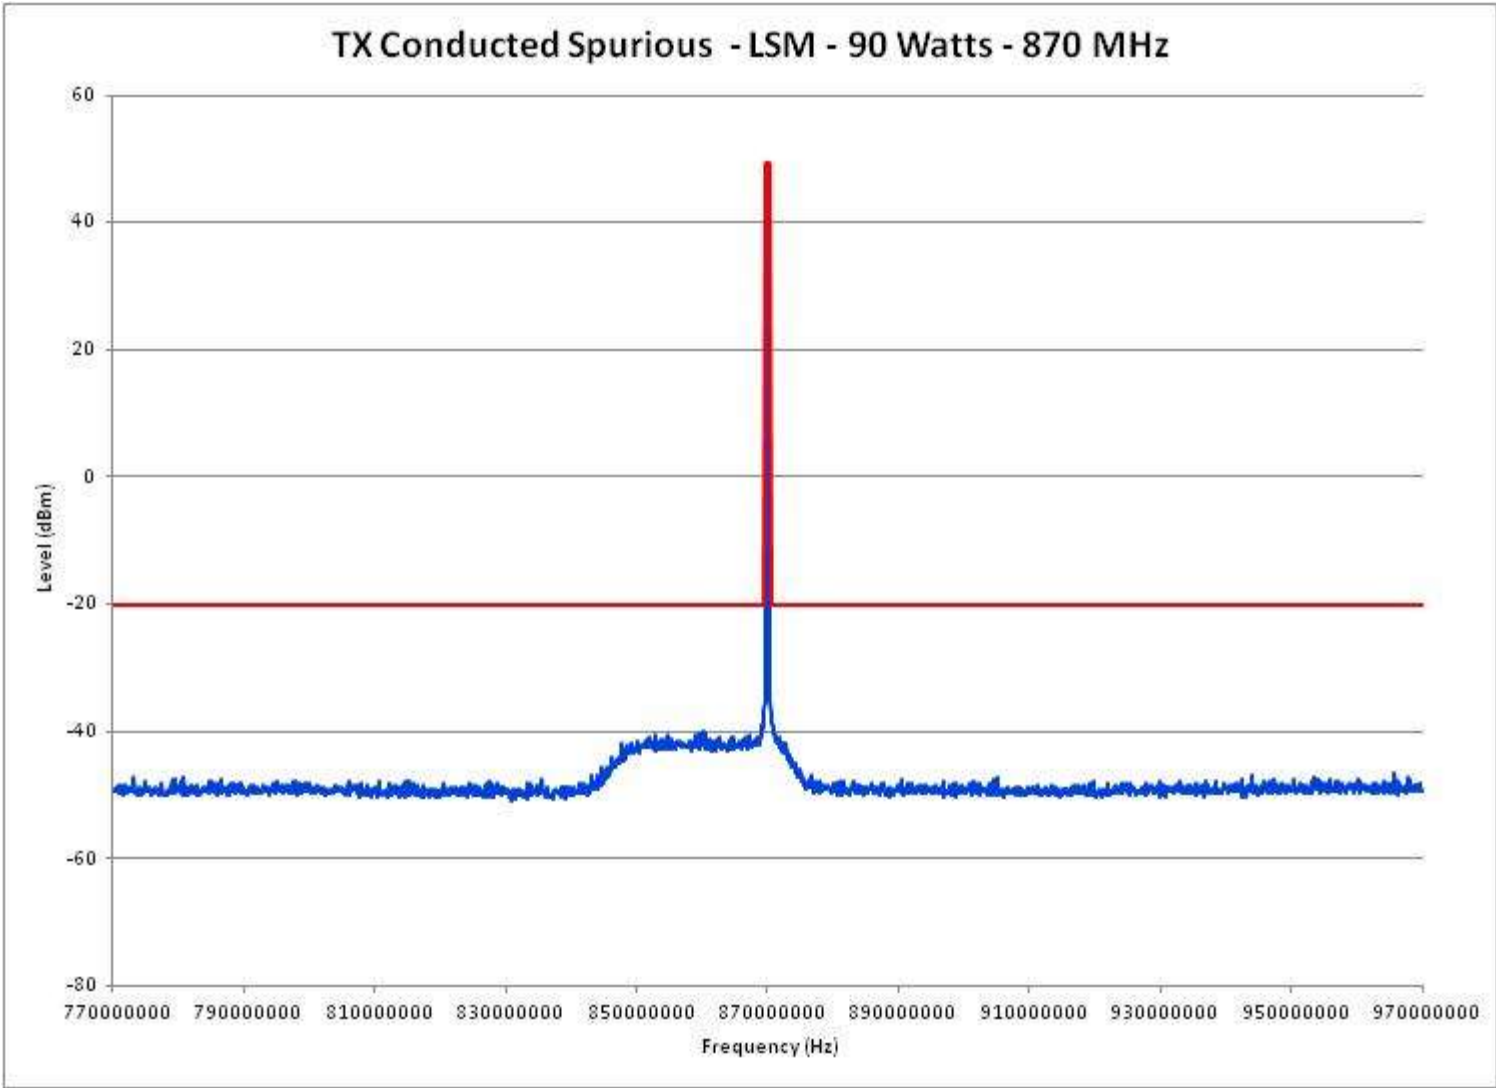


Report on Test Measurements

Conducted Spurious Emission Spectrum – 90 Watts C4FM – 200 MHz Span – Low End of Band

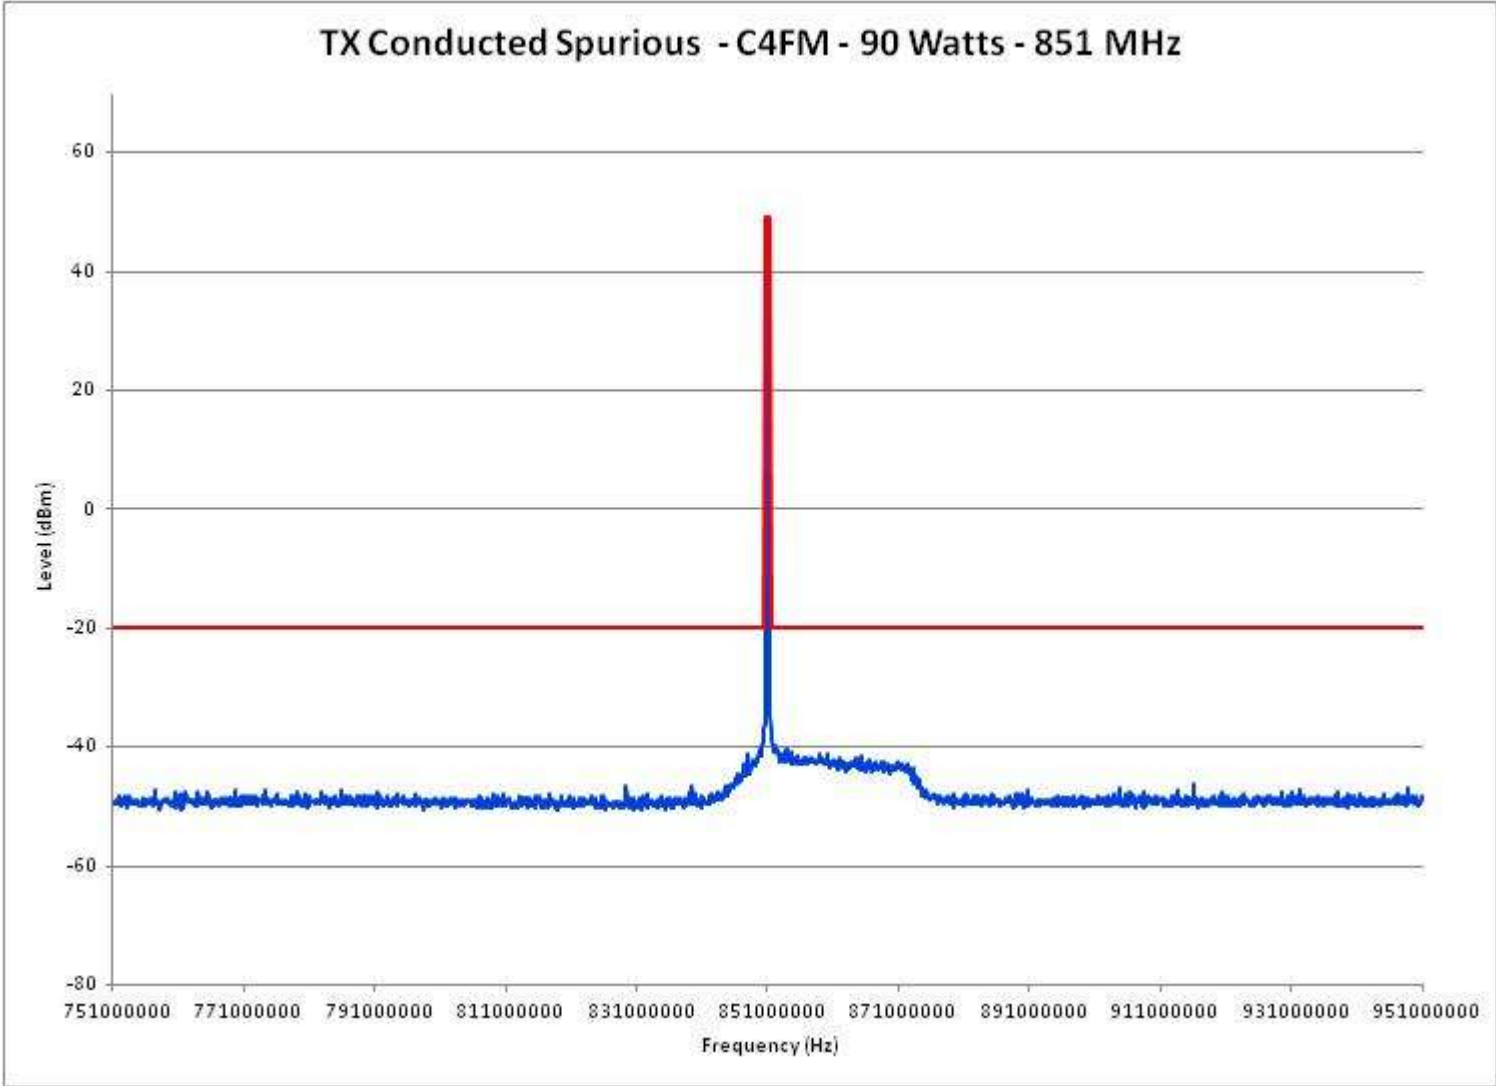


Report on Test Measurements

Conducted Spurious Emission Spectrum – 90 Watts C4FM – 200 MHz Span – Middle of Band

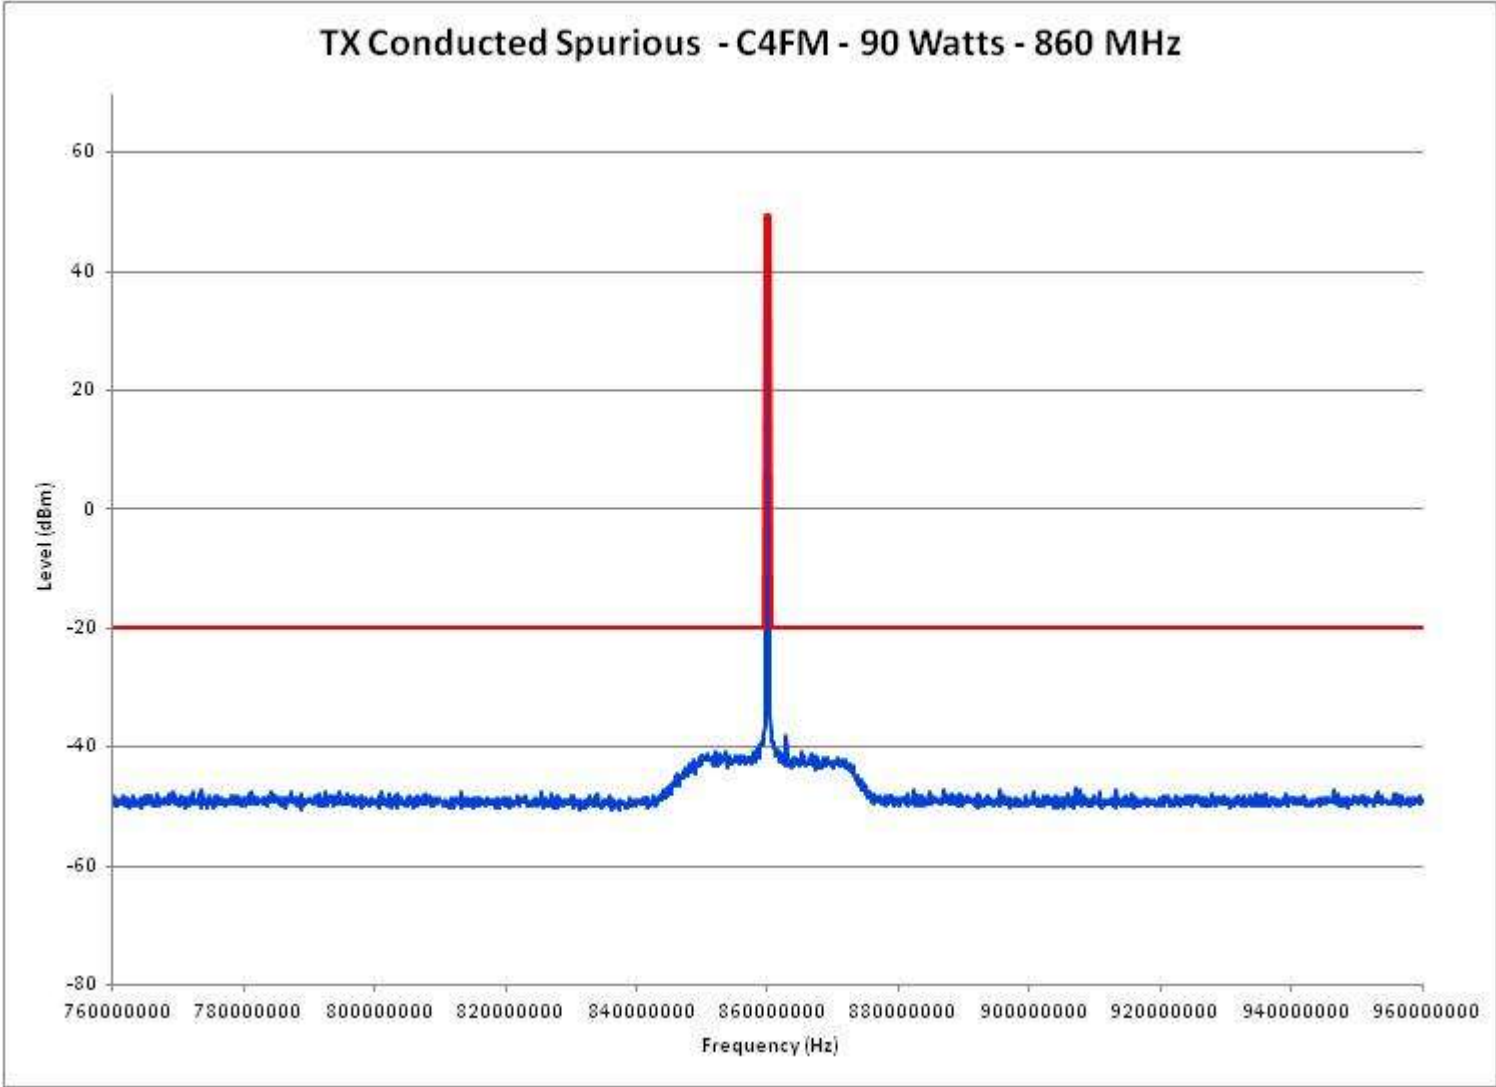


Report on Test Measurements

Conducted Spurious Emission Spectrum – 90 Watts C4FM – 200 MHz Span – High End of Band

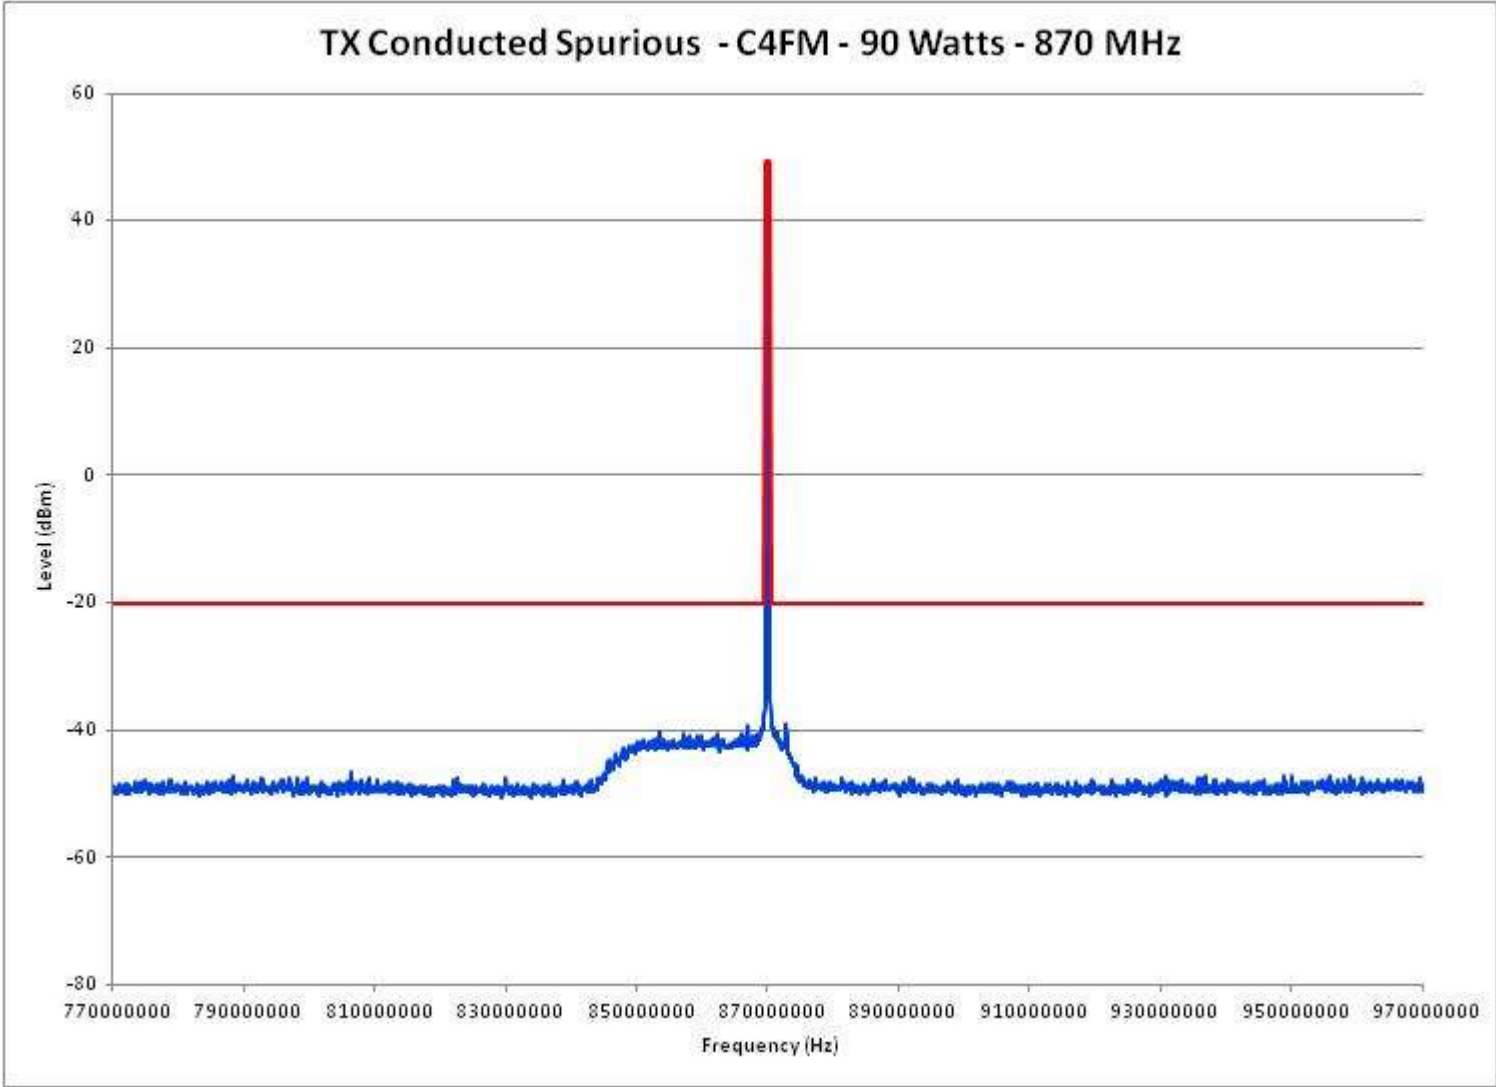


Report on Test Measurements

Conducted Spurious Emission Spectrum – 90 Watts H-DQPSK P25 Two Slot TDMA – 200 MHz Span – Low End of Band

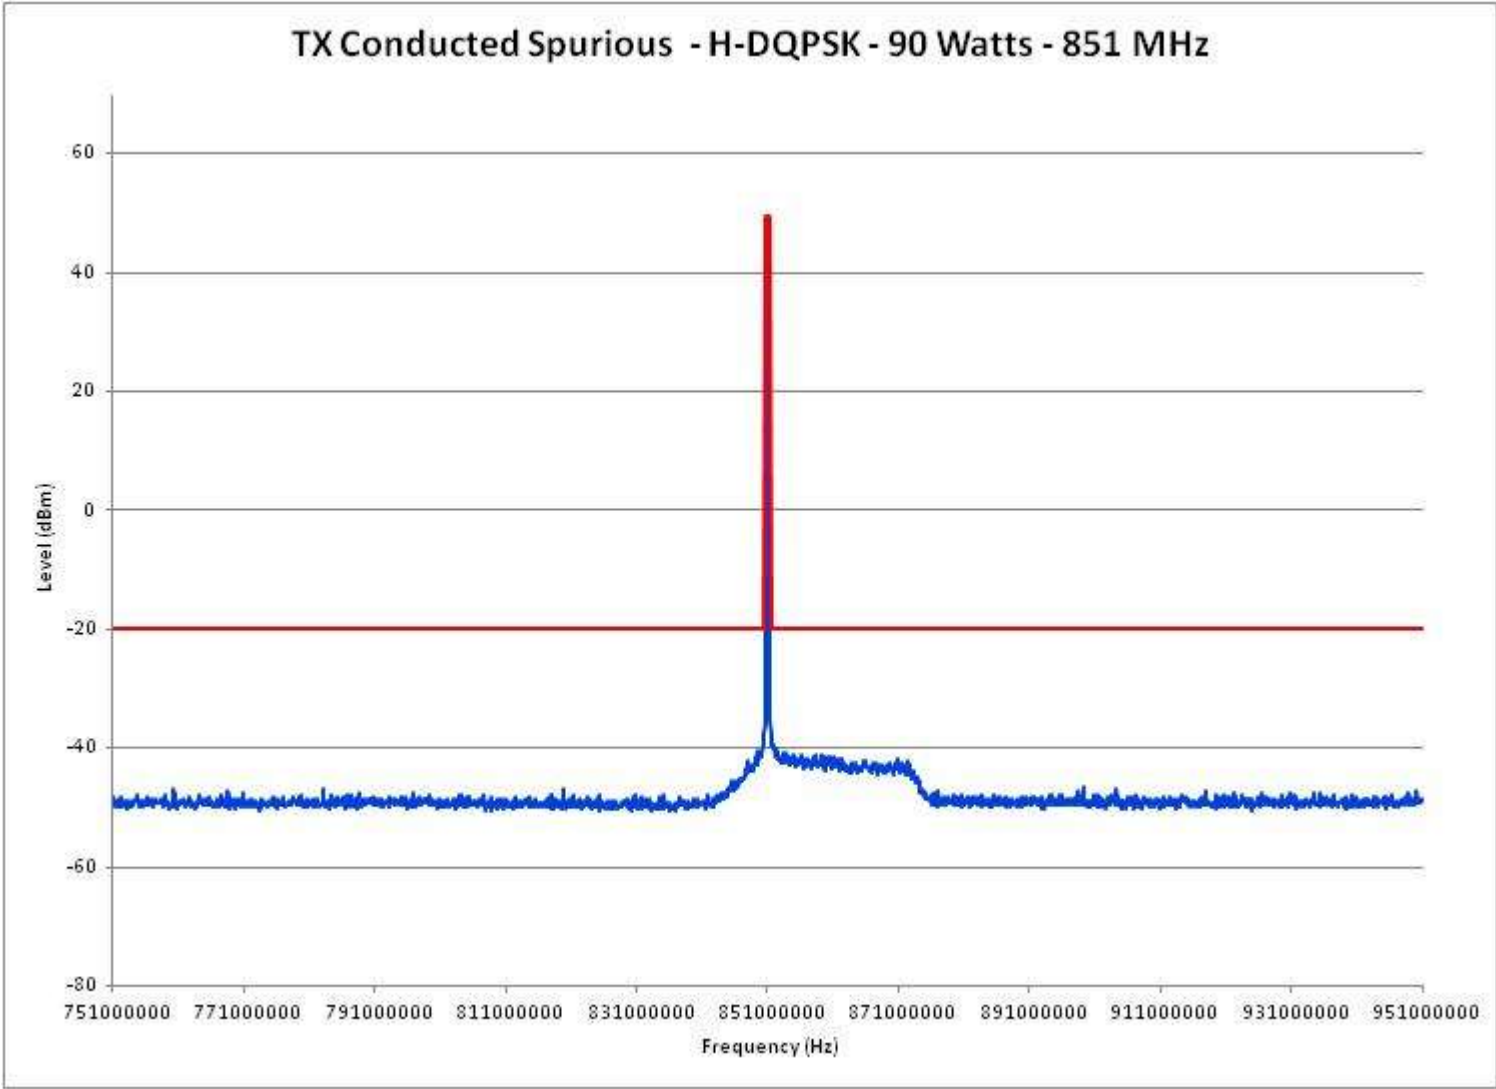


Report on Test Measurements

Conducted Spurious Emission Spectrum – 90 Watts H-DQPSK P25 Two Slot TDMA – 200 MHz Span – Middle of Band

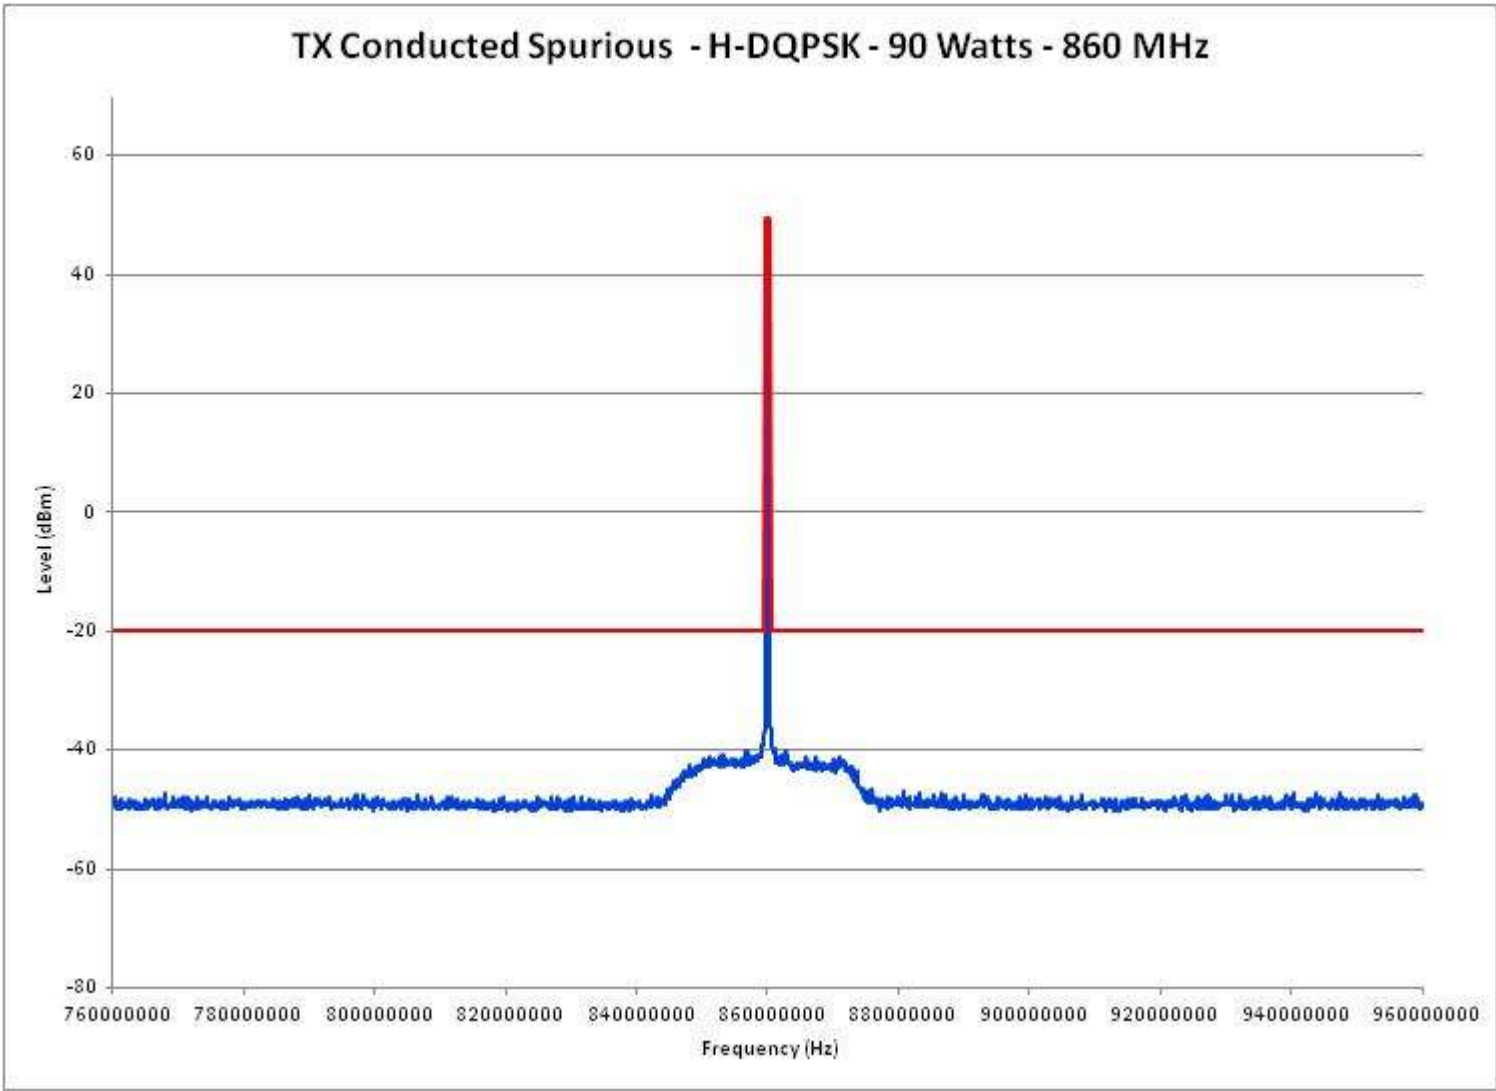

Report on Test Measurements

Conducted Spurious Emission Spectrum – 90 Watts H-DQPSK P25 Two Slot TDMA – 200 MHz Span – High End of Band

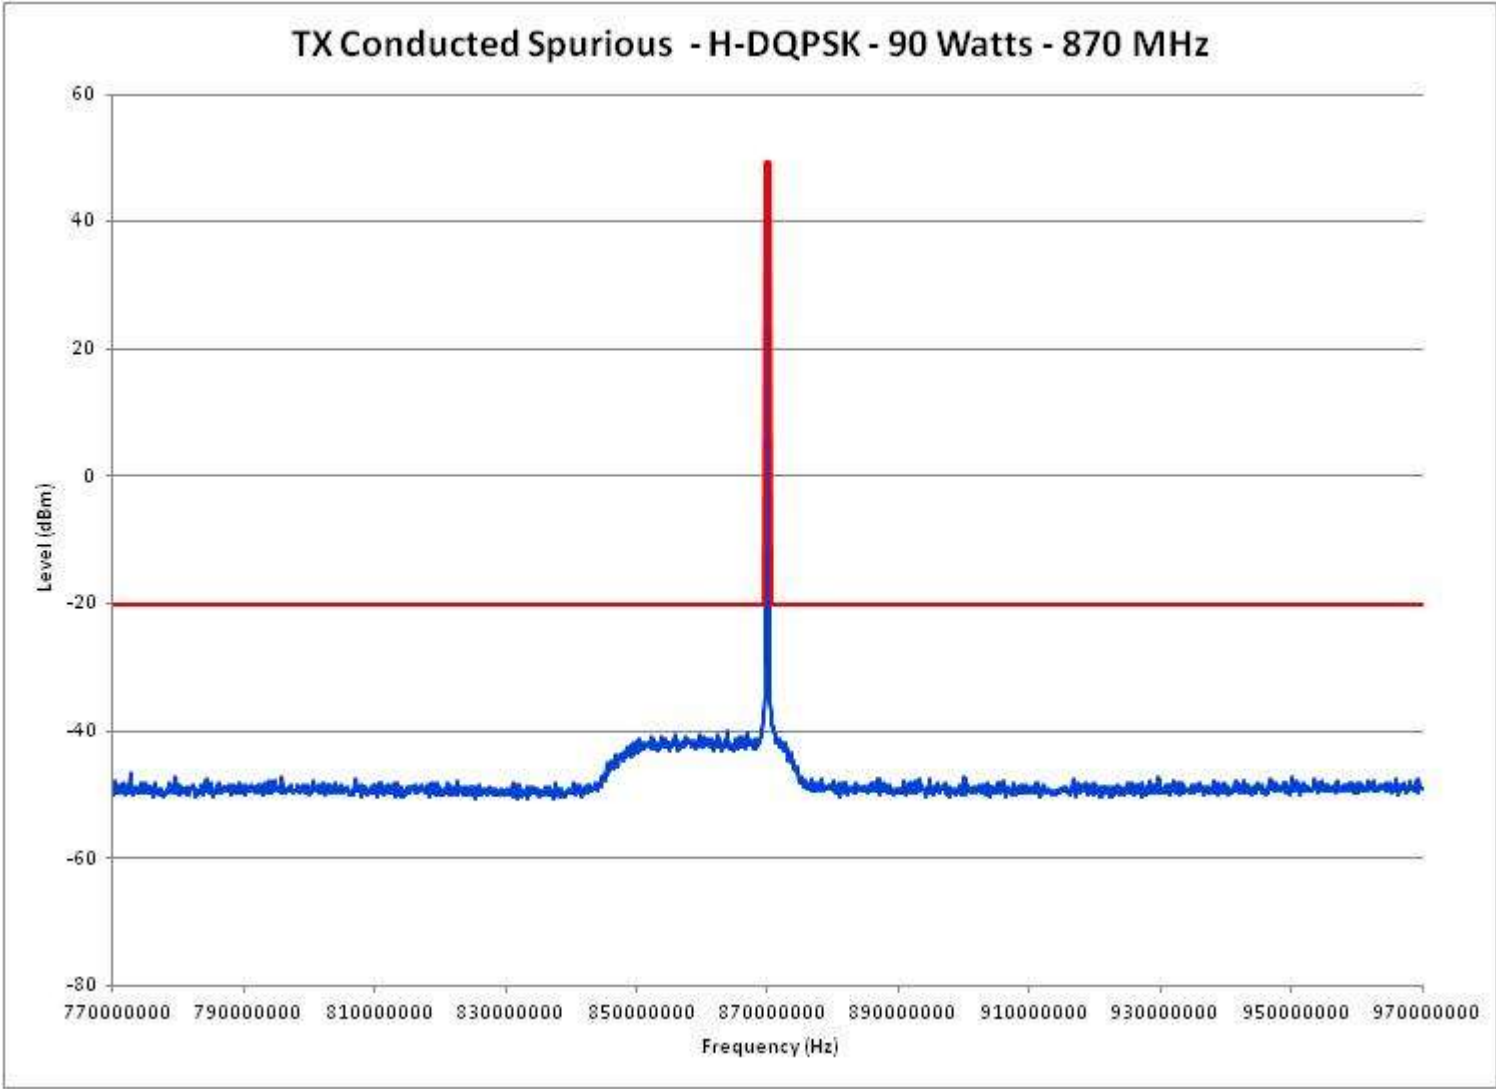

Report on Test Measurements

Radiated Spurious Emissions, Harmonics

Specification Requirement 47 CFR §90.210(d) and IC RSS-119 section 5.8.3 - Emission Limits – “D-Mask”:

Emission *Mask D*: For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz:
At least 50 plus $10 \log_{10}(P)$ dB or 70 dB, whichever is the lesser attenuation.

Modulation: Linear Simulcast Modulation (LSM), Compatible 4-Level Frequency Modulation (C4FM) or P25 Two Slot TDMA Digital Modulation (H-DQPSK) as indicated

Carrier Frequencies: Radiated Spurious Emissions was run with 9 carriers transmitting at 90W and 2W per carrier. Frequencies tested were 851 (C4FM), 852 (LSM), 859 (C4FM), 860 (H-DQPSK), 869 (C4FM), 870 (H-DQPSK). These frequencies represent the low end, center, and high end of the 851-870 MHz band, and are representative of the full operating band.

EXHIBIT	DESCRIPTION
E1-4.1	Radiated Spurious Harmonic Emissions, Power Output 90 Watts (Average), 851MHz, C4FM
E1-4.2	Radiated Spurious Harmonic Emissions, Power Output 2 Watts (Average), 851 MHz, C4FM
E1-4.3	Radiated Spurious Harmonic Emissions, Power Output 90 Watts (Average), 852 MHz, LSM
E1-4.4	Radiated Spurious Harmonic Emissions, Power Output 2 Watts (Average), 852 MHz, LSM
E1-4.5	Radiated Spurious Harmonic Emissions, Power Output 90 Watts (Average), 859MHz, C4FM
E1-4.6	Radiated Spurious Harmonic Emissions, Power Output 2 Watts (Average), 859 MHz, C4FM
E1-4.7	Radiated Spurious Harmonic Emissions, Power Output 90 Watts (Average), 860 MHz, H-DQPSK
E1-4.8	Radiated Spurious Harmonic Emissions, Power Output 2 Watts (Average), 860 MHz, H-DQPSK
E1-4.9	Radiated Spurious Harmonic Emissions, Power Output 90 Watts (Average), 869MHz, C4FM
E1-4.10	Radiated Spurious Harmonic Emissions, Power Output 2 Watts (Average), 869 MHz, C4FM
E1-4.11	Radiated Spurious Harmonic Emissions, Power Output 90 Watts (Average), 870 MHz, LSM
E1-4.12	Radiated Spurious Harmonic Emissions, Power Output 2 Watts (Average), 870 MHz, LSM

Report on Test Measurements

Radiated Spurious Harmonic Emissions — Power Output 90 Watts (Average), 851MHz, C4FM

Test Details	
Manufacturer	Motorola Solutions Inc.
EUT	UHF Radio
Model No.	D-Series Multicarrier Radio Site
Serial No.	800VHPEMC
Mode	Tx
Frequency Tested	851MHz
Notes	90W Power
Date Tested	February 13, 2025

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm)	Attenuation Below Output Power (dB)	Minimum Attenuation (dB)
1702.00	H	55.49		-50.60	4.28	2.28	-48.60	98.14	69.54
1702.00	V	55.05		-49.65	4.28	2.28	-47.65	97.20	69.54
2553.00	H	55.05		-46.25	3.08	2.85	-46.02	95.56	69.54
2553.00	V	52.61		-48.55	3.08	2.85	-48.31	97.86	69.54
3404.00	H	51.22	*	-49.01	5.66	3.31	-46.67	96.21	69.54
3404.00	V	50.56	*	-49.95	5.66	3.31	-47.60	97.15	69.54
4255.00	H	49.40	*	-49.53	6.99	3.67	-46.22	95.76	69.54
4255.00	V	48.76	*	-50.12	6.99	3.67	-46.81	96.35	69.54
5106.00	H	49.63	*	-47.82	7.80	3.98	-44.01	93.55	69.54
5106.00	V	48.79	*	-48.49	7.80	3.98	-44.68	94.22	69.54
5957.00	H	49.80	*	-47.41	8.23	4.33	-43.51	93.06	69.54
5957.00	V	49.30	*	-47.76	8.23	4.33	-43.86	93.41	69.54
6808.00	H	48.61	*	-47.62	8.82	4.72	-43.51	93.05	69.54
6808.00	V	48.31	*	-48.39	8.82	4.72	-44.29	93.83	69.54
7659.00	H	49.52	*	-47.30	10.06	5.07	-42.32	91.86	69.54
7659.00	V	47.95	*	-49.32	10.06	5.07	-44.33	93.87	69.54
8510.00	H	50.10	*	-46.34	10.93	5.20	-40.61	90.15	69.54
8510.00	V	48.34	*	-48.37	10.93	5.20	-42.64	92.18	69.54

Report on Test Measurements

Radiated Spurious Harmonic Emissions — Power Output 2 Watts (Average), 851MHz, C4FM

Test Details	
Manufacturer	Motorola Solutions Inc.
EUT	UHF Radio
Model No.	D-Series Multicarrier Radio Site
Serial No.	800VHPEMC
Mode	Tx
Frequency Tested	851MHz
Notes	2W Power
Date Tested	February 13, 2025

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm)	Attenuation Below Output Power (dB)	Minimum Attenuation (dB)
1702.00	H	53.07	*	-53.02	4.28	2.28	-51.02	84.03	53.01
1702.00	V	53.11	*	-51.59	4.28	2.28	-49.59	82.60	53.01
2553.00	H	50.62	*	-50.68	3.08	2.85	-50.45	83.46	53.01
2553.00	V	50.28	*	-50.88	3.08	2.85	-50.64	83.65	53.01
3404.00	H	51.19	*	-49.04	5.66	3.31	-46.70	79.71	53.01
3404.00	V	50.54	*	-49.97	5.66	3.31	-47.62	80.63	53.01
4255.00	H	48.59	*	-50.34	6.99	3.67	-47.03	80.04	53.01
4255.00	V	49.57	*	-49.31	6.99	3.67	-46.00	79.01	53.01
5106.00	H	48.74	*	-48.71	7.80	3.98	-44.90	77.91	53.01
5106.00	V	49.48	*	-47.80	7.80	3.98	-43.99	77.00	53.01
5957.00	H	49.04	*	-48.17	8.23	4.33	-44.27	77.28	53.01
5957.00	V	48.35	*	-48.71	8.23	4.33	-44.81	77.82	53.01
6808.00	H	49.39	*	-46.84	8.82	4.72	-42.73	75.74	53.01
6808.00	V	48.46	*	-48.24	8.82	4.72	-44.14	77.15	53.01
7659.00	H	49.15	*	-47.67	10.06	5.07	-42.69	75.70	53.01
7659.00	V	49.38	*	-47.89	10.06	5.07	-42.90	75.91	53.01
8510.00	H	48.74	*	-47.70	10.93	5.20	-41.97	74.98	53.01
8510.00	V	48.98	*	-47.73	10.93	5.20	-42.00	75.01	53.01

Report on Test Measurements

Radiated Spurious Harmonic Emissions — Power Output 90Watts (Average), 852MHz, LSM

Test Details	
Manufacturer	Motorola Solutions Inc.
EUT	UHF Radio
Model No.	D-Series Multicarrier Radio Site
Serial No.	800VHPEMC
Mode	Tx
Frequency Tested	852MHz
Notes	90W Power
Date Tested	February 13, 2025

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm)	Attenuation Below Output Power (dB)	Minimum Attenuation (dB)
1704.00	H	55.62		-50.43	4.27	2.28	-48.45	97.99	69.54
1704.00	V	55.00		-49.65	4.27	2.28	-47.66	97.21	69.54
2556.00	H	51.34		-49.96	3.09	2.85	-49.72	99.26	69.54
2556.00	V	52.09		-49.06	3.09	2.85	-48.82	98.37	69.54
3408.00	H	50.69	*	-49.54	5.66	3.32	-47.19	96.74	69.54
3408.00	V	50.21	*	-50.27	5.66	3.32	-47.92	97.47	69.54
4260.00	H	49.17	*	-49.75	7.00	3.68	-46.43	95.98	69.54
4260.00	V	49.16	*	-49.72	7.00	3.68	-46.40	95.94	69.54
5112.00	H	49.08	*	-48.37	7.80	3.99	-44.56	94.10	69.54
5112.00	V	48.95	*	-48.33	7.80	3.99	-44.52	94.06	69.54
5964.00	H	49.36	*	-47.85	8.23	4.33	-43.95	93.49	69.54
5964.00	V	49.00	*	-48.05	8.23	4.33	-44.15	93.70	69.54
6816.00	H	49.24	*	-47.01	8.84	4.72	-42.90	92.44	69.54
6816.00	V	48.55	*	-48.18	8.84	4.72	-44.06	93.60	69.54
7668.00	H	48.84	*	-48.00	10.07	5.07	-43.01	92.55	69.54
7668.00	V	48.64	*	-48.63	10.07	5.07	-43.64	93.18	69.54
8520.00	H	49.50	*	-46.93	10.93	5.20	-41.20	90.74	69.54
8520.00	V	48.67	*	-48.00	10.93	5.20	-42.27	91.81	69.54

Report on Test Measurements

Radiated Spurious Harmonic Emissions — Power Output 2 Watts (Average), 852MHz, LSM

Test Details	
Manufacturer	Motorola Solutions Inc.
EUT	UHF Radio
Model No.	D-Series Multicarrier Radio Site
Serial No.	800VHPEMC
Mode	Tx
Frequency Tested	852MHz
Notes	2W Power
Date Tested	February 13, 2025

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm)	Attenuation Below Output Power (dB)	Minimum Attenuation (dB)
1704.00	H	52.62	*	-53.43	4.27	2.28	-51.45	84.46	53.01
1704.00	V	53.18	*	-51.47	4.27	2.28	-49.48	82.49	53.01
2556.00	H	51.59	*	-49.71	3.09	2.85	-49.47	82.48	53.01
2556.00	V	51.21	*	-49.94	3.09	2.85	-49.70	82.72	53.01
3408.00	H	50.56	*	-49.67	5.66	3.32	-47.32	80.33	53.01
3408.00	V	49.92	*	-50.56	5.66	3.32	-48.21	81.22	53.01
4260.00	H	49.44	*	-49.48	7.00	3.68	-46.16	79.17	53.01
4260.00	V	50.12	*	-48.76	7.00	3.68	-45.44	78.45	53.01
5112.00	H	49.17	*	-48.28	7.80	3.99	-44.47	77.48	53.01
5112.00	V	48.57	*	-48.71	7.80	3.99	-44.90	77.91	53.01
5964.00	H	48.83	*	-48.38	8.23	4.33	-44.48	77.49	53.01
5964.00	V	49.21	*	-47.84	8.23	4.33	-43.94	76.96	53.01
6816.00	H	49.40	*	-46.85	8.84	4.72	-42.74	75.75	53.01
6816.00	V	49.19	*	-47.54	8.84	4.72	-43.42	76.43	53.01
7668.00	H	49.18	*	-47.66	10.07	5.07	-42.67	75.68	53.01
7668.00	V	48.67	*	-48.60	10.07	5.07	-43.61	76.62	53.01
8520.00	H	49.11	*	-47.32	10.93	5.20	-41.59	74.60	53.01
8520.00	V	49.73	*	-46.94	10.93	5.20	-41.21	74.22	53.01

Report on Test Measurements

Radiated Spurious Harmonic Emissions — Power Output 90 Watts (Average), 859MHz, C4FM

Test Details	
Manufacturer	Motorola Solutions Inc.
EUT	UHF Radio
Model No.	D-Series Multicarrier Radio Site
Serial No.	800VHPEMC
Mode	Tx
Frequency Tested	859MHz
Notes	90W Power
Date Tested	February 13, 2025

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm)	Attenuation Below Output Power (dB)	Minimum Attenuation (dB)
1718.00	H	57.16		-48.66	4.21	2.29	-46.74	96.28	69.54
1718.00	V	53.61		-50.70	4.21	2.29	-48.78	98.32	69.54
2577.00	H	60.88		-40.36	3.12	2.86	-40.10	89.64	69.54
2577.00	V	59.40		-41.72	3.12	2.86	-41.46	91.00	69.54
3436.00	H	50.44	*	-49.78	5.70	3.33	-47.41	96.95	69.54
3436.00	V	49.76	*	-50.54	5.70	3.33	-48.17	97.71	69.54
4295.00	H	48.94	*	-49.92	7.04	3.69	-46.57	96.11	69.54
4295.00	V	48.88	*	-49.95	7.04	3.69	-46.61	96.15	69.54
5154.00	H	48.21	*	-49.20	7.79	4.00	-45.42	94.96	69.54
5154.00	V	49.10	*	-48.20	7.79	4.00	-44.42	93.96	69.54
6013.00	H	49.15	*	-48.01	8.28	4.35	-44.09	93.63	69.54
6013.00	V	49.46	*	-47.56	8.28	4.35	-43.64	93.19	69.54
6872.00	H	48.81	*	-47.65	8.92	4.75	-43.47	93.01	69.54
6872.00	V	48.60	*	-48.31	8.92	4.75	-44.13	93.67	69.54
7731.00	H	49.06	*	-47.91	10.13	5.10	-42.87	92.42	69.54
7731.00	V	48.89	*	-48.41	10.13	5.10	-43.37	92.92	69.54
8590.00	H	49.70	*	-46.69	10.97	5.20	-40.92	90.46	69.54
8590.00	V	49.45	*	-46.99	10.97	5.20	-41.22	90.76	69.54

Report on Test Measurements

Radiated Spurious Harmonic Emissions — Power Output 2 Watts (Average), 859MHz, C4FM

Test Details	
Manufacturer	Motorola Solutions Inc.
EUT	UHF Radio
Model No.	D-Series Multicarrier Radio Site
Serial No.	800VHPEMC
Mode	Tx
Frequency Tested	859MHz
Notes	2W Power
Date Tested	February 13, 2025

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm)	Attenuation Below Output Power (dB)	Minimum Attenuation (dB)
1718.00	H	52.83	*	-52.99	4.21	2.29	-51.07	84.08	53.01
1718.00	V	52.91	*	-51.40	4.21	2.29	-49.48	82.49	53.01
2577.00	H	51.20	*	-50.04	3.12	2.86	-49.78	82.79	53.01
2577.00	V	51.60	*	-49.52	3.12	2.86	-49.26	82.27	53.01
3436.00	H	50.64	*	-49.58	5.70	3.33	-47.21	80.22	53.01
3436.00	V	50.29	*	-50.01	5.70	3.33	-47.64	80.65	53.01
4295.00	H	49.07	*	-49.79	7.04	3.69	-46.44	79.45	53.01
4295.00	V	47.88	*	-50.95	7.04	3.69	-47.61	80.62	53.01
5154.00	H	49.28	*	-48.13	7.79	4.00	-44.35	77.36	53.01
5154.00	V	49.23	*	-48.07	7.79	4.00	-44.29	77.30	53.01
6013.00	H	49.35	*	-47.81	8.28	4.35	-43.89	76.90	53.01
6013.00	V	49.21	*	-47.81	8.28	4.35	-43.89	76.90	53.01
6872.00	H	48.79	*	-47.67	8.92	4.75	-43.49	76.50	53.01
6872.00	V	49.32	*	-47.59	8.92	4.75	-43.41	76.42	53.01
7731.00	H	48.96	*	-48.01	10.13	5.10	-42.97	75.99	53.01
7731.00	V	48.91	*	-48.39	10.13	5.10	-43.35	76.37	53.01
8590.00	H	48.71	*	-47.68	10.97	5.20	-41.91	74.92	53.01
8590.00	V	49.79	*	-46.65	10.97	5.20	-40.88	73.89	53.01

Report on Test Measurements

Radiated Spurious Harmonic Emissions — Power Output 90 Watts (Average), 860MHz, H-DQPSK

Test Details	
Manufacturer	Motorola Solutions Inc.
EUT	UHF Radio
Model No.	D-Series Multicarrier Radio Site
Serial No.	800VHPEMC
Mode	Tx
Frequency Tested	860MHz
Notes	90W Power
Date Tested	February 13, 2025

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm)	Attenuation Below Output Power (dB)	Minimum Attenuation (dB)
1720.00	H	53.29		-52.49	4.20	2.29	-50.58	100.12	69.54
1720.00	V	53.35		-50.91	4.20	2.29	-49.00	98.54	69.54
2580.00	H	64.47		-36.76	3.13	2.86	-36.50	86.04	69.54
2580.00	V	62.56		-38.55	3.13	2.86	-38.29	87.83	69.54
3440.00	H	50.47	*	-49.75	5.70	3.33	-47.37	96.92	69.54
3440.00	V	49.99	*	-50.28	5.70	3.33	-47.91	97.45	69.54
4300.00	H	49.11	*	-49.74	7.04	3.69	-46.39	95.93	69.54
4300.00	V	49.52	*	-49.31	7.04	3.69	-45.96	95.50	69.54
5160.00	H	49.73	*	-47.68	7.78	4.01	-43.90	93.44	69.54
5160.00	V	48.60	*	-48.70	7.78	4.01	-44.92	94.47	69.54
6020.00	H	48.73	*	-48.40	8.28	4.36	-44.47	94.01	69.54
6020.00	V	48.26	*	-48.76	8.28	4.36	-44.84	94.38	69.54
6880.00	H	48.69	*	-47.79	8.94	4.75	-43.61	93.15	69.54
6880.00	V	48.66	*	-48.27	8.94	4.75	-44.08	93.63	69.54
7740.00	H	49.11	*	-47.87	10.14	5.10	-42.84	92.38	69.54
7740.00	V	48.36	*	-48.94	10.14	5.10	-43.90	93.45	69.54
8600.00	H	48.60	*	-47.79	10.98	5.20	-42.01	91.55	69.54
8600.00	V	49.04	*	-47.37	10.98	5.20	-41.59	91.13	69.54

Report on Test Measurements

Radiated Spurious Harmonic Emissions — Power Output 2 Watts (Average), 860MHz, H-DQPSK

Test Details	
Manufacturer	Motorola Solutions Inc.
EUT	UHF Radio
Model No.	D-Series Multicarrier Radio Site
Serial No.	800VHPEMC
Mode	Tx
Frequency Tested	860MHz
Notes	2W Power
Date Tested	February 13, 2025

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm)	Attenuation Below Output Power (dB)	Minimum Attenuation (dB)
1720.00	H	53.26	*	-52.52	4.20	2.29	-50.61	83.62	53.01
1720.00	V	53.12	*	-51.14	4.20	2.29	-49.23	82.24	53.01
2580.00	H	51.08	*	-50.15	3.13	2.86	-49.89	82.90	53.01
2580.00	V	50.53	*	-50.58	3.13	2.86	-50.32	83.33	53.01
3440.00	H	49.27	*	-50.95	5.70	3.33	-48.57	81.58	53.01
3440.00	V	49.51	*	-50.76	5.70	3.33	-48.39	81.40	53.01
4300.00	H	48.77	*	-50.08	7.04	3.69	-46.73	79.74	53.01
4300.00	V	48.79	*	-50.04	7.04	3.69	-46.69	79.70	53.01
5160.00	H	48.66	*	-48.75	7.78	4.01	-44.97	77.98	53.01
5160.00	V	48.17	*	-49.13	7.78	4.01	-45.35	78.36	53.01
6020.00	H	49.40	*	-47.73	8.28	4.36	-43.80	76.81	53.01
6020.00	V	49.32	*	-47.70	8.28	4.36	-43.78	76.79	53.01
6880.00	H	49.37	*	-47.11	8.94	4.75	-42.93	75.94	53.01
6880.00	V	49.11	*	-47.82	8.94	4.75	-43.63	76.64	53.01
7740.00	H	48.27	*	-48.71	10.14	5.10	-43.68	76.69	53.01
7740.00	V	48.94	*	-48.36	10.14	5.10	-43.32	76.33	53.01
8600.00	H	49.31	*	-47.08	10.98	5.20	-41.30	74.31	53.01
8600.00	V	46.23	*	-50.18	10.98	5.20	-44.40	77.41	53.01

Report on Test Measurements

Radiated Spurious Harmonic Emissions — Power Output 90 Watts (Average), 869MHz, C4FM

Test Details	
Manufacturer	Motorola Solutions Inc.
EUT	UHF Radio
Model No.	D-Series Multicarrier Radio Site
Serial No.	800VHPEMC
Mode	Tx
Frequency Tested	869MHz
Notes	90W Power
Date Tested	February 13, 2025

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm)	Attenuation Below Output Power (dB)	Minimum Attenuation (dB)
1738.00	H	55.11		-50.37	4.13	2.30	-48.54	98.09	69.54
1738.00	V	52.67		-51.16	4.13	2.30	-49.33	98.87	69.54
2607.00	H	51.80		-49.37	3.19	2.88	-49.06	98.60	69.54
2607.00	V	51.61		-49.45	3.19	2.88	-49.14	98.68	69.54
3476.00	H	50.19	*	-50.01	5.75	3.35	-47.61	97.15	69.54
3476.00	V	50.66	*	-49.38	5.75	3.35	-46.97	96.52	69.54
4345.00	H	50.20	*	-48.57	7.04	3.71	-45.23	94.77	69.54
4345.00	V	50.16	*	-48.61	7.04	3.71	-45.28	94.82	69.54
5214.00	H	49.61	*	-47.75	7.78	4.03	-44.01	93.55	69.54
5214.00	V	48.58	*	-48.74	7.78	4.03	-45.00	94.54	69.54
6083.00	H	48.64	*	-48.18	8.34	4.39	-44.23	93.77	69.54
6083.00	V	48.99	*	-48.03	8.34	4.39	-44.08	93.62	69.54
6952.00	H	49.02	*	-47.72	9.05	4.78	-43.45	92.99	69.54
6952.00	V	48.62	*	-48.54	9.05	4.78	-44.27	93.81	69.54
7821.00	H	49.04	*	-47.96	10.20	5.13	-42.89	92.43	69.54
7821.00	V	49.39	*	-47.85	10.20	5.13	-42.78	92.32	69.54
8690.00	H	48.61	*	-47.73	10.99	5.20	-41.95	91.49	69.54
8690.00	V	47.60	*	-48.51	10.99	5.20	-42.72	92.26	69.54

Report on Test Measurements

Radiated Spurious Harmonic Emissions — Power Output 2 Watts (Average), 869MHz, C4FM

Test Details	
Manufacturer	Motorola Solutions Inc.
EUT	UHF Radio
Model No.	D-Series Multicarrier Radio Site
Serial No.	800VHPEMC
Mode	Tx
Frequency Tested	869MHz
Notes	2W Power
Date Tested	February 13, 2025

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm)	Attenuation Below Output Power (dB)	Minimum Attenuation (dB)
1738.00	H	52.72	*	-52.76	4.13	2.30	-50.93	83.94	53.01
1738.00	V	52.80	*	-51.03	4.13	2.30	-49.20	82.21	53.01
2607.00	H	51.11	*	-50.06	3.19	2.88	-49.75	82.76	53.01
2607.00	V	51.09	*	-49.97	3.19	2.88	-49.66	82.67	53.01
3476.00	H	51.10	*	-49.10	5.75	3.35	-46.70	79.71	53.01
3476.00	V	50.10	*	-49.94	5.75	3.35	-47.53	80.55	53.01
4345.00	H	49.00	*	-49.77	7.04	3.71	-46.43	79.44	53.01
4345.00	V	49.66	*	-49.11	7.04	3.71	-45.78	78.79	53.01
5214.00	H	49.28	*	-48.08	7.78	4.03	-44.34	77.35	53.01
5214.00	V	48.68	*	-48.64	7.78	4.03	-44.90	77.91	53.01
6083.00	H	48.22	*	-48.60	8.34	4.39	-44.65	77.66	53.01
6083.00	V	48.28	*	-48.74	8.34	4.39	-44.79	77.80	53.01
6952.00	H	49.15	*	-47.59	9.05	4.78	-43.32	76.33	53.01
6952.00	V	48.38	*	-48.78	9.05	4.78	-44.51	77.52	53.01
7821.00	H	49.10	*	-47.90	10.20	5.13	-42.83	75.84	53.01
7821.00	V	48.76	*	-48.48	10.20	5.13	-43.41	76.42	53.01
8690.00	H	49.62	*	-46.72	10.99	5.20	-40.94	73.95	53.01
8690.00	V	49.27	*	-46.84	10.99	5.20	-41.05	74.06	53.01

Report on Test Measurements

Radiated Spurious Harmonic Emissions — Power Output 90 Watts (Average), 870MHz, LSM

Test Details	
Manufacturer	Motorola Solutions Inc.
EUT	UHF Radio
Model No.	D-Series Multicarrier Radio Site
Serial No.	800VHPEMC
Mode	Tx
Frequency Tested	870MHz
Notes	90W Power
Date Tested	February 13, 2025

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm)	Attenuation Below Output Power (dB)	Minimum Attenuation (dB)
1740.00	H	60.54		-44.91	4.12	2.30	-43.09	92.63	69.54
1740.00	V	56.77		-47.01	4.12	2.30	-45.19	94.73	69.54
2610.00	H	53.15		-48.01	3.20	2.88	-47.69	97.23	69.54
2610.00	V	50.89		-50.16	3.20	2.88	-49.84	99.38	69.54
3480.00	H	51.60	*	-48.60	5.75	3.35	-46.19	95.74	69.54
3480.00	V	51.10	*	-48.91	5.75	3.35	-46.51	96.05	69.54
4350.00	H	49.78	*	-48.98	7.05	3.71	-45.64	95.19	69.54
4350.00	V	49.61	*	-49.16	7.05	3.71	-45.82	95.37	69.54
5220.00	H	48.97	*	-48.39	7.78	4.03	-44.65	94.19	69.54
5220.00	V	48.92	*	-48.40	7.78	4.03	-44.66	94.20	69.54
6090.00	H	48.58	*	-48.21	8.35	4.39	-44.25	93.79	69.54
6090.00	V	48.68	*	-48.34	8.35	4.39	-44.39	93.93	69.54
6960.00	H	48.63	*	-48.14	9.07	4.78	-43.86	93.40	69.54
6960.00	V	48.92	*	-48.27	9.07	4.78	-43.98	93.52	69.54
7830.00	H	48.02	*	-48.98	10.21	5.14	-43.90	93.45	69.54
7830.00	V	48.81	*	-48.43	10.21	5.14	-43.35	92.89	69.54
8700.00	H	48.51	*	-47.83	10.99	5.20	-42.04	91.58	69.54
8700.00	V	48.59	*	-47.49	10.99	5.20	-41.70	91.24	69.54

Report on Test Measurements

Radiated Spurious Harmonic Emissions — Power Output 2 Watts (Average), 870MHz, LSM

Test Details	
Manufacturer	Motorola Solutions Inc.
EUT	UHF Radio
Model No.	D-Series Multicarrier Radio Site
Serial No.	800VHPEMC
Mode	Tx
Frequency Tested	870MHz
Notes	2W Power
Date Tested	February 13, 2025

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	Calculated Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	ERP (dBm)	Attenuation Below Output Power (dB)	Minimum Attenuation (dB)
1740.00	H	53.40	*	-52.05	4.12	2.30	-50.23	83.24	53.01
1740.00	V	53.36	*	-50.42	4.12	2.30	-48.60	81.61	53.01
2610.00	H	51.14	*	-50.02	3.20	2.88	-49.70	82.71	53.01
2610.00	V	50.40	*	-50.65	3.20	2.88	-50.33	83.34	53.01
3480.00	H	49.99	*	-50.21	5.75	3.35	-47.80	80.81	53.01
3480.00	V	49.84	*	-50.17	5.75	3.35	-47.77	80.78	53.01
4350.00	H	49.39	*	-49.37	7.05	3.71	-46.03	79.04	53.01
4350.00	V	50.31	*	-48.46	7.05	3.71	-45.12	78.13	53.01
5220.00	H	49.18	*	-48.18	7.78	4.03	-44.44	77.45	53.01
5220.00	V	47.65	*	-49.67	7.78	4.03	-45.93	78.94	53.01
6090.00	H	49.60	*	-47.19	8.35	4.39	-43.23	76.24	53.01
6090.00	V	49.06	*	-47.96	8.35	4.39	-44.01	77.02	53.01
6960.00	H	48.95	*	-47.82	9.07	4.78	-43.54	76.55	53.01
6960.00	V	48.88	*	-48.31	9.07	4.78	-44.02	77.03	53.01
7830.00	H	49.66	*	-47.34	10.21	5.14	-42.26	75.27	53.01
7830.00	V	48.86	*	-48.38	10.21	5.14	-43.30	76.31	53.01
8700.00	H	48.45	*	-47.89	10.99	5.20	-42.10	75.11	53.01
8700.00	V	48.60	*	-47.48	10.99	5.20	-41.69	74.70	53.01

Report on Test Measurements

Oscillator Frequency Stability

Manufacturer data for the system site frequency standard was used in generation of the following frequency stability exhibits.

Specification Requirement: Reference RSS-119 Section 5.3

Fixed and Base stations operating at 851-866 MHz and 866-869 MHz must have a frequency stability of better than +/- 1.0 PPM for 12.5 kHz channel spacing and +/- 1.5 PPM for 25 kHz channel spacing.

Specification Requirement: Reference Part 90.213

Fixed and Base stations operating at 851-854 must have a frequency stability of better than +/- 1.0 PPM.

Fixed and Base stations operating at 854-869 must have a frequency stability of better than +/- 1.5 PPM.


Only the more stringent specification limit is shown on the frequency stability exhibits.

Performance was measured at carrier frequencies at the low end, middle, and high end of the operating band.

EXHIBIT	DESCRIPTION
E1-5.1	Frequency Stability Vs Temperature
E1-5.2	Frequency Stability Vs Voltage


Report on Test Measurements

Frequency Stability Vs Temperature

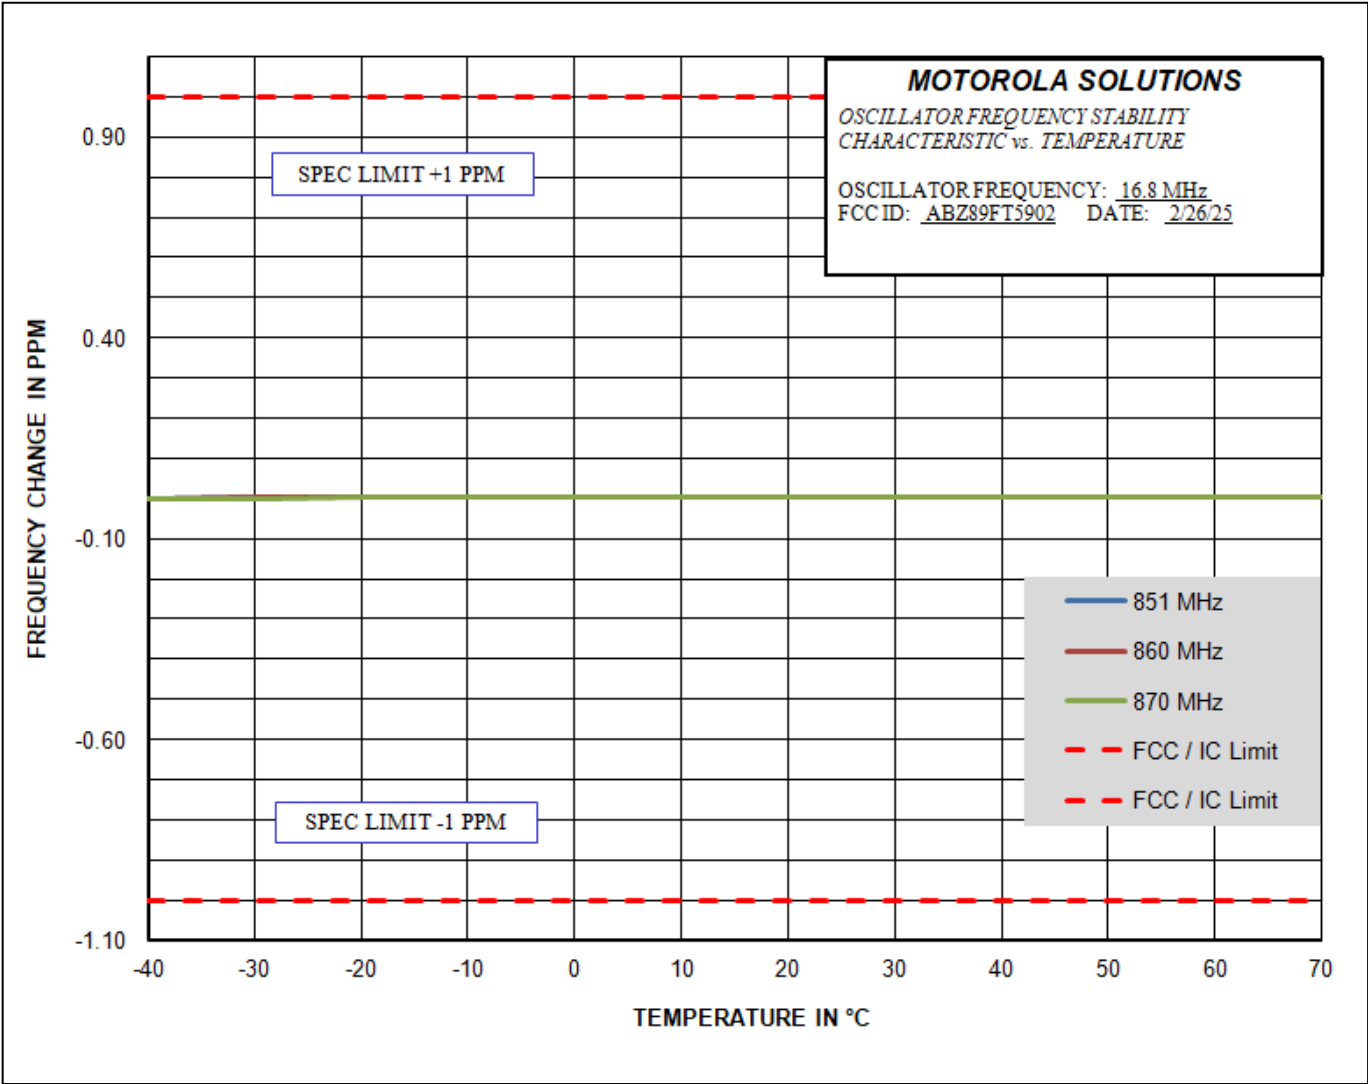

Report on Test Measurements

Frequency Stability Vs Voltage

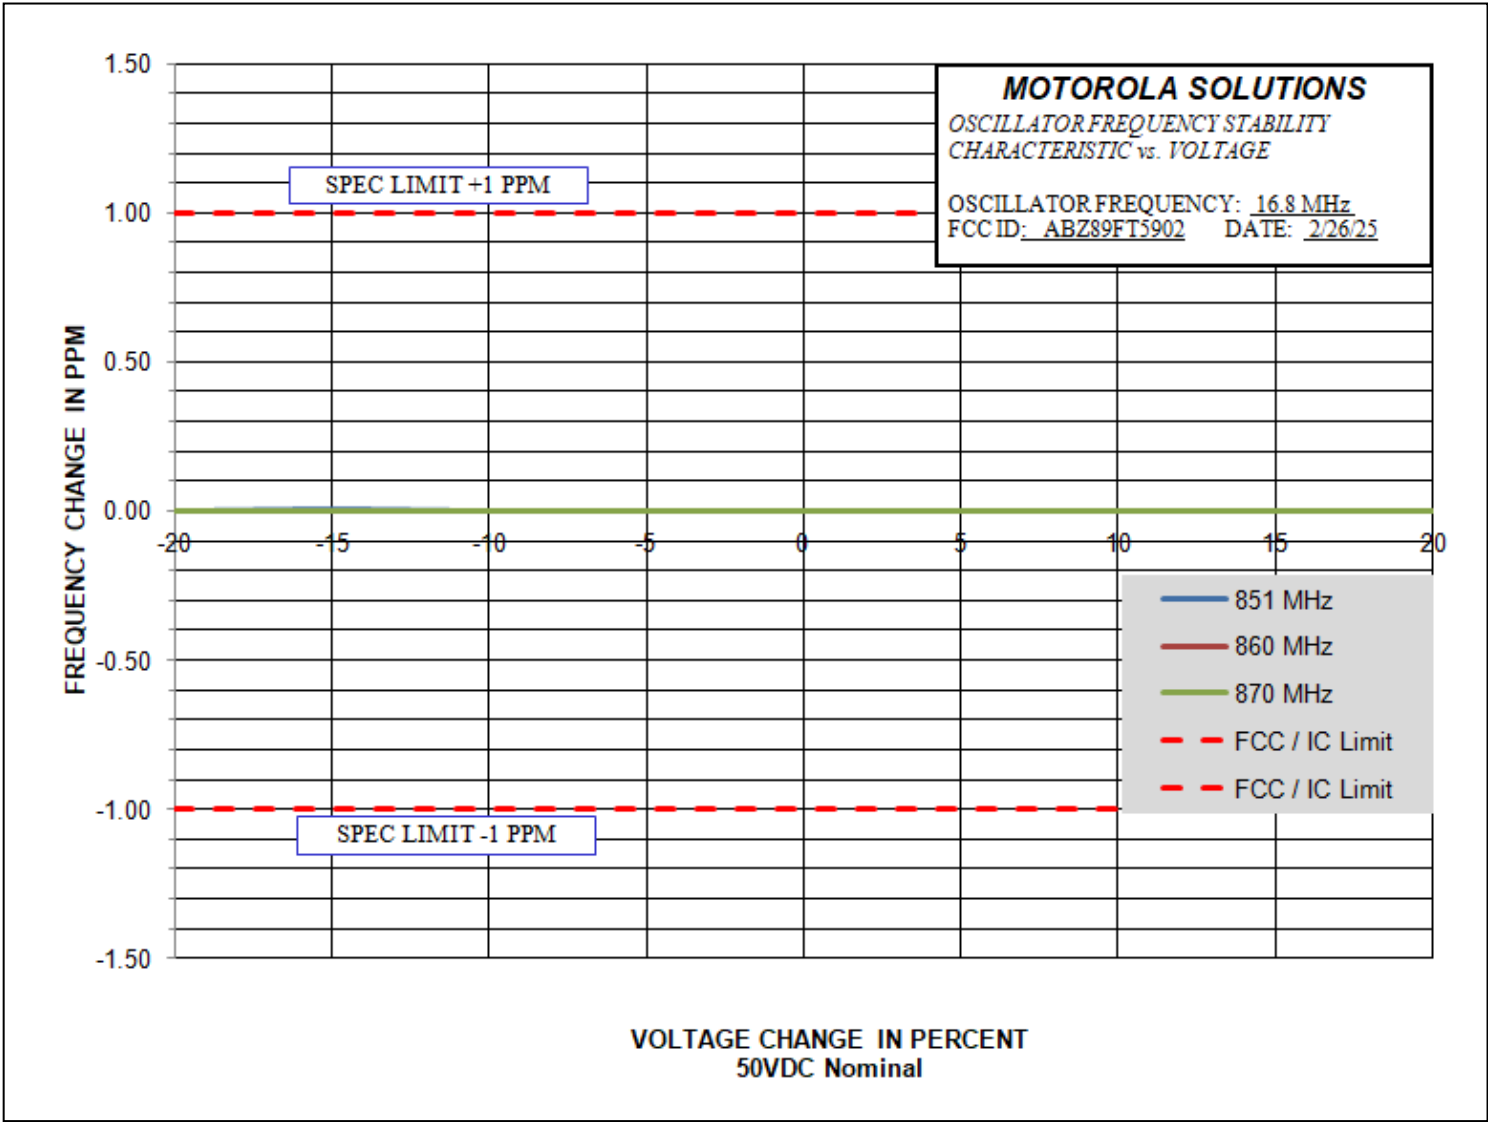

Report on Test Measurements

Test Setup Details

Test Locations:

(for all tests except radiated emissions)
Motorola Solutions, Inc., Schaumburg Lab
2000 Progress Parkway, Schaumburg, IL 60196
FCC Registration Number 786245
IC CAB Identifier US0220
Test Engineer Kelsey Johnson

(for radiated emissions)
Elite Electronic Engineering Inc.
1516 Centre Circle Dr., Downers Grove, IL 60515
FCC Registration Number 269750
IC Registration Number 2987A
IC CAB Identifier US0107
Test Engineer Javier Cardenas

Report on Test Measurements

Test Equipment List (Motorola)

Manufacturer	Model	Description	Serial Number	Last Cal	Interval
Keysight	N9030A	PXA Signal Analyzer, 3 Hz to 50 GHz	MY53310751	08-21-2024	08-21-2025
Keysight	U8903A	Audio Analyzer, 10 Hz to 100 kHz	MY50500002	10-14-2024	10-14-2025
Rohde & Schwarz	NRP-Z11	Power Sensor	101590	08-21-2024	8-21-2026
Rohde & Schwarz	SMU200A	Signal Generator / Power Meter	101350	08-20-2024	08-20-2027
Keysight	34401A	Digital Multimeter	3146A59752	08-29-2022	08-29-2026
Keysight	8482a	Power Sensor	2652A15873	08-22-2024	08-22-2025
Keysight	E5071C	ENA Series Network analyzer	MY46316134	08-20-2024	08-20-2025
Thermotron	WS-120- CHM-15-15	Temperature Chamber	52516	11-28-2023	11-28-2025
Keysight	E4440A	PSA Spectrum Analyzer 3 Hz - 26.5 GHz	MY46185813	08-22-2024	08-22-2026
Keysight	8753es	S-parameter Network Analyzer	US39175306	08-21-2024	08-21-2025

Report on Test Measurements

Test Equipment List (Elite)

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW3	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-35-120-5RD-10-12	PL2924	1GHZ-20GHZ	3/20/2024	3/20/2025
CDZ4	LAB WORKSTATION	ELITE	LWS-10		WINDOWS 10	CNR	
NTA3	BILOG ANTENNA	TESEQ	6112D	32853	25-2000GHZ	10/03/2024	10/03/2026
NWQ2	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS LINDGREN	3117	66659	1GHZ-18GHZ	4/26/2024	4/26/2026
R21F	3M ANECHOIC CHAMBER NSA	EMC TEST SYSTEMS	3M ANECHOIC		30MHZ-18GHZ	3/1/2024	3/1/2025
RBG3	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101592	2HZ-44GHZ	3/7/2024	3/7/2025
SCB1	PROGRAMABLE POWER SUPPLY	CALIFORNIA INSTRUMENTS	CSW5550-208/156-321-ELF	1513A01938		NOTE 1	
SCB2	PROGRAMABLE POWER SUPPLY	CALIFORNIA INSTRUMENTS	CSW5550-208/156-321-ELF	1513A02092		NOTE 1	
SHC2	Power Supplies	HENGFU	HF60W-SL-24	A11372702	24V	NOTE 1	
VBV2	COMMERCIAL RADIATED EMISSIONS.EXE	ELITE		---	---	N/A	
WKA1	SOFTWARE, UNIVERSAL RCV EMI	ELITE	UNIV_RCV_EMI	1	---	I/O	

N/A: Not Applicable


I/O: Initial Only

CNR: Calibration Not Required

NOTE 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

Report on Test Measurements

Test Setup (Elite)

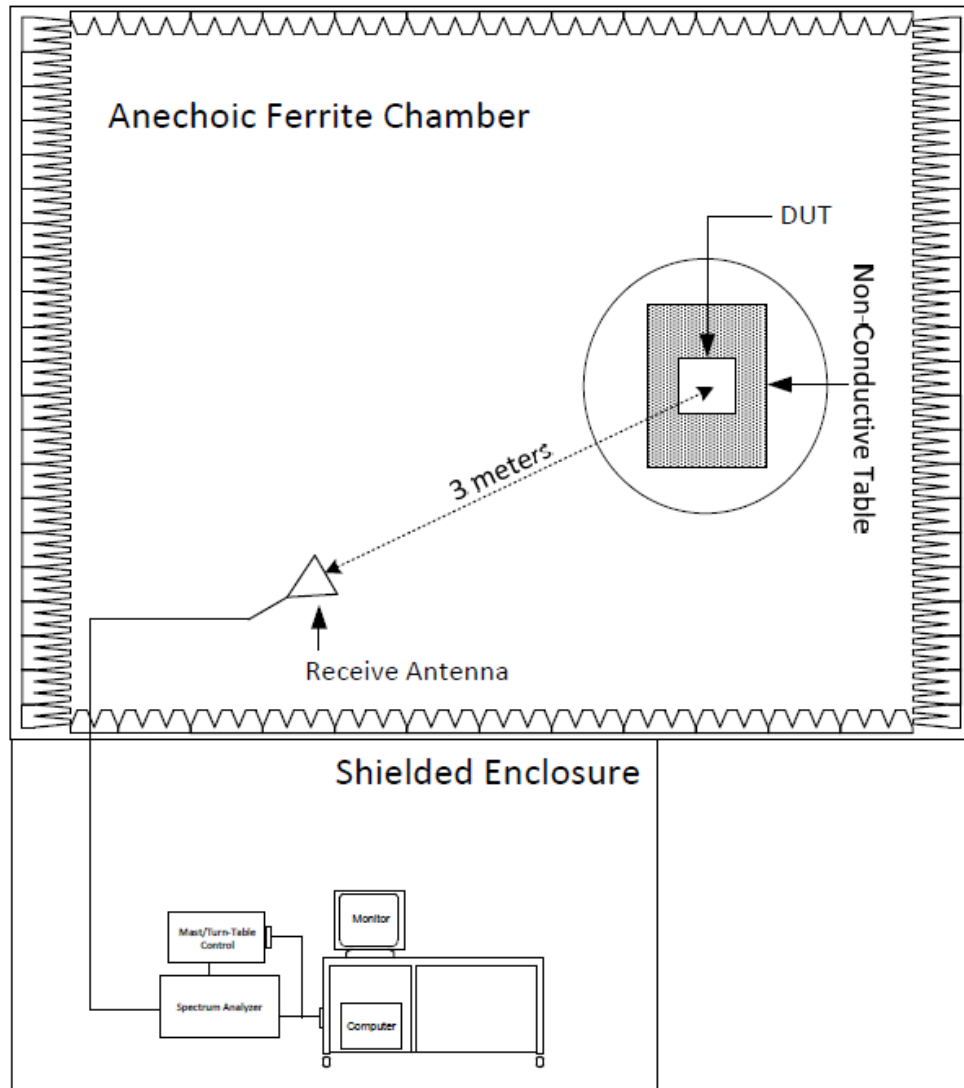

Radiated Measurements Test Setup

Report on Test Measurements

Test Setup (Elite)



Test Setup for Case Spurious Radiated Emissions, 30MHz – 1GHz – Antenna Polarization Horizontal



Test Setup for Case Spurious Radiated Emissions, 30MHz – 1GHz – Antenna Polarization Vertical

Report on Test Measurements

Test Setup (Elite)



Test Setup for Case Spurious Radiated Emissions, Above 1GHz – Antenna
Polarization Horizontal



Test Setup for Case Spurious Radiated Emissions, Above 1GHz – Antenna
Polarization Vertical

Report on Test Measurements

Statement of Certification

The technical data supplied with this application, having been taken under my supervision is hereby duly certified. The following is a statement of my qualifications:

College Degree: BSECE, Michigan State University, East Lansing, MI, USA

3 years of Design and Development experience in the field of two-way radio communication.

NAME: Kelsey Johnson

SIGNATURE: 

DATE: February 25, 2025

POSITION: Senior RF Engineer

I hereby certify that the above application was prepared under my direction and that to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct:

NAME: Matt Nawrocki

SIGNATURE: 

DATE: February 25, 2025

POSITION: Engineering Manager