

FCC - TEST REPORT

Report Number : **68.950.23.0881.01** Date of Issue: **2023-11-06**

Model : **NPG-001, HP52A, HP52AX, NPG01ASTB**

Product : **Playground**

Applicant : **Shenzhen Skyworth Digital Technology Co., LTD.**

Address : **14/F, Unit A, Skyworth Building, Gaoxin Ave.1.S.,**
Nanshan District, 518063 Shenzhen,
PEOPLE'S REPUBLIC OF CHINA

Manufacturer : **Shenzhen Skyworth Digital Technology Co., LTD.**

Address : **14/F, Unit A, Skyworth Building, Gaoxin Ave.1.S.,**
Nanshan District, 518063 Shenzhen,
PEOPLE'S REPUBLIC OF CHINA

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : **97**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Test Setups	8
8	Systems Test Configuration	10
9	Technical Requirement	11
9.1	Conducted Emission	11
9.2	Conducted Peak Output Power	14
9.3	6dB Bandwidth	16
9.4	Power Spectral Density	27
9.5	Spurious RF Conducted Emissions	37
9.6	Band Edge Testing	64
9.7	Spurious Radiated Emissions for Transmitter	71
10	Test Equipment List	96
11	System Measurement Uncertainty	97

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park, Guankou Erlu,
Nantou, Nanshan District, Shenzhen, Guangdong, China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 514049

FCC Designation Number: CN5009

IC Registration No.: 10320A

3 Description of the Equipment Under Test

Product:	Playground
Model no.:	NPG-001, HP52A, HP52AX, NPG01ASTB
Model difference:	All models have the same technical construction including circuit diagram, PCB layout, components and component layout. Only the outlook/color are different. So the main test model is NPG-001.
FCC ID:	WNA-NPG-001
Options and accessories:	Adapter, HDMI Cable, Remote
Rating:	5VDC, 3A supplied by external adapter
Adapter information:	Adapter Model: AD-0150500300US-1 Input: 100-240VAC 50/60Hz, 0.5A, Output: 5VDC, 3.0A 15.0W
Remote information:	Type name: Bluetooth voice remote control Model: NPG-RCU-001 FCC ID: 2A7GQ-NPG-RCU-001
RF Transmission Frequency:	2412MHz-2462MHz for 802.11b/g/n20 (Wi-Fi) 2422MHz-2452MHz for 802.11n40 (Wi-Fi)
No. of Operated Channel:	11 for 802.11b/g/n20/n40 (Wi-Fi) 7 for 802.11n40 (Wi-Fi)
Modulation:	DSSS, OFDM
Antenna Type:	PCBA antenna
Antenna 0	2.3dBi
Antenna 1	2.3dBi
Description of the EUT:	The EUT is a playground with Bluetooth Low Energy/Bluetooth BDR+EDR, 2.4G Wi-Fi & 5G Wi-Fi functions. Only 2.4G Wi-Fi included in this report.

NOTE 1: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2021 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10 (2020).

5 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C						
Test Condition		Test Site	Test Result			Test Environment
			Pass	Fail	N/A	
§15.207	Conducted emission AC power port	Site 1	☒	☐	☐	--
§15.247 (b) (1)	Conducted peak output power	Site 1	☒	☐	☐	T: 23.7°C H: 50.3%
§15.247(a)(1)	20dB bandwidth	---	☐	☐	☒	--
§15.247(a)(1)	Carrier frequency separation	---	☐	☐	☒	--
§15.247(a)(1)(iii)	Number of hopping frequencies	---	☐	☐	☒	--
§15.247(a)(1)(iii)	Dwell Time	---	☐	☐	☒	--
§15.247(a)(2)	6dB bandwidth	Site 1	☒	☐	☐	T: 23.7°C H: 50.3%
§15.247(e)	Power spectral density	Site 1	☒	☐	☐	T: 23.7°C H: 50.3%
§15.247(d)	Spurious RF conducted emissions	Site 1	☒	☐	☐	T: 23.7°C H: 50.3%
§15.247(d)	Band edge	Site 1	☒	☐	☐	T: 23.7°C H: 50.3%
§15.247(d) & §15.205 & §15.209	Spurious radiated emissions for transmitter	Site 1	☒	☐	☐	T: 24.5°C H: 53.2%
§15.203	Antenna requirement	See note 2	☒	☐	☐	--

Note 1: N/A=Not Applicable.

Note 2: The EUT uses a PCBA antenna, which gain Ant1: 2.3dBi and Ant2: 2.3dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

Note 3: T: Temperature, H: Humidity

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: WNA-NPG-001 complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 2023-10-23

Testing Start Date: 2023-10-23


Testing End Date: 2023-11-04

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch


Reviewed by:


Prepared by:

Tested by:


John Zhi
Project Manager





Sanvin Zheng
Project Engineer


Carry Cai
Test Engineer


7 Test Setups

7.1 AC Power Line Conducted Emission test setups

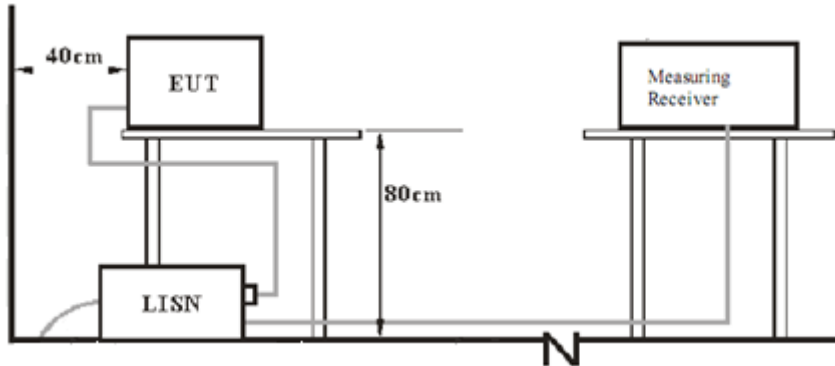


7.2 Radiated test setups


9kHz - 30MHz

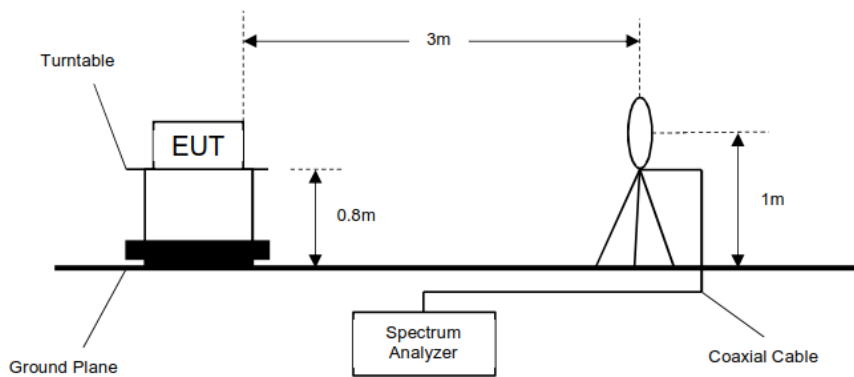


30MHz - 1GHz

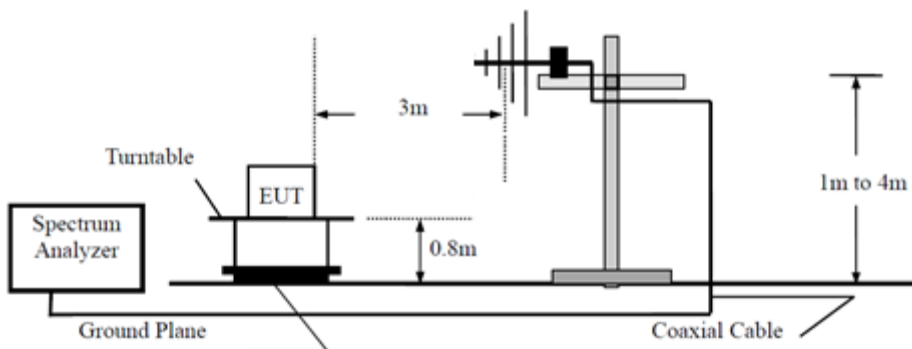

Above 1GHz

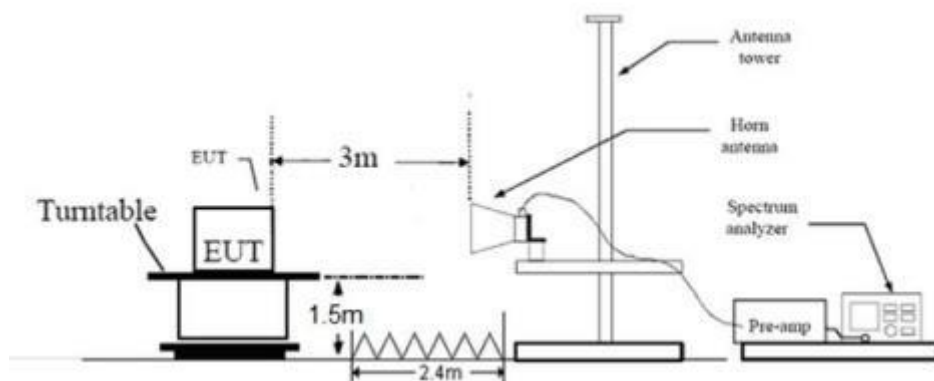

7.3 Conducted RF test setups



8 Systems Test Configuration

Auxiliary Equipment Used during Test:

Description	Manufacturer	Model No.	Remark
Notebook	Lenovo	X220	---
Remote	Wuxi Weida Intelligent Electronics	NPG-RCU-001	Type name: Bluetooth voice remote control FCC ID: 2A7GQ-NPG-RCU-001

Cables Used During Test:

Cable	Length	Shielded/unshielded	With / without ferrite
HDMI Cable	150cm	Shielded	Without ferrite
Type-C Cable	100cm	Unshielded	Without ferrite

Test software information:

Test Software	adb.exe	
Mode	Setting TX Power	Packet Type
802.11b	Default	DSSS
802.11g	Default	OFDM
802.11n20	Default	OFDM
802.11n40	Default	OFDM

The system was configured to non-hopping mode.

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

Through pre-scan all kind of modulation and all kind of rates, find the 1Mbps of rate is the worst case of 802.11b; the 6Mbps of rate is the worst case of 802.11g; the 13Mbps of rate is the worst case of 802.11n20 and 802.11n40, only the worst case transmitter rate data mode is recorded in the report.

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

Limit


According to §15.207, Conducted emissions limit as below:

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

Conducted Emission

Product Type : Playground
 M/N : NPG-001
 Operating Condition : Transmitting mode
 Test Specification : Line
 Comment : AC 120V/60Hz

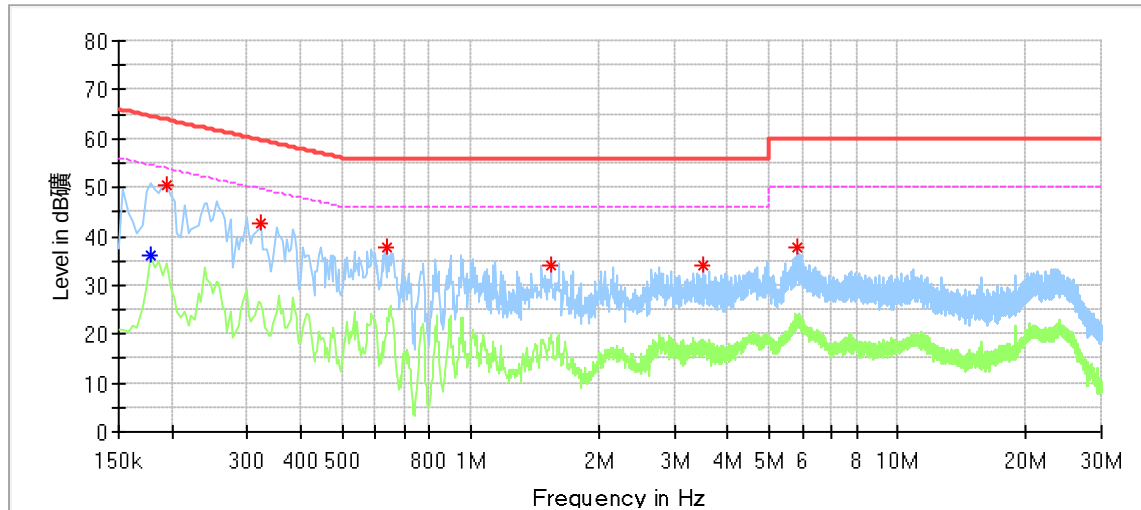

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.178000	---	36.20	54.58	18.37	L1	9.54
0.194000	50.44	---	63.86	13.42	L1	9.54
0.322000	42.60	---	59.66	17.06	L1	9.57
0.638000	37.93	---	56.00	18.07	L1	9.60
1.546000	33.92	---	56.00	22.08	L1	9.61
3.494000	33.94	---	56.00	22.06	L1	9.68
5.802000	37.71	---	60.00	22.29	L1	9.78

Remark:


Max Peak/ Average=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Playground
 M/N : NPG-001
 Operating Condition : Transmitting mode
 Test Specification : Neutral
 Comment : AC 120V/60Hz

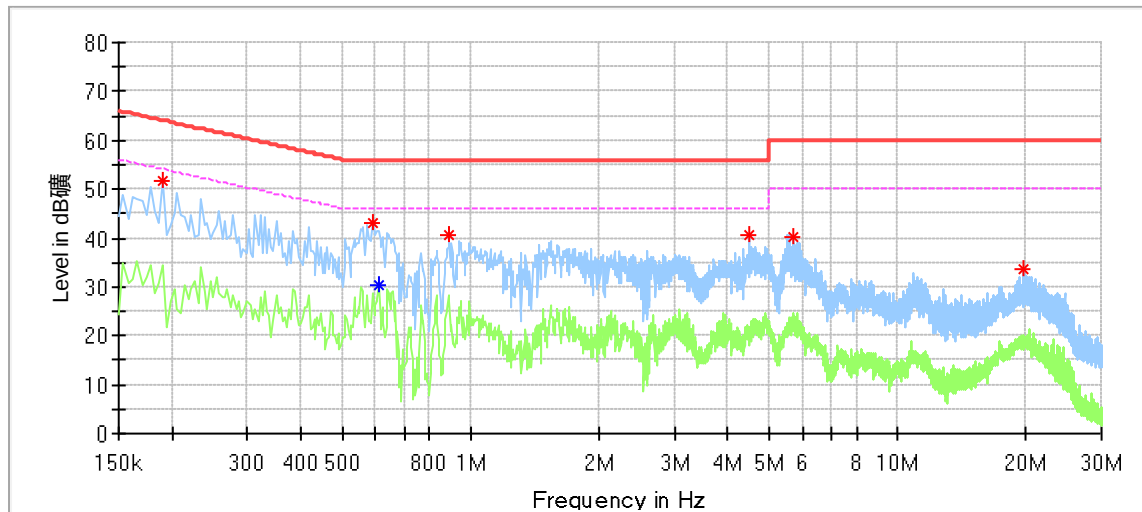

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.190000	51.53	---	64.04	12.50	N	9.57
0.590000	42.90	---	56.00	13.10	N	9.63
0.610000	---	30.53	46.00	15.47	N	9.63
0.890000	40.59	---	56.00	15.41	N	9.63
4.482000	40.68	---	56.00	15.32	N	9.75
5.714000	40.15	---	60.00	19.85	N	9.81
19.694000	33.74	---	60.00	26.26	N	9.95

Remark:

Max Peak/ Average=Reading Level + Correction Factor


Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

9.2 Conducted Peak Output Power

Test Method

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 4) Measure the peak power of the transmitter. This measurement is a peak over both the ON and OFF periods of the transmitter.

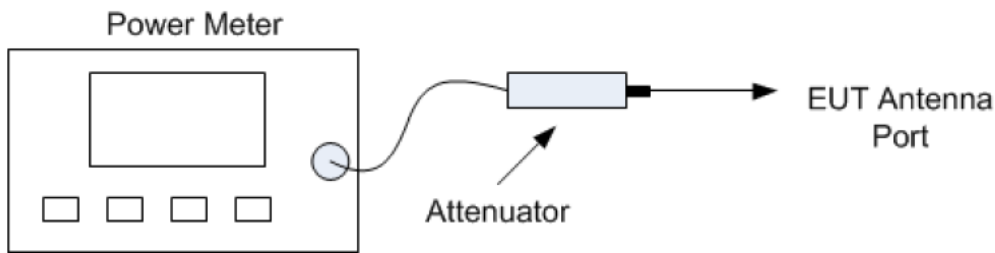

Power meter conducted test setup

Limits

According to §15.247 (b) (3), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Test result as below table

802.11b_SISO modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)		Result
	Ant 0	Ant 1	
Low channel 2412MHz	16.9	15.4	Pass
Middle channel 2437MHz	18.9	16.9	Pass
High channel 2462MHz	18.0	15.5	Pass

802.11g_SISO modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)		Result
	Ant 0	Ant 1	
Low channel 2412MHz	11.0	10.7	Pass
Middle channel 2437MHz	18.9	17.1	Pass
High channel 2462MHz	11.9	11.0	Pass

802.11n20_MIMO modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)			Result
	Ant 0	Ant 1	SUM	
Low channel 2412MHz	9.4	11.2	13.4	Pass
Middle channel 2437MHz	17.1	17.7	20.4	Pass
High channel 2462MHz	9.8	11.0	13.5	Pass

802.11n40_MIMO modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)			Result
	Ant 0	Ant 1	SUM	
Low channel 2422MHz	8.4	13.1	14.4	Pass
Middle channel 2437MHz	14.0	15.0	17.5	Pass
High channel 2452MHz	8.3	13.0	14.3	Pass

$$\text{Power}^{\text{SUM}} = 10 * \log(10^{(\text{PowerAnt0}/10)} + 10^{(\text{PowerAnt1}/10)})$$

9.3 6dB Bandwidth

Test Method for 6 dB Bandwidth

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW=100KHz, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Use the automatic bandwidth measurement capability of an instrument, use the X dB bandwidth mode with X set to 6 dB.
5. Allow the trace to stabilize, record the 6 dB Bandwidth value.

Limit

According to §15.247(a)(2), 6dB Bandwidth limit as below:

Limit [kHz]

≥500

802.11b modulation Test Result

Frequency (MHz)	Antenna	6dB bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	Ant0	10.160	0.5	Pass
Middle channel 2437MHz	Ant0	10.160	0.5	Pass
High channel 2462MHz	Ant0	10.160	0.5	Pass

Frequency (MHz)	Antenna	6dB bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	Ant1	10.160	0.5	Pass
Middle channel 2437MHz	Ant1	10.160	0.5	Pass
High channel 2462MHz	Ant1	10.160	0.5	Pass

802.11g modulation Test Result

Frequency (MHz)	Antenna	6dB bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	Ant0	15.800	0.5	Pass
Middle channel 2437MHz	Ant0	16.120	0.5	Pass
High channel 2462MHz	Ant0	15.920	0.5	Pass

Frequency (MHz)	Antenna	6dB bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	Ant1	16.120	0.5	Pass
Middle channel 2437MHz	Ant1	15.600	0.5	Pass
High channel 2462MHz	Ant1	15.920	0.5	Pass

802.11n-HT20 modulation Test Result

Frequency (MHz)	Antenna	6dB bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	Ant0	16.640	0.5	Pass
Middle channel 2437MHz	Ant0	16.640	0.5	Pass
High channel 2462MHz	Ant0	17.000	0.5	Pass

Frequency (MHz)	Antenna	6dB bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	Ant1	16.400	0.5	Pass
Middle channel 2437MHz	Ant1	16.640	0.5	Pass
High channel 2462MHz	Ant1	16.640	0.5	Pass


802.11n-HT40 modulation Test Result


Frequency (MHz)	Antenna	6dB bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	Ant0	35.280	0.5	Pass
Middle channel 2437MHz	Ant0	35.280	0.5	Pass
High channel 2462MHz	Ant0	35.600	0.5	Pass

Frequency (MHz)	Antenna	6dB bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	Ant1	35.280	0.5	Pass
Middle channel 2437MHz	Ant1	35.280	0.5	Pass
High channel 2462MHz	Ant1	35.280	0.5	Pass




6 dB Bandwidth

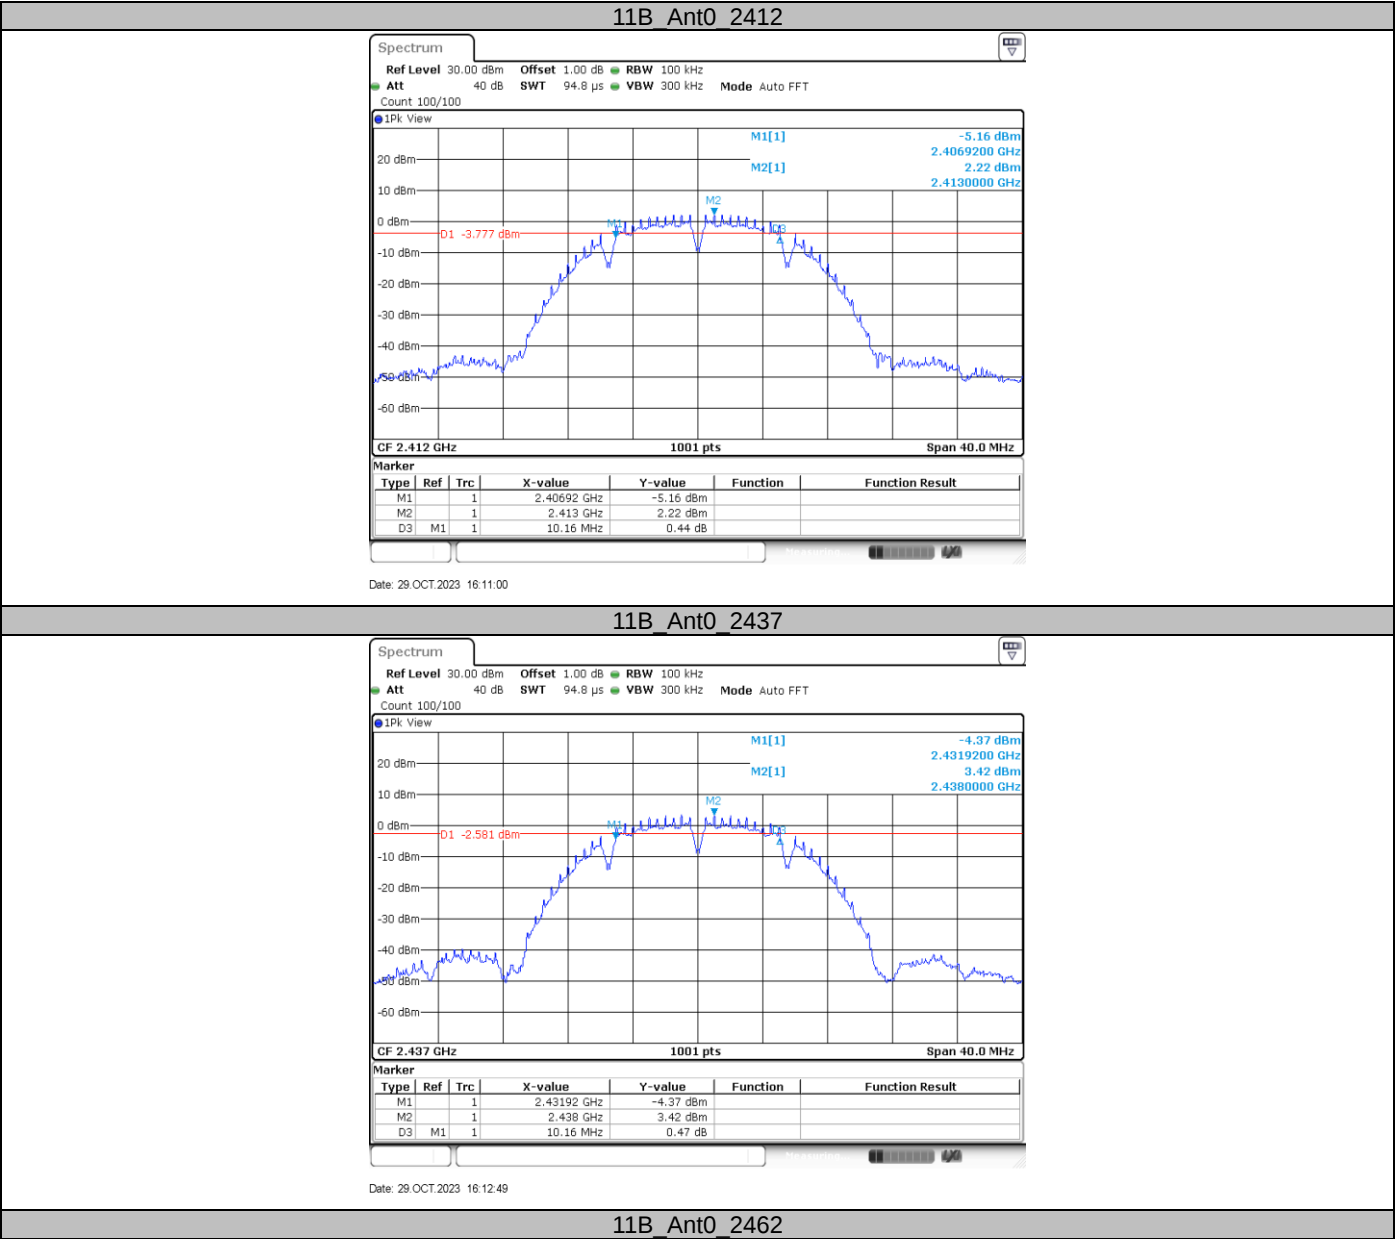

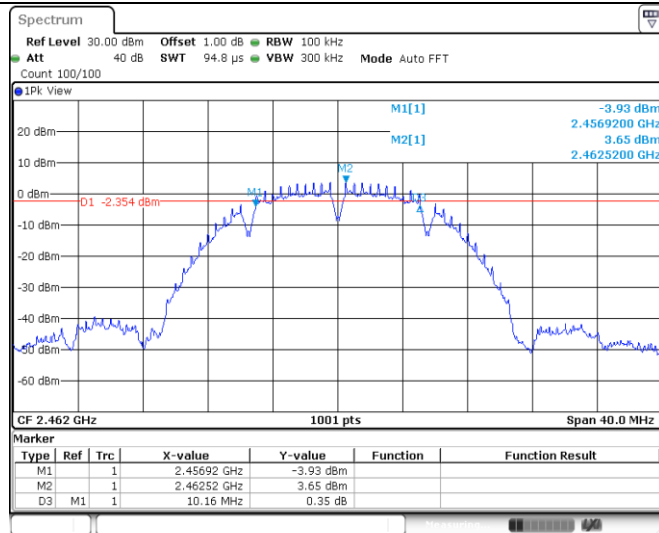


Date: 29.OCT.2023 16:14:56

11G Ant0 2412

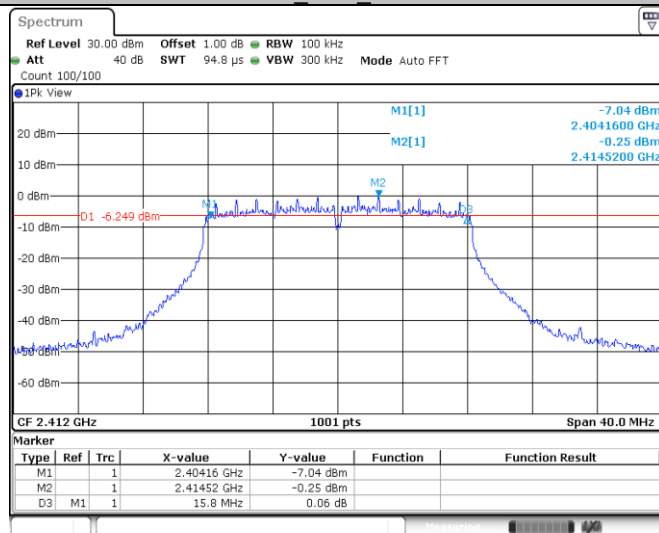


Date: 29.OCT.2023 16:21:14

11G Ant0 2437

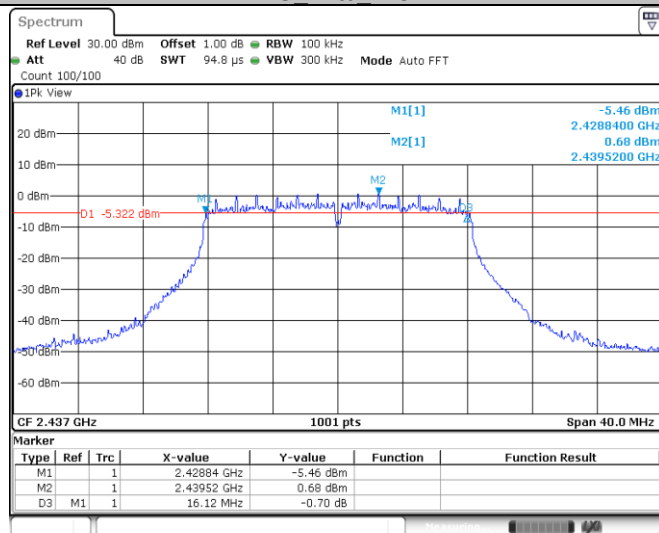


Date: 29.OCT.2023 16:19:22

11G Ant0 2462

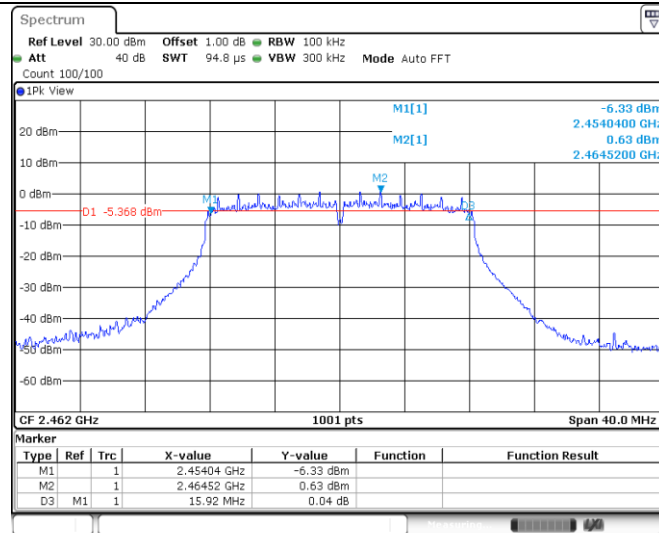


Date: 29.OCT.2023 16:22:45

11N20SISO_Ant0_2412

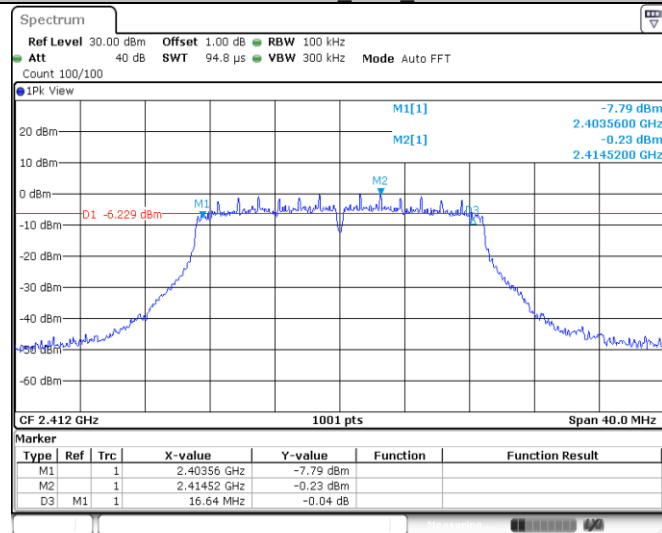


Date: 29.OCT.2023 16:26:31

11N20SISO_Ant0_2437

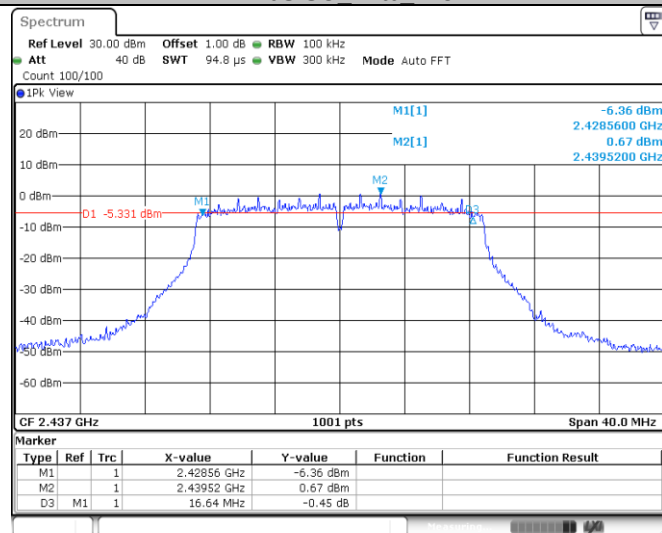


Date: 29.OCT.2023 16:29:20

11N20SISO_Ant0_2462

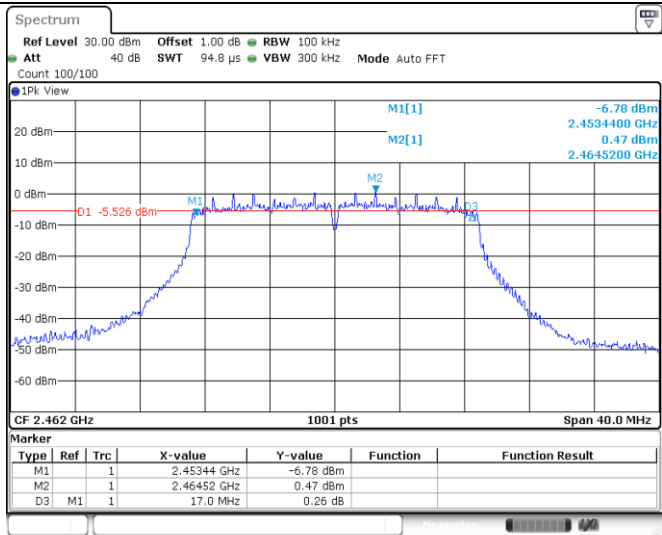


Date: 29.OCT.2023 16:31:02

11N40SISO_Ant0_2422

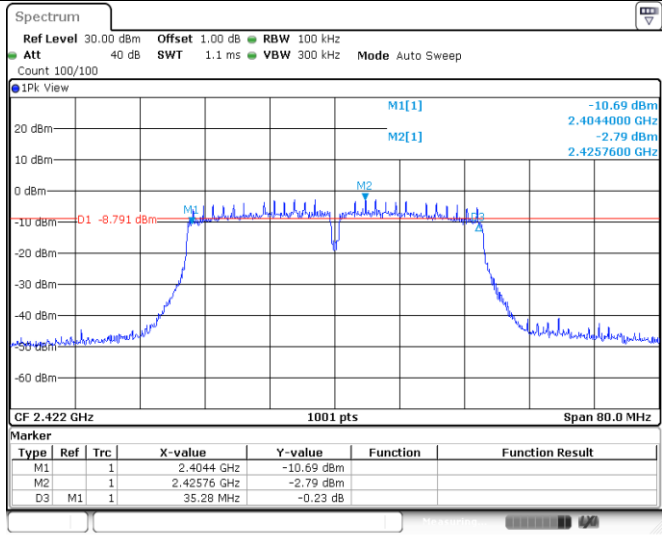




Date: 29.OCT.2023 16:38:45

11N40SISO_Ant0_2437

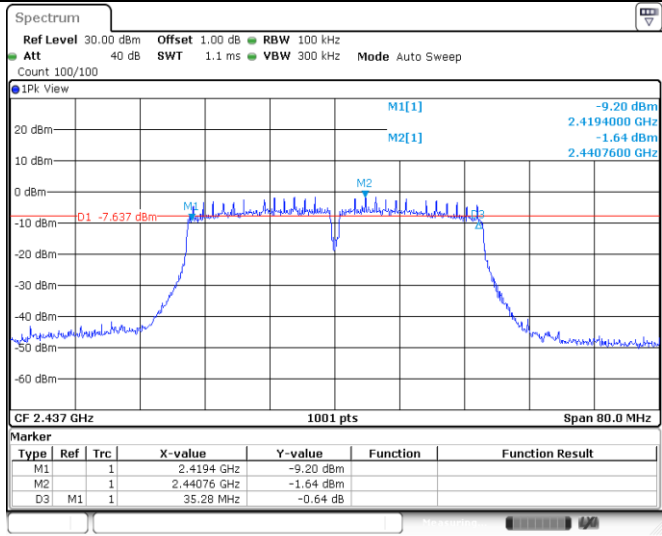


Date: 29.OCT.2023 16:40:32

11N40SISO_Ant0_2452

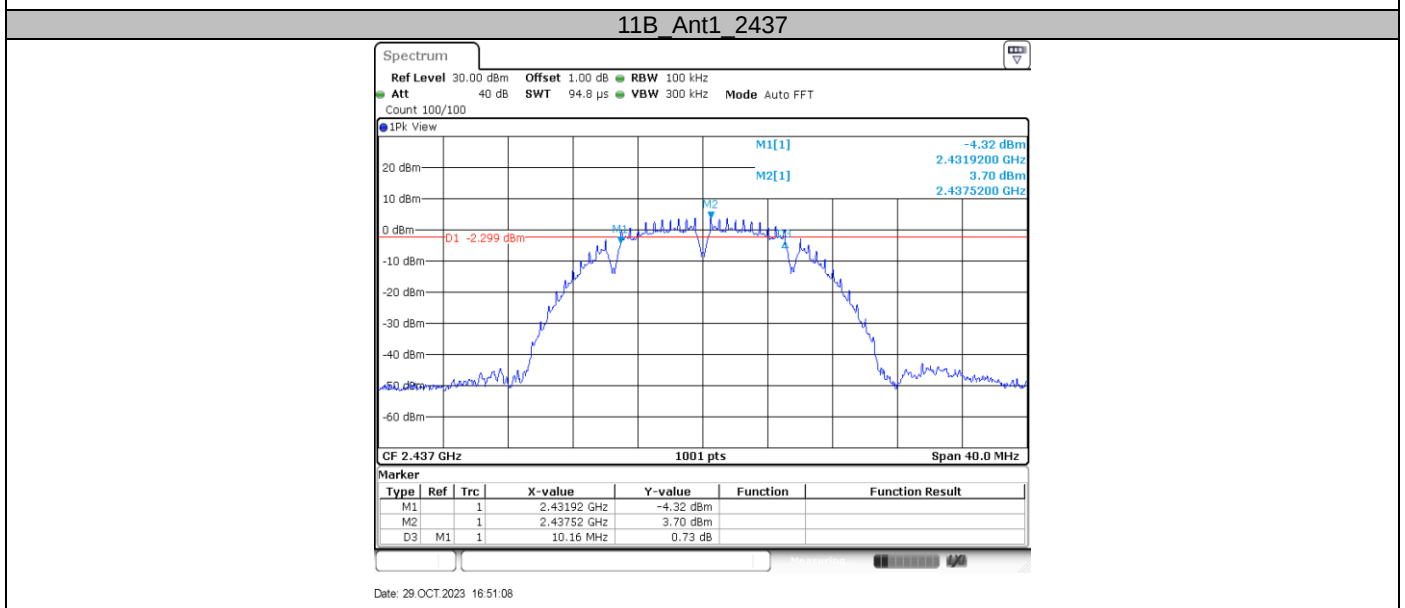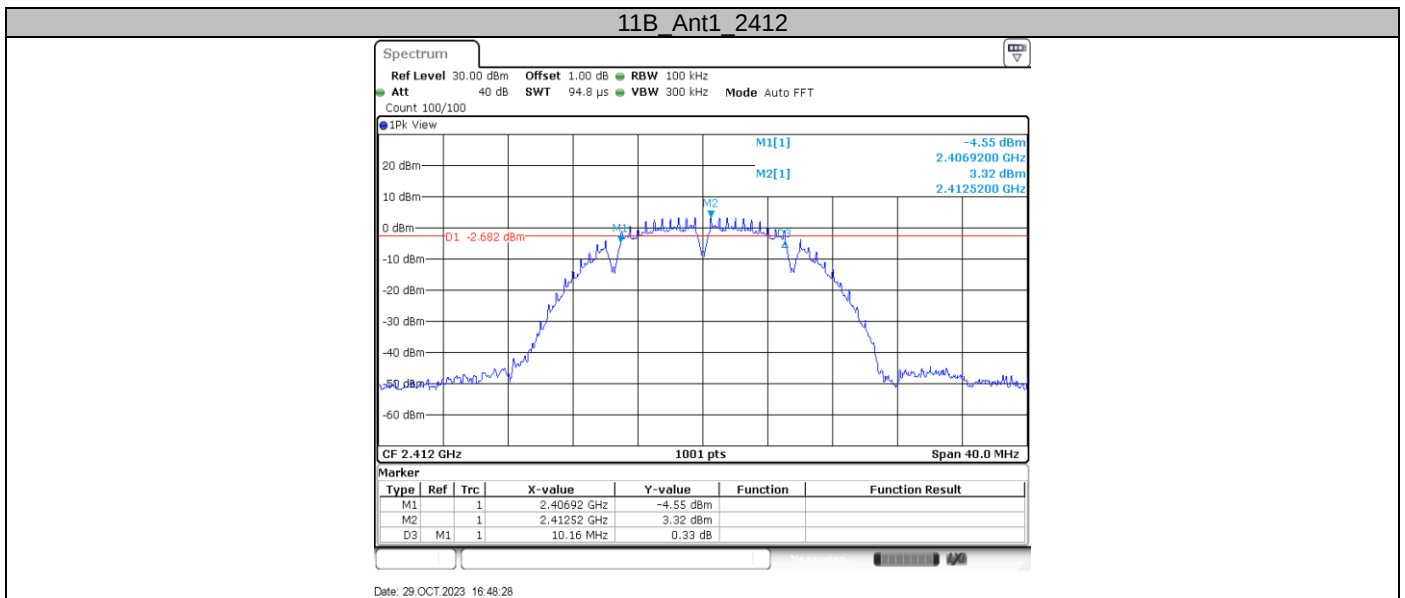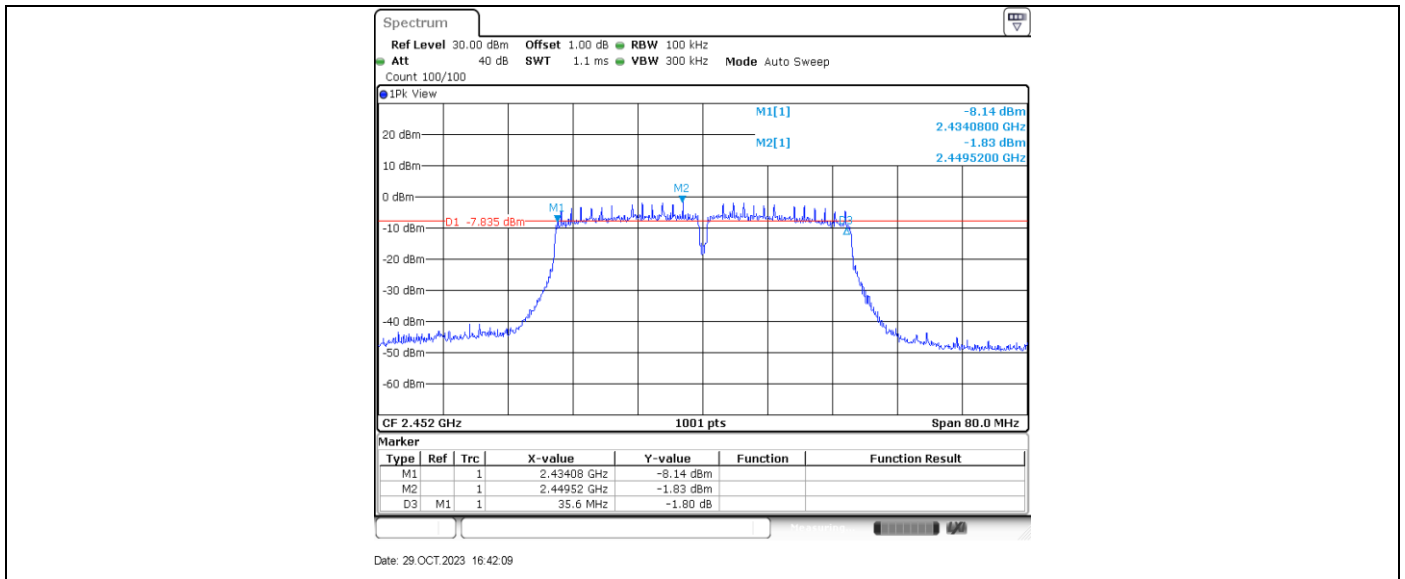




11B Ant1 2462

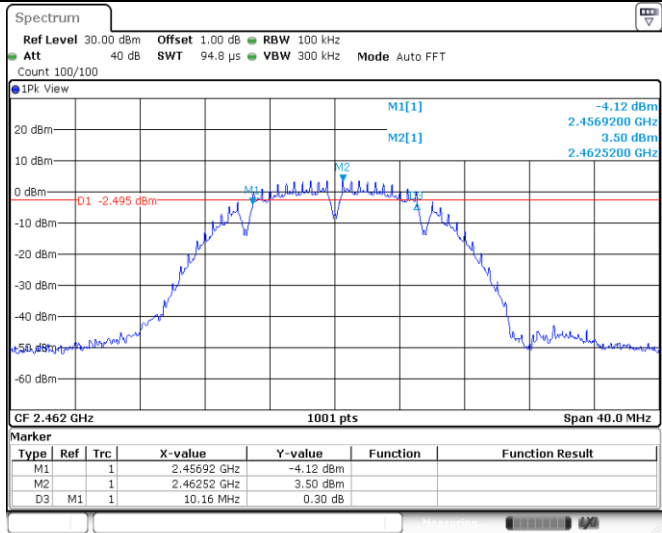


Date: 29.OCT.2023 16:52:45

11G Ant1 2412

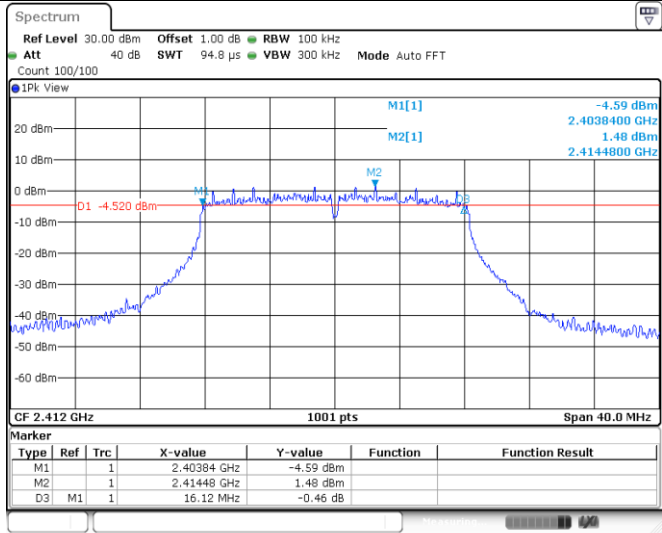


Date: 29.OCT.2023 16:56:42

11G Ant1 2437

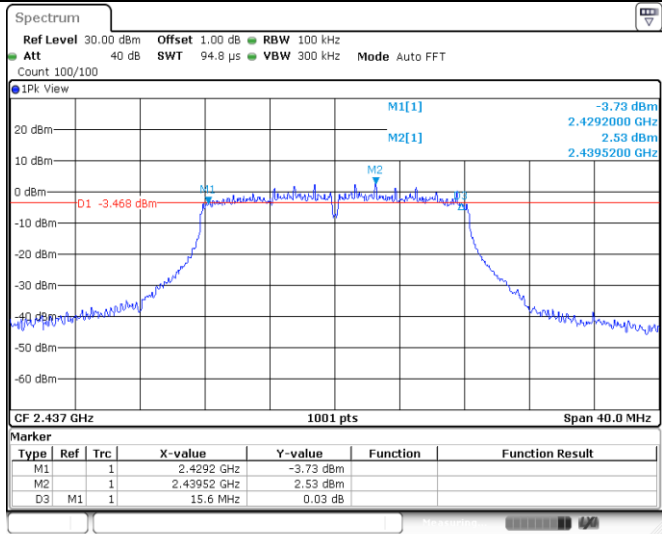


Date: 29.OCT.2023 16:58:24

11G Ant1 2462

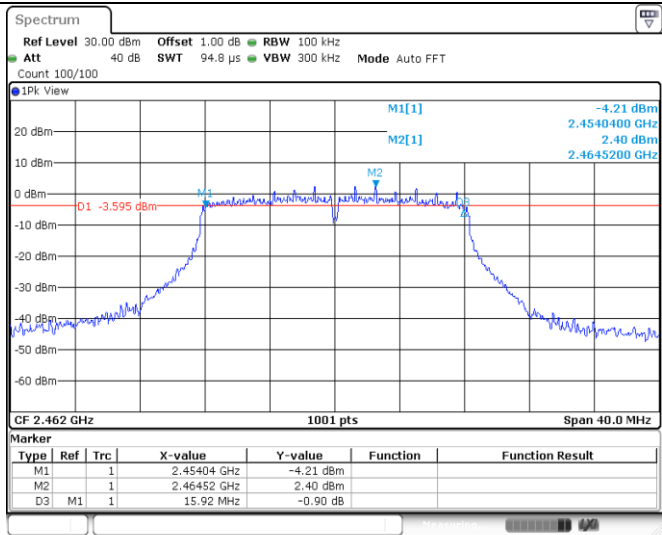


Date: 29.OCT.2023 17:00:06

11N20SISO Ant1 2412

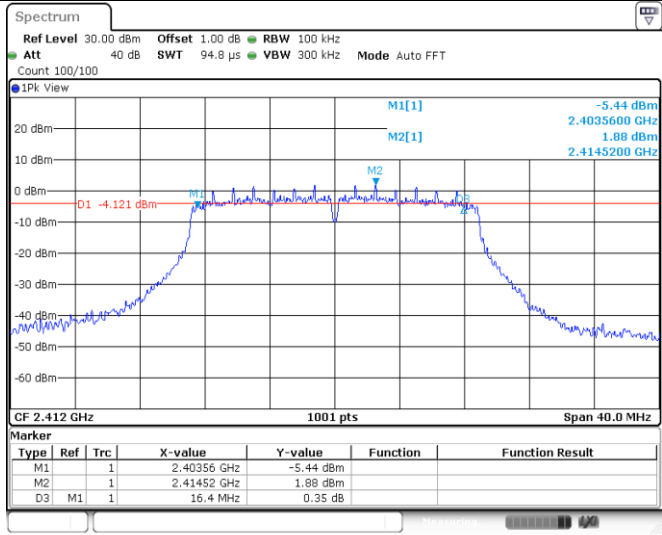


Date: 29.OCT.2023 17:02:06

11N20SISO Ant1 2437

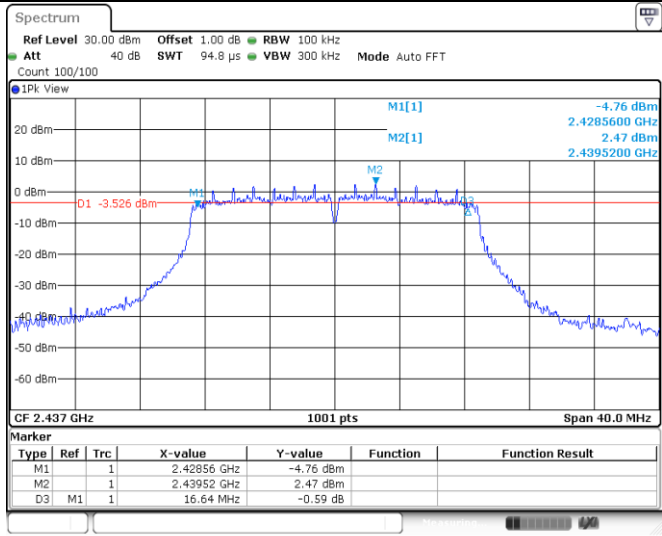


Date: 29.OCT.2023 17:04:20

11N20SISO Ant1 2462

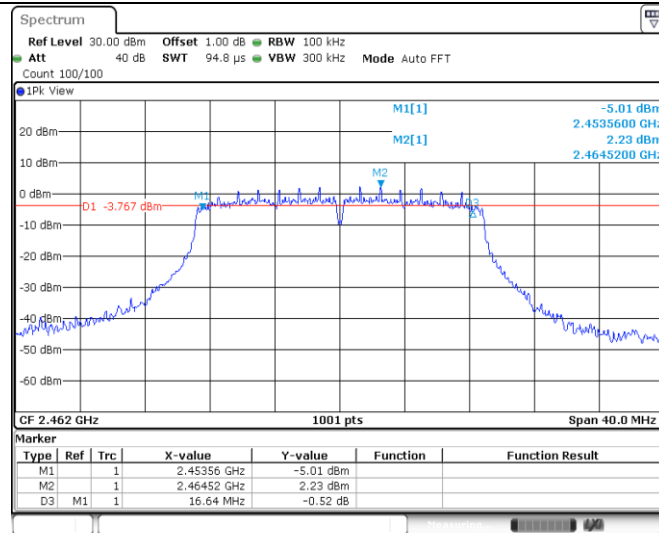


Date: 29.OCT.2023 17:05:59

11N40SISO Ant1 2422

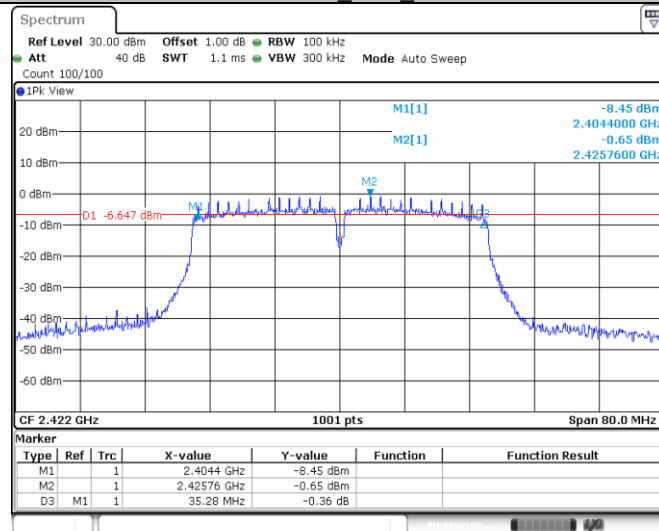


Date: 29.OCT.2023 17:07:50

11N40SISO Ant1 2437

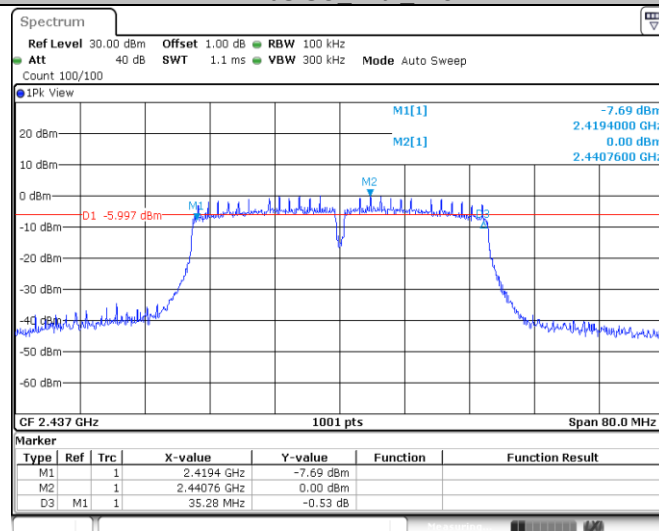

Date: 29.OCT.2023 17:09:45

11N40SISO Ant1 2452

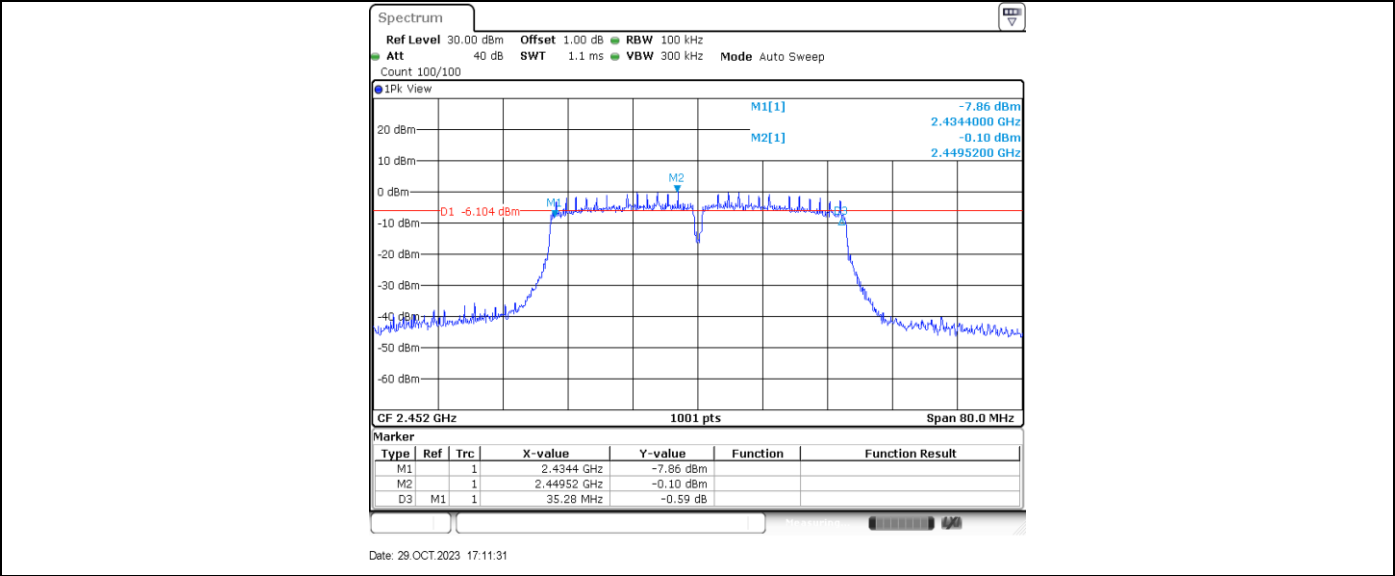

9.4 Power Spectral Density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.

Limit

According to §15.247(e), power spectral density limit as below:

$$\text{Limit [dBm/3KHz]} \leq 8$$

802.11b modulation Test Result

Frequency (MHz)	Power spectral density (dBm/3KHz)		Limit (dBm)	Result
	Ant0	Ant1		
Low channel 2412MHz	-7.70	-7.79	8	Pass
Middle channel 2437MHz	-6.63	-7.37	8	Pass
High channel 2462MHz	-7.07	-7.83	8	Pass

802.11g modulation Test Result

Frequency (MHz)	Power spectral density (dBm/3KHz)		Limit (dBm)	Result
	Ant0	Ant1		
Low channel 2412MHz	-16.52	-15.00	8	Pass
Middle channel 2437MHz	-8.85	-8.46	8	Pass
High channel 2462MHz	-16.00	-14.89	8	Pass

802.11n-HT20 modulation Test Result


Frequency (MHz)	Power spectral density (dBm/3KHz)			Limit (dBm)	Result
	Ant0	Ant1	SUM		
Low channel 2412MHz	-15.88	-14.43	-12.08	8	Pass
Middle channel 2437MHz	-8.34	-7.96	-5.14	8	Pass
High channel 2462MHz	-15.49	-14.38	-11.89	8	Pass

802.11n-HT40 modulation Test Result

Frequency (MHz)	Power spectral density (dBm/3KHz)			Limit (dBm)	Result
	Ant0	Ant1	SUM		
Low channel 2422MHz	-18.14	-16.67	-14.33	8	Pass
Middle channel 2437MHz	-13.78	-12.95	-10.33	8	Pass
High channel 2452MHz	-17.19	-16.44	-13.79	8	Pass


$$PSD_{SUM} = 10 * \log(10^{(PSD_{Ant0}/10)} + 10^{(PSD_{Ant1}/10)})$$

11B_Ant0_2412

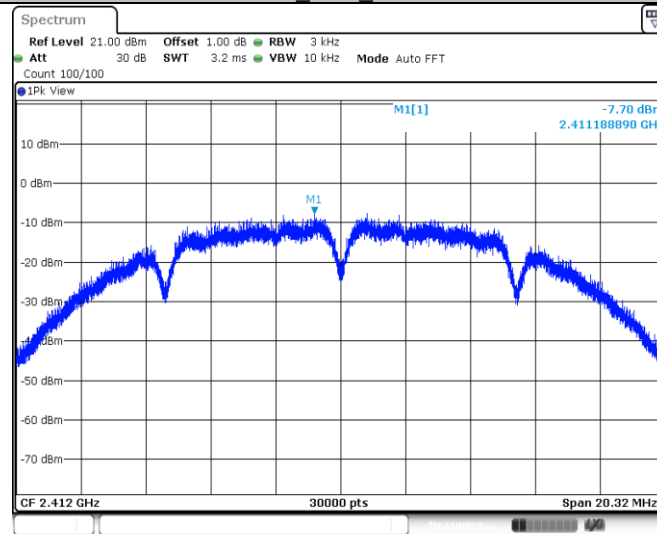


Date: 4 NOV.2023 16:10:42

11B_Ant0_2437

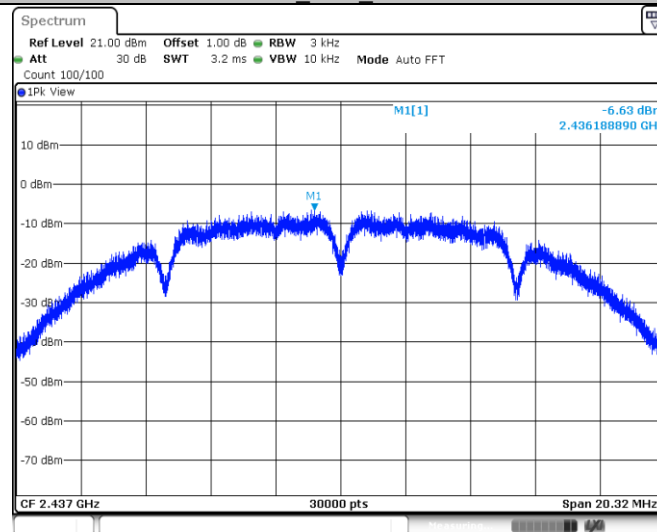


Date: 4 NOV.2023 16:11:54

11B_Ant0_2462

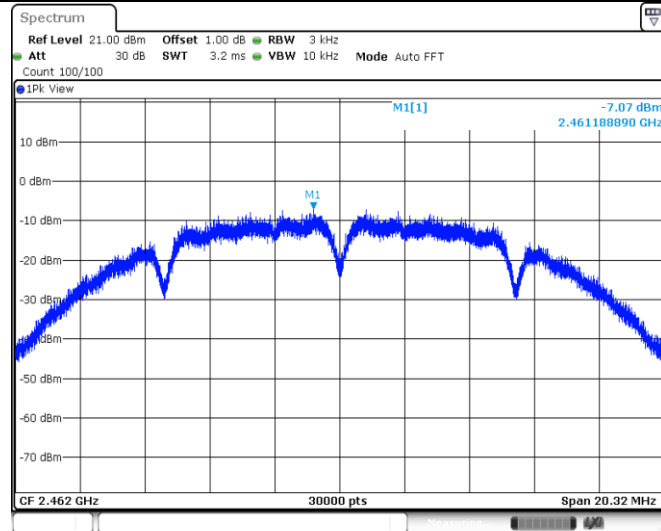


Date: 4 NOV. 2023 16:13:09

11G Ant0 2412

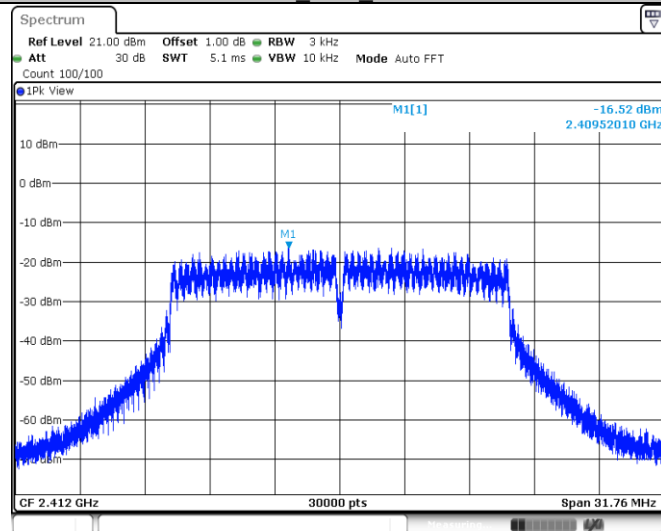


Date: 4 NOV. 2023 16:16:27

11G Ant0 2437

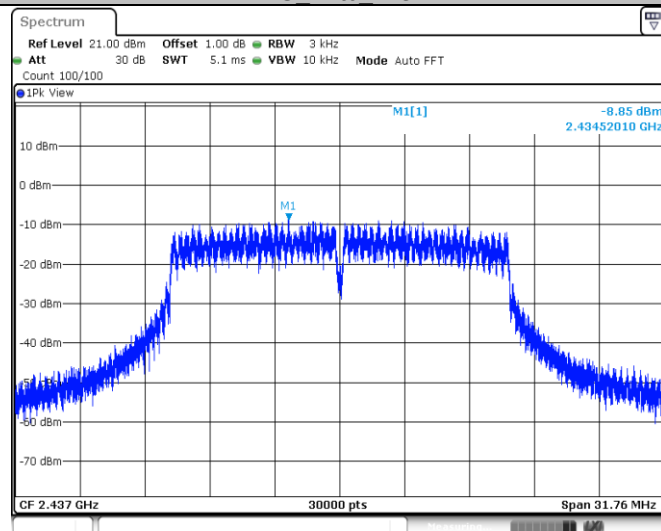


Date: 4 NOV. 2023 16:17:59


11G Ant0 2462

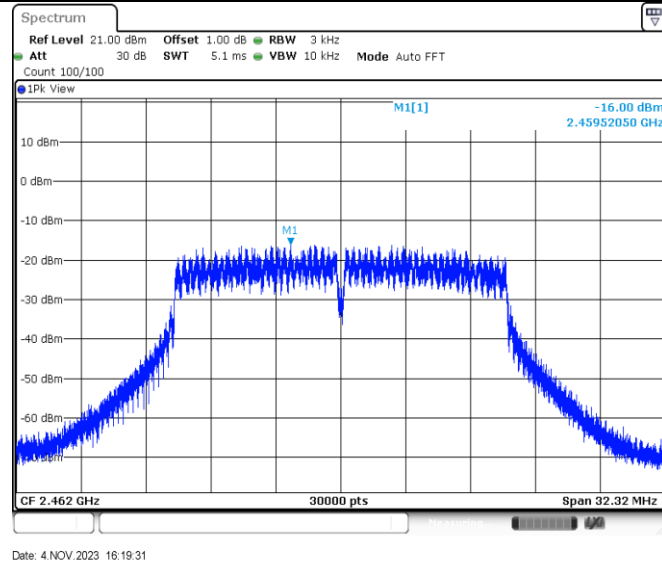


11N20SISO_Ant0_2412

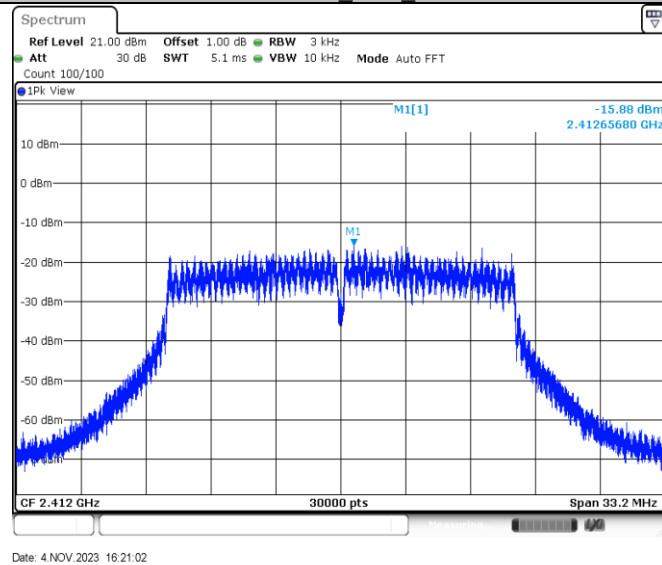

11N20SISO_Ant0_2437

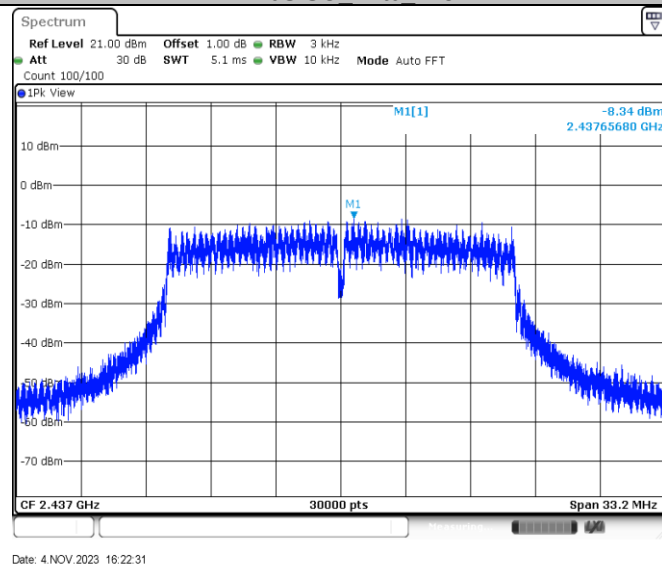


11N20SISO_Ant0_2462

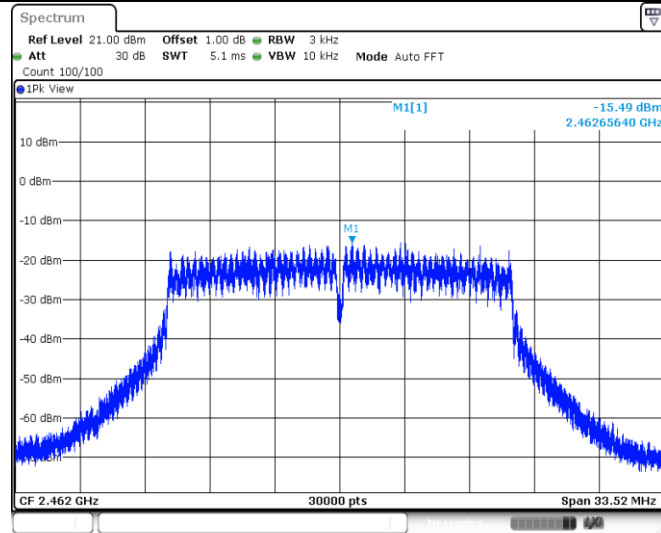


Date: 4 NOV 2023 16:24:04

11N40SISO_Ant0_2422

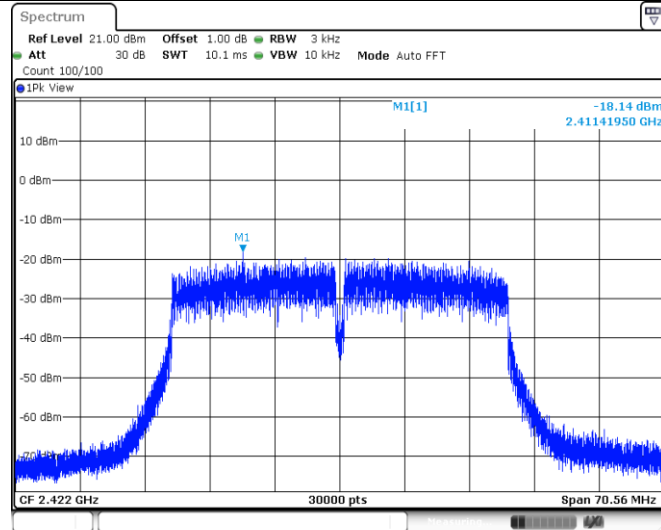


Date: 4 NOV 2023 16:25:24

11N40SISO_Ant0_2437

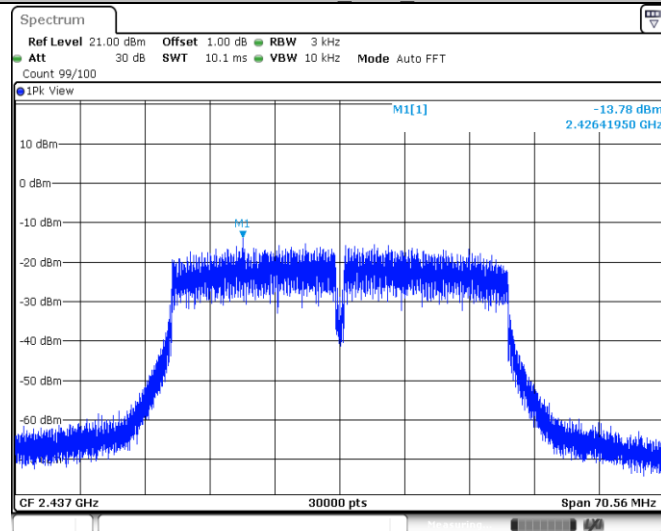


Date: 4 NOV 2023 16:27:35

11N40SISO_Ant0_2452

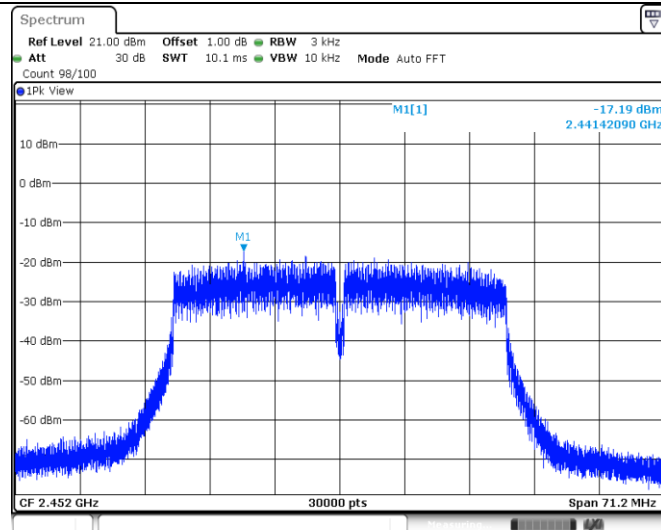


Date: 4 NOV 2023 16:29:22

11B Ant1 2412

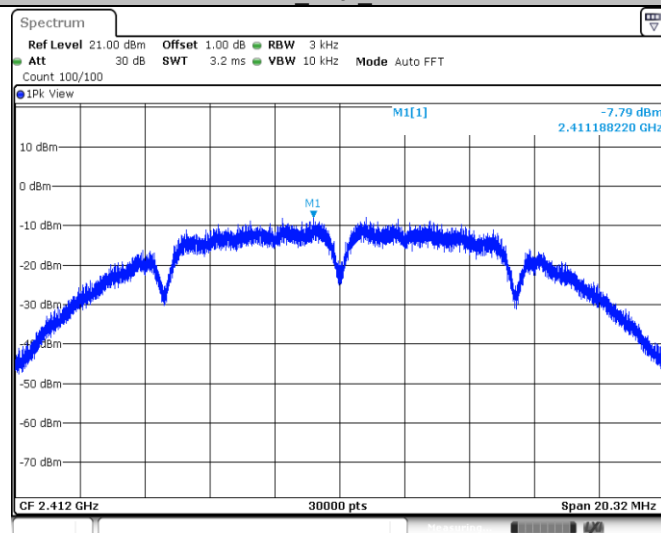


Date: 4 NOV 2023 16:34:28

11B Ant1 2437

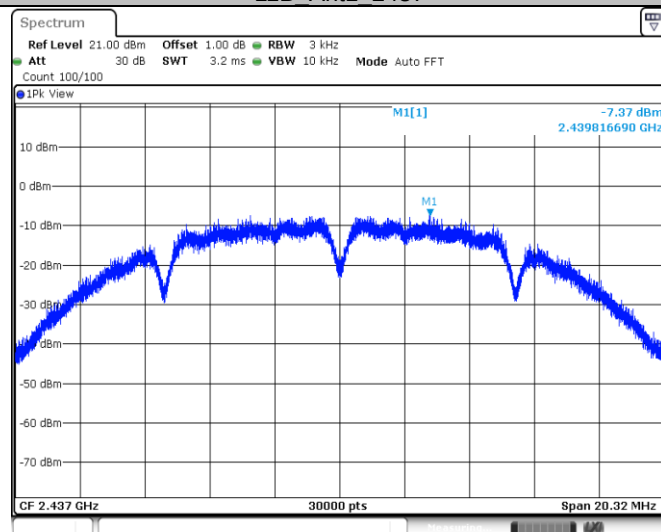


Date: 4 NOV 2023 16:36:34

11B Ant1 2462

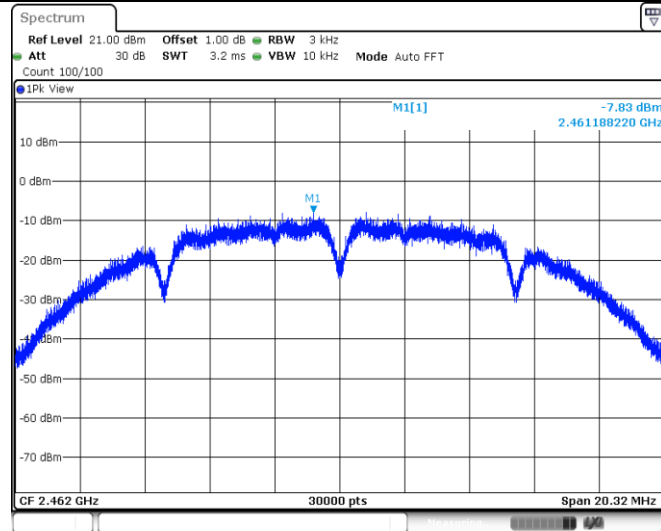


Date: 4 NOV. 2023 16:37:34

11G Ant1 2412

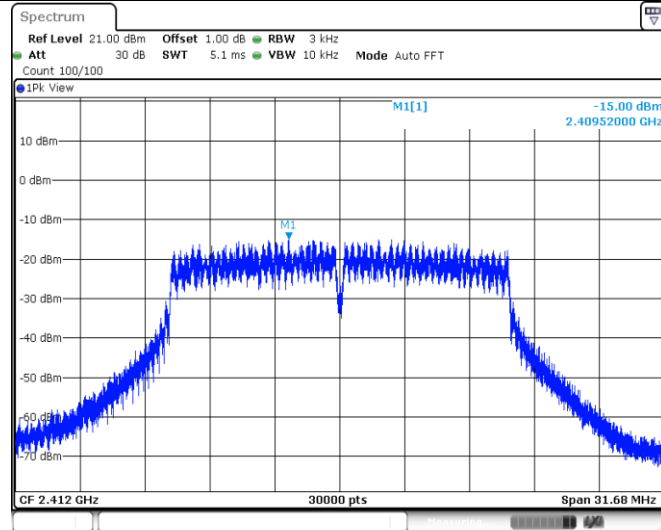


Date: 4 NOV. 2023 16:39:33

11G Ant1 2437

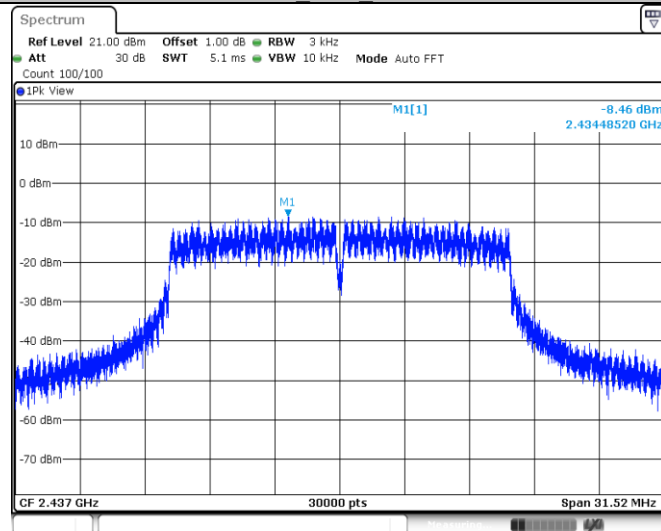


Date: 4 NOV. 2023 16:41:38

11G Ant1 2462

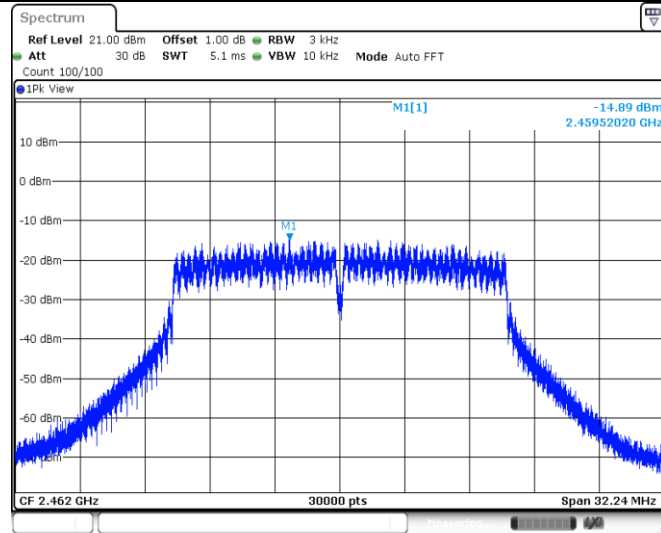


Date: 4 NOV.2023 16:42:38

11N20SISO_Ant1_2412

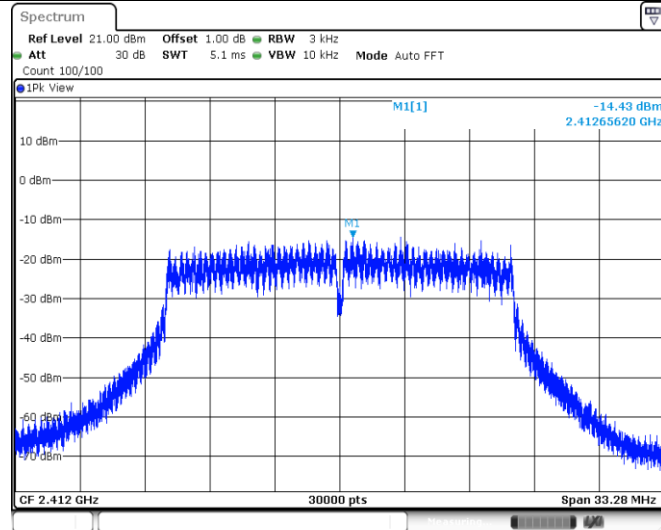


Date: 4 NOV.2023 16:46:53

11N20SISO_Ant1_2437

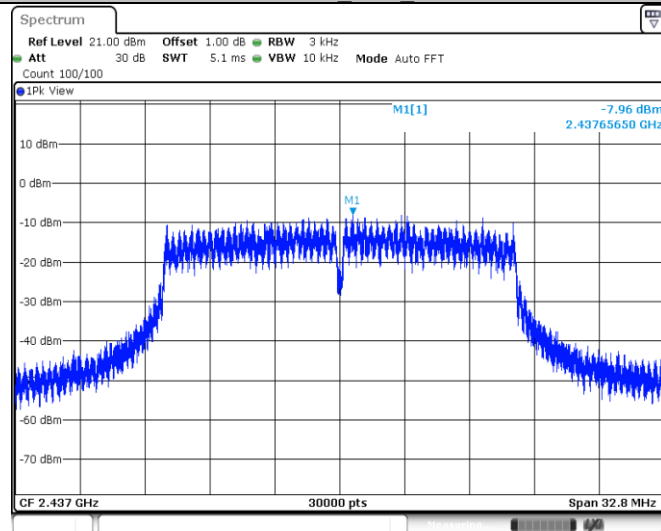


Date: 4 NOV.2023 16:49:50

11N20SISO_Ant1_2462

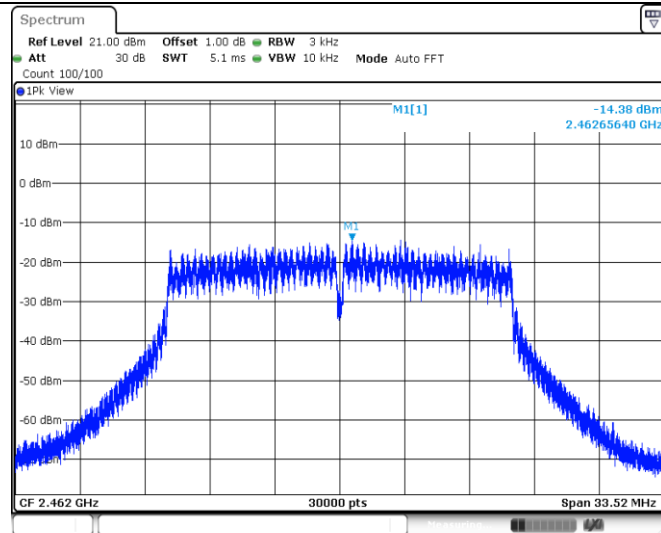


Date: 4 NOV.2023 16:50:48

11N40SISO_Ant1_2422

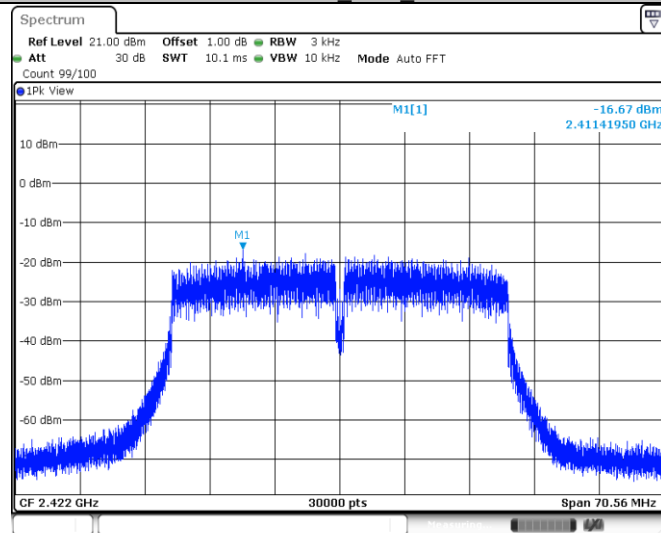


Date: 4 NOV.2023 16:52:35

11N40SISO_Ant1_2437

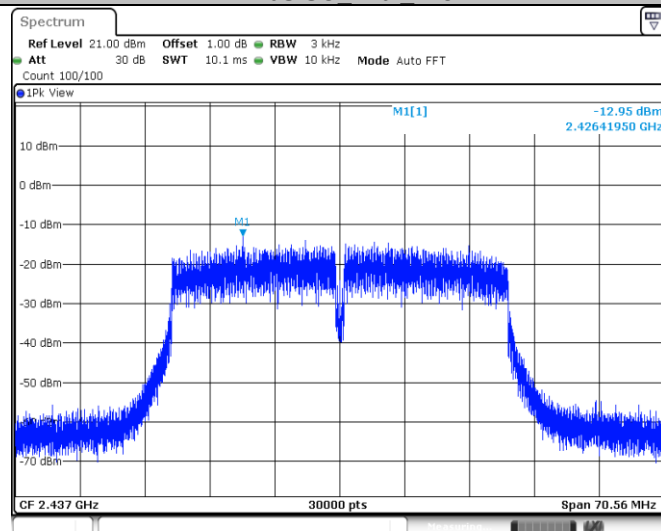

Date: 4 NOV.2023 16:53:46

11N40SISO_Ant1_2452

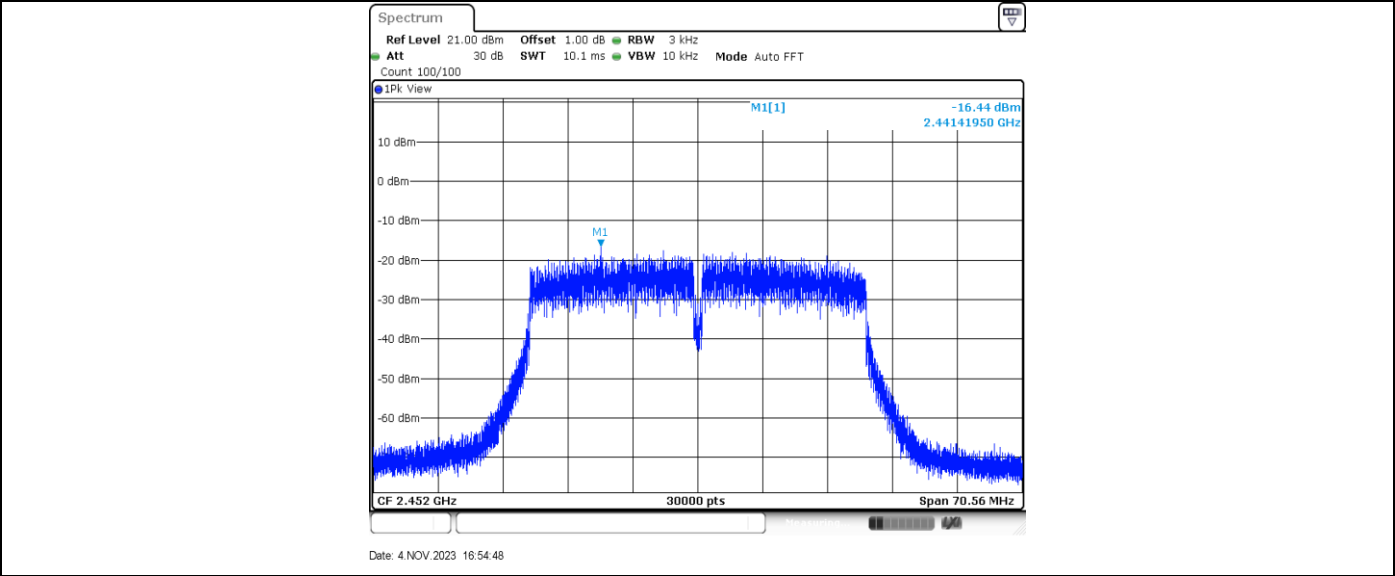

9.5 Spurious RF Conducted Emissions

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

Limit

According to §15.247(d), spurious RF conducted emissions limit as below:


Frequency Range MHz	Limit (dBc)
30-25000	-20

Spurious RF conducted emissions

Test Mode	Antenna	Channel (MHz)	Frequency Range (MHz)	Reference Level	Result (dBm)	Limit (dBm)	Verdict
11B	Ant0	2412	Reference	2.72	2.72	---	PASS
			30~1000	30~1000	-67.84	<=-17.28	PASS
			1000~26500	1000~26500	-47.98	<=-17.28	PASS
		2437	Reference	3.39	3.39	---	PASS
			30~1000	30~1000	-68.31	<=-16.61	PASS
			1000~26500	1000~26500	-51.82	<=-16.61	PASS
		2462	Reference	3.53	3.53	---	PASS
			30~1000	30~1000	-68.44	<=-16.47	PASS
			1000~26500	1000~26500	-50.34	<=-16.47	PASS
11G	Ant0	2412	Reference	-1.71	-1.71	---	PASS
			30~1000	30~1000	-67.81	<=-21.71	PASS
			1000~26500	1000~26500	-52.27	<=-21.71	PASS
		2437	Reference	0.85	0.85	---	PASS
			30~1000	30~1000	-67.89	<=-19.15	PASS
			1000~26500	1000~26500	-51.96	<=-19.15	PASS
		2462	Reference	-1.21	-1.21	---	PASS
			30~1000	30~1000	-67.89	<=-21.21	PASS
			1000~26500	1000~26500	-51.45	<=-21.21	PASS
11N20	Ant0	2412	Reference	-0.26	-0.26	---	PASS
			30~1000	30~1000	-68.65	<=-20.26	PASS
			1000~26500	1000~26500	-40.36	<=-20.26	PASS
		2437	Reference	0.81	0.81	---	PASS
			30~1000	30~1000	-67.71	<=-19.19	PASS
			1000~26500	1000~26500	-52.91	<=-19.19	PASS
		2462	Reference	0.74	0.74	---	PASS
			30~1000	30~1000	-68.3	<=-19.26	PASS
			1000~26500	1000~26500	-52.03	<=-19.26	PASS
11N40	Ant0	2422	Reference	-3.34	-3.34	---	PASS
			30~1000	30~1000	-68.47	<=-23.34	PASS
			1000~26500	1000~26500	-43.63	<=-23.34	PASS
		2437	Reference	-2.04	-2.04	---	PASS
			30~1000	30~1000	-68.43	<=-22.04	PASS
			1000~26500	1000~26500	-50.36	<=-22.04	PASS
		2452	Reference	-2.09	-2.09	---	PASS
			30~1000	30~1000	-68.46	<=-22.09	PASS
			1000~26500	1000~26500	-50.87	<=-22.09	PASS
11B	Ant1	2412	Reference	3.04	3.04	---	PASS
			30~1000	30~1000	-68.39	<=-16.96	PASS
			1000~26500	1000~26500	-51.96	<=-16.96	PASS
		2437	Reference	3.73	3.73	---	PASS
			30~1000	30~1000	-68.15	<=-16.27	PASS
			1000~26500	1000~26500	-52.31	<=-16.27	PASS
		2462	Reference	3.67	3.67	---	PASS
			30~1000	30~1000	-67.97	<=-16.33	PASS
			1000~26500	1000~26500	-52.3	<=-16.33	PASS
11G	Ant1	2412	Reference	1.76	1.76	---	PASS
			30~1000	30~1000	-67.54	<=-18.24	PASS
			1000~26500	1000~26500	-34.94	<=-18.24	PASS
		2437	Reference	2.19	2.19	---	PASS
			30~1000	30~1000	-68.57	<=-17.81	PASS
			1000~26500	1000~26500	-52.19	<=-17.81	PASS
		2462	Reference	2.17	2.17	---	PASS
			30~1000	30~1000	-68.36	<=-17.83	PASS
			1000~26500	1000~26500	-52.24	<=-17.83	PASS
11N20	Ant1	2412	Reference	1.28	1.28	---	PASS
			30~1000	30~1000	-67.8	<=-18.72	PASS
			1000~26500	1000~26500	-36.09	<=-18.72	PASS
		2437	Reference	2.34	2.34	---	PASS
			30~1000	30~1000	-68.22	<=-17.66	PASS


11N40	Ant1	2462	1000~26500	1000~26500	-52.36	<=-17.66	PASS
			Reference	1.95	1.95	---	PASS
			30~1000	30~1000	-67.79	<=-18.05	PASS
		2422	1000~26500	1000~26500	-52.19	<=-18.05	PASS
			Reference	-1.09	-1.09	---	PASS
			30~1000	30~1000	-68.39	<=-21.09	PASS
		2437	1000~26500	1000~26500	-38.19	<=-21.09	PASS
			Reference	-0.59	-0.59	---	PASS
			30~1000	30~1000	-68.19	<=-20.59	PASS
		2452	1000~26500	1000~26500	-46.3	<=-20.59	PASS
			Reference	-1.58	-1.58	---	PASS
			30~1000	30~1000	-68.23	<=-21.58	PASS
		2452	1000~26500	1000~26500	-46.91	<=-21.58	PASS

11B_Ant0_2412_0~Reference

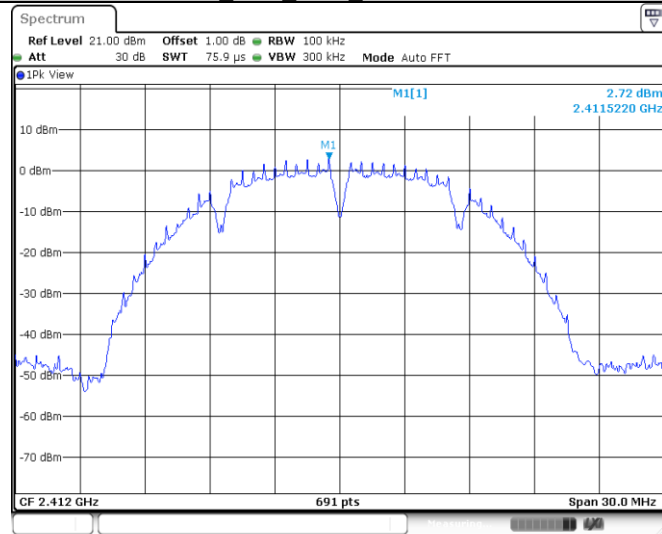


Date: 29.OCT.2023 16:11:36

11B_Ant0_2412_30~1000

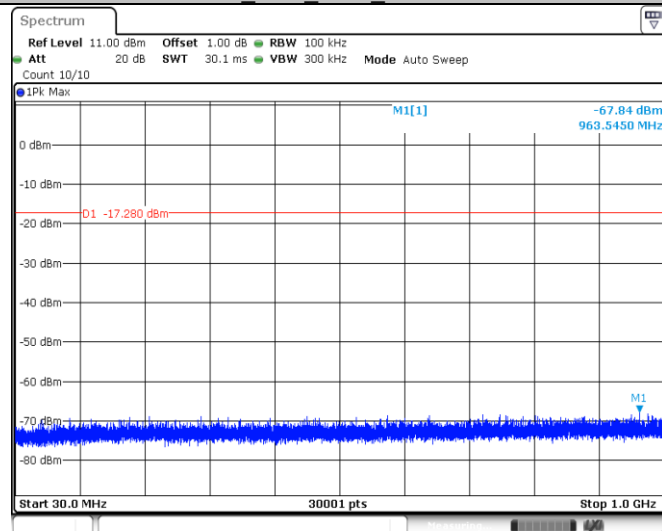


Date: 29.OCT.2023 16:11:42

11B_Ant0_2412_1000~26500

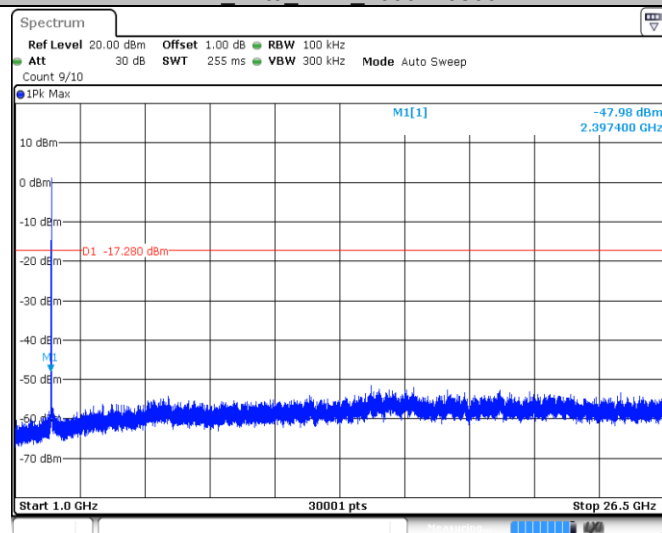


Date: 29.OCT.2023 16:11:50

11B_Ant0_2437_0~Reference

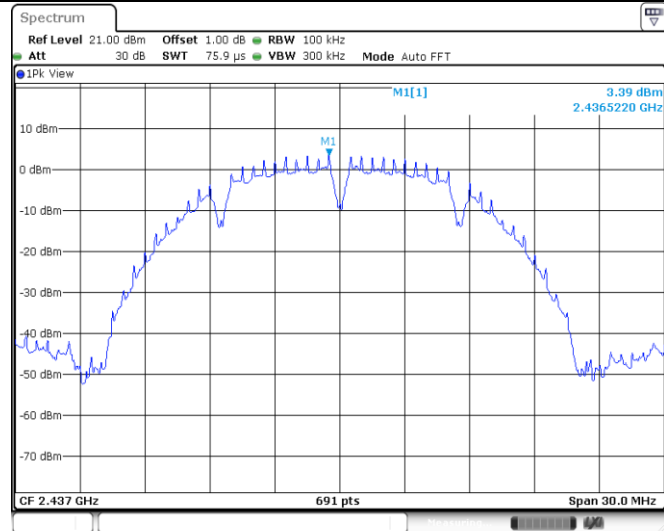


Date: 29.OCT.2023 16:13:16

11B_Ant0_2437_30~1000

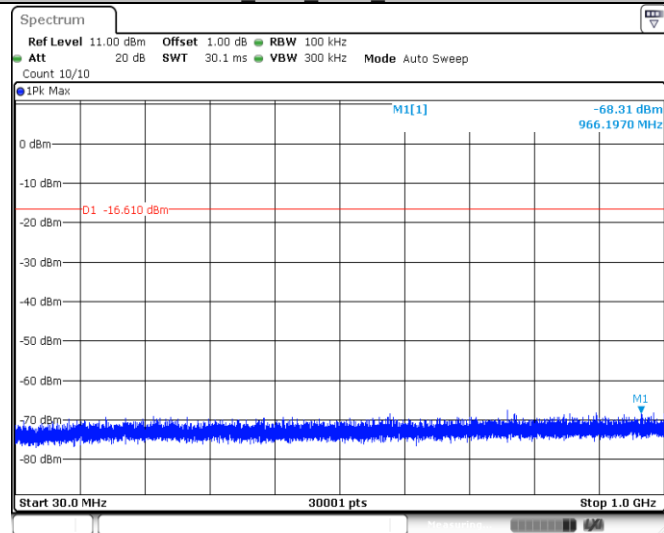


Date: 29.OCT.2023 16:13:22

11B_Ant0_2437_1000~26500

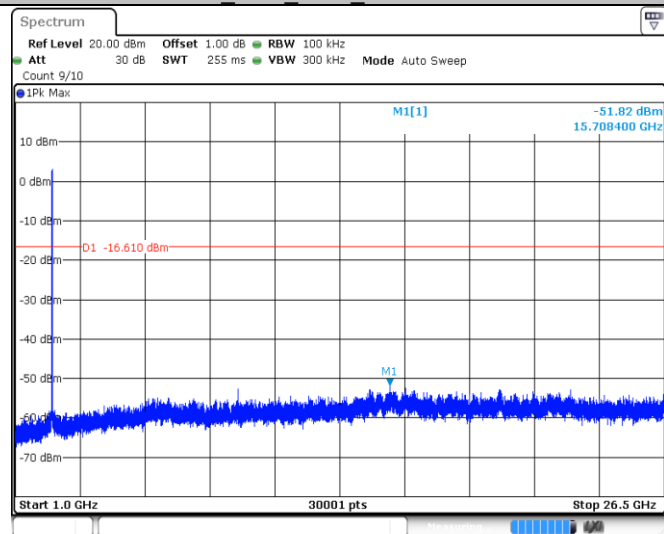


Date: 29.OCT.2023 16:13:30

11B_Ant0_2462_0~Reference

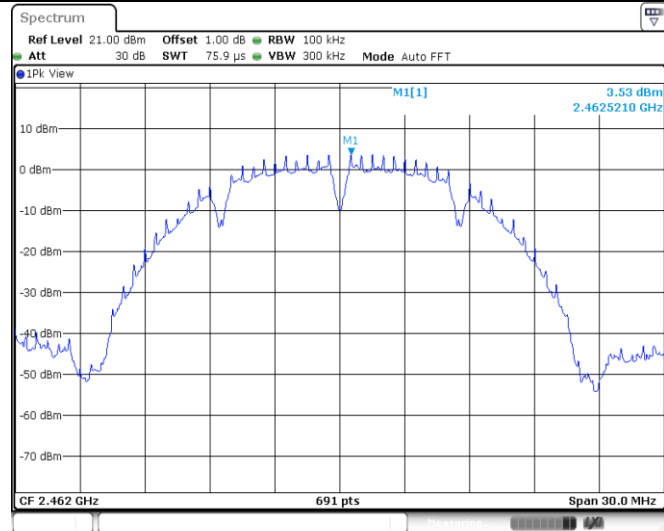


Date: 29.OCT.2023 16:15:32

11B Ant0 2462 30~1000

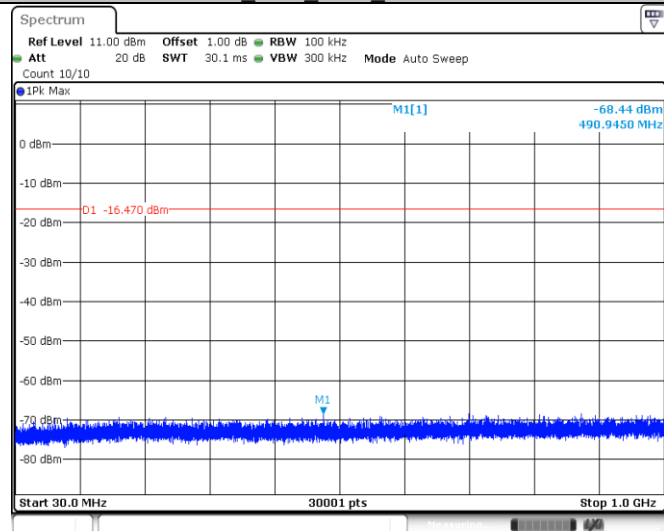


Date: 29.OCT.2023 16:15:38

11B Ant0 2462 1000~26500

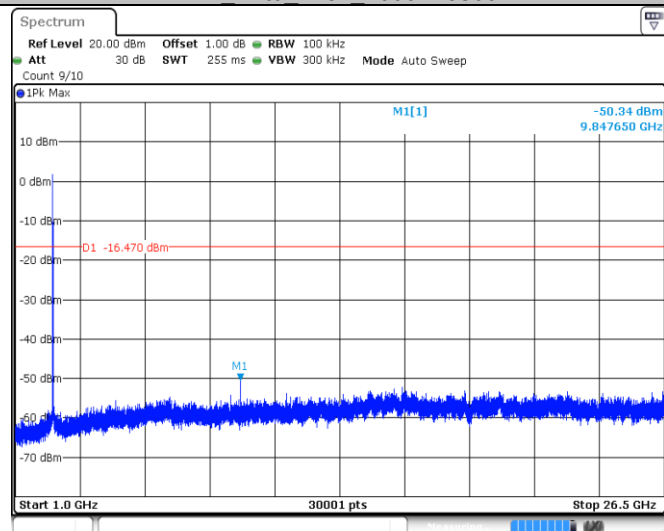


Date: 29.OCT.2023 16:15:46

11G Ant0 2412 0~Reference

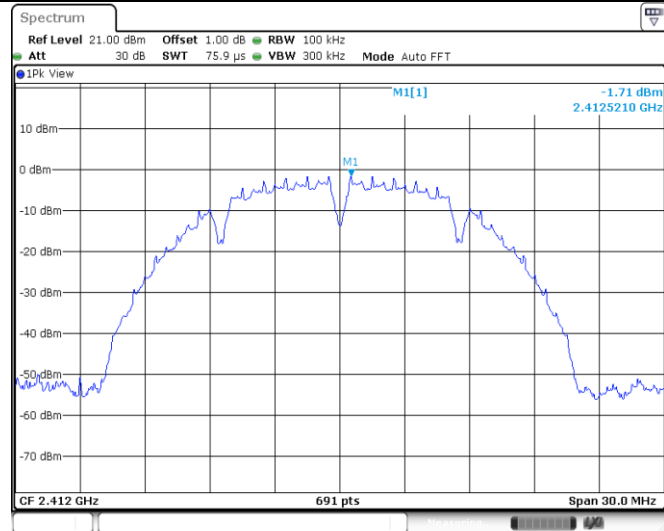


Date: 29.OCT.2023 16:18:09

11G Ant0 2412 30~1000

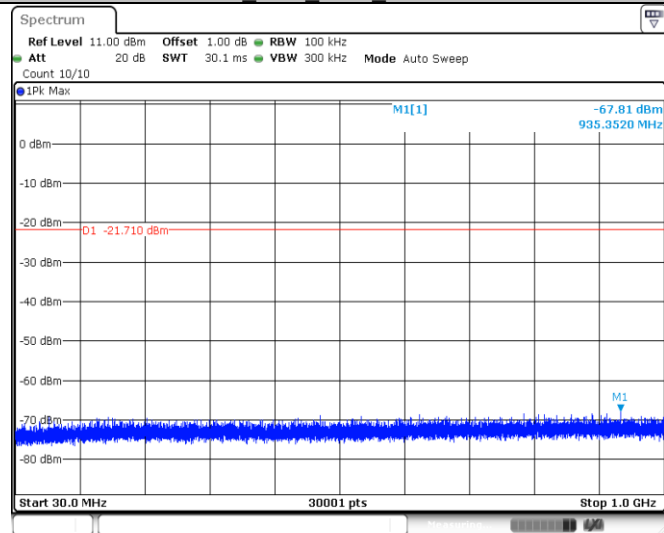


Date: 29.OCT.2023 16:18:15

11G Ant0 2412 1000~26500

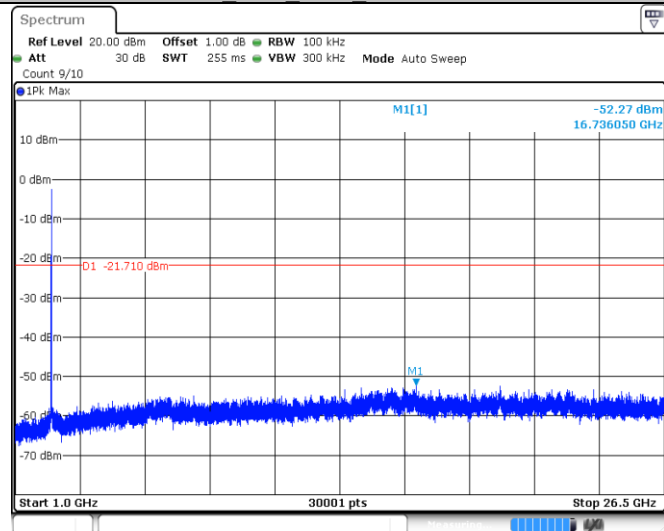


Date: 29.OCT.2023 16:18:23

11G Ant0 2437 0~Reference

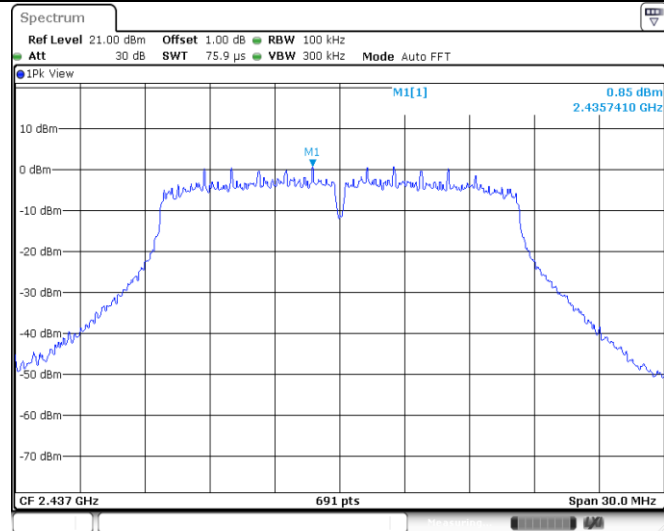


Date: 29.OCT.2023 16:19:49

11G_Ant0_2437_30~1000

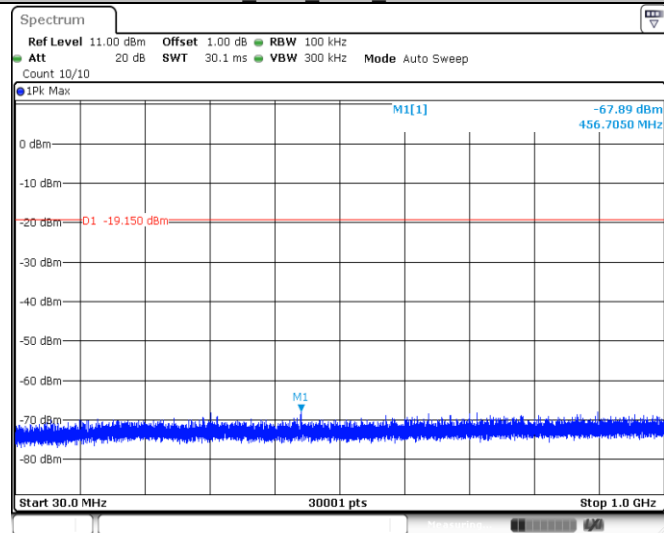


Date: 29.OCT.2023 16:19:55

11G_Ant0_2437_1000~26500

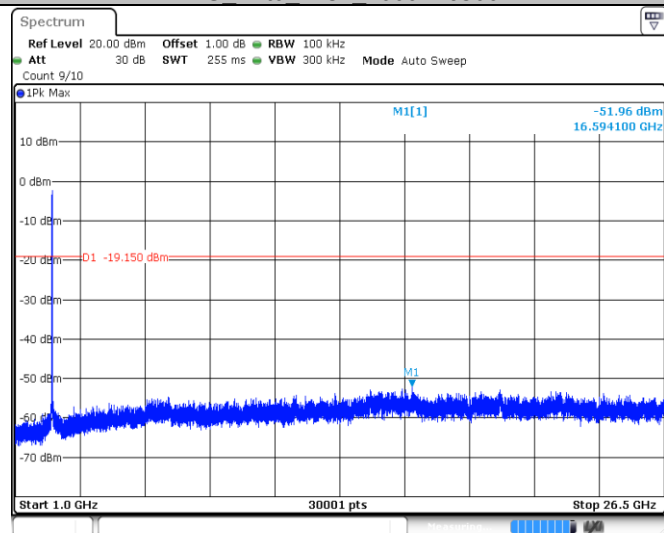


Date: 29.OCT.2023 16:20:03

11G_Ant0_2462_0~Reference

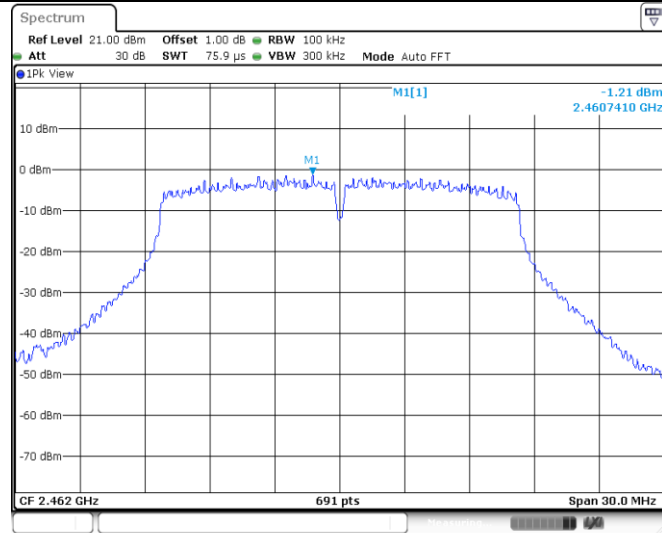


Date: 29.OCT.2023 16:23:21

11G Ant0 2462 30~1000

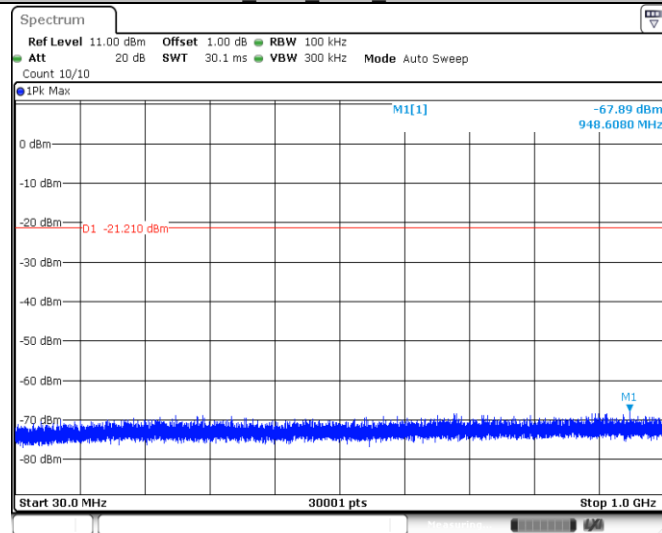


Date: 29.OCT.2023 16:23:27

11G Ant0 2462 1000~26500

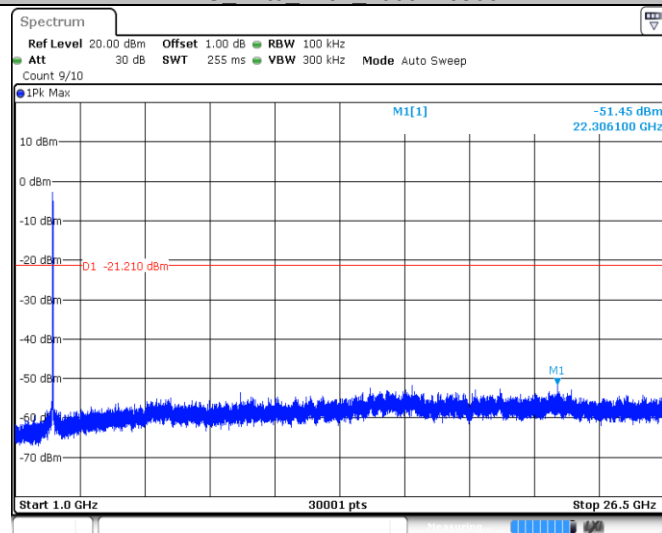


Date: 29.OCT.2023 16:23:35

11N20SISO Ant0 2412 0~Reference

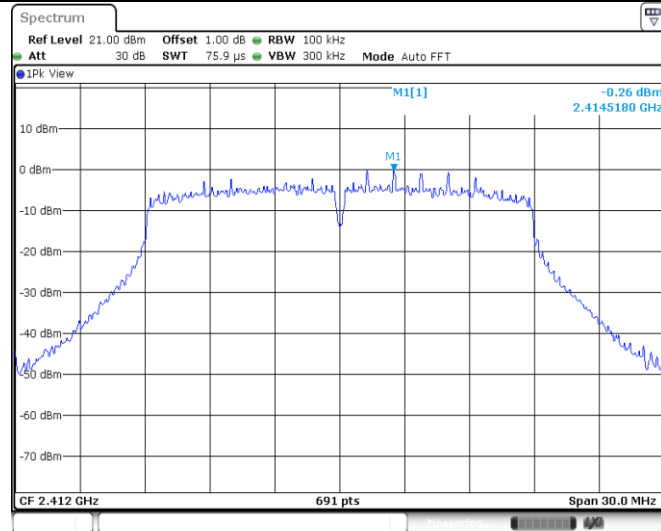


Date: 29.OCT.2023 16:27:08

11N20SISO Ant0 2412 30~1000

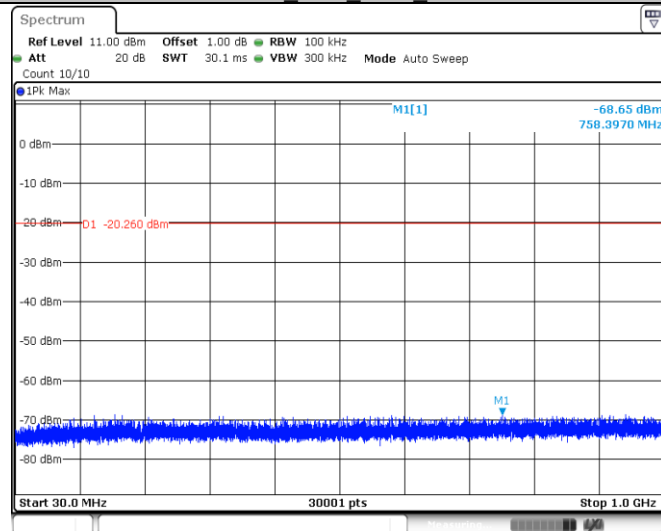


Date: 29.OCT.2023 16:27:14

11N20SISO Ant0 2412 1000~26500

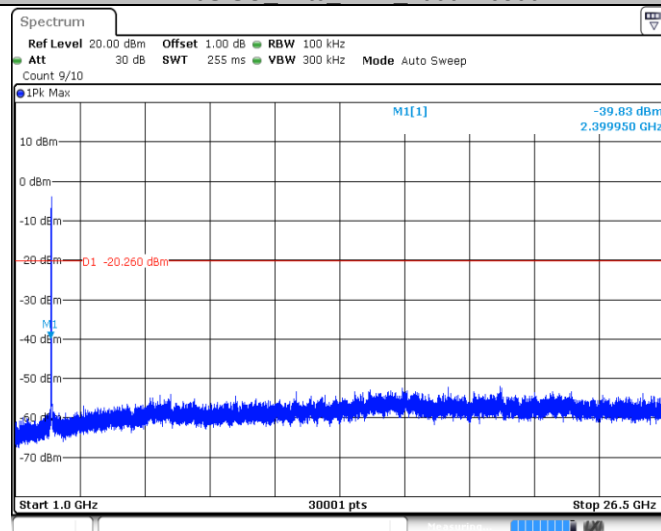


Date: 29.OCT.2023 16:27:22

11N20SISO Ant0 2437 0~Reference

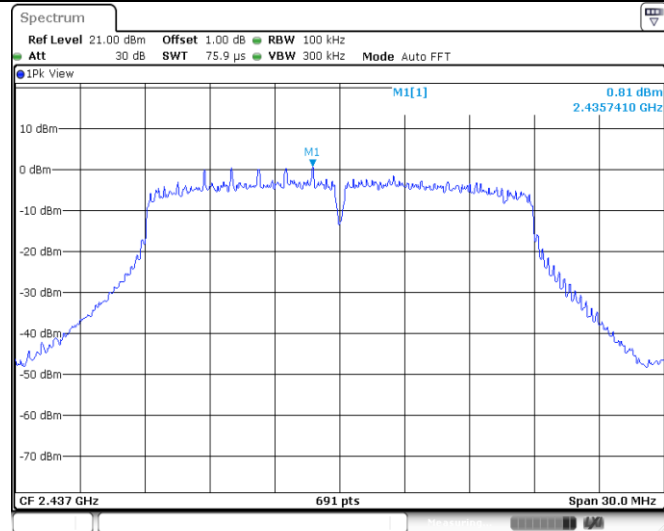


Date: 29.OCT.2023 16:29:47

11N20SISO Ant0 2437 30~1000

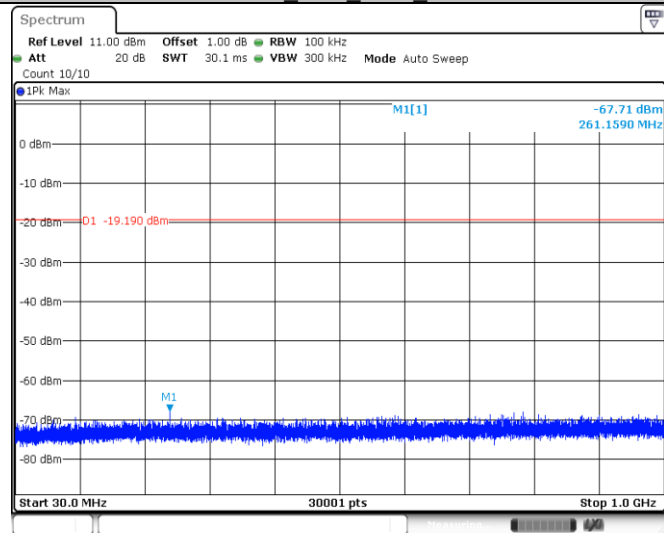


Date: 29.OCT.2023 16:29:54

11N20SISO Ant0 2437 1000~26500

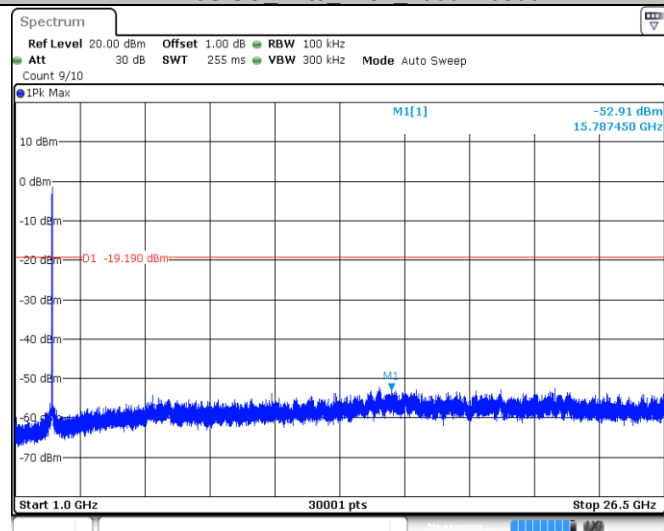


Date: 29.OCT.2023 16:30:01

11N20SISO Ant0 2462 0~Reference

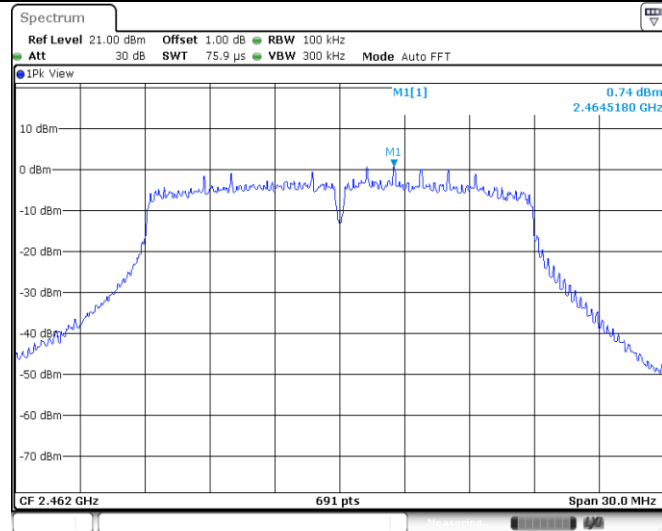


Date: 29.OCT.2023 16:31:38

11N20SISO Ant0 2462 30~1000

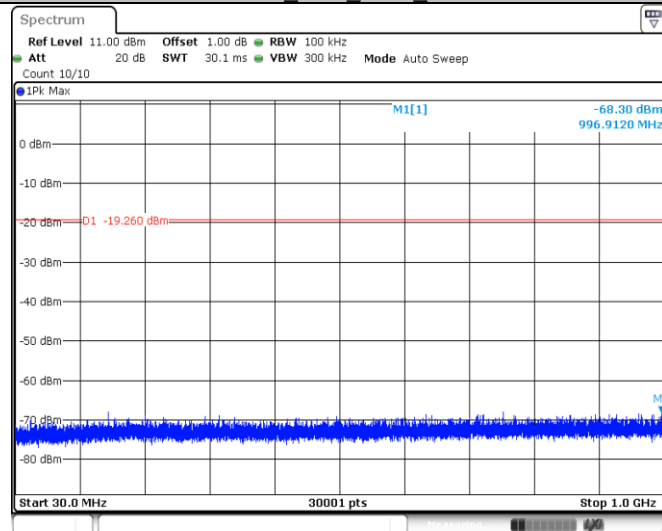


Date: 29.OCT.2023 16:31:44

11N20SISO Ant0 2462 1000~26500

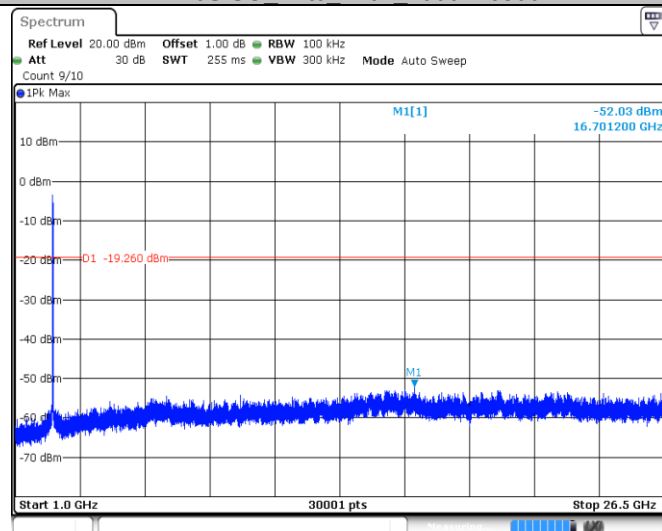


Date: 29.OCT.2023 16:31:52

11N40SISO Ant0 2422 0~Reference

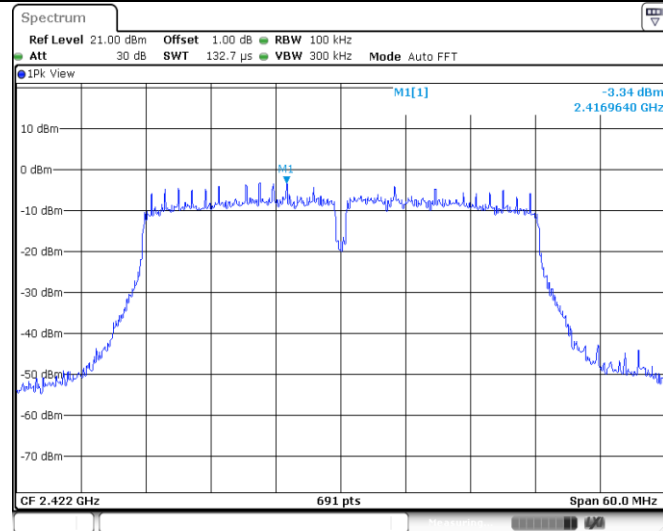


Date: 29.OCT.2023 16:39:22

11N40SISO Ant0 2422 30~1000

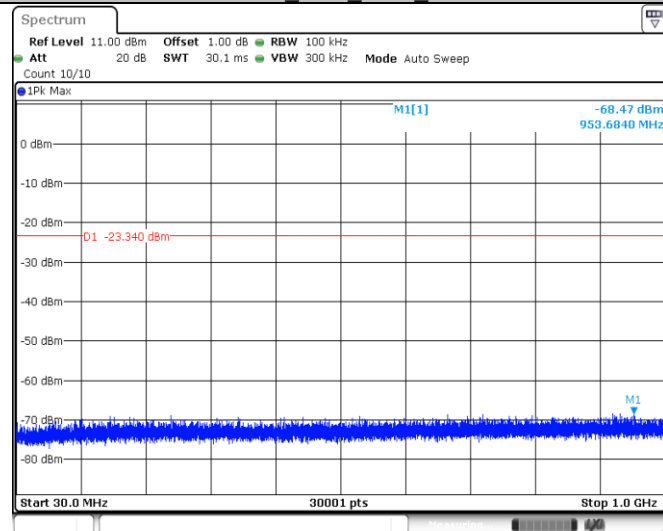


Date: 29.OCT.2023 16:39:28

11N40SISO Ant0 2422 1000~26500

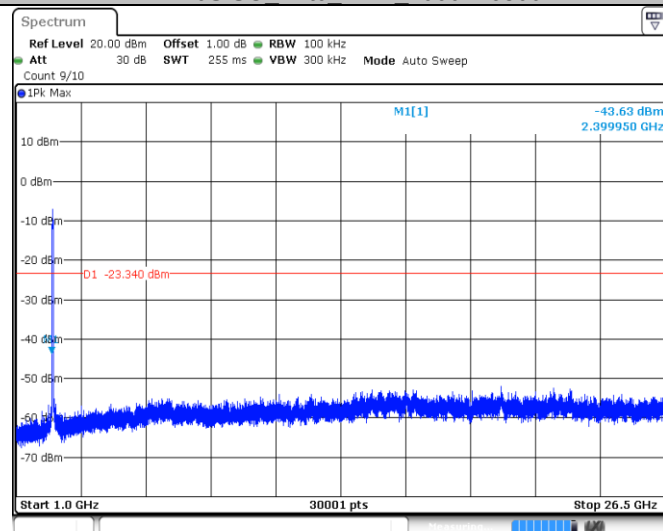


Date: 29.OCT.2023 16:39:36

11N40SISO Ant0 2437 0~Reference

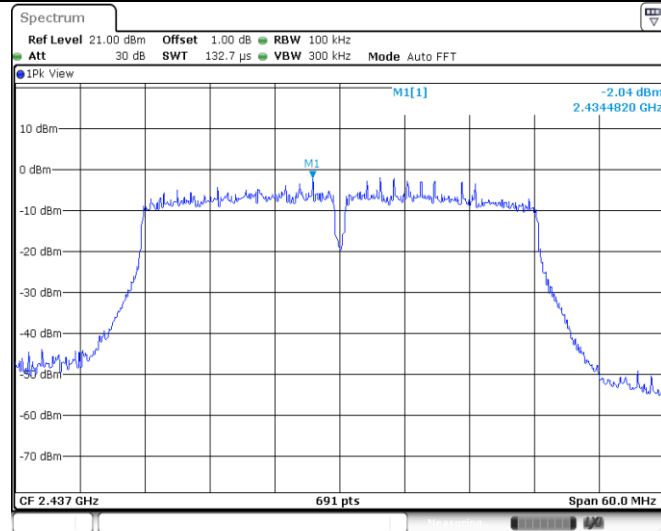


Date: 29.OCT.2023 16:40:59

11N40SISO Ant0 2437 30~1000

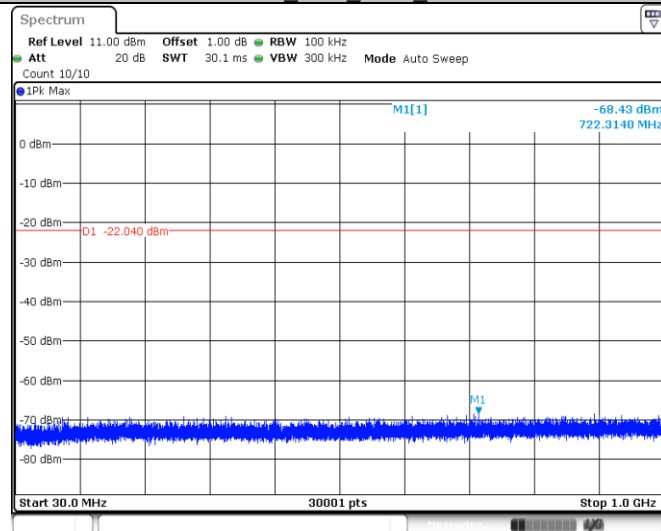

Date: 29.OCT.2023 16:41:05

11N40SISO Ant0 2437 1000~26500

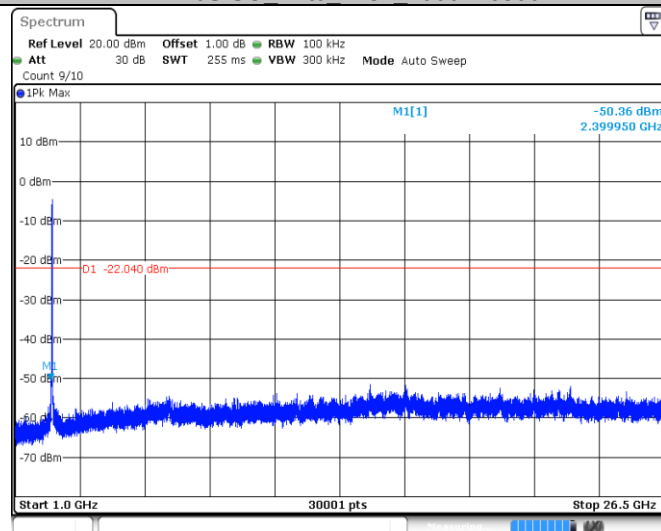

Date: 29.OCT.2023 16:41:13

11N40SISO Ant0 2452 0~Reference