


FCC Part 15 Class B

Voltage Mains Test

EUT: 9000 SM
Manufacturer: Motorola
Operating Condition: 73 deg. F, 70% R.H.
Test Site: DLS OF Screen Room
Operator: Craig Brandt
Test Specification: 120 VAC, 60 Hz
Comment: Line 1 transmit mode
Date: 6/7/04

SCAN TABLE: "FCC ClassB Voltage"

Short Description:				FCC Class B Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.0 kHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	LISN	DLS#128
				Average			

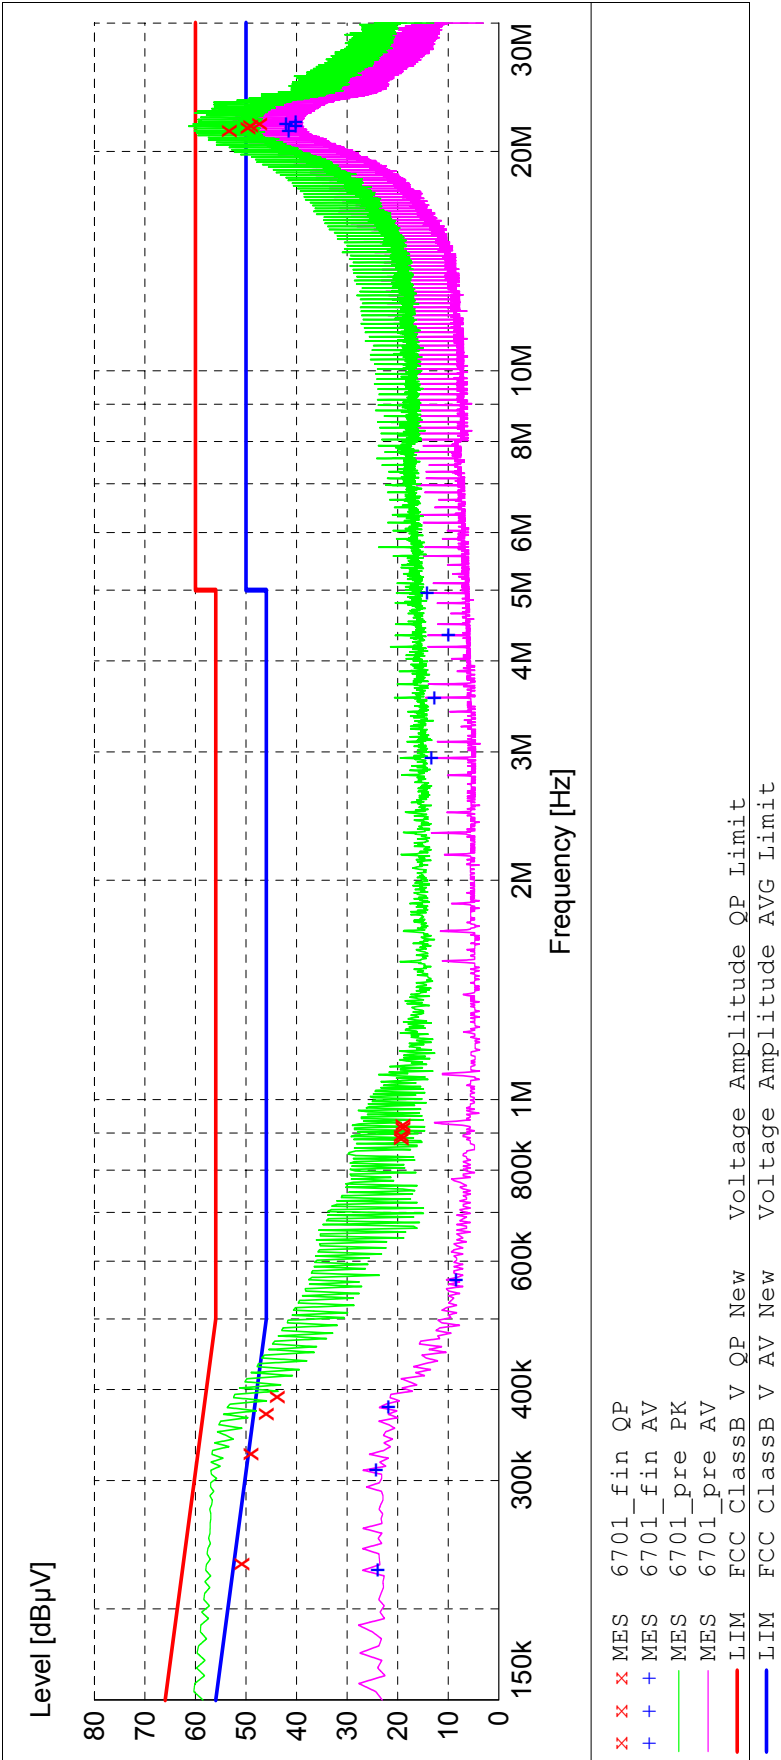

MEASUREMENT RESULT: "6701_fin QP"

6/7/2004 3:56PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.230000	51.20	10.8	62	11.3	1	---
0.326000	49.40	10.5	60	10.2	1	---
0.370000	46.40	10.4	59	12.1	1	---
0.390000	44.20	10.4	58	13.9	1	---
0.882000	19.70	10.3	56	36.3	1	---
0.890000	19.70	10.3	56	36.3	1	---
0.914000	19.30	10.3	56	36.7	1	---
0.922000	19.30	10.3	56	36.7	1	---
21.346000	53.70	11.6	60	6.3	1	---
21.502000	50.00	11.7	60	10.0	1	---
21.658000	49.50	11.7	60	10.5	1	---
21.814000	47.70	11.7	60	12.3	1	---

MEASUREMENT RESULT: "6701_fin AV"

6/7/2004 3:56PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.226000	23.90	10.8	53	28.7	1	---
0.310000	24.20	10.5	50	25.8	1	---
0.378000	21.80	10.4	48	26.5	1	---
0.566000	8.40	10.4	46	37.6	1	---
2.942000	13.30	10.1	46	32.7	1	---
3.562000	12.70	10.2	46	33.3	1	---
4.338000	9.90	10.4	46	36.1	1	---
4.954000	14.10	10.6	46	31.9	1	---
21.346000	41.50	11.6	50	8.5	1	---
21.658000	40.10	11.7	50	9.9	1	---
21.810000	42.00	11.7	50	8.0	1	---
21.966000	40.10	11.7	50	9.9	1	---