

FCC Test Report

Report No.: AGC11563210602FE02

FCC ID : 2ATFO-CM800

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Smart Touch Screen Terminal

BRAND NAME : N/A

CM800, CP800, CM800E, CM800HW, CP800, CP800HW, CT800, RP800, RM800, RT800, RP80, RP90, TM500E, TM500, TP500, VHD-CP800, VHD-CM800, VHD-CM800E,

MODEL NAME: VHD-CM800HW, VHD-CP800, VHD-CP800HW,

VHD-CT800, VHD-RP800, VHD-RM800, VHD-RT800, VHD-RP80, VHD-RP90, VHD-TM500E, VHD-TM500,

VHD-TP500

APPLICANT: ValueHD Corporation

DATE OF ISSUE : Jul. 22, 2021

STANDARD(S) : FCC Part 15.247

REPORT VERSION : VA

Attestation of Global Compliance (Shenzhen) Co., Ltd





Page 2 of 62

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0		Jul. 22, 2021	Valid	Initial Release



Report No.: AGC11563210602FE02 Page 3 of 62

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	
2.3. RELATED SUBMITTAL(S)/GRANT(S)	7
2.4. TEST METHODOLOGY	7
2.5. SPECIAL ACCESSORIES	7
2.6. EQUIPMENT MODIFICATIONS	
2.7. ANTENNA REQUIREMENT	7
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF TESTED SYSTEM	
5.2. EQUIPMENT USED IN TESTED SYSTEM	
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	12
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
7.3. LIMITS AND MEASUREMENT RESULT	
8. BANDWIDTH	17
8.1. MEASUREMENT PROCEDURE	17
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	17
9. CONDUCTED SPURIOUS EMISSION	24
9.1. MEASUREMENT PROCEDURE	24
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	24
9.3. MEASUREMENT EQUIPMENT USED	
9.4. LIMITS AND MEASUREMENT RESULT	
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	36



Report No.: AGC11563210602FE02 Page 4 of 62

10.1. MEASUREMENT PROCEDURE	36
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	36
10.3. MEASUREMENT EQUIPMENT USED	36
10.4. LIMITS AND MEASUREMENT RESULT	36
11. RADIATED EMISSION	40
11.1. MEASUREMENT PROCEDURE	40
11.2. TEST SETUP	
11.3. LIMITS AND MEASUREMENT RESULT	42
11.4. TEST RESULT	42
12. LINE CONDUCTED EMISSION TEST	56
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	56
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	57
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	57
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	58
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	60
APPENDIX B. PHOTOGRAPHS OF FUT	62



Page 5 of 62

1. VERIFICATION OF COMPLIANCE

Applicant	ValueHD Corporation	
Address	2-3/F, No. 2, Honghui Industrial Park, Xin'an Street, Bao'an District, Shenzhen, 518101, China	
Manufacturer	ValueHD Corporation	
Address	2-3/F, No. 2, Honghui Industrial Park, Xin'an Street, Bao'an District, Shenzhen, 518101, China	
Factory	ValueHD Corporation	
Address	2-3/F, No. 2, Honghui Industrial Park, Xin'an Street, Bao'an District, Shenzhen, 518101, China	
Product Designation	Smart Touch Screen Terminal	
Brand Name	N/A	
Test Model	CM800	
Series Model	CP800, CM800E, CM800HW, CP800, CP800HW, CT800, RP800, RM800, RT800, RP80, RP90, TM500E, TM500, TP500, VHD-CP800, VHD-CM800, VHD-CM800E, VHD-CM800HW, VHD-CP800, VHD-CP800HW, VHD-CT800, VHD-RP800, VHD-RM800, VHD-RT800, VHD-RP80, VHD-RP90, VHD-TM500E, VHD-TM500, VHD-TP500	
Declaration of Difference	All the series models are the same as the test model except for the model names	
Date of test	Jun. 16, 2021 to Jul. 22, 2021	
Deviation	No any deviation from the test method	
Condition of Test Sample	nple Normal	
Test Result	Pass	
Report Template	AGCRT-US-BLE/RF	
TALL TO SECULA		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By	Kelly Charry	
10	Kelly Cheng (Project Engineer)	Jul. 22, 2021
Reviewed By	Max Zhang	
	Max Zhang (Reviewer)	Jul. 22, 2021
Approved By	Formesticis	
6,0	Forrest Lei (Authorized Officer)	Jul. 22, 2021



Page 6 of 62

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "Smart Touch Screen Terminal". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	3.925dBm (Max)
Bluetooth Version	V5.0
Modulation	BR □GFSK, EDR □π /4-DQPSK, □8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps
Number of channels	40 Channels
Antenna Designation	FPC Antenna (Comply with requirements of the FCC part 15.203)
Antenna Gain	1.65dBi
Hardware Version	1.0
Software Version	1.0
Power Supply	DC 12V by adapter

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402 MHz
100 aC	1	2404 MHz
2400~2483.5MHz	CO CO	
cC a	38	2478 MHz
200	39	2480 MHz



Page 7 of 62

2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2ATFO-CM800** filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Page 8 of 62

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



Page 9 of 62

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION	
1	Low channel TX	
2	Middle channel TX	
3	High channel TX	

Note

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 4. The test software is the adb which can set the EUT into the individual test modes.




Page 10 of 62


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:



5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Smart Touch Screen Terminal	CM800	2ATFO-CM800	EUT
2	Adapter	TS-A036-120030L	Input:100-240, 50-60Hz, 1.2A Output:12V, 3A	AE
3	Earphone	AM116	N/A	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Compliant



Page 11 of 62

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd	
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	
Designation Number	esignation Number CN1259	
FCC Test Firm Registration Number	975832	
A2LA Cert. No.	5054.02	
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA	

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Equipment Manufacturer		Model S/N		Cal. Due			
TEST RECEIVER	R&S	ESPI	101206	May 15, 2021	May 14, 2022			
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2021	Jun. 08, 2022			
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A			

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2021	May 14, 2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 07, 2020	Dec. 06, 2021
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK BBHA 9170 #768		Sep. 21, 2019	Sep. 20, 2021	
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2022
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023
Test software	FARA	EZ-EMC (Ver RA-03A)	N/A	N/A	N/A



Page 12 of 62

7. PEAK OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW ≥ DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

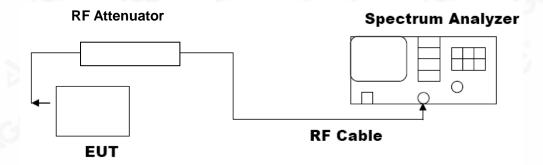



g/Inspection The test results the test report.




7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power							
Test Mode	Test Channel Peak Power (MHz) (dBm)		Limits (dBm)	Pass or Fail			
0	2402	1.817	≤30	Pass			
GFSK 1M	2440	3.925	≤30	Pass			
8	2480	3.617	≤30	Pass			
-C	2402	1.675	≤30	Pass			
GFSK 2M	2440	3.925	≤30	Pass			
	2480	3.637	≤30	Pass			

Test Graphs of Conducted Output Power




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Figure Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


















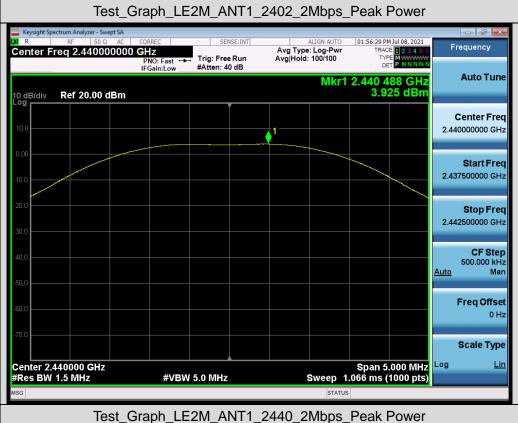



g/Inspection
The test results
If the test report.



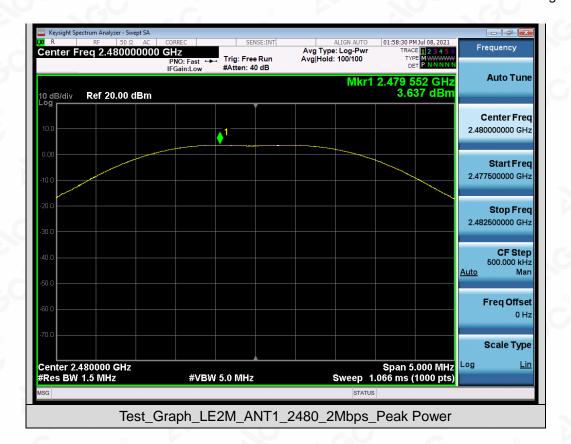



Page 17 of 62

8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.


Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.


8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth								
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Doce or Eo				
- 60	2402	1.061	0.713	≥0.5	Pass			
GFSK 1M	2440	1.061	0.717	≥0.5	Pass			
· ·	2480	1.062	0.714	≥0.5	Pass			
-C	2402	2.085	1.115	≥0.5	Pass			
GFSK 2M	2440	2.085	1.107	≥0.5	Pass			
0	2480	2.084	1.111	≥0.5	Pass			







Test Graphs of Occupied Bandwidth

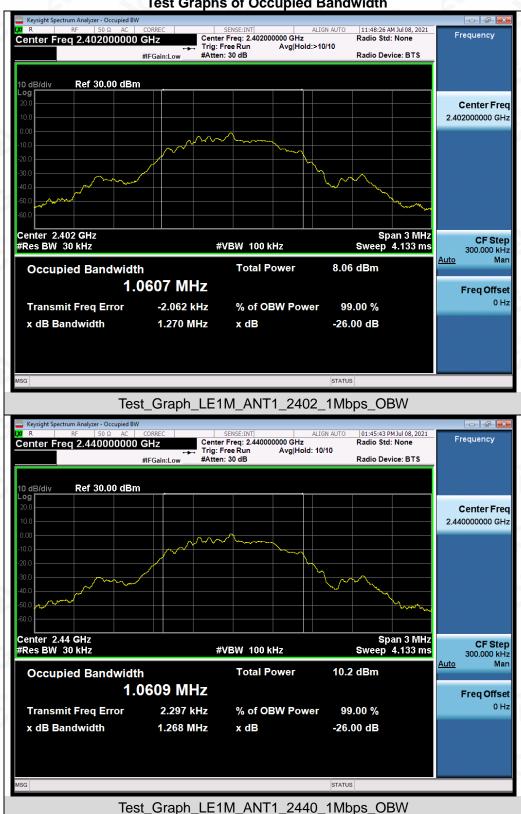


Compliance Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15d ace of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





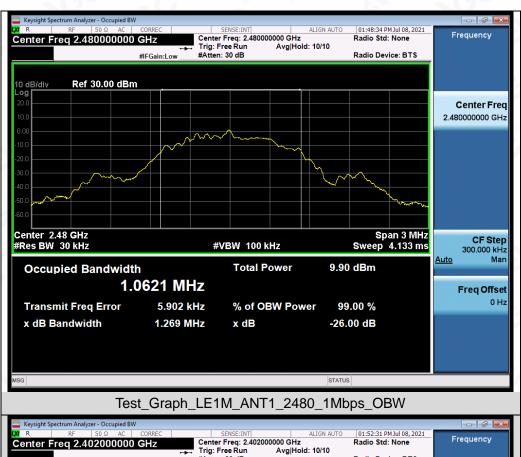


















Test Graphs of DTS Bandwidth

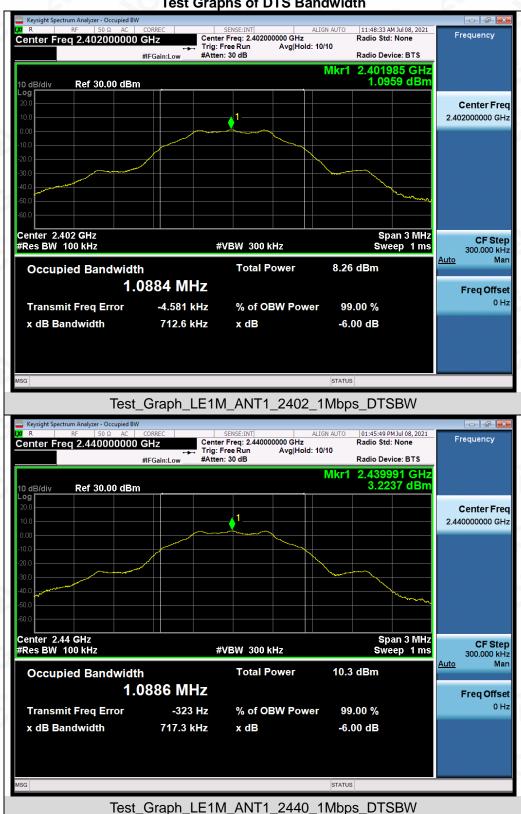


Compliance Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter The test results ance of the test report. presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15d Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.
















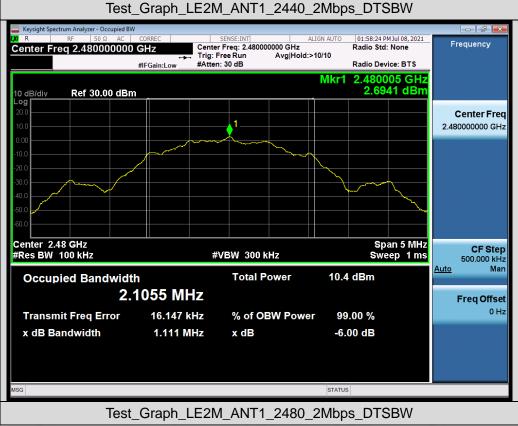



Page 24 of 62

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT						
Annii alia i inii	Measurement Result					
Applicable Limits	Test Data	Criteria				
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS				






Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Test_Graph_LE1M_ANT1_2402_1Mbps_Lower Band Emissions















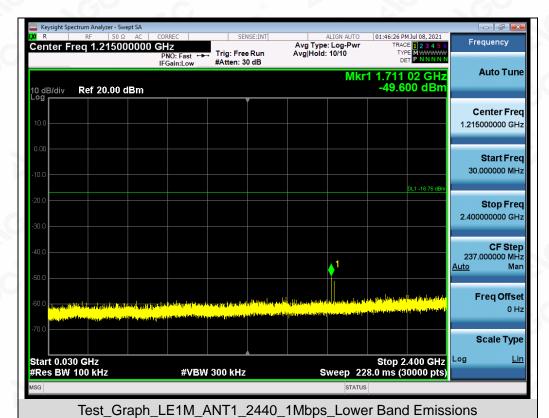












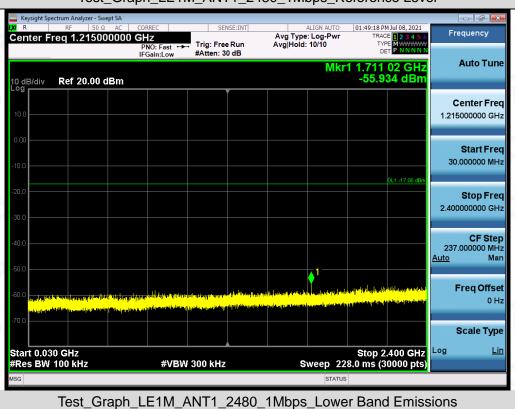







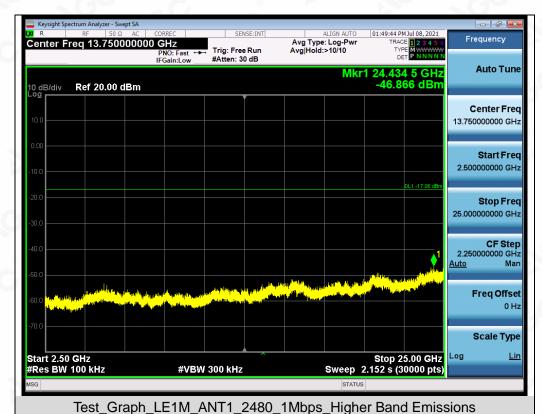








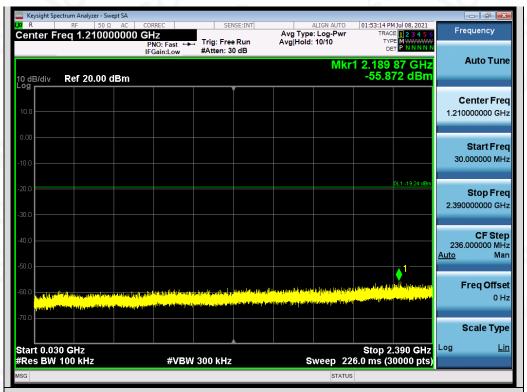











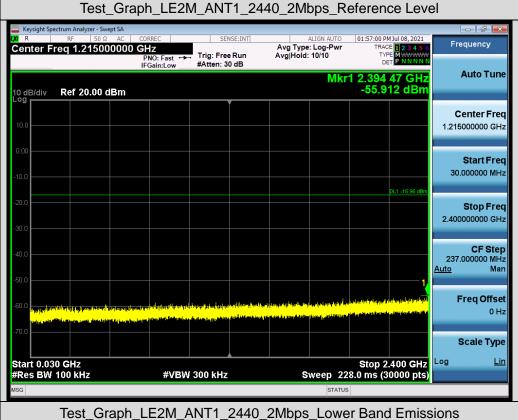
















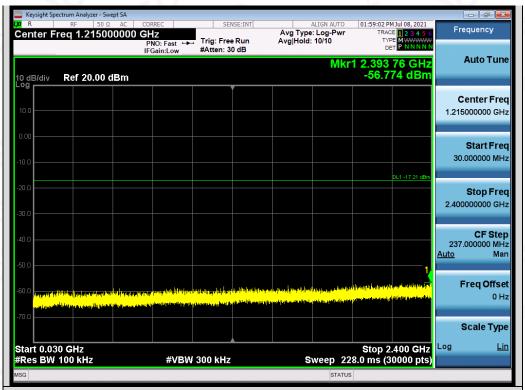











Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

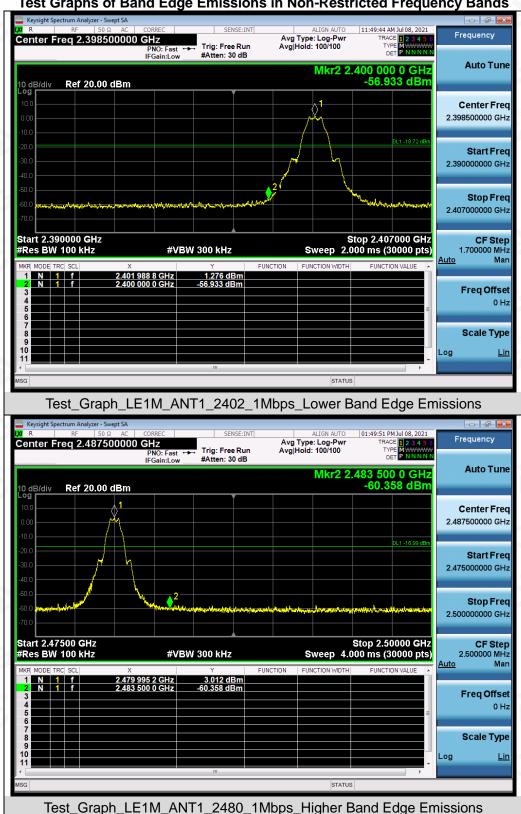





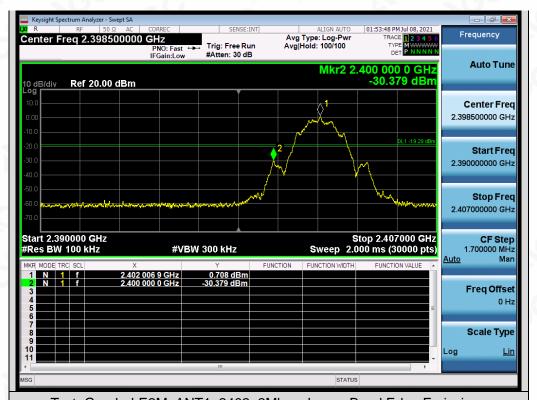

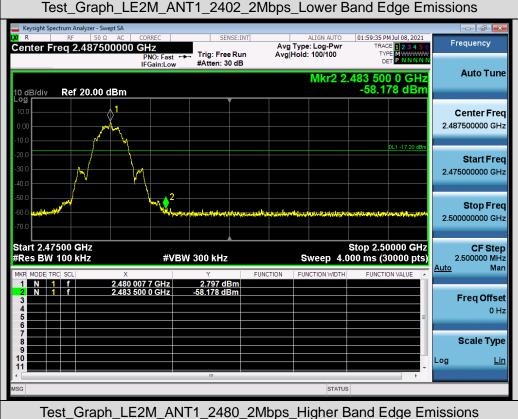



Page 36 of 62

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


Refer to Section 7.2.

10.3. MEASUREMENT EQUIPMENT USED

Refer to Section 6.


10.4. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power Spectral Density						
Test Mode	Test Channel (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail		
<u> </u>	2402	-12.212	≪8	Pass		
GFSK 1M	2440	-10.100	≤8	Pass		
G ®	2480	-10.436	≤8	Pass		
60	2402	-15.342	≤8	Pass		
GFSK 2M	2440	-13.005	≤ 8	Pass		
	2480	-13.233	≪8	Pass		







Test Graphs of Conducted Output Power Spectral Density

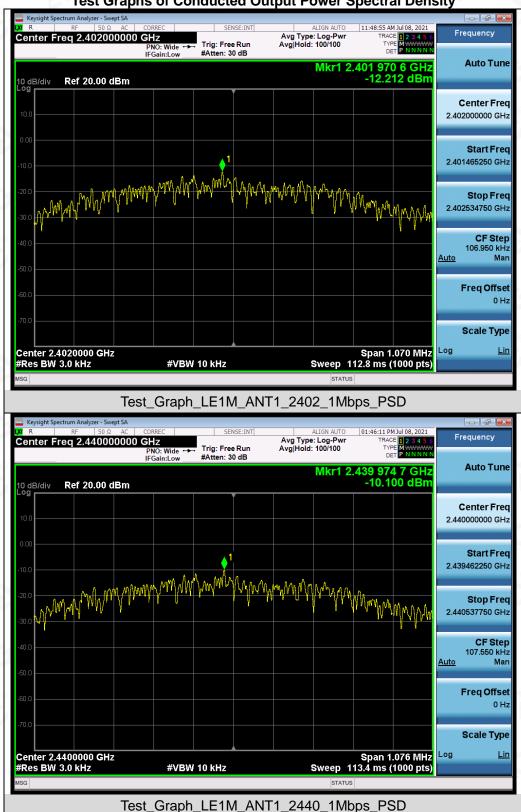



Complian Pesting/Inspection Any report having not been signed by authorized approver, or having been altered without authorization, or maying not been signed by authorization of AGC. The test results stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results are the invalid to AGC within 15day Cafter the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






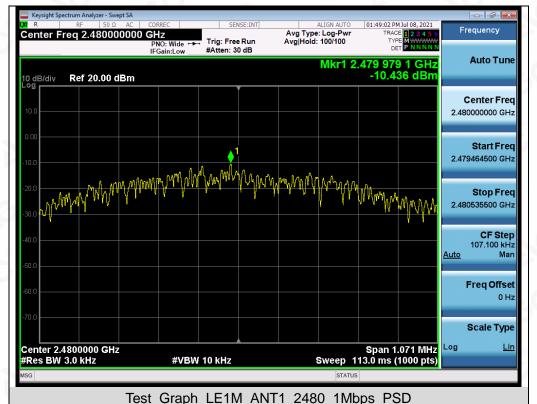


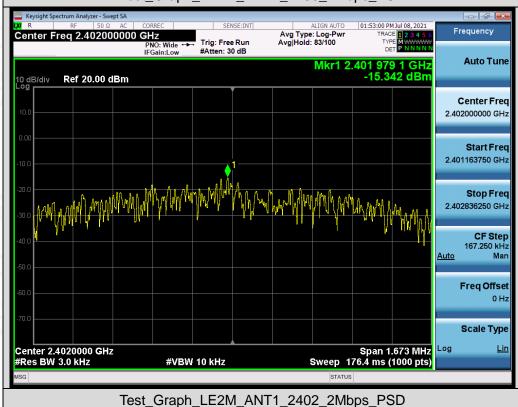





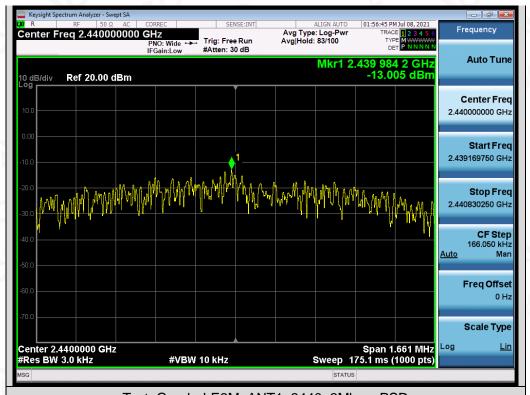

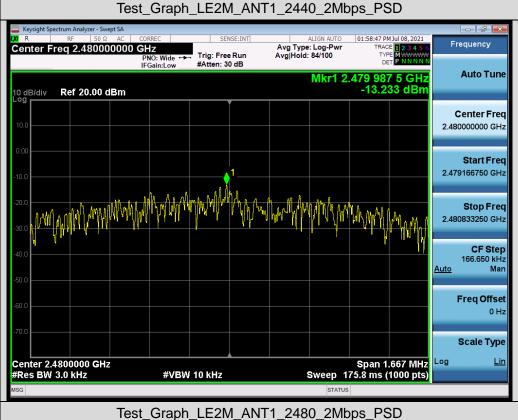




Page 40 of 62

11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.






11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

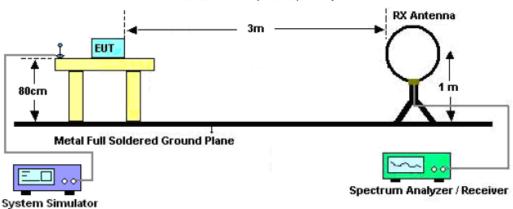

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

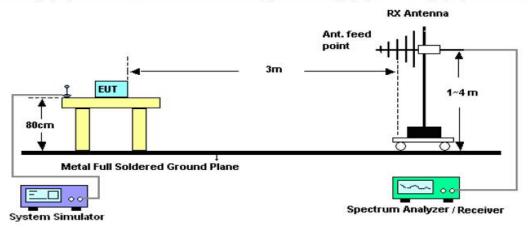

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

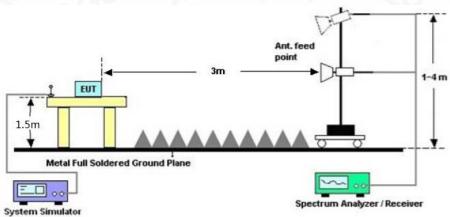



Page 42 of 62

11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Page 43 of 62

Radiated emission from 30MHz to 1000MHz

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

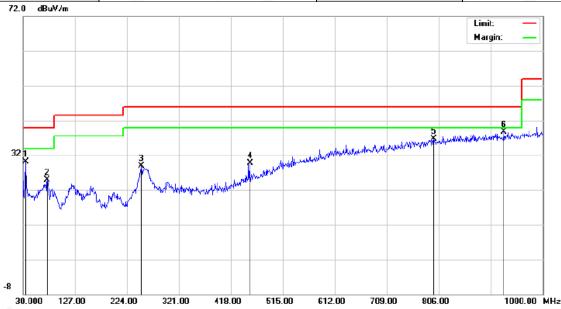


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∨	dB	dBuV/m	dBuV/m	dB	Detector
1		33.8800	17.75	12.29	30.04	40.00	-9.96	peak
2		74.6200	9.33	15.65	24.98	40.00	-15.02	peak
3		250.1899	14.46	14.50	28.96	46.00	-17.04	peak
4		452.9200	9.45	20.16	29.61	46.00	-16.39	peak
5		796.2999	6.28	30.33	36.61	46.00	-9.39	peak
6	*	927.2500	6.72	31.93	38.65	46.00	-7.35	peak

RESULT: PASS



Page 44 of 62

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

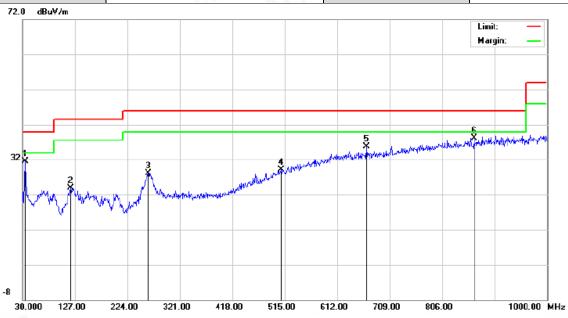

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		33.8800	19.27	12.29	31.56	40.00	-8.44	peak
2		118.2699	6.56	17.37	23.93	43.50	-19.57	peak
3		261.8299	12.91	15.28	28.19	46.00	-17.81	peak
4		507.2400	5.75	23.28	29.03	46.00	-16.97	peak
5		665.3500	8.00	27.73	35.73	46.00	-10.27	peak
6	*	864.2000	6.94	31.24	38.18	46.00	-7.82	peak

RESULT: PASS Note:

1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been tested. The mode 2 of 1M is the worst case and recorded in the report.



Page 45 of 62

The test results the test report.

Radiated emission above 1GHz

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.000	44.39	0.08	44.47	74	-29.53	peak
4804.000	35.71	0.08	35.79	54	-18.21	AVG
7206.000	38.46	2.21	40.67	74	-33.33	peak
7206.000	30.18	2.21	32.39	54	-21.61	AVG
		8				8
			8			

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.19	0.08	46.27	74	-27.73	peak
4804.000	35.87	0.08	35.95	54	-18.05	AVG
7206.000	38.54	2.21	40.75	74	-33.25	peak
7206.000	30.46	2.21 ®	32.67	54	-21.33	AVG
		-C	8			
(0)				®		

Factor = Antenna Factor + Cable Loss - Pre-amplifier



Page 46 of 62

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

(dBµV) 45.16	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
45.16	0.44		,	(ab)	
	0.14	45.3	74	-28.7	peak
35.27	0.14	35.41	54	-18.59	AVG
39.42	2.36	41.78	74	-32.22	peak
31.44	2.36	33.8	54	-20.2	AVG
0		4 64	-6		
	0				0
	39.42	39.42 2.36	39.42 2.36 41.78	39.42 2.36 41.78 74	39.42 2.36 41.78 74 -32.22

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin 🔍	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	45.19	0.14	45.33	74	-28.67	peak
4880.000	38.27	0.14	38.41	54	-15.59	AVG
7320.000	40.34	2.36	42.7	74	-31.3	peak
7320.000	31.59	2.36	33.95	54	-20.05	AVG
		G	(2)			
				®		

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 47 of 62

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

		(8)	_			
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.29	0.22	46.51	74	-27.49	peak
4960.000	35.17	0.22	35.39	54	-18.61	AVG
7440.000	40.15	2.64	42.79	74	-31.21	peak
7440.000	30.58	2.64	33.22	54	-20.78	AVG
					0	
	LC	8				0
Remark:			(3)			G

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
45.13	0.22	45.35	74	-28.65	peak
36.27	0.22	36.49	54	-17.51	AVG
39.57	2.64	42.21	74 🔍	-31.79	peak
28.46	2.64	31.1	54	-22.9	AVG
- COP	-61	(a)		6	0
	(dBµV) 45.13 36.27 39.57	(dBµV) (dB) 45.13 0.22 36.27 0.22 39.57 2.64	(dBμV) (dB) (dBμV/m) 45.13 0.22 45.35 36.27 0.22 36.49 39.57 2.64 42.21	(dBμV) (dB) (dBμV/m) (dBμV/m) 45.13 0.22 45.35 74 36.27 0.22 36.49 54 39.57 2.64 42.21 74	(dBμV) (dB) (dBμV/m) (dBμV/m) (dBμV/m) 45.13 0.22 45.35 74 -28.65 36.27 0.22 36.49 54 -17.51 39.57 2.64 42.21 74 -31.79

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The 1M is the worst case and recorded in the report.