

# FCC Test Report

## (PART 27)

**Report No.:** RF180723C13-3

**FCC ID:** APV-3040LA

**Test Model:** LMU3040LA

**Received Date:** Apr. 16, 2018

**Test Date:** Apr. 16, 2018, 2018 ~ Aug. 14, 2018

**Issued Date:** Aug. 22, 2018

**Applicant:** CalAmp Corporation

**Address:** 2177 Salk Ave., Suite 200 Carlsbad, CA 92008

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan  
(R.O.C.)

**Test Location (1):** No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City  
33383, Taiwan (R.O.C)

**FCC Registration /**  
**Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results.....</b>	<b>5</b>
2.1 Measurement Uncertainty.....	6
2.2 Test Site and Instruments .....	7
<b>3 General Information .....</b>	<b>9</b>
3.1 General Description of EUT .....	9
3.2 Configuration of System under Test.....	10
3.2.1 Description of Support Units.....	10
3.3 Test Mode Applicability and Tested Channel Detail .....	11
3.4 EUT Operating Conditions .....	14
3.5 General Description of Applied Standards.....	14
<b>4 Test Types and Results .....</b>	<b>15</b>
4.1 Output Power Measurement .....	15
4.1.1 Limits of Output Power Measurement.....	15
4.1.2 Test Procedures.....	15
4.1.3 Test Setup.....	16
4.1.4 Test Results .....	17
4.2 Frequency Stability Measurement .....	25
4.2.1 Limits of Frequency Stability Measurement .....	25
4.2.2 Test Procedure .....	25
4.2.3 Test Setup.....	25
4.2.4 Test Results .....	26
4.3 Occupied Bandwidth Measurement.....	36
4.3.1 Limits of Occupied Bandwidth Measurement .....	36
4.3.2 Test Procedure .....	36
4.3.3 Test Setup.....	36
4.3.4 Test Result .....	37
4.4 Band Edge Measurement .....	42
4.4.1 Limits of Band Edge Measurement .....	42
4.4.2 Test Setup.....	42
4.4.3 Test Procedures.....	42
4.4.4 Test Results .....	43
4.5 Peak to Average Ratio .....	53
4.5.1 Limits of Peak to Average Ratio Measurement .....	53
4.5.2 Test Setup.....	53
4.5.3 Test Procedures.....	53
4.5.4 Test Results .....	54
4.6 Conducted Spurious Emissions .....	59
4.6.1 Limits of Conducted Spurious Emissions Measurement.....	59
4.6.2 Test Setup.....	59
4.6.3 Test Procedure .....	59
4.6.4 Test Results .....	60
4.7 Radiated Emission Measurement.....	82
4.7.1 Limits of Radiated Emission Measurement .....	82
4.7.2 Test Procedure .....	82
4.7.3 Deviation from Test Standard .....	82
4.7.4 Test Setup.....	83
4.7.5 Test Results .....	84
<b>5 Pictures of Test Arrangements.....</b>	<b>120</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>121</b>

### Release Control Record

Issue No.	Description	Date Issued
RF180723C13-3	Original Release	Aug. 22, 2018

## 1 Certificate of Conformity

**Product:** OBD2 LTE/3G/GPS/BT tracker

**Brand:** CalAmp Corp.

**Test Model:** LMU3040LA

**Sample Status:** Production Unit

**Applicant:** CalAmp Corporation

**Test Date:** Apr. 16, 2018, 2018 ~ Aug. 14, 2018

**Standards:** FCC Part 27, Subpart C, H, L

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Aug. 22, 2018

Ivonne Wu / Supervisor

**Approved by :**  , **Date:** Aug. 22, 2018

Dylan Chiou / Project Engineer

## 2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2 (LTE 4)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(h)	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(h)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -34.45 dB at 43.58 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 12)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(c)(10)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(g)	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(g)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -19.65 dB at 65.89 MHz.

## 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expended Uncertainty (k=2) ( $\pm$ )
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 16, 2018	Mar. 15, 2019
Spectrum Analyzer Agilent	N9010A	MY52220314	Nov. 24, 2017	Nov. 23, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 12, 2017	Nov. 11, 2018
HORN Antenna SCHWARZBECK	BBHA 9170	148	Dec. 13, 2017	Dec. 12, 2018
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Dec. 06, 2017	Dec. 05, 2018
MXG Vector signal generator Agilent	N5182B	MY53050430	Oct. 24, 2017	Oct. 23, 2018
Loop Antenna	EM-6879	269	Aug. 11, 2017	Aug. 10, 2018
	HLA 6121	45745	Jun. 14, 2018	Jun. 13, 2019
Preamplifier EMCI	EMC001340	980201	Nov. 01, 2017	Oct. 30, 2018
Preamplifier EMCI	EMC 012645	980115	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 330H	980112	Oct. 13, 2017	Oct. 12, 2018
Power Meter Anritsu	ML2495A	1012010	Aug. 15, 2017	Aug. 14, 2018
Power Sensor Anritsu	MA2411B	1315050	Aug. 15, 2017	Aug. 14, 2018
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1000(140807)	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 20, 2017	Oct. 19, 2018
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 08, 2017	Sep. 07, 2018
DC Power Supply Topward	33010D	807748	Oct. 25, 2016	Oct. 24, 2018
Digital Multimeter Fluke	87-III	70360742	Jun. 30, 2017	Jun. 29, 2018
			Jun. 29, 2018	Jun. 28, 2019

- Note:
1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 10.
  3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
  4. The IC Site Registration No. is IC7450F-10.

### 3 General Information


#### 3.1 General Description of EUT

<b>Product</b>	OBD2 LTE/3G/GPS/BT tracker	
<b>Brand</b>	CalAmp Corp.	
<b>Test Model</b>	LMU3040LA	
<b>Status of EUT</b>	Production Unit	
<b>Power Supply Rating</b>	5~30 Vdc	
<b>Modulation Type</b>	LTE	QPSK, 16QAM
<b>Frequency Range</b>	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1710.7 ~ 1754.3 MHz
	LTE Band 4 (Channel Bandwidth: 3 MHz)	1711.5 ~ 1753.5 MHz
	LTE Band 4 (Channel Bandwidth: 5 MHz)	1712.5 ~ 1752.5 MHz
	LTE Band 4 (Channel Bandwidth: 10 MHz)	1715.0 ~ 1750.0 MHz
	LTE Band 4 (Channel Bandwidth: 15 MHz)	1717.5 ~ 1747.5 MHz
	LTE Band 4 (Channel Bandwidth: 20 MHz)	1720.0 ~ 1745.0 MHz
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	699.7 ~ 715.3 MHz
	LTE Band 12 (Channel Bandwidth: 3 MHz)	700.5 ~ 714.5 MHz
	LTE Band 12 (Channel Bandwidth: 5 MHz)	701.5 ~ 713.5 MHz
	LTE Band 12 (Channel Bandwidth: 10 MHz)	704.0 ~ 711.0 MHz
<b>Emission Designator</b>	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 4 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 4 (Channel Bandwidth: 5 MHz)	4M49G7D
	LTE Band 4 (Channel Bandwidth: 10 MHz)	8M96G7D
	LTE Band 4 (Channel Bandwidth: 15 MHz)	13M4G7D
	LTE Band 4 (Channel Bandwidth: 20 MHz)	17M9G7D
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 12 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 12 (Channel Bandwidth: 5 MHz)	4M49W7D
	LTE Band 12 (Channel Bandwidth: 10 MHz)	8M97G7D
<b>Max. ERP Power</b>	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	142.23 mW
	LTE Band 12 (Channel Bandwidth: 3 MHz)	149.97 mW
	LTE Band 12 (Channel Bandwidth: 5 MHz)	159.59 mW
	LTE Band 12 (Channel Bandwidth: 10 MHz)	169.04 mW
<b>Max. EIRP Power</b>	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	287.74 mW
	LTE Band 4 (Channel Bandwidth: 3 MHz)	304.09 mW
	LTE Band 4 (Channel Bandwidth: 5 MHz)	322.85 mW
	LTE Band 4 (Channel Bandwidth: 10 MHz)	339.63 mW
	LTE Band 4 (Channel Bandwidth: 15 MHz)	356.45 mW
	LTE Band 4 (Channel Bandwidth: 20 MHz)	375.84 mW
<b>Antenna Type</b>	Fixed Internal Antenna	
<b>Antenna Gain</b>	LTE Band 4	2.74 dBi
	LTE Band 12	-0.33 dBi
<b>Accessory Device</b>	Refer to Note as below	
<b>Data Cable Supplied</b>	Refer to Note as below	

Note:

1. The maximum bandwidth for 16QAM of the EUT is 5 MHz.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

### 3.2 Configuration of System under Test

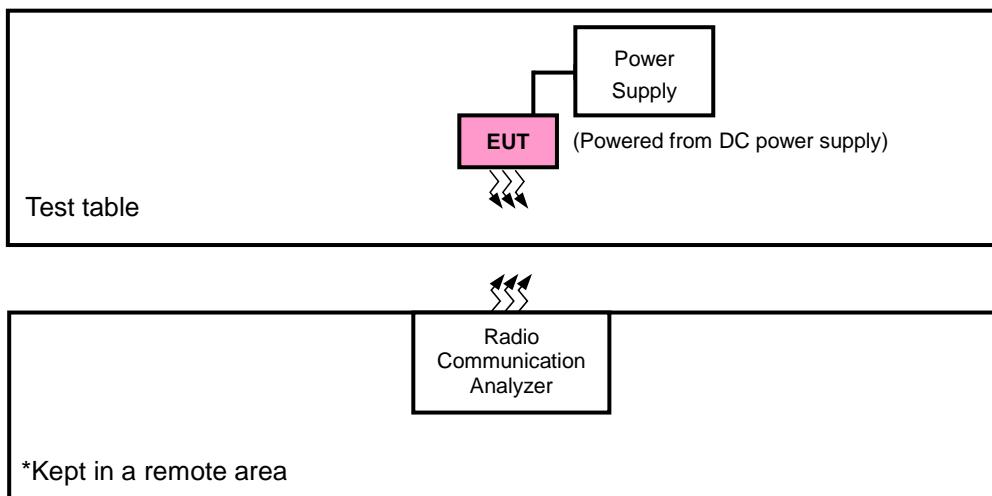

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	DC Power Supply	Topward	33010D	807748	N/A

No.	Signal Cable Description Of The Above Support Units
1.	N/A

Note:

1. All power cords of the above support units are non-shielded (1.8m).

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP / EIRP	Radiated Emission
LTE Band 4	X-plane	Y-axis
LTE Band 12	Y-plane	Y-axis

#### LTE Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset
-	Frequency Stability	19957 to 20393	19957, 20393	1.4 MHz	QPSK	6 RB / 0 RB Offset
		19965 to 20385	19965, 20385	3 MHz	QPSK	15 RB / 0 RB Offset
		19975 to 20375	19975, 20375	5 MHz	QPSK	25 RB / 0 RB Offset
		20000 to 20350	20000, 20350	10 MHz	QPSK	50 RB / 0 RB Offset
		20025 to 20325	20025, 20325	15 MHz	QPSK	75 RB / 0 RB Offset
		20050 to 20300	20050, 20300	20 MHz	QPSK	100 RB / 0 RB Offset
-	Occupied Bandwidth	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK	50 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK	75 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	100 RB / 0 RB Offset
-	Peak to Average Ratio	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Band Edge	19957 to 20393	19957	1.4 MHz	QPSK	1 RB / 0 RB Offset
			20393	1.4 MHz		6 RB / 0 RB Offset
		19965 to 20385	19965	3 MHz	QPSK	1 RB / 5 RB Offset
			20385	3 MHz		6 RB / 0 RB Offset
		19975 to 20375	19975	5 MHz	QPSK	1 RB / 0 RB Offset
			20375	5 MHz		25 RB / 0 RB Offset
		20000 to 20350	20000	10 MHz	QPSK	1 RB / 24 RB Offset
			20350	10 MHz		25 RB / 0 RB Offset
		20025 to 20325	20025	15 MHz	QPSK	1 RB / 0 RB Offset
			20325	15 MHz		75 RB / 0 RB Offset
		20050 to 20300	20050	20 MHz	QPSK	1 RB / 74 RB Offset
			20300	20 MHz		75 RB / 0 RB Offset
		19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset
-	Conducted Emission	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset

**Note:** This device was pre-tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

**LTE Band 12**

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset
-	Frequency Stability	23017 to 23173	23017, 23173	1.4 MHz	QPSK	6 RB / 0 RB Offset
		23025 to 23165	23025, 23165	3 MHz	QPSK	15 RB / 0 RB Offset
		23035 to 23155	23035, 23155	5 MHz	QPSK	25 RB / 0 RB Offset
		23060 to 23130	23060, 23130	10 MHz	QPSK	50 RB / 0 RB Offset
-	Occupied Bandwidth	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	50 RB / 0 RB Offset
-	Peak to Average Ratio	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset
-	Band Edge	23017 to 23173	23017	1.4 MHz	QPSK	1 RB / 0 RB Offset
			23173	1.4 MHz		6 RB / 0 RB Offset
		23025 to 23165	23025	3 MHz	QPSK	1 RB / 5 RB Offset
			23165	3 MHz		6 RB / 0 RB Offset
		23035 to 23155	23035	5 MHz	QPSK	1 RB / 0 RB Offset
			23155	5 MHz		15 RB / 0 RB Offset
		23060 to 23130	23060	10 MHz	QPSK	1 RB / 14 RB Offset
			23130	10 MHz		15 RB / 0 RB Offset
					QPSK	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
					QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
-	Conducted Emission	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset

**Note:** This device was pre-tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

**Test Condition:**

Test Item	Environmental Conditions	Input Power	Tested By
ERP / EIRP	25 deg. C, 65 % RH	12 Vdc	Jisyong Wang
Frequency Stability	25 deg. C, 65 % RH	12 Vdc	Han Wu
Occupied Bandwidth	25 deg. C, 65 % RH	12 Vdc	Han Wu
Band Edge	25 deg. C, 65 % RH	12 Vdc	Han Wu
Peak to Average Ratio	25 deg. C, 65 % RH	12 Vdc	Han Wu
Conducted Emission	25 deg. C, 65 % RH	12 Vdc	Han Wu
Radiated Emission	25 deg. C, 65 % RH	12 Vdc	Jisyong Wang

**3.4 EUT Operating Conditions**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

**3.5 General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 27**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-E 2016**

**ANSI 63.26-2015**

**Note:** All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

Portable stations (hand-held devices) operating in the 698-716 MHz band are limited to 3 watts ERP

#### 4.1.2 Test Procedures

##### **EIRP / ERP Measurement:**

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ . E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P\text{ power} = E.I.R.P\text{ power} - 2.15\text{ dB}$ .


##### **Conducted Power Measurement:**

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


#### 4.1.3 Test Setup

##### EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

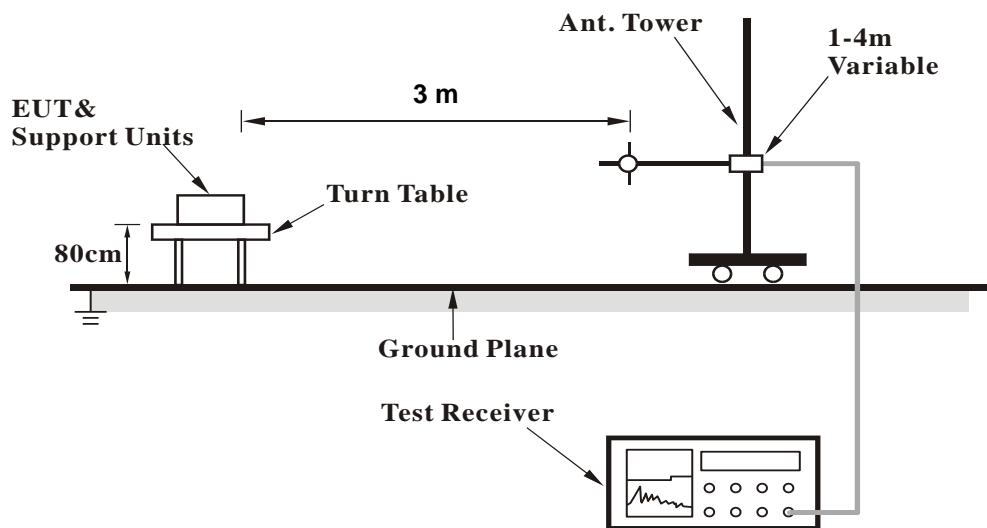

<Radiated Emission above 1 GHz>

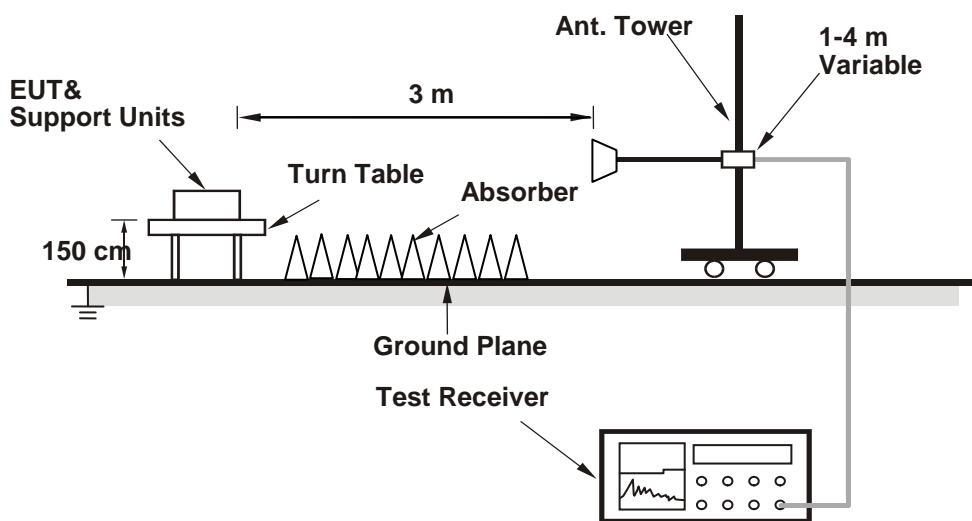

For the actual test configuration, please refer to the attached file (Test Setup Photo).

##### Conducted Power Measurement:



#### 4.1.4 Test Results

##### Conducted Output Power (dBm)

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 19957	Mid Ch 20175	High Ch 20393		Low Ch 19957	Mid Ch 20175	High Ch 20393	
			1710.7 MHz	1732.5 MHz	1754.3 MHz		1710.7 MHz	1732.5 MHz	1754.3 MHz	
4 / 1.4M	1	0	22.86	23.18	23.15	0	21.86	22.12	22.17	1
	1	2	22.76	22.94	23.14	0	21.69	21.87	21.99	1
	1	5	22.70	22.81	22.90	0	21.52	21.68	21.82	1
	3	0	22.64	22.78	23.02	0	21.66	21.70	21.81	1
	3	1	22.56	22.70	22.80	0	21.37	21.61	21.65	1
	3	3	22.50	22.65	22.93	0	21.50	21.56	21.72	1
	6	0	21.84	22.08	21.98	1	20.71	20.98	21.08	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 19965	Mid Ch 20175	High Ch 20385		Low Ch 19965	Mid Ch 20175	High Ch 20385	
			1711.5 MHz	1732.5 MHz	1753.5 MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz	
4 / 3M	1	0	23.12	23.19	23.34	0	22.01	22.16	22.23	1
	1	7	22.92	23.15	23.29	0	21.93	22.11	22.12	1
	1	14	22.85	22.90	22.96	0	21.74	21.93	21.96	1
	8	0	21.87	22.04	22.25	1	20.88	20.98	21.01	2
	8	3	21.68	21.93	21.97	1	20.60	20.92	20.93	2
	8	7	21.62	21.70	21.92	1	20.66	20.67	20.89	2
	15	0	22.00	22.02	22.24	1	20.88	21.02	21.07	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 19975	Mid Ch 20175	High Ch 20375		Low CH 19975	Mid CH 20175	High CH 20375	
			1712.5 MHz	1732.5 MHz	1752.5 MHz		1712.5 MHz	1732.5 MHz	1752.5 MHz	
4 / 5M	1	0	23.14	23.34	23.46	0	22.22	22.28	22.42	1
	1	12	23.01	23.12	23.31	0	21.97	22.08	22.31	1
	1	24	22.93	23.19	23.26	0	21.74	22.06	22.14	1
	12	0	22.12	22.20	22.23	1	20.90	21.07	21.27	2
	12	6	21.95	21.95	22.06	1	20.85	20.91	21.14	2
	12	13	21.78	21.87	22.00	1	20.68	20.77	21.00	2
	25	0	21.93	22.19	22.25	1	20.99	21.10	21.29	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)
			Low Ch 20000	Mid Ch 20175	High Ch 20350	
			1715.0 MHz	1732.5 MHz	1750.0 MHz	
4 / 10M	1	0	23.33	23.47	23.54	0
	1	24	23.23	23.36	23.44	0
	1	49	23.03	23.15	23.37	0
	25	0	22.22	22.37	22.41	1
	25	12	22.02	22.08	22.29	1
	25	25	21.99	22.10	22.12	1
	50	0	22.22	22.27	22.42	1

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)
			Low Ch 20025	Mid Ch 20175	High Ch 20325	
			1717.5 MHz	1732.5 MHz	1747.5 MHz	
4 / 15M	1	0	23.45	23.58	23.73	0
	1	37	23.36	23.45	23.61	0
	1	74	23.05	23.29	23.42	0
	36	0	22.30	22.49	22.56	1
	36	19	22.12	22.30	22.41	1
	36	39	22.01	22.16	22.27	1
	75	0	22.30	22.53	22.57	1

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)
			Low Ch 20050	Mid Ch 20175	High Ch 20300	
			1720.0 MHz	1732.5 MHz	1745.0 MHz	
4 / 20M	1	0	23.56	23.71	23.82	0
	1	50	23.43	23.57	23.66	0
	1	99	23.31	23.41	23.54	0
	50	0	22.43	22.58	22.70	1
	50	25	22.21	22.38	22.49	1
	50	50	22.14	22.34	22.44	1
	100	0	22.33	22.45	22.49	1

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 23017	Mid Ch 23095	High Ch 23173		Low Ch 23017	Mid Ch 23095	High Ch 23173	
			699.7 MHz	707.5 MHz	715.3 MHz		699.7 MHz	707.5 MHz	715.3 MHz	
12 / 1.4M	1	0	22.88	22.83	22.85	0	21.66	21.74	21.66	1
	1	2	22.66	22.67	22.58	0	21.74	21.71	21.50	1
	1	5	22.38	22.31	22.37	0	21.40	21.46	21.38	1
	3	0	22.50	22.53	22.43	0	21.57	21.58	21.35	1
	3	1	22.25	22.15	22.25	0	21.29	21.38	21.30	1
	3	3	22.39	22.38	22.32	0	21.52	21.54	21.30	1
	6	0	21.81	21.67	21.71	1	20.53	20.59	20.52	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 23025	Mid Ch 23095	High Ch 23165		Low Ch 23025	Mid Ch 23095	High Ch 23165	
			700.5 MHz	707.5 MHz	714.5 MHz		700.5 MHz	707.5 MHz	714.5 MHz	
12 / 3M	1	0	22.87	22.89	22.87	0	21.80	21.89	21.69	1
	1	7	22.82	22.79	22.78	0	21.79	21.76	21.56	1
	1	14	22.54	22.64	22.50	0	21.73	21.45	21.59	1
	8	0	21.79	21.77	21.68	1	20.80	20.66	20.71	2
	8	3	21.59	21.69	21.49	1	20.49	20.45	20.39	2
	8	7	21.53	21.48	21.37	1	20.46	20.48	20.46	2
	15	0	21.72	21.79	21.66	1	20.76	20.63	20.63	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 23035	Mid Ch 23095	High Ch 23155		Low Ch 23035	Mid Ch 23095	High Ch 23155	
			701.5 MHz	707.5 MHz	713.5 MHz		701.5 MHz	707.5 MHz	713.5 MHz	
12 / 5M	1	0	23.08	23.12	23.10	0	22.10	22.06	21.99	1
	1	12	23.06	23.07	22.99	0	21.98	21.94	21.88	1
	1	24	22.72	22.94	22.72	0	21.83	21.92	21.66	1
	12	0	22.07	22.06	21.98	1	20.97	20.96	20.79	2
	12	6	21.84	21.91	21.79	1	20.80	20.87	20.64	2
	12	13	21.72	21.69	21.69	1	20.67	20.79	20.53	2
	25	0	21.97	22.06	21.99	1	20.88	20.91	20.86	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)
			Low Ch 23060	Mid Ch 23095	High Ch 23130	
			704.0 MHz	707.5 MHz	711.0 MHz	
12 / 10M	1	0	23.39	23.27	23.33	0
	1	24	23.27	23.29	23.21	0
	1	49	23.09	23.09	22.98	0
	25	0	22.27	22.29	22.17	1
	25	12	22.06	22.07	21.97	1
	25	25	21.96	22.03	21.83	1
	50	0	22.18	22.24	22.20	1

**ERP Power (dBm)**

LTE Band 12							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	23017	699.7	-6.68	30.36	21.53	142.23	H
	23095	707.5	-6.72	30.17	21.30	134.90	
	23173	715.3	-6.61	30.17	21.41	138.36	
	23017	699.7	-13.34	32.03	16.54	45.08	V
	23095	707.5	-13.60	31.98	16.23	41.98	
	23173	715.3	-13.58	32.06	16.33	42.95	
Channel Bandwidth: 1.4 MHz / 16QAM							
Y	23017	699.7	-7.67	30.36	20.54	113.24	H
	23095	707.5	-7.71	30.17	20.31	107.40	
	23173	715.3	-7.60	30.17	20.42	110.15	
	23017	699.7	-14.33	32.03	15.55	35.89	V
	23095	707.5	-14.59	31.98	15.24	33.42	
	23173	715.3	-14.57	32.06	15.34	34.20	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	23025	700.5	-6.26	30.17	21.76	149.97	H
	23095	707.5	-6.49	30.17	21.53	142.23	
	23165	714.5	-6.39	30.18	21.64	145.88	
	23025	700.5	-13.04	31.96	16.77	47.53	V
	23095	707.5	-13.37	31.98	16.46	44.26	
	23165	714.5	-13.32	32.03	16.56	45.29	
Channel Bandwidth: 3 MHz / 16QAM							
Y	23025	700.5	-7.28	30.17	20.74	118.58	H
	23095	707.5	-7.51	30.17	20.51	112.46	
	23165	714.5	-7.41	30.18	20.62	115.35	
	23025	700.5	-14.06	31.96	15.75	37.58	V
	23095	707.5	-14.39	31.98	15.44	34.99	
	23165	714.5	-14.34	32.03	15.54	35.81	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	23035	701.5	-5.99	30.17	22.03	159.59	H
	23095	707.5	-6.22	30.17	21.80	151.36	
	23155	713.5	-6.12	30.18	21.91	155.24	
	23035	701.5	-12.77	31.96	17.04	50.58	V
	23095	707.5	-13.10	31.98	16.73	47.10	
	23155	713.5	-13.05	32.03	16.83	48.19	
Channel Bandwidth: 5 MHz / 16QAM							
Y	23035	701.5	-6.92	30.17	21.10	128.82	H
	23095	707.5	-7.15	30.17	20.87	122.18	
	23155	713.5	-7.05	30.18	20.98	125.31	
	23035	701.5	-13.70	31.96	16.11	40.83	V
	23095	707.5	-14.03	31.98	15.80	38.02	
	23155	713.5	-13.98	32.03	15.90	38.90	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	23060	704.0	-5.74	30.17	22.28	169.04	H
	23095	707.5	-5.97	30.17	22.05	160.32	
	23130	711.0	-5.87	30.18	22.16	164.44	
	23060	704.0	-12.52	31.96	17.29	53.58	V
	23095	707.5	-12.85	31.98	16.98	49.89	
	23130	711.0	-12.80	32.03	17.08	51.05	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

**EIRP Power (dBm)**

LTE Band 4							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	19957	1710.7	-12.09	36.45	24.36	272.90	H
	20175	1732.5	-12.27	36.80	24.53	283.79	
	20393	1754.3	-12.35	36.94	24.59	287.74	
	19957	1710.7	-18.43	37.28	18.85	76.74	V
	20175	1732.5	-18.55	37.63	19.08	80.91	
	20393	1754.3	-18.29	37.64	19.35	86.10	
Channel Bandwidth: 1.4 MHz / 16QAM							
X	19957	1710.7	-13.20	36.45	23.25	211.35	H
	20175	1732.5	-13.38	36.80	23.42	219.79	
	20393	1754.3	-13.46	36.94	23.48	222.84	
	19957	1710.7	-19.54	37.28	17.74	59.43	V
	20175	1732.5	-19.66	37.63	17.97	62.66	
	20393	1754.3	-19.40	37.64	18.24	66.68	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	19965	1711.5	-11.85	36.45	24.60	288.40	H
	20175	1732.5	-12.03	36.80	24.77	299.92	
	20385	1753.5	-12.11	36.94	24.83	304.09	
	19965	1711.5	-18.19	37.28	19.09	81.10	V
	20175	1732.5	-18.31	37.63	19.32	85.51	
	20385	1753.5	-18.05	37.64	19.59	90.99	
Channel Bandwidth: 3 MHz / 16QAM							
X	19965	1711.5	-13.08	36.45	23.37	217.27	H
	20175	1732.5	-13.26	36.80	23.54	225.94	
	20385	1753.5	-13.34	36.94	23.60	229.09	
	19965	1711.5	-19.42	37.28	17.86	61.09	V
	20175	1732.5	-19.54	37.63	18.09	64.42	
	20385	1753.5	-19.28	37.64	18.36	68.55	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	19975	1712.5	-11.59	36.45	24.86	306.20	H
	20175	1732.5	-11.77	36.80	25.03	318.42	
	20375	1752.5	-11.85	36.94	25.09	322.85	
	19975	1712.5	-17.93	37.28	19.35	86.10	V
	20175	1732.5	-18.05	37.63	19.58	90.78	
	20375	1752.5	-17.79	37.64	19.85	96.61	
Channel Bandwidth: 5 MHz / 16QAM							
X	19975	1712.5	-12.56	36.45	23.89	244.91	H
	20175	1732.5	-12.74	36.80	24.06	254.68	
	20375	1752.5	-12.82	36.94	24.12	258.23	
	19975	1712.5	-18.90	37.28	18.38	68.87	V
	20175	1732.5	-19.02	37.63	18.61	72.61	
	20375	1752.5	-18.76	37.64	18.88	77.27	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	20000	1715.0	-11.56	36.64	25.08	322.11	H
	20175	1732.5	-11.55	36.80	25.25	334.97	
	20350	1750.0	-11.49	36.80	25.31	339.63	
	20000	1715.0	-17.87	37.44	19.57	90.57	V
	20175	1732.5	-17.83	37.63	19.80	95.50	
	20350	1750.0	-17.57	37.64	20.07	101.62	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	20025	1717.5	-11.16	36.45	25.29	338.06	H
	20175	1732.5	-11.34	36.80	25.46	351.56	
	20325	1747.5	-11.42	36.94	25.52	356.45	
	20025	1717.5	-17.50	37.28	19.78	95.06	V
	20175	1732.5	-17.62	37.63	20.01	100.23	
	20325	1747.5	-17.36	37.64	20.28	106.66	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	20050	1720.0	-10.93	36.45	25.52	356.45	H
	20175	1732.5	-11.11	36.80	25.69	370.68	
	20300	1745.0	-11.19	36.94	25.75	375.84	
	20050	1720.0	-17.27	37.28	20.01	100.23	V
	20175	1732.5	-17.39	37.63	20.24	105.68	
	20300	1745.0	-17.13	37.64	20.51	112.46	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

## 4.2 Frequency Stability Measurement

### 4.2.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 4.2.2 Test Procedure

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**Note:** The frequency error was recorded frequency error from the communication simulator.

### 4.2.3 Test Setup

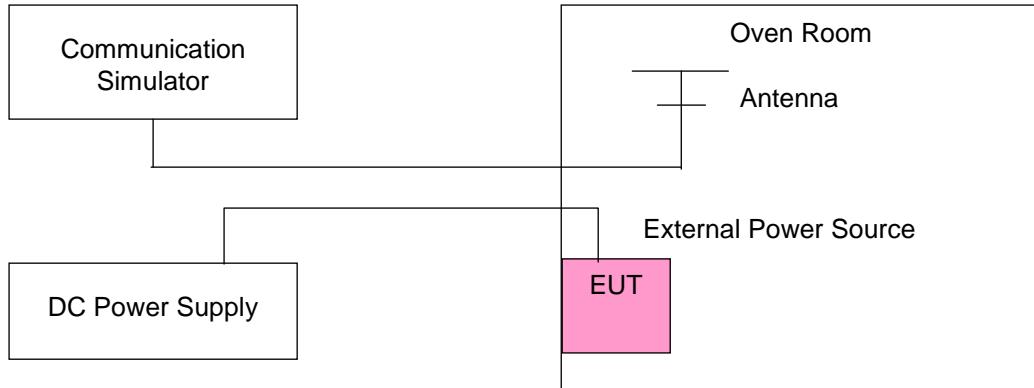

#### 4.2.4 Test Results

##### Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)	
	Channel Bandwidth: 1.4 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
12	1710.700002	0.001	1754.300001	0.001	2.5	
10.2	1710.700002	0.001	1754.300003	0.002	2.5	
13.8	1710.700002	0.001	1754.300003	0.002	2.5	

**Note:** The applicant defined the normal working voltage of the power supply is from 10.2 Vdc to 13.8 Vdc.

##### Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)	
	Channel Bandwidth: 1.4 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	1710.700002	0.001	1754.300002	0.001	2.5	
-20	1710.700004	0.002	1754.300004	0.002	2.5	
-10	1710.700001	0.001	1754.300003	0.001	2.5	
0	1710.700002	0.001	1754.300004	0.002	2.5	
10	1710.700002	0.001	1754.300004	0.002	2.5	
20	1710.699997	-0.002	1754.299998	-0.001	2.5	
30	1710.699996	-0.002	1754.299998	-0.001	2.5	
40	1710.699996	-0.002	1754.299998	-0.001	2.5	
50	1710.699997	-0.002	1754.299996	-0.002	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)	
	Channel Bandwidth: 3 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
12	1711.500002	0.001	1753.500004	0.002	2.5	
10.2	1711.500003	0.002	1753.500002	0.001	2.5	
13.8	1711.500002	0.001	1753.500004	0.002	2.5	

**Note:** The applicant defined the normal working voltage of the power supply is from 10.2 Vdc to 13.8 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)	
	Channel Bandwidth: 3 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	1711.500004	0.002	1753.500003	0.002	2.5	
-20	1711.500003	0.002	1753.500001	0.001	2.5	
-10	1711.500002	0.001	1753.500002	0.001	2.5	
0	1711.500002	0.001	1753.500002	0.001	2.5	
10	1711.500001	0.001	1753.500004	0.002	2.5	
20	1711.499998	-0.001	1753.499997	-0.002	2.5	
30	1711.499999	-0.001	1753.499998	-0.001	2.5	
40	1711.499999	-0.001	1753.499999	-0.001	2.5	
50	1711.499999	-0.001	1753.499999	-0.001	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)	
	Channel Bandwidth: 5 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
12	1712.500001	0.001	1752.500003	0.002	2.5	
10.2	1712.500001	0.001	1752.500001	0.001	2.5	
13.8	1712.500001	0.001	1752.500001	0.001	2.5	

**Note:** The applicant defined the normal working voltage of the power supply is from 10.2 Vdc to 13.8 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)	
	Channel Bandwidth: 5 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	1712.500001	0.001	1752.500001	0.001	2.5	
-20	1712.500002	0.001	1752.500002	0.001	2.5	
-10	1712.500004	0.002	1752.500002	0.001	2.5	
0	1712.500002	0.001	1752.500004	0.002	2.5	
10	1712.500003	0.002	1752.500004	0.002	2.5	
20	1712.499998	-0.001	1752.499996	-0.002	2.5	
30	1712.499996	-0.002	1752.499996	-0.002	2.5	
40	1712.499997	-0.002	1752.499998	-0.001	2.5	
50	1712.499996	-0.002	1752.499997	-0.002	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)	
	Channel Bandwidth: 10 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
12	1715.000002	0.001	1750.000004	0.002	2.5	
10.2	1715.000002	0.001	1750.000002	0.001	2.5	
13.8	1715.000003	0.002	1750.000002	0.001	2.5	

**Note:** The applicant defined the normal working voltage of the power supply is from 10.2 Vdc to 13.8 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)	
	Channel Bandwidth: 10 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	1715.000002	0.001	1750.000002	0.001	2.5	
-20	1715.000003	0.002	1750.000002	0.001	2.5	
-10	1715.000002	0.001	1750.000002	0.001	2.5	
0	1715.000004	0.002	1750.000002	0.001	2.5	
10	1715.000003	0.002	1750.000003	0.002	2.5	
20	1714.999999	-0.001	1749.999999	-0.001	2.5	
30	1714.999996	-0.002	1749.999997	-0.002	2.5	
40	1714.999998	-0.001	1749.999998	-0.001	2.5	
50	1714.999998	-0.001	1749.999997	-0.002	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)	
	Channel Bandwidth: 15 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
12	1717.500003	0.002	1747.500003	0.002	2.5	
10.2	1717.500003	0.002	1747.500001	0.001	2.5	
13.8	1717.500002	0.001	1747.500002	0.001	2.5	

**Note:** The applicant defined the normal working voltage of the power supply is from 10.2 Vdc to 13.8 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)	
	Channel Bandwidth: 15 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	1717.500004	0.002	1747.500002	0.001	2.5	
-20	1717.500002	0.001	1747.500001	0.001	2.5	
-10	1717.500003	0.002	1747.500002	0.001	2.5	
0	1717.500004	0.002	1747.500003	0.002	2.5	
10	1717.500004	0.002	1747.500003	0.002	2.5	
20	1717.499997	-0.002	1747.499996	-0.002	2.5	
30	1717.499998	-0.001	1747.499998	-0.001	2.5	
40	1717.499998	-0.001	1747.499999	-0.001	2.5	
50	1717.499997	-0.002	1747.499997	-0.002	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)	
	Channel Bandwidth: 20 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
12	1720.000002	0.001	1745.000003	0.002	2.5	
10.2	1720.000003	0.002	1745.000001	0.001	2.5	
13.8	1720.000003	0.002	1745.000002	0.001	2.5	

**Note:** The applicant defined the normal working voltage of the power supply is from 10.2 Vdc to 13.8 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)	
	Channel Bandwidth: 20 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	1720.000003	0.002	1745.000003	0.001	2.5	
-20	1720.000003	0.002	1745.000001	0.001	2.5	
-10	1720.000003	0.002	1745.000004	0.002	2.5	
0	1720.000004	0.002	1745.000003	0.002	2.5	
10	1720.000004	0.002	1745.000003	0.001	2.5	
20	1719.999997	-0.002	1744.999998	-0.001	2.5	
30	1719.999996	-0.002	1744.999998	-0.001	2.5	
40	1719.999996	-0.002	1744.999999	-0.001	2.5	
50	1719.999997	-0.002	1744.999998	-0.001	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12				Limit (ppm)	
	Channel Bandwidth: 1.4 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
12	699.700004	0.005	715.300003	0.004	2.5	
10.2	699.700003	0.004	715.300003	0.003	2.5	
13.8	699.700004	0.005	715.300002	0.003	2.5	

**Note:** The applicant defined the normal working voltage of the power supply is from 10.2 Vdc to 13.8 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12				Limit (ppm)	
	Channel Bandwidth: 1.4 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	699.700003	0.005	715.300001	0.001	2.5	
-20	699.700004	0.005	715.300002	0.002	2.5	
-10	699.700004	0.006	715.300003	0.004	2.5	
0	699.700001	0.002	715.300003	0.004	2.5	
10	699.700002	0.002	715.300003	0.004	2.5	
20	699.699999	-0.001	715.299998	-0.003	2.5	
30	699.699999	-0.002	715.299997	-0.004	2.5	
40	699.699999	-0.002	715.299997	-0.004	2.5	
50	699.699998	-0.003	715.299997	-0.004	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12				Limit (ppm)	
	Channel Bandwidth: 3 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
12	700.500003	0.004	714.500001	0.002	2.5	
10.2	700.500003	0.005	714.500002	0.003	2.5	
13.8	700.500002	0.003	714.500002	0.002	2.5	

**Note:** The applicant defined the normal working voltage of the power supply is from 10.2 Vdc to 13.8 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12				Limit (ppm)	
	Channel Bandwidth: 3 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	700.500004	0.005	714.500004	0.005	2.5	
-20	700.500004	0.006	714.500004	0.006	2.5	
-10	700.500004	0.006	714.500002	0.002	2.5	
0	700.500002	0.003	714.500002	0.002	2.5	
10	700.500003	0.005	714.500002	0.003	2.5	
20	700.499997	-0.004	714.499997	-0.004	2.5	
30	700.499996	-0.005	714.499998	-0.003	2.5	
40	700.499997	-0.005	714.499999	-0.002	2.5	
50	700.499999	-0.002	714.499997	-0.004	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12				Limit (ppm)	
	Channel Bandwidth: 5 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
12	701.500002	0.003	713.500002	0.003	2.5	
10.2	701.500003	0.004	713.500003	0.004	2.5	
13.8	701.500002	0.003	713.500002	0.003	2.5	

**Note:** The applicant defined the normal working voltage of the power supply is from 10.2 Vdc to 13.8 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12				Limit (ppm)	
	Channel Bandwidth: 5 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	701.500003	0.004	713.500002	0.003	2.5	
-20	701.500002	0.003	713.500002	0.003	2.5	
-10	701.500002	0.003	713.500001	0.002	2.5	
0	701.500004	0.005	713.500003	0.004	2.5	
10	701.500002	0.002	713.500002	0.002	2.5	
20	701.499997	-0.004	713.499997	-0.004	2.5	
30	701.499998	-0.003	713.499997	-0.005	2.5	
40	701.499999	-0.002	713.499999	-0.002	2.5	
50	701.499997	-0.005	713.499996	-0.005	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12				Limit (ppm)	
	Channel Bandwidth: 10 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
12	704.000003	0.005	711.000002	0.002	2.5	
10.2	704.000002	0.003	711.000003	0.005	2.5	
13.8	704.000001	0.002	711.000001	0.002	2.5	

**Note:** The applicant defined the normal working voltage of the power supply is from 10.2 Vdc to 13.8 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12				Limit (ppm)	
	Channel Bandwidth: 10 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	704.000001	0.002	711.000002	0.003	2.5	
-20	704.000003	0.005	711.000003	0.004	2.5	
-10	704.000001	0.002	711.000004	0.005	2.5	
0	704.000002	0.002	711.000003	0.004	2.5	
10	704.000003	0.004	711.000003	0.004	2.5	
20	703.999996	-0.005	710.999998	-0.002	2.5	
30	703.999997	-0.004	710.999997	-0.005	2.5	
40	703.999998	-0.002	710.999998	-0.003	2.5	
50	703.999996	-0.005	710.999997	-0.004	2.5	

## 4.3 Occupied Bandwidth Measurement


### 4.3.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

### 4.3.2 Test Procedure


- a. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- b. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

### 4.3.3 Test Setup

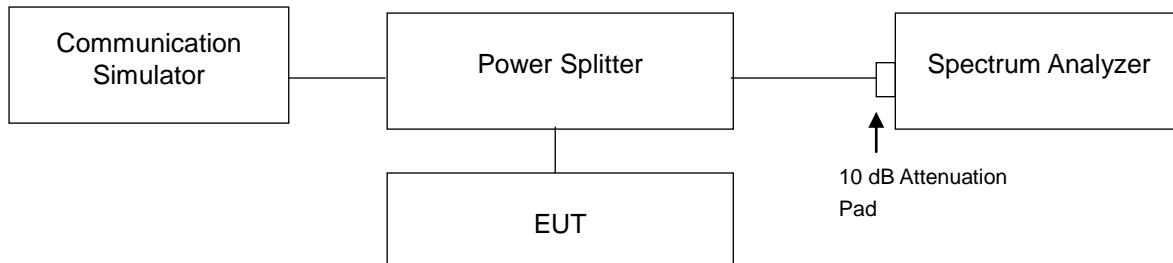


#### 4.3.4 Test Result


LTE Band 4							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	1.09	1.09	19965	1711.5	2.70	2.70
20175	1732.5	1.09	1.09	20175	1732.5	2.70	2.70
20393	1754.3	1.09	1.09	20385	1753.5	2.70	2.70

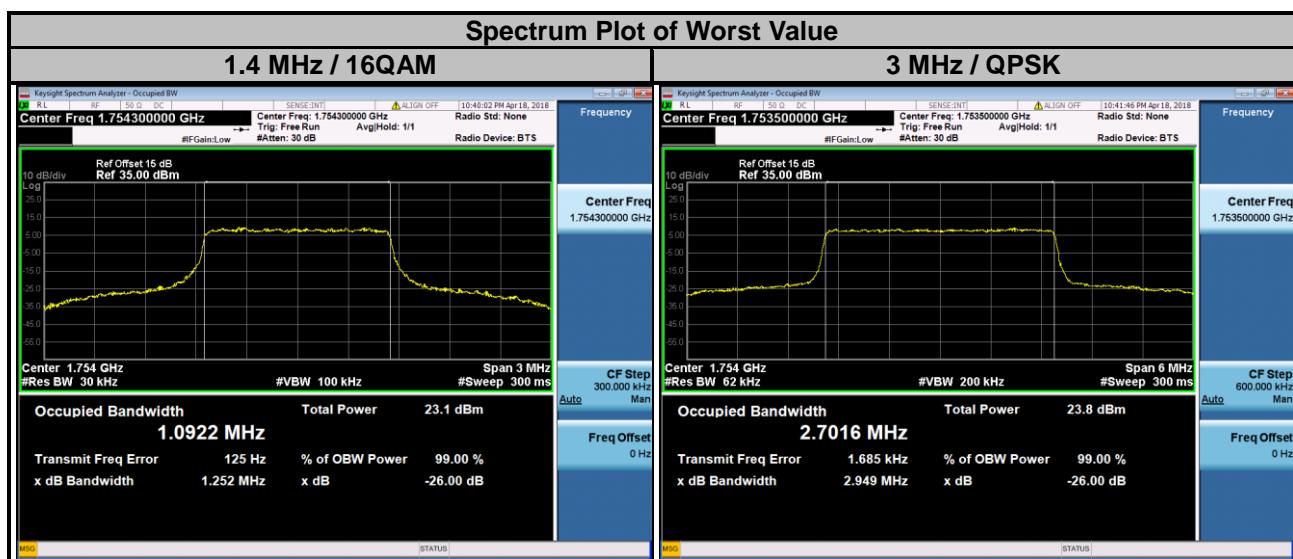


LTE Band 4							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.49	4.49	20000	1715.0	8.94	NA
20175	1732.5	4.49	4.49	20175	1732.5	8.95	NA
20375	1752.5	4.49	4.49	20350	1750.0	8.96	NA

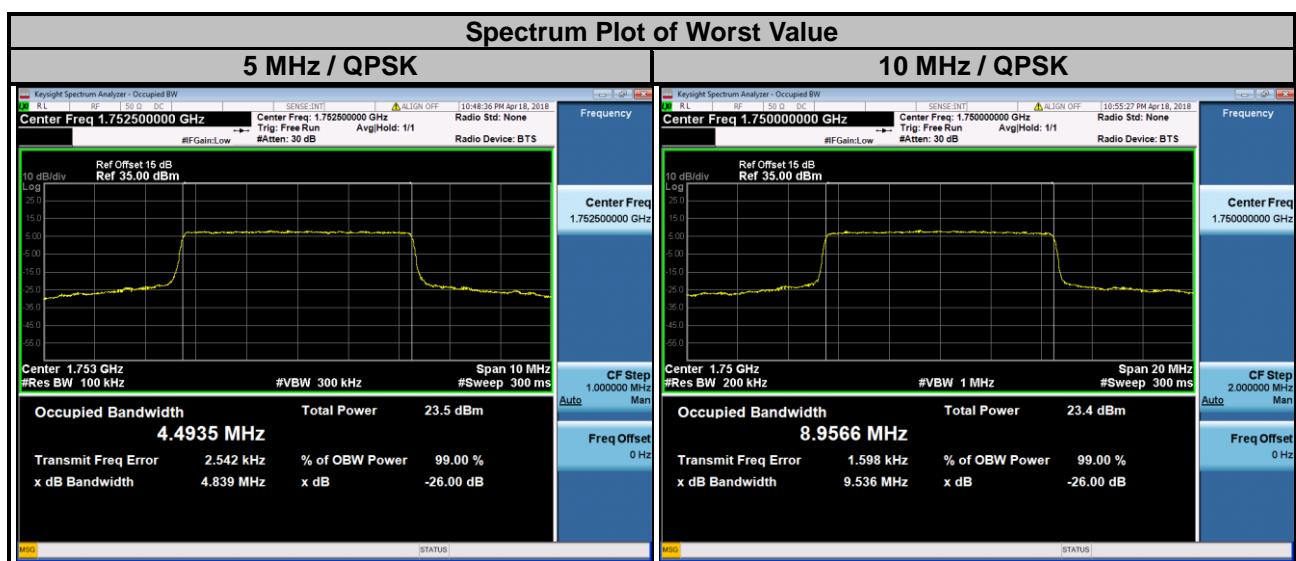


LTE Band 4							
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	13.42	NA	20050	1720.0	17.90	NA
20175	1732.5	13.43	NA	20175	1732.5	17.90	NA
20325	1747.5	13.44	NA	20300	1745.0	17.89	NA

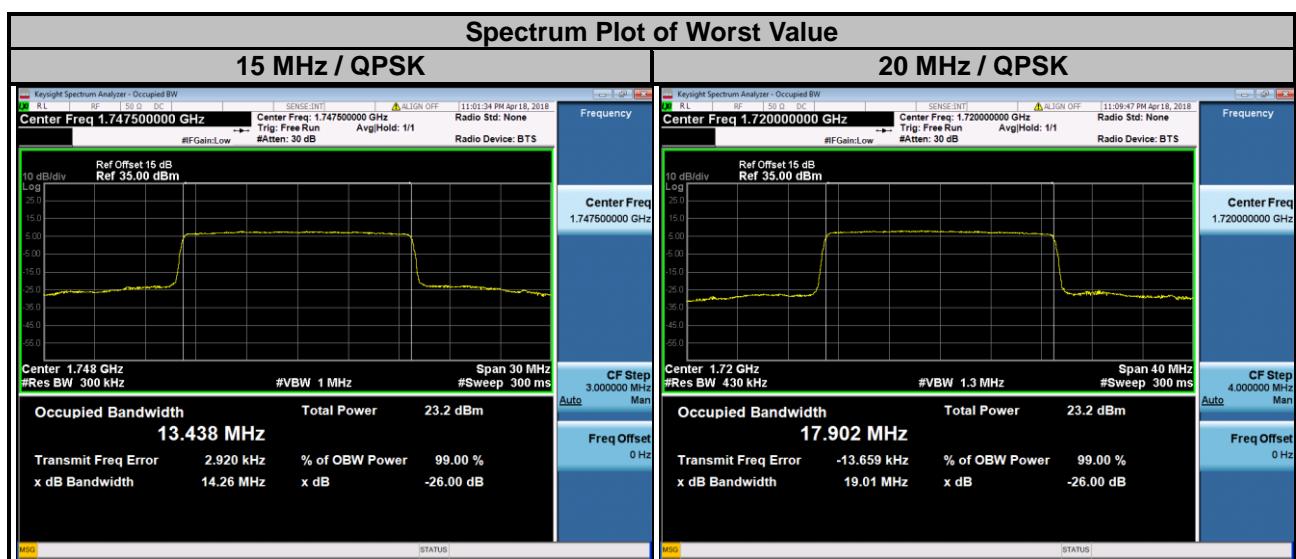

LTE Band 12							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23017	699.7	1.09	1.09	23025	700.5	2.70	2.70
23095	707.5	1.09	1.09	23095	707.5	2.70	2.70
23173	715.3	1.09	1.09	23165	714.5	2.70	2.70

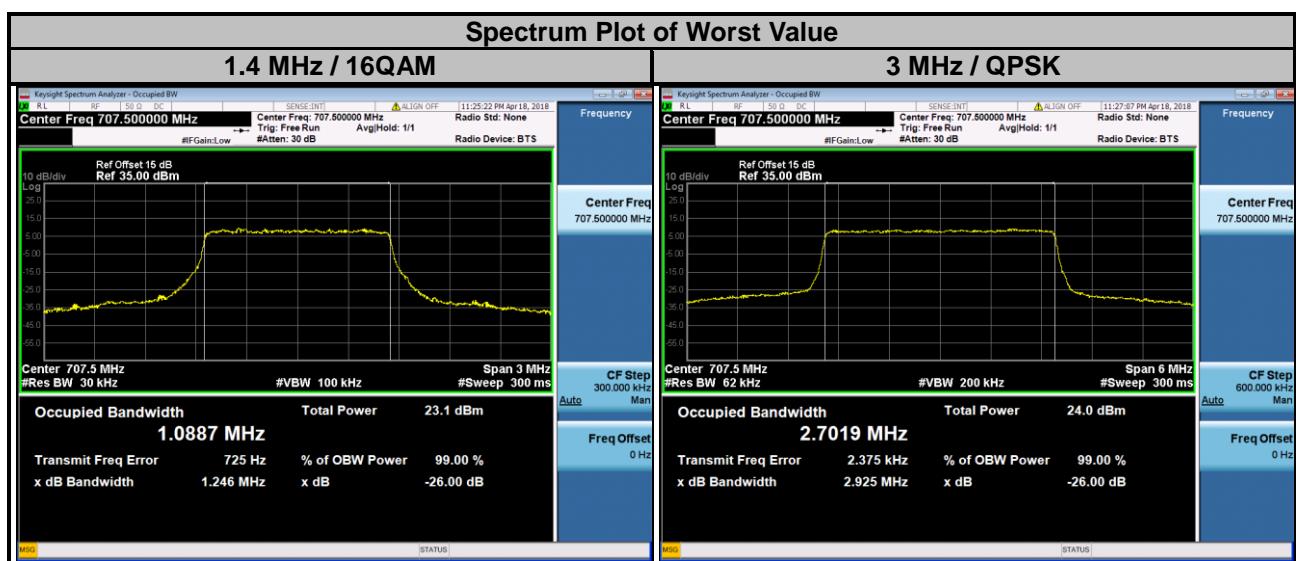

LTE Band 12							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23035	701.5	4.48	4.49	23060	704.0	8.94	NA
23095	707.5	4.49	4.49	23095	707.5	8.97	NA
23155	713.5	4.48	4.49	23130	711.0	8.95	NA

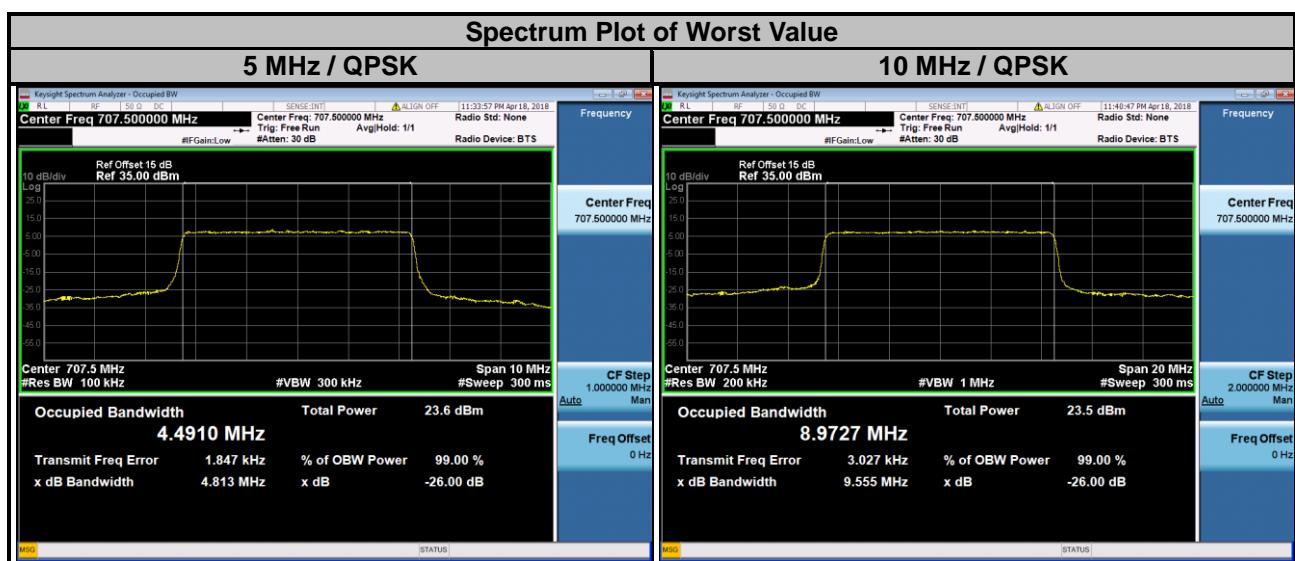

## 4.4 Band Edge Measurement


### 4.4.1 Limits of Band Edge Measurement

For operations in the 698–716 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

For operations in the 1710–1755 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB.


### 4.4.2 Test Setup

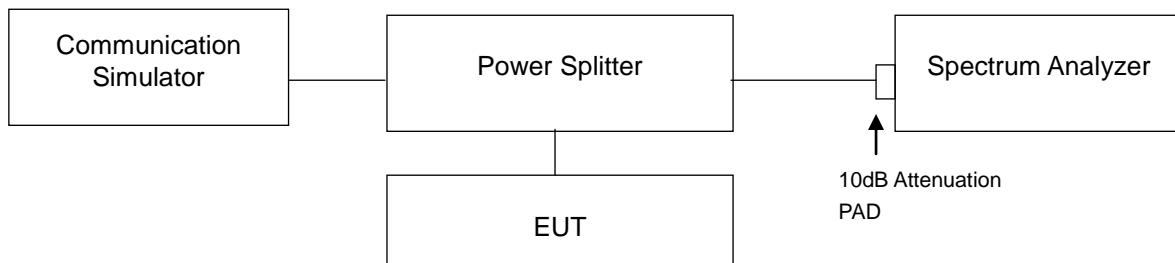



### 4.4.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 62 kHz and VB of the spectrum is 200 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 200 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 10 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 300 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 15 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 300 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 20 MHz).
- Record the max. trace plot into the test report.


#### 4.4.4 Test Results

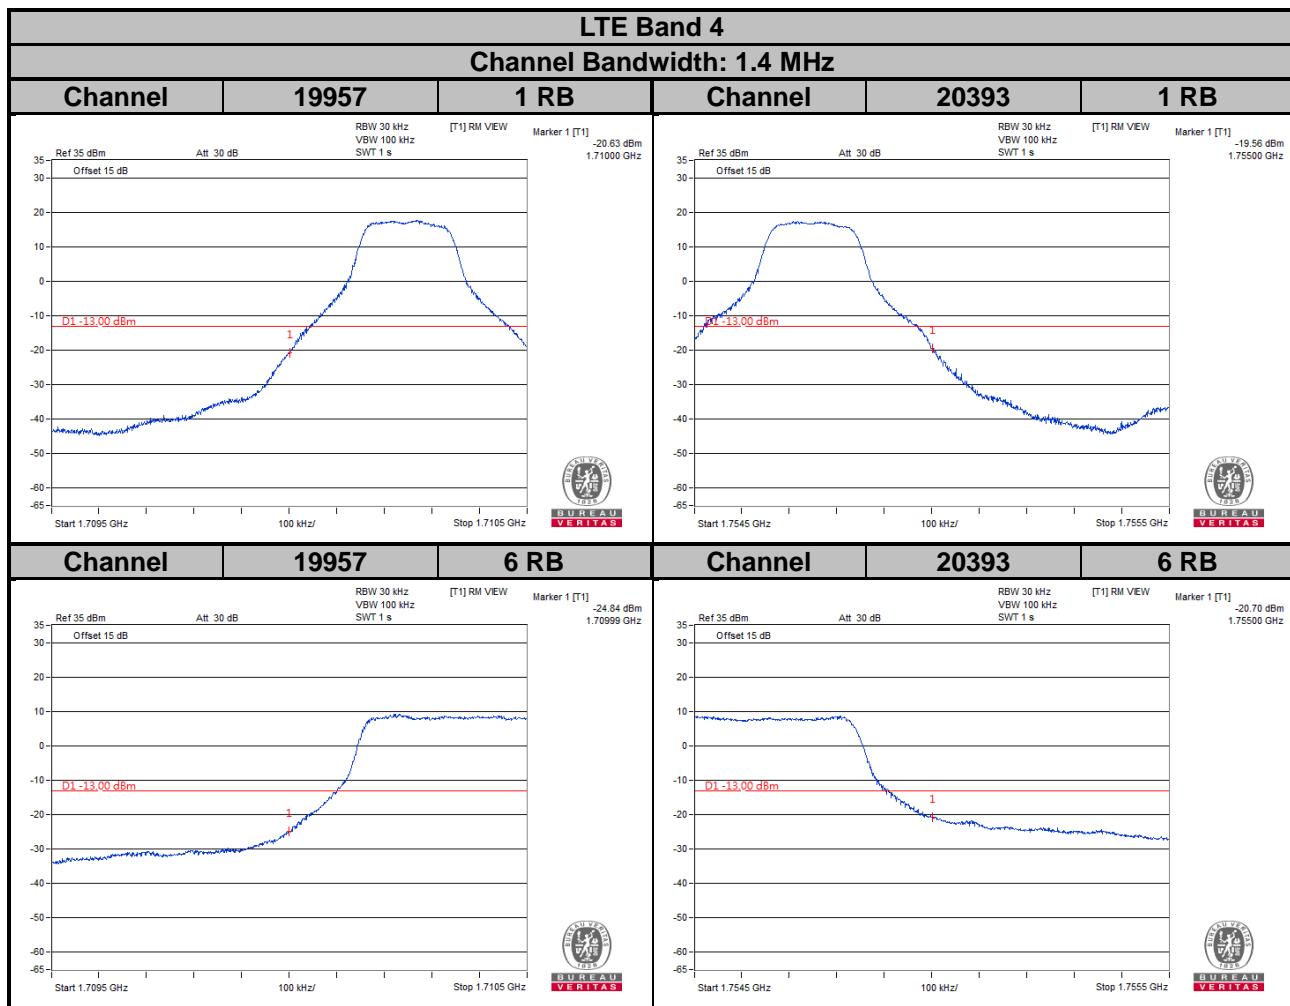


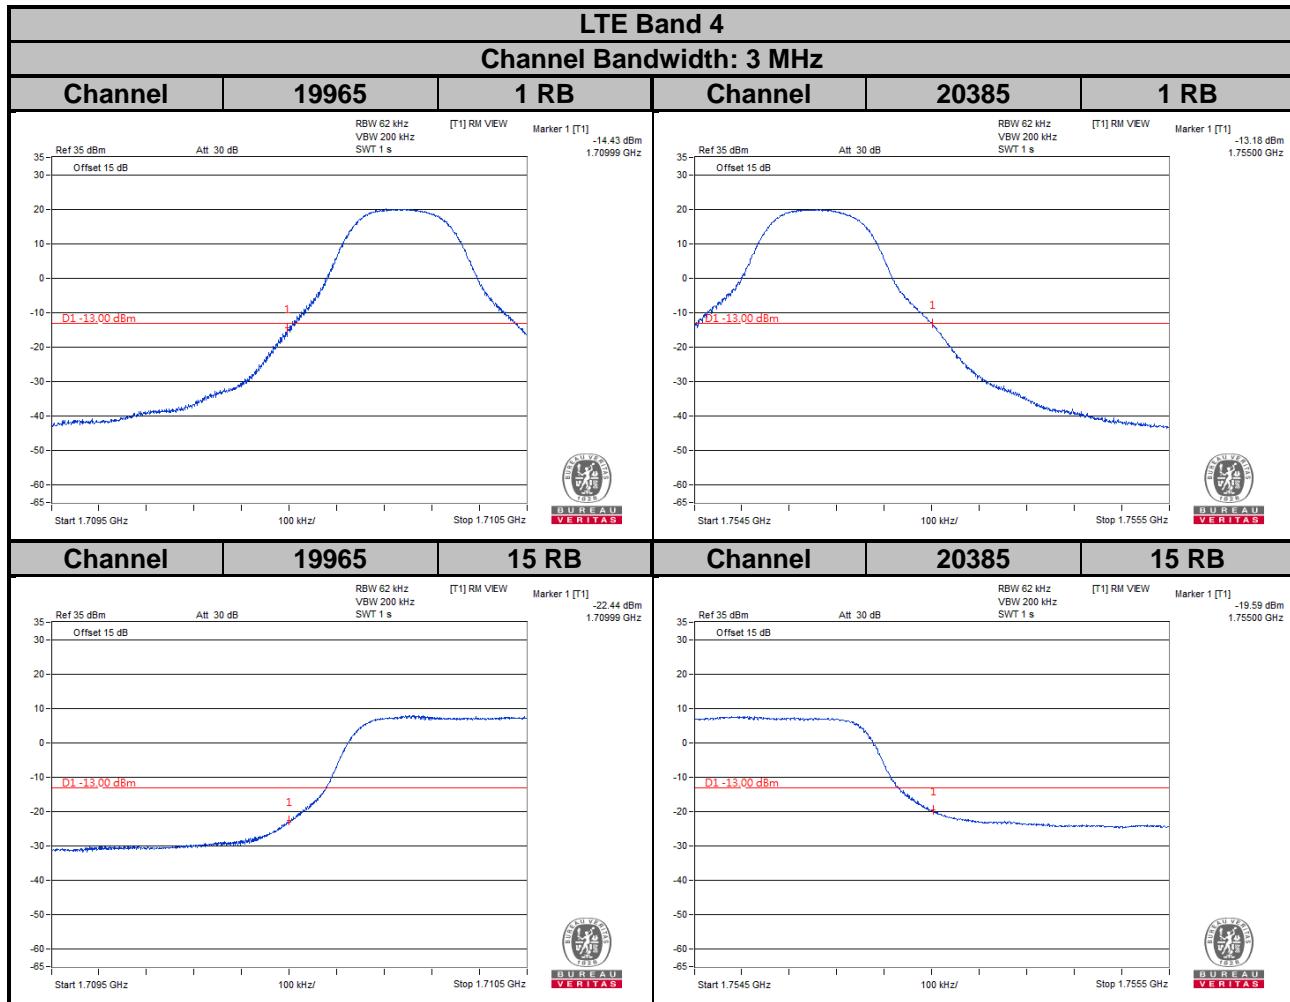


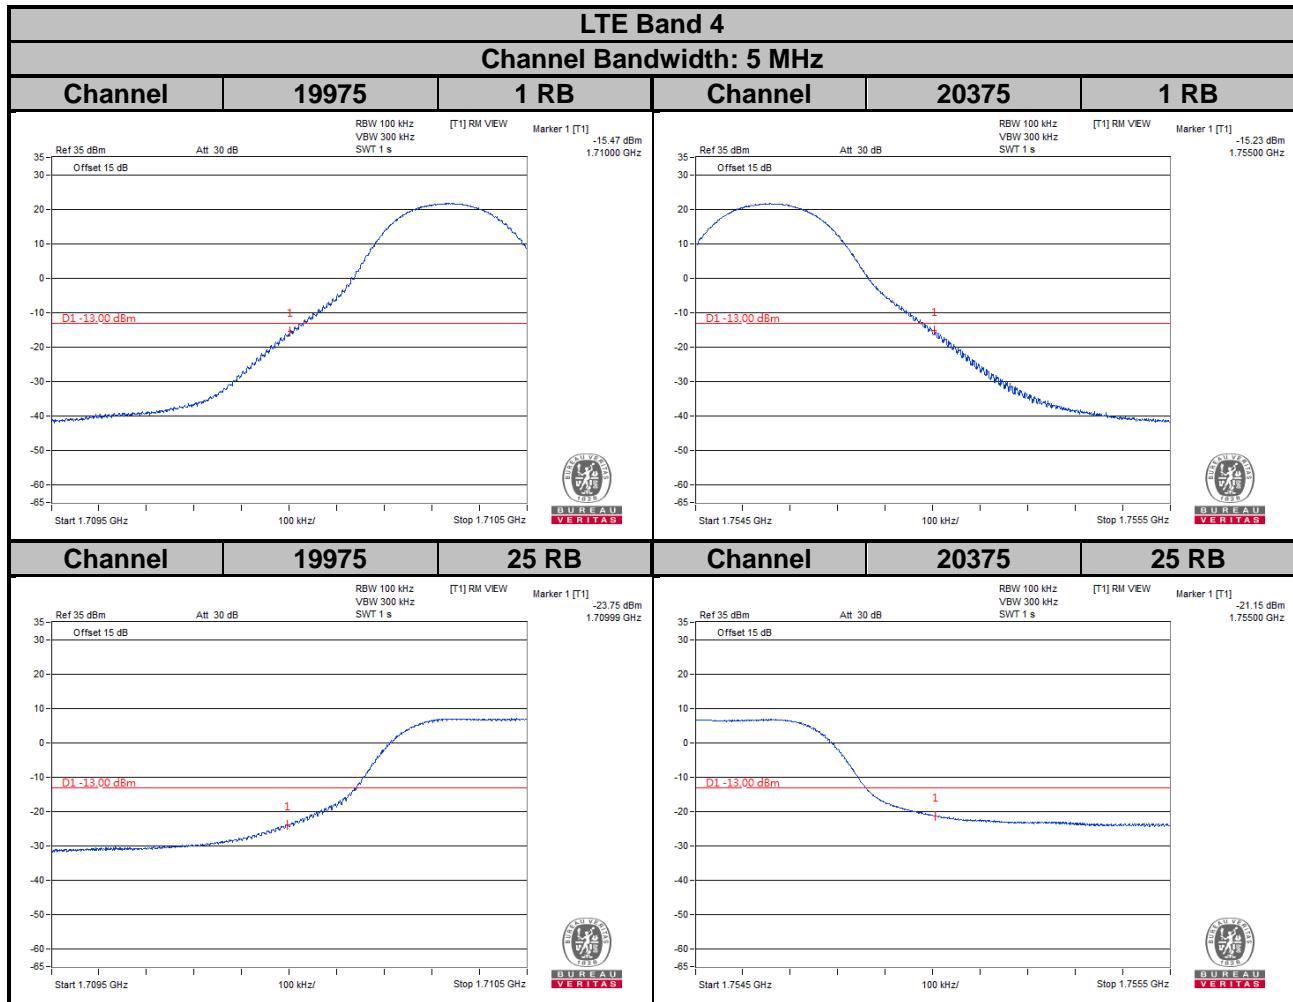


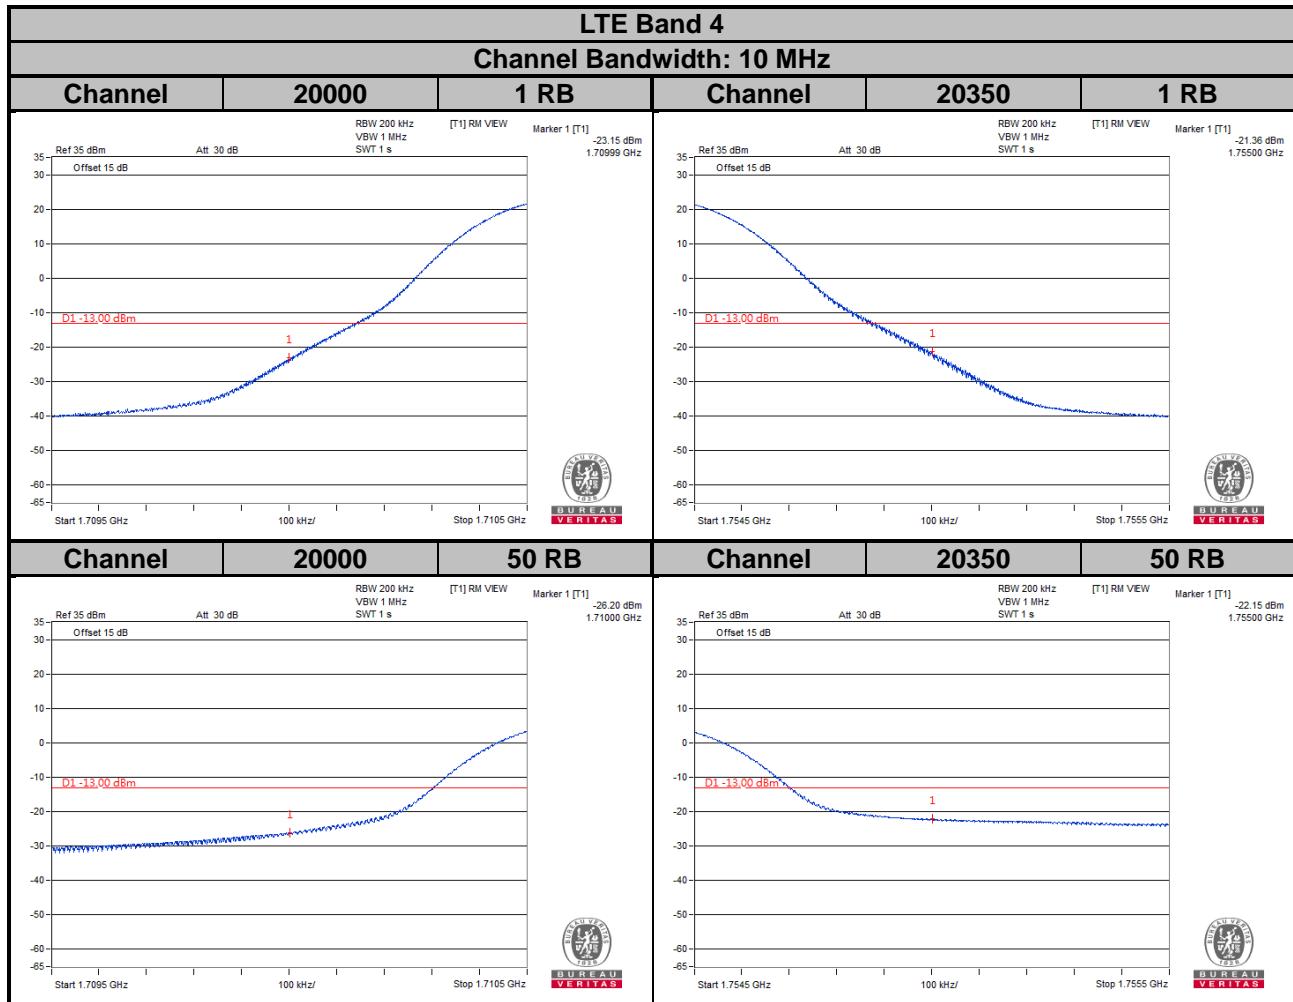


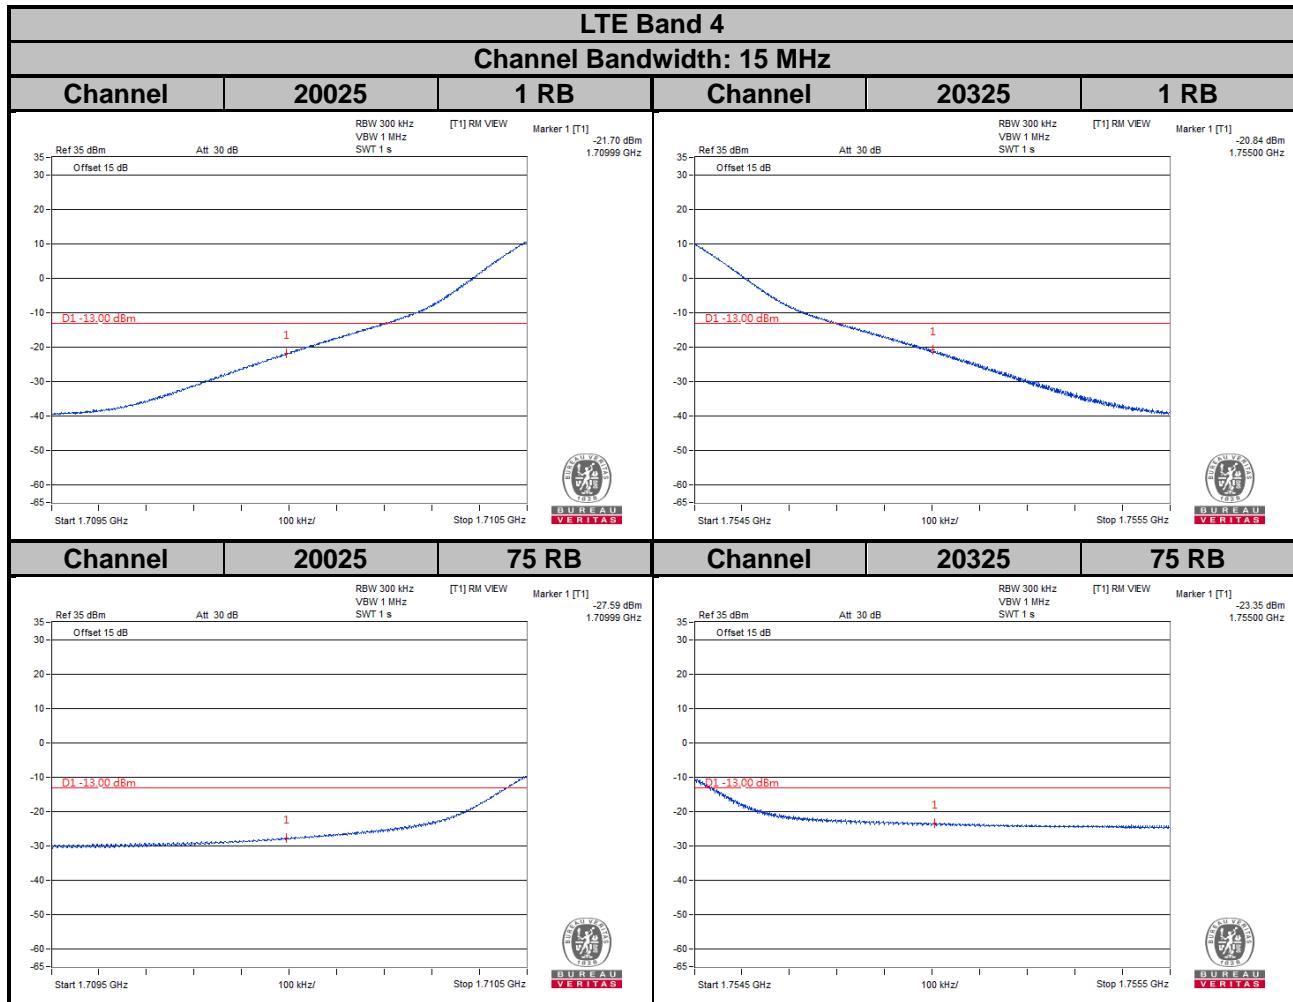


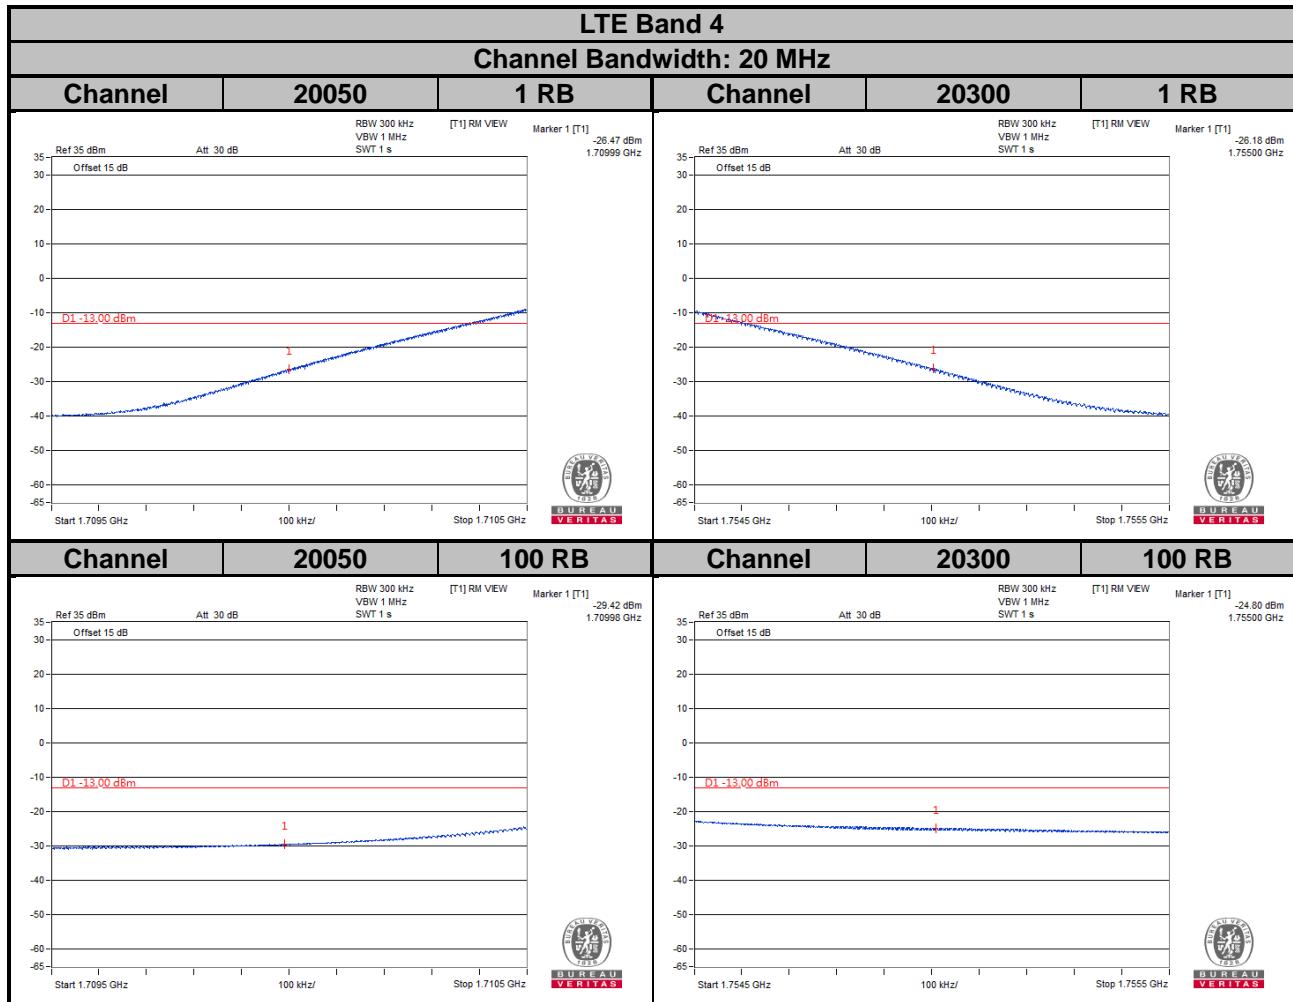

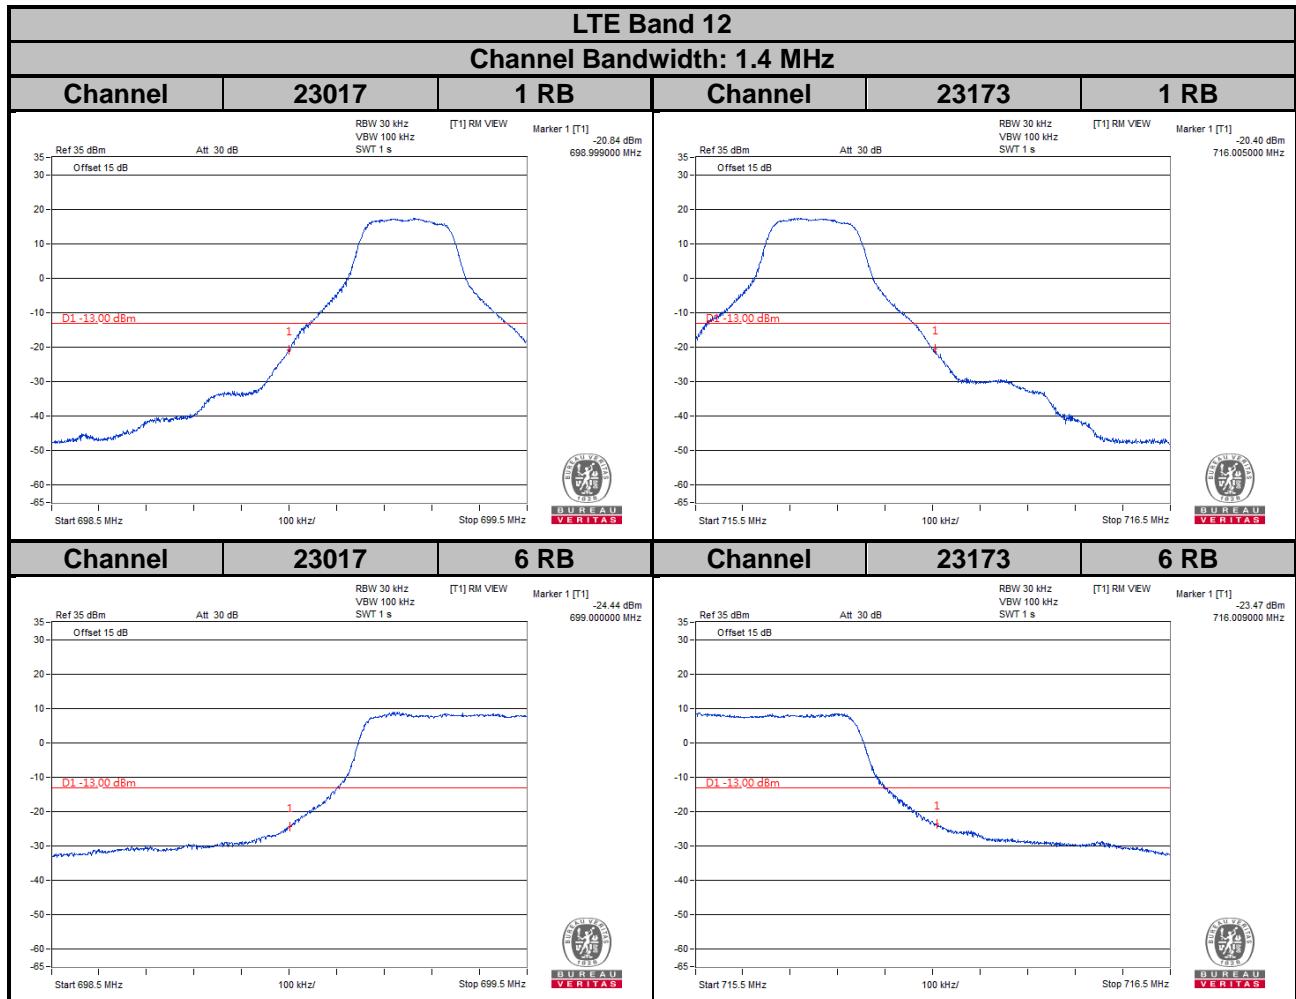

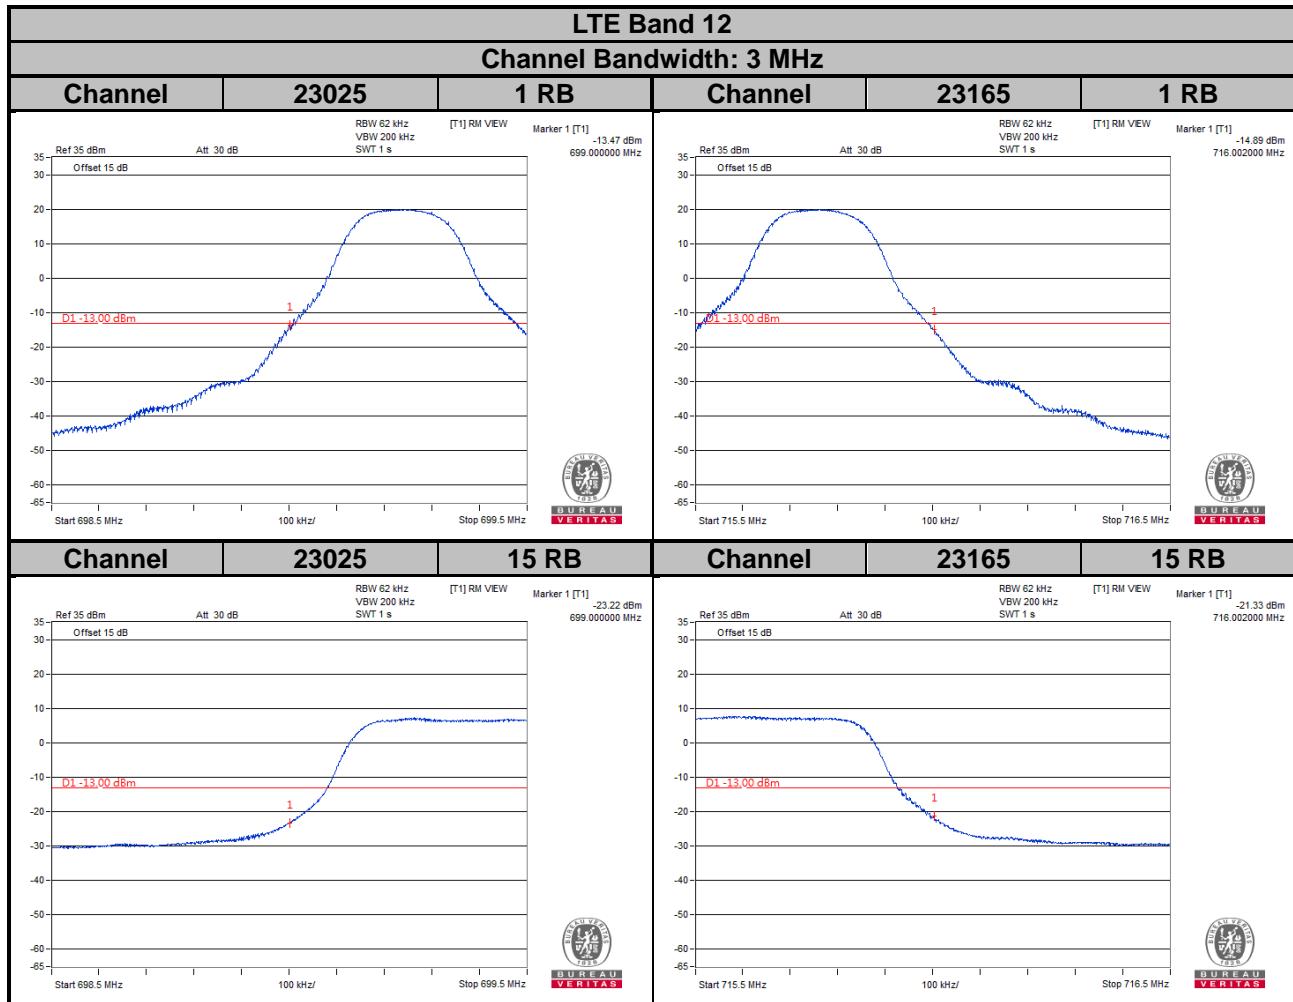

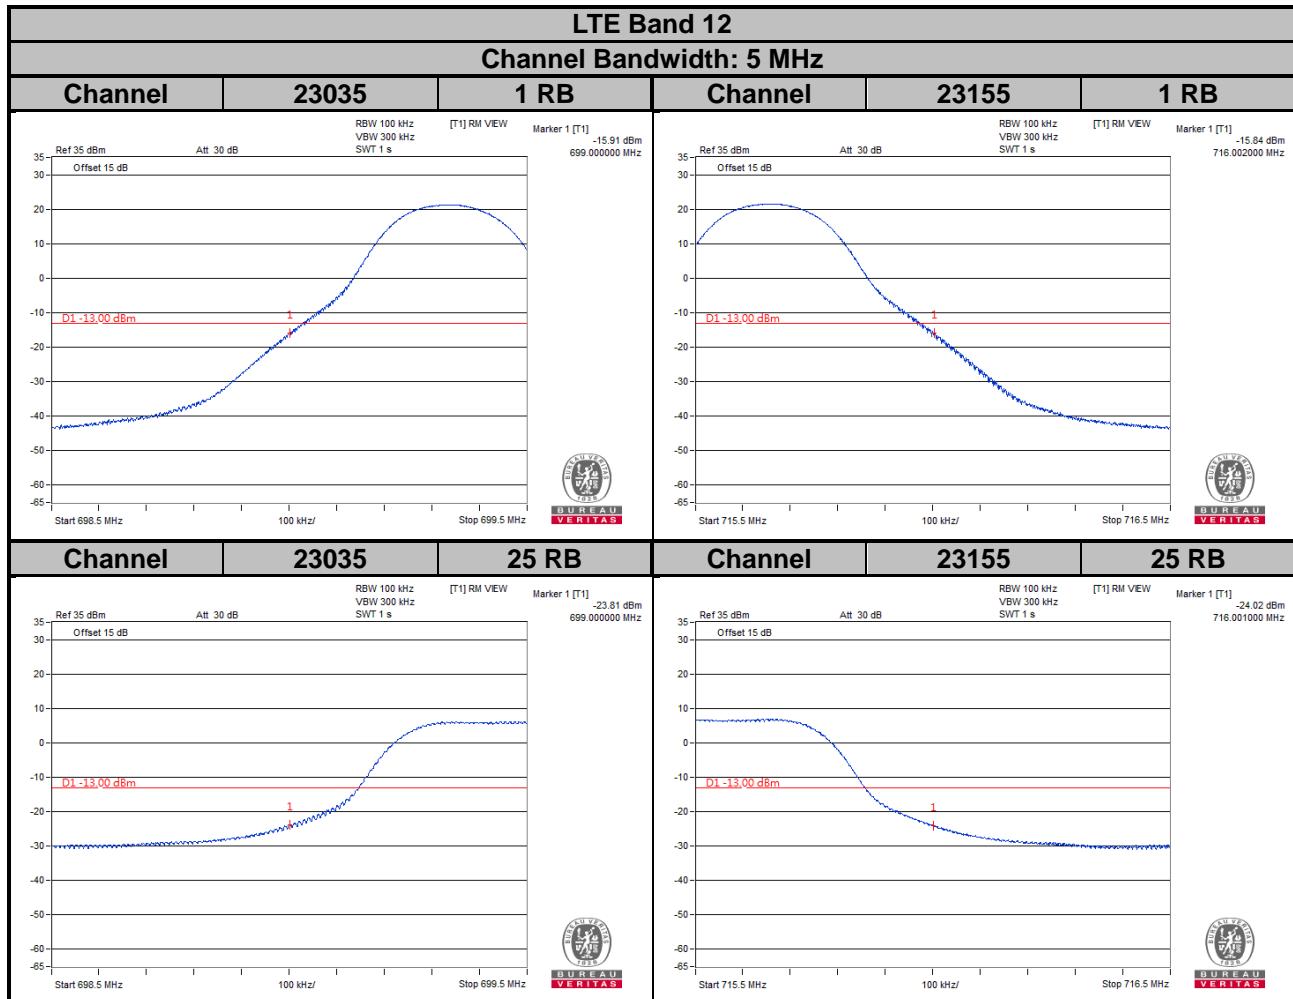

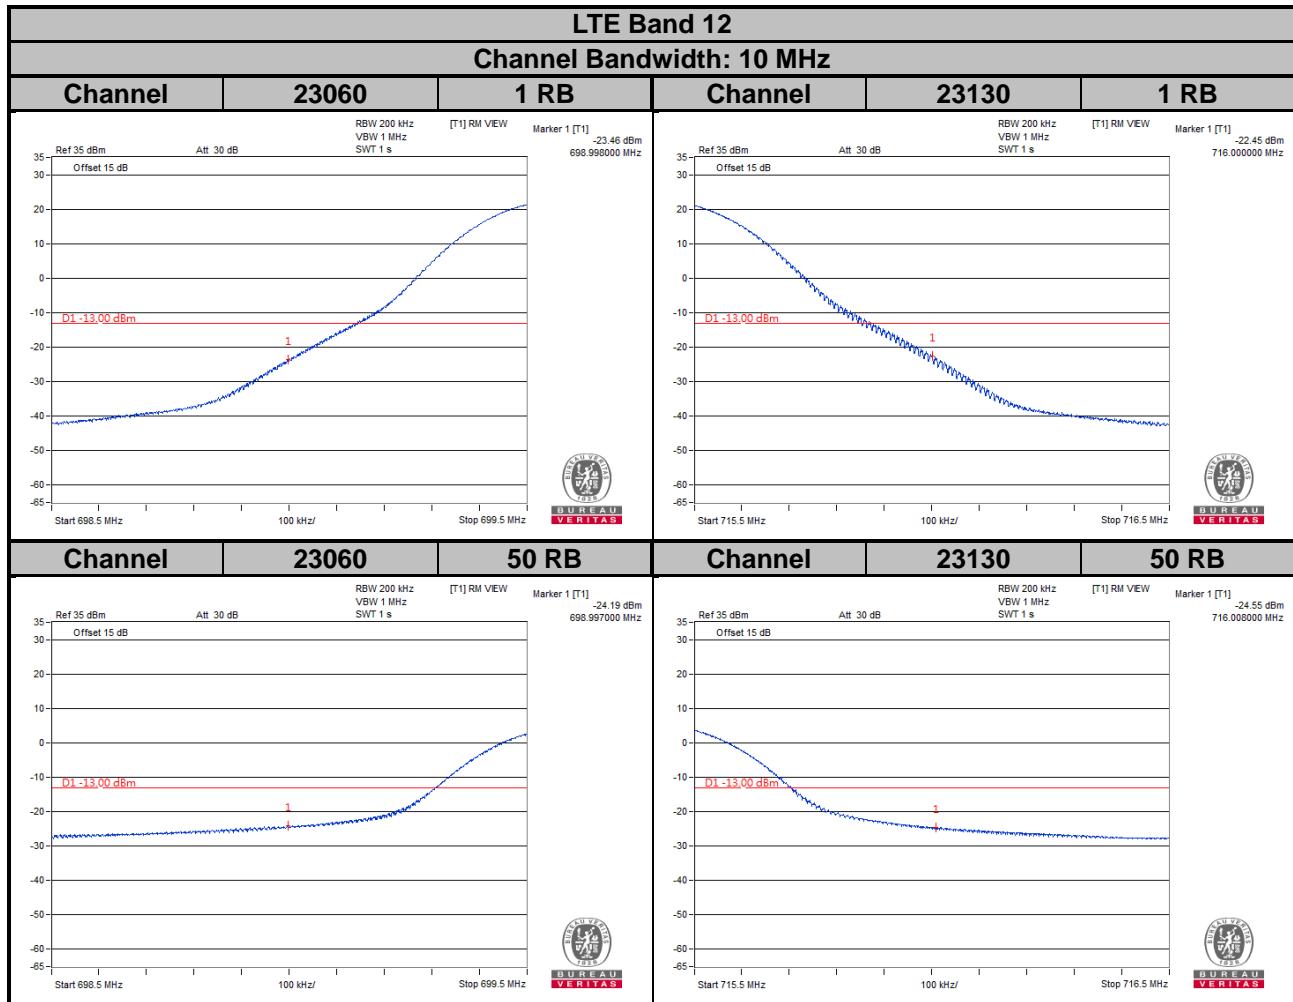


## 4.5 Peak to Average Ratio

### 4.5.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 4.5.2 Test Setup

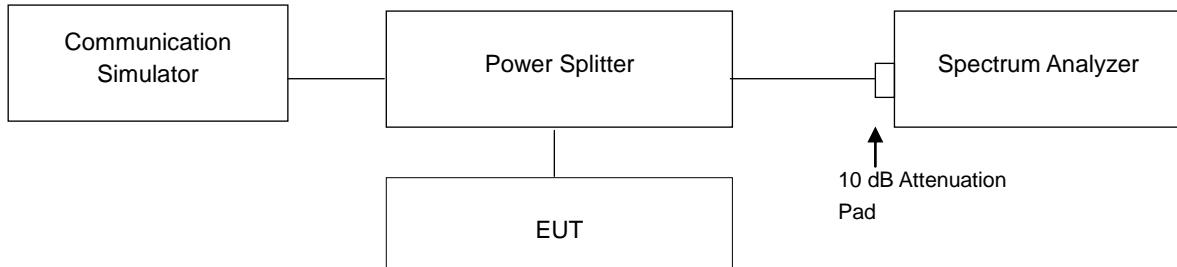


### 4.5.3 Test Procedures


1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

#### 4.5.4 Test Results


LTE Band 4							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	4.19	5.07	19965	1711.5	4.21	5.07
20175	1732.5	4.57	5.38	20175	1732.5	4.62	5.41
20393	1754.3	3.65	4.50	20385	1753.5	3.73	4.64

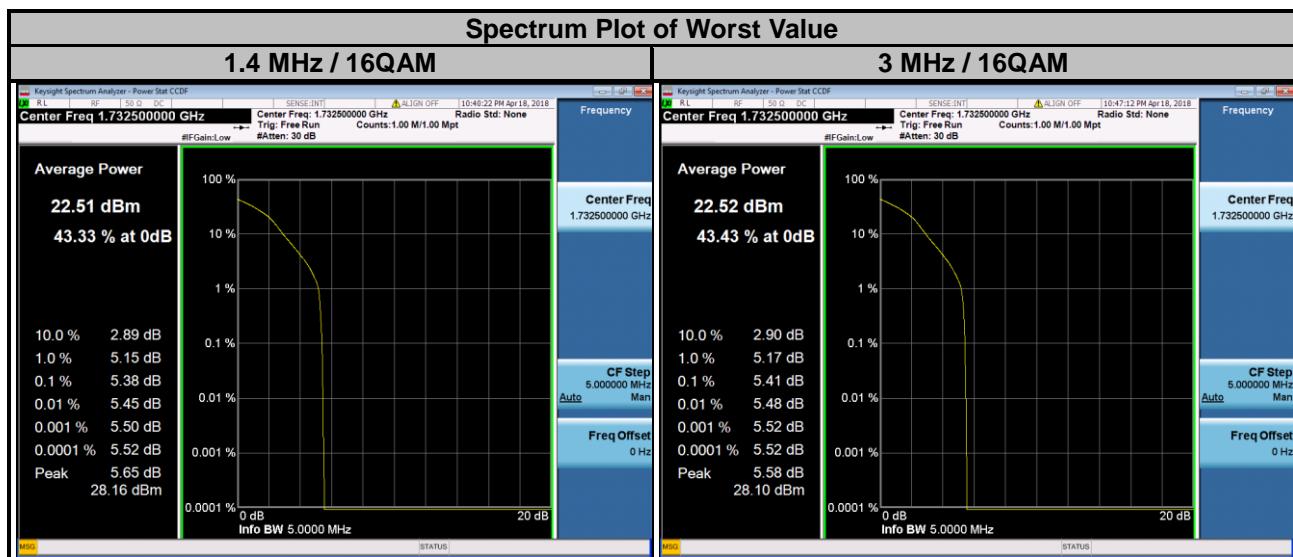


LTE Band 4							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.25	5.07	20000	1715.0	4.17	NA
20175	1732.5	4.60	5.38	20175	1732.5	4.57	NA
20375	1752.5	3.79	4.67	20350	1750.0	3.92	NA

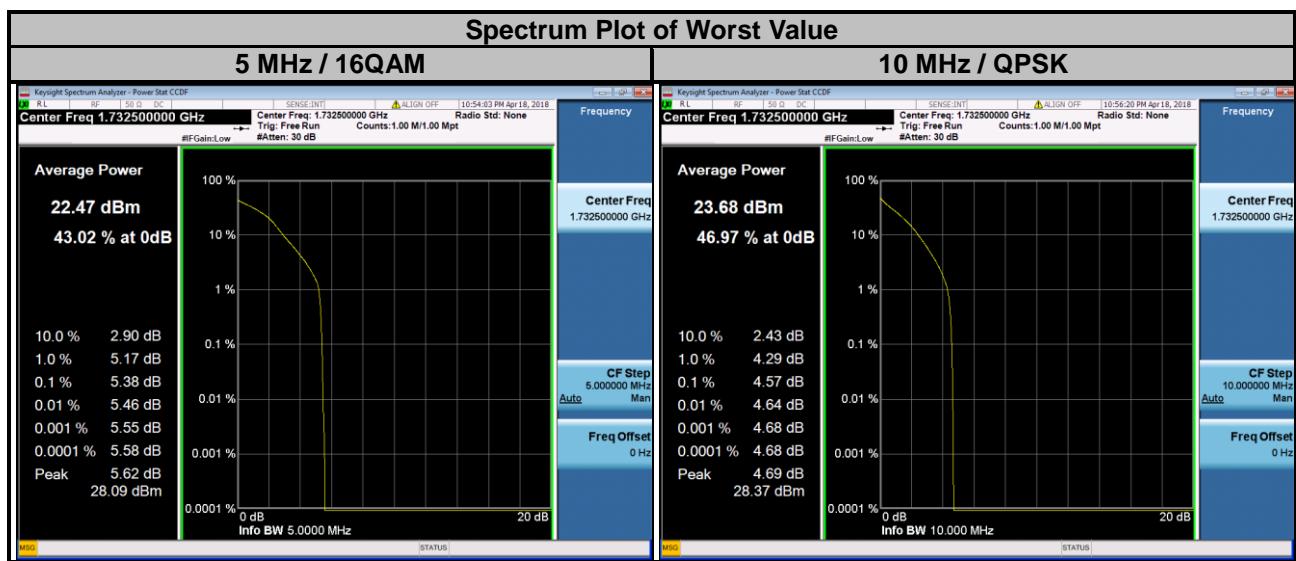


LTE Band 4							
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	4.17	NA	20050	1720.0	4.16	NA
20175	1732.5	4.54	NA	20175	1732.5	4.41	NA
20325	1747.5	4.03	NA	20300	1745.0	4.38	NA

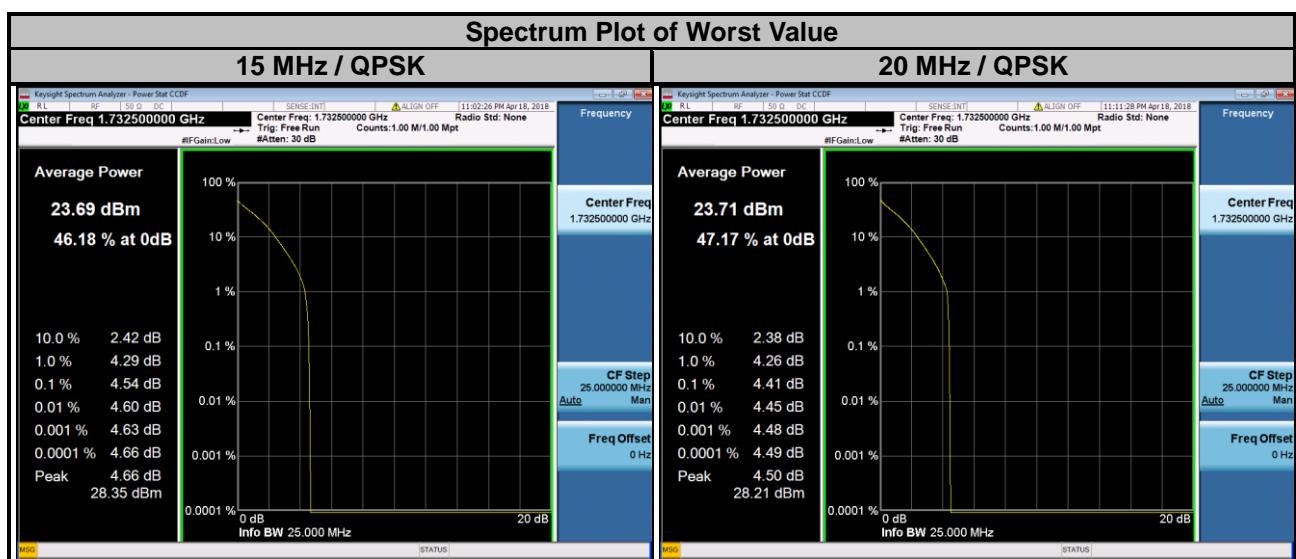

LTE Band 12							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
23017	699.7	4.00	4.76	23025	700.5	4.02	4.81
23095	707.5	3.84	4.61	23095	707.5	3.84	4.60
23173	715.3	3.81	4.62	23165	714.5	3.94	4.69

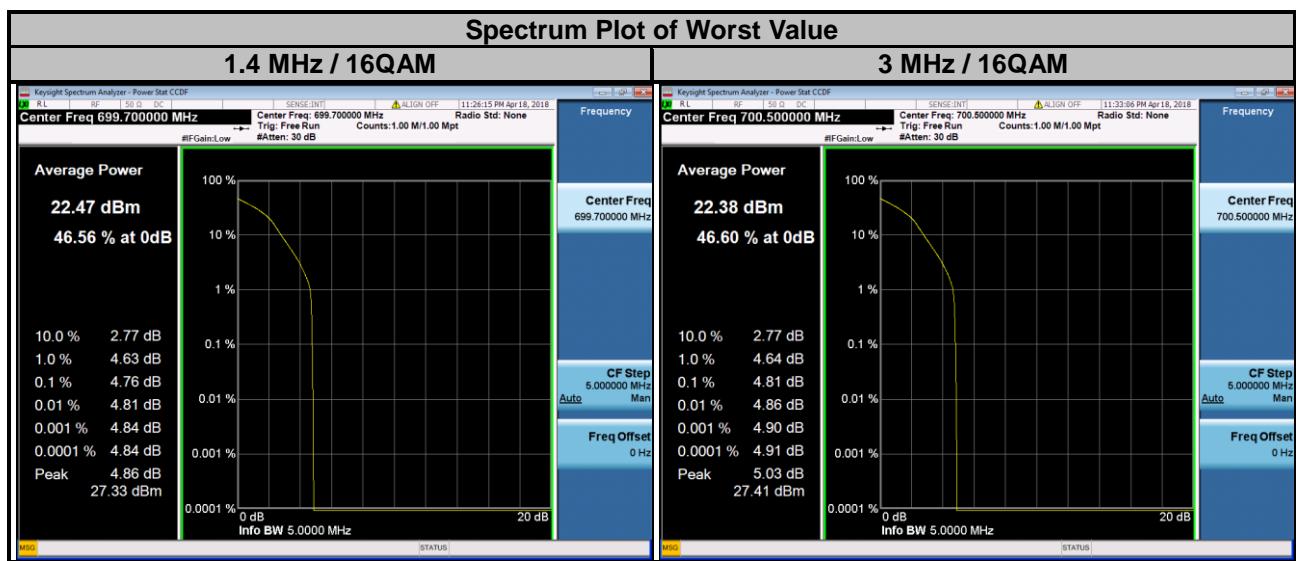

LTE Band 12							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
23035	701.5	4.02	4.80	23060	704.0	3.97	NA
23095	707.5	3.92	4.70	23095	707.5	3.92	NA
23155	713.5	4.02	4.83	23130	711.0	3.82	NA

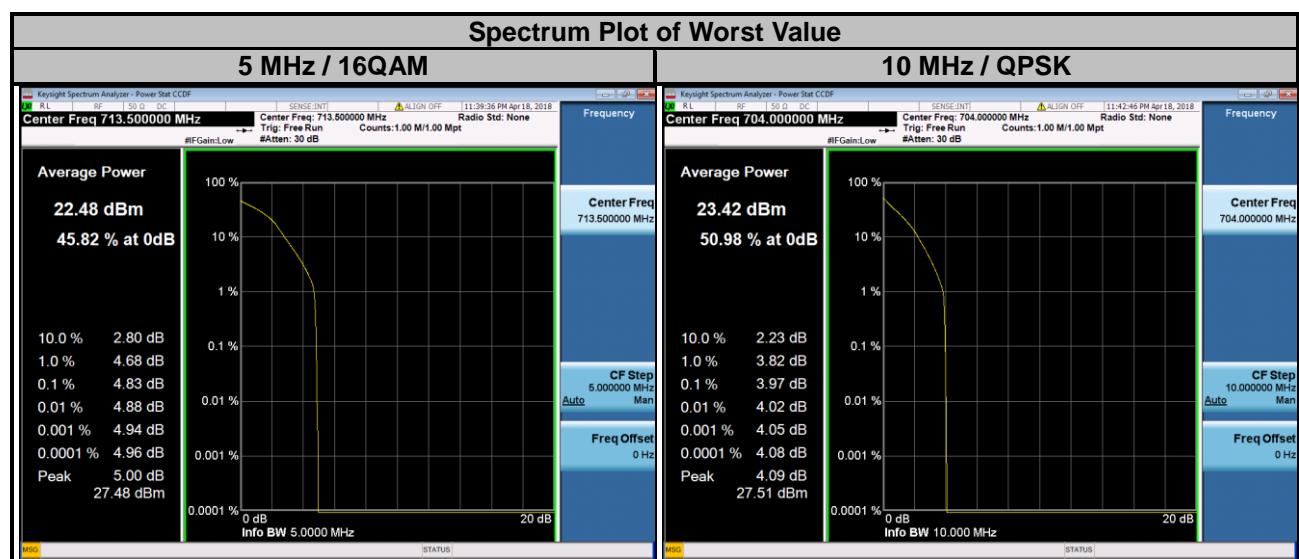


## 4.6 Conducted Spurious Emissions

### 4.6.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB. The limit of emission is equal to -13 dBm.


### 4.6.2 Test Setup

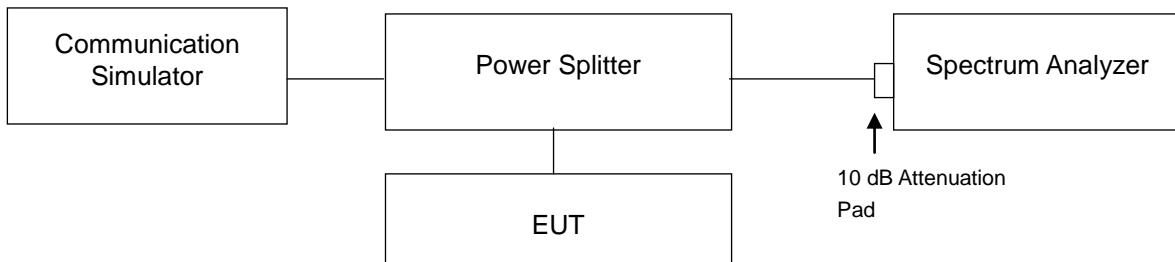

### 4.6.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz is used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 27 GHz (for LTE B4) & 1 GHz to 10 GHz (for LTE B12). 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.

#### 4.6.4 Test Results

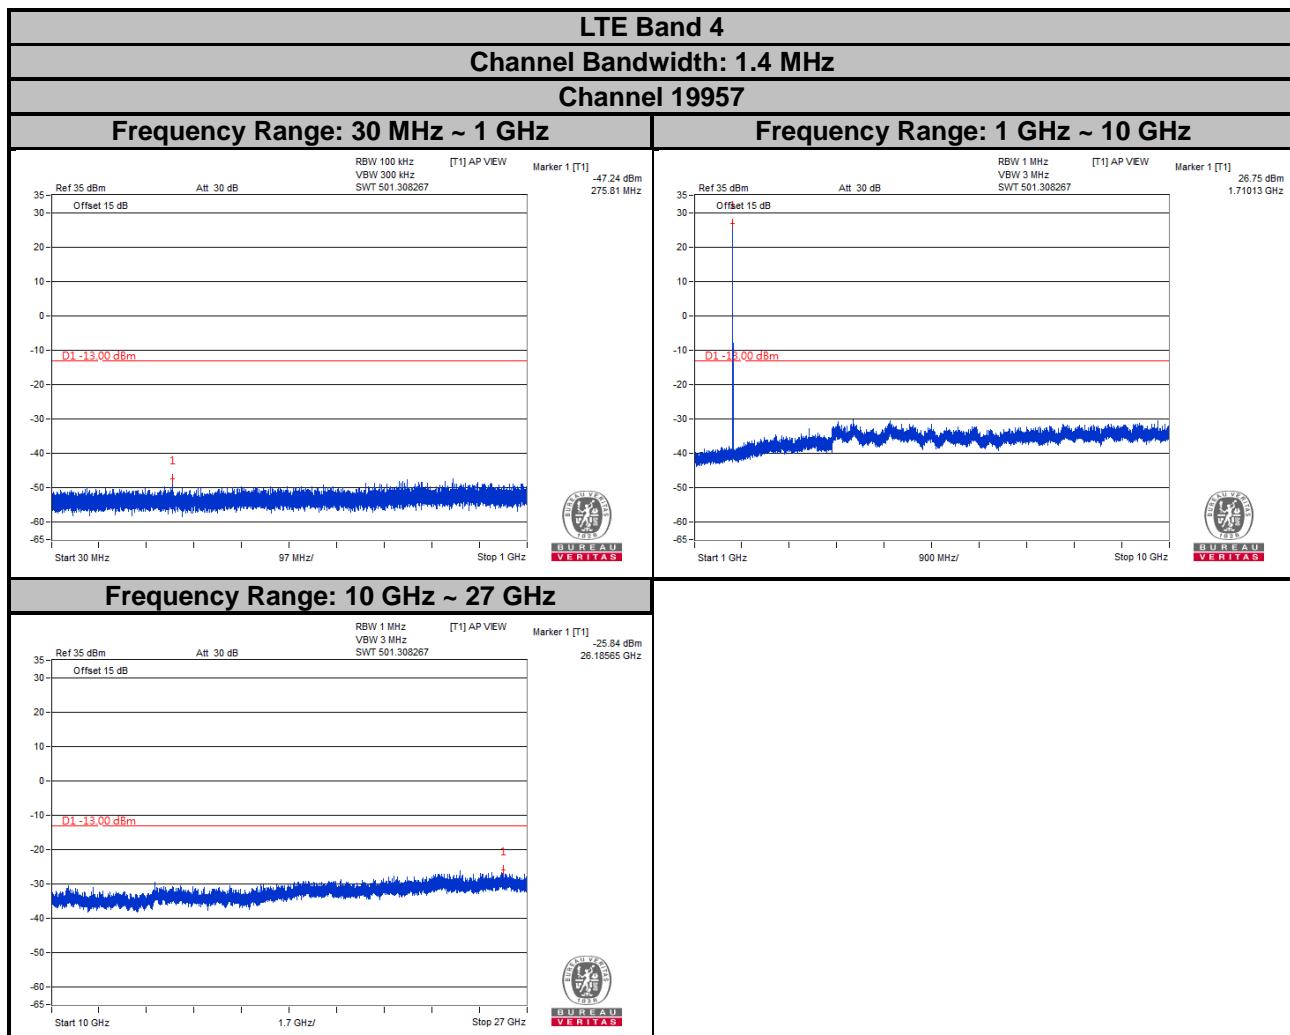


### LTE Band 4


Channel Bandwidth: 1.4 MHz

Channel 20175


Frequency Range: 30 MHz ~ 1 GHz

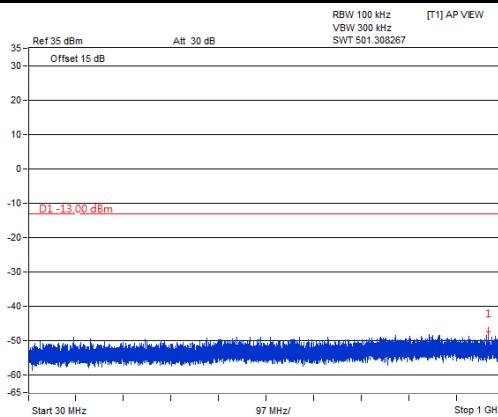

Frequency Range: 1 GHz ~ 10 GHz

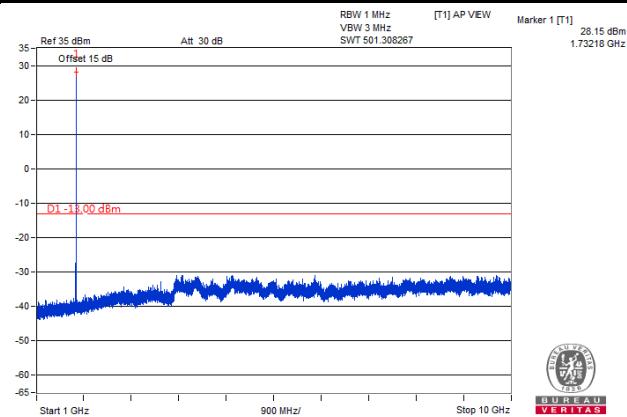

Frequency Range: 10 GHz ~ 27 GHz

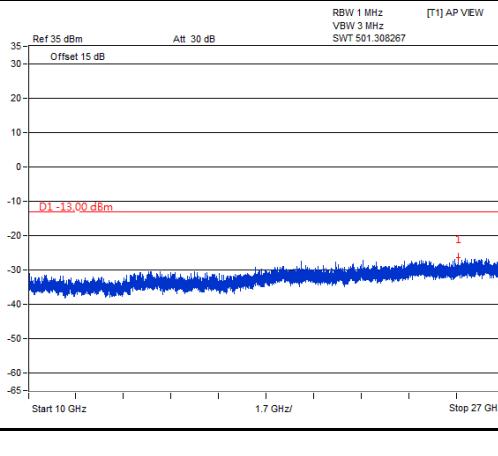


### LTE Band 4


Channel Bandwidth: 1.4 MHz

Channel 20393


Frequency Range: 30 MHz ~ 1 GHz

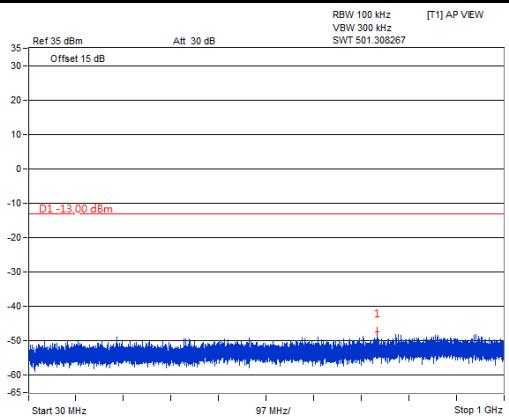

Frequency Range: 1 GHz ~ 10 GHz

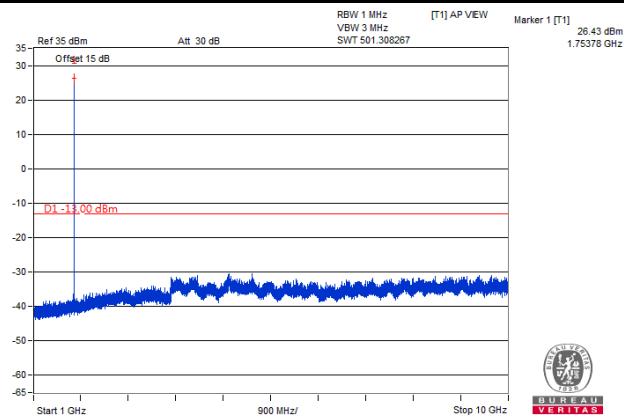


Frequency Range: 10 GHz ~ 27 GHz

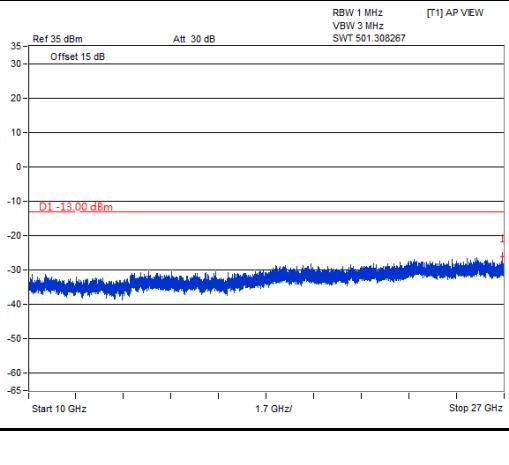


**LTE Band 4**  
**Channel Bandwidth: 3 MHz**  
**Channel 19965**


**Frequency Range: 30 MHz ~ 1 GHz**

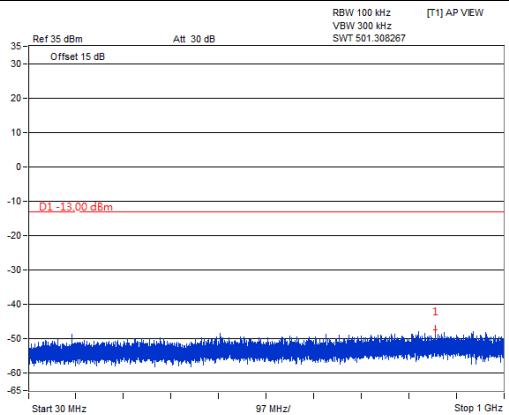


**Frequency Range: 1 GHz ~ 10 GHz**

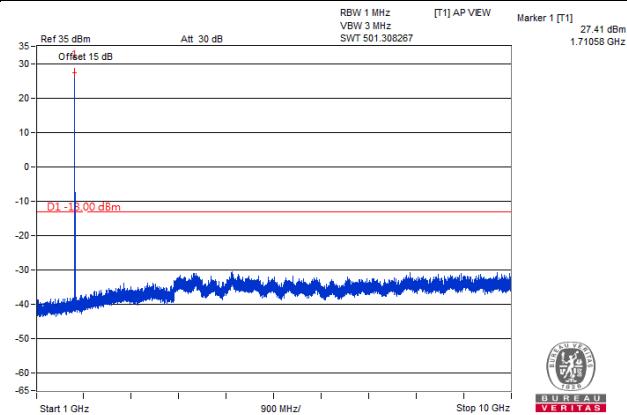

**Frequency Range: 10 GHz ~ 27 GHz**

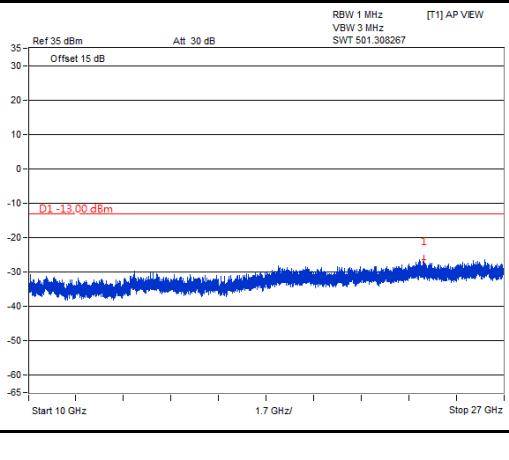

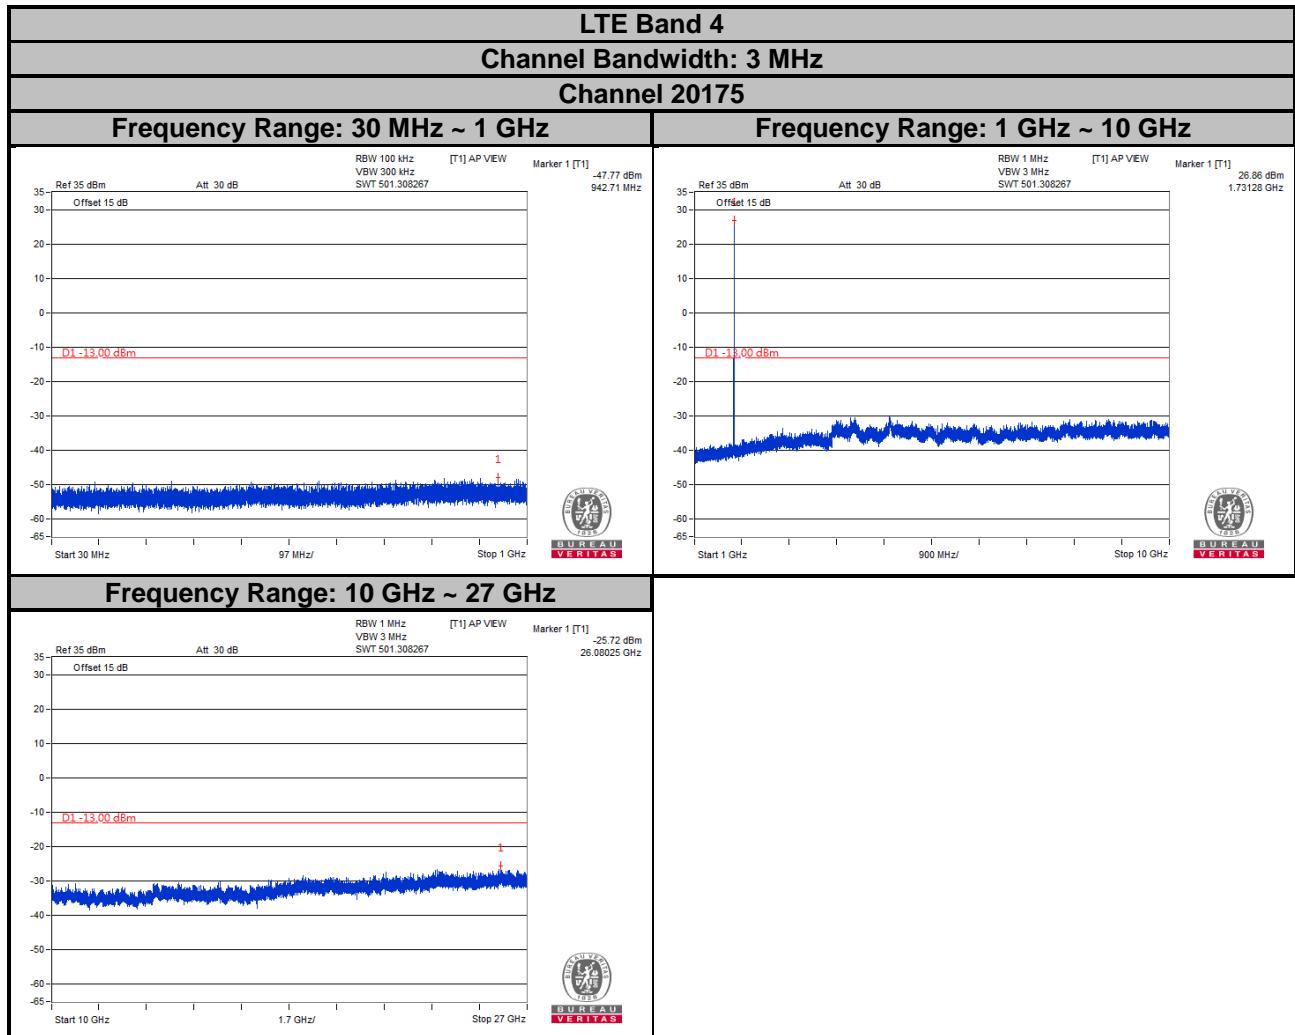


### LTE Band 4


Channel Bandwidth: 3 MHz

Channel 20385


Frequency Range: 30 MHz ~ 1 GHz

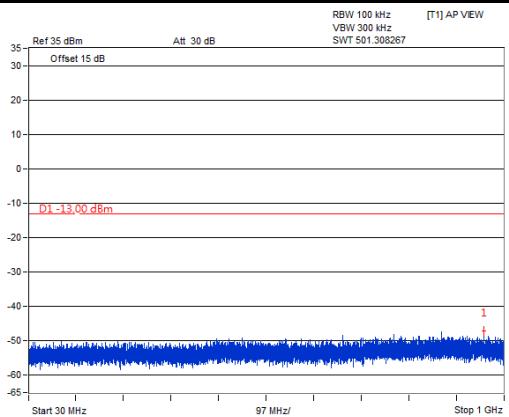

Frequency Range: 1 GHz ~ 10 GHz

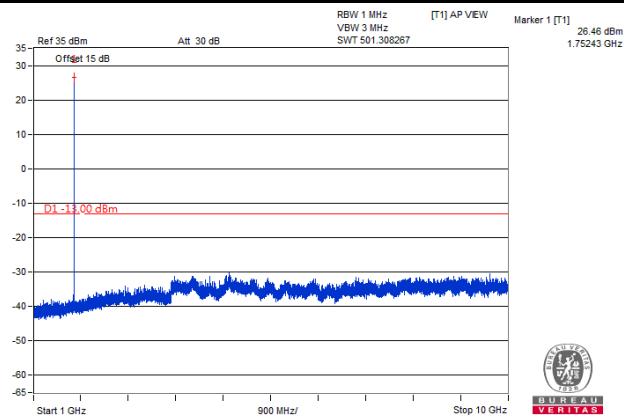

Frequency Range: 10 GHz ~ 27 GHz

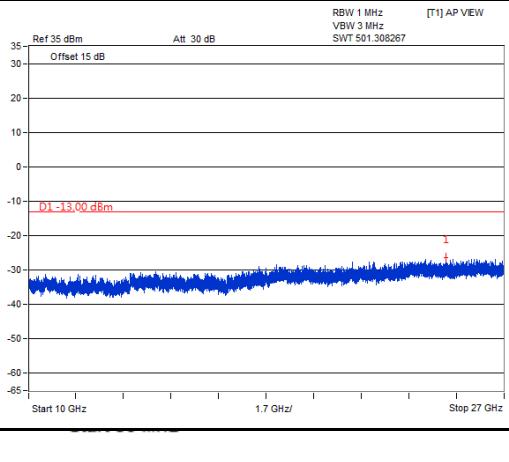


### LTE Band 4


Channel Bandwidth: 5 MHz

Channel 19975


Frequency Range: 30 MHz ~ 1 GHz

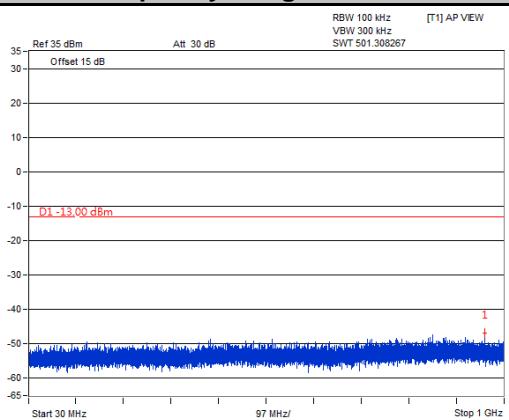

Frequency Range: 1 GHz ~ 10 GHz

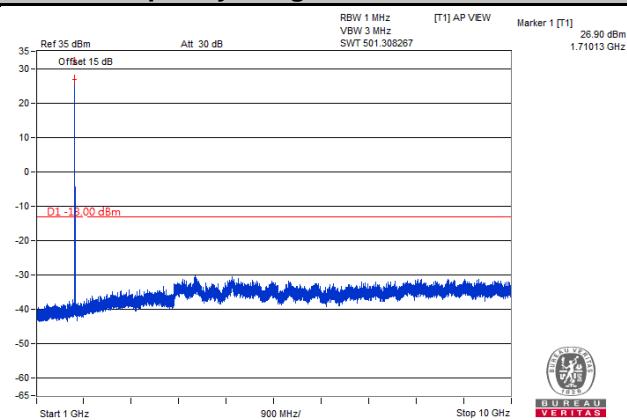


Frequency Range: 10 GHz ~ 27 GHz

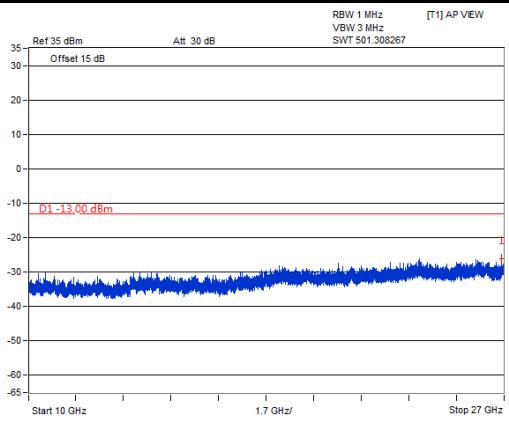


**LTE Band 4**  
**Channel Bandwidth: 5 MHz**  
**Channel 20175**


**Frequency Range: 30 MHz ~ 1 GHz**

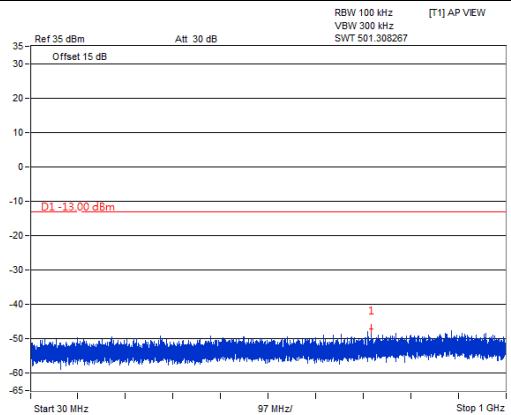

**Frequency Range: 1 GHz ~ 10 GHz**

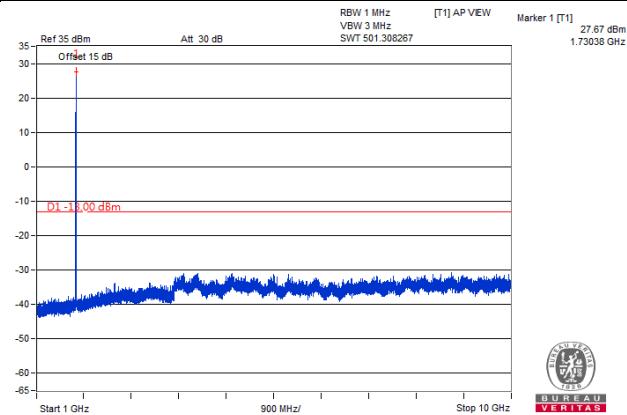


**Frequency Range: 10 GHz ~ 27 GHz**

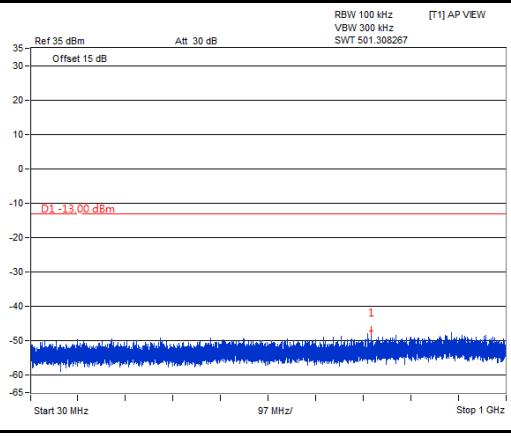


**LTE Band 4**  
**Channel Bandwidth: 5 MHz**  
**Channel 20375**


**Frequency Range: 30 MHz ~ 1 GHz**

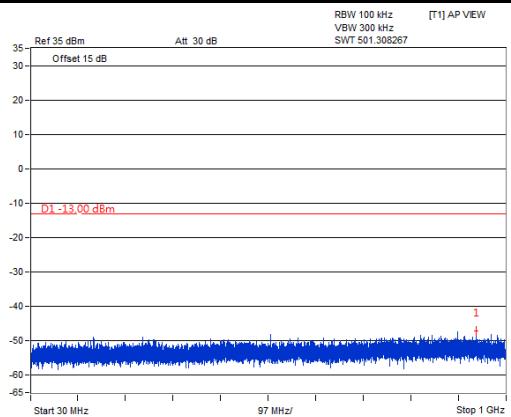

**Frequency Range: 1 GHz ~ 10 GHz**

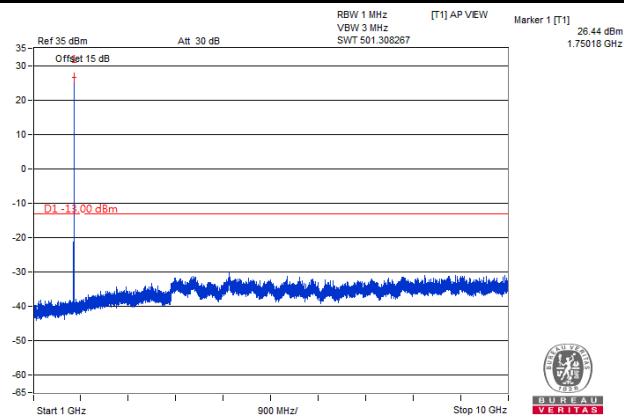

**Frequency Range: 10 GHz ~ 27 GHz**

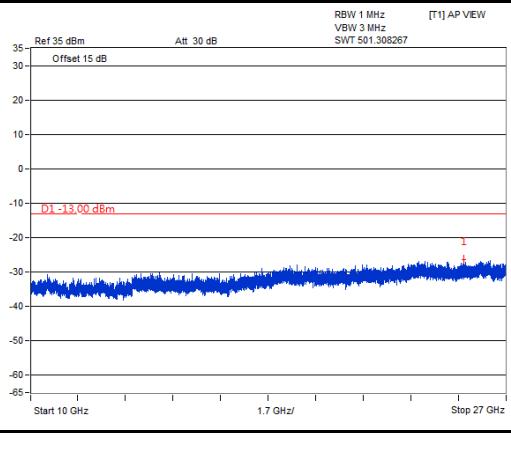


### LTE Band 4


Channel Bandwidth: 10 MHz

Channel 20000


Frequency Range: 30 MHz ~ 1 GHz

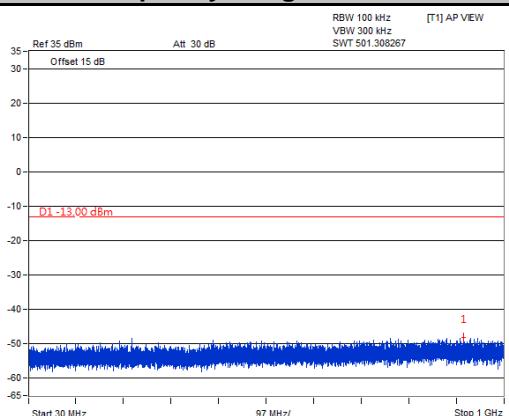



Frequency Range: 1 GHz ~ 10 GHz

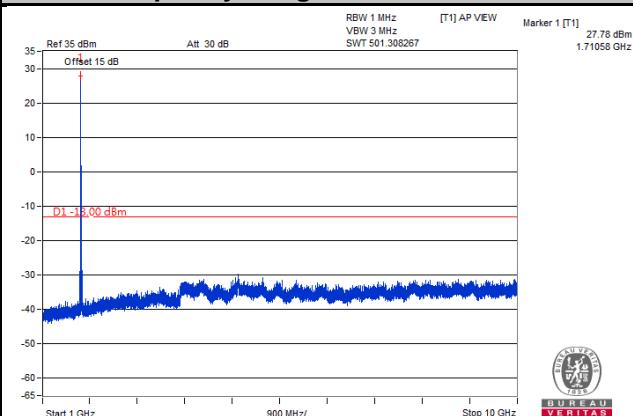

Frequency Range: 10 GHz ~ 27 GHz

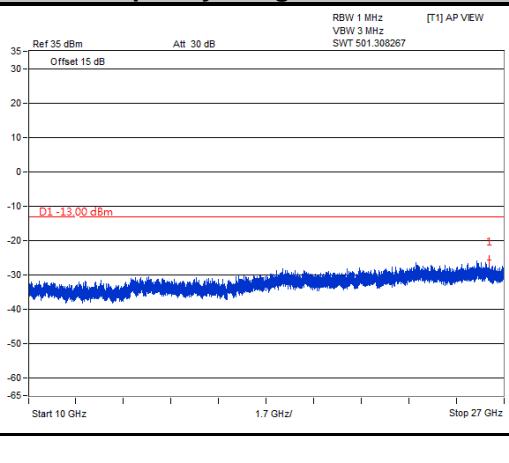

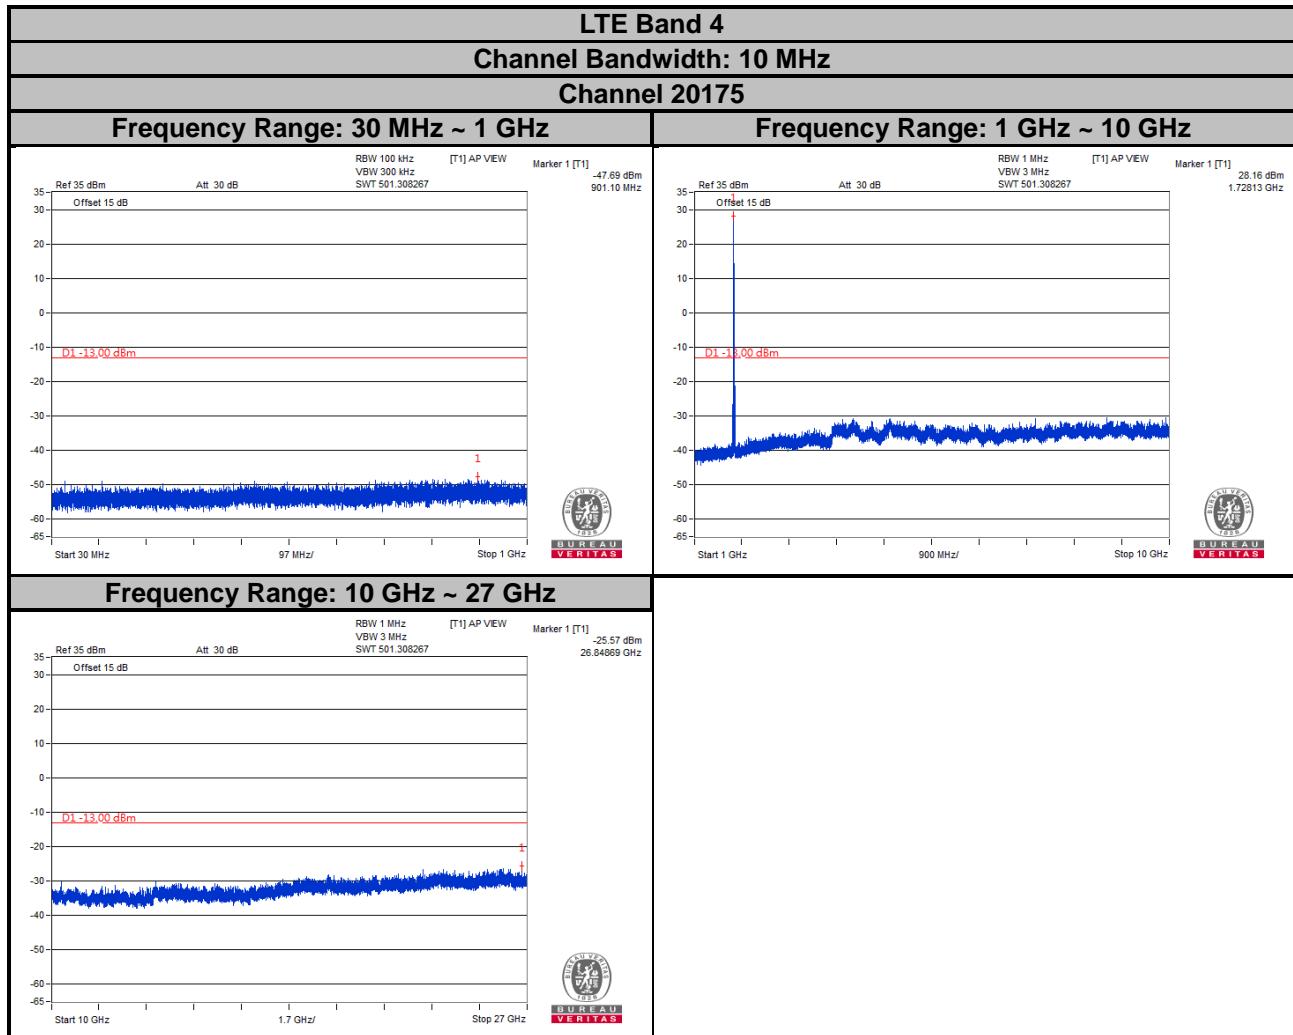

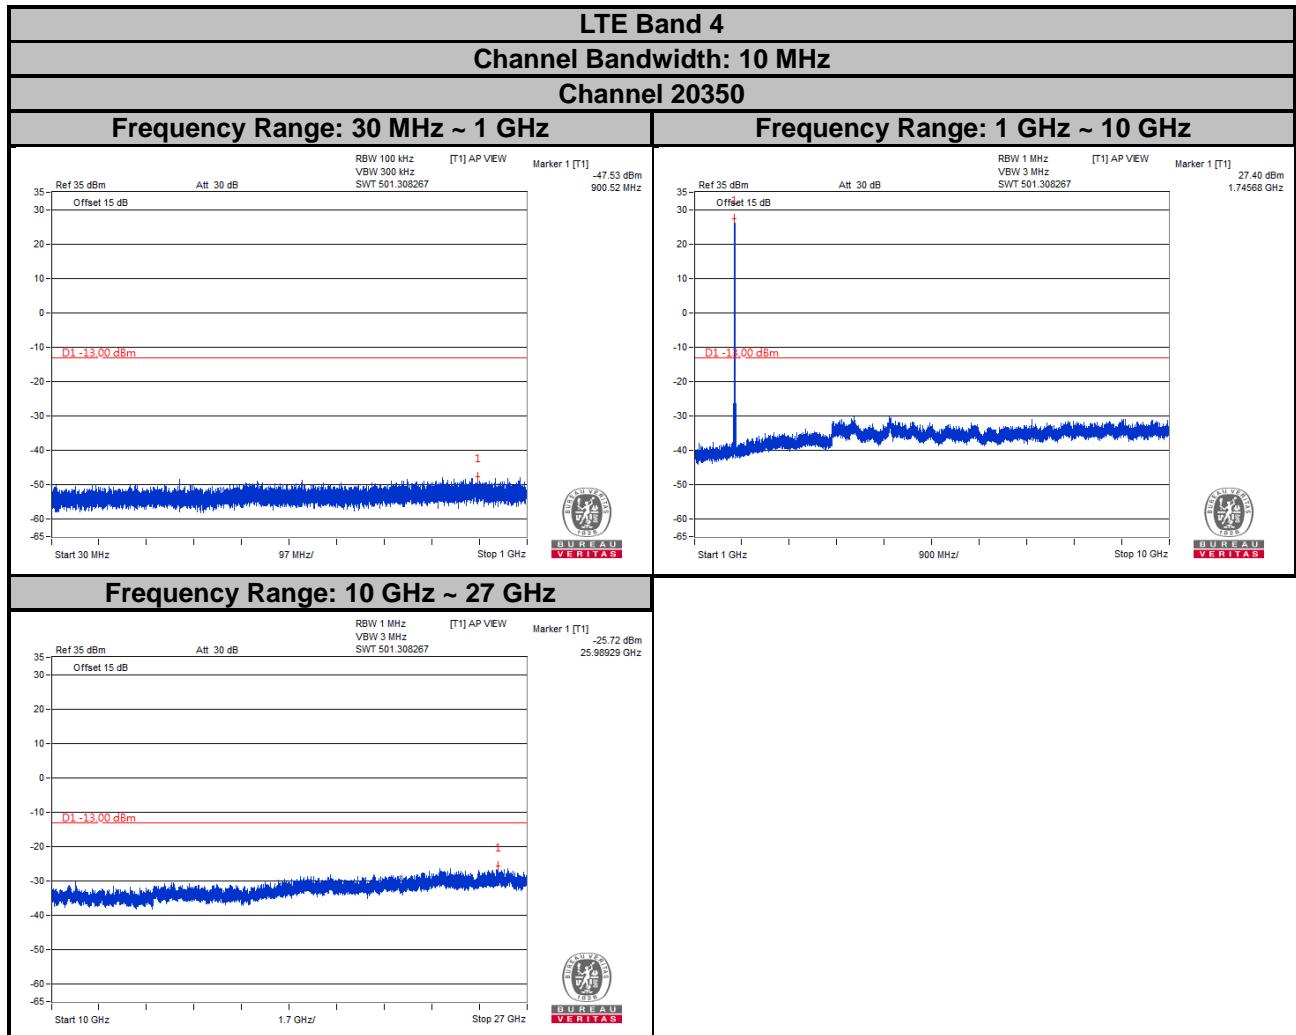


### LTE Band 4


Channel Bandwidth: 15 MHz

Channel 20025


Frequency Range: 30 MHz ~ 1 GHz

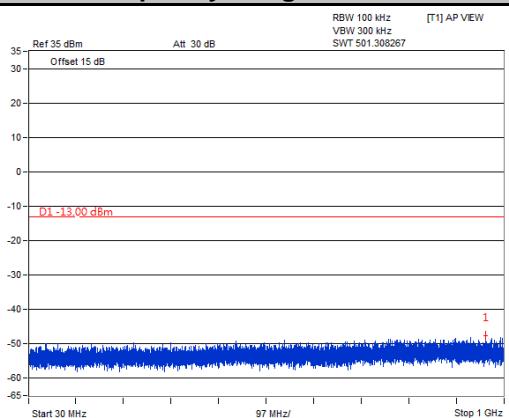

Frequency Range: 1 GHz ~ 10 GHz

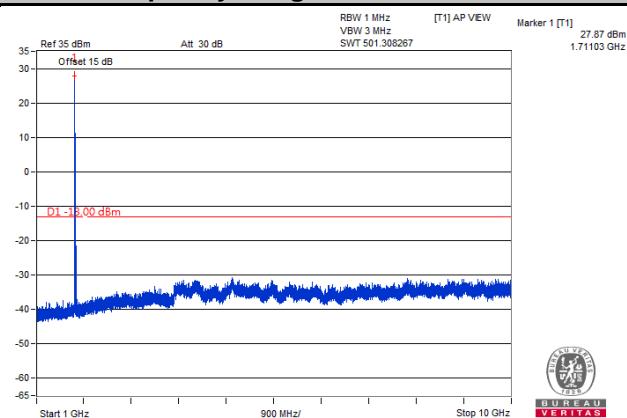

Frequency Range: 10 GHz ~ 27 GHz

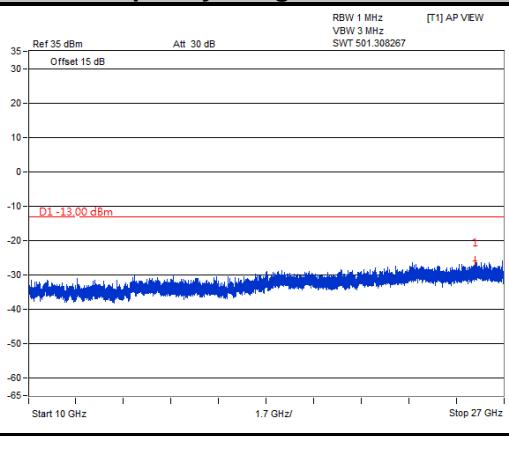


### LTE Band 4


Channel Bandwidth: 15 MHz

Channel 20175


Frequency Range: 30 MHz ~ 1 GHz

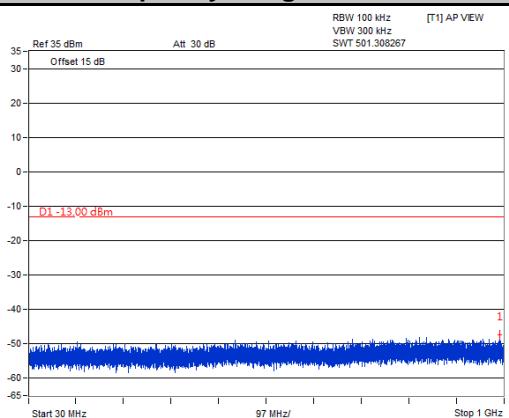


Frequency Range: 1 GHz ~ 10 GHz

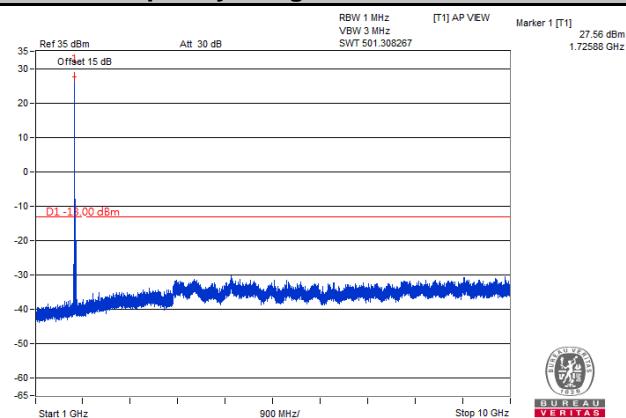


Frequency Range: 10 GHz ~ 27 GHz

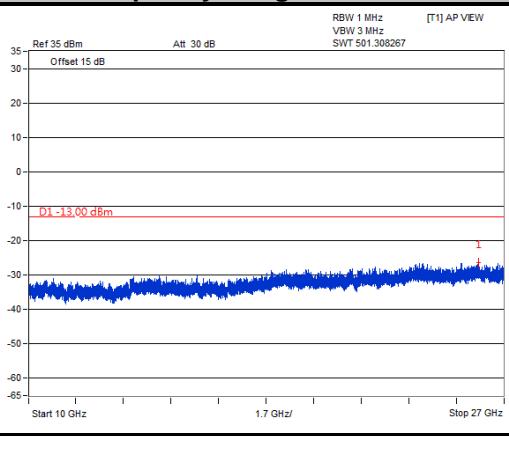

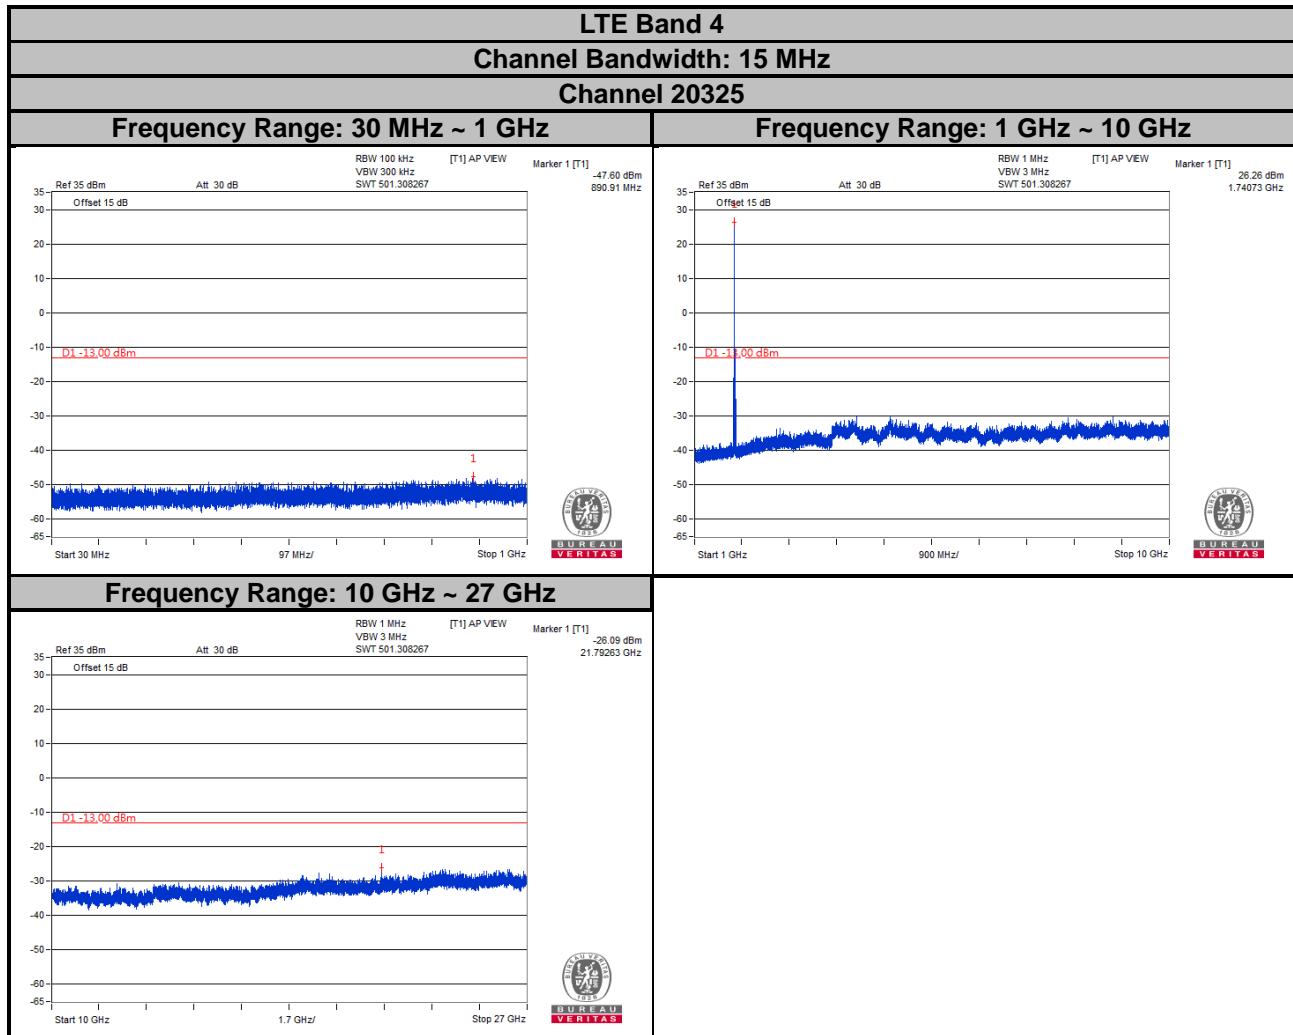


**LTE Band 4**  
**Channel Bandwidth: 20 MHz**  
**Channel 20050**


**Frequency Range: 30 MHz ~ 1 GHz**

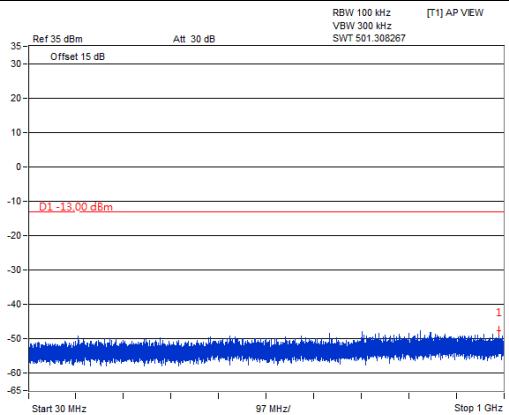



**Frequency Range: 1 GHz ~ 10 GHz**






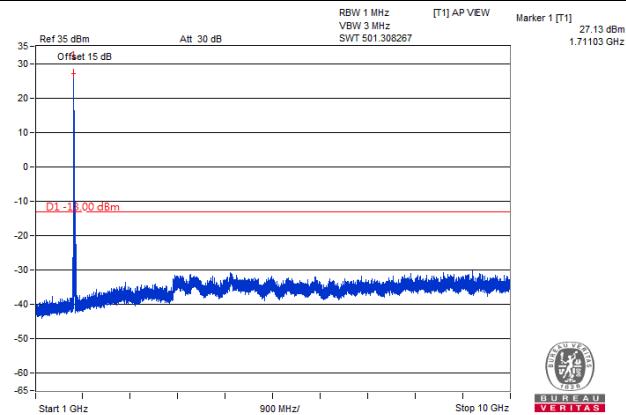








**Frequency Range: 10 GHz ~ 27 GHz**

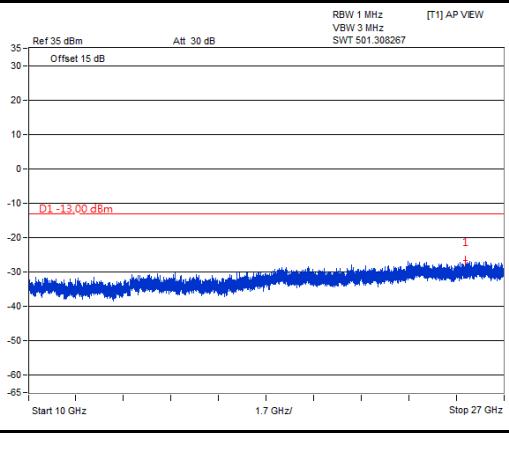


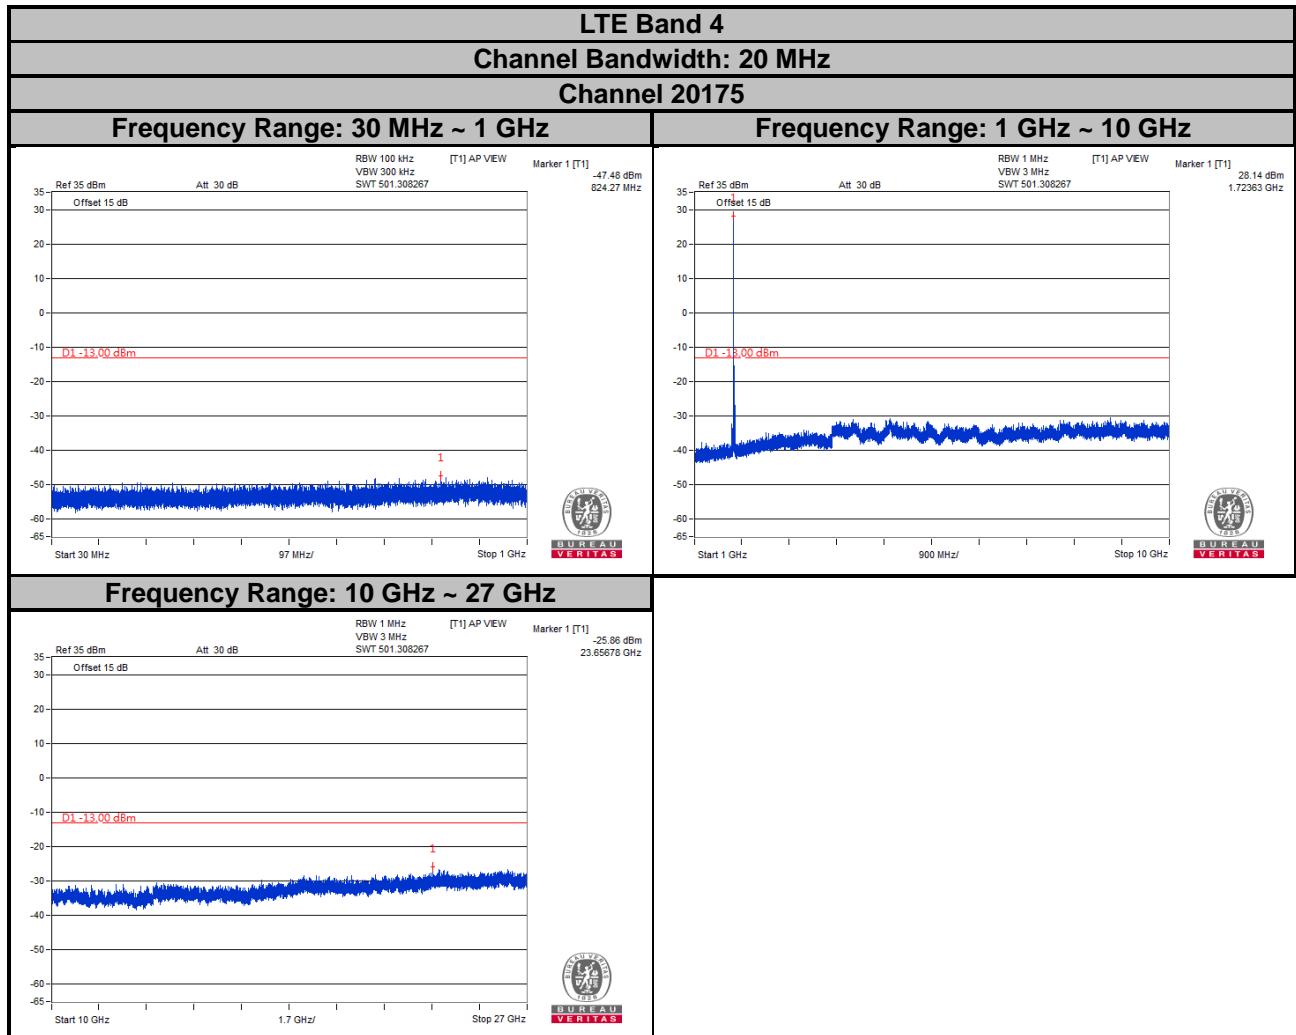


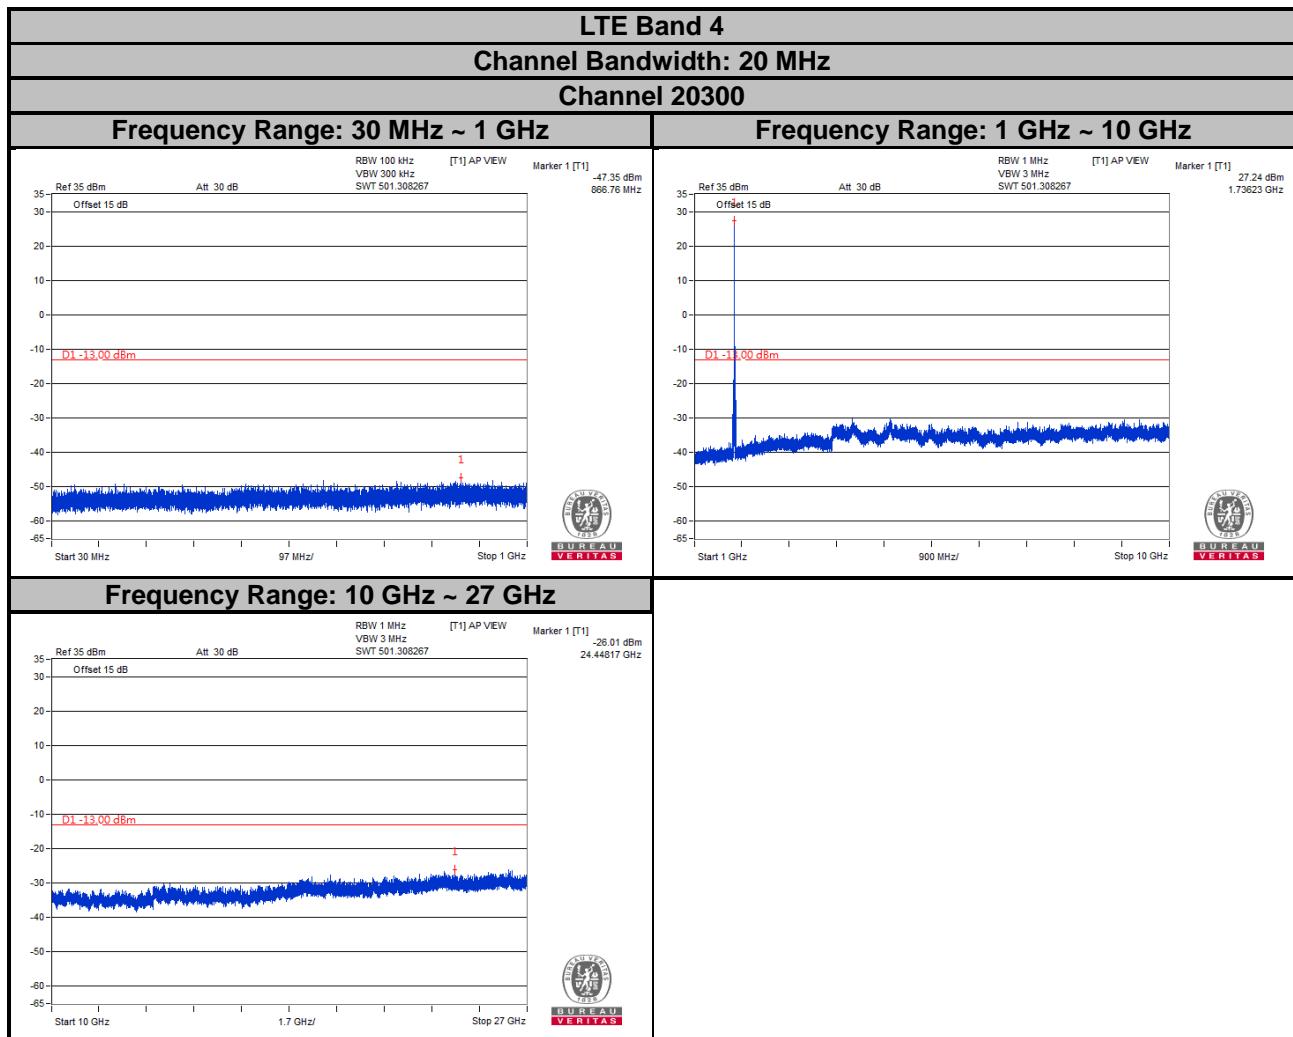

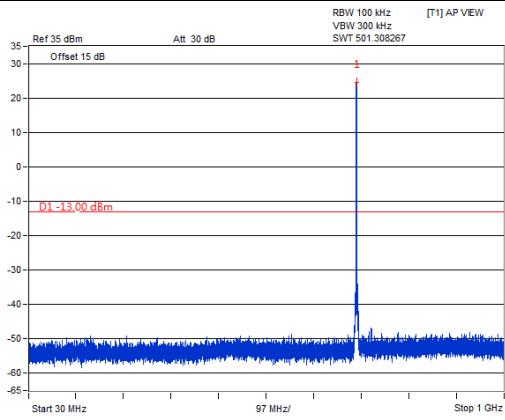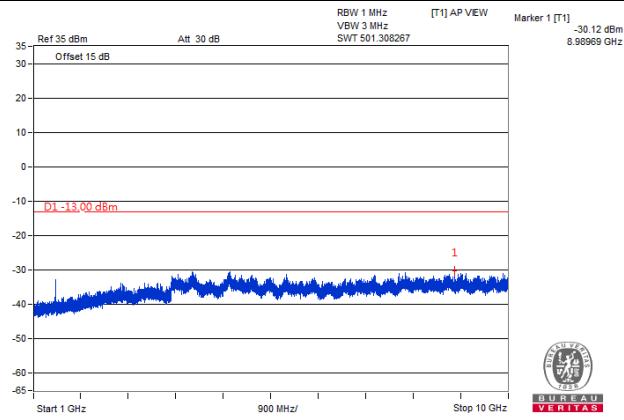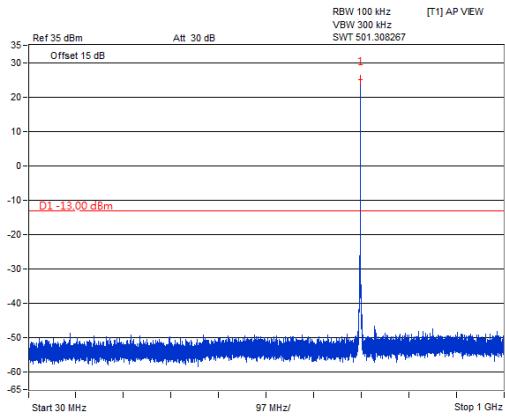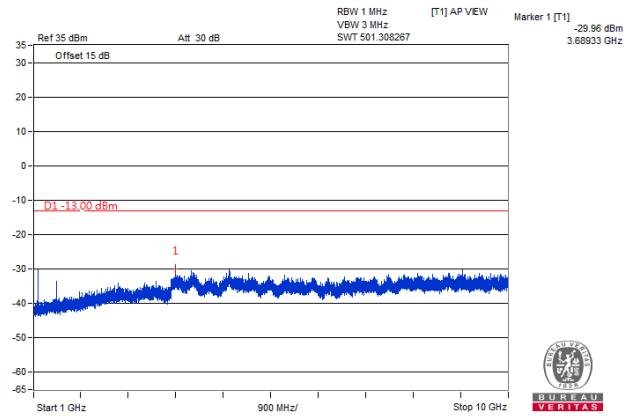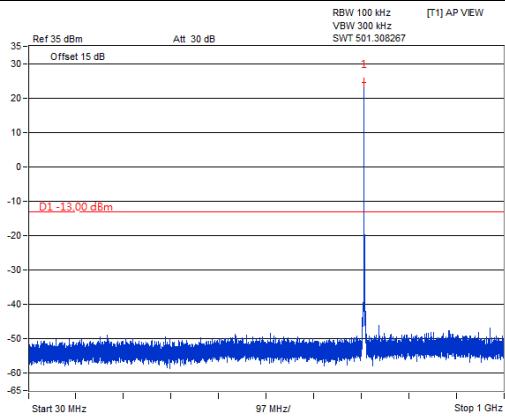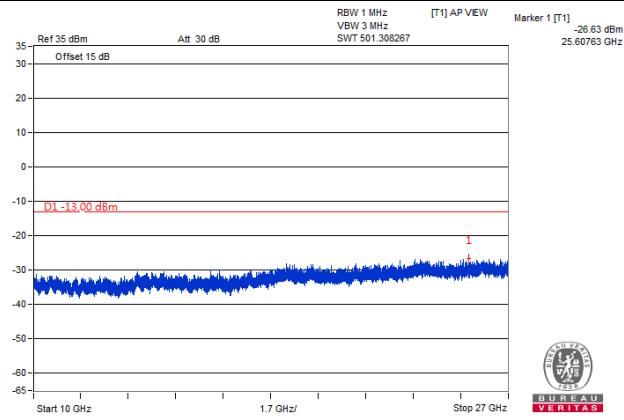**LTE Band 12**
**Channel Bandwidth: 1.4 MHz**
**Channel 23017**
**Frequency Range: 30 MHz ~ 1 GHz**

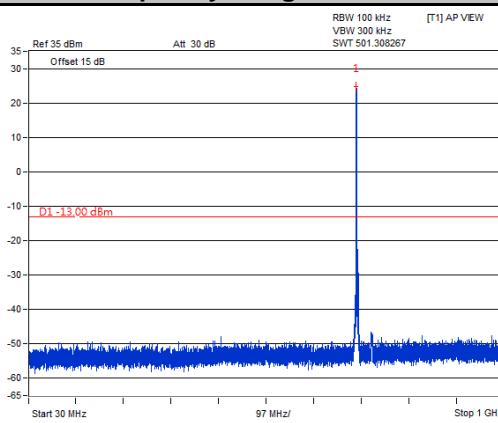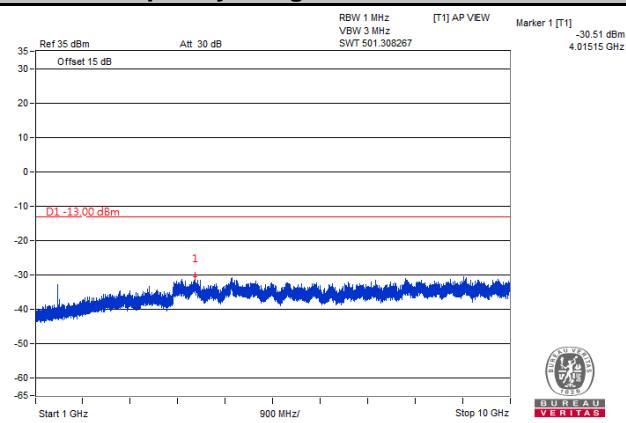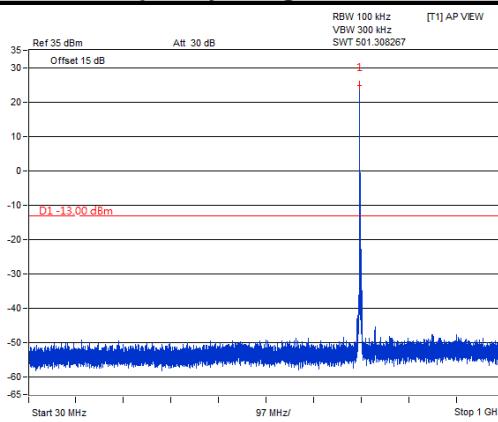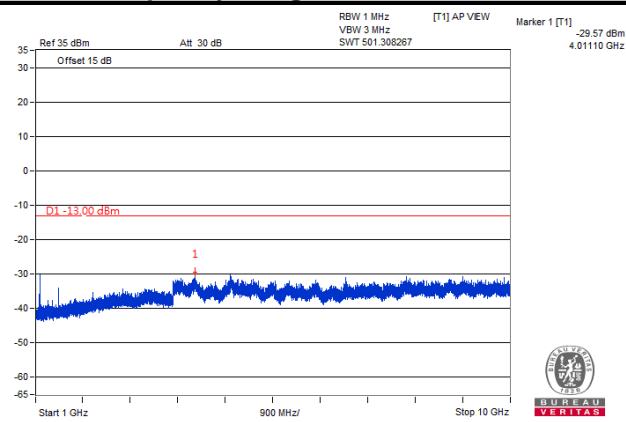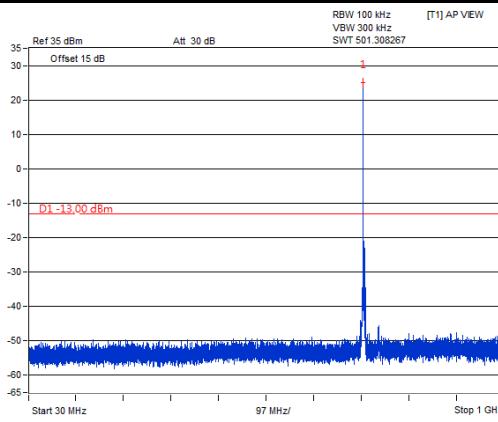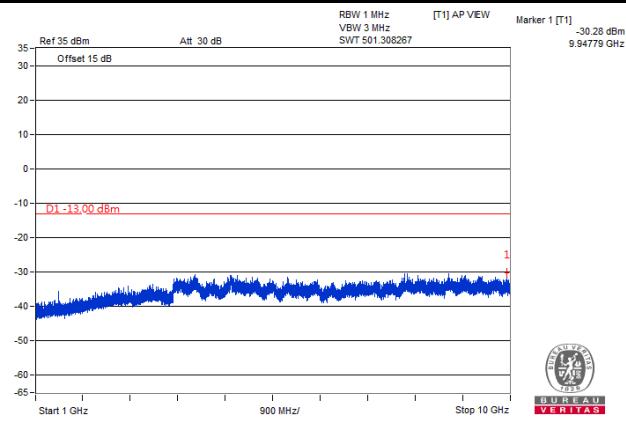**Frequency Range: 1 GHz ~ 10 GHz**

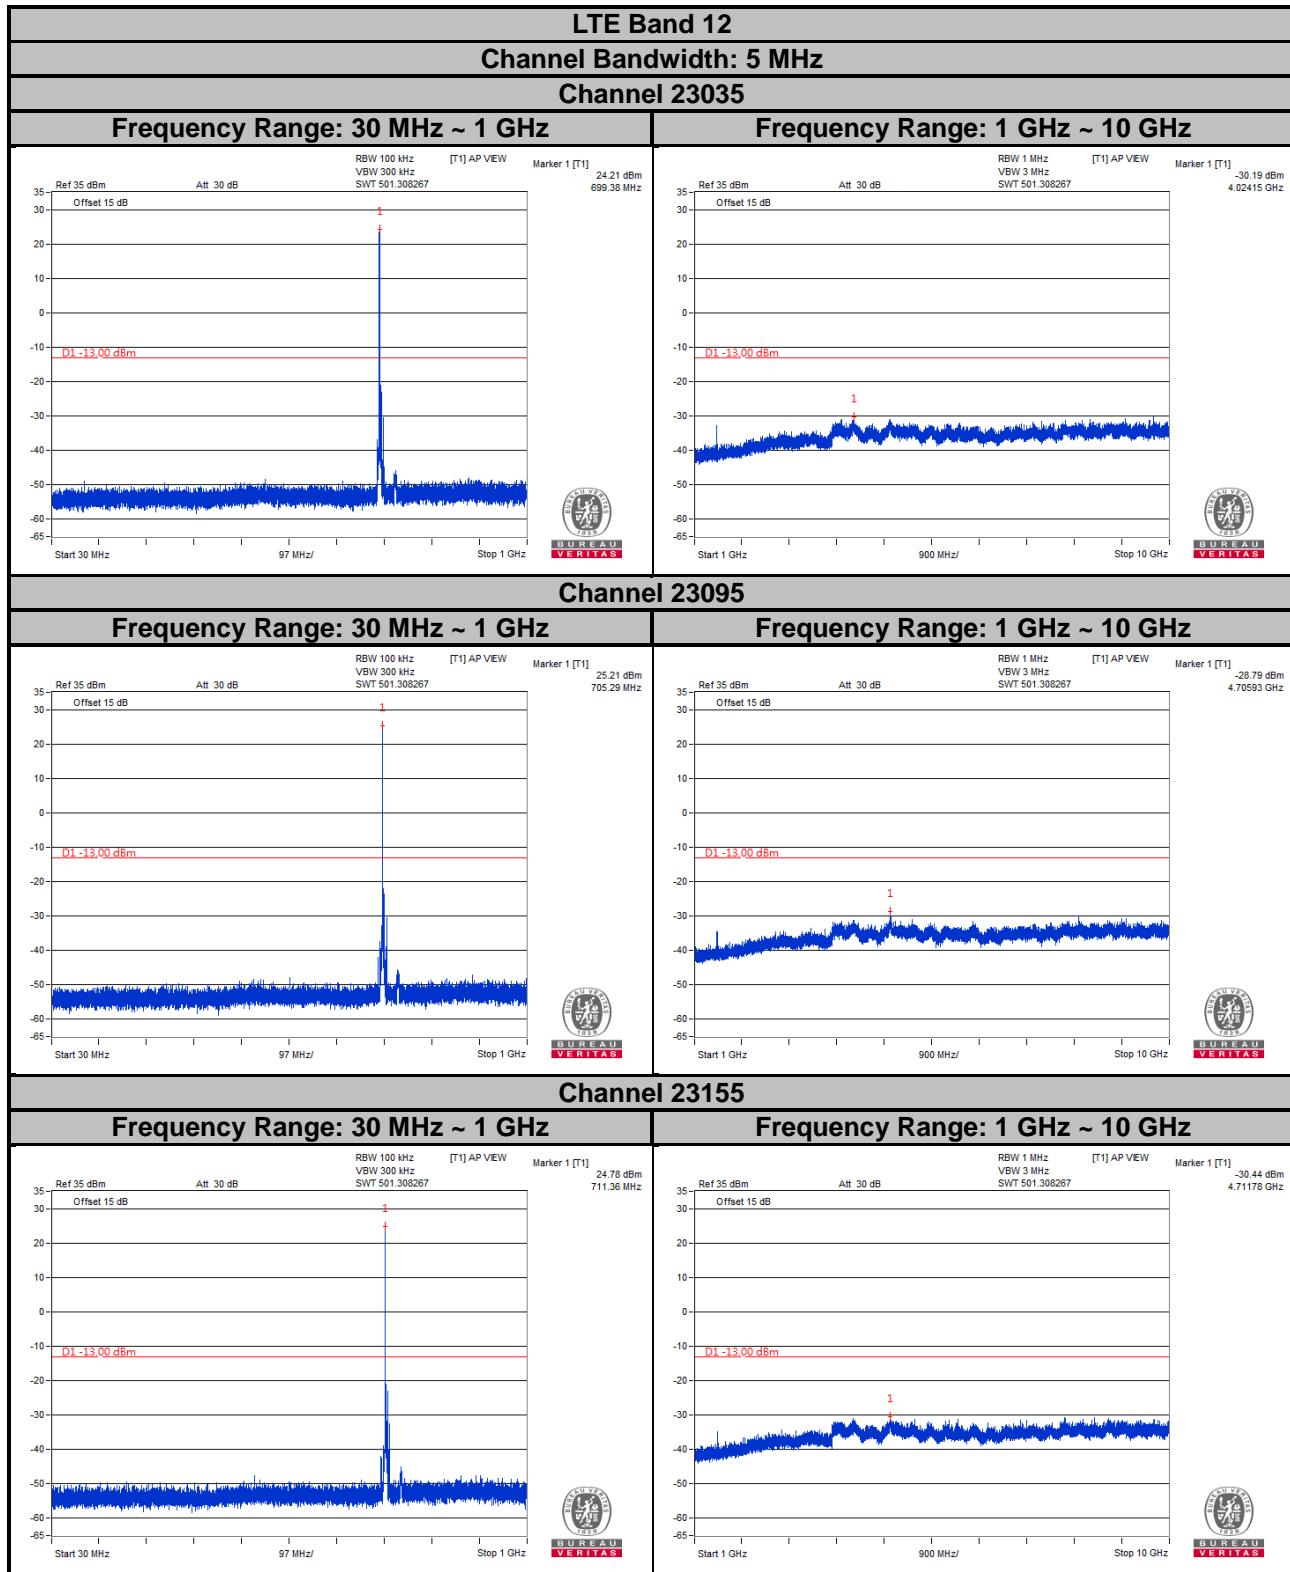**Channel 23095**
**Frequency Range: 30 MHz ~ 1 GHz**

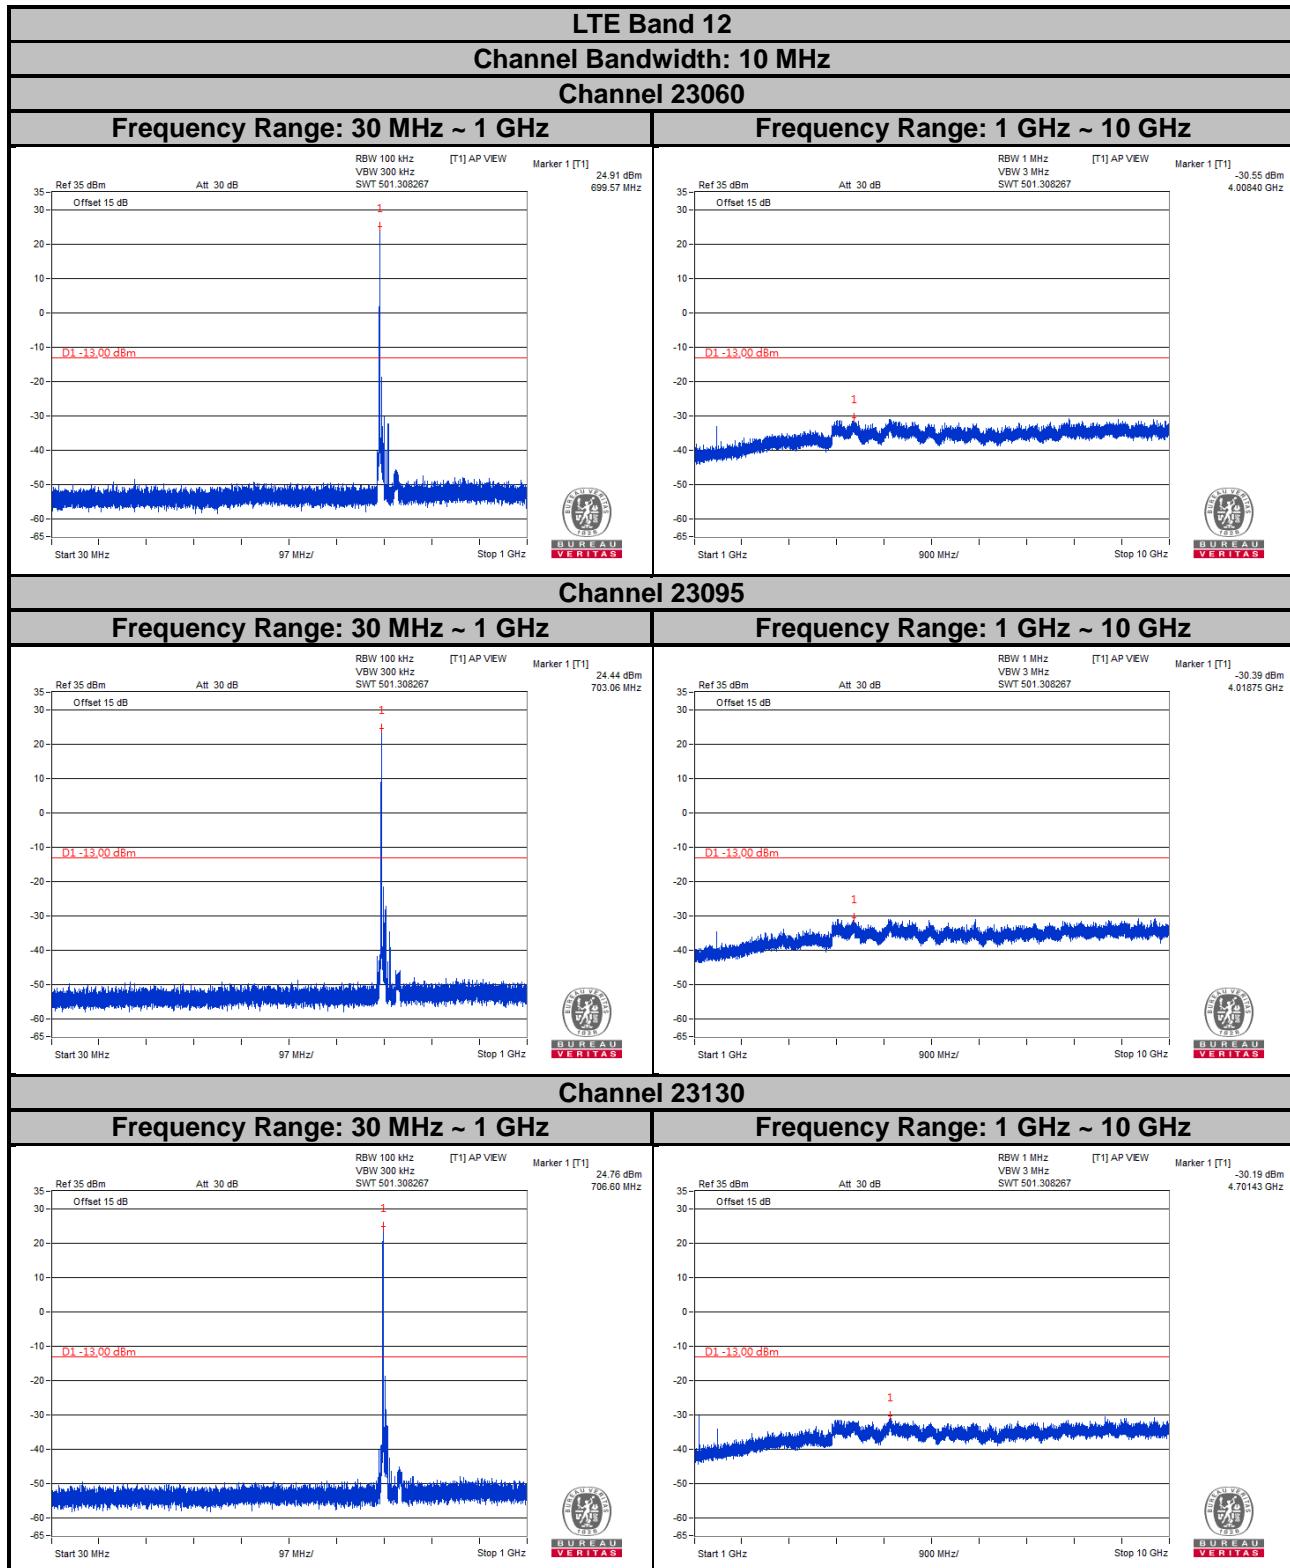**Frequency Range: 1 GHz ~ 10 GHz**

**Channel 23173**
**Frequency Range: 30 MHz ~ 1 GHz**

**Frequency Range: 1 GHz ~ 10 GHz**


**LTE Band 12**
**Channel Bandwidth: 3 MHz**
**Channel 23025**
**Frequency Range: 30 MHz ~ 1 GHz**

**Frequency Range: 1 GHz ~ 10 GHz**

**Channel 23095**
**Frequency Range: 30 MHz ~ 1 GHz**

**Frequency Range: 1 GHz ~ 10 GHz**

**Channel 23165**
**Frequency Range: 30 MHz ~ 1 GHz**

**Frequency Range: 1 GHz ~ 10 GHz**






## 4.7 Radiated Emission Measurement

### 4.7.1 Limits of Radiated Emission Measurement

- a. The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB. The limit of emission is equal to -13 dBm.

### 4.7.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.


**Note:** The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

### 4.7.3 Deviation from Test Standard


No deviation.

#### 4.7.4 Test Setup

##### <Radiated Emission below or equal 1 GHz>

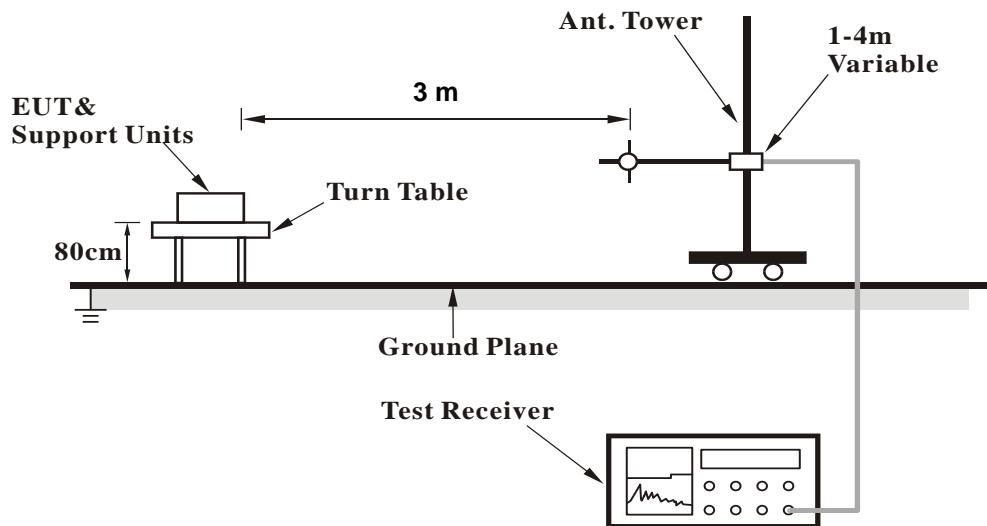

##### <Radiated Emission above 1 GHz>

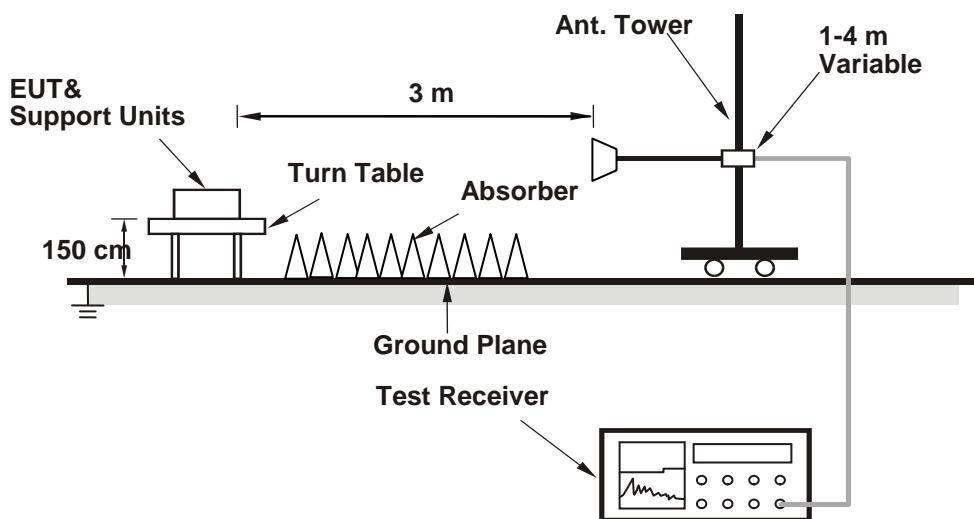

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.7.5 Test Results

##### LTE Band 4

Channel Bandwidth: 1.4 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

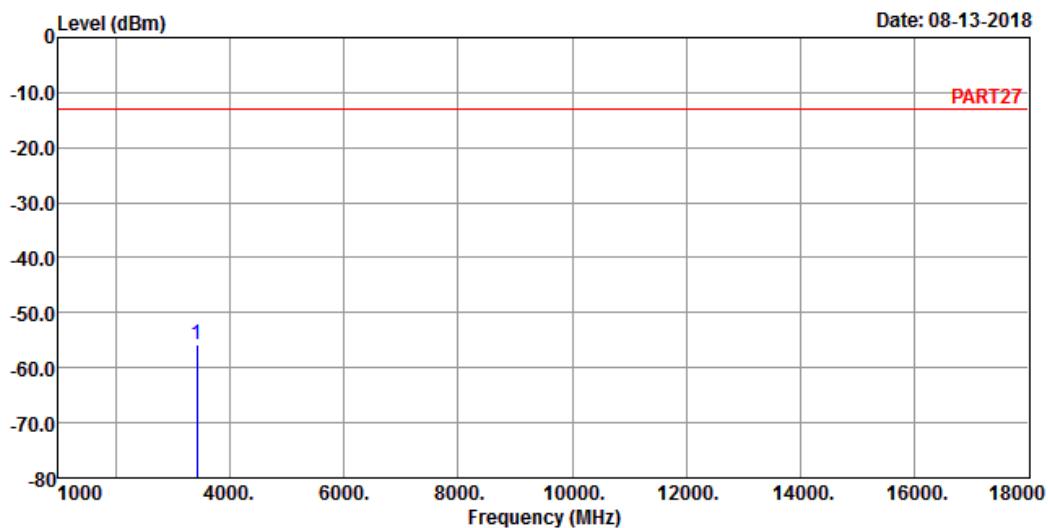

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 4 QPSK\_1.4M Link\_L-CH

Tested by: Jisyong Wang


	Read	Limit	Over		
Freq	Level	Level	Line	Limit Factor	Remark
MHz	dBm	dBm	dBm	dB	dB
1 pp	3421.40	-55.85	-47.51	-13.00	-42.85
					-8.34 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

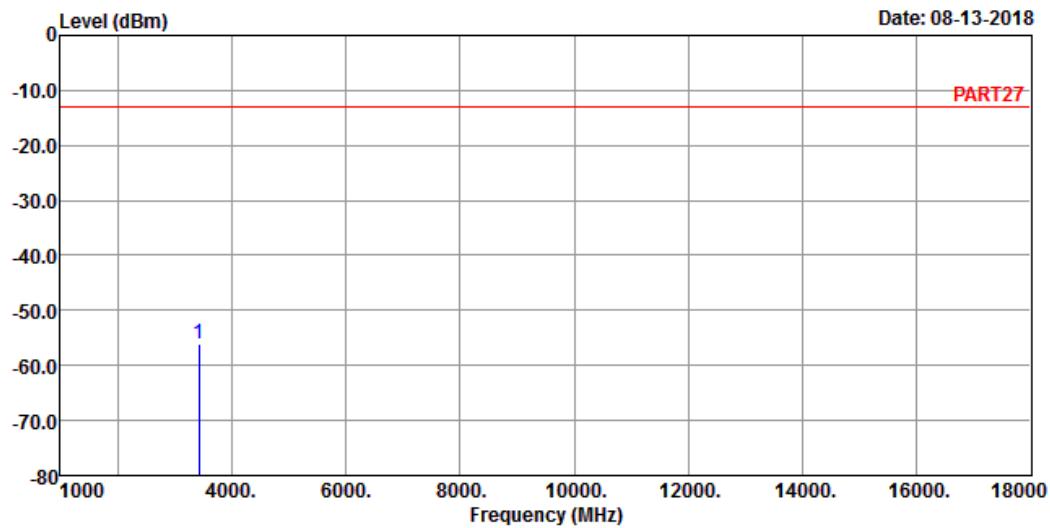

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 4 QPSK\_1.4M Link\_L-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over	Factor	Remark
			Line Limit		
MHz	dBm	dBm	dBm	dB	dB
1 pp	3421.40	-56.12	-47.78	-13.00	-43.12 -8.34 Peak


## Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

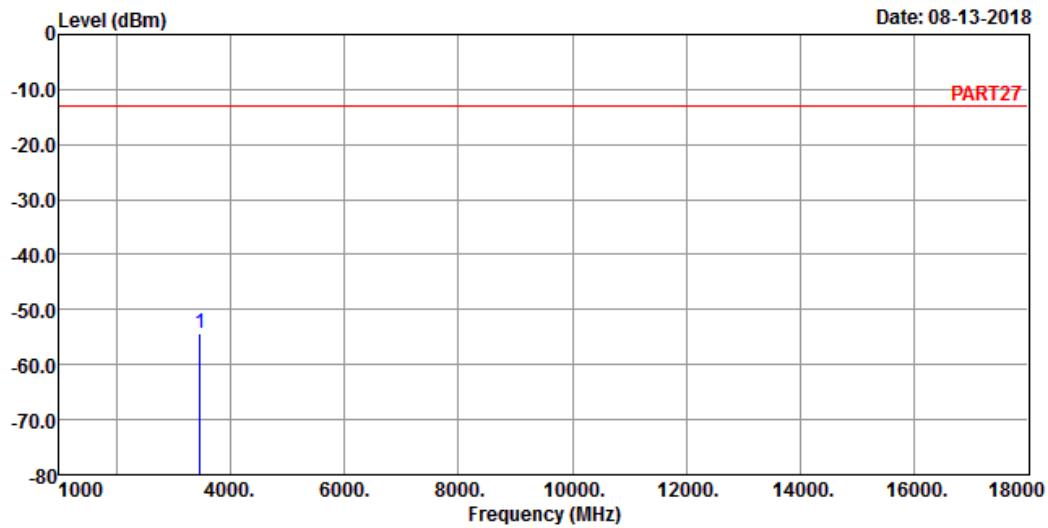

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 4 QPSK\_1.4M Link\_M-CH

Tested by: Jisyong Wang


Freq	Read	Limit	Over	Factor	Remark
	Level	Level	Line		
MHz	dBm	dBm	dBm	dB	dB
1 pp	3465.00	-54.19	-46.31	-13.00	-41.19 -7.88 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

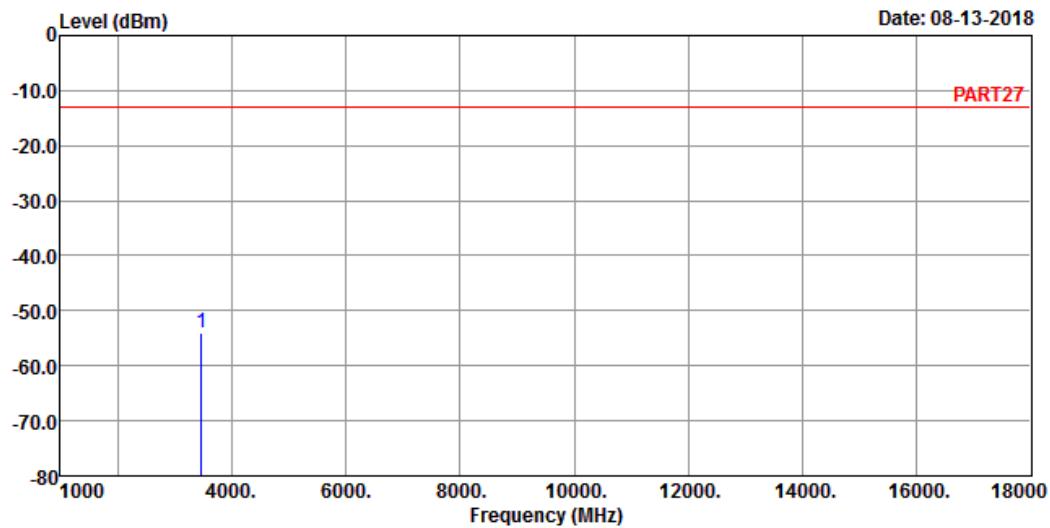

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 4 QPSK\_1.4M Link\_M-CH

Tested by: Jisyong Wang

Freq	Read	Limit	Over	Factor	Remark
	Level	Level	Line		
MHz	dBm	dBm	dBm	dB	dB
1 pp	3465.00	-53.97	-46.09	-13.00	-40.97 -7.88 Peak


## High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

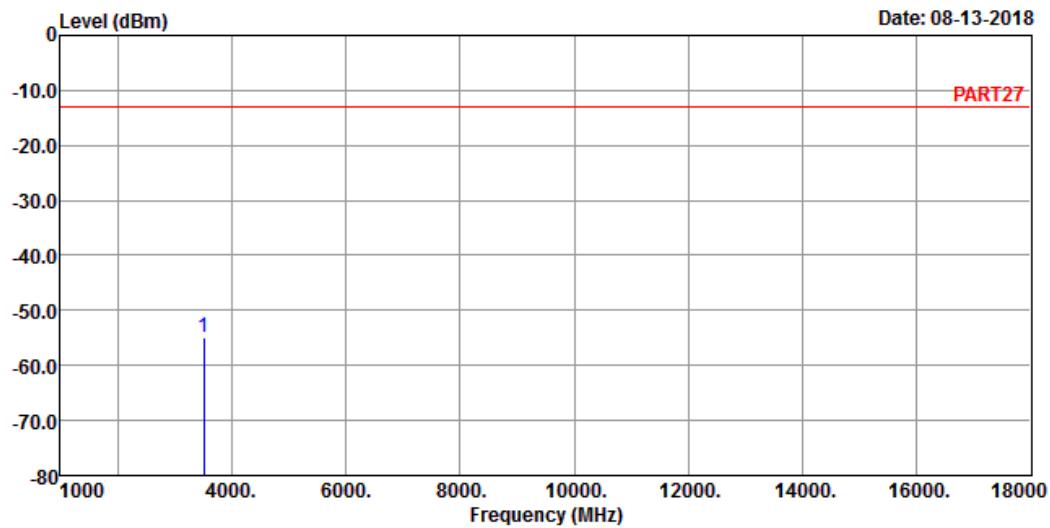

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 4 QPSK\_1.4M Link\_H-CH

Tested by: Jisyong Wang


Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
	MHz	dBm	dBm	dBm	dB
1 pp	3508.60	-54.85	-47.40	-13.00	-41.85 -7.45 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

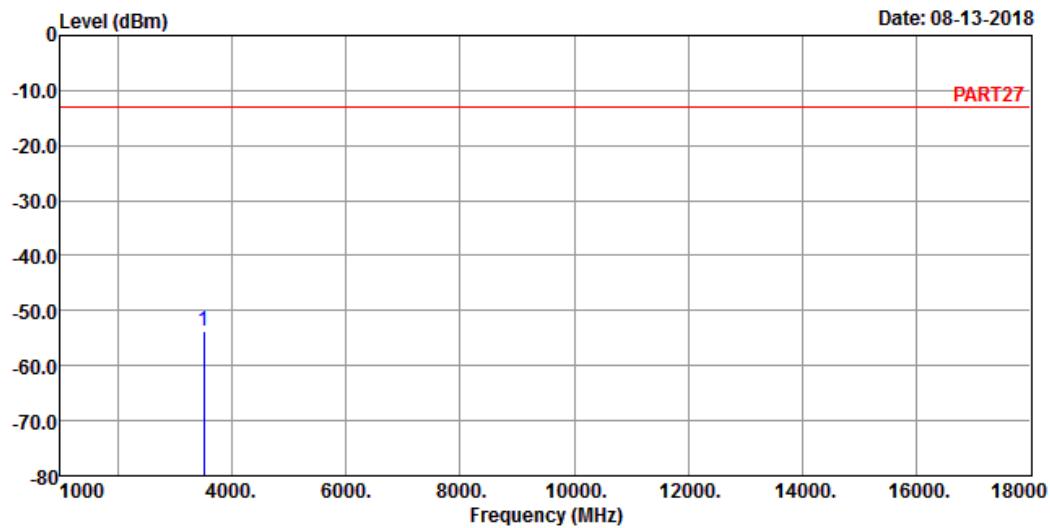

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 4 QPSK\_1.4M Link\_H-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over	Factor	Remark
			Line		
MHz	dBm	dBm	dBm	dB	dB
1 pp	3508.60	-53.62	-46.17	-13.00	-40.62 -7.45 Peak

Channel Bandwidth: 5 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

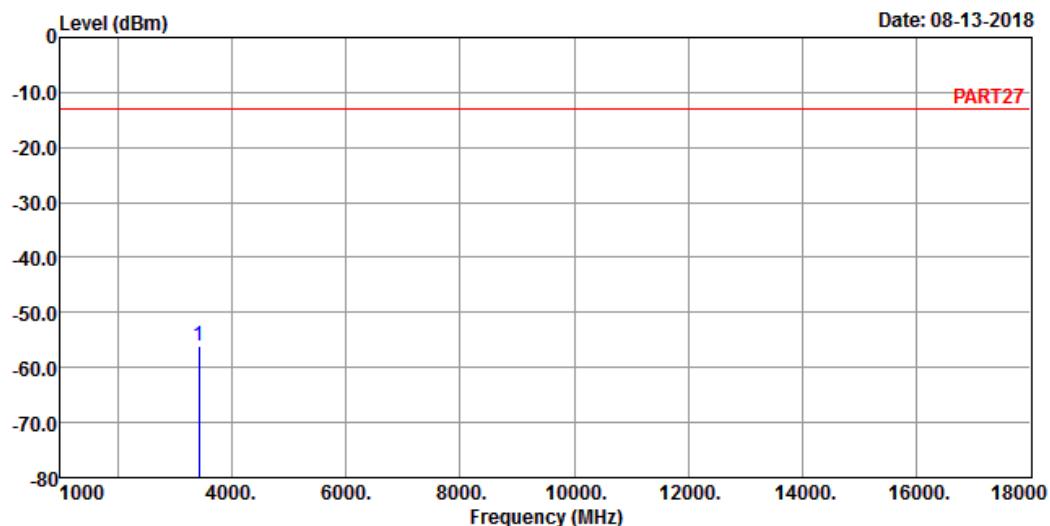

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 4 QPSK\_5M Link\_L-CH

Tested by: Jisyong Wang


Freq	Read Level	Limit Level	Over		Remark
			Line	Limit Factor	
MHz	dBm	dBm	dBm	dB	
1 pp	3425.00	-55.99	-47.65	-13.00	-42.99 -8.34 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

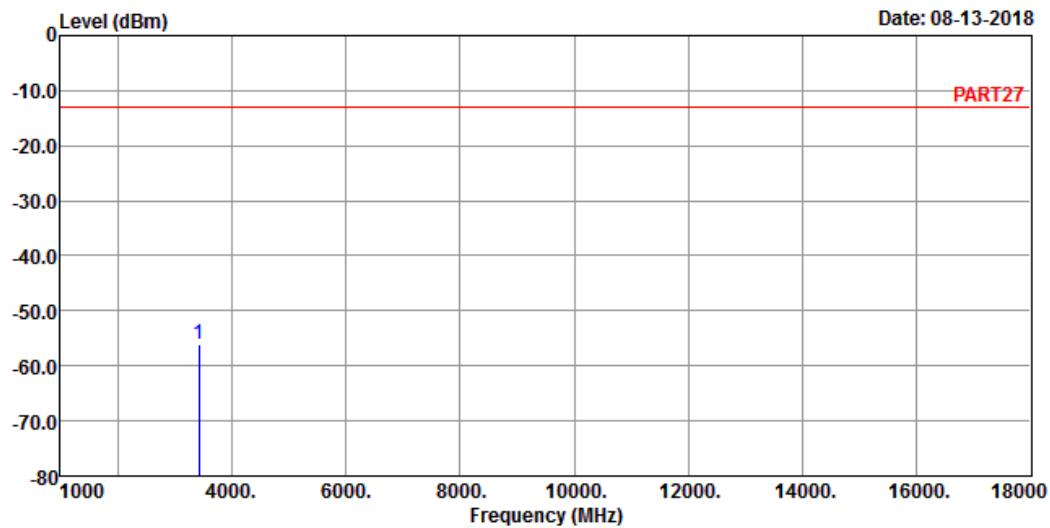

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 4 QPSK\_5M Link\_L-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over	Factor	Remark
			Line		
MHz	dBm	dBm	dBm	dB	dB
1 pp	3425.00	-56.01	-47.67	-13.00	-43.01 -8.34 Peak


## Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

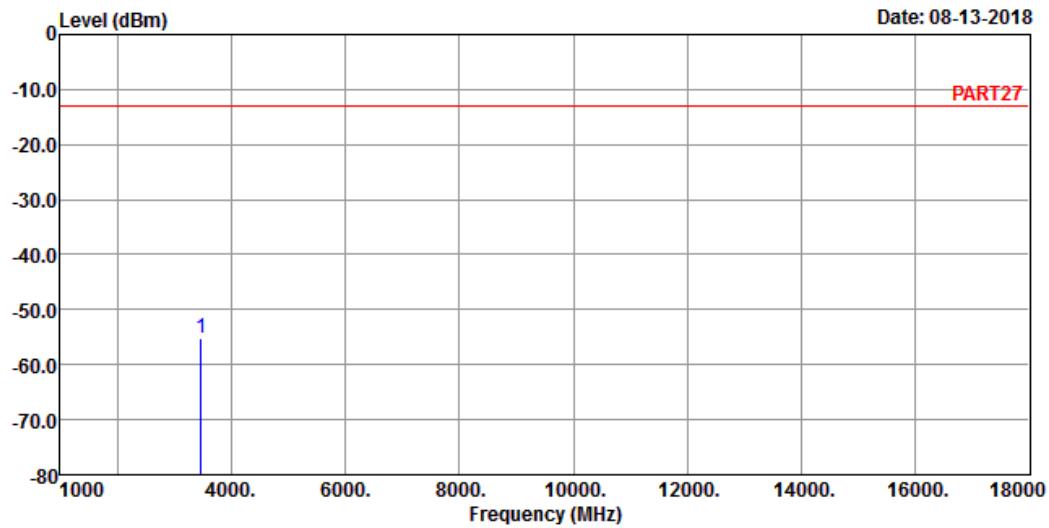

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 4 QPSK\_5M Link\_M-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
MHz	dBm	dBm	dBm	dB	dB


1 pp 3465.00 -55.12 -47.24 -13.00 -42.12 -7.88 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

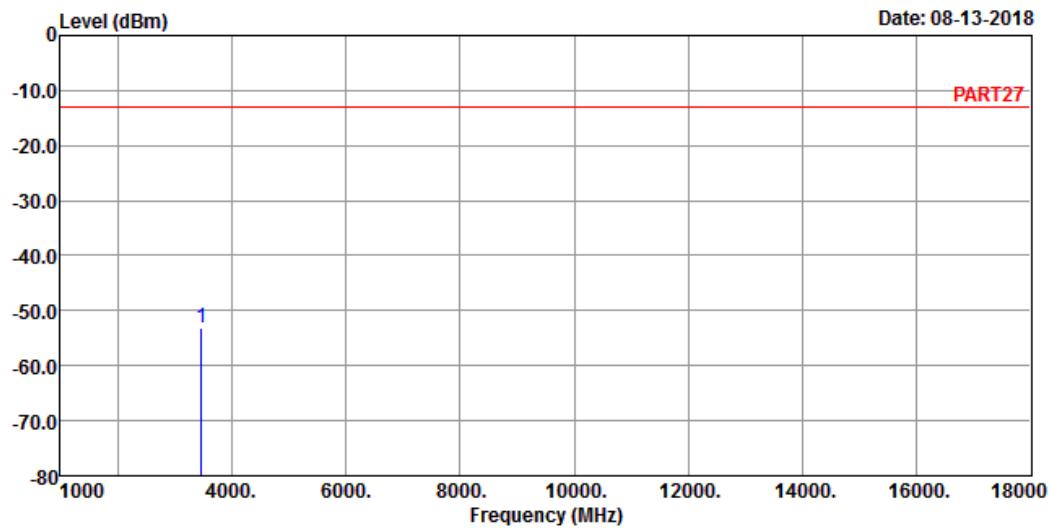

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 4 QPSK\_5M Link\_M-CH

Tested by: Jisyong Wang

Freq	Read	Limit	Over	Factor	Remark
	Level	Level	Line		
MHz	dBm	dBm	dBm	dB	dB
1 pp	3465.00	-53.14	-45.26	-13.00	-40.14 -7.88 Peak


## High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

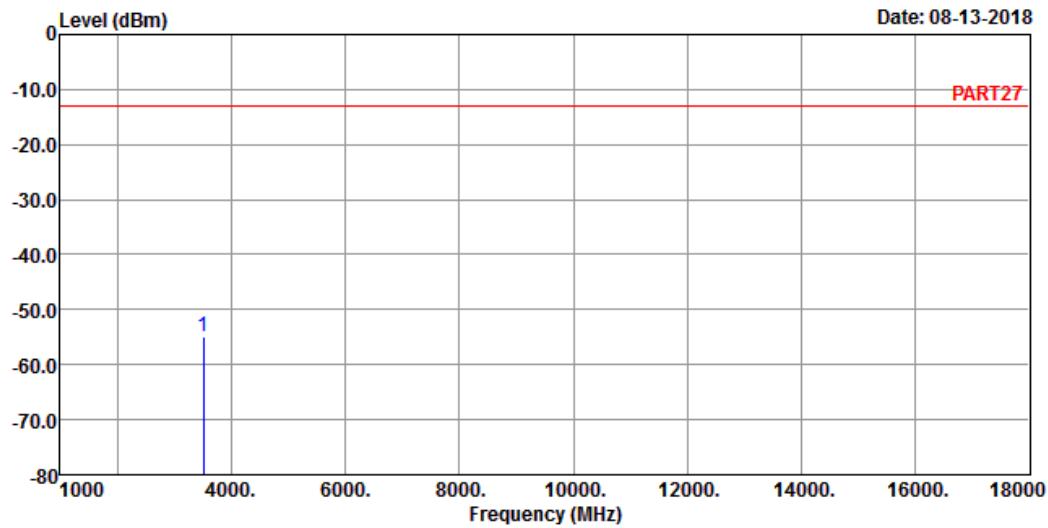

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 4 QPSK\_5M Link\_H-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
MHz	dBm	dBm	dBm	dB	dB


1 pp 3505.00 -54.99 -47.54 -13.00 -41.99 -7.45 Peak



## Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

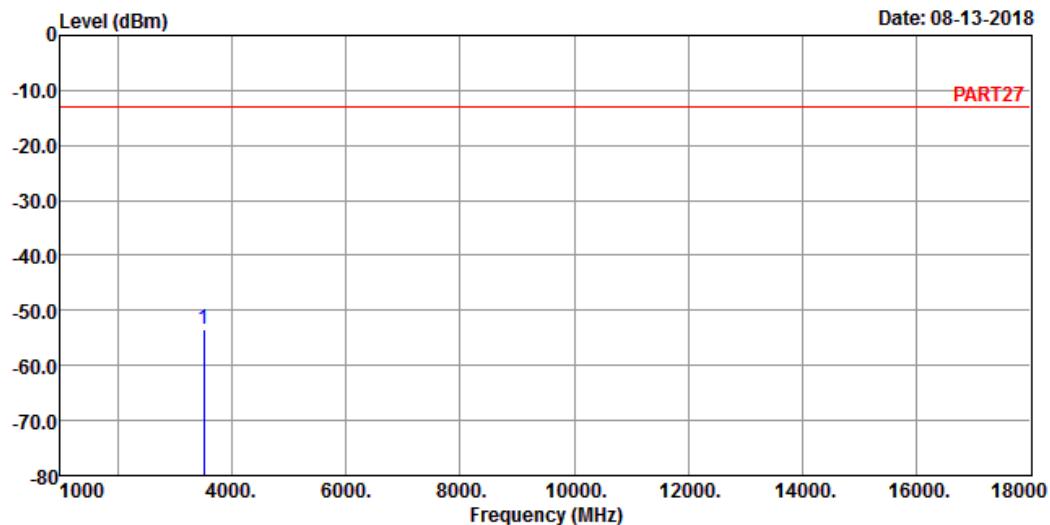

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 4 QPSK\_5M Link\_H-CH

Tested by: Jisyong Wang

Freq	Read	Limit	Over	Factor	Remark
	Level	Level	Line		
MHz	dBm	dBm	dBm	dB	dB
1 pp	3505.00	-53.49	-46.04	-13.00	-40.49 -7.45 Peak

Channel Bandwidth: 20 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

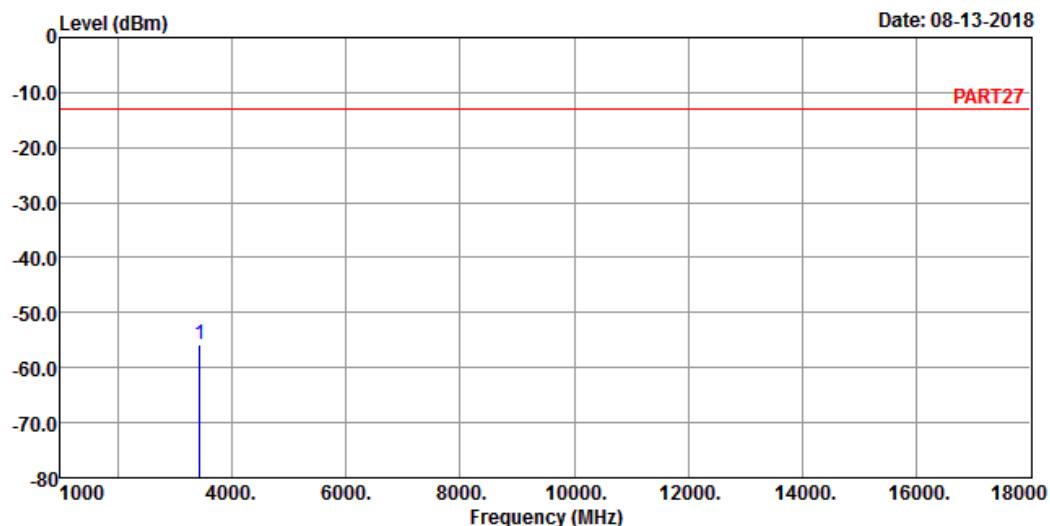

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 4 QPSK\_20M Link\_L-CH

Tested by: Jisyong Wang


Freq	Read Level	Limit Level	Over		
			Line	Limit	Factor
MHz	dBm	dBm	dBm	dB	dB
1 pp	3440.00	-55.88	-47.66	-13.00	-42.88
					-8.22 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

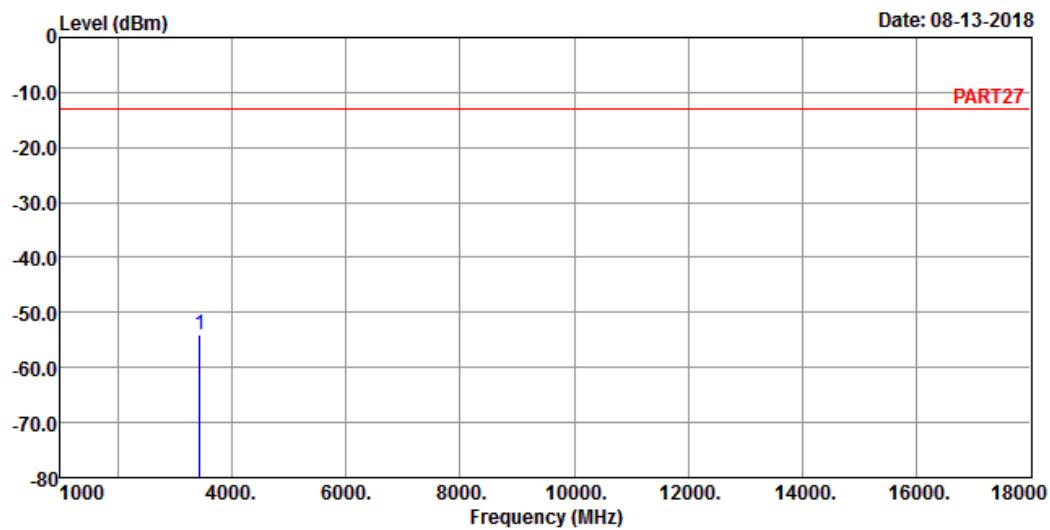

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 4 QPSK\_20M Link\_L-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over	Factor	Remark
			Line		
MHz	dBm	dBm	dBm	dB	dB
1 pp	3440.00	-54.11	-45.89	-13.00	-41.11 -8.22 Peak


## Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

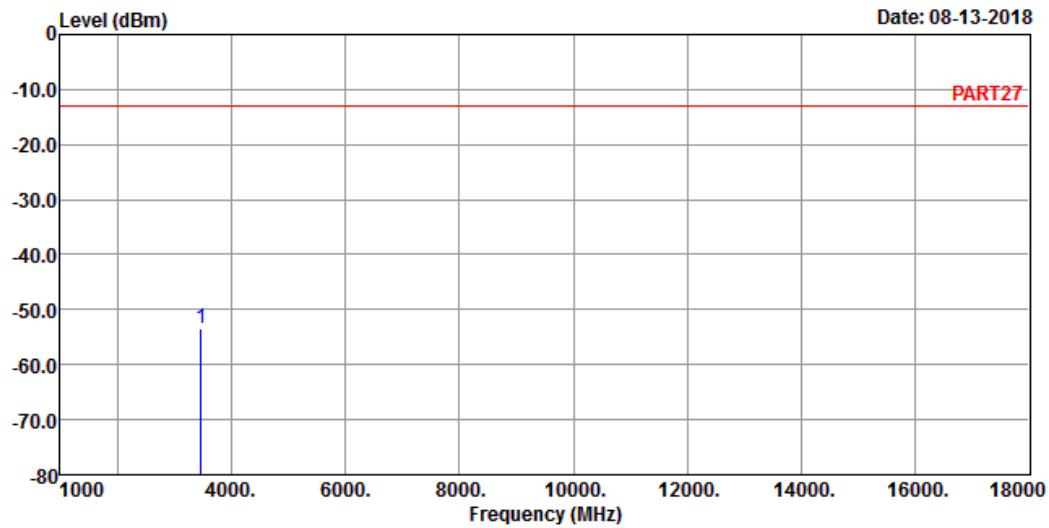

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 4 QPSK\_20M Link\_M-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
------	------------	-------------	-----------	--------------	--------

MHz	dBm	dBm	dBm	dB	dB
-----	-----	-----	-----	----	----


1 pp 3465.00 -53.44 -45.56 -13.00 -40.44 -7.88 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

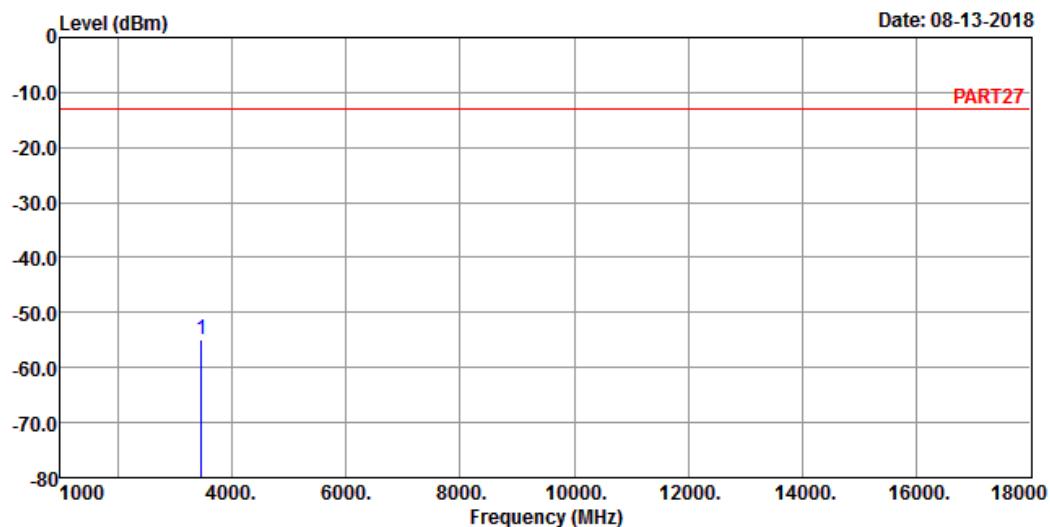

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 4 QPSK\_20M Link\_M-CH

Tested by: Jisyong Wang

Freq	Level	Read	Limit	Over	Factor	Remark
		MHz	dBm	dBm	dBm	dB
1 pp	3465.00	-54.77	-46.89	-13.00	-41.77	-7.88 Peak


## High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

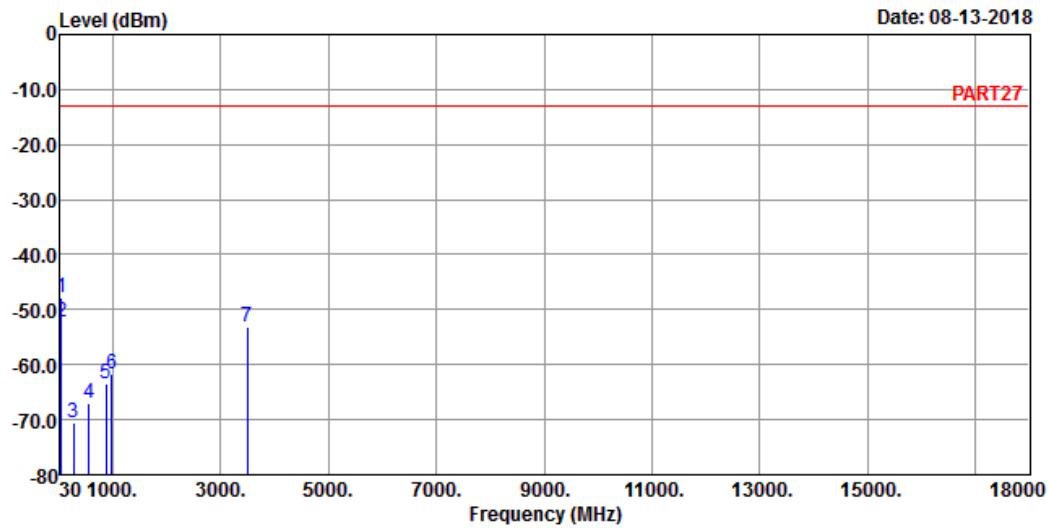

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 4 QPSK\_20M Link\_H-CH

Tested by: Jisyong Wang


Freq	Read Level	Limit Level	Over		
			Line	Limit	Factor
MHz	dBm	dBm	dBm	dB	Remark
1 pp	44.55	-47.87	-45.88	-13.00	-34.87 -1.99 Peak
2	53.28	-52.17	-46.36	-13.00	-39.17 -5.81 Peak
3	271.53	-70.56	-64.13	-13.00	-57.56 -6.43 Peak
4	556.71	-66.88	-64.31	-13.00	-53.88 -2.57 Peak
5	876.81	-63.55	-63.99	-13.00	-50.55 0.44 Peak
6	979.63	-61.82	-64.68	-13.00	-48.82 2.86 Peak
7	3490.00	-53.11	-45.46	-13.00	-40.11 -7.65 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

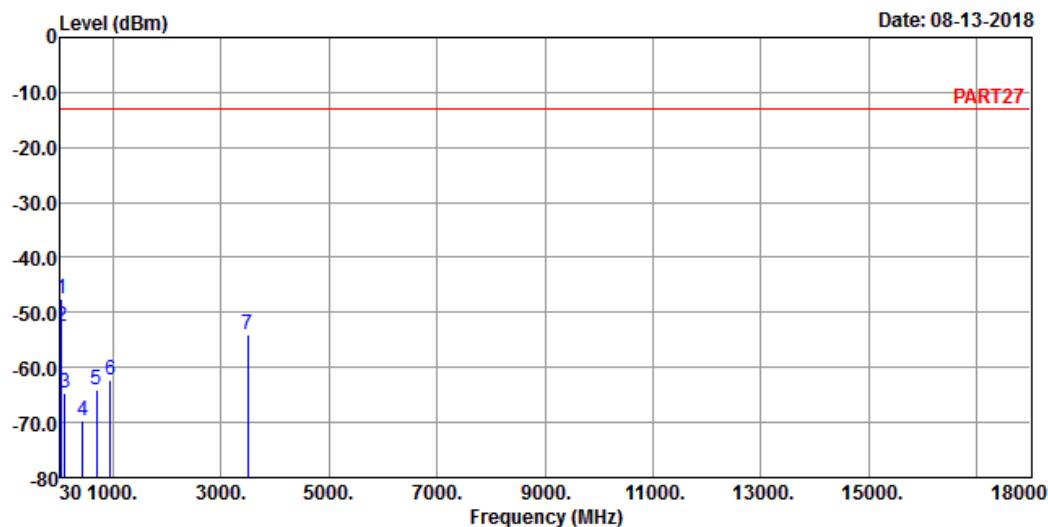

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 4 QPSK\_20M Link\_H-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Read	Limit	Over	Factor	Remark
			MHz	dBm	dBm		
1 pp	43.58	-47.45	-45.98	-13.00	-34.45	-1.47	Peak
2	53.28	-52.47	-46.66	-13.00	-39.47	-5.81	Peak
3	114.39	-64.67	-54.56	-13.00	-51.67	-10.11	Peak
4	442.25	-69.62	-64.01	-13.00	-56.62	-5.61	Peak
5	699.30	-64.15	-64.04	-13.00	-51.15	-0.11	Peak
6	946.65	-62.14	-63.87	-13.00	-49.14	1.73	Peak
7	3490.00	-54.01	-46.36	-13.00	-41.01	-7.65	Peak

LTE Band 12

Channel Bandwidth: 1.4 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

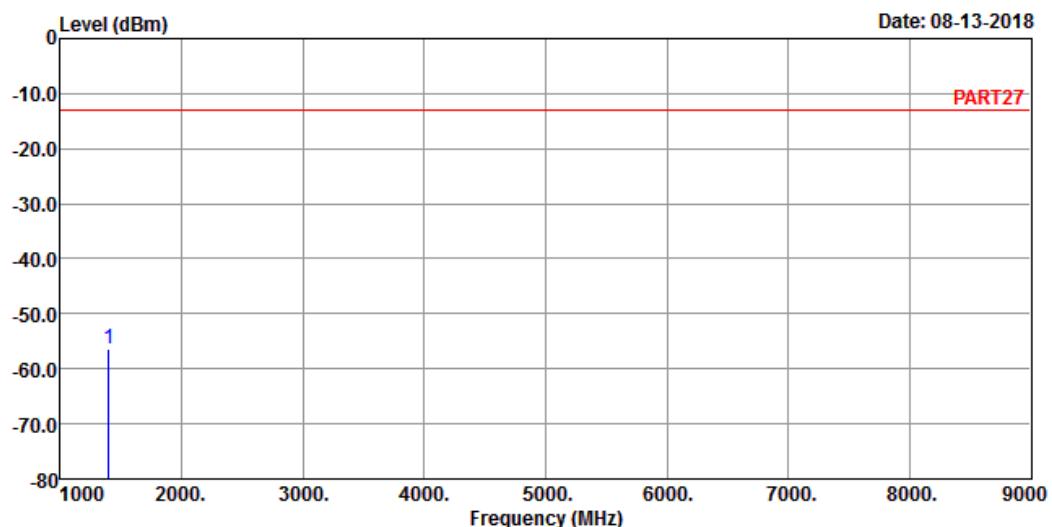

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 12 QPSK\_1.4M Link\_L-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
------	------------	-------------	-----------	--------------	--------

MHz	dBm	dBm	dBm	dB	dB
-----	-----	-----	-----	----	----


1 pp 1399.40 -56.41 -44.56 -13.00 -43.41 -11.85 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

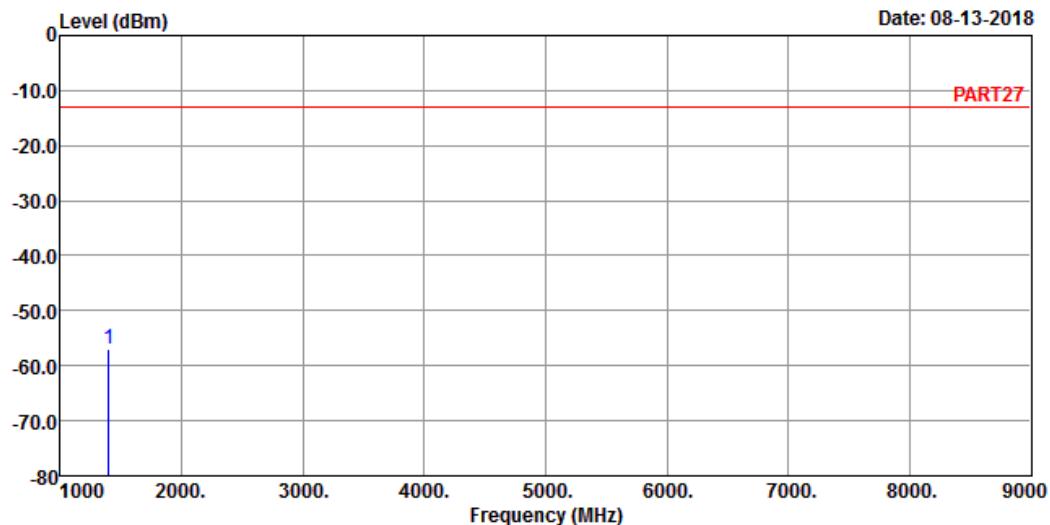

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 12 QPSK\_1.4M Link\_L-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
MHz	dBm	dBm	dBm	dB	dB

1 pp 1399.40 -56.85 -45.00 -13.00 -43.85 -11.85 Peak


## Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

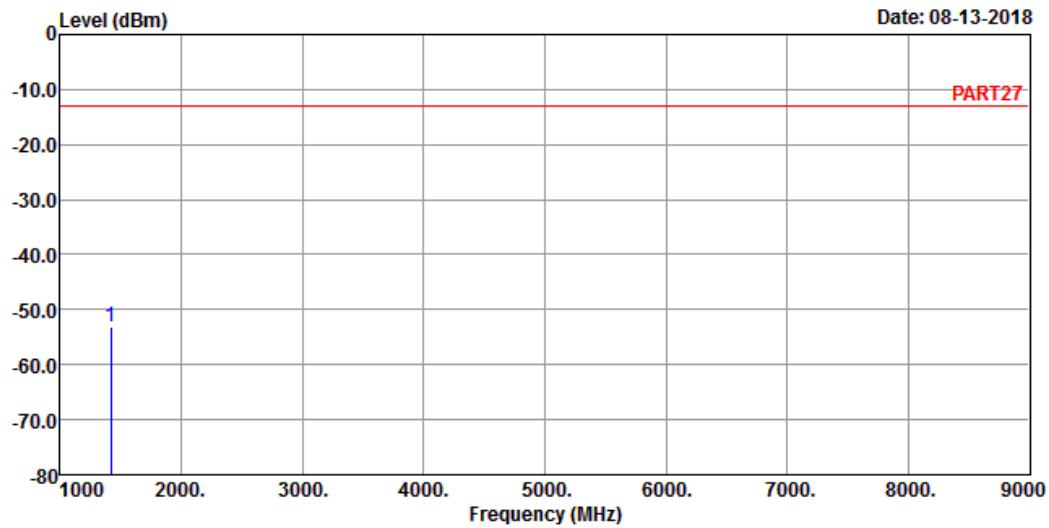

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 12 QPSK\_1.4M Link\_M-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
MHz	dBm	dBm	dBm	dB	dB


1 pp 1415.00 -53.19 -41.11 -13.00 -40.19 -12.08 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

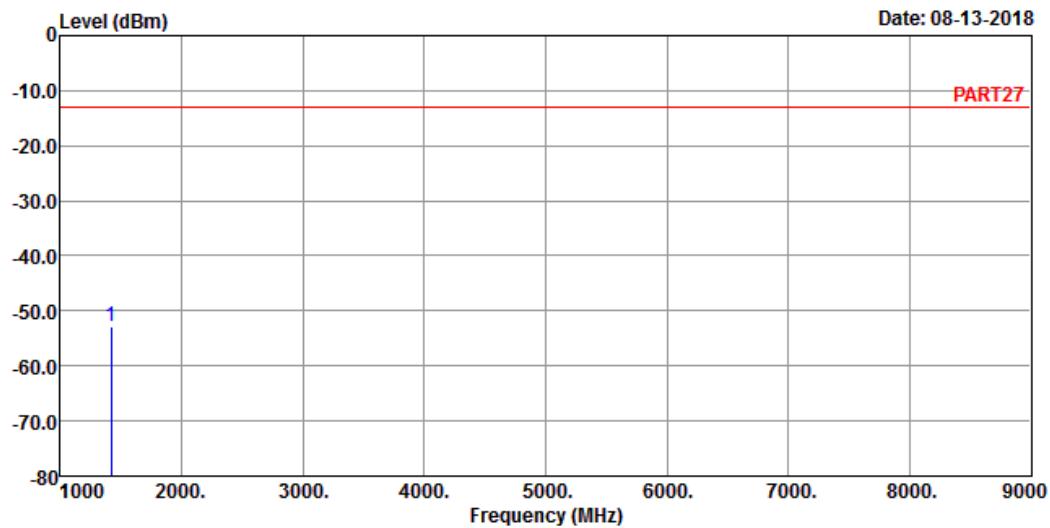

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 12 QPSK\_1.4M Link\_M-CH

Tested by: Jisyong Wang

Freq	Read	Limit	Over	Factor	Remark
	Level	Level	Line		
MHz	dBm	dBm	dBm	dB	dB
1415.00	-52.97	-40.89	-13.00	-39.97	-12.08 Peak

1 pp 1415.00 -52.97 -40.89 -13.00 -39.97 -12.08 Peak


## High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

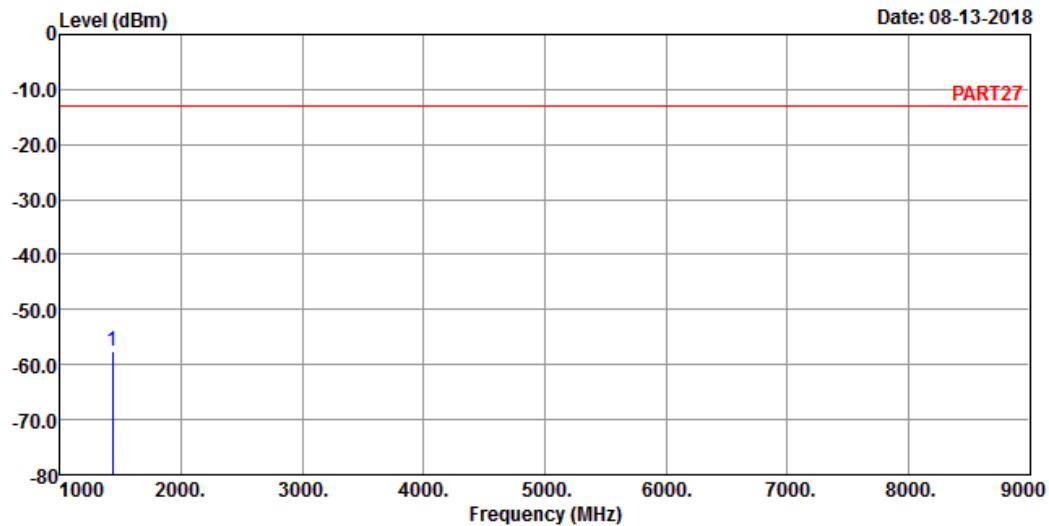

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 12 QPSK\_1.4M Link\_H-CH

Tested by: Jisyong Wang

Freq	Read Level (dBm)	Limit Line (dBm)	Over Limit Factor (dB)	Remark
1430.60	-57.68	-10.00	-47.68	Peak


1 pp 1430.60 -57.68 -45.37 -13.00 -44.68 -12.31 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

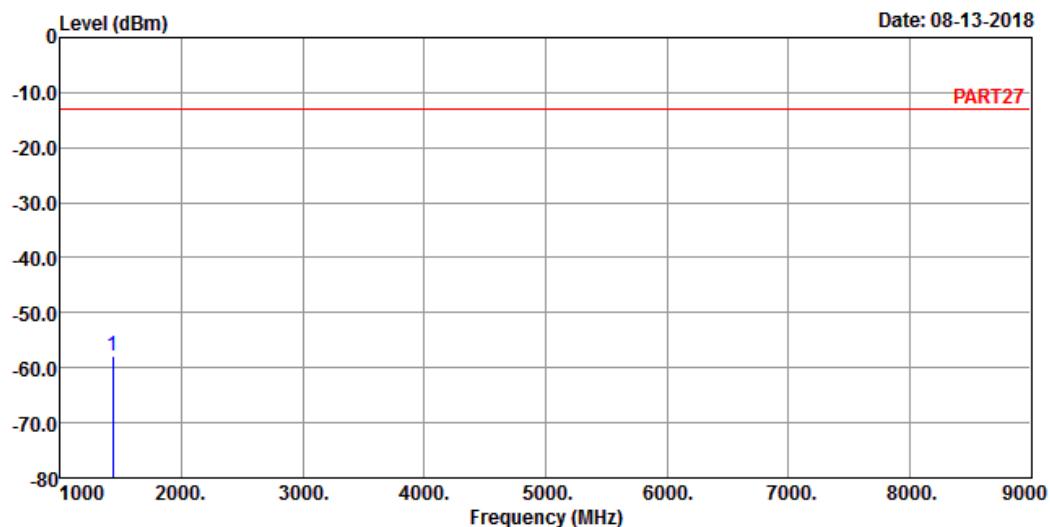

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 12 QPSK\_1.4M Link\_H-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
MHz	dBm	dBm	dBm	dB	dB

1 pp 1430.60 -57.99 -45.68 -13.00 -44.99 -12.31 Peak


Channel Bandwidth: 5 MHz / QPSK  
Low Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

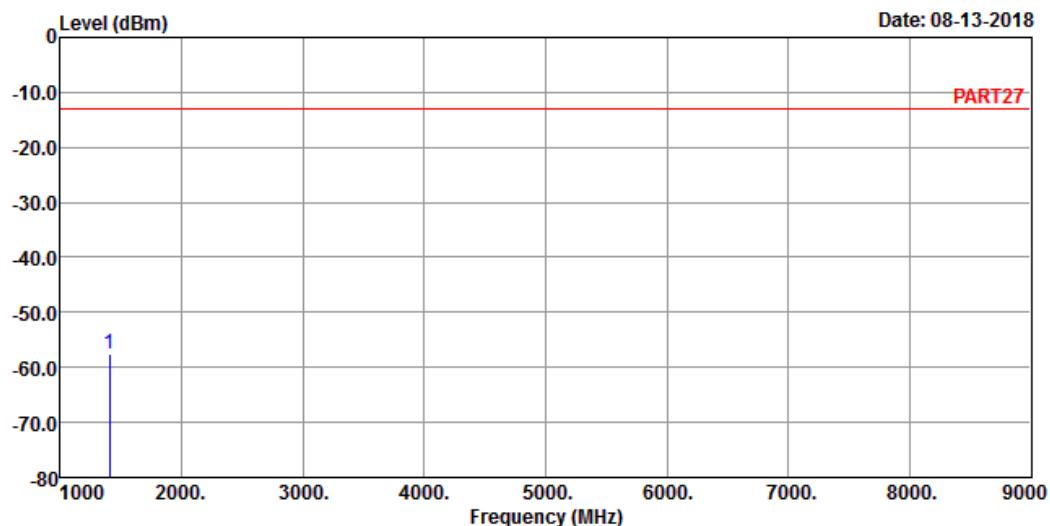

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 12 QPSK\_5M Link\_L-CH

Tested by: Jisyong Wang


Freq	Level	Read	Limit	Over	Remark
		MHz	dBm	dBm	
1 pp	1403.00	-57.52	-45.61	-13.00	-44.52 -11.91 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

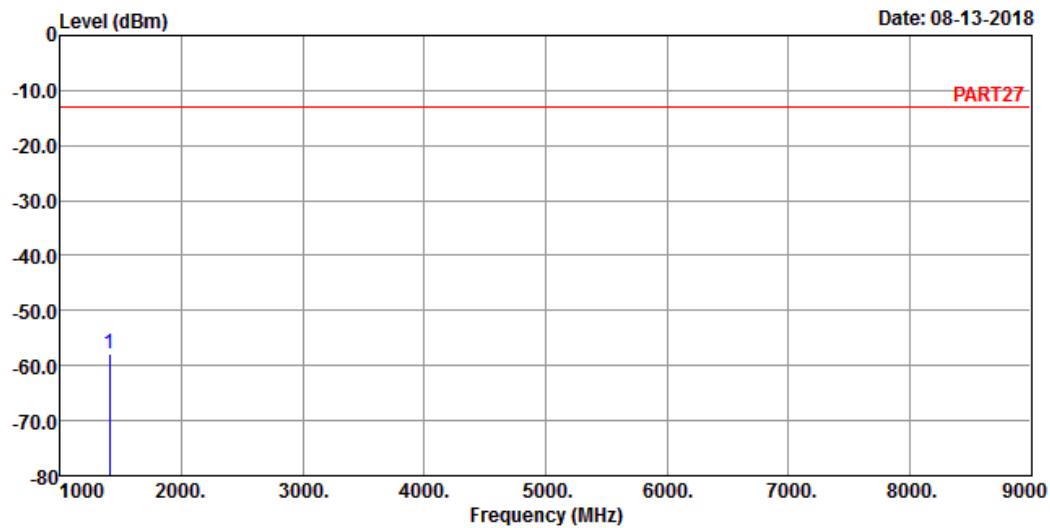

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 12 QPSK\_5M Link\_L-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
------	------------	-------------	-----------	--------------	--------

MHz	dBm	dBm	dBm	dB	dB
-----	-----	-----	-----	----	----

1 pp 1403.00 -57.99 -46.08 -13.00 -44.99 -11.91 Peak


## Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

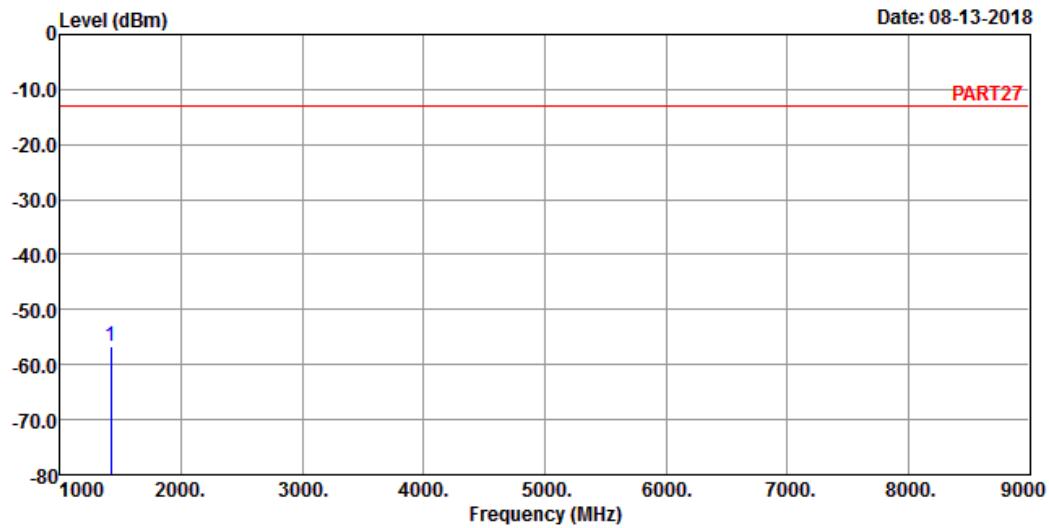

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 12 QPSK\_5M Link\_M-CH

Tested by: Jisyong Wang

Freq	Read Level (dBm)	Limit Line (dBm)	Over Limit Factor (dB)	Remark
1415.00	-56.74	-10.00	-46.74	Peak


1 pp 1415.00 -56.74 -44.66 -13.00 -43.74 -12.08 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

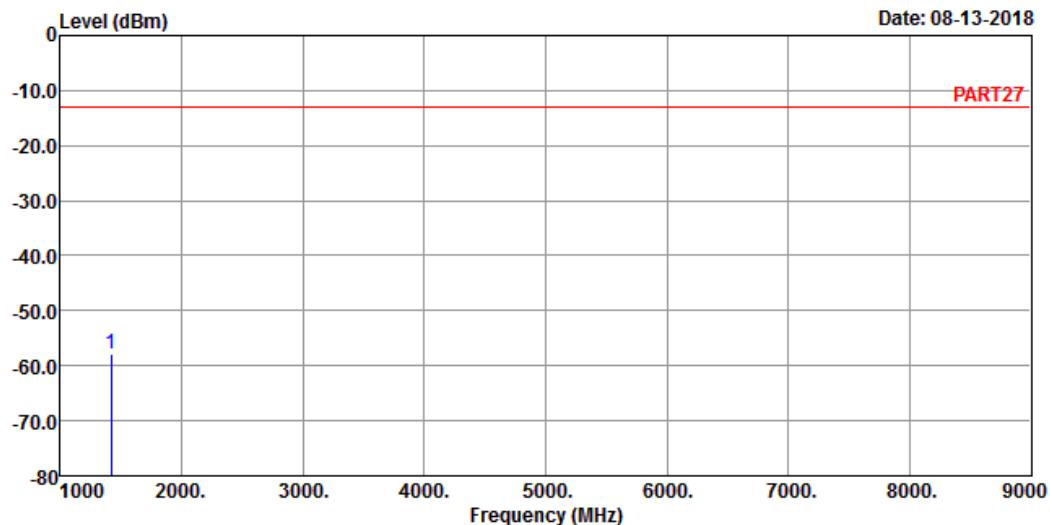

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 12 QPSK\_5M Link\_M-CH

Tested by: Jisyong Wang

	Read	Limit	Over		
Freq	Level	Level	Line	Limit Factor	Remark
MHz	dBm	dBm	dBm	dB	dB

1 pp 1415.00 -57.98 -45.90 -13.00 -44.98 -12.08 Peak


## High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

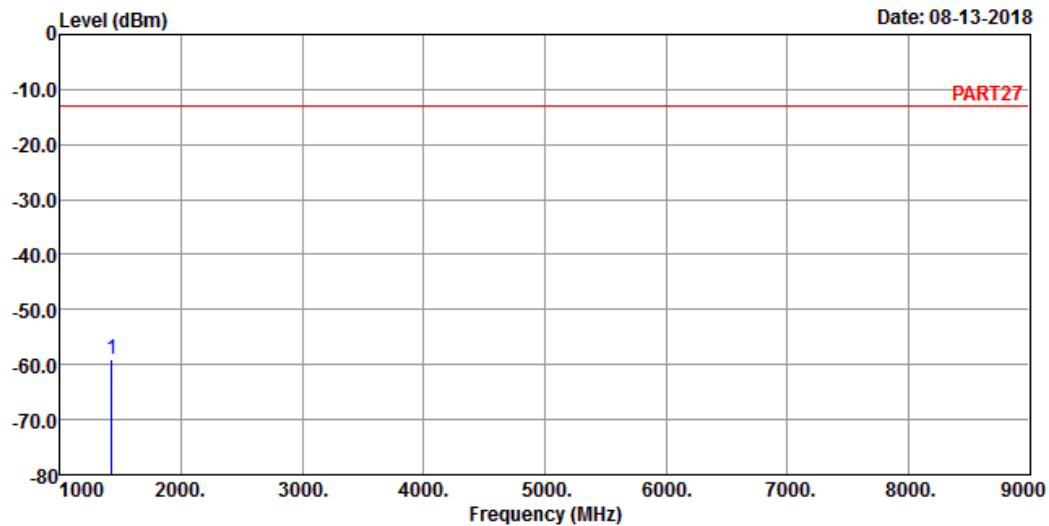

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 12 QPSK\_5M Link\_H-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
MHz	dBm	dBm	dBm	dB	dB


1 pp 1427.00 -58.97 -46.72 -13.00 -45.97 -12.25 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

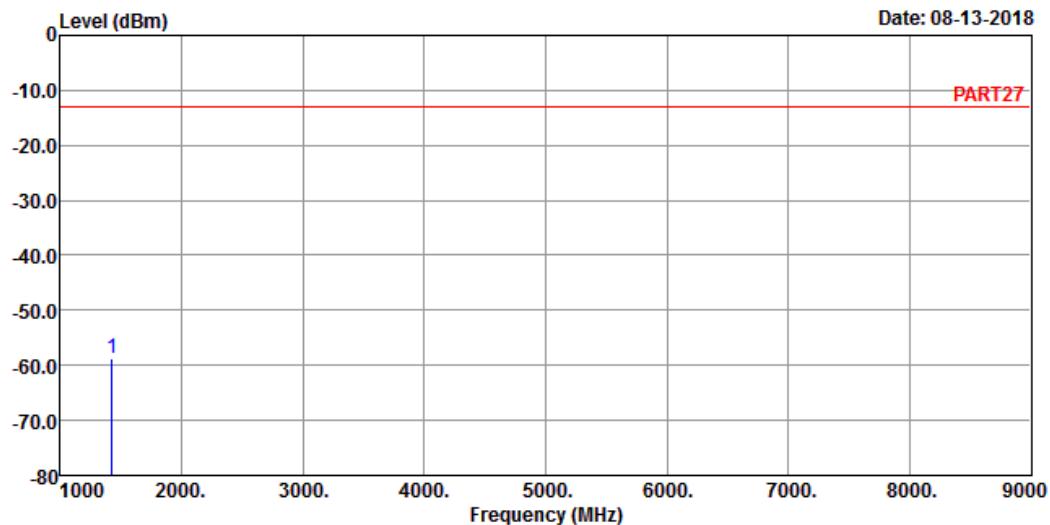

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 12 QPSK\_5M Link\_H-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
MHz	dBm	dBm	dBm	dB	dB


1 pp 1427.00 -58.65 -46.40 -13.00 -45.65 -12.25 Peak

**Channel Bandwidth: 10 MHz / QPSK**
**Low Channel**


Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 5

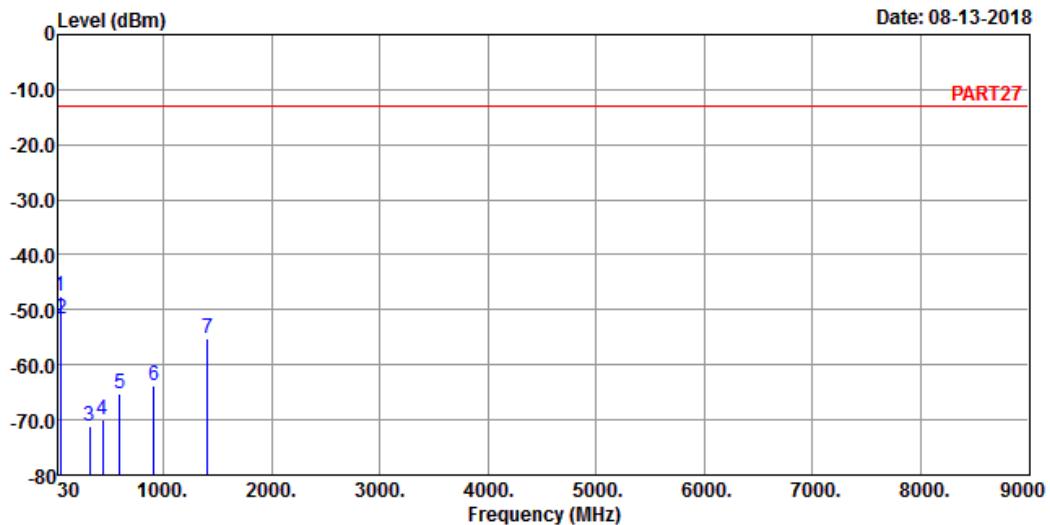

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 12 QPSK\_10M Link\_L-CH

Tested by: Jisyong Wang


		Read Freq	Level	Limit Level	Over Line	Over Limit	Factor	Remark
		MHz	dBm	dBm	dB	dB		
1 pp	44.55	-47.62	-45.63	-13.00	-34.62	-1.99	Peak	
2	53.28	-51.79	-45.98	-13.00	-38.79	-5.81	Peak	
3	316.15	-71.23	-64.47	-13.00	-58.23	-6.76	Peak	
4	436.43	-69.88	-64.22	-13.00	-56.88	-5.66	Peak	
5	598.42	-65.34	-64.51	-13.00	-52.34	-0.83	Peak	
6	914.64	-63.70	-64.63	-13.00	-50.70	0.93	Peak	
7	1408.00	-55.11	-43.15	-13.00	-42.11	-11.96	Peak	



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

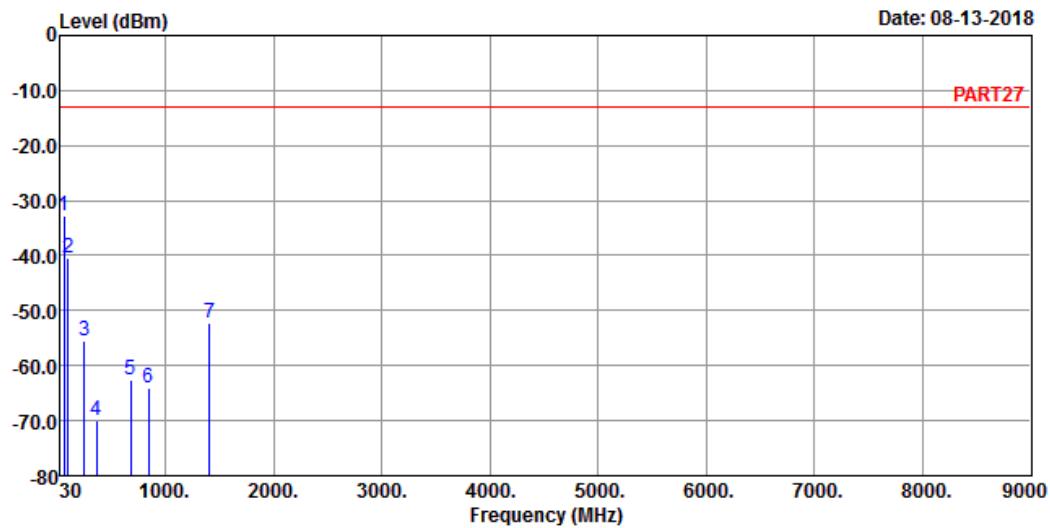

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 12 QPSK\_10M Link\_L-CH

Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB
1 pp	65.89	-32.65	-24.55	-13.00	-19.65	-8.10 Peak
2	102.75	-40.59	-30.10	-13.00	-27.59	-10.49 Peak
3	248.25	-55.37	-49.30	-13.00	-42.37	-6.07 Peak
4	365.62	-69.99	-63.84	-13.00	-56.99	-6.15 Peak
5	676.02	-62.69	-62.21	-13.00	-49.69	-0.48 Peak
6	844.80	-64.18	-64.52	-13.00	-51.18	0.34 Peak
7	1408.00	-52.11	-40.15	-13.00	-39.11	-11.96 Peak


## Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

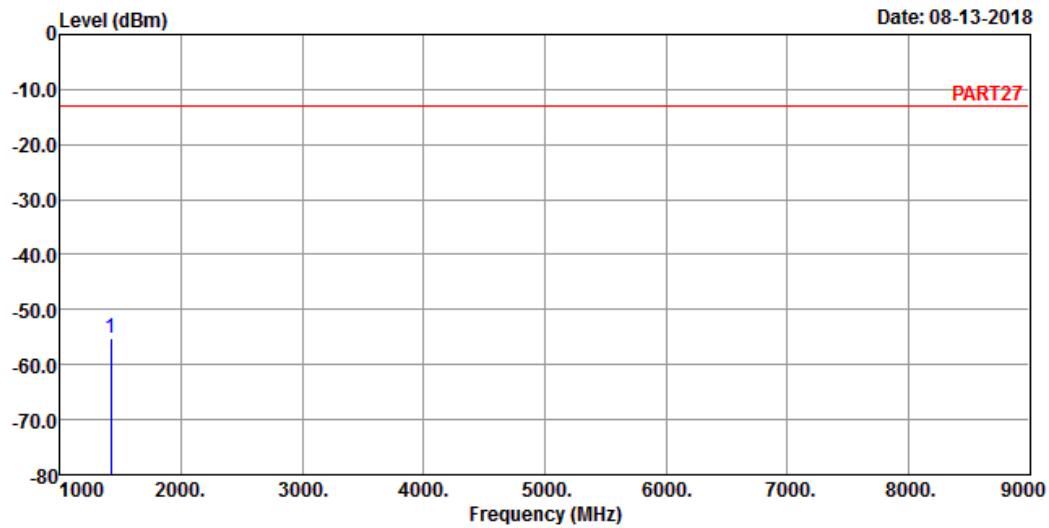

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 12 QPSK\_10M Link\_M-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
MHz	dBm	dBm	dBm	dB	dB


1 pp 1415.00 -55.14 -43.06 -13.00 -42.14 -12.08 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

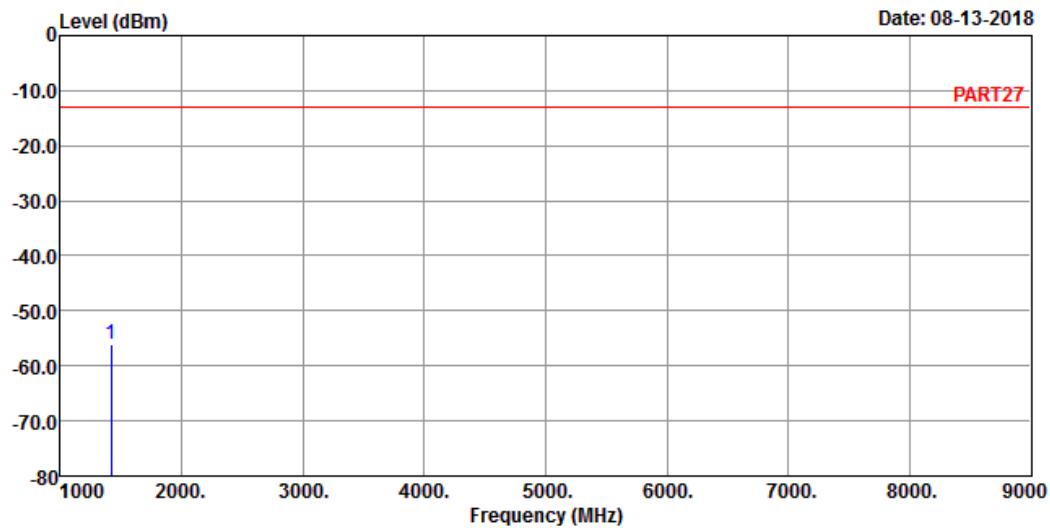

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 12 QPSK\_10M Link\_M-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
MHz	dBm	dBm	dBm	dB	dB

1 pp 1415.00 -56.12 -44.04 -13.00 -43.12 -12.08 Peak


## High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

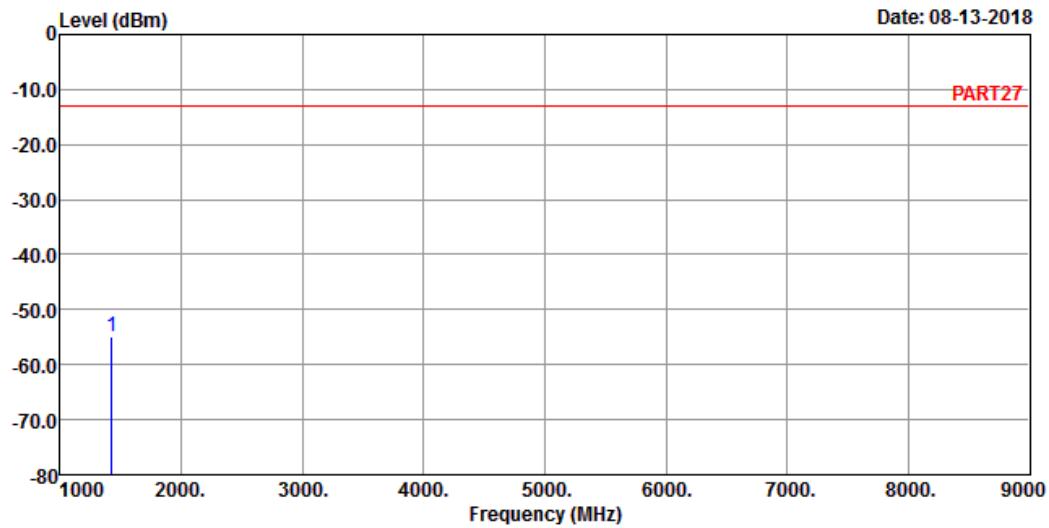

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 12 QPSK\_10M Link\_H-CH

Tested by: Jisyong Wang

Freq	Read Level (dBm)	Limit Line (dBm)	Over Limit Factor (dB)	Remark
1422.00	-54.99	-10.00	-12.19	Peak


1 pp 1422.00 -54.99 -42.80 -13.00 -41.99 -12.19 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 4

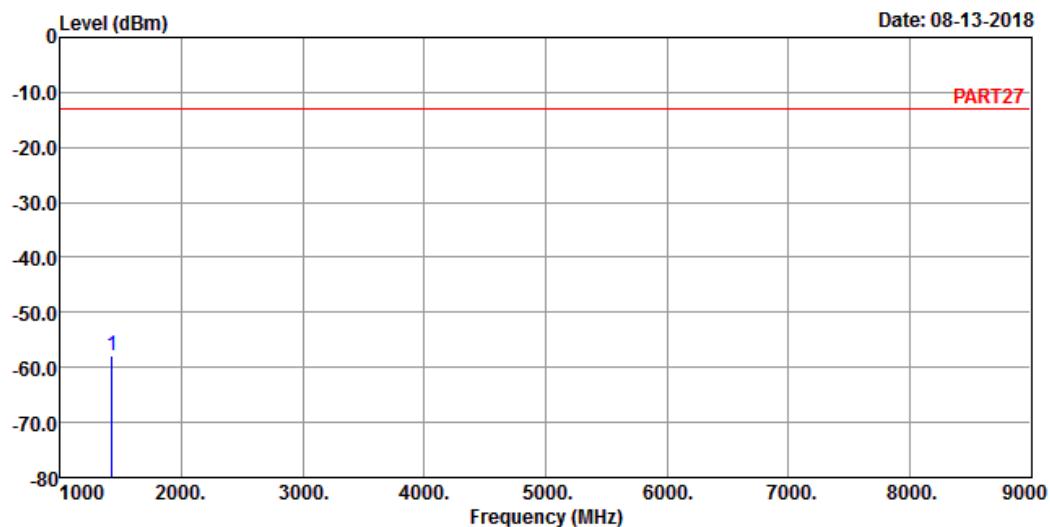

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 12 QPSK\_10M Link\_H-CH

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over	Factor	Remark
			Line Limit		
MHz	dBm	dBm	dBm	dB	dB

1 pp 1422.00 -57.85 -45.66 -13.00 -44.85 -12.19 Peak

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180  
Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565  
Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety**

Tel: 886-3-3183232  
Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---