# SAR TEST REPORT

The following samples were submitted and identified on behalf of the client as:

| | |
|---|---|
| **Equipment Under Test** | Smart phone |
| **Company Name** | SHARP CORPORATION, Mobile Communication B.U. |
| **Company Address** | 2-13-1, Hachihonmatsu-Iida, Higashi-hiroshima-shi, Hiroshima, 739-0192, Japan |
| **Standards** | IEEE/ANSI C95.1-1992, IEEE 1528-2013, KDB248227D01v02r02,KDB865664D01v01r04, KDB865664D02v01r02,KDB941225D01v03r01, KDB941225D06v02r01,KDB447498D01v06, KDB941225D05v02r05 |
| **FCC ID** | APYHRO00260 |
| **Date of Receipt** | Mar. 05, 2018 |
| **Date of Test(s)** | Mar. 25, 2018 ~ Apr. 02, 2018 |
| **Date of Issue** | Apr. 26, 2018 |

In the configuration tested, the EUT complied with the standards specified above.

**Remarks:**

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in writing.

**Signed on behalf of SGS**

| Clerk / Ruby Ou | Engineer / Bond Tsai | Asst. Manager / John Yeh |
|---|---|---|
| Ruby Ou | Bond Tsai | John Yeh |

**Date: Apr. 26, 2018**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Highest SAR Summary | | | | | | |
|---|---|---|---|---|---|---|
| Equipment class | Frequency Band | Head (Separation 0mm) | Body-worn (Separation 10mm) | Hotspot (Separation 10mm) | product specific 10g-SAR (Separation 0 mm) | Highest Simultaneous Transmission 1g SAR(W/Kg) |
| | | 1g SAR(W/Kg) | | | | |
| Licensed | UMTS BII | 0.20 | - | - | - | 0.78 |
| Licensed | GPRS850 | - | - | 0.59 | | |
| Licensed | LTE B5 | - | 0.49 | - | - | |
| Licensed | LTE B12 | - | 0.49 | - | - | |
| DTS | 2.4GHz WLAN | 0.42 | 0.10 | 0.10 | - | |
| NII | 5GHz WLAN | 0.29 | 0.12 | - | 0.37 | |
| DSS | Bluetooth | 0.11 | 0.02 | - | - | |
| Date of Testing | | 2018/03/25~2018/04/2 | | | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# Revision History

| Report Number | Revision | Description | Issue Date |
|---|---|---|---|
| E5/2018/30005 | Rev.00 | Initial creation of document | Apr. 19, 2018 |
| E5/2018/30005 | Rev.01 | 1st modification | Apr. 26, 2018 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Contents

**1. General Information ..... 5**
1.1 Testing Laboratory ..... 5
1.2 Details of Applicant ..... 5
1.3 Description of EUT ..... 6
1.4 Test Environment ..... 78
1.5 Operation Description ..... 78
1.6 Positioning Procedure ..... 83
1.7 Evaluation Procedures ..... 86
1.8 Probe Calibration Procedures ..... 88
1.9 The SAR Measurement System ..... 91
1.10 System Components ..... 93
1.11 SAR System Verification ..... 95
1.12 Tissue Simulant Fluid for the Frequency Band ..... 97
1.13 Test Standards and Limits ..... 100
**2. Summary of Results ..... 102**
**3. Simultaneous Transmission Analysis ..... 112**
3.1 Estimated SAR calculation ..... 113
3.2 SPLSR evaluation and analysis ..... 113
**4. Instruments List ..... 129**
**5. Measurements ..... 130**
**6. SAR System Performance Verification ..... 180**
**7. DAE & Probe Calibration Certificate ..... 198**
**8. Uncertainty Budget ..... 212**
**9. Phantom Description ..... 214**
**10. System Validation from Original Equipment Supplier ..... 215**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# 1. General Information

## 1.1 Testing Laboratory

| | |
|---|---|
| SGS Taiwan Ltd. Electronics & Communication Laboratory | |
| No. 2, Keji 1st Rd., Guishan Township, Taoyuan County, 33383, Taiwan | |
| Tel | +886-2-2299-3279 |
| Fax | +886-2-2298-0488 |
| Internet | http://www.tw.sgs.com/ |

## 1.2 Details of Applicant

| | |
|---|---|
| Company Name | SHARP CORPORATION, Mobile Communication B.U. |
| Company Address | 2-13-1, Hachihonmatsu-Iida, Higashi-hiroshima-shi, Hiroshima, 739-0192, Japan |

### 1.2.1 Details of Manufacturer

| | |
|---|---|
| Company Name | Sharp Corporation |
| Company Address | 1 Takumi-cho, Sakai-ku, Sakai City,Osaka 590-8522,Japan |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 1.3 Description of EUT

| | | | | |
|---|---|---|---|---|
| EUT Name | Smart phone | | | |
| FCC ID | APYHRO00260 | | | |
| Mode of Operation | ☒GSM ☒GPRS ☒WCDMA<br>☒HSDPA ☒HSUPA ☒LTE FDD ☒LTE TDD<br>☒WLAN802.11 a/b/g/n/ac(20M/40M/80M) ☒Bluetooth | | | |
| Duty Cycle | GSM<br>(DTM multi class B) | 1/8.3 | | |
| | GPRS<br>(support multi class 12 max) | 1/2 (1Dn4UP)<br>1/2.76 (1Dn3UP)<br>1/4.1 (1Dn2UP)<br>1/8.3 (1Dn1UP) | | |
| | LTE FDD | 1 | | |
| | LTE FDD | 0.633 | | |
| | WCDMA | 1 | | |
| | WLAN802.11<br>a/b/g/n/ac(20M/40M/80M) | 1 | | |
| | Bluetooth | 1 | | |
| TX Frequency Range (MHz) | GSM850 | 824 | – | 849 |
| | GSM1900 | 1850 | – | 1910 |
| | WCDMA Band II | 1850 | – | 1910 |
| | WCDMA Band IV | 1710 | – | 1755 |
| | WCDMA Band V | 824 | – | 849 |
| | LTE FDD Band 2 | 1850 | – | 1910 |
| | LTE FDD Band 4 | 1710 | – | 1755 |
| | LTE FDD Band 5 | 824 | – | 849 |
| | LTE FDD Band 12 | 699 | – | 716 |
| | LTE FDD Band 13 | 777 | – | 787 |
| | LTE FDD Band 17 | 704 | – | 716 |
| | LTE TDD Band 38 | 2570 | – | 2620 |
| | WiFi 2.4GHz | 2400 | – | 2462 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| | | | | |
|---|---|---|---|---|
| TX Frequency Range (MHz) | WiFi 5GHz | 5150 | – | 5725 |
| | Bluetooth | 2402 | – | 2480 |
| Channel Number (ARFCN) | GSM850 | 128 | – | 251 |
| | GSM1900 | 512 | – | 810 |
| | WCDMA Band II | 9262 | – | 9538 |
| | WCDMA Band IV | 1312 | – | 1513 |
| | WCDMA Band V | 4132 | – | 4233 |
| | LTE FDD Band 2 | 18607 | – | 19193 |
| | LTE FDD Band 4 | 19957 | – | 20393 |
| | LTE FDD Band 5 | 20407 | – | 20643 |
| | LTE FDD Band 12 | 23017 | – | 23173 |
| | LTE FDD Band 13 | 23205 | – | 23255 |
| | LTE FDD Band 17 | 23755 | – | 23825 |
| | LTE TDD Band 38 | 37775 | – | 38225 |
| | WiFi 2.4GHz | 1 | – | 11 |
| | WiFi 5GHz | 36 | – | 144 |
| | Bluetooth | 0 | – | 78 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Max. SAR (1-g) (Unit: W/Kg) | | | | |
|---|---|---|---|---|
| Mode | Band | Measured | Reported | Position / Channel |
| Head | GSM 850 | 0.08 | 0.11 | ☒Left ☐Right<br>☒Cheek ☐Tilt<br>128 Channel |
| | GSM 1900 | 0.06 | 0.08 | ☐Left ☒Right<br>☒Cheek ☐Tilt<br>810 Channel |
| | WCDMA Band II | 0.17 | 0.20 | ☐Left ☒Right<br>☒Cheek ☐Tilt<br>9262 Channel |
| | WCDMA Band IV | 0.07 | 0.08 | ☐Left ☒Right<br>☒Cheek ☐Tilt<br>1312 Channel |
| | WCDMA Band V | 0.09 | 0.11 | ☒Left ☐Right<br>☒Cheek ☐Tilt<br>4132 Channel |
| | LTE FDD Band 2 | 0.14 | 0.18 | ☐Left ☒Right<br>☒Cheek ☐Tilt<br>19100 Channel |
| | LTE FDD Band 4 | 0.06 | 0.08 | ☐Left ☒Right<br>☒Cheek ☐Tilt<br>20050 Channel |
| | LTE FDD Band 5 | 0.10 | 0.13 | ☒Left ☐Right<br>☒Cheek ☐Tilt<br>20525 Channel |
| | LTE FDD Band 12 | 0.11 | 0.14 | ☒Left ☐Right<br>☒Cheek ☐Tilt<br>23130 Channel |
| | LTE FDD Band 13 | 0.05 | 0.06 | ☒Left ☐Right<br>☒Cheek ☐Tilt<br>23230 Channel |
| | LTE FDD Band 17 | 0.11 | 0.14 | ☒Left ☐Right<br>☒Cheek ☐Tilt<br>23790 Channel |
| | LTE FDD Band 38 | 0.04 | 0.05 | ☐Left ☒Right<br>☒Cheek ☐Tilt<br>38000 Channel |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Max. SAR (1-g) (Unit: W/Kg) | | | | |
|---|---|---|---|---|
| Mode | Band | Measured | Reported | Position / Channel |
| Head | WLAN802.11 b | 0.40 | 0.42 | ☒Left ☐Right<br>☒Cheek ☐Tilt<br>11 Channel |
| | WLAN802.11n(40M)5.2G | 0.20 | 0.23 | ☒Left ☐Right<br>☒Cheek ☐Tilt<br>46 Channel |
| | WLAN802.11n(40M)5.3G | 0.26 | 0.29 | ☒Left ☐Right<br>☒Cheek ☐Tilt<br>54 Channel |
| | WLAN802.11ac(80M)5.6G | 0.24 | 0.28 | ☐Left ☒Right<br>☒Cheek ☐Tilt<br>122 Channel |
| | Bluetooth | 0.06 | 0.11 | ☒Left ☐Right<br>☒Cheek ☐Tilt<br>78 Channel |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Max. SAR (1-g) (Unit: W/Kg) | | | | |
|---|---|---|---|---|
| Mode | Band | Measured | Reported | Position / Channel |
| Body-worn | GSM 850 | 0.33 | 0.45 | ☐Front ☒Back 128 Channel |
| | GSM 1900 | 0.18 | 0.23 | ☐Front ☒Back 810 Channel |
| | WCDMA Band II | 0.36 | 0.43 | ☐Front ☒Back 9262 Channel |
| | WCDMA Band IV | 0.18 | 0.20 | ☐Front ☒Back 1312 Channel |
| | WCDMA Band V | 0.39 | 0.49 | ☐Front ☒Back 4132 Channel |
| | LTE FDD Band 2 | 0.35 | 0.44 | ☐Front ☒Back 19100 Channel |
| | LTE FDD Band 4 | 0.11 | 0.14 | ☐Front ☒Back 20050 Channel |
| | LTE FDD Band 5 | 0.39 | 0.49 | ☐Front ☒Back 20525 Channel |
| | LTE FDD Band 12 | 0.39 | 0.49 | ☐Front ☒Back 23130 Channel |
| | LTE FDD Band 13 | 0.19 | 0.24 | ☐Front ☒Back 23230 Channel |
| | LTE FDD Band 17 | 0.37 | 0.47 | ☐Front ☒Back 23790 Channel |
| | LTE FDD Band 38 | 0.23 | 0.29 | ☐Front ☒Back 38000 Channel |
| | WLAN802.11 b | 0.09 | 0.10 | ☐Front ☒Back 11 Channel |
| | WLAN802.11n(40M)5.2G | 0.07 | 0.08 | ☐Front ☒Back 46 Channel |
| | WLAN802.11n(40M)5.3G | 0.09 | 0.10 | ☐Front ☒Back 54 Channel |
| | WLAN802.11ac(80M)5.6G | 0.10 | 0.12 | ☐Front ☒Back 122 Channel |
| | Bluetooth | 0.01 | 0.02 | ☐Front ☒Back 78 Channel |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Max. SAR (1-g) (Unit: W/Kg) | | | | |
|---|---|---|---|---|
| Mode | Band | Measured | Reported | Position / Channel |
| Hotspot mode | GPRS 850 (1Dn4UP) | 0.46 | 0.59 | ☐Front ☒Back<br>☐Bottom ☐Right<br>☐Left<br>190 Channel |
| | GPRS 1900 (1Dn4UP) | 0.21 | 0.27 | ☐Front ☒Back<br>☐Top ☐Right<br>☐Left ☐Bottom<br>810 Channel |
| | WCDMA Band II | 0.36 | 0.43 | ☐Front ☒Back<br>☐Top ☐Right<br>☐Left<br>9262 Channel |
| | WCDMA Band IV | 0.18 | 0.20 | ☐Front ☒Back<br>☐Top ☐Right<br>☐Left<br>1312 Channel |
| | WCDMA Band V | 0.39 | 0.49 | ☐Front ☒Back<br>☐Top ☐Right<br>☐Left<br>4132 Channel |
| | LTE FDD Band 2 | 0.35 | 0.44 | ☐Front ☒Back<br>☐Bottom ☐Right<br>☐Left<br>19100 Channel |
| | LTE FDD Band 4 | 0.11 | 0.14 | ☐Front ☒Back<br>☐Bottom ☐Right<br>☐Left<br>20050 Channel |
| | LTE FDD Band 5 | 0.39 | 0.49 | ☐Front ☒Back<br>☐Bottom ☐Right<br>☐Left<br>20525 Channel |
| | LTE FDD Band 12 | 0.39 | 0.49 | ☐Front ☒Back<br>☐Bottom ☐Right<br>☐Left<br>23130 Channel |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Max. SAR (1-g) (Unit: W/Kg) | | | | |
|---|---|---|---|---|
| Mode | Band | Measured | Reported | Position / Channel |
| Hotspot mode | LTE FDD Band 13 | 0.19 | 0.24 | ☐Front ☒Back<br>☐Bottom ☐Right<br>☐Left<br>23230 Channel |
| | LTE FDD Band 17 | 0.37 | 0.47 | ☐Front ☒Back<br>☐Bottom ☐Right<br>☐Left<br>23790 Channel |
| | LTE FDD Band 38 | 0.36 | 0.45 | ☐Front ☐Back<br>☒Bottom ☐Right<br>☐Left<br>38000 Channel |
| | WLAN802.11 b | 0.09 | 0.10 | ☐Front ☒Back<br>☐Top ☐Right<br>☐Left ☐Bottom<br>11 Channel |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Max. SAR (10 g) (Unit: W/Kg) | | | | |
|---|---|---|---|---|
| Mode | Band | Measured | Reported | Position / Channel |
| Product specific 10-g SAR | WLAN802.11n(40M)5.2G | 0.28 | 0.32 | ☐Front ☒Back<br>☐Top ☐Right<br>☐Left<br>46 Channel |
| | WLAN802.11n(40M)5.3G | 0.30 | 0.34 | ☐Front ☒Back<br>☐Top ☐Right<br>☐Left<br>54 Channel |
| | WLAN802.11ac(80M)5.6G | 0.31 | 0.37 | ☐Front ☒Back<br>☐Top ☐Right<br>☐Left<br>122 Channel |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## GSM 850 - conducted power table:

| EUT mode | Frequency (MHz) | CH | Max. Rated Avg. Power + Max. | Burst average power | Source-based time average power |
|---|---|---|---|---|---|
| | | | | Avg. (dBm) | Avg. (dBm) |
| GSM 850 (GMSK) | 824.2 | 128 | 33.5 | 32.11 | 23.08 |
| | 836.6 | 190 | 33.5 | 32.10 | 23.07 |
| | 848.8 | 251 | 33.5 | 32.03 | 23.00 |
| The division factor compared to the number of TX time slot | | | | | |
| Division factor | | | | 1 TX time slot | |
| | | | | -9.03 | |

## GPRS 850 - conducted power table:

| Burst average power | | | | | | |
|---|---|---|---|---|---|---|
| Max. Rated Avg. Power + Max. Tolerance (dBm) | | | 33.5 | 31.1 | 30.3 | 29.5 |
| | | | 1Dn1UP | 1Dn2UP | 1Dn3UP | 1Dn4UP |
| EUT mode | Frequency (MHz) | CH | Avg. (dBm) | Avg. (dBm) | Avg. (dBm) | Avg. (dBm) |
| GPRS 850 | 824.2 | 128 | 32.11 | 30.10 | 29.25 | 28.34 |
| | 836.6 | 190 | 32.10 | 30.08 | 29.28 | 28.40 |
| | 848.8 | 251 | 32.03 | 30.00 | 29.22 | 28.33 |
| Source-based time average power | | | | | | |
| GPRS 850 | 824.2 | 128 | 23.08 | 24.08 | 24.99 | 25.33 |
| | 836.6 | 190 | 23.07 | 24.06 | 25.02 | 25.39 |
| | 848.8 | 251 | 23.00 | 23.98 | 24.96 | 25.32 |
| The division factor compared to the number of TX time slot | | | | | | |
| Division factor | | | 1 TX time slot | 2 TX time slot | 3 TX time slot | 4 TX time slot |
| | | | -9.03 | -6.02 | -4.26 | -3.01 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## GSM 1900 - conducted power table:

| EUT mode | Frequency (MHz) | CH | Max. Rated Avg. Power + Max. | Burst average power | Source-based time average power |
|---|---|---|---|---|---|
| | | | | Avg. (dBm) | Avg. (dBm) |
| GSM1900 (GMSK) | 1850.2 | 512 | 30.5 | 29.32 | 20.29 |
| | 1800 | 661 | 30.5 | 29.08 | 20.05 |
| | 1909.8 | 810 | 30.5 | 29.37 | 20.34 |
| The division factor compared to the number of TX time slot | | | | | |
| Division factor | | | | 1 TX time slot | |
| | | | | -9.03 | |

## GPRS 1900 - conducted power table:

| Burst average power | | | | | | |
|---|---|---|---|---|---|---|
| Max. Rated Avg. Power + Max. Tolerance (dBm) | | | 30.5 | 28 | 26.2 | 25.4 |
| | | | 1Dn1UP | 1Dn2UP | 1Dn3UP | 1Dn4UP |
| EUT mode | Frequency (MHz) | CH | Avg. (dBm) | Avg. (dBm) | Avg. (dBm) | Avg. (dBm) |
| GPRS 1900 | 1850.2 | 512 | 29.32 | 27.04 | 24.99 | 24.26 |
| | 1880 | 661 | 29.08 | 26.73 | 24.78 | 24.01 |
| | 1909.8 | 810 | 29.37 | 27.09 | 25.07 | 24.29 |
| Source-based time average power | | | | | | |
| GPRS 1900 | 1850.2 | 512 | 20.29 | 21.02 | 20.73 | 21.25 |
| | 1880 | 661 | 20.05 | 20.71 | 20.52 | 21.00 |
| | 1909.8 | 810 | 20.34 | 21.07 | 20.81 | 21.28 |
| The division factor compared to the number of TX time slot | | | | | | |
| Division factor | | | 1 TX time slot | 2 TX time slot | 3 TX time slot | 4 TX time slot |
| | | | -9.03 | -6.02 | -4.26 | -3.01 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**WCDMA Band II / Band IV / Band V - HSDPA / HSUPA Conducted power table (Unit: dBm):**

| Band | | WCDMA II | | |
|---|---|---|---|---|
| TX Channel | | 9262 | 9400 | 9538 |
| Frequency (MHz) | | 1852.4 | 1880 | 1907.6 |
| Max. Rated Avg. Power+Max. Tolerance (dBm) | | **24.20** | | |
| 3GPP Rel 99 | RMC 12.2Kbps | 23.45 | 23.41 | 23.28 |
| 3GPP Rel 5 | HSDPA Subtest-1 | 22.44 | 22.35 | 22.32 |
| | HSDPA Subtest-2 | 22.43 | 22.33 | 22.30 |
| | HSDPA Subtest-3 | 21.98 | 21.97 | 21.77 |
| | HSDPA Subtest-4 | 21.97 | 21.90 | 21.79 |
| 3GPP Rel 6 | HSUPA Subtest-1 | 22.55 | 22.40 | 22.25 |
| | HSUPA Subtest-2 | 21.89 | 21.92 | 21.77 |
| | HSUPA Subtest-3 | 22.48 | 22.41 | 22.33 |
| | HSUPA Subtest-4 | 22.19 | 22.18 | 22.16 |
| | HSUPA Subtest-5 | 22.56 | 22.46 | 22.26 |

| Band | | WCDMA IV | | |
|---|---|---|---|---|
| TX Channel | | 1312 | 1412 | 1513 |
| Frequency (MHz) | | 1712.4 | 1732.4 | 1752.6 |
| Max. Rated Avg. Power+Max. Tolerance (dBm) | | **24.20** | | |
| 3GPP Rel 99 | RMC 12.2Kbps | 23.70 | 23.57 | 23.44 |
| 3GPP Rel 5 | HSDPA Subtest-1 | 22.72 | 22.66 | 22.53 |
| | HSDPA Subtest-2 | 22.71 | 22.65 | 22.52 |
| | HSDPA Subtest-3 | 22.18 | 22.06 | 21.94 |
| | HSDPA Subtest-4 | 22.20 | 22.03 | 21.91 |
| 3GPP Rel 6 | HSUPA Subtest-1 | 22.73 | 22.57 | 22.43 |
| | HSUPA Subtest-2 | 22.15 | 22.07 | 21.90 |
| | HSUPA Subtest-3 | 22.70 | 22.52 | 22.44 |
| | HSUPA Subtest-4 | 22.19 | 22.20 | 22.15 |
| | HSUPA Subtest-5 | 22.75 | 22.61 | 22.45 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Band | | WCDMA V | | |
|---|---|---|---|---|
| TX Channel | | 4132 | 4183 | 4233 |
| Frequency (MHz) | | 826.4 | 836.6 | 846.6 |
| Max. Rated Avg. Power+Max. Tolerance (dBm) | | **24.20** | | |
| 3GPP Rel 99 | RMC 12.2Kbps | 23.23 | 23.22 | 23.14 |
| 3GPP Rel 5 | HSDPA Subtest-1 | 22.29 | 22.22 | 22.15 |
| | HSDPA Subtest-2 | 22.25 | 22.21 | 22.13 |
| | HSDPA Subtest-3 | 21.73 | 21.74 | 21.65 |
| | HSDPA Subtest-4 | 21.78 | 21.77 | 21.69 |
| 3GPP Rel 6 | HSUPA Subtest-1 | 22.23 | 22.19 | 22.21 |
| | HSUPA Subtest-2 | 21.71 | 21.69 | 21.62 |
| | HSUPA Subtest-3 | 22.20 | 22.20 | 22.12 |
| | HSUPA Subtest-4 | 22.18 | 22.19 | 22.11 |
| | HSUPA Subtest-5 | 22.24 | 22.21 | 22.23 |

Subtests for WCDMA Release 5 HSDPA

| SUB-TEST | $\beta_c$ | $\beta_d$ | $\beta_d$ *(SF)* | $\beta_c/\beta_d$ | $\beta_{HS}$ *(Note1, Note 2)* | CM (dB) *(Note 3)* | MPR (dB) *(Note 3)* |
|---|---|---|---|---|---|---|---|
| 1 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 0.0 | 0.0 |
| 2 | 12/15 | 15/15 | 64 | 12/15 | 24/15 | 1.0 | 0.0 |
| 3 | 15/15 | 8/15 | 64 | 15/8 | 30/15 | 1.5 | 0.5 |
| 4 | 15/15 | 4/15 | 64 | 15/4 | 30/15 | 1.5 | 0.5 |

Subtests for WCDMA Release 6 HSUPA

| SUB-TEST | $\beta_c$ | $\beta_d$ | $\beta_d$ *(SF)* | $\beta_c/\beta_d$ | $\beta_{HS}$ *(Note1)* | $\beta_{ec}$ | $\beta_{ed}$ *(Note 5) (Note 6)* | $\beta_{ed}$ *(SF)* | $\beta_{ed}$ *(Codes)* | CM *(dB) (Note 2)* | MPR *(dB) (Note 2)* | *AG Index (Note 6)* | *E-TFCI* |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 11/15 | 15/15 | 64 | 11/15 | 22/15 | 209/225 | 1309/225 | 4 | 1 | 1.0 | 0.0 | 20 | 75 |
| 2 | 6/15 | 15/15 | 64 | 6/15 | 12/15 | 12/15 | 94/75 | 4 | 1 | 3.0 | 2.0 | 12 | 67 |
| 3 | 15/15 | 9/15 | 64 | 15/9 | 30/15 | 30/15 | $\beta_{ed}1$: 47/15<br>$\beta_{ed}2$: 47/15 | 4<br>4 | 2 | 2.0 | 1.0 | 15 | 92 |
| 4 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 2/15 | 56/75 | 4 | 1 | 3.0 | 2.0 | 17 | 71 |
| 5 | 15/15 | 15/15 | 64 | 15/15 | 30/15 | 24/15 | 134/15 | 4 | 1 | 1.0 | 0.0 | 21 | 81 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## LTE Band 2 / Band 4 / Band 5 / Band 12 / Band 13 / Band 17 / Band 38 - conducted power table:

| FDD Band 2 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 20 | QPSK | 1 RB | 0 | 1860 | 18700 | 22.10 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.12 | 23.2 | 0 |
| | | | | 1900 | 19100 | 22.15 | 23.2 | 0 |
| | | | 50 | 1860 | 18700 | 22.03 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.01 | 23.2 | 0 |
| | | | | 1900 | 19100 | 22.19 | 23.2 | 0 |
| | | | 99 | 1860 | 18700 | 22.10 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.03 | 23.2 | 0 |
| | | | | 1900 | 19100 | 22.01 | 23.2 | 0 |
| | | 18 RB | 0 | 1860 | 18700 | 21.47 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.49 | 22.2 | 0-1 |
| | | | | 1900 | 19100 | 21.51 | 22.2 | 0-1 |
| | | | 25 | 1860 | 18700 | 21.55 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.41 | 22.2 | 0-1 |
| | | | | 1900 | 19100 | 21.41 | 22.2 | 0-1 |
| | | | 50 | 1860 | 18700 | 21.62 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.55 | 22.2 | 0-1 |
| | | | | 1900 | 19100 | 21.36 | 22.2 | 0-1 |
| | | 100RB | | 1860 | 18700 | 21.04 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.03 | 22.2 | 0-1 |
| | | | | 1900 | 19100 | 21.00 | 22.2 | 0-1 |
| | 16-QAM | 1 RB | 0 | 1860 | 18700 | 21.07 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.04 | 22.2 | 0-1 |
| | | | | 1900 | 19100 | 21.08 | 22.2 | 0-1 |
| | | | 50 | 1860 | 18700 | 21.09 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.16 | 22.2 | 0-1 |
| | | | | 1900 | 19100 | 21.12 | 22.2 | 0-1 |
| | | | 99 | 1860 | 18700 | 21.13 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.05 | 22.2 | 0-1 |
| | | | | 1900 | 19100 | 21.16 | 22.2 | 0-1 |
| | | 50 RB | 0 | 1860 | 18700 | 20.36 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.47 | 21.2 | 0-2 |
| | | | | 1900 | 19100 | 20.51 | 21.2 | 0-2 |
| | | | 25 | 1860 | 18700 | 20.48 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.53 | 21.2 | 0-2 |
| | | | | 1900 | 19100 | 20.53 | 21.2 | 0-2 |
| | | | 50 | 1860 | 18700 | 20.48 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.63 | 21.2 | 0-2 |
| | | | | 1900 | 19100 | 20.47 | 21.2 | 0-2 |
| | | 100RB | | 1860 | 18700 | 20.04 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.09 | 21.2 | 0-2 |
| | | | | 1900 | 19100 | 20.20 | 21.2 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 2 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 20 | 64-QAM | 1 RB | 0 | 1860 | 18700 | 20.12 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.04 | 21.2 | 0-2 |
| | | | | 1900 | 19100 | 20.01 | 21.2 | 0-2 |
| | | | 50 | 1860 | 18700 | 20.04 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.00 | 21.2 | 0-2 |
| | | | | 1900 | 19100 | 20.09 | 21.2 | 0-2 |
| | | | 99 | 1860 | 18700 | 20.06 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.04 | 21.2 | 0-2 |
| | | | | 1900 | 19100 | 20.13 | 21.2 | 0-2 |
| | | 50 RB | 0 | 1860 | 18700 | 19.62 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.62 | 20.2 | 0-3 |
| | | | | 1900 | 19100 | 19.44 | 20.2 | 0-3 |
| | | | 25 | 1860 | 18700 | 19.48 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.50 | 20.2 | 0-3 |
| | | | | 1900 | 19100 | 19.58 | 20.2 | 0-3 |
| | | | 50 | 1860 | 18700 | 19.57 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.59 | 20.2 | 0-3 |
| | | | | 1900 | 19100 | 19.47 | 20.2 | 0-3 |
| | | 100RB | | 1860 | 18700 | 19.08 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.15 | 20.2 | 0-3 |
| | | | | 1900 | 19100 | 19.18 | 20.2 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 2 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 15 | QPSK | 1 RB | 0 | 1857.5 | 18675 | 22.16 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.15 | 23.2 | 0 |
| | | | | 1902.5 | 19125 | 22.08 | 23.2 | 0 |
| | | | 36 | 1857.5 | 18675 | 22.04 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.16 | 23.2 | 0 |
| | | | | 1902.5 | 19125 | 22.17 | 23.2 | 0 |
| | | | 74 | 1857.5 | 18675 | 22.18 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.04 | 23.2 | 0 |
| | | | | 1902.5 | 19125 | 22.15 | 23.2 | 0 |
| | | 36 RB | 0 | 1857.5 | 18675 | 21.55 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.48 | 22.2 | 0-1 |
| | | | | 1902.5 | 19125 | 21.39 | 22.2 | 0-1 |
| | | | 18 | 1857.5 | 18675 | 21.44 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.57 | 22.2 | 0-1 |
| | | | | 1902.5 | 19125 | 21.55 | 22.2 | 0-1 |
| | | | 37 | 1857.5 | 18675 | 21.55 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.66 | 22.2 | 0-1 |
| | | | | 1902.5 | 19125 | 21.53 | 22.2 | 0-1 |
| | | 75RB | | 1857.5 | 18675 | 21.17 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.01 | 22.2 | 0-1 |
| | | | | 1902.5 | 19125 | 21.05 | 22.2 | 0-1 |
| | 16-QAM | 1 RB | 0 | 1857.5 | 18675 | 21.10 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.07 | 22.2 | 0-1 |
| | | | | 1902.5 | 19125 | 21.01 | 22.2 | 0-1 |
| | | | 36 | 1857.5 | 18675 | 21.09 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.07 | 22.2 | 0-1 |
| | | | | 1902.5 | 19125 | 21.02 | 22.2 | 0-1 |
| | | | 74 | 1857.5 | 18675 | 21.09 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.19 | 22.2 | 0-1 |
| | | | | 1902.5 | 19125 | 21.07 | 22.2 | 0-1 |
| | | 36 RB | 0 | 1857.5 | 18675 | 20.62 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.44 | 21.2 | 0-2 |
| | | | | 1902.5 | 19125 | 20.68 | 21.2 | 0-2 |
| | | | 18 | 1857.5 | 18675 | 20.46 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.53 | 21.2 | 0-2 |
| | | | | 1902.5 | 19125 | 20.40 | 21.2 | 0-2 |
| | | | 37 | 1857.5 | 18675 | 20.50 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.66 | 21.2 | 0-2 |
| | | | | 1902.5 | 19125 | 20.55 | 21.2 | 0-2 |
| | | 75RB | | 1857.5 | 18675 | 20.01 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.05 | 21.2 | 0-2 |
| | | | | 1902.5 | 19125 | 20.18 | 21.2 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 2 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 15 | 64-QAM | 1 RB | 0 | 1857.5 | 18675 | 20.15 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.10 | 21.2 | 0-2 |
| | | | | 1902.5 | 19125 | 20.09 | 21.2 | 0-2 |
| | | | 50 | 1857.5 | 18675 | 20.05 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.06 | 21.2 | 0-2 |
| | | | | 1902.5 | 19125 | 20.15 | 21.2 | 0-2 |
| | | | 99 | 1857.5 | 18675 | 20.09 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.08 | 21.2 | 0-2 |
| | | | | 1902.5 | 19125 | 20.11 | 21.2 | 0-2 |
| | | 36 RB | 0 | 1857.5 | 18675 | 19.51 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.55 | 20.2 | 0-3 |
| | | | | 1902.5 | 19125 | 19.59 | 20.2 | 0-3 |
| | | | 25 | 1857.5 | 18675 | 19.69 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.41 | 20.2 | 0-3 |
| | | | | 1902.5 | 19125 | 19.61 | 20.2 | 0-3 |
| | | | 50 | 1857.5 | 18675 | 19.53 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.43 | 20.2 | 0-3 |
| | | | | 1902.5 | 19125 | 19.38 | 20.2 | 0-3 |
| | | 75RB | | 1857.5 | 18675 | 19.14 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.01 | 20.2 | 0-3 |
| | | | | 1902.5 | 19125 | 19.03 | 20.2 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 2 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 10 | QPSK | 1 RB | 0 | 1855 | 18650 | 22.07 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.11 | 23.2 | 0 |
| | | | | 1905 | 19150 | 22.10 | 23.2 | 0 |
| | | | 25 | 1855 | 18650 | 22.08 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.08 | 23.2 | 0 |
| | | | | 1905 | 19150 | 22.09 | 23.2 | 0 |
| | | | 49 | 1855 | 18650 | 22.16 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.16 | 23.2 | 0 |
| | | | | 1905 | 19150 | 22.17 | 23.2 | 0 |
| | | 25 RB | 0 | 1855 | 18650 | 21.39 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.45 | 22.2 | 0-1 |
| | | | | 1905 | 19150 | 21.39 | 22.2 | 0-1 |
| | | | 12 | 1855 | 18650 | 21.69 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.47 | 22.2 | 0-1 |
| | | | | 1905 | 19150 | 21.66 | 22.2 | 0-1 |
| | | | 25 | 1855 | 18650 | 21.36 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.51 | 22.2 | 0-1 |
| | | | | 1905 | 19150 | 21.58 | 22.2 | 0-1 |
| | | 50RB | | 1855 | 18650 | 21.07 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.06 | 22.2 | 0-1 |
| | | | | 1905 | 19150 | 21.13 | 22.2 | 0-1 |
| | 16-QAM | 1 RB | 0 | 1855 | 18650 | 21.09 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.19 | 22.2 | 0-1 |
| | | | | 1905 | 19150 | 21.17 | 22.2 | 0-1 |
| | | | 25 | 1855 | 18650 | 21.17 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.10 | 22.2 | 0-1 |
| | | | | 1905 | 19150 | 21.14 | 22.2 | 0-1 |
| | | | 49 | 1855 | 18650 | 21.20 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.02 | 22.2 | 0-1 |
| | | | | 1905 | 19150 | 21.05 | 22.2 | 0-1 |
| | | 25 RB | 0 | 1855 | 18650 | 20.46 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.52 | 21.2 | 0-2 |
| | | | | 1905 | 19150 | 20.60 | 21.2 | 0-2 |
| | | | 12 | 1855 | 18650 | 20.62 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.53 | 21.2 | 0-2 |
| | | | | 1905 | 19150 | 20.49 | 21.2 | 0-2 |
| | | | 25 | 1855 | 18650 | 20.35 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.54 | 21.2 | 0-2 |
| | | | | 1905 | 19150 | 20.55 | 21.2 | 0-2 |
| | | 50RB | | 1855 | 18650 | 20.10 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.04 | 21.2 | 0-2 |
| | | | | 1905 | 19150 | 20.05 | 21.2 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 2 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 10 | 64-QAM | 1 RB | 0 | 1855 | 18650 | 20.12 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.10 | 21.2 | 0-2 |
| | | | | 1905 | 19150 | 20.10 | 21.2 | 0-2 |
| | | | 25 | 1855 | 18650 | 20.20 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.17 | 21.2 | 0-2 |
| | | | | 1905 | 19150 | 20.13 | 21.2 | 0-2 |
| | | | 49 | 1855 | 18650 | 20.15 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.09 | 21.2 | 0-2 |
| | | | | 1905 | 19150 | 20.09 | 21.2 | 0-2 |
| | | 25 RB | 0 | 1855 | 18650 | 19.61 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.62 | 20.2 | 0-3 |
| | | | | 1905 | 19150 | 19.55 | 20.2 | 0-3 |
| | | | 12 | 1855 | 18650 | 19.63 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.44 | 20.2 | 0-3 |
| | | | | 1905 | 19150 | 19.66 | 20.2 | 0-3 |
| | | | 25 | 1855 | 18650 | 19.37 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.42 | 20.2 | 0-3 |
| | | | | 1905 | 19150 | 19.42 | 20.2 | 0-3 |
| | | 50RB | | 1855 | 18650 | 19.10 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.16 | 20.2 | 0-3 |
| | | | | 1905 | 19150 | 19.20 | 20.2 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 2 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 5 | QPSK | 1 RB | 0 | 1852.5 | 18625 | 22.11 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.02 | 23.2 | 0 |
| | | | | 1907.5 | 19175 | 22.07 | 23.2 | 0 |
| | | | 12 | 1852.5 | 18625 | 22.06 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.15 | 23.2 | 0 |
| | | | | 1907.5 | 19175 | 22.10 | 23.2 | 0 |
| | | | 24 | 1852.5 | 18625 | 22.17 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.01 | 23.2 | 0 |
| | | | | 1907.5 | 19175 | 22.03 | 23.2 | 0 |
| | | 12 RB | 0 | 1852.5 | 18625 | 21.58 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.63 | 22.2 | 0-1 |
| | | | | 1907.5 | 19175 | 21.63 | 22.2 | 0-1 |
| | | | 6 | 1852.5 | 18625 | 21.70 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.54 | 22.2 | 0-1 |
| | | | | 1907.5 | 19175 | 21.47 | 22.2 | 0-1 |
| | | | 13 | 1852.5 | 18625 | 21.55 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.62 | 22.2 | 0-1 |
| | | | | 1907.5 | 19175 | 21.59 | 22.2 | 0-1 |
| | | 25RB | | 1852.5 | 18625 | 21.12 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.04 | 22.2 | 0-1 |
| | | | | 1907.5 | 19175 | 21.07 | 22.2 | 0-1 |
| | 16-QAM | 1 RB | 0 | 1852.5 | 18625 | 21.02 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.08 | 22.2 | 0-1 |
| | | | | 1907.5 | 19175 | 21.03 | 22.2 | 0-1 |
| | | | 12 | 1852.5 | 18625 | 21.17 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.15 | 22.2 | 0-1 |
| | | | | 1907.5 | 19175 | 21.05 | 22.2 | 0-1 |
| | | | 24 | 1852.5 | 18625 | 21.08 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.01 | 22.2 | 0-1 |
| | | | | 1907.5 | 19175 | 21.11 | 22.2 | 0-1 |
| | | 12 RB | 0 | 1852.5 | 18625 | 20.53 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.57 | 21.2 | 0-2 |
| | | | | 1907.5 | 19175 | 20.48 | 21.2 | 0-2 |
| | | | 6 | 1852.5 | 18625 | 20.44 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.49 | 21.2 | 0-2 |
| | | | | 1907.5 | 19175 | 20.49 | 21.2 | 0-2 |
| | | | 13 | 1852.5 | 18625 | 20.48 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.52 | 21.2 | 0-2 |
| | | | | 1907.5 | 19175 | 20.46 | 21.2 | 0-2 |
| | | 25RB | | 1852.5 | 18625 | 20.17 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.03 | 21.2 | 0-2 |
| | | | | 1907.5 | 19175 | 20.13 | 21.2 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 2 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 5 | 64-QAM | 1 RB | 0 | 1852.5 | 18625 | 20.02 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.15 | 21.2 | 0-2 |
| | | | | 1907.5 | 19175 | 20.00 | 21.2 | 0-2 |
| | | | 12 | 1852.5 | 18625 | 20.15 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.05 | 21.2 | 0-2 |
| | | | | 1907.5 | 19175 | 20.10 | 21.2 | 0-2 |
| | | | 24 | 1852.5 | 18625 | 20.14 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.12 | 21.2 | 0-2 |
| | | | | 1907.5 | 19175 | 20.01 | 21.2 | 0-2 |
| | | 12 RB | 0 | 1852.5 | 18625 | 19.55 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.45 | 20.2 | 0-3 |
| | | | | 1907.5 | 19175 | 19.47 | 20.2 | 0-3 |
| | | | 6 | 1852.5 | 18625 | 19.55 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.58 | 20.2 | 0-3 |
| | | | | 1907.5 | 19175 | 19.62 | 20.2 | 0-3 |
| | | | 13 | 1852.5 | 18625 | 19.65 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.46 | 20.2 | 0-3 |
| | | | | 1907.5 | 19175 | 19.36 | 20.2 | 0-3 |
| | | 25RB | | 1852.5 | 18625 | 19.12 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.08 | 20.2 | 0-3 |
| | | | | 1907.5 | 19175 | 19.10 | 20.2 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 2 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 3 | QPSK | 1 RB | 0 | 1851.5 | 18615 | 22.14 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.17 | 23.2 | 0 |
| | | | | 1908.5 | 19185 | 22.12 | 23.2 | 0 |
| | | | 7 | 1851.5 | 18615 | 22.04 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.18 | 23.2 | 0 |
| | | | | 1908.5 | 19185 | 22.11 | 23.2 | 0 |
| | | | 14 | 1851.5 | 18615 | 22.11 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.17 | 23.2 | 0 |
| | | | | 1908.5 | 19185 | 22.08 | 23.2 | 0 |
| | | 8 RB | 0 | 1851.5 | 18615 | 21.46 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.69 | 22.2 | 0-1 |
| | | | | 1908.5 | 19185 | 21.63 | 22.2 | 0-1 |
| | | | 4 | 1851.5 | 18615 | 21.61 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.58 | 22.2 | 0-1 |
| | | | | 1908.5 | 19185 | 21.59 | 22.2 | 0-1 |
| | | | 7 | 1851.5 | 18615 | 21.59 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.50 | 22.2 | 0-1 |
| | | | | 1908.5 | 19185 | 21.58 | 22.2 | 0-1 |
| | | 15RB | | 1851.5 | 18615 | 21.14 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.07 | 22.2 | 0-1 |
| | | | | 1908.5 | 19185 | 21.14 | 22.2 | 0-1 |
| | 16-QAM | 1 RB | 0 | 1851.5 | 18615 | 21.08 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.00 | 22.2 | 0-1 |
| | | | | 1908.5 | 19185 | 21.14 | 22.2 | 0-1 |
| | | | 7 | 1851.5 | 18615 | 21.19 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.08 | 22.2 | 0-1 |
| | | | | 1908.5 | 19185 | 21.12 | 22.2 | 0-1 |
| | | | 14 | 1851.5 | 18615 | 21.15 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.18 | 22.2 | 0-1 |
| | | | | 1908.5 | 19185 | 21.02 | 22.2 | 0-1 |
| | | 8 RB | 0 | 1851.5 | 18615 | 20.47 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.41 | 21.2 | 0-2 |
| | | | | 1908.5 | 19185 | 20.60 | 21.2 | 0-2 |
| | | | 4 | 1851.5 | 18615 | 20.43 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.55 | 21.2 | 0-2 |
| | | | | 1908.5 | 19185 | 20.54 | 21.2 | 0-2 |
| | | | 7 | 1851.5 | 18615 | 20.64 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.65 | 21.2 | 0-2 |
| | | | | 1908.5 | 19185 | 20.44 | 21.2 | 0-2 |
| | | 15RB | | 1851.5 | 18615 | 20.18 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.15 | 21.2 | 0-2 |
| | | | | 1908.5 | 19185 | 20.01 | 21.2 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 2 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 3 | 64-QAM | 1 RB | 0 | 1851.5 | 18615 | 20.10 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.11 | 21.2 | 0-2 |
| | | | | 1908.5 | 19185 | 20.14 | 21.2 | 0-2 |
| | | | 7 | 1851.5 | 18615 | 20.08 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.04 | 21.2 | 0-2 |
| | | | | 1908.5 | 19185 | 20.08 | 21.2 | 0-2 |
| | | | 14 | 1851.5 | 18615 | 20.10 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.15 | 21.2 | 0-2 |
| | | | | 1908.5 | 19185 | 20.03 | 21.2 | 0-2 |
| | | 8 RB | 0 | 1851.5 | 18615 | 19.67 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.33 | 20.2 | 0-3 |
| | | | | 1908.5 | 19185 | 19.53 | 20.2 | 0-3 |
| | | | 4 | 1851.5 | 18615 | 19.69 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.60 | 20.2 | 0-3 |
| | | | | 1908.5 | 19185 | 19.70 | 20.2 | 0-3 |
| | | | 7 | 1851.5 | 18615 | 19.62 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.56 | 20.2 | 0-3 |
| | | | | 1908.5 | 19185 | 19.57 | 20.2 | 0-3 |
| | | 15RB | | 1851.5 | 18615 | 19.16 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.05 | 20.2 | 0-3 |
| | | | | 1908.5 | 19185 | 19.18 | 20.2 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 2 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 1.4 | QPSK | 1 RB | 0 | 1850.7 | 18607 | 22.16 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.00 | 23.2 | 0 |
| | | | | 1909.3 | 19193 | 22.10 | 23.2 | 0 |
| | | | 2 | 1850.7 | 18607 | 22.04 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.17 | 23.2 | 0 |
| | | | | 1909.3 | 19193 | 22.11 | 23.2 | 0 |
| | | | 5 | 1850.7 | 18607 | 22.06 | 23.2 | 0 |
| | | | | 1880 | 18900 | 22.12 | 23.2 | 0 |
| | | | | 1909.3 | 19193 | 22.10 | 23.2 | 0 |
| | | 3 RB | 0 | 1850.7 | 18607 | 21.89 | 23.2 | 0 |
| | | | | 1880 | 18900 | 21.88 | 23.2 | 0 |
| | | | | 1909.3 | 19193 | 22.00 | 23.2 | 0 |
| | | | 2 | 1850.7 | 18607 | 21.90 | 23.2 | 0 |
| | | | | 1880 | 18900 | 21.85 | 23.2 | 0 |
| | | | | 1909.3 | 19193 | 21.84 | 23.2 | 0 |
| | | | 3 | 1850.7 | 18607 | 21.84 | 23.2 | 0 |
| | | | | 1880 | 18900 | 21.94 | 23.2 | 0 |
| | | | | 1909.3 | 19193 | 21.93 | 23.2 | 0 |
| | | 6RB | | 1850.7 | 18607 | 21.06 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.17 | 22.2 | 0-1 |
| | | | | 1909.3 | 19193 | 21.07 | 22.2 | 0-1 |
| | 16-QAM | 1 RB | 0 | 1850.7 | 18607 | 21.06 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.06 | 22.2 | 0-1 |
| | | | | 1909.3 | 19193 | 21.17 | 22.2 | 0-1 |
| | | | 2 | 1850.7 | 18607 | 21.00 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.16 | 22.2 | 0-1 |
| | | | | 1909.3 | 19193 | 21.08 | 22.2 | 0-1 |
| | | | 5 | 1850.7 | 18607 | 21.13 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 21.04 | 22.2 | 0-1 |
| | | | | 1909.3 | 19193 | 21.18 | 22.2 | 0-1 |
| | | 3 RB | 0 | 1850.7 | 18607 | 20.90 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 20.95 | 22.2 | 0-1 |
| | | | | 1909.3 | 19193 | 20.91 | 22.2 | 0-1 |
| | | | 2 | 1850.7 | 18607 | 20.80 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 20.82 | 22.2 | 0-1 |
| | | | | 1909.3 | 19193 | 20.94 | 22.2 | 0-1 |
| | | | 3 | 1850.7 | 18607 | 20.86 | 22.2 | 0-1 |
| | | | | 1880 | 18900 | 20.85 | 22.2 | 0-1 |
| | | | | 1909.3 | 19193 | 20.99 | 22.2 | 0-1 |
| | | 6RB | | 1850.7 | 18607 | 20.14 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.10 | 21.2 | 0-2 |
| | | | | 1909.3 | 19193 | 20.09 | 21.2 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 2 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 1.4 | 64-QAM | 1 RB | 0 | 1850.7 | 18607 | 20.03 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.14 | 21.2 | 0-2 |
| | | | | 1909.3 | 19193 | 20.01 | 21.2 | 0-2 |
| | | | 2 | 1850.7 | 18607 | 20.18 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.05 | 21.2 | 0-2 |
| | | | | 1909.3 | 19193 | 20.17 | 21.2 | 0-2 |
| | | | 5 | 1850.7 | 18607 | 20.16 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 20.18 | 21.2 | 0-2 |
| | | | | 1909.3 | 19193 | 20.20 | 21.2 | 0-2 |
| | | 3 RB | 0 | 1850.7 | 18607 | 20.00 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 19.83 | 21.2 | 0-2 |
| | | | | 1909.3 | 19193 | 20.00 | 21.2 | 0-2 |
| | | | 2 | 1850.7 | 18607 | 19.89 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 19.84 | 21.2 | 0-2 |
| | | | | 1909.3 | 19193 | 19.88 | 21.2 | 0-2 |
| | | | 3 | 1850.7 | 18607 | 19.90 | 21.2 | 0-2 |
| | | | | 1880 | 18900 | 19.86 | 21.2 | 0-2 |
| | | | | 1909.3 | 19193 | 20.00 | 21.2 | 0-2 |
| | | 6RB | | 1850.7 | 18607 | 19.09 | 20.2 | 0-3 |
| | | | | 1880 | 18900 | 19.07 | 20.2 | 0-3 |
| | | | | 1909.3 | 19193 | 19.20 | 20.2 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 4 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 20 | QPSK | 1 RB | 0 | 1720 | 20050 | 22.02 | 23.2 | 0 |
| | | | | 1732.5 | 20175 | 22.12 | 23.2 | 0 |
| | | | | 1745 | 20300 | 22.10 | 23.2 | 0 |
| | | | 50 | 1720 | 20050 | 22.19 | 23.2 | 0 |
| | | | | 1732.5 | 20175 | 22.17 | 23.2 | 0 |
| | | | | 1745 | 20300 | 22.07 | 23.2 | 0 |
| | | | 99 | 1720 | 20050 | 22.09 | 23.2 | 0 |
| | | | | 1732.5 | 20175 | 22.07 | 23.2 | 0 |
| | | | | 1745 | 20300 | 22.13 | 23.2 | 0 |
| | | 50 RB | 0 | 1720 | 20050 | 21.35 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.55 | 22.2 | 0-1 |
| | | | | 1745 | 20300 | 21.47 | 22.2 | 0-1 |
| | | | 25 | 1720 | 20050 | 21.46 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.48 | 22.2 | 0-1 |
| | | | | 1745 | 20300 | 21.60 | 22.2 | 0-1 |
| | | | 50 | 1720 | 20050 | 21.45 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.48 | 22.2 | 0-1 |
| | | | | 1745 | 20300 | 21.63 | 22.2 | 0-1 |
| | | 100RB | | 1720 | 20050 | 21.00 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.17 | 22.2 | 0-1 |
| | | | | 1745 | 20300 | 21.14 | 22.2 | 0-1 |
| | 16-QAM | 1 RB | 0 | 1720 | 20050 | 21.19 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.19 | 22.2 | 0-1 |
| | | | | 1745 | 20300 | 21.01 | 22.2 | 0-1 |
| | | | 50 | 1720 | 20050 | 21.00 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.11 | 22.2 | 0-1 |
| | | | | 1745 | 20300 | 21.19 | 22.2 | 0-1 |
| | | | 99 | 1720 | 20050 | 21.04 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.10 | 22.2 | 0-1 |
| | | | | 1745 | 20300 | 21.14 | 22.2 | 0-1 |
| | | 50 RB | 0 | 1720 | 20050 | 20.67 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.40 | 21.2 | 0-2 |
| | | | | 1745 | 20300 | 20.39 | 21.2 | 0-2 |
| | | | 25 | 1720 | 20050 | 20.66 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.50 | 21.2 | 0-2 |
| | | | | 1745 | 20300 | 20.55 | 21.2 | 0-2 |
| | | | 50 | 1720 | 20050 | 20.52 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.69 | 21.2 | 0-2 |
| | | | | 1745 | 20300 | 20.44 | 21.2 | 0-2 |
| | | 100RB | | 1720 | 20050 | 20.09 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.15 | 21.2 | 0-2 |
| | | | | 1745 | 20300 | 20.07 | 21.2 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 4 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 20 | 64-QAM | 1 RB | 0 | 1720 | 20050 | 20.10 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.07 | 21.2 | 0-2 |
| | | | | 1745 | 20300 | 20.06 | 21.2 | 0-2 |
| | | | 50 | 1720 | 20050 | 20.02 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.12 | 21.2 | 0-2 |
| | | | | 1745 | 20300 | 20.19 | 21.2 | 0-2 |
| | | | 99 | 1720 | 20050 | 20.18 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.14 | 21.2 | 0-2 |
| | | | | 1745 | 20300 | 20.04 | 21.2 | 0-2 |
| | | 50 RB | 0 | 1720 | 20050 | 19.64 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.70 | 20.2 | 0-3 |
| | | | | 1745 | 20300 | 19.65 | 20.2 | 0-3 |
| | | | 25 | 1720 | 20050 | 19.50 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.66 | 20.2 | 0-3 |
| | | | | 1745 | 20300 | 19.45 | 20.2 | 0-3 |
| | | | 50 | 1720 | 20050 | 19.50 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.60 | 20.2 | 0-3 |
| | | | | 1745 | 20300 | 19.62 | 20.2 | 0-3 |
| | | 100RB | | 1720 | 20050 | 19.09 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.19 | 20.2 | 0-3 |
| | | | | 1745 | 20300 | 19.16 | 20.2 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 4 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 15 | QPSK | 1 RB | 0 | 1717.5 | 20025 | 22.05 | 23.2 | 0 |
| | | | | 1732.5 | 20175 | 22.09 | 23.2 | 0 |
| | | | | 1747.5 | 20325 | 22.05 | 23.2 | 0 |
| | | | 36 | 1717.5 | 20025 | 22.15 | 23.2 | 0 |
| | | | | 1732.5 | 20175 | 22.18 | 23.2 | 0 |
| | | | | 1747.5 | 20325 | 22.01 | 23.2 | 0 |
| | | | 74 | 1717.5 | 20025 | 22.05 | 23.2 | 0 |
| | | | | 1732.5 | 20175 | 22.14 | 23.2 | 0 |
| | | | | 1747.5 | 20325 | 22.17 | 23.2 | 0 |
| | | 36 RB | 0 | 1717.5 | 20025 | 21.58 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.63 | 22.2 | 0-1 |
| | | | | 1747.5 | 20325 | 21.58 | 22.2 | 0-1 |
| | | | 18 | 1717.5 | 20025 | 21.61 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.67 | 22.2 | 0-1 |
| | | | | 1747.5 | 20325 | 21.54 | 22.2 | 0-1 |
| | | | 37 | 1717.5 | 20025 | 21.59 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.41 | 22.2 | 0-1 |
| | | | | 1747.5 | 20325 | 21.39 | 22.2 | 0-1 |
| | | 75RB | | 1717.5 | 20025 | 21.05 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.07 | 22.2 | 0-1 |
| | | | | 1747.5 | 20325 | 21.19 | 22.2 | 0-1 |
| | 16-QAM | 1 RB | 0 | 1717.5 | 20025 | 21.00 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.16 | 22.2 | 0-1 |
| | | | | 1747.5 | 20325 | 21.07 | 22.2 | 0-1 |
| | | | 36 | 1717.5 | 20025 | 21.00 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.18 | 22.2 | 0-1 |
| | | | | 1747.5 | 20325 | 21.11 | 22.2 | 0-1 |
| | | | 74 | 1717.5 | 20025 | 21.17 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.04 | 22.2 | 0-1 |
| | | | | 1747.5 | 20325 | 21.05 | 22.2 | 0-1 |
| | | 36 RB | 0 | 1717.5 | 20025 | 20.49 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.60 | 21.2 | 0-2 |
| | | | | 1747.5 | 20325 | 20.58 | 21.2 | 0-2 |
| | | | 18 | 1717.5 | 20025 | 20.66 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.59 | 21.2 | 0-2 |
| | | | | 1747.5 | 20325 | 20.35 | 21.2 | 0-2 |
| | | | 37 | 1717.5 | 20025 | 20.61 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.64 | 21.2 | 0-2 |
| | | | | 1747.5 | 20325 | 20.41 | 21.2 | 0-2 |
| | | 75RB | | 1717.5 | 20025 | 20.14 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.13 | 21.2 | 0-2 |
| | | | | 1747.5 | 20325 | 20.05 | 21.2 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 4 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 15 | 64-QAM | 1 RB | 0 | 1717.5 | 22.51 | 20.15 | 21.2 | 0-2 |
| | | | | 1732.5 | 22.58 | 20.06 | 21.2 | 0-2 |
| | | | | 1747.5 | 22.77 | 20.07 | 21.2 | 0-2 |
| | | | 36 | 1717.5 | 22.12 | 20.19 | 21.2 | 0-2 |
| | | | | 1732.5 | 22.7 | 20.07 | 21.2 | 0-2 |
| | | | | 1747.5 | 22.44 | 20.10 | 21.2 | 0-2 |
| | | | 74 | 1717.5 | 22.42 | 20.11 | 21.2 | 0-2 |
| | | | | 1732.5 | 22.7 | 20.14 | 21.2 | 0-2 |
| | | | | 1747.5 | 22.73 | 20.13 | 21.2 | 0-2 |
| | | 36 RB | 0 | 1717.5 | 21.22 | 19.50 | 20.2 | 0-3 |
| | | | | 1732.5 | 21.38 | 19.63 | 20.2 | 0-3 |
| | | | | 1747.5 | 21.52 | 19.55 | 20.2 | 0-3 |
| | | | 18 | 1717.5 | 21.24 | 19.60 | 20.2 | 0-3 |
| | | | | 1732.5 | 21.34 | 19.38 | 20.2 | 0-3 |
| | | | | 1747.5 | 21.41 | 19.48 | 20.2 | 0-3 |
| | | | 37 | 1717.5 | 21.25 | 19.58 | 20.2 | 0-3 |
| | | | | 1732.5 | 21.29 | 19.46 | 20.2 | 0-3 |
| | | | | 1747.5 | 21.46 | 19.52 | 20.2 | 0-3 |
| | | 75RB | | 1717.5 | 21.22 | 19.13 | 20.2 | 0-3 |
| | | | | 1732.5 | 21.35 | 19.01 | 20.2 | 0-3 |
| | | | | 1747.5 | 21.43 | 19.09 | 20.2 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 4 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 10 | QPSK | 1 RB | 0 | 1715 | 20000 | 22.15 | 23.2 | 0 |
| | | | | 1732.5 | 20175 | 22.01 | 23.2 | 0 |
| | | | | 1750 | 20350 | 22.15 | 23.2 | 0 |
| | | | 25 | 1715 | 20000 | 22.11 | 23.2 | 0 |
| | | | | 1732.5 | 20175 | 22.13 | 23.2 | 0 |
| | | | | 1750 | 20350 | 22.09 | 23.2 | 0 |
| | | | 49 | 1715 | 20000 | 22.03 | 23.2 | 0 |
| | | | | 1732.5 | 20175 | 22.08 | 23.2 | 0 |
| | | | | 1750 | 20350 | 22.12 | 23.2 | 0 |
| | | 25 RB | 0 | 1715 | 20000 | 21.52 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.49 | 22.2 | 0-1 |
| | | | | 1750 | 20350 | 21.47 | 22.2 | 0-1 |
| | | | 12 | 1715 | 20000 | 21.60 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.45 | 22.2 | 0-1 |
| | | | | 1750 | 20350 | 21.59 | 22.2 | 0-1 |
| | | | 25 | 1715 | 20000 | 21.45 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.55 | 22.2 | 0-1 |
| | | | | 1750 | 20350 | 21.52 | 22.2 | 0-1 |
| | | 50RB | | 1715 | 20000 | 21.13 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.05 | 22.2 | 0-1 |
| | | | | 1750 | 20350 | 21.11 | 22.2 | 0-1 |
| | 16-QAM | 1 RB | 0 | 1715 | 20000 | 21.03 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.08 | 22.2 | 0-1 |
| | | | | 1750 | 20350 | 21.01 | 22.2 | 0-1 |
| | | | 25 | 1715 | 20000 | 21.11 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.08 | 22.2 | 0-1 |
| | | | | 1750 | 20350 | 21.06 | 22.2 | 0-1 |
| | | | 49 | 1715 | 20000 | 21.06 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.12 | 22.2 | 0-1 |
| | | | | 1750 | 20350 | 21.13 | 22.2 | 0-1 |
| | | 25 RB | 0 | 1715 | 20000 | 20.34 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.24 | 21.2 | 0-2 |
| | | | | 1750 | 20350 | 20.35 | 21.2 | 0-2 |
| | | | 12 | 1715 | 20000 | 20.42 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.25 | 21.2 | 0-2 |
| | | | | 1750 | 20350 | 20.21 | 21.2 | 0-2 |
| | | | 25 | 1715 | 20000 | 20.33 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.33 | 21.2 | 0-2 |
| | | | | 1750 | 20350 | 20.25 | 21.2 | 0-2 |
| | | 50RB | | 1715 | 20000 | 20.09 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.20 | 21.2 | 0-2 |
| | | | | 1750 | 20350 | 20.08 | 21.2 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 4 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 10 | 64-QAM | 1 RB | 0 | 1715 | 20000 | 20.20 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.09 | 21.2 | 0-2 |
| | | | | 1750 | 20350 | 20.04 | 21.2 | 0-2 |
| | | | 25 | 1715 | 20000 | 20.02 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.06 | 21.2 | 0-2 |
| | | | | 1750 | 20350 | 20.13 | 21.2 | 0-2 |
| | | | 49 | 1715 | 20000 | 20.16 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.10 | 21.2 | 0-2 |
| | | | | 1750 | 20350 | 20.13 | 21.2 | 0-2 |
| | | 25 RB | 0 | 1715 | 20000 | 19.61 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.62 | 20.2 | 0-3 |
| | | | | 1750 | 20350 | 19.61 | 20.2 | 0-3 |
| | | | 12 | 1715 | 20000 | 19.56 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.64 | 20.2 | 0-3 |
| | | | | 1750 | 20350 | 19.53 | 20.2 | 0-3 |
| | | | 25 | 1715 | 20000 | 19.53 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.53 | 20.2 | 0-3 |
| | | | | 1750 | 20350 | 19.65 | 20.2 | 0-3 |
| | | 50RB | | 1715 | 20000 | 19.16 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.00 | 20.2 | 0-3 |
| | | | | 1750 | 20350 | 19.13 | 20.2 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 4 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 5 | QPSK | 1 RB | 0 | 1712.5 | 19975 | 22.04 | 23.2 | 0 |
| | | | | 1732.5 | 20175 | 22.10 | 23.2 | 0 |
| | | | | 1752.5 | 20375 | 22.16 | 23.2 | 0 |
| | | | 12 | 1712.5 | 19975 | 22.15 | 23.2 | 0 |
| | | | | 1732.5 | 20175 | 22.14 | 23.2 | 0 |
| | | | | 1752.5 | 20375 | 22.19 | 23.2 | 0 |
| | | | 24 | 1712.5 | 19975 | 22.14 | 23.2 | 0 |
| | | | | 1732.5 | 20175 | 22.13 | 23.2 | 0 |
| | | | | 1752.5 | 20375 | 22.11 | 23.2 | 0 |
| | | 12 RB | 0 | 1712.5 | 19975 | 21.62 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.67 | 22.2 | 0-1 |
| | | | | 1752.5 | 20375 | 21.59 | 22.2 | 0-1 |
| | | | 6 | 1712.5 | 19975 | 21.48 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.65 | 22.2 | 0-1 |
| | | | | 1752.5 | 20375 | 21.62 | 22.2 | 0-1 |
| | | | 13 | 1712.5 | 19975 | 21.36 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.56 | 22.2 | 0-1 |
| | | | | 1752.5 | 20375 | 21.52 | 22.2 | 0-1 |
| | | 25RB | | 1712.5 | 19975 | 21.11 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.20 | 22.2 | 0-1 |
| | | | | 1752.5 | 20375 | 21.18 | 22.2 | 0-1 |
| | 16-QAM | 1 RB | 0 | 1712.5 | 19975 | 21.07 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.07 | 22.2 | 0-1 |
| | | | | 1752.5 | 20375 | 21.12 | 22.2 | 0-1 |
| | | | 12 | 1712.5 | 19975 | 21.02 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.10 | 22.2 | 0-1 |
| | | | | 1752.5 | 20375 | 21.05 | 22.2 | 0-1 |
| | | | 24 | 1712.5 | 19975 | 21.04 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.01 | 22.2 | 0-1 |
| | | | | 1752.5 | 20375 | 21.03 | 22.2 | 0-1 |
| | | 12 RB | 0 | 1712.5 | 19975 | 20.57 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.51 | 21.2 | 0-2 |
| | | | | 1752.5 | 20375 | 20.55 | 21.2 | 0-2 |
| | | | 6 | 1712.5 | 19975 | 20.57 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.68 | 21.2 | 0-2 |
| | | | | 1752.5 | 20375 | 20.49 | 21.2 | 0-2 |
| | | | 13 | 1712.5 | 19975 | 20.43 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.46 | 21.2 | 0-2 |
| | | | | 1752.5 | 20375 | 20.55 | 21.2 | 0-2 |
| | | 25RB | | 1712.5 | 19975 | 20.02 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.13 | 21.2 | 0-2 |
| | | | | 1752.5 | 20375 | 20.06 | 21.2 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 4 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 5 | 64-QAM | 1 RB | 0 | 1712.5 | 19975 | 20.11 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.13 | 21.2 | 0-2 |
| | | | | 1752.5 | 20375 | 20.18 | 21.2 | 0-2 |
| | | | 12 | 1712.5 | 19975 | 20.14 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.17 | 21.2 | 0-2 |
| | | | | 1752.5 | 20375 | 20.14 | 21.2 | 0-2 |
| | | | 24 | 1712.5 | 19975 | 20.06 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.07 | 21.2 | 0-2 |
| | | | | 1752.5 | 20375 | 20.12 | 21.2 | 0-2 |
| | | 12 RB | 0 | 1712.5 | 19975 | 19.68 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.48 | 20.2 | 0-3 |
| | | | | 1752.5 | 20375 | 19.64 | 20.2 | 0-3 |
| | | | 6 | 1712.5 | 19975 | 19.59 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.61 | 20.2 | 0-3 |
| | | | | 1752.5 | 20375 | 19.50 | 20.2 | 0-3 |
| | | | 13 | 1712.5 | 19975 | 19.57 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.62 | 20.2 | 0-3 |
| | | | | 1752.5 | 20375 | 19.63 | 20.2 | 0-3 |
| | | 25RB | | 1712.5 | 19975 | 19.17 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.05 | 20.2 | 0-3 |
| | | | | 1752.5 | 20375 | 19.18 | 20.2 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 4 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 3 | QPSK | 1 RB | 0 | 1711.5 | 19965 | 22.13 | 23.2 | 0 |
| | | | | 1732.5 | 20175 | 22.03 | 23.2 | 0 |
| | | | | 1753.5 | 20385 | 22.03 | 23.2 | 0 |
| | | | 7 | 1711.5 | 19965 | 22.10 | 23.2 | 0 |
| | | | | 1732.5 | 20175 | 22.17 | 23.2 | 0 |
| | | | | 1753.5 | 20385 | 22.11 | 23.2 | 0 |
| | | | 14 | 1711.5 | 19965 | 22.02 | 23.2 | 0 |
| | | | | 1732.5 | 20175 | 22.16 | 23.2 | 0 |
| | | | | 1753.5 | 20385 | 22.03 | 23.2 | 0 |
| | | 8 RB | 0 | 1711.5 | 19965 | 21.56 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.68 | 22.2 | 0-1 |
| | | | | 1753.5 | 20385 | 21.53 | 22.2 | 0-1 |
| | | | 4 | 1711.5 | 19965 | 21.51 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.63 | 22.2 | 0-1 |
| | | | | 1753.5 | 20385 | 21.37 | 22.2 | 0-1 |
| | | | 7 | 1711.5 | 19965 | 21.38 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.52 | 22.2 | 0-1 |
| | | | | 1753.5 | 20385 | 21.38 | 22.2 | 0-1 |
| | | 15RB | | 1711.5 | 19965 | 21.09 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.19 | 22.2 | 0-1 |
| | | | | 1753.5 | 20385 | 21.09 | 22.2 | 0-1 |
| | 16-QAM | 1 RB | 0 | 1711.5 | 19965 | 21.08 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.08 | 22.2 | 0-1 |
| | | | | 1753.5 | 20385 | 21.06 | 22.2 | 0-1 |
| | | | 7 | 1711.5 | 19965 | 21.02 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.06 | 22.2 | 0-1 |
| | | | | 1753.5 | 20385 | 21.02 | 22.2 | 0-1 |
| | | | 14 | 1711.5 | 19965 | 21.16 | 22.2 | 0-1 |
| | | | | 1732.5 | 20175 | 21.01 | 22.2 | 0-1 |
| | | | | 1753.5 | 20385 | 21.06 | 22.2 | 0-1 |
| | | 8 RB | 0 | 1711.5 | 19965 | 20.52 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.50 | 21.2 | 0-2 |
| | | | | 1753.5 | 20385 | 20.60 | 21.2 | 0-2 |
| | | | 4 | 1711.5 | 19965 | 20.53 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.36 | 21.2 | 0-2 |
| | | | | 1753.5 | 20385 | 20.63 | 21.2 | 0-2 |
| | | | 7 | 1711.5 | 19965 | 20.39 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.68 | 21.2 | 0-2 |
| | | | | 1753.5 | 20385 | 20.42 | 21.2 | 0-2 |
| | | 15RB | | 1711.5 | 19965 | 20.08 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.02 | 21.2 | 0-2 |
| | | | | 1753.5 | 20385 | 20.14 | 21.2 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 4 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 3 | 64-QAM | 1 RB | 0 | 1711.5 | 19965 | 20.11 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.19 | 21.2 | 0-2 |
| | | | | 1753.5 | 20385 | 20.16 | 21.2 | 0-2 |
| | | | 7 | 1711.5 | 19965 | 20.14 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.00 | 21.2 | 0-2 |
| | | | | 1753.5 | 20385 | 20.14 | 21.2 | 0-2 |
| | | | 14 | 1711.5 | 19965 | 20.14 | 21.2 | 0-2 |
| | | | | 1732.5 | 20175 | 20.13 | 21.2 | 0-2 |
| | | | | 1753.5 | 20385 | 20.19 | 21.2 | 0-2 |
| | | 8 RB | 0 | 1711.5 | 19965 | 19.48 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.46 | 20.2 | 0-3 |
| | | | | 1753.5 | 20385 | 19.48 | 20.2 | 0-3 |
| | | | 4 | 1711.5 | 19965 | 19.45 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.43 | 20.2 | 0-3 |
| | | | | 1753.5 | 20385 | 19.47 | 20.2 | 0-3 |
| | | | 7 | 1711.5 | 19965 | 19.50 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.60 | 20.2 | 0-3 |
| | | | | 1753.5 | 20385 | 19.62 | 20.2 | 0-3 |
| | | 15RB | | 1711.5 | 19965 | 19.03 | 20.2 | 0-3 |
| | | | | 1732.5 | 20175 | 19.19 | 20.2 | 0-3 |
| | | | | 1753.5 | 20385 | 19.04 | 20.2 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 5 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 10 | QPSK | 1 RB | 0 | 829 | 20450 | 23.92 | 25 | 0 |
| | | | | 836.5 | 20525 | 23.98 | 25 | 0 |
| | | | | 844 | 20600 | 23.91 | 25 | 0 |
| | | | 25 | 829 | 20450 | 23.85 | 25 | 0 |
| | | | | 836.5 | 20525 | 23.99 | 25 | 0 |
| | | | | 844 | 20600 | 23.82 | 25 | 0 |
| | | | 49 | 829 | 20450 | 23.92 | 25 | 0 |
| | | | | 836.5 | 20525 | 23.87 | 25 | 0 |
| | | | | 844 | 20600 | 23.84 | 25 | 0 |
| | | 25 RB | 0 | 829 | 20450 | 23.19 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 23.19 | 24 | 0-1 |
| | | | | 844 | 20600 | 23.47 | 24 | 0-1 |
| | | | 12 | 829 | 20450 | 23.47 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 23.29 | 24 | 0-1 |
| | | | | 844 | 20600 | 23.43 | 24 | 0-1 |
| | | | 25 | 829 | 20450 | 23.41 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 23.37 | 24 | 0-1 |
| | | | | 844 | 20600 | 23.46 | 24 | 0-1 |
| | | 50RB | | 829 | 20450 | 22.94 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.88 | 24 | 0-1 |
| | | | | 844 | 20600 | 22.90 | 24 | 0-1 |
| | 16-QAM | 1 RB | 0 | 829 | 20450 | 22.95 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.88 | 24 | 0-1 |
| | | | | 844 | 20600 | 22.87 | 24 | 0-1 |
| | | | 25 | 829 | 20450 | 22.86 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.86 | 24 | 0-1 |
| | | | | 844 | 20600 | 22.88 | 24 | 0-1 |
| | | | 49 | 829 | 20450 | 22.91 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.92 | 24 | 0-1 |
| | | | | 844 | 20600 | 22.80 | 24 | 0-1 |
| | | 25 RB | 0 | 829 | 20450 | 22.35 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 22.14 | 23 | 0-2 |
| | | | | 844 | 20600 | 22.26 | 23 | 0-2 |
| | | | 12 | 829 | 20450 | 22.49 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 22.42 | 23 | 0-2 |
| | | | | 844 | 20600 | 22.26 | 23 | 0-2 |
| | | | 25 | 829 | 20450 | 22.14 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 22.46 | 23 | 0-2 |
| | | | | 844 | 20600 | 22.22 | 23 | 0-2 |
| | | 500RB | | 829 | 20450 | 21.97 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.99 | 23 | 0-2 |
| | | | | 844 | 20600 | 21.95 | 23 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 5 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 10 | 64-QAM | 1 RB | 0 | 829 | 20450 | 21.91 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.83 | 23 | 0-2 |
| | | | | 844 | 20600 | 21.81 | 23 | 0-2 |
| | | | 25 | 829 | 20450 | 21.99 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.96 | 23 | 0-2 |
| | | | | 844 | 20600 | 21.88 | 23 | 0-2 |
| | | | 49 | 829 | 20450 | 21.97 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.83 | 23 | 0-2 |
| | | | | 844 | 20600 | 21.87 | 23 | 0-2 |
| | | 25 RB | 0 | 829 | 20450 | 21.38 | 22 | 0-3 |
| | | | | 836.5 | 20525 | 21.20 | 22 | 0-3 |
| | | | | 844 | 20600 | 21.42 | 22 | 0-3 |
| | | | 12 | 829 | 20450 | 21.41 | 22 | 0-3 |
| | | | | 836.5 | 20525 | 21.29 | 22 | 0-3 |
| | | | | 844 | 20600 | 21.39 | 22 | 0-3 |
| | | | 25 | 829 | 20450 | 21.24 | 22 | 0-3 |
| | | | | 836.5 | 20525 | 21.25 | 22 | 0-3 |
| | | | | 844 | 20600 | 21.29 | 22 | 0-3 |
| | | 500RB | | 829 | 20450 | 20.91 | 22 | 0-3 |
| | | | | 836.5 | 20525 | 20.96 | 22 | 0-3 |
| | | | | 844 | 20600 | 20.92 | 22 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 5 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 5 | QPSK | 1 RB | 0 | 826.5 | 20425 | 23.89 | 25 | 0 |
| | | | | 836.5 | 20525 | 23.88 | 25 | 0 |
| | | | | 846.5 | 20625 | 23.89 | 25 | 0 |
| | | | 12 | 826.5 | 20425 | 23.82 | 25 | 0 |
| | | | | 836.5 | 20525 | 23.94 | 25 | 0 |
| | | | | 846.5 | 20625 | 23.82 | 25 | 0 |
| | | | 24 | 826.5 | 20425 | 23.93 | 25 | 0 |
| | | | | 836.5 | 20525 | 23.92 | 25 | 0 |
| | | | | 846.5 | 20625 | 23.96 | 25 | 0 |
| | | 12 RB | 0 | 826.5 | 20425 | 23.43 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 23.23 | 24 | 0-1 |
| | | | | 846.5 | 20625 | 23.16 | 24 | 0-1 |
| | | | 6 | 826.5 | 20425 | 23.38 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 23.33 | 24 | 0-1 |
| | | | | 846.5 | 20625 | 23.40 | 24 | 0-1 |
| | | | 13 | 826.5 | 20425 | 23.25 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 23.45 | 24 | 0-1 |
| | | | | 846.5 | 20625 | 23.28 | 24 | 0-1 |
| | | 25RB | | 826.5 | 20425 | 23.00 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.83 | 24 | 0-1 |
| | | | | 846.5 | 20625 | 22.98 | 24 | 0-1 |
| | 16-QAM | 1 RB | 0 | 826.5 | 20425 | 22.99 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.90 | 24 | 0-1 |
| | | | | 846.5 | 20625 | 23.00 | 24 | 0-1 |
| | | | 12 | 826.5 | 20425 | 22.92 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.90 | 24 | 0-1 |
| | | | | 846.5 | 20625 | 22.91 | 24 | 0-1 |
| | | | 24 | 826.5 | 20425 | 22.90 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.96 | 24 | 0-1 |
| | | | | 846.5 | 20625 | 22.93 | 24 | 0-1 |
| | | 12 RB | 0 | 826.5 | 20425 | 22.22 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 22.23 | 23 | 0-2 |
| | | | | 846.5 | 20625 | 22.30 | 23 | 0-2 |
| | | | 6 | 826.5 | 20425 | 22.41 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 22.25 | 23 | 0-2 |
| | | | | 846.5 | 20625 | 22.23 | 23 | 0-2 |
| | | | 13 | 826.5 | 20425 | 22.24 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 22.33 | 23 | 0-2 |
| | | | | 846.5 | 20625 | 22.49 | 23 | 0-2 |
| | | 25RB | | 826.5 | 20425 | 21.97 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.91 | 23 | 0-2 |
| | | | | 846.5 | 20625 | 21.86 | 23 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 5 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 5 | 64-QAM | 1 RB | 0 | 826.5 | 20425 | 21.89 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.89 | 23 | 0-2 |
| | | | | 846.5 | 20625 | 21.83 | 23 | 0-2 |
| | | | 12 | 826.5 | 20425 | 21.94 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.87 | 23 | 0-2 |
| | | | | 846.5 | 20625 | 21.88 | 23 | 0-2 |
| | | | 24 | 826.5 | 20425 | 21.84 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.99 | 23 | 0-2 |
| | | | | 846.5 | 20625 | 21.91 | 23 | 0-2 |
| | | 12 RB | 0 | 826.5 | 20425 | 21.35 | 22 | 0-3 |
| | | | | 836.5 | 20525 | 21.33 | 22 | 0-3 |
| | | | | 846.5 | 20625 | 21.31 | 22 | 0-3 |
| | | | 6 | 826.5 | 20425 | 21.24 | 22 | 0-3 |
| | | | | 836.5 | 20525 | 21.47 | 22 | 0-3 |
| | | | | 846.5 | 20625 | 21.50 | 22 | 0-3 |
| | | | 13 | 826.5 | 20425 | 21.22 | 22 | 0-3 |
| | | | | 836.5 | 20525 | 21.34 | 22 | 0-3 |
| | | | | 846.5 | 20625 | 21.28 | 22 | 0-3 |
| | | 25RB | | 826.5 | 20425 | 20.82 | 22 | 0-3 |
| | | | | 836.5 | 20525 | 20.81 | 22 | 0-3 |
| | | | | 846.5 | 20625 | 20.87 | 22 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 5 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 3 | QPSK | 1 RB | 0 | 825.5 | 20415 | 23.85 | 25 | 0 |
| | | | | 836.5 | 20525 | 23.87 | 25 | 0 |
| | | | | 847.5 | 20635 | 23.90 | 25 | 0 |
| | | | 7 | 825.5 | 20415 | 23.92 | 25 | 0 |
| | | | | 836.5 | 20525 | 23.94 | 25 | 0 |
| | | | | 847.5 | 20635 | 23.85 | 25 | 0 |
| | | | 14 | 825.5 | 20415 | 23.85 | 25 | 0 |
| | | | | 836.5 | 20525 | 23.80 | 25 | 0 |
| | | | | 847.5 | 20635 | 23.83 | 25 | 0 |
| | | 8 RB | 0 | 825.5 | 20415 | 23.39 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 23.41 | 24 | 0-1 |
| | | | | 847.5 | 20635 | 23.34 | 24 | 0-1 |
| | | | 4 | 825.5 | 20415 | 23.27 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 23.43 | 24 | 0-1 |
| | | | | 847.5 | 20635 | 23.33 | 24 | 0-1 |
| | | | 7 | 825.5 | 20415 | 23.18 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 23.16 | 24 | 0-1 |
| | | | | 847.5 | 20635 | 23.40 | 24 | 0-1 |
| | | 15RB | | 825.5 | 20415 | 22.93 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.82 | 24 | 0-1 |
| | | | | 847.5 | 20635 | 22.86 | 24 | 0-1 |
| | 16-QAM | 1 RB | 0 | 825.5 | 20415 | 22.91 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.89 | 24 | 0-1 |
| | | | | 847.5 | 20635 | 22.92 | 24 | 0-1 |
| | | | 7 | 825.5 | 20415 | 22.94 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.98 | 24 | 0-1 |
| | | | | 847.5 | 20635 | 22.98 | 24 | 0-1 |
| | | | 14 | 825.5 | 20415 | 22.82 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.90 | 24 | 0-1 |
| | | | | 847.5 | 20635 | 22.82 | 24 | 0-1 |
| | | 8 RB | 0 | 825.5 | 20415 | 22.33 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 22.50 | 23 | 0-2 |
| | | | | 847.5 | 20635 | 22.35 | 23 | 0-2 |
| | | | 4 | 825.5 | 20415 | 22.34 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 22.37 | 23 | 0-2 |
| | | | | 847.5 | 20635 | 22.39 | 23 | 0-2 |
| | | | 7 | 825.5 | 20415 | 22.43 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 22.36 | 23 | 0-2 |
| | | | | 847.5 | 20635 | 22.36 | 23 | 0-2 |
| | | 15RB | | 825.5 | 20415 | 21.95 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.93 | 23 | 0-2 |
| | | | | 847.5 | 20635 | 21.91 | 23 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 5 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 3 | 64-QAM | 1 RB | 0 | 825.5 | 20415 | 21.87 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.82 | 23 | 0-2 |
| | | | | 847.5 | 20635 | 21.84 | 23 | 0-2 |
| | | | 7 | 825.5 | 20415 | 22.00 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.81 | 23 | 0-2 |
| | | | | 847.5 | 20635 | 21.98 | 23 | 0-2 |
| | | | 14 | 825.5 | 20415 | 21.89 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.95 | 23 | 0-2 |
| | | | | 847.5 | 20635 | 21.97 | 23 | 0-2 |
| | | 8 RB | 0 | 825.5 | 20415 | 21.38 | 22 | 0-3 |
| | | | | 836.5 | 20525 | 21.44 | 22 | 0-3 |
| | | | | 847.5 | 20635 | 21.39 | 22 | 0-3 |
| | | | 4 | 825.5 | 20415 | 21.43 | 22 | 0-3 |
| | | | | 836.5 | 20525 | 21.38 | 22 | 0-3 |
| | | | | 847.5 | 20635 | 21.39 | 22 | 0-3 |
| | | | 7 | 825.5 | 20415 | 21.34 | 22 | 0-3 |
| | | | | 836.5 | 20525 | 21.41 | 22 | 0-3 |
| | | | | 847.5 | 20635 | 21.23 | 22 | 0-3 |
| | | 15RB | | 825.5 | 20415 | 20.89 | 22 | 0-3 |
| | | | | 836.5 | 20525 | 20.97 | 22 | 0-3 |
| | | | | 847.5 | 20635 | 20.90 | 22 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 5 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 1.4 | QPSK | 1 RB | 0 | 824.7 | 20407 | 23.98 | 25 | 0 |
| | | | | 836.5 | 20525 | 23.86 | 25 | 0 |
| | | | | 848.3 | 20643 | 23.87 | 25 | 0 |
| | | | 2 | 824.7 | 20407 | 23.83 | 25 | 0 |
| | | | | 836.5 | 20525 | 23.89 | 25 | 0 |
| | | | | 848.3 | 20643 | 23.93 | 25 | 0 |
| | | | 5 | 824.7 | 20407 | 23.81 | 25 | 0 |
| | | | | 836.5 | 20525 | 23.84 | 25 | 0 |
| | | | | 848.3 | 20643 | 23.98 | 25 | 0 |
| | | 3 RB | 0 | 824.7 | 20407 | 23.75 | 25 | 0 |
| | | | | 836.5 | 20525 | 23.63 | 25 | 0 |
| | | | | 848.3 | 20643 | 23.79 | 25 | 0 |
| | | | 2 | 824.7 | 20407 | 23.70 | 25 | 0 |
| | | | | 836.5 | 20525 | 23.72 | 25 | 0 |
| | | | | 848.3 | 20643 | 23.62 | 25 | 0 |
| | | | 3 | 824.7 | 20407 | 23.69 | 25 | 0 |
| | | | | 836.5 | 20525 | 23.75 | 25 | 0 |
| | | | | 848.3 | 20643 | 23.79 | 25 | 0 |
| | | 6RB | | 824.7 | 20407 | 22.84 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.93 | 24 | 0-1 |
| | | | | 848.3 | 20643 | 22.88 | 24 | 0-1 |
| | 16-QAM | 1 RB | 0 | 824.7 | 20407 | 22.91 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.94 | 24 | 0-1 |
| | | | | 848.3 | 20643 | 22.84 | 24 | 0-1 |
| | | | 2 | 824.7 | 20407 | 22.88 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.80 | 24 | 0-1 |
| | | | | 848.3 | 20643 | 22.94 | 24 | 0-1 |
| | | | 5 | 824.7 | 20407 | 22.82 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.98 | 24 | 0-1 |
| | | | | 848.3 | 20643 | 22.96 | 24 | 0-1 |
| | | 3 RB | 0 | 824.7 | 20407 | 22.75 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.72 | 24 | 0-1 |
| | | | | 848.3 | 20643 | 22.80 | 24 | 0-1 |
| | | | 2 | 824.7 | 20407 | 22.71 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.77 | 24 | 0-1 |
| | | | | 848.3 | 20643 | 22.66 | 24 | 0-1 |
| | | | 3 | 824.7 | 20407 | 22.79 | 24 | 0-1 |
| | | | | 836.5 | 20525 | 22.79 | 24 | 0-1 |
| | | | | 848.3 | 20643 | 22.71 | 24 | 0-1 |
| | | 6RB | | 824.7 | 20407 | 21.80 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.92 | 23 | 0-2 |
| | | | | 848.3 | 20643 | 21.84 | 23 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 5 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 1.4 | 64-QAM | 1 RB | 0 | 824.7 | 20407 | 21.99 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.88 | 23 | 0-2 |
| | | | | 848.3 | 20643 | 21.90 | 23 | 0-2 |
| | | | 2 | 824.7 | 20407 | 21.91 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.93 | 23 | 0-2 |
| | | | | 848.3 | 20643 | 21.98 | 23 | 0-2 |
| | | | 5 | 824.7 | 20407 | 21.93 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.94 | 23 | 0-2 |
| | | | | 848.3 | 20643 | 21.91 | 23 | 0-2 |
| | | 3 RB | 0 | 824.7 | 20407 | 21.66 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.70 | 23 | 0-2 |
| | | | | 848.3 | 20643 | 21.61 | 23 | 0-2 |
| | | | 2 | 824.7 | 20407 | 21.62 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.77 | 23 | 0-2 |
| | | | | 848.3 | 20643 | 21.78 | 23 | 0-2 |
| | | | 3 | 824.7 | 20407 | 21.80 | 23 | 0-2 |
| | | | | 836.5 | 20525 | 21.60 | 23 | 0-2 |
| | | | | 848.3 | 20643 | 21.70 | 23 | 0-2 |
| | | 6RB | | 824.7 | 20407 | 20.96 | 22 | 0-3 |
| | | | | 836.5 | 20525 | 20.88 | 22 | 0-3 |
| | | | | 848.3 | 20643 | 20.84 | 22 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 12 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 10 | QPSK | 1 RB | 0 | 704 | 23060 | 22.89 | 24 | 0 |
| | | | | 707.5 | 23095 | 22.82 | 24 | 0 |
| | | | | 711 | 23130 | 22.98 | 24 | 0 |
| | | | 25 | 704 | 23060 | 22.90 | 24 | 0 |
| | | | | 707.5 | 23095 | 22.86 | 24 | 0 |
| | | | | 711 | 23130 | 22.92 | 24 | 0 |
| | | | 49 | 704 | 23060 | 22.88 | 24 | 0 |
| | | | | 707.5 | 23095 | 22.84 | 24 | 0 |
| | | | | 711 | 23130 | 22.98 | 24 | 0 |
| | | 25 RB | 0 | 704 | 23060 | 22.35 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 22.42 | 23 | 0-1 |
| | | | | 711 | 23130 | 22.36 | 23 | 0-1 |
| | | | 12 | 704 | 23060 | 22.32 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 22.29 | 23 | 0-1 |
| | | | | 711 | 23130 | 22.42 | 23 | 0-1 |
| | | | 25 | 704 | 23060 | 22.36 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 22.33 | 23 | 0-1 |
| | | | | 711 | 23130 | 22.48 | 23 | 0-1 |
| | | 50RB | | 704 | 23060 | 22.00 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.89 | 23 | 0-1 |
| | | | | 711 | 23130 | 21.99 | 23 | 0-1 |
| | 16-QAM | 1 RB | 0 | 704 | 23060 | 21.94 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.88 | 23 | 0-1 |
| | | | | 711 | 23130 | 21.86 | 23 | 0-1 |
| | | | 25 | 704 | 23060 | 21.83 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.98 | 23 | 0-1 |
| | | | | 711 | 23130 | 21.94 | 23 | 0-1 |
| | | | 49 | 704 | 23060 | 21.85 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.96 | 23 | 0-1 |
| | | | | 711 | 23130 | 21.89 | 23 | 0-1 |
| | | 25 RB | 0 | 704 | 23060 | 21.19 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 21.25 | 22 | 0-2 |
| | | | | 711 | 23130 | 21.50 | 22 | 0-2 |
| | | | 12 | 704 | 23060 | 21.39 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 21.42 | 22 | 0-2 |
| | | | | 711 | 23130 | 21.35 | 22 | 0-2 |
| | | | 25 | 704 | 23060 | 21.40 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 21.18 | 22 | 0-2 |
| | | | | 711 | 23130 | 21.20 | 22 | 0-2 |
| | | 50RB | | 704 | 23060 | 20.85 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.94 | 22 | 0-2 |
| | | | | 711 | 23130 | 20.91 | 22 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 12 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 10 | 64-QAM | 1 RB | 0 | 704 | 23060 | 20.87 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.91 | 22 | 0-2 |
| | | | | 711 | 23130 | 20.86 | 22 | 0-2 |
| | | | 25 | 704 | 23060 | 20.83 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.90 | 22 | 0-2 |
| | | | | 711 | 23130 | 20.92 | 22 | 0-2 |
| | | | 49 | 704 | 23060 | 21.00 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.81 | 22 | 0-2 |
| | | | | 711 | 23130 | 20.88 | 22 | 0-2 |
| | | 25 RB | 0 | 704 | 23060 | 20.46 | 21 | 0-3 |
| | | | | 707.5 | 23095 | 20.38 | 21 | 0-3 |
| | | | | 711 | 23130 | 20.30 | 21 | 0-3 |
| | | | 12 | 704 | 23060 | 20.37 | 21 | 0-3 |
| | | | | 707.5 | 23095 | 20.33 | 21 | 0-3 |
| | | | | 711 | 23130 | 20.47 | 21 | 0-3 |
| | | | 25 | 704 | 23060 | 20.33 | 21 | 0-3 |
| | | | | 707.5 | 23095 | 20.23 | 21 | 0-3 |
| | | | | 711 | 23130 | 20.37 | 21 | 0-3 |
| | | 50RB | | 704 | 23060 | 19.94 | 21 | 0-3 |
| | | | | 707.5 | 23095 | 19.99 | 21 | 0-3 |
| | | | | 711 | 23130 | 19.96 | 21 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 12 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 5 | QPSK | 1 RB | 0 | 701.5 | 23035 | 22.92 | 24 | 0 |
| | | | | 707.5 | 23095 | 22.91 | 24 | 0 |
| | | | | 713.5 | 23155 | 22.86 | 24 | 0 |
| | | | 12 | 701.5 | 23035 | 22.91 | 24 | 0 |
| | | | | 707.5 | 23095 | 22.94 | 24 | 0 |
| | | | | 713.5 | 23155 | 22.94 | 24 | 0 |
| | | | 24 | 701.5 | 23035 | 22.95 | 24 | 0 |
| | | | | 707.5 | 23095 | 22.83 | 24 | 0 |
| | | | | 713.5 | 23155 | 22.85 | 24 | 0 |
| | | 12 RB | 0 | 701.5 | 23035 | 22.49 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 22.44 | 23 | 0-1 |
| | | | | 713.5 | 23155 | 22.47 | 23 | 0-1 |
| | | | 6 | 701.5 | 23035 | 22.35 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 22.45 | 23 | 0-1 |
| | | | | 713.5 | 23155 | 22.23 | 23 | 0-1 |
| | | | 13 | 701.5 | 23035 | 22.34 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 22.40 | 23 | 0-1 |
| | | | | 713.5 | 23155 | 22.36 | 23 | 0-1 |
| | | 25RB | | 701.5 | 23035 | 21.87 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.84 | 23 | 0-1 |
| | | | | 713.5 | 23155 | 21.88 | 23 | 0-1 |
| | 16-QAM | 1 RB | 0 | 701.5 | 23035 | 21.84 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.80 | 23 | 0-1 |
| | | | | 713.5 | 23155 | 21.90 | 23 | 0-1 |
| | | | 12 | 701.5 | 23035 | 21.85 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.89 | 23 | 0-1 |
| | | | | 713.5 | 23155 | 21.95 | 23 | 0-1 |
| | | | 24 | 701.5 | 23035 | 21.84 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.91 | 23 | 0-1 |
| | | | | 713.5 | 23155 | 21.88 | 23 | 0-1 |
| | | 12 RB | 0 | 701.5 | 23035 | 21.48 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 21.39 | 22 | 0-2 |
| | | | | 713.5 | 23155 | 21.32 | 22 | 0-2 |
| | | | 6 | 701.5 | 23035 | 21.26 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 21.47 | 22 | 0-2 |
| | | | | 713.5 | 23155 | 21.24 | 22 | 0-2 |
| | | | 13 | 701.5 | 23035 | 21.43 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 21.23 | 22 | 0-2 |
| | | | | 713.5 | 23155 | 21.33 | 22 | 0-2 |
| | | 25RB | | 701.5 | 23035 | 20.89 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.82 | 22 | 0-2 |
| | | | | 713.5 | 23155 | 20.95 | 22 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 12 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 5 | 64-QAM | 1 RB | 0 | 701.5 | 23035 | 20.94 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.97 | 22 | 0-2 |
| | | | | 713.5 | 23155 | 20.93 | 22 | 0-2 |
| | | | 12 | 701.5 | 23035 | 20.84 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.95 | 22 | 0-2 |
| | | | | 713.5 | 23155 | 20.95 | 22 | 0-2 |
| | | | 24 | 701.5 | 23035 | 20.96 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.99 | 22 | 0-2 |
| | | | | 713.5 | 23155 | 20.85 | 22 | 0-2 |
| | | 12 RB | 0 | 701.5 | 23035 | 20.30 | 21 | 0-3 |
| | | | | 707.5 | 23095 | 20.32 | 21 | 0-3 |
| | | | | 713.5 | 23155 | 20.50 | 21 | 0-3 |
| | | | 6 | 701.5 | 23035 | 20.35 | 21 | 0-3 |
| | | | | 707.5 | 23095 | 20.26 | 21 | 0-3 |
| | | | | 713.5 | 23155 | 20.20 | 21 | 0-3 |
| | | | 13 | 701.5 | 23035 | 20.14 | 21 | 0-3 |
| | | | | 707.5 | 23095 | 20.29 | 21 | 0-3 |
| | | | | 713.5 | 23155 | 20.43 | 21 | 0-3 |
| | | 25RB | | 701.5 | 23035 | 19.91 | 21 | 0-3 |
| | | | | 707.5 | 23095 | 19.88 | 21 | 0-3 |
| | | | | 713.5 | 23155 | 19.91 | 21 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 12 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 3 | QPSK | 1 RB | 0 | 700.5 | 23025 | 22.94 | 24 | 0 |
| | | | | 707.5 | 23095 | 22.97 | 24 | 0 |
| | | | | 714.5 | 23165 | 22.93 | 24 | 0 |
| | | | 7 | 700.5 | 23025 | 22.86 | 24 | 0 |
| | | | | 707.5 | 23095 | 22.83 | 24 | 0 |
| | | | | 714.5 | 23165 | 22.83 | 24 | 0 |
| | | | 14 | 700.5 | 23025 | 22.85 | 24 | 0 |
| | | | | 707.5 | 23095 | 22.96 | 24 | 0 |
| | | | | 714.5 | 23165 | 22.96 | 24 | 0 |
| | | 8 RB | 0 | 700.5 | 23025 | 22.41 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 22.46 | 23 | 0-1 |
| | | | | 714.5 | 23165 | 22.25 | 23 | 0-1 |
| | | | 4 | 700.5 | 23025 | 22.33 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 22.33 | 23 | 0-1 |
| | | | | 714.5 | 23165 | 22.46 | 23 | 0-1 |
| | | | 7 | 700.5 | 23025 | 22.35 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 22.31 | 23 | 0-1 |
| | | | | 714.5 | 23165 | 22.44 | 23 | 0-1 |
| | | 15RB | | 700.5 | 23025 | 21.80 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.85 | 23 | 0-1 |
| | | | | 714.5 | 23165 | 21.94 | 23 | 0-1 |
| | 16-QAM | 1 RB | 0 | 700.5 | 23025 | 21.82 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.98 | 23 | 0-1 |
| | | | | 714.5 | 23165 | 21.98 | 23 | 0-1 |
| | | | 7 | 700.5 | 23025 | 21.83 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.86 | 23 | 0-1 |
| | | | | 714.5 | 23165 | 21.87 | 23 | 0-1 |
| | | | 14 | 700.5 | 23025 | 21.82 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.89 | 23 | 0-1 |
| | | | | 714.5 | 23165 | 21.96 | 23 | 0-1 |
| | | 8 RB | 0 | 700.5 | 23025 | 21.35 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 21.36 | 22 | 0-2 |
| | | | | 714.5 | 23165 | 21.27 | 22 | 0-2 |
| | | | 4 | 700.5 | 23025 | 21.20 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 21.29 | 22 | 0-2 |
| | | | | 714.5 | 23165 | 21.41 | 22 | 0-2 |
| | | | 7 | 700.5 | 23025 | 21.33 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 21.42 | 22 | 0-2 |
| | | | | 714.5 | 23165 | 21.42 | 22 | 0-2 |
| | | 15RB | | 700.5 | 23025 | 20.82 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.81 | 22 | 0-2 |
| | | | | 714.5 | 23165 | 20.83 | 22 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 12 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 3 | 64-QAM | 1 RB | 0 | 700.5 | 23025 | 20.93 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.98 | 22 | 0-2 |
| | | | | 714.5 | 23165 | 20.91 | 22 | 0-2 |
| | | | 7 | 700.5 | 23025 | 20.82 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.95 | 22 | 0-2 |
| | | | | 714.5 | 23165 | 20.88 | 22 | 0-2 |
| | | | 14 | 700.5 | 23025 | 20.84 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.94 | 22 | 0-2 |
| | | | | 714.5 | 23165 | 20.81 | 22 | 0-2 |
| | | 8 RB | 0 | 700.5 | 23025 | 20.37 | 21 | 0-3 |
| | | | | 707.5 | 23095 | 20.31 | 21 | 0-3 |
| | | | | 714.5 | 23165 | 20.29 | 21 | 0-3 |
| | | | 4 | 700.5 | 23025 | 20.35 | 21 | 0-3 |
| | | | | 707.5 | 23095 | 20.19 | 21 | 0-3 |
| | | | | 714.5 | 23165 | 20.47 | 21 | 0-3 |
| | | | 7 | 700.5 | 23025 | 20.44 | 21 | 0-3 |
| | | | | 707.5 | 23095 | 20.28 | 21 | 0-3 |
| | | | | 714.5 | 23165 | 20.32 | 21 | 0-3 |
| | | 15RB | | 700.5 | 23025 | 19.95 | 21 | 0-3 |
| | | | | 707.5 | 23095 | 19.95 | 21 | 0-3 |
| | | | | 714.5 | 23165 | 19.93 | 21 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 12 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 1.4 | QPSK | 1 RB | 0 | 699.7 | 23017 | 22.82 | 24 | 0 |
| | | | | 707.5 | 23095 | 22.84 | 24 | 0 |
| | | | | 715.3 | 23173 | 22.89 | 24 | 0 |
| | | | 2 | 699.7 | 23017 | 22.92 | 24 | 0 |
| | | | | 707.5 | 23095 | 22.91 | 24 | 0 |
| | | | | 715.3 | 23173 | 22.94 | 24 | 0 |
| | | | 5 | 699.7 | 23017 | 22.84 | 24 | 0 |
| | | | | 707.5 | 23095 | 22.95 | 24 | 0 |
| | | | | 715.3 | 23173 | 22.96 | 24 | 0 |
| | | 3 RB | 0 | 699.7 | 23017 | 22.71 | 24 | 0 |
| | | | | 707.5 | 23095 | 22.63 | 24 | 0 |
| | | | | 715.3 | 23173 | 22.62 | 24 | 0 |
| | | | 2 | 699.7 | 23017 | 22.79 | 24 | 0 |
| | | | | 707.5 | 23095 | 22.74 | 24 | 0 |
| | | | | 715.3 | 23173 | 22.69 | 24 | 0 |
| | | | 3 | 699.7 | 23017 | 22.64 | 24 | 0 |
| | | | | 707.5 | 23095 | 22.62 | 24 | 0 |
| | | | | 715.3 | 23173 | 22.71 | 24 | 0 |
| | | 6RB | | 699.7 | 23017 | 21.91 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.94 | 23 | 0-1 |
| | | | | 715.3 | 23173 | 21.89 | 23 | 0-1 |
| | 16-QAM | 1 RB | 0 | 699.7 | 23017 | 21.85 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.88 | 23 | 0-1 |
| | | | | 715.3 | 23173 | 21.90 | 23 | 0-1 |
| | | | 2 | 699.7 | 23017 | 21.85 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.97 | 23 | 0-1 |
| | | | | 715.3 | 23173 | 22.00 | 23 | 0-1 |
| | | | 5 | 699.7 | 23017 | 21.93 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.94 | 23 | 0-1 |
| | | | | 715.3 | 23173 | 21.85 | 23 | 0-1 |
| | | 3 RB | 0 | 699.7 | 23017 | 21.78 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.79 | 23 | 0-1 |
| | | | | 715.3 | 23173 | 21.71 | 23 | 0-1 |
| | | | 2 | 699.7 | 23017 | 21.77 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.72 | 23 | 0-1 |
| | | | | 715.3 | 23173 | 21.68 | 23 | 0-1 |
| | | | 3 | 699.7 | 23017 | 21.69 | 23 | 0-1 |
| | | | | 707.5 | 23095 | 21.65 | 23 | 0-1 |
| | | | | 715.3 | 23173 | 21.76 | 23 | 0-1 |
| | | 6RB | | 699.7 | 23017 | 20.93 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.91 | 22 | 0-2 |
| | | | | 715.3 | 23173 | 20.80 | 22 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 12 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 1.4 | 64-QAM | 1 RB | 0 | 699.7 | 23017 | 20.92 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.91 | 22 | 0-2 |
| | | | | 715.3 | 23173 | 20.81 | 22 | 0-2 |
| | | | 2 | 699.7 | 23017 | 20.93 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.93 | 22 | 0-2 |
| | | | | 715.3 | 23173 | 20.87 | 22 | 0-2 |
| | | | 5 | 699.7 | 23017 | 20.85 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.93 | 22 | 0-2 |
| | | | | 715.3 | 23173 | 20.99 | 22 | 0-2 |
| | | 3 RB | 0 | 699.7 | 23017 | 20.80 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.64 | 22 | 0-2 |
| | | | | 715.3 | 23173 | 20.62 | 22 | 0-2 |
| | | | 2 | 699.7 | 23017 | 20.79 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.76 | 22 | 0-2 |
| | | | | 715.3 | 23173 | 20.60 | 22 | 0-2 |
| | | | 3 | 699.7 | 23017 | 20.73 | 22 | 0-2 |
| | | | | 707.5 | 23095 | 20.66 | 22 | 0-2 |
| | | | | 715.3 | 23173 | 20.78 | 22 | 0-2 |
| | | 6RB | | 699.7 | 23017 | 19.87 | 21 | 0-3 |
| | | | | 707.5 | 23095 | 19.99 | 21 | 0-3 |
| | | | | 715.3 | 23173 | 20.00 | 21 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 13 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 10 | QPSK | 1 RB | 0 | 782 | 23230 | 22.96 | 24 | 0 |
| | | | 25 | 782 | 23230 | 22.99 | 24 | 0 |
| | | | 49 | 782 | 23230 | 22.87 | 24 | 0 |
| | | 25 RB | 0 | 782 | 23230 | 22.40 | 23 | 0-1 |
| | | | 12 | 782 | 23230 | 22.41 | 23 | 0-1 |
| | | | 25 | 782 | 23230 | 22.47 | 23 | 0-1 |
| | | 50RB | | 782 | 23230 | 21.86 | 23 | 0-1 |
| | 16-QAM | 1 RB | 0 | 782 | 23230 | 21.94 | 23 | 0-1 |
| | | | 25 | 782 | 23230 | 21.94 | 23 | 0-1 |
| | | | 49 | 782 | 23230 | 21.80 | 23 | 0-1 |
| | | 25 RB | 0 | 782 | 23230 | 21.16 | 22 | 0-2 |
| | | | 12 | 782 | 23230 | 21.22 | 22 | 0-2 |
| | | | 25 | 782 | 23230 | 21.36 | 22 | 0-2 |
| | | 50RB | | 782 | 23230 | 20.62 | 22 | 0-2 |
| | 64-QAM | 1 RB | 0 | 782 | 23230 | 20.68 | 22 | 0-2 |
| | | | 25 | 782 | 23230 | 20.64 | 22 | 0-2 |
| | | | 49 | 782 | 23230 | 20.67 | 22 | 0-2 |
| | | 25 RB | 0 | 782 | 23230 | 20.42 | 21 | 0-3 |
| | | | 12 | 782 | 23230 | 20.36 | 21 | 0-3 |
| | | | 25 | 782 | 23230 | 20.44 | 21 | 0-3 |
| | | 50RB | | 782 | 23230 | 19.89 | 21 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 13 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 5 | QPSK | 1 RB | 0 | 779.5 | 23205 | 22.81 | 24 | 0 |
| | | | | 782 | 23230 | 22.89 | 24 | 0 |
| | | | | 784.5 | 23255 | 22.87 | 24 | 0 |
| | | | 12 | 779.5 | 23205 | 22.83 | 24 | 0 |
| | | | | 782 | 23230 | 22.91 | 24 | 0 |
| | | | | 784.5 | 23255 | 22.82 | 24 | 0 |
| | | | 24 | 779.5 | 23205 | 22.94 | 24 | 0 |
| | | | | 782 | 23230 | 22.83 | 24 | 0 |
| | | | | 784.5 | 23255 | 22.90 | 24 | 0 |
| | | 12 RB | 0 | 779.5 | 23205 | 22.33 | 23 | 0-1 |
| | | | | 782 | 23230 | 22.29 | 23 | 0-1 |
| | | | | 784.5 | 23255 | 22.38 | 23 | 0-1 |
| | | | 6 | 779.5 | 23205 | 22.42 | 23 | 0-1 |
| | | | | 782 | 23230 | 22.49 | 23 | 0-1 |
| | | | | 784.5 | 23255 | 22.32 | 23 | 0-1 |
| | | | 13 | 779.5 | 23205 | 22.46 | 23 | 0-1 |
| | | | | 782 | 23230 | 22.36 | 23 | 0-1 |
| | | | | 784.5 | 23255 | 22.21 | 23 | 0-1 |
| | | 25RB | | 779.5 | 23205 | 21.84 | 23 | 0-1 |
| | | | | 782 | 23230 | 21.88 | 23 | 0-1 |
| | | | | 784.5 | 23255 | 21.84 | 23 | 0-1 |
| | 16-QAM | 1 RB | 0 | 779.5 | 23205 | 21.99 | 23 | 0-1 |
| | | | | 782 | 23230 | 21.86 | 23 | 0-1 |
| | | | | 784.5 | 23255 | 21.87 | 23 | 0-1 |
| | | | 12 | 779.5 | 23205 | 21.81 | 23 | 0-1 |
| | | | | 782 | 23230 | 21.99 | 23 | 0-1 |
| | | | | 784.5 | 23255 | 21.81 | 23 | 0-1 |
| | | | 24 | 779.5 | 23205 | 21.91 | 23 | 0-1 |
| | | | | 782 | 23230 | 21.86 | 23 | 0-1 |
| | | | | 784.5 | 23255 | 21.99 | 23 | 0-1 |
| | | 12 RB | 0 | 779.5 | 23205 | 21.32 | 22 | 0-2 |
| | | | | 782 | 23230 | 21.44 | 22 | 0-2 |
| | | | | 784.5 | 23255 | 21.47 | 22 | 0-2 |
| | | | 6 | 779.5 | 23205 | 21.24 | 22 | 0-2 |
| | | | | 782 | 23230 | 21.42 | 22 | 0-2 |
| | | | | 784.5 | 23255 | 21.40 | 22 | 0-2 |
| | | | 13 | 779.5 | 23205 | 21.30 | 22 | 0-2 |
| | | | | 782 | 23230 | 21.49 | 22 | 0-2 |
| | | | | 784.5 | 23255 | 21.37 | 22 | 0-2 |
| | | 25RB | | 779.5 | 23205 | 20.93 | 22 | 0-2 |
| | | | | 782 | 23230 | 20.85 | 22 | 0-2 |
| | | | | 784.5 | 23255 | 20.81 | 22 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 13 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 5 | 64-QAM | 1 RB | 0 | 779.5 | 23205 | 20.99 | 22 | 0-2 |
| | | | | 782 | 23230 | 20.95 | 22 | 0-2 |
| | | | | 784.5 | 23255 | 20.97 | 22 | 0-2 |
| | | | 12 | 779.5 | 23205 | 20.94 | 22 | 0-2 |
| | | | | 782 | 23230 | 20.90 | 22 | 0-2 |
| | | | | 784.5 | 23255 | 20.94 | 22 | 0-2 |
| | | | 24 | 779.5 | 23205 | 20.99 | 22 | 0-2 |
| | | | | 782 | 23230 | 20.91 | 22 | 0-2 |
| | | | | 784.5 | 23255 | 20.96 | 22 | 0-2 |
| | | 12 RB | 0 | 779.5 | 23205 | 20.28 | 21 | 0-3 |
| | | | | 782 | 23230 | 20.36 | 21 | 0-3 |
| | | | | 784.5 | 23255 | 20.31 | 21 | 0-3 |
| | | | 6 | 779.5 | 23205 | 20.41 | 21 | 0-3 |
| | | | | 782 | 23230 | 20.39 | 21 | 0-3 |
| | | | | 784.5 | 23255 | 20.37 | 21 | 0-3 |
| | | | 13 | 779.5 | 23205 | 20.21 | 21 | 0-3 |
| | | | | 782 | 23230 | 20.29 | 21 | 0-3 |
| | | | | 784.5 | 23255 | 20.32 | 21 | 0-3 |
| | | 25RB | | 779.5 | 23205 | 19.93 | 21 | 0-3 |
| | | | | 782 | 23230 | 19.93 | 21 | 0-3 |
| | | | | 784.5 | 23255 | 19.81 | 21 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 17 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 10 | QPSK | 1 RB | 0 | 709 | 23780 | 22.91 | 24 | 0 |
| | | | | 710 | 23790 | 22.98 | 24 | 0 |
| | | | | 711 | 23800 | 22.92 | 24 | 0 |
| | | | 25 | 709 | 23780 | 22.83 | 24 | 0 |
| | | | | 710 | 23790 | 22.90 | 24 | 0 |
| | | | | 711 | 23800 | 22.86 | 24 | 0 |
| | | | 49 | 709 | 23780 | 22.97 | 24 | 0 |
| | | | | 710 | 23790 | 22.82 | 24 | 0 |
| | | | | 711 | 23800 | 22.97 | 24 | 0 |
| | | 25 RB | 0 | 709 | 23780 | 22.40 | 23 | 0-1 |
| | | | | 710 | 23790 | 22.47 | 23 | 0-1 |
| | | | | 711 | 23800 | 22.43 | 23 | 0-1 |
| | | | 12 | 709 | 23780 | 22.37 | 23 | 0-1 |
| | | | | 710 | 23790 | 22.37 | 23 | 0-1 |
| | | | | 711 | 23800 | 22.29 | 23 | 0-1 |
| | | | 25 | 709 | 23780 | 22.39 | 23 | 0-1 |
| | | | | 710 | 23790 | 22.38 | 23 | 0-1 |
| | | | | 711 | 23800 | 22.42 | 23 | 0-1 |
| | | 50RB | | 709 | 23780 | 21.83 | 23 | 0-1 |
| | | | | 710 | 23790 | 21.83 | 23 | 0-1 |
| | | | | 711 | 23800 | 21.95 | 23 | 0-1 |
| | 16-QAM | 1 RB | 0 | 709 | 23780 | 21.91 | 23 | 0-1 |
| | | | | 710 | 23790 | 21.99 | 23 | 0-1 |
| | | | | 711 | 23800 | 21.84 | 23 | 0-1 |
| | | | 25 | 709 | 23780 | 21.84 | 23 | 0-1 |
| | | | | 710 | 23790 | 21.89 | 23 | 0-1 |
| | | | | 711 | 23800 | 21.84 | 23 | 0-1 |
| | | | 49 | 709 | 23780 | 21.93 | 23 | 0-1 |
| | | | | 710 | 23790 | 21.86 | 23 | 0-1 |
| | | | | 711 | 23800 | 21.97 | 23 | 0-1 |
| | | 25 RB | 0 | 709 | 23780 | 21.42 | 22 | 0-2 |
| | | | | 710 | 23790 | 21.37 | 22 | 0-2 |
| | | | | 711 | 23800 | 21.26 | 22 | 0-2 |
| | | | 12 | 709 | 23780 | 21.40 | 22 | 0-2 |
| | | | | 710 | 23790 | 21.40 | 22 | 0-2 |
| | | | | 711 | 23800 | 21.49 | 22 | 0-2 |
| | | | 25 | 709 | 23780 | 21.39 | 22 | 0-2 |
| | | | | 710 | 23790 | 21.32 | 22 | 0-2 |
| | | | | 711 | 23800 | 21.18 | 22 | 0-2 |
| | | 50RB | | 709 | 23780 | 20.91 | 22 | 0-2 |
| | | | | 710 | 23790 | 20.97 | 22 | 0-2 |
| | | | | 711 | 23800 | 20.88 | 22 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 17 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 10 | 64-QAM | 1 RB | 0 | 709 | 23780 | 20.88 | 22 | 0-2 |
| | | | | 710 | 23790 | 20.85 | 22 | 0-2 |
| | | | | 711 | 23800 | 20.85 | 22 | 0-2 |
| | | | 25 | 709 | 23780 | 20.90 | 22 | 0-2 |
| | | | | 710 | 23790 | 20.91 | 22 | 0-2 |
| | | | | 711 | 23800 | 20.81 | 22 | 0-2 |
| | | | 49 | 709 | 23780 | 20.94 | 22 | 0-2 |
| | | | | 710 | 23790 | 20.98 | 22 | 0-2 |
| | | | | 711 | 23800 | 21.00 | 22 | 0-2 |
| | | 25 RB | 0 | 709 | 23780 | 20.24 | 21 | 0-3 |
| | | | | 710 | 23790 | 20.29 | 21 | 0-3 |
| | | | | 711 | 23800 | 20.21 | 21 | 0-3 |
| | | | 12 | 709 | 23780 | 20.43 | 21 | 0-3 |
| | | | | 710 | 23790 | 20.29 | 21 | 0-3 |
| | | | | 711 | 23800 | 20.50 | 21 | 0-3 |
| | | | 25 | 709 | 23780 | 20.39 | 21 | 0-3 |
| | | | | 710 | 23790 | 20.42 | 21 | 0-3 |
| | | | | 711 | 23800 | 20.35 | 21 | 0-3 |
| | | 50RB | | 709 | 23780 | 19.82 | 21 | 0-3 |
| | | | | 710 | 23790 | 19.87 | 21 | 0-3 |
| | | | | 711 | 23800 | 19.80 | 21 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 17 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 5 | QPSK | 1 RB | 0 | 706.5 | 23755 | 22.80 | 24 | 0 |
| | | | | 710 | 23790 | 22.81 | 24 | 0 |
| | | | | 713.5 | 23825 | 22.88 | 24 | 0 |
| | | | 12 | 706.5 | 23755 | 22.95 | 24 | 0 |
| | | | | 710 | 23790 | 22.91 | 24 | 0 |
| | | | | 713.5 | 23825 | 22.90 | 24 | 0 |
| | | | 24 | 706.5 | 23755 | 22.82 | 24 | 0 |
| | | | | 710 | 23790 | 22.80 | 24 | 0 |
| | | | | 713.5 | 23825 | 22.91 | 24 | 0 |
| | | 12 RB | 0 | 706.5 | 23755 | 22.30 | 23 | 0-1 |
| | | | | 710 | 23790 | 22.24 | 23 | 0-1 |
| | | | | 713.5 | 23825 | 22.36 | 23 | 0-1 |
| | | | 6 | 706.5 | 23755 | 22.48 | 23 | 0-1 |
| | | | | 710 | 23790 | 22.40 | 23 | 0-1 |
| | | | | 713.5 | 23825 | 22.37 | 23 | 0-1 |
| | | | 13 | 706.5 | 23755 | 22.28 | 23 | 0-1 |
| | | | | 710 | 23790 | 22.30 | 23 | 0-1 |
| | | | | 713.5 | 23825 | 22.41 | 23 | 0-1 |
| | | 25RB | | 706.5 | 23755 | 21.82 | 23 | 0-1 |
| | | | | 710 | 23790 | 21.89 | 23 | 0-1 |
| | | | | 713.5 | 23825 | 21.88 | 23 | 0-1 |
| | 16-QAM | 1 RB | 0 | 706.5 | 23755 | 21.95 | 23 | 0-1 |
| | | | | 710 | 23790 | 21.88 | 23 | 0-1 |
| | | | | 713.5 | 23825 | 21.88 | 23 | 0-1 |
| | | | 12 | 706.5 | 23755 | 21.87 | 23 | 0-1 |
| | | | | 710 | 23790 | 21.98 | 23 | 0-1 |
| | | | | 713.5 | 23825 | 21.92 | 23 | 0-1 |
| | | | 24 | 706.5 | 23755 | 21.83 | 23 | 0-1 |
| | | | | 710 | 23790 | 21.91 | 23 | 0-1 |
| | | | | 713.5 | 23825 | 21.89 | 23 | 0-1 |
| | | 12 RB | 0 | 706.5 | 23755 | 21.42 | 22 | 0-2 |
| | | | | 710 | 23790 | 21.39 | 22 | 0-2 |
| | | | | 713.5 | 23825 | 21.30 | 22 | 0-2 |
| | | | 6 | 706.5 | 23755 | 21.40 | 22 | 0-2 |
| | | | | 710 | 23790 | 21.14 | 22 | 0-2 |
| | | | | 713.5 | 23825 | 21.39 | 22 | 0-2 |
| | | | 13 | 706.5 | 23755 | 21.48 | 22 | 0-2 |
| | | | | 710 | 23790 | 21.30 | 22 | 0-2 |
| | | | | 713.5 | 23825 | 21.39 | 22 | 0-2 |
| | | 25RB | | 706.5 | 23755 | 20.82 | 22 | 0-2 |
| | | | | 710 | 23790 | 20.84 | 22 | 0-2 |
| | | | | 713.5 | 23825 | 20.87 | 22 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| FDD Band 17 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 5 | 64-QAM | 1 RB | 0 | 706.5 | 23755 | 20.87 | 22 | 0-2 |
| | | | | 710 | 23790 | 20.88 | 22 | 0-2 |
| | | | | 713.5 | 23825 | 20.88 | 22 | 0-2 |
| | | | 12 | 706.5 | 23755 | 20.86 | 22 | 0-2 |
| | | | | 710 | 23790 | 20.93 | 22 | 0-2 |
| | | | | 713.5 | 23825 | 20.90 | 22 | 0-2 |
| | | | 24 | 706.5 | 23755 | 20.99 | 22 | 0-2 |
| | | | | 710 | 23790 | 20.99 | 22 | 0-2 |
| | | | | 713.5 | 23825 | 20.96 | 22 | 0-2 |
| | | 12 RB | 0 | 706.5 | 23755 | 20.29 | 21 | 0-3 |
| | | | | 710 | 23790 | 20.37 | 21 | 0-3 |
| | | | | 713.5 | 23825 | 20.38 | 21 | 0-3 |
| | | | 6 | 706.5 | 23755 | 20.38 | 21 | 0-3 |
| | | | | 710 | 23790 | 20.29 | 21 | 0-3 |
| | | | | 713.5 | 23825 | 20.43 | 21 | 0-3 |
| | | | 13 | 706.5 | 23755 | 20.49 | 21 | 0-3 |
| | | | | 710 | 23790 | 20.28 | 21 | 0-3 |
| | | | | 713.5 | 23825 | 20.25 | 21 | 0-3 |
| | | 25RB | | 706.5 | 23755 | 19.86 | 21 | 0-3 |
| | | | | 710 | 23790 | 19.82 | 21 | 0-3 |
| | | | | 713.5 | 23825 | 19.90 | 21 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| TDD Band 38 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 20 | QPSK | 1 RB | 0 | 2580 | 37850 | 22.90 | 24 | 0 |
| | | | | 2595 | 38000 | 22.99 | 24 | 0 |
| | | | | 2610 | 38150 | 22.91 | 24 | 0 |
| | | | 50 | 2580 | 37850 | 22.86 | 24 | 0 |
| | | | | 2595 | 38000 | 22.97 | 24 | 0 |
| | | | | 2610 | 38150 | 22.89 | 24 | 0 |
| | | | 99 | 2580 | 37850 | 22.97 | 24 | 0 |
| | | | | 2595 | 38000 | 22.98 | 24 | 0 |
| | | | | 2610 | 38150 | 22.99 | 24 | 0 |
| | | 50 RB | 0 | 2580 | 37850 | 22.37 | 23 | 0-1 |
| | | | | 2595 | 38000 | 22.46 | 23 | 0-1 |
| | | | | 2610 | 38150 | 22.39 | 23 | 0-1 |
| | | | 25 | 2580 | 37850 | 22.41 | 23 | 0-1 |
| | | | | 2595 | 38000 | 22.29 | 23 | 0-1 |
| | | | | 2610 | 38150 | 22.49 | 23 | 0-1 |
| | | | 50 | 2580 | 37850 | 22.19 | 23 | 0-1 |
| | | | | 2595 | 38000 | 22.17 | 23 | 0-1 |
| | | | | 2610 | 38150 | 22.24 | 23 | 0-1 |
| | | 100RB | | 2580 | 37850 | 21.84 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.94 | 23 | 0-1 |
| | | | | 2610 | 38150 | 21.80 | 23 | 0-1 |
| | 16-QAM | 1 RB | 0 | 2580 | 37850 | 21.97 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.86 | 23 | 0-1 |
| | | | | 2610 | 38150 | 21.83 | 23 | 0-1 |
| | | | 50 | 2580 | 37850 | 21.82 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.81 | 23 | 0-1 |
| | | | | 2610 | 38150 | 21.98 | 23 | 0-1 |
| | | | 99 | 2580 | 37850 | 21.90 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.91 | 23 | 0-1 |
| | | | | 2610 | 38150 | 21.87 | 23 | 0-1 |
| | | 50 RB | 0 | 2580 | 37850 | 21.40 | 22 | 0-2 |
| | | | | 2595 | 38000 | 21.30 | 22 | 0-2 |
| | | | | 2610 | 38150 | 21.36 | 22 | 0-2 |
| | | | 25 | 2580 | 37850 | 21.30 | 22 | 0-2 |
| | | | | 2595 | 38000 | 21.21 | 22 | 0-2 |
| | | | | 2610 | 38150 | 21.33 | 22 | 0-2 |
| | | | 50 | 2580 | 37850 | 21.47 | 22 | 0-2 |
| | | | | 2595 | 38000 | 21.41 | 22 | 0-2 |
| | | | | 2610 | 38150 | 21.22 | 22 | 0-2 |
| | | 100RB | | 2580 | 37850 | 20.85 | 22 | 0-2 |
| | | | | 2595 | 38000 | 20.83 | 22 | 0-2 |
| | | | | 2610 | 38150 | 20.82 | 22 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| TDD Band 38 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 20 | 64-QAM | 1 RB | 0 | 2580 | 37850 | 20.95 | 22 | 0-2 |
| | | | | 2595 | 38000 | 20.82 | 22 | 0-2 |
| | | | | 2610 | 38150 | 20.84 | 22 | 0-2 |
| | | | 50 | 2580 | 37850 | 20.84 | 22 | 0-2 |
| | | | | 2595 | 38000 | 20.91 | 22 | 0-2 |
| | | | | 2610 | 38150 | 20.98 | 22 | 0-2 |
| | | | 99 | 2580 | 37850 | 20.96 | 22 | 0-2 |
| | | | | 2595 | 38000 | 20.90 | 22 | 0-2 |
| | | | | 2610 | 38150 | 20.83 | 22 | 0-2 |
| | | 50 RB | 0 | 2580 | 37850 | 20.22 | 21 | 0-3 |
| | | | | 2595 | 38000 | 20.42 | 21 | 0-3 |
| | | | | 2610 | 38150 | 20.40 | 21 | 0-3 |
| | | | 25 | 2580 | 37850 | 20.22 | 21 | 0-3 |
| | | | | 2595 | 38000 | 20.27 | 21 | 0-3 |
| | | | | 2610 | 38150 | 20.34 | 21 | 0-3 |
| | | | 50 | 2580 | 37850 | 20.41 | 21 | 0-3 |
| | | | | 2595 | 38000 | 20.40 | 21 | 0-3 |
| | | | | 2610 | 38150 | 20.30 | 21 | 0-3 |
| | | 100RB | | 2580 | 37850 | 19.87 | 21 | 0-3 |
| | | | | 2595 | 38000 | 19.97 | 21 | 0-3 |
| | | | | 2610 | 38150 | 19.80 | 21 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| TDD Band 38 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 15 | QPSK | 1 RB | 0 | 2577.5 | 37825 | 22.89 | 24 | 0 |
| | | | | 2595 | 38000 | 22.94 | 24 | 0 |
| | | | | 2612.5 | 38175 | 22.91 | 24 | 0 |
| | | | 36 | 2577.5 | 37825 | 22.84 | 24 | 0 |
| | | | | 2595 | 38000 | 22.95 | 24 | 0 |
| | | | | 2612.5 | 38175 | 22.96 | 24 | 0 |
| | | | 74 | 2577.5 | 37825 | 22.91 | 24 | 0 |
| | | | | 2595 | 38000 | 22.87 | 24 | 0 |
| | | | | 2612.5 | 38175 | 22.96 | 24 | 0 |
| | | 36 RB | 0 | 2577.5 | 37825 | 22.40 | 23 | 0-1 |
| | | | | 2595 | 38000 | 22.41 | 23 | 0-1 |
| | | | | 2612.5 | 38175 | 22.38 | 23 | 0-1 |
| | | | 18 | 2577.5 | 37825 | 22.39 | 23 | 0-1 |
| | | | | 2595 | 38000 | 22.41 | 23 | 0-1 |
| | | | | 2612.5 | 38175 | 22.43 | 23 | 0-1 |
| | | | 37 | 2577.5 | 37825 | 22.40 | 23 | 0-1 |
| | | | | 2595 | 38000 | 22.36 | 23 | 0-1 |
| | | | | 2612.5 | 38175 | 22.32 | 23 | 0-1 |
| | | 75RB | | 2577.5 | 37825 | 21.90 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.85 | 23 | 0-1 |
| | | | | 2612.5 | 38175 | 21.81 | 23 | 0-1 |
| | 16-QAM | 1 RB | 0 | 2577.5 | 37825 | 21.93 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.87 | 23 | 0-1 |
| | | | | 2612.5 | 38175 | 21.83 | 23 | 0-1 |
| | | | 36 | 2577.5 | 37825 | 21.82 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.81 | 23 | 0-1 |
| | | | | 2612.5 | 38175 | 21.85 | 23 | 0-1 |
| | | | 74 | 2577.5 | 37825 | 21.90 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.84 | 23 | 0-1 |
| | | | | 2612.5 | 38175 | 21.98 | 23 | 0-1 |
| | | 36 RB | 0 | 2577.5 | 37825 | 21.26 | 22 | 0-2 |
| | | | | 2595 | 38000 | 21.21 | 22 | 0-2 |
| | | | | 2612.5 | 38175 | 21.23 | 22 | 0-2 |
| | | | 18 | 2577.5 | 37825 | 21.32 | 22 | 0-2 |
| | | | | 2595 | 38000 | 21.17 | 22 | 0-2 |
| | | | | 2612.5 | 38175 | 21.30 | 22 | 0-2 |
| | | | 37 | 2577.5 | 37825 | 21.25 | 22 | 0-2 |
| | | | | 2595 | 38000 | 21.50 | 22 | 0-2 |
| | | | | 2612.5 | 38175 | 21.42 | 22 | 0-2 |
| | | 75RB | | 2577.5 | 37825 | 20.91 | 22 | 0-2 |
| | | | | 2595 | 38000 | 20.98 | 22 | 0-2 |
| | | | | 2612.5 | 38175 | 20.81 | 22 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| TDD Band 38 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 15 | 64-QAM | 1 RB | 0 | 2577.5 | 37825 | 20.95 | 22 | 0-2 |
| | | | | 2595 | 38000 | 20.88 | 22 | 0-2 |
| | | | | 2612.5 | 38175 | 20.98 | 22 | 0-2 |
| | | | 36 | 2577.5 | 37825 | 20.83 | 22 | 0-2 |
| | | | | 2595 | 38000 | 20.90 | 22 | 0-2 |
| | | | | 2612.5 | 38175 | 20.87 | 22 | 0-2 |
| | | | 74 | 2577.5 | 37825 | 20.99 | 22 | 0-2 |
| | | | | 2595 | 38000 | 21.00 | 22 | 0-2 |
| | | | | 2612.5 | 38175 | 20.86 | 22 | 0-2 |
| | | 36 RB | 0 | 2577.5 | 37825 | 20.43 | 21 | 0-3 |
| | | | | 2595 | 38000 | 20.45 | 21 | 0-3 |
| | | | | 2612.5 | 38175 | 20.42 | 21 | 0-3 |
| | | | 18 | 2577.5 | 37825 | 20.28 | 21 | 0-3 |
| | | | | 2595 | 38000 | 20.32 | 21 | 0-3 |
| | | | | 2612.5 | 38175 | 20.31 | 21 | 0-3 |
| | | | 37 | 2577.5 | 37825 | 20.23 | 21 | 0-3 |
| | | | | 2595 | 38000 | 20.22 | 21 | 0-3 |
| | | | | 2612.5 | 38175 | 20.41 | 21 | 0-3 |
| | | 75RB | | 2577.5 | 37825 | 19.92 | 21 | 0-3 |
| | | | | 2595 | 38000 | 19.90 | 21 | 0-3 |
| | | | | 2612.5 | 38175 | 19.99 | 21 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| TDD Band 38 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 10 | QPSK | 1 RB | 0 | 2575 | 37800 | 22.90 | 24 | 0 |
| | | | | 2595 | 38000 | 22.80 | 24 | 0 |
| | | | | 2615 | 38200 | 22.81 | 24 | 0 |
| | | | 25 | 2575 | 37800 | 22.92 | 24 | 0 |
| | | | | 2595 | 38000 | 22.81 | 24 | 0 |
| | | | | 2615 | 38200 | 22.93 | 24 | 0 |
| | | | 49 | 2575 | 37800 | 22.87 | 24 | 0 |
| | | | | 2595 | 38000 | 22.88 | 24 | 0 |
| | | | | 2615 | 38200 | 22.98 | 24 | 0 |
| | | 25 RB | 0 | 2575 | 37800 | 22.19 | 23 | 0-1 |
| | | | | 2595 | 38000 | 22.14 | 23 | 0-1 |
| | | | | 2615 | 38200 | 22.30 | 23 | 0-1 |
| | | | 12 | 2575 | 37800 | 22.39 | 23 | 0-1 |
| | | | | 2595 | 38000 | 22.34 | 23 | 0-1 |
| | | | | 2615 | 38200 | 22.33 | 23 | 0-1 |
| | | | 25 | 2575 | 37800 | 22.49 | 23 | 0-1 |
| | | | | 2595 | 38000 | 22.32 | 23 | 0-1 |
| | | | | 2615 | 38200 | 22.47 | 23 | 0-1 |
| | | 50RB | | 2575 | 37800 | 21.90 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.82 | 23 | 0-1 |
| | | | | 2615 | 38200 | 21.94 | 23 | 0-1 |
| | 16-QAM | 1 RB | 0 | 2575 | 37800 | 21.86 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.87 | 23 | 0-1 |
| | | | | 2615 | 38200 | 21.93 | 23 | 0-1 |
| | | | 25 | 2575 | 37800 | 21.87 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.81 | 23 | 0-1 |
| | | | | 2615 | 38200 | 21.87 | 23 | 0-1 |
| | | | 49 | 2575 | 37800 | 21.97 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.82 | 23 | 0-1 |
| | | | | 2615 | 38200 | 21.81 | 23 | 0-1 |
| | | 25 RB | 0 | 2575 | 37800 | 21.41 | 22 | 0-2 |
| | | | | 2595 | 38000 | 21.40 | 22 | 0-2 |
| | | | | 2615 | 38200 | 21.28 | 22 | 0-2 |
| | | | 12 | 2575 | 37800 | 21.50 | 22 | 0-2 |
| | | | | 2595 | 38000 | 21.38 | 22 | 0-2 |
| | | | | 2615 | 38200 | 21.36 | 22 | 0-2 |
| | | | 25 | 2575 | 37800 | 21.31 | 22 | 0-2 |
| | | | | 2595 | 38000 | 21.16 | 22 | 0-2 |
| | | | | 2615 | 38200 | 21.27 | 22 | 0-2 |
| | | 50RB | | 2575 | 37800 | 20.97 | 22 | 0-2 |
| | | | | 2595 | 38000 | 20.83 | 22 | 0-2 |
| | | | | 2615 | 38200 | 20.98 | 22 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| TDD Band 38 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 10 | 64-QAM | 1 RB | 0 | 2575 | 37800 | 20.92 | 22 | 0-2 |
| | | | | 2595 | 38000 | 20.97 | 22 | 0-2 |
| | | | | 2615 | 38200 | 20.98 | 22 | 0-2 |
| | | | 25 | 2575 | 37800 | 20.84 | 22 | 0-2 |
| | | | | 2595 | 38000 | 20.93 | 22 | 0-2 |
| | | | | 2615 | 38200 | 20.91 | 22 | 0-2 |
| | | | 49 | 2575 | 37800 | 20.89 | 22 | 0-2 |
| | | | | 2595 | 38000 | 20.89 | 22 | 0-2 |
| | | | | 2615 | 38200 | 20.90 | 22 | 0-2 |
| | | 25 RB | 0 | 2575 | 37800 | 20.24 | 21 | 0-3 |
| | | | | 2595 | 38000 | 20.28 | 21 | 0-3 |
| | | | | 2615 | 38200 | 20.34 | 21 | 0-3 |
| | | | 12 | 2575 | 37800 | 20.48 | 21 | 0-3 |
| | | | | 2595 | 38000 | 20.29 | 21 | 0-3 |
| | | | | 2615 | 38200 | 20.31 | 21 | 0-3 |
| | | | 25 | 2575 | 37800 | 20.49 | 21 | 0-3 |
| | | | | 2595 | 38000 | 20.41 | 21 | 0-3 |
| | | | | 2615 | 38200 | 20.46 | 21 | 0-3 |
| | | 50RB | | 2575 | 37800 | 19.90 | 21 | 0-3 |
| | | | | 2595 | 38000 | 19.89 | 21 | 0-3 |
| | | | | 2615 | 38200 | 19.81 | 21 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| TDD Band 38 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 5 | QPSK | 1 RB | 0 | 2572.5 | 37775 | 22.80 | 24 | 0 |
| | | | | 2595 | 38000 | 22.95 | 24 | 0 |
| | | | | 2617.5 | 38225 | 22.88 | 24 | 0 |
| | | | 12 | 2572.5 | 37775 | 22.87 | 24 | 0 |
| | | | | 2595 | 38000 | 22.91 | 24 | 0 |
| | | | | 2617.5 | 38225 | 22.89 | 24 | 0 |
| | | | 24 | 2572.5 | 37775 | 22.82 | 24 | 0 |
| | | | | 2595 | 38000 | 22.91 | 24 | 0 |
| | | | | 2617.5 | 38225 | 22.81 | 24 | 0 |
| | | 12 RB | 0 | 2572.5 | 37775 | 22.44 | 23 | 0-1 |
| | | | | 2595 | 38000 | 22.25 | 23 | 0-1 |
| | | | | 2617.5 | 38225 | 22.37 | 23 | 0-1 |
| | | | 6 | 2572.5 | 37775 | 22.17 | 23 | 0-1 |
| | | | | 2595 | 38000 | 22.50 | 23 | 0-1 |
| | | | | 2617.5 | 38225 | 22.41 | 23 | 0-1 |
| | | | 13 | 2572.5 | 37775 | 22.46 | 23 | 0-1 |
| | | | | 2595 | 38000 | 22.36 | 23 | 0-1 |
| | | | | 2617.5 | 38225 | 22.33 | 23 | 0-1 |
| | | 25RB | | 2572.5 | 37775 | 21.82 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.90 | 23 | 0-1 |
| | | | | 2617.5 | 38225 | 21.87 | 23 | 0-1 |
| | 16-QAM | 1 RB | 0 | 2572.5 | 37775 | 21.98 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.99 | 23 | 0-1 |
| | | | | 2617.5 | 38225 | 21.95 | 23 | 0-1 |
| | | | 12 | 2572.5 | 37775 | 21.87 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.92 | 23 | 0-1 |
| | | | | 2617.5 | 38225 | 21.94 | 23 | 0-1 |
| | | | 24 | 2572.5 | 37775 | 21.88 | 23 | 0-1 |
| | | | | 2595 | 38000 | 21.82 | 23 | 0-1 |
| | | | | 2617.5 | 38225 | 21.91 | 23 | 0-1 |
| | | 12 RB | 0 | 2572.5 | 37775 | 21.44 | 22 | 0-2 |
| | | | | 2595 | 38000 | 21.30 | 22 | 0-2 |
| | | | | 2617.5 | 38225 | 21.30 | 22 | 0-2 |
| | | | 6 | 2572.5 | 37775 | 21.32 | 22 | 0-2 |
| | | | | 2595 | 38000 | 21.23 | 22 | 0-2 |
| | | | | 2617.5 | 38225 | 21.22 | 22 | 0-2 |
| | | | 13 | 2572.5 | 37775 | 21.27 | 22 | 0-2 |
| | | | | 2595 | 38000 | 21.41 | 22 | 0-2 |
| | | | | 2617.5 | 38225 | 21.26 | 22 | 0-2 |
| | | 25RB | | 2572.5 | 37775 | 20.85 | 22 | 0-2 |
| | | | | 2595 | 38000 | 20.99 | 22 | 0-2 |
| | | | | 2617.5 | 38225 | 20.81 | 22 | 0-2 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| TDD Band 38 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| BW(Mhz) | Modulation | RB Size | RB Offset | Frequency (MHz) | Channel | Conducted power (dBm) | Target Power + Max. Tolerance (dBm) | MPR Allowed per 3GPP(dB) |
| 5 | 64-QAM | 1 RB | 0 | 2572.5 | 37775 | 20.80 | 22 | 0-2 |
| | | | | 2595 | 38000 | 20.93 | 22 | 0-2 |
| | | | | 2617.5 | 38225 | 20.80 | 22 | 0-2 |
| | | | 12 | 2572.5 | 37775 | 20.92 | 22 | 0-2 |
| | | | | 2595 | 38000 | 20.96 | 22 | 0-2 |
| | | | | 2617.5 | 38225 | 20.99 | 22 | 0-2 |
| | | | 24 | 2572.5 | 37775 | 20.90 | 22 | 0-2 |
| | | | | 2595 | 38000 | 20.89 | 22 | 0-2 |
| | | | | 2617.5 | 38225 | 20.92 | 22 | 0-2 |
| | | 12 RB | 0 | 2572.5 | 37775 | 20.22 | 21 | 0-3 |
| | | | | 2595 | 38000 | 20.46 | 21 | 0-3 |
| | | | | 2617.5 | 38225 | 20.31 | 21 | 0-3 |
| | | | 6 | 2572.5 | 37775 | 20.48 | 21 | 0-3 |
| | | | | 2595 | 38000 | 20.36 | 21 | 0-3 |
| | | | | 2617.5 | 38225 | 20.28 | 21 | 0-3 |
| | | | 13 | 2572.5 | 37775 | 20.43 | 21 | 0-3 |
| | | | | 2595 | 38000 | 20.46 | 21 | 0-3 |
| | | | | 2617.5 | 38225 | 20.45 | 21 | 0-3 |
| | | 25RB | | 2572.5 | 37775 | 19.91 | 21 | 0-3 |
| | | | | 2595 | 38000 | 19.85 | 21 | 0-3 |
| | | | | 2617.5 | 38225 | 19.94 | 21 | 0-3 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## WLAN802.11 a/b/g/n/ac (20/40/80M) conducted power table:

| Main Antenna | | | | | | |
|---|---|---|---|---|---|---|
| Band | Mode | Channel | Frequency (MHz) | Data Rate | Max. Rated Avg. Power + Max. Tolerance (dBm) | Average power (dBm) |
| 2450 MHz | 802.11b | 1 | 2412 | 1Mbps | 15.00 | 14.54 |
| | | 6 | 2437 | | 15.00 | 14.73 |
| | | 11 | 2462 | | 15.00 | 14.74 |
| | 802.11g | 1 | 2412 | 6Mbps | 15.00 | 14.53 |
| | | 6 | 2437 | | 15.00 | 14.63 |
| | | 11 | 2462 | | 15.00 | 14.79 |
| | 802.11n-HT20 | 1 | 2412 | MCS0 | 15.00 | 14.61 |
| | | 6 | 2437 | | 15.00 | 14.67 |
| | | 11 | 2462 | | 15.00 | 14.76 |

| Main Antenna | | | | | | |
|---|---|---|---|---|---|---|
| Band | Mode | Channel | Frequency (MHz) | Data Rate | Max. Rated Avg. Power + Max. Tolerance (dBm) | Average power (dBm) |
| 5.15-5.25 GHz | 802.11a | 36 | 5180 | 6Mbps | 12.00 | 11.67 |
| | | 40 | 5200 | | 15.00 | 14.59 |
| | | 44 | 5220 | | 15.00 | 14.57 |
| | | 48 | 5240 | | 15.00 | 14.73 |
| | 802.11n-HT20 | 36 | 5180 | MCS0 | 12.00 | 11.50 |
| | | 40 | 5200 | | 15.00 | 14.61 |
| | | 44 | 5220 | | 15.00 | 14.57 |
| | | 48 | 5240 | | 15.00 | 14.69 |
| | 802.11ac20-VHT0 | 36 | 5180 | MCS0 | 12.00 | 11.46 |
| | | 40 | 5200 | | 15.00 | 14.52 |
| | | 44 | 5220 | | 15.00 | 14.56 |
| | | 48 | 5240 | | 15.00 | 14.57 |
| | 802.11n-HT40 | 38 | 5190 | MCS0 | 12.00 | 11.41 |
| | | 46 | 5230 | | 15.00 | 14.45 |
| | 802.11ac40-VHT0 | 38 | 5190 | MCS0 | 12.00 | 11.38 |
| | | 46 | 5230 | | 15.00 | 14.39 |
| | 802.11ac80-VHT0 | 42 | 5210 | MCS0 | 12.00 | 11.56 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Main Antenna | | | | | | |
|---|---|---|---|---|---|---|
| Band | Mode | Channel | Frequency (MHz) | Data Rate | Max. Rated Avg. Power + Max. Tolerance (dBm) | Average power (dBm) |
| 5.25-5.35 GHz | 802.11a | 52 | 5260 | 6Mbps | 15.00 | 14.67 |
| | | 56 | 5280 | | 15.00 | 14.62 |
| | | 60 | 5300 | | 15.00 | 14.56 |
| | | 64 | 5320 | | 12.00 | 11.43 |
| | 802.11n-HT20 | 52 | 5260 | MCS0 | 15.00 | 14.68 |
| | | 56 | 5280 | | 15.00 | 14.64 |
| | | 60 | 5300 | | 15.00 | 14.56 |
| | | 64 | 5320 | | 12.00 | 11.79 |
| | 802.11ac20-VHT0 | 52 | 5260 | MCS0 | 15.00 | 14.56 |
| | | 56 | 5280 | | 15.00 | 14.51 |
| | | 60 | 5300 | | 15.00 | 14.48 |
| | | 64 | 5320 | | 12.00 | 11.70 |
| | 802.11n-HT40 | 54 | 5270 | MCS0 | 15.00 | 14.52 |
| | | 62 | 5310 | | 12.00 | 11.61 |
| | 802.11ac40-VHT0 | 54 | 5270 | MCS0 | 15.00 | 14.46 |
| | | 62 | 5310 | | 12.00 | 11.54 |
| | 802.11ac80-VHT0 | 58 | 5290 | MCS0 | 12.00 | 11.42 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Main Antenna | | | | | | |
|---|---|---|---|---|---|---|
| Band | Mode | Channel | Frequency (MHz) | Data Rate | Max. Rated Avg. Power + Max. Tolerance (dBm) | Average power (dBm) |
| 5600 MHz | 802.11a | 100 | 5500 | 6Mbps | 12.00 | 11.51 |
| | | 120 | 5600 | | 15.00 | 14.65 |
| | | 124 | 5620 | | 15.00 | 14.66 |
| | | 128 | 5640 | | 15.00 | 14.62 |
| | | 140 | 5700 | | 12.00 | 11.72 |
| | 802.11n-HT20 | 100 | 5500 | MCS0 | 12.00 | 11.82 |
| | | 120 | 5600 | | 15.00 | 14.67 |
| | | 124 | 5620 | | 15.00 | 14.57 |
| | | 128 | 5640 | | 15.00 | 14.61 |
| | | 140 | 5700 | | 12.00 | 11.59 |
| | 802.1ac20-VHT0 | 100 | 5500 | MCS0 | 12.00 | 11.67 |
| | | 120 | 5600 | | 15.00 | 14.62 |
| | | 124 | 5620 | | 15.00 | 14.55 |
| | | 128 | 5640 | | 15.00 | 14.59 |
| | | 140 | 5700 | | 12.00 | 11.56 |
| | 802.11n-HT40 | 102 | 5510 | MCS0 | 12.00 | 11.64 |
| | | 118 | 5590 | | 15.00 | 14.56 |
| | | 126 | 5630 | | 15.00 | 14.51 |
| | | 134 | 5670 | | 12.00 | 11.77 |
| | 802.11ac40-VHT0 | 102 | 5510 | MCS0 | 15.00 | 14.44 |
| | | 118 | 5590 | | 15.00 | 14.42 |
| | | 126 | 5630 | | 15.00 | 14.53 |
| | | 134 | 5670 | | 12.00 | 11.75 |
| | 802.11ac80-VHT0 | 106 | 5530 | MCS0 | 12.00 | 11.39 |
| | | 122 | 5610 | | 15.00 | 14.37 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Aux Antenna | | | | | | |
|---|---|---|---|---|---|---|
| Band | Mode | Channel | Frequency (MHz) | Data Rate | Max. Rated Avg. Power + Max. Tolerance (dBm) | Average power (dBm) |
| 2450 MHz | 802.11b | 1 | 2412 | 1Mbps | 15.00 | 14.47 |
| | | 6 | 2437 | | 15.00 | 14.68 |
| | | 11 | 2462 | | 15.00 | 14.73 |
| | 802.11g | 1 | 2412 | 6Mbps | 15.00 | 14.48 |
| | | 6 | 2437 | | 15.00 | 14.55 |
| | | 11 | 2462 | | 15.00 | 14.72 |
| | 802.11n-HT20 | 1 | 2412 | MCS0 | 15.00 | 14.53 |
| | | 6 | 2437 | | 15.00 | 14.56 |
| | | 11 | 2462 | | 15.00 | 14.68 |

| Aux Antenna | | | | | | |
|---|---|---|---|---|---|---|
| Band | Mode | Channel | Frequency (MHz) | Data Rate | Max. Rated Avg. Power + Max. Tolerance (dBm) | Average power (dBm) |
| 5.15-5.25 GHz | 802.11a | 36 | 5180 | 6Mbps | 12.00 | 11.56 |
| | | 40 | 5200 | | 15.00 | 14.53 |
| | | 44 | 5220 | | 15.00 | 14.43 |
| | | 48 | 5240 | | 15.00 | 14.61 |
| | 802.11n-HT20 | 36 | 5180 | MCS0 | 12.00 | 11.48 |
| | | 40 | 5200 | | 15.00 | 14.48 |
| | | 44 | 5220 | | 15.00 | 14.46 |
| | | 48 | 5240 | | 15.00 | 14.54 |
| | 802.11ac20-VHT0 | 36 | 5180 | MCS0 | 12.00 | 11.45 |
| | | 40 | 5200 | | 15.00 | 14.45 |
| | | 44 | 5220 | | 15.00 | 14.41 |
| | | 48 | 5240 | | 15.00 | 14.46 |
| | 802.11n-HT40 | 38 | 5190 | MCS0 | 12.00 | 11.36 |
| | | 46 | 5230 | | 15.00 | 14.37 |
| | 802.11ac40-VHT0 | 38 | 5190 | MCS0 | 12.00 | 11.36 |
| | | 46 | 5230 | | 15.00 | 14.27 |
| | 802.11ac80-VHT0 | 42 | 5210 | MCS0 | 12.00 | 11.21 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Aux Antenna | | | | | | |
|---|---|---|---|---|---|---|
| Band | Mode | Channel | Frequency (MHz) | Data Rate | Max. Rated Avg. Power + Max. Tolerance (dBm) | Average power (dBm) |
| 5.25-5.35 GHz | 802.11a | 52 | 5260 | 6Mbps | 15.00 | 14.55 |
| | | 56 | 5280 | | 15.00 | 14.51 |
| | | 60 | 5300 | | 15.00 | 14.53 |
| | | 64 | 5320 | | 12.00 | 11.42 |
| | 802.11n-HT20 | 52 | 5260 | MCS0 | 15.00 | 14.63 |
| | | 56 | 5280 | | 15.00 | 14.56 |
| | | 60 | 5300 | | 15.00 | 14.43 |
| | | 64 | 5320 | | 12.00 | 11.63 |
| | 802.11ac20-VHT0 | 52 | 5260 | MCS0 | 15.00 | 14.54 |
| | | 56 | 5280 | | 15.00 | 14.49 |
| | | 60 | 5300 | | 15.00 | 14.43 |
| | | 64 | 5320 | | 12.00 | 11.61 |
| | 802.11n-HT40 | 54 | 5270 | MCS0 | 15.00 | 14.39 |
| | | 62 | 5310 | | 12.00 | 11.43 |
| | 802.11ac40-VHT0 | 54 | 5270 | MCS0 | 15.00 | 14.34 |
| | | 62 | 5310 | | 12.00 | 11.36 |
| | 802.11ac80-VHT0 | 58 | 5290 | MCS0 | 12.00 | 11.18 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Aux Antenna | | | | | | |
|---|---|---|---|---|---|---|
| Band | Mode | Channel | Frequency (MHz) | Data Rate | Max. Rated Avg. Power + Max. Tolerance (dBm) | Average power (dBm) |
| 5600 MHz | 802.11a | 100 | 5500 | 6Mbps | 12.00 | 11.43 |
| | | 120 | 5600 | | 15.00 | 14.57 |
| | | 124 | 5620 | | 15.00 | 14.42 |
| | | 128 | 5640 | | 15.00 | 14.63 |
| | | 140 | 5700 | | 12.00 | 11.57 |
| | 802.11n-HT20 | 100 | 5500 | MCS0 | 12.00 | 11.78 |
| | | 120 | 5600 | | 15.00 | 14.64 |
| | | 124 | 5620 | | 15.00 | 14.65 |
| | | 128 | 5640 | | 15.00 | 14.57 |
| | | 140 | 5700 | | 12.00 | 11.56 |
| | 802.1ac20-VHT0 | 100 | 5500 | MCS0 | 12.00 | 11.75 |
| | | 120 | 5600 | | 15.00 | 14.43 |
| | | 124 | 5620 | | 15.00 | 14.57 |
| | | 128 | 5640 | | 15.00 | 14.52 |
| | | 140 | 5700 | | 12.00 | 11.45 |
| | 802.11n-HT40 | 102 | 5510 | MCS0 | 12.00 | 11.57 |
| | | 118 | 5590 | | 15.00 | 14.55 |
| | | 126 | 5630 | | 15.00 | 14.52 |
| | | 134 | 5670 | | 12.00 | 11.74 |
| | 802.11ac40-VHT0 | 102 | 5510 | MCS0 | 12.00 | 11.57 |
| | | 118 | 5590 | | 15.00 | 14.46 |
| | | 126 | 5630 | | 15.00 | 14.42 |
| | | 134 | 5670 | | 12.00 | 11.71 |
| | 802.11ac80-VHT0 | 106 | 5530 | MCS0 | 12.00 | 11.36 |
| | | 122 | 5610 | | 15.00 | 14.27 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Bluetooth maximum power table:**

| Mode | Channel | Frequency (MHz) | Average Output Power (dBm) | | | Max. Rated Avg. Power + Max. Tolerance (dBm) |
|---|---|---|---|---|---|---|
| | | | 1Mbps | 2Mbps | 3Mbps | |
| BR/EDR | CH 00 | 2402 | 11.41 | 9.15 | 9.16 | 12.2 |
| | CH 39 | 2441 | 11.39 | 9.41 | 9.42 | |
| | CH 78 | 2480 | 9.46 | 7.35 | 7.35 | |

| Mode | Channel | Frequency (MHz) | Average Output Power (dBm) | Max. Rated Avg. Power + Max. Tolerance (dBm) |
|---|---|---|---|---|
| | | | GFSK | |
| LE | CH 00 | 2402 | 6.76 | 12.2 |
| | CH 19 | 2440 | 7.59 | |
| | CH 39 | 2480 | 5.93 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 1.4 Test Environment

Ambient Temperature: 22±2° C
Tissue Simulating Liquid: 22±2° C

## 1.5 Operation Description

1. The EUT is controlled by using a Radio Communication Tester (MT8820C), and the communication between the EUT and the tester is established by air link.

2. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s). The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.

3. During the SAR testing, the DASY 5 system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.

4. SAR test reduction for GPRS mode is determined by the source-based time-averaged output power. The data mode with highest specified time-averaged output power should be tested for SAR compliance.

5. The 3G SAR test reduction procedure is applied to HSDPA with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSDPA) is ≤ ¼ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSDPA).

6. The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSPA) is ≤ ¼ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSPA).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

7. LTE modes test according to **KDB 941225D05v02r05.**

a. Per Section 5.2.1, the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation.

- Using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.
- When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

b. Per Section 5.2.2, the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation

- The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.

c. Per Section 5.2.3, the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation

- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg.
- Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

d. Per Section 5.2.4, Higher order modulations

- For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 5.2.1, 5.2.2 and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

e. Per Section 5.3, other channel bandwidth standalone SAR test requirements

- For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > ½ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth.
- TDD LTE was tested at highest duty factor using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.

WLAN

802.11b DSSS SAR Test Requirements:

8. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

9. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

802.11g/n OFDM SAR Test Exclusion Requirements:

10. SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

11. BT and WLAN Main use the same antenna path and Bluetooth may transmit with WLAN Aux simultaneously.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

12. According to KDB447498D01v06, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is ≤ 100MHz.

13. According to **KDB865664D01v01r04**, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit)

14. According to **KDB447498D01v06** – The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances≤ 50 mm are determined by: [(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] · [√f(GHz)] ≤ 3.0 for 1-g SAR, and ≤ 7.5 for product specific 10-g SAR.

| Mode | Maximum power (dBm) | Maximum power(mW) | Product specific 10g-SAR | | |
|---|---|---|---|---|---|
| | | | test separation distance (mm) | Exclusion threshold | Require SAR testing? |
| BT | 12.2 | 16.596 | 5 | 5.227 | NO |

.

15. For WLAN (Main / Aux) antenna, 5.2 n(40) / 5.3 n(40) / 5.6ac(80) are chosen to be the initial test configurations.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

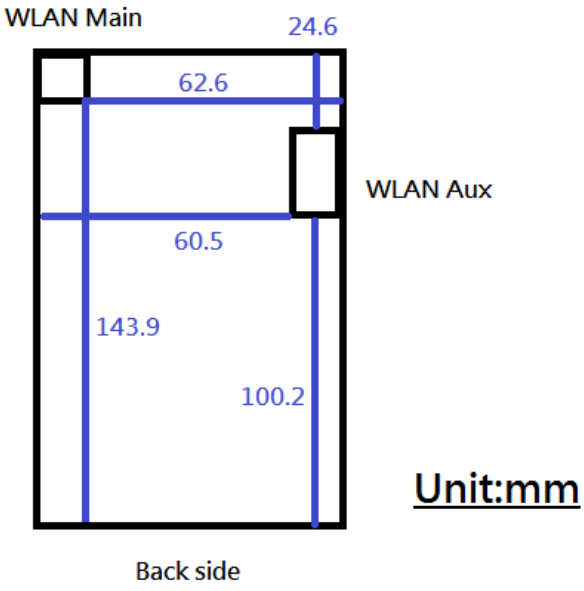


**The location of the antennas**

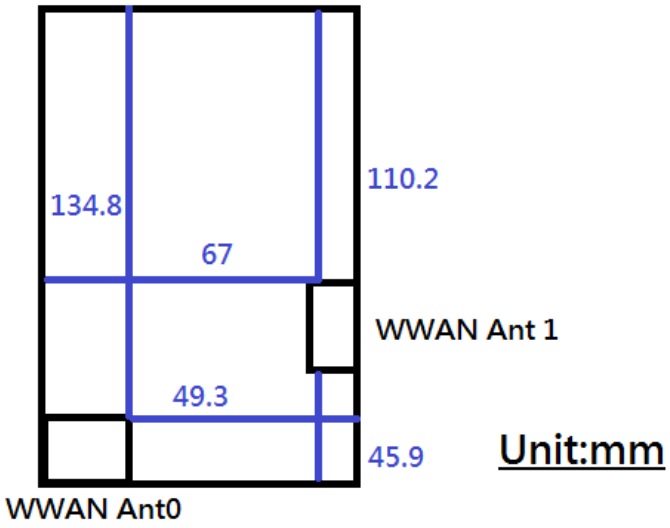


**The location of the antennas**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 1.6 Positioning Procedure

### Head SAR measurement statement

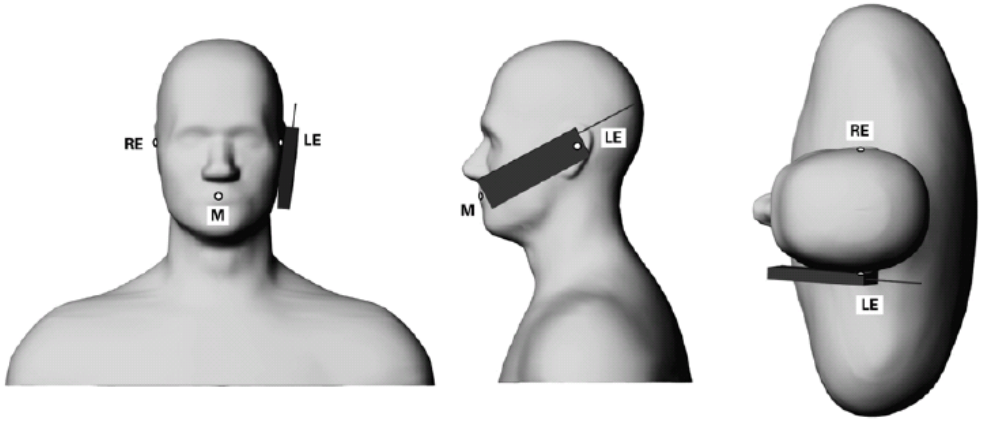


Phone position 1, “cheek” or “touch” position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning.

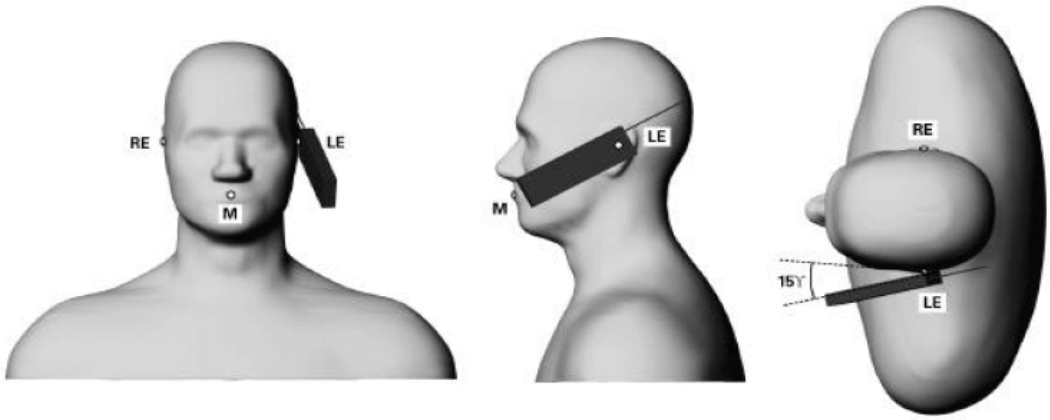


Phone position 2, “tilted position.” The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning.

Cheek/Touch Position:
The handset was brought toward the mouth of the head phantom by pivoting against the ear reference point until any point of the mouthpiece or keypad touched the phantom.
Ear/Tilt Position:
With the phone aligned in the Cheek/Touch position, the handset was tilted away from the mouth with respect to the test device reference point by 15 degrees.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company’s findings at the time of its intervention only and within the limits of Client’s instructions, if any. The Company’s sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Body SAR measurement statement

1. Body-worn exposure: 10mm
   Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

2. Hotspot exposure: 10mm
   A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge when the form factor of a handset is larger than 9 cm × 5 cm,

   Test configurations of WWAN:
   (1) Front side
   (2) Back side
   (3) Bottom side
   (4) Right side
   (5) Left side

   Test configurations of WLAN:
   (1) Front side
   (2) Back side
   (3) Top side
   (4) Left side
   (5) Right side

3. Phablet SAR test consideration
   Since the device is a phablet (overall diagonal dimension > 16.0 cm), the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for product specific 10-g SAR. When hotspot mode applies, product specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. Since the highest reported hotspot SAR for WWAN/WLAN 2.4GHz is less than 1.2, 10-g extremity SAR is not required for them. For WLAN 5.2/5.3/5.6G, product specific 10g-SAR is required since hotspot function is not supported in them.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

4. Based on KDB941225D06v02r01, the hotspot mode and body-worn accessory SAR test configurations may overlap for handsets. When the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations. For WCDMA /LTE/WLAN, since the maximum power is the same between body-worn and hotspot mode, and the test distance of hotspot mode is the same with that of body-worn mode, hotspot mode SAR is used to support body-worn SAR. For GSM850/1900, since the wireless mode transmission configurations is different between body-worn and hotspot mode, body-worn SAR is performed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 1.7 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan.
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
3. The generation of a high-resolution mesh within the measured volume.
4. The interpolation of all measured values from the measurement grid to the high-resolution grid.
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within –2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans.

The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30x30x30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found.
If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 1.8 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

### 1.8.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field ( $E$ ) and the temperature gradient ( $\delta T / \delta t$ ) in the liquid.

$$SAR = C \frac{\delta T}{\delta t},$$

Whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

1. The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

thermal equilibrium in the liquid. With a careful setup these errors can be kept small.

2. The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
3. The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (~ 2% for c; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
4. Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about ±10% (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is ±5% (RSS) when the same liquid is used for the calibration and for actual measurements and ±7-9% (RSS) when not, which is in good agreement with the estimates given in [2].

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### 1.8.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

1. The setup must enable accurate determination of the incident power.
2. The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
3. Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

**References**

(1) N. Kuster, Q. Balzano, and J.C. Lin, Eds., *Mobile Communications Safety*, Chapman & Hall, London, 1997.

(2) K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", *IEEE Transactions on Microwave Theory and Techniques*, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.

(3) K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", *IEEE Transactions on Instrumentation and Measurements*, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 1.9 The SAR Measurement System

A block diagram of the SAR measurement system is given in Fig. a. This SAR measurement system uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). Model EX3DV4 field probes are used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ (|Ei|2)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

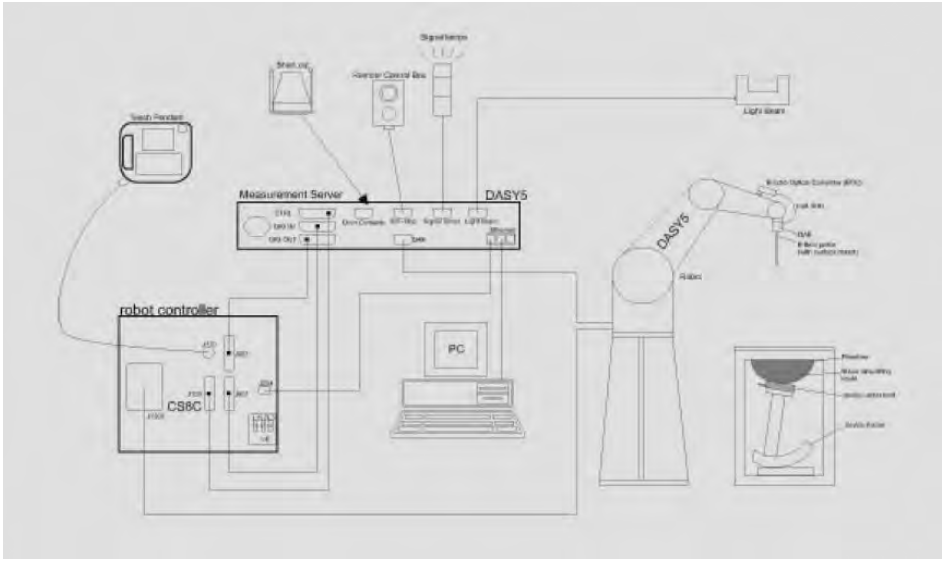


Fig. a A block diagram of the SAR measurement system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

The DASY 5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
7. A computer operating Windows7
8. DASY 5 software.
9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
10. The SAM twin phantom enabling testing left-hand and right-hand usage.
11. The device holder for handheld mobile phones.
12. Tissue simulating liquid mixed according to the given recipes.
13. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 1.10 System Components

### EX3DV4 E-Field Probe

| | | |
|---|---|---|
| Construction | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) | |
| Calibration | Basic Broad Band Calibration in air<br>Conversion Factors (CF) for HSL750/835/1750/1900/2450/2600 /5200/5300/5600 MHz Additional CF for other liquids and frequencies upon request | |
| Frequency | 10 MHz to > 6 GHz, Linearity: ± 0.6 dB | |
| Directivity | ± 0.3 dB in HSL (rotation around probe axis)<br>± 0.5 dB in tissue material (rotation normal to probe axis) | |
| Dynamic Range | 10 µW/g to > 100 mW/g<br>Linearity: ± 0.2 dB (noise: typically < 1 µW/g) | |
| Dimensions | Tip diameter: 2.5 mm | |
| Application | High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%. | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Phantom

| | |
|---|---|
| Model | Twin SAM |
| Construction | The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209.<br>It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot. |
| Shell Thickness | 2 ± 0.2 mm |
| Filling Volume | Approx. 25 liters |
| Dimensions | Height: 850 mm;<br>Length: 1000 mm;<br>Width: 500 mm |

## DEVICE HOLDER

| | |
|---|---|
| Construction | In combination with the Twin SAM Phantom V4.0/V4.0C or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom). |

Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 1.11 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% (according to KDB865664D01) from the target SAR values.
These tests were done at 750/835/1750/1900/2450/2600/5200/5300/5600 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1. During the tests, the liquid depth above the ear reference points was above 15 cm (≤3G) or 10 cm (>3G) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

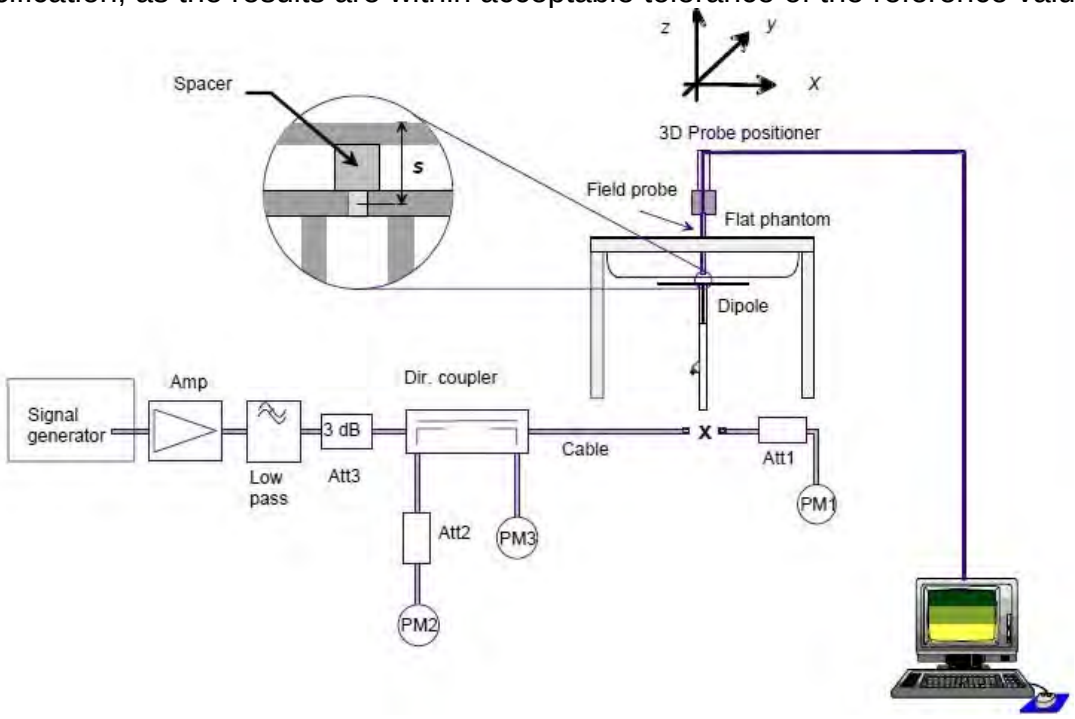


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Validation Kit | S/N | Frequency (MHz) | | 1W Target SAR-1g (mW/g) | Measured SAR-1g (mW/g) | Measured SAR-1g normalized to 1W (mW/g) | Deviation (%) | Measured Date |
|---|---|---|---|---|---|---|---|---|
| D750V2 | 1015 | 750 | Head | 8.25 | 2.03 | 8.12 | -1.58% | Mar. 25, 2018 |
| | | | Body | 8.76 | 2.16 | 8.64 | -1.37% | Mar. 25, 2018 |
| D835V2 | 4d063 | 835 | Head | 9.34 | 2.33 | 9.32 | -0.21% | Mar. 26, 2018 |
| | | | Body | 9.57 | 2.36 | 9.44 | -1.36% | Mar. 26, 2018 |
| D1750V2 | 1008 | 1750 | Head | 36 | 9.18 | 36.72 | 2.00% | Mar. 27, 2018 |
| | | | Body | 36.7 | 9.19 | 36.76 | 0.16% | Mar. 27, 2018 |
| D1900V2 | 5d173 | 1900 | Head | 40.7 | 9.80 | 39.20 | -3.69% | Mar. 29, 2018 |
| | | | Body | 40.2 | 9.96 | 39.84 | -0.90% | Mar. 29, 2018 |
| D2450V2 | 727 | 2450 | Head | 52.2 | 13.40 | 53.60 | 2.68% | Mar. 30, 2018 |
| | | | Body | 50.6 | 12.70 | 50.80 | 0.40% | Mar. 29, 2018 |
| D2600V2 | 1005 | 2600 | Head | 56.8 | 14.30 | 57.20 | 0.70% | Mar. 31, 2018 |
| | | | Body | 54.4 | 13.70 | 54.80 | 0.74% | Mar. 31, 2018 |
| D5GHzV2 | 1023 | 5200 | Head | 77.3 | 7.79 | 77.90 | 0.78% | Mar. 31, 2018 |
| | | | Body | 70.9 | 7.33 | 73.30 | 3.39% | Mar. 31, 2018 |
| | | 5300 | Head | 80.9 | 8.09 | 80.90 | 0.00% | Apr. 01, 2018 |
| | | | Body | 72.9 | 7.40 | 74.00 | 1.51% | Apr. 01, 2018 |
| | | 5600 | Head | 81.9 | 7.98 | 79.80 | -2.56% | Apr. 02, 2018 |
| | | | Body | 77.6 | 7.78 | 77.80 | 0.26% | Apr. 02, 2018 |

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 1.12 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer.
All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The depth of the tissue simulant in the flat section of the phantom was at least 15 cm (≤3G) or 10 cm (>3G) during all tests. (Appendix Fig. 2)

| Tissue Type | Measurement Date | Measured Frequency (MHz) | Target Dielectric Constant, εr | Target Conductivity, σ (S/m) | Measured Dielectric Constant, εr | Measured Conductivity, σ (S/m) | % dev εr | % dev σ |
|---|---|---|---|---|---|---|---|---|
| Head | Mar, 25. 2018 | 710 | 42.149 | 0.890 | 43.072 | 0.887 | -2.19% | 0.37% |
| | | 711 | 42.144 | 0.890 | 43.065 | 0.885 | -2.18% | 0.60% |
| | | 750 | 41.942 | 0.893 | 42.489 | 0.901 | -1.31% | -0.85% |
| | | 782 | 41.775 | 0.896 | 42.025 | 0.909 | -0.60% | -1.47% |
| | Mar, 26. 2018 | 824.2 | 41.556 | 0.899 | 41.511 | 0.924 | 0.11% | -2.76% |
| | | 826.4 | 41.545 | 0.899 | 41.453 | 0.922 | 0.22% | -2.52% |
| | | 835 | 41.500 | 0.900 | 41.339 | 0.925 | 0.39% | -2.78% |
| | | 836.5 | 41.500 | 0.902 | 41.314 | 0.926 | 0.45% | -2.70% |
| | Mar, 27. 2018 | 1712.4 | 40.138 | 1.349 | 40.691 | 1.319 | -1.38% | 2.24% |
| | | 1720 | 40.126 | 1.354 | 40.698 | 1.319 | -1.42% | 2.56% |
| | | 1750 | 40.079 | 1.371 | 40.568 | 1.324 | -1.22% | 3.43% |
| | Mar, 29. 2018 | 1852.4 | 40.000 | 1.400 | 40.092 | 1.377 | -0.23% | 1.64% |
| | | 1900 | 40.000 | 1.400 | 39.855 | 1.392 | 0.36% | 0.57% |
| | | 1909.8 | 40.000 | 1.400 | 39.813 | 1.395 | 0.47% | 0.36% |
| | Mar, 30. 2018 | 2450 | 39.200 | 1.800 | 39.366 | 1.791 | -0.42% | 0.50% |
| | | 2462 | 39.185 | 1.813 | 39.349 | 1.803 | -0.42% | 0.56% |
| | | 2480 | 39.162 | 1.827 | 39.264 | 1.826 | -0.26% | 0.04% |
| | Mar, 31. 2018 | 2595 | 39.015 | 1.958 | 38.756 | 1.962 | 0.66% | -0.20% |
| | | 2600 | 39.009 | 1.964 | 38.781 | 1.966 | 0.58% | -0.12% |
| | Mar, 31. 2018 | 5200 | 35.986 | 4.655 | 36.193 | 4.545 | -0.58% | 2.36% |
| | | 5230 | 35.974 | 4.665 | 36.327 | 4.534 | -0.98% | 2.81% |
| | Apr, 01. 2018 | 5270 | 35.883 | 4.747 | 35.952 | 4.658 | -0.19% | 1.88% |
| | | 5300 | 35.871 | 4.758 | 35.835 | 4.652 | 0.10% | 2.22% |
| | Apr, 02. 2018 | 5600 | 35.529 | 5.065 | 35.142 | 5.051 | 1.09% | 0.28% |
| | | 5610 | 35.609 | 4.993 | 35.369 | 4.936 | 0.67% | 1.15% |
| Body | Mar, 25. 2018 | 710 | 55.687 | 0.960 | 56.230 | 0.939 | -0.98% | 2.21% |
| | | 711 | 55.683 | 0.960 | 56.274 | 0.938 | -1.06% | 2.33% |
| | | 750 | 55.531 | 0.963 | 55.905 | 0.963 | -0.67% | 0.04% |
| | | 782 | 55.406 | 0.966 | 55.580 | 0.978 | -0.31% | -1.26% |
| | Mar, 26. 2018 | 824.2 | 55.242 | 0.969 | 55.187 | 0.981 | 0.10% | -1.22% |
| | | 826.4 | 55.234 | 0.969 | 55.203 | 0.985 | 0.06% | -1.62% |
| | | 835 | 55.200 | 0.970 | 55.053 | 0.993 | 0.27% | -2.37% |
| | | 836.5 | 55.195 | 0.972 | 55.063 | 1.001 | 0.24% | -3.00% |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| Tissue Type | Measurement Date | Measured Frequency (MHz) | Target Dielectric Constant, εr | Target Conductivity, σ (S/m) | Measured Dielectric Constant, εr | Measured Conductivity, σ (S/m) | % dev εr | % dev σ |
|---|---|---|---|---|---|---|---|---|
| Body | Mar, 27. 2018 | 1712.4 | 53.531 | 1.465 | 53.112 | 1.434 | 0.78% | 2.09% |
| | | 1720 | 53.511 | 1.469 | 53.121 | 1.421 | 0.73% | 3.30% |
| | | 1750 | 53.432 | 1.488 | 52.887 | 1.434 | 1.02% | 3.66% |
| | Mar, 29. 2018 | 1852.4 | 53.300 | 1.520 | 52.681 | 1.482 | 1.16% | 2.50% |
| | | 1900 | 53.300 | 1.520 | 52.524 | 1.508 | 1.46% | 0.79% |
| | | 1909.8 | 53.300 | 1.520 | 52.493 | 1.511 | 1.51% | 0.59% |
| | Mar, 29. 2018 | 2450 | 52.700 | 1.950 | 52.621 | 2.005 | 0.15% | -2.82% |
| | | 2462 | 52.685 | 1.967 | 52.566 | 2.024 | 0.23% | -2.90% |
| | | 2480 | 52.662 | 1.993 | 52.518 | 2.052 | 0.27% | -2.98% |
| | Mar, 31. 2018 | 2595 | 52.515 | 2.156 | 52.051 | 2.207 | 0.88% | -2.38% |
| | | 2600 | 52.509 | 2.163 | 52.032 | 2.202 | 0.91% | -1.82% |
| | Mar, 31. 2018 | 5200 | 49.014 | 5.299 | 49.548 | 5.118 | -1.09% | 3.42% |
| | | 5230 | 49.001 | 5.311 | 49.568 | 5.126 | -1.16% | 3.48% |
| | Apr, 01. 2018 | 5270 | 48.892 | 5.404 | 49.501 | 5.276 | -1.25% | 2.38% |
| | | 5300 | 48.879 | 5.416 | 49.301 | 5.243 | -0.86% | 3.20% |
| | Apr, 02. 2018 | 5600 | 48.471 | 5.766 | 48.381 | 5.765 | 0.19% | 0.02% |
| | | 5610 | 48.566 | 5.685 | 48.558 | 5.664 | 0.02% | 0.36% |

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

The composition of the tissue simulating liquid:

| Frequency (MHz) | Mode | Ingredient | | | | | | Total amount |
|---|---|---|---|---|---|---|---|---|
| | | DGMBE | Water | Salt | Preventol D-7 | Cellulose | Sugar | |
| 750 | Head | — | 532.98 g | 18.3 g | 2.4 g | 3.2 g | 766 g | 1.3L(Kg) |
| | Body | — | 631.68 g | 11.72 g | 1.2 g | — | 600 g | 1.0L(Kg) |
| 850 | Head | — | 532.98 g | 18.3 g | 2.4 g | 3.2 g | 766 g | 1.3L(Kg) |
| | Body | — | 631.68 g | 11.72 g | 1.2 g | — | 600 g | 1.0L(Kg) |
| 1750 | Head | 444.52 g | 552.42 g | 3.06 g | — | — | — | 1.0L(Kg) |
| | Body | 300.67 g | 716.56 g | 4.0 g | — | — | — | 1.0L(Kg) |
| 1900 | Head | 444.52 g | 552.42 g | 3.06 g | — | — | — | 1.0L(Kg) |
| | Body | 300.67 g | 716.56 g | 4.0 g | — | — | — | 1.0L(Kg) |
| 2450 | Head | 550ml | 450ml | — | — | — | — | 1.0L(Kg) |
| | Body | 301.7ml | 698.3ml | — | — | — | — | 1.0L(Kg) |
| 2600 | Head | 550ml | 450ml | — | — | — | — | 1.0L(Kg) |
| | Body | 301.7ml | 698.3ml | — | — | — | — | 1.0L(Kg) |

Simulating Liquids for 5 GHz, Manufactured by SPEAG:

| Ingredients | Water | Esters, Emulsifiers, Inhibitors | Sodium and Salt |
|---|---|---|---|
| (% by weight) | 60-80 | 20-40 | 0-1.5 |

Table 3. Recipes for tissue simulating liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (‘‘SAR’’) in Section 4.2 of ‘‘IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz,’’ ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.

These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in ‘‘Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields,’’ NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter.

Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

1. Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over a 10 grams of tissue (defined as a tissue volume in the shape of a cube).

Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

2. Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company’s findings at the time of its intervention only and within the limits of Client’s instructions, if any. The Company’s sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube).
General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure.
Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.(Table .6)

| Human Exposure | Uncontrolled Environment General Population | Controlled Environment Occupational |
|---|---|---|
| Spatial Peak SAR (Brain) | 1.60 W/kg | 8.00 W/kg |
| Spatial Average SAR (Whole Body) | 0.08 W/kg | 0.40 W/kg |
| Spatial Peak SAR (Hands/Feet/Ankle/Wrist) | 4.00 W/kg | 20.00 W/kg |

Table 4. RF exposure limits

Notes:
1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# 2. Summary of Results

## GSM 850

| Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | Measured | Reported | |
| Head (GSM) | Re Cheek | - | 128 | 824.2 | 33.50 | 32.11 | 37.72% | 0.05 | 0.07 | - |
| | Re Tilt | - | 128 | 824.2 | 33.50 | 32.11 | 37.72% | 0.02 | 0.03 | - |
| | Le Cheek | - | 128 | 824.2 | 33.50 | 32.11 | 37.72% | 0.08 | 0.11 | 130 |
| | Le Tilt | - | 128 | 824.2 | 33.50 | 32.11 | 37.72% | 0.03 | 0.04 | - |
| Body-worn (GSM) | Front side | 10 | 128 | 824.2 | 33.50 | 32.11 | 37.72% | 0.22 | 0.30 | - |
| | Back side | 10 | 128 | 824.2 | 33.50 | 32.11 | 37.72% | 0.33 | 0.45 | 131 |
| Hotspot (GPRS) <1Dn4Up> | Front side | 10 | 190 | 836.6 | 29.50 | 28.40 | 28.82% | 0.31 | 0.40 | - |
| | Back side | 10 | 190 | 836.6 | 29.50 | 28.40 | 28.82% | 0.46 | 0.59 | 132 |
| | Bottom side | 10 | 190 | 836.6 | 29.50 | 28.40 | 28.82% | 0.17 | 0.22 | - |
| | Right side | 10 | 190 | 836.6 | 29.50 | 28.40 | 28.82% | 0.06 | 0.08 | - |
| | Left side | 10 | 190 | 836.6 | 29.50 | 28.40 | 28.82% | 0.38 | 0.49 | - |

## GSM 1900

| Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | Measured | Reported | |
| Head (GSM) | Re Cheek | - | 810 | 1909.8 | 30.50 | 29.37 | 29.72% | 0.06 | 0.08 | 133 |
| | Re Tilt | - | 810 | 1909.8 | 30.50 | 29.37 | 29.72% | 0.02 | 0.03 | - |
| | Le Cheek | - | 810 | 1909.8 | 30.50 | 29.37 | 29.72% | 0.05 | 0.06 | - |
| | Le Tilt | - | 810 | 1909.8 | 30.50 | 29.37 | 29.72% | 0.02 | 0.03 | - |
| Body-worn (GSM) | Front side | 10 | 810 | 1909.8 | 30.50 | 29.37 | 29.72% | 0.13 | 0.17 | - |
| | Back side | 10 | 810 | 1909.8 | 30.50 | 29.37 | 29.72% | 0.18 | 0.23 | 134 |
| Hotspot (GPRS) <1Dn4Up> | Front side | 10 | 810 | 1909.8 | 25.40 | 24.29 | 29.12% | 0.15 | 0.19 | - |
| | Back side | 10 | 810 | 1909.8 | 25.40 | 24.29 | 29.12% | 0.21 | 0.27 | 135 |
| | Bottom side | 10 | 810 | 1909.8 | 25.40 | 24.29 | 29.12% | 0.20 | 0.26 | - |
| | Right side | 10 | 810 | 1909.8 | 25.40 | 24.29 | 29.12% | 0.08 | 0.10 | - |
| | Left side | 10 | 810 | 1909.8 | 25.40 | 24.29 | 29.12% | 0.03 | 0.04 | - |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## WCDMA Band II

| Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | Measured | Reported | |
| R99 (Head) | RE Cheek | - | 9262 | 1852.4 | 24.2 | 23.45 | 18.85% | 0.17 | 0.20 | 136 |
| | RE Tilt | - | 9262 | 1852.4 | 24.2 | 23.45 | 18.85% | 0.09 | 0.11 | - |
| | LE Cheek | - | 9262 | 1852.4 | 24.2 | 23.45 | 18.85% | 0.14 | 0.17 | - |
| | LE Tilt | - | 9262 | 1852.4 | 24.2 | 23.45 | 18.85% | 0.08 | 0.10 | - |
| Body-Worn | Front side | 10 | 9262 | 1852.4 | 24.2 | 23.45 | 18.85% | 0.34 | 0.40 | - |
| | Back side | 10 | 9262 | 1852.4 | 24.2 | 23.45 | 18.85% | 0.36 | 0.43 | - |
| Hotspot | Front side | 10 | 9262 | 1852.4 | 24.2 | 23.45 | 18.85% | 0.34 | 0.40 | - |
| | Back side | 10 | 9262 | 1852.4 | 24.2 | 23.45 | 18.85% | 0.36 | 0.43 | 137 |
| | Bottom side | 10 | 9262 | 1852.4 | 24.2 | 23.45 | 18.85% | 0.34 | 0.40 | - |
| | Right side | 10 | 9262 | 1852.4 | 24.2 | 23.45 | 18.85% | 0.16 | 0.19 | - |
| | Left side | 10 | 9262 | 1852.4 | 24.2 | 23.45 | 18.85% | 0.10 | 0.12 | - |

## WCDMA Band IV

| Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | Measured | Reported | |
| R99 (Head) | RE Cheek | - | 1312 | 1712.4 | 24.2 | 23.70 | 12.20% | 0.07 | 0.08 | 138 |
| | RE Tilt | - | 1312 | 1712.4 | 24.2 | 23.70 | 12.20% | 0.03 | 0.03 | - |
| | LE Cheek | - | 1312 | 1712.4 | 24.2 | 23.70 | 12.20% | 0.06 | 0.07 | - |
| | LE Tilt | - | 1312 | 1712.4 | 24.2 | 23.70 | 12.20% | 0.02 | 0.02 | - |
| Body-Worn | Front side | 10 | 1312 | 1712.4 | 24.2 | 23.70 | 12.20% | 0.14 | 0.16 | - |
| | Back side | 10 | 1312 | 1712.4 | 24.2 | 23.70 | 12.20% | 0.18 | 0.20 | - |
| Hotspot | Front side | 10 | 1312 | 1712.4 | 24.2 | 23.70 | 12.20% | 0.14 | 0.16 | - |
| | Back side | 10 | 1312 | 1712.4 | 24.2 | 23.70 | 12.20% | 0.18 | 0.20 | 139 |
| | Bottom side | 10 | 1312 | 1712.4 | 24.2 | 23.70 | 12.20% | 0.13 | 0.15 | - |
| | Right side | 10 | 1312 | 1712.4 | 24.2 | 23.70 | 12.20% | 0.08 | 0.09 | - |
| | Left side | 10 | 1312 | 1712.4 | 24.2 | 23.70 | 12.20% | 0.06 | 0.07 | - |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## WCDMA Band V

| Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | Measured | Reported | |
| R99 (Head) | RE Cheek | - | 4132 | 826.4 | 24.2 | 23.23 | 25.03% | 0.07 | 0.09 | - |
| | RE Tilt | - | 4132 | 826.4 | 24.2 | 23.23 | 25.03% | 0.03 | 0.04 | - |
| | LE Cheek | - | 4132 | 826.4 | 24.2 | 23.23 | 25.03% | 0.09 | 0.11 | 140 |
| | LE Tilt | - | 4132 | 826.4 | 24.2 | 23.23 | 25.03% | 0.04 | 0.05 | - |
| Body-Worn | Front side | 10 | 4132 | 826.4 | 24.2 | 23.23 | 25.03% | 0.29 | 0.36 | - |
| | Back side | 10 | 4132 | 826.4 | 24.2 | 23.23 | 25.03% | 0.39 | 0.49 | - |
| Hotspot | Front side | 10 | 4132 | 826.4 | 24.2 | 23.23 | 25.03% | 0.29 | 0.36 | - |
| | Back side | 10 | 4132 | 826.4 | 24.2 | 23.23 | 25.03% | 0.39 | 0.49 | 141 |
| | Bottom side | 10 | 4132 | 826.4 | 24.2 | 23.23 | 25.03% | 0.15 | 0.19 | - |
| | Right side | 10 | 4132 | 826.4 | 24.2 | 23.23 | 25.03% | 0.05 | 0.06 | - |
| | Left side | 10 | 4132 | 826.4 | 24.2 | 23.23 | 25.03% | 0.32 | 0.40 | - |

## LTE FDD Band 2

| Mode | Bandwidth (MHz) | Modulation | RB Size | RB start | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | Measured | Reported | |
| Head | 20MHz | QPSK | 1 RB | 50 | RE Cheek | - | 19100 | 1900 | 23.2 | 22.19 | 26.18% | 0.14 | 0.18 | 142 |
| | | | | | RE Tilt | - | 19100 | 1900 | 23.2 | 22.19 | 26.18% | 0.08 | 0.10 | - |
| | | | | | LE Cheek | - | 19100 | 1900 | 23.2 | 22.19 | 26.18% | 0.11 | 0.14 | - |
| | | | | | LE Tilt | - | 19100 | 1900 | 23.2 | 22.19 | 26.18% | 0.09 | 0.11 | - |
| Body-worn | 20MHz | QPSK | 1RB | 50 | Front side | 10 | 19100 | 1900 | 23.2 | 22.19 | 26.18% | 0.34 | 0.43 | - |
| | | | | | Back side | 10 | 19100 | 1900 | 23.2 | 22.19 | 26.18% | 0.35 | 0.44 | - |
| Hotspot | 20MHz | QPSK | 1 RB | 50 | Front side | 10 | 19100 | 1900 | 23.2 | 22.19 | 26.18% | 0.34 | 0.43 | - |
| | | | | | Back side | 10 | 19100 | 1900 | 23.2 | 22.19 | 26.18% | 0.35 | 0.44 | 143 |
| | | | | | Bottom side | 10 | 19100 | 1900 | 23.2 | 22.19 | 26.18% | 0.33 | 0.42 | - |
| | | | | | Right side | 10 | 19100 | 1900 | 23.2 | 22.19 | 26.18% | 0.15 | 0.19 | - |
| | | | | | Left side | 10 | 19100 | 1900 | 23.2 | 22.19 | 26.18% | 0.09 | 0.11 | - |

## LTE FDD Band 4

| Mode | Bandwidth (MHz) | Modulation | RB Size | RB start | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | Measured | Reported | |
| Head | 20MHz | QPSK | 1 RB | 50 | RE Cheek | - | 20050 | 1720 | 23.2 | 22.19 | 26.18% | 0.06 | 0.08 | 144 |
| | | | | | RE Tilt | - | 20050 | 1720 | 23.2 | 22.19 | 26.18% | 0.02 | 0.03 | - |
| | | | | | LE Cheek | - | 20050 | 1720 | 23.2 | 22.19 | 26.18% | 0.05 | 0.06 | - |
| | | | | | LE Tilt | - | 20050 | 1720 | 23.2 | 22.19 | 26.18% | 0.02 | 0.03 | - |
| Body-worn | 20MHz | QPSK | 1RB | 50 | Front side | 10 | 20050 | 1720 | 23.2 | 22.19 | 26.18% | 0.10 | 0.13 | - |
| | | | | | Back side | 10 | 20050 | 1720 | 23.2 | 22.19 | 26.18% | 0.11 | 0.14 | - |
| Hotspot | 20MHz | QPSK | 1 RB | 50 | Front side | 10 | 20050 | 1720 | 23.2 | 22.19 | 26.18% | 0.10 | 0.13 | - |
| | | | | | Back side | 10 | 20050 | 1720 | 23.2 | 22.19 | 26.18% | 0.11 | 0.14 | 145 |
| | | | | | Bottom side | 10 | 20050 | 1720 | 23.2 | 22.19 | 26.18% | 0.09 | 0.11 | - |
| | | | | | Right side | 10 | 20050 | 1720 | 23.2 | 22.19 | 26.18% | 0.04 | 0.05 | - |
| | | | | | Left side | 10 | 20050 | 1720 | 23.2 | 22.19 | 26.18% | 0.02 | 0.03 | - |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## LTE FDD Band 5

| Mode | Bandwidth (MHz) | Modulation | RB Size | RB start | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | Measured | Reported | |
| Head | 10MHz | QPSK | 1 RB | 25 | RE Cheek | - | 20525 | 836.5 | 25 | 23.99 | 26.18% | 0.08 | 0.10 | - |
| | | | | | RE Tilt | - | 20525 | 836.5 | 25 | 23.99 | 26.18% | 0.03 | 0.04 | - |
| | | | | | LE Cheek | - | 20525 | 836.5 | 25 | 23.99 | 26.18% | 0.10 | 0.13 | 146 |
| | | | | | LE Tilt | - | 20525 | 836.5 | 25 | 23.99 | 26.18% | 0.05 | 0.06 | - |
| Body-worn | 10MHz | QPSK | 1RB | 25 | Front side | 10 | 20525 | 836.5 | 25 | 23.99 | 26.18% | 0.28 | 0.35 | - |
| | | | | | Back side | 10 | 20525 | 836.5 | 25 | 23.99 | 26.18% | 0.39 | 0.49 | - |
| Hotspot | 10MHz | QPSK | 1 RB | 25 | Front side | 10 | 20525 | 836.5 | 25 | 23.99 | 26.18% | 0.28 | 0.35 | - |
| | | | | | Back side | 10 | 20525 | 836.5 | 25 | 23.99 | 26.18% | 0.39 | 0.49 | 147 |
| | | | | | Bottom side | 10 | 20525 | 836.5 | 25 | 23.99 | 26.18% | 0.16 | 0.20 | - |
| | | | | | Right side | 10 | 20525 | 836.5 | 25 | 23.99 | 26.18% | 0.06 | 0.08 | - |
| | | | | | Left side | 10 | 20525 | 836.5 | 25 | 23.99 | 26.18% | 0.30 | 0.38 | - |

## LTE FDD Band 12

| Mode | Bandwidth (MHz) | Modulation | RB Size | RB start | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | Measured | Reported | |
| Head | 10MHz | QPSK | 1 RB | 0 | RE Cheek | - | 23130 | 711 | 24 | 22.98 | 26.47% | 0.08 | 0.10 | - |
| | | | | | RE Tilt | - | 23130 | 711 | 24 | 22.98 | 26.47% | 0.04 | 0.05 | - |
| | | | | | LE Cheek | - | 23130 | 711 | 24 | 22.98 | 26.47% | 0.11 | 0.14 | 148 |
| | | | | | LE Tilt | - | 23130 | 711 | 24 | 22.98 | 26.47% | 0.05 | 0.06 | - |
| Body-worn | 10MHz | QPSK | 1RB | 0 | Front side | 10 | 23130 | 711 | 24 | 22.98 | 26.47% | 0.28 | 0.35 | - |
| | | | | | Back side | 10 | 23130 | 711 | 24 | 22.98 | 26.47% | 0.39 | 0.49 | - |
| Hotspot | 10MHz | QPSK | 1 RB | 0 | Front side | 10 | 23130 | 711 | 24 | 22.98 | 26.47% | 0.28 | 0.35 | - |
| | | | | | Back side | 10 | 23130 | 711 | 24 | 22.98 | 26.47% | 0.39 | 0.49 | 149 |
| | | | | | Bottom side | 10 | 23130 | 711 | 24 | 22.98 | 26.47% | 0.16 | 0.20 | - |
| | | | | | Right side | 10 | 23130 | 711 | 24 | 22.98 | 26.47% | 0.06 | 0.08 | - |
| | | | | | Left side | 10 | 23130 | 711 | 24 | 22.98 | 26.47% | 0.31 | 0.39 | - |

## LTE FDD Band 13

| Mode | Bandwidth (MHz) | Modulation | RB Size | RB start | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | Measured | Reported | |
| Head | 10MHz | QPSK | 1 RB | 25 | RE Cheek | - | 23230 | 782 | 24 | 22.99 | 26.18% | 0.04 | 0.05 | - |
| | | | | | RE Tilt | - | 23230 | 782 | 24 | 22.99 | 26.18% | 0.01 | 0.01 | - |
| | | | | | LE Cheek | - | 23230 | 782 | 24 | 22.99 | 26.18% | 0.05 | 0.06 | 150 |
| | | | | | LE Tilt | - | 23230 | 782 | 24 | 22.99 | 26.18% | 0.02 | 0.03 | - |
| Body-worn | 10MHz | QPSK | 1RB | 25 | Front side | 10 | 23230 | 782 | 24 | 22.99 | 26.18% | 0.14 | 0.18 | - |
| | | | | | Back side | 10 | 23230 | 782 | 24 | 22.99 | 26.18% | 0.19 | 0.24 | - |
| Hotspot | 10MHz | QPSK | 1 RB | 25 | Front side | 10 | 23230 | 782 | 24 | 22.99 | 26.18% | 0.14 | 0.18 | - |
| | | | | | Back side | 10 | 23230 | 782 | 24 | 22.99 | 26.18% | 0.19 | 0.24 | 151 |
| | | | | | Bottom side | 10 | 23230 | 782 | 24 | 22.99 | 26.18% | 0.07 | 0.09 | - |
| | | | | | Right side | 10 | 23230 | 782 | 24 | 22.99 | 26.18% | 0.03 | 0.04 | - |
| | | | | | Left side | 10 | 23230 | 782 | 24 | 22.99 | 26.18% | 0.15 | 0.19 | - |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## LTE FDD Band 17

| Mode | Bandwidth (MHz) | Modulation | RB Size | RB start | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | Measured | Reported | |
| Head | 10MHz | QPSK | 1 RB | 0 | RE Cheek | - | 23790 | 710 | 24 | 22.98 | 26.47% | 0.07 | 0.09 | - |
| | | | | | RE Tilt | - | 23790 | 710 | 24 | 22.98 | 26.47% | 0.04 | 0.05 | - |
| | | | | | LE Cheek | - | 23790 | 710 | 24 | 22.98 | 26.47% | 0.11 | 0.14 | 152 |
| | | | | | LE Tilt | - | 23790 | 710 | 24 | 22.98 | 26.47% | 0.06 | 0.08 | - |
| Body-worn | 10MHz | QPSK | 1RB | 0 | Front side | 10 | 23790 | 710 | 24 | 22.98 | 26.47% | 0.29 | 0.37 | - |
| | | | | | Back side | 10 | 23790 | 710 | 24 | 22.98 | 26.47% | 0.37 | 0.47 | - |
| Hotspot | 10MHz | QPSK | 1 RB | 0 | Front side | 10 | 23790 | 710 | 24 | 22.98 | 26.47% | 0.29 | 0.37 | - |
| | | | | | Back side | 10 | 23790 | 710 | 24 | 22.98 | 26.47% | 0.37 | 0.47 | 153 |
| | | | | | Bottom side | 10 | 23790 | 710 | 24 | 22.98 | 26.47% | 0.14 | 0.18 | - |
| | | | | | Right side | 10 | 23790 | 710 | 24 | 22.98 | 26.47% | 0.05 | 0.06 | - |
| | | | | | Left side | 10 | 23790 | 710 | 24 | 22.98 | 26.47% | 0.27 | 0.34 | - |

## LTE FDD Band 38

| Mode | Bandwidth (MHz) | Modulation | RB Size | RB start | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | Measured | Reported | |
| Head | 20MHz | QPSK | 1 RB | 0 | RE Cheek | - | 38000 | 2595 | 24 | 22.99 | 26.18% | 0.04 | 0.05 | 154 |
| | | | | | RE Tilt | - | 38000 | 2595 | 24 | 22.99 | 26.18% | 0.01 | 0.01 | - |
| | | | | | LE Cheek | - | 38000 | 2595 | 24 | 22.99 | 26.18% | 0.03 | 0.04 | - |
| | | | | | LE Tilt | - | 38000 | 2595 | 24 | 22.99 | 26.18% | 0.02 | 0.03 | - |
| Body-worn | 20MHz | QPSK | 1RB | 0 | Front side | 10 | 38000 | 2595 | 24 | 22.99 | 26.18% | 0.13 | 0.16 | - |
| | | | | | Back side | 10 | 38000 | 2595 | 24 | 22.99 | 26.18% | 0.23 | 0.29 | - |
| Hotspot | 20MHz | QPSK | 1 RB | 0 | Front side | 10 | 38000 | 2595 | 24 | 22.99 | 26.18% | 0.13 | 0.16 | - |
| | | | | | Back side | 10 | 38000 | 2595 | 24 | 22.99 | 26.18% | 0.23 | 0.29 | - |
| | | | | | Bottom side | 10 | 38000 | 2595 | 24 | 22.99 | 26.18% | 0.36 | 0.45 | 155 |
| | | | | | Right side | 10 | 38000 | 2595 | 24 | 22.99 | 26.18% | 0.06 | 0.08 | - |
| | | | | | Left side | 10 | 38000 | 2595 | 24 | 22.99 | 26.18% | 0.01 | 0.01 | - |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## WLAN 802.11b (Main antenna)

| Antenna | Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | Measured | Reported | |
| Main | Head | RE Cheek | - | 11 | 2462 | 15 | 14.74 | 6.17% | 0.21 | 0.22 | - |
| | | RE Tilt | - | 11 | 2462 | 15 | 14.74 | 6.17% | 0.20 | 0.21 | - |
| | | LE Cheek | - | 11 | 2462 | 15 | 14.74 | 6.17% | 0.40 | 0.42 | 156 |
| | | LE Tilt | - | 11 | 2462 | 15 | 14.74 | 6.17% | 0.35 | 0.37 | - |
| | Body-worn | Front side | 10 | 11 | 2462 | 15 | 14.74 | 6.17% | 0.06 | 0.06 | - |
| | | Back side | 10 | 11 | 2462 | 15 | 14.74 | 6.17% | 0.09 | 0.10 | - |
| | Hotspot | Front side | 10 | 11 | 2462 | 15 | 14.74 | 6.17% | 0.06 | 0.06 | - |
| | | Back side | 10 | 11 | 2462 | 15 | 14.74 | 6.17% | 0.09 | 0.10 | 157 |
| | | Top side | 10 | 11 | 2462 | 15 | 14.74 | 6.17% | 0.07 | 0.07 | - |
| | | Right side | 10 | 11 | 2462 | 15 | 14.74 | 6.17% | 0.01 | 0.01 | - |

## WLAN 802.11b (Aux antenna)

| Antenna | Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | Measured | Reported | |
| Aux | Head | RE Cheek | - | 11 | 2462 | 15 | 14.73 | 6.41% | 0.07 | 0.07 | 158 |
| | | RE Tilt | - | 11 | 2462 | 15 | 14.73 | 6.41% | 0.04 | 0.04 | - |
| | | LE Cheek | - | 11 | 2462 | 15 | 14.73 | 6.41% | 0.03 | 0.03 | - |
| | | LE Tilt | - | 11 | 2462 | 15 | 14.73 | 6.41% | 0.02 | 0.02 | - |
| | Body-worn | Front side | 10 | 11 | 2462 | 15 | 14.73 | 6.41% | 0.06 | 0.06 | - |
| | | Back side | 10 | 11 | 2462 | 15 | 14.73 | 6.41% | 0.08 | 0.09 | - |
| | Hotspot | Front side | 10 | 11 | 2462 | 15 | 14.73 | 6.41% | 0.06 | 0.06 | - |
| | | Back side | 10 | 11 | 2462 | 15 | 14.73 | 6.41% | 0.08 | 0.09 | 159 |
| | | Top side | 10 | 11 | 2462 | 15 | 14.73 | 6.41% | 0.01 | 0.01 | - |
| | | Right side | 10 | 11 | 2462 | 15 | 14.73 | 6.41% | 0.04 | 0.04 | - |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## WLAN 802.11n(40M) 5.2G (Main antenna)

| Antenna | Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | Measured | Reported | |
| Main | Head | RE Cheek | - | 46 | 5230 | 15 | 14.45 | 13.50% | 0.13 | 0.15 | - |
| | | RE Tilt | - | 46 | 5230 | 15 | 14.45 | 13.50% | 0.07 | 0.08 | - |
| | | LE Cheek | - | 46 | 5230 | 15 | 14.45 | 13.50% | 0.20 | 0.23 | 160 |
| | | LE Tilt | - | 46 | 5230 | 15 | 14.45 | 13.50% | 0.16 | 0.18 | - |
| | Body-worn | Front side | 10 | 46 | 5230 | 15 | 14.45 | 13.50% | 0.02 | 0.02 | - |
| | | Back side | 10 | 46 | 5230 | 15 | 14.45 | 13.50% | 0.07 | 0.08 | 161 |
| Antenna | Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 10g (W/kg) | | Plot page |
| | | | | | | | | | Measured | Reported | |
| Main | product specific 10-g SAR | Front side | - | 46 | 5230 | 15 | 14.45 | 13.50% | 0.13 | 0.15 | - |
| | | Back side | - | 46 | 5230 | 15 | 14.45 | 13.50% | 0.28 | 0.32 | 162 |
| | | Top side | - | 46 | 5230 | 15 | 14.45 | 13.50% | 0.15 | 0.17 | - |
| | | Right side | - | 46 | 5230 | 15 | 14.45 | 13.50% | 0.10 | 0.11 | - |

## WLAN 802.11n(40M) 5.2G (Aux antenna)

| Antenna | Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | Measured | Reported | |
| Aux | Head | RE Cheek | - | 46 | 5230 | 15 | 14.37 | 15.61% | 0.14 | 0.16 | 163 |
| | | RE Tilt | - | 46 | 5230 | 15 | 14.37 | 15.61% | 0.04 | 0.05 | - |
| | | LE Cheek | - | 46 | 5230 | 15 | 14.37 | 15.61% | 0.05 | 0.06 | - |
| | | LE Tilt | - | 46 | 5230 | 15 | 14.37 | 15.61% | 0.02 | 0.02 | - |
| | Body-worn | Front side | 10 | 46 | 5230 | 15 | 14.37 | 15.61% | 0.02 | 0.02 | - |
| | | Back side | 10 | 46 | 5230 | 15 | 14.37 | 15.61% | 0.05 | 0.06 | 164 |
| Antenna | Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 10g (W/kg) | | Plot page |
| | | | | | | | | | Measured | Reported | |
| Aux | product specific 10-g SAR | Front side | - | 46 | 5230 | 15 | 14.37 | 15.61% | 0.10 | 0.12 | - |
| | | Back side | - | 46 | 5230 | 15 | 14.37 | 15.61% | 0.24 | 0.28 | 165 |
| | | Top side | - | 46 | 5230 | 15 | 14.37 | 15.61% | 0.02 | 0.02 | - |
| | | Left side | - | 46 | 5230 | 15 | 14.37 | 15.61% | 0.21 | 0.24 | - |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## WLAN 802.11n(40M) 5.3G (Main antenna)

| Antenna | Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | Measured | Reported | |
| Main | Head | RE Cheek | - | 54 | 5270 | 15 | 14.52 | 11.69% | 0.16 | 0.18 | - |
| | | RE Tilt | - | 54 | 5270 | 15 | 14.52 | 11.69% | 0.10 | 0.11 | - |
| | | LE Cheek | - | 54 | 5270 | 15 | 14.52 | 11.69% | 0.26 | 0.29 | 166 |
| | | LE Tilt | - | 54 | 5270 | 15 | 14.52 | 11.69% | 0.19 | 0.21 | - |
| | Body-worn | Front side | 10 | 54 | 5270 | 15 | 14.52 | 11.69% | 0.02 | 0.02 | - |
| | | Back side | 10 | 54 | 5270 | 15 | 14.52 | 11.69% | 0.09 | 0.10 | 167 |
| Antenna | Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 10g (W/kg) | | Plot page |
| | | | | | | | | | Measured | Reported | |
| Main | product specific 10-g SAR | Front side | - | 54 | 5270 | 15 | 14.52 | 11.69% | 0.14 | 0.16 | - |
| | | Back side | - | 54 | 5270 | 15 | 14.52 | 11.69% | 0.30 | 0.34 | 168 |
| | | Top side | - | 54 | 5270 | 15 | 14.52 | 11.69% | 0.20 | 0.22 | - |
| | | Right side | - | 54 | 5270 | 15 | 14.52 | 11.69% | 0.11 | 0.12 | - |

## WLAN 802.11n(40M) 5.3G (Aux antenna)

| Antenna | Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | Measured | Reported | |
| Aux | Head | RE Cheek | - | 54 | 5270 | 15 | 14.39 | 15.08% | 0.18 | 0.21 | 169 |
| | | RE Tilt | - | 54 | 5270 | 15 | 14.39 | 15.08% | 0.05 | 0.06 | - |
| | | LE Cheek | - | 54 | 5270 | 15 | 14.39 | 15.08% | 0.07 | 0.08 | - |
| | | LE Tilt | - | 54 | 5270 | 15 | 14.39 | 15.08% | 0.03 | 0.03 | - |
| | Body-worn | Front side | 10 | 54 | 5270 | 15 | 14.39 | 15.08% | 0.02 | 0.02 | - |
| | | Back side | 10 | 54 | 5270 | 15 | 14.39 | 15.08% | 0.09 | 0.10 | 170 |
| Antenna | Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 10g (W/kg) | | Plot page |
| | | | | | | | | | Measured | Reported | |
| Aux | product specific 10-g SAR | Front side | - | 54 | 5270 | 15 | 14.39 | 15.08% | 0.11 | 0.13 | - |
| | | Back side | - | 54 | 5270 | 15 | 14.39 | 15.08% | 0.27 | 0.31 | 171 |
| | | Top side | - | 54 | 5270 | 15 | 14.39 | 15.08% | 0.03 | 0.03 | - |
| | | Left side | - | 54 | 5270 | 15 | 14.39 | 15.08% | 0.24 | 0.28 | - |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## WLAN 802.11ac(80M) 5.6G (Main antenna)

| Antenna | Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | Measured | Reported | |
| Main | Head | RE Cheek | - | 122 | 5610 | 15 | 14.37 | 15.61% | 0.12 | 0.14 | - |
| | | RE Tilt | - | 122 | 5610 | 15 | 14.37 | 15.61% | 0.06 | 0.07 | - |
| | | LE Cheek | - | 122 | 5610 | 15 | 14.37 | 15.61% | 0.19 | 0.22 | 172 |
| | | LE Tilt | - | 122 | 5610 | 15 | 14.37 | 15.61% | 0.15 | 0.17 | - |
| | Body-worn | Front side | 10 | 122 | 5610 | 15 | 14.37 | 15.61% | 0.03 | 0.03 | - |
| | | Back side | 10 | 122 | 5610 | 15 | 14.37 | 15.61% | 0.10 | 0.12 | 173 |
| Antenna | Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 10g (W/kg) | | Plot page |
| | | | | | | | | | Measured | Reported | |
| Main | product specific 10-g SAR | Front side | - | 122 | 5610 | 15 | 14.37 | 15.61% | 0.12 | 0.14 | - |
| | | Back side | - | 122 | 5610 | 15 | 14.37 | 15.61% | 0.26 | 0.30 | 174 |
| | | Top side | - | 122 | 5610 | 15 | 14.37 | 15.61% | 0.17 | 0.20 | - |
| | | Right side | - | 122 | 5610 | 15 | 14.37 | 15.61% | 0.11 | 0.13 | - |

## WLAN 802.11ac(80M) 5.6G (Aux antenna)

| Antenna | Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | Measured | Reported | |
| Aux | Head | RE Cheek | - | 122 | 5610 | 15 | 14.27 | 18.30% | 0.24 | 0.28 | 175 |
| | | RE Tilt | - | 122 | 5610 | 15 | 14.27 | 18.30% | 0.07 | 0.08 | - |
| | | LE Cheek | - | 122 | 5610 | 15 | 14.27 | 18.30% | 0.09 | 0.11 | - |
| | | LE Tilt | - | 122 | 5610 | 15 | 14.27 | 18.30% | 0.04 | 0.05 | - |
| | Body-worn | Front side | 10 | 122 | 5610 | 15 | 14.27 | 18.30% | 0.03 | 0.04 | - |
| | | Back side | 10 | 122 | 5610 | 15 | 14.27 | 18.30% | 0.10 | 0.12 | 176 |
| Antenna | Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 10g (W/kg) | | Plot page |
| | | | | | | | | | Measured | Reported | |
| Aux | product specific 10-g SAR | Front side | - | 122 | 5610 | 15 | 14.27 | 18.30% | 0.13 | 0.15 | - |
| | | Back side | - | 122 | 5610 | 15 | 14.27 | 18.30% | 0.31 | 0.37 | 177 |
| | | Top side | - | 122 | 5610 | 15 | 14.27 | 18.30% | 0.03 | 0.04 | - |
| | | Left side | - | 122 | 5610 | 15 | 14.27 | 18.30% | 0.27 | 0.32 | - |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Bluetooth

| Antenna | Mode | Position | Distance (mm) | CH | Freq. (MHz) | Max. Rated Avg. Power + Max. Tolerance (dBm) | Measured Avg. Power (dBm) | Scaling | Averaged SAR over 1g (W/kg) | | Plot page |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | Measured | Reported | |
| Main | Head | RE Cheek | - | 78 | 2480 | 12.2 | 9.53 | 84.93% | 0.04 | 0.07 | - |
| | | RE Tilt | - | 78 | 2480 | 12.2 | 9.53 | 84.93% | 0.03 | 0.06 | - |
| | | LE Cheek | - | 78 | 2480 | 12.2 | 9.53 | 84.93% | 0.06 | 0.11 | 178 |
| | | LE Tilt | - | 78 | 2480 | 12.2 | 9.53 | 84.93% | 0.04 | 0.07 | - |
| | Body-worn | Front side | 10 | 78 | 2480 | 12.2 | 9.53 | 84.93% | 0.00 | 0.00 | - |
| | | Back side | 10 | 78 | 2480 | 12.2 | 9.53 | 84.93% | 0.01 | 0.02 | 179 |

Note:

$$\text{Scaling} = \frac{\text{reported SAR}}{\text{measured SAR}} = \frac{P2(mW)}{P1(mW)} = 10^{\left(\frac{P_2 - P_1}{10}\right)(dBm)}$$

Reported SAR = measured SAR * (scaling)
Where P2 is maximum specified power, P1 is measured conducted power

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# 3. Simultaneous Transmission Analysis

## Simultaneous Transmission Scenarios:

| Simultaneous Transmit Configurations | Head | Body-Worn | Hotspot | product specific 10-g SAR |
|---|---|---|---|---|
| GSM + 2.4GHz Wi-Fi Main + 2.4GHz Wi-Fi Aux | Yes | Yes | No | Yes |
| GPRS + 2.4GHz Wi-Fi Main + 2.4GHz Wi-Fi Aux | No | No | Yes | Yes |
| WCDMA + 2.4GHz Wi-Fi Main + 2.4GHz Wi-Fi Aux | Yes | Yes | Yes | Yes |
| LTE + 2.4GHz Wi-Fi Main + 2.4GHz Wi-Fi Aux | Yes | Yes | Yes | Yes |
| GSM + 2.4GHz Wi-Fi Main + 5GHz Wi-Fi Aux | Yes | Yes | No | Yes |
| GPRS + 2.4GHz Wi-Fi Main + 5GHz Wi-Fi Aux | No | No | No | Yes |
| WCDMA + 2.4GHz Wi-Fi Main + 5GHz Wi-Fi Aux | Yes | Yes | No | Yes |
| LTE + 2.4GHz Wi-Fi Main + 5GHz Wi-Fi Aux | Yes | Yes | No | Yes |
| GSM + 5GHz Wi-Fi Main + 5GHz Wi-Fi Aux | Yes | Yes | No | Yes |
| GPRS + 5GHz Wi-Fi Main + 5GHz Wi-Fi Aux | No | Yes | No | Yes |
| WCDMA + 5GHz Wi-Fi Main + 5GHz Wi-Fi Aux | Yes | Yes | No | Yes |
| LTE + 5GHz Wi-Fi Main + 5GHz Wi-Fi Aux | Yes | Yes | No | Yes |
| GSM + 5GHz Wi-Fi Main + BT + 5GHz Wi-Fi Aux | Yes | Yes | No | Yes |
| GPRS + 5GHz Wi-Fi Main + BT + 5GHz Wi-Fi Aux | No | Yes | No | Yes |
| WCDMA + 5GHz Wi-Fi Main + BT + 5GHz Wi-Fi Aux | Yes | Yes | No | Yes |
| LTE + 5GHz Wi-Fi Main + BT + 5GHz Wi-Fi Aux | Yes | Yes | No | Yes |
| GSM + BT + 5GHz Wi-Fi Aux | Yes | Yes | No | Yes |
| GPRS + BT + 5GHz Wi-Fi Aux | No | Yes | No | Yes |
| WCDMA + BT + 5GHz Wi-Fi Aux | Yes | Yes | No | Yes |
| LTE + BT + 5GHz Wi-Fi Aux | Yes | Yes | No | Yes |

Note:
1. The device does not support DTM function. Body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Based on KDB447498D01 note 36, when SAR test exclusion is allowed by other published RF exposure KDB procedures, such as the 2.5 cm hotspot mode SAR test exclusion for an edge or surface, then estimated SAR is not required to determine simultaneous SAR test exclusion.
3. Based on KDB 648474 D04v01r03 note 6, simultaneous transmission SAR for 10-g extremity SAR requires consideration only when standalone 10-g SAR is required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## 3.1 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$\text{Estimated SAR} = \frac{\text{Max. tune up power (mW)}}{\text{Min. test separation distance (mm)}} \times \frac{\sqrt{f(\text{GHz})}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

## 3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by **(SAR1 + SAR2)^1.5/Ri**, rounded to two decimal digits, and must be **≤ 0.04** for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Simultaneous Transmission Combination

| reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation | | | | | | |
|---|---|---|---|---|---|---|
| Frequency band | Position | | reported SAR / W/kg | | | ΣSAR |
| | | | WWAN | WLAN Main | WLAN Aux | <1.6W/kg |
| GSM 850 | Head | Right cheek | 0.07 | 0.22 | 0.07 | 0.36 |
| | | Right tilt | 0.03 | 0.21 | 0.04 | 0.28 |
| | | Left cheek | 0.11 | 0.42 | 0.03 | 0.56 |
| | | Left tilt | 0.04 | 0.37 | 0.02 | 0.43 |
| GPRS 850 (1Dn4UP) | Hotspot | Front side | 0.40 | 0.06 | 0.06 | 0.52 |
| | | Back side | 0.59 | 0.10 | 0.09 | 0.78 |
| | | Top side | - | 0.07 | 0.01 | - |
| | | Bottom side | 0.22 | - | - | - |
| | | Right side | 0.08 | 0.01 | - | - |
| | | Left side | 0.49 | - | 0.04 | - |
| GSM 1900 | Head | Right cheek | 0.08 | 0.22 | 0.07 | 0.37 |
| | | Right tilt | 0.03 | 0.21 | 0.04 | 0.28 |
| | | Left cheek | 0.06 | 0.42 | 0.03 | 0.51 |
| | | Left tilt | 0.03 | 0.37 | 0.02 | 0.42 |
| GPRS 1900 (1Dn4UP) | Hotspot | Front side | 0.19 | 0.06 | 0.06 | 0.31 |
| | | Back side | 0.27 | 0.10 | 0.09 | 0.46 |
| | | Top side | - | 0.07 | 0.01 | - |
| | | Bottom side | 0.26 | - | - | - |
| | | Right side | 0.10 | 0.01 | - | - |
| | | Left side | 0.04 | - | 0.04 | - |
| WCDMA Band II | Head | Right cheek | 0.20 | 0.22 | 0.07 | 0.49 |
| | | Right tilt | 0.11 | 0.21 | 0.04 | 0.36 |
| | | Left cheek | 0.17 | 0.42 | 0.03 | 0.62 |
| | | Left tilt | 0.10 | 0.37 | 0.02 | 0.49 |
| | Hotspot | Front side | 0.40 | 0.06 | 0.06 | 0.52 |
| | | Back side | 0.43 | 0.10 | 0.09 | 0.62 |
| | | Top side | - | 0.07 | 0.01 | - |
| | | Bottom side | 0.40 | - | - | - |
| | | Right side | 0.19 | 0.01 | - | - |
| | | Left side | 0.12 | - | 0.04 | - |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation | | | | | | |
|---|---|---|---|---|---|---|
| Frequency band | Position | | reported SAR / W/kg | | | ΣSAR |
| | | | WWAN | WLAN Main | WLAN Aux | <1.6W/kg |
| WCDMA Band IV | Head | Right cheek | 0.08 | 0.22 | 0.07 | 0.37 |
| | | Right tilt | 0.03 | 0.21 | 0.04 | 0.28 |
| | | Left cheek | 0.07 | 0.42 | 0.03 | 0.52 |
| | | Left tilt | 0.02 | 0.37 | 0.02 | 0.41 |
| | Hotspot | Front side | 0.16 | 0.06 | 0.06 | 0.28 |
| | | Back side | 0.20 | 0.10 | 0.09 | 0.39 |
| | | Top side | - | 0.07 | 0.01 | - |
| | | Bottom side | 0.15 | - | - | - |
| | | Right side | 0.09 | 0.01 | - | - |
| | | Left side | 0.07 | - | 0.04 | - |
| WCDMA Band V | Head | Right cheek | 0.09 | 0.22 | 0.07 | 0.38 |
| | | Right tilt | 0.04 | 0.21 | 0.04 | 0.29 |
| | | Left cheek | 0.11 | 0.42 | 0.03 | 0.56 |
| | | Left tilt | 0.05 | 0.37 | 0.02 | 0.44 |
| | Hotspot | Front side | 0.36 | 0.06 | 0.06 | 0.48 |
| | | Back side | 0.49 | 0.10 | 0.09 | 0.68 |
| | | Top side | - | 0.07 | 0.01 | - |
| | | Bottom side | 0.19 | - | - | - |
| | | Right side | 0.06 | 0.01 | - | - |
| | | Left side | 0.40 | - | 0.04 | - |
| LTE FDD Band 2 | Head | Right cheek | 0.18 | 0.22 | 0.07 | 0.47 |
| | | Right tilt | 0.10 | 0.21 | 0.04 | 0.35 |
| | | Left cheek | 0.14 | 0.42 | 0.03 | 0.59 |
| | | Left tilt | 0.11 | 0.37 | 0.02 | 0.50 |
| | Hotspot | Front side | 0.43 | 0.06 | 0.06 | 0.55 |
| | | Back side | 0.44 | 0.10 | 0.09 | 0.63 |
| | | Top side | - | 0.07 | 0.01 | - |
| | | Bottom side | 0.42 | - | - | |
| | | Right side | 0.19 | 0.01 | - | - |
| | | Left side | 0.11 | - | 0.04 | - |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation | | | | | | |
|---|---|---|---|---|---|---|
| Frequency band | Position | | reported SAR / W/kg | | | ΣSAR |
| | | | WWAN | WLAN Main | WLAN Aux | <1.6W/kg |
| LTE FDD Band 4 | Head | Right cheek | 0.08 | 0.22 | 0.07 | 0.37 |
| | | Right tilt | 0.03 | 0.21 | 0.04 | 0.28 |
| | | Left cheek | 0.06 | 0.42 | 0.03 | 0.51 |
| | | Left tilt | 0.03 | 0.37 | 0.02 | 0.42 |
| | Hotspot | Front side | 0.13 | 0.06 | 0.06 | 0.25 |
| | | Back side | 0.14 | 0.10 | 0.09 | 0.33 |
| | | Top side | - | 0.07 | 0.01 | - |
| | | Bottom side | 0.11 | - | - | - |
| | | Right side | 0.05 | 0.01 | - | - |
| | | Left side | 0.03 | - | 0.04 | - |
| LTE FDD Band 5 | Head | Right cheek | 0.10 | 0.22 | 0.07 | 0.39 |
| | | Right tilt | 0.04 | 0.21 | 0.04 | 0.29 |
| | | Left cheek | 0.13 | 0.42 | 0.03 | 0.58 |
| | | Left tilt | 0.06 | 0.37 | 0.02 | 0.45 |
| | Hotspot | Front side | 0.35 | 0.06 | 0.06 | 0.47 |
| | | Back side | 0.49 | 0.10 | 0.09 | 0.68 |
| | | Top side | - | 0.07 | 0.01 | - |
| | | Bottom side | 0.20 | - | - | - |
| | | Right side | 0.08 | 0.01 | - | - |
| | | Left side | 0.38 | - | 0.04 | - |
| LTE FDD Band 12 | Head | Right cheek | 0.10 | 0.22 | 0.07 | 0.39 |
| | | Right tilt | 0.05 | 0.21 | 0.04 | 0.30 |
| | | Left cheek | 0.14 | 0.42 | 0.03 | 0.59 |
| | | Left tilt | 0.06 | 0.37 | 0.02 | 0.45 |
| | Hotspot | Front side | 0.35 | 0.06 | 0.06 | 0.47 |
| | | Back side | 0.49 | 0.10 | 0.09 | 0.68 |
| | | Top side | - | 0.07 | 0.01 | - |
| | | Bottom side | 0.20 | - | - | |
| | | Right side | 0.08 | 0.01 | - | - |
| | | Left side | 0.39 | - | 0.04 | - |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation | | | | | | |
|---|---|---|---|---|---|---|
| Frequency band | Position | | reported SAR / W/kg | | | ΣSAR |
| | | | WWAN | WLAN Main | WLAN Aux | <1.6W/kg |
| LTE FDD Band 13 | Head | Right cheek | 0.05 | 0.22 | 0.07 | 0.34 |
| | | Right tilt | 0.01 | 0.21 | 0.04 | 0.26 |
| | | Left cheek | 0.06 | 0.42 | 0.03 | 0.51 |
| | | Left tilt | 0.03 | 0.37 | 0.02 | 0.42 |
| | Hotspot | Front side | 0.18 | 0.06 | 0.06 | 0.30 |
| | | Back side | 0.24 | 0.10 | 0.09 | 0.43 |
| | | Top side | - | 0.07 | 0.01 | - |
| | | Bottom side | 0.09 | - | - | - |
| | | Right side | 0.04 | 0.01 | - | - |
| | | Left side | 0.19 | - | 0.04 | - |
| LTE FDD Band 17 | Head | Right cheek | 0.09 | 0.22 | 0.07 | 0.38 |
| | | Right tilt | 0.05 | 0.21 | 0.04 | 0.30 |
| | | Left cheek | 0.14 | 0.42 | 0.03 | 0.59 |
| | | Left tilt | 0.08 | 0.37 | 0.02 | 0.47 |
| | Hotspot | Front side | 0.37 | 0.06 | 0.06 | 0.49 |
| | | Back side | 0.47 | 0.10 | 0.09 | 0.66 |
| | | Top side | - | 0.07 | 0.01 | - |
| | | Bottom side | 0.18 | - | - | |
| | | Right side | 0.06 | 0.01 | - | - |
| | | Left side | 0.34 | - | 0.04 | - |
| LTE FDD Band 38 | Head | Right cheek | 0.05 | 0.22 | 0.07 | 0.34 |
| | | Right tilt | 0.01 | 0.21 | 0.04 | 0.26 |
| | | Left cheek | 0.04 | 0.42 | 0.03 | 0.49 |
| | | Left tilt | 0.03 | 0.37 | 0.02 | 0.42 |
| | Hotspot | Front side | 0.16 | 0.06 | 0.06 | 0.28 |
| | | Back side | 0.29 | 0.10 | 0.09 | 0.48 |
| | | Top side | - | 0.07 | 0.01 | - |
| | | Bottom side | 0.45 | - | - | |
| | | Right side | 0.08 | 0.01 | - | - |
| | | Left side | 0.01 | - | 0.04 | - |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation | | | | | | |
|---|---|---|---|---|---|---|
| Frequency band | Position | | reported SAR / W/kg | | | ΣSAR |
| | | | WWAN | WLAN Main | WLAN Aux | <1.6W/kg |
| GSM 850 | body-worn | Front side | 0.30 | 0.06 | 0.06 | 0.42 |
| | | Back side | 0.45 | 0.10 | 0.09 | 0.64 |
| GSM 1900 | body-worn | Front side | 0.17 | 0.06 | 0.06 | 0.29 |
| | | Back side | 0.23 | 0.10 | 0.09 | 0.42 |
| WCDMA Band II | body-worn | Front side | 0.40 | 0.06 | 0.06 | 0.52 |
| | | Back side | 0.43 | 0.10 | 0.09 | 0.62 |
| WCDMA Band IV | body-worn | Front side | 0.16 | 0.06 | 0.06 | 0.28 |
| | | Back side | 0.20 | 0.10 | 0.09 | 0.39 |
| WCDMA Band V | body-worn | Front side | 0.36 | 0.06 | 0.06 | 0.48 |
| | | Back side | 0.49 | 0.10 | 0.09 | 0.68 |
| LTE FDD Band 2 | body-worn | Front side | 0.43 | 0.06 | 0.06 | 0.55 |
| | | Back side | 0.44 | 0.10 | 0.09 | 0.63 |
| LTE FDD Band 4 | body-worn | Front side | 0.13 | 0.06 | 0.06 | 0.25 |
| | | Back side | 0.14 | 0.10 | 0.09 | 0.33 |
| LTE FDD Band 5 | body-worn | Front side | 0.35 | 0.06 | 0.06 | 0.47 |
| | | Back side | 0.49 | 0.10 | 0.09 | 0.68 |
| LTE FDD Band 12 | body-worn | Front side | 0.35 | 0.06 | 0.06 | 0.47 |
| | | Back side | 0.49 | 0.10 | 0.09 | 0.68 |
| LTE FDD Band 13 | body-worn | Front side | 0.18 | 0.06 | 0.06 | 0.30 |
| | | Back side | 0.24 | 0.10 | 0.09 | 0.43 |
| LTE FDD Band 17 | body-worn | Front side | 0.37 | 0.06 | 0.06 | 0.49 |
| | | Back side | 0.47 | 0.10 | 0.09 | 0.66 |
| LTE FDD Band 38 | body-worn | Front side | 0.16 | 0.06 | 0.06 | 0.28 |
| | | Back side | 0.29 | 0.10 | 0.09 | 0.48 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| reported SAR WWAN and WLAN 2.4GHz MAIN and WLAN 5GHz AUX, ΣSAR evaluation | | | | | | |
|---|---|---|---|---|---|---|
| Frequency band | Position | | reported SAR / W/kg | | | ΣSAR |
| | | | WWAN | WLAN Main | WLAN Aux | <1.6W/kg |
| GSM 850 | Head | Right cheek | 0.07 | 0.22 | 0.28 | 0.57 |
| | | Right tilt | 0.03 | 0.21 | 0.08 | 0.32 |
| | | Left cheek | 0.11 | 0.42 | 0.11 | 0.64 |
| | | Left tilt | 0.04 | 0.37 | 0.05 | 0.46 |
| | body-worn | Front side | 0.30 | 0.06 | 0.04 | 0.40 |
| | | Back side | 0.45 | 0.10 | 0.12 | 0.67 |
| GSM 1900 | Head | Right cheek | 0.08 | 0.22 | 0.28 | 0.58 |
| | | Right tilt | 0.03 | 0.21 | 0.08 | 0.32 |
| | | Left cheek | 0.06 | 0.42 | 0.11 | 0.59 |
| | | Left tilt | 0.03 | 0.37 | 0.05 | 0.45 |
| | body-worn | Front side | 0.17 | 0.06 | 0.04 | 0.27 |
| | | Back side | 0.23 | 0.10 | 0.12 | 0.45 |
| WCDMA Band II | Head | Right cheek | 0.20 | 0.22 | 0.28 | 0.70 |
| | | Right tilt | 0.11 | 0.21 | 0.08 | 0.40 |
| | | Left cheek | 0.17 | 0.42 | 0.11 | 0.70 |
| | | Left tilt | 0.10 | 0.37 | 0.05 | 0.52 |
| | body-worn | Front side | 0.40 | 0.06 | 0.04 | 0.50 |
| | | Back side | 0.43 | 0.10 | 0.12 | 0.65 |
| WCDMA Band IV | Head | Right cheek | 0.08 | 0.22 | 0.28 | 0.58 |
| | | Right tilt | 0.03 | 0.21 | 0.08 | 0.32 |
| | | Left cheek | 0.07 | 0.42 | 0.11 | 0.60 |
| | | Left tilt | 0.02 | 0.37 | 0.05 | 0.44 |
| | body-worn | Front side | 0.16 | 0.06 | 0.04 | 0.26 |
| | | Back side | 0.20 | 0.10 | 0.12 | 0.42 |
| WCDMA Band V | Head | Right cheek | 0.09 | 0.22 | 0.28 | 0.59 |
| | | Right tilt | 0.04 | 0.21 | 0.08 | 0.33 |
| | | Left cheek | 0.11 | 0.42 | 0.11 | 0.64 |
| | | Left tilt | 0.05 | 0.37 | 0.05 | 0.47 |
| | body-worn | Front side | 0.36 | 0.06 | 0.04 | 0.46 |
| | | Back side | 0.49 | 0.10 | 0.12 | 0.71 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| reported SAR WWAN and WLAN 2.4GHz MAIN and WLAN 5GHz AUX, ΣSAR evaluation | | | | | | |
|---|---|---|---|---|---|---|
| Frequency band | Position | | reported SAR / W/kg | | | ΣSAR |
| | | | WWAN | WLAN Main | WLAN Aux | <1.6W/kg |
| LTE FDD Band 2 | Head | Right cheek | 0.18 | 0.22 | 0.28 | 0.68 |
| | | Right tilt | 0.10 | 0.21 | 0.08 | 0.39 |
| | | Left cheek | 0.14 | 0.42 | 0.11 | 0.67 |
| | | Left tilt | 0.11 | 0.37 | 0.05 | 0.53 |
| | body-worn | Front side | 0.43 | 0.06 | 0.04 | 0.53 |
| | | Back side | 0.44 | 0.10 | 0.12 | 0.66 |
| LTE FDD Band 4 | Head | Right cheek | 0.08 | 0.22 | 0.28 | 0.58 |
| | | Right tilt | 0.03 | 0.21 | 0.08 | 0.32 |
| | | Left cheek | 0.06 | 0.42 | 0.11 | 0.59 |
| | | Left tilt | 0.03 | 0.37 | 0.05 | 0.45 |
| | body-worn | Front side | 0.13 | 0.06 | 0.04 | 0.23 |
| | | Back side | 0.14 | 0.10 | 0.12 | 0.36 |
| LTE FDD Band 5 | Head | Right cheek | 0.10 | 0.22 | 0.28 | 0.60 |
| | | Right tilt | 0.04 | 0.21 | 0.08 | 0.33 |
| | | Left cheek | 0.13 | 0.42 | 0.11 | 0.66 |
| | | Left tilt | 0.06 | 0.37 | 0.05 | 0.48 |
| | body-worn | Front side | 0.35 | 0.06 | 0.04 | 0.45 |
| | | Back side | 0.49 | 0.10 | 0.12 | 0.71 |
| LTE FDD Band 12 | Head | Right cheek | 0.10 | 0.22 | 0.28 | 0.60 |
| | | Right tilt | 0.05 | 0.21 | 0.08 | 0.34 |
| | | Left cheek | 0.14 | 0.42 | 0.11 | 0.67 |
| | | Left tilt | 0.06 | 0.37 | 0.05 | 0.48 |
| | body-worn | Front side | 0.35 | 0.06 | 0.04 | 0.45 |
| | | Back side | 0.49 | 0.10 | 0.12 | 0.71 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| reported SAR WWAN and WLAN 2.4GHz MAIN and WLAN 5GHz AUX, ΣSAR evaluation | | | | | | |
|---|---|---|---|---|---|---|
| Frequency band | Position | | reported SAR / W/kg | | | ΣSAR |
| | | | WWAN | WLAN Main | WLAN Aux | <1.6W/kg |
| LTE FDD Band 13 | Head | Right cheek | 0.05 | 0.22 | 0.28 | 0.55 |
| | | Right tilt | 0.01 | 0.21 | 0.08 | 0.30 |
| | | Left cheek | 0.06 | 0.42 | 0.11 | 0.59 |
| | | Left tilt | 0.03 | 0.37 | 0.05 | 0.45 |
| | body-worn | Front side | 0.18 | 0.06 | 0.04 | 0.28 |
| | | Back side | 0.24 | 0.10 | 0.12 | 0.46 |
| LTE FDD Band 17 | Head | Right cheek | 0.09 | 0.22 | 0.28 | 0.59 |
| | | Right tilt | 0.05 | 0.21 | 0.08 | 0.34 |
| | | Left cheek | 0.14 | 0.42 | 0.11 | 0.67 |
| | | Left tilt | 0.08 | 0.37 | 0.05 | 0.50 |
| | body-worn | Front side | 0.37 | 0.06 | 0.04 | 0.47 |
| | | Back side | 0.47 | 0.10 | 0.12 | 0.69 |
| LTE FDD Band 38 | Head | Right cheek | 0.05 | 0.22 | 0.28 | 0.55 |
| | | Right tilt | 0.01 | 0.21 | 0.08 | 0.30 |
| | | Left cheek | 0.04 | 0.42 | 0.11 | 0.57 |
| | | Left tilt | 0.03 | 0.37 | 0.05 | 0.45 |
| | body-worn | Front side | 0.16 | 0.06 | 0.04 | 0.26 |
| | | Back side | 0.29 | 0.10 | 0.12 | 0.51 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation | | | | | | |
|---|---|---|---|---|---|---|
| Frequency band | Position | | reported SAR / W/kg | | | ΣSAR |
| | | | WWAN | WLAN Main | WLAN Aux | <1.6W/kg |
| GSM 850 | Head | Right cheek | 0.07 | 0.18 | 0.28 | 0.53 |
| | | Right tilt | 0.03 | 0.11 | 0.08 | 0.22 |
| | | Left cheek | 0.11 | 0.29 | 0.11 | 0.51 |
| | | Left tilt | 0.04 | 0.21 | 0.05 | 0.30 |
| | body-worn | Front side | 0.30 | 0.03 | 0.04 | 0.37 |
| | | Back side | 0.45 | 0.12 | 0.12 | 0.69 |
| GSM 1900 | Head | Right cheek | 0.08 | 0.18 | 0.28 | 0.54 |
| | | Right tilt | 0.03 | 0.11 | 0.08 | 0.22 |
| | | Left cheek | 0.06 | 0.29 | 0.11 | 0.46 |
| | | Left tilt | 0.03 | 0.21 | 0.05 | 0.29 |
| | body-worn | Front side | 0.17 | 0.03 | 0.04 | 0.24 |
| | | Back side | 0.23 | 0.12 | 0.12 | 0.47 |
| WCDMA Band II | Head | Right cheek | 0.20 | 0.18 | 0.28 | 0.66 |
| | | Right tilt | 0.11 | 0.11 | 0.08 | 0.30 |
| | | Left cheek | 0.17 | 0.29 | 0.11 | 0.57 |
| | | Left tilt | 0.10 | 0.21 | 0.05 | 0.36 |
| | body-worn | Front side | 0.40 | 0.03 | 0.04 | 0.47 |
| | | Back side | 0.43 | 0.12 | 0.12 | 0.67 |
| WCDMA Band IV | Head | Right cheek | 0.08 | 0.18 | 0.28 | 0.54 |
| | | Right tilt | 0.03 | 0.11 | 0.08 | 0.22 |
| | | Left cheek | 0.07 | 0.29 | 0.11 | 0.47 |
| | | Left tilt | 0.02 | 0.21 | 0.05 | 0.28 |
| | body-worn | Front side | 0.16 | 0.03 | 0.04 | 0.23 |
| | | Back side | 0.20 | 0.12 | 0.12 | 0.44 |
| WCDMA Band V | Head | Right cheek | 0.09 | 0.18 | 0.28 | 0.55 |
| | | Right tilt | 0.04 | 0.11 | 0.08 | 0.23 |
| | | Left cheek | 0.11 | 0.29 | 0.11 | 0.51 |
| | | Left tilt | 0.05 | 0.21 | 0.05 | 0.31 |
| | body-worn | Front side | 0.36 | 0.03 | 0.04 | 0.43 |
| | | Back side | 0.49 | 0.12 | 0.12 | 0.73 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation | | | | | | |
|---|---|---|---|---|---|---|
| Frequency band | Position | | reported SAR / W/kg | | | ΣSAR |
| | | | WWAN | WLAN Main | WLAN Aux | <1.6W/kg |
| LTE FDD Band 2 | Head | Right cheek | 0.18 | 0.18 | 0.28 | 0.64 |
| | | Right tilt | 0.10 | 0.11 | 0.08 | 0.29 |
| | | Left cheek | 0.14 | 0.29 | 0.11 | 0.54 |
| | | Left tilt | 0.11 | 0.21 | 0.05 | 0.37 |
| | body-worn | Front side | 0.43 | 0.03 | 0.04 | 0.50 |
| | | Back side | 0.44 | 0.12 | 0.12 | 0.68 |
| LTE FDD Band 4 | Head | Right cheek | 0.08 | 0.18 | 0.28 | 0.54 |
| | | Right tilt | 0.03 | 0.11 | 0.08 | 0.22 |
| | | Left cheek | 0.06 | 0.29 | 0.11 | 0.46 |
| | | Left tilt | 0.03 | 0.21 | 0.05 | 0.29 |
| | body-worn | Front side | 0.13 | 0.03 | 0.04 | 0.20 |
| | | Back side | 0.14 | 0.12 | 0.12 | 0.38 |
| LTE FDD Band 5 | Head | Right cheek | 0.10 | 0.18 | 0.28 | 0.56 |
| | | Right tilt | 0.04 | 0.11 | 0.08 | 0.23 |
| | | Left cheek | 0.13 | 0.29 | 0.11 | 0.53 |
| | | Left tilt | 0.06 | 0.21 | 0.05 | 0.32 |
| | body-worn | Front side | 0.35 | 0.03 | 0.04 | 0.42 |
| | | Back side | 0.49 | 0.12 | 0.12 | 0.73 |
| LTE FDD Band 12 | Head | Right cheek | 0.10 | 0.18 | 0.28 | 0.56 |
| | | Right tilt | 0.05 | 0.11 | 0.08 | 0.24 |
| | | Left cheek | 0.14 | 0.29 | 0.11 | 0.54 |
| | | Left tilt | 0.06 | 0.21 | 0.05 | 0.32 |
| | body-worn | Front side | 0.35 | 0.03 | 0.04 | 0.42 |
| | | Back side | 0.49 | 0.12 | 0.12 | 0.73 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation | | | | | | |
|---|---|---|---|---|---|---|
| Frequency band | Position | | reported SAR / W/kg | | | ΣSAR |
| | | | WWAN | WLAN Main | WLAN Aux | <1.6W/kg |
| LTE FDD Band 13 | Head | Right cheek | 0.05 | 0.18 | 0.28 | 0.51 |
| | | Right tilt | 0.01 | 0.11 | 0.08 | 0.20 |
| | | Left cheek | 0.06 | 0.29 | 0.11 | 0.46 |
| | | Left tilt | 0.03 | 0.21 | 0.05 | 0.29 |
| | body-worn | Front side | 0.18 | 0.03 | 0.04 | 0.25 |
| | | Back side | 0.24 | 0.12 | 0.12 | 0.48 |
| LTE FDD Band 17 | Head | Right cheek | 0.09 | 0.18 | 0.28 | 0.55 |
| | | Right tilt | 0.05 | 0.11 | 0.08 | 0.24 |
| | | Left cheek | 0.14 | 0.29 | 0.11 | 0.54 |
| | | Left tilt | 0.08 | 0.21 | 0.05 | 0.34 |
| | body-worn | Front side | 0.37 | 0.03 | 0.04 | 0.44 |
| | | Back side | 0.47 | 0.12 | 0.12 | 0.71 |
| LTE FDD Band 38 | Head | Right cheek | 0.05 | 0.18 | 0.28 | 0.51 |
| | | Right tilt | 0.01 | 0.11 | 0.08 | 0.20 |
| | | Left cheek | 0.04 | 0.29 | 0.11 | 0.44 |
| | | Left tilt | 0.03 | 0.21 | 0.05 | 0.29 |
| | body-worn | Front side | 0.16 | 0.03 | 0.04 | 0.23 |
| | | Back side | 0.29 | 0.12 | 0.12 | 0.53 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| reported SAR WWAN and WLAN 5GHz and Bluetooth, ΣSAR evaluation | | | | | | | |
|---|---|---|---|---|---|---|---|
| Frequency band | Position | | reported SAR / W/kg | | | | ΣSAR |
| | | | WWAN | WLAN Main | WLAN Aux | BT | <1.6W/kg |
| GSM 850 | Head | Right cheek | 0.07 | 0.18 | 0.28 | 0.07 | 0.60 |
| | | Right tilt | 0.03 | 0.11 | 0.08 | 0.06 | 0.28 |
| | | Left cheek | 0.11 | 0.29 | 0.11 | 0.11 | 0.62 |
| | | Left tilt | 0.04 | 0.21 | 0.05 | 0.07 | 0.37 |
| | body-worn | Front side | 0.30 | 0.03 | 0.04 | 0.00 | 0.37 |
| | | Back side | 0.45 | 0.12 | 0.12 | 0.02 | 0.71 |
| GSM 1900 | Head | Right cheek | 0.08 | 0.18 | 0.28 | 0.07 | 0.61 |
| | | Right tilt | 0.03 | 0.11 | 0.08 | 0.06 | 0.28 |
| | | Left cheek | 0.06 | 0.29 | 0.11 | 0.11 | 0.57 |
| | | Left tilt | 0.03 | 0.21 | 0.05 | 0.07 | 0.36 |
| | body-worn | Front side | 0.17 | 0.03 | 0.04 | 0.00 | 0.24 |
| | | Back side | 0.23 | 0.12 | 0.12 | 0.02 | 0.49 |
| WCDMA Band II | Head | Right cheek | 0.20 | 0.18 | 0.28 | 0.07 | 0.73 |
| | | Right tilt | 0.11 | 0.11 | 0.08 | 0.06 | 0.36 |
| | | Left cheek | 0.17 | 0.29 | 0.11 | 0.11 | 0.68 |
| | | Left tilt | 0.10 | 0.21 | 0.05 | 0.07 | 0.43 |
| | body-worn | Front side | 0.40 | 0.03 | 0.04 | 0.00 | 0.47 |
| | | Back side | 0.43 | 0.12 | 0.12 | 0.02 | 0.69 |
| WCDMA Band IV | Head | Right cheek | 0.08 | 0.18 | 0.28 | 0.07 | 0.61 |
| | | Right tilt | 0.03 | 0.11 | 0.08 | 0.06 | 0.28 |
| | | Left cheek | 0.07 | 0.29 | 0.11 | 0.11 | 0.58 |
| | | Left tilt | 0.02 | 0.21 | 0.05 | 0.07 | 0.35 |
| | body-worn | Front side | 0.16 | 0.03 | 0.04 | 0.00 | 0.23 |
| | | Back side | 0.20 | 0.12 | 0.12 | 0.02 | 0.46 |
| WCDMA Band V | Head | Right cheek | 0.09 | 0.18 | 0.28 | 0.07 | 0.62 |
| | | Right tilt | 0.04 | 0.11 | 0.08 | 0.06 | 0.29 |
| | | Left cheek | 0.11 | 0.29 | 0.11 | 0.11 | 0.62 |
| | | Left tilt | 0.05 | 0.21 | 0.05 | 0.07 | 0.38 |
| | body-worn | Front side | 0.36 | 0.03 | 0.04 | 0.00 | 0.43 |
| | | Back side | 0.49 | 0.12 | 0.12 | 0.02 | 0.75 |
| LTE FDD Band 2 | Head | Right cheek | 0.18 | 0.18 | 0.28 | 0.07 | 0.71 |
| | | Right tilt | 0.10 | 0.11 | 0.08 | 0.06 | 0.35 |
| | | Left cheek | 0.14 | 0.29 | 0.11 | 0.11 | 0.65 |
| | | Left tilt | 0.11 | 0.21 | 0.05 | 0.07 | 0.44 |
| | body-worn | Front side | 0.43 | 0.03 | 0.04 | 0.00 | 0.50 |
| | | Back side | 0.44 | 0.12 | 0.12 | 0.02 | 0.70 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| reported SAR WWAN and WLAN 5GHz and Bluetooth, ΣSAR evaluation | | | | | | | |
|---|---|---|---|---|---|---|---|
| Frequency band | Position | | reported SAR / W/kg | | | | ΣSAR |
| | | | WWAN | WLAN Main | WLAN Aux | BT | <1.6W/kg |
| LTE FDD Band 4 | Head | Right cheek | 0.08 | 0.18 | 0.28 | 0.07 | 0.61 |
| | | Right tilt | 0.03 | 0.11 | 0.08 | 0.06 | 0.28 |
| | | Left cheek | 0.06 | 0.29 | 0.11 | 0.11 | 0.57 |
| | | Left tilt | 0.03 | 0.21 | 0.05 | 0.07 | 0.36 |
| | body-worn | Front side | 0.13 | 0.03 | 0.04 | 0.00 | 0.20 |
| | | Back side | 0.14 | 0.12 | 0.12 | 0.02 | 0.40 |
| LTE FDD Band 5 | Head | Right cheek | 0.10 | 0.18 | 0.28 | 0.07 | 0.63 |
| | | Right tilt | 0.04 | 0.11 | 0.08 | 0.06 | 0.29 |
| | | Left cheek | 0.13 | 0.29 | 0.11 | 0.11 | 0.64 |
| | | Left tilt | 0.06 | 0.21 | 0.05 | 0.07 | 0.39 |
| | body-worn | Front side | 0.35 | 0.03 | 0.04 | 0.00 | 0.42 |
| | | Back side | 0.49 | 0.12 | 0.12 | 0.02 | 0.75 |
| LTE FDD Band 12 | Head | Right cheek | 0.10 | 0.18 | 0.28 | 0.07 | 0.63 |
| | | Right tilt | 0.05 | 0.11 | 0.08 | 0.06 | 0.30 |
| | | Left cheek | 0.14 | 0.29 | 0.11 | 0.11 | 0.65 |
| | | Left tilt | 0.06 | 0.21 | 0.05 | 0.07 | 0.39 |
| | body-worn | Front side | 0.35 | 0.03 | 0.04 | 0.00 | 0.42 |
| | | Back side | 0.49 | 0.12 | 0.12 | 0.02 | 0.75 |
| LTE FDD Band 13 | Head | Right cheek | 0.05 | 0.18 | 0.28 | 0.07 | 0.58 |
| | | Right tilt | 0.01 | 0.11 | 0.08 | 0.06 | 0.26 |
| | | Left cheek | 0.06 | 0.29 | 0.11 | 0.11 | 0.57 |
| | | Left tilt | 0.03 | 0.21 | 0.05 | 0.07 | 0.36 |
| | body-worn | Front side | 0.18 | 0.03 | 0.04 | 0.00 | 0.25 |
| | | Back side | 0.24 | 0.12 | 0.12 | 0.02 | 0.50 |
| LTE FDD Band 17 | Head | Right cheek | 0.09 | 0.18 | 0.28 | 0.07 | 0.62 |
| | | Right tilt | 0.05 | 0.11 | 0.08 | 0.06 | 0.30 |
| | | Left cheek | 0.14 | 0.29 | 0.11 | 0.11 | 0.65 |
| | | Left tilt | 0.08 | 0.21 | 0.05 | 0.07 | 0.41 |
| | body-worn | Front side | 0.37 | 0.03 | 0.04 | 0.00 | 0.44 |
| | | Back side | 0.47 | 0.12 | 0.12 | 0.02 | 0.73 |
| LTE FDD Band 38 | Head | Right cheek | 0.05 | 0.18 | 0.28 | 0.07 | 0.58 |
| | | Right tilt | 0.01 | 0.11 | 0.08 | 0.06 | 0.26 |
| | | Left cheek | 0.04 | 0.29 | 0.11 | 0.11 | 0.55 |
| | | Left tilt | 0.03 | 0.21 | 0.05 | 0.07 | 0.36 |
| | body-worn | Front side | 0.16 | 0.03 | 0.04 | 0.00 | 0.23 |
| | | Back side | 0.29 | 0.12 | 0.12 | 0.02 | 0.55 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| reported SAR WWAN and WLAN 5GHz and Bluetooth, ΣSAR evaluation | | | | | | |
|---|---|---|---|---|---|---|
| Frequency band | Position | | reported SAR / W/kg | | | ΣSAR |
| | | | WWAN | WLAN Aux | BT | <1.6W/kg |
| GSM 850 | Head | Right cheek | 0.07 | 0.28 | 0.07 | 0.42 |
| | | Right tilt | 0.03 | 0.08 | 0.06 | 0.17 |
| | | Left cheek | 0.11 | 0.11 | 0.11 | 0.33 |
| | | Left tilt | 0.04 | 0.05 | 0.07 | 0.16 |
| | body-worn | Front side | 0.30 | 0.04 | 0.00 | 0.34 |
| | | Back side | 0.45 | 0.12 | 0.02 | 0.59 |
| GSM 1900 | Head | Right cheek | 0.08 | 0.28 | 0.07 | 0.43 |
| | | Right tilt | 0.03 | 0.08 | 0.06 | 0.17 |
| | | Left cheek | 0.06 | 0.11 | 0.11 | 0.28 |
| | | Left tilt | 0.03 | 0.05 | 0.07 | 0.15 |
| | body-worn | Front side | 0.17 | 0.04 | 0.00 | 0.21 |
| | | Back side | 0.23 | 0.12 | 0.02 | 0.37 |
| WCDMA Band II | Head | Right cheek | 0.20 | 0.28 | 0.07 | 0.55 |
| | | Right tilt | 0.11 | 0.08 | 0.06 | 0.25 |
| | | Left cheek | 0.17 | 0.11 | 0.11 | 0.39 |
| | | Left tilt | 0.10 | 0.05 | 0.07 | 0.22 |
| | body-worn | Front side | 0.40 | 0.04 | 0.00 | 0.44 |
| | | Back side | 0.43 | 0.12 | 0.02 | 0.57 |
| WCDMA Band IV | Head | Right cheek | 0.08 | 0.28 | 0.07 | 0.43 |
| | | Right tilt | 0.03 | 0.08 | 0.06 | 0.17 |
| | | Left cheek | 0.07 | 0.11 | 0.11 | 0.29 |
| | | Left tilt | 0.02 | 0.05 | 0.07 | 0.14 |
| | body-worn | Front side | 0.16 | 0.04 | 0.00 | 0.20 |
| | | Back side | 0.20 | 0.12 | 0.02 | 0.34 |
| WCDMA Band V | Head | Right cheek | 0.09 | 0.28 | 0.07 | 0.44 |
| | | Right tilt | 0.04 | 0.08 | 0.06 | 0.18 |
| | | Left cheek | 0.11 | 0.11 | 0.11 | 0.33 |
| | | Left tilt | 0.05 | 0.05 | 0.07 | 0.17 |
| | body-worn | Front side | 0.36 | 0.04 | 0.00 | 0.40 |
| | | Back side | 0.49 | 0.12 | 0.02 | 0.63 |
| LTE FDD Band 2 | Head | Right cheek | 0.18 | 0.28 | 0.07 | 0.53 |
| | | Right tilt | 0.10 | 0.08 | 0.06 | 0.24 |
| | | Left cheek | 0.14 | 0.11 | 0.11 | 0.36 |
| | | Left tilt | 0.11 | 0.05 | 0.07 | 0.23 |
| | body-worn | Front side | 0.43 | 0.04 | 0.00 | 0.47 |
| | | Back side | 0.44 | 0.12 | 0.02 | 0.58 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| reported SAR WWAN and WLAN 5GHz and Bluetooth, ΣSAR evaluation | | | | | | |
|---|---|---|---|---|---|---|
| Frequency band | Position | | reported SAR / W/kg | | | ΣSAR |
| | | | WWAN | WLAN Aux | BT | <1.6W/kg |
| LTE FDD Band 4 | Head | Right cheek | 0.08 | 0.28 | 0.07 | 0.43 |
| | | Right tilt | 0.03 | 0.08 | 0.06 | 0.17 |
| | | Left cheek | 0.06 | 0.11 | 0.11 | 0.28 |
| | | Left tilt | 0.03 | 0.05 | 0.07 | 0.15 |
| | body-worn | Front side | 0.13 | 0.04 | 0.00 | 0.17 |
| | | Back side | 0.14 | 0.12 | 0.02 | 0.28 |
| LTE FDD Band 5 | Head | Right cheek | 0.10 | 0.28 | 0.07 | 0.45 |
| | | Right tilt | 0.04 | 0.08 | 0.06 | 0.18 |
| | | Left cheek | 0.13 | 0.11 | 0.11 | 0.35 |
| | | Left tilt | 0.06 | 0.05 | 0.07 | 0.18 |
| | body-worn | Front side | 0.35 | 0.04 | 0.00 | 0.39 |
| | | Back side | 0.49 | 0.12 | 0.02 | 0.63 |
| LTE FDD Band 12 | Head | Right cheek | 0.10 | 0.28 | 0.07 | 0.45 |
| | | Right tilt | 0.05 | 0.08 | 0.06 | 0.19 |
| | | Left cheek | 0.14 | 0.11 | 0.11 | 0.36 |
| | | Left tilt | 0.06 | 0.05 | 0.07 | 0.18 |
| | body-worn | Front side | 0.35 | 0.04 | 0.00 | 0.39 |
| | | Back side | 0.49 | 0.12 | 0.02 | 0.63 |
| LTE FDD Band 13 | Head | Right cheek | 0.05 | 0.28 | 0.07 | 0.40 |
| | | Right tilt | 0.01 | 0.08 | 0.06 | 0.15 |
| | | Left cheek | 0.06 | 0.11 | 0.11 | 0.28 |
| | | Left tilt | 0.03 | 0.05 | 0.07 | 0.15 |
| | body-worn | Front side | 0.18 | 0.04 | 0.00 | 0.22 |
| | | Back side | 0.24 | 0.12 | 0.02 | 0.38 |
| LTE FDD Band 17 | Head | Right cheek | 0.09 | 0.28 | 0.07 | 0.44 |
| | | Right tilt | 0.05 | 0.08 | 0.06 | 0.19 |
| | | Left cheek | 0.14 | 0.11 | 0.11 | 0.36 |
| | | Left tilt | 0.08 | 0.05 | 0.07 | 0.20 |
| | body-worn | Front side | 0.37 | 0.04 | 0.00 | 0.41 |
| | | Back side | 0.47 | 0.12 | 0.02 | 0.61 |
| LTE FDD Band 38 | Head | Right cheek | 0.05 | 0.28 | 0.07 | 0.40 |
| | | Right tilt | 0.01 | 0.08 | 0.06 | 0.15 |
| | | Left cheek | 0.04 | 0.11 | 0.11 | 0.26 |
| | | Left tilt | 0.03 | 0.05 | 0.07 | 0.15 |
| | body-worn | Front side | 0.16 | 0.04 | 0.00 | 0.20 |
| | | Back side | 0.29 | 0.12 | 0.02 | 0.43 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# 4. Instruments List

| Manufacturer | Device | Type | Serial number | Date of last calibration | Date of next calibration |
|---|---|---|---|---|---|
| SPEAG | Dosimetric E-Field Probe | EX3DV4 | 3831 | Jan.23,2018 | Jan.22,2019 |
| SPEAG | System Validation Dipole | D750V2 | 1015 | Aug.21,2017 | Aug.20,2018 |
| | | D835V2 | 4d063 | Aug.21,2017 | Aug.20,2018 |
| | | D1750V2 | 1008 | Aug.21,2017 | Aug.20,2018 |
| | | D1900V2 | 5d173 | May.31,2017 | May.30,2018 |
| | | D2450V2 | 727 | Apr.21,2017 | Apr.20,2018 |
| | | D2600V2 | 1005 | Jan.17,2018 | Jan.16,2019 |
| | | D5GHzV2 | 1023 | Jan.25,2018 | Jan.24,2019 |
| SPEAG | Data acquisition Electronics | DAE4 | 913 | May.02,2017 | May.01,2018 |
| SPEAG | Software | DASY 52 V52.8.8 | N/A | Calibration not required | Calibration not required |
| SPEAG | Phantom | SAM | N/A | Calibration not required | Calibration not required |
| Network Analyzer | Agilent | E5071C | MY46107530 | Feb.26,2018 | Feb.25,2019 |
| Agilent | Dielectric Probe Kit | 85070E | MY44300677 | Calibration not required | Calibration not required |
| Agilent | Dual-directional coupler | 772D | MY52180142 | Apr.13,2017 | Apr.12,2018 |
| | | 778D | MY52180302 | Apr.13,2017 | Apr.12,2018 |
| Agilent | RF Signal Generator | N5181A | MY50144143 | Mar.14,2018 | Mar.13,2019 |
| Agilent | Power Meter | E4417A | MY52240003 | Dec.21,2017 | Dec.20,2018 |
| Agilent | Power Sensor | E9301H | MY52200003 | Dec.21,2017 | Dec.20,2018 |
| | | | MY52200004 | Dec.21,2017 | Dec.20,2018 |
| TECPEL | Digital thermometer | N5181A | MY50144143 | Mar.15,2018 | Mar.14,2019 |
| Anritsu | Radio Communication Test | MT8820C | 6201061049 | Apr.08,2017 | Apr.07,2018 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# 5. Measurements

Date: 2018/3/26

## GSM 850_Head_Le Cheek_CH 128

Communication System: GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: f = 824.2 MHz; $\sigma$ = 0.924 S/m; $\varepsilon_r$ = 41.511; $\rho$ = 1000 kg/m$^3$
Phantom section: Left Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.1, 9.1, 9.1); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.0907 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.649 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.105 W/kg
**SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.055 W/kg**
Maximum value of SAR (measured) = 0.0925 W/kg

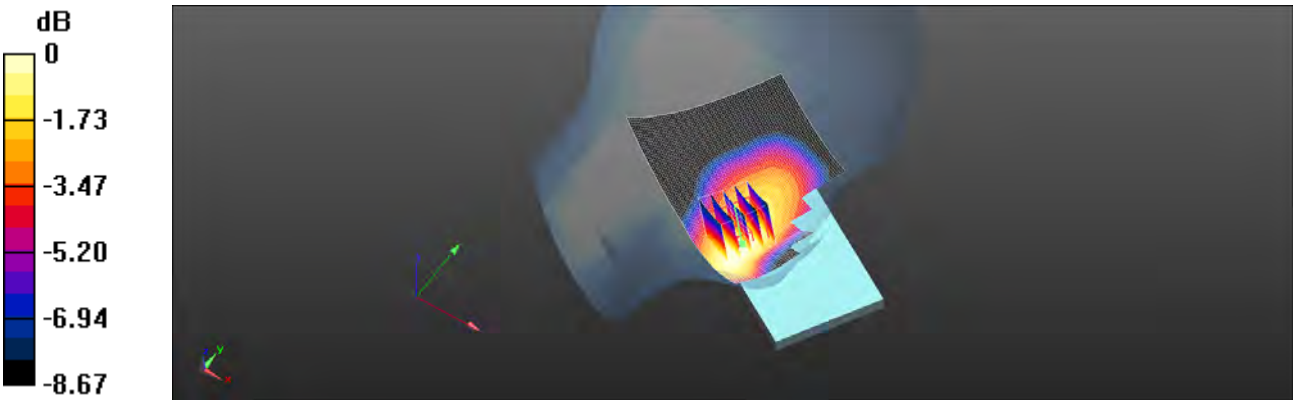


0 dB = 0.0925 W/kg = -10.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/26

## GSM 850_Body-worn_Back side_CH 128_10mm

Communication System: GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: f = 824.2 MHz; $\sigma$ = 0.981 S/m; $\varepsilon_r$ = 55.187; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.18, 9.18, 9.18); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.421 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.69 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.507 W/kg
**SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.213 W/kg**
Maximum value of SAR (measured) = 0.422 W/kg

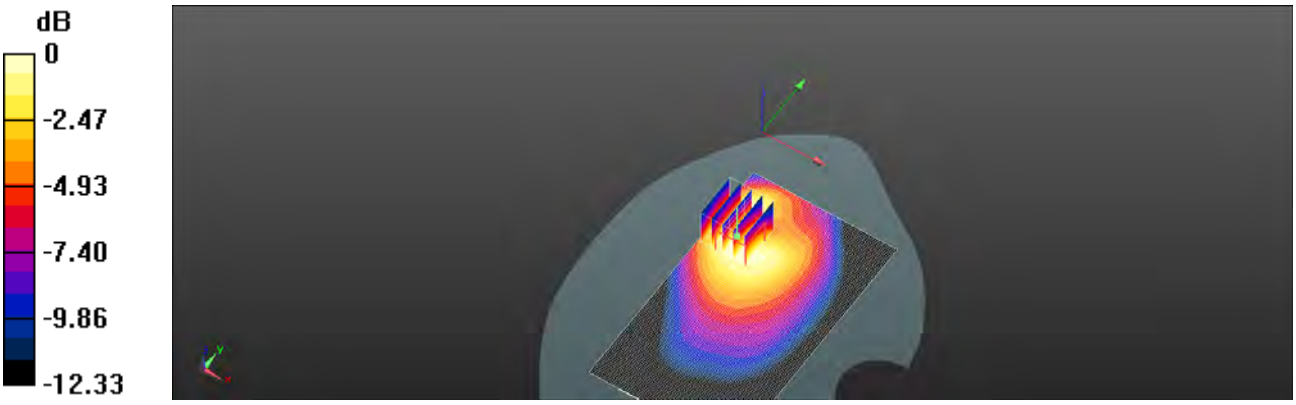


0 dB = 0.422 W/kg = -3.75 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/26

## GPRS 850_Hotspot_Back side_CH 190_10mm

Communication System: GPRS (1Dn4Up); Frequency: 836.6 MHz; Duty Cycle: 1:2
Medium parameters used: f = 837 MHz; $\sigma$ = 0.981 S/m; $\varepsilon_r$ = 55.187; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.18, 9.18, 9.18); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.594 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.27 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.725 W/kg
**SAR(1 g) = 0.457 W/kg; SAR(10 g) = 0.296 W/kg**
Maximum value of SAR (measured) = 0.581 W/kg

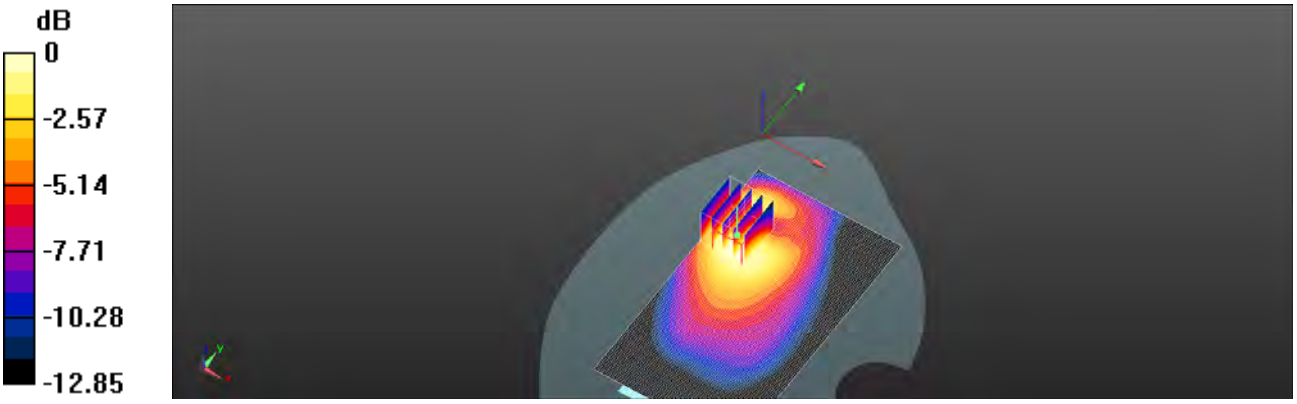


0 dB = 0.581 W/kg = -2.36 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/29

## GSM 1900_Head_Re Cheek_CH 810

Communication System: GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: f = 1910 MHz; $\sigma$ = 1.395 S/m; $\varepsilon_r$ = 39.813; $\rho$ = 1000 kg/m$^3$
Phantom section: Right Section
Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.78, 7.78, 7.78); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.0766 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.897 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 0.0910 W/kg
**SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.042 W/kg**
Maximum value of SAR (measured) = 0.0770 W/kg

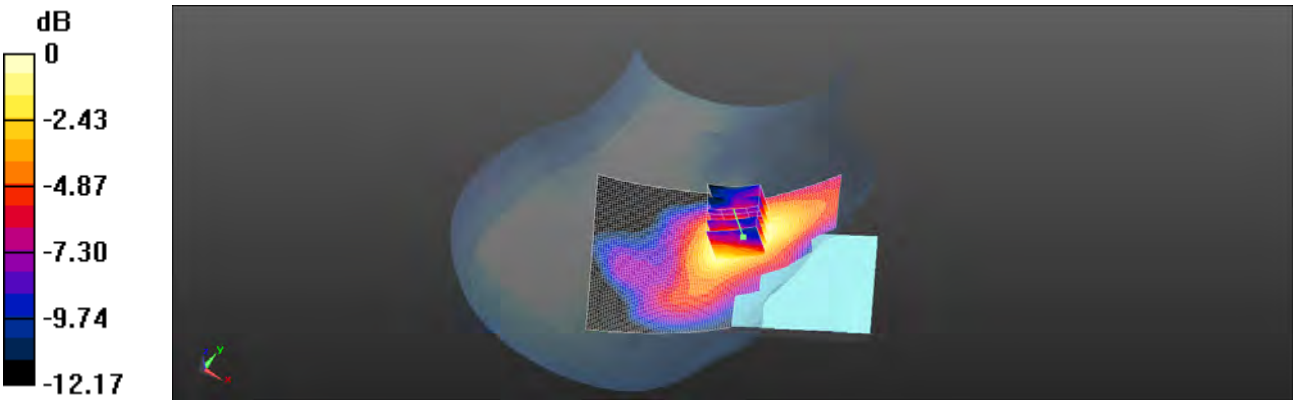


0 dB = 0.0770 W/kg = -11.13 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/29

## GSM 1900_Body-worn_Back side_CH 810_10mm

Communication System: GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: f = 1910 MHz; $\sigma$ = 1.511 S/m; $\varepsilon_r$ = 52.493; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.35, 7.35, 7.35); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.223 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.452 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.281 W/kg
**SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.104 W/kg**
Maximum value of SAR (measured) = 0.220 W/kg

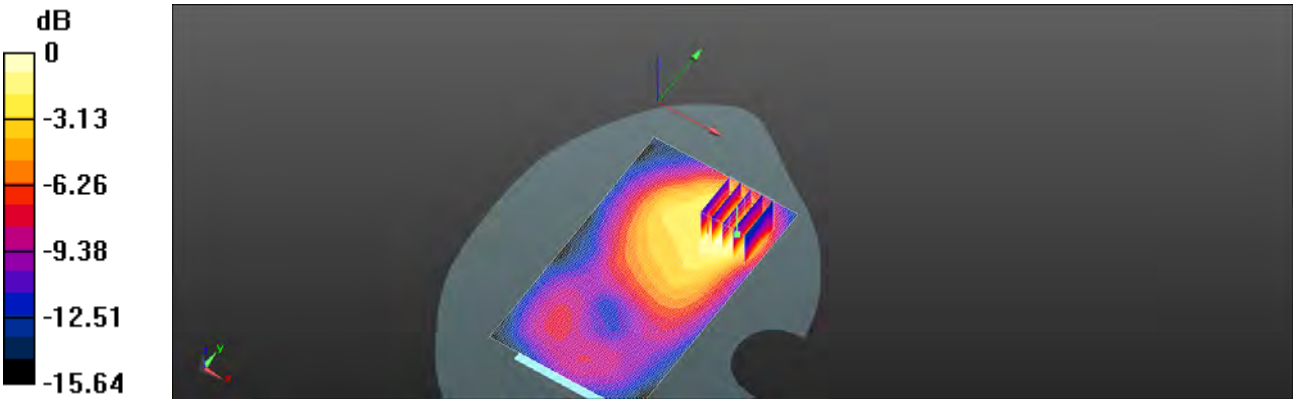


0 dB = 0.220 W/kg = -6.57 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/29

## GPRS 1900_Hotspot_Back side_CH 810_10mm

Communication System: GPRS (1Dn4Up); Frequency: 1909.8 MHz; Duty Cycle: 1: 2
Medium parameters used: f = 1910 MHz; $\sigma$ = 1.511 S/m; $\varepsilon_r$ = 52.493; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.35, 7.35, 7.35); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.271 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.953 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 0.335 W/kg
**SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.123 W/kg**
Maximum value of SAR (measured) = 0.259 W/kg

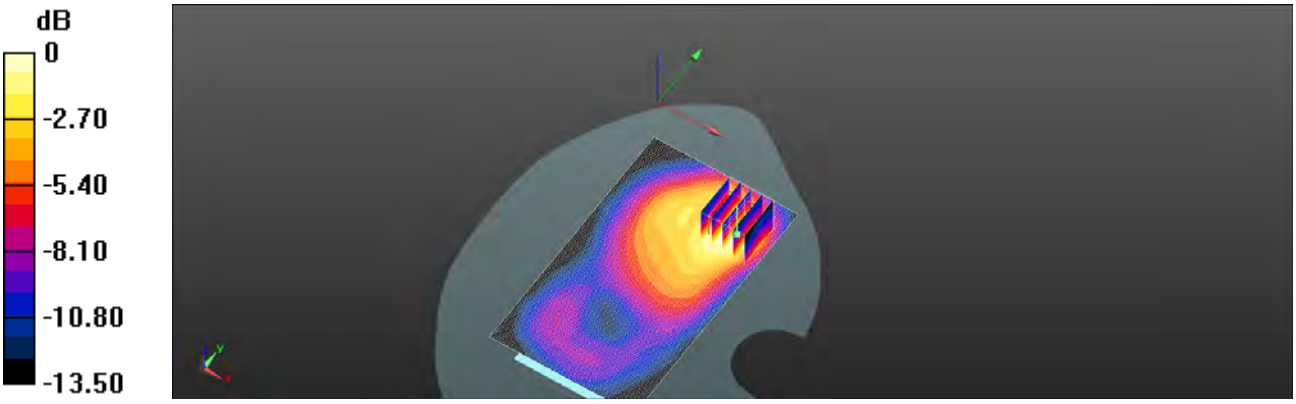


0 dB = 0.259 W/kg = -5.88 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/29

## WCDMA Band II_Head_Re Cheek_CH 9262

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: f = 1852.4 MHz; $\sigma$ = 1.377 S/m; $\varepsilon_r$ = 40.092; $\rho$ = 1000 kg/m$^3$
Phantom section: Right Section
Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.78, 7.78, 7.78); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.217 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.937 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.253 W/kg
**SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.111 W/kg**
Maximum value of SAR (measured) = 0.206 W/kg

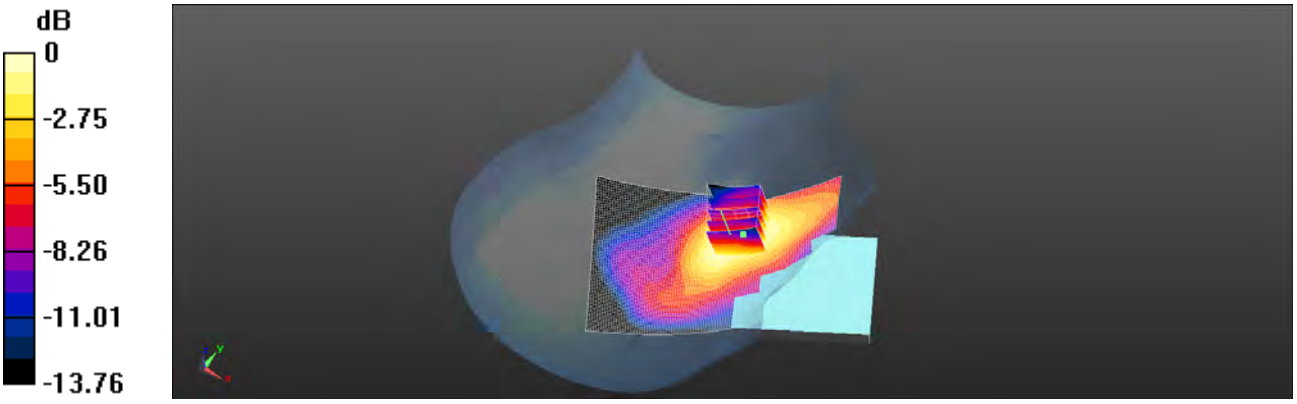


0 dB = 0.206 W/kg = -6.86 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/29

## WCDMA Band II_Hotspot_Back side_CH 9262_10mm

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: f = 1852.4 MHz; $\sigma$ = 1.482 S/m; $\varepsilon_r$ = 52.681; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.35, 7.35, 7.35); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.466 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.523 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.566 W/kg
**SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.213 W/kg**
Maximum value of SAR (measured) = 0.480 W/kg

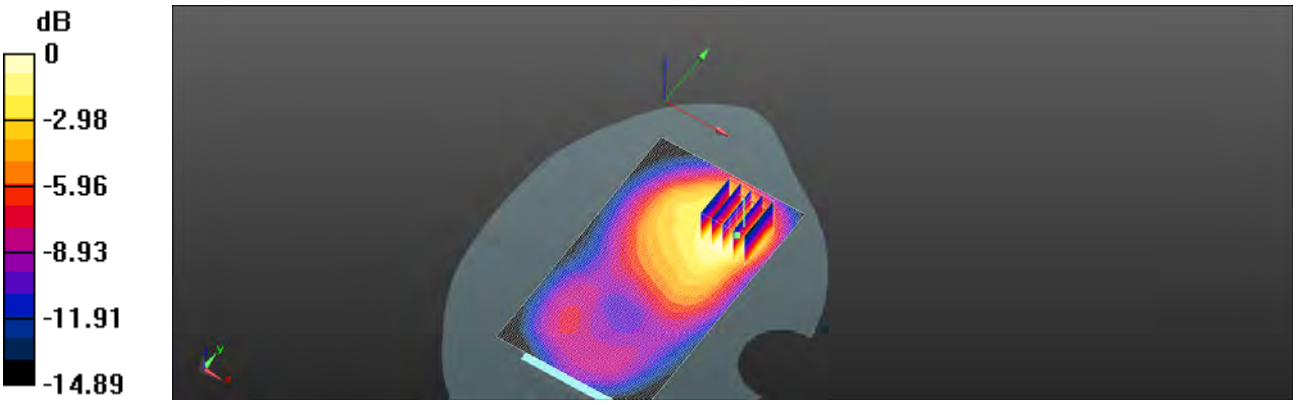


0 dB = 0.480 W/kg = -3.19 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/27

## WCDMA Band IV_Head_Re Cheek_CH 1312

Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium parameters used: f = 1712.4 MHz; $\sigma$ = 1.319 S/m; $\varepsilon_r$ = 40.691; $\rho$ = 1000 kg/m$^3$
Phantom section: Right Section
Ambient temperature: 22.5°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(8.09, 8.09, 8.09); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.0912 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.139 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.0960 W/kg
**SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.051 W/kg**
Maximum value of SAR (measured) = 0.0870 W/kg

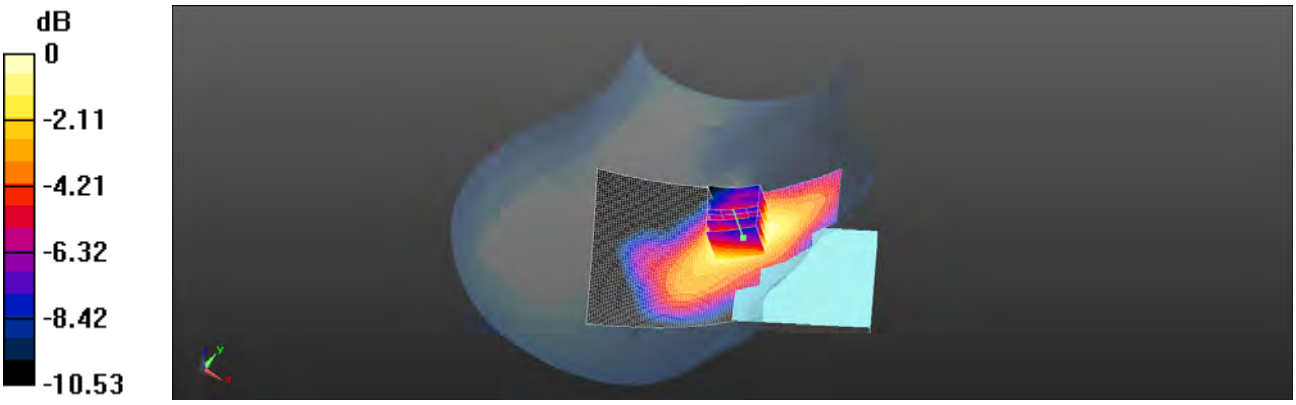


0 dB = 0.0870 W/kg = -10.61 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/27

## WCDMA Band IV_Hotspot_Back side_CH 1312_10mm

Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium parameters used: f = 1712.4 MHz; $\sigma$ = 1.434 S/m; $\varepsilon_r$ = 53.112; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.2°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.65, 7.65, 7.65); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.227 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.121 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.282 W/kg
**SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.112 W/kg**
Maximum value of SAR (measured) = 0.228 W/kg

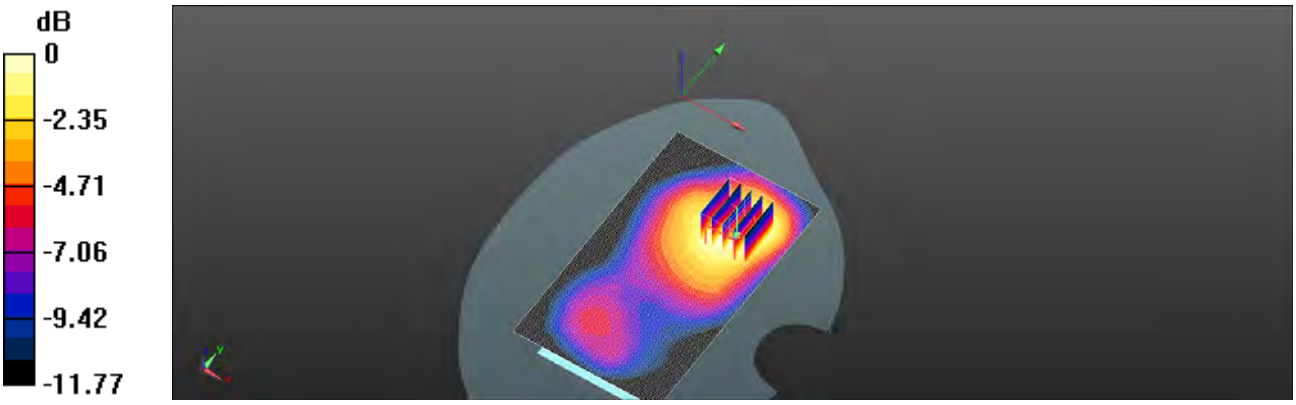


0 dB = 0.228 W/kg = -6.42 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/26

## WCDMA Band V_Head_Le Cheek_CH 4132

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium parameters used: f = 826.4 MHz; $\sigma$ = 0.922 S/m; $\varepsilon_r$ = 41.453; $\rho$ = 1000 kg/m$^3$
Phantom section: Left Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.1, 9.1, 9.1); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.110 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.239 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.126 W/kg
**SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.065 W/kg**
Maximum value of SAR (measured) = 0.110 W/kg

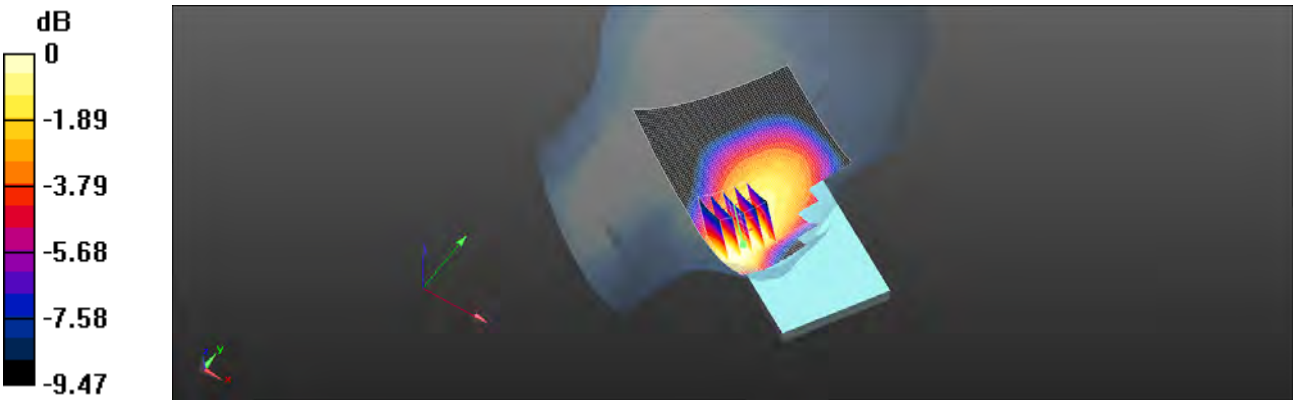


0 dB = 0.110 W/kg = -9.59 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/26

## WCDMA Band V_Hotspot_Back side_CH 4132_10mm

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium parameters used: f = 826.4 MHz; $\sigma$ = 0.985 S/m; $\varepsilon_r$ = 55.203; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.18, 9.18, 9.18); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.503 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.17 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.612 W/kg
**SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.248 W/kg**
Maximum value of SAR (measured) = 0.489 W/kg

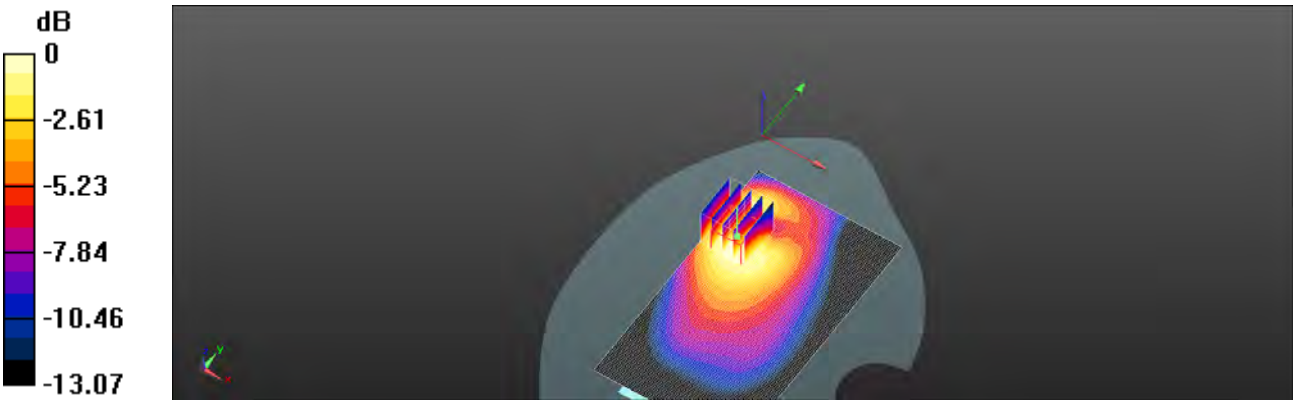


0 dB = 0.489 W/kg = -3.11 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/29

## LTE Band 2 (20MHz)_Head_Re Cheek_CH 19100_QPSK_1-50

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: f = 1900 MHz; $\sigma$ = 1.392 S/m; $\varepsilon_r$ = 39.855; $\rho$ = 1000 kg/m$^3$
Phantom section: Right Section
Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.78, 7.78, 7.78); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.169 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.701 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.199 W/kg
**SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.090 W/kg**
Maximum value of SAR (measured) = 0.169 W/kg

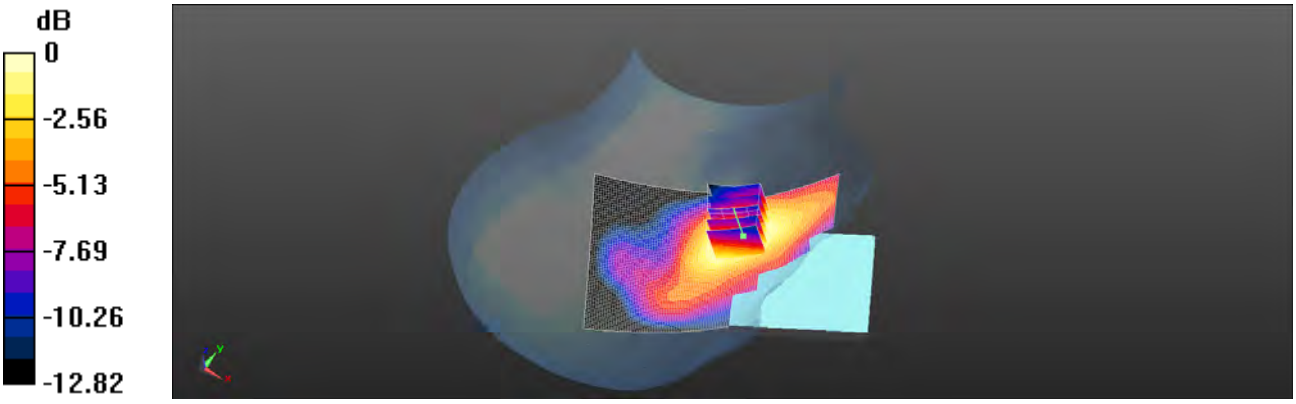


0 dB = 0.169 W/kg = -7.72 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/29

## LTE Band 2 (20MHz)_Hotspot_Back side_CH 19100_QPSK_1-50_10mm

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: f = 1900 MHz; $\sigma$ = 1.508 S/m; $\varepsilon_r$ = 52.524; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.35, 7.35, 7.35); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.468 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.569 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.569 W/kg
**SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.207 W/kg**
Maximum value of SAR (measured) = 0.445 W/kg

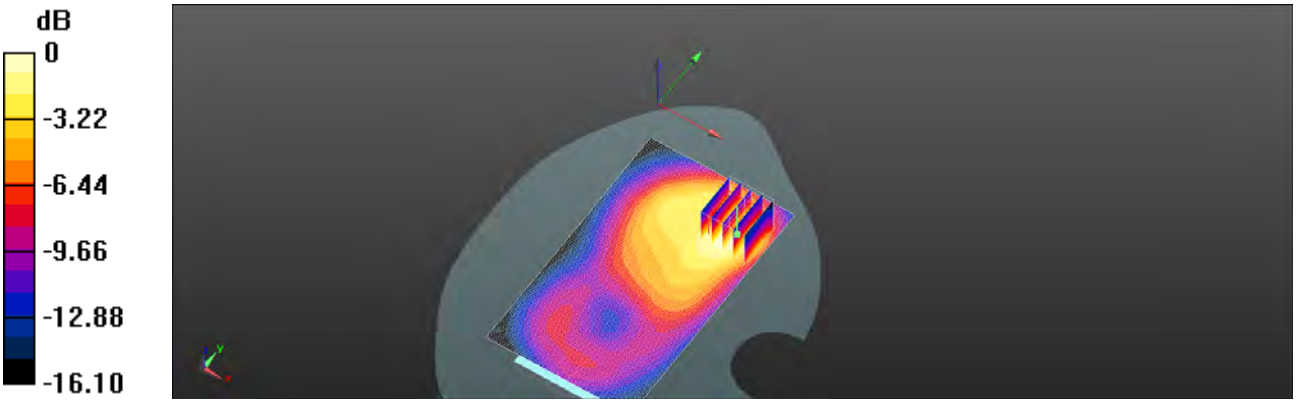


0 dB = 0.445 W/kg = -3.51 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/27

## LTE Band 4 (20MHz)_Head_Re Cheek_CH 20050_QPSK_1-50

Communication System: LTE; Frequency: 1720 MHz; Duty Cycle: 1:1
Medium parameters used: f = 1720 MHz; $\sigma$ = 1.319 S/m; $\varepsilon_r$ = 40.698; $\rho$ = 1000 kg/m$^3$
Phantom section: Right Section
Ambient temperature: 22.5°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(8.09, 8.09, 8.09); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.0720 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.993 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.0800 W/kg
**SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.040 W/kg**
Maximum value of SAR (measured) = 0.0704 W/kg

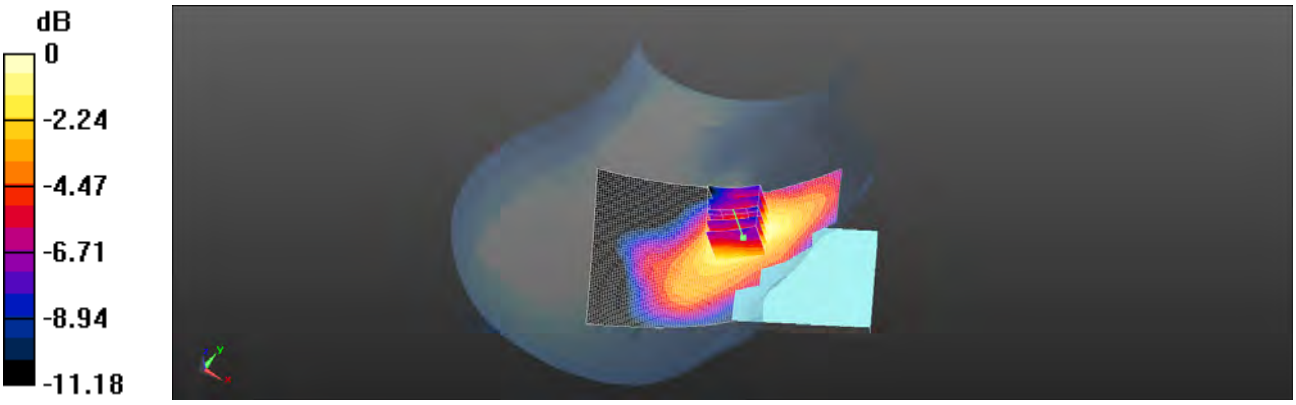


0 dB = 0.0704 W/kg = -11.52 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/27

## LTE Band 4 (20MHz)_Hotspot_Back side_CH 20050_QPSK_1-50_10mm

Communication System: LTE; Frequency: 1720 MHz; Duty Cycle: 1:1
Medium parameters used: f = 1720 MHz; $\sigma$ = 1.421 S/m; $\varepsilon_r$ = 53.121; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.2°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.65, 7.65, 7.65); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.151 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.995 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.178 W/kg
**SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.072 W/kg**
Maximum value of SAR (measured) = 0.147 W/kg

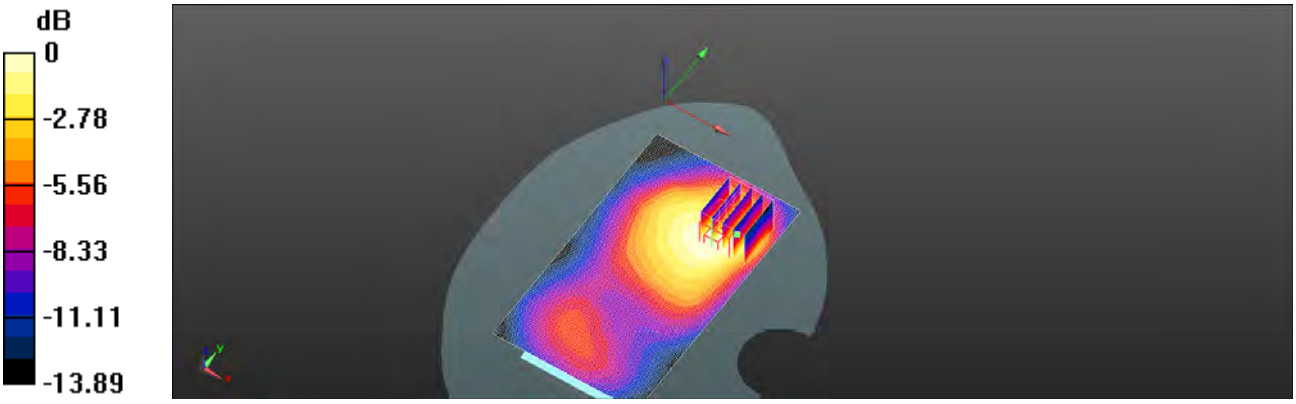


0 dB = 0.147 W/kg = -8.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/26

## LTE Band 5 (10MHz)_Head_Le Cheek_CH 20525_QPSK_1-25

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: f = 836.5 MHz; $\sigma$ = 0.926 S/m; $\varepsilon_r$ = 41.314; $\rho$ = 1000 kg/m$^3$
Phantom section: Left Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.1, 9.1, 9.1); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.115 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.885 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.129 W/kg
**SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.068 W/kg**
Maximum value of SAR (measured) = 0.113 W/kg

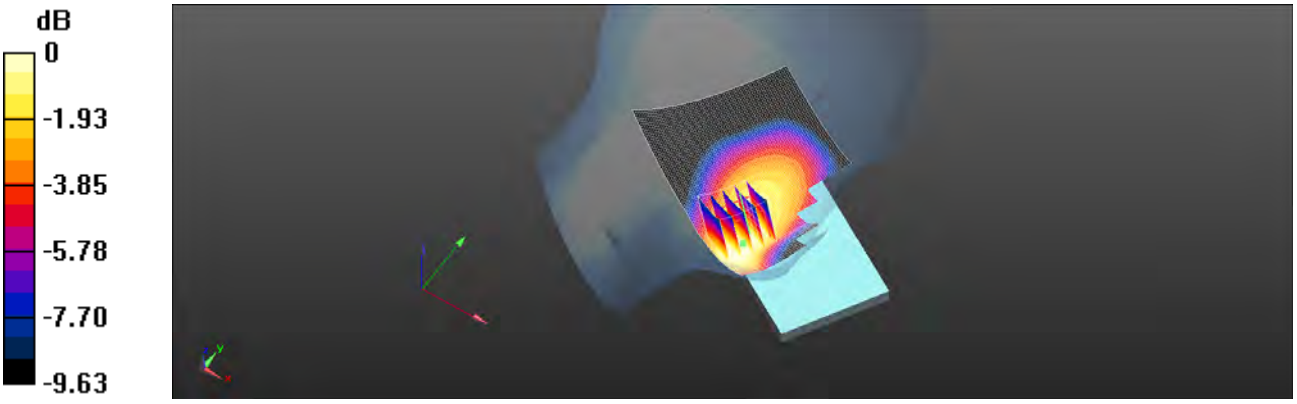


0 dB = 0.113 W/kg = -9.46 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/26

## LTE Band 5 (10MHz)_Hotspot_Back side_CH 20525_QPSK_1-25_10mm

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: f = 836.5 MHz; $\sigma$ = 1.001 S/m; $\varepsilon_r$ = 55.063; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.18, 9.18, 9.18); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.514 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.34 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.616 W/kg
**SAR(1 g) = 0.391 W/kg; SAR(10 g) = 0.253 W/kg**
Maximum value of SAR (measured) = 0.502 W/kg

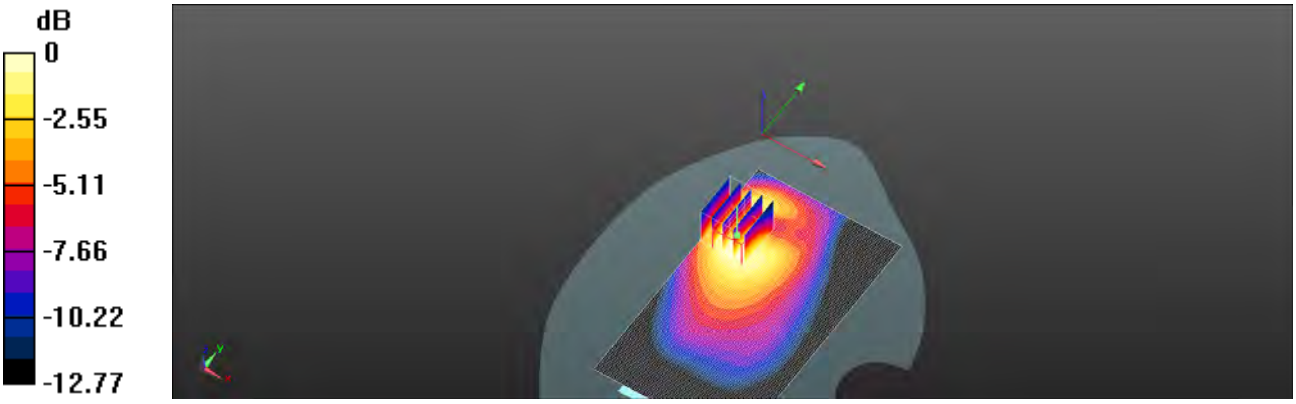


0 dB = 0.502 W/kg = -2.99 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/25

## LTE Band 12 (10MHz)_Head_Le Cheek_CH 23130_QPSK_1-0

Communication System: LTE; Frequency: 711 MHz; Duty Cycle: 1:1
Medium parameters used: f = 711 MHz; $\sigma$ = 0.885 S/m; $\varepsilon_r$ = 43.065; $\rho$ = 1000 kg/m$^3$
Phantom section: Left Section
Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.55, 9.55, 9.55); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.135 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.338 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.151 W/kg
**SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.079 W/kg**
Maximum value of SAR (measured) = 0.134 W/kg

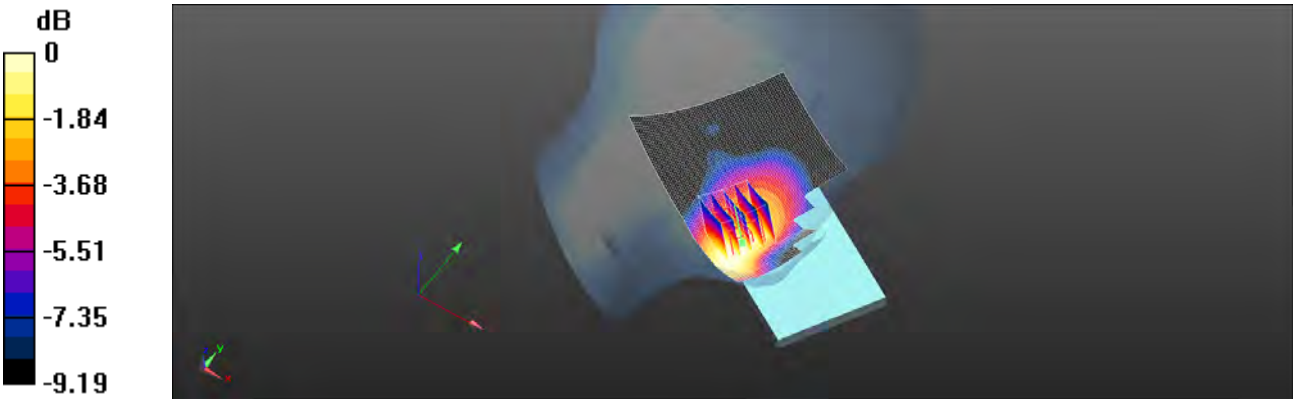


0 dB = 0.134 W/kg = -8.73 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/25

## LTE Band 12 (10MHz)_Hotspot_Back side_CH 23130_QPSK_1-0_10mm

Communication System: LTE; Frequency: 711 MHz; Duty Cycle: 1:1
Medium parameters used: f = 711 MHz; $\sigma$ = 0.938 S/m; $\varepsilon_r$ = 56.274; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.39, 9.39, 9.39); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.519 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.178 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.615 W/kg
**SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.244 W/kg**
Maximum value of SAR (measured) = 0.515 W/kg

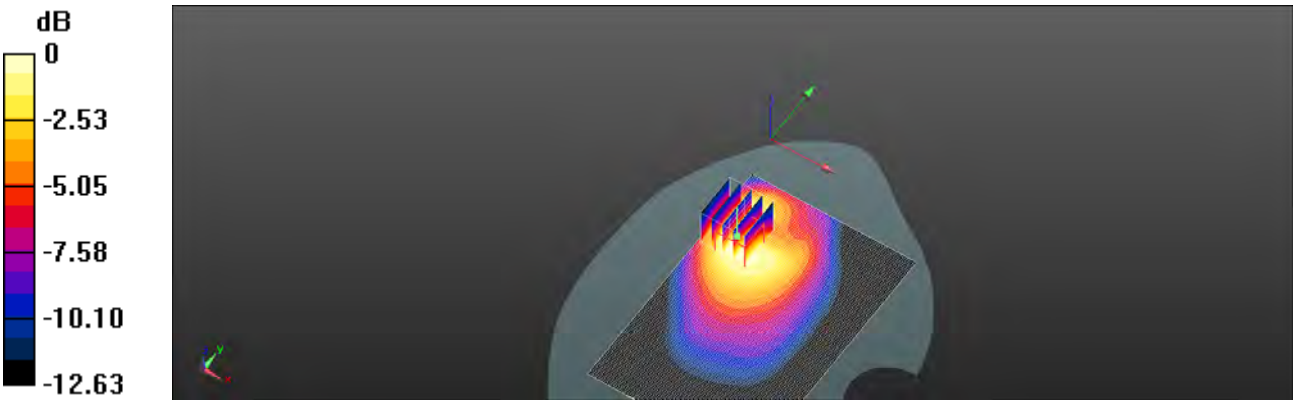


0 dB = 0.515 W/kg = -2.88 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/25

## LTE Band 13 (10MHz)_Head_Le Cheek_CH 23230_QPSK_1-25

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: f = 782 MHz; $\sigma$ = 0.909 S/m; $\varepsilon_r$ = 42.025; $\rho$ = 1000 kg/m$^3$
Phantom section: Left Section
Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.55, 9.55, 9.55); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.0539 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.606 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.0610 W/kg
**SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.035 W/kg**
Maximum value of SAR (measured) = 0.0531 W/kg

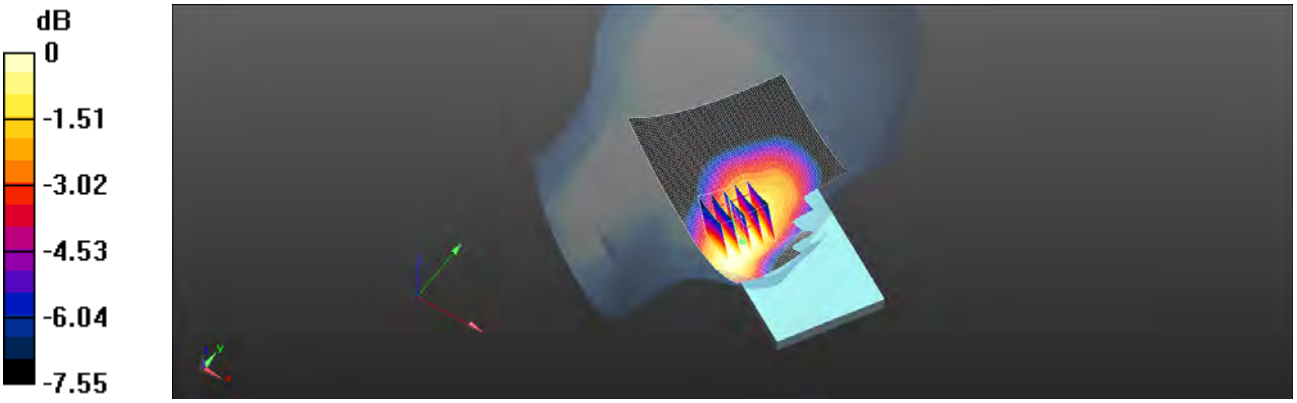


0 dB = 0.0531 W/kg = -12.75 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/25

## LTE Band 13 (10MHz)_Hotspot_Back side_CH 23230_QPSK_1-25_10mm

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: f = 782 MHz; $\sigma$ = 0.978 S/m; $\varepsilon_r$ = 55.58; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.39, 9.39, 9.39); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.246 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.660 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.294 W/kg
**SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.117 W/kg**
Maximum value of SAR (measured) = 0.240 W/kg

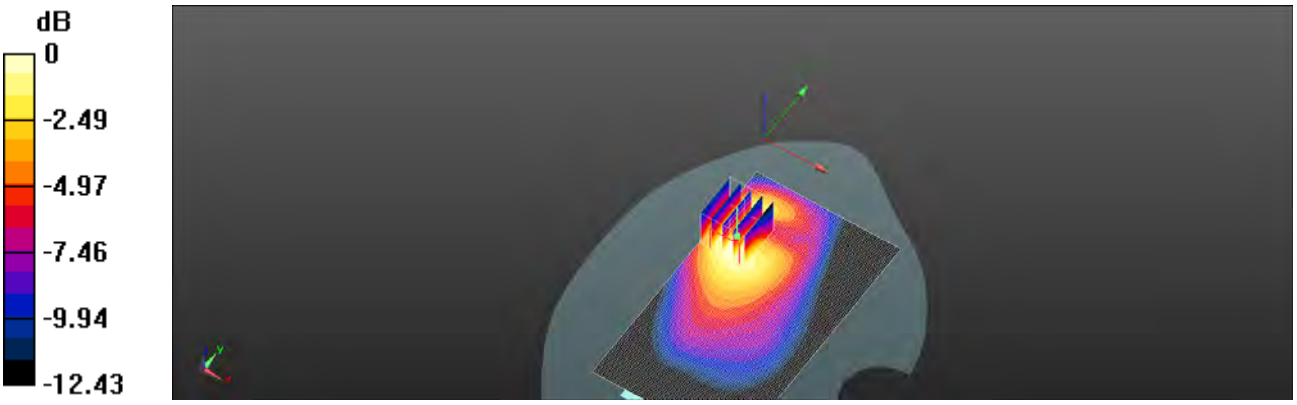


0 dB = 0.240 W/kg = -6.19 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/25

## LTE Band 17 (10MHz)_Head_Le Cheek_CH 23790_QPSK_1-0

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: f = 710 MHz; $\sigma$ = 0.887 S/m; $\varepsilon_r$ = 43.072; $\rho$ = 1000 kg/m$^3$
Phantom section: Left Section
Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.55, 9.55, 9.55); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.128 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.389 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.146 W/kg
**SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.076 W/kg**
Maximum value of SAR (measured) = 0.129 W/kg

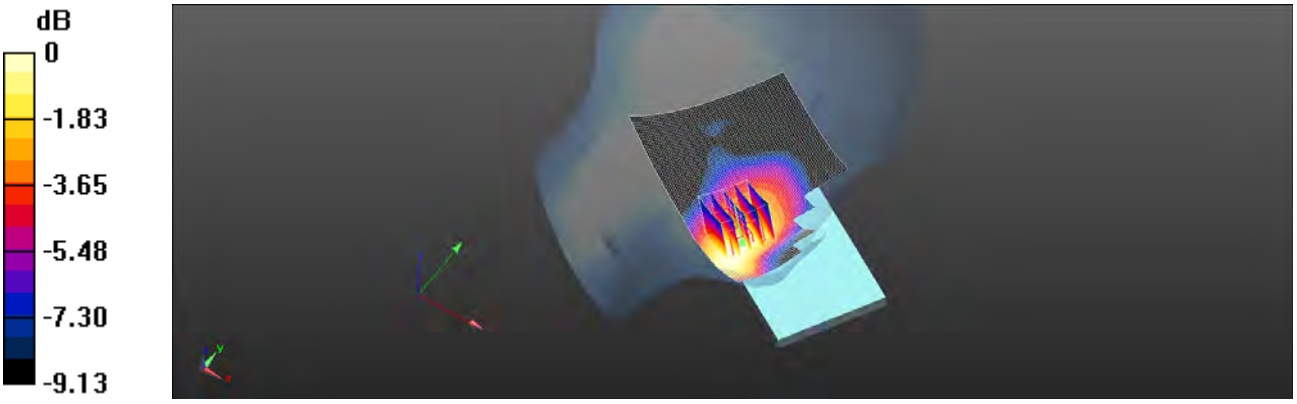


0 dB = 0.129 W/kg = -8.90 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/25

## LTE Band 17 (10MHz)_Hotspot_Back side_CH 23790_QPSK_1-0_10mm

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: f = 710 MHz; $\sigma$ = 0.939 S/m; $\varepsilon_r$ = 56.23; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.39, 9.39, 9.39); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (71x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 0.490 W/kg

**Configuration/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.035 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.583 W/kg
**SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.231 W/kg**
Maximum value of SAR (measured) = 0.489 W/kg

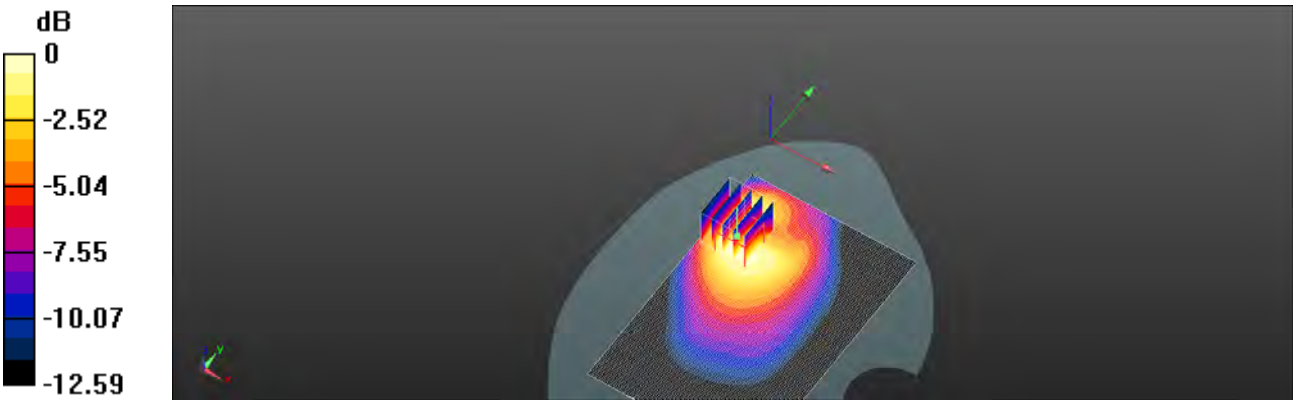


0 dB = 0.489 W/kg = -3.11 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/31

## LTE Band 38 (20MHz)_Head_Re Cheek _CH 38000_QPSK_1-0

Communication System: LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
Medium parameters used: f = 2595 MHz; $\sigma$ = 1.962 S/m; $\varepsilon_r$ = 38.756; $\rho$ = 1000 kg/m$^3$
Phantom section: Right Section
Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(6.95, 6.95, 6.95); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (91x151x1):** Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 0.0533 W/kg

**Configuration/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.713 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.0790 W/kg
**SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.019 W/kg**
Maximum value of SAR (measured) = 0.0561 W/kg

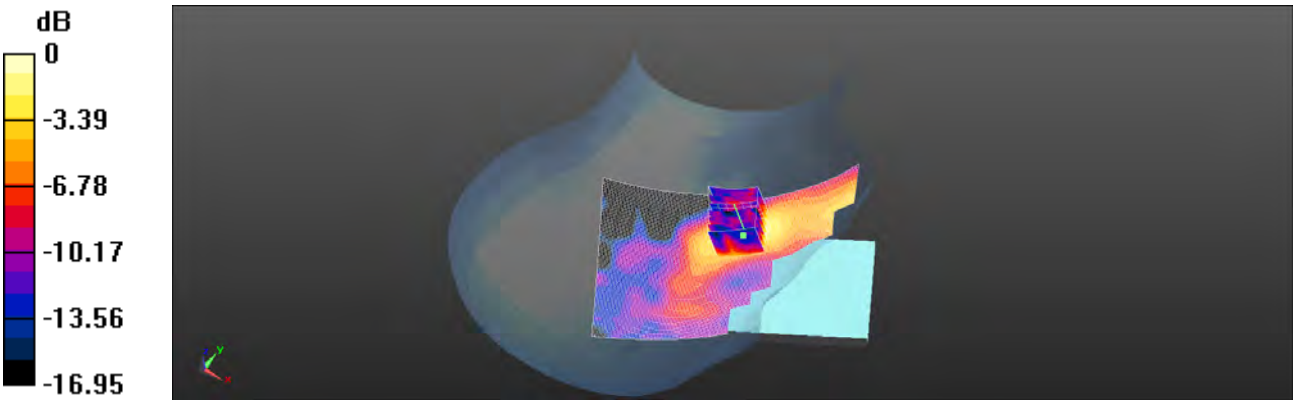


0 dB = 0.0561 W/kg = -12.51 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/31

## LTE Band 38 (20MHz)_Hotspot_Bottom side_CH 38000_QPSK_1-0_10mm

Communication System: LTE; Frequency: 2595 MHz; Duty Cycle: 1:1
Medium parameters used: f = 2595 MHz; $\sigma$ = 2.207 S/m; $\varepsilon_r$ = 52.05; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(6.95, 6.95, 6.95); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (51x101x1):** Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 0.596 W/kg

**Configuration/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 13.83 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.745 W/kg
**SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.163 W/kg**
Maximum value of SAR (measured) = 0.557 W/kg

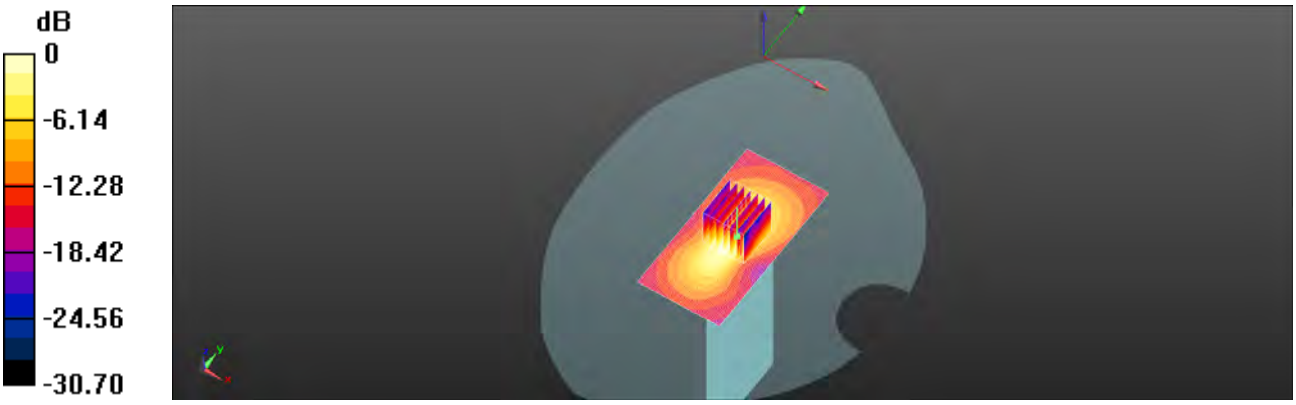


0 dB = 0.557 W/kg = -2.54 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/30

## WLAN 802.11b_Head_Le Cheek_CH 11_Main

Communication System: WLAN(2.45G); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: f = 2462 MHz; $\sigma$ = 1.803 S/m; $\varepsilon_r$ = 39.349; $\rho$ = 1000 kg/m$^3$
Phantom section: Left Section
Ambient temperature: 22.1°C; Liquid temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.16, 7.16, 7.16); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (91x151x1):** Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 0.746 W/kg

**Configuration/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.81 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.913 W/kg
**SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.189 W/kg**
Maximum value of SAR (measured) = 0.628 W/kg

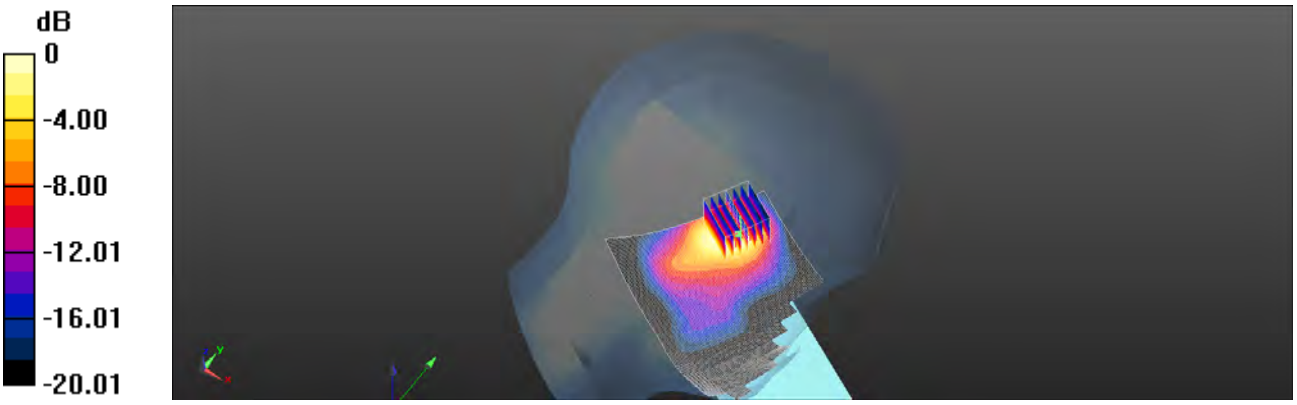


0 dB = 0.628 W/kg = -2.02 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/29

## WLAN 802.11b_Hotspot_Back side_CH 11_10mm_Main

Communication System: WLAN(2.45G); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: f = 2462 MHz; $\sigma$ = 2.024 S/m; $\varepsilon_r$ = 52.566; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.26, 7.26, 7.26); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Head/Area Scan (81x151x1):** Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 0.143 W/kg

**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.512 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 0.183 W/kg
**SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.045 W/kg**
Maximum value of SAR (measured) = 0.134 W/kg

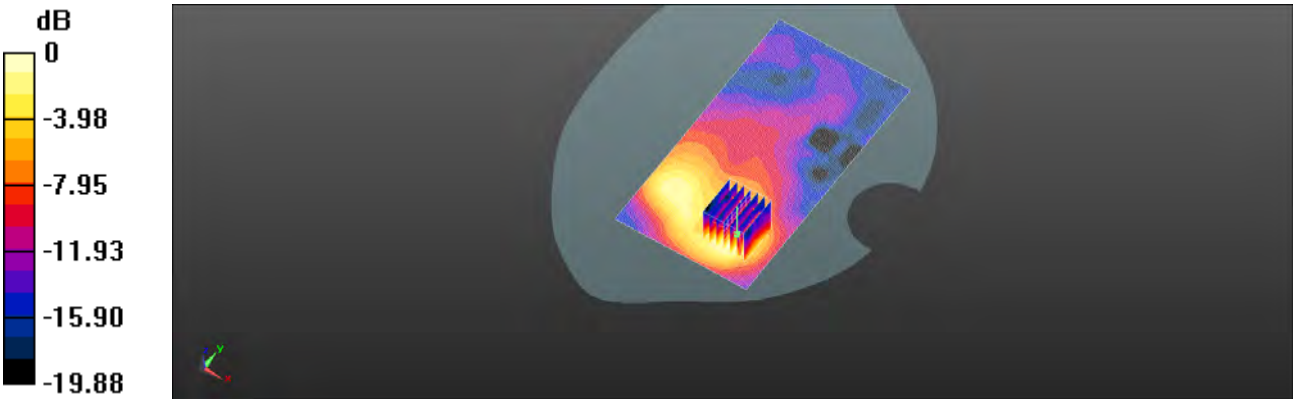


0 dB = 0.134 W/kg = -8.73 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/30

## WLAN 802.11b_Head_Re Cheek_CH 11_Aux

Communication System: WLAN(2.45G); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: f = 2462 MHz; $\sigma$ = 1.803 S/m; $\varepsilon_r$ = 39.349; $\rho$ = 1000 kg/m$^3$
Phantom section: Right Section
Ambient temperature: 22.1°C; Liquid temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.16, 7.16, 7.16); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (91x151x1):** Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 0.0901 W/kg

**Configuration/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.009 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.134 W/kg
**SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.032 W/kg**
Maximum value of SAR (measured) = 0.0982 W/kg

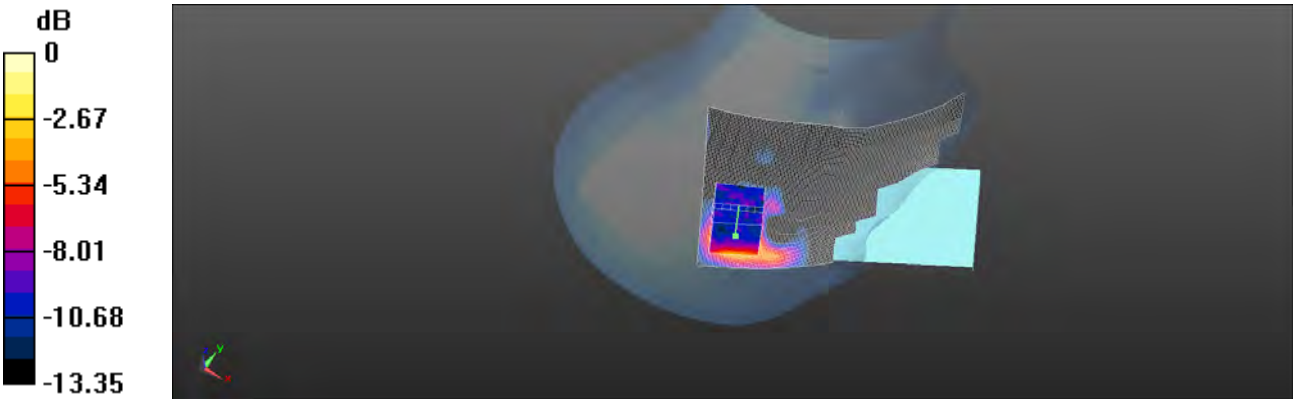


0 dB = 0.0982 W/kg = -10.08 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/29

## WLAN 802.11b_Hotspot_Back side_CH 11_10mm_Aux

Communication System: WLAN(2.45G); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: f = 2462 MHz; $\sigma$ = 2.024 S/m; $\varepsilon_r$ = 52.566; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.26, 7.26, 7.26); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (81x151x1):** Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 0.107 W/kg

**Configuration/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.7940 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.140 W/kg
**SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.028 W/kg**
Maximum value of SAR (measured) = 0.105 W/kg

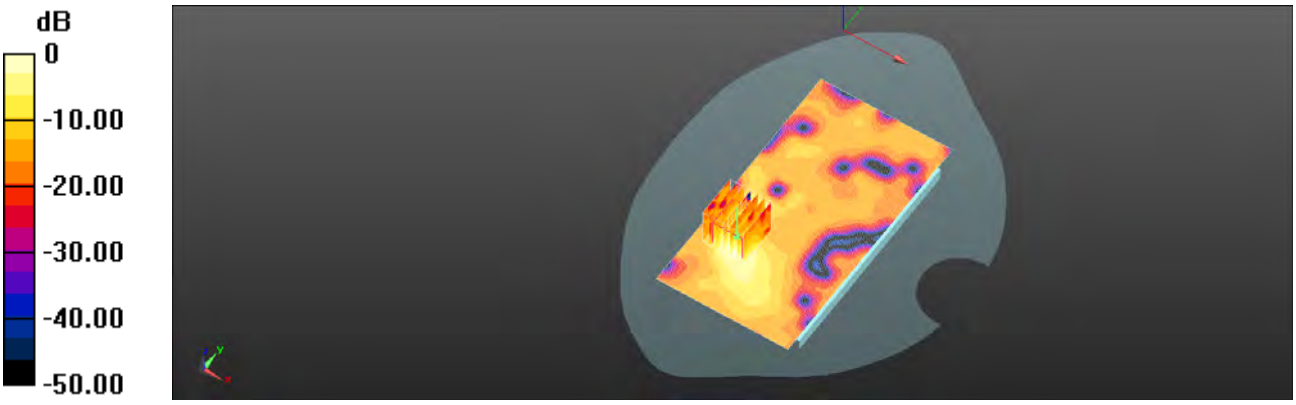


0 dB = 0.105 W/kg = -9.79 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/31

## WLAN 802.11n(40M) 5.2G_Head_Le Cheek_CH 46_Main

Communication System: WLAN(5G); Frequency: 5230 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5230 MHz; $\sigma$ = 4.534 S/m; $\varepsilon_r$ = 36.327; $\rho$ = 1000 kg/m$^3$
Phantom section: Left Section
Ambient temperature: 22.3°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.86, 4.86, 4.86); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.365 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 3.498 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 1.04 W/kg
**SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.085 W/kg**
Maximum value of SAR (measured) = 0.386 W/kg

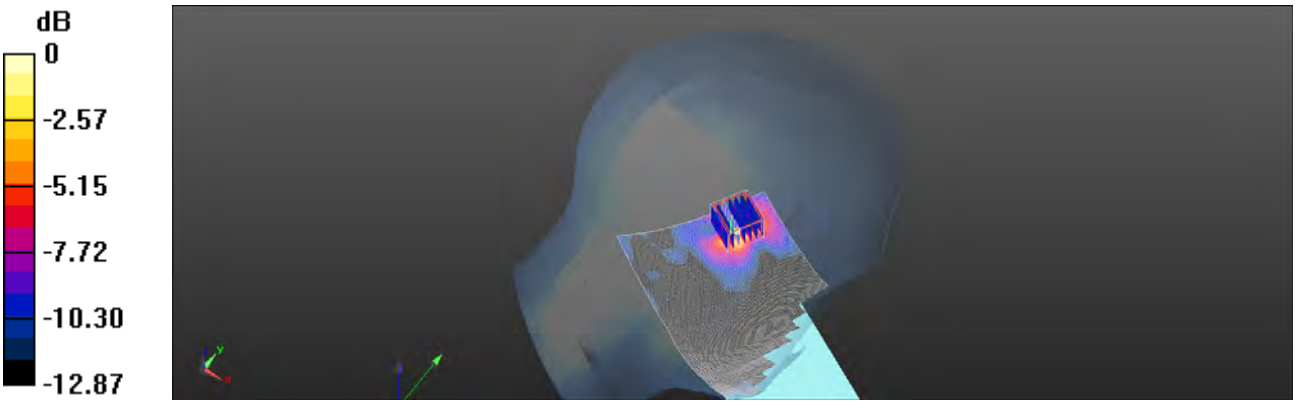


0 dB = 0.386 W/kg = -4.13 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/31

**WLAN 802.11n(40M) 5.2G_Body-worn_Back side_CH 46_10mm_Main**

Communication System: WLAN(5G); Frequency: 5230 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5230 MHz; $\sigma$ = 5.126 S/m; $\varepsilon_r$ = 49.568; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.56, 4.56, 4.56); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.132 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.133 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.321 W/kg
**SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.028 W/kg**
Maximum value of SAR (measured) = 0.136 W/kg

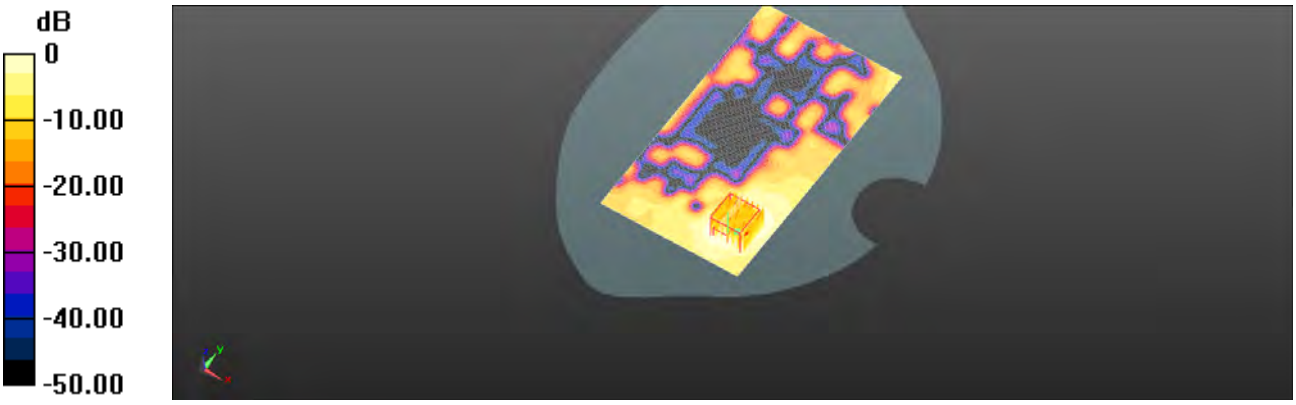


0 dB = 0.136 W/kg = -8.66 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/31

## WLAN 802.11n(40M) 5.2G_product specific 10g-SAR_Back side_CH 46_0mm_Main

Communication System: WLAN(5G); Frequency: 5230 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5230 MHz; $\sigma$ = 5.126 S/m; $\varepsilon_r$ = 49.568; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.56, 4.56, 4.56); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 3.53 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.7760 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 10.6 W/kg
**SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.280 W/kg**
Maximum value of SAR (measured) = 3.28 W/kg

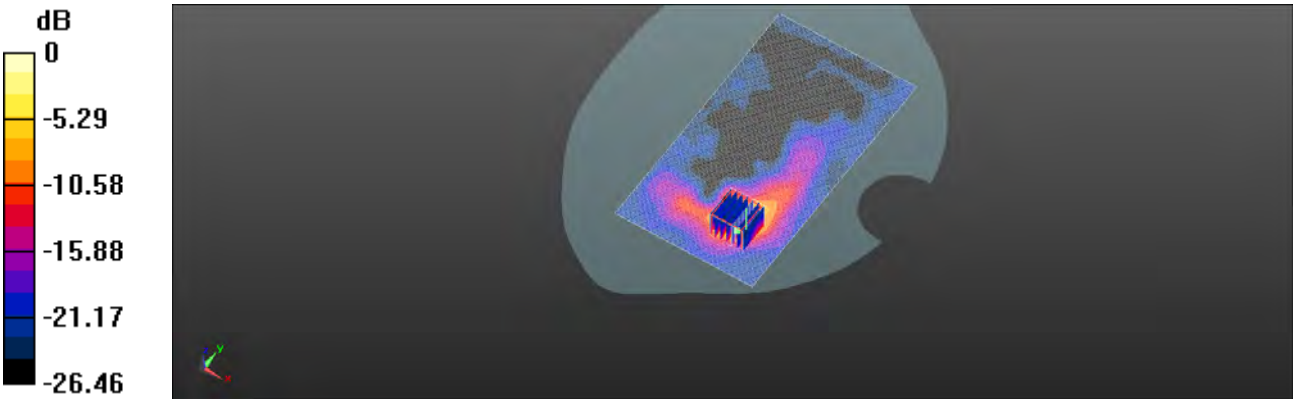


0 dB = 3.28 W/kg = 5.16 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/31

## WLAN 802.11n(40M) 5.2G_Head_Re Cheek_CH 46_Aux

Communication System: WLAN(5G); Frequency: 5230 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5230 MHz; $\sigma$ = 4.534 S/m; $\varepsilon_r$ = 36.327; $\rho$ = 1000 kg/m$^3$
Phantom section: Right Section
Ambient temperature: 22.3°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.86, 4.86, 4.86); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.289 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 2.884 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.681 W/kg
**SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.066 W/kg**
Maximum value of SAR (measured) = 0.293 W/kg

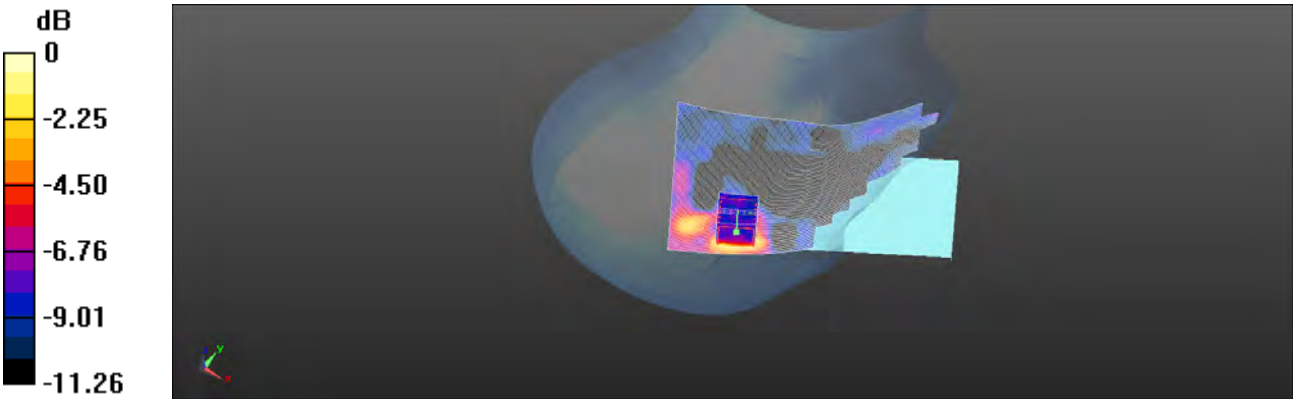


0 dB = 0.293 W/kg = -5.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/31

## WLAN 802.11n(40M) 5.2G_Body-worn_Back side_CH 46_10mm_Aux

Communication System: WLAN(5G); Frequency: 5230 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5230 MHz; $\sigma$ = 5.126 S/m; $\varepsilon_r$ = 49.568; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.56, 4.56, 4.56); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.108 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.552 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.177 W/kg
**SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.021 W/kg**
Maximum value of SAR (measured) = 0.0920 W/kg

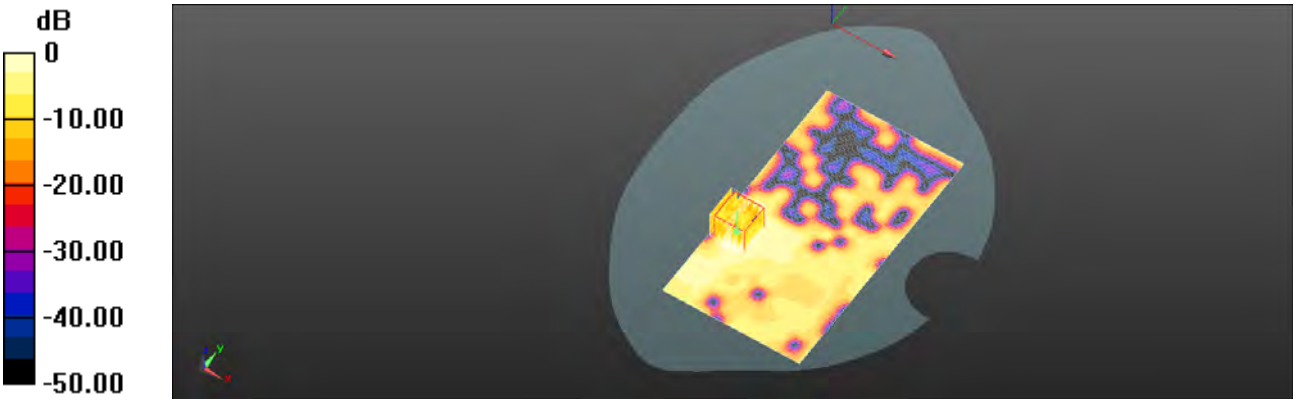


0 dB = 0.0920 W/kg = -10.36 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/31

## WLAN 802.11n(40M) 5.2G_product specific 10g-SAR_Back side_CH 46_0mm_Aux

Communication System: WLAN(5G); Frequency: 5230 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5230 MHz; $\sigma$ = 5.126 S/m; $\varepsilon_r$ = 49.568; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.56, 4.56, 4.56); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 1.56 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.934 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 4.03 W/kg
**SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.237 W/kg**
Maximum value of SAR (measured) = 1.44 W/kg

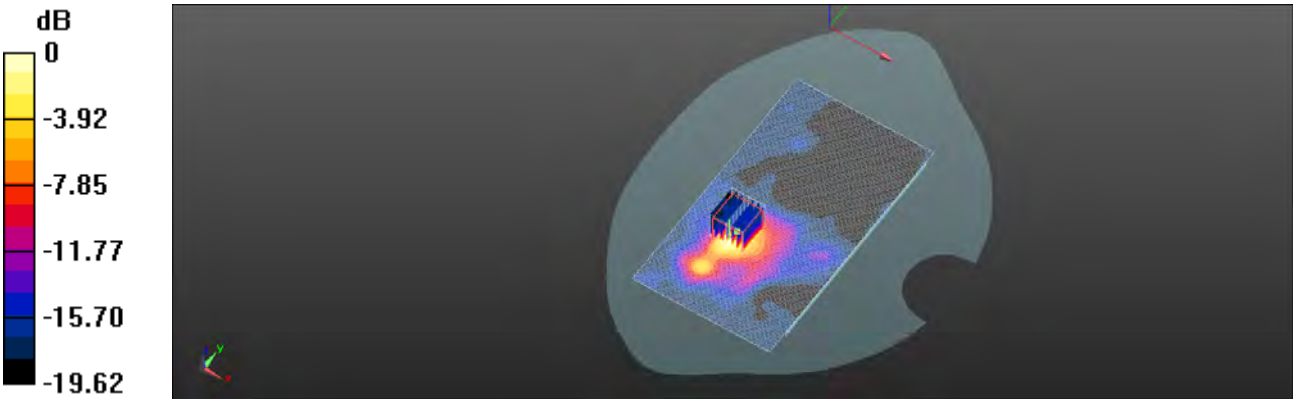


0 dB = 1.44 W/kg = 1.58 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/1

## WLAN 802.11n(40M) 5.3G_Head_Le Cheek_CH 54_Main

Communication System: WLAN(5G); Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5270 MHz; $\sigma$ = 4.658 S/m; $\varepsilon_r$ = 35.952; $\rho$ = 1000 kg/m$^3$
Phantom section: Left Section
Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.65, 4.65, 4.65); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.504 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 4.301 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 1.23 W/kg
**SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.103 W/kg**
Maximum value of SAR (measured) = 0.522 W/kg

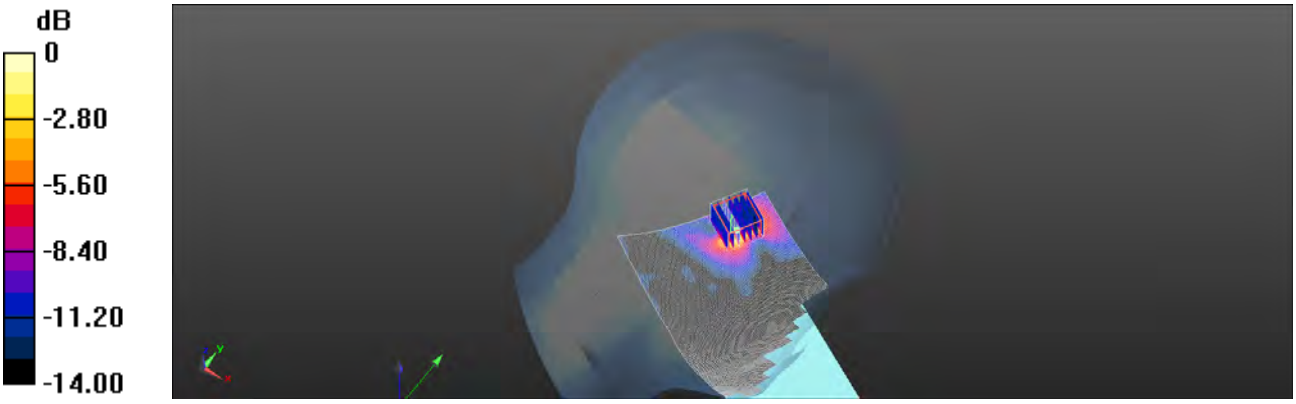


0 dB = 0.522 W/kg = -2.82 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/1

## WLAN 802.11n(40M) 5.3G_Body-worn_Back side_CH 54_10mm_Main

Communication System: WLAN(5G); Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5270 MHz; $\sigma$ = 5.276 S/m; $\varepsilon_r$ = 49.501; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.39, 4.39, 4.39); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.165 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.9290 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.362 W/kg
**SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.035 W/kg**
Maximum value of SAR (measured) = 0.172 W/kg

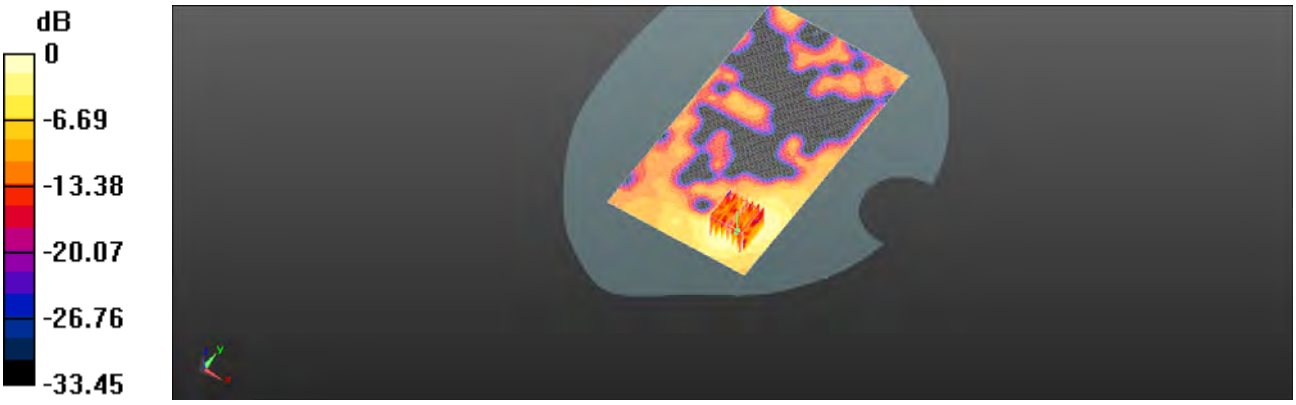


0 dB = 0.172 W/kg = -7.64 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/1

## WLAN 802.11n(40M) 5.3G_product specific 10g-SAR_Back side_CH 54_0mm_Main

Communication System: WLAN(5G); Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5270 MHz; $\sigma$ = 5.276 S/m; $\varepsilon_r$ = 49.501; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.39, 4.39, 4.39); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 3.28 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.476 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 10.4 W/kg
**SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.303 W/kg**
Maximum value of SAR (measured) = 3.49 W/kg

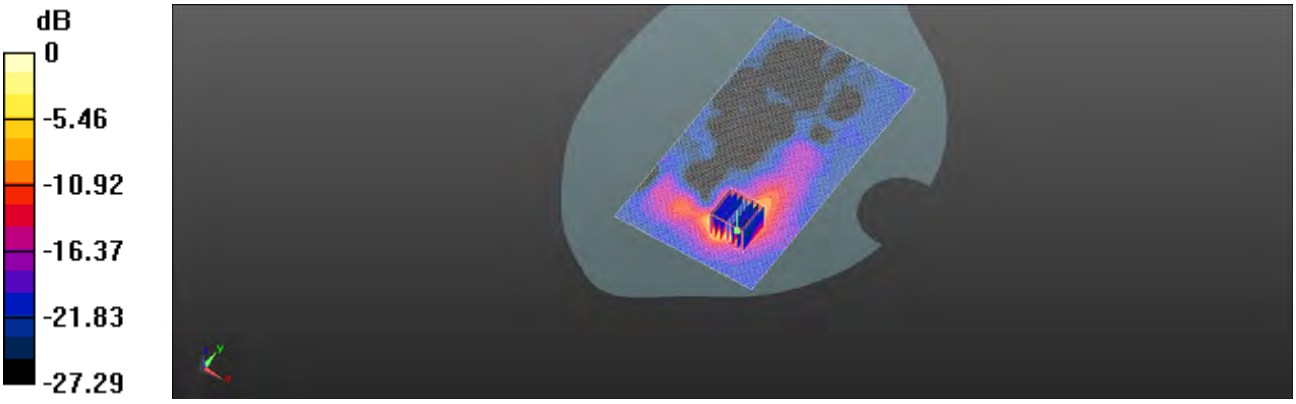


0 dB = 3.49 W/kg = 5.43 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/1

## WLAN 802.11n(40M) 5.3G_Head_Re Cheek_CH 54_Aux

Communication System: WLAN(5G); Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5270 MHz; $\sigma$ = 4.658 S/m; $\varepsilon_r$ = 35.952; $\rho$ = 1000 kg/m$^3$
Phantom section: Right Section
Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.65, 4.65, 4.65); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.351 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 2.923 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.08 W/kg
**SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.078 W/kg**
Maximum value of SAR (measured) = 0.356 W/kg

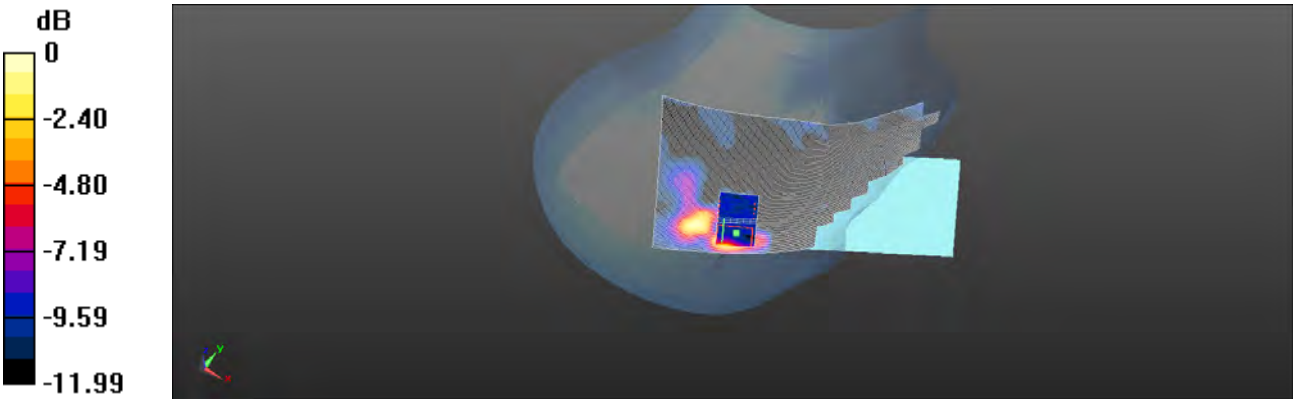


0 dB = 0.356 W/kg = -4.49 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/1

## WLAN 802.11n(40M) 5.3G_Body-worn_Back side_CH 54_10mm_Aux

Communication System: WLAN(5G); Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5270 MHz; $\sigma$ = 5.276 S/m; $\varepsilon_r$ = 49.501; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.39, 4.39, 4.39); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.167 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.899 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.375 W/kg
**SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.032 W/kg**
Maximum value of SAR (measured) = 0.168 W/kg

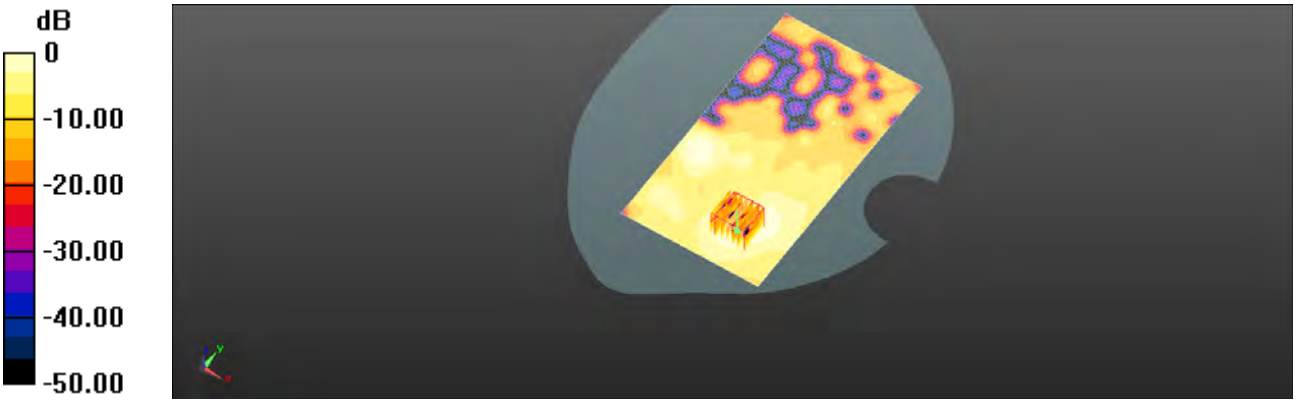


0 dB = 0.168 W/kg = -7.75 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/1

## WLAN 802.11n(40M) 5.3G_product specific 10g-SAR_Back side_CH 54_0mm_Aux

Communication System: WLAN(5G); Frequency: 5270 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5270 MHz; $\sigma$ = 5.276 S/m; $\varepsilon_r$ = 49.501; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.39, 4.39, 4.39); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 1.84 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 2.182 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 4.34 W/kg
**SAR(1 g) = 0.915 W/kg; SAR(10 g) = 0.265 W/kg**
Maximum value of SAR (measured) = 1.99 W/kg

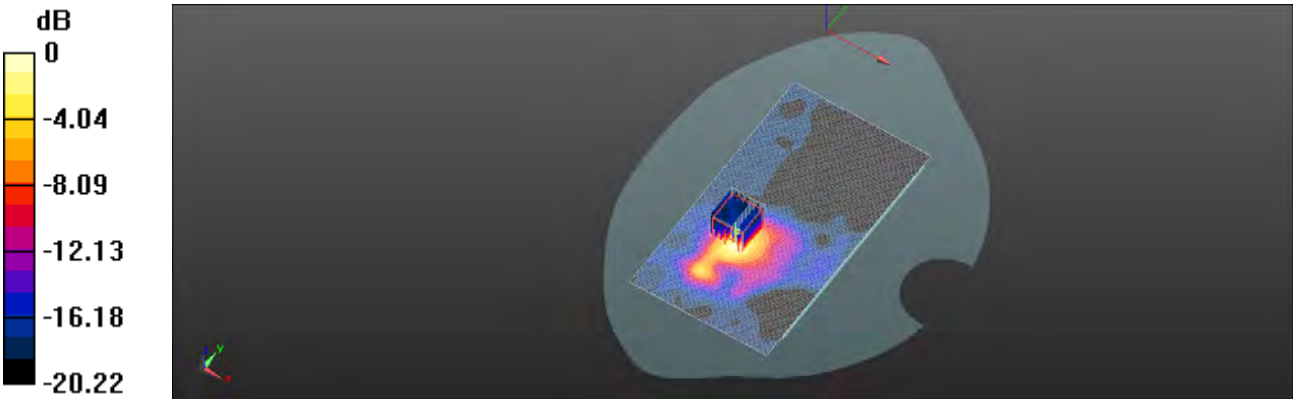


0 dB = 1.99 W/kg = 2.99 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/2

## WLAN 802.11ac(80M) 5.6G_Head_Le Cheek_CH 122_Main

Communication System: WLAN(5G); Frequency: 5610 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5610 MHz; $\sigma$ = 4.936 S/m; $\varepsilon_r$ = 35.369; $\rho$ = 1000 kg/m$^3$
Phantom section: Left Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.49, 4.49, 4.49); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.321 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 3.717 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 0.998 W/kg
**SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.079 W/kg**
Maximum value of SAR (measured) = 0.361 W/kg

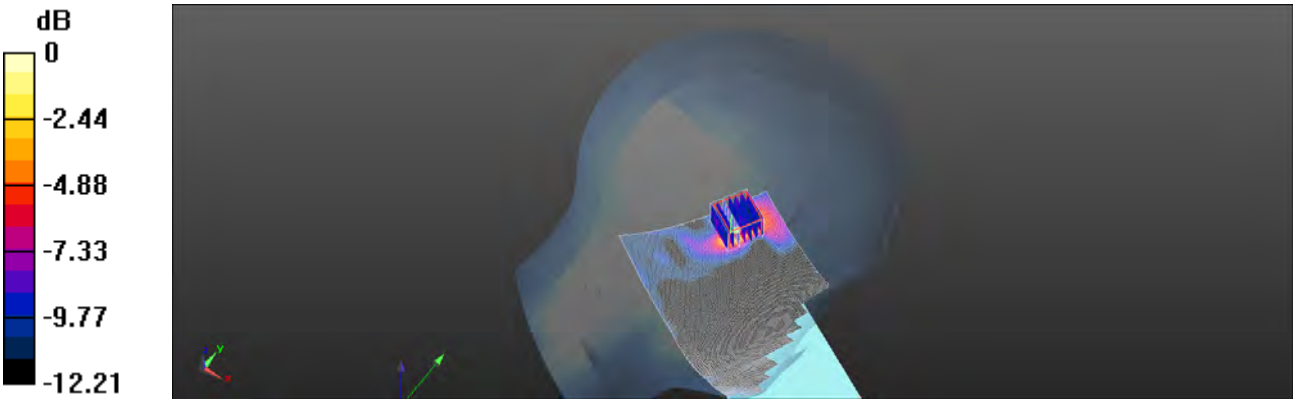


0 dB = 0.361 W/kg = -4.42 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/2

**WLAN 802.11ac(80M) 5.6G_Body-worn_Back side_CH 122_10mm_Main**
Communication System: WLAN(5G); Frequency: 5610 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5610 MHz; $\sigma$ = 5.664 S/m; $\varepsilon_r$ = 48.558; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.5°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(3.92, 3.92, 3.92); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.185 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.004 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.383 W/kg
**SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.039 W/kg**
Maximum value of SAR (measured) = 0.172 W/kg

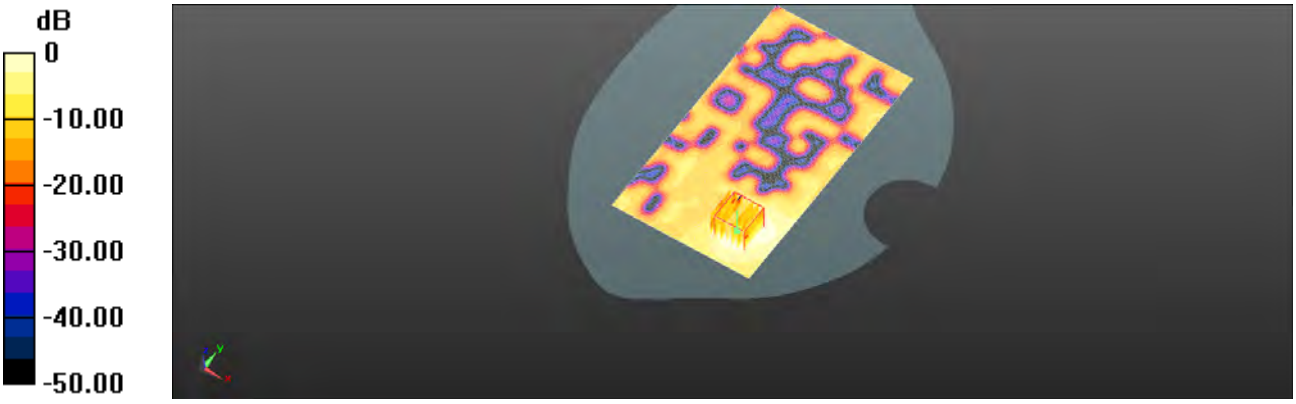


0 dB = 0.172 W/kg = -7.64 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/2

## WLAN 802.11ac(80M) 5.6G_product specific 10g-SAR_Back side_CH 122_0mm_Main

Communication System: WLAN(5G); Frequency: 5610 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5610 MHz; $\sigma$ = 5.664 S/m; $\varepsilon_r$ = 48.558; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.5°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(3.92, 3.92, 3.92); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 1.89 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.531 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 4.08 W/kg
**SAR(1 g) = 0.677 W/kg; SAR(10 g) = 0.257 W/kg**
Maximum value of SAR (measured) = 1.51 W/kg

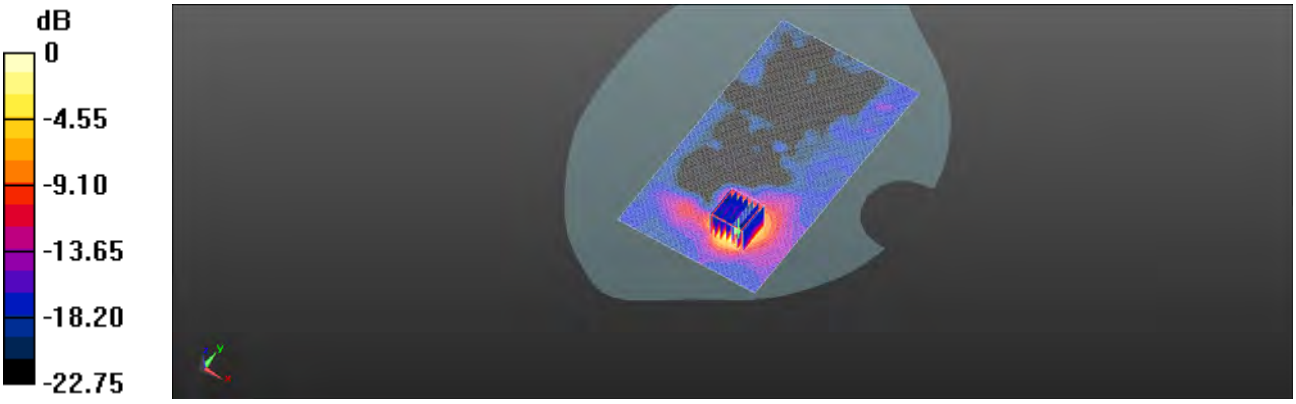


0 dB = 1.51 W/kg = 1.79 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/2

## WLAN 802.11ac(80M) 5.6G_Head_Re Cheek_CH 122_Aux

Communication System: WLAN(5G); Frequency: 5610 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5610 MHz; $\sigma$ = 4.936 S/m; $\varepsilon_r$ = 35.369; $\rho$ = 1000 kg/m$^3$
Phantom section: Right Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.49, 4.49, 4.49); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.389 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 2.044 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.14 W/kg
**SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.094 W/kg**
Maximum value of SAR (measured) = 0.439 W/kg

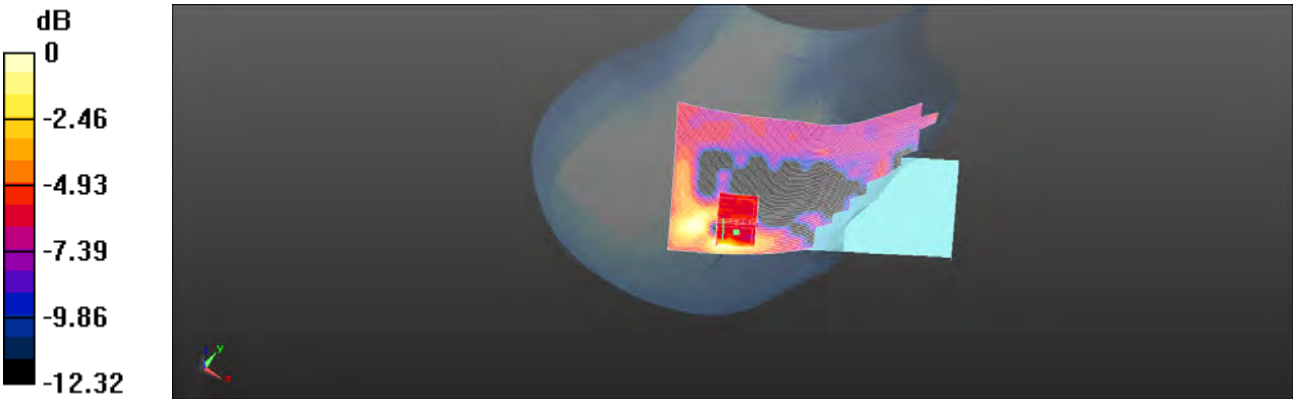


0 dB = 0.439 W/kg = -3.58 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/2

## WLAN 802.11ac(80M) 5.6G_Body-worn_Back side_CH 122_10mm_Aux

Communication System: WLAN(5G); Frequency: 5610 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5610 MHz; $\sigma$ = 5.664 S/m; $\varepsilon_r$ = 48.558; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.5°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(3.92, 3.92, 3.92); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.194 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.852 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 0.424 W/kg
**SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.040 W/kg**
Maximum value of SAR (measured) = 0.198 W/kg

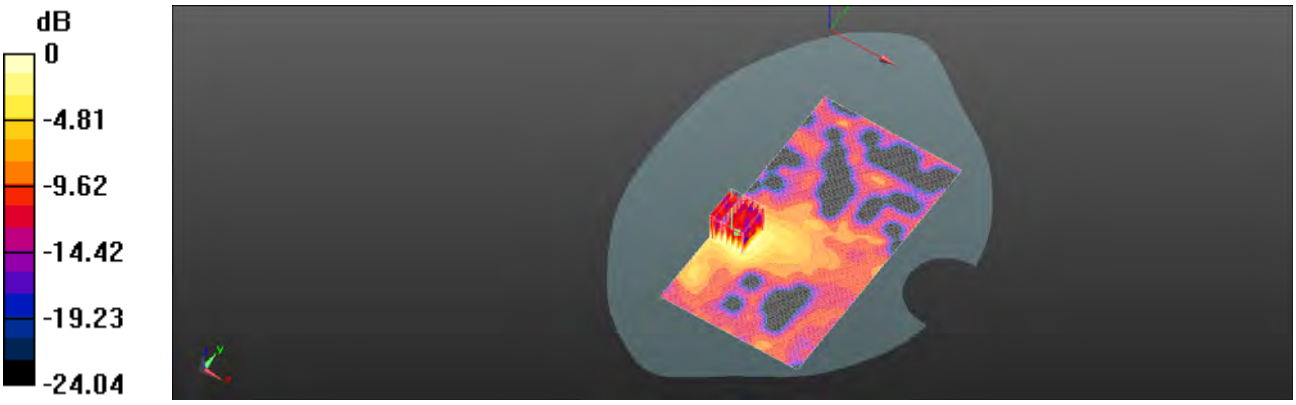


0 dB = 0.198 W/kg = -7.03 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/2

## WLAN 802.11ac(80M) 5.6G_product specific 10g-SAR_Back side_CH 122_0mm_Aux

Communication System: WLAN(5G); Frequency: 5610 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5610 MHz; $\sigma$ = 5.664 S/m; $\varepsilon_r$ = 48.558; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.5°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(3.92, 3.92, 3.92); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (101x181x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 2.50 W/kg

**Configuration/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 2.295 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 6.63 W/kg
**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.314 W/kg**
Maximum value of SAR (measured) = 2.48 W/kg

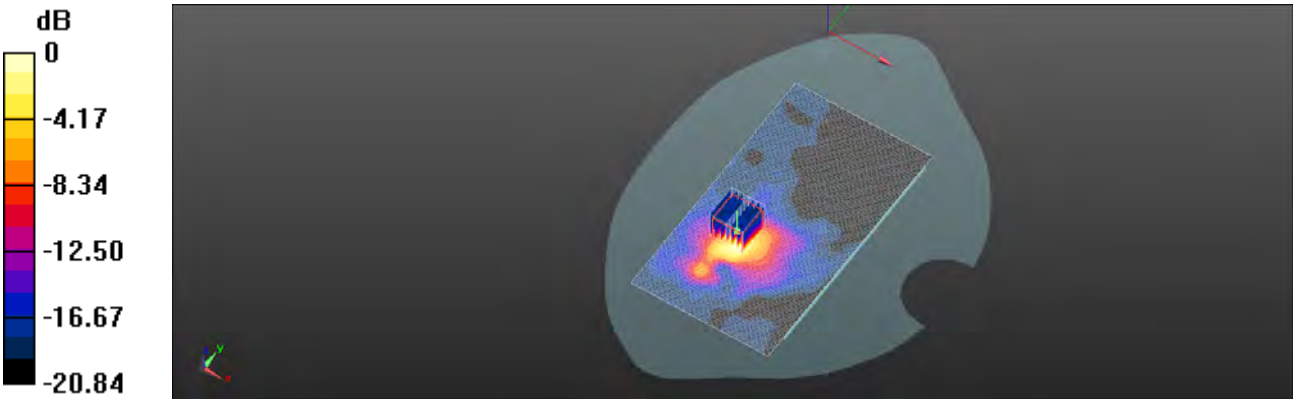


0 dB = 2.48 W/kg = 3.94 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/30

## Bluetooth(GFSK)_Head_Le Cheek_CH 78_Main

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1
Medium parameters used: f = 2480 MHz; $\sigma$ = 1.826 S/m; $\varepsilon_r$ = 39.264; $\rho$ = 1000 kg/m$^3$
Phantom section: Left Section
Ambient temperature: 22.1°C; Liquid temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.16, 7.16, 7.16); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (81x151x1):** Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 0.0994 W/kg

**Configuration/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.151 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.441 W/kg
**SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.024 W/kg**
Maximum value of SAR (measured) = 0.115 W/kg

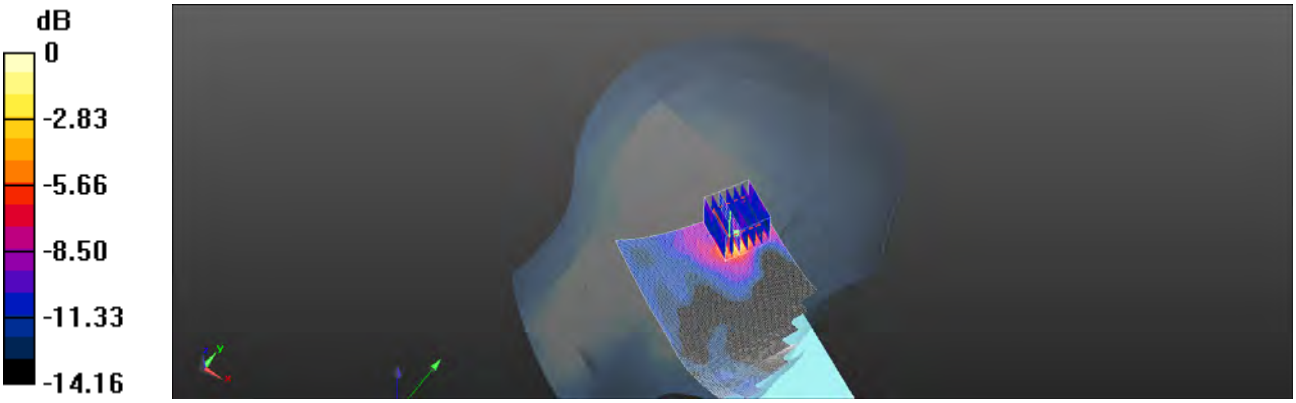


0 dB = 0.115 W/kg = -9.39 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/29

## Buletooth(GFSK)_Body-worn_Back side_CH 78_10mm_Main

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1
Medium parameters used: f = 2480 MHz; $\sigma$ = 2.052 S/m; $\varepsilon_r$ = 52.518; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.26, 7.26, 7.26); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Area Scan (81x151x1):** Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 0.0194 W/kg

**Configuration/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.4580 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.0220 W/kg
**SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00488 W/kg**
Maximum value of SAR (measured) = 0.0171 W/kg

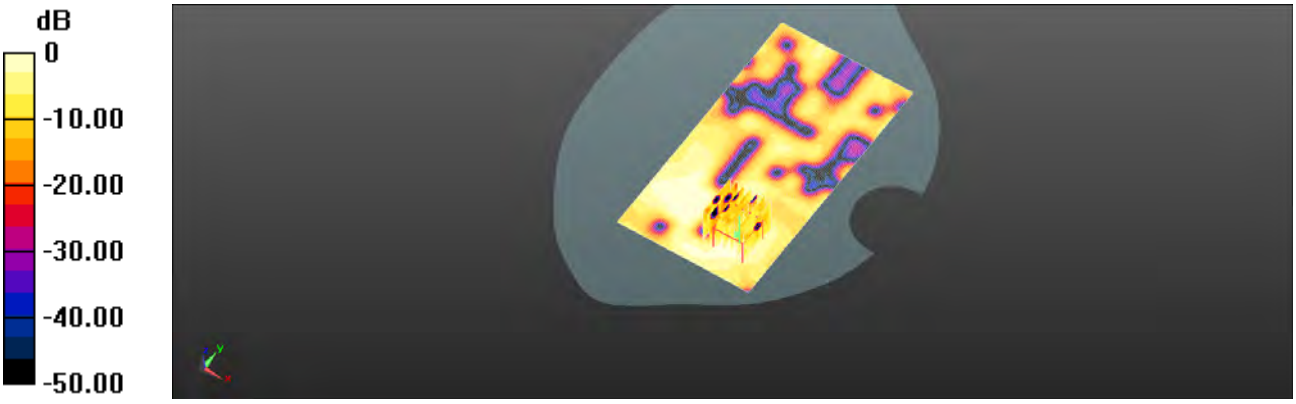


0 dB = 0.0171 W/kg = -17.67 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# 6. SAR System Performance Verification

Date: 2018/3/25

## Dipole 750 MHz_SN:1015_Head

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: f = 750 MHz; $\sigma$ = 0.901 S/m; $\varepsilon_r$ = 42.489; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.55, 9.55, 9.55); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=250mW/Area Scan (51x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 2.54 W/kg

**Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.54 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 3.12 W/kg
**SAR(1 g) = 2.03 W/kg; SAR(10 g) = 1.33 W/kg**
Maximum value of SAR (measured) = 2.60 W/kg

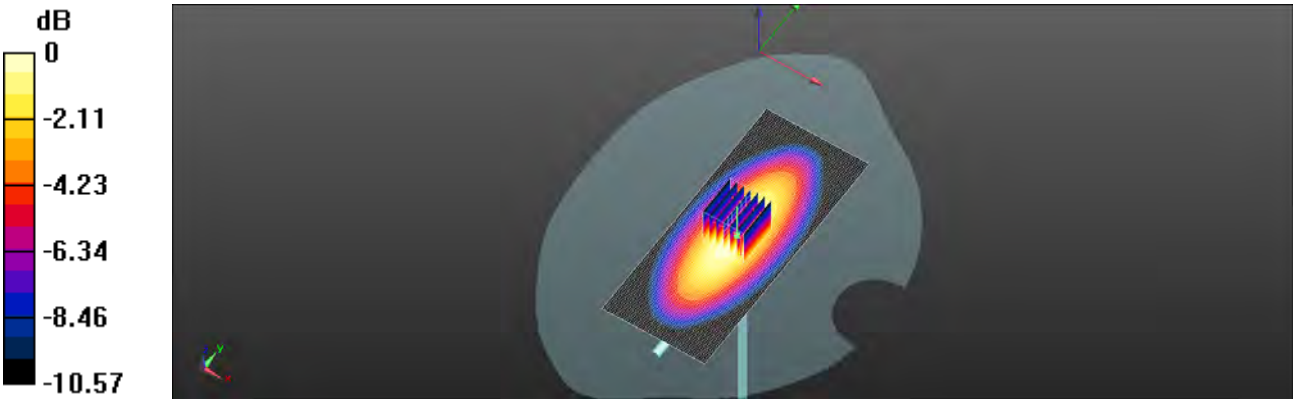


0 dB = 2.60 W/kg = 4.15 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/25

## Dipole 750 MHz_SN:1015_Body

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: f = 750 MHz; $\sigma$ = 0.963 S/m; $\varepsilon_r$ = 55.905; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.39, 9.39, 9.39); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=250mW/Area Scan (51x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 2.70 W/kg

**Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 53.70 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 3.12 W/kg
**SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.46 W/kg**
Maximum value of SAR (measured) = 2.69 W/kg

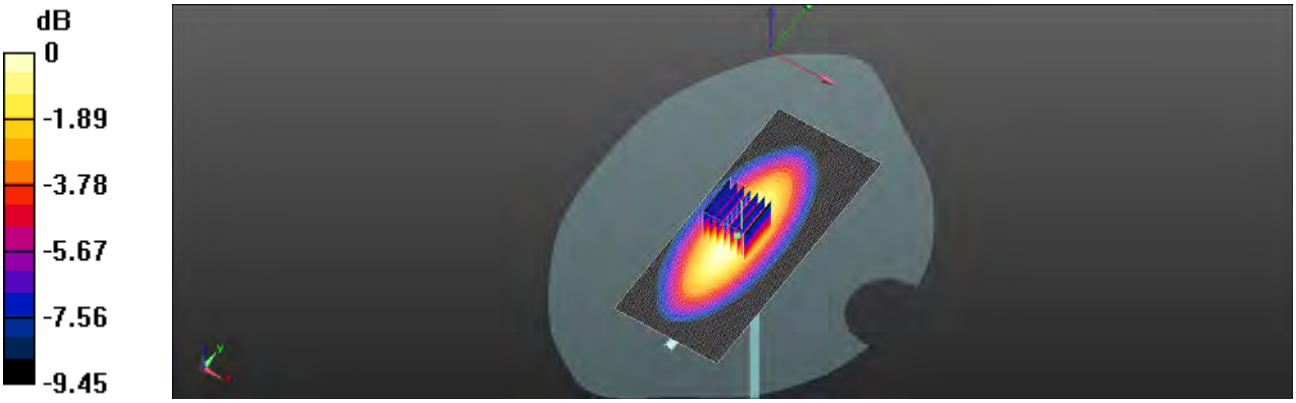


0 dB = 2.69 W/kg = 4.30 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/26

## Dipole 835 MHz_SN:4d063_Head

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: f = 835 MHz; $\sigma$ = 0.925 S/m; $\varepsilon_r$ = 41.339; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.1, 9.1, 9.1); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=250mW/Area Scan (51x121x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 2.99 W/kg

**Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.20 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 3.54 W/kg
**SAR(1 g) = 2.33 W/kg; SAR(10 g) = 1.51 W/kg**
Maximum value of SAR (measured) = 2.97 W/kg

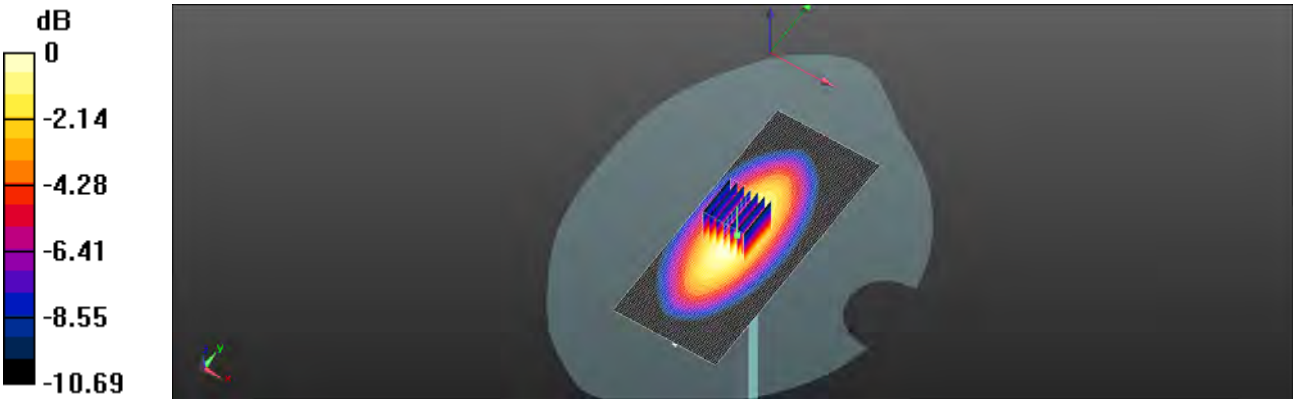


0 dB = 2.97 W/kg = 4.73 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/26

## Dipole 835 MHz_SN:4d063_Body

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: f = 835 MHz; $\sigma$ = 0.993 S/m; $\varepsilon_r$ = 55.053; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(9.18, 9.18, 9.18); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=250mW/Area Scan (51x111x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 2.96 W/kg

**Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 52.72 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 3.42 W/kg
**SAR(1 g) = 2.36 W/kg; SAR(10 g) = 1.57 W/kg**
Maximum value of SAR (measured) = 2.96 W/kg

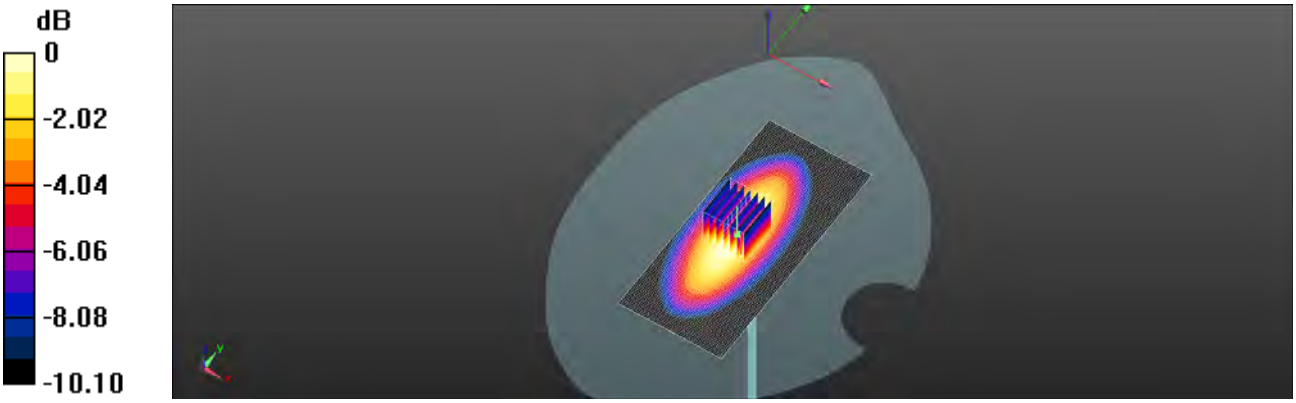


0 dB = 2.96 W/kg = 4.71 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/27

## Dipole 1750 MHz_SN:1008_Head

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium parameters used: f = 1750 MHz; $\sigma$ = 1.324 S/m; $\varepsilon_r$ = 40.568; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.5°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(8.09, 8.09, 8.09); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=250mW/Area Scan (51x101x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 14.0 W/kg

**Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 100.6 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 16.7 W/kg
**SAR(1 g) = 9.18 W/kg; SAR(10 g) = 4.87 W/kg**
Maximum value of SAR (measured) = 13.0 W/kg

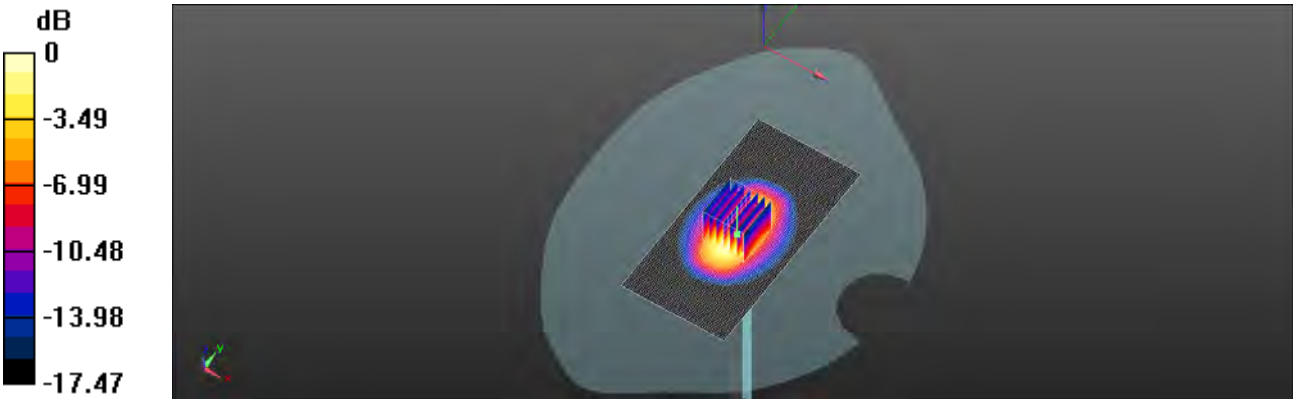


0 dB = 13.0 W/kg = 11.14 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/27

## Dipole 1750 MHz_SN:1008_Body

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium parameters used: f = 1750 MHz; $\sigma$ = 1.434 S/m; $\varepsilon_r$ = 52.887; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.2°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.65, 7.65, 7.65); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=250mW/Area Scan (51x101x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 14.6 W/kg

**Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 98.92 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 18.8 W/kg
**SAR(1 g) = 9.19 W/kg; SAR(10 g) = 5.01 W/kg**
Maximum value of SAR (measured) = 14.4 W/kg

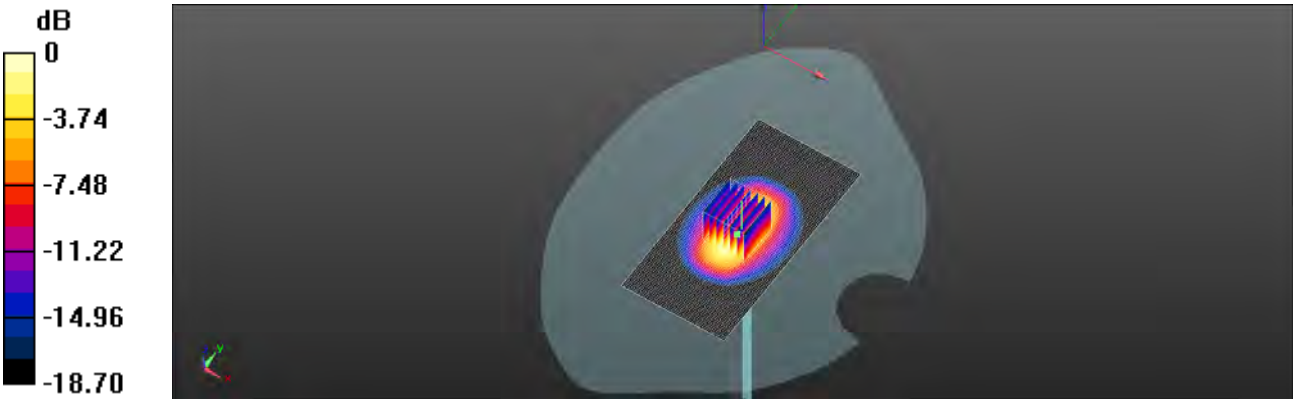


0 dB = 14.4 W/kg = 11.58 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/29

## Dipole 1900 MHz_SN:5d173_Head

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: f = 1900 MHz; $\sigma$ = 1.392 S/m; $\varepsilon_r$ = 39.855; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.78, 7.78, 7.78); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=250mW/Area Scan (41x81x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 14.2 W/kg

**Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 100.5 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 18.4 W/kg
**SAR(1 g) = 9.8 W/kg; SAR(10 g) = 5.1 W/kg**
Maximum value of SAR (measured) = 14.1 W/kg

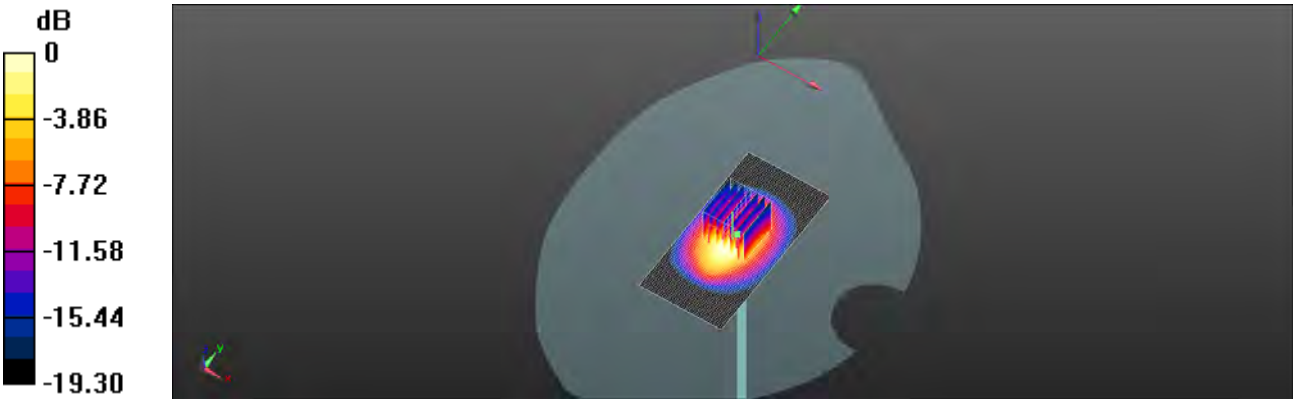


0 dB = 14.1 W/kg = 11.49 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/29

## Dipole 1900 MHz_SN:5d173_Body

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: f = 1900 MHz; $\sigma$ = 1.508 S/m; $\varepsilon_r$ = 52.524; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.35, 7.35, 7.35); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=250mW/Area Scan (41x71x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 15.3 W/kg

**Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 96.11 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 18.2 W/kg
**SAR(1 g) = 9.96 W/kg; SAR(10 g) = 5.18 W/kg**
Maximum value of SAR (measured) = 14.3 W/kg

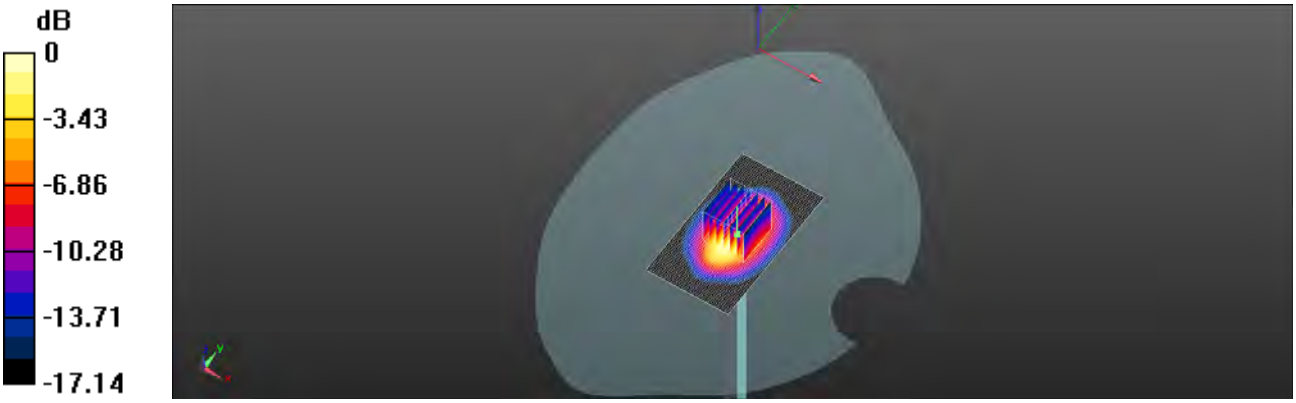


0 dB = 14.3 W/kg = 11.56 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/30

## Dipole 2450 MHz_SN:727_Head

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: f = 2450 MHz; $\sigma$ = 1.791 S/m; $\varepsilon_r$ = 39.366; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.16, 7.16, 7.16); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=250mW/Area Scan (51x101x1):** Interpolated grid: dx=15 mm, dy=15 mm
Maximum value of SAR (interpolated) = 21.0 W/kg

**Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 107.5 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 27.2 W/kg
**SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.31 W/kg**
Maximum value of SAR (measured) = 20.5 W/kg

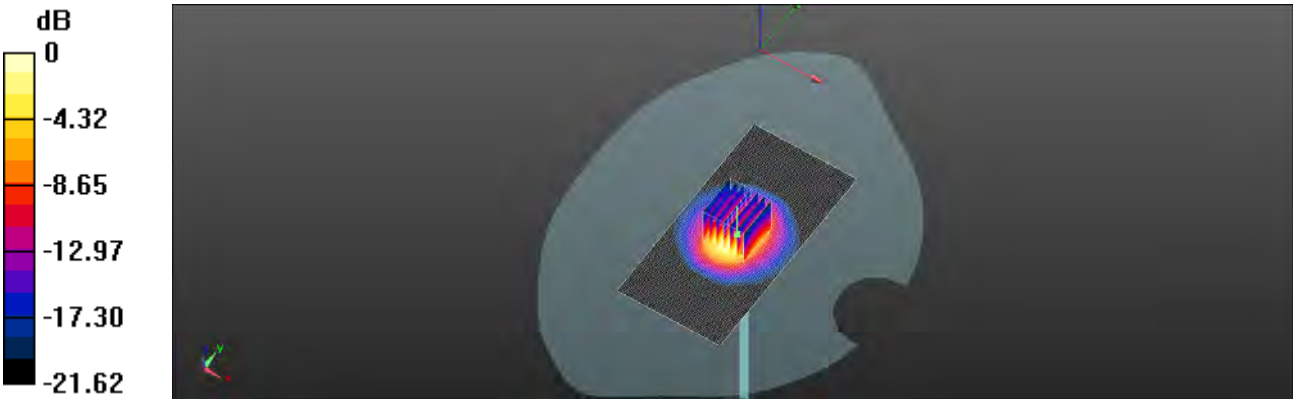


0 dB = 20.5 W/kg = 13.11 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/29

## Dipole 2450 MHz_SN:727_Body

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: f = 2450 MHz; $\sigma$ = 2.005 S/m; $\varepsilon_r$ = 52.621; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(7.26, 7.26, 7.26); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=250mW/Area Scan (51x71x1):** Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 21.3 W/kg

**Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 99.54 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 26.5 W/kg
**SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.92 W/kg**
Maximum value of SAR (measured) = 19.6 W/kg

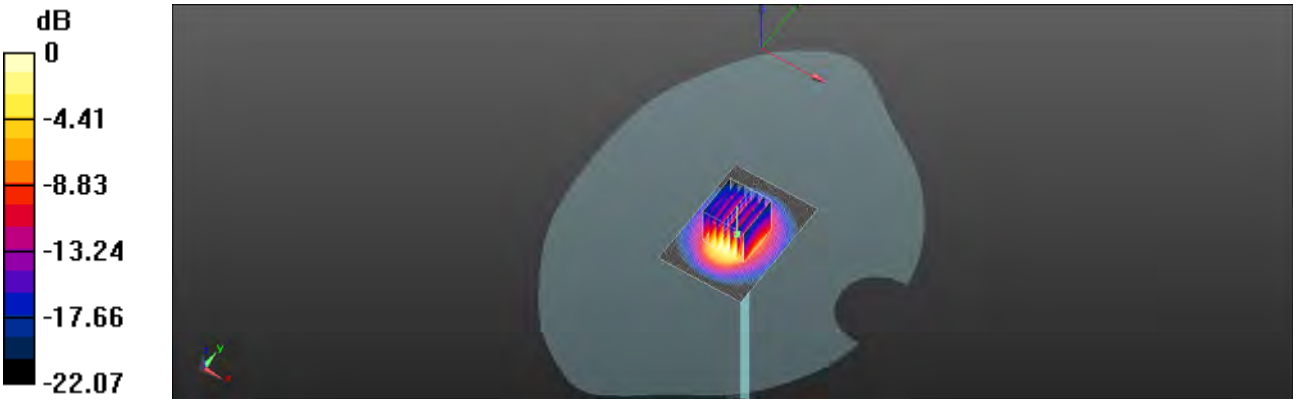


0 dB = 19.6 W/kg = 12.93 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/31

## Dipole 2600 MHz_SN:1005_Head

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: f = 2600 MHz; $\sigma$ = 1.966 S/m; $\varepsilon_r$ = 38.781; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(6.95, 6.95, 6.95); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=250mW/Area Scan (51x81x1):** Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 23.0 W/kg

**Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 97.21 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 31.0 W/kg
**SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.4 W/kg**
Maximum value of SAR (measured) = 21.9 W/kg

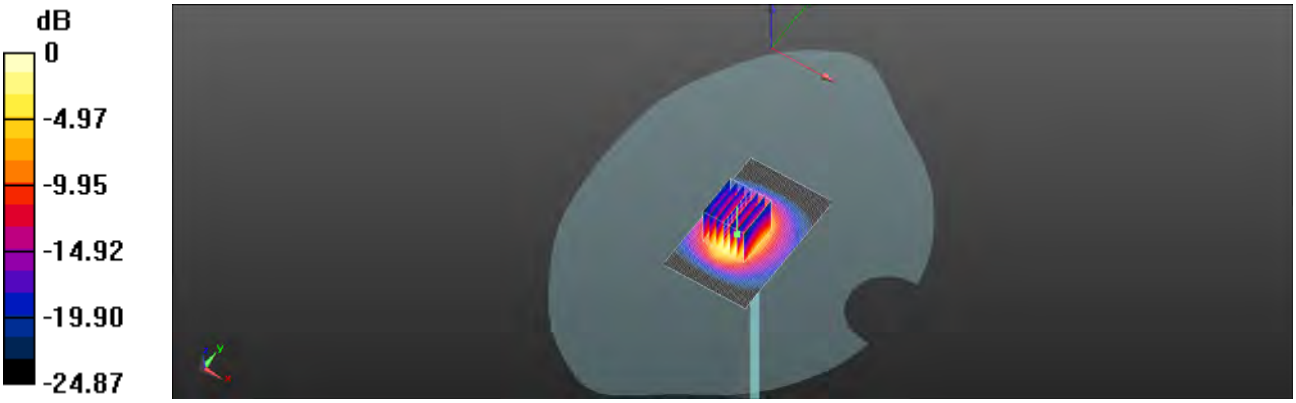


0 dB = 21.9 W/kg = 13.41 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/31

## Dipole 2600 MHz_SN:1005_Body

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: f = 2600 MHz; $\sigma$ = 2.202 S/m; $\varepsilon_r$ = 52.032; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(6.95, 6.95, 6.95); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=250mW/Area Scan (51x61x1):** Interpolated grid: dx=12 mm, dy=12 mm
Maximum value of SAR (interpolated) = 22.8 W/kg

**Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 96.86 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 30.2 W/kg
**SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.07 W/kg**
Maximum value of SAR (measured) = 21.6 W/kg

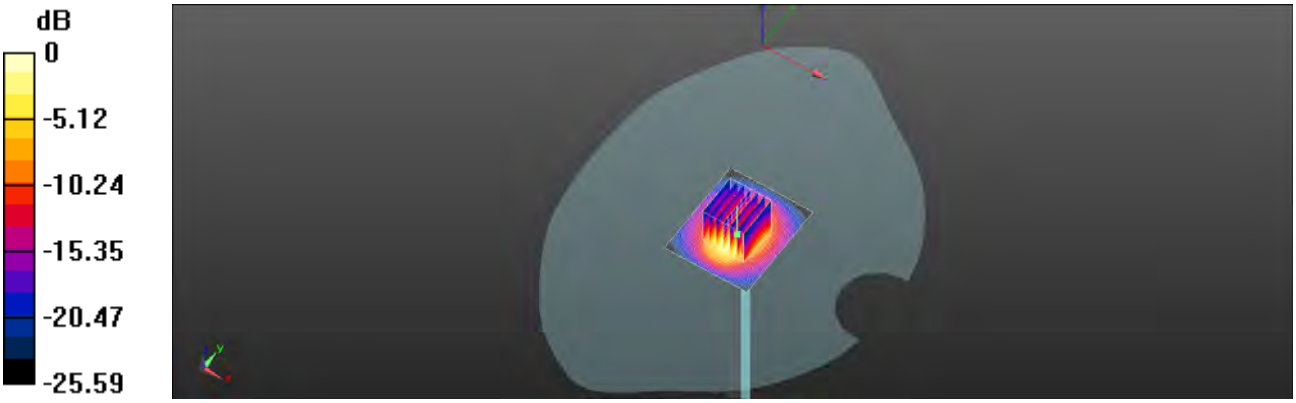


0 dB = 21.6 W/kg = 13.35 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/31

## Dipole 5200 MHz_SN:1023_Head

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5200 MHz; $\sigma$ = 4.545 S/m; $\varepsilon_r$ = 36.193; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.3°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.86, 4.86, 4.86); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=100mW/Area Scan (61x91x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 16.5 W/kg

**Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 60.36 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 31.7 W/kg
**SAR(1 g) = 7.79 W/kg; SAR(10 g) = 2.24 W/kg**
Maximum value of SAR (measured) = 16.3 W/kg

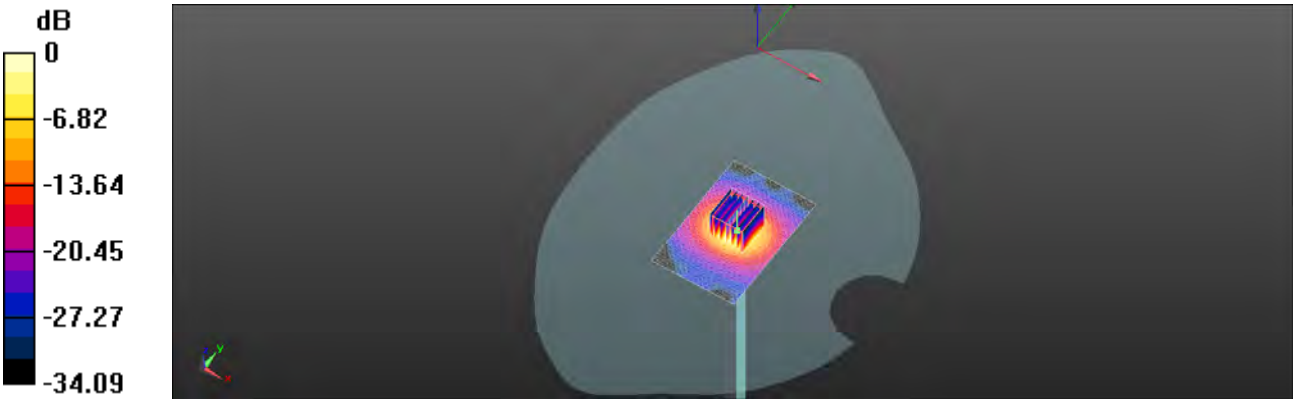


0 dB = 16.3 W/kg = 12.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/3/31

## Dipole 5200 MHz_SN:1023_Body

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5200 MHz; $\sigma$ = 5.118 S/m; $\varepsilon_r$ = 49.548; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.56, 4.56, 4.56); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=100mW/Area Scan (71x91x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 17.0 W/kg

**Configuration/Pin=100mW/Zoom Scan (7x7x7) (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 59.58 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 33.8 W/kg
**SAR(1 g) = 7.33 W/kg; SAR(10 g) = 2.06 W/kg**
Maximum value of SAR (measured) = 16.3 W/kg

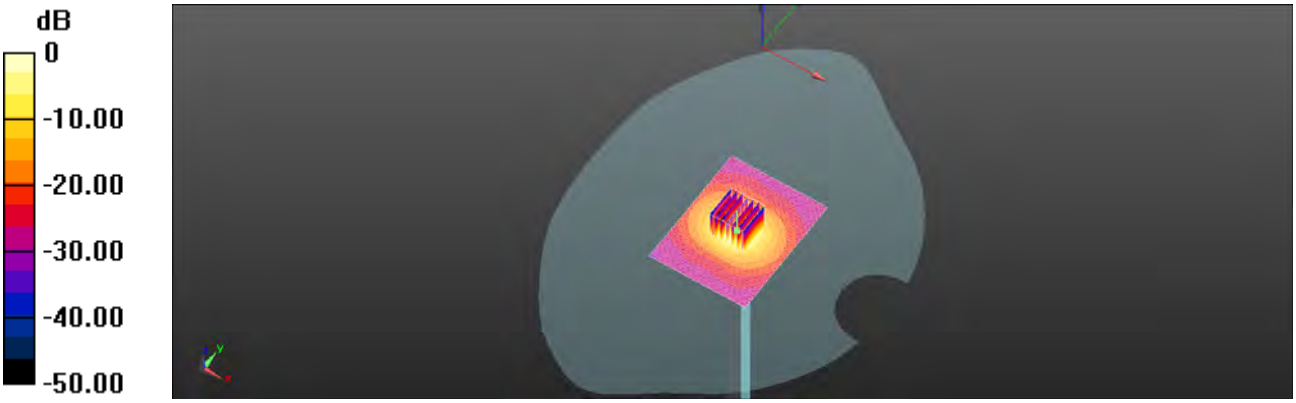


0 dB = 16.3 W/kg = 12.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/1

## Dipole 5300 MHz_SN:1023_Head

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5300 MHz; $\sigma$ = 4.652 S/m; $\varepsilon_r$ = 35.835; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.65, 4.65, 4.65); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=100mW/Area Scan (71x91x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 18.1 W/kg

**Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 61.02 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 37.4 W/kg
**SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.27 W/kg**
Maximum value of SAR (measured) = 17.2 W/kg

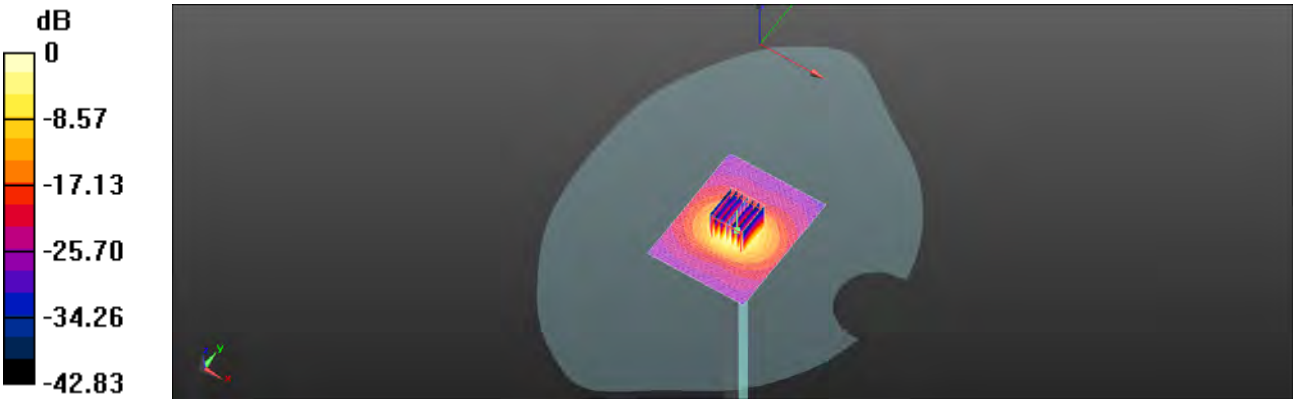


0 dB = 17.2 W/kg = 12.35 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/1

## Dipole 5300 MHz_SN:1023_Body

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5300 MHz; $\sigma$ = 5.243 S/m; $\varepsilon_r$ = 49.301; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.39, 4.39, 4.39); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=100mW/Area Scan (61x81x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 19.1 W/kg

**Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 60.33 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 35.4 W/kg
**SAR(1 g) = 7.4 W/kg; SAR(10 g) = 2.09 W/kg**
Maximum value of SAR (measured) = 19.3 W/kg

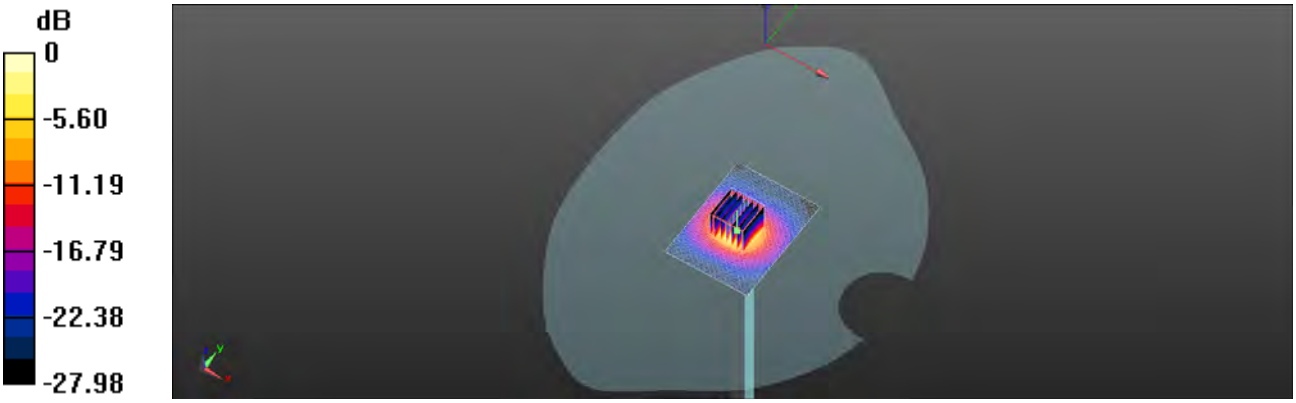


0 dB = 19.3 W/kg = 12.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/2

## Dipole 5600 MHz_SN:1023_Head

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5600 MHz; $\sigma$ = 5.051 S/m; $\varepsilon_r$ = 35.142; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(4.49, 4.49, 4.49); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=100mW/Area Scan (61x91x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 17.4 W/kg

**Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 61.40 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 34.7 W/kg
**SAR(1 g) = 7.98 W/kg; SAR(10 g) = 2.36 W/kg**
Maximum value of SAR (measured) = 17.1 W/kg

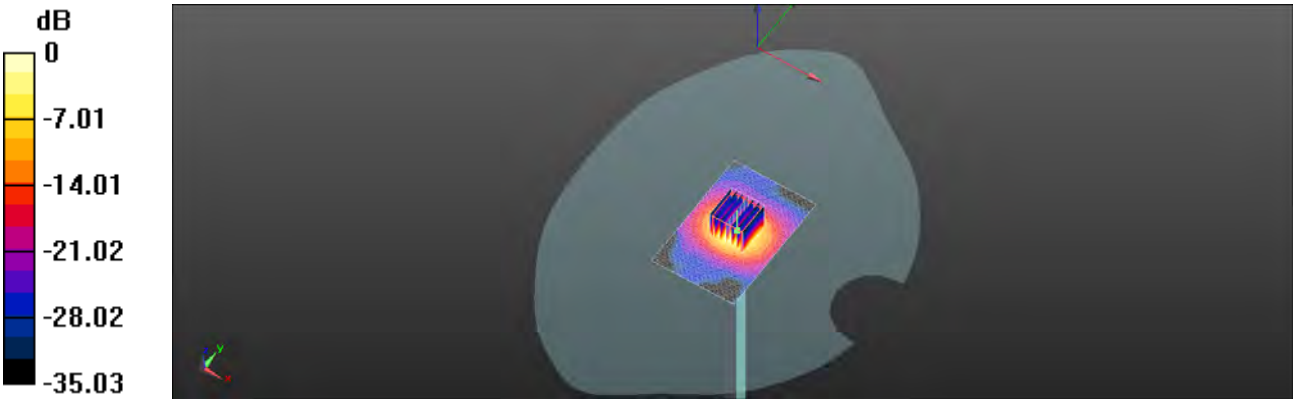


0 dB = 17.1 W/kg = 12.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2018/4/2

## Dipole 5600 MHz_SN:1023_Body

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: f = 5600 MHz; $\sigma$ = 5.765 S/m; $\varepsilon_r$ = 48.381; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Ambient temperature: 22.5°C; Liquid temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3831; ConvF(3.92, 3.92, 3.92); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

**Configuration/Pin=100mW/Area Scan (71x91x1):** Interpolated grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 18.6 W/kg

**Configuration/Pin=100mW/Zoom Scan (7x7x7) (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 57.64 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 43.0 W/kg
**SAR(1 g) = 7.78 W/kg; SAR(10 g) = 2.15 W/kg**
Maximum value of SAR (measured) = 17.9 W/kg

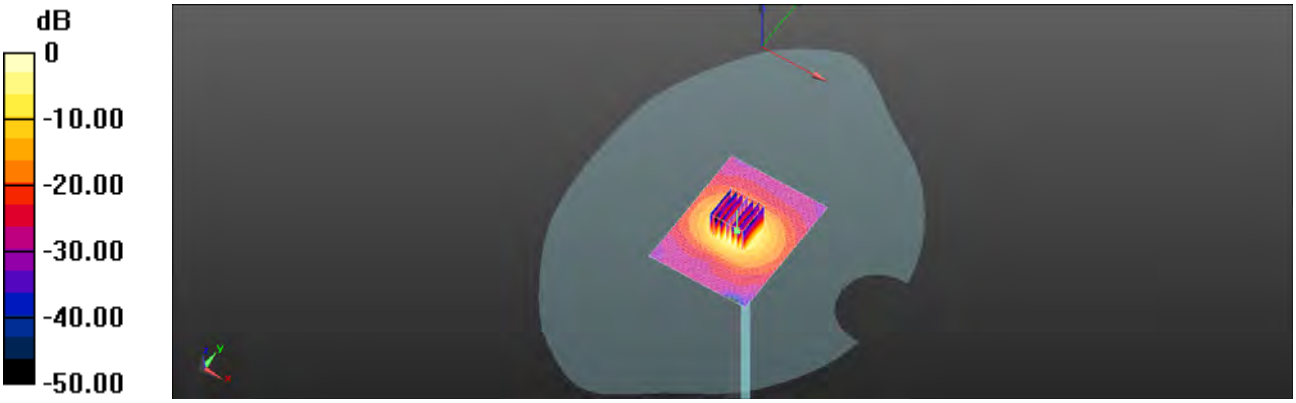


0 dB = 17.9 W/kg = 12.53 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# 7. DAE & Probe Calibration Certificate

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Client : **Auden** **Certificate No: Z17-97053**

## CALIBRATION CERTIFICATE

| | |
|---|---|
| Object | DAE4 - SN: 913 |
| Calibration Procedure(s) | FF-Z11-002-01<br>Calibration Procedure for the Data Acquisition Electronics (DAEx) |
| Calibration date: | May 02, 2017 |

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)℃ and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Process Calibrator 753 | 1971018 | 27-June-16 (CTTL, No:J16X04778) | June-17 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Yu Zongying | SAR Test Engineer | |
| Reviewed by: | Lin Hao | SAR Test Engineer | |
| Approved by: | Qi Dianyuan | SAR Project Leader | |

Issued: May 03, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

In Collaboration with
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com Http://www.chinattl.cn

**Glossary:**

| | |
|---|---|
| DAE | data acquisition electronics |
| Connector angle | information used in DASY system to align probe sensor X to the robot coordinate system. |

**Methods Applied and Interpretation of Parameters:**

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

In Collaboration with
s p e a g
CALIBRATION LABORATORY
Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com Http://www.chinattl.cn

## DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1μV , full range = -100...+300 mV
Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X | Y | Z |
|---|---|---|---|
| High Range | 404.035 ± 0.15% (k=2) | 404.438 ± 0.15% (k=2) | 404.997 ± 0.15% (k=2) |
| Low Range | 3.98645 ± 0.7% (k=2) | 3.99532 ± 0.7% (k=2) | 4.02083 ± 0.7% (k=2) |

## Connector Angle

| | |
|---|---|
| **Connector Angle** to be used in DASY system | 186.5° ± 1 ° |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client SGS-TW (Auden) Certificate No: EX3-3831_Jan18

# CALIBRATION CERTIFICATE

Object EX3DV4 - SN:3831

Calibration procedure(s) QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes

Calibration date: January 23, 2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power meter NRP | SN: 104778 | 04-Apr-17 (No. 217-02521/02522) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-17 (No. 217-02521) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-17 (No. 217-02525) | Apr-18 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 07-Apr-17 (No. 217-02528) | Apr-18 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-17 (No. ES3-3013_Dec17) | Dec-18 |
| DAE4 | SN: 660 | 21-Dec-17 (No. DAE4-660_Dec17) | Dec-18 |
| | | | |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| Power meter E4419B | SN: GB41293874 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A | SN: MY41498087 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A | SN: 000110210 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C | SN: US3642U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Michael Weber | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: January 25, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

## Glossary:

| | |
|---|---|
| TSL | tissue simulating liquid |
| NORMx,y,z | sensitivity in free space |
| ConvF | sensitivity in TSL / NORMx,y,z |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., ϑ = 0 is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

## Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, ", "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- *NORMx,y,z*: Assessed for E-field polarization ϑ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the $E^2$-field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)x,y,z = NORMx,y,z * frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCPx,y,z*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR*: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z*: *A, B, C, D* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORMx,y,z * ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORMx* (no uncertainty required).



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# Probe EX3DV4

## SN:3831

Manufactured: September 6, 2011
Calibrated: January 23, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:3831

## Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|---|---|---|---|
| Norm (μV/(V/m)$^2$)$^A$ | 0.43 | 0.41 | 0.42 | ± 10.1 % |
| DCP (mV)$^B$ | 100.3 | 106.6 | 101.4 | |

## Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB√μV | C | D dB | VR mV | Unc$^E$ (k=2) |
|---|---|---|---|---|---|---|---|---|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 176.5 | ±3.5 % |
| | | Y | 0.0 | 0.0 | 1.0 | | 196.9 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 196.8 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

A The uncertainties of Norm X,Y,Z do not affect the $E^2$-field uncertainty inside TSL (see Pages 5 and 6).
B Numerical linearization parameter: uncertainty not required.
E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:3831

## Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) [C] | Relative Permittivity [F] | Conductivity (S/m) [F] | ConvF X | ConvF Y | ConvF Z | Alpha [G] | Depth [G] (mm) | Unc (k=2) |
|---|---|---|---|---|---|---|---|---|
| 750 | 41.9 | 0.89 | 9.55 | 9.55 | 9.55 | 0.32 | 1.00 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 9.10 | 9.10 | 9.10 | 0.29 | 1.04 | ± 12.0 % |
| 900 | 41.5 | 0.97 | 9.00 | 9.00 | 9.00 | 0.40 | 0.85 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 8.09 | 8.09 | 8.09 | 0.37 | 0.80 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 7.78 | 7.78 | 7.78 | 0.34 | 0.84 | ± 12.0 % |
| 2000 | 40.0 | 1.40 | 7.79 | 7.79 | 7.79 | 0.27 | 0.84 | ± 12.0 % |
| 2300 | 39.5 | 1.67 | 7.50 | 7.50 | 7.50 | 0.32 | 0.80 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 7.16 | 7.16 | 7.16 | 0.38 | 0.84 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 6.95 | 6.95 | 6.95 | 0.38 | 0.82 | ± 12.0 % |
| 3500 | 37.9 | 2.91 | 6.64 | 6.64 | 6.64 | 0.30 | 1.20 | ± 13.1 % |
| 5200 | 36.0 | 4.66 | 4.86 | 4.86 | 4.86 | 0.35 | 1.80 | ± 13.1 % |
| 5300 | 35.9 | 4.76 | 4.65 | 4.65 | 4.65 | 0.35 | 1.80 | ± 13.1 % |
| 5600 | 35.5 | 5.07 | 4.49 | 4.49 | 4.49 | 0.40 | 1.80 | ± 13.1 % |
| 5800 | 35.3 | 5.27 | 4.50 | 4.50 | 4.50 | 0.40 | 1.80 | ± 13.1 % |

[C] Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.
[F] At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.
[G] Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:3831

## Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) [C] | Relative Permittivity [F] | Conductivity (S/m) [F] | ConvF X | ConvF Y | ConvF Z | Alpha [G] | Depth [G] (mm) | Unc (k=2) |
|---|---|---|---|---|---|---|---|---|
| 750 | 55.5 | 0.96 | 9.39 | 9.39 | 9.39 | 0.34 | 1.00 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 9.18 | 9.18 | 9.18 | 0.39 | 0.85 | ± 12.0 % |
| 900 | 55.0 | 1.05 | 9.13 | 9.13 | 9.13 | 0.32 | 0.96 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 7.65 | 7.65 | 7.65 | 0.32 | 0.85 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 7.35 | 7.35 | 7.35 | 0.38 | 0.81 | ± 12.0 % |
| 2000 | 53.3 | 1.52 | 7.51 | 7.51 | 7.51 | 0.36 | 0.80 | ± 12.0 % |
| 2300 | 52.9 | 1.81 | 7.29 | 7.29 | 7.29 | 0.36 | 0.88 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 7.26 | 7.26 | 7.26 | 0.34 | 0.88 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 6.95 | 6.95 | 6.95 | 0.25 | 0.99 | ± 12.0 % |
| 3500 | 51.3 | 3.31 | 6.60 | 6.60 | 6.60 | 0.30 | 1.20 | ± 13.1 % |
| 5200 | 49.0 | 5.30 | 4.56 | 4.56 | 4.56 | 0.35 | 1.90 | ± 13.1 % |
| 5300 | 48.9 | 5.42 | 4.39 | 4.39 | 4.39 | 0.35 | 1.90 | ± 13.1 % |
| 5600 | 48.5 | 5.77 | 3.92 | 3.92 | 3.92 | 0.40 | 1.90 | ± 13.1 % |
| 5800 | 48.2 | 6.00 | 4.17 | 4.17 | 4.17 | 0.40 | 1.90 | ± 13.1 % |

[C] Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

[F] At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

[G] Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

EX3DV4– SN:3831 January 23, 2018

## Frequency Response of E-Field
(TEM-Cell:ifi110 EXX, Waveguide: R22)

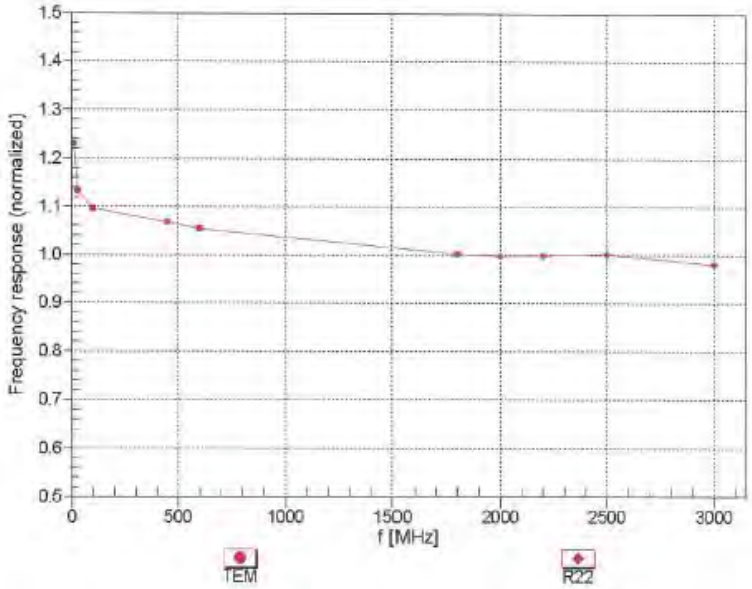


Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

EX3DV4– SN:3831 January 23, 2018

## Receiving Pattern (ϕ), ϑ = 0°

f=600 MHz,TEM

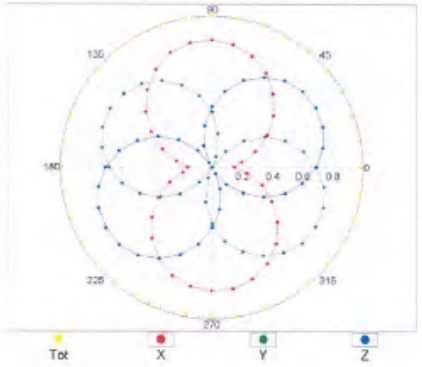


f=1800 MHz,R22

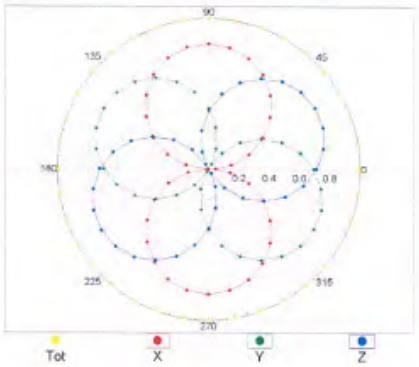


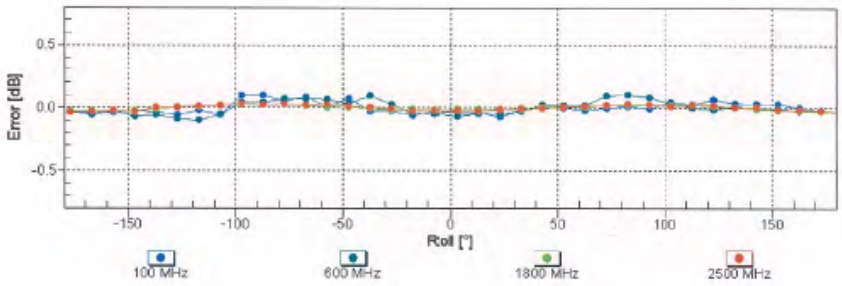


Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

EX3DV4– SN:3831 January 23, 2018

## Dynamic Range f(SAR$_{head}$)
(TEM cell , $f_{eval}$= 1900 MHz)

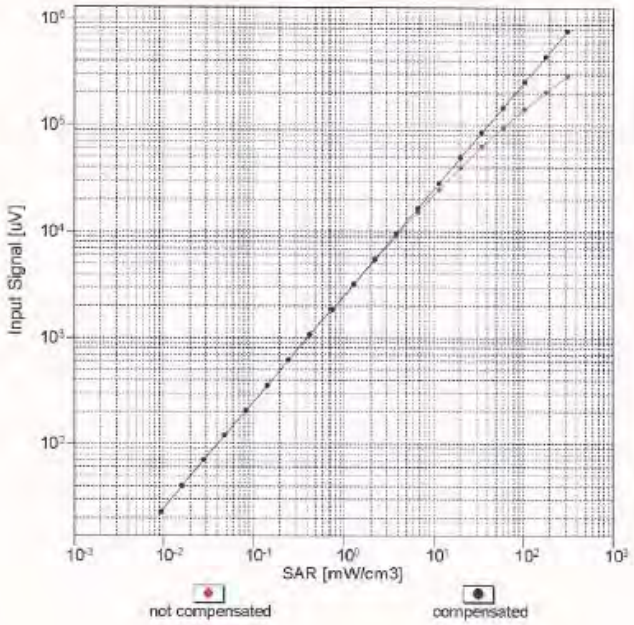


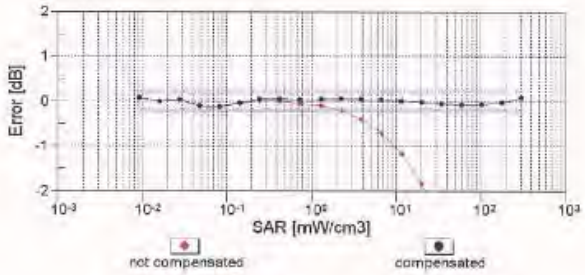


Uncertainty of Linearity Assessment: ± 0.6% (k=2)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

EX3DV4– SN:3831 January 23, 2018

## Conversion Factor Assessment

f = 835 MHz,WGLS R9 (H_convF)

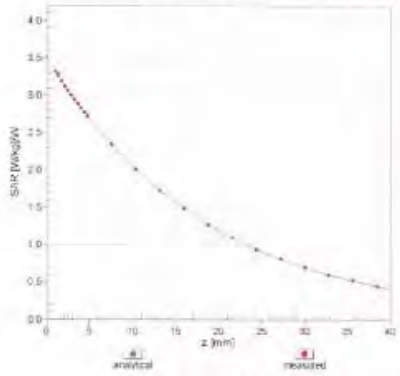


f = 1900 MHz,WGLS R22 (H_convF)

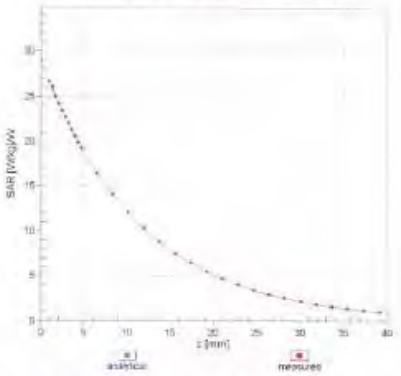


## Deviation from Isotropy in Liquid

Error (ϕ, ϑ), f = 900 MHz

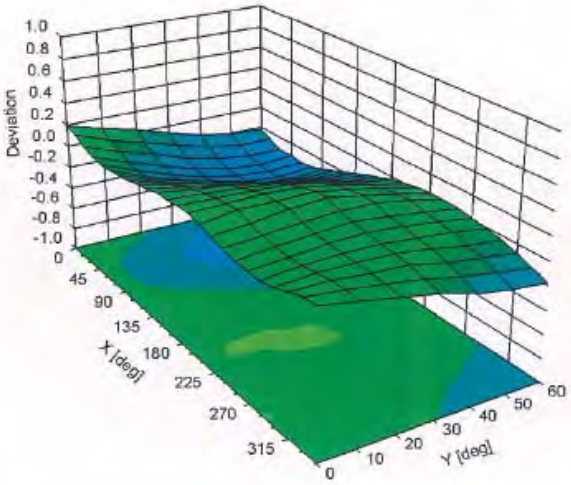





Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:3831

## Other Probe Parameters

| | |
|---|---|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | -17.1 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 1.4 mm |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# 8. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

| A | c | D | e | | f | g | h=c * f / e | i=c * g / e | k |
|---|---|---|---|---|---|---|---|---|---|
| Source of Uncertainty | Tolerance/ Uncertainty | Probability Distributio | Div | Div Value | ci (1g) | ci (10g) | Standard uncertainty | Standard uncertainty | vi, or Veff |
| | | | | | | | | | |
| **Measurement system** | | | | | | | | | |
| Probe calibration | 6.00% | N | 1 | 1 | 1 | 1 | 6.00% | 6.00% | ∞ |
| ***Isotropy , Axial*** | 3.50% | R | √3 | 1.732 | 1 | 1 | 2.02% | 2.02% | ∞ |
| ***Isotropy, Hemispherical*** | 9.60% | R | √3 | 1.732 | 1 | 1 | 5.54% | 5.54% | ∞ |
| Modulation Response | 2.40% | R | √3 | 1.732 | 1 | 1 | 1.40% | 1.40% | ∞ |
| Boundary Effect | 1.00% | R | √3 | 1.732 | 1 | 1 | 0.58% | 0.58% | ∞ |
| Linearity | 4.70% | R | √3 | 1.732 | 1 | 1 | 2.71% | 2.71% | ∞ |
| Detection Limits | 1.00% | R | √3 | 1.732 | 1 | 1 | 0.58% | 0.58% | ∞ |
| Readout Electronics | 0.30% | N | 1 | 1 | 1 | 1 | 0.30% | 0.30% | ∞ |
| Response time | 0.80% | R | √3 | 1.732 | 1 | 1 | 0.46% | 0.46% | ∞ |
| Integration Time | 2.60% | R | √3 | 1.732 | 1 | 1 | 1.50% | 1.50% | ∞ |
| ***Measurement drift (class A evaluation)*** | 1.75% | R | √3 | 1.732 | 1 | 1 | 1.01% | 1.01% | ∞ |
| RF ambient condition - noise | 3.00% | R | √3 | 1.732 | 1 | 1 | 1.73% | 1.73% | ∞ |
| RF ambient conditions - reflections | 3.00% | R | √3 | 1.732 | 1 | 1 | 1.73% | 1.73% | ∞ |
| Probe positioner Mechanical restrictions | 0.40% | R | √3 | 1.732 | 1 | 1 | 0.23% | 0.23% | ∞ |
| Probe Positioning with respect to phantom shell | 2.90% | R | √3 | 1.732 | 1 | 1 | 1.67% | 1.67% | ∞ |
| Post-processing | 1.00% | R | √3 | 1.732 | 1 | 1 | 0.58% | 0.58% | ∞ |
| Max SAR Eval | 1.00% | R | √3 | 1.732 | 1 | 1 | 0.58% | 0.58% | ∞ |
| | | | | | | | | | |
| **Test Sample related** | | | | | | | | | |
| Test sample positioning | 2.90% | N | 1 | 1 | 1 | 1 | 2.90% | 2.90% | M-1 |
| Device Holder Uncertainty | 3.60% | N | 1 | 1 | 1 | 1 | 3.60% | 3.60% | M-1 |
| Drift of output power | 5.00% | R | √3 | 1.732 | 1 | 1 | 2.89% | 2.89% | ∞ |
| | | | | | | | | | |
| **Phantom and Setup** | | | | | | | | | |
| Phantom Uncertainty | 4.00% | R | √3 | 1.732 | 1 | 1 | 2.31% | 2.31% | ∞ |
| Liquid permittivity (mea.) | -2.19% | N | 1 | 1 | 0.64 | 0.43 | -1.40% | -0.94% | M |
| Liquid Conductivity (mea.) | 3.66% | N | 1 | 1 | 0.6 | 0.49 | 2.20% | 1.79% | M |
| Combined standard uncertainty | | RSS | | | | | 11.71% | 11.59% | |
| Expant uncertainty (95% confidence interval), K=2 | | | | | | | 23.42% | 23.17% | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

| A | c | D | e | | f | g | h=c * f / e | i=c * g / e | k |
|---|---|---|---|---|---|---|---|---|---|
| Source of Uncertainty | Tolerance/ Uncertainty | Probability Distributio | Div | Div Value | ci (1g) | ci (10g) | Standard uncertainty | Standard uncertainty | vi, or Veff |
| | | | | | | | | | |
| **Measurement system** | | | | | | | | | |
| Probe calibration | 6.55% | N | 1 | 1 | 1 | 1 | 6.55% | 6.55% | ∞ |
| ***Isotropy , Axial*** | 3.50% | R | √3 | 1.732 | 1 | 1 | 2.02% | 2.02% | ∞ |
| ***Isotropy, Hemispherical*** | 9.60% | R | √3 | 1.732 | 1 | 1 | 5.54% | 5.54% | ∞ |
| Modulation Response | 2.40% | R | √3 | 1.732 | 1 | 1 | 1.40% | 1.40% | ∞ |
| Boundary Effect | 1.00% | R | √3 | 1.732 | 1 | 1 | 0.58% | 0.58% | ∞ |
| Linearity | 4.70% | R | √3 | 1.732 | 1 | 1 | 2.71% | 2.71% | ∞ |
| Detection Limits | 1.00% | R | √3 | 1.732 | 1 | 1 | 0.58% | 0.58% | ∞ |
| Readout Electronics | 0.30% | N | 1 | 1 | 1 | 1 | 0.30% | 0.30% | ∞ |
| Response time | 0.80% | R | √3 | 1.732 | 1 | 1 | 0.46% | 0.46% | ∞ |
| Integration Time | 2.60% | R | √3 | 1.732 | 1 | 1 | 1.50% | 1.50% | ∞ |
| ***Measurement drift (class A evaluation)*** | 1.75% | R | √3 | 1.732 | 1 | 1 | 1.01% | 1.01% | ∞ |
| RF ambient condition - noise | 3.00% | R | √3 | 1.732 | 1 | 1 | 1.73% | 1.73% | ∞ |
| RF ambient conditions - reflections | 3.00% | R | √3 | 1.732 | 1 | 1 | 1.73% | 1.73% | ∞ |
| Probe positioner Mechanical restrictions | 0.40% | R | √3 | 1.732 | 1 | 1 | 0.23% | 0.23% | ∞ |
| Probe Positioning with respect to phantom shell | 2.90% | R | √3 | 1.732 | 1 | 1 | 1.67% | 1.67% | ∞ |
| Post-processing | 1.00% | R | √3 | 1.732 | 1 | 1 | 0.58% | 0.58% | ∞ |
| Max SAR Eval | 1.00% | R | √3 | 1.732 | 1 | 1 | 0.58% | 0.58% | ∞ |
| | | | | | | | | | |
| **Test Sample related** | | | | | | | | | |
| Test sample positioning | 2.90% | N | 1 | 1 | 1 | 1 | 2.90% | 2.90% | M-1 |
| Device Holder Uncertainty | 3.60% | N | 1 | 1 | 1 | 1 | 3.60% | 3.60% | M-1 |
| Drift of output power | 5.00% | R | √3 | 1.732 | 1 | 1 | 2.89% | 2.89% | ∞ |
| | | | | | | | | | |
| **Phantom and Setup** | | | | | | | | | |
| Phantom Uncertainty | 4.00% | R | √3 | 1.732 | 1 | 1 | 2.31% | 2.31% | ∞ |
| Liquid permittivity (mea.) | -1.25% | N | 1 | 1 | 0.64 | 0.43 | -0.80% | -0.54% | M |
| Liquid Conductivity (mea.) | 3.48% | N | 1 | 1 | 0.6 | 0.49 | 2.09% | 1.71% | M |
| Combined standard uncertainty | | RSS | | | | | 11.93% | 11.84% | |
| Expant uncertainty (95% confidence interval), K=2 | | | | | | | 23.86% | 23.68% | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# 9. Phantom Description

Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
info@speag.com, http://www.speag.com

s p e a g

**Certificate of Conformity / First Article Inspection**

| | |
|---|---|
| Item | SAM Twin Phantom V4.0 |
| Type No | QD 000 P40 C |
| Series No | TP-1150 and higher |
| Manufacturer | SPEAG<br>Zeughausstrasse 43<br>CH-8004 Zürich<br>Switzerland |

**Tests**
The series production process used allows the limitation to test of first articles.
Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series items (called samples) or are tested at each item.

| Test | Requirement | Details | Units tested |
|---|---|---|---|
| Dimensions | Compliant with the geometry according to the CAD model. | IT'IS CAD File (*) | First article, Samples |
| Material thickness of shell | Compliant with the requirements according to the standards | 2mm +/- 0.2mm in flat and specific areas of head section | First article, Samples, TP-1314 ff. |
| Material thickness at ERP | Compliant with the requirements according to the standards | 6mm +/- 0.2mm at ERP | First article, All items |
| Material parameters | Dielectric parameters for required frequencies | 300 MHz – 6 GHz: Relative permittivity < 5. Loss tangent < 0.05 | Material samples |
| Material resistivity | The material has been tested to be compatible with the liquids defined in the standards if handled and cleaned according to the instructions. Observe technical Note for material compatibility. | DEGMBE based simulating liquids | Pre-series, First article, Material samples |
| Sagging | Compliant with the requirements according to the standards. Sagging of the flat section when filled with tissue simulating liquid | < 1% typical < 0.6% if filled with 156mm of HSL900 and without DUT below | Prototypes, Sample testing |

**Standards**
[1] CENELEC EN 50361
[2] IEEE Std 1528-2003
[3] IEC 62209 Part I
[4] FCC OET Bulletin 65, Supplement C, Edition 01-01
(*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of the other documents.

**Conformity**
Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standards [1] to [4]

**Date** 07.07.2005

**Signature / Stamp**

s p e a g
Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9779
info@speag.com, http://www.speag.com



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

# 10. System Validation from Original Equipment Supplier

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client SGS-TW (Auden)

Certificate No: D750V3-1015_Aug17

## CALIBRATION CERTIFICATE

Object D750V3 - SN:1015

Calibration procedure(s) QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz

Calibration date August 21, 2017

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power meter NRP | SN: 104778 | 04-Apr-17 (No. 217-02521/02522) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-17 (No. 217-02521) | Apr-18 |
| Power sensor NRP-Z01 | SN: 103245 | 04-Apr-17 (No. 217-02522) | Apr-18 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 07-Apr-17 (No. 217-02528) | Apr-18 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529) | Apr-18 |
| Reference Probe EX3DV4 | SN: 7349 | 31-May-17 (No. EX3-7349_May17) | May-18 |
| DAE4 | SN: 601 | 28-Mar-17 (No. DAE4-601_Mar17) | Mar-18 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---|---|---|---|
| Power meter EPM-442A | SN: GB37480704 | 07-Oct-15 (in house check Oct-16) | in house check: Oct-18 |
| Power sensor HP 8481A | SN: US37292783 | 07-Oct-15 (in house check Oct-16) | in house check: Oct-18 |
| Power sensor HP 8481A | SN: MY41092317 | 07-Oct-15 (in house check Oct-16) | in house check: Oct-18 |
| RF generator R&S SMT-06 | SN: 100972 | 15-Jun-15 (in house check Oct-16) | in house check: Oct-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-16) | in house check: Oct-17 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by | Claudio Leubler | Laboratory Technician | |
| Approved by | Katja Pokovic | Technical Manager | |

Issued: August 21, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D750V3-1015_Aug17 Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

**Glossary:**

| | |
|---|---|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

**Calibration is Performed According to the Following Standards:**

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---|---|---|
| DASY Version | DASY5 | V52.10.0 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 15 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 750 MHz ± 1 MHz | |

## Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Head TSL parameters | 22.0 °C | 41.9 | 0.89 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 41.1 ± 6 % | 0.90 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | — | — |

## SAR result with Head TSL

| SAR averaged over 1 $cm^3$ (1 g) of Head TSL | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 2.09 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **8.25 W/kg ± 17.0 % (k=2)** |

| SAR averaged over 10 $cm^3$ (10 g) of Head TSL | condition | |
|---|---|---|
| SAR measured | 250 mW input power | 1.35 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **5.35 W/kg ± 16.5 % (k=2)** |

## Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Body TSL parameters | 22.0 °C | 55.5 | 0.96 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 55.5 ± 6 % | 0.96 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C | — | — |

## SAR result with Body TSL

| SAR averaged over 1 $cm^3$ (1 g) of Body TSL | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 2.19 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **8.76 W/kg ± 17.0 % (k=2)** |

| SAR averaged over 10 $cm^3$ (10 g) of Body TSL | condition | |
|---|---|---|
| SAR measured | 250 mW input power | 1.44 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **5.76 W/kg ± 16.5 % (k=2)** |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

| | |
|---|---|
| Impedance, transformed to feed point | 53.9 Ω + 0.3 jΩ |
| Return Loss | - 28.6 dB |

### Antenna Parameters with Body TSL

| | |
|---|---|
| Impedance, transformed to feed point | 48.6 Ω - 3.4 jΩ |
| Return Loss | - 28.4 dB |

### General Antenna Parameters and Design

| | |
|---|---|
| Electrical Delay (one direction) | 1.037 ns |

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

| | |
|---|---|
| Manufactured by | SPEAG |
| Manufactured on | March 22, 2010 |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

**DASY5 Validation Report for Head TSL**

Date: 18.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1015**

Communication System: UID 0 - CW; Frequency: 750 MHz
Medium parameters used: f = 750 MHz; $\sigma$ = 0.9 S/m; $\varepsilon_r$ = 41.1; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.49, 10.49, 10.49); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 58.52 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 3.21 W/kg
**SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.35 W/kg**
Maximum value of SAR (measured) = 2.82 W/kg

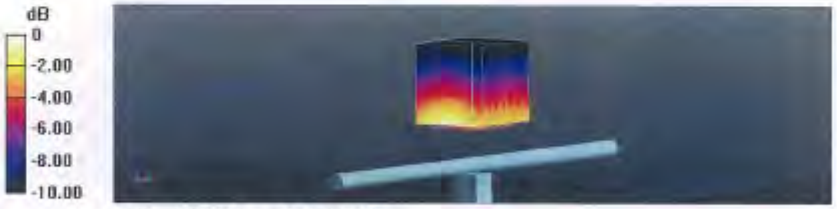


0 dB = 2.82 W/kg = 4.50 dBW/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Impedance Measurement Plot for Head TSL

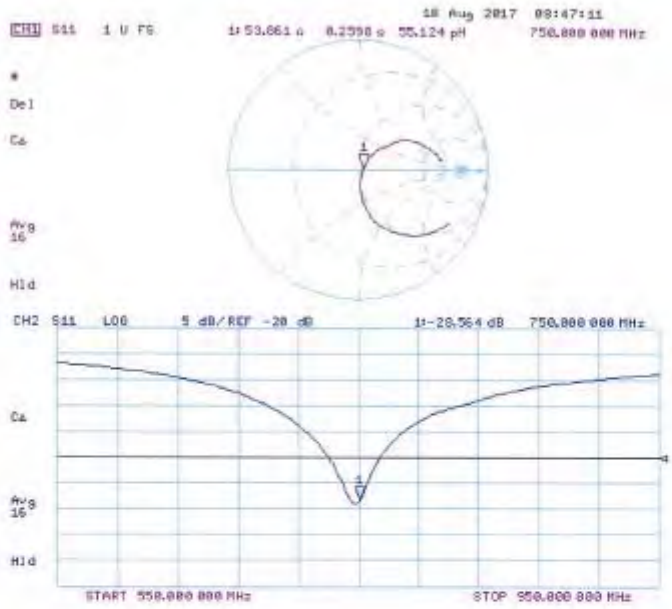




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

**DASY5 Validation Report for Body TSL**

Date: 21.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1015**

Communication System: UID 0 - CW; Frequency: 750 MHz
Medium parameters used: f = 750 MHz; $\sigma$ = 0.96 S/m; $\varepsilon_r$ = 55.5; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.35, 10.35, 10.35); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 57.77 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 3.27 W/kg
**SAR(1 g) = 2.19 W/kg; SAR(10 g) = 1.44 W/kg**
Maximum value of SAR (measured) = 2.89 W/kg

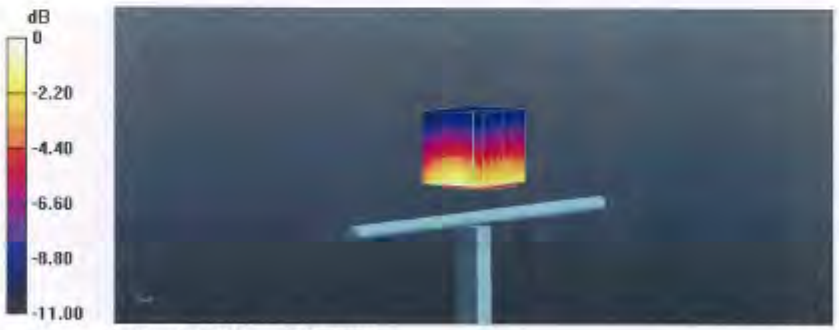


0 dB = 2.89 W/kg = 4.61 dBW/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Impedance Measurement Plot for Body TSL

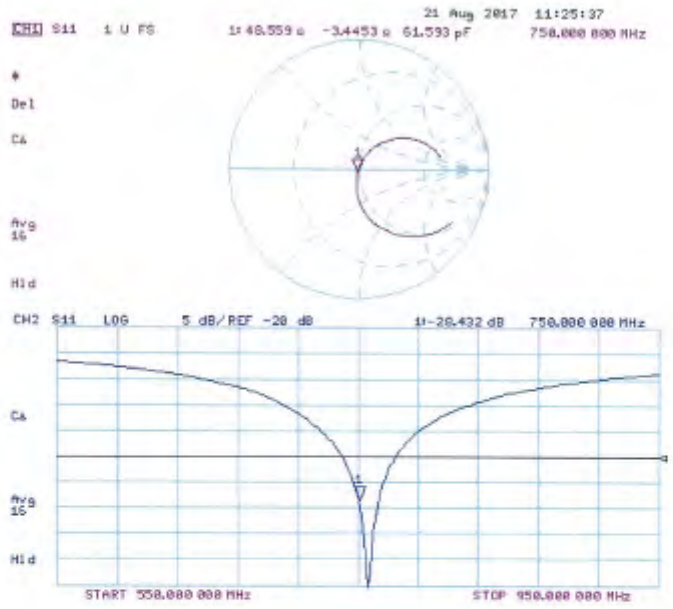




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client SGS-TW (Auden) Certificate No: D835V2-4d063_Aug17

# CALIBRATION CERTIFICATE

Object D835V2 - SN:4d063

Calibration procedure(s) QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz

Calibration date August 21, 2017

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power meter NRP | SN: 104778 | 04-Apr-17 (No. 217-02521/02522) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-17 (No. 217-02521) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-17 (No. 217-02522) | Apr-18 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 07-Apr-17 (No. 217-02525) | Apr-18 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529) | Apr-18 |
| Reference Probe EX3DV4 | SN: 7349 | 31-May-17 (No. EX3-7349_May17) | May-18 |
| DAE4 | SN: 601 | 28-Mar-17 (No. DAE4-601_Mar17) | Mar-18 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---|---|---|---|
| Power meter EPM-442A | SN: GB37480704 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: US37292783 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: MY41092317 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06 | SN: 100972 | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by | Claudio Leubler | Laboratory Technician | |
| Approved by | Katja Pokovic | Technical Manager | |

Issued: August 21, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

**Glossary:**

| | |
|---|---|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

**Calibration is Performed According to the Following Standards:**

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---|---|---|
| DASY Version | DASY5 | V52.10.0 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 15 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 835 MHz ± 1 MHz | |

## Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Head TSL parameters | 22.0 °C | 41.5 | 0.90 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 40.9 ± 6 % | 0.93 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | — | — |

## SAR result with Head TSL

| SAR averaged over 1 $cm^3$ (1 g) of Head TSL | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 2.40 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **9.34 W/kg ± 17.0 % (k=2)** |

| SAR averaged over 10 $cm^3$ (10 g) of Head TSL | condition | |
|---|---|---|
| SAR measured | 250 mW input power | 1.55 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **6.07 W/kg ± 16.5 % (k=2)** |

## Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Body TSL parameters | 22.0 °C | 55.2 | 0.97 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 55.3 ± 6 % | 0.98 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C | — | — |

## SAR result with Body TSL

| SAR averaged over 1 $cm^3$ (1 g) of Body TSL | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 2.41 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **9.57 W/kg ± 17.0 % (k=2)** |

| SAR averaged over 10 $cm^3$ (10 g) of Body TSL | condition | |
|---|---|---|
| SAR measured | 250 mW input power | 1.58 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **6.28 W/kg ± 16.5 % (k=2)** |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

| | |
|---|---|
| Impedance, transformed to feed point | 51.1 Ω - 2.7 jΩ |
| Return Loss | - 30.8 dB |

### Antenna Parameters with Body TSL

| | |
|---|---|
| Impedance, transformed to feed point | 47.2 Ω - 5.2 jΩ |
| Return Loss | - 24.4 dB |

### General Antenna Parameters and Design

| | |
|---|---|
| Electrical Delay (one direction) | 1.387 ns |

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

| | |
|---|---|
| Manufactured by | SPEAG |
| Manufactured on | November 27, 2006 |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

**DASY5 Validation Report for Head TSL**

Date: 18.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d063**

Communication System: UID 0 - CW; Frequency: 835 MHz
Medium parameters used: f = 835 MHz; $\sigma$ = 0.93 S/m; $\varepsilon_r$ = 40.9; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.07, 10.07, 10.07); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 61.74 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 3.71 W/kg
**SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.55 W/kg**
Maximum value of SAR (measured) = 3.26 W/kg

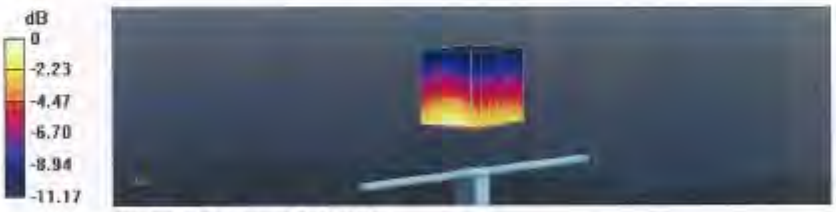


0 dB = 3.26 W/kg = 5.13 dBW/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Impedance Measurement Plot for Head TSL

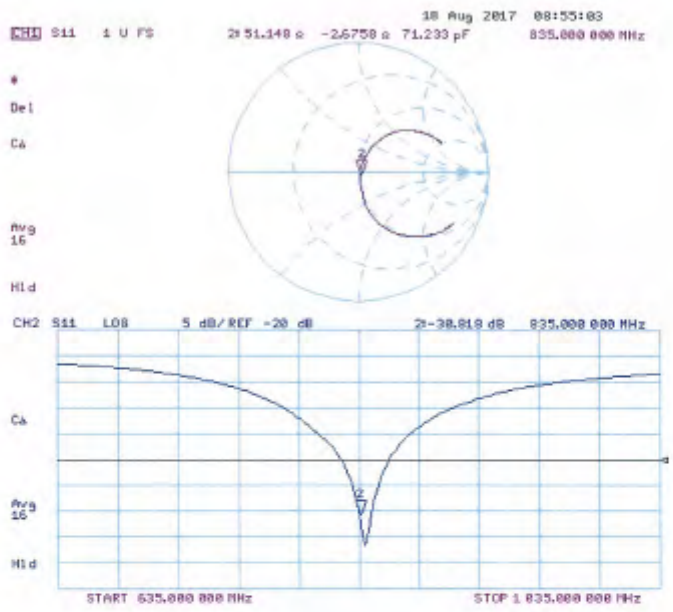




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

**DASY5 Validation Report for Body TSL**

Date: 21.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d063**

Communication System: UID 0 - CW; Frequency: 835 MHz
Medium parameters used: f = 835 MHz; $\sigma$ = 0.98 S/m; $\varepsilon_r$ = 55.3; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.2, 10.2, 10.2); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 59.86 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 3.64 W/kg
**SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.58 W/kg**
Maximum value of SAR (measured) = 3.20 W/kg

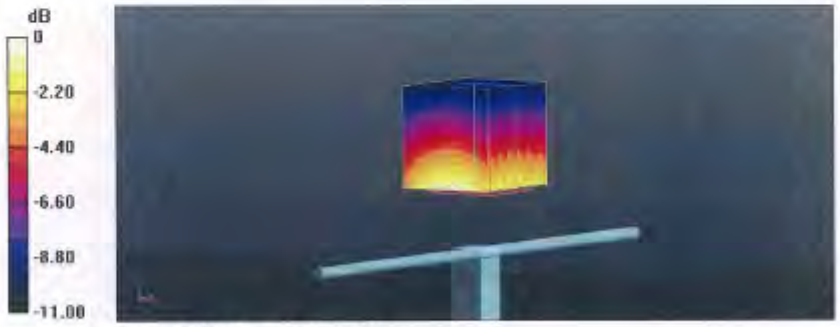


0 dB = 3.20 W/kg = 5.05 dBW/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Impedance Measurement Plot for Body TSL

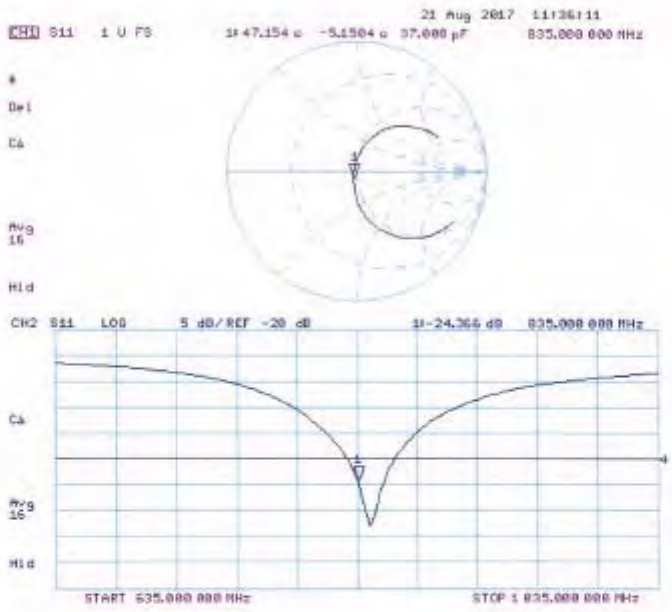




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client SGS-TW (Auden)

Certificate No: D1750V2-1008_Aug17

# CALIBRATION CERTIFICATE

Object D1750V2 - SN:1008

Calibration procedure(s) QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz

Calibration date August 21, 2017

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power meter NRP | SN: 104778 | 04-Apr-17 (No. 217-02521/02522) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-17 (No. 217-02521) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-17 (No. 217-02522) | Apr-18 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 07-Apr-17 (No. 217-02528) | Apr-18 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529) | Apr-18 |
| Reference Probe EX3DV4 | SN: 7349 | 31-May-17 (No. EX3-7349_May17) | May-18 |
| DAE4 | SN: 601 | 28-Mar-17 (No. DAE4-601_Mar17) | Mar-18 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---|---|---|---|
| Power meter EPM-442A | SN: GB37480704 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: US37292783 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: MY41092317 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06 | SN: 100972 | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Claudio Leubler | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: August 21, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D1750V2-1008_Aug17 Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

**Glossary:**

| | |
|---|---|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

**Calibration is Performed According to the Following Standards:**

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---|---|---|
| **DASY Version** | DASY5 | V52.10.0 |
| **Extrapolation** | Advanced Extrapolation | |
| **Phantom** | Modular Flat Phantom | |
| **Distance Dipole Center - TSL** | 10 mm | with Spacer |
| **Zoom Scan Resolution** | dx, dy, dz = 5 mm | |
| **Frequency** | 1750 MHz ± 1 MHz | |

## Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| **Nominal Head TSL parameters** | 22.0 °C | 40.1 | 1.37 mho/m |
| **Measured Head TSL parameters** | (22.0 ± 0.2) °C | 39.1 ± 6 % | 1.35 mho/m ± 6 % |
| **Head TSL temperature change during test** | < 0.5 °C | — | — |

## SAR result with Head TSL

| **SAR averaged over 1 cm³ (1 g) of Head TSL** | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 8.98 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **36.0 W/kg ± 17.0 % (k=2)** |

| **SAR averaged over 10 cm³ (10 g) of Head TSL** | condition | |
|---|---|---|
| SAR measured | 250 mW input power | 4.75 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **19.0 W/kg ± 16.5 % (k=2)** |

## Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| **Nominal Body TSL parameters** | 22.0 °C | 53.4 | 1.49 mho/m |
| **Measured Body TSL parameters** | (22.0 ± 0.2) °C | 53.9 ± 6 % | 1.47 mho/m ± 6 % |
| **Body TSL temperature change during test** | < 0.5 °C | — | — |

## SAR result with Body TSL

| **SAR averaged over 1 cm³ (1 g) of Body TSL** | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 9.09 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **36.7 W/kg ± 17.0 % (k=2)** |

| **SAR averaged over 10 cm³ (10 g) of Body TSL** | condition | |
|---|---|---|
| SAR measured | 250 mW input power | 4.87 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **19.6 W/kg ± 16.5 % (k=2)** |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

| | |
|---|---|
| Impedance, transformed to feed point | 49.9 Ω - 0.4 jΩ |
| Return Loss | - 46.7 dB |

### Antenna Parameters with Body TSL

| | |
|---|---|
| Impedance, transformed to feed point | 46.3 Ω - 1.4 jΩ |
| Return Loss | - 27.6 dB |

### General Antenna Parameters and Design

| | |
|---|---|
| Electrical Delay (one direction) | 1.221 ns |

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

| | |
|---|---|
| Manufactured by | SPEAG |
| Manufactured on | February 11, 2009 |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

**DASY5 Validation Report for Head TSL**

Date: 21.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1008**

Communication System: UID 0 - CW; Frequency: 1750 MHz
Medium parameters used: f = 1750 MHz; $\sigma$ = 1.35 S/m; $\varepsilon_r$ = 39.1; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.73, 8.73, 8.73); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 104.0 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 16.8 W/kg
**SAR(1 g) = 8.98 W/kg; SAR(10 g) = 4.75 W/kg**
Maximum value of SAR (measured) = 13.7 W/kg

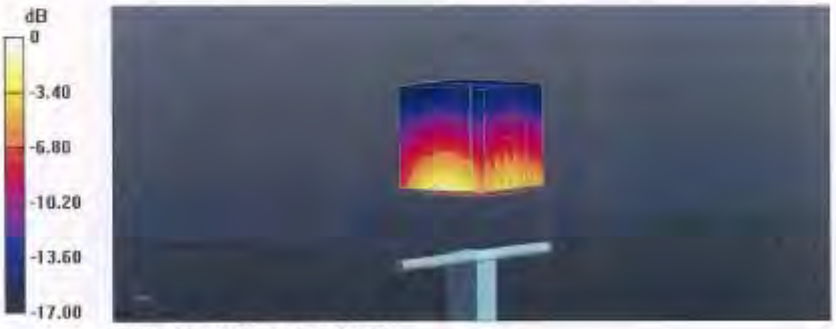


0 dB = 13.7 W/kg = 11.37 dBW/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Impedance Measurement Plot for Head TSL

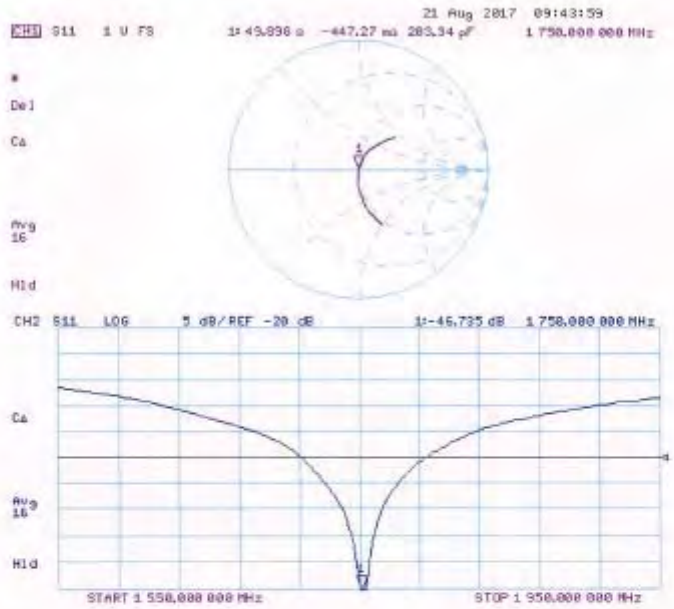




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client SGS-TW (Auden)

Certificate No: D1900V2-5d173_May17

# CALIBRATION CERTIFICATE

Object D1900V2 - SN:5d173

Calibration procedure(s) QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: May 31, 2017

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power meter NRP | SN: 104778 | 04-Apr-17 (No. 217-02521/02522) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-17 (No. 217-02521) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-17 (No. 217-02522) | Apr-18 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 07-Apr-17 (No. 217-02528) | Apr-18 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529) | Apr-18 |
| Reference Probe EX3DV4 | SN: 7460 | 19-May-17 (No. EX3-7460_May17) | May-18 |
| DAE4 | SN: 601 | 28-Mar-17 (No. DAE4-601_Mar17) | Mar-18 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---|---|---|---|
| Power meter EPM-442A | SN: GB37480704 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: US37292783 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: MY41092317 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06 | SN: 100972 | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Jeton Kastrati | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: May 31, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D1900V2-5d173_May17 Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

**Glossary:**

| | |
|---|---|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

**Calibration is Performed According to the Following Standards:**

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---|---|---|
| **DASY Version** | DASY5 | V52.10.0 |
| **Extrapolation** | Advanced Extrapolation | |
| **Phantom** | Modular Flat Phantom | |
| **Distance Dipole Center - TSL** | 10 mm | with Spacer |
| **Zoom Scan Resolution** | dx, dy, dz = 5 mm | |
| **Frequency** | 1900 MHz ± 1 MHz | |

## Head TSL parameters

The following parameters and calculations were applied.

| | **Temperature** | **Permittivity** | **Conductivity** |
|---|---|---|---|
| **Nominal Head TSL parameters** | 22.0 °C | 40.0 | 1.40 mho/m |
| **Measured Head TSL parameters** | (22.0 ± 0.2) °C | 41.3 ± 6 % | 1.40 mho/m ± 6 % |
| **Head TSL temperature change during test** | < 0.5 °C | --- | --- |

## SAR result with Head TSL

| **SAR averaged over 1 cm³ (1 g) of Head TSL** | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 10.1 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **40.7 W/kg ± 17.0 % (k=2)** |

| **SAR averaged over 10 cm³ (10 g) of Head TSL** | condition | |
|---|---|---|
| SAR measured | 250 mW input power | 5.26 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **21.1 W/kg ± 16.5 % (k=2)** |

## Body TSL parameters

The following parameters and calculations were applied.

| | **Temperature** | **Permittivity** | **Conductivity** |
|---|---|---|---|
| **Nominal Body TSL parameters** | 22.0 °C | 53.3 | 1.52 mho/m |
| **Measured Body TSL parameters** | (22.0 ± 0.2) °C | 54.2 ± 6 % | 1.51 mho/m ± 6 % |
| **Body TSL temperature change during test** | < 0.5 °C | --- | --- |

## SAR result with Body TSL

| **SAR averaged over 1 cm³ (1 g) of Body TSL** | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 9.96 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **40.2 W/kg ± 17.0 % (k=2)** |

| **SAR averaged over 10 cm³ (10 g) of Body TSL** | condition | |
|---|---|---|
| SAR measured | 250 mW input power | 5.30 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **21.3 W/kg ± 16.5 % (k=2)** |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

| | |
|---|---|
| Impedance, transformed to feed point | 51.3 Ω + 4.9 jΩ |
| Return Loss | - 26.1 dB |

### Antenna Parameters with Body TSL

| | |
|---|---|
| Impedance, transformed to feed point | 47.5 Ω + 6.0 jΩ |
| Return Loss | - 23.5 dB |

### General Antenna Parameters and Design

| | |
|---|---|
| Electrical Delay (one direction) | 1.199 ns |

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

| | |
|---|---|
| Manufactured by | SPEAG |
| Manufactured on | June 06, 2012 |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

**DASY5 Validation Report for Head TSL**

Date: 31.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d173**

Communication System: UID 0 - CW; Frequency: 1900 MHz
Medium parameters used: f = 1900 MHz; $\sigma$ = 1.4 S/m; $\varepsilon_r$ = 41.3; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7460; ConvF(7.98, 7.98, 7.98); Calibrated: 19.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 107.7 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 18.9 W/kg
**SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.26 W/kg**
Maximum value of SAR (measured) = 15.3 W/kg

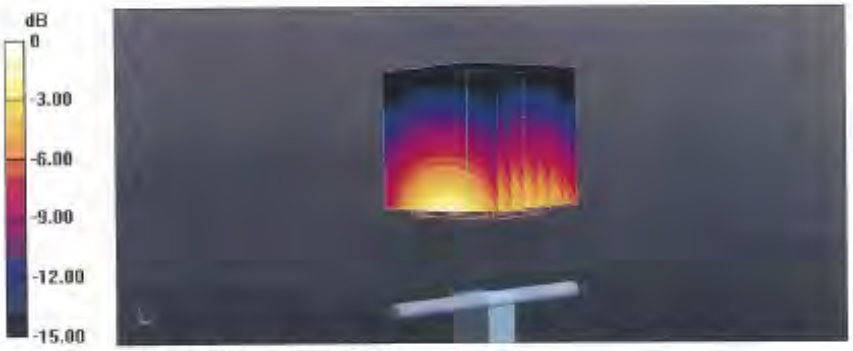


0 dB = 15.3 W/kg = 11.85 dBW/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## Impedance Measurement Plot for Head TSL

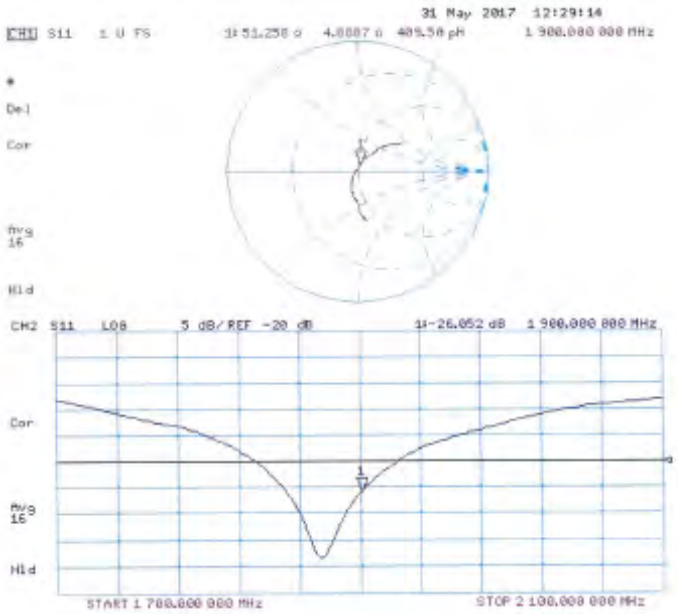




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

**DASY5 Validation Report for Body TSL**

Date: 31.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d173**

Communication System: UID 0 - CW; Frequency: 1900 MHz
Medium parameters used: f = 1900 MHz; $\sigma$ = 1.51 S/m; $\varepsilon_r$ = 54.2; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7460; ConvF(7.82, 7.82, 7.82); Calibrated: 19.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 102.9 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 17.5 W/kg
**SAR(1 g) = 9.98 W/kg; SAR(10 g) = 5.3 W/kg**
Maximum value of SAR (measured) = 14.3 W/kg

0 dB = 14.3 W/kg = 11.55 dBW/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Impedance Measurement Plot for Body TSL

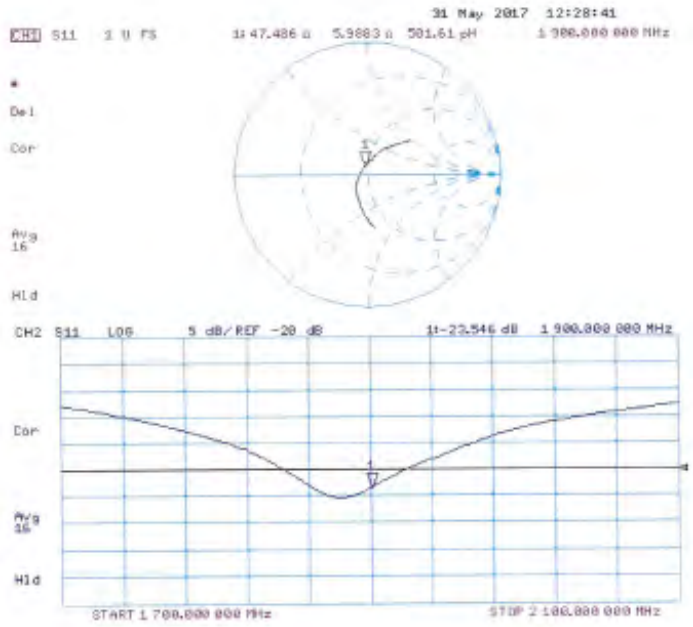




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client SGS -TW (Auden)

Certificate No: D2450V2-727_Apr17

# CALIBRATION CERTIFICATE

Object D2450V2 - SN: 727

Calibration procedure(s) QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz

Calibration date April 21, 2017

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power meter NRP | SN: 104778 | 04-Apr-17 (No. 217-02521/02522) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-17 (No. 217-02521) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-17 (No. 217-02522) | Apr-18 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 07-Apr-17 (No. 217-02528) | Apr-18 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529) | Apr-18 |
| Reference Probe EX3DV4 | SN: 7349 | 31-Dec-16 (No. EX3-7349_Dec16) | Dec-17 |
| DAE4 | SN: 601 | 28-Mar-17 (No. DAE4-601_Mar17) | Mar-18 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---|---|---|---|
| Power meter EPM-442A | SN: GB37480704 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: US37292783 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: MY41092317 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06 | SN: 100972 | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Michael Weber | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: April 21, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D2450V2-727_Apr17 Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

**Glossary:**

| | |
|---|---|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

**Calibration is Performed According to the Following Standards:**

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

| DASY Version | DASY5 | V52.10.0 |
|---|---|---|
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 2450 MHz ± 1 MHz | |

## Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Head TSL parameters | 22.0 °C | 39.2 | 1.80 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 37.7 ± 6 % | 1.87 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

## SAR result with Head TSL

| SAR averaged over 1 cm³ (1 g) of Head TSL | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 13.4 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **52.2 W/kg ± 17.0 % (k=2)** |

| SAR averaged over 10 cm³ (10 g) of Head TSL | condition | |
|---|---|---|
| SAR measured | 250 mW input power | 6.18 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **24.3 W/kg ± 16.5 % (k=2)** |

## Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Body TSL parameters | 22.0 °C | 52.7 | 1.95 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 52.5 ± 6 % | 2.03 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

## SAR result with Body TSL

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 12.9 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **50.6 W/kg ± 17.0 % (k=2)** |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|---|---|
| SAR measured | 250 mW input power | 6.01 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **23.8 W/kg ± 16.5 % (k=2)** |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

| | |
|---|---|
| Impedance, transformed to feed point | 56.3 Ω + 2.1 jΩ |
| Return Loss | - 24.0 dB |

### Antenna Parameters with Body TSL

| | |
|---|---|
| Impedance, transformed to feed point | 51.1 Ω + 4.1 jΩ |
| Return Loss | - 27.5 dB |

### General Antenna Parameters and Design

| | |
|---|---|
| Electrical Delay (one direction) | 1.149 ns |

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

| | |
|---|---|
| Manufactured by | SPEAG |
| Manufactured on | January 09, 2003 |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

**DASY5 Validation Report for Head TSL**

Date: 21.04.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727**

Communication System: UID 0 - CW; Frequency: 2450 MHz
Medium parameters used: f = 2450 MHz; $\sigma$ = 1.87 S/m; $\varepsilon_r$ = 37.7; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.72, 7.72, 7.72); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 109.8 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 27.3 W/kg
**SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.18 W/kg**
Maximum value of SAR (measured) = 21.1 W/kg

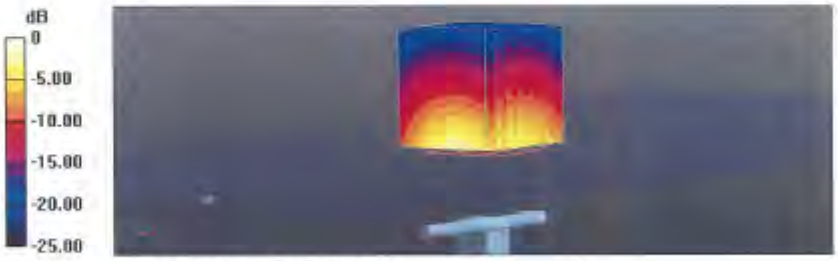


0 dB = 21.1 W/kg = 13.24 dBW/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Impedance Measurement Plot for Head TSL

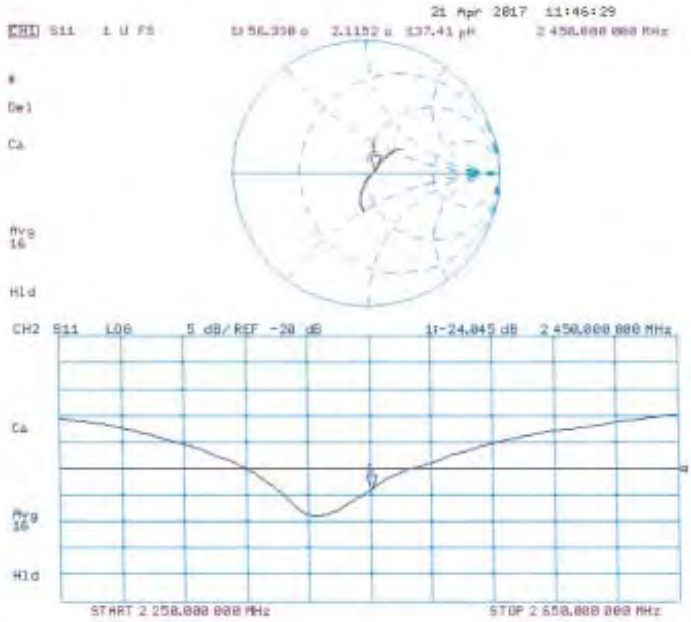




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

**DASY5 Validation Report for Body TSL**

Date: 21.04.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727**

Communication System: UID 0 - CW; Frequency: 2450 MHz
Medium parameters used: f = 2450 MHz; $\sigma$ = 2.03 S/m; $\varepsilon_r$ = 52.5; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

**Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 105.0 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 25.4 W/kg
**SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.01 W/kg**
Maximum value of SAR (measured) = 20.0 W/kg

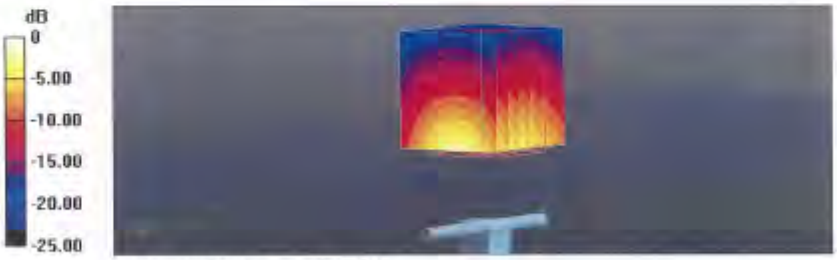


0 dB = 20.0 W/kg = 13.01 dBW/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Impedance Measurement Plot for Body TSL

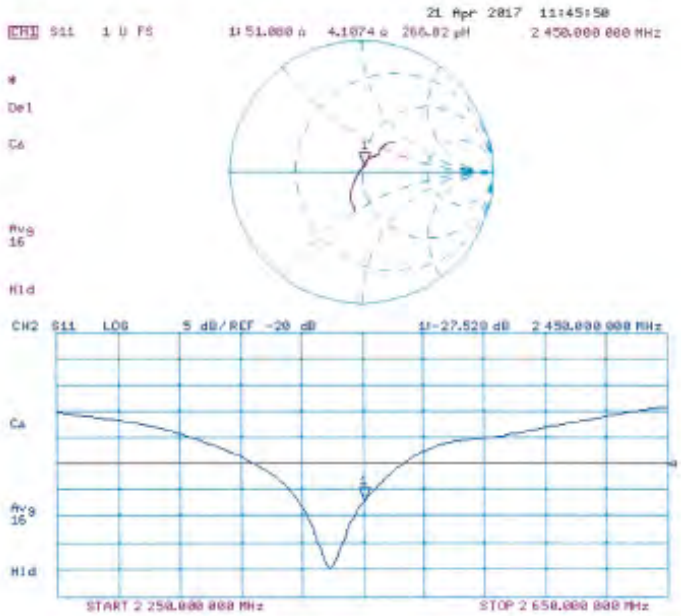




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client SGS-TW (Auden) Certificate No: D2600V2-1005_Jan18

# CALIBRATION CERTIFICATE

Object D2600V2 - SN:1005

Calibration procedure(s) QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: January 17, 2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power meter NRP | SN: 104778 | 04-Apr-17 (No. 217-02521/02522) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-17 (No. 217-02521) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-17 (No. 217-02522) | Apr-18 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 07-Apr-17 (No. 217-02528) | Apr-18 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529) | Apr-18 |
| Reference Probe EX3DV4 | SN: 7349 | 30-Dec-17 (No. EX3-7349_Dec17) | Dec-18 |
| DAE4 | SN: 601 | 26-Oct-17 (No. DAE4-601_Oct17) | Oct-18 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---|---|---|---|
| Power meter EPM-442A | SN: GB37480704 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: US37292783 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: MY41092317 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06 | SN: 100972 | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Jeton Kastrati | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: January 17, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

**Glossary:**

| | |
|---|---|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

**Calibration is Performed According to the Following Standards:**

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

| DASY Version | DASY5 | V52.10.0 |
|---|---|---|
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 2600 MHz ± 1 MHz | |

## Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Head TSL parameters | 22.0 °C | 39.0 | 1.96 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 37.2 ± 6 % | 2.04 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | --- | --- |

## SAR result with Head TSL

| SAR averaged over 1 $cm^3$ (1 g) of Head TSL | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 14.6 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **56.8 W/kg ± 17.0 % (k=2)** |

| SAR averaged over 10 $cm^3$ (10 g) of Head TSL | condition | |
|---|---|---|
| SAR measured | 250 mW input power | 6.49 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **25.5 W/kg ± 16.5 % (k=2)** |

## Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Body TSL parameters | 22.0 °C | 52.5 | 2.16 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 51.1 ± 6 % | 2.20 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C | --- | --- |

## SAR result with Body TSL

| SAR averaged over 1 $cm^3$ (1 g) of Body TSL | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 13.8 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **54.4 W/kg ± 17.0 % (k=2)** |

| SAR averaged over 10 $cm^3$ (10 g) of Body TSL | condition | |
|---|---|---|
| SAR measured | 250 mW input power | 6.13 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **24.3 W/kg ± 16.5 % (k=2)** |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

| | |
|---|---|
| Impedance, transformed to feed point | 48.4 Ω - 4.7 jΩ |
| Return Loss | - 26.0 dB |

### Antenna Parameters with Body TSL

| | |
|---|---|
| Impedance, transformed to feed point | 46.2 Ω - 3.0 jΩ |
| Return Loss | - 25.9 dB |

### General Antenna Parameters and Design

| | |
|---|---|
| Electrical Delay (one direction) | 1.155 ns |

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

| | |
|---|---|
| Manufactured by | SPEAG |
| Manufactured on | December 23, 2006 |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

**DASY5 Validation Report for Head TSL**

Date: 17.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1005**

Communication System: UID 0 - CW; Frequency: 2600 MHz
Medium parameters used: f = 2600 MHz; $\sigma$ = 2.04 S/m; $\varepsilon_r$ = 37.2; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.7, 7.7, 7.7); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 118.8 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 29.8 W/kg
**SAR(1 g) = 14.6 W/kg; SAR(10 g) = 6.49 W/kg**
Maximum value of SAR (measured) = 24.1 W/kg

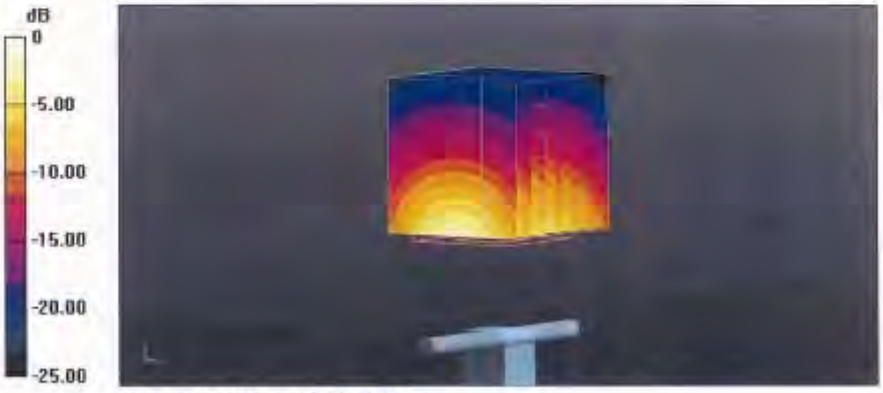


0 dB = 24.1 W/kg = 13.82 dBW/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Impedance Measurement Plot for Head TSL

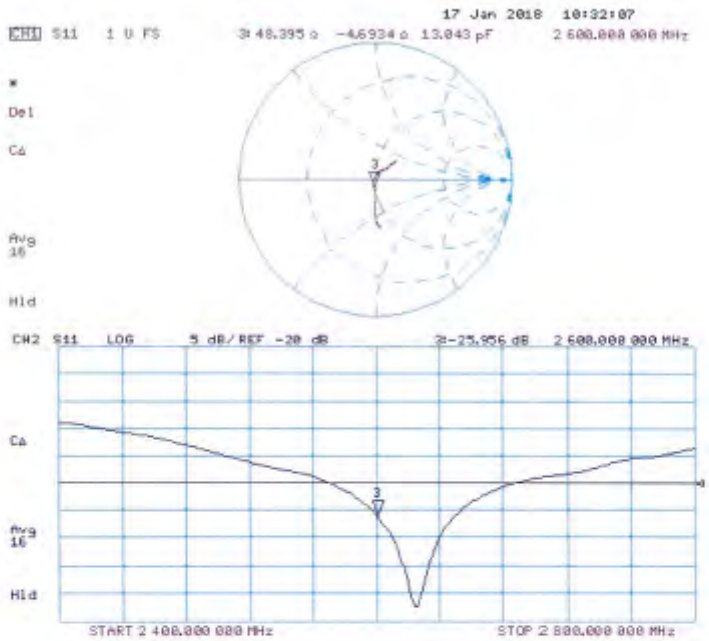




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

**DASY5 Validation Report for Body TSL**

Date: 17.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1005**

Communication System: UID 0 - CW; Frequency: 2600 MHz
Medium parameters used: f = 2600 MHz; $\sigma$ = 2.2 S/m; $\varepsilon_r$ = 51.1; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.81, 7.81, 7.81); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 108.0 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 28.6 W/kg
**SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.13 W/kg**
Maximum value of SAR (measured) = 22.6 W/kg

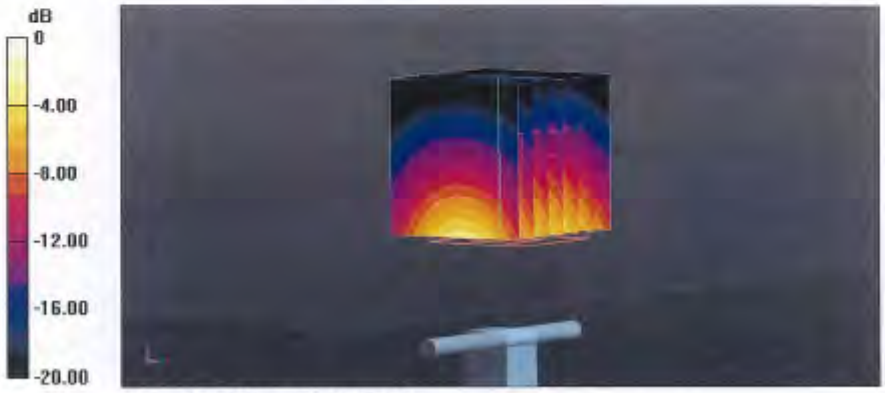


0 dB = 22.6 W/kg = 13.54 dBW/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## Impedance Measurement Plot for Body TSL

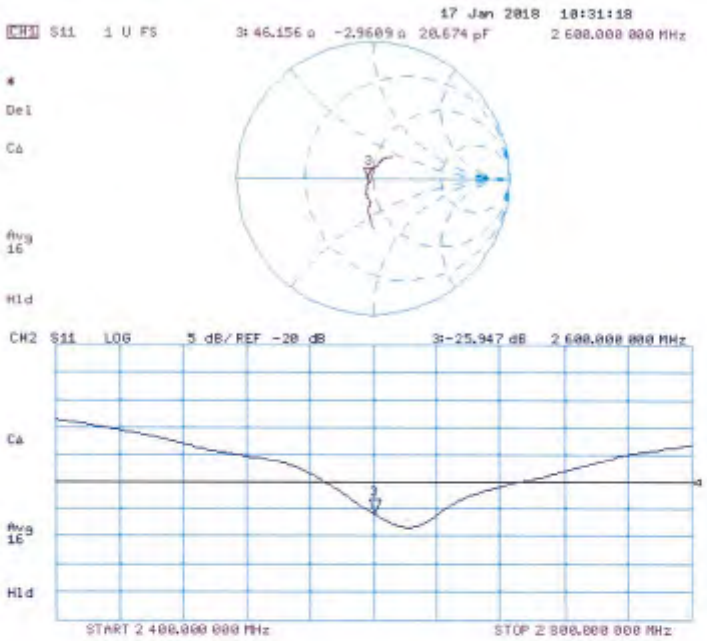




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client SGS-TW (Auden)

Certificate No: D5GHzV2-1023_Jan18

# CALIBRATION CERTIFICATE

Object D5GHzV2 - SN:1023

Calibration procedure(s) QA CAL-22.v2
Calibration procedure for dipole validation kits between 3-6 GHz

Calibration date: January 25, 2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power meter NRP | SN: 104778 | 04-Apr-17 (No. 217-02521/02522) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-17 (No. 217-02521) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-17 (No. 217-02522) | Apr-18 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 07-Apr-17 (No. 217-02528) | Apr-18 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529) | Apr-18 |
| Reference Probe EX3DV4 | SN: 3503 | 30-Dec-17 (No. EX3-3503_Dec17) | Dec-18 |
| DAE4 | SN: 601 | 26-Oct-17 (No. DAE4-601_Oct17) | Oct-18 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---|---|---|---|
| Power meter EPM-442A | SN: GB37480704 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: US37292783 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: MY41092317 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06 | SN: 100972 | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Jeton Kastrati | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: January 25, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

**Glossary:**

| | |
|---|---|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

**Calibration is Performed According to the Following Standards:**

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---|---|---|
| **DASY Version** | DASY5 | V52.10.0 |
| **Extrapolation** | Advanced Extrapolation | |
| **Phantom** | Modular Flat Phantom V5.0 | |
| **Distance Dipole Center - TSL** | 10 mm | with Spacer |
| **Zoom Scan Resolution** | dx, dy = 4.0 mm, dz = 1.4 mm | Graded Ratio = 1.4 (Z direction) |
| **Frequency** | 5200 MHz ± 1 MHz<br>5300 MHz ± 1 MHz<br>5600 MHz ± 1 MHz<br>5800 MHz ± 1 MHz | |

## Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| **Nominal Head TSL parameters** | 22.0 °C | 36.0 | 4.66 mho/m |
| **Measured Head TSL parameters** | (22.0 ± 0.2) °C | 36.3 ± 6 % | 4.50 mho/m ± 6 % |
| **Head TSL temperature change during test** | < 0.5 °C | --- | --- |

## SAR result with Head TSL at 5200 MHz

| **SAR averaged over 1 $cm^3$ (1 g) of Head TSL** | Condition | |
|---|---|---|
| SAR measured | 100 mW input power | 7.72 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **77.3 W/kg ± 19.9 % (k=2)** |

| **SAR averaged over 10 $cm^3$ (10 g) of Head TSL** | condition | |
|---|---|---|
| SAR measured | 100 mW input power | 2.22 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **22.2 W/kg ± 19.5 % (k=2)** |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Head TSL parameters | 22.0 °C | 35.9 | 4.76 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 35.2 ± 6 % | 4.60 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | — | — |

## SAR result with Head TSL at 5300 MHz

| SAR averaged over 1 $cm^3$ (1 g) of Head TSL | Condition | |
|---|---|---|
| SAR measured | 100 mW input power | 8.09 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **80.9 W / kg ± 19.9 % (k=2)** |

| SAR averaged over 10 $cm^3$ (10 g) of Head TSL | condition | |
|---|---|---|
| SAR measured | 100 mW input power | 2.32 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **23.2 W/kg ± 19.5 % (k=2)** |

## Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Head TSL parameters | 22.0 °C | 35.5 | 5.07 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 35.6 ± 6 % | 4.90 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | — | — |

## SAR result with Head TSL at 5600 MHz

| SAR averaged over 1 $cm^3$ (1 g) of Head TSL | Condition | |
|---|---|---|
| SAR measured | 100 mW input power | 8.19 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **81.9 W/kg ± 19.9 % (k=2)** |

| SAR averaged over 10 $cm^3$ (10 g) of Head TSL | condition | |
|---|---|---|
| SAR measured | 100 mW input power | 2.34 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **23.4 W/kg ± 19.5 % (k=2)** |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

### Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Head TSL parameters | 22.0 °C | 35.3 | 5.27 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 35.5 ± 6 % | 5.11 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | --- | --- |

### SAR result with Head TSL at 5800 MHz

| SAR averaged over 1 $cm^3$ (1 g) of Head TSL | Condition | |
|---|---|---|
| SAR measured | 100 mW input power | 7.90 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **79.0 W/kg ± 19.9 % (k=2)** |

| SAR averaged over 10 $cm^3$ (10 g) of Head TSL | condition | |
|---|---|---|
| SAR measured | 100 mW input power | 2.25 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **22.5 W/kg ± 19.5 % (k=2)** |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

### Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Body TSL parameters | 22.0 °C | 49.0 | 5.30 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 47.3 ± 6 % | 5.41 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C | — | — |

### SAR result with Body TSL at 5200 MHz

| SAR averaged over 1 $cm^3$ (1 g) of Body TSL | Condition | |
|---|---|---|
| SAR measured | 100 mW input power | 7.14 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **70.5 W/kg ± 19.9 % (k=2)** |

| SAR averaged over 10 $cm^3$ (10 g) of Body TSL | condition | |
|---|---|---|
| SAR measured | 100 mW input power | 2.00 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **19.8 W/kg ± 19.5 % (k=2)** |

### Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Body TSL parameters | 22.0 °C | 48.9 | 5.42 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 47.1 ± 6 % | 5.54 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C | — | — |

### SAR result with Body TSL at 5300 MHz

| SAR averaged over 1 $cm^3$ (1 g) of Body TSL | Condition | |
|---|---|---|
| SAR measured | 100 mW input power | 7.34 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **72.9 W/kg ± 19.9 % (k=2)** |

| SAR averaged over 10 $cm^3$ (10 g) of Body TSL | condition | |
|---|---|---|
| SAR measured | 100 mW input power | 2.06 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **20.4 W/kg ± 19.5 % (k=2)** |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Body TSL parameters | 22.0 °C | 48.5 | 5.77 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 46.6 ± 6 % | 5.94 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C | --- | --- |

## SAR result with Body TSL at 5600 MHz

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|---|---|
| SAR measured | 100 mW input power | 7.81 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **77.6 W/kg ± 19.9 % (k=2)** |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|---|---|
| SAR measured | 100 mW input power | 2.19 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **21.7 W/kg ± 19.5 % (k=2)** |

## Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---|---|---|
| Nominal Body TSL parameters | 22.0 °C | 48.2 | 6.00 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 46.2 ± 6 % | 6.22 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C | --- | --- |

## SAR result with Body TSL at 5800 MHz

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|---|---|
| SAR measured | 100 mW input power | 7.46 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **74.1 W/kg ± 19.9 % (k=2)** |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|---|---|
| SAR measured | 100 mW input power | 2.07 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **20.5 W/kg ± 19.5 % (k=2)** |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL at 5200 MHz

| | |
|---|---|
| Impedance, transformed to feed point | 50.1 Ω - 8.1 jΩ |
| Return Loss | - 21.9 dB |

### Antenna Parameters with Head TSL at 5300 MHz

| | |
|---|---|
| Impedance, transformed to feed point | 50.5 Ω - 2.3 jΩ |
| Return Loss | - 32.7 dB |

### Antenna Parameters with Head TSL at 5600 MHz

| | |
|---|---|
| Impedance, transformed to feed point | 53.9 Ω - 0.7 jΩ |
| Return Loss | - 28.4 dB |

### Antenna Parameters with Head TSL at 5800 MHz

| | |
|---|---|
| Impedance, transformed to feed point | 55.3 Ω + 2.6 jΩ |
| Return Loss | - 25.1 dB |

### Antenna Parameters with Body TSL at 5200 MHz

| | |
|---|---|
| Impedance, transformed to feed point | 49.8 Ω - 6.9 jΩ |
| Return Loss | - 23.2 dB |

### Antenna Parameters with Body TSL at 5300 MHz

| | |
|---|---|
| Impedance, transformed to feed point | 50.9 Ω - 0.9 jΩ |
| Return Loss | - 37.9 dB |

### Antenna Parameters with Body TSL at 5600 MHz

| | |
|---|---|
| Impedance, transformed to feed point | 56.0 Ω + 0.5 jΩ |
| Return Loss | - 24.9 dB |

### Antenna Parameters with Body TSL at 5800 MHz

| | |
|---|---|
| Impedance, transformed to feed point | 56.6 Ω + 2.3 jΩ |
| Return Loss | - 23.7 dB |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## General Antenna Parameters and Design

| | |
|---|---|
| Electrical Delay (one direction) | 1.199 ns |

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

## Additional EUT Data

| | |
|---|---|
| Manufactured by | SPEAG |
| Manufactured on | February 05, 2004 |



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## DASY5 Validation Report for Head TSL

Date: 25.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1023**

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz
Medium parameters used: f = 5200 MHz; $\sigma$ = 4.5 S/m; $\varepsilon_r$ = 36.3; $\rho$ = 1000 kg/m$^3$,
Medium parameters used: f = 5300 MHz; $\sigma$ = 4.6 S/m; $\varepsilon_r$ = 36.2; $\rho$ = 1000 kg/m$^3$,
Medium parameters used: f = 5600 MHz; $\sigma$ = 4.9 S/m; $\varepsilon_r$ = 35.8; $\rho$ = 1000 kg/m$^3$,
Medium parameters used: f = 5800 MHz; $\sigma$ = 5.11 S/m; $\varepsilon_r$ = 35.5; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.75, 5.75, 5.75); Calibrated: 30.12.2017, ConvF(5.5, 5.5, 5.5); Calibrated: 30.12.2017, ConvF(5.05, 5.05, 5.05); Calibrated: 30.12.2017, ConvF(4.96, 4.96, 4.96); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm**
**(8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 70.47 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 27.5 W/kg
**SAR(1 g) = 7.72 W/kg; SAR(10 g) = 2.22 W/kg**
Maximum value of SAR (measured) = 17.7 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm**
**(8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 74.63 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 29.6 W/kg
**SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.32 W/kg**
Maximum value of SAR (measured) = 18.6 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm**
**(8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 70.79 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 31.5 W/kg
**SAR(1 g) = 8.19 W/kg; SAR(10 g) = 2.34 W/kg**
Maximum value of SAR (measured) = 19.6 W/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 69.22 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 31.2 W/kg
**SAR(1 g) = 7.9 W/kg; SAR(10 g) = 2.25 W/kg**
Maximum value of SAR (measured) = 19.0 W/kg

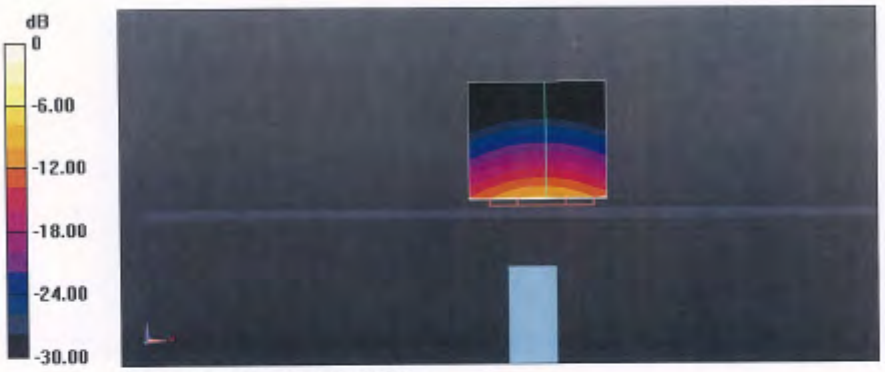


0 dB = 17.7 W/kg = 12.48 dBW/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## Impedance Measurement Plot for Head TSL

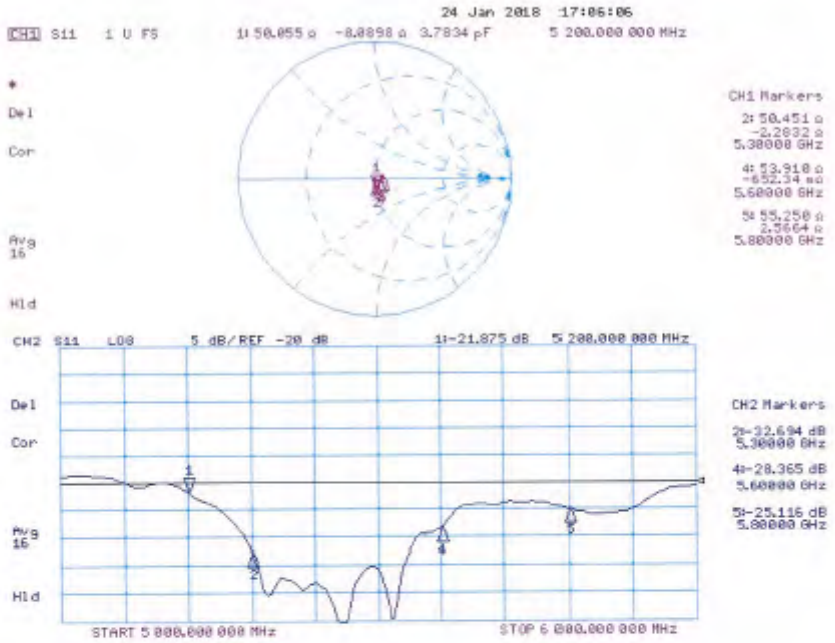




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

## DASY5 Validation Report for Body TSL

Date: 23.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1023**

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz
Medium parameters used: f = 5200 MHz; $\sigma$ = 5.41 S/m; $\varepsilon_r$ = 47.3; $\rho$ = 1000 kg/m$^3$,
Medium parameters used: f = 5300 MHz; $\sigma$ = 5.54 S/m; $\varepsilon_r$ = 47.1; $\rho$ = 1000 kg/m$^3$,
Medium parameters used: f = 5600 MHz; $\sigma$ = 5.94 S/m; $\varepsilon_r$ = 46.6; $\rho$ = 1000 kg/m$^3$,
Medium parameters used: f = 5800 MHz; $\sigma$ = 6.22 S/m; $\varepsilon_r$ = 46.2; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.35, 5.35, 5.35); Calibrated: 30.12.2017; ConvF(5.15, 5.15, 5.15); Calibrated: 30.12.2017, ConvF(4.65, 4.65, 4.65); Calibrated: 30.12.2017, ConvF(4.53, 4.53, 4.53); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 66.00 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 26.4 W/kg
**SAR(1 g) = 7.14 W/kg; SAR(10 g) = 2 W/kg**
Maximum value of SAR (measured) = 16.8 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 65.19 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 28.4 W/kg
**SAR(1 g) = 7.34 W/kg; SAR(10 g) = 2.06 W/kg**
Maximum value of SAR (measured) = 17.6 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 66.21 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 32.8 W/kg
**SAR(1 g) = 7.81 W/kg; SAR(10 g) = 2.19 W/kg**
Maximum value of SAR (measured) = 19.1 W/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 64.05 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 32.3 W/kg
**SAR(1 g) = 7.46 W/kg; SAR(10 g) = 2.07 W/kg**
Maximum value of SAR (measured) = 18.8 W/kg

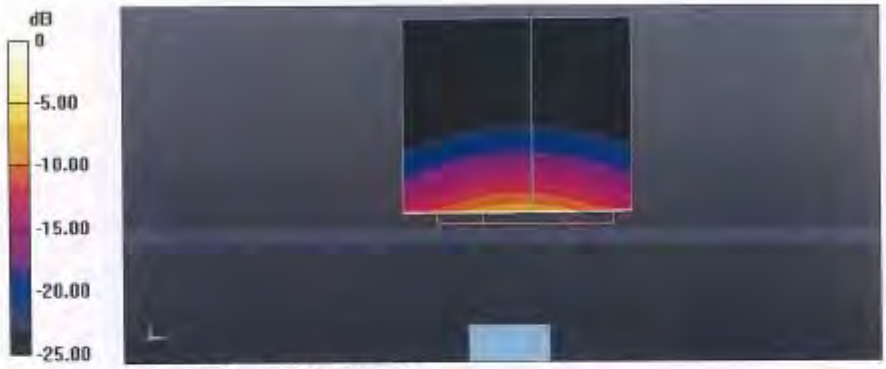


0 dB = 18.8 W/kg = 12.74 dBW/kg



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group

**Impedance Measurement Plot for Body TSL**

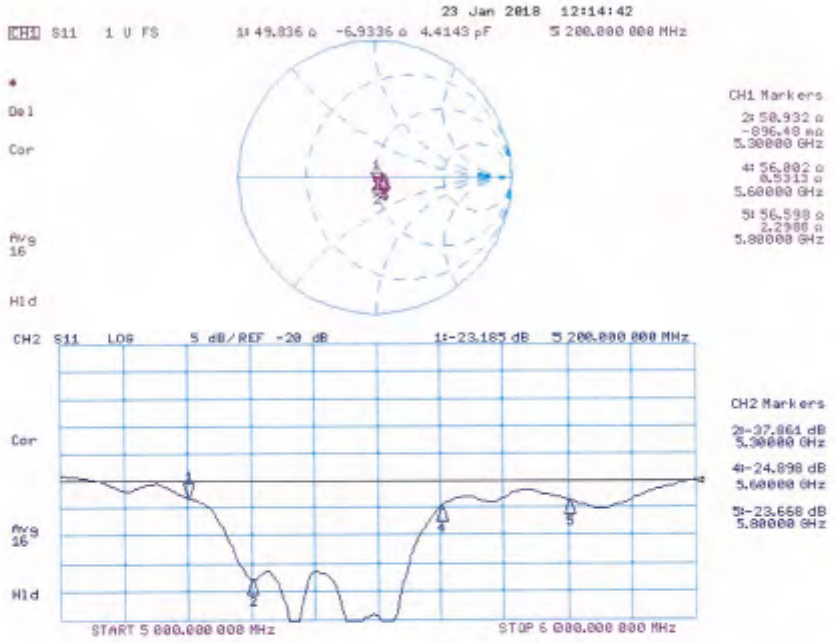




**- End of report -**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 | No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號
t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com
Member of SGS Group