

AT7020 Series

Multilayer Chip Antenna

Features

- ❖ Monolithic SMD with small, low-profile and light-weight type.
- ❖ Wide bandwidth
- ❖ RoHS compliant

Applications

- ❖ Low power radio applications for 902~928MHz.



Specifications

Part Number	Frequency Range (MHz)	Peak Gain (dBi typ.)	Average Gain (dBi typ.)	VSWR	Impedance
AT7020-AR90HAA_	902~928	-1.0 (XZ-total)	-4.0 (XZ-total)	2.2 max.	50 Ω


Q'ty/Reel (pcs) : 1,000 pcs
 Operating Temperature Range : -40 ~ +85 °C
 Storage Temperature Range : -40 ~ +85 °C
 Storage Period : 12 months max.
 Power Capacity : 2W max.

Part Number

AT 7020 - A R90 HAA □ □
 ① ② ③ ④ ⑤ ⑥ ⑦

① Type	AT : Antenna	② Dimensions (L × W)	7.0× 2.0 mm
③ Material Code	A	④ Frequency Range	R90=915MHz
⑤ Specification Code	HAA	⑥ Packaging	T: Tape & Reel B: Bulk
⑦ Soldering	/LF=lead-free		


Terminal Configuration

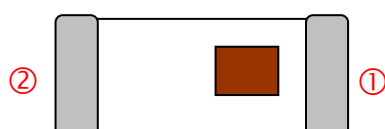

No.	Terminal Name	No.	Terminal Name
①	Feeding Point	②	NC

Dimensions and Recommended PC Board Pattern


Unit : mm

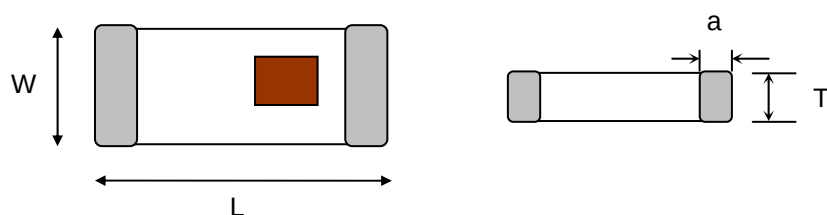


Mark	L	W	T	a
Dimensions	7.0±0.2	2.0±0.2	0.8+ 0.1/-0.2	0.5±0.3

Typical Electrical Characteristics (T=25°C)

❖ Test Board-Type A

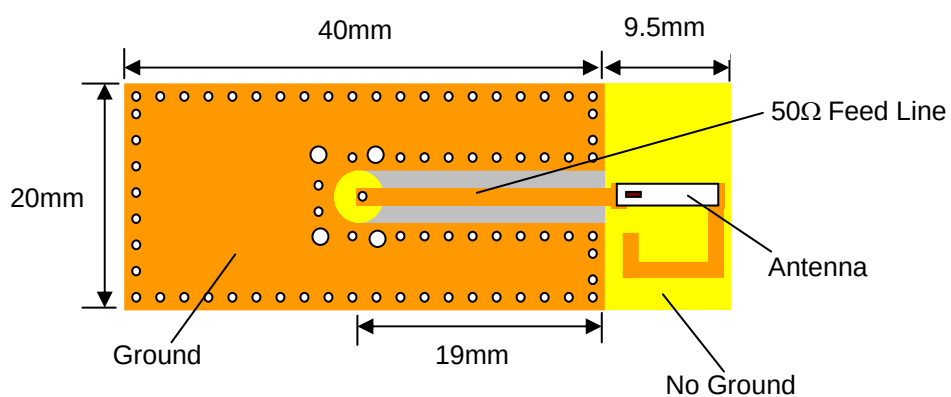


❖ With matching-Type A

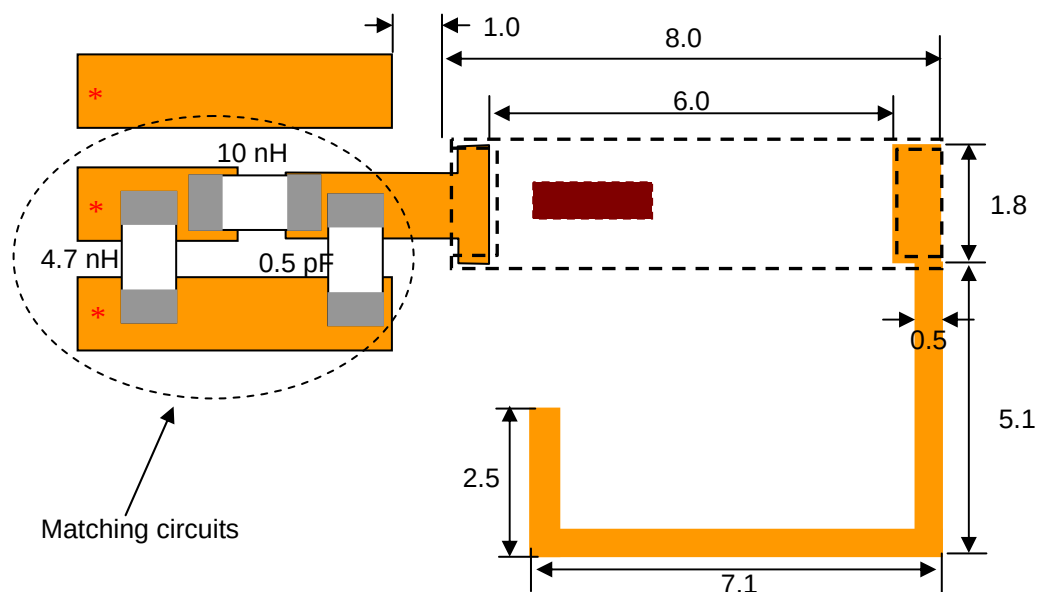

(Matching circuit and component values will be different,
depending on PCB layout)


*Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

❖ Return Loss (with matching)-Type A

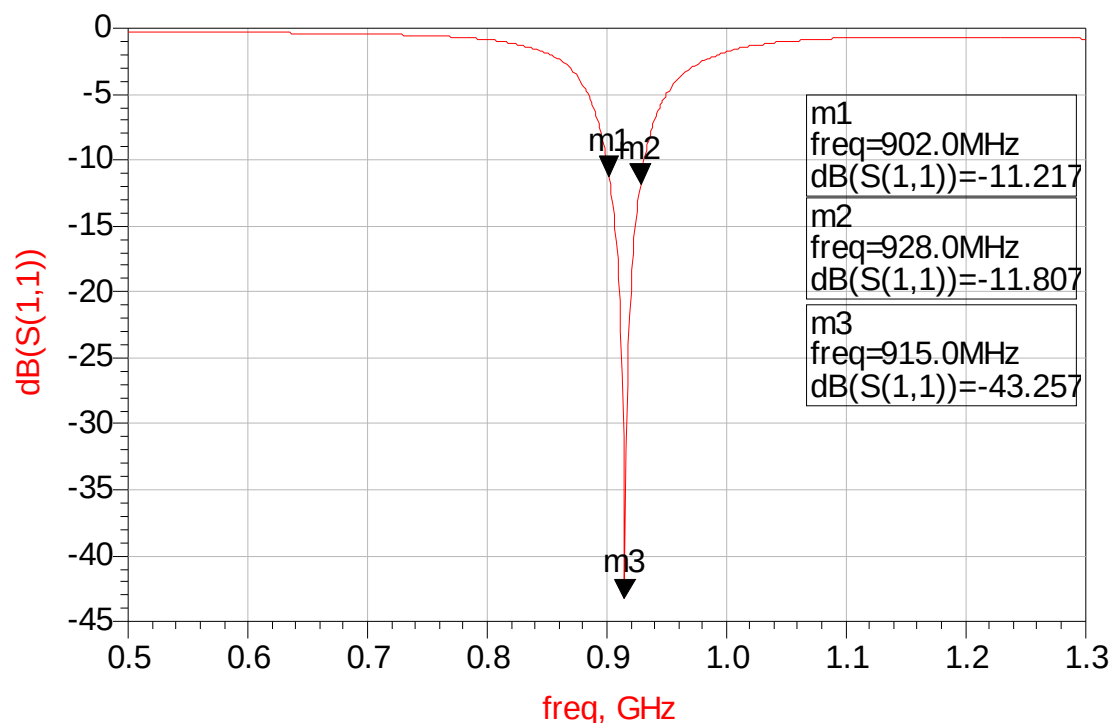


❖ Radiation Patterns-Type A


XY-V/XY-H

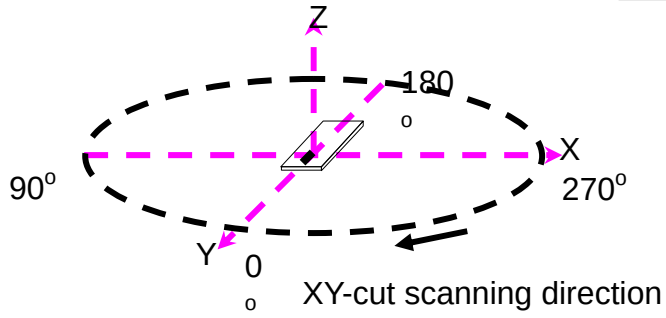


XY cut @915MHz
— Vertical
— Horizontal

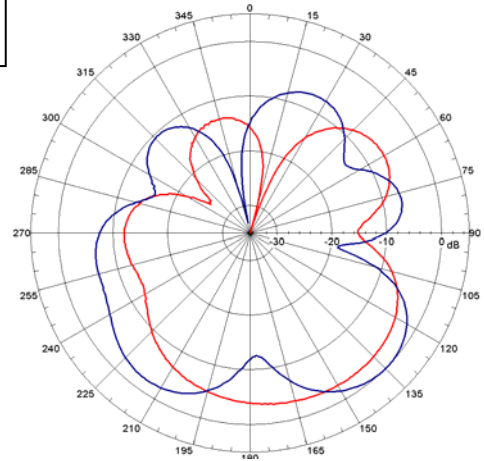


XZ-V/XZ-H

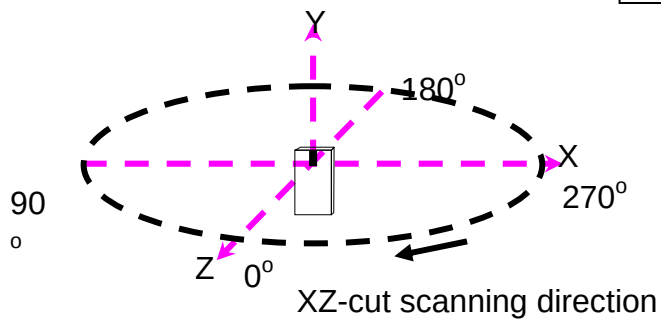


XZ cut @915MHz
— Vertical
— Horizontal

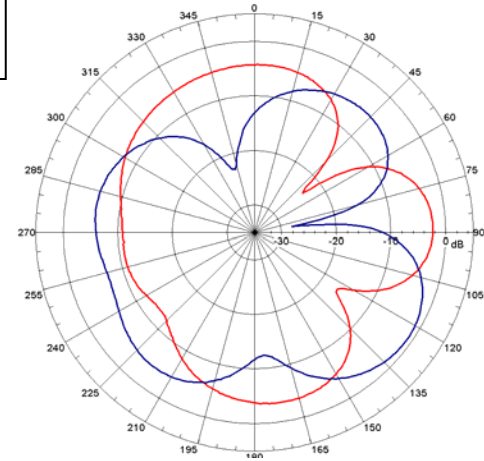


YZ-V/YZ-H

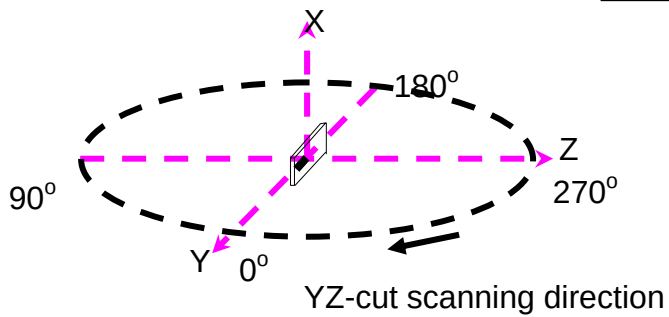


YZ cut @915MHz
— Vertical
— Horizontal

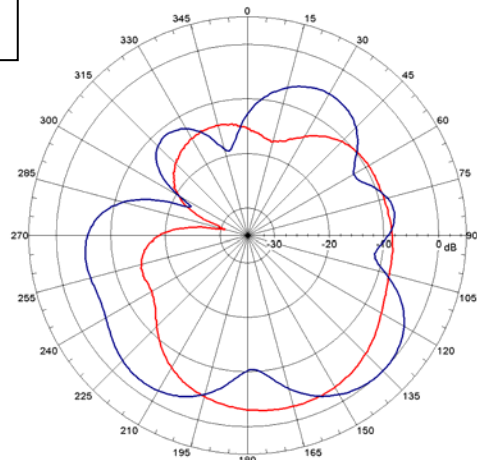

❖ Test Board-Type B

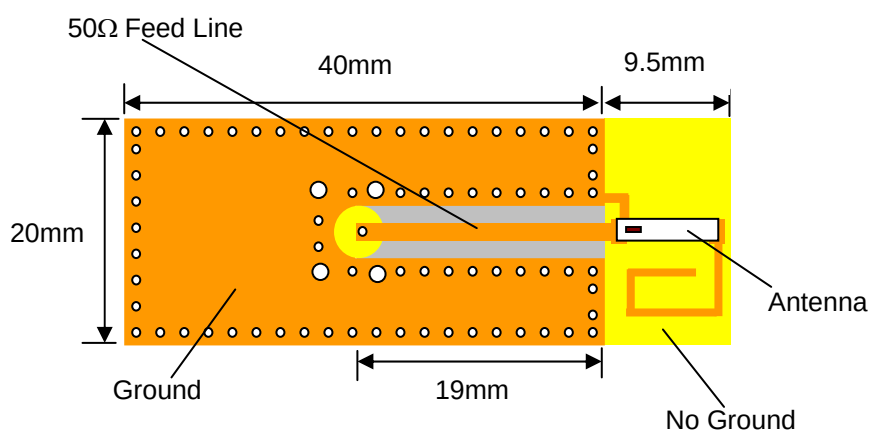


❖ With matching-Type B

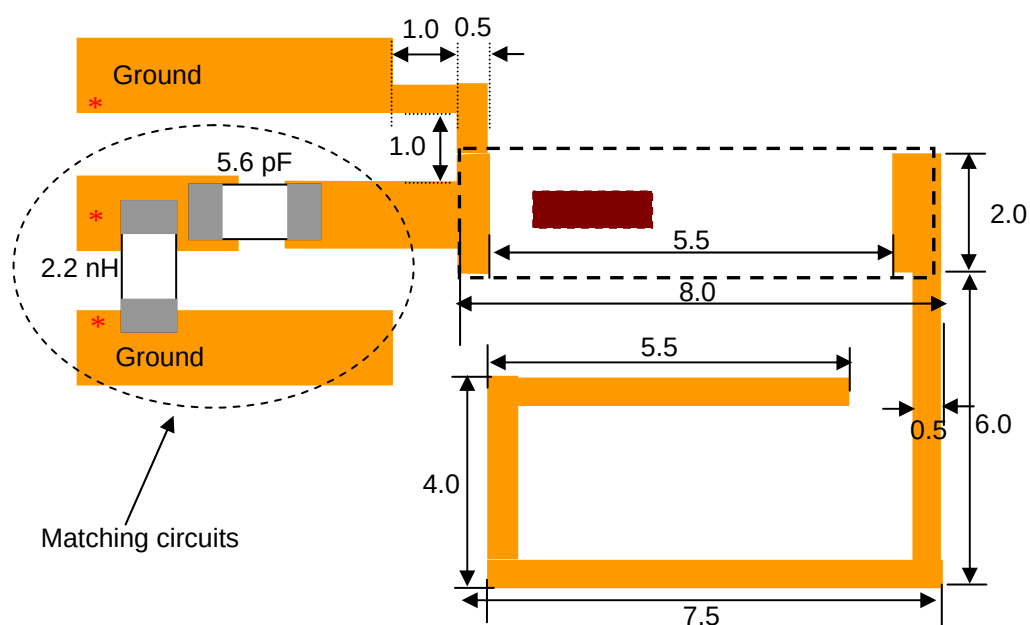

(Matching circuit and component values will be different,
depending on PCB layout)



*Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

❖Return Loss (with matching)-Type B


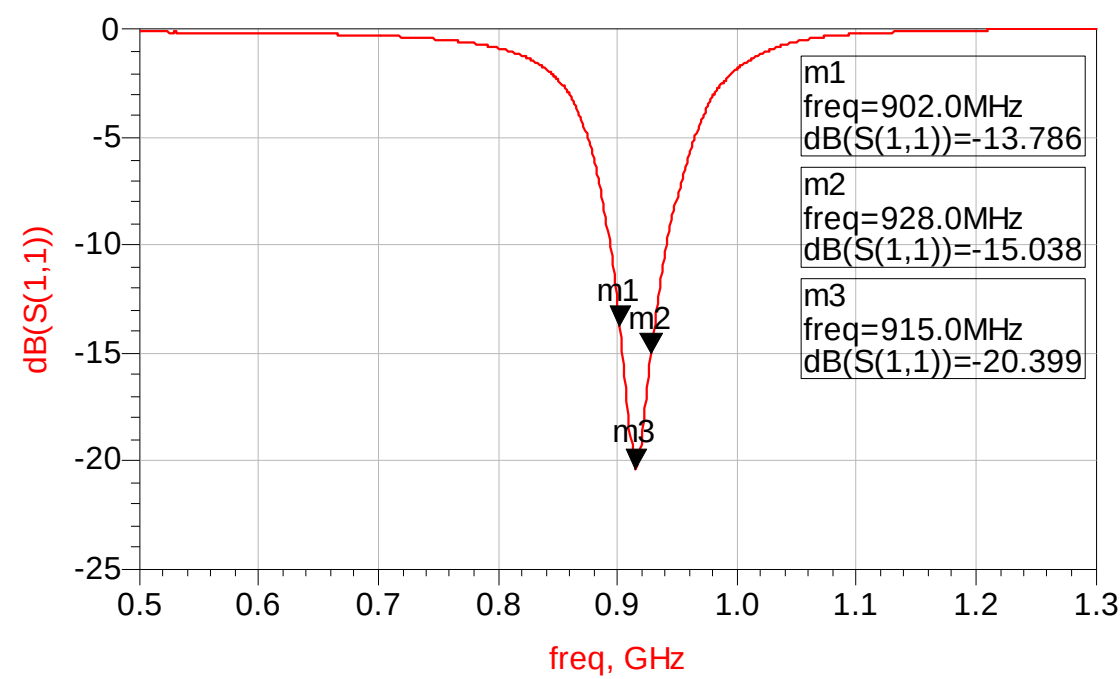


❖ Radiation Patterns-Type B



XY-V/XY-H

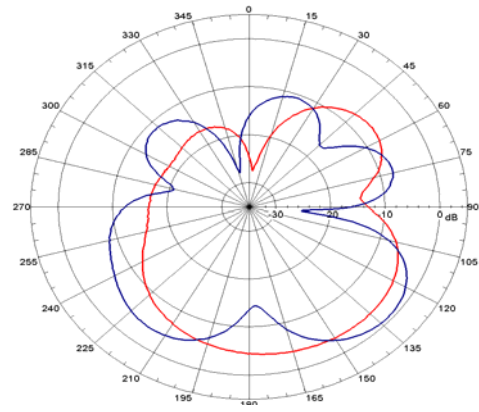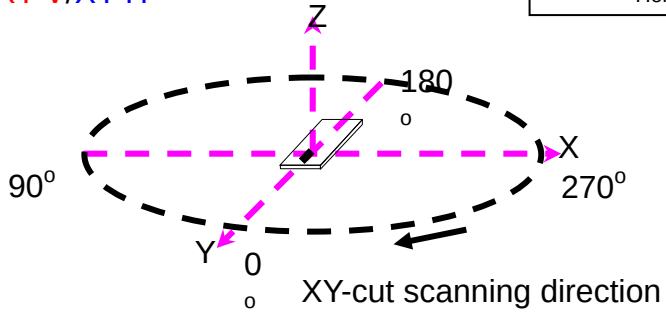

XZ-V/XZ-H

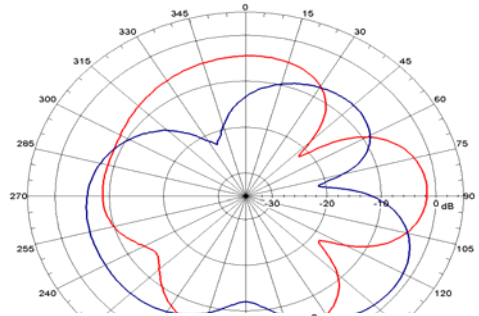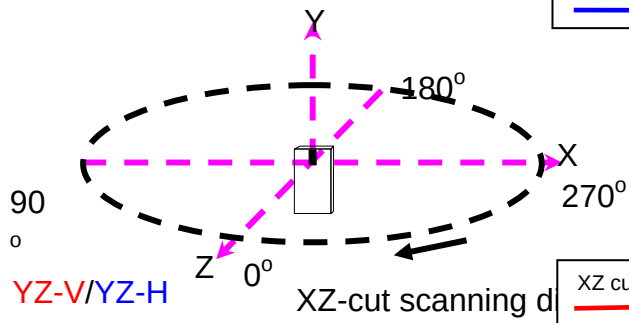


YZ-V/YZ-H

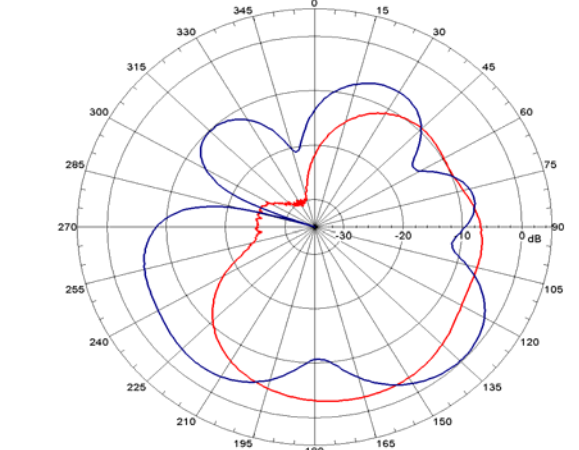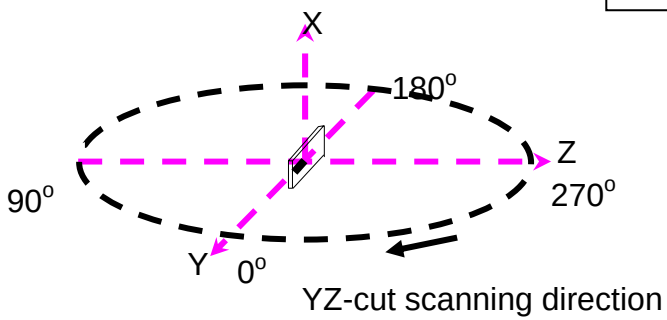



Taping Specifications

❖Tape & Reel Dimensions (Unit: mm) vs. Quantity (pcs)

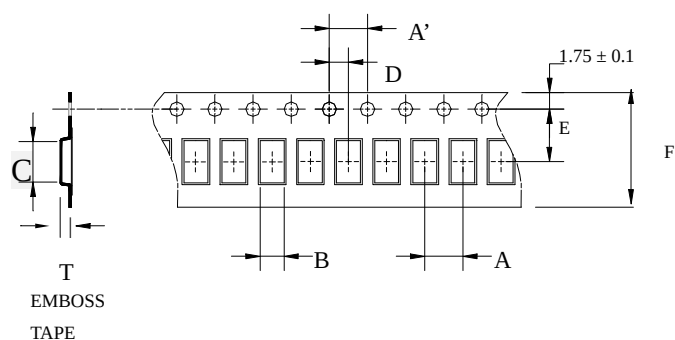

Type	A	A'	B	C	D	E	F	T	Quantity/per reel	Tape material
AT7020	4.0±0.1	4.0±0.1	2.4±0.1	7.3±0.1	2.0±0.05	5.5±0.1	12.0±0.1	1.45±0.1	1,000pcs	Plastic (Embossed)


❖Reel Dimensions (Unit: mm)

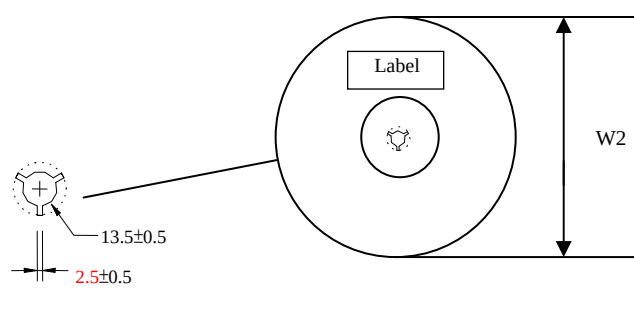


Label: Customer's Name,
ACX P/N, Q'ty, Date,
ACX Corp.

Type	W2	W3	W4	W5
AT5020	178±1	60±0.5	1.485±0.5	13±0.5

❖Leader and Trailer Tape

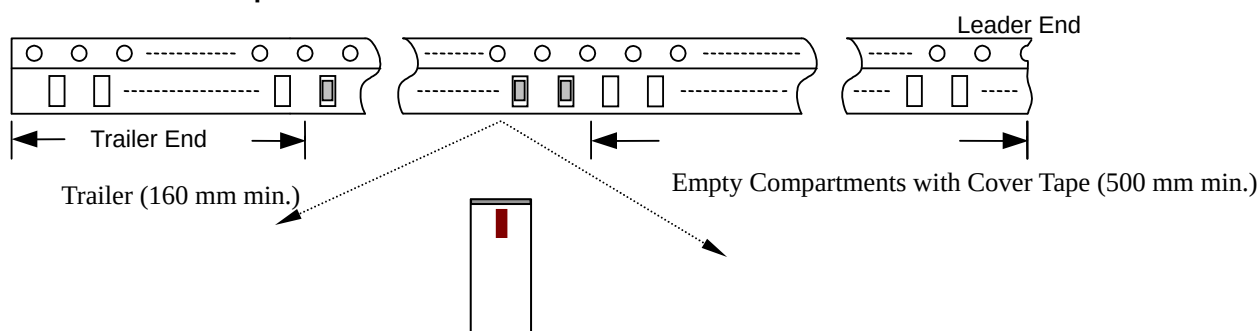

❖ Peel-off Force

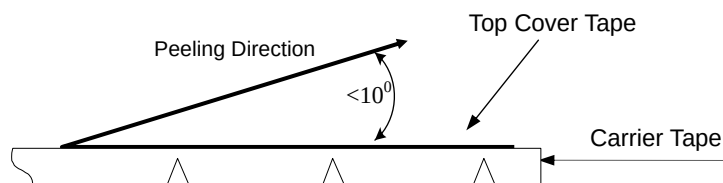

Peel-off force should be in the range of 0.2 – 1.20 N at a peel-off speed of 300 ± 10 mm/min .


❖ Storage Conditions

- (1) Temperature: 5 ~35°C , relative humidity (RH): 45~75%.
- (2) Non-corrosive environment

Notes

❖ The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.


Mechanical & Environmental Characteristics

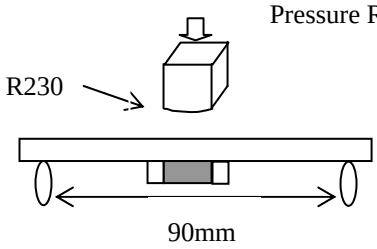Item	Requirements	Procedure
Solderability	1. No apparent damage 2. More than 95% of the terminal electrode shall be covered with new solder	1. Preheat: $120 \pm 5^{\circ}\text{C}$ 2. Solder: $245 \pm 5^{\circ}\text{C}$ for 5 ± 1 sec
Soldering strength (Termination Adhesion)	1. 1kg minimum	1. Solder specimen onto test jig. 2. Apply push force at 0.5mm/s until electrode pads are peeled off or ceramic are broken. Pushing force is applied to longitude direction
Deflection (Substrate Bending)	1. No apparent damage	1. Solder specimen onto test jig (FR4, 0.8mm) using the recommend soldering profile. 2. Apply a bending force of 1mm deflection 
Heat/Humidity Resistance	1. No apparent damage 2. Fulfill the electrical specification after test	1. Temperature: $85 \pm 2^{\circ}\text{C}$ 2. Humidity: 90% ~ 95% RH 3. Duration: 1000 ± 48hrs 4. Recovery: 1-2hrs
Thermal shock (Temperature Cycle)	1. No apparent damage 2. Fulfill the electrical specification after test	1. One cycle/step 1 : $125 \pm 5^{\circ}\text{C}$ for 30 min step 2 : $-40 \pm 5^{\circ}\text{C}$ for 30 min 2. No of cycles : 100 3. Recovery: 1-2 hrs
Low Temperature Resistance	1. No apparent damage 2. Fulfill the electrical specification after test	1. Temperature: $-40^{\circ} \pm 5^{\circ}\text{C}$ 2. Duration: 500 ± 24hrs 3. Recovery: 1-2hrs

Soldering Conditions

❖ Typical Soldering Profile for Lead-free Process

Reflow Soldering :

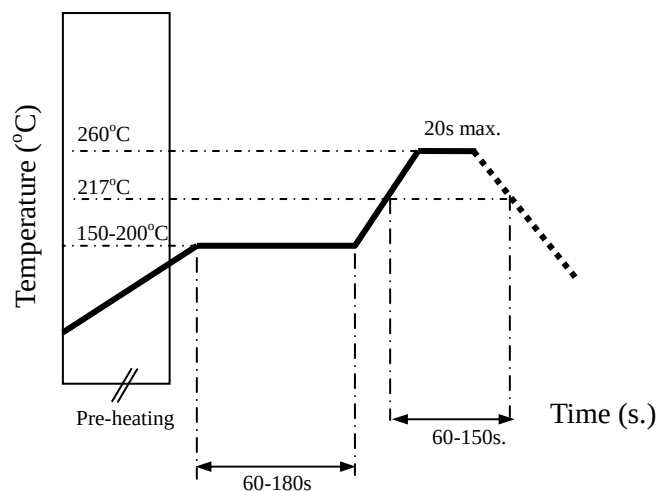

Notes

❖ The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.

Advanced Ceramic X Corp.

16 Tzu Chiang Road, Hsinchu Industrial District Hsinchu Hsien 303, Taiwan

TEL:886-3-5987008 FAX:886-3-5987001

E-mail: acx@acxc.com.tw

<http://www.acxc.com.tw>