

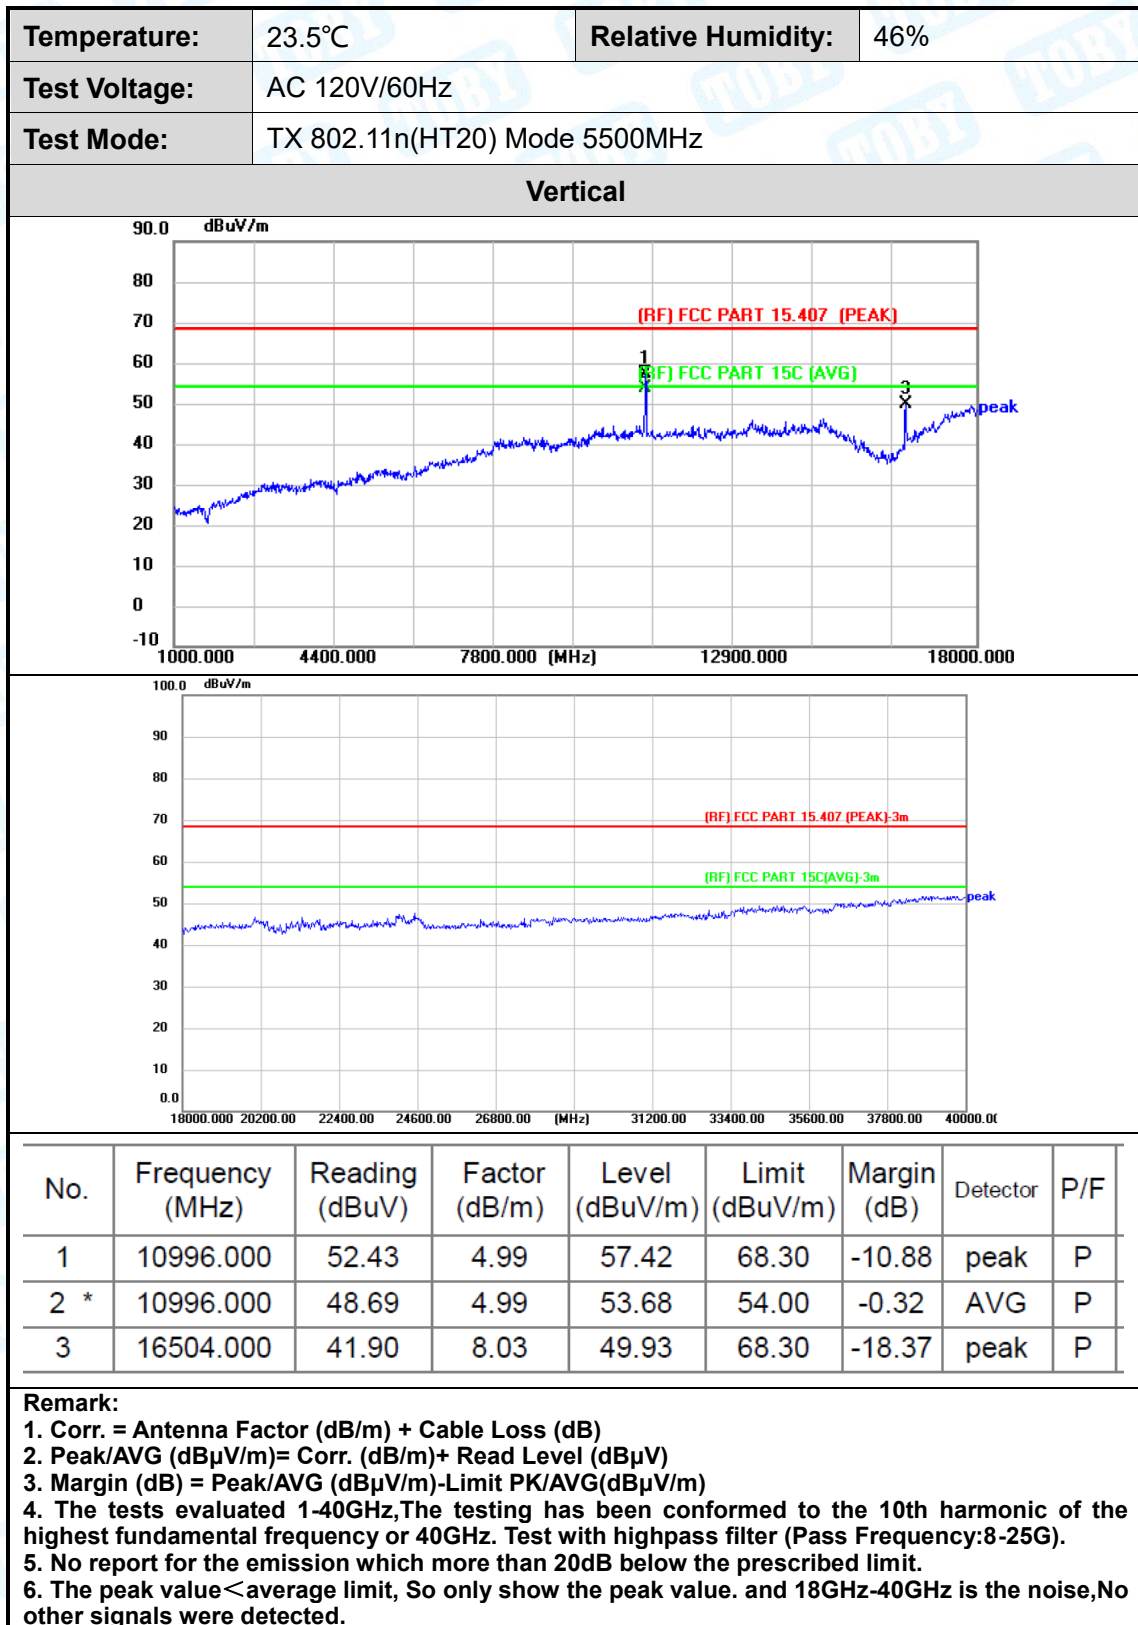


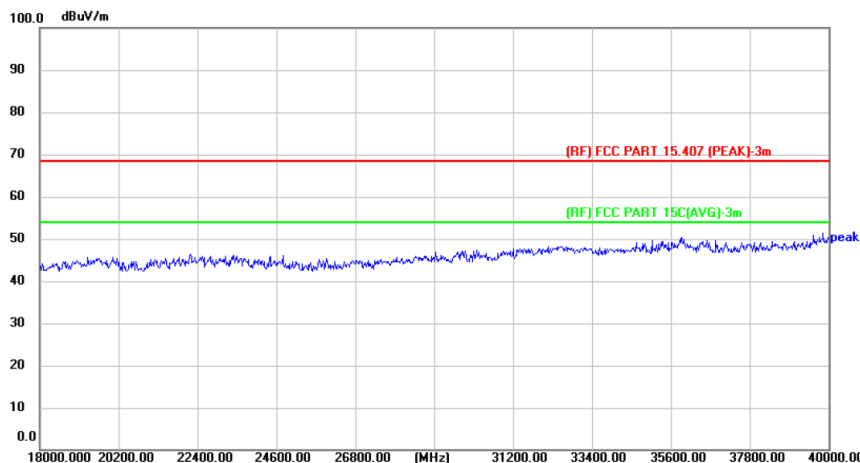

Temperature:	23.5°C	Relative Humidity:	46%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT20) Mode 5580MHz		

Horizontal

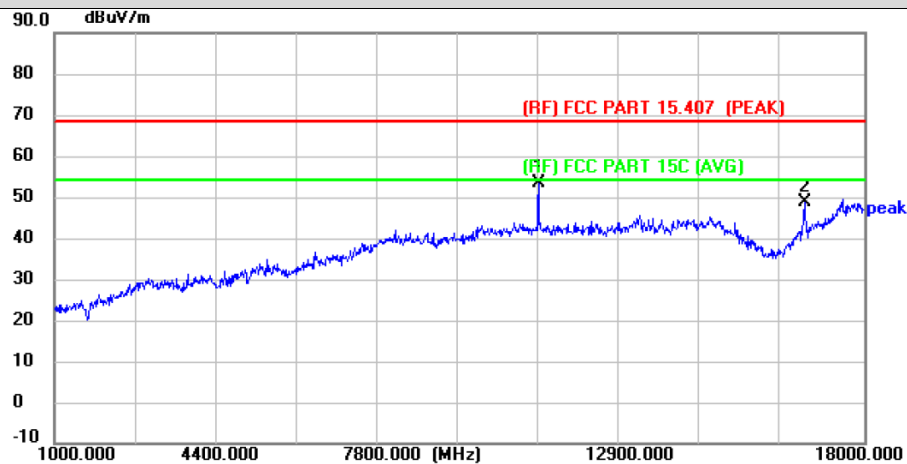



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	11166.000	47.87	5.41	53.28	68.30	-15.02	peak	P
2	16742.000	39.80	8.91	48.71	68.30	-19.59	peak	P


Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.




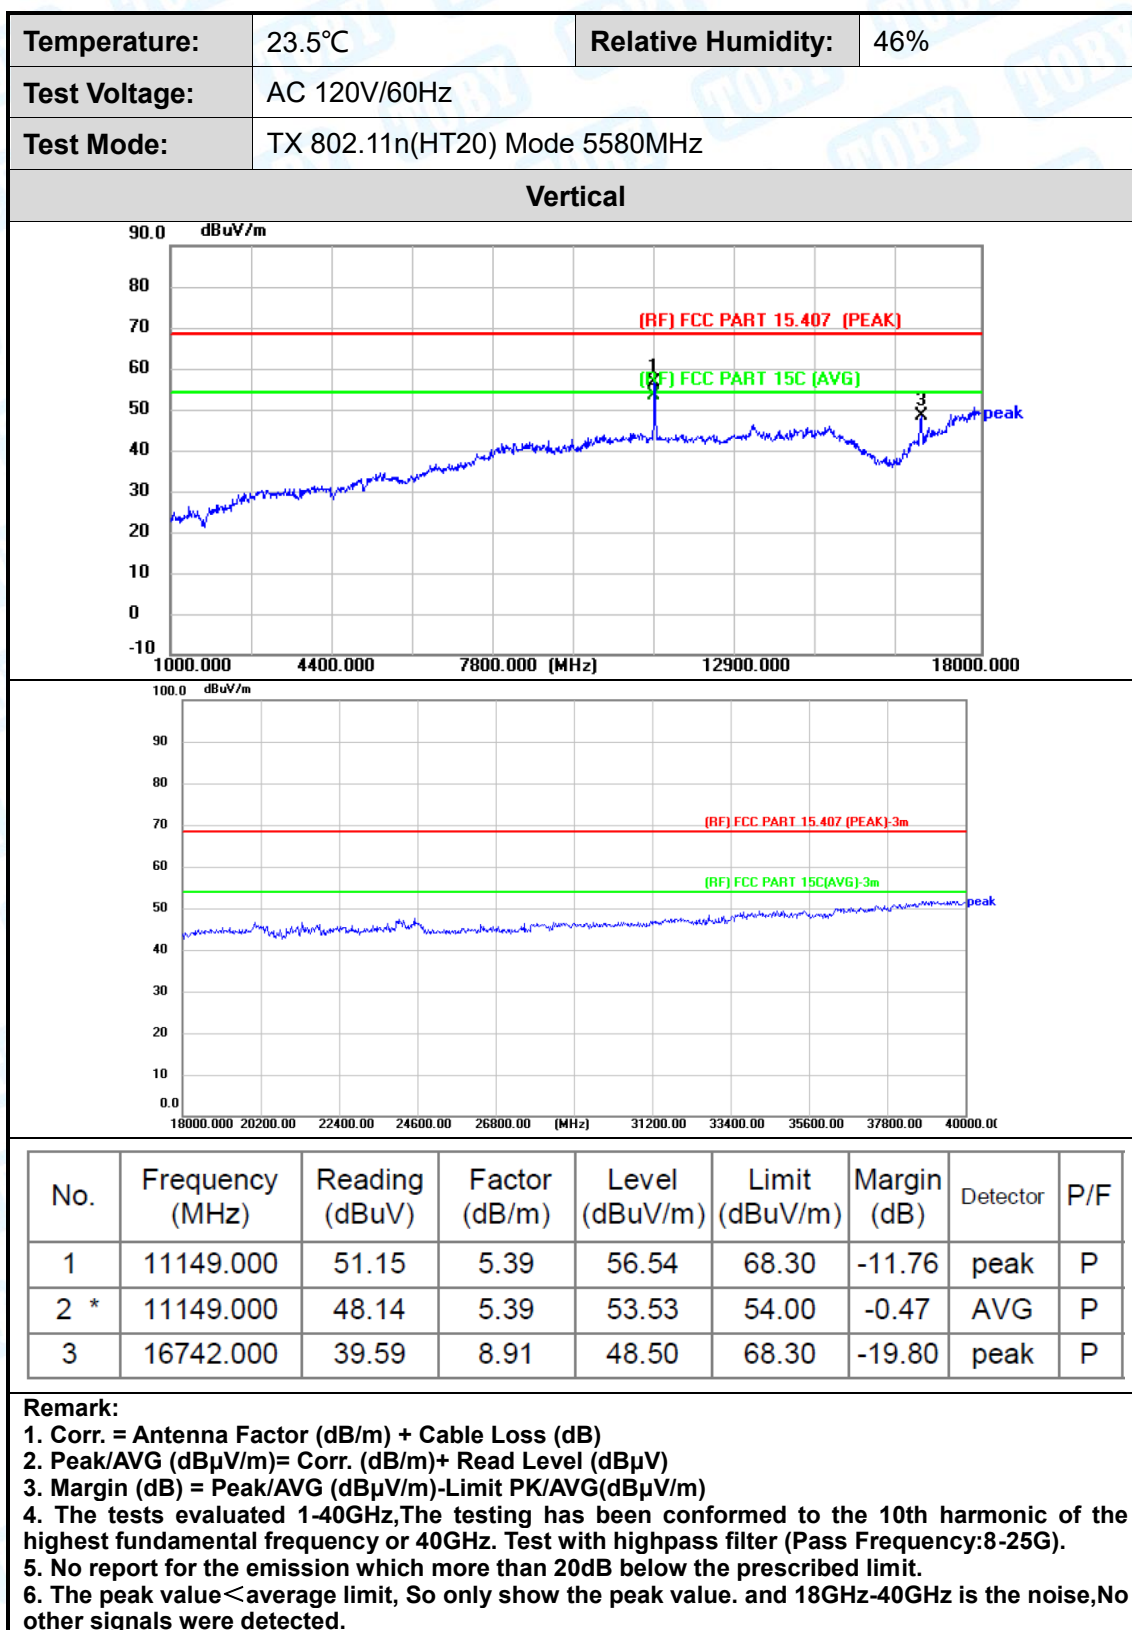


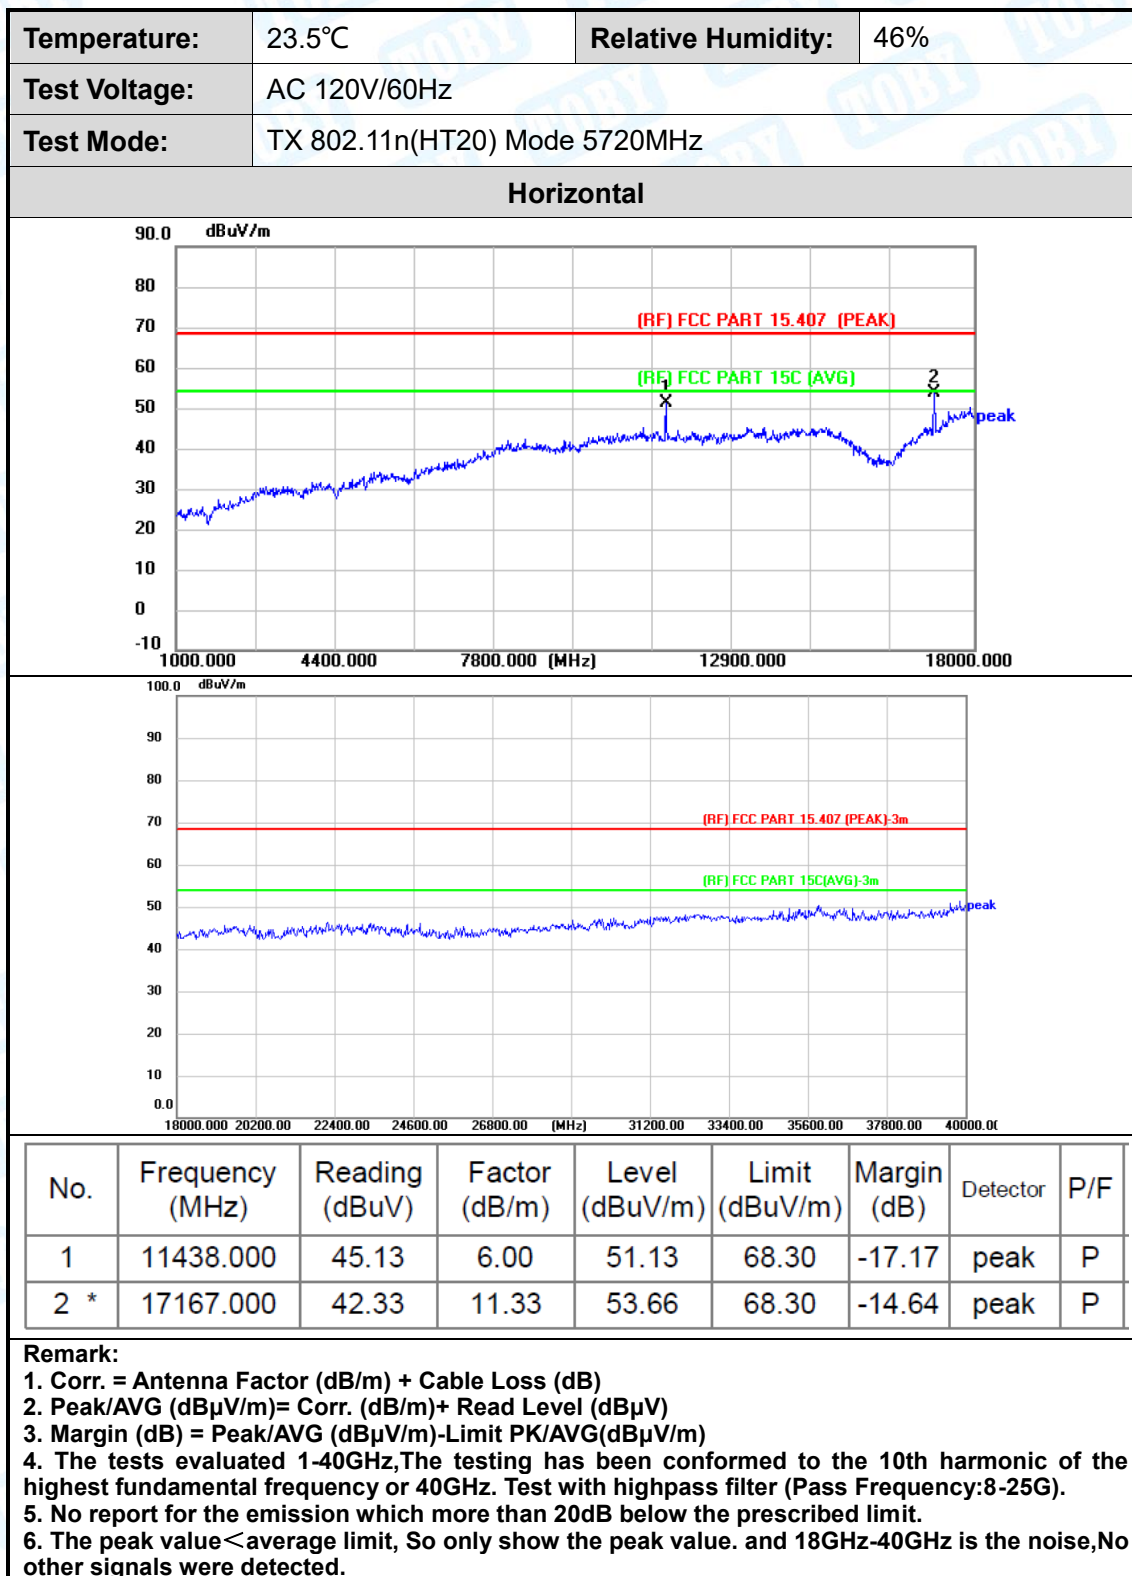


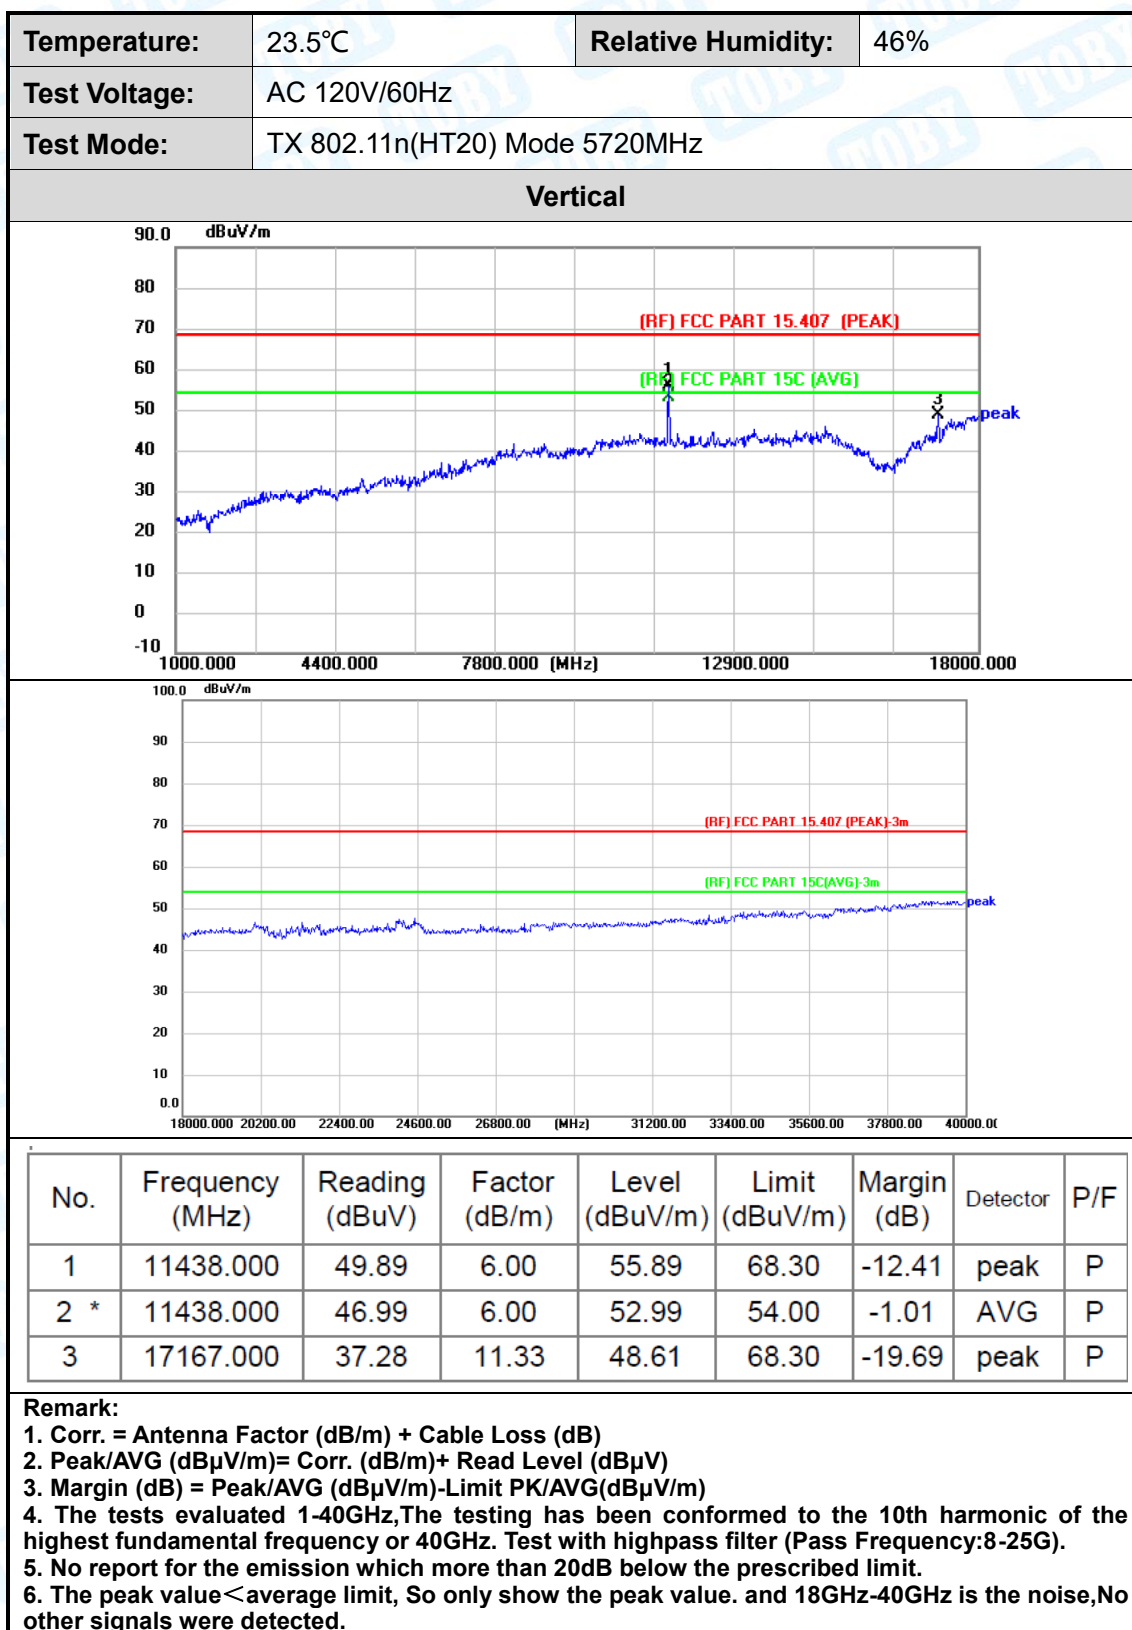


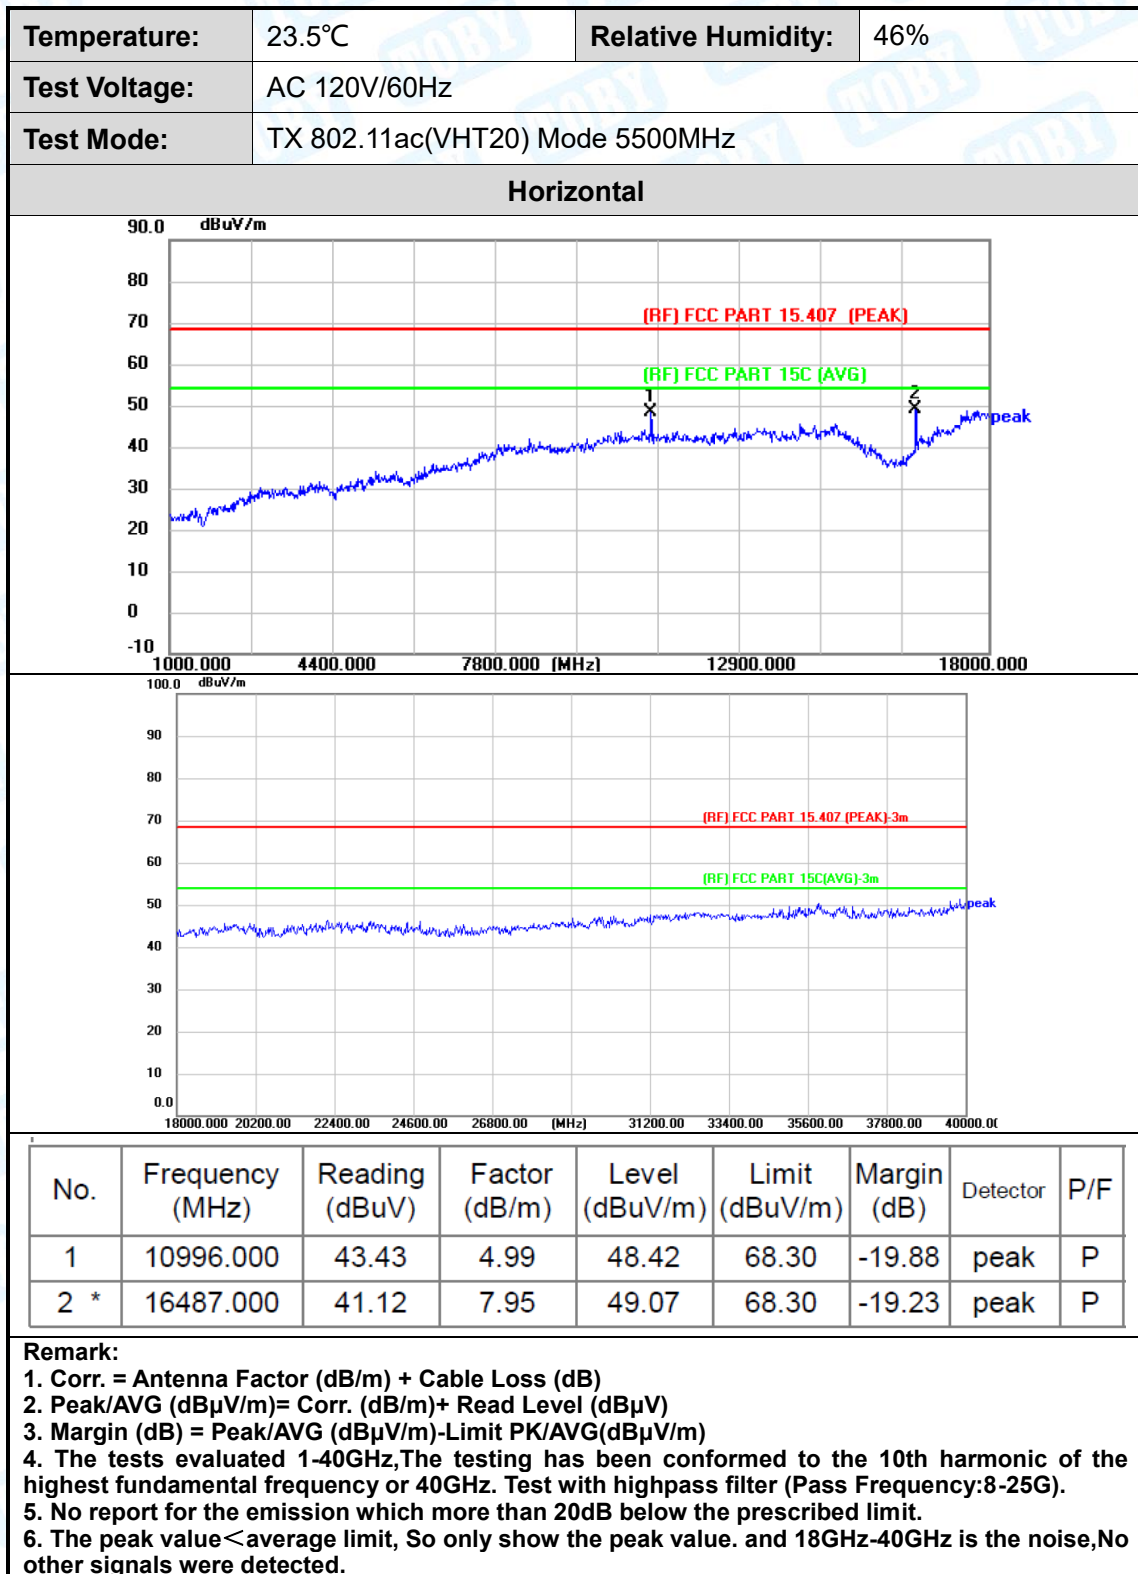


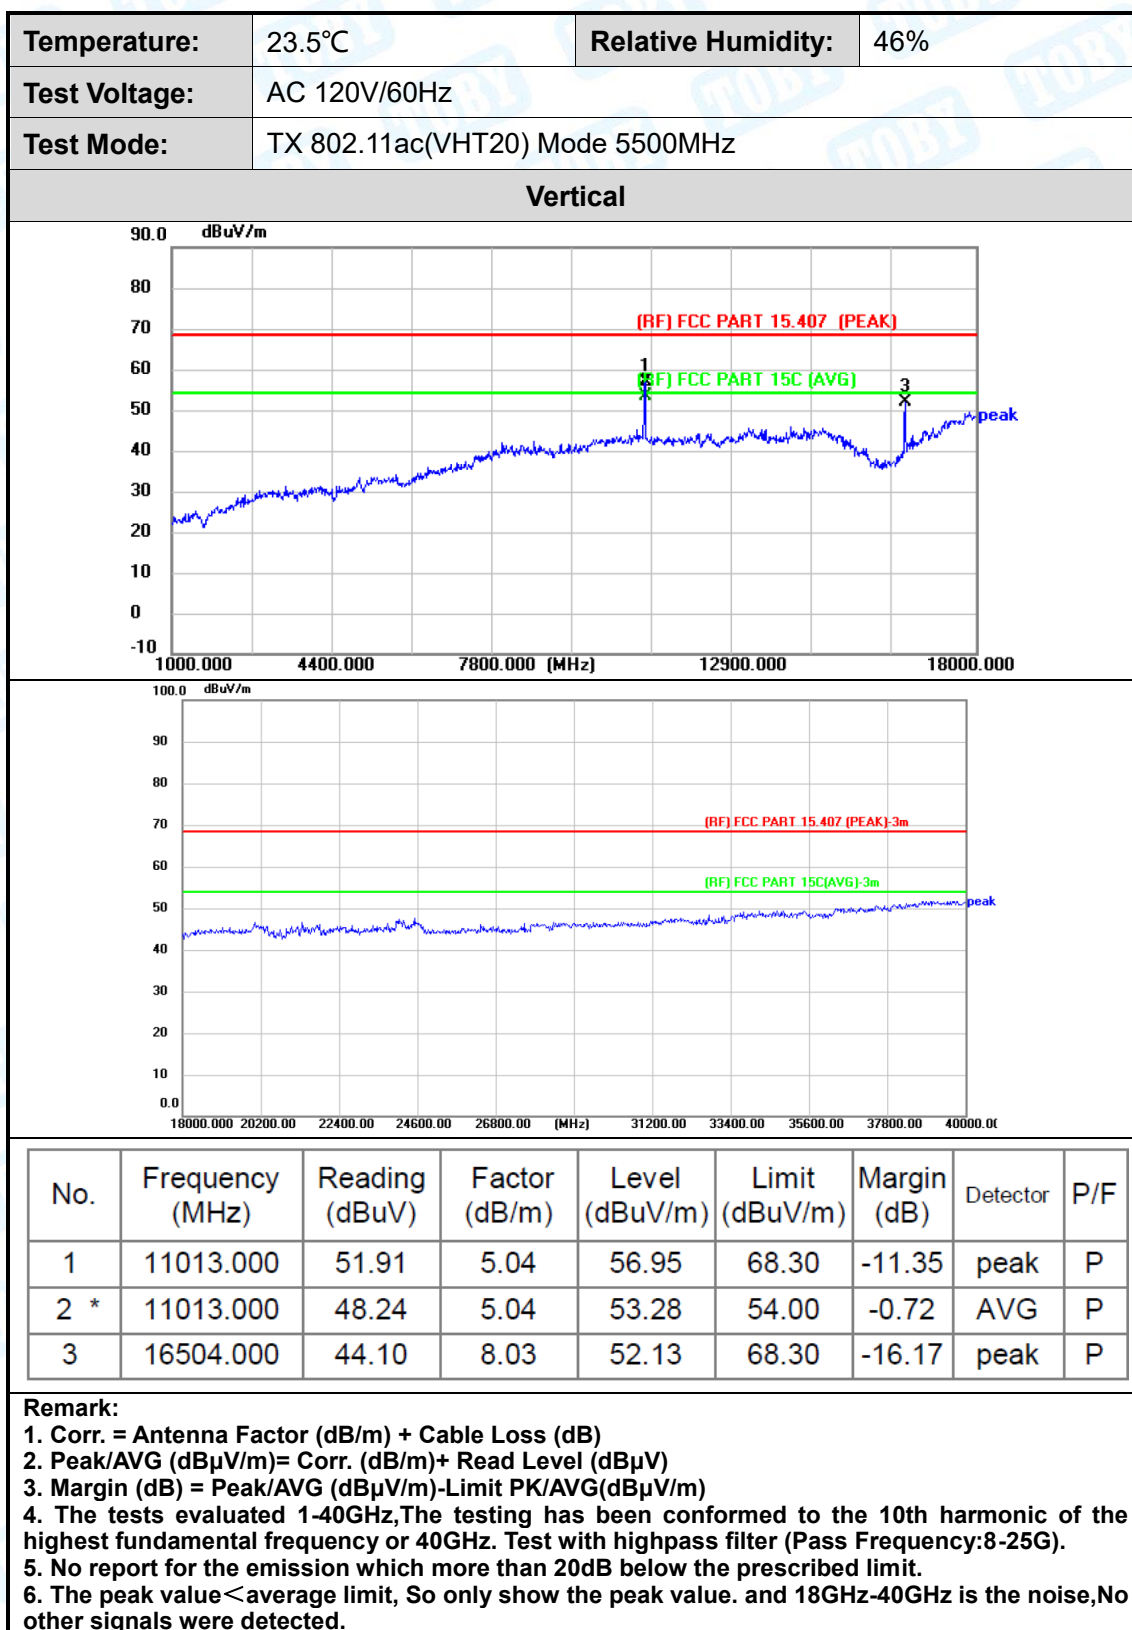


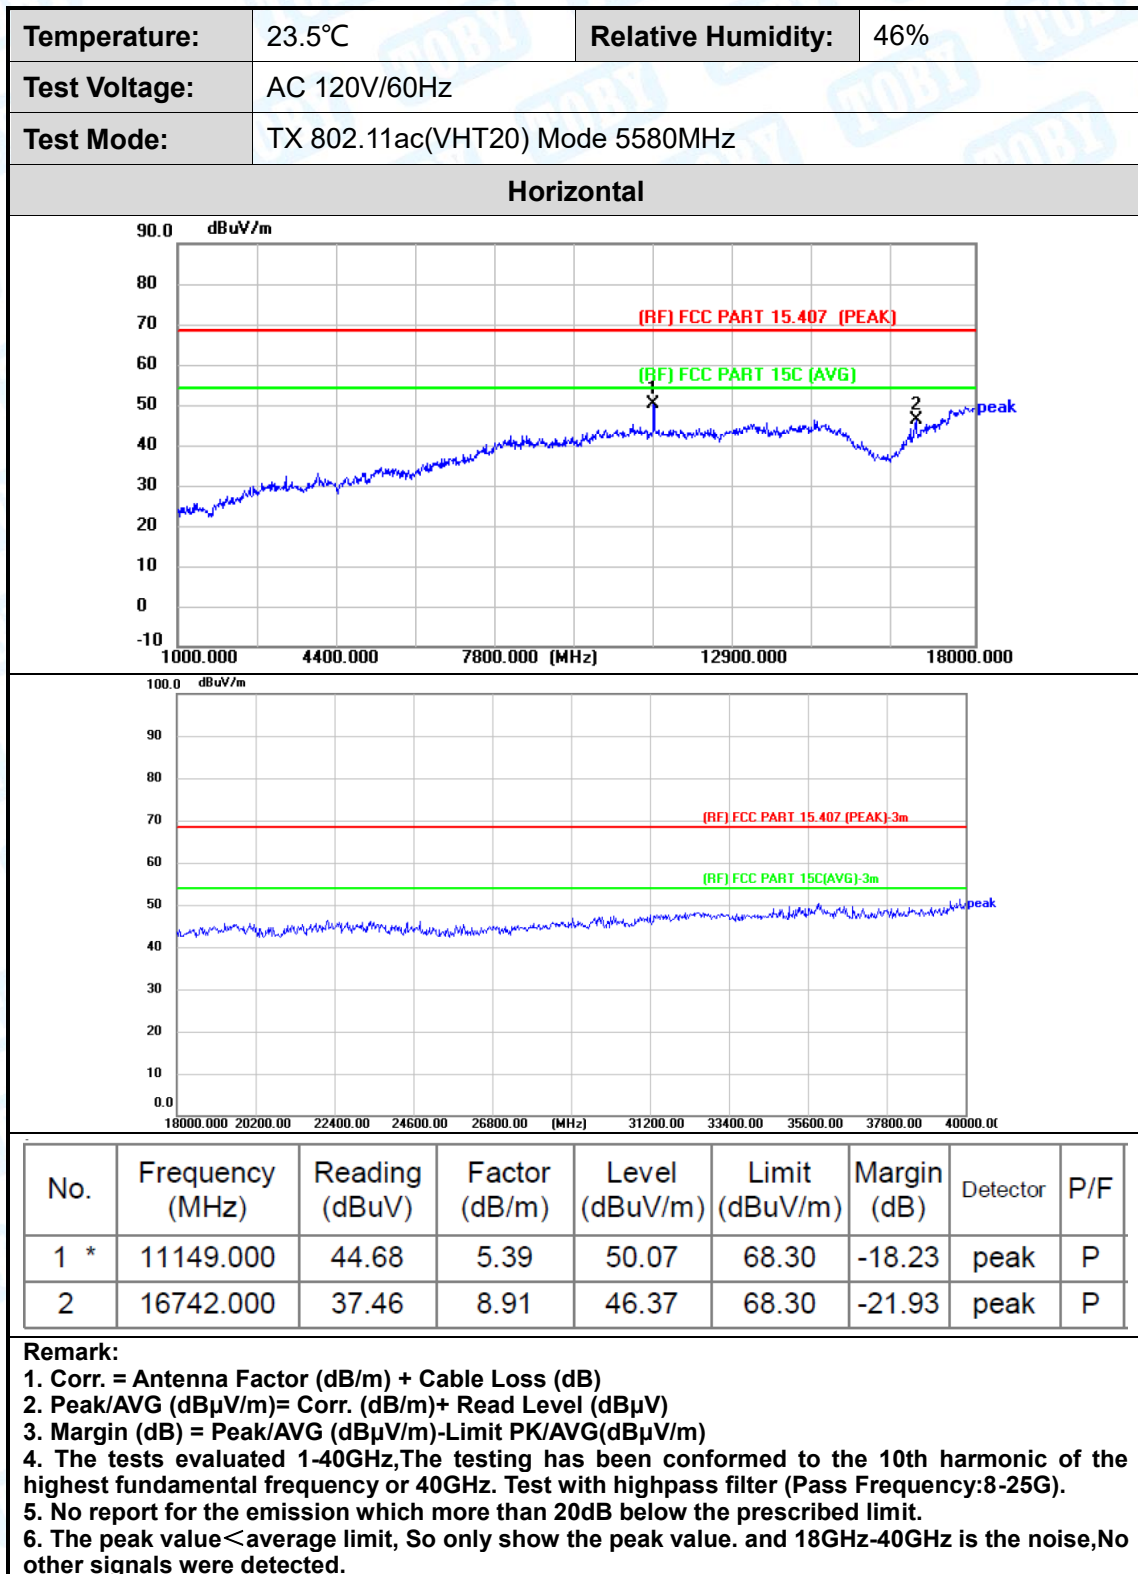


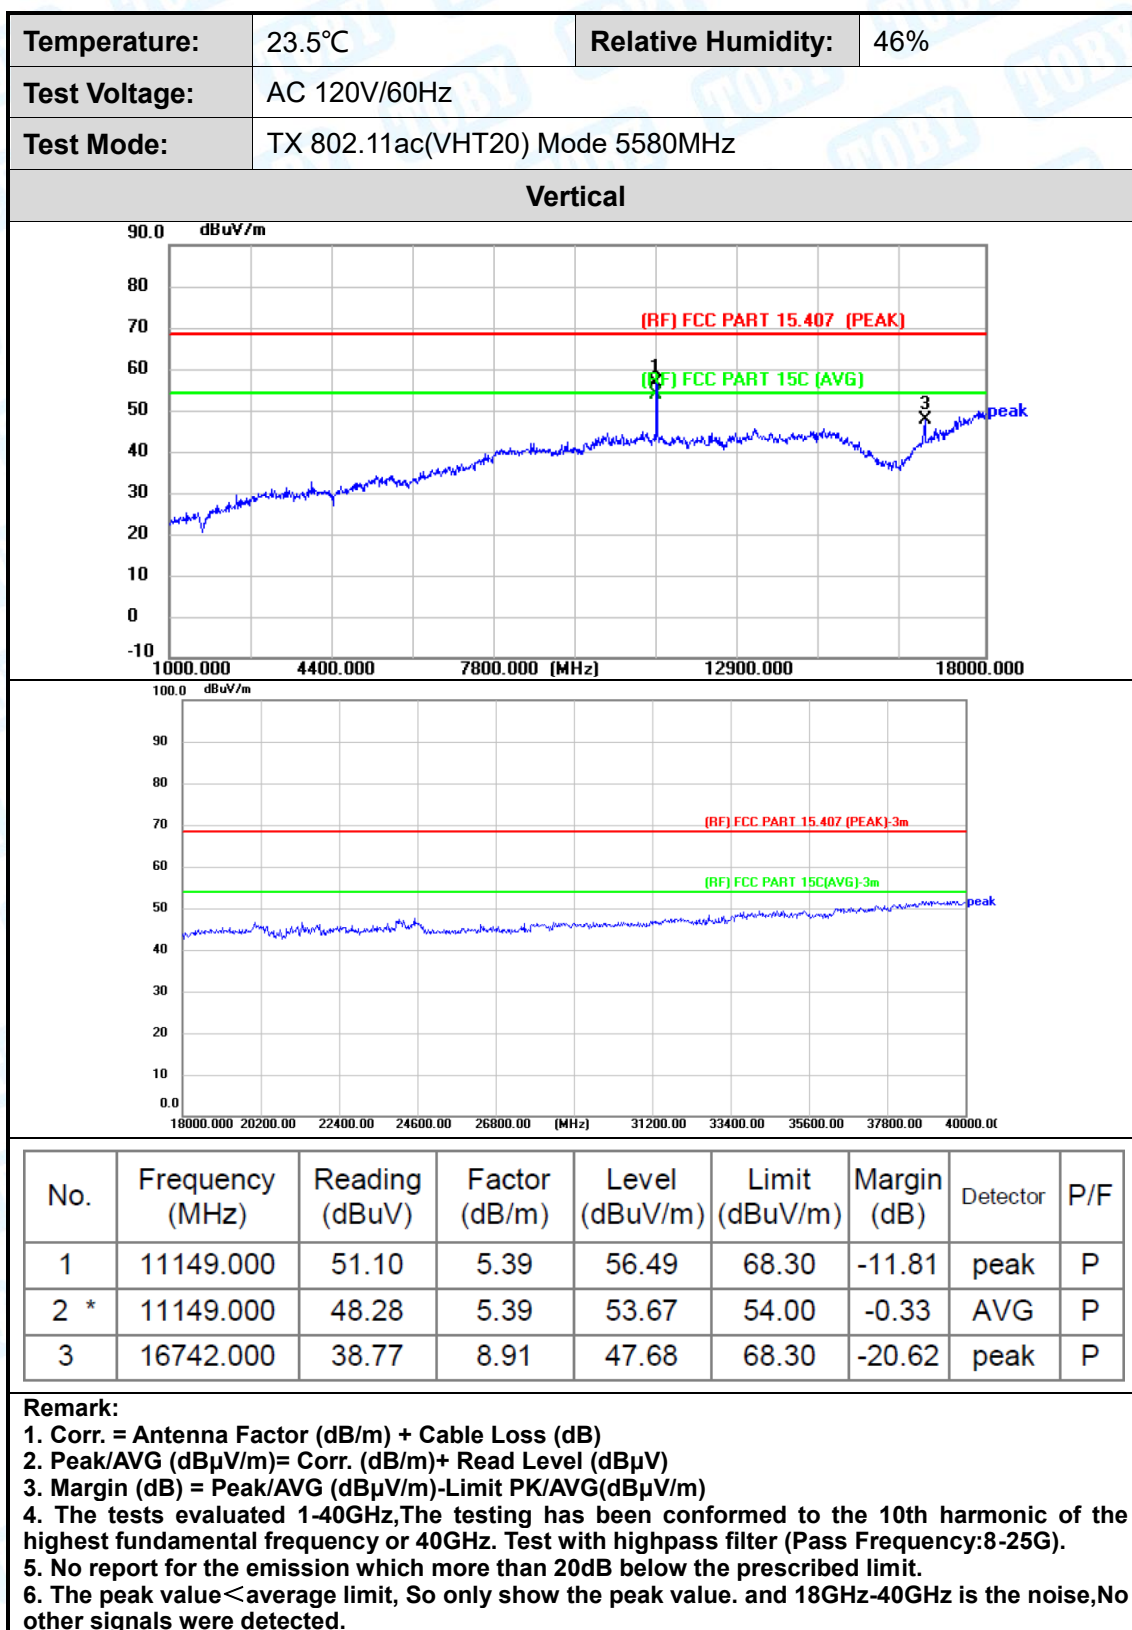


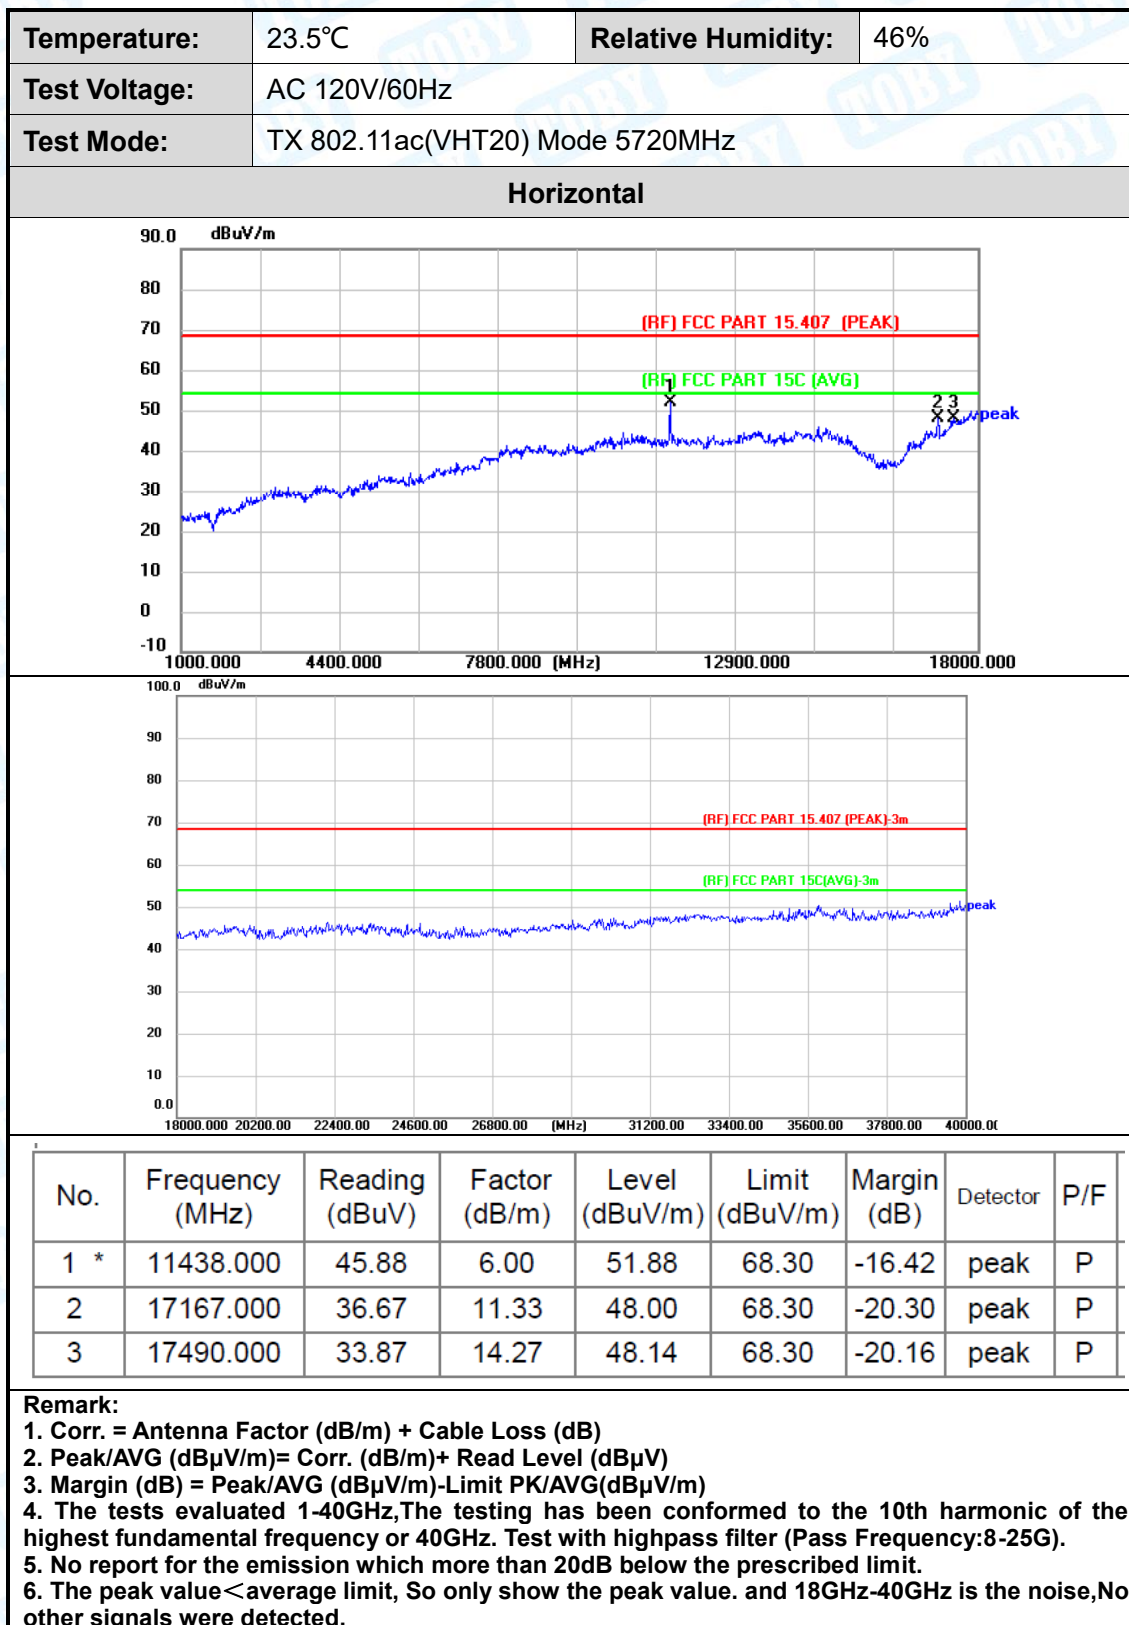


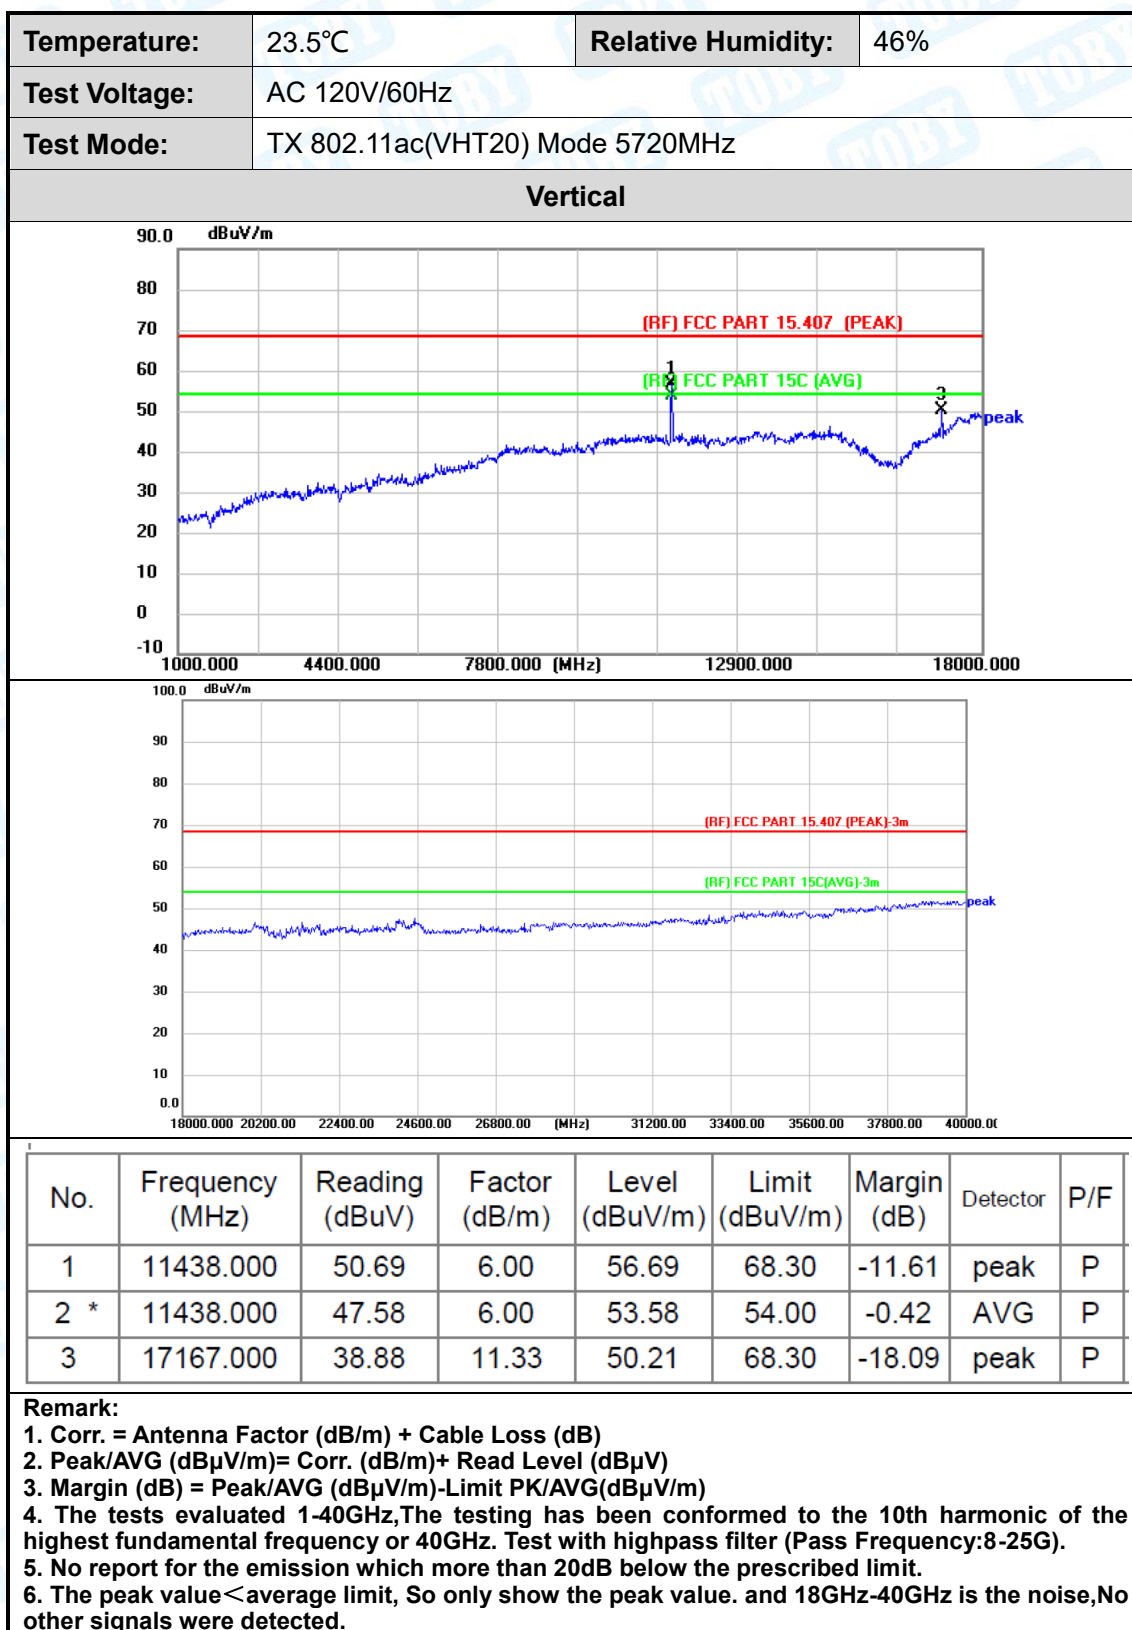


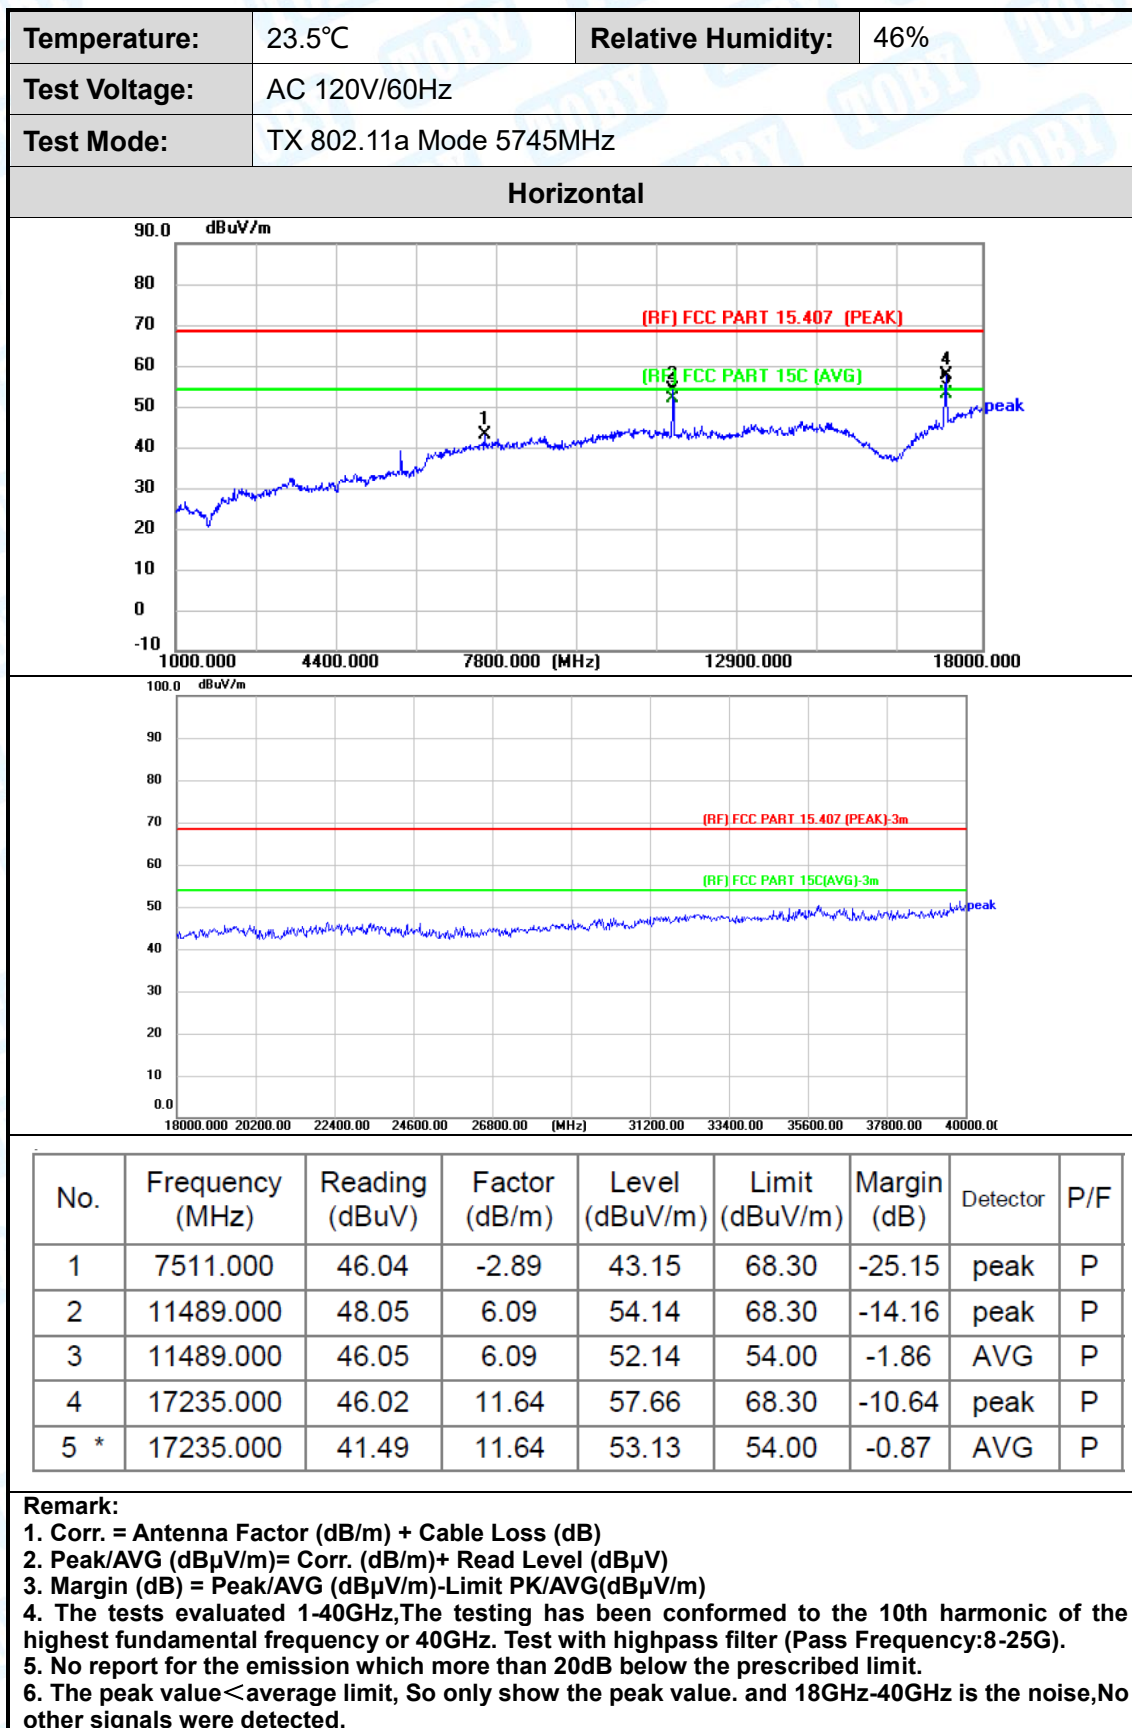


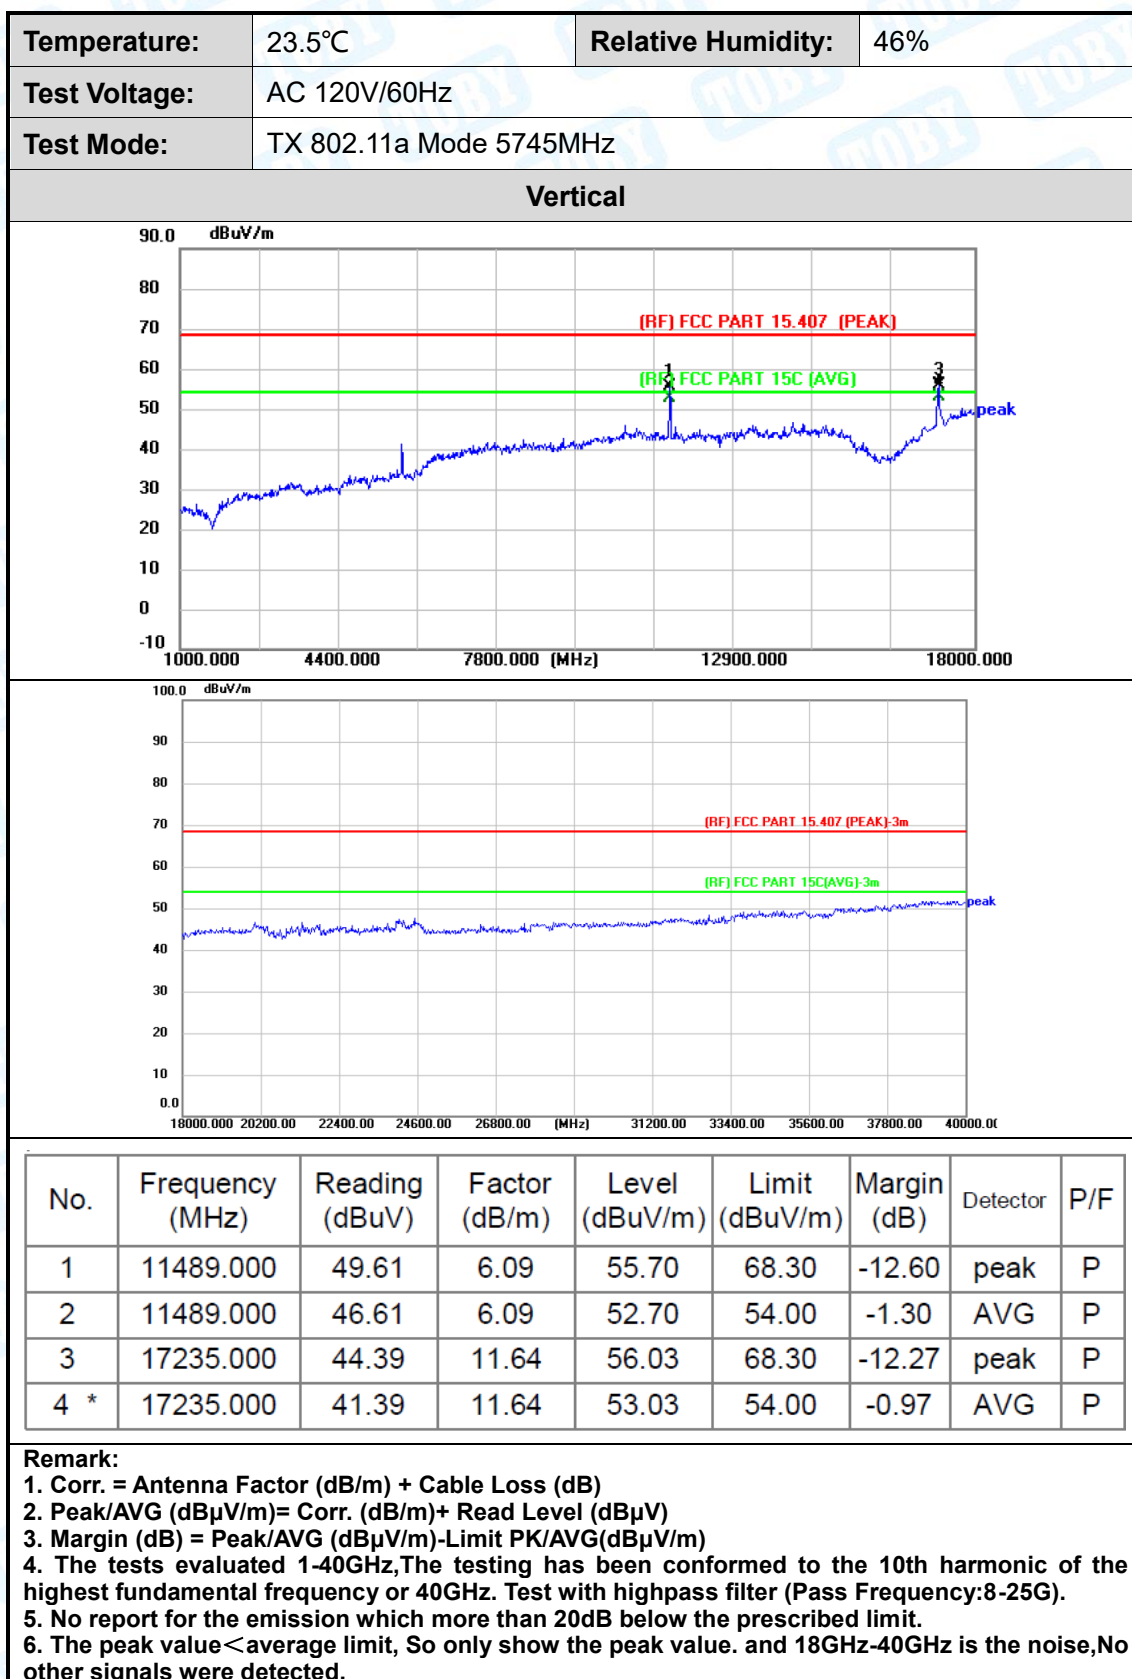


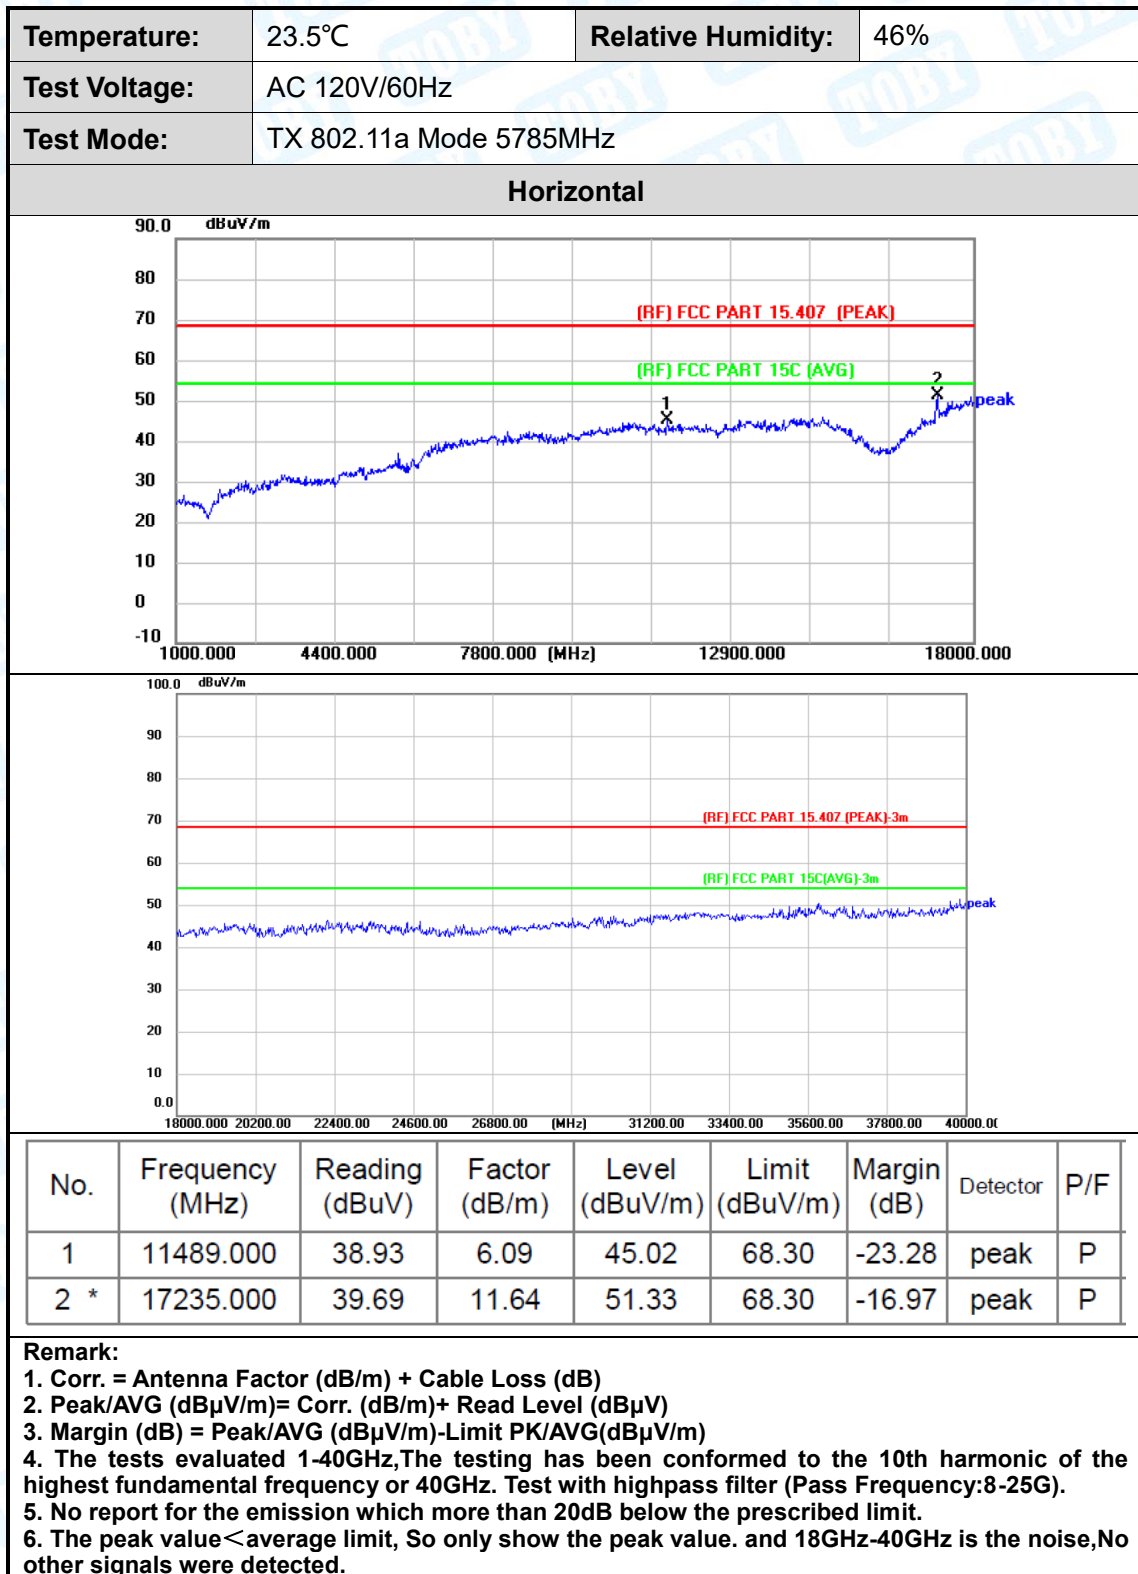


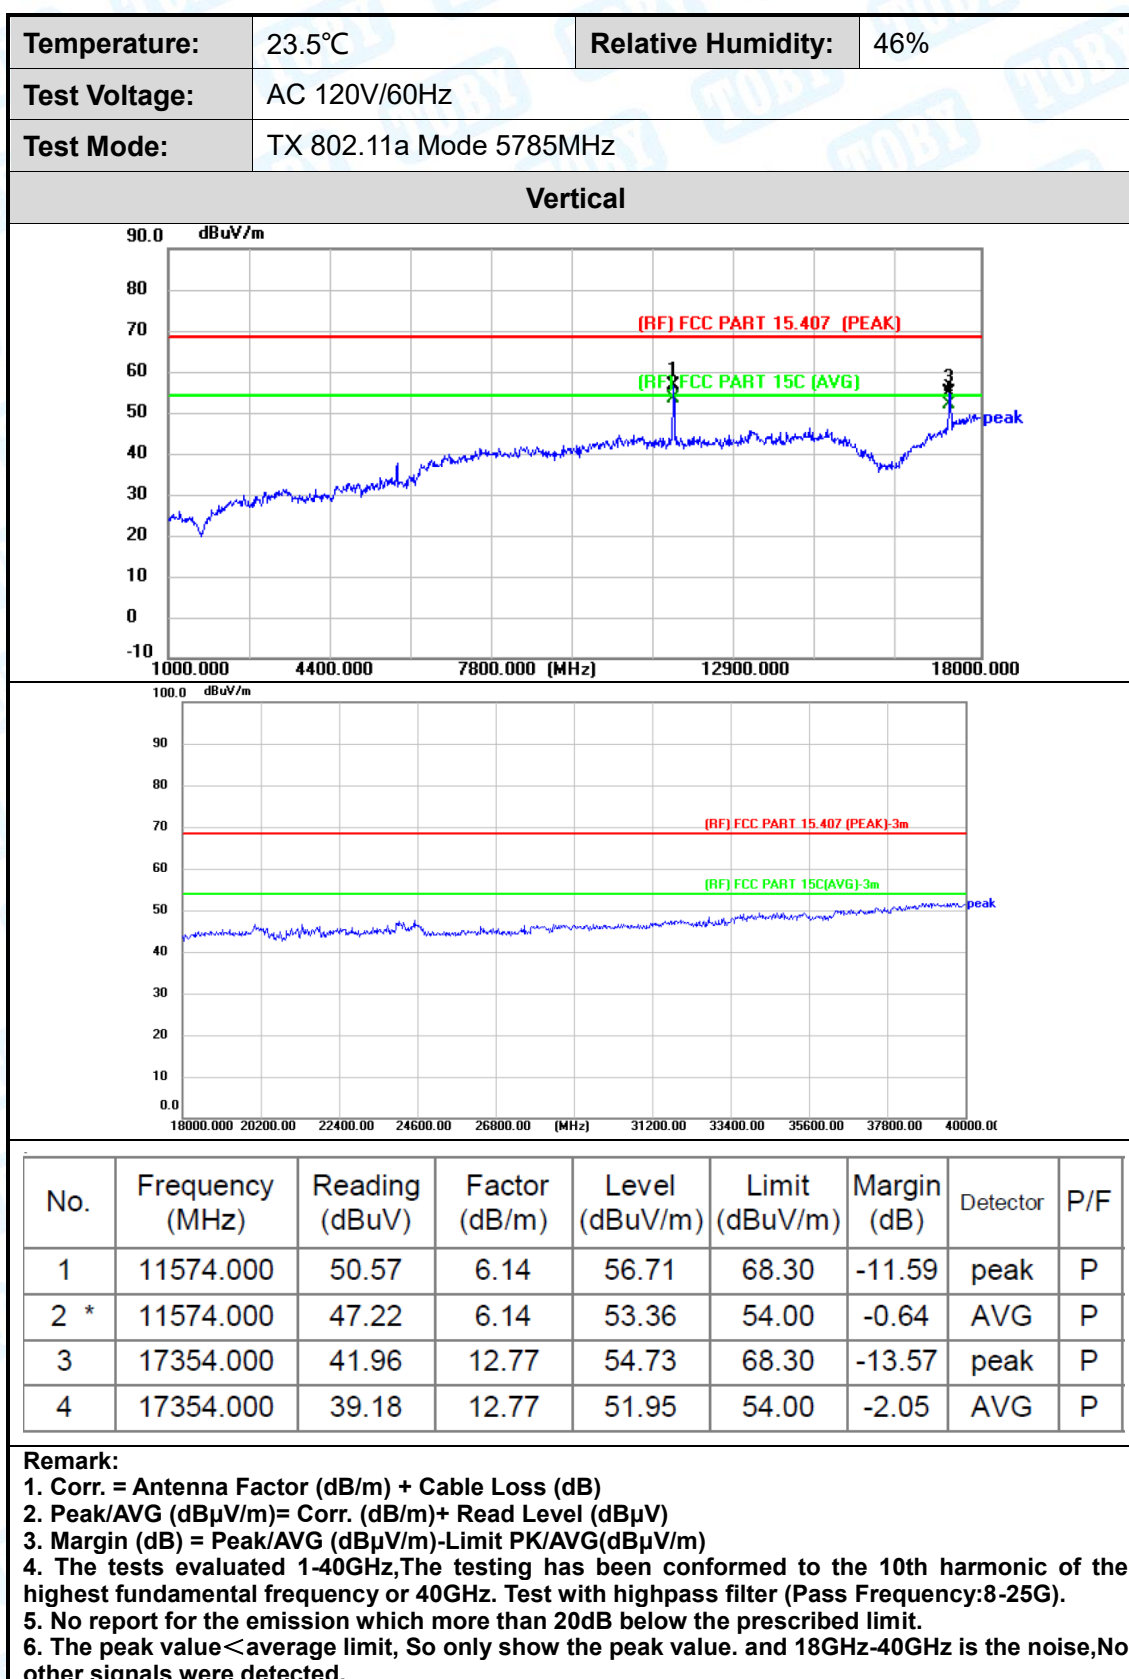


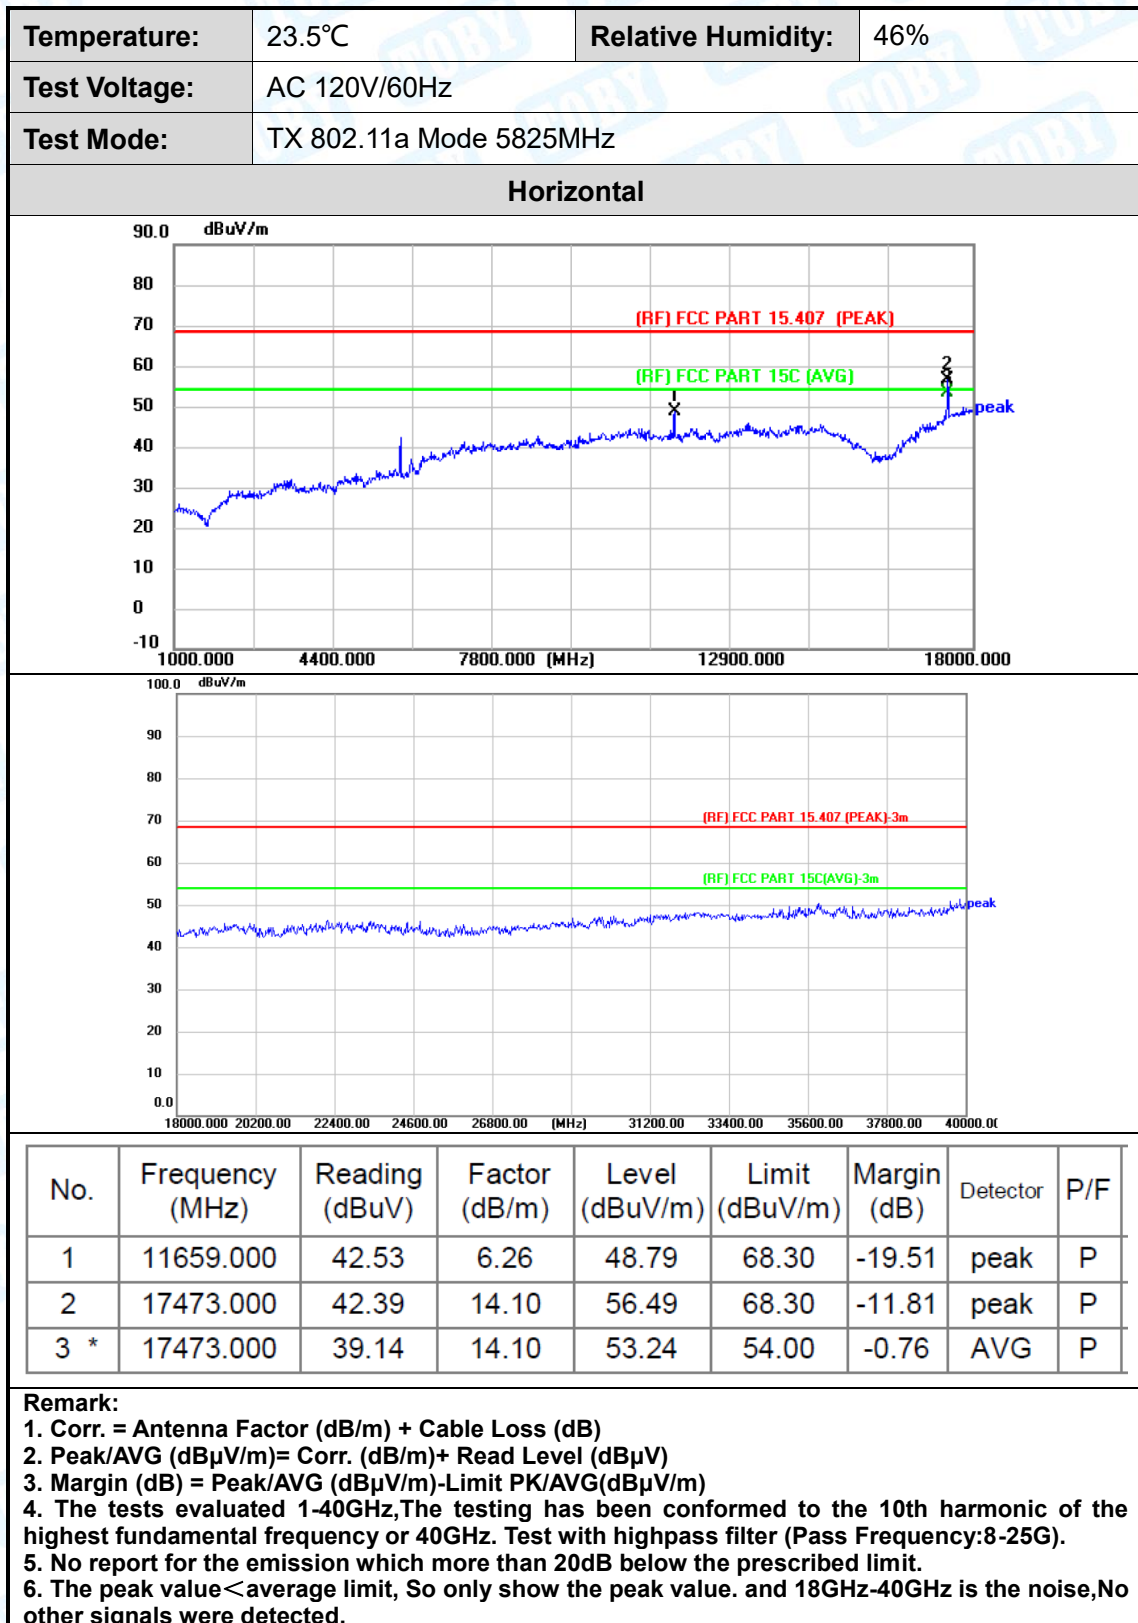


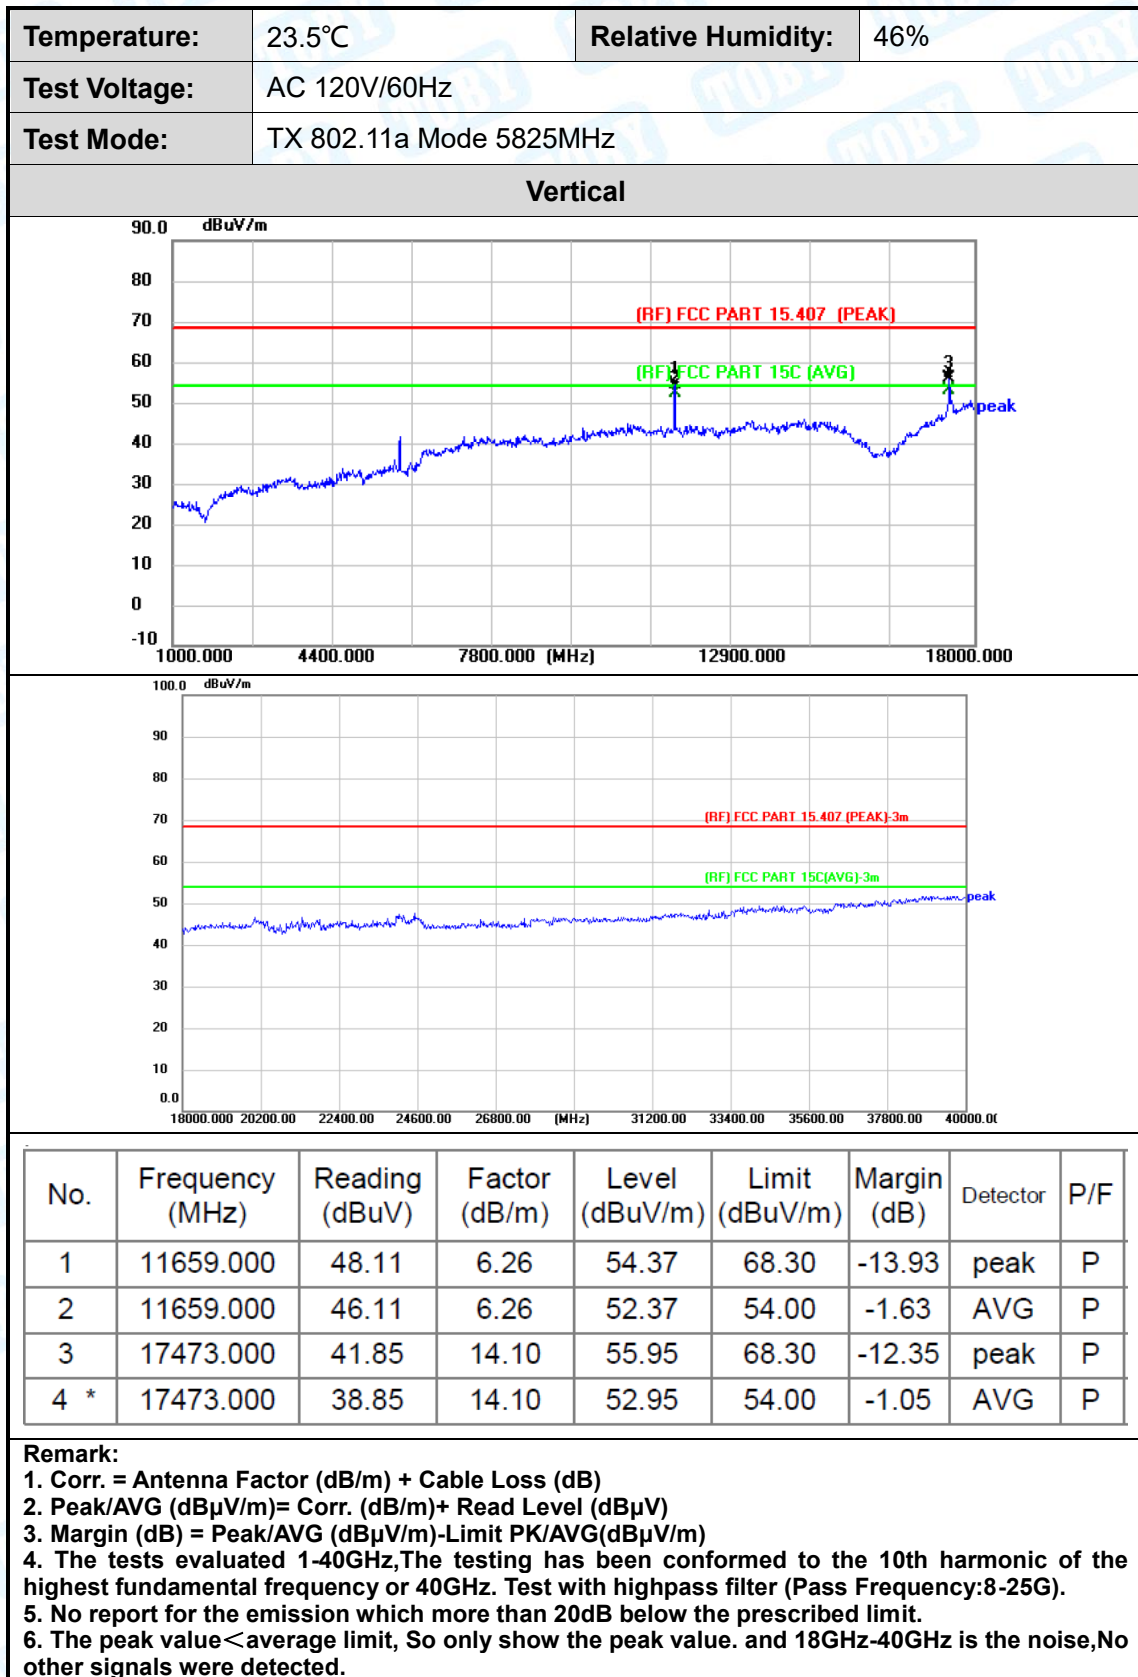


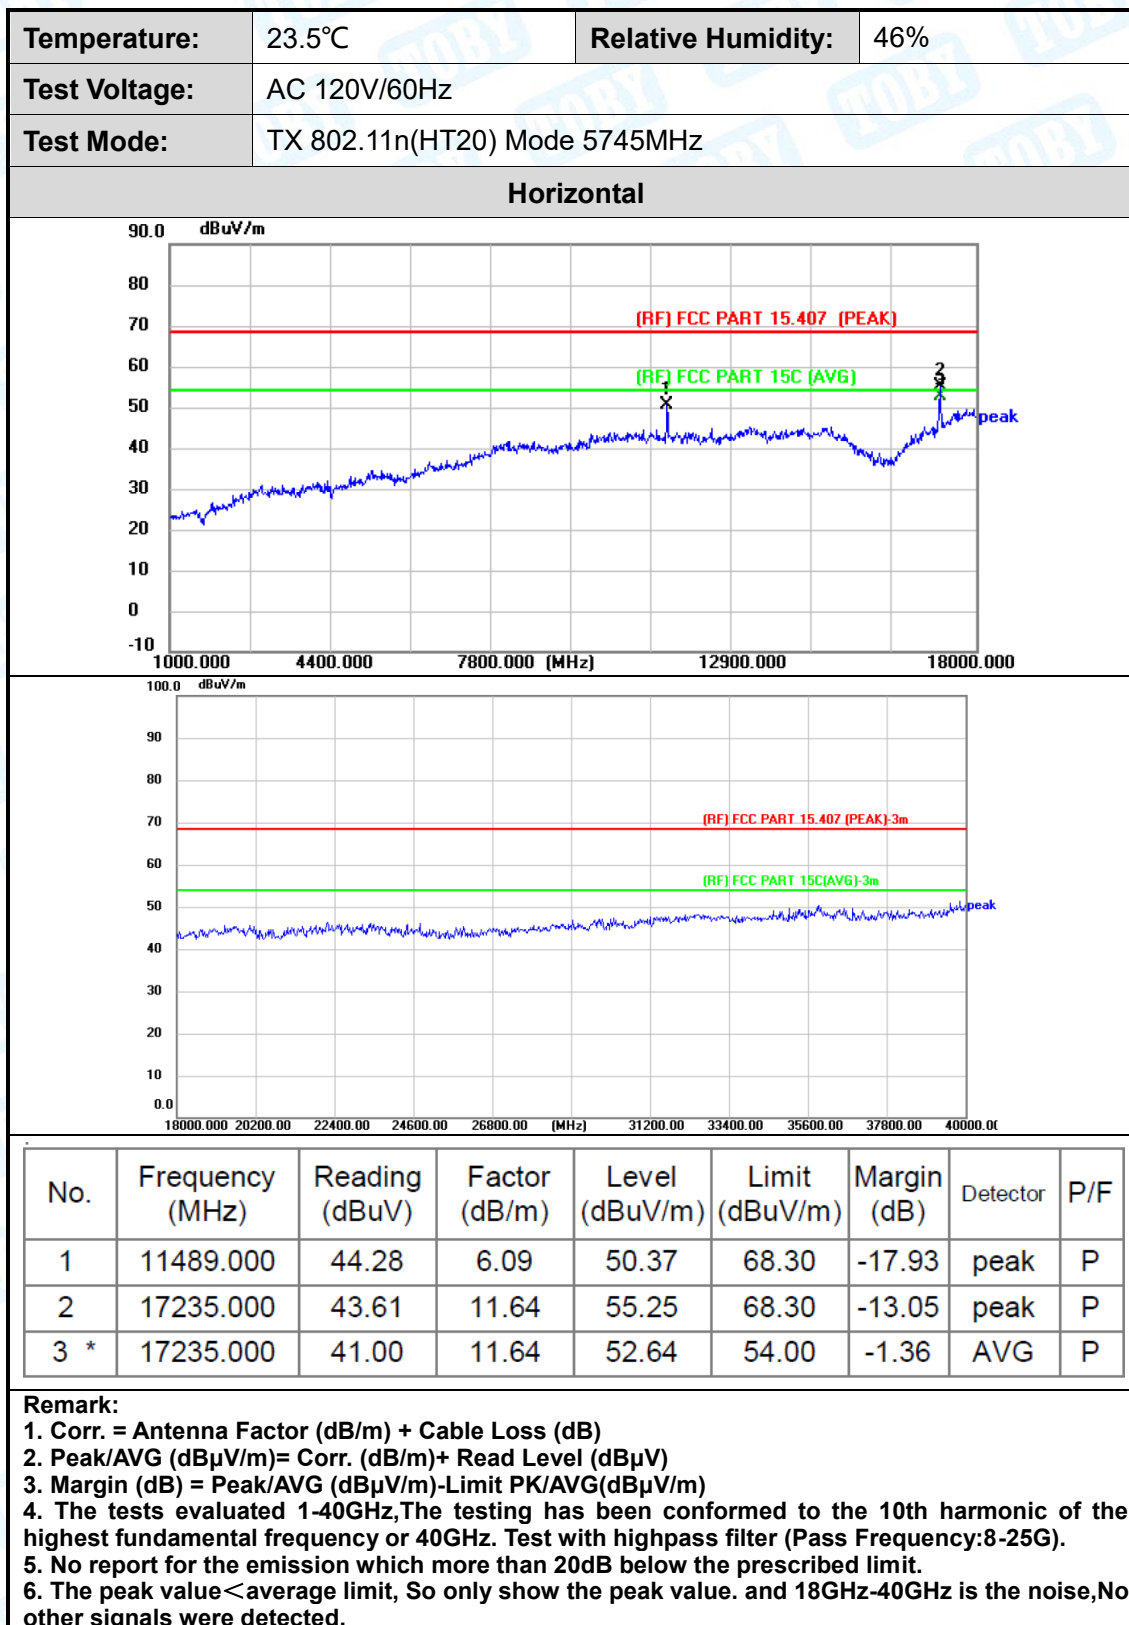


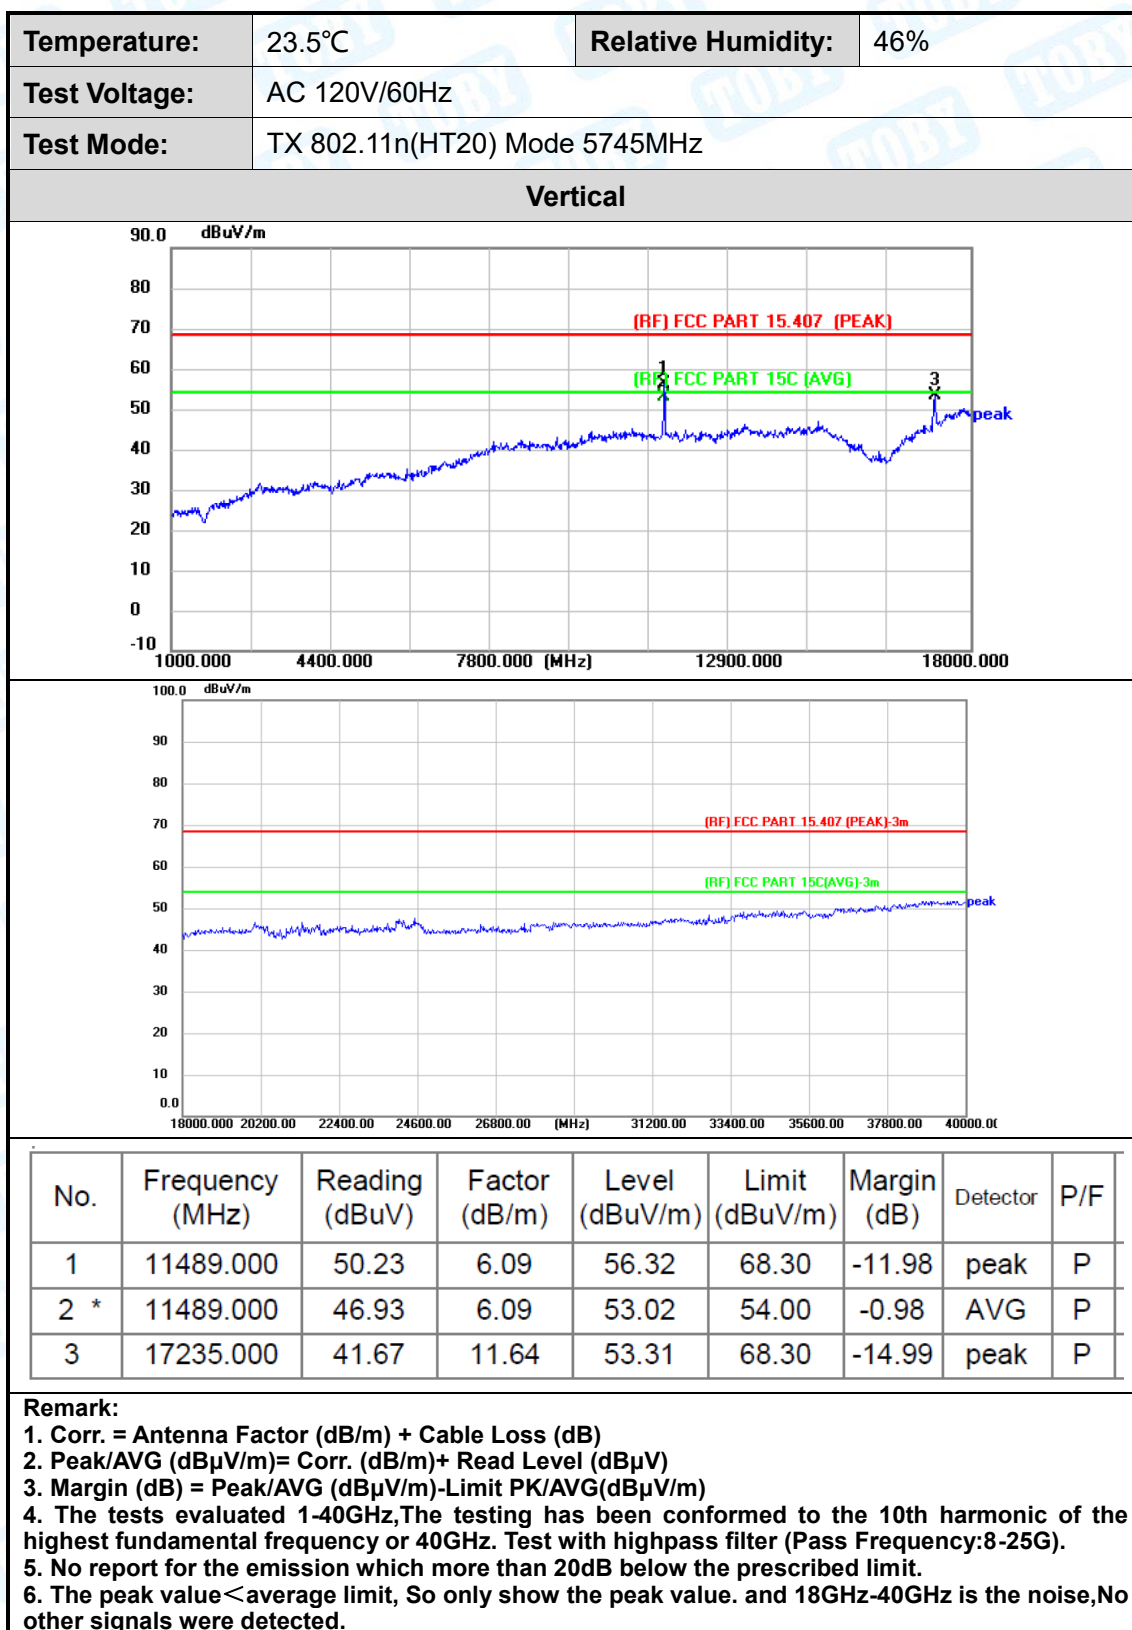


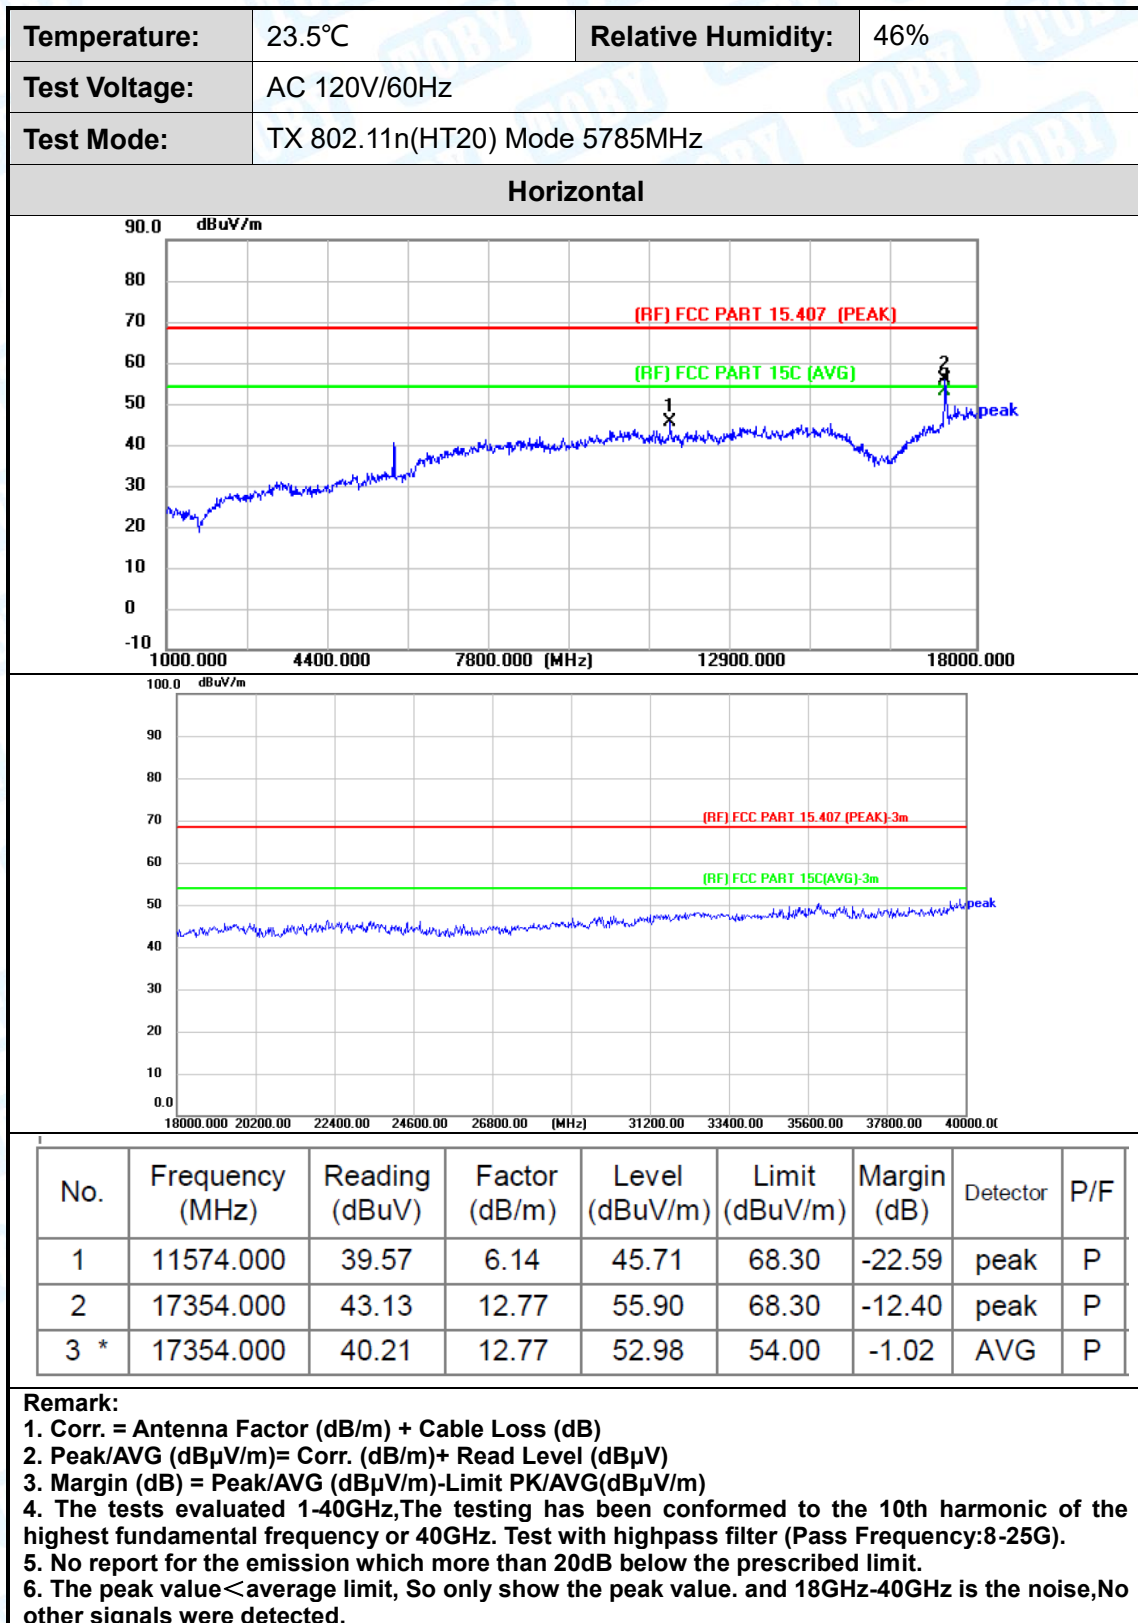


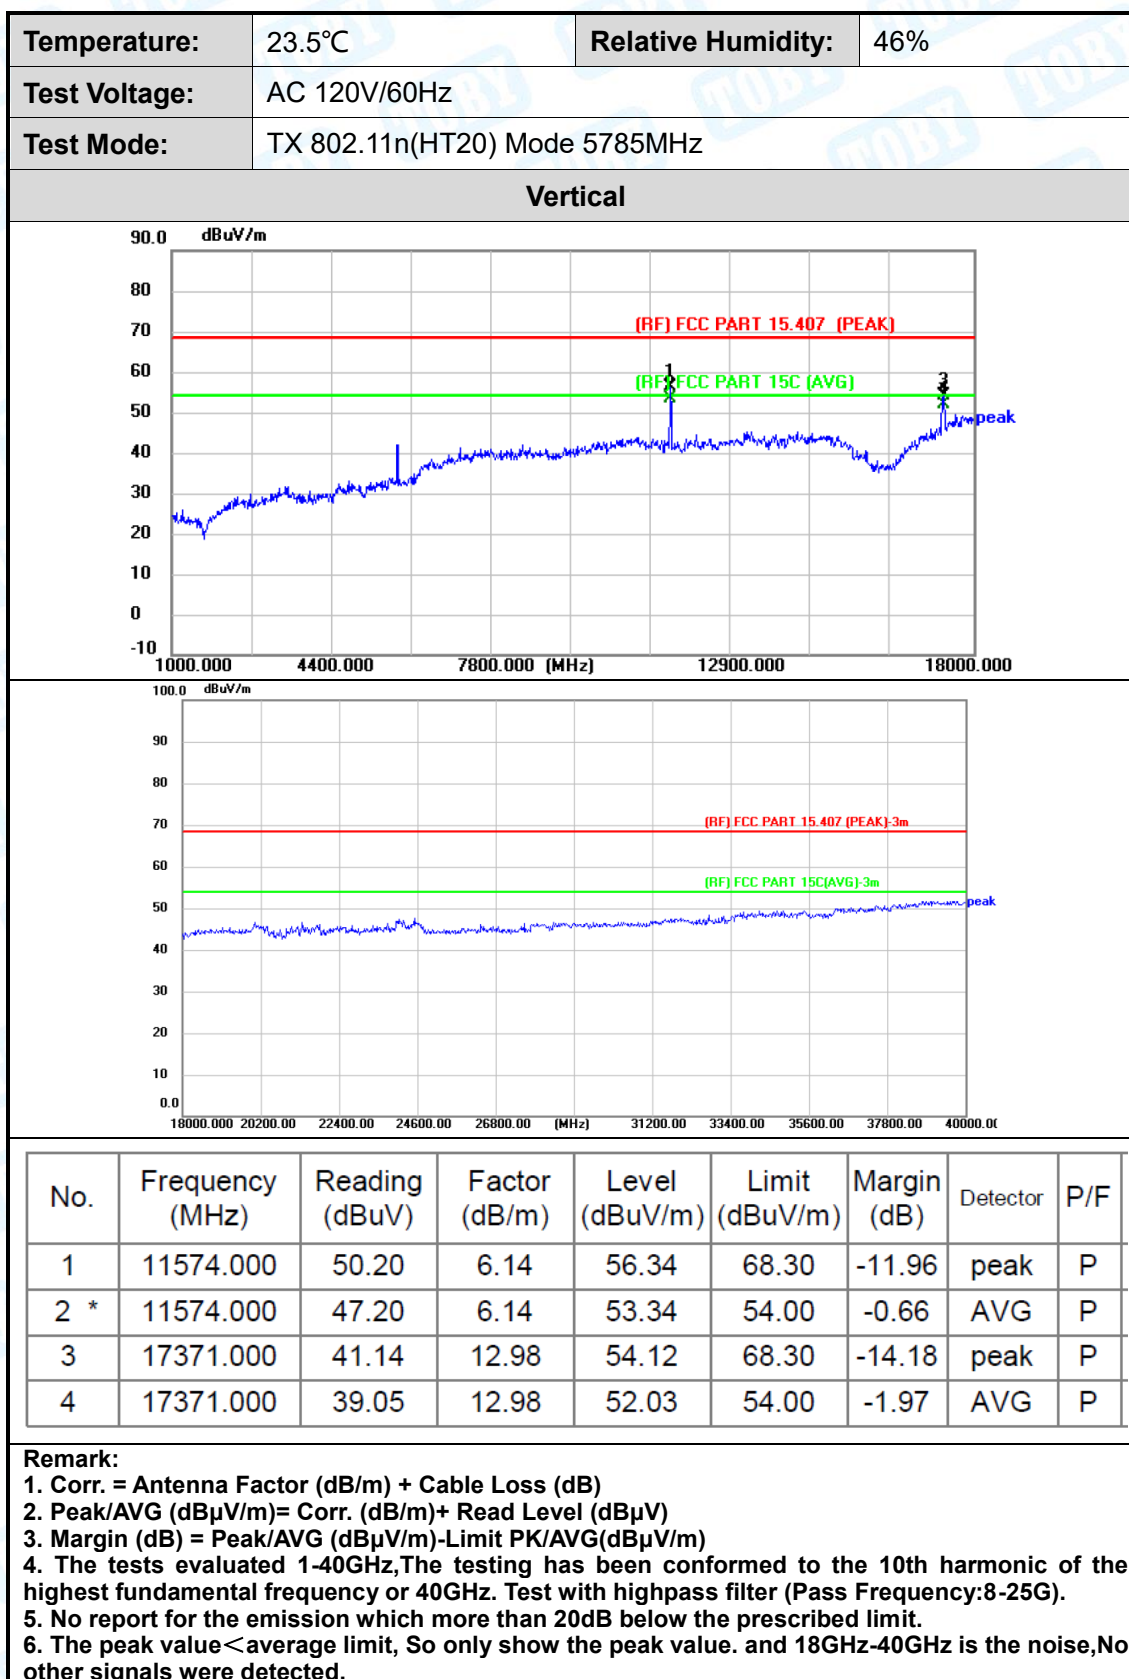


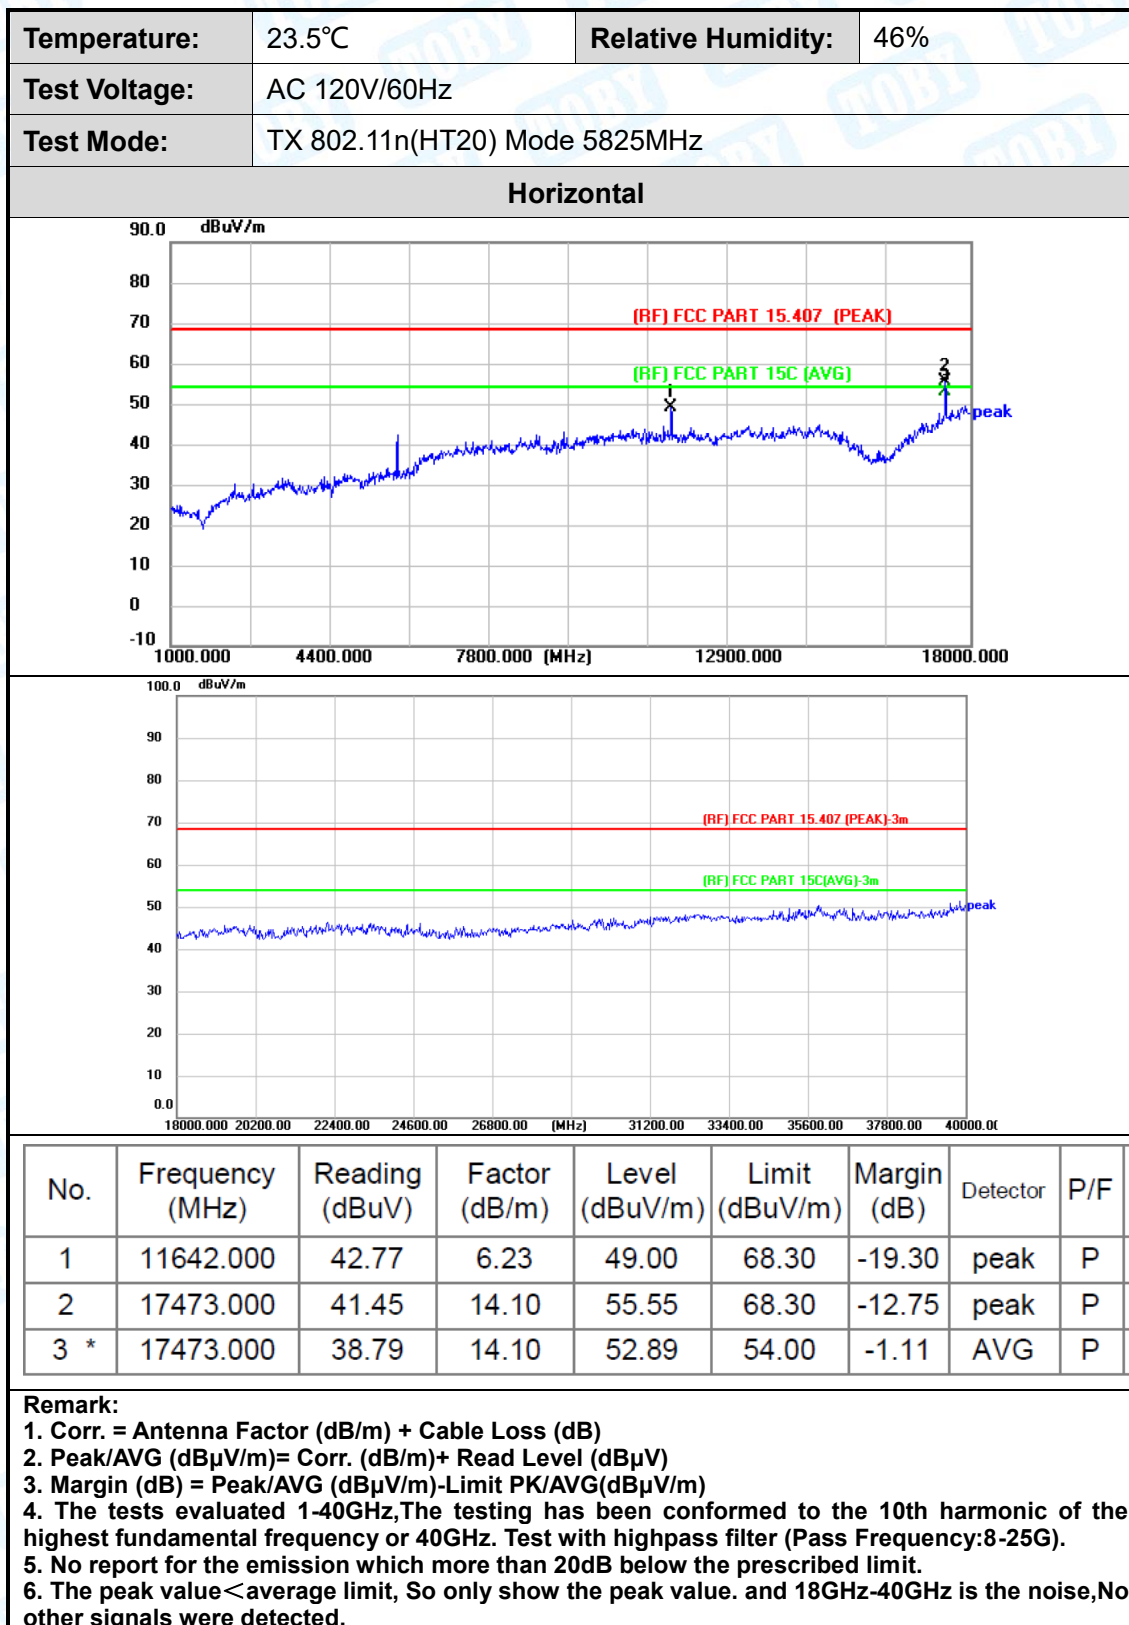


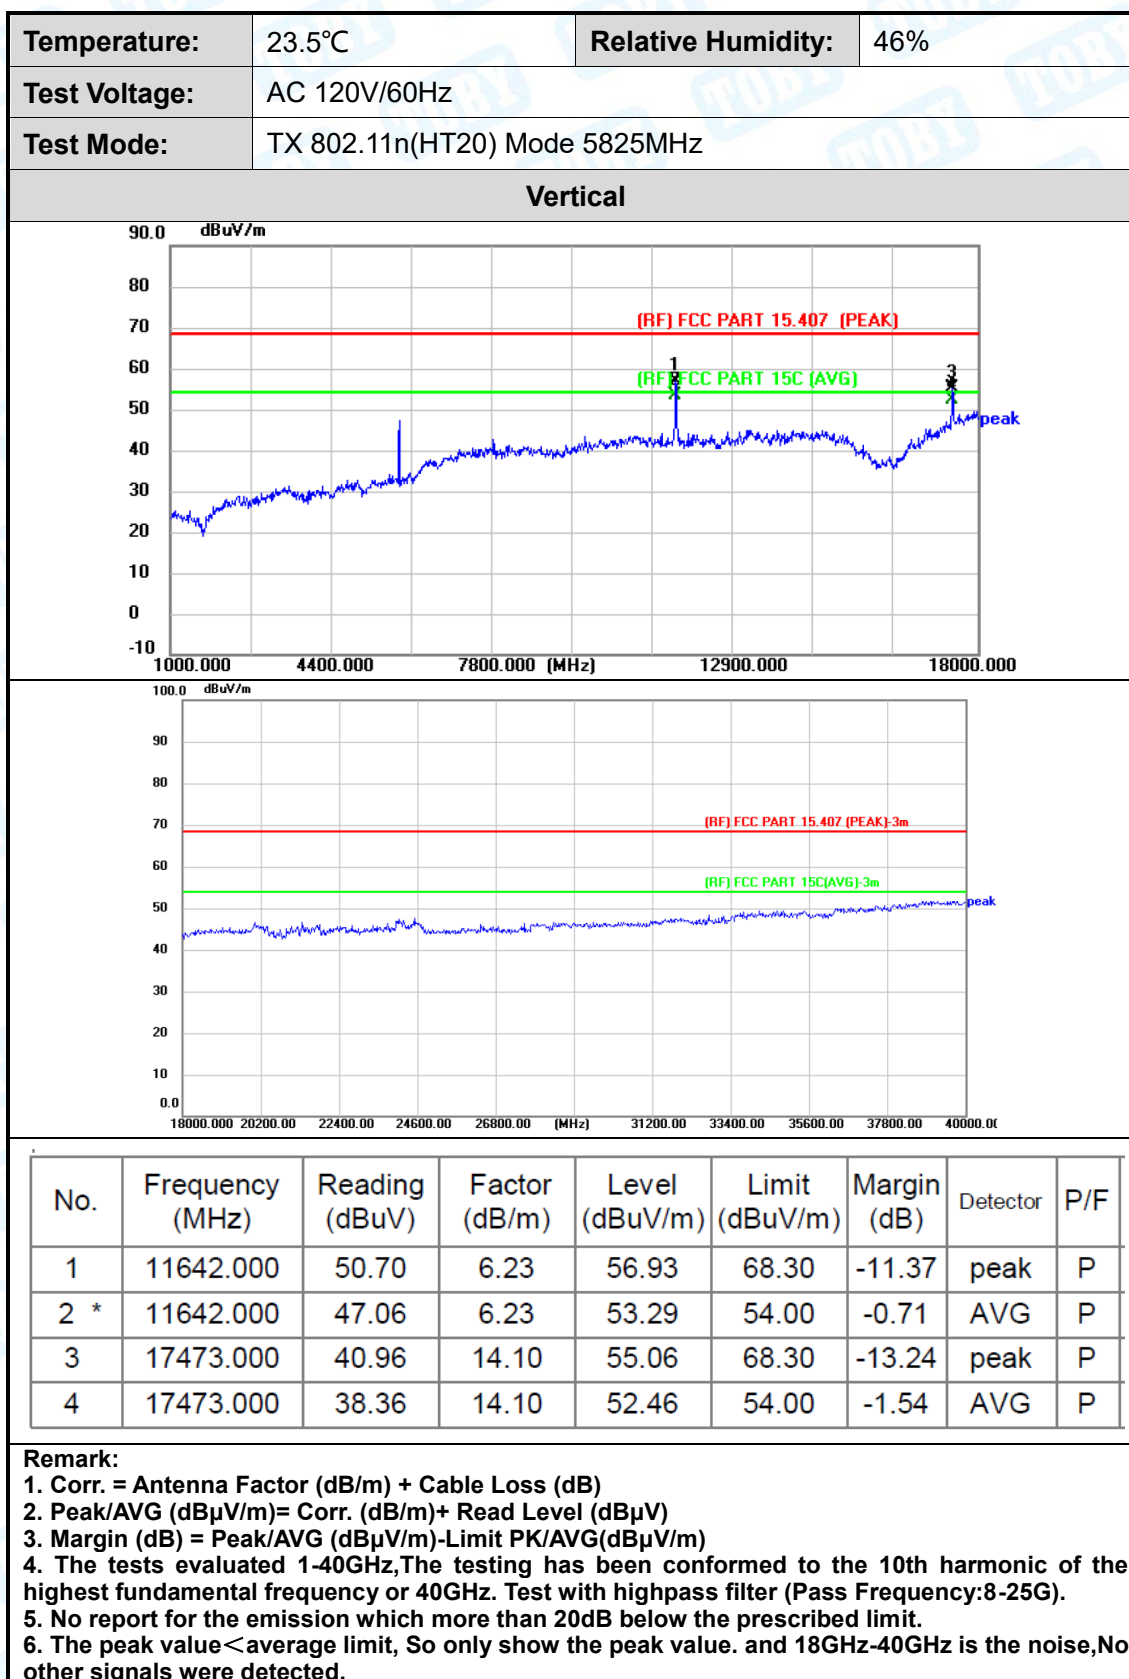


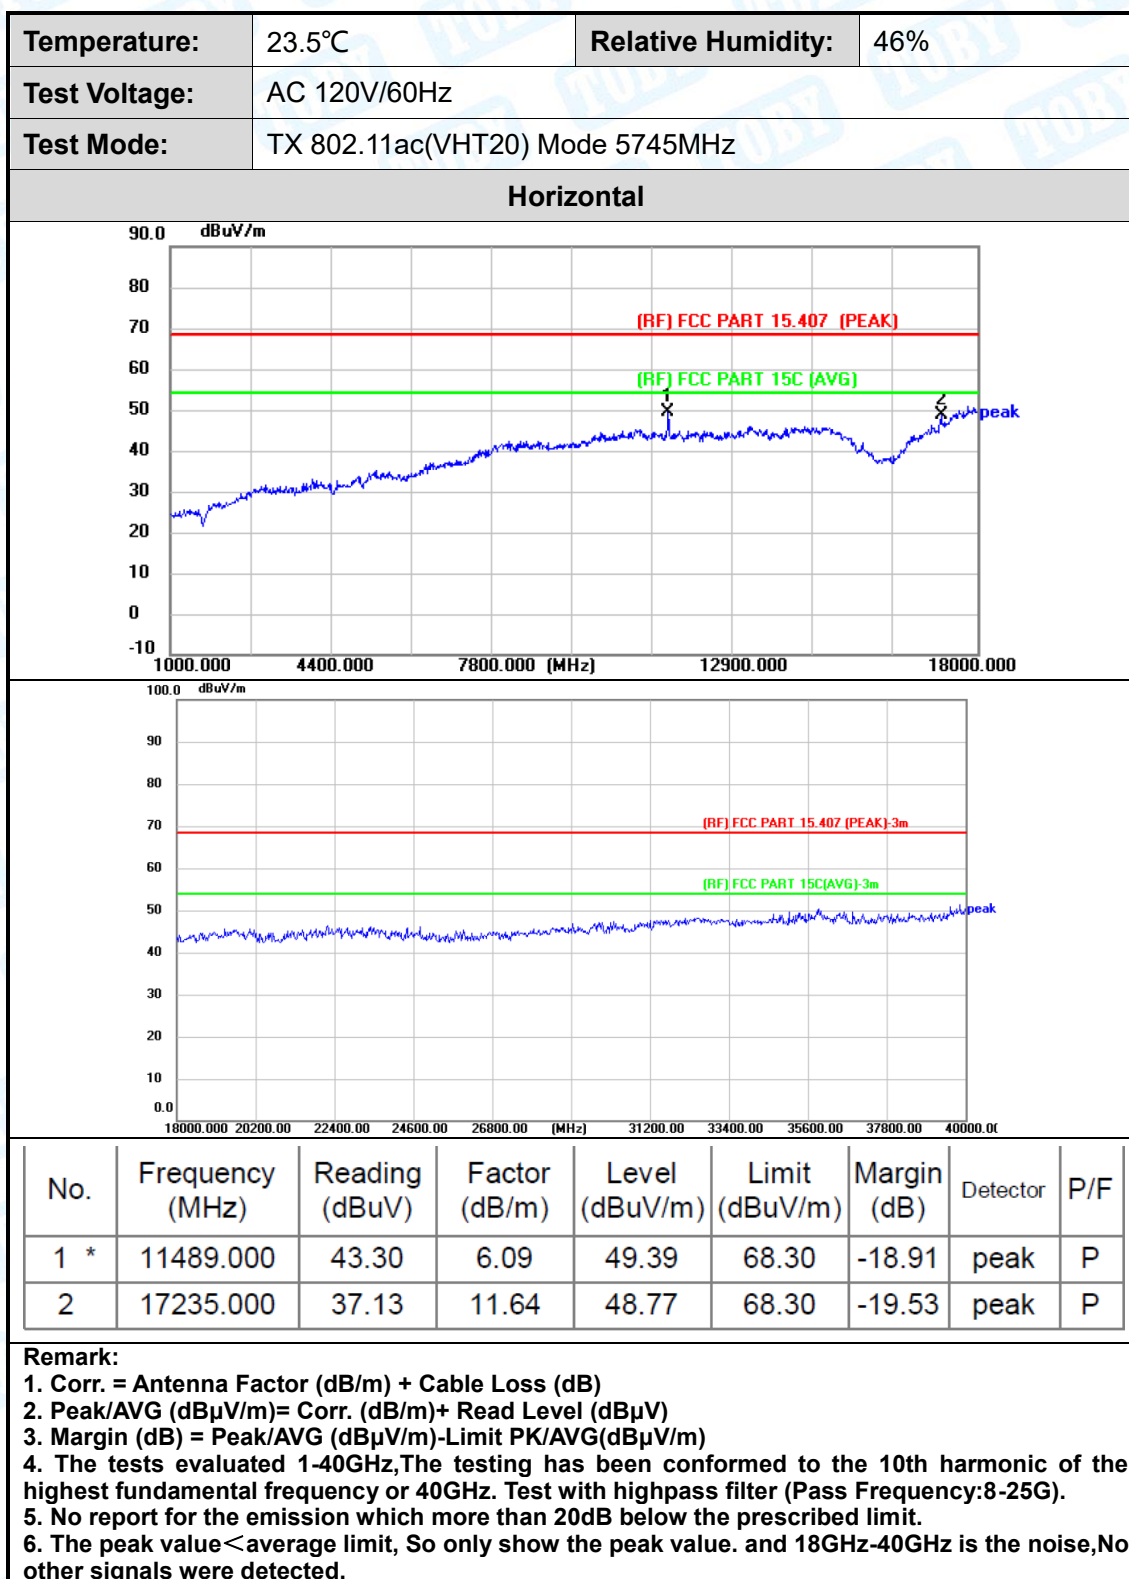


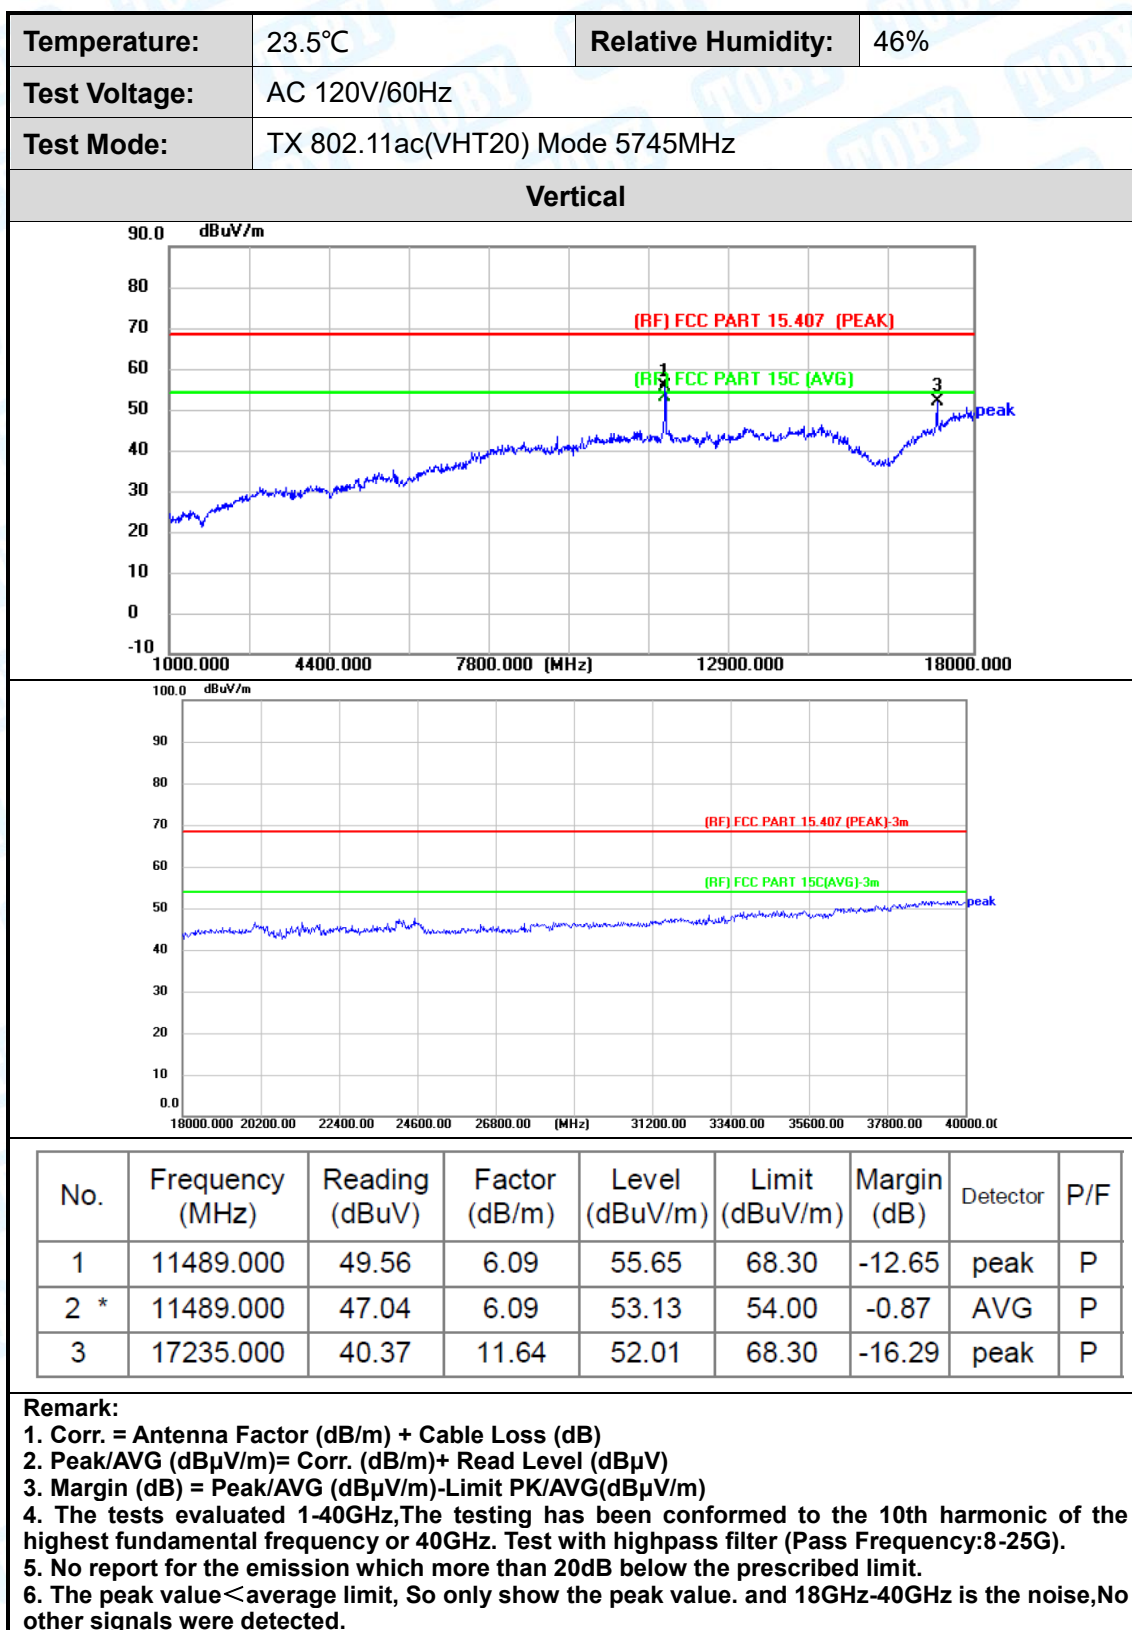


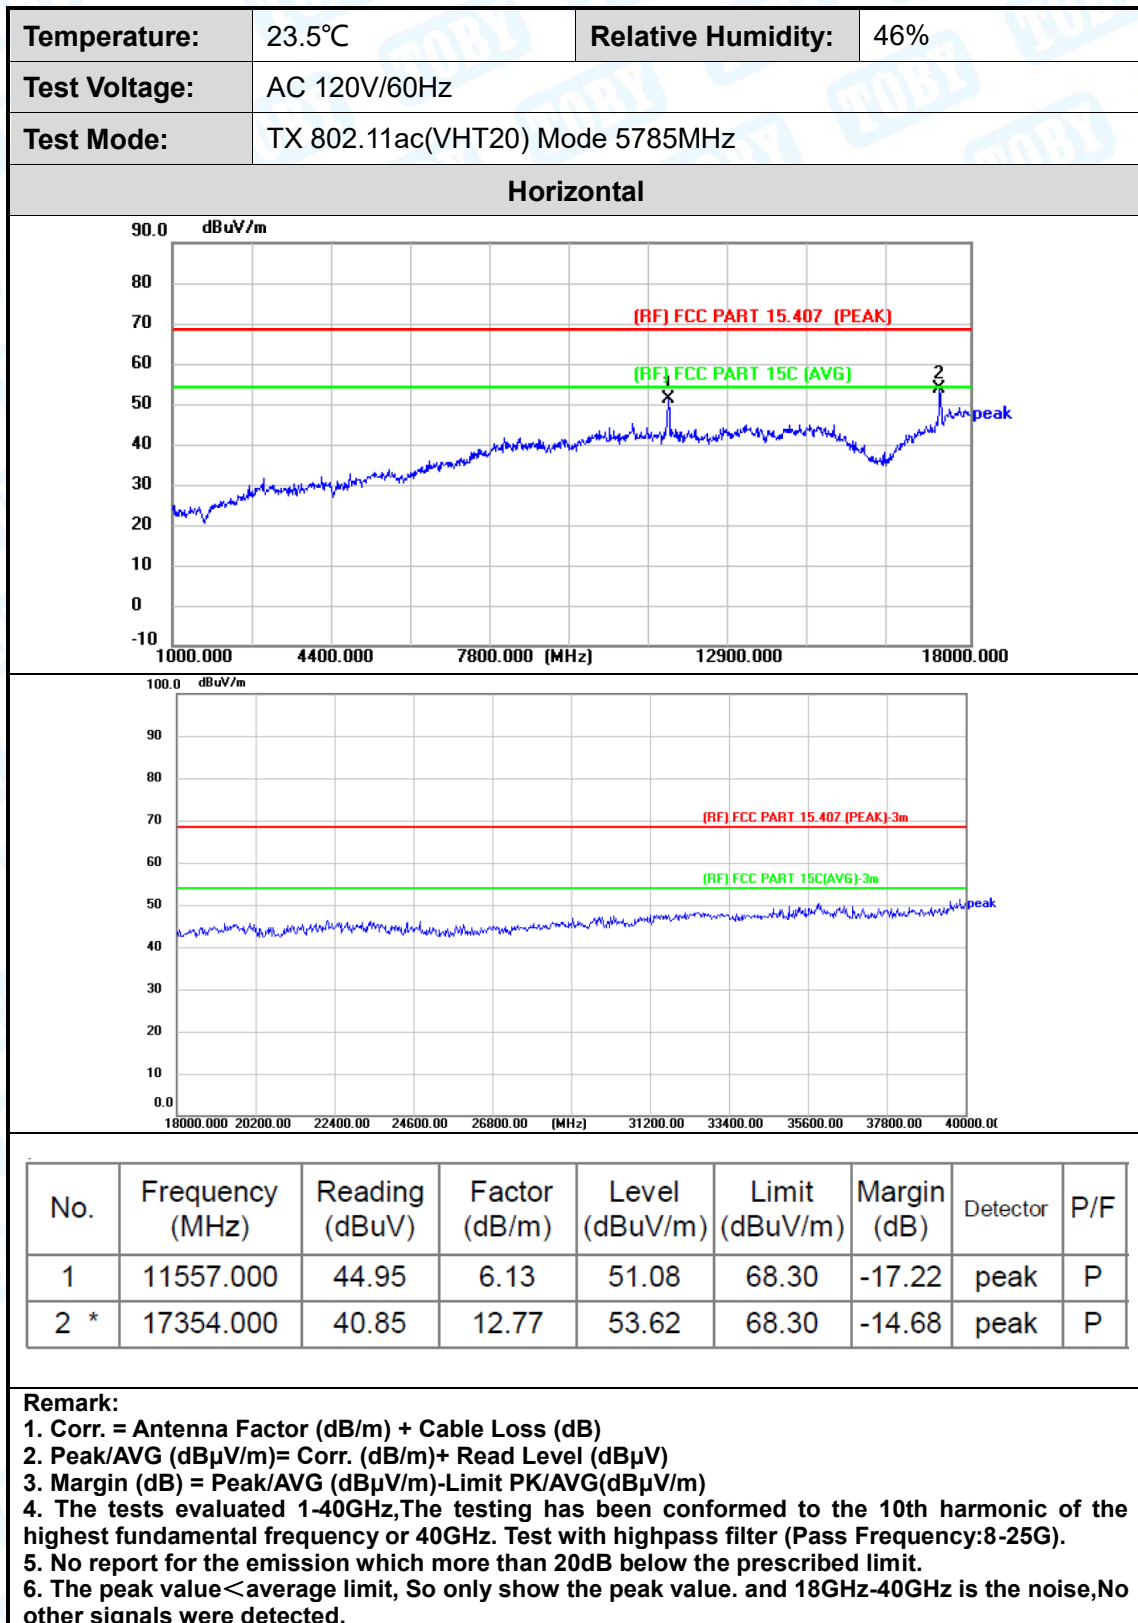


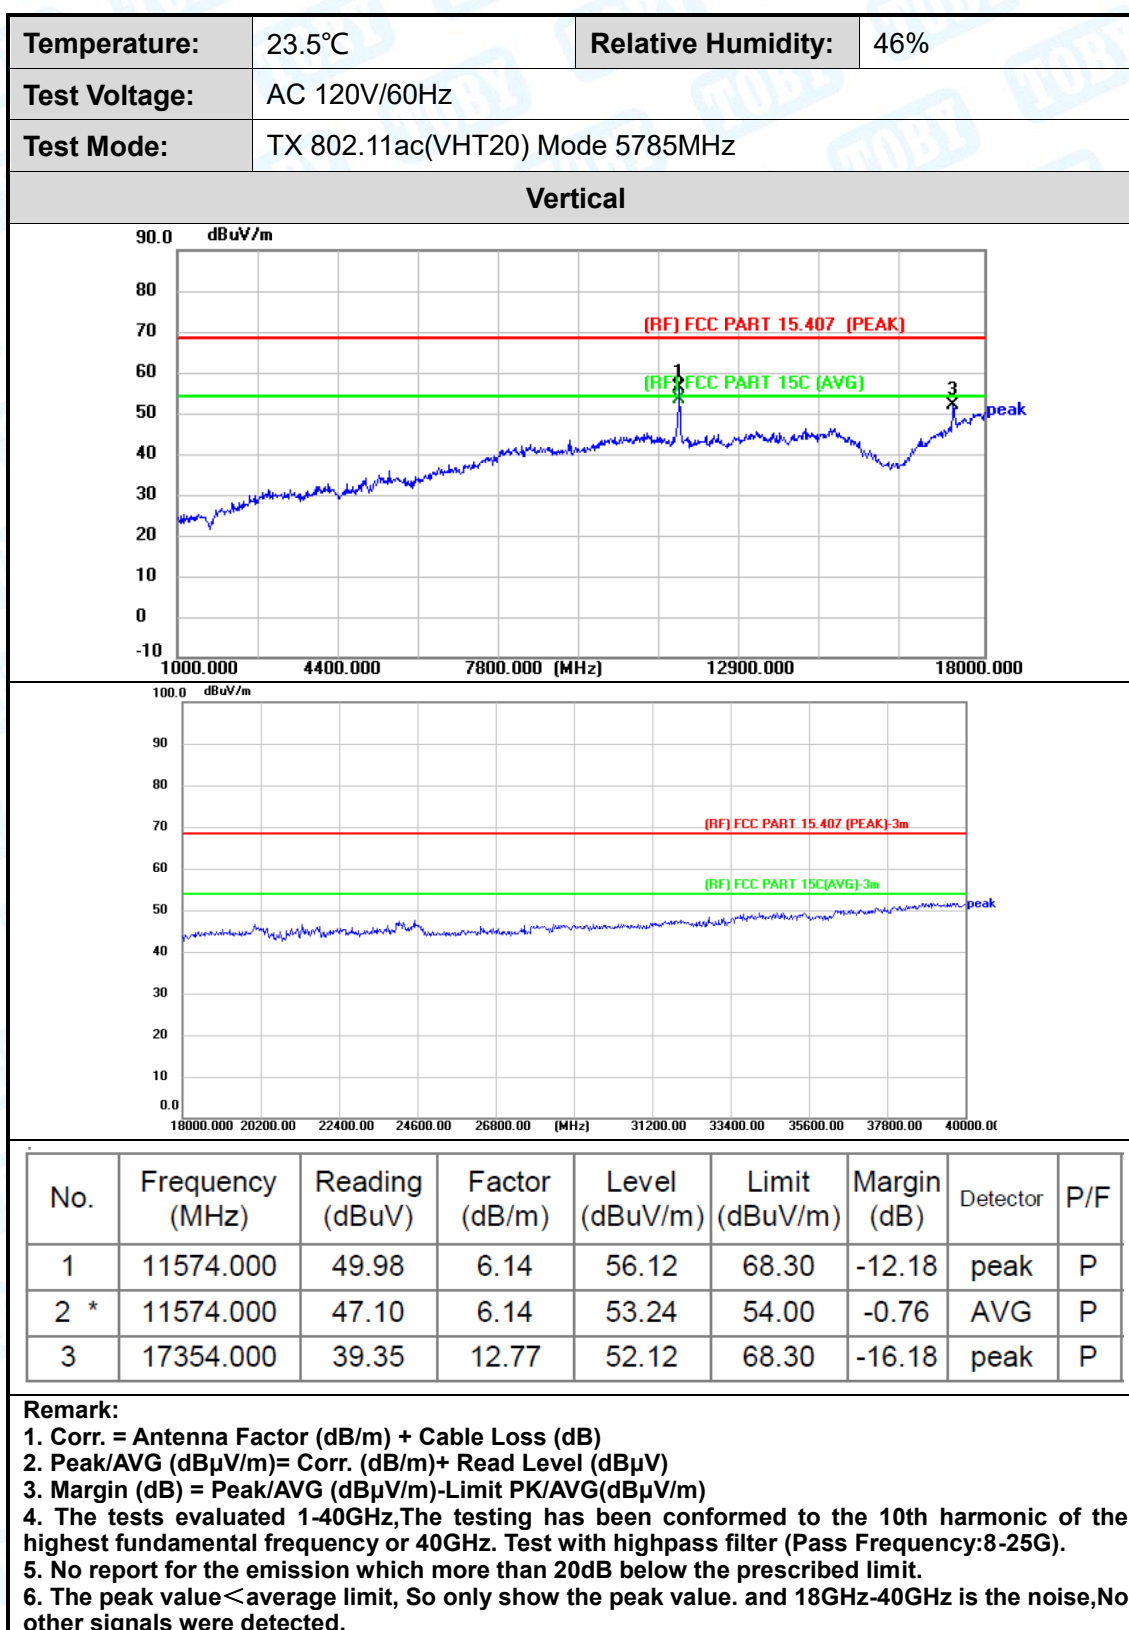


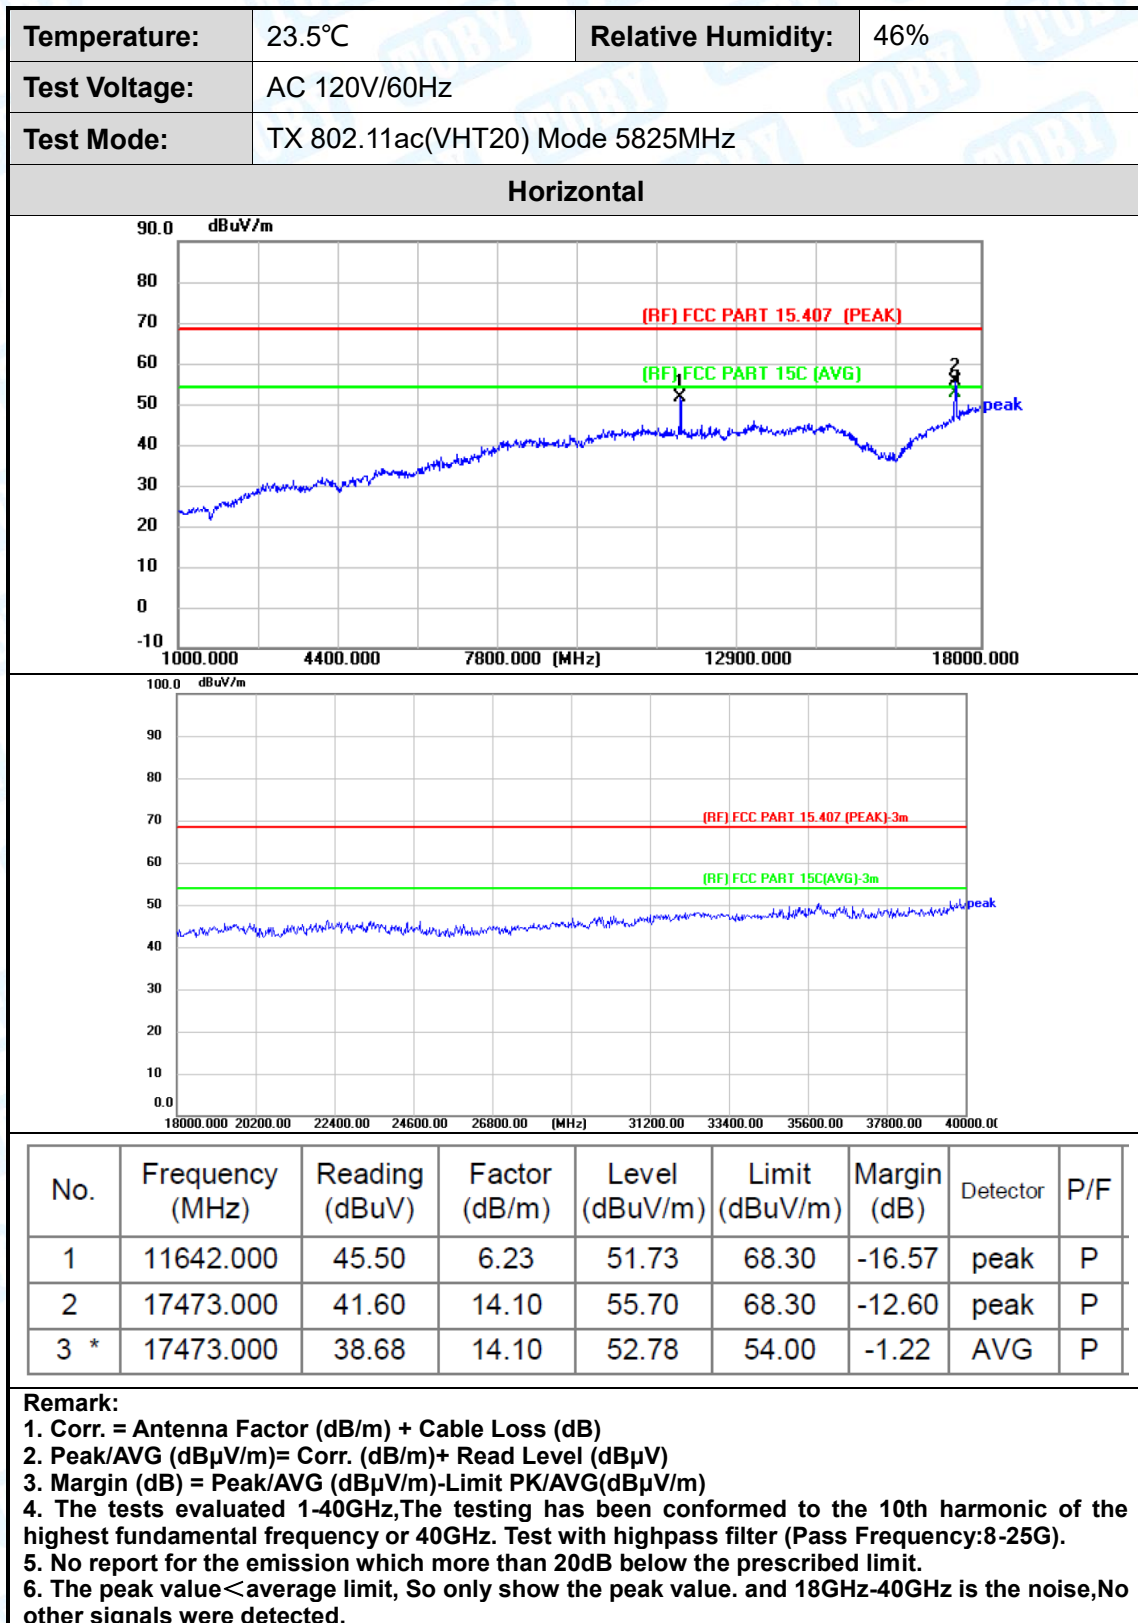


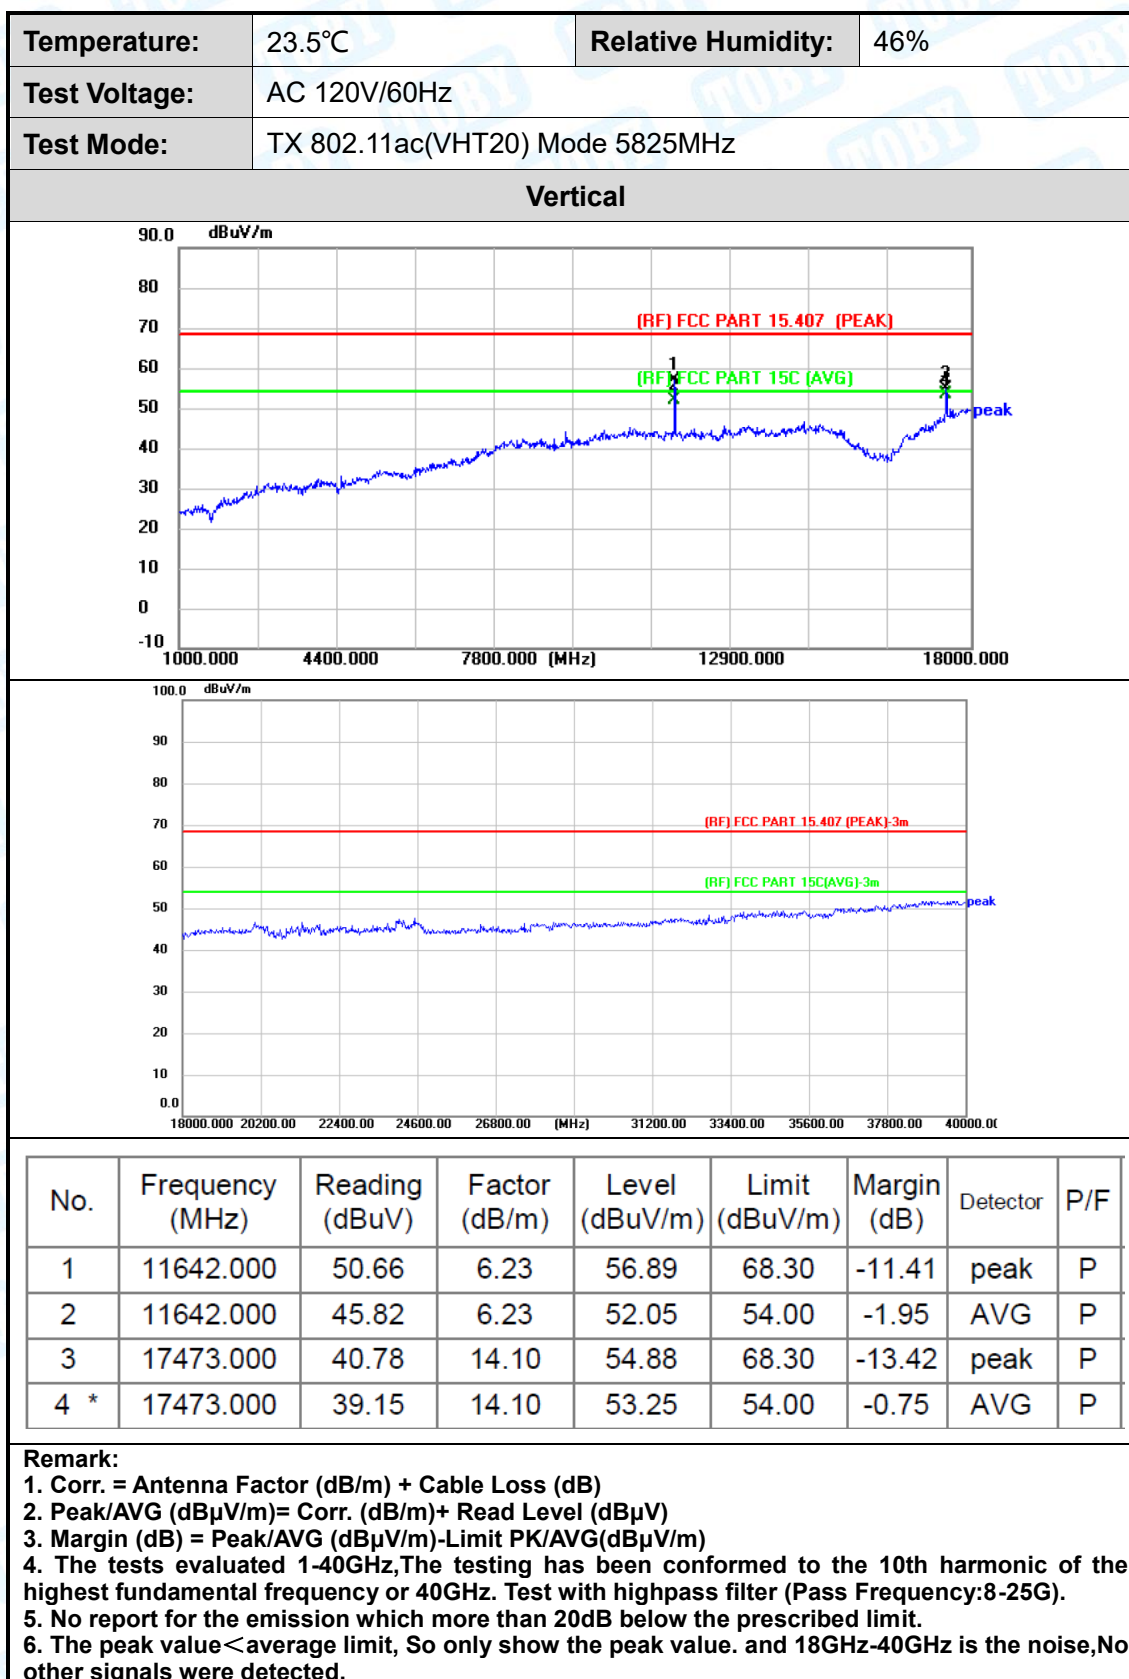


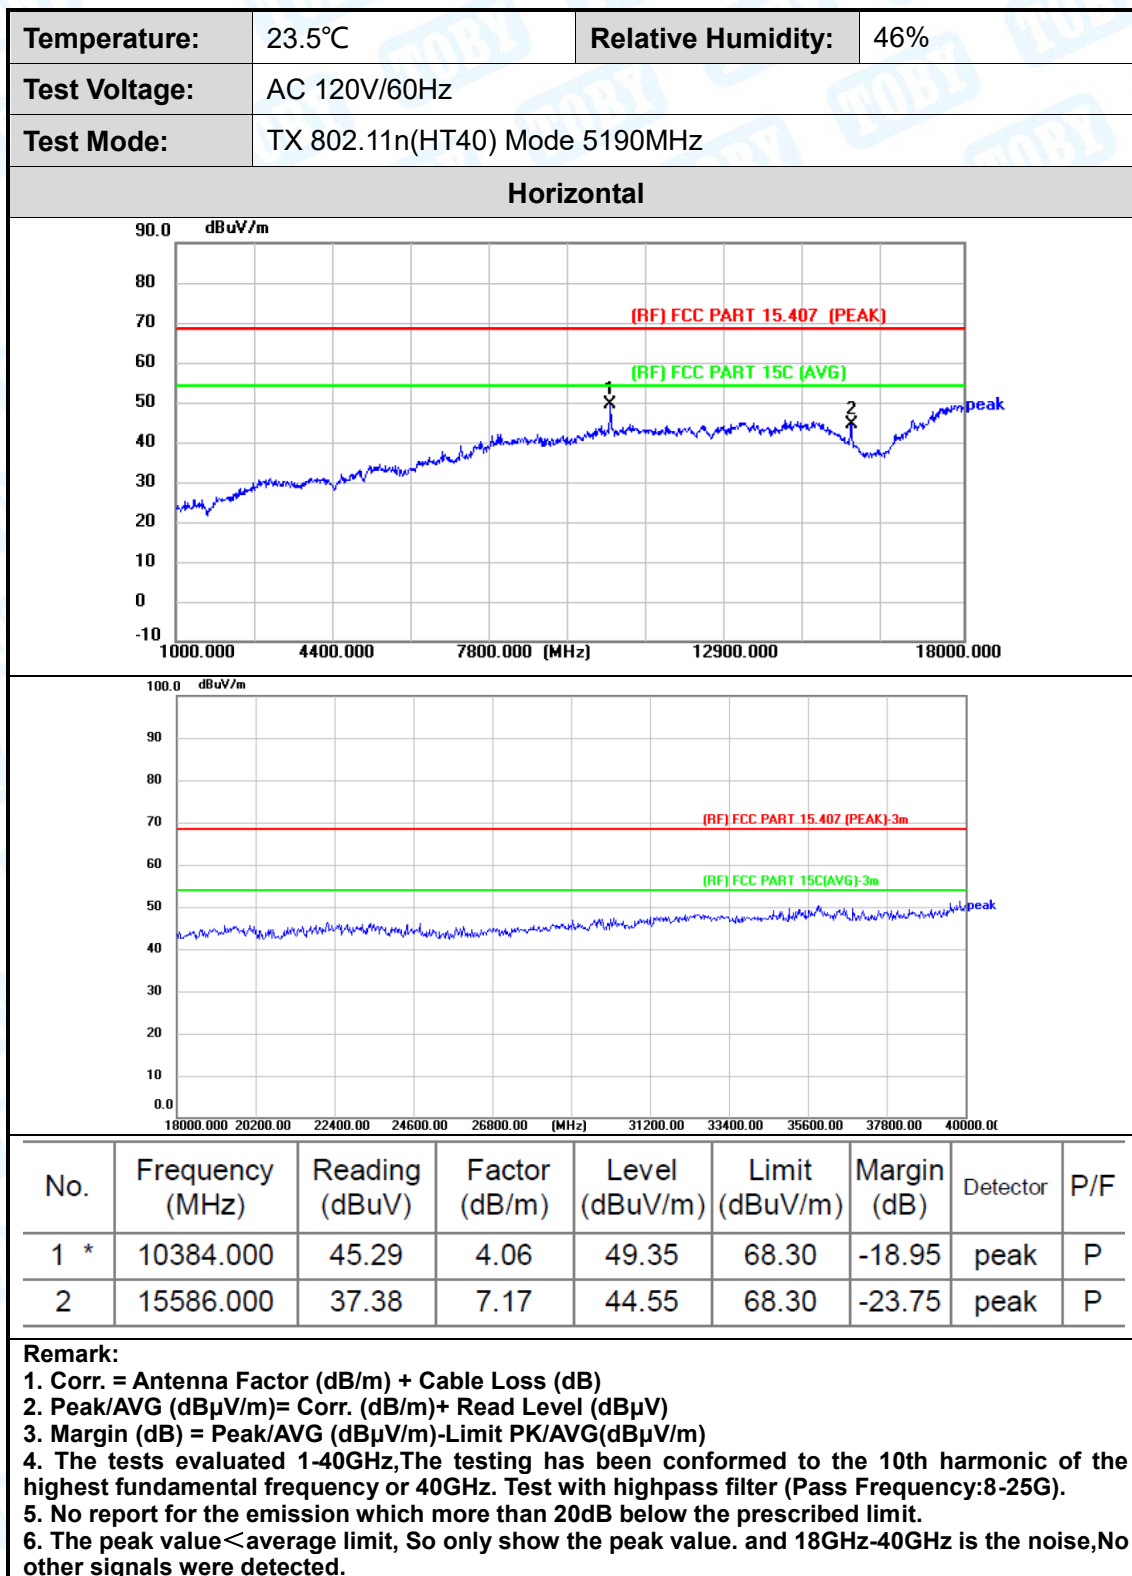

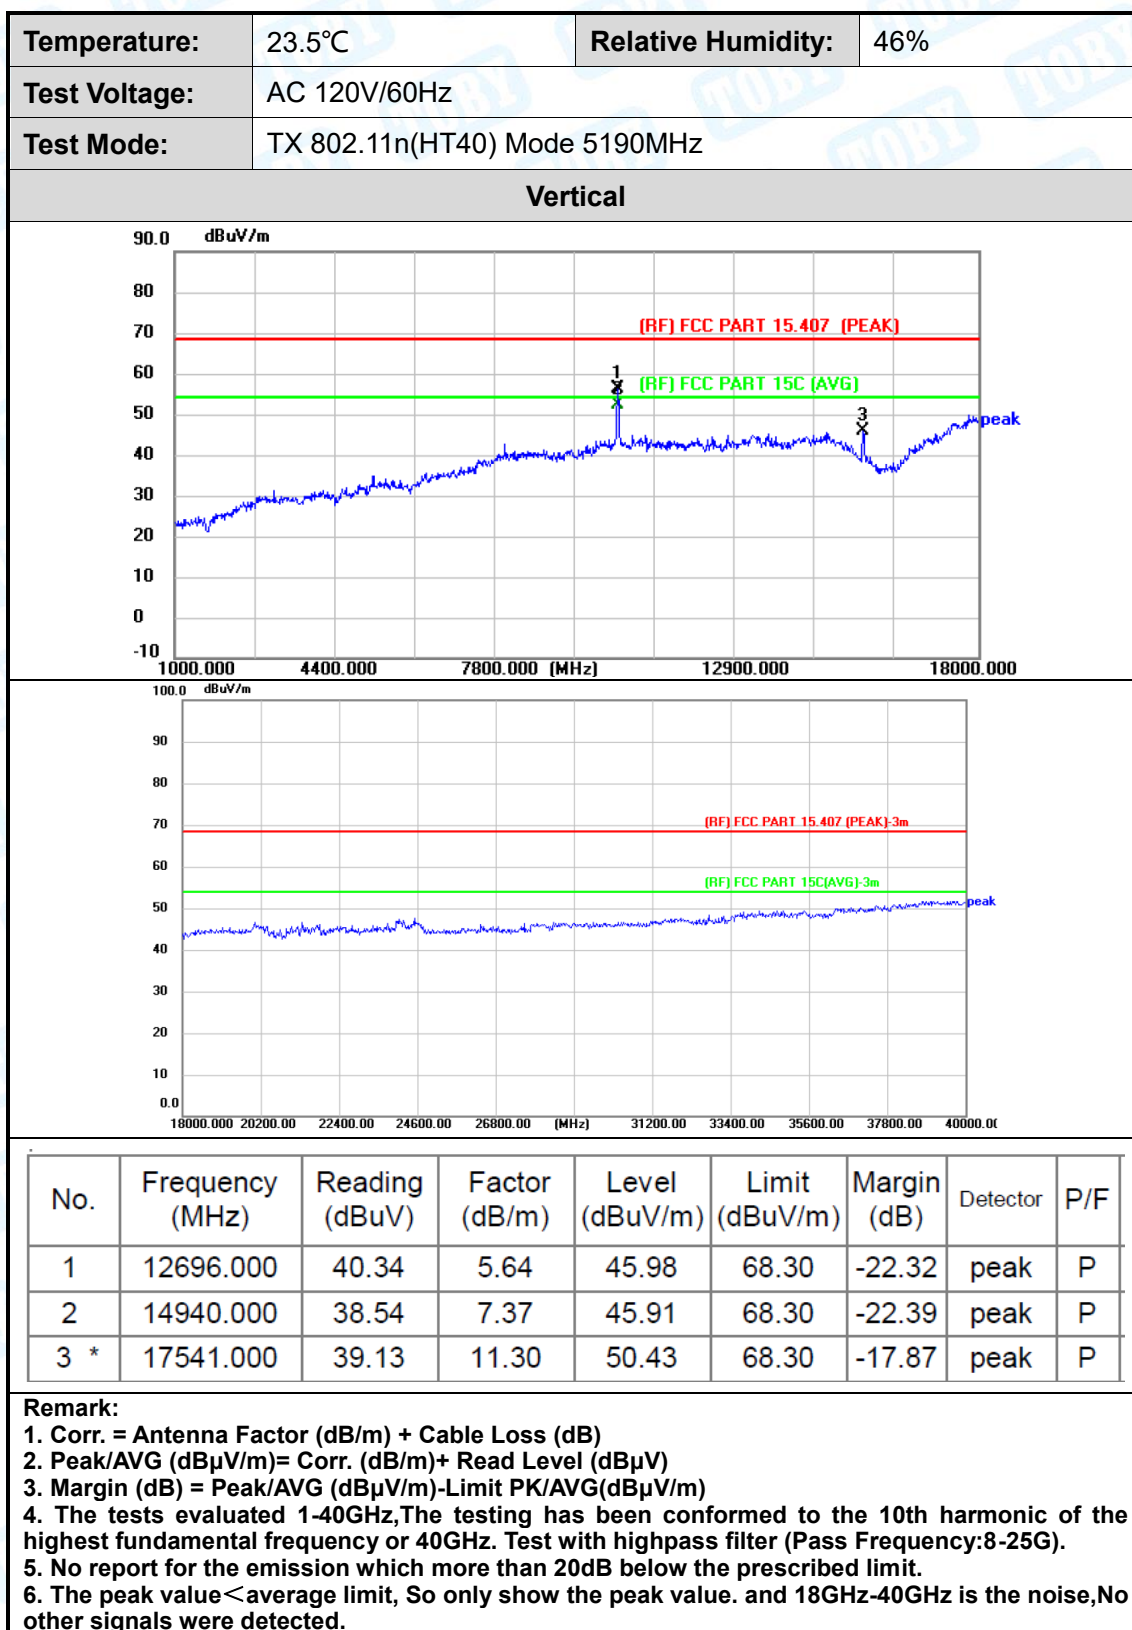


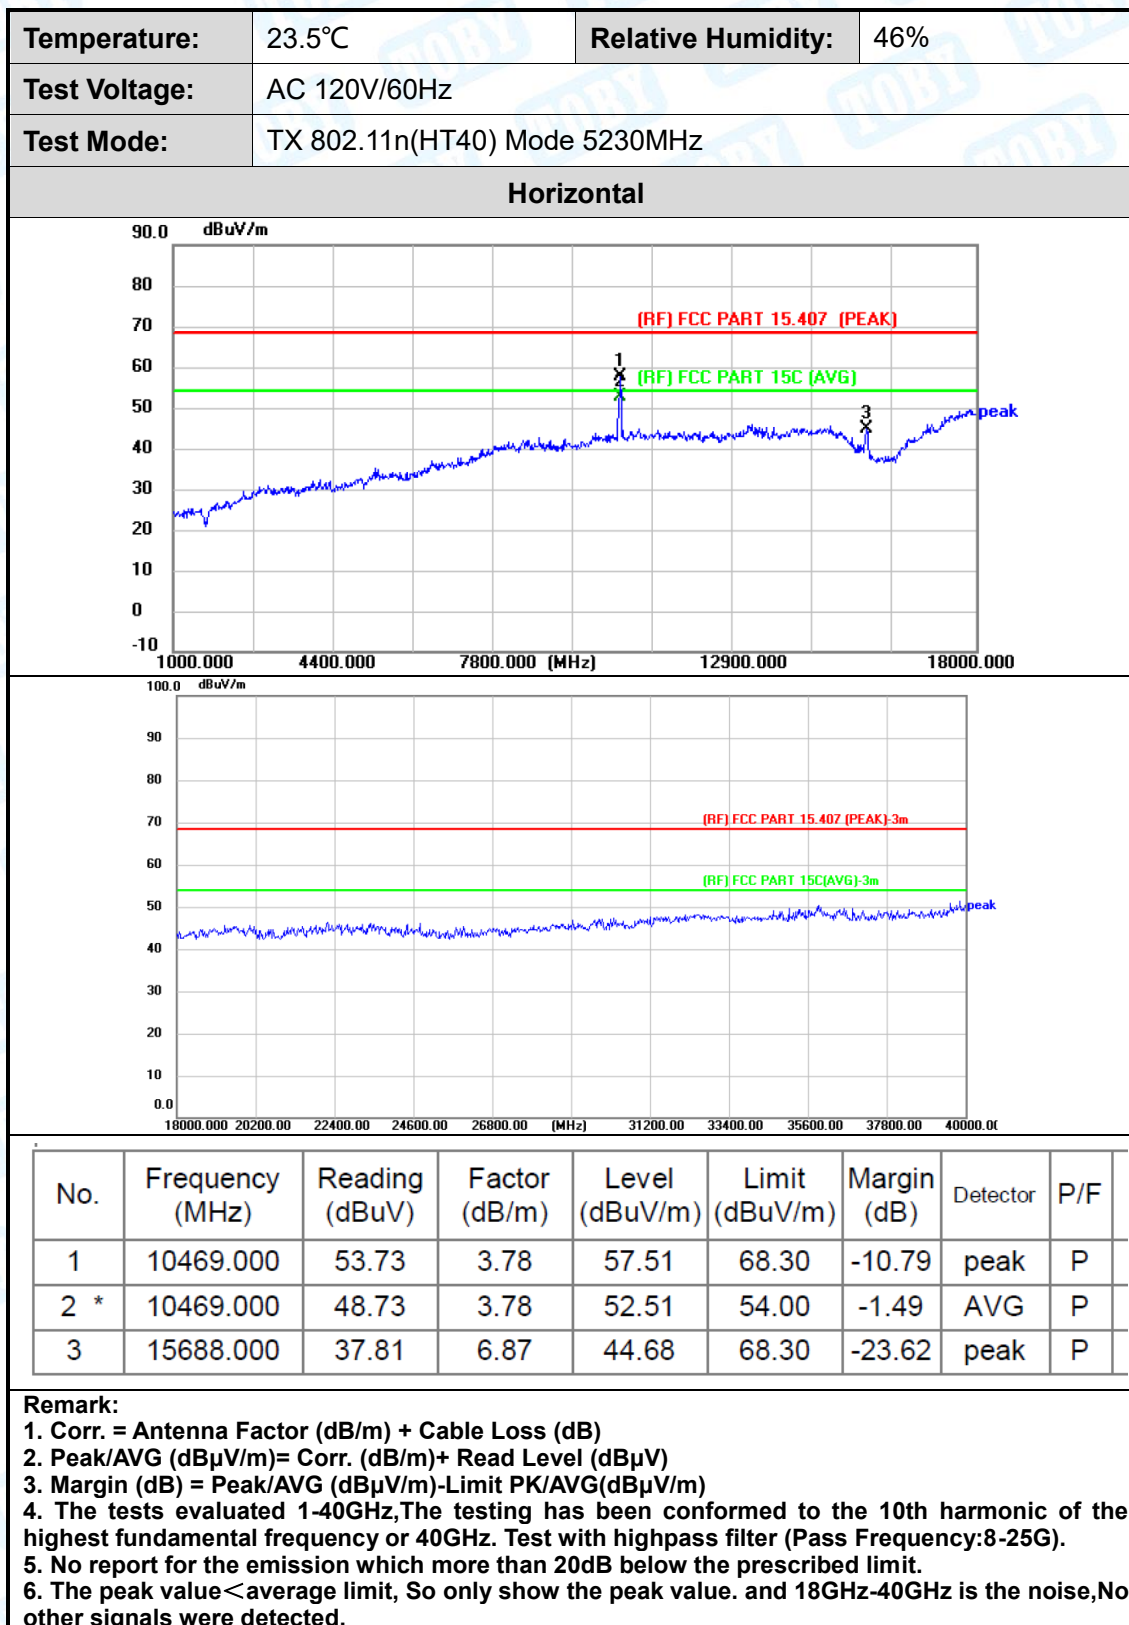


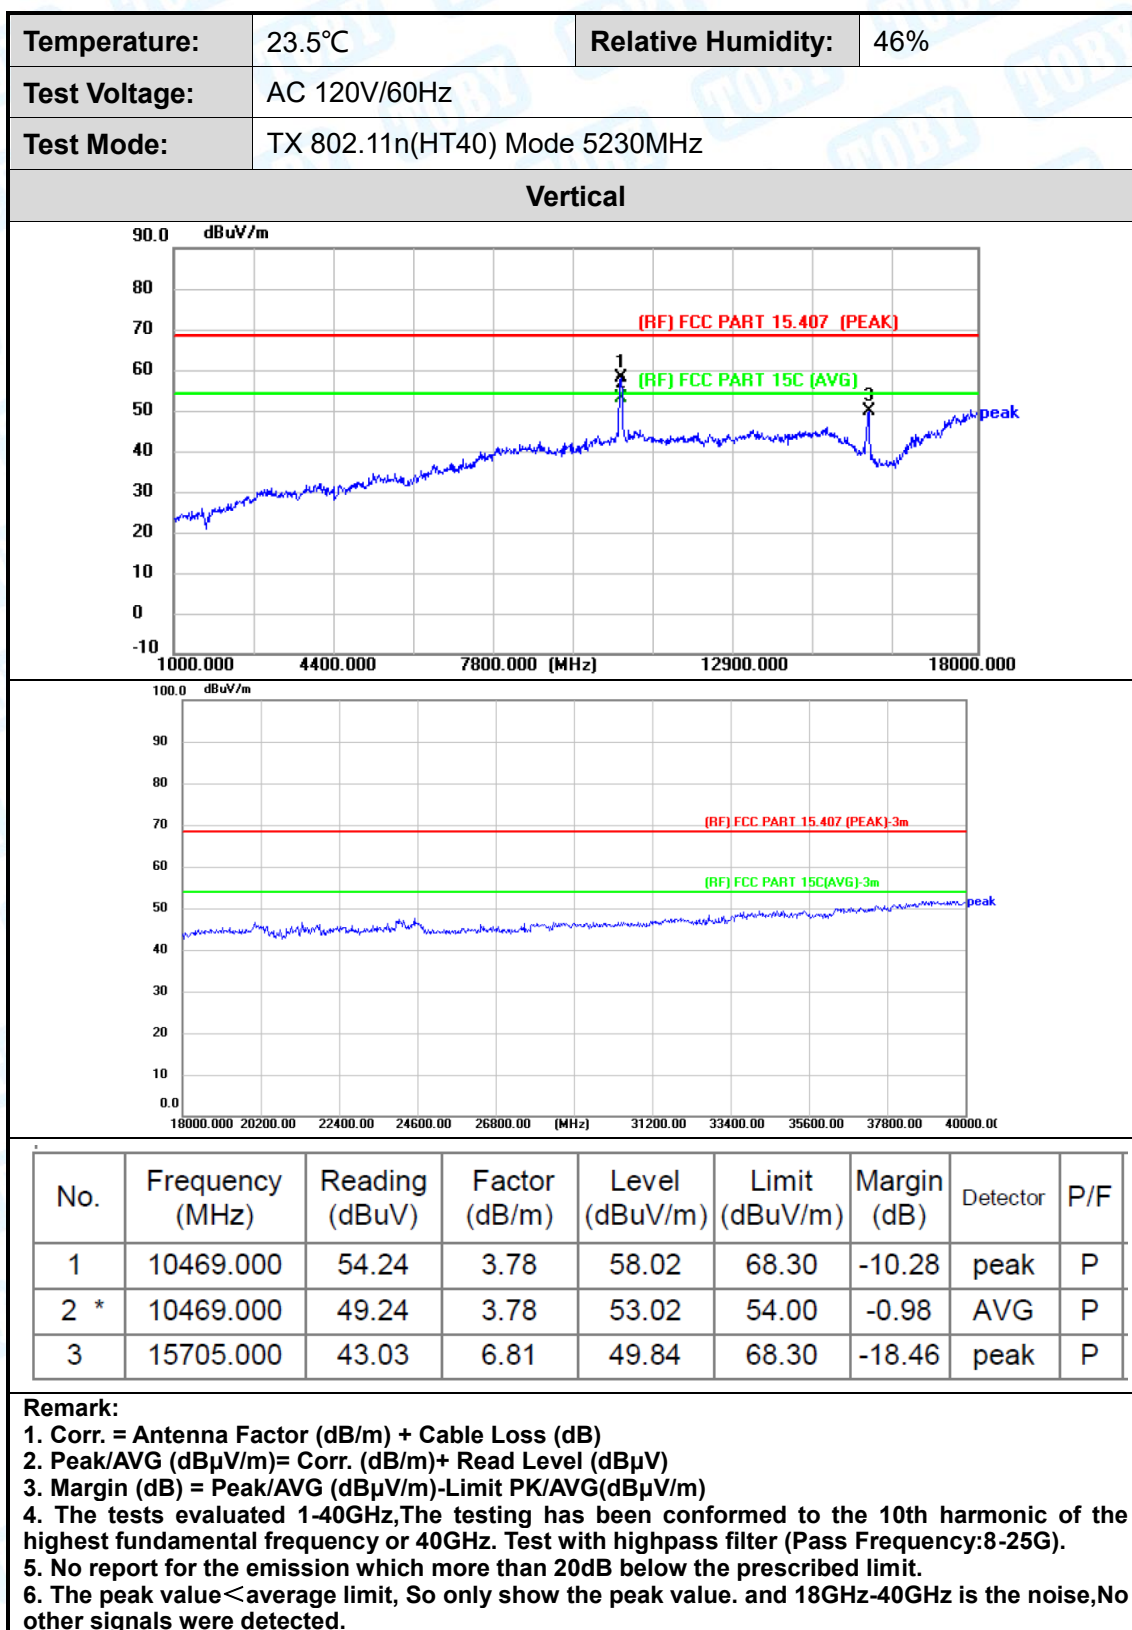

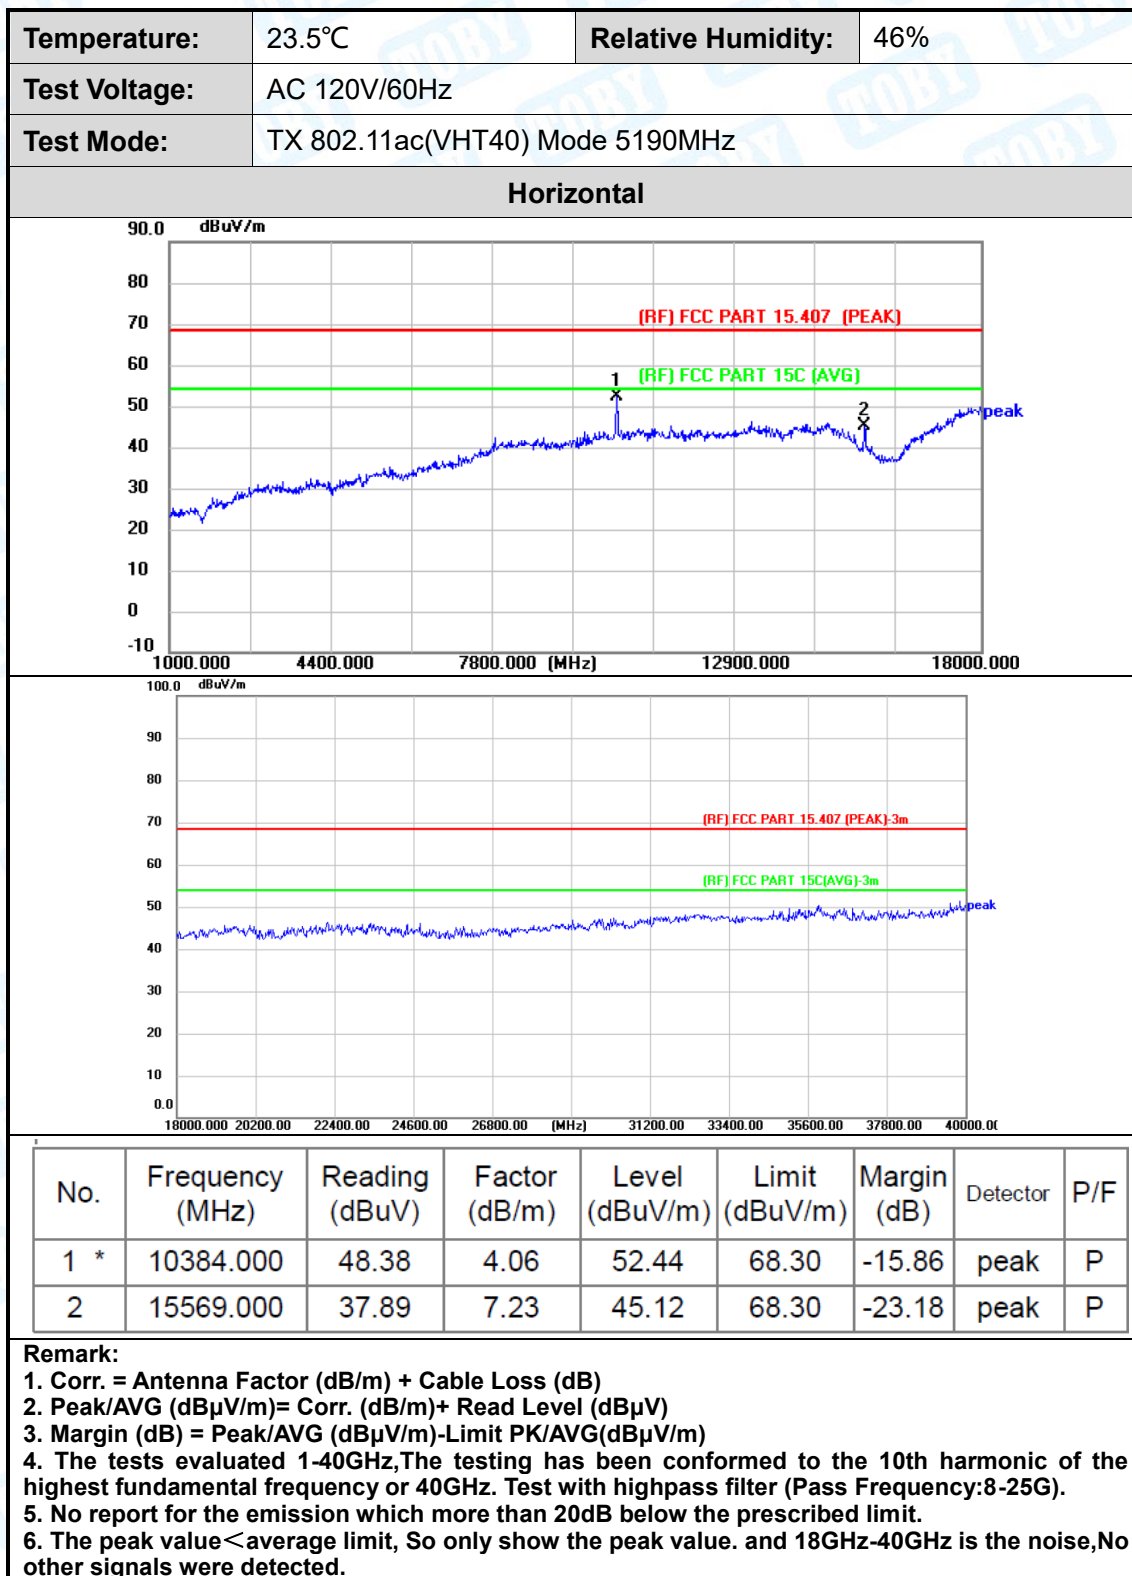

Temperature:	23.5°C	Relative Humidity:	46%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz		

Vertical

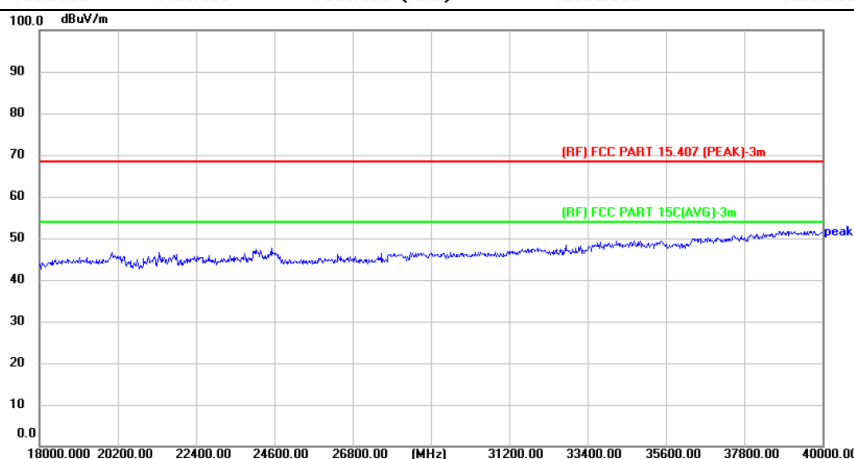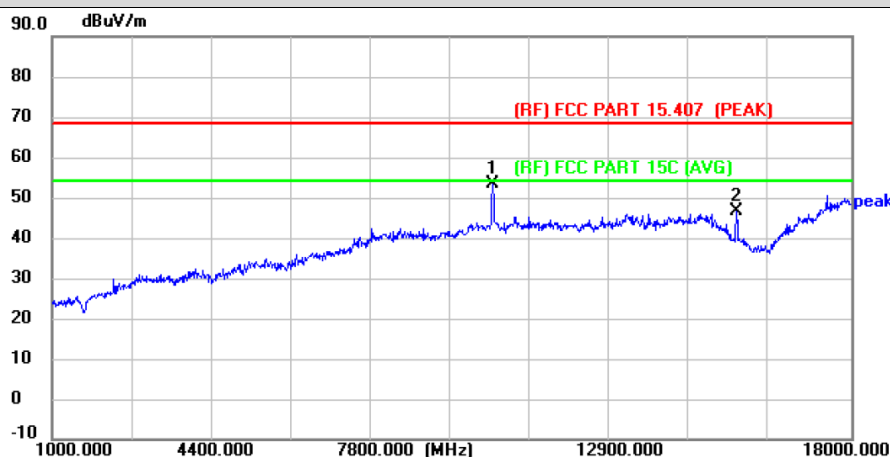

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	10367.000	49.46	4.02	53.48	68.30	-14.82	peak	P
2	15569.000	39.24	7.23	46.47	68.30	-21.83	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



