
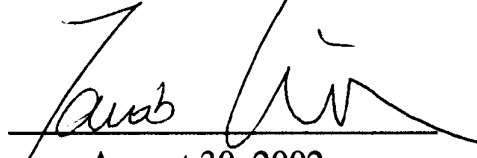


**Test Report**

1/19

Report No.	C3115715
FCC ID	IOW2400UP
Specifications	FCC Part 15, Class B
Test Method	ANSI C63.4 1992
Applicant	Chic Technology Corp.
Applicant address	16F, No. 150, Chien-I Road, 235 Chung Ho City, Taipei Hsien, Taiwan, R.O.C.
Items tested	Optical Wireless Mouse (Sample # C31572)
Model No.	CHIC 2400UP; CHIC 2401UP; CHIC 2402UP
Frequency Range	26.96MHz to 27.28MHz
Results	<b>Compliance</b> (As detailed within this report)
Date	07/16/2002 (month / day / year)(Sample received) 08/12/2002 (month / day / year)(Tested)
Prepared by	 Project Engineer
Authorized by	 V.General Manager (Jacob Lin)
Issue dat	August 30, 2002 (month / day / year)
Modifications	None
Tested by	Training Research Co., Ltd. <b>(Accredited by NVLAP)</b>
Office at	2, Lane 194, Huan-Ho Street, Hsichih, Taipei Hsien 221, Taiwan
Open site at	No. 15, Lane 530, Pa-Lian RD., Sec. 1, Hsichih City, Taipei Hsien, Taiwan, R.O.C.

**Conditions of issue :**

- *This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.*
- *The test data in this test report are following the procedures in accordance with the terms of accreditation.*
- *This test report and measurements made by TRC are traceable to the NIST only Conducted and Radiated Method (TRC is accredited by NVLAP, code No.: 200174-0).*
- *The device has been tested is fully complied with the requirements the Directive FCC Part 15.*

**Report No.: C3115715****Training Research Co., Ltd., TEL: 886-2-26461146, Fax: 886-2-26461778**

# Contents

## Chapter 1 Introduction

Description of EUT .....	3
Configuration of Test Setup.....	4
List of Support Equipment .....	6

## Chapter 2 Conducted Emission Test

Test Condition and Setup .....	8
Conducted Test Placement .....	9

## Chapter 3 Peak Power Measurement (Frequency Band: 26.96 ~ 27.28)

Test Setup .....	10
Test Procedure .....	10

## Chapter 4 Radiated Emission Test

Test Condition and Setup .....	11
Radiated Test Placement .....	12

## Appendix A :

Conducted test result .....	13
-----------------------------	----

## Appendix B :

Peak Power and Radiated test result .....	14
---	----

## Appendix C :

Band Edge of Measurement.....	18
-------------------------------	----

## ***Chapter 1 Introduction***

### ***Description of EUT:***

**EUT** : Optical Wireless Mouse  
**Model No.** : CHIC 2400UP; CHIC 2401UP; CHIC 2402UP  
**Product name** : Optical Wireless Mouse  
**FCC ID** : IOW2400UP  
**Frequency Range** : 26.96 – 27.28 MHz  
**Power Type** : Transmitter: Powered by two 1.5VDC AA batteries

\*This EUT has two channels (each with 256 IDs):

1. 27.1000 MHz
2. 27.0500 MHz

\*Battery and Charging Notice

1. At the first time of usage, please charge the batteries at least 6 to 8 hours.
2. Recommendation: please do not use the mouse during charge periods.
3. The LED indicator or the scroll wheel on the mouse will light while the mouse is low battery. Please change or recharge the batteries immediately.
4. Press any button to wake up the mouse while the mouse is in the sleeping mode.

### ***Test method:***

All measurements contained in this report were performed according to the techniques described in Measurement procedure ANSI C63.4 – 1992.

Pretest was found that the emission of operating mode is worse than standby mode. So, The final test is made at the operating mode.


During the measurement, there are two channel and three modes tested: “Operating CH-1“, “Operating CH-2“ and “Charging“ modes. The pretest was found out the testing mode: “Operating CH-1“ and “Charging“ were the worse cases and we only recorded worse cases in this report.

While testing, the EUT was made to transmit continuously and adjusted at a position, which transmitted the maximum emission.

The test placement as the photographs showed is the worst case emission placed. (If the emission is close to the ambient, the resolution BW and view resolution will be reduced and the data will be recorded by detection of maximum hold peak mode.)

***The testing configuration of test setup is showing in the next page.***


**Configuration of Test Setup(Test mode: “Normal”)**

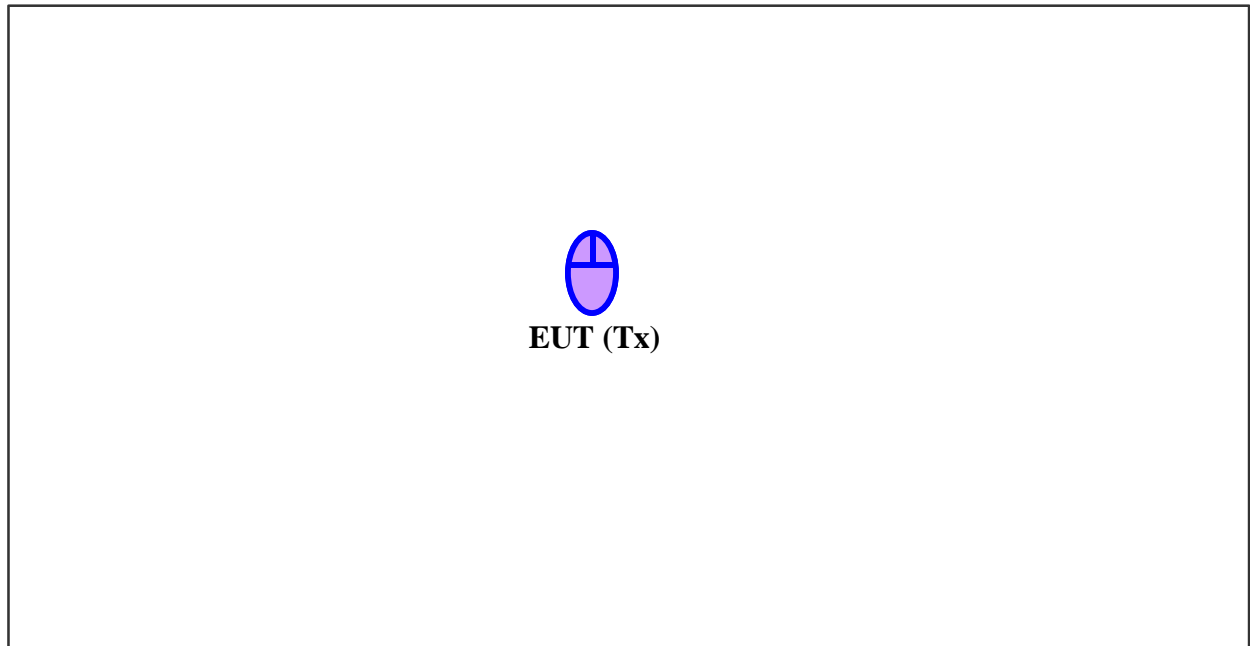

**EUT:**

Put two AA size, 1.5V battery into the battery cell of EUT, powers the subject device.  
The EUT does not be connected with any product.

**Configuration of Test Setup (Test mode: “Charging”)**

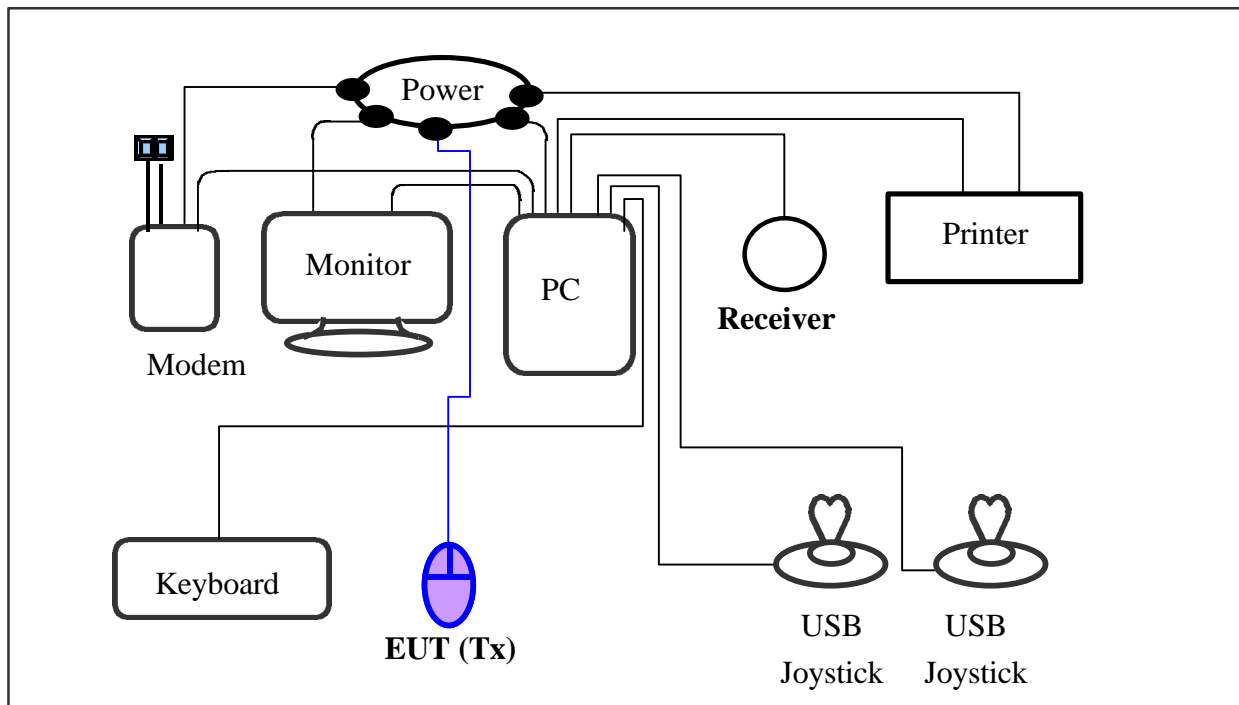

**Connections:**

**PC:**

- \*Serial Port --- via a 110cm shielded RS-232 cable to an external modem.
  - \*Monitor Port --- a monitor with 1.5m length data cable.
  - \*Keyboard port --- a keyboard with 1.5m length data cable.
  - \*Mouse port --- Receiver.
  - \*USB port A --- a USB joystick with 1.5m long, shielded, no ferrite bead data cable.
  - \*USB port B --- a USB joystick with 1.5m long, shielded, no ferrite bead data cable.
- (Each port on PC is connected with suitable device)

**EUT:**

- \*Put two AA size, 1.5V battery into the battery cell of EUT, powers the subject device.
- The EUT does not be connected with any product.
- \*Power jack --- via a 1.88m long power cable with a AC/DC adaptor (MODEL: TL-35GD-060500; INPUT: 230VAC 50Hz; OUTPUT: 6VDC 300mA).

**List of Support Equipment**

**Conducted (Radiated) test:**

**PC** : **HP Brio 85xx 6/350**  
Model No. : D6928A  
Serial No. : SG91801443  
FCC ID : Doc Approved  
Power type : 100 ~ 230VAC / 50 ~ 60Hz, 5A, Switching  
Power cord : Non-shielded, 2.33m long, Plastic, No ferrite core

**Monitor** : **HP pavilion mx70**  
Model No. : P1283A  
Serial No. : THTBR00257  
FCC ID : DOC Approved  
Power type : 100 ~ 240V AC 15A 50/60Hz  
Power cord : Shielded, 1.83m long, No ferrite core  
Data cable : Shielded, 1.46m (1.80m) long, with two ferrite cores (no ferrite core)

**Printer** : **HP**  
Model No. : C2642A  
Serial No. : SG69A196GV  
FCC ID : B94C2642X  
Power type : 230 VAC, 50Hz  
Power cord : Non-shielded, 2m long, no ferrite core  
Data cable : Shielded, 1.84m long, no ferrite core

**Modem** : **ACEEX**  
Model No. : DM-1414V  
FCC ID : IFAXDM1414  
Power type : 120VAC, 60Hz/ 9VAC, 1A  
Power cord : Non-shielded, 1.9m long, no ferrite cord  
Data cable : RS232, Shielded, 1.2m long, no ferrite core  
RJ11C x 2, 7' long non-shielded, no ferrite core

**Keyboard** : **Logitech SK-720C**  
Model No. : Y-SA2  
Serial No. : SCC04514357  
FCC ID : GYUR49SK  
Power type : By PC  
Data cable : Shielded, 1.73m long, with ferrite core

**USB Joystick** : **Padix**  
Model No. : QF-606U, QF-707U  
Serial No. : 8100848  
FCC ID : Doc Approval  
Power type : Powered by PC  
Power Cable : Shielded, 1.5M long, No ferrite bead data cable

**Receiver** : **Chic Technology Corp.**  
Model No. : C105R (CHIC 1405UP)  
Serial No. : SCC04514357  
FCC ID : N/A, Doc Approval (IOW1405UP)  
Power type : By PC  
Data cable : Shielded, 1.43m long, with ferrite core  
Nemko Project No.: 200225145

## ***Chapter 2 Conducted Emission Test***

### ***Test Condition and Setup:***

All the equipment is placed and setup according to the ANSI C63.4 – 1992. The EUT is assembled on a wooden table that is 80 cm high, is placed 40 cm from the back-wall that is a vertical conducting plane. One LISN is for EUT, the other LISN is for support equipment. They are all placed on the conductive ground. The EUT's LISN connect a line switch box for selecting L1 or L2, then connect to a preamplifier and Spectrum.

The spectrum measured from 150KHz to 30MHz. Conducted emission levels are detected at max. peak mode. But if the max. peak mode failed or over average limit, it will be measured by QP and average detection mode using the Receiver.

While testing, there is the worst-emission plot printed at peak detection mode, and there are more than 6 highest emissions relative to limit recorded. The plot is kept as the original data, not included in test report.

### ***List of test Instrument :***

<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Calibration Date</u>	
				<u>Last time</u>	<u>Next time</u>
Receiver	SCR3102	SCHAFFNER	012	03/29/02	03/28/03
LISN (EUT)	3825/2	EMCO	9411-2284	06/10/02	06/09/03
LISN (Support E.)	3825/2	EMCO	9210-2007	06/14/02	06/13/03
Preamplifier	EQ3-006	TRC	-----	05/14/02	05/13/03
Line switch box	EQ3-007	TRC	-----	05/14/02	05/13/03

The level of confidence of 95% , the uncertainty of measurement of conducted emission is  $\pm 2.02$  dB .

### ***Test Result: Pass (Appendix A)***




***Conducted Test Placement: (Photographs)***



### Chapter 3 Peak Power Measurement (Frequency Band: 26.96 ~ 27.28)

#### Test Setup:

##### 1. Test Setup:

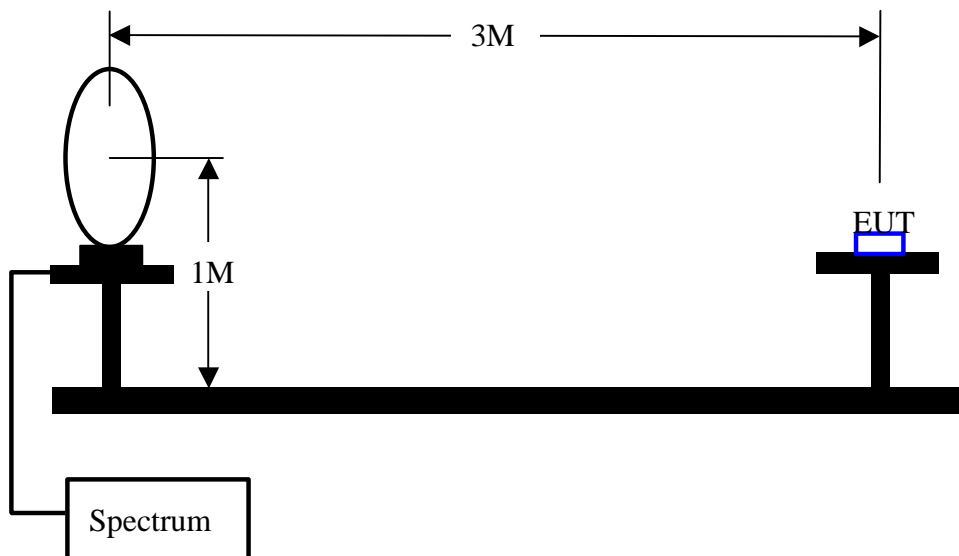

##### 2. Test Procedure:

- The EUT was setup in the anechoic chamber as shown above.
- The loop antenna was located upon its plane vertical, 3-meter distance from the EUT. The center of the loop is 1-meter above the ground plane.
- In order to find the maximum radiation, the EUT was rotated 360°. The measuring antenna was rotated about its axis at each azimuth about the EUT.

#### List of test Instrument :

Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u>	
				Last time	Next time
Receiver	SCR3102	SCHAFFNER	012	03/29/02	03/28/03
Control Box	TRC-CB-2	TRC	CB-002	N/A	N/A
Antenna	6502	EMCO	9206-2777	06/10/02	06/09/03
Open test side (Antenna, Amplify, cable calibrated together)				05/16/02	05/15/03

The level of confidence of 95% , the uncertainty of measurement of radiated emission is  $\pm 3.44$  dB .

#### Test Result : Appendix A

## **Chapter 4 Radiated Emission Test**

### **Test Condition and Setup:**

**Pretest :** Prior to the final test ,the EUT is placed in an anechoic chamber, and scan from 30MHz to 1GHz. The devices rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit. This is done to ensure the radiation exactly emits form the EUT.

**Final test:** Final radiation measurements is made on a **3 – meter** open-field test site. The EUT's maximum emission of radiation is placed on a nonconductive table, which is 0.8m height, the top surface is 1.0 x 1.5 meter. All placement is according to ANSI C63.4 - 1992.

The emissions was examined from 30 MHz to 1000 MHz measured by receiver.

The whole range Antenna is used to measure frequency from 30 MHz to 1 GHz. The final test is used the receiver.

Measure more than six top marked frequencies generated form pretest by computer step by step at each frequency. The EUT is rotated 360 degrees, and antenna is raised and lowered from 1 to 4 meters to find the maximum emission levels. The antenna is used with both horizontal and vertical polarization.

Appropriated preamplifier, which is made by TRC is used for improving sensitivity and precautions is taken to avoid overloading. The spectrum analyzer' s 6dB bandwidth is set to 120 KHz, and the EUT is measured at quasi-peak mode.

If the emission is close to the frequency band of ambient, the tester will recheck the data and the corrected data will be written in the test data sheet. If the emission is just within the ambient, the data from shield room will be taken as the final data.

### **List of test Instrument :**



Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u>	
				Last time	Next time
Receiver	SCR3102	SCHAFFNER	012	03/29/02	03/28/03
Control Box	TRC-CB-2	TRC	CB-002	N/A	N/A
Antenna	VULB 9160	SCHAFFNER	4188	11/29/01	11/29/02
Open test side (Antenna, Amplify, cable calibrated together)				05/16/02	05/15/03

The level of confidence of 95% , the uncertainty of measurement of radiated emission is  $\pm 3.44$  dB .

### **Test Result : Pass (Appendix A)**



***Radiated Test Placement: (Photographs)***

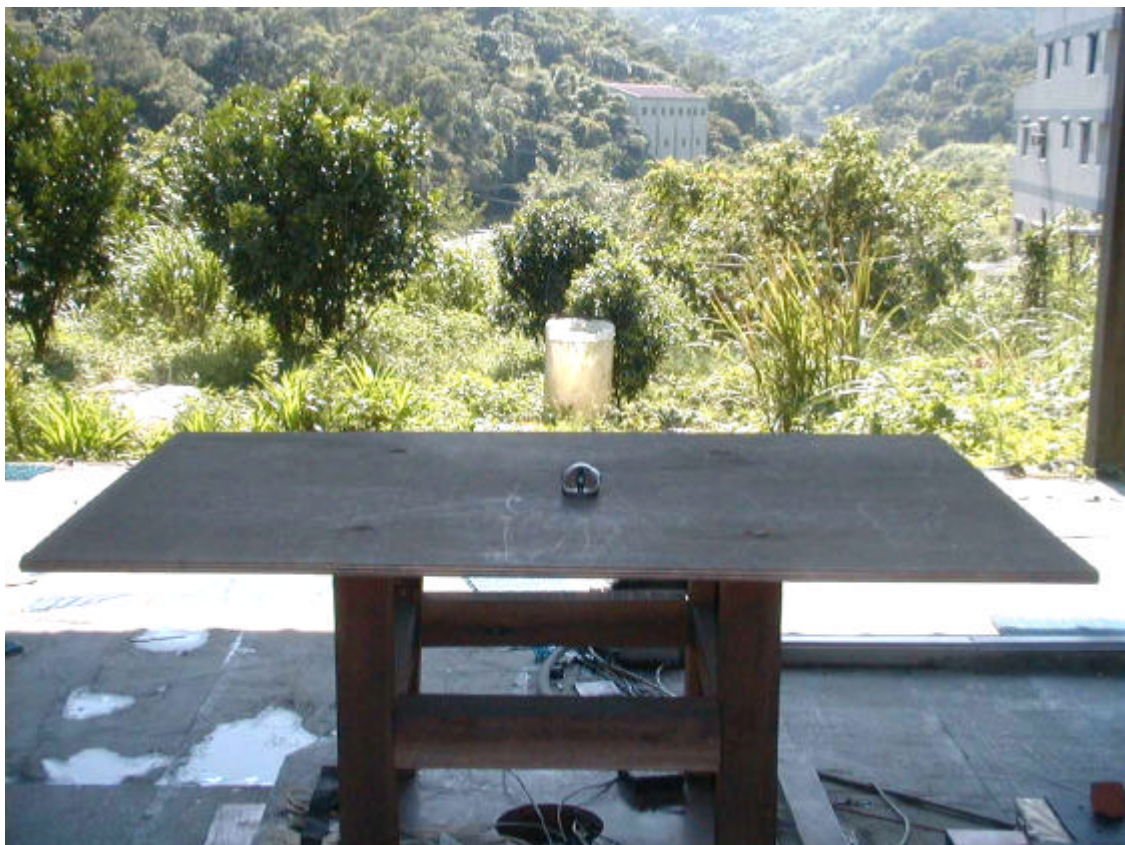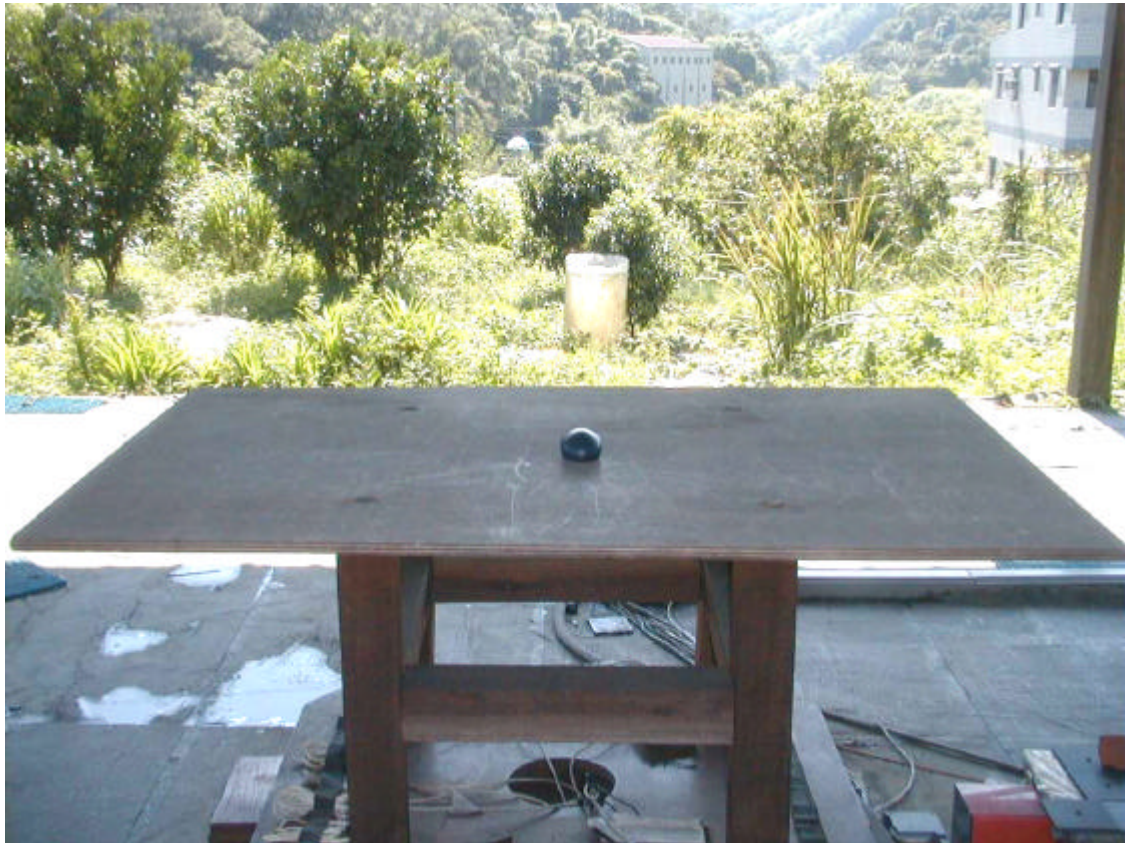

## Appendix A

### Conducted Emission Test Result: (Test mode: Charging)

Testing room :      Temperature : 21 ° C      Humidity : 72 % RH

#### Line 1

Frequency (KHz)	READING AMPLITUDE			LIMIT		Margin (dB)
	Peak (dBmV)	Quasi-Peak (dBmV)	Average (dBmV)	Quasi-Peak (dBmV)	Average (dBmV)	
499.00	30.84	***.***	***.***	48.00	***.***	-17.16
604.00	30.85	***.***	***.***	48.00	***.***	-17.15
705.00	29.40	***.***	***.***	48.00	***.***	-18.60
1113.00	29.57	***.***	***.***	48.00	***.***	-18.43
1215.00	28.56	***.***	***.***	48.00	***.***	-19.44
1516.00	30.82	***.***	***.***	48.00	***.***	-17.18
1623.00	30.89	***.***	***.***	48.00	***.***	-17.11
27090.00	40.79	***.***	***.***	48.00	***.***	-7.21
---.---	---.---	---.---	---.---	---.---	---.---	---.---
---.---	---.---	---.---	---.---	---.---	---.---	---.---

#### Line 2

Frequency (KHz)	READING AMPLITUDE			LIMIT		Margin (dB)
	Peak (dBmV)	Quasi-Peak (dBmV)	Average (dBmV)	Quasi-Peak (dBmV)	Average (dBmV)	
499.00	32.17	***.***	***.***	48.00	***.***	-15.83
604.00	30.79	***.***	***.***	48.00	***.***	-17.21
705.00	30.55	***.***	***.***	48.00	***.***	-17.45
793.00	28.24	***.***	***.***	48.00	***.***	-19.76
898.00	28.59	***.***	***.***	48.00	***.***	-19.41
11060.00	29.30	***.***	***.***	48.00	***.***	-18.70
27090.00	38.56	***.***	***.***	48.00	***.***	-9.44
---.---	---.---	---.---	---.---	---.---	---.---	---.---
---.---	---.---	---.---	---.---	---.---	---.---	---.---
---.---	---.---	---.---	---.---	---.---	---.---	---.---

\*The reading amplitudes are all under limit.

## Appendix B

### Peak Power Test Result: (Horizontal)(Test mode: Normal)

Frequency	Reading Amplitude	Correction Factors	Corrected Amplitude	Limit	Margin
MHz	dBμV/m	dB	dBμV/m	dBμV/m	dB
27.1000	72.43	-8.30	64.13	80.00	-15.13

### Radiated Emission Test Result: (Horizontal) (Test mode: Normal)

Test Conditions:

Testing site :      Temperature : 28 ° C      Humidity : 73 % RH

Frequency	Reading Amplitude	Ant. Height	Table	Correction Factors	Corrected Amplitude	Class B Limit	Margin
MHz	dBμV/m	m	degree	dB	dBμV/m	dBμV/m	dB
125.4525	39.05	2.50	48	-4.72	34.33	43.52	-9.19
197.1525	33.82	2.50	121	-5.40	28.42	43.52	-15.10
415.6900	21.82	0.97	32	2.97	24.79	46.02	-21.23
581.9680	27.32	0.97	328	6.15	33.47	46.02	-12.55
***							

Note:

1. Margin = Amplitude – limit, *if margin is minus means under limit.*
2. Corrected Amplitude = Reading Amplitude – Correction Factors
3. Correction factor = Antenna factor + ( Cable Loss – Amplitude gain)  
(For example : 30MHz correction factor = 15.5 + (-15.26) = 0.24 dB/m)

**Peak Power Test Result: (Vertical) (Test mode: Normal)**

Frequency	Reading Amplitude	Correction Factors	Corrected Amplitude	Limit	Margin
MHz	dBμV/m	dB/m	dBμV	dBμV/m	dB
27.1025	75.62	-8.30	67.32	80.00	-12.68

**Radiated Emission Test Result: (Vertical) (Test mode: Normal)**

Test Conditions:

Testing site : Temperature : 28 ° C Humidity : 73 % RH

Frequency	Reading Amplitude	Ant. Height	Table	Correction Factors	Corrected Amplitude	Class B Limit	Margin
MHz	dBμV/m	m	degree	dB	dBμV/m	dBμV/m	dB
126.0025	43.43	1.00	72	-4.66	38.77	43.52	-4.75
156.0025	43.09	2.50	200	-4.47	38.62	43.52	-4.90
270.4900	37.67	1.00	306	-3.02	34.65	46.02	-11.37
***							

Note:

1. Margin = Amplitude – limit, *if margin is minus means under limit.*
2. Corrected Amplitude = Reading Amplitude – Correction Factors
3. Correction factor = Antenna factor + ( Cable Loss – Amplitude gain)  
(For example : 30MHz correction factor = 15.5 + (–15.26) = 0.24 dB/m)

**Peak Power Test Result: (Horizontal)(Test mode: Charging)**

Frequency	Reading Amplitude	Correction Factors	Corrected Amplitude	Limit	Margin
MHz	dBμV/m	dB	dBμV/m	dBμV/m	dB
27.1000	72.04	-8.30	63.74	80.00	-16.26

**Radiated Emission Test Result: (Horizontal) (Test mode: Charging)**

Test Conditions:

Testing site : Temperature : 28 ° C Humidity : 73 % RH

Frequency	Reading Amplitude	Ant. Height	Table	Correction Factors	Corrected Amplitude	Class B Limit	Margin
MHz	dBμV/m	m	degree	dB	dBμV/m	dBμV/m	dB
125.4525	35.92	2.51	312	-4.72	31.20	43.52	-12.32
185.1580	29.81	1.00	296	-5.96	23.85	43.52	-19.67
334.0500	26.12	1.00	287	-0.36	25.76	46.02	-20.26
***							

Note:

1. Margin = Amplitude – limit, *if margin is minus means under limit.*
2. Corrected Amplitude = Reading Amplitude – Correction Factors
3. Correction factor = Antenna factor + ( Cable Loss – Amplitude gain)  
(For example : 30MHz correction factor = 15.5 + (–15.26) = 0.24 dB/m)



**Peak Power Test Result: (Vertical) (Test mode: Charging)**

Frequency	Reading Amplitude	Correction Factors	Corrected Amplitude	Limit	Margin
MHz	dBμV/m	dB/m	dBμV	dBμV/m	dB
27.1025	76.24	-8.30	67.94	80.00	-12.06

**Radiated Emission Test Result: (Vertical) (Test mode: Charging)**

Test Conditions:

Testing site : Temperature : 28 ° C Humidity : 73 % RH

Frequency	Reading Amplitude	Ant. Height	Table	Correction Factors	Corrected Amplitude	Class B Limit	Margin
MHz	dBμV/m	m	degree	dB	dBμV/m	dBμV/m	dB
125.4490	43.29	0.97	134	-4.73	38.56	43.52	-4.96
288.0000	25.67	2.51	180	-2.69	22.98	46.02	-23.04
384.0663	24.19	0.97	349	1.47	25.66	46.02	-20.36
***							


Note:

1. Margin = Amplitude – limit, *if margin is minus means under limit.*
2. Corrected Amplitude = Reading Amplitude – Correction Factors
3. Correction factor = Antenna factor + ( Cable Loss – Amplitude gain)  
(For example : 30MHz correction factor = 15.5 + (–15.26) = 0.24 dB/m)

## Appendix C


**Band Edge of Measurement: (Frequency Band: 26.96 ~ 27.28)**

Lower channel

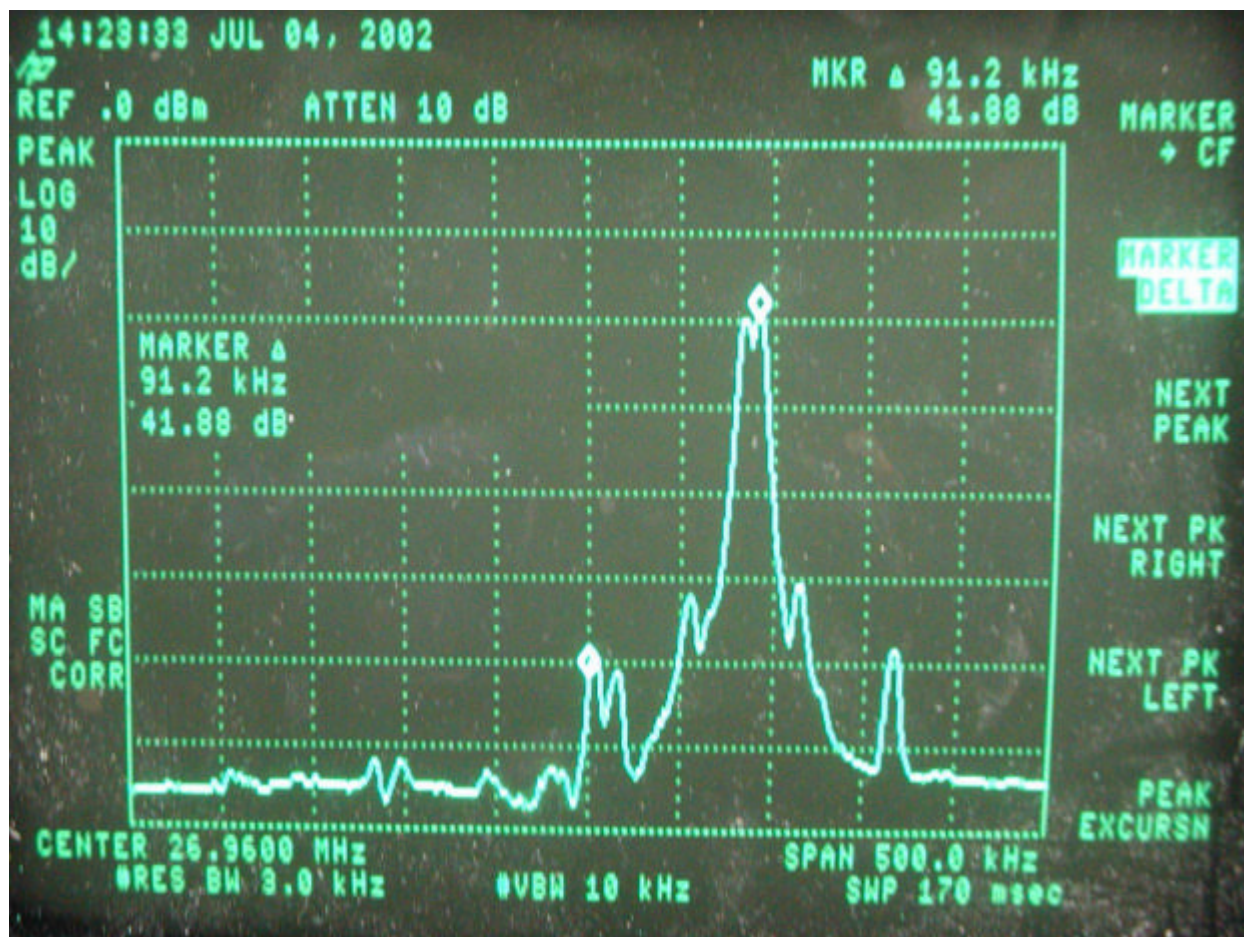

26.96MHz << Class B Limit.

Upper channel:

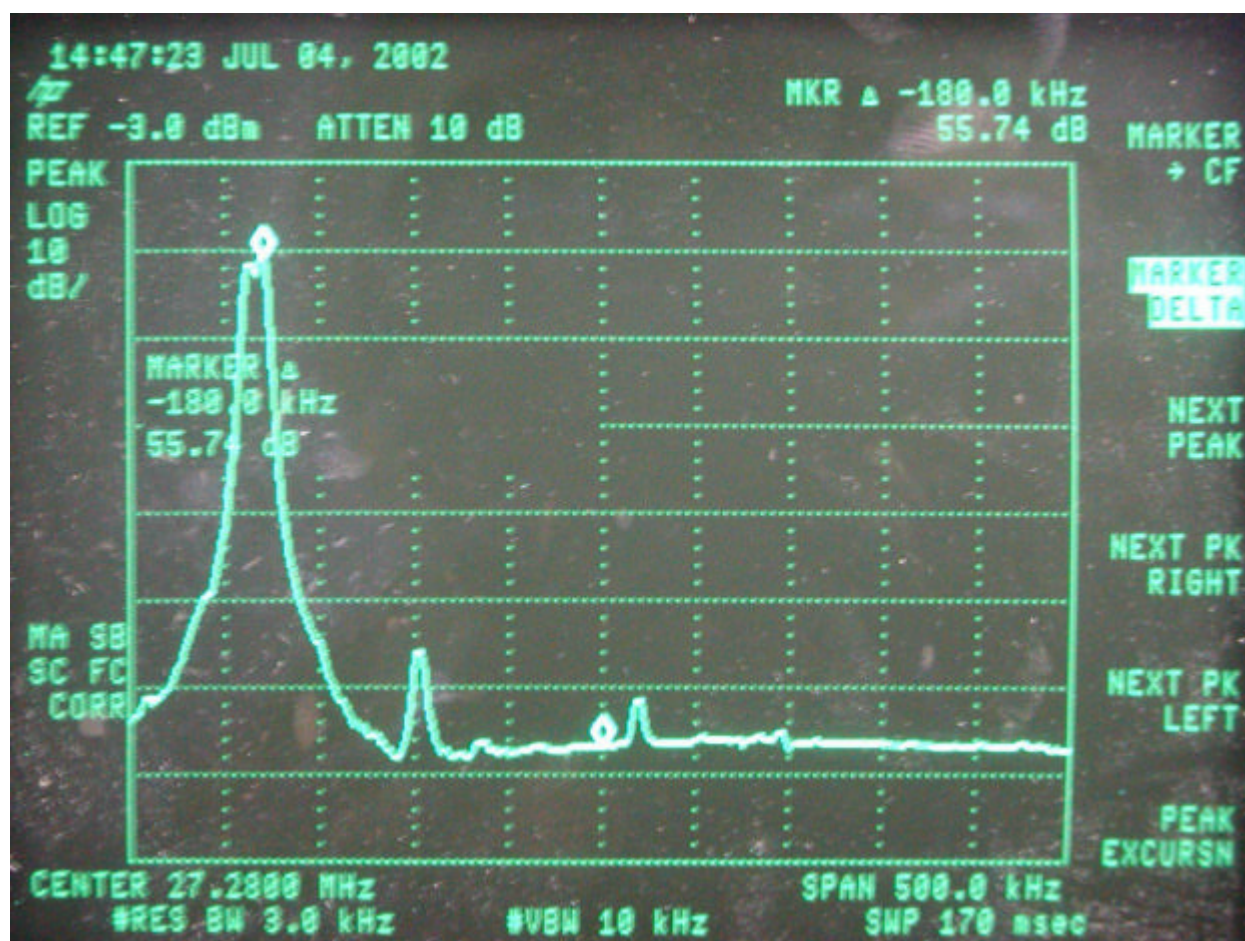

27.28 MHz >> Class B Limit.