






11G_Ant1_2437_0~Reference

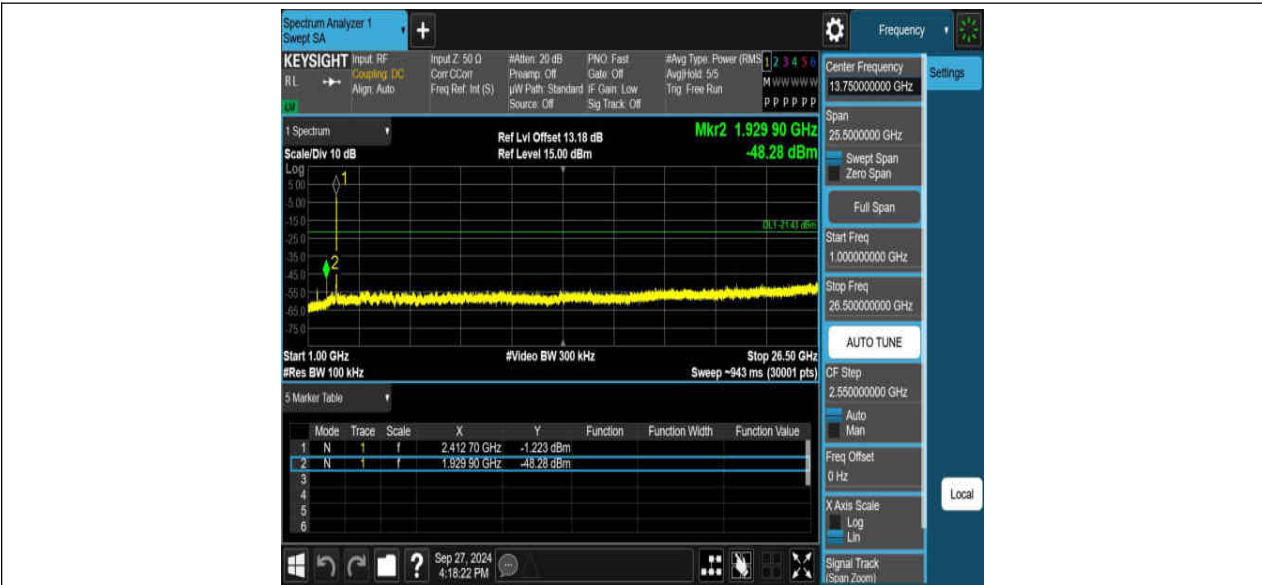


11G_Ant1_2437_30~1000

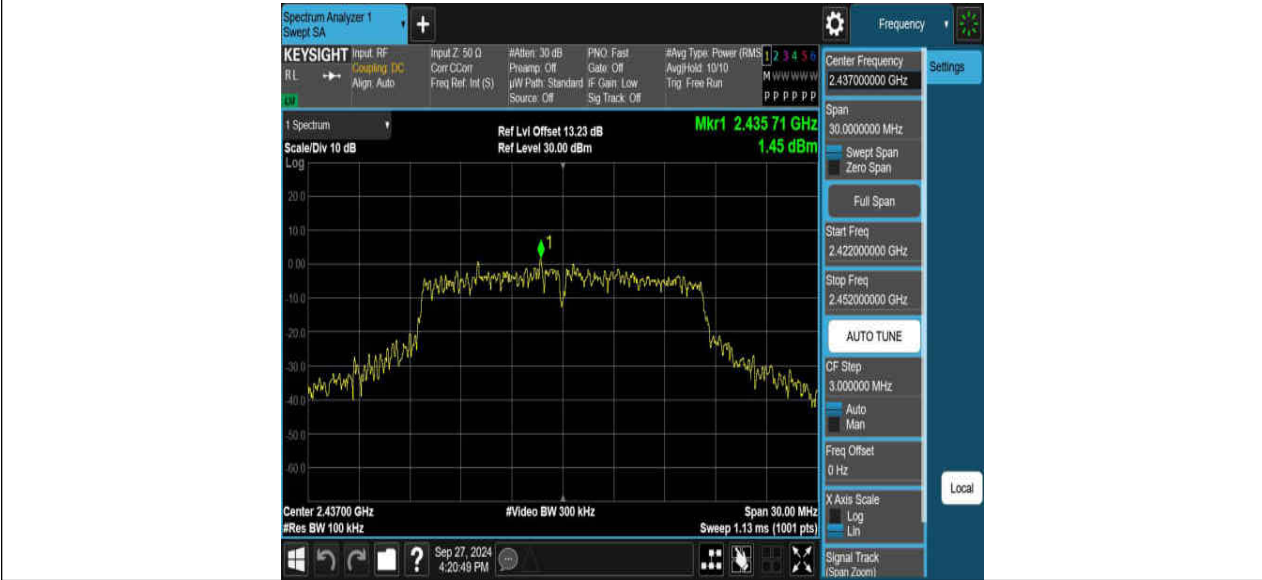

11G_Ant1_2437_1000~26500

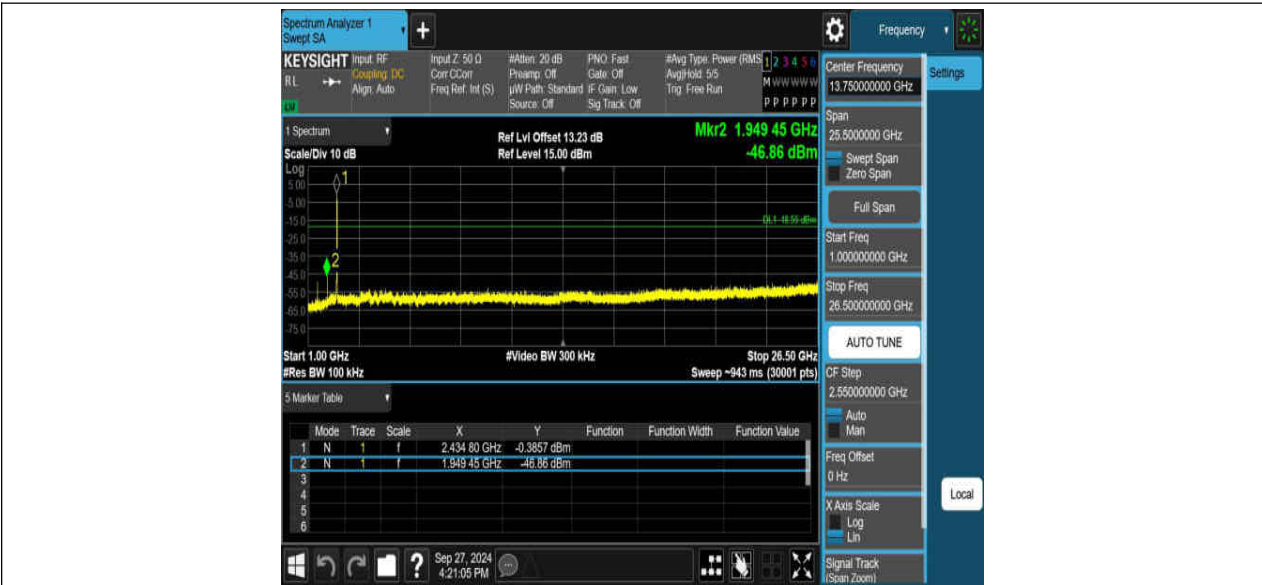


11G_Ant1_2462_0~Reference

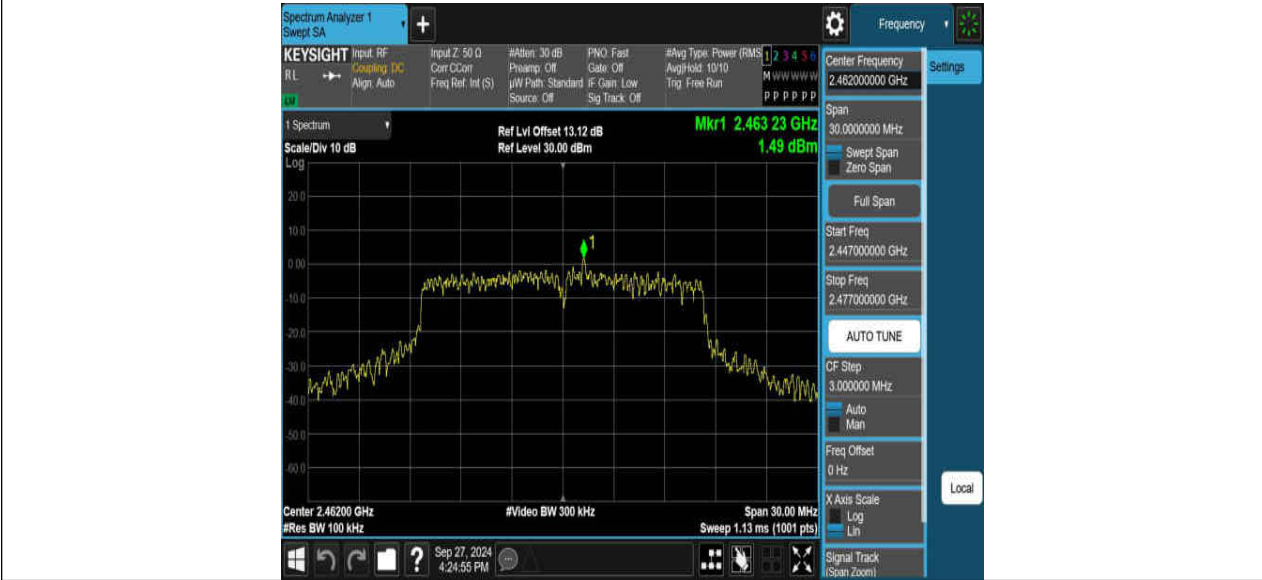


11G_Ant1_2462_30~1000



11G_Ant1_2462_1000~26500

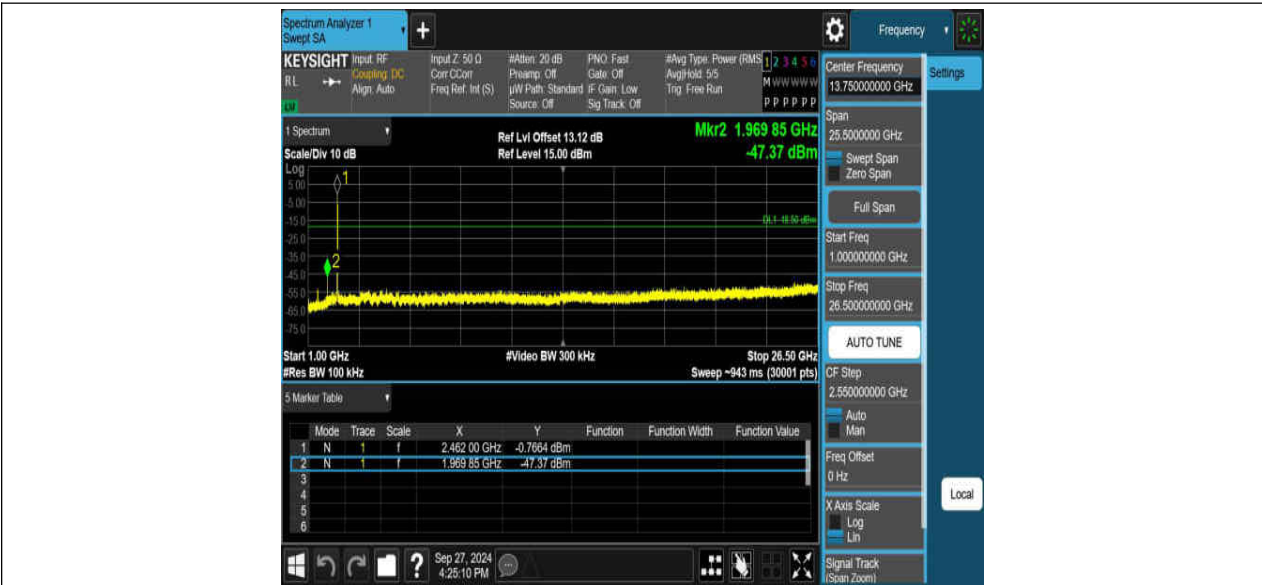


11N20SISO_Ant1_2412_0~Reference

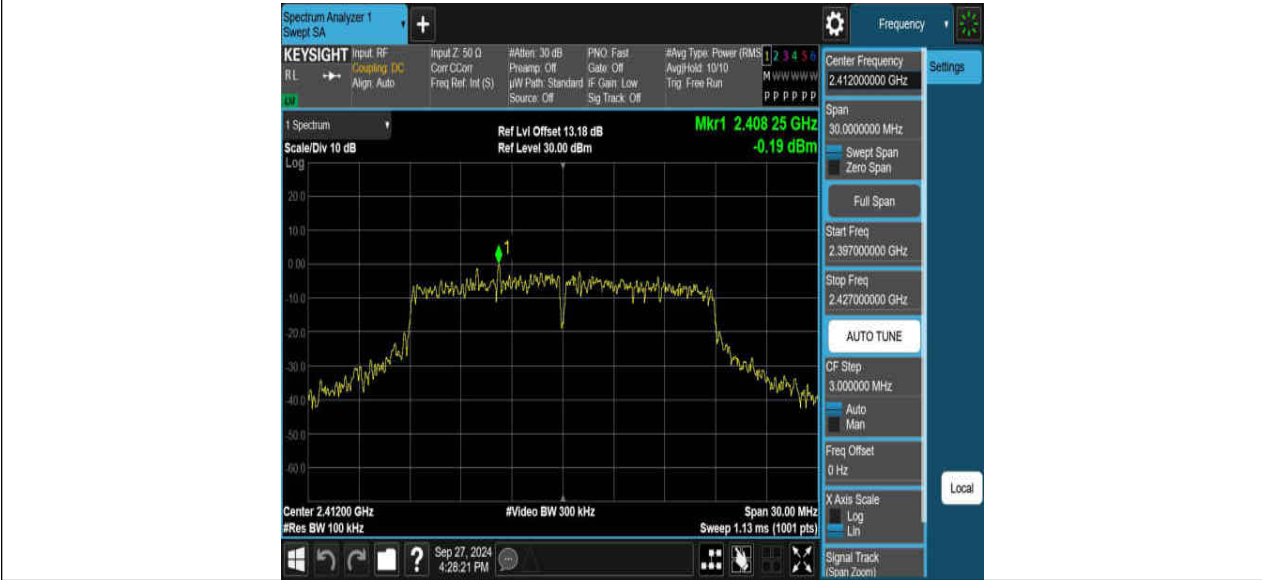

11N20SISO_Ant1_2412_30~1000




11N20SISO_Ant1_2412_1000~26500

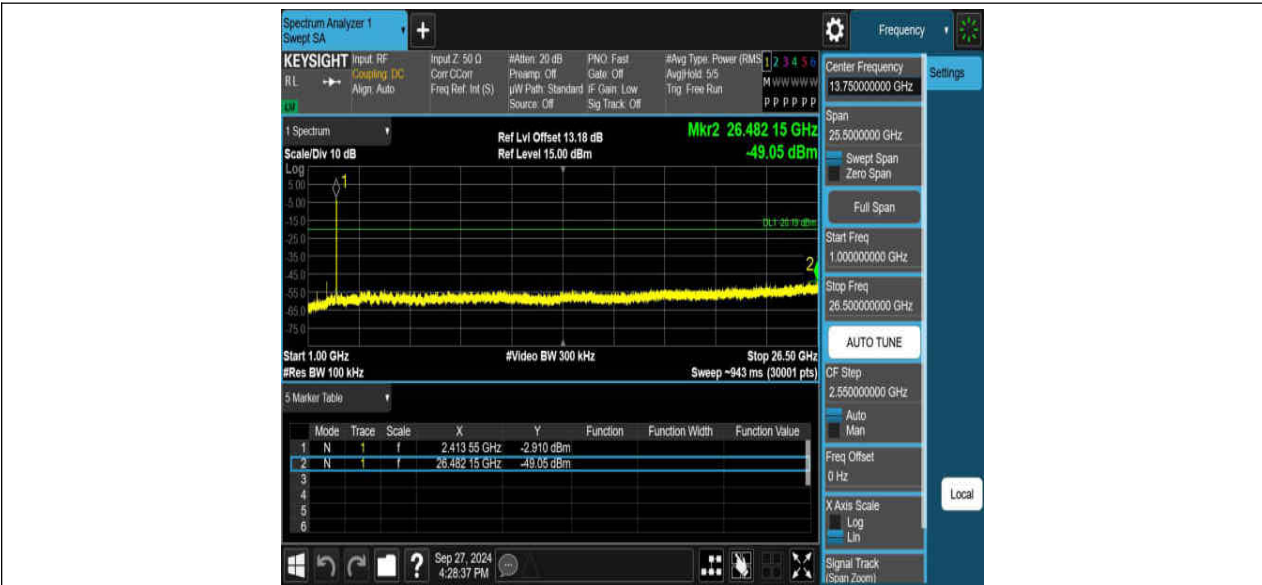

11N20SISO_Ant1_2437_0~Reference




11N20SISO_Ant1_2437_30~1000

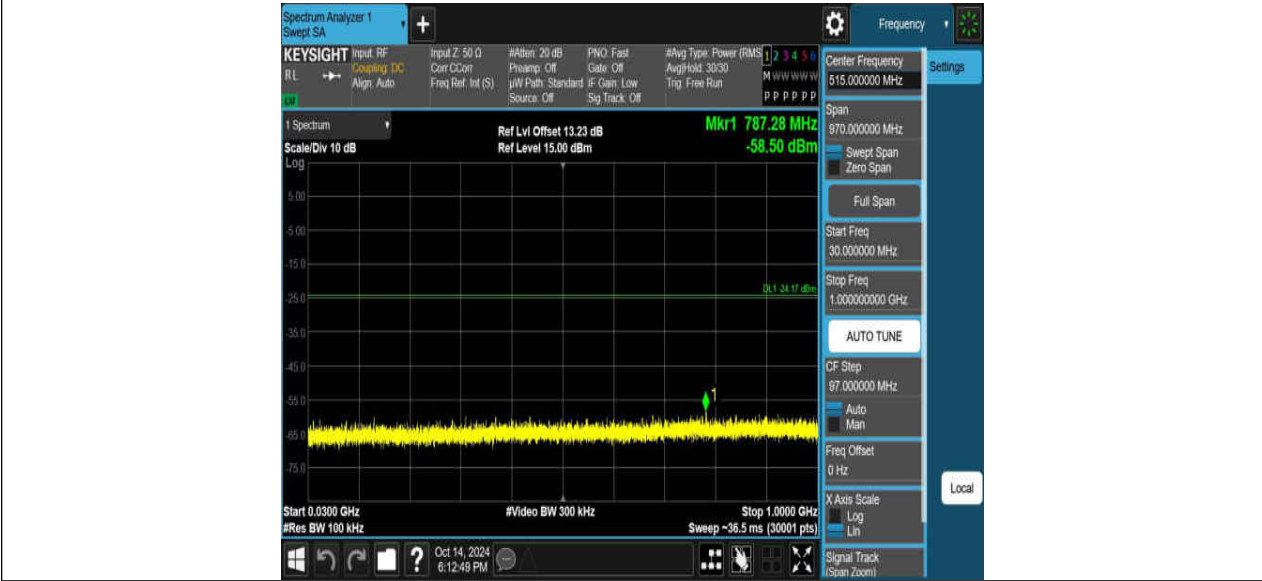

11N20SISO_Ant1_2437_1000~26500




11N20SISO_Ant1_2462_0~Reference

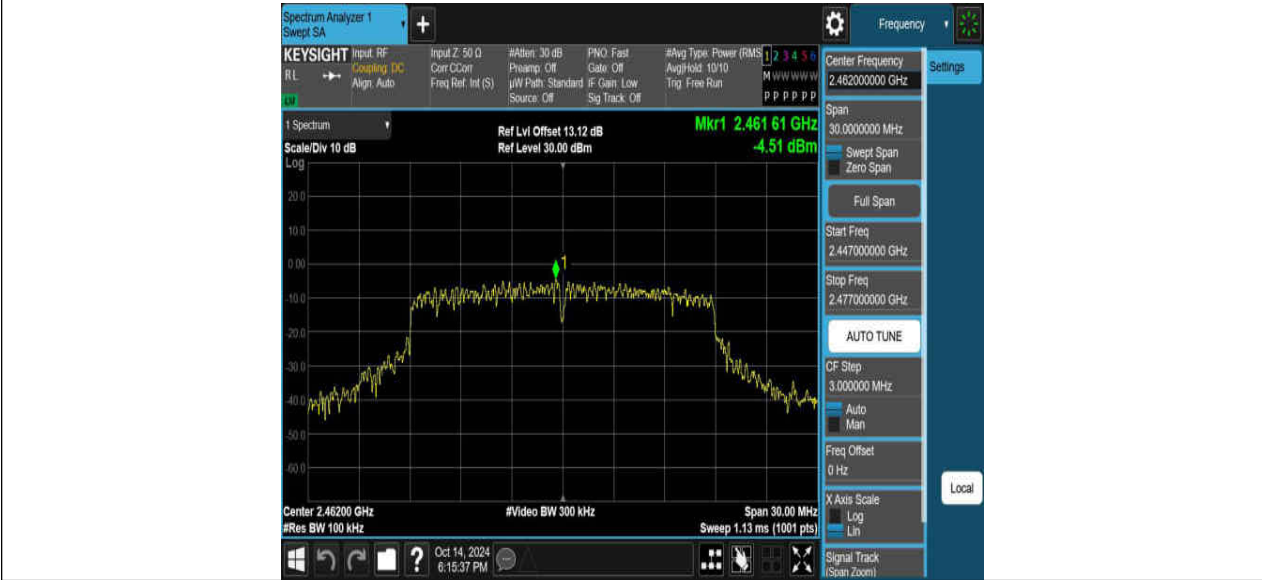


11N20SISO_Ant1_2462_30~1000




11N20SISO_Ant1_2462_1000~26500

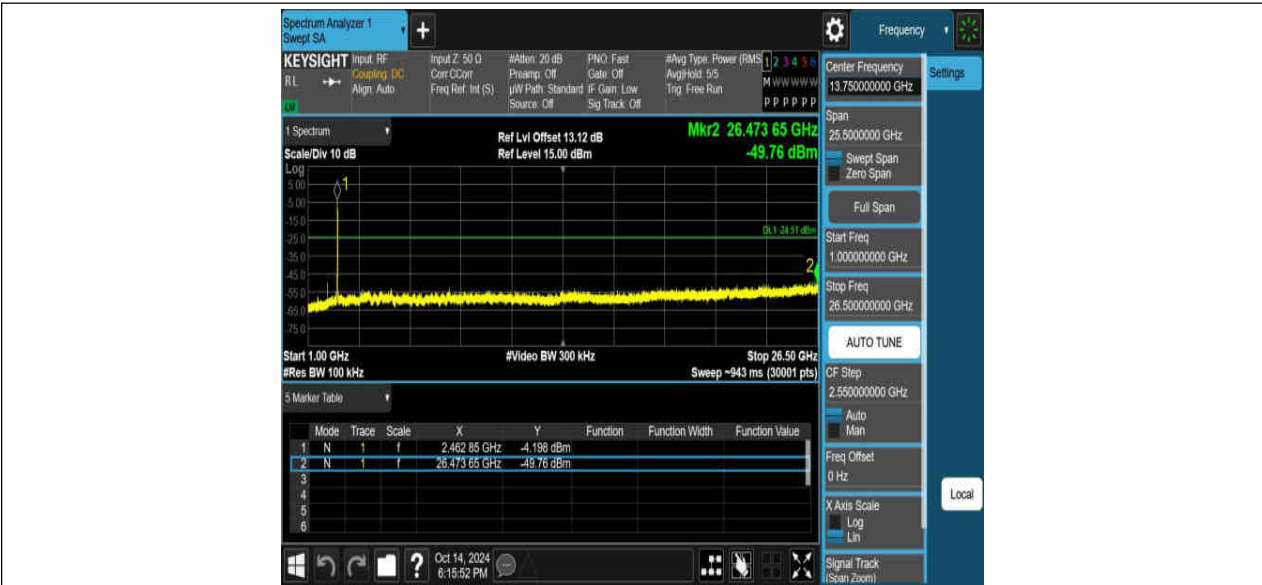


11N40SISO_Ant1_2422_0~Reference

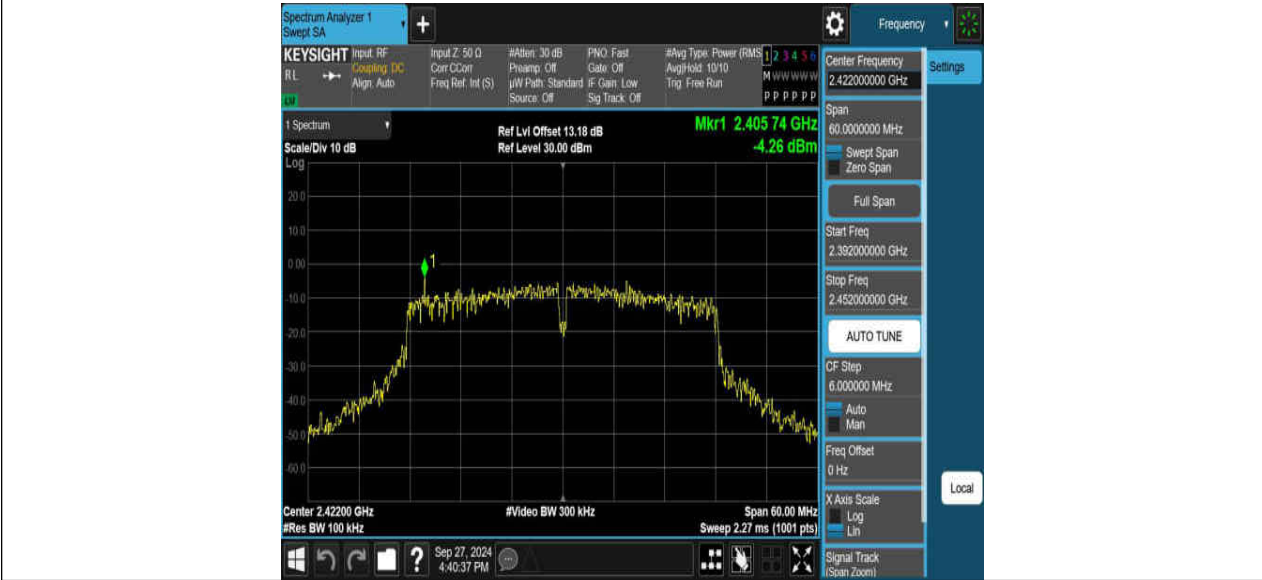


11N40SISO_Ant1_2422_30~1000

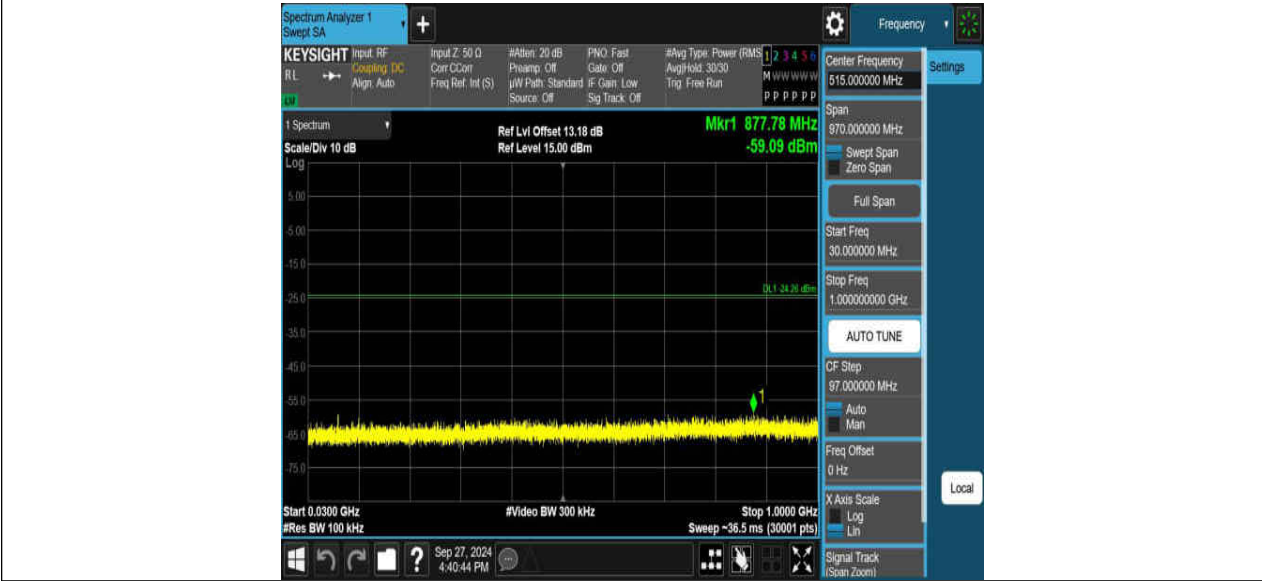

11N40SISO_Ant1_2422_1000~26500

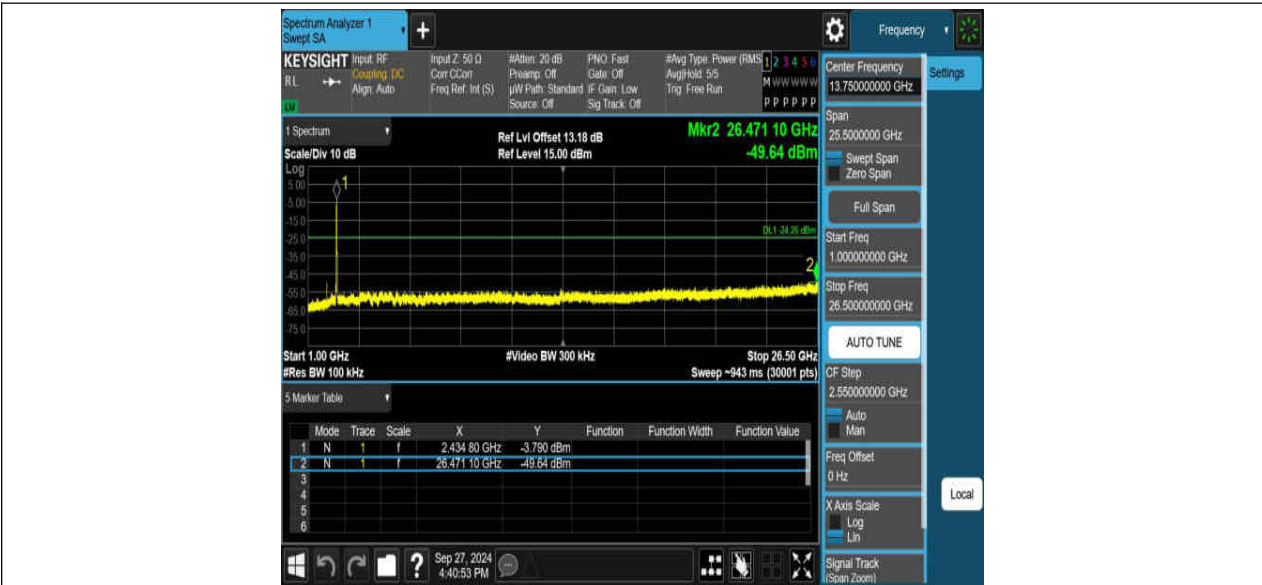


11N40SISO_Ant1_2437_0~Reference

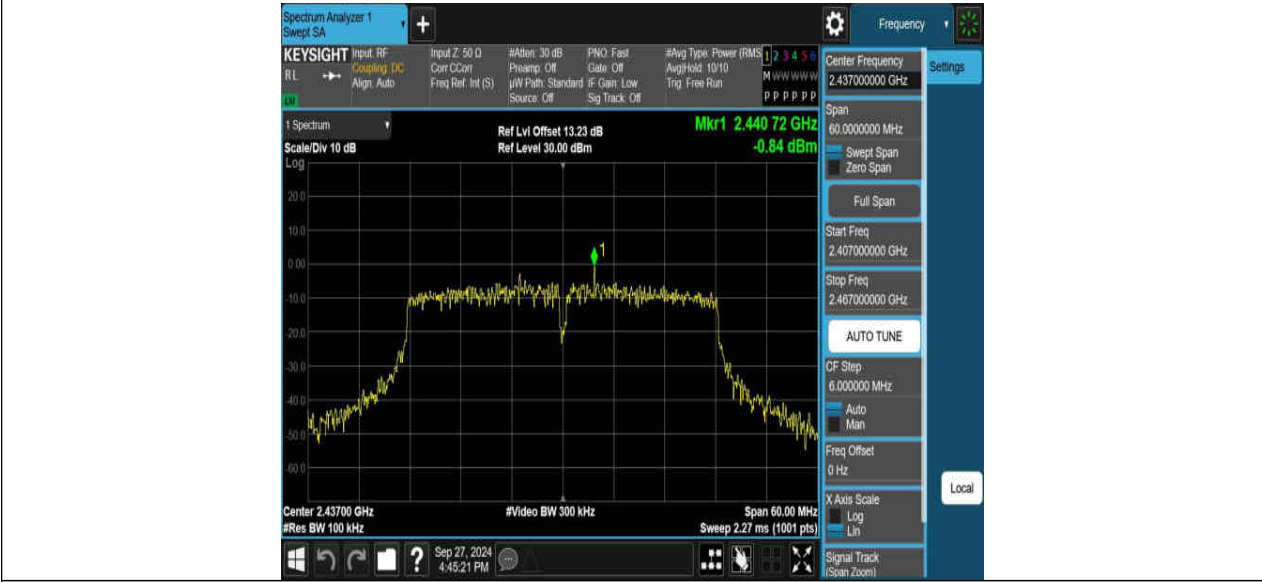


11N40SISO_Ant1_2437_30~1000



11N40SISO_Ant1_2437_1000~26500

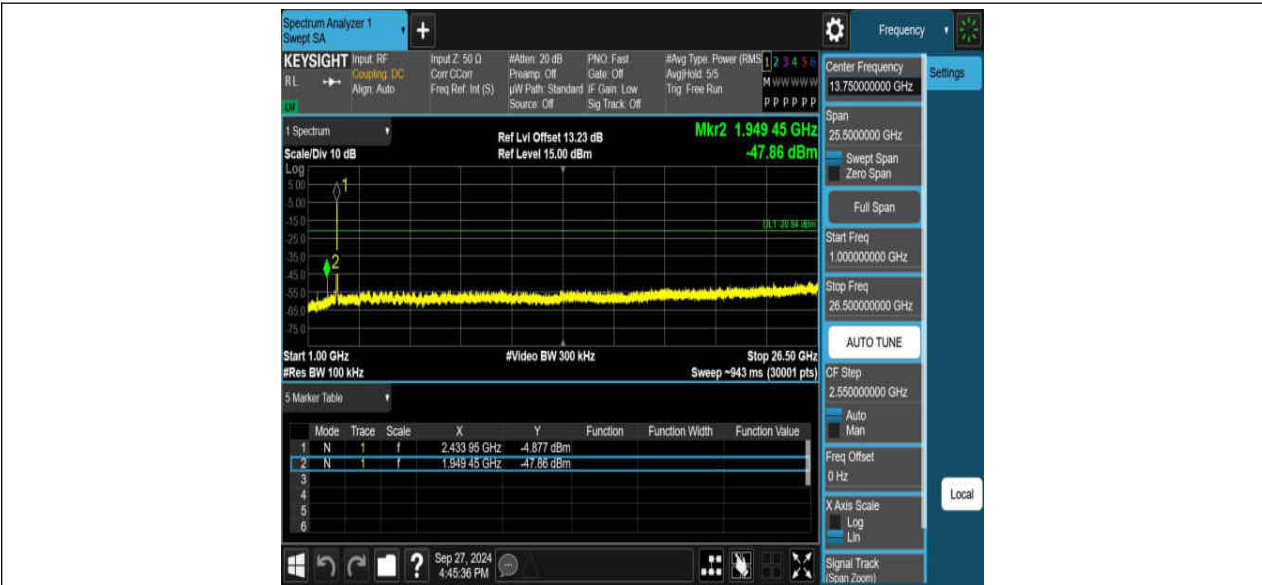


11N40SISO_Ant1_2452_0~Reference

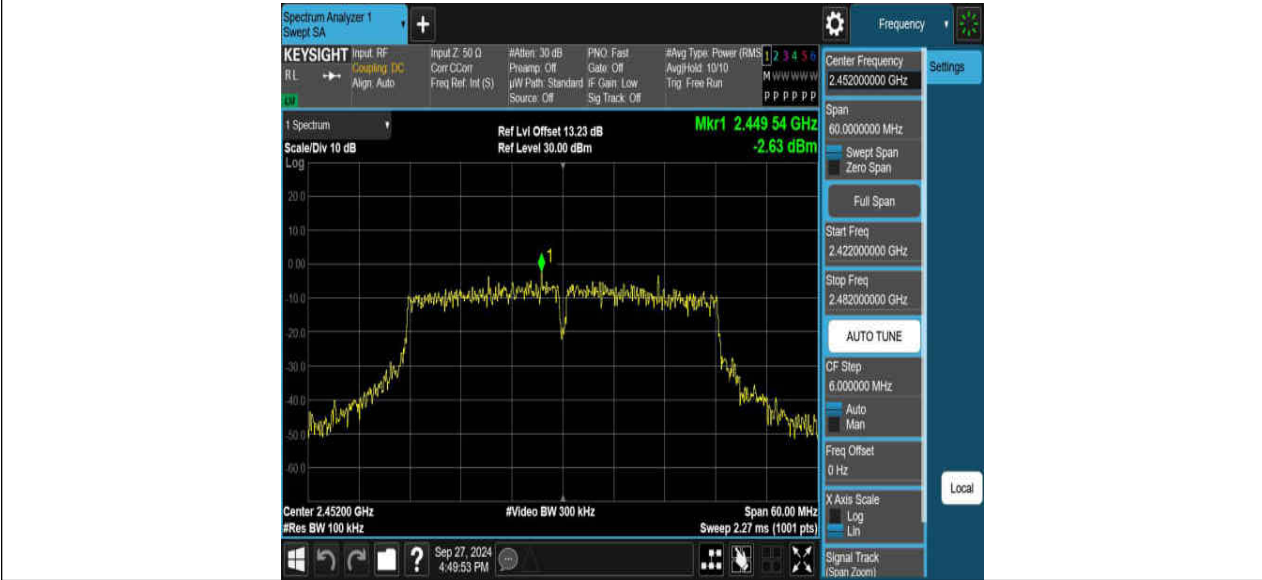

11N40SISO_Ant1_2452_30~1000



11N40SISO_Ant1_2452_1000~26500

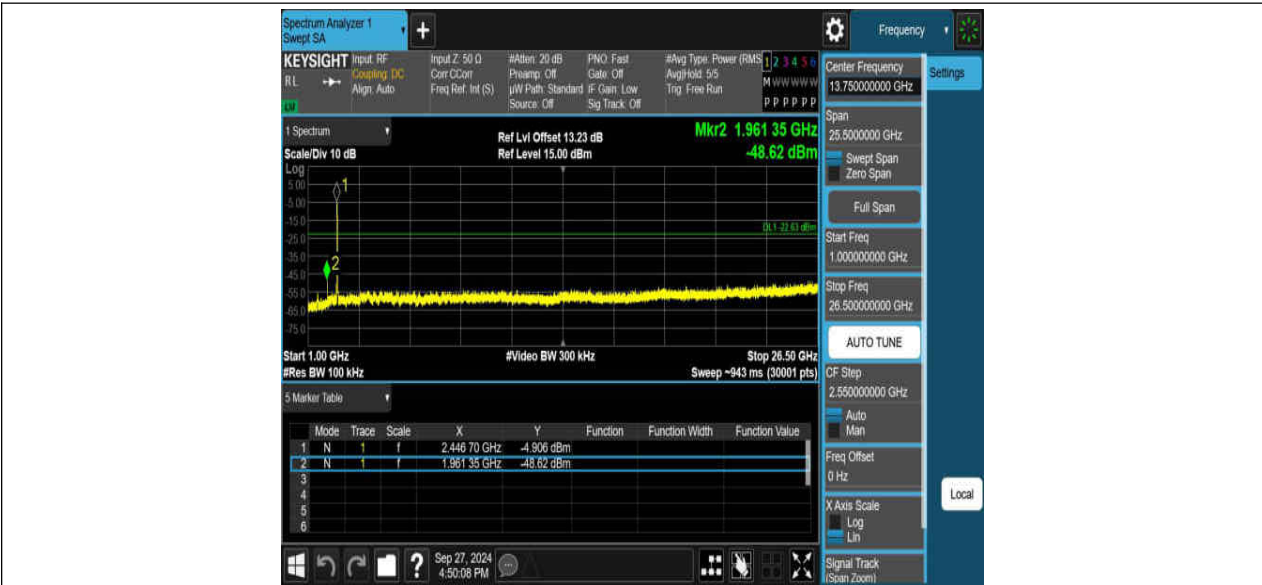

11AX20SISO_Ant1_2412_0~Reference



11AX20SISO_Ant1_2412_30~1000




11AX20SISO_Ant1_2412_1000~26500



11AX20SISO_Ant1_2437_0~Reference



11AX20SISO_Ant1_2437_30~1000

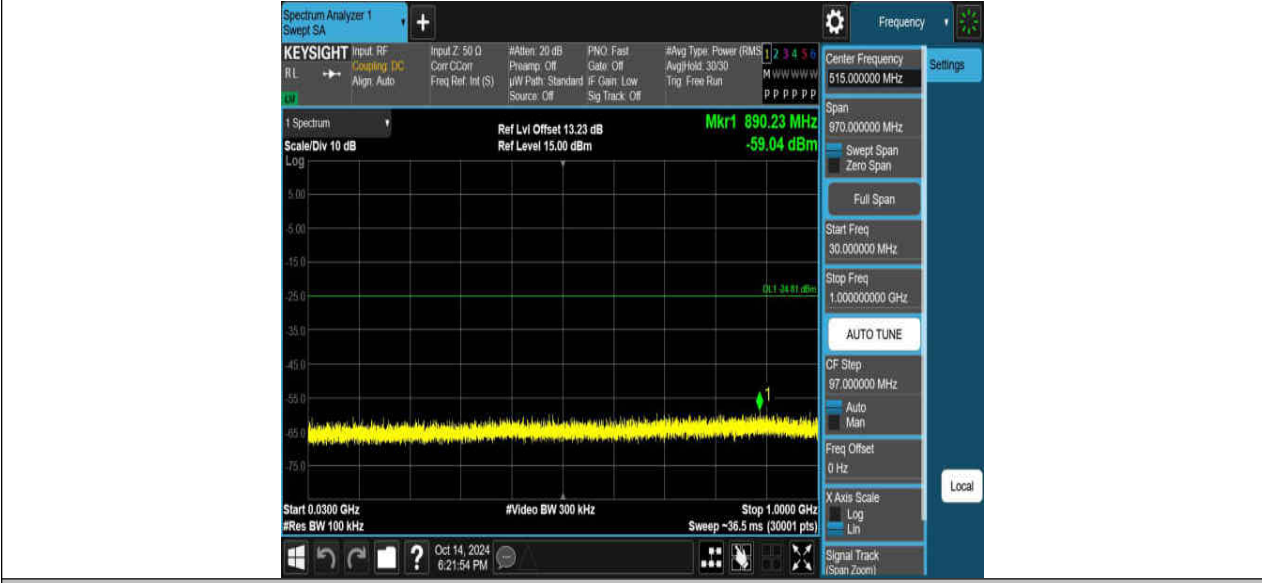


11AX20SISO_Ant1_2437_1000~26500



11AX20SISO_Ant1_2462_0~Reference



11AX20SISO_Ant1_2462_30~1000

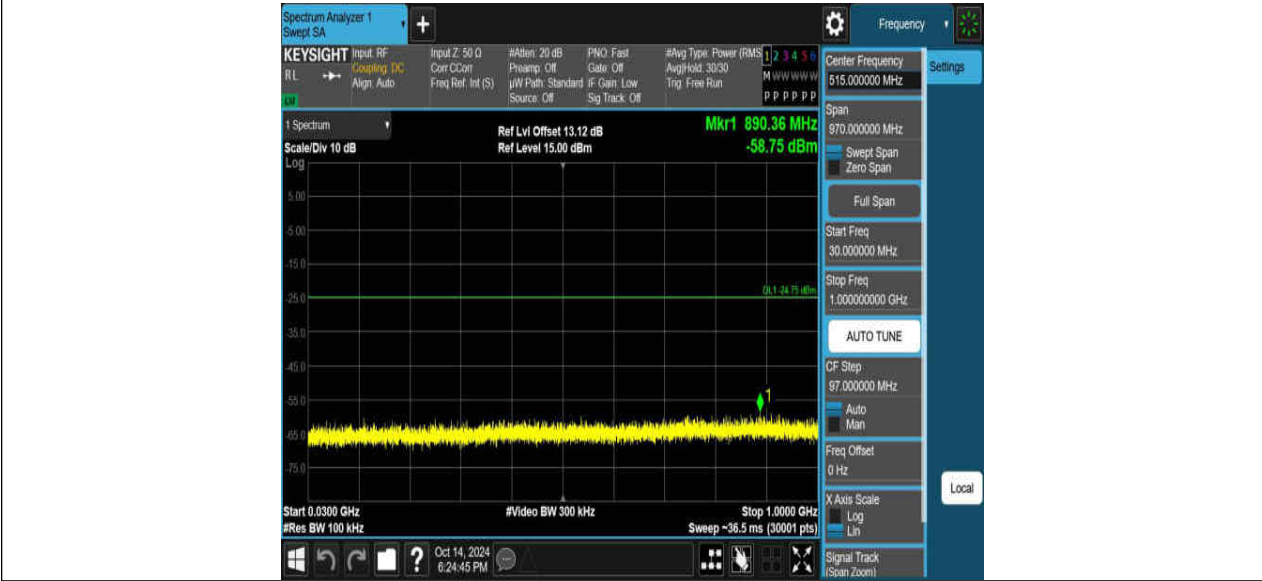

11AX20SISO_Ant1_2462_1000~26500




11AX40SISO_Ant1_2422_0~Reference



11AX40SISO_Ant1_2422_30~1000



11AX40SISO_Ant1_2422_1000~26500

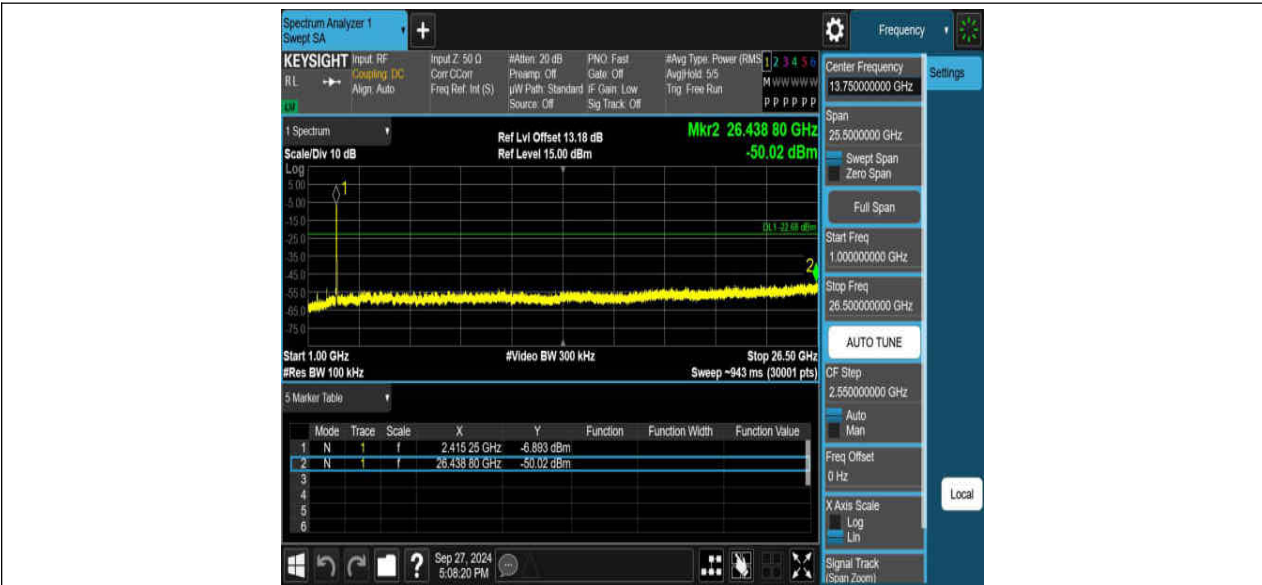


11AX40SISO_Ant1_2437_0~Reference



11AX40SISO_Ant1_2437_30~1000




11AX40SISO_Ant1_2437_1000~26500

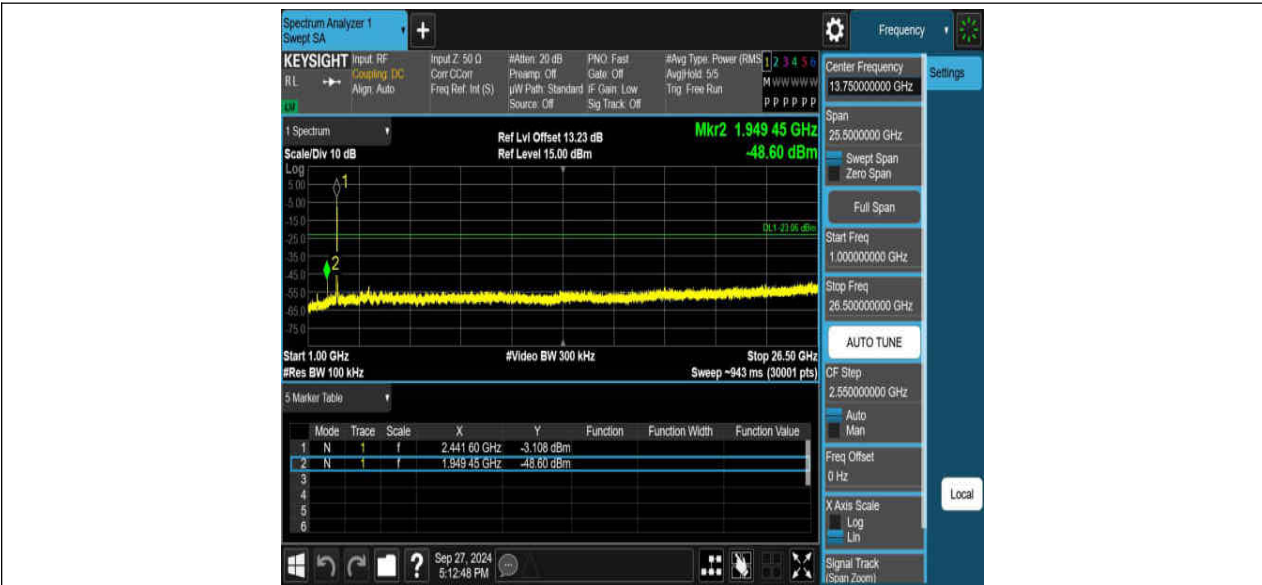

11AX40SISO_Ant1_2452_0~Reference



11AX40SISO_Ant1_2452_30~1000

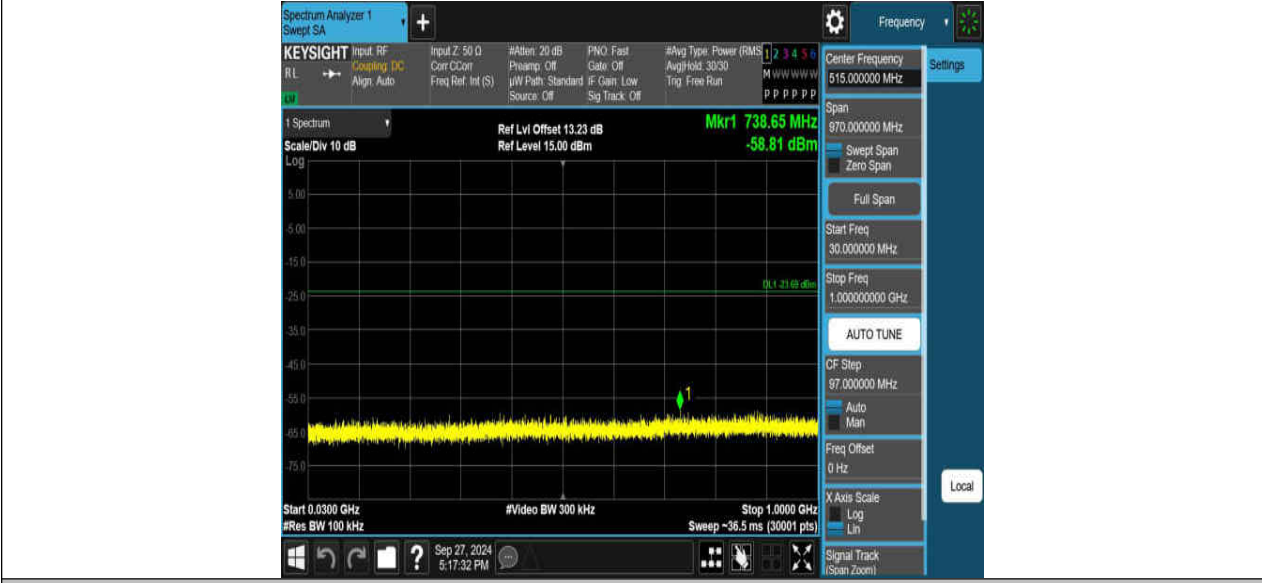


11AX40SISO_Ant1_2452_1000~26500




13. Radiated Emission

13.1. Block diagram of test setup


In 3m Anechoic Chamber, test setup diagram for 9kHz - 30MHz:

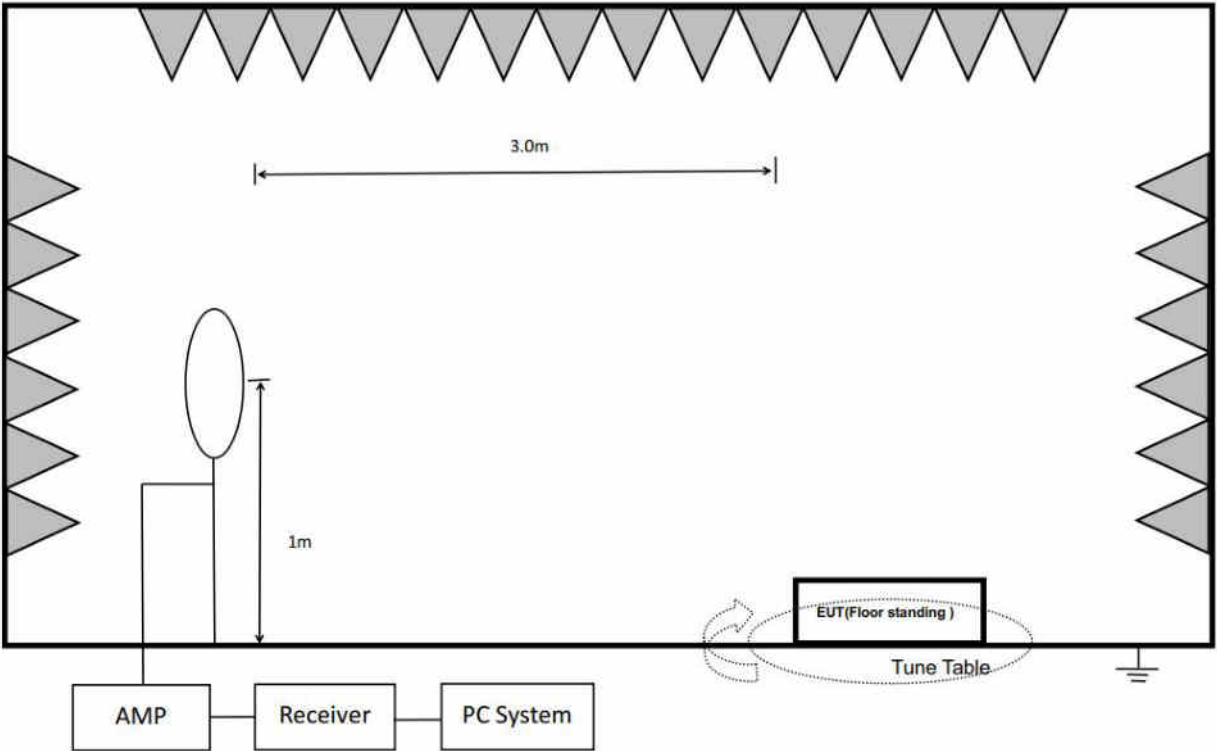

In 3m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

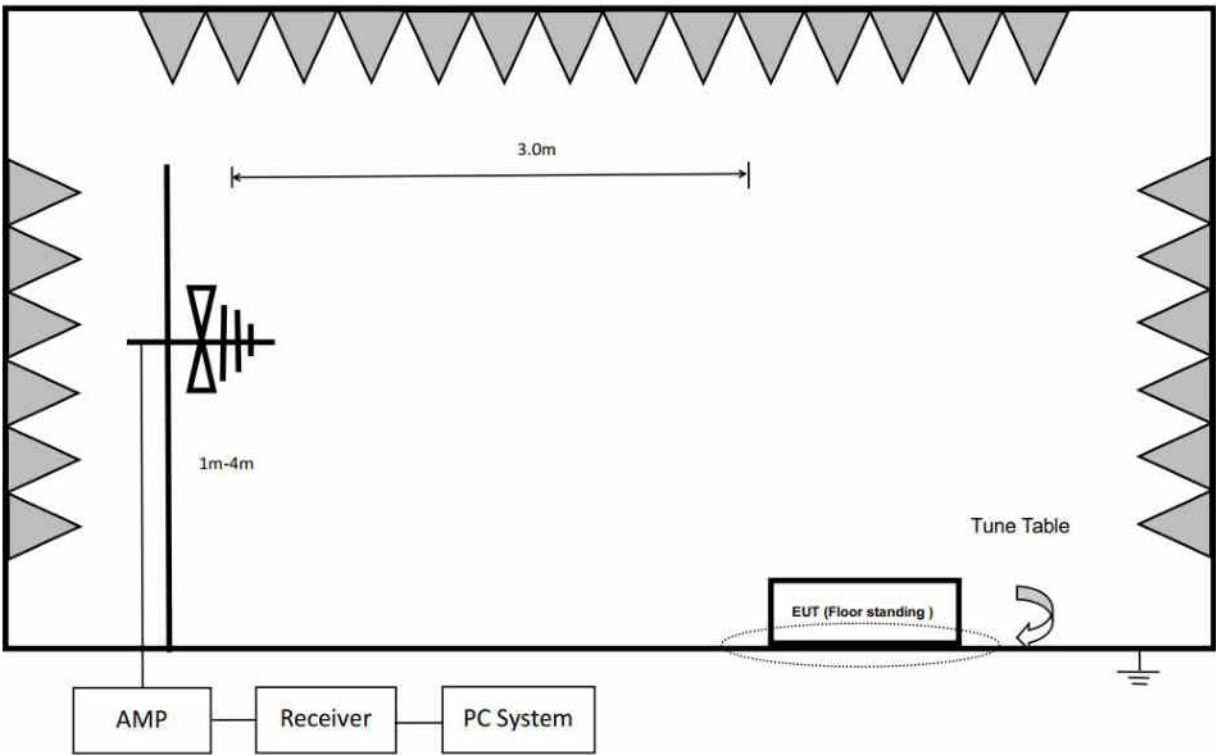

In 3m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

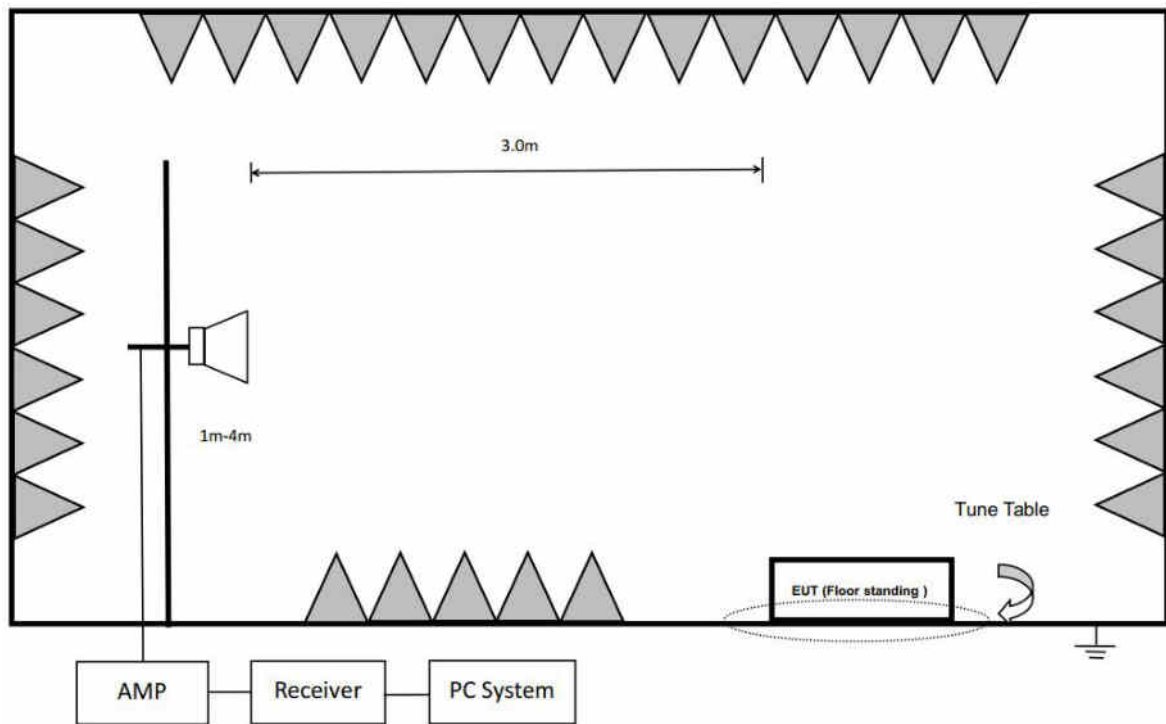

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

13.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit.

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/\text{F}(\text{kHz})$	$67.6-20\log(\text{F})$
0.490 ~ 1.705	30	$24000/\text{F}(\text{kHz})$	$87.6-20\log(\text{F})$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

About Restricted bands of operation please refer to RSS-Gen section 8.10 and FCC § 15.205(a).

13.3. Test Procedure

Below 30 MHz:

The setting of the spectrum Analyzer

RBW	300 Hz (From 9 kHz to 0.15 MHz)/ 10 kHz (From 0.15 MHz to 30 MHz)
VBW	1 kHz (From 9 kHz to 0.15 MHz)/ 30 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013

2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.

3. The EUT and all cables shall be insulated, if required, from the ground plane by up to 12mm of insulating material.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of 1 meter height antenna tower.

5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are

then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz:

The setting of the spectrum Analyzer

RBW	100 kHz
VBW	300 kHz
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT and all cables shall be insulated, if required, from the ground plane by up to 12mm of insulating material.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz:

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT and all cables shall be insulated, if required, from the ground plane by up to 12mm of insulating material.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.

6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for AVG measurements. For the Duty Cycle please refer to clause 8.1.ON TIME AND DUTY CYCLE.

7. Restriction band: Investigated frequency range from 2310 MHz to 2430 MHz and 2445 MHz to 2500 MHz, 2310 MHz to 2450 MHz and 2425 MHz to 2500MHz.

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT does not support simultaneous transmission.

Note 3: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

13.4. Results

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz, so the final test was performed with frequency range from 30 MHz to 26 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 11G, Tx CH6 mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.


13.5. Original test data

Below 1 GHz and above 30 MHz test data Refer to appendix A

Above 1 GHz test data Refer to appendix B

14. AC Power Line Conducted Emissions

14.1. Block diagram of test setup

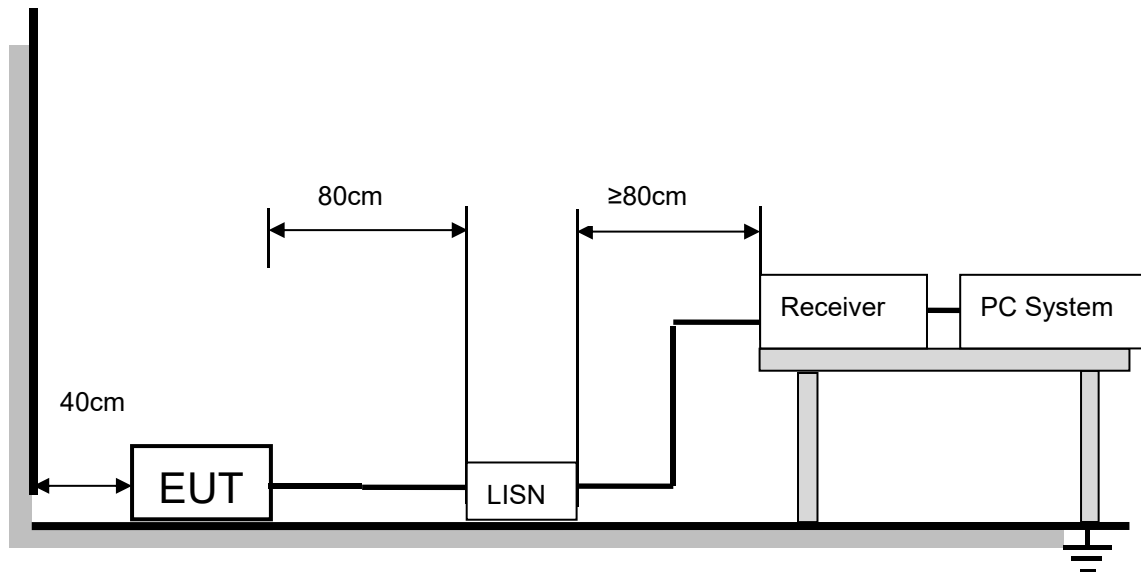

The EUT and all cables shall be insulated, if required, from the ground plane by up to 12mm of insulating material. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

14.2. Limits

Please refer to CFR 47 FCC § 15.207 (a) and ISED RSS-Gen Clause 8.8.

Frequency (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.3. Test procedure

The EUT and all cables shall be insulated, if required, from the ground plane by up to 12mm of insulating material.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.4. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worse case.

14.5. Original test data

AC Power Line Conducted Emission Test Data Refer to appendix C

15. Antenna Requirements

15.1. Applicable Requirements

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

15.2. Result

The antenna used for this product is SMA antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 4.06 dBi


APPENDIX A – Radiated Emission Below 1GHz Test Data

Test Report

Project Information			
EUT:		Environment:	
Model:	CH65GC	SN:	
Mode:	11G_2437	Voltage:	AC120V/60Hz
Customer:		Engineer:	Fly Liao
Remark:	Power Set:Default		

Start of Test: 2024-10-13

Test Graph

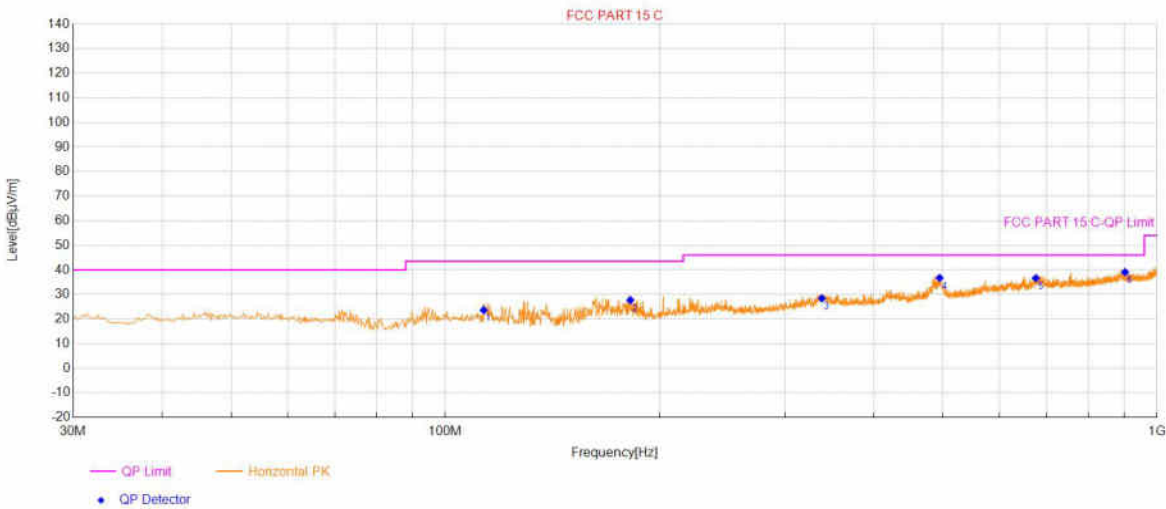


Final Data List								
NO.	Frequency (MHz)	QP Value (dBμV/m)	QP Limit (dBμV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	113.2426	23.66	43.50	19.84	100	348	Horizontal	PASS
2	181.9324	27.71	43.50	15.79	100	41	Horizontal	PASS
3	338.1336	28.43	46.00	17.57	100	255	Horizontal	PASS
4	494.9170	36.78	46.00	9.22	100	301	Horizontal	PASS
5	675.5671	36.64	46.00	9.36	100	291	Horizontal	PASS
6	901.8164	39.11	46.00	6.89	100	248	Horizontal	PASS

Test Report

Project Information			
EUT:		Environment:	
Model:	CH65GC	SN:	
Mode:	11G_2437	Voltage:	AC120V/60Hz
Customer:		Engineer:	Fly Liao
Remark:	Power Set:Default		

Start of Test: 2024-10-13

Test Graph

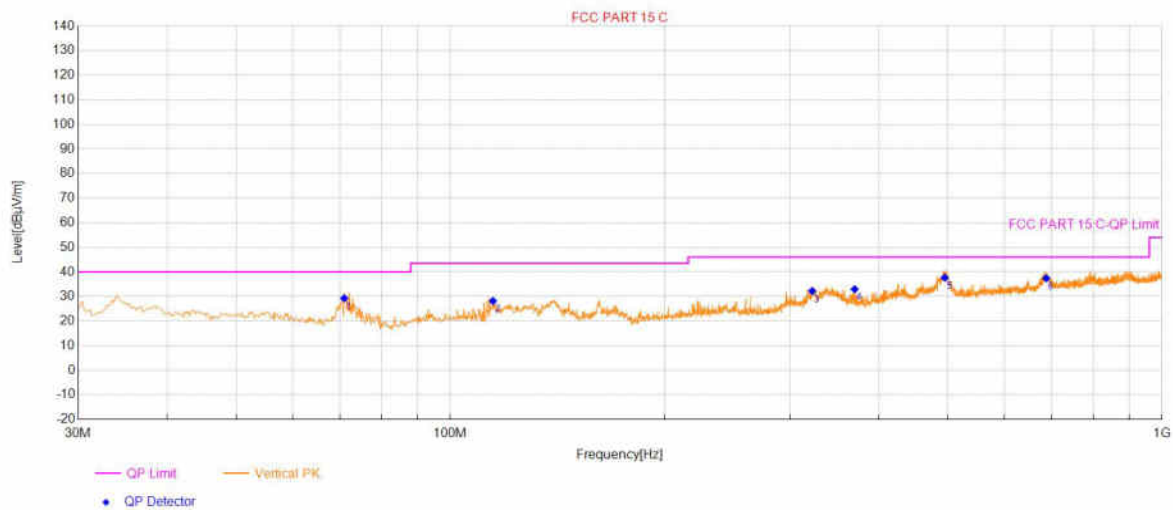


Final Data List								
NO.	Frequency (MHz)	QP Value (dBµV/m)	QP Limit (dBµV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	70.9422	29.30	40.00	10.70	100	32	Vertical	PASS
2	114.7950	28.20	43.50	15.30	100	359	Vertical	PASS
3	322.4165	32.24	46.00	13.76	100	322	Vertical	PASS
4	369.9560	32.95	46.00	13.05	100	32	Vertical	PASS
5	495.1110	37.65	46.00	8.35	100	360	Vertical	PASS
6	687.5975	37.43	46.00	8.57	100	184	Vertical	PASS

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH75GC	SN:	
Mode:	11G_2437	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C: Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC PART 15 C			

Start of Test:2024-10-15 11:21:47

Test Graph

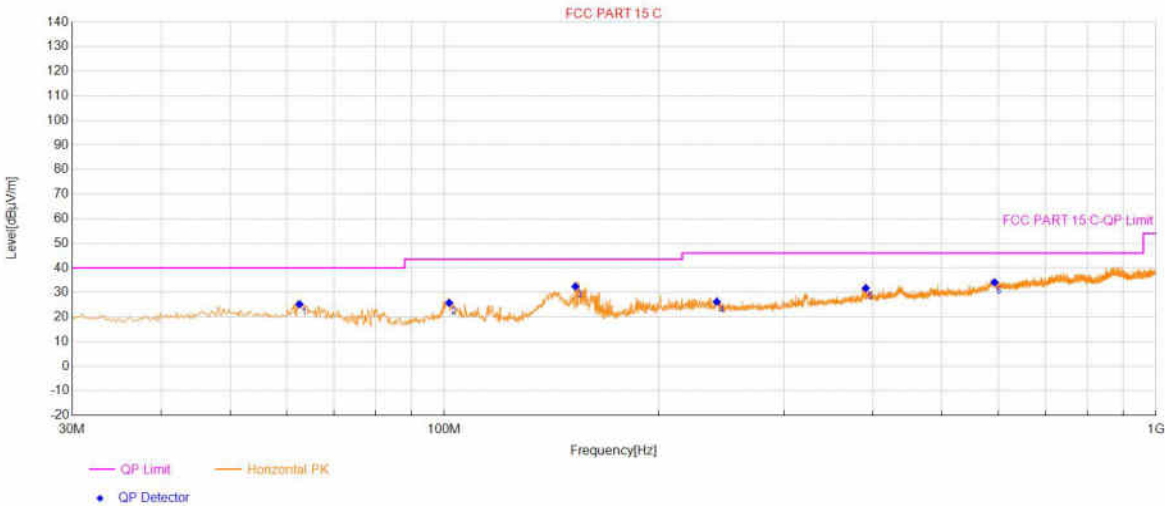


Final Data List									
NO.	Frequency (MHz)	Factor (dB/m)	QP Value (dBμV/m)	QP Limit (dBμV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	62.5985	19.63	25.24	40.00	14.76	100	59	Horizontal	PASS
2	101.6003	19.89	25.77	43.50	17.73	100	33	Horizontal	PASS
3	152.8266	17.20	32.46	43.50	11.04	100	52	Horizontal	PASS
4	241.5023	21.72	26.24	46.00	19.76	100	33	Horizontal	PASS
5	391.1062	25.61	31.73	46.00	14.27	100	292	Horizontal	PASS
6	593.1006	30.23	34.15	46.00	11.85	100	343	Horizontal	PASS

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH75GC	SN:	
Mode:	11G_2437	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C: Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC PART 15 C			

Start of Test:2024-10-15 11:22:32

Test Graph

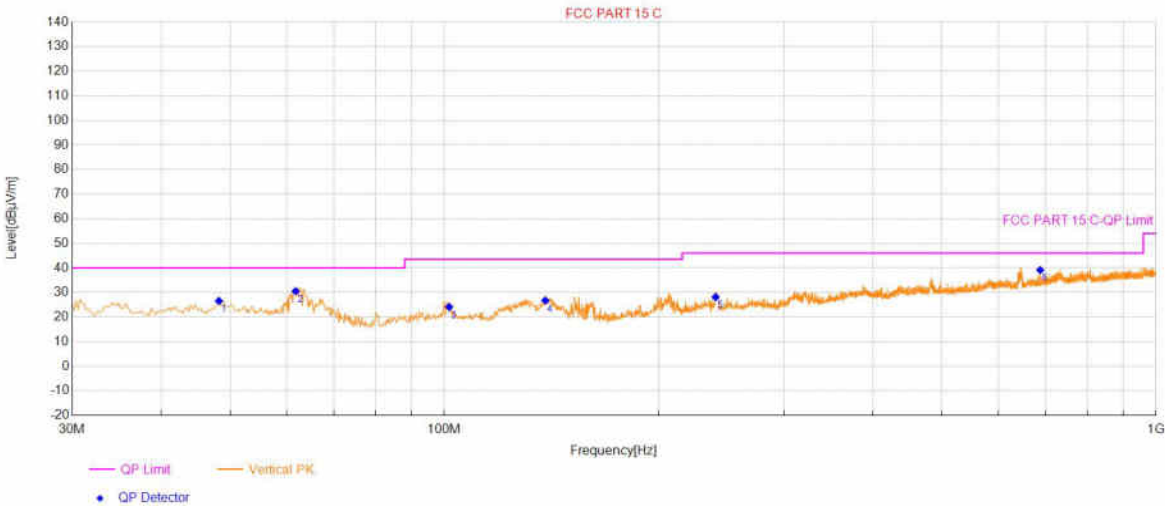

Final Data List									
NO.	Frequency (MHz)	Factor (dB/m)	QP Value (dBµV/m)	QP Limit (dBµV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	48.2396	21.30	26.55	40.00	13.45	100	2	Vertical	PASS
2	61.8224	19.83	30.55	40.00	9.45	100	329	Vertical	PASS
3	101.6003	19.89	24.14	43.50	19.36	100	1	Vertical	PASS
4	138.6617	16.74	26.74	43.50	16.76	100	272	Vertical	PASS
5	240.5321	21.68	28.13	46.00	17.87	100	329	Vertical	PASS
6	687.5975	31.05	39.13	46.00	6.87	100	203	Vertical	PASS


APPENDIX B – Radiated Emission Above 1GHz Test Data

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11G_2412	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC PART 15 C			

Start of Test:2024-10-11 15:20:03

Test Graph

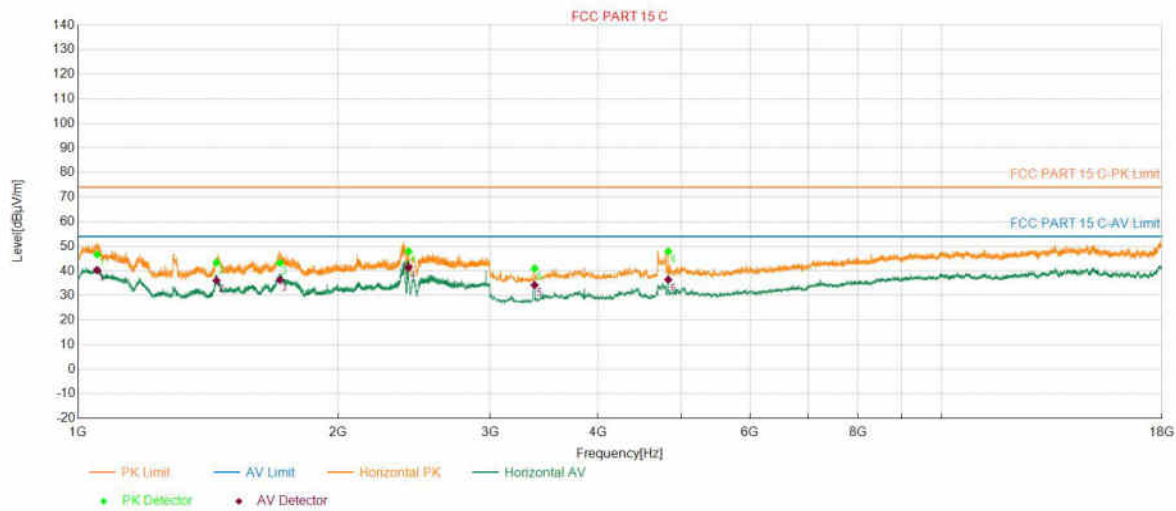


PK Final Data List											
NO.	Frequency (MHz)	Factor (dB/m)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1052.0104	-1.17	46.66	74.00	27.34	40.26	54.00	13.74	150	152	Horizontal
2	1446.0892	-0.04	43.36	74.00	30.64	36.04	54.00	17.96	150	236	Horizontal
3	1712.9426	0.35	43.25	74.00	30.75	36.28	54.00	17.72	150	224	Horizontal
4	2413.8828	6.65	47.91	74.00	26.09	41.47	54.00	12.53	150	255	Horizontal
5	3378.0756	-9.99	40.94	74.00	33.06	34.26	54.00	19.74	150	155	Horizontal
6	4824.3649	-4.86	47.93	74.00	26.07	36.43	54.00	17.57	150	45	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11G_2412	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC PART 15 C			

Start of Test:2024-10-11 15:21:32

Test Graph

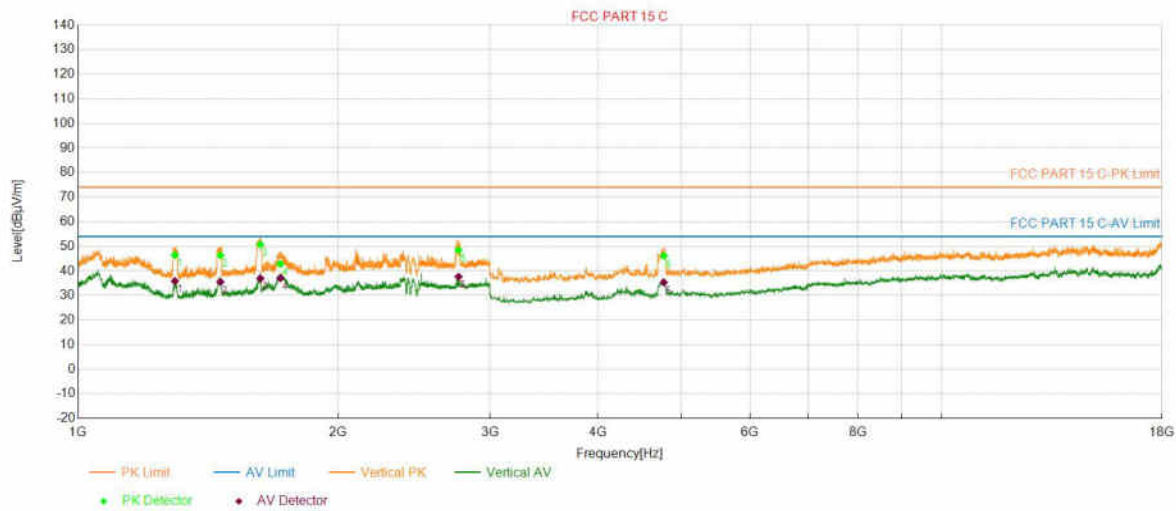

PK Final Data List


NO.	Frequency (MHz)	Factor (dB/m)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1294.4589	-0.40	46.47	74.00	27.53	35.88	54.00	18.12	150	349	Vertical
2	1461.2923	-0.01	46.36	74.00	27.64	35.51	54.00	18.49	150	335	Vertical
3	1625.7251	0.41	50.73	74.00	23.27	36.96	54.00	17.04	150	2	Vertical
4	1714.5429	0.35	42.82	74.00	31.18	37.04	54.00	16.96	150	168	Vertical
5	2757.9516	6.18	48.45	74.00	25.55	37.62	54.00	16.38	150	28	Vertical
6	4767.3535	-5.23	46.15	74.00	27.85	35.32	54.00	18.68	150	82	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11G_2437	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	Power Set:Default		
Test Standard: FCC PART 15 C			

Start of Test:2024-10-11 15:24:27

Test Graph

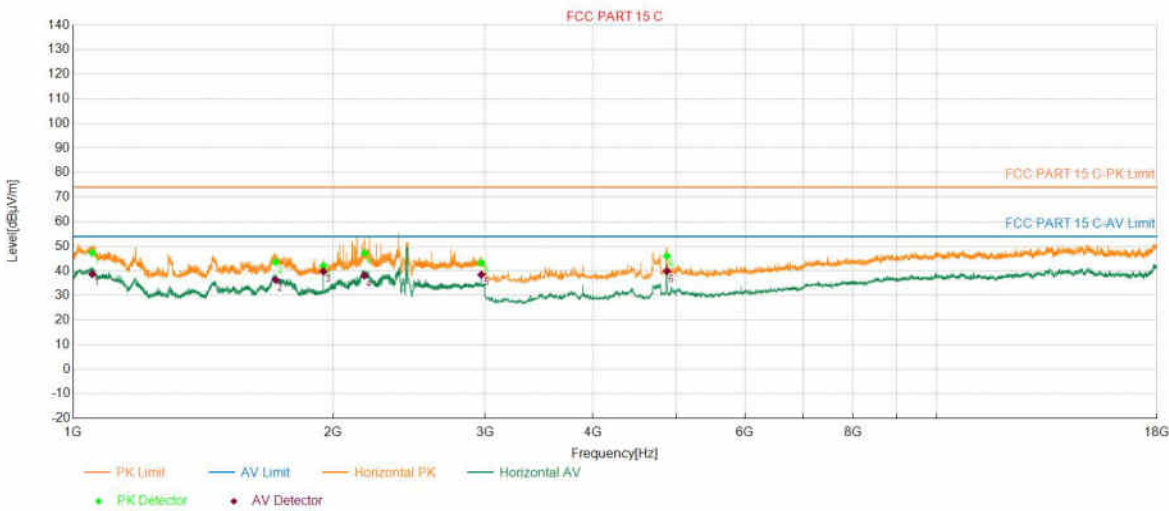


PK Final Data List											
NO.	Frequency (MHz)	Factor (dB/m)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1052.4105	-1.17	47.36	74.00	26.64	38.69	54.00	15.31	150	151	Horizontal
2	1716.5433	0.34	43.60	74.00	30.40	36.33	54.00	17.67	150	224	Horizontal
3	1949.7900	2.03	42.11	74.00	31.89	39.74	54.00	14.26	150	36	Horizontal
4	2175.0350	3.40	47.26	74.00	26.74	38.10	54.00	15.90	150	48	Horizontal
5	2969.9940	7.56	43.32	74.00	30.68	38.49	54.00	15.51	150	89	Horizontal
6	4872.3745	-4.50	46.02	74.00	27.98	39.96	54.00	14.04	150	45	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11G_2437	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	Power Set:Default		
Test Standard: FCC PART 15 C			

Start of Test:2024-10-11 15:26:09

Test Graph

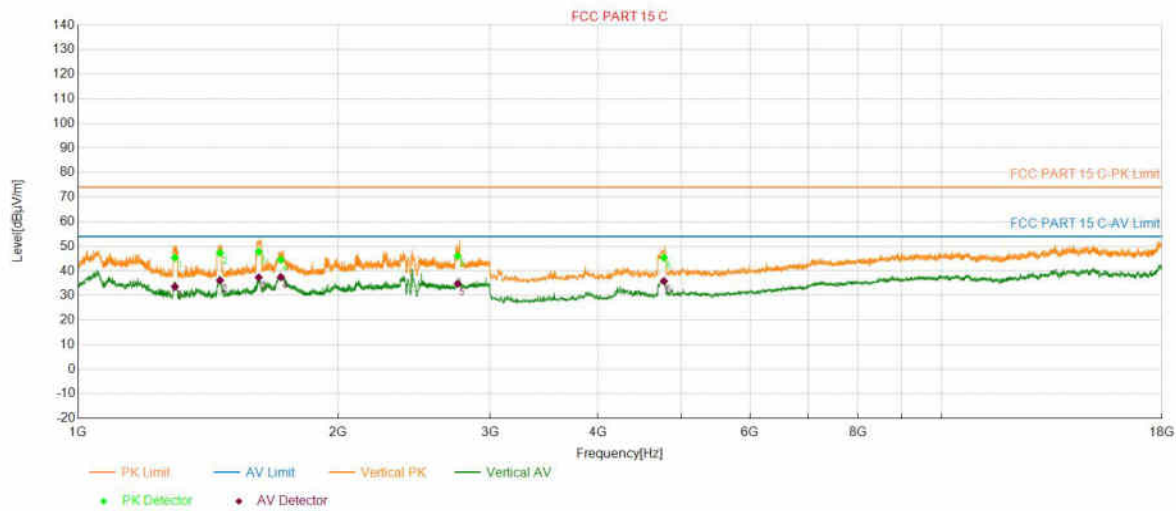


PK Final Data List											
NO.	Frequency (MHz)	Factor (dB/m)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1294.4589	-0.40	45.42	74.00	28.58	33.65	54.00	20.35	150	353	Vertical
2	1460.0920	-0.01	47.28	74.00	26.72	36.15	54.00	17.85	150	38	Vertical
3	1618.5237	0.42	47.76	74.00	26.24	37.37	54.00	16.63	150	2	Vertical
4	1716.9434	0.34	44.57	74.00	29.43	37.43	54.00	16.57	150	173	Vertical
5	2751.5503	6.15	46.07	74.00	27.93	34.79	54.00	19.21	150	10	Vertical
6	4770.3541	-5.21	45.35	74.00	28.65	35.81	54.00	18.19	150	93	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11G_2462	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	Power Set:Default		
Test Standard: FCC PART 15 C			

Start of Test:2024-10-11 15:28:16

Test Graph

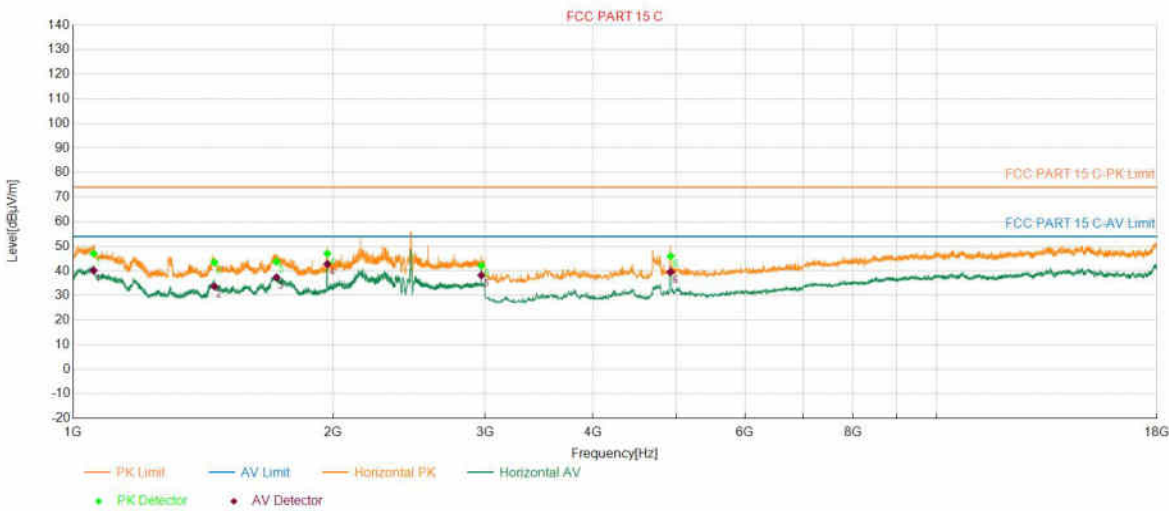


PK Final Data List											
NO.	Frequency (MHz)	Factor (dB/m)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1056.0112	-1.16	47.08	74.00	26.92	40.14	54.00	13.86	150	141	Horizontal
2	1457.6915	-0.02	43.49	74.00	30.51	33.68	54.00	20.32	150	100	Horizontal
3	1720.1440	0.35	43.75	74.00	30.25	37.39	54.00	16.61	150	224	Horizontal
4	1969.7940	2.23	47.10	74.00	26.90	42.81	54.00	11.19	150	58	Horizontal
5	2970.3941	7.57	42.14	74.00	31.86	38.21	54.00	15.79	150	90	Horizontal
6	4920.3841	-4.25	45.97	74.00	28.03	39.61	54.00	14.39	150	62	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11G_2462	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	Power Set:Default		
Test Standard: FCC PART 15 C			

Start of Test:2024-10-11 15:29:57

Test Graph

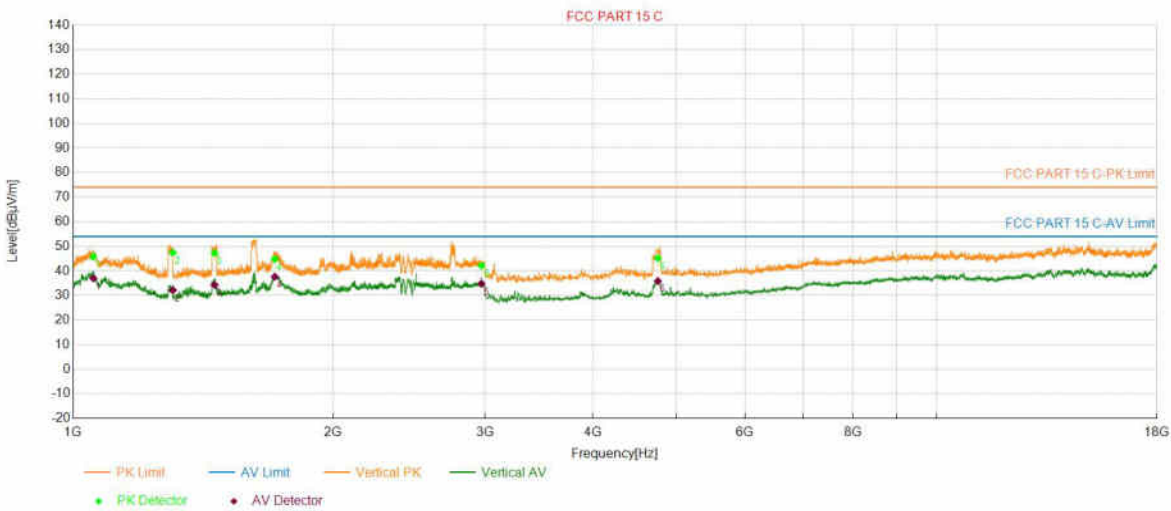

PK Final Data List


NO.	Frequency (MHz)	Factor (dB/m)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1055.2110	-1.16	45.81	74.00	28.19	37.04	54.00	16.96	150	121	Vertical
2	1304.4609	-0.38	47.48	74.00	26.52	32.17	54.00	21.83	150	346	Vertical
3	1458.0916	-0.02	47.24	74.00	26.76	34.34	54.00	19.66	150	39	Vertical
4	1712.1424	0.34	44.84	74.00	29.16	37.60	54.00	16.40	150	174	Vertical
5	2970.3941	7.57	42.16	74.00	31.84	34.83	54.00	19.17	150	174	Vertical
6	4755.3511	-5.30	45.16	74.00	28.84	35.86	54.00	18.14	150	95	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH75GC	SN:	
Mode:	11G_2412	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC PART 15 C			

Start of Test:2024-10-14 11:16:24

Test Graph

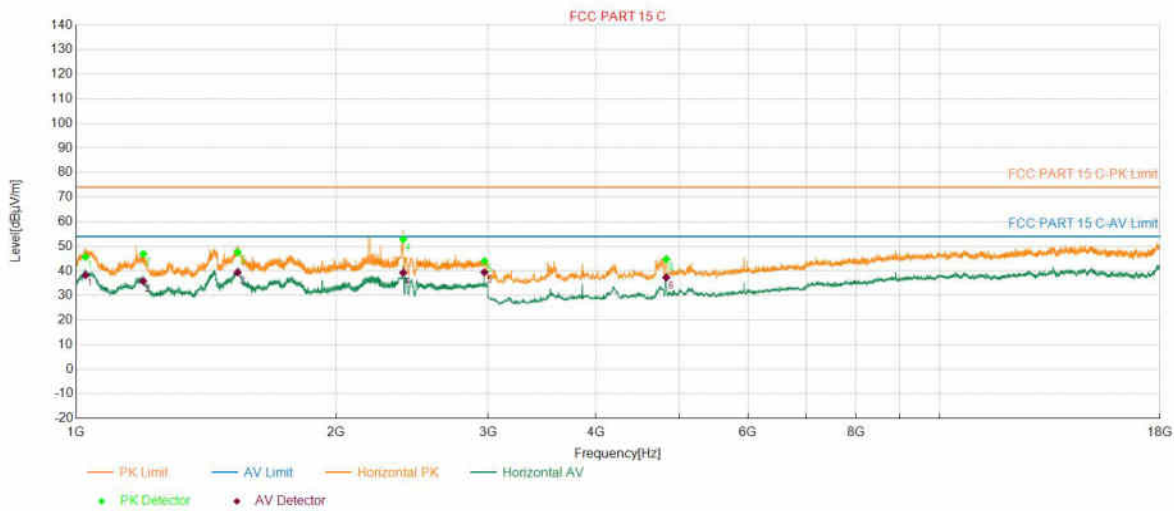


PK Final Data List											
NO.	Frequency (MHz)	Factor (dB/m)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1025.2050	-1.23	45.70	74.00	28.30	38.24	54.00	15.76	150	115	Horizontal
2	1196.0392	-0.67	46.93	74.00	27.07	35.85	54.00	18.15	150	106	Horizontal
3	1538.1076	0.21	47.60	74.00	26.40	39.35	54.00	14.65	150	75	Horizontal
4	2391.8784	6.84	52.83	74.00	21.17	39.24	54.00	14.76	150	53	Horizontal
5	2970.3941	7.57	44.00	74.00	30.00	39.47	54.00	14.53	150	84	Horizontal
6	4824.3649	-4.86	44.78	74.00	29.22	37.32	54.00	16.68	150	59	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH75GC	SN:	
Mode:	11G_2412	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC PART 15 C			

Start of Test:2024-10-14 11:17:54

Test Graph

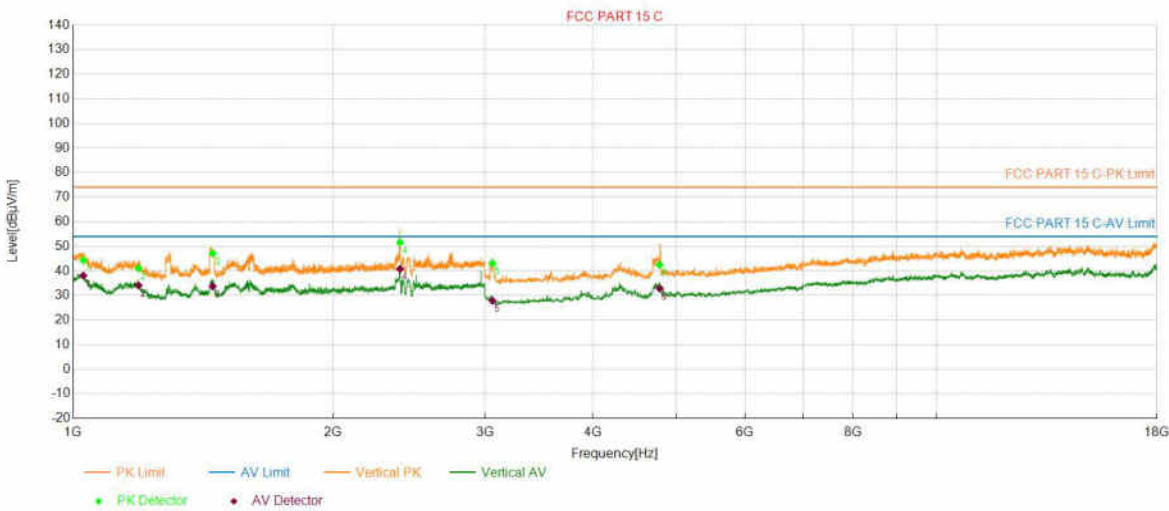

PK Final Data List


NO.	Frequency (MHz)	Factor (dB/m)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1027.6055	-1.22	44.34	74.00	29.66	38.10	54.00	15.90	150	342	Vertical
2	1190.4381	-0.70	41.08	74.00	32.92	34.11	54.00	19.89	150	305	Vertical
3	1450.8902	-0.03	47.09	74.00	26.91	33.72	54.00	20.28	150	354	Vertical
4	2390.6781	6.85	51.58	74.00	22.42	40.80	54.00	13.20	150	111	Vertical
5	3060.0120	-9.72	43.07	74.00	30.93	27.85	54.00	26.15	150	310	Vertical
6	4776.3553	-5.18	42.50	74.00	31.50	32.91	54.00	21.09	150	82	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH75GC	SN:	
Mode:	11G_2437	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC PART 15 C			

Start of Test:2024-10-14 11:21:52

Test Graph

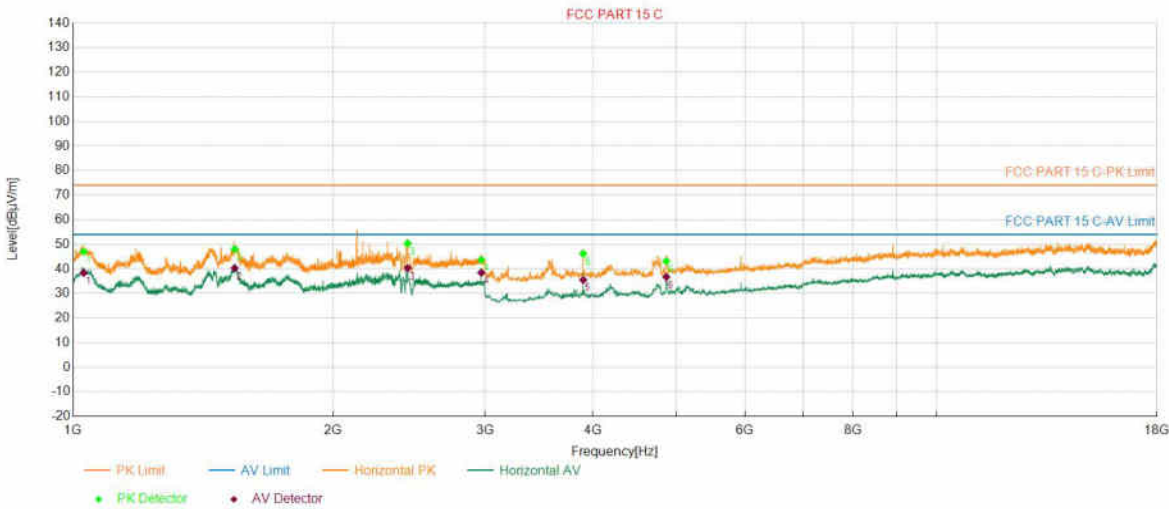


PK Final Data List											
NO.	Frequency (MHz)	Factor (dB/m)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1028.4057	-1.22	47.00	74.00	27.00	38.37	54.00	15.63	150	111	Horizontal
2	1538.5077	0.21	48.08	74.00	25.92	40.34	54.00	13.66	150	70	Horizontal
3	2440.6881	6.45	50.37	74.00	23.63	40.38	54.00	13.62	150	39	Horizontal
4	2970.3941	7.57	43.70	74.00	30.30	38.49	54.00	15.51	150	91	Horizontal
5	3897.1794	-8.33	46.18	74.00	27.82	35.53	54.00	18.47	150	124	Horizontal
6	4863.3727	-4.57	43.15	74.00	30.85	36.73	54.00	17.27	150	62	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH75GC	SN:	
Mode:	11G_2437	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC PART 15 C			

Start of Test:2024-10-14 11:23:21

Test Graph

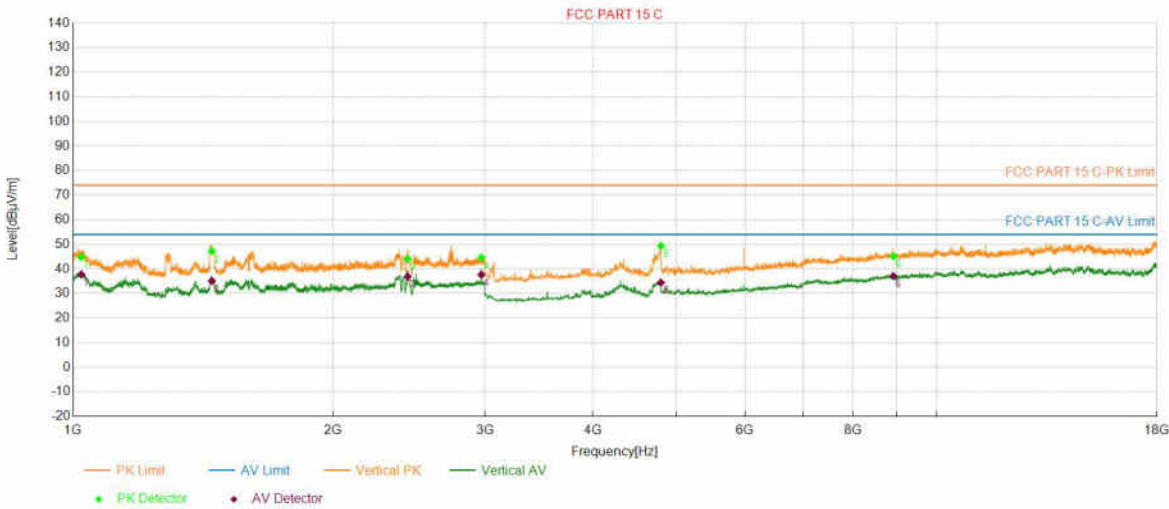


PK Final Data List											
NO.	Frequency (MHz)	Factor (dB/m)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1022.0044	-1.23	44.81	74.00	29.19	37.77	54.00	16.23	150	351	Vertical
2	1447.6895	-0.04	47.19	74.00	26.81	35.11	54.00	18.89	150	356	Vertical
3	2440.6881	6.45	44.07	74.00	29.93	36.92	54.00	17.08	150	101	Vertical
4	2970.3941	7.57	44.54	74.00	29.46	37.65	54.00	16.35	150	2	Vertical
5	4794.3589	-5.08	49.33	74.00	24.67	34.42	54.00	19.58	150	105	Vertical
6	8911.1822	7.03	45.14	74.00	28.86	37.09	54.00	16.91	150	146	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH75GC	SN:	
Mode:	11G_2462	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC PART 15 C			

Start of Test:2024-10-14 11:25:14

Test Graph

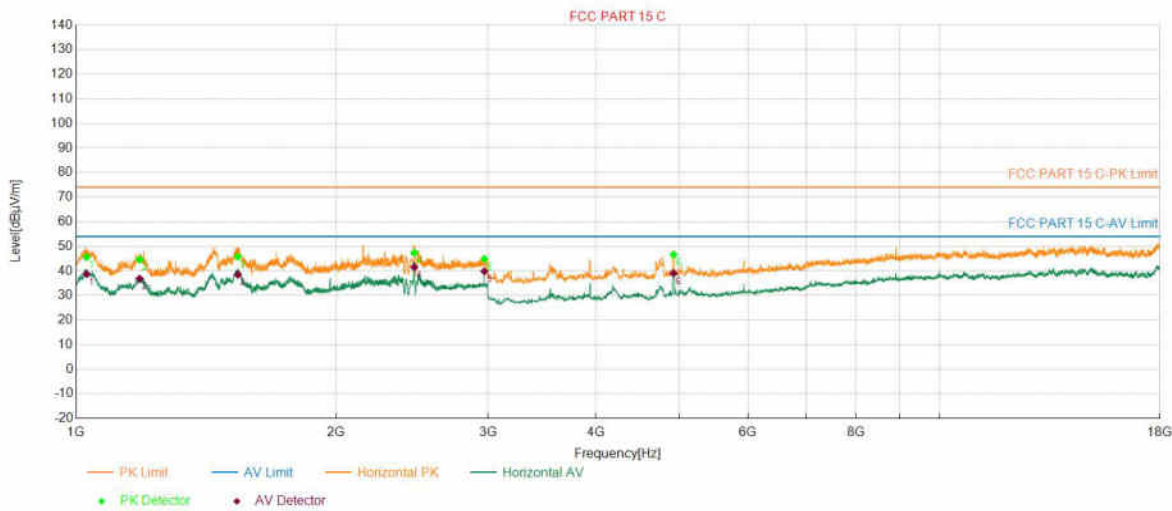


PK Final Data List											
NO.	Frequency (MHz)	Factor (dB/m)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1028.4057	-1.22	45.61	74.00	28.39	38.70	54.00	15.30	150	101	Horizontal
2	1184.4369	-0.72	44.62	74.00	29.38	36.83	54.00	17.17	150	101	Horizontal
3	1539.3079	0.21	45.80	74.00	28.20	38.50	54.00	15.50	150	82	Horizontal
4	2463.8928	6.29	47.39	74.00	26.61	41.52	54.00	12.48	150	174	Horizontal
5	2970.3941	7.57	44.87	74.00	29.13	39.86	54.00	14.14	150	82	Horizontal
6	4920.3841	-4.25	46.64	74.00	27.36	39.05	54.00	14.95	150	52	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH75GC	SN:	
Mode:	11G_2462	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC PART 15 C			

Start of Test:2024-10-14 11:26:43

Test Graph

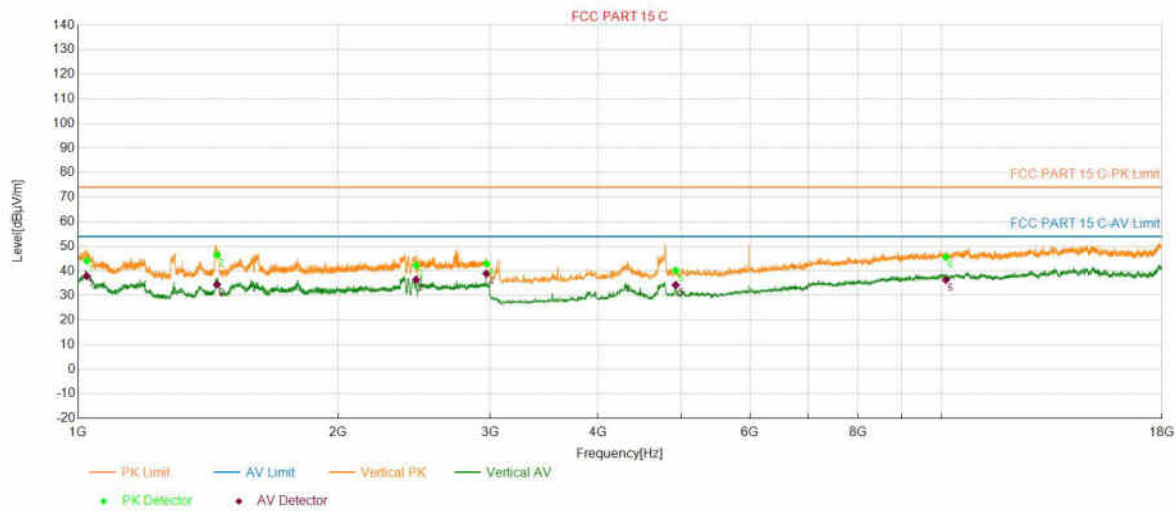


PK Final Data List											
NO.	Frequency (MHz)	Factor (dB/m)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1023.2046	-1.23	44.10	74.00	29.90	37.86	54.00	16.14	150	346	Vertical
2	1448.0896	-0.04	46.51	74.00	27.49	34.43	54.00	19.57	150	355	Vertical
3	2463.0926	6.29	42.19	74.00	31.81	36.44	54.00	17.56	150	101	Vertical
4	2970.3941	7.57	42.93	74.00	31.07	38.90	54.00	15.10	150	3	Vertical
5	4920.3841	-4.25	40.17	74.00	33.83	34.27	54.00	19.73	150	133	Vertical
6	10114.4229	8.72	45.59	74.00	28.41	36.35	54.00	17.65	150	13	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11B_2412	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 0 14		
Test Standard: FCC Part15 C			

Start of Test:2024-10-11 15:37:02

Test Graph

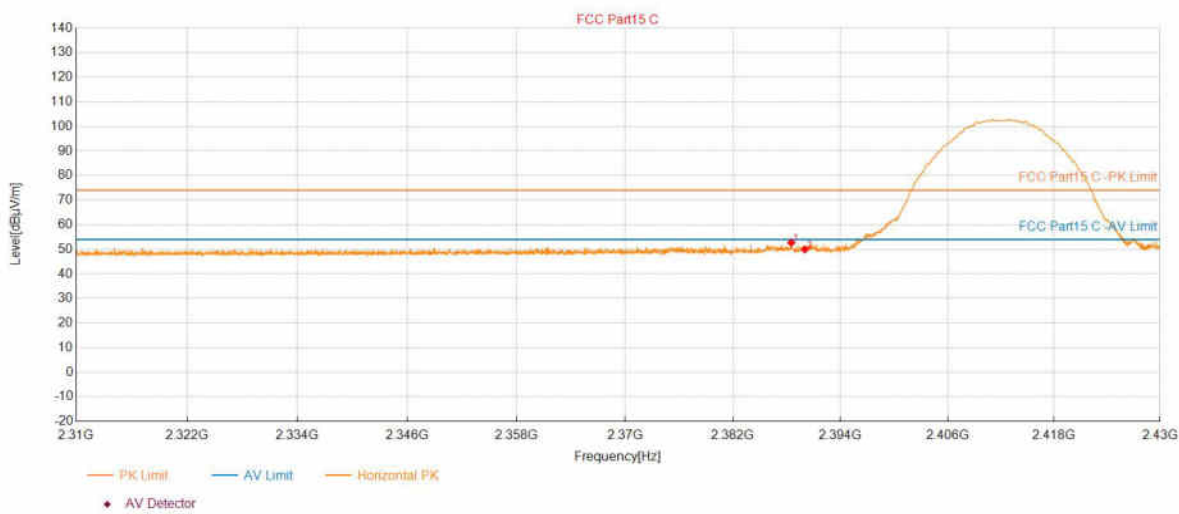


Suspected Data List							
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.4957	52.70	74.00	21.30	150	235	Horizontal
2	2390.0080	49.96	74.00	24.04	150	235	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11B_2412	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 0 14		
Test Standard: FCC Part15 C			

Start of Test:2024-10-11 15:38:00

Test Graph

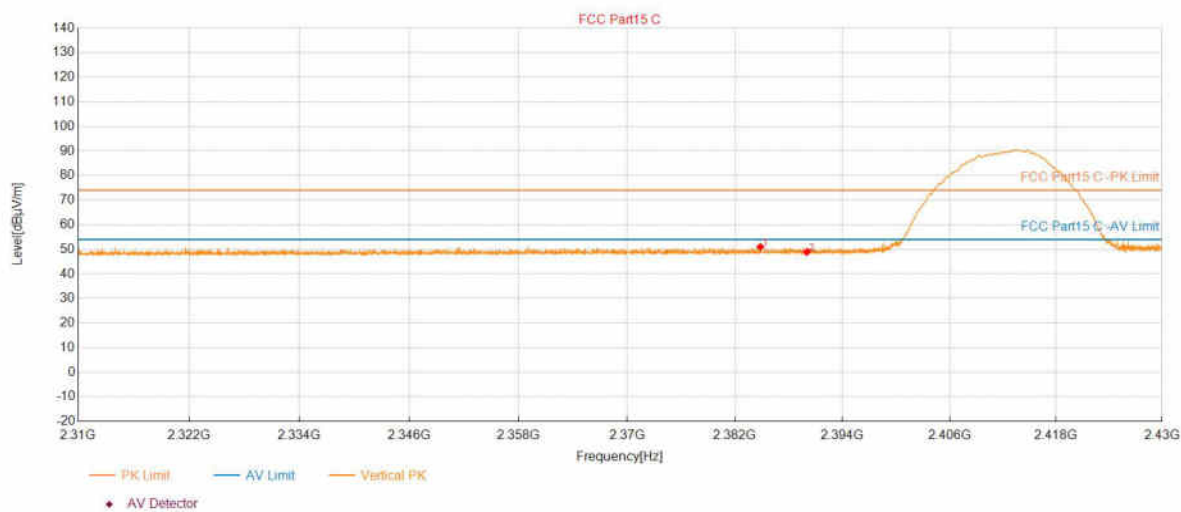


Suspected Data List							
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2384.8230	50.97	74.00	23.03	150	291	Vertical
2	2390.0080	48.92	74.00	25.08	150	4	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11B_2462	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC Part15 C			

Start of Test:2024-10-11 15:43:05

Test Graph

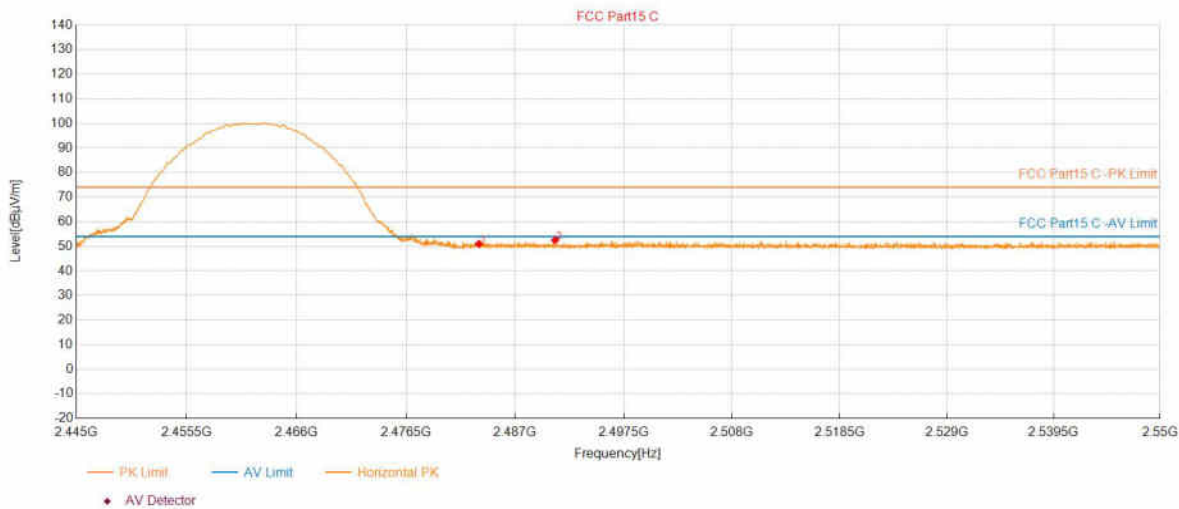


Suspected Data List							
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.5007	50.97	74.00	23.03	150	60	Horizontal
2	2490.8522	52.52	74.00	21.48	150	29	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11B_2462	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC Part15 C			

Start of Test:2024-10-11 15:48:21

Test Graph

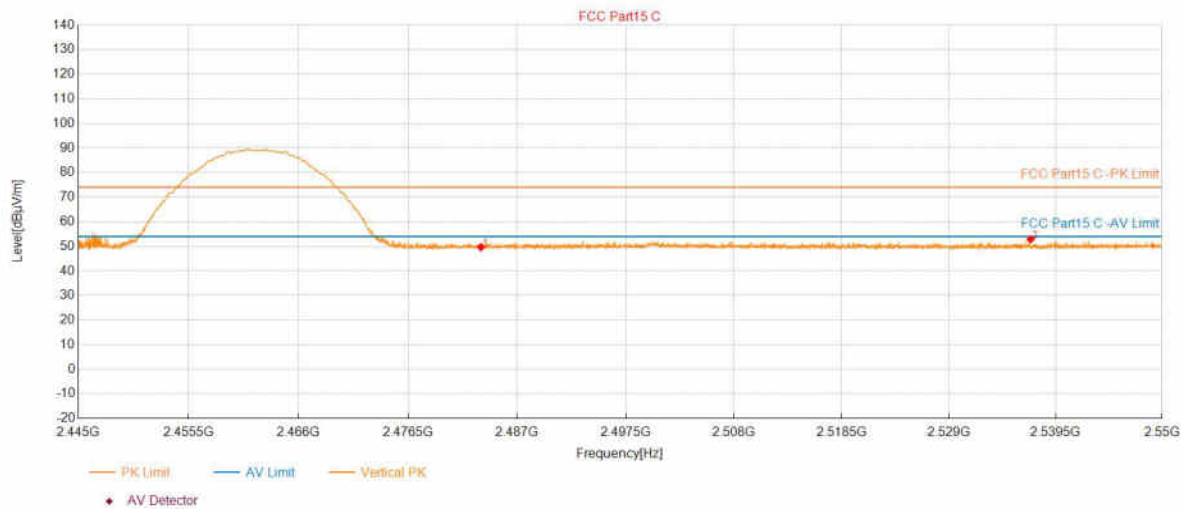


Suspected Data List							
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.5007	49.64	74.00	24.36	150	249	Vertical
2	2537.0194	52.80	74.00	21.20	150	52	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11G_2412	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC Part15 C			

Start of Test:2024-10-12 20:12:02

Test Graph

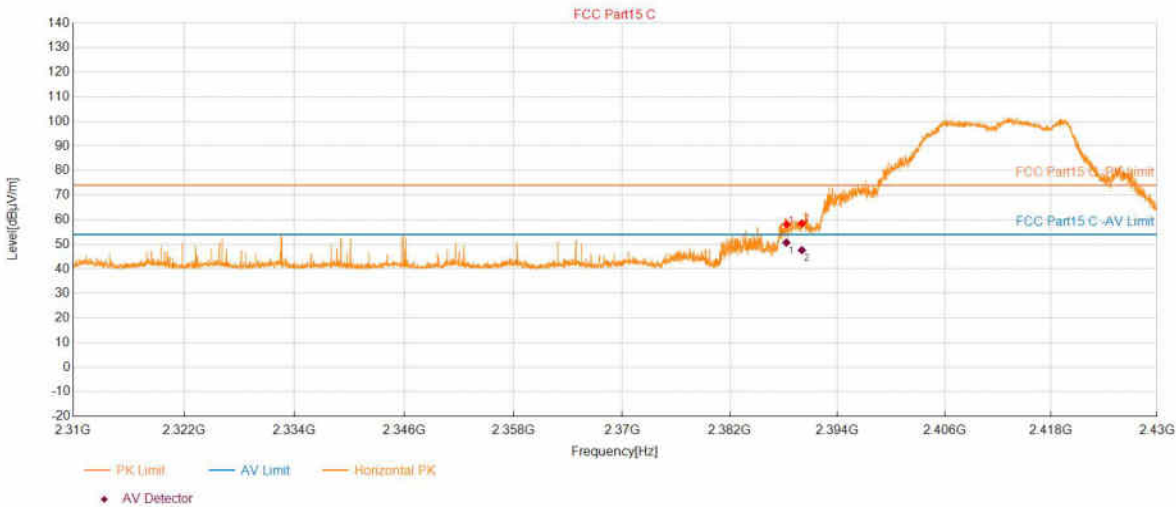

Suspected Data List							
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.3037	58.08	74.00	15.92	150	200	Horizontal
2	2390.0080	58.46	74.00	15.54	150	184	Horizontal


PK Final Data List								
NO.	Frequency (MHz)	Factor (dB/m)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.2818	3.51	50.71	54.00	3.29	155.2	197	Horizontal
2	2390.0080	3.51	47.63	54.00	6.37	150	184	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11G_2412	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC Part15 C			

Start of Test:2024-10-12 20:12:48

Test Graph

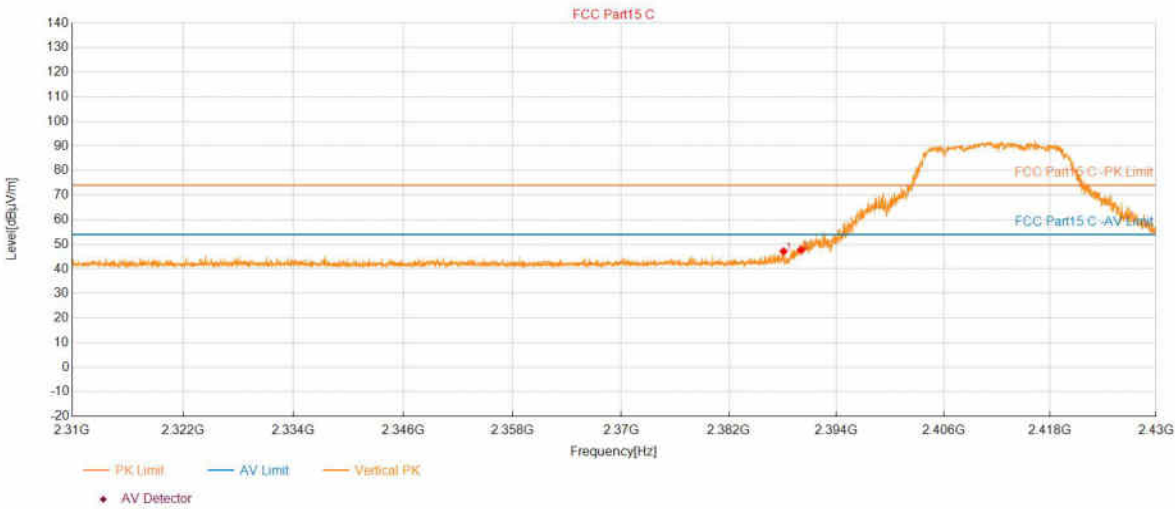


Suspected Data List							
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.0876	47.18	74.00	26.82	150	210	Vertical
2	2390.0080	47.68	74.00	26.32	150	183	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11G_2462	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC Part15 C			

Start of Test:2024-10-12 20:21:13

Test Graph

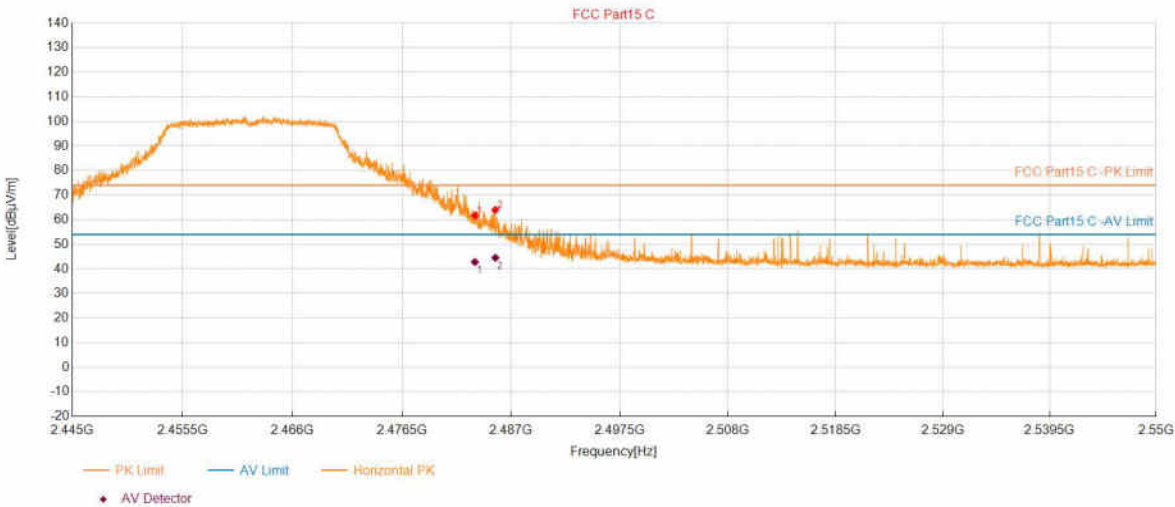

Suspected Data List							
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.5007	61.69	74.00	12.31	150	53	Horizontal
2	2485.4751	63.98	74.00	10.02	150	203	Horizontal


PK Final Data List								
NO.	Frequency (MHz)	Factor (dB/m)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.5007	3.98	42.81	54.00	11.19	150	53	Horizontal
2	2485.4751	3.99	44.52	54.00	9.48	150	203	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11G_2462	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 0 4 14		
Test Standard: FCC Part15 C			

Start of Test:2024-10-12 20:22:05

Test Graph

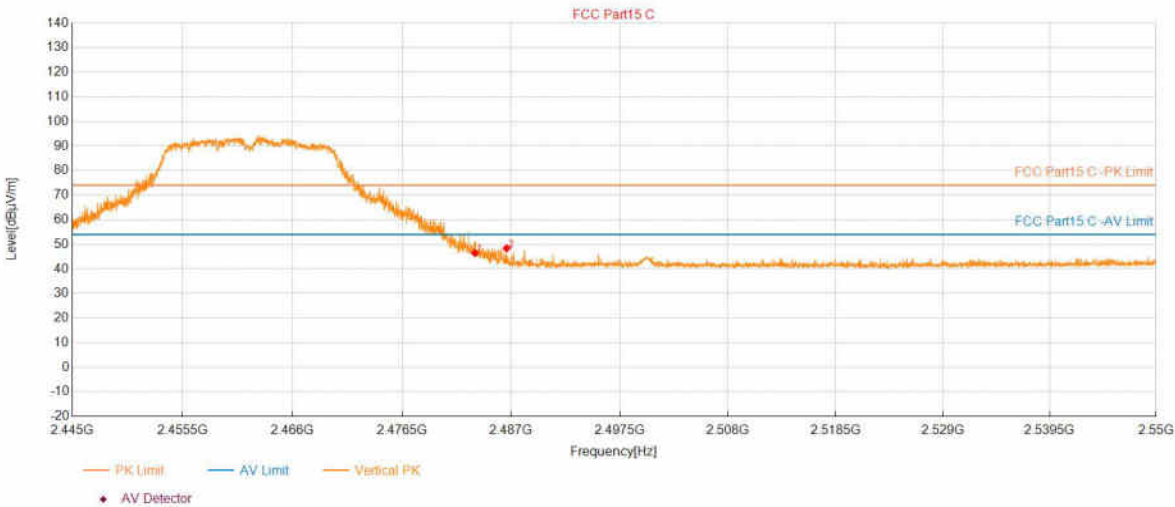


Suspected Data List							
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.5007	46.48	74.00	27.52	150	167	Vertical
2	2486.5463	48.37	74.00	25.63	150	167	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11N20_2412	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 1 0 11		
Test Standard: FCC Part15 C			

Start of Test:2024-10-12 20:36:03

Test Graph

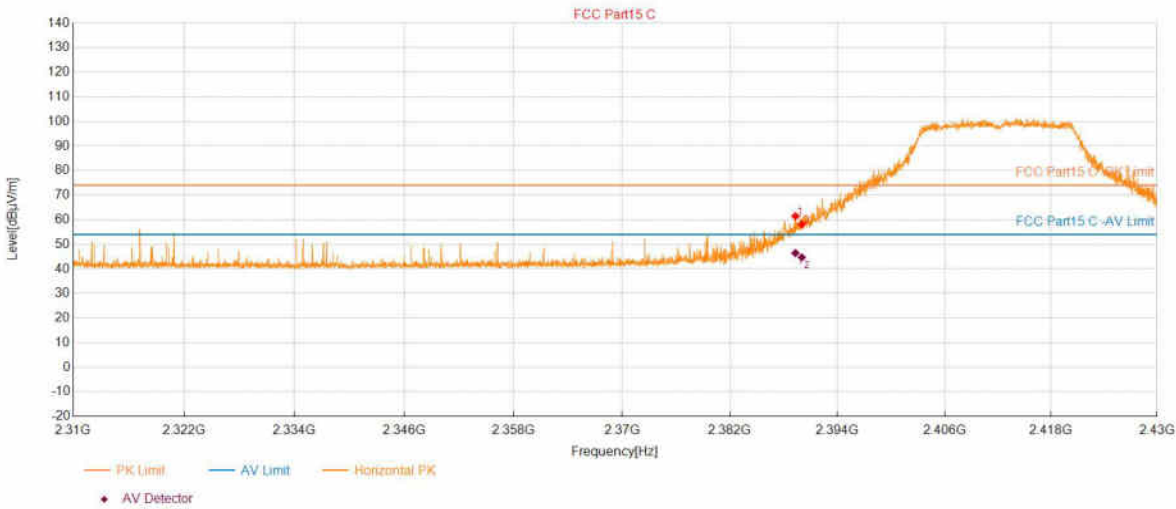

Suspected Data List							
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.2879	61.47	74.00	12.53	150	192	Horizontal
2	2390.0080	58.12	74.00	15.88	150	192	Horizontal


PK Final Data List								
NO.	Frequency (MHz)	Factor (dB/m)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.2869	3.51	46.45	54.00	7.55	162.3	205	Horizontal
2	2390.0080	3.51	44.72	54.00	9.28	150	192	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11N20_2412	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 1 0 11		
Test Standard: FCC Part15 C			

Start of Test:2024-10-12 20:36:53

Test Graph

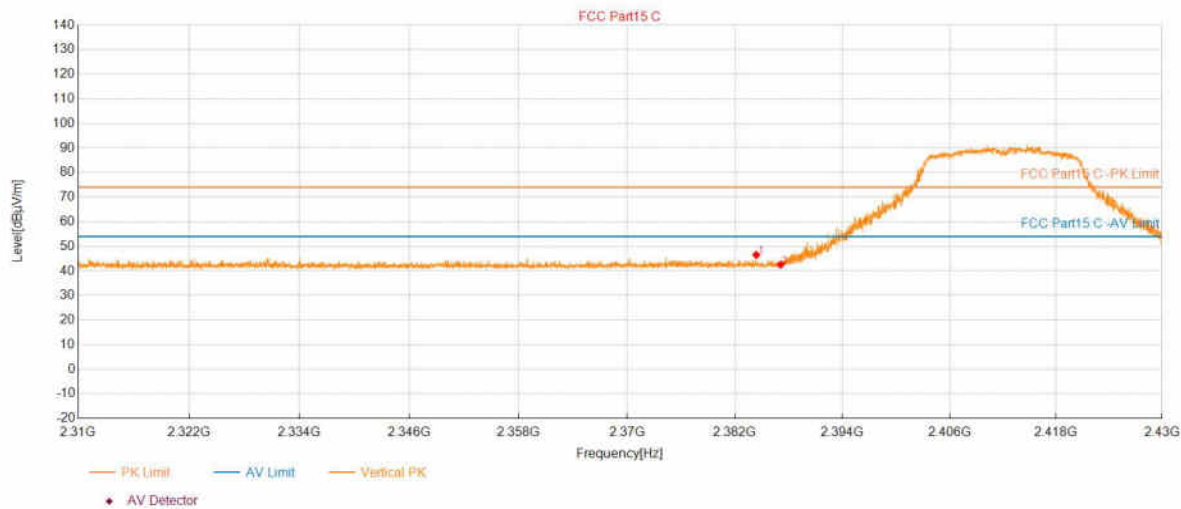


Suspected Data List							
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2384.3669	46.53	74.00	27.47	150	208	Vertical
2	2387.0794	42.51	74.00	31.49	150	5	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	CH65GC	SN:	
Mode:	11N20_2462	Voltage:	AC120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Fly Liao
Remark:	power set:1 1 0 11		
Test Standard: FCC Part15 C			

Start of Test:2024-10-12 20:49:07

Test Graph

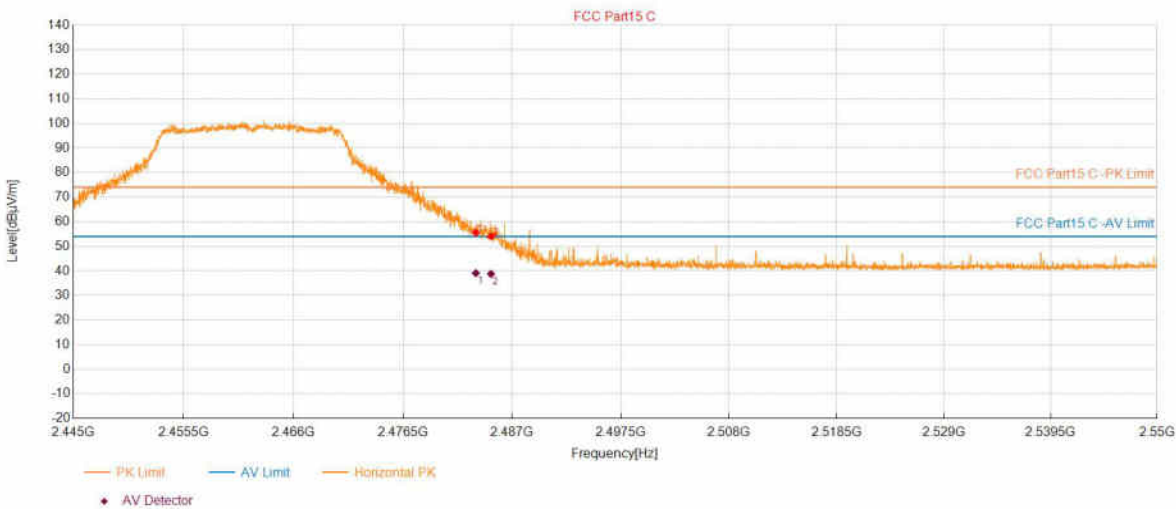

Suspected Data List							
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.5007	55.51	74.00	18.49	150	96	Horizontal
2	2484.9710	54.03	74.00	19.97	150	203	Horizontal

PK Final Data List								
NO.	Frequency (MHz)	Factor (dB/m)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.5007	3.98	39.10	54.00	14.90	150	96	Horizontal
2	2484.9517	3.99	38.80	54.00	15.20	130	205	Horizontal