

**ANNEX C   System Validation Reports**

**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL1900 MHz\_13\_08\_2014**

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d025**

Communication System: UID 0 - n/a, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Muscle 1900 MHz Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.464$  S/m;  $\epsilon_r = 54.371$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 11.5 W/kg

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 89.841 V/m; Power Drift = 0.16 dB  
Peak SAR (extrapolated) = 15.2 W/kg  
**SAR(1 g) = 9.46 W/kg; SAR(10 g) = 5.12 W/kg**  
Maximum value of SAR (measured) = 10.7 W/kg

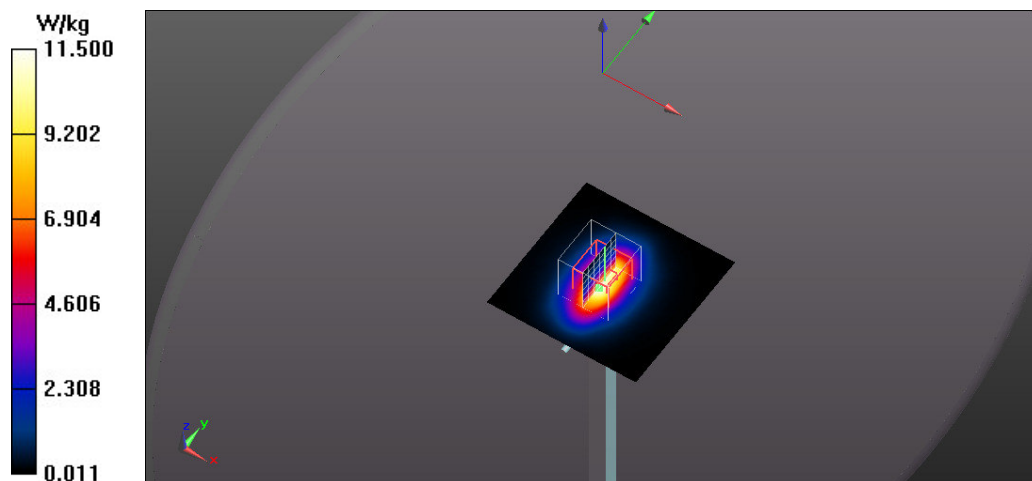

**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL1900 MHz\_12\_08\_2014**

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d025**

Communication System: UID 0 - n/a, CW; Frequency: 1900 MHz;Duty Cycle: 1:1

Medium: Muscle 1900 MHz Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.464$  S/m;  $\epsilon_r = 54.371$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=xx mW, dist=4.0mm (ET-Probe)/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 11.2 W/kg

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=xx mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 90.340 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 14.9 W/kg  
**SAR(1 g) = 9.24 W/kg; SAR(10 g) = 5.02 W/kg**  
Maximum value of SAR (measured) = 10.5 W/kg

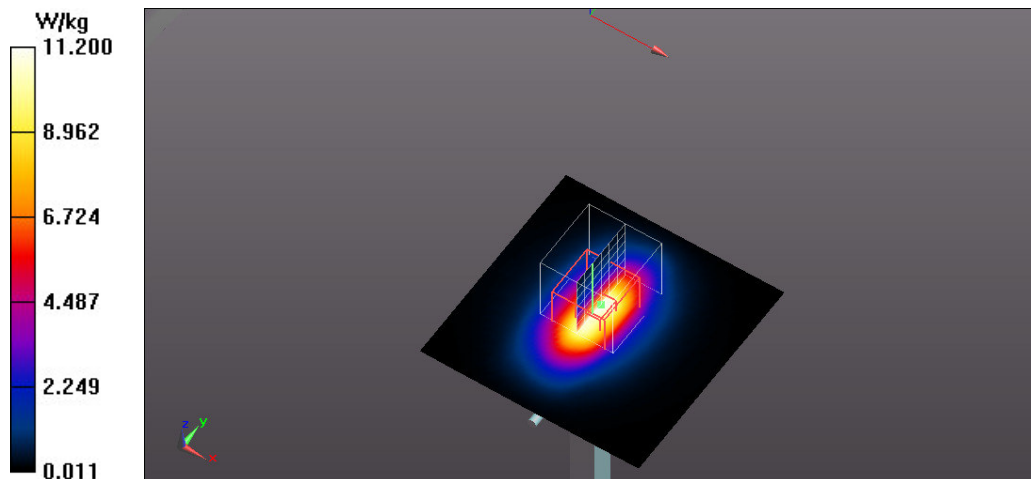

**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL900 MHz\_11\_08\_2014**

**DUT: Dipole 900 MHz; Type: D900V2; Serial: 164**

Communication System: UID 0 - n/a, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Muscle 900 MHz Medium parameters used:  $f = 900$  MHz;  $\sigma = 1.03$  S/m;  $\epsilon_r = 54.419$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(5.99, 5.99, 5.99); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.90 W/kg

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 55.309 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 3.88 W/kg  
**SAR(1 g) = 2.71 W/kg; SAR(10 g) = 1.77 W/kg**  
Maximum value of SAR (measured) = 2.93 W/kg

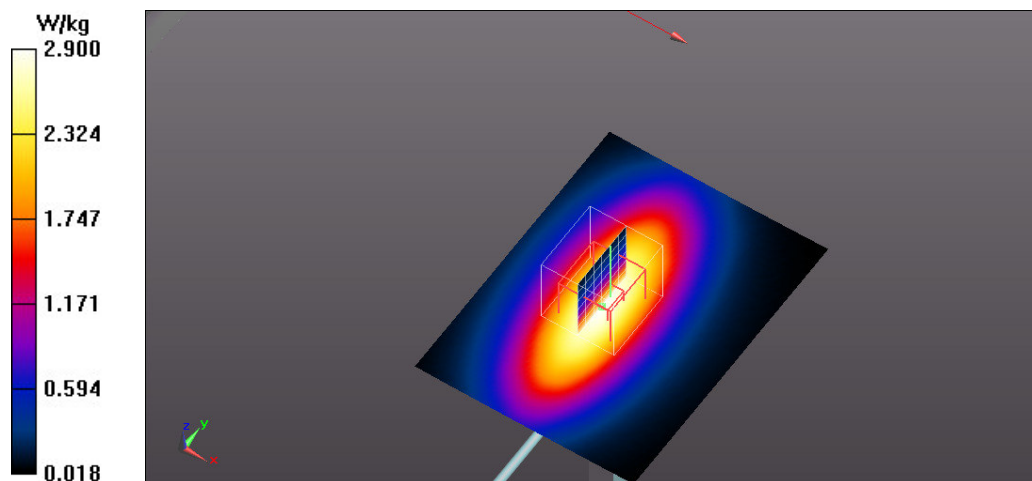

**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL900 MHz\_08\_08\_2014**

**DUT: Dipole 900 MHz; Type: D900V2; Serial: 164**

Communication System: UID 0 - n/a, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Muscle 900 MHz Medium parameters used:  $f = 900$  MHz;  $\sigma = 1.03$  S/m;  $\epsilon_r = 54.419$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(5.99, 5.99, 5.99); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=xx mW, dist=4.0mm (ET-Probe)/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 3.03 W/kg

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=xx mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 54.585 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 4.02 W/kg  
**SAR(1 g) = 2.8 W/kg; SAR(10 g) = 1.83 W/kg**  
Maximum value of SAR (measured) = 3.05 W/kg

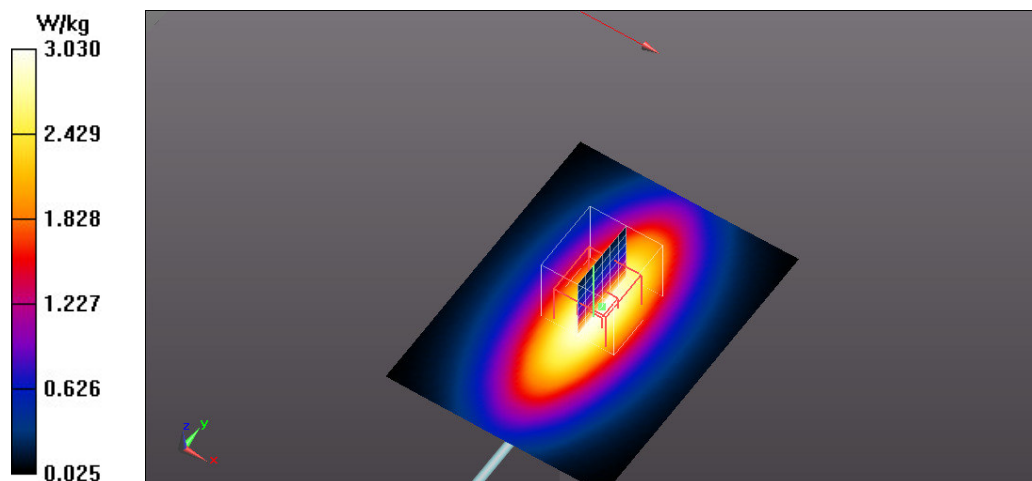

**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL900 MHz\_14\_08\_2014**

**DUT: Dipole 900 MHz; Type: D900V2; Serial: 164**

Communication System: UID 0 - n/a, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Muscle 900 MHz Medium parameters used:  $f = 900 \text{ MHz}$ ;  $\sigma = 1.03 \text{ S/m}$ ;  $\epsilon_r = 54.419$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(5.99, 5.99, 5.99); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 2.99 W/kg

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 54.980 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 4.00 W/kg  
**SAR(1 g) = 2.78 W/kg; SAR(10 g) = 1.82 W/kg**  
Maximum value of SAR (measured) = 3.04 W/kg

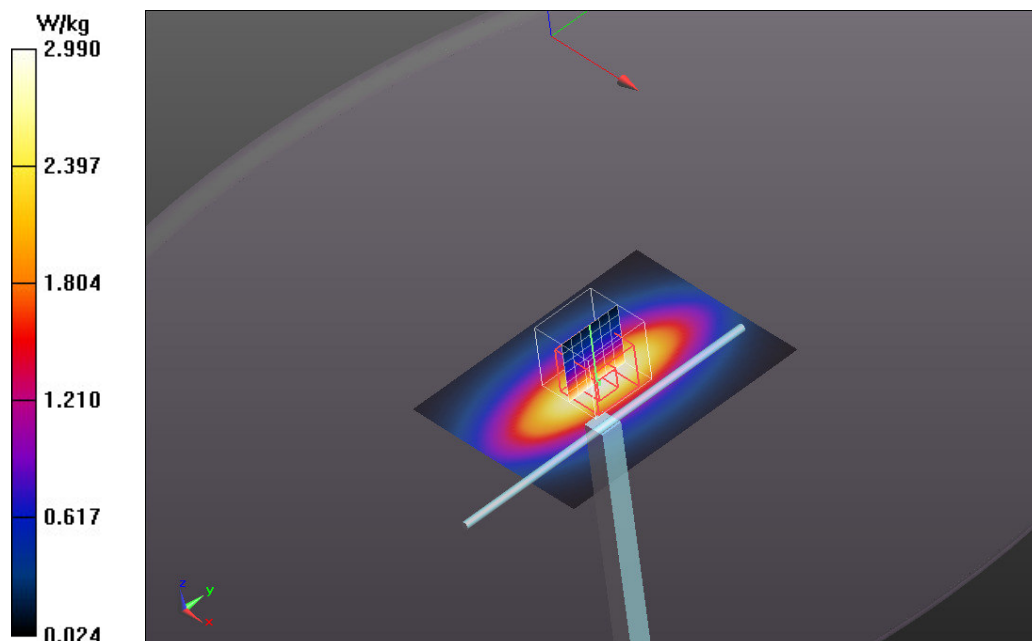

**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL 5800\_06\_08\_2014**

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:xxx**

Communication System: UID 0 - n/a, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: MBBL 3-6 GHz Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.07$  S/m;  $\epsilon_r = 46$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: EX3DV4 - SN3893; ConvF(4.38, 4.38, 4.38); Calibrated: 9/17/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check with D5GHzV2 Dipole (uniform grid)/d=10mm, Pin=100mW, f=5800 MHz/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 18.9 W/kg


**System Performance Check with D5GHzV2 Dipole (uniform grid)/d=10mm, Pin=100mW, f=5800 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (8x8x13)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 52.846 V/m; Power Drift = 0.08dB

Peak SAR (extrapolated) = 34.3 W/kg

**SAR(1 g) = 6.95 W/kg; SAR(10 g) = 1.94 W/kg**

Maximum value of SAR (measured) = 17.2 W/kg

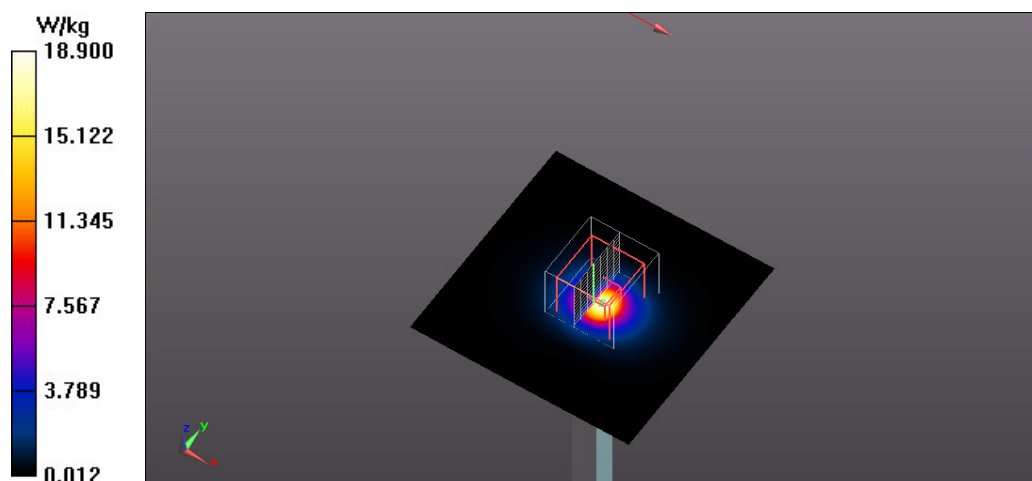

**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL 5500\_06\_08\_2014**

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:xxx**

Communication System: UID 0 - n/a, CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: MBBL 3-6 GHz Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.68$  S/m;  $\epsilon_r = 46.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: EX3DV4 - SN3893; ConvF(4.27, 4.27, 4.27); Calibrated: 9/17/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check with D5GHzV2 Dipole (uniform grid)/d=10mm, Pin=100mW, f=5500 MHz/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 19.7 W/kg


**System Performance Check with D5GHzV2 Dipole (uniform grid)/d=10mm, Pin=100mW, f=5500 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (8x8x13)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.026 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 34.6 W/kg

**SAR(1 g) = 7.43 W/kg; SAR(10 g) = 2.07 W/kg**

Maximum value of SAR (measured) = 17.7 W/kg

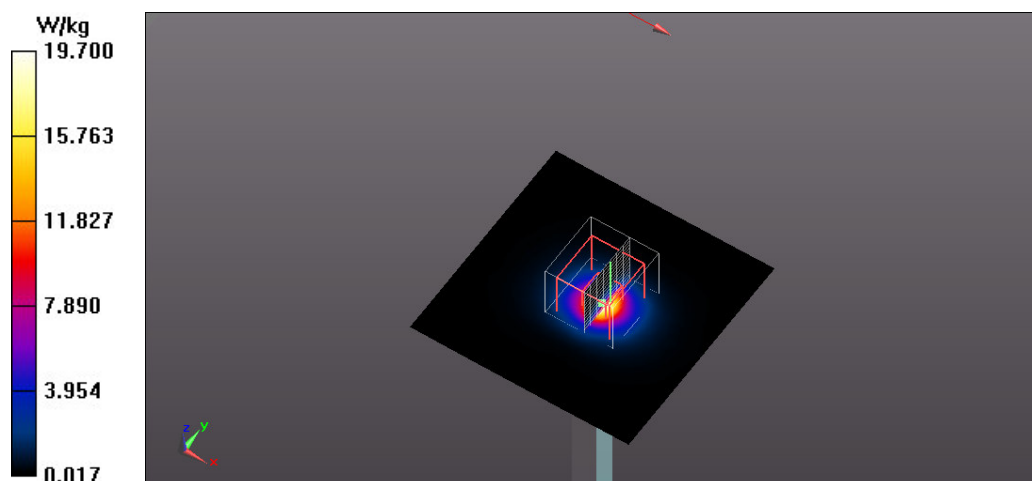



**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL 5200\_06\_08\_2014**

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:xxx**

Communication System: UID 0 - n/a, CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: MBBL 3-6 GHz Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.3$  S/m;  $\epsilon_r = 47.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: EX3DV4 - SN3893; ConvF(4.67, 4.67, 4.67); Calibrated: 9/17/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check with D5GHzV2 Dipole (uniform grid)/d=10mm, Pin=100mW, f=5200 MHz/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 18.5 W/kg


**System Performance Check with D5GHzV2 Dipole (uniform grid)/d=10mm, Pin=100mW, f=5200 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (8x8x13)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 57.406 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 30.6 W/kg

**SAR(1 g) = 7.26 W/kg; SAR(10 g) = 2.05 W/kg**

Maximum value of SAR (measured) = 17.1 W/kg

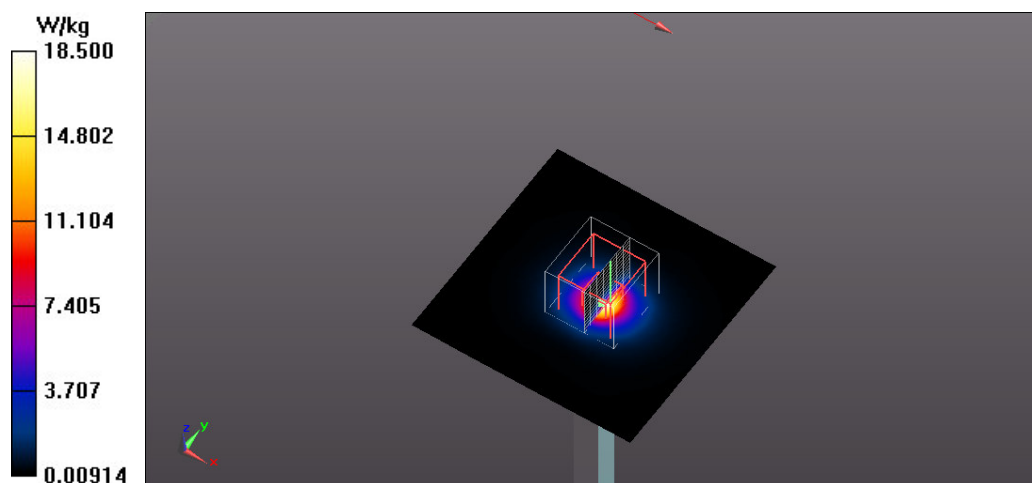

## Test Laboratory: Eurofins Product Service GmbH

### SystemPerformanceCheck-2450MHz\_04\_08\_2014

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 722**

Communication System: UID 0 - n/a, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: Muscle 2450 MHz Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 2.022$  S/m;  $\epsilon_r = 50.559$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.05, 4.05, 4.05); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)


**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 19.1 W/kg

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 94.254 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 41.8 W/kg

**SAR(1 g) = 14.05 W/kg; SAR(10 g) = 6.45 W/kg**

Maximum value of SAR (measured) = 18.1 W/kg

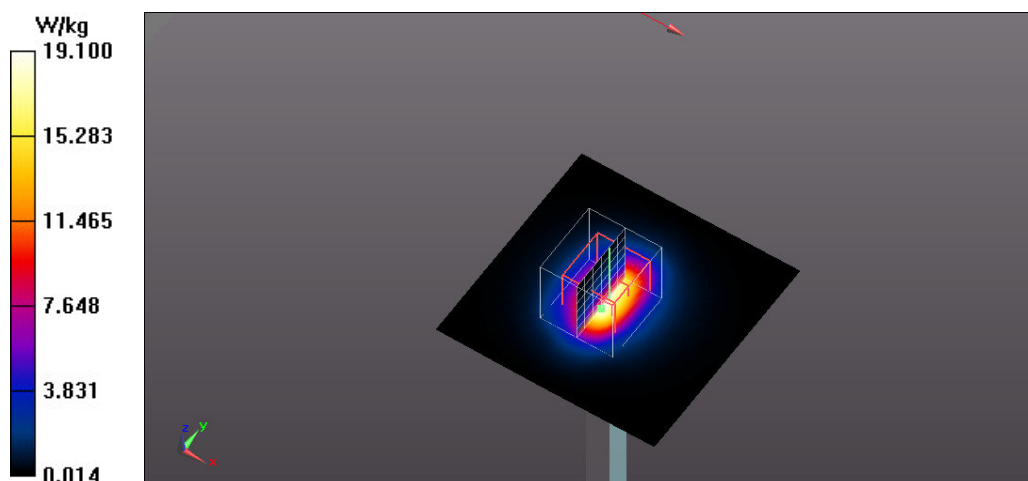

**Test Laboratory: Eurofins Product Service GmbH**

**System Performance Check - SAM Phantom - ET3DV6 - MSL - 1800 MHz**

**DUT: Dipole 1750 MHz (D1750V2); Type: SA AAD 175 AA; Serial: 1126**

Communication System: UID 0 - n/a, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: Muscle 1800 MHz Medium parameters used:  $f = 1750 \text{ MHz}$ ;  $\sigma = 1.56 \text{ S/m}$ ;  $\epsilon_r = 53.244$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.74, 4.74, 4.74); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 10.9 W/kg


**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 86.975 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 14.7 W/kg

**SAR(1 g) = 9.15 W/kg; SAR(10 g) = 4.97 W/kg**

Maximum value of SAR (measured) = 10.3 W/kg

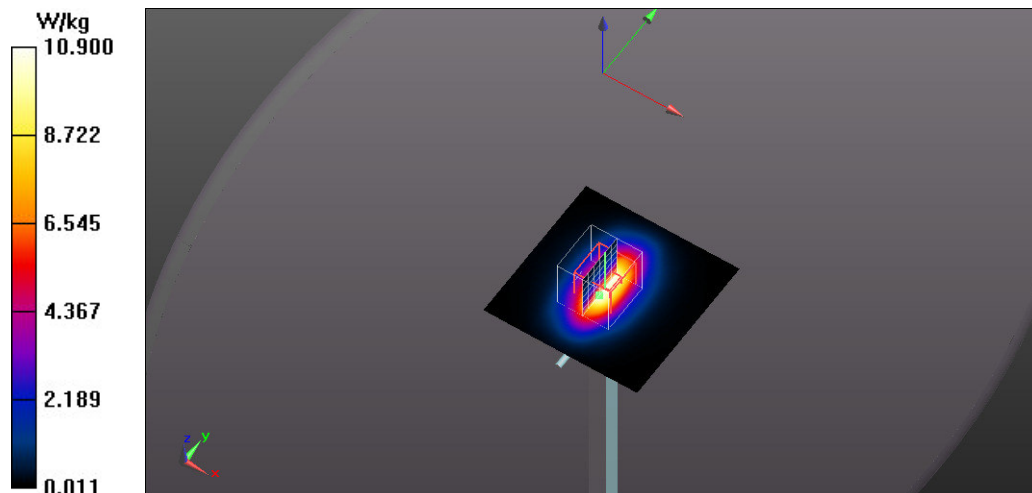

## Test Laboratory: Eurofins Product Service GmbH

### System Performance Check - SAM Phantom - ET3DV6 - MSL - 750 MHz

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1125**

Communication System: UID 0 - n/a, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: Muscle 750 MHz Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.963 \text{ S/m}$ ;  $\epsilon_r = 55.001$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

#### DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.26, 6.26, 6.26); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.40 W/kg

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 52.356 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 3.21 W/kg  
**SAR(1 g) = 2.24 W/kg; SAR(10 g) = 1.49 W/kg**  
Maximum value of SAR (measured) = 2.44 W/kg

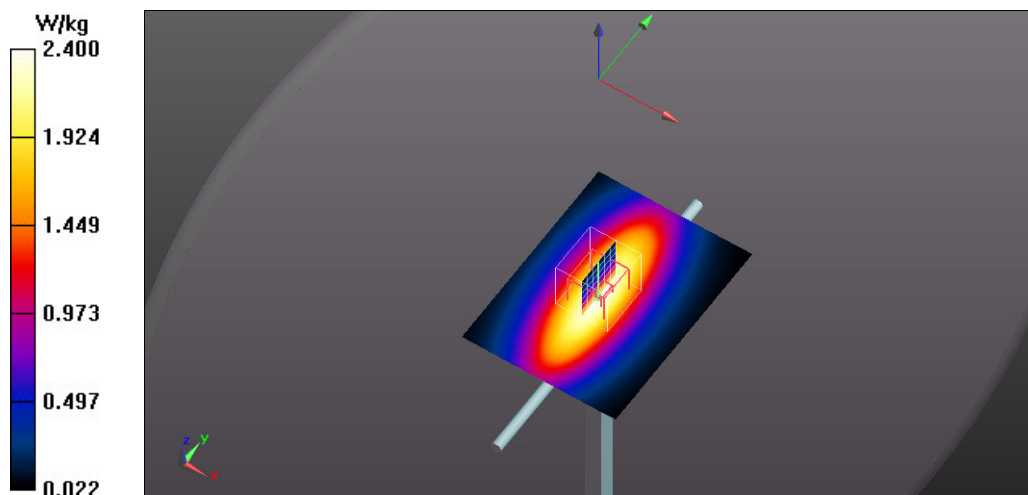

**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL1900 MHz\_13\_08\_2014**

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d025**

Communication System: UID 0 - n/a, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Muscle 1900 MHz Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.464$  S/m;  $\epsilon_r = 54.371$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 11.5 W/kg

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 89.841 V/m; Power Drift = 0.16 dB  
Peak SAR (extrapolated) = 15.2 W/kg  
**SAR(1 g) = 9.46 W/kg; SAR(10 g) = 5.12 W/kg**  
Maximum value of SAR (measured) = 10.7 W/kg

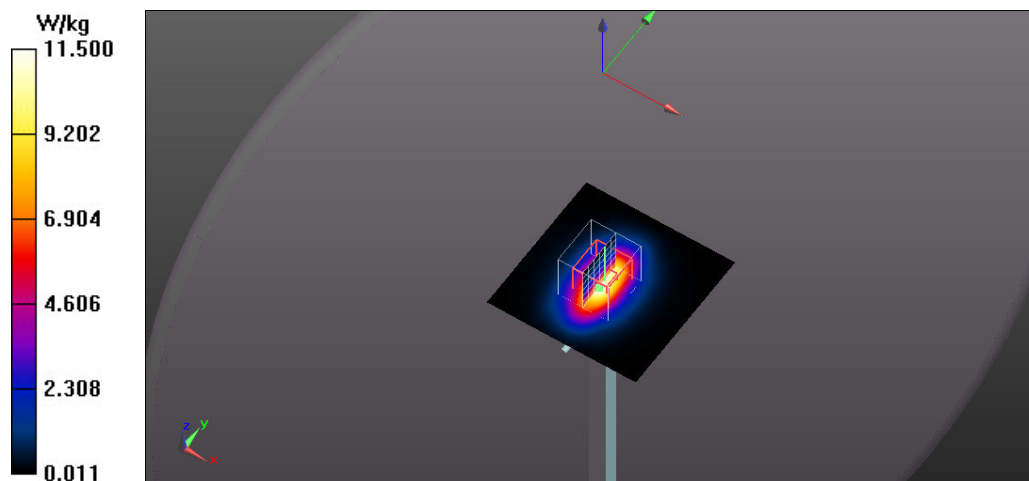

**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL1900 MHz\_12\_08\_2014**

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d025**

Communication System: UID 0 - n/a, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Muscle 1900 MHz Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.464 \text{ S/m}$ ;  $\epsilon_r = 54.371$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=xx mW, dist=4.0mm (ET-Probe)/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 11.2 W/kg

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=xx mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 90.340 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 14.9 W/kg  
**SAR(1 g) = 9.24 W/kg; SAR(10 g) = 5.02 W/kg**  
Maximum value of SAR (measured) = 10.5 W/kg

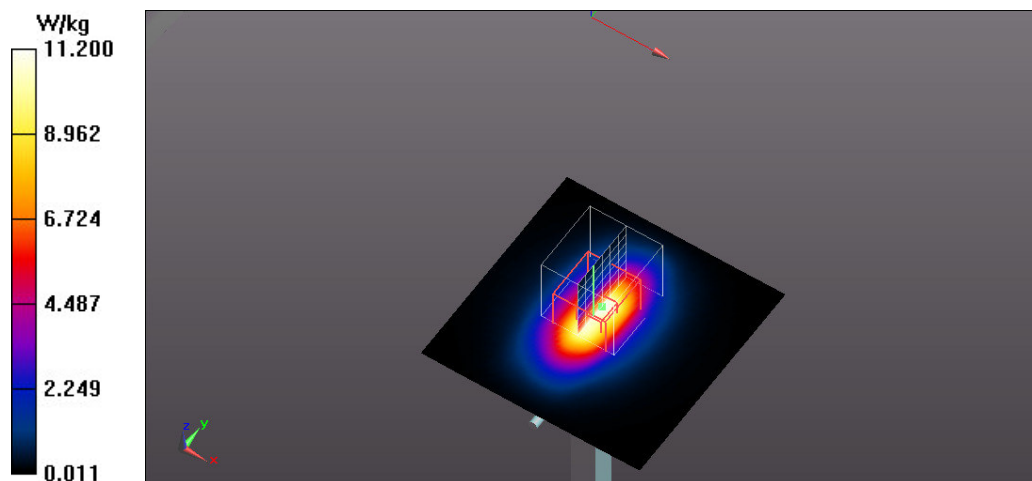

**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL900 MHz\_11\_08\_2014**

**DUT: Dipole 900 MHz; Type: D900V2; Serial: 164**

Communication System: UID 0 - n/a, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Muscle 900 MHz Medium parameters used:  $f = 900$  MHz;  $\sigma = 1.03$  S/m;  $\epsilon_r = 54.419$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(5.99, 5.99, 5.99); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.90 W/kg

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 55.309 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 3.88 W/kg  
**SAR(1 g) = 2.71 W/kg; SAR(10 g) = 1.77 W/kg**  
Maximum value of SAR (measured) = 2.93 W/kg

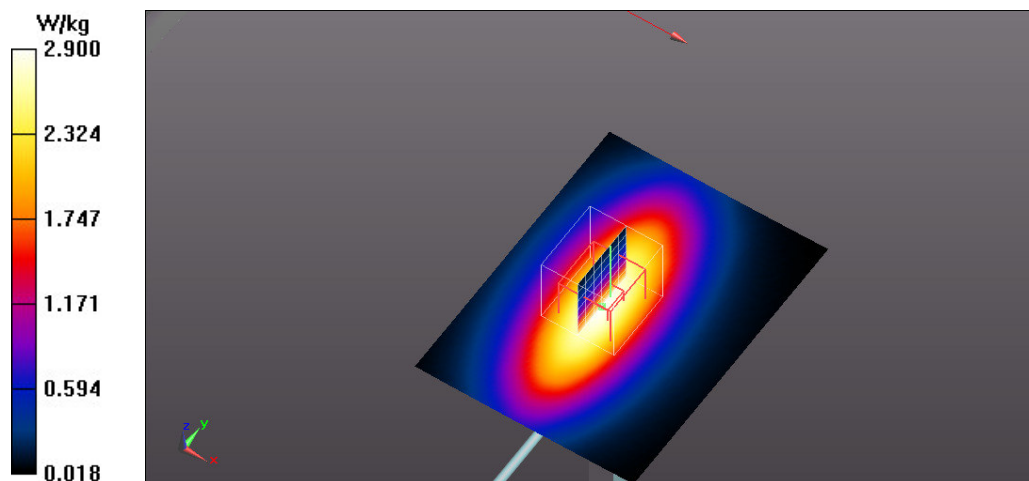

**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL900 MHz\_08\_08\_2014**

**DUT: Dipole 900 MHz; Type: D900V2; Serial: 164**

Communication System: UID 0 - n/a, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Muscle 900 MHz Medium parameters used:  $f = 900$  MHz;  $\sigma = 1.03$  S/m;  $\epsilon_r = 54.419$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(5.99, 5.99, 5.99); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=xx mW, dist=4.0mm (ET-Probe)/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 3.03 W/kg


**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=xx mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.585 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 4.02 W/kg

**SAR(1 g) = 2.8 W/kg; SAR(10 g) = 1.83 W/kg**

Maximum value of SAR (measured) = 3.05 W/kg

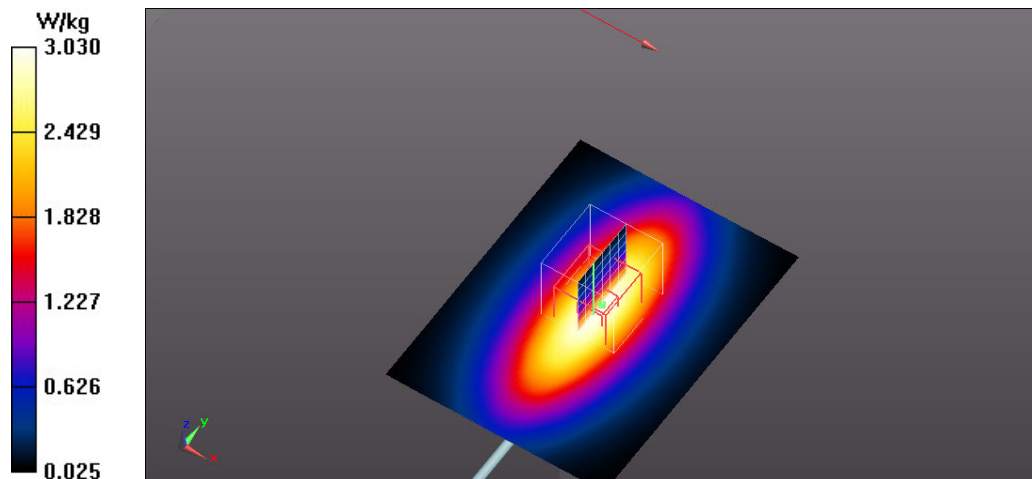



**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL900 MHz\_14\_08\_2014**

**DUT: Dipole 900 MHz; Type: D900V2; Serial: 164**

Communication System: UID 0 - n/a, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Muscle 900 MHz Medium parameters used:  $f = 900 \text{ MHz}$ ;  $\sigma = 1.03 \text{ S/m}$ ;  $\epsilon_r = 54.419$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(5.99, 5.99, 5.99); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 2.99 W/kg

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 54.980 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 4.00 W/kg  
**SAR(1 g) = 2.78 W/kg; SAR(10 g) = 1.82 W/kg**  
Maximum value of SAR (measured) = 3.04 W/kg

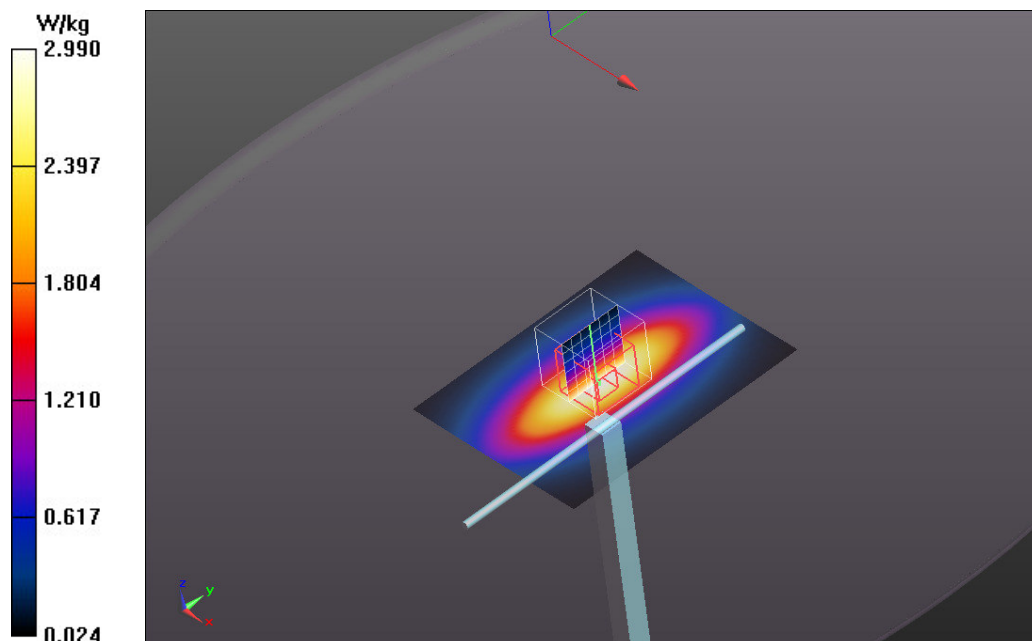

**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL 5800\_06\_08\_2014**

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:xxx**

Communication System: UID 0 - n/a, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: MBBL 3-6 GHz Medium parameters used:  $f = 5800 \text{ MHz}$ ;  $\sigma = 6.07 \text{ S/m}$ ;  $\epsilon_r = 46$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: EX3DV4 - SN3893; ConvF(4.38, 4.38, 4.38); Calibrated: 9/17/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check with D5GHzV2 Dipole (uniform grid)/d=10mm, Pin=100mW, f=5800 MHz/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 18.9 W/kg


**System Performance Check with D5GHzV2 Dipole (uniform grid)/d=10mm, Pin=100mW, f=5800 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (8x8x13)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 52.846 V/m; Power Drift = 0.08dB

Peak SAR (extrapolated) = 34.3 W/kg

**SAR(1 g) = 6.95 W/kg; SAR(10 g) = 1.94 W/kg**

Maximum value of SAR (measured) = 17.2 W/kg

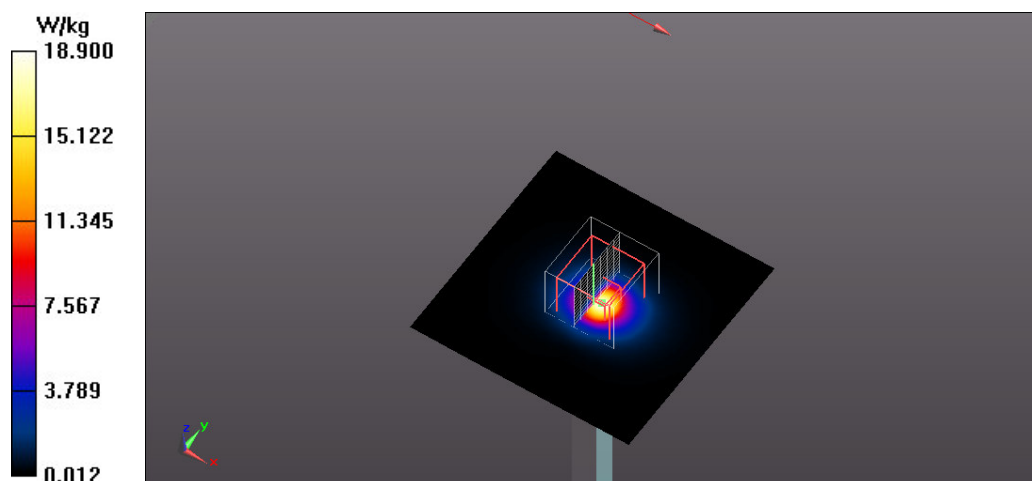

**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL 5500\_06\_08\_2014**

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:xxx**

Communication System: UID 0 - n/a, CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: MBBL 3-6 GHz Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.68$  S/m;  $\epsilon_r = 46.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: EX3DV4 - SN3893; ConvF(4.27, 4.27, 4.27); Calibrated: 9/17/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check with D5GHzV2 Dipole (uniform grid)/d=10mm, Pin=100mW, f=5500 MHz/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 19.7 W/kg


**System Performance Check with D5GHzV2 Dipole (uniform grid)/d=10mm, Pin=100mW, f=5500 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (8x8x13)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.026 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 34.6 W/kg

**SAR(1 g) = 7.43 W/kg; SAR(10 g) = 2.07 W/kg**

Maximum value of SAR (measured) = 17.7 W/kg

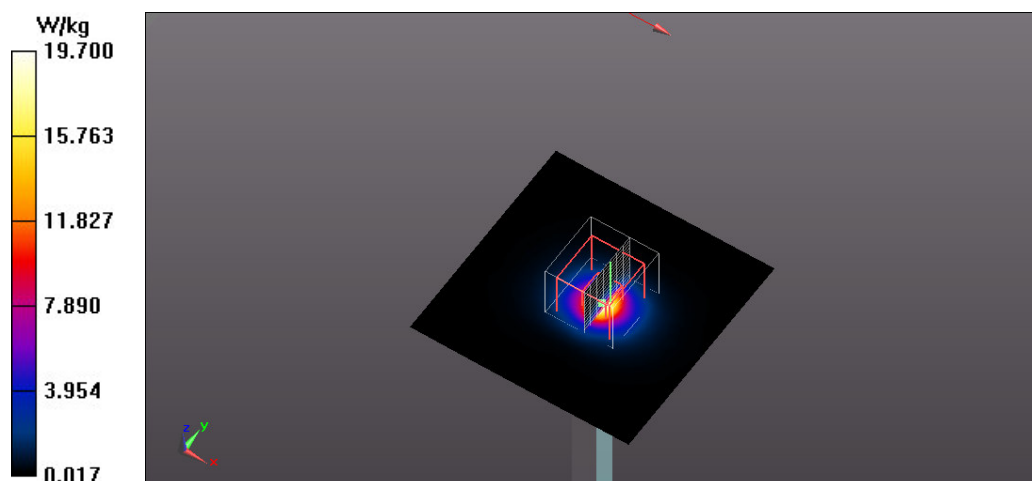

**Test Laboratory: Eurofins Product Service GmbH**

**SystemPerformanceCheck-MSL 5200\_06\_08\_2014**

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:xxx**

Communication System: UID 0 - n/a, CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: MBBL 3-6 GHz Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.3$  S/m;  $\epsilon_r = 47.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: EX3DV4 - SN3893; ConvF(4.67, 4.67, 4.67); Calibrated: 9/17/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check with D5GHzV2 Dipole (uniform grid)/d=10mm, Pin=100mW, f=5200 MHz/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 18.5 W/kg

**System Performance Check with D5GHzV2 Dipole (uniform grid)/d=10mm, Pin=100mW, f=5200 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (8x8x13)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 57.406 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 30.6 W/kg  
**SAR(1 g) = 7.26 W/kg; SAR(10 g) = 2.05 W/kg**  
Maximum value of SAR (measured) = 17.1 W/kg

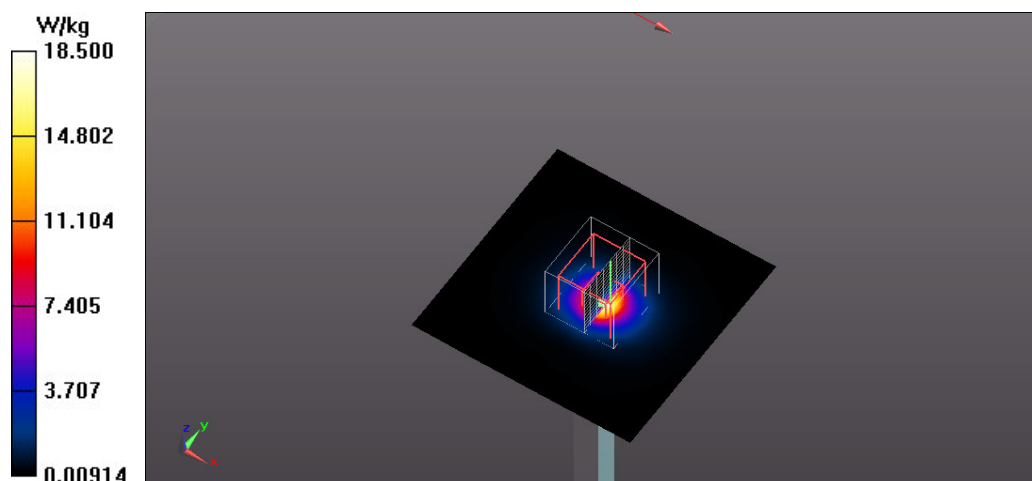

## Test Laboratory: Eurofins Product Service GmbH

### SystemPerformanceCheck-2450MHz\_04\_08\_2014

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 722**

Communication System: UID 0 - n/a, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: Muscle 2450 MHz Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 2.022$  S/m;  $\epsilon_r = 50.559$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.05, 4.05, 4.05); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)


**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 19.1 W/kg

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 94.254 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 41.8 W/kg

**SAR(1 g) = 14.05 W/kg; SAR(10 g) = 6.45 W/kg**

Maximum value of SAR (measured) = 18.1 W/kg

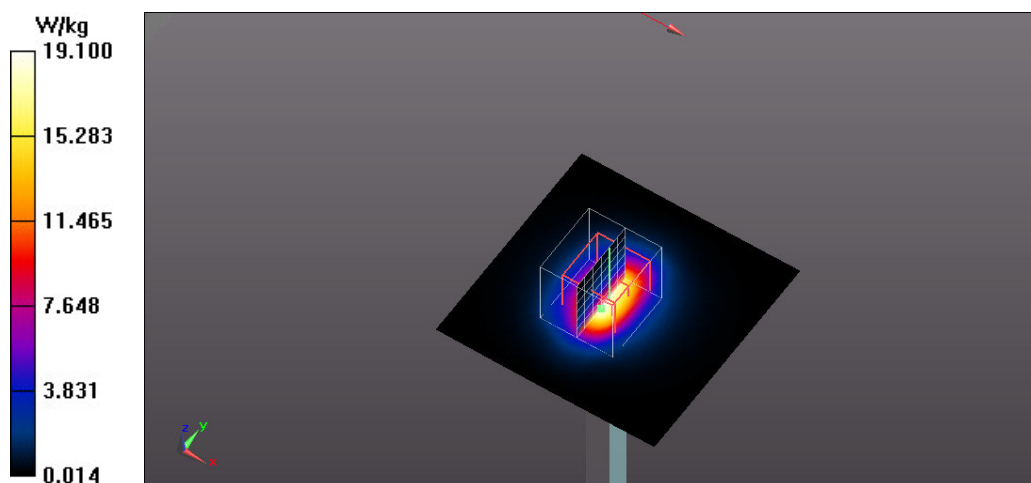

**Test Laboratory: Eurofins Product Service GmbH**

**System Performance Check - SAM Phantom - ET3DV6 - MSL - 1800 MHz**

**DUT: Dipole 1750 MHz (D1750V2); Type: SA AAD 175 AA; Serial: 1126**

Communication System: UID 0 - n/a, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: Muscle 1800 MHz Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.56$  S/m;  $\epsilon_r = 53.244$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.74, 4.74, 4.74); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 10.9 W/kg

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 86.975 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 14.7 W/kg  
**SAR(1 g) = 9.15 W/kg; SAR(10 g) = 4.97 W/kg**  
Maximum value of SAR (measured) = 10.3 W/kg

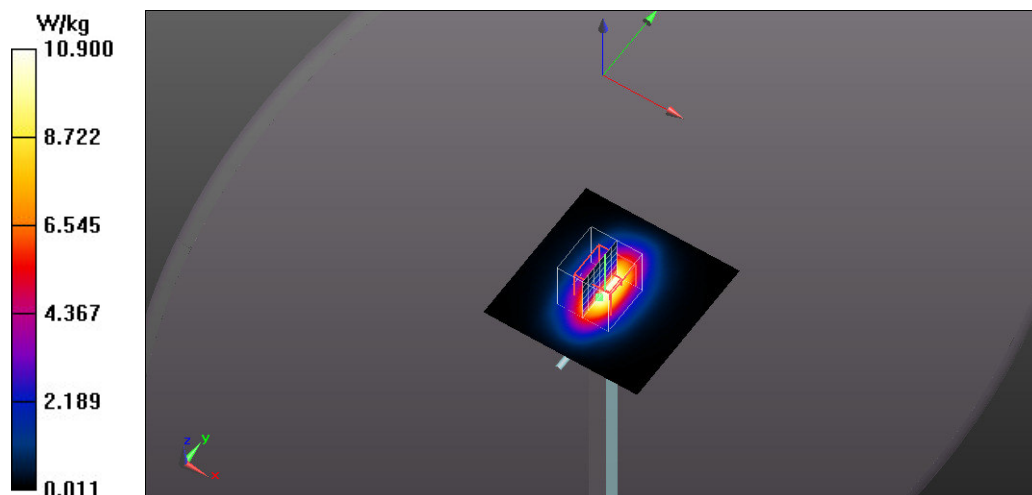

## Test Laboratory: Eurofins Product Service GmbH

### System Performance Check - SAM Phantom - ET3DV6 - MSL - 750 MHz

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1125**

Communication System: UID 0 - n/a, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: Muscle 750 MHz Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.963 \text{ S/m}$ ;  $\epsilon_r = 55.001$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

#### DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.26, 6.26, 6.26); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.40 W/kg


**System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.356 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.21 W/kg

**SAR(1 g) = 2.24 W/kg; SAR(10 g) = 1.49 W/kg**

Maximum value of SAR (measured) = 2.44 W/kg

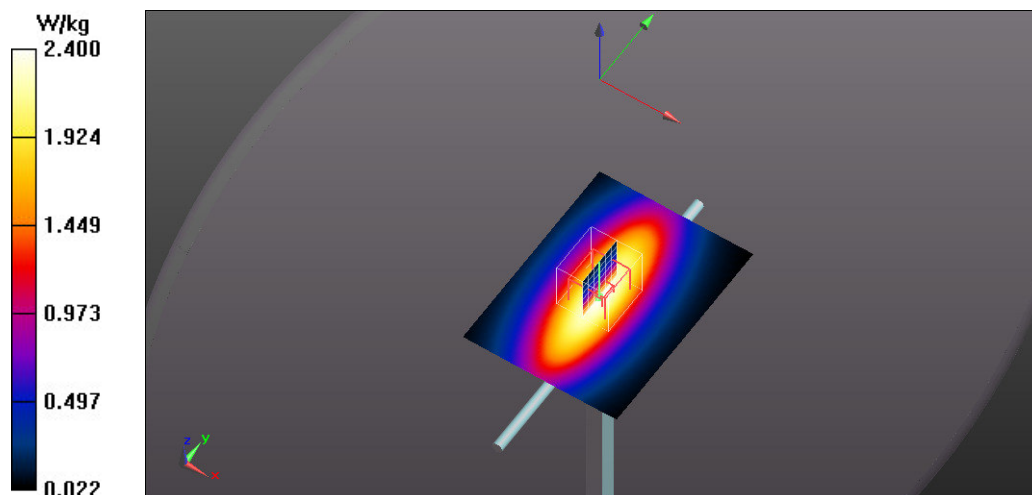

**ANNEX D SAR Measurement Reports**



**Test Laboratory: Eurofins Product Service GmbH**

**GPRS 1900 Ch 661 3TX top 0mm**

**DUT: Tablet PC / Aava Mobile; Type: INARI10-LTBN-1; Serial: -**

Communication System: UID 0 - n/a, GPRS 1900 3xSlot; Frequency: 1880 MHz; Duty Cycle: 1:2.18776

Medium: Muscle 1900 MHz Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.461$  S/m;  $\epsilon_r = 54.42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Flat-Section MSL/Flat Section 0mm/Area Scan (141x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.586 W/kg


**Flat-Section MSL/Flat Section 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.840 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.196 W/kg**

Maximum value of SAR (measured) = 0.553 W/kg

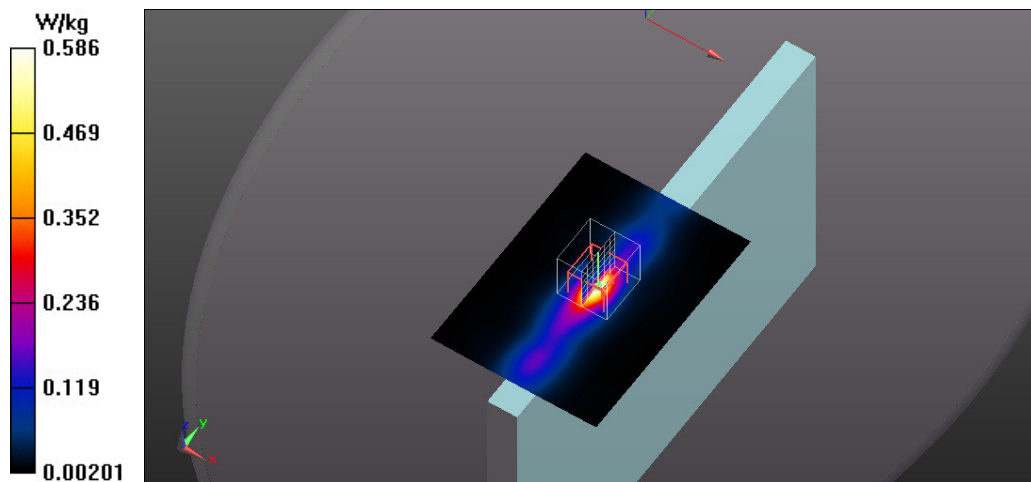

**Test Laboratory: Eurofins Product Service GmbH**

**GPRS 850 Ch 190 3TX back 0mm**

**DUT: Tablet PC / Aava Mobile; Type: INARI10-LTBN-1; Serial: -**

Communication System: UID 0 - n/a, GPRS 850 3xSlot; Frequency: 836.6 MHz; Duty Cycle: 1:2.18776

Medium: Muscle 900 MHz Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.954$  S/m;  $\epsilon_r = 55.294$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(5.99, 5.99, 5.99); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Flat-Section MSL/Flat Section 0mm/Area Scan (141x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.640 W/kg


**Flat-Section MSL/Flat Section 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.599 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.59 W/kg

**SAR(1 g) = 0.599 W/kg; SAR(10 g) = 0.287 W/kg**

Maximum value of SAR (measured) = 0.677 W/kg

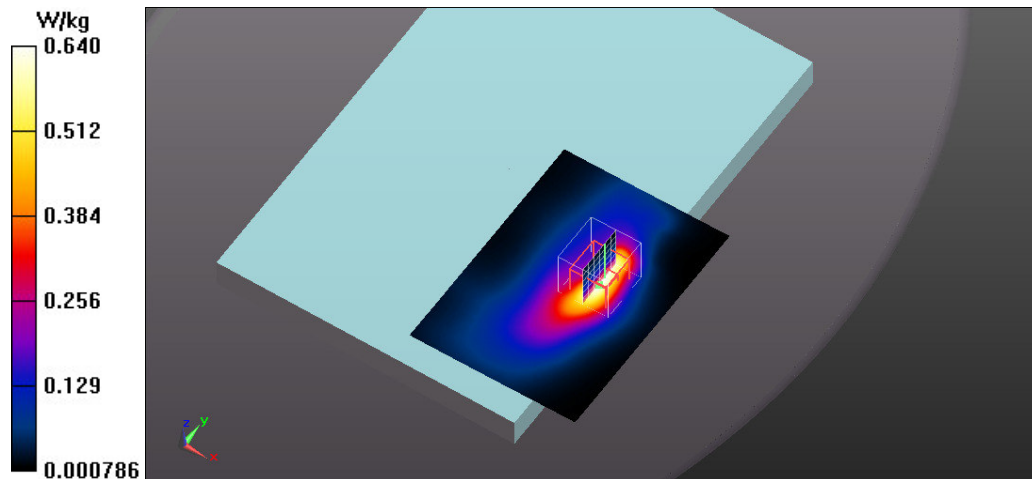

**Test Laboratory: Eurofins Product Service GmbH**

**FDDIV Ch 1413 12.2 kbps top 0mm**

**DUT: Tablet PC / Aava Mobile; Type: INARI10-LTBN-1; Serial: -**

Communication System: UID 0 - n/a, UMTS FDD IV; Frequency: 1732.6 MHz; Duty Cycle: 1:2.18776

Medium: Muscle 1800 MHz Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.555$  S/m;  $\epsilon_r = 53.201$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.74, 4.74, 4.74); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Flat-Section MSL/Flat Section 0mm/Area Scan (141x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.834 W/kg


**Flat-Section MSL/Flat Section 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.133 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.86 W/kg

**SAR(1 g) = 0.676 W/kg; SAR(10 g) = 0.259 W/kg**

Maximum value of SAR (measured) = 0.786 W/kg

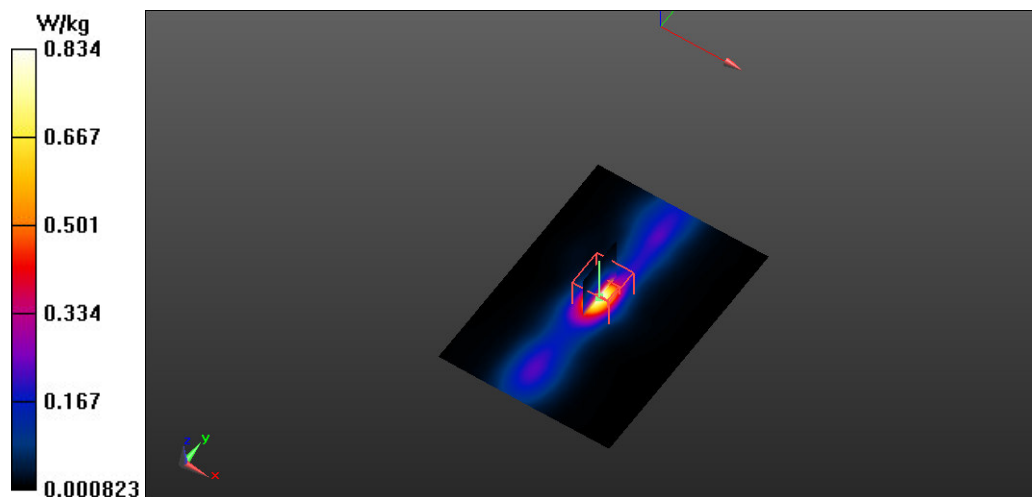

**Test Laboratory: Eurofins Product Service GmbH**

**FDD II Ch 9400 12.2kbps top 0mm**

**DUT: Tablet PC / Aava Mobile; Type: INARI10-LTBN-1; Serial: -**

Communication System: UID 0 - n/a, UMTS FDD II; Frequency: 1880 MHz; Duty Cycle: 1:2.18776

Medium: Muscle 1900 MHz Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.461 \text{ S/m}$ ;  $\epsilon_r = 54.42$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Flat-Section MSL/Flat Section 0mm/Area Scan (141x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.910 \text{ W/kg}$


**Flat-Section MSL/Flat Section 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $9.106 \text{ V/m}$ ; Power Drift =  $-0.01 \text{ dB}$

Peak SAR (extrapolated) =  $1.77 \text{ W/kg}$

**SAR(1 g) =  $0.730 \text{ W/kg}$ ; SAR(10 g) =  $0.304 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.814 \text{ W/kg}$

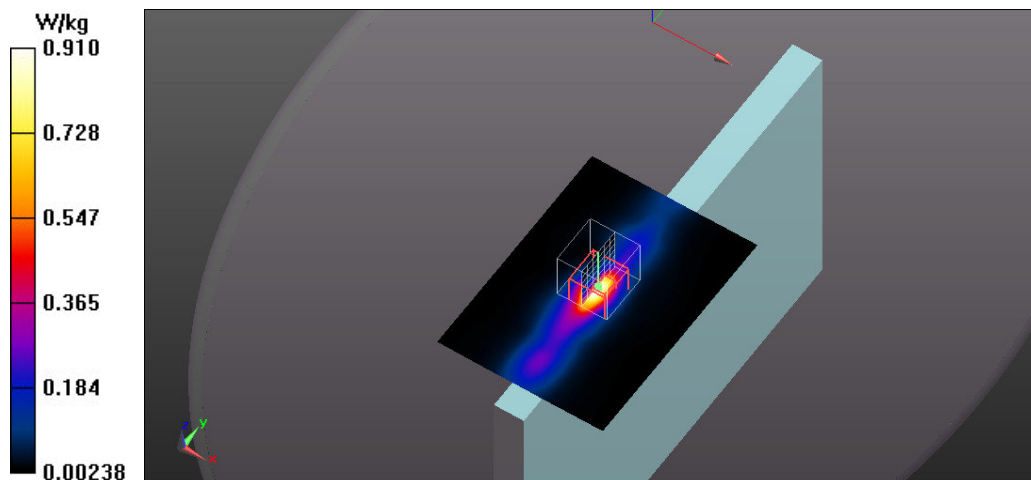

**Test Laboratory: Eurofins Product Service GmbH**

**FDD V Ch 4233 RMC 64 kbps back 0mm**

**DUT: Tablet PC / Aava Mobile; Type: INARI10-LTBN-1; Serial: -**

Communication System: UID 0 - n/a, UMTS FDD V; Frequency: 846.6 MHz; Duty Cycle: 1:2.18776

Medium: Muscle 900 MHz Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 0.963$  S/m;  $\epsilon_r = 55.146$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(5.99, 5.99, 5.99); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Flat-Section MSL/Flat Section 0mm/Area Scan (131x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.612 W/kg


**Flat-Section MSL/Flat Section 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.361 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.72 W/kg

**SAR(1 g) = 0.580 W/kg; SAR(10 g) = 0.274 W/kg**

Maximum value of SAR (measured) = 0.658 W/kg

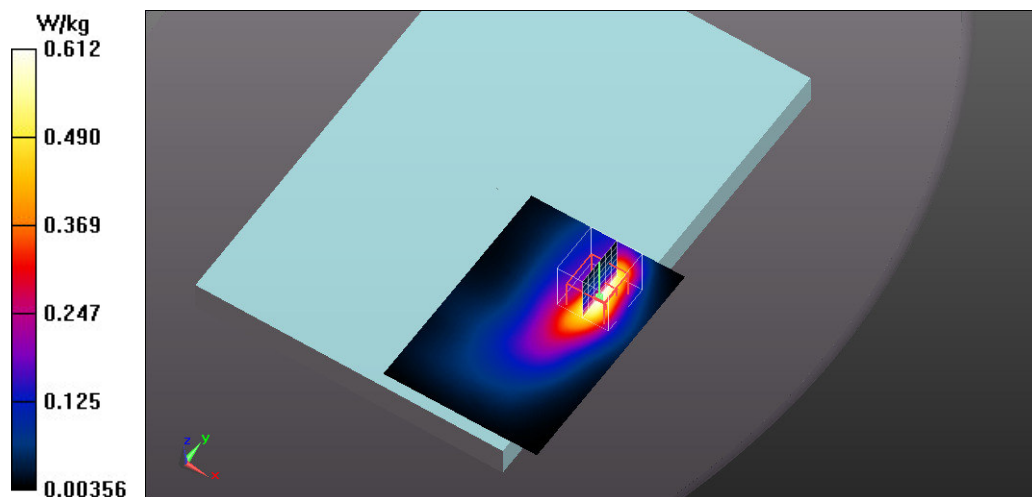

**Test Laboratory: Eurofins Product Service GmbH**

**FDD 2 Ch 18900 RB 1 RB offset 100 top0 mm**

**DUT: Tablet PC / Aava Mobile; Type: INARI10-LTBN-1; Serial: -**

Communication System: UID 0 - n/a, LTE FDD 2; Frequency: 1880 MHz; Duty Cycle: 1:6.13762

Medium: Muscle 1900 MHz Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.461 \text{ S/m}$ ;  $\epsilon_r = 54.42$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Flat-Section MSL/Flat Section 0mm/Area Scan (141x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.926 \text{ W/kg}$


**Flat-Section MSL/Flat Section 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $8.323 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$

Peak SAR (extrapolated) =  $1.98 \text{ W/kg}$

**SAR(1 g) =  $0.705 \text{ W/kg}$ ; SAR(10 g) =  $0.274 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.827 \text{ W/kg}$

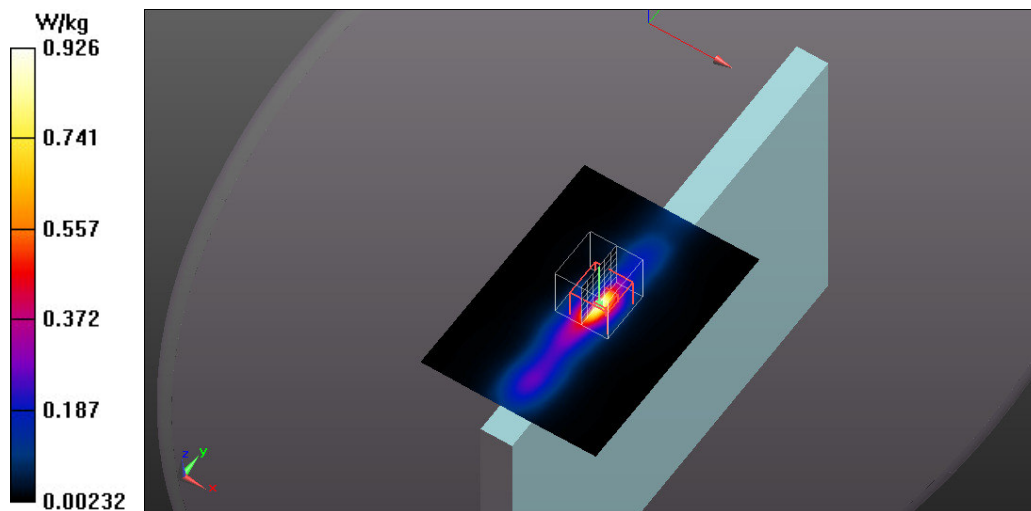

**Test Laboratory: Eurofins Product Service GmbH**

**FDD4 Ch 20175 RB1 offset 0 back 0mm**

**DUT: Tablet PC / Aava Mobile; Type: INARI10-LTBN-1; Serial: -**

Communication System: UID 0 - n/a, LTE FDD 4; Frequency: 1732.5 MHz; Duty Cycle: 1:5.42001

Medium: Muscle 1800 MHz Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.555$  S/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(4.74, 4.74, 4.74); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Flat-Section MSL/Flat Section 0mm/Area Scan (101x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.595 W/kg


**Flat-Section MSL/Flat Section 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.317 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.240 W/kg**

Maximum value of SAR (measured) = 0.575 W/kg

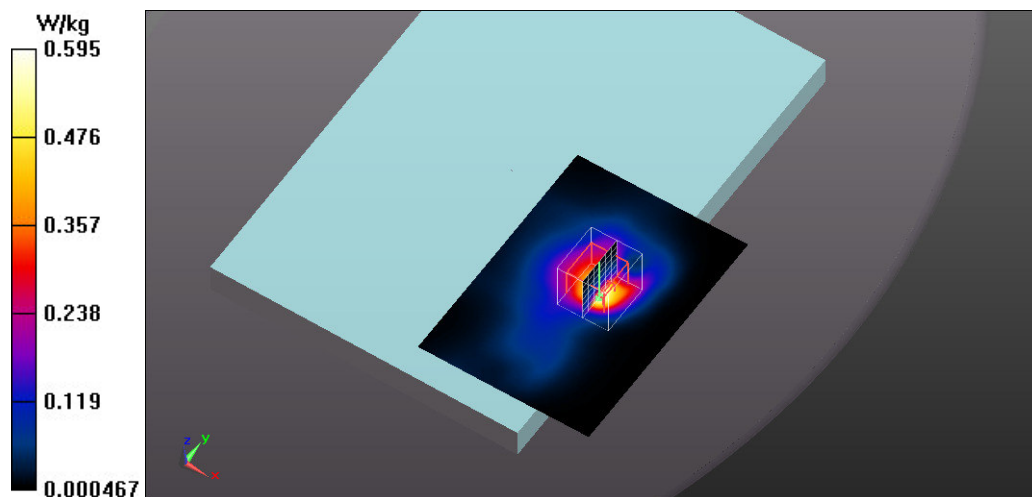

**Test Laboratory: Eurofins Product Service GmbH**

**FDD5 Ch 20525 RB1 offset 49 back 0mm**

**DUT: Tablet PC / Aava Mobile; Type: INARI10-LTBN-1; Serial: -**

Communication System: UID 0 - n/a, LTE FDD 5; Frequency: 836.5 MHz; Duty Cycle: 1:6.63743

Medium: Muscle 900 MHz Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.954$  S/m;  $\epsilon_r = 55.295$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(5.99, 5.99, 5.99); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Flat-Section MSL/Flat Section 0mm/Area Scan (101x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.629 W/kg


**Flat-Section MSL/Flat Section 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.822 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.68 W/kg

**SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.250 W/kg**

Maximum value of SAR (measured) = 0.647 W/kg

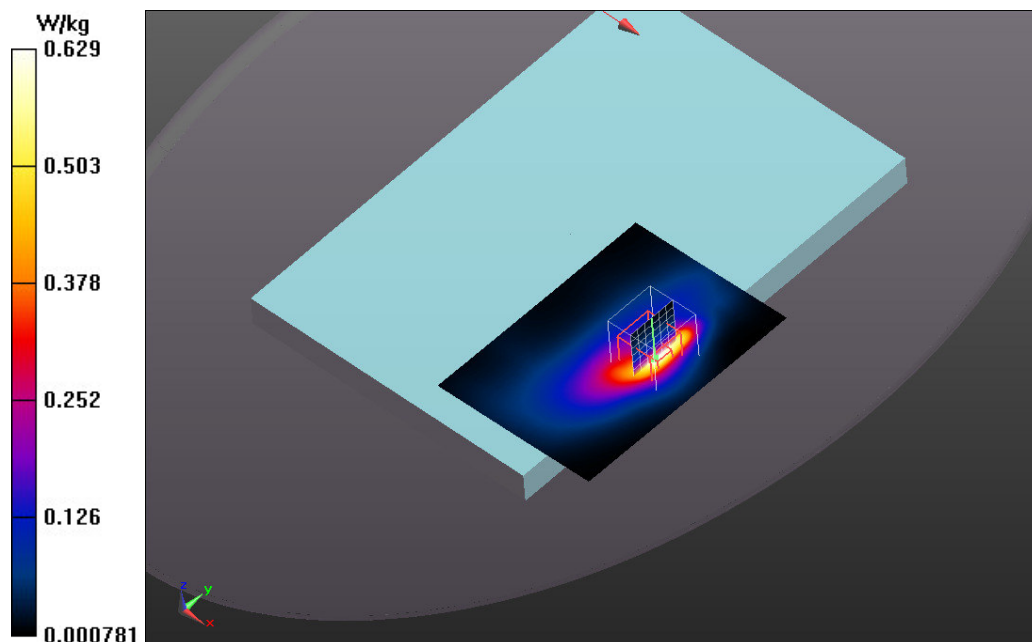



**Test Laboratory: Eurofins Product Service GmbH**

**FDD13 Ch 23230 RB1 offset 49 back 0mm**

**DUT: Tablet PC / Aava Mobile; Type: INARI10-LTBN-1; Serial: -**

Communication System: UID 0 - n/a, LTE FDD 13; Frequency: 782 MHz; Duty Cycle: 1:6.63743

Medium: Muscle 750 MHz Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.975 \text{ S/m}$ ;  $\epsilon_r = 54.767$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(6.26, 6.26, 6.26); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Flat-Section MSL/Flat Section 0mm/Area Scan (101x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.730 \text{ W/kg}$


**Flat-Section MSL/Flat Section 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $3.343 \text{ V/m}$ ; Power Drift =  $-0.07 \text{ dB}$

Peak SAR (extrapolated) =  $1.88 \text{ W/kg}$

**SAR(1 g) =  $0.652 \text{ W/kg}$ ; SAR(10 g) =  $0.309 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.744 \text{ W/kg}$

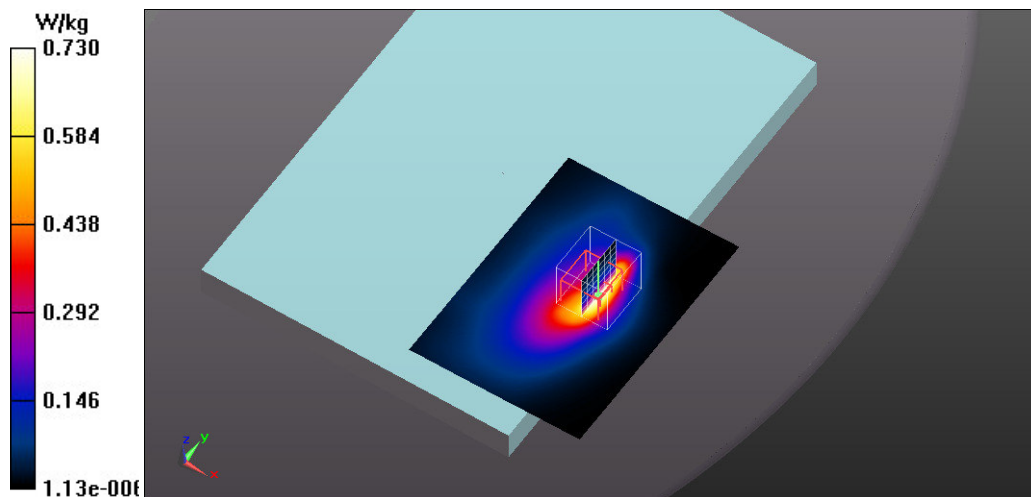

**Test Laboratory: Eurofins Product Service GmbH**

**FDD17 Ch 23790 RB1 offset 49 back 0mm**

**DUT: Tablet PC / Aava Mobile; Type: INARI10-LTBN-1; Serial: -**

Communication System: UID 0 - n/a, LTE FDD 17; Frequency: 710 MHz; Duty Cycle: 1:6.63743

Medium: Muscle 750 MHz Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.859 \text{ S/m}$ ;  $\epsilon_r = 55.471$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: ET3DV6 - SN1711; ConvF(6.26, 6.26, 6.26); Calibrated: 9/22/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/17/2014
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASYS2, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Flat-Section MSL/Flat Section 0mm/Area Scan (101x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.497 \text{ W/kg}$


**Flat-Section MSL/Flat Section 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $3.991 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$

Peak SAR (extrapolated) =  $1.56 \text{ W/kg}$

**SAR(1 g) =  $0.484 \text{ W/kg}$ ; SAR(10 g) =  $0.222 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.535 \text{ W/kg}$

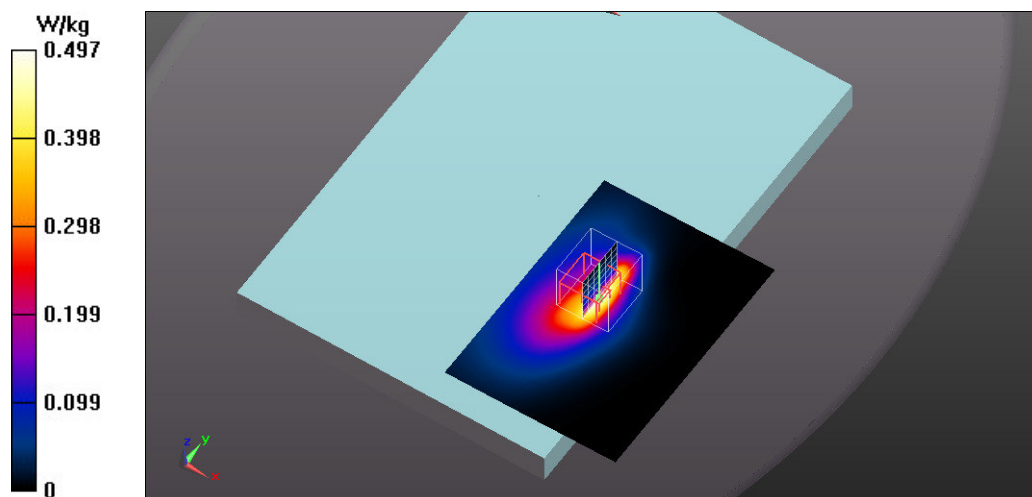

## Test Laboratory: Eurofins Product Service GmbH

### 2\_4GHz Ch 11 Mbps 1 Antenna MAIN back 0mm

**DUT: Tablet PC / Aava Mobile; Type: INARI10-LTBN-1; Serial: -**

Communication System: UID 0 - n/a, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1Mbps); Frequency: 2462 MHz; Duty Cycle: 1:1.53815

Medium: Muscle 2450 MHz Medium parameters used (interpolated):  $f = 2462$  MHz;  $\sigma = 2.051$  S/m;  $\epsilon_r = 50.56$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.05, 4.05, 4.05); Calibrated: 9/18/2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Flat-Section MSL/Flat Section 0mm/Area Scan (291x201x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.868 W/kg


**Flat-Section MSL/Flat Section 0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.57 W/kg

**SAR(1 g) = 0.714 W/kg; SAR(10 g) = 0.259 W/kg**

Maximum value of SAR (measured) = 0.813 W/kg

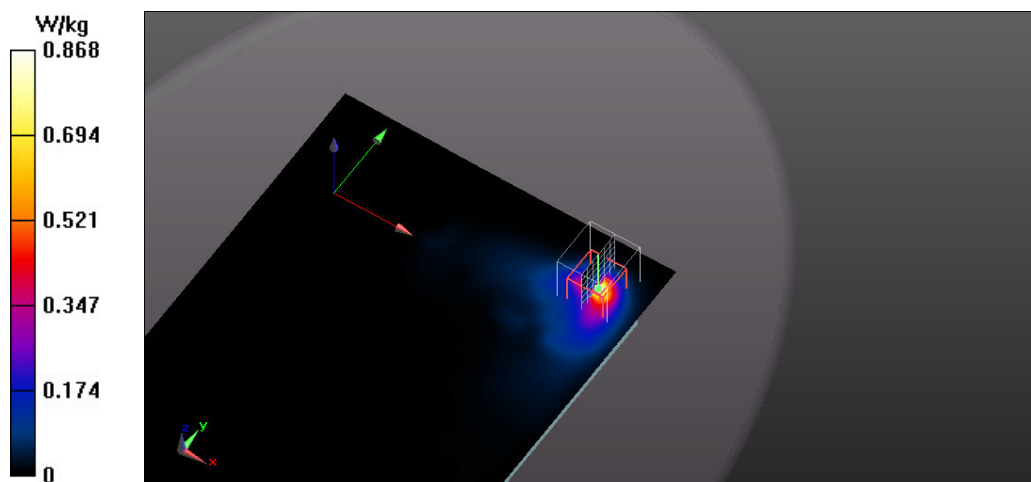

**Test Laboratory: Eurofins Product Service GmbH**

**5\_8GHz Ch 161 Mbps 6 Antenna MAIN right 0mm**

**DUT: Tablet PC / Aava Mobile; Type: INARI10-LTBN-1; Serial: -**

Communication System: UID 0 - n/a, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6Mbps); Frequency: 5805 MHz; Duty Cycle: 1:17.0608

Medium: MBBL 3-6 GHz Medium parameters used (interpolated):  $f = 5805$  MHz;  $\sigma = 6.291$  S/m;  $\epsilon_r = 48.39$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: EX3DV4 - SN3893; ConvF(4.38, 4.38, 4.38); Calibrated: 9/17/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/11/2013
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP: 1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Flat-Section MSL/Flat Section 0mm/Area Scan (71x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 1.18 W/kg

**Flat-Section MSL/Flat Section 0mm/Zoom Scan (8x8x13)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.205 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.61 W/kg

**SAR(1 g) = 0.426 W/kg; SAR(10 g) = 0.120 W/kg**

Maximum value of SAR (measured) = 1.15 W/kg

