

FCC RF Test Report


APPLICANT : VeriFone, Inc.
EQUIPMENT : Point of Sale Terminal
BRAND NAME : VeriFone
MODEL NAME : VX690 3G-BT-WiFi
FCC ID : B32VX6903GBTWIFI
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Apr. 11, 2014 and testing was completed on May 06, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Descriptions of Test Mode	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System	10
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
2.6 Measurement Results Explanation Example	13
3 TEST RESULT	14
3.1 Number of Channel Measurement	14
3.2 Hopping Channel Separation Measurement	16
3.3 Dwell Time Measurement	23
3.4 20dB and 99% Bandwidth Measurement	26
3.5 Peak Output Power Measurement	39
3.6 Conducted Band Edges Measurement	41
3.7 Conducted Spurious Emission Measurement	48
3.8 Radiated Band Edges and Spurious Emission Measurement	58
3.9 AC Conducted Emission Measurement	71
3.10 Antenna Requirements	81
4 LIST OF MEASURING EQUIPMENT	82
5 UNCERTAINTY OF EVALUATION	83
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR441115A	Rev. 01	Initial issue of report	May 13, 2014

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	RSS-210 A8.4(2)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	RSS-210 A8.1(b)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	RSS-210 A8.1(d)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	RSS-210 A8.1(a)	20dB Bandwidth	NA	Pass	-
3.4	-	RSS-Gen 4.6.1	99% Bandwidth	-	Pass	-
3.5	15.247(b)(1)	RSS-210 A8.1(b)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	RSS-210 A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	RSS-210 A8.5	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 8.22 dB at 49.440 MHz
3.9	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 1.00 dB at 13.558 MHz
3.10	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

VeriFone, Inc.

1400 West Stanford Ranch Road Suite 200 Rocklin CA 95765 USA

1.2 Manufacturer

Inventec Appliances (Pudong) Co., Ltd.

No. 789 Pu Xing Road, Shanghai, PRC

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Point of Sale Terminal
Brand Name	VeriFone
Model Name	VX690 3G-BT-WiFi
FCC ID	B32VX6903GBTWIFI
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/RFID WLAN 11a/b/g/n (HT20) Bluetooth v4.0 EDR/LE
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 8.04 dBm (0.0064 W) Bluetooth EDR (2Mbps) : 7.89 dBm (0.0062 W) Bluetooth EDR (3Mbps) : 8.21 dBm (0.0066 W)
99% Occupied Bandwidth	Bluetooth BR(1Mbps) : 0.872MHz Bluetooth EDR (2Mbps) : 1.200MHz Bluetooth EDR (3Mbps) : 1.176MHz
Antenna Type	PIFA Antenna type with gain 1.18 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		
	TH02-HY	CO05-HY	03CH07-HY



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	7.19 dBm	6.95 dBm	7.41 dBm
Ch39	2441MHz	7.86 dBm	7.67 dBm	8.12 dBm
Ch78	2480MHz	8.04 dBm	7.89 dBm	8.21 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
 2. The data rate was set in 3Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (Y plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 :GSM850 (GPRS class 8) Idle + Bluetooth Link + TC+ TF + GPS Rx + Battery 2 + Bluetooth Base (Charging from Adapter 1) + USB flash drive + Micro USB Cable (Data Link with notebook) + RJ-45 (Load) + RJ-11 (Load) + RS232 (Load) Mode 2 :GSM850 (GPRS class 8) Idle + WLAN (2.4GHz) Link + TC + TF + Battery 1 + Adapter 1 Mode 3 :GSM850 (GPRS class 8) Idle + WLAN (5GHz) Link + TC + TF + Battery 1 + Adapter 1		
Remark:			
1. For radiated test cases, the worst mode data rate 3Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 3Mbps, and no other significantly frequencies found in conducted spurious emission.			
2. The worst case of conducted emission is mode 1; only the test data of it was reported.			
3. TC stands for Test Configuration, and consists of Smart Card, SD Card, and Printer.			
4. TF stands for Test Function, and consists of MSR On and RFID On.			
5. “Linking with USB Flash Drive” means data application transferred mode between EUT and USB Flash Drive.			
6. “Link with Notebook” means data application transferred mode between EUT and Notebook.			

2.3 Connection Diagram of Test System


<Bluetooth Tx Mode>

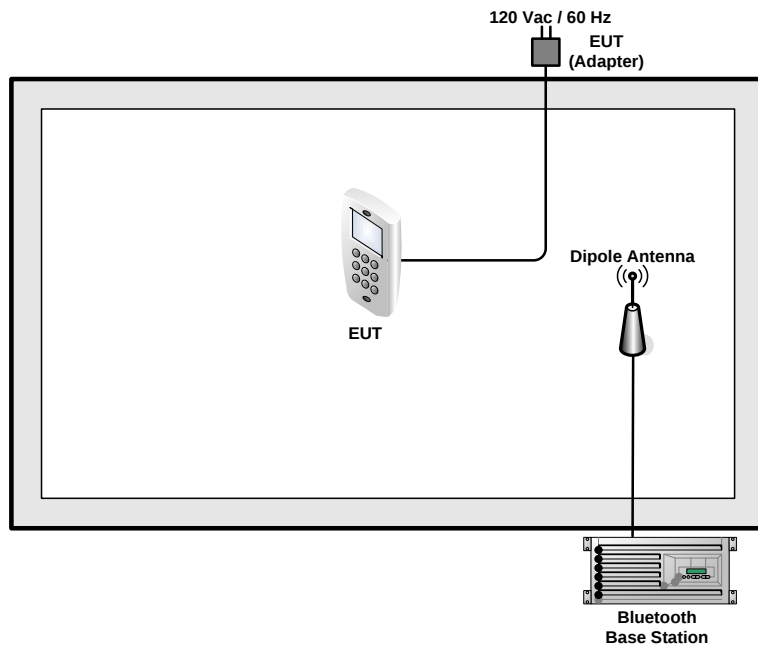

<EUT with USB Cable (Link with Notebook) Mode>

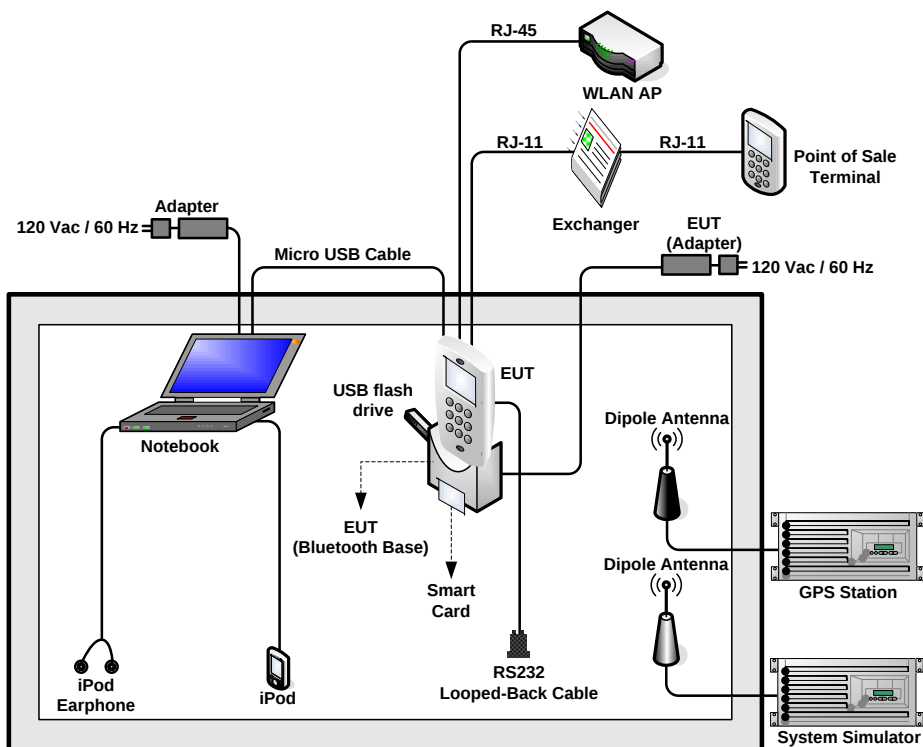

<EUT with Adapter Mode>

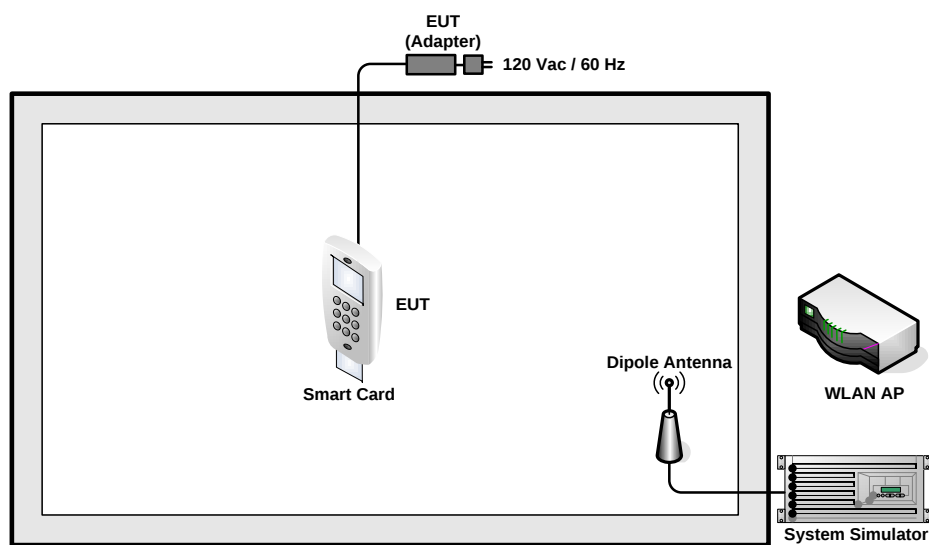

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded, 1.8 m
3.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
4.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
5.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	Unshielded, 3.0 m	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	Point of Sale Terminal	VeriFone	VX520	FCC DoC	Unshielded, 3.0 m	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
7.	Exchange	Sun Moon Star	SMS-4 PLUS	N/A	N/A	Unshielded, 1.6 m
8.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
9.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
10.	USB flash drive	SP	Touch T01	FCC DoC	N/A	N/A
11.	Smart Card	N/A	N/A	N/A	N/A	N/A
12.	MSR Card	N/A	N/A	N/A	N/A	N/A
13.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth function, use BT tool of EUT to make the EUT established a test mode with CBT, then the test mode could provide functions like channel selection and power level for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW $\geq$ 1% of the span; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

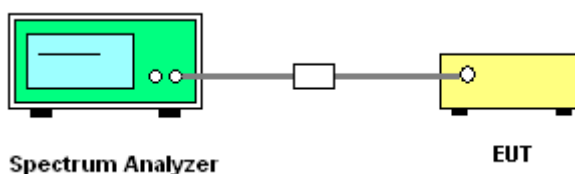


3.1.5 Test Result of Number of Hopping Frequency


Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Alex Lee	Relative Humidity :	50~53%
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78

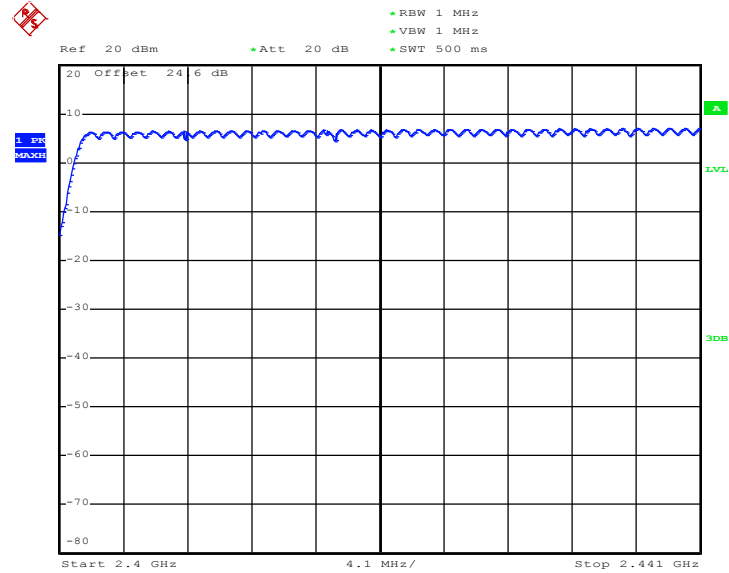

Date: 23.APR.2014 11:51:45

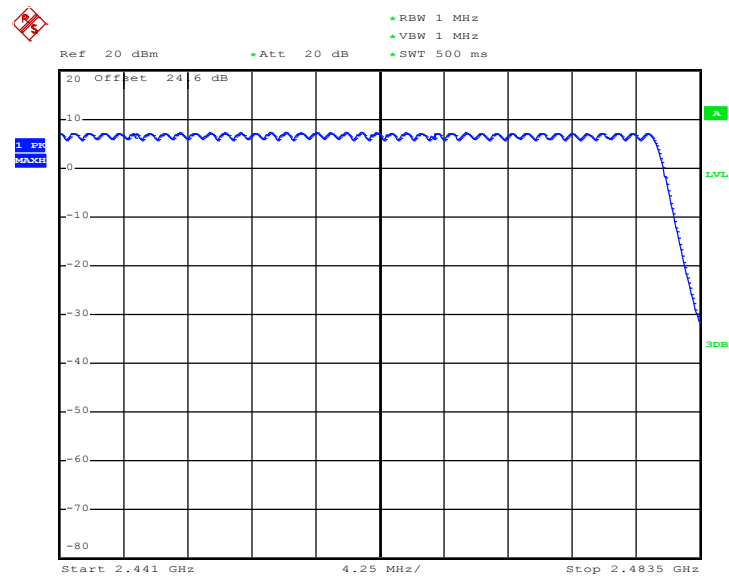

Date: 23.APR.2014 11:56:54

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

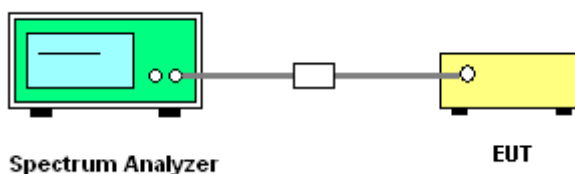


3.2.5 Test Result of Hopping Channel Separation


Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Alex Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6027	Pass
39	2441	1.002	0.6027	Pass
78	2480	1.002	0.6053	Pass


Channel Separation Plot on Channel 00 - 01

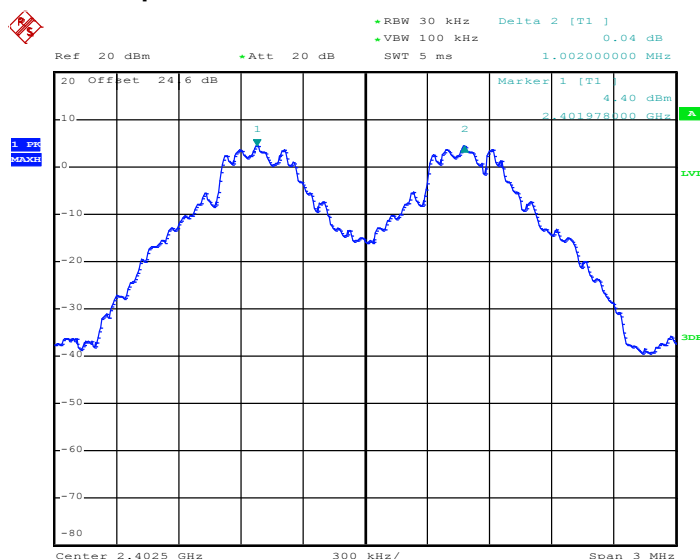

Date: 23.APR.2014 14:10:43

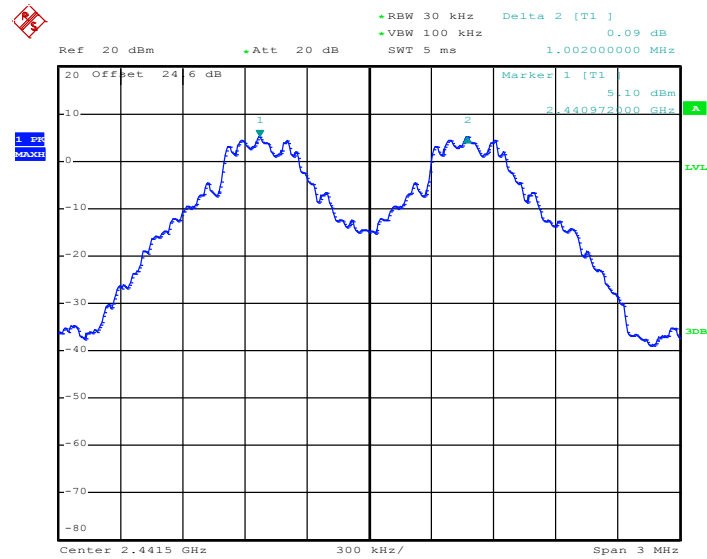Channel Separation Plot on Channel 39 - 40


Date: 23.APR.2014 14:08:14

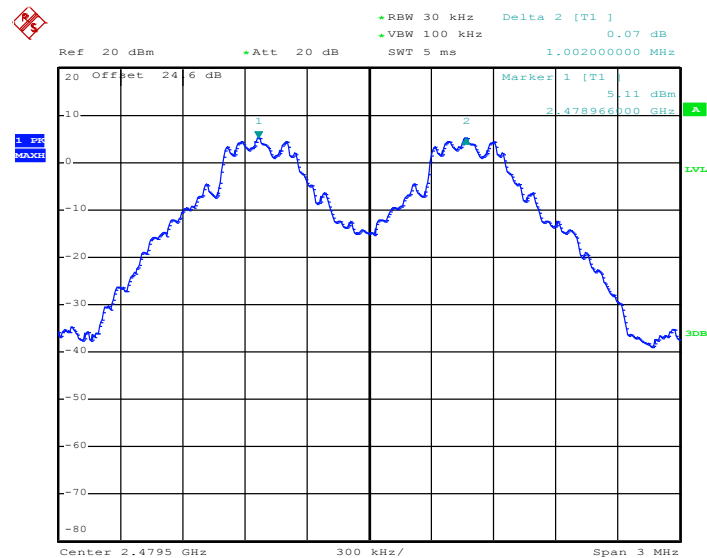Channel Separation Plot on Channel 77 - 78


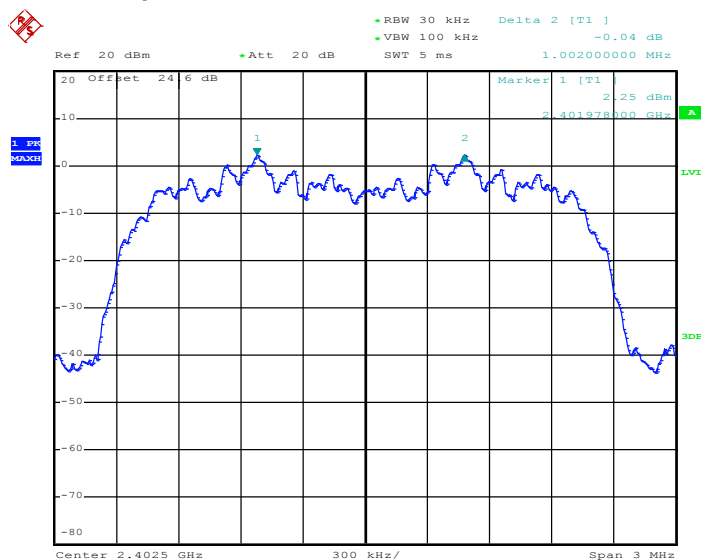
Date: 23.APR.2014 14:04:08



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Alex Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.9000	Pass
39	2441	1.002	0.9000	Pass
78	2480	1.002	0.9000	Pass


Channel Separation Plot on Channel 00 - 01



Date: 23.APR.2014 13:50:58




Channel Separation Plot on Channel 39 - 40

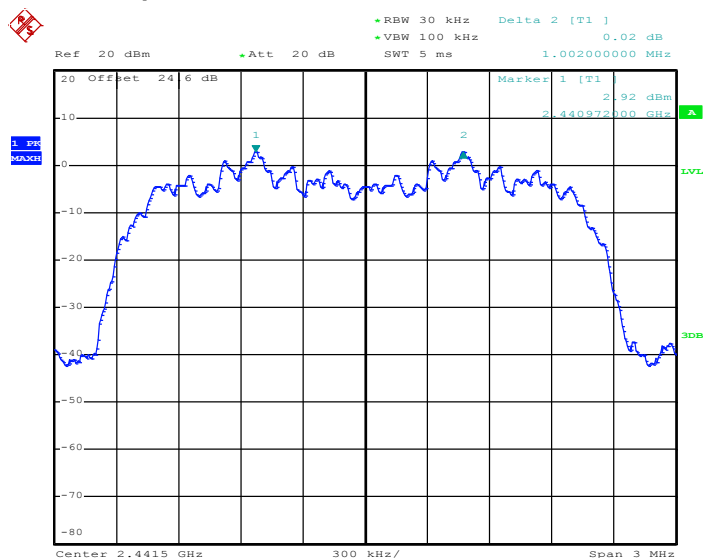

Date: 23.APR.2014 13:54:34

Channel Separation Plot on Channel 77 - 78

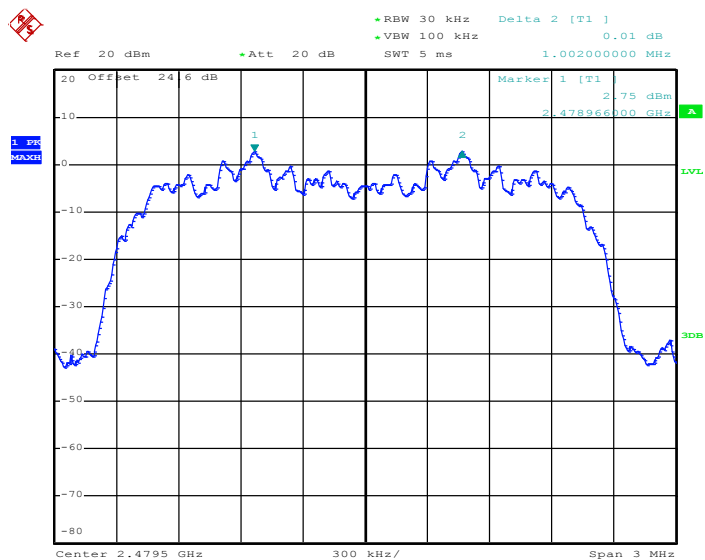


Date: 23.APR.2014 14:01:39



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Alex Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8560	Pass
39	2441	1.002	0.8600	Pass
78	2480	1.002	0.8600	Pass


Channel Separation Plot on Channel 00 - 01

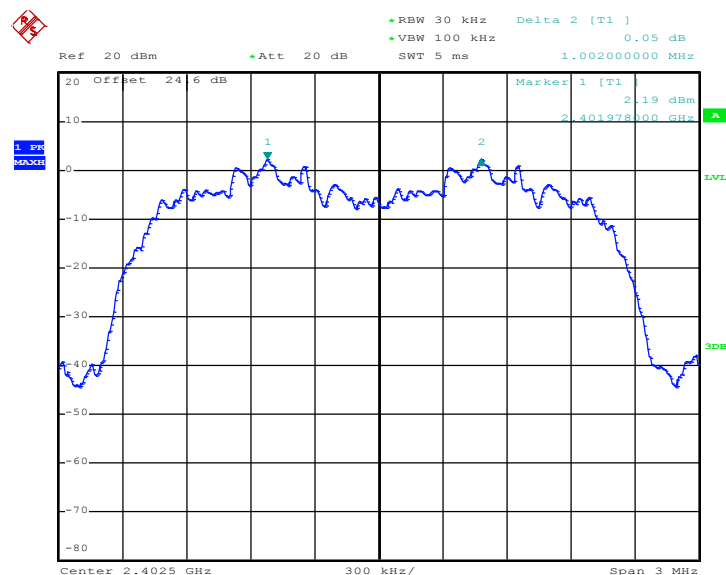

Date: 23.APR.2014 13:35:47




Channel Separation Plot on Channel 39 - 40

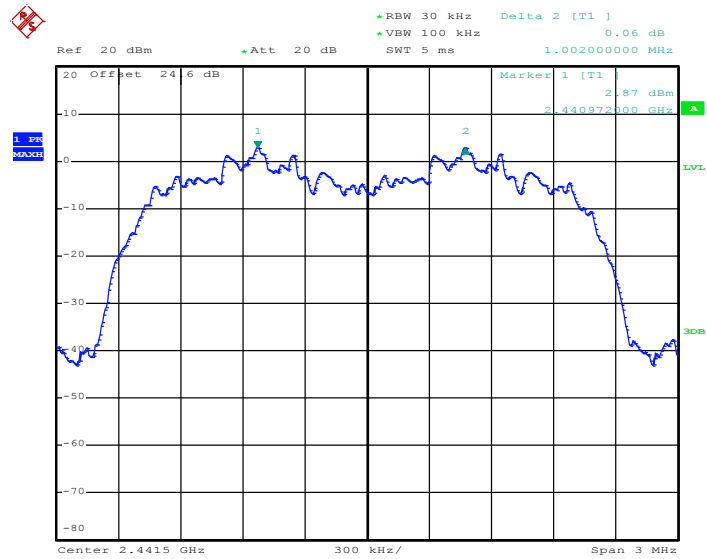

Date: 23.APR.2014 13:39:30

Channel Separation Plot on Channel 77 - 78

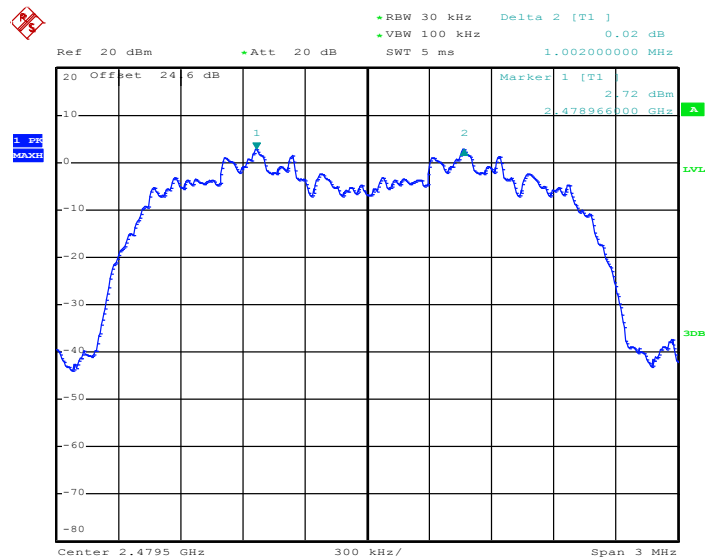

Date: 23.APR.2014 13:42:38

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

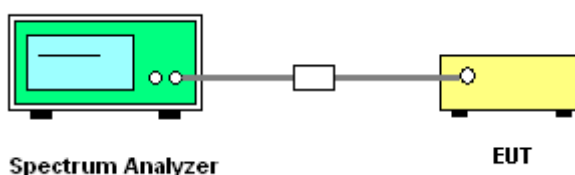

3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	24~26℃
Test Engineer :	Alex Lee	Relative Humidity :	50~53%


Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

Remark:

- In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Package Transfer Time Plot

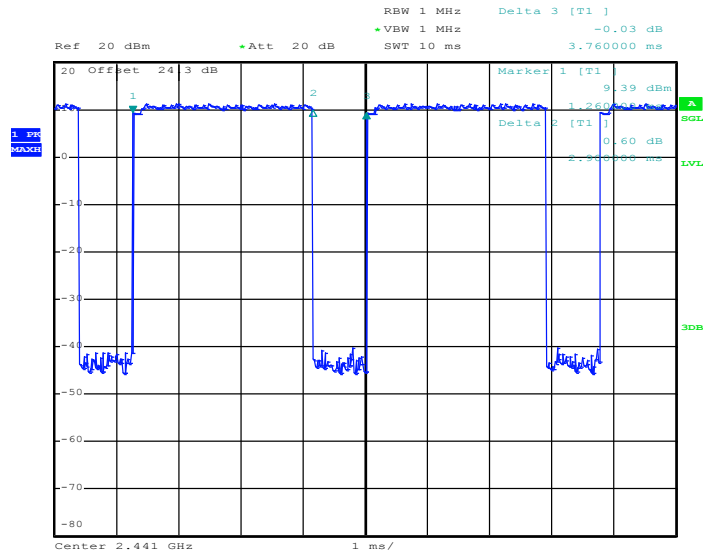

Date: 19.APR.2014 11:55:26

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
For 99% Bandwidth measurement, the RBW=30kHz, and VBW = 100kHz. Sweep = auto ;
Detector function = sample. Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

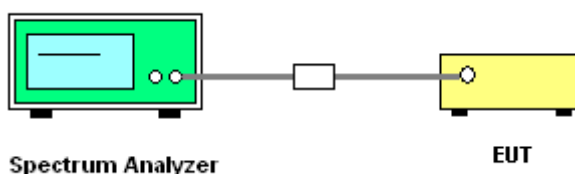


3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Alex Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.904
39	2441	0.904
78	2480	0.908

20 dB Bandwidth Plot on Channel 00

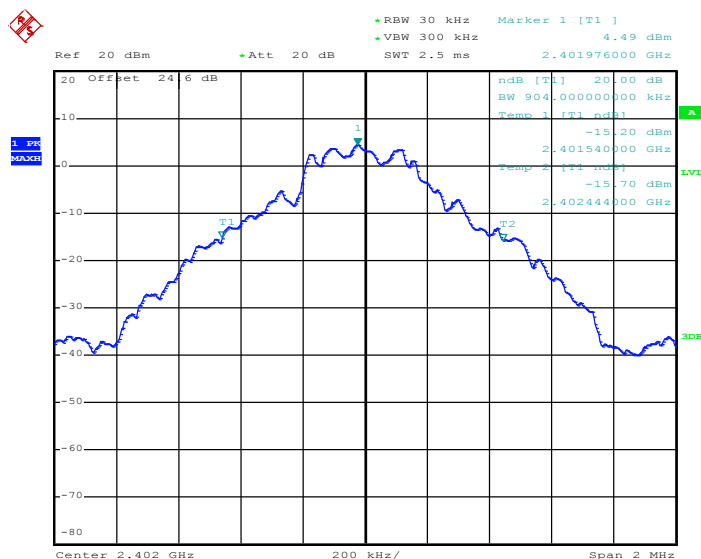

Date: 23.APR.2014 14:12:20



*RBW 30 kHz
 *VBW 300 kHz
 *Att 20 dB
 *SWT 2.5 ms
 Marker 1 [T1]
 5.32 dBm
 2.440968000 GHz

Ref 20 dBm
 Offset 24.6 dB

1. Freq 2.441 GHz
 2.440968000 GHz
 -14.61 dBm
 2.440532000 GHz
 -14.96 dBm
 2.441436000 GHz

Center 2.441 GHz
 Span 2 MHz
 200 kHz/

Date: 23.APR.2014 14:08:39

+RBW 30 kHz
 +Att 20 dB
 VBW 300 kHz
 SWT 2.5 ms

Ref 20 dBm
 Marker 1 [T1]
 5.32 dBm
 2.479964000 GHz

ndB [T1]	20.00 dB
BW 908.000000000 kHz	
Temp 1 [T1 ndB]	-14.97 dBm
2.479524000 GHz	
Temp 2 [T1 ndB]	-14.72 dBm
2.480432000 GHz	

Center 2.48 GHz
 200 kHz/
 Span 2 MHz


Date: 23.APR.2014 14:04:38



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Alex Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.350
39	2441	1.350
78	2480	1.350


20 dB Bandwidth Plot on Channel 00

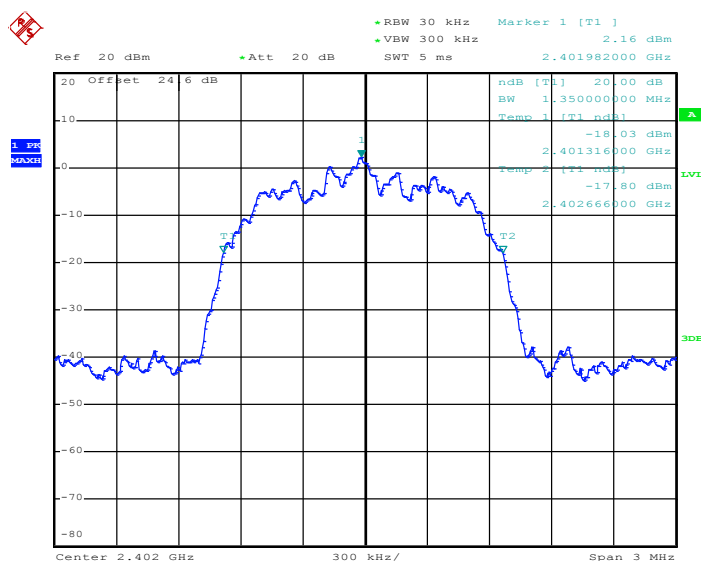

Date: 23.APR.2014 13:51:30




20 dB Bandwidth Plot on Channel 39

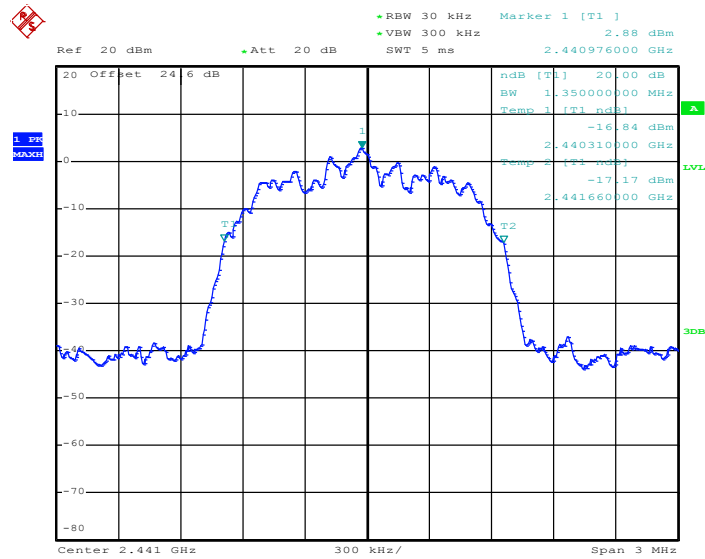

Date: 23.APR.2014 13:54:59


20 dB Bandwidth Plot on Channel 78

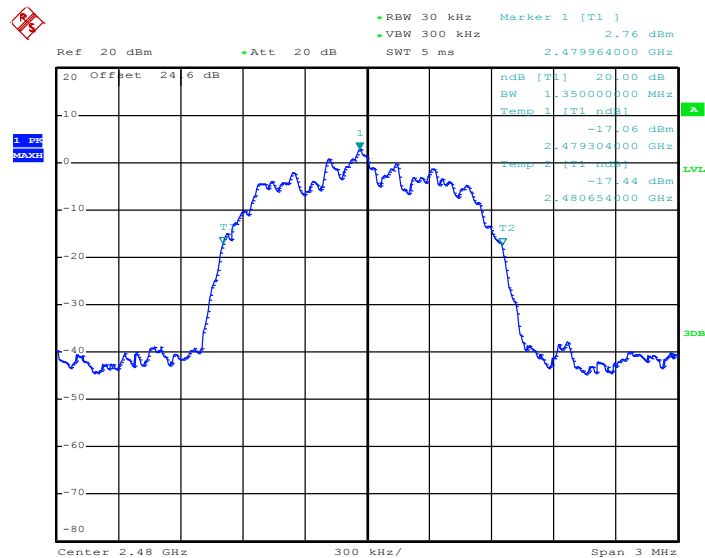

Date: 23.APR.2014 13:59:33

Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Alex Lee	Relative Humidity :	50~53%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.284
39	2441	1.290
78	2480	1.290

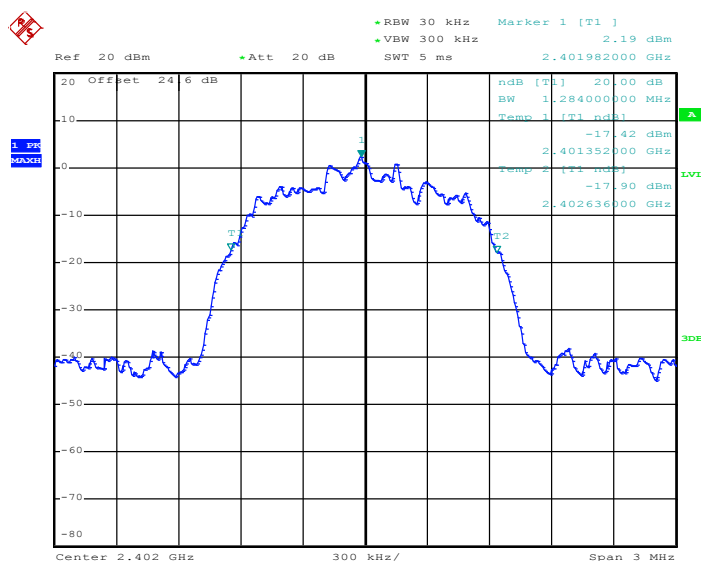20 dB Bandwidth Plot on Channel 00


Date: 23.APR.2014 13:36:11




20 dB Bandwidth Plot on Channel 39

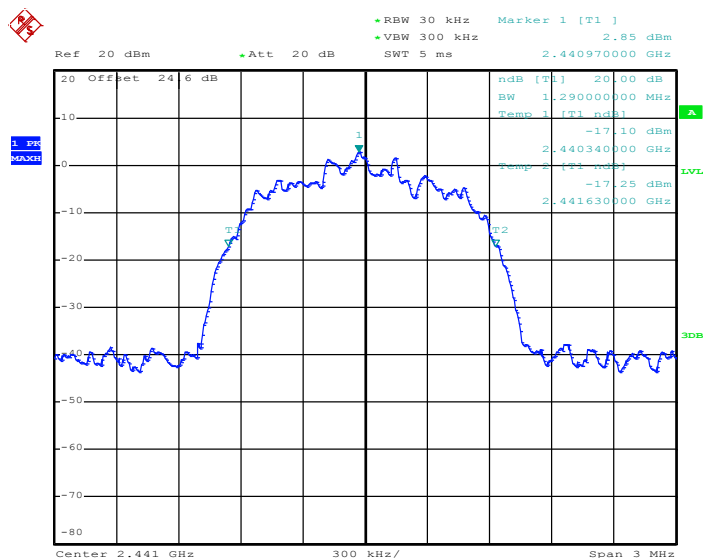

Date: 23.APR.2014 13:39:53

20 dB Bandwidth Plot on Channel 78

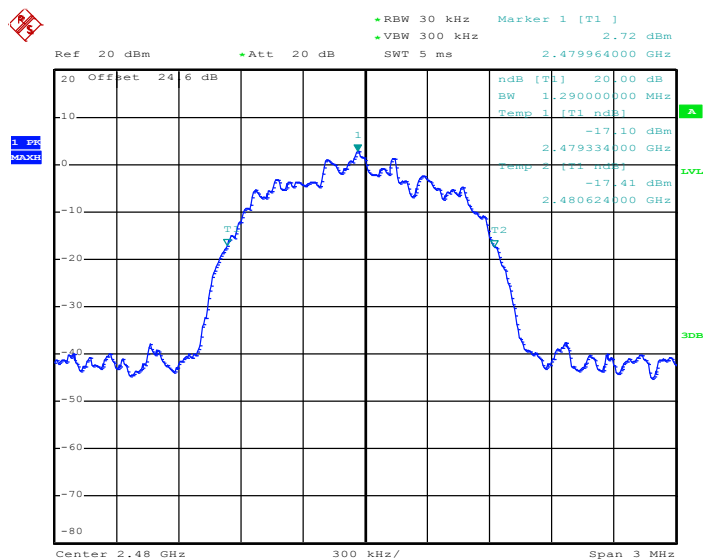


Date: 23.APR.2014 13:46:28

3.4.6 Test Result of 99% Occupied Bandwidth

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Alex Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.872
39	2441	0.872
78	2480	0.868


99% Occupied Bandwidth Plot on Channel 00

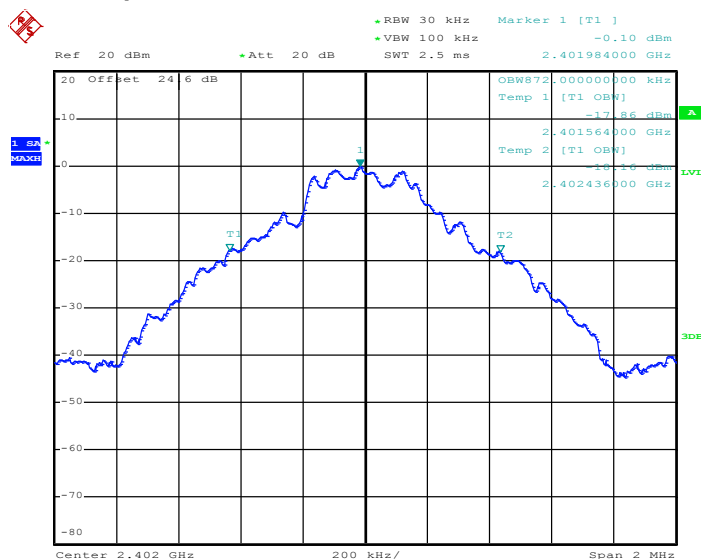

Date: 6.MAY.2014 15:17:08




99% Occupied Bandwidth Plot on Channel 39

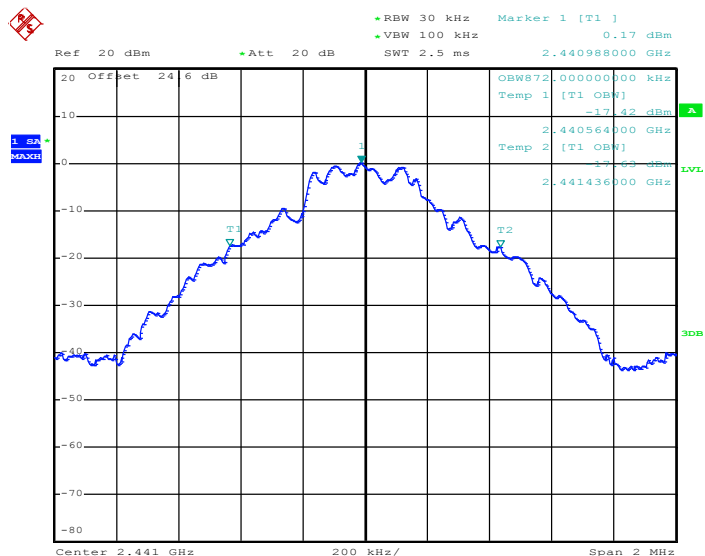

Date: 6.MAY.2014 15:18:42


99% Occupied Bandwidth Plot on Channel 78

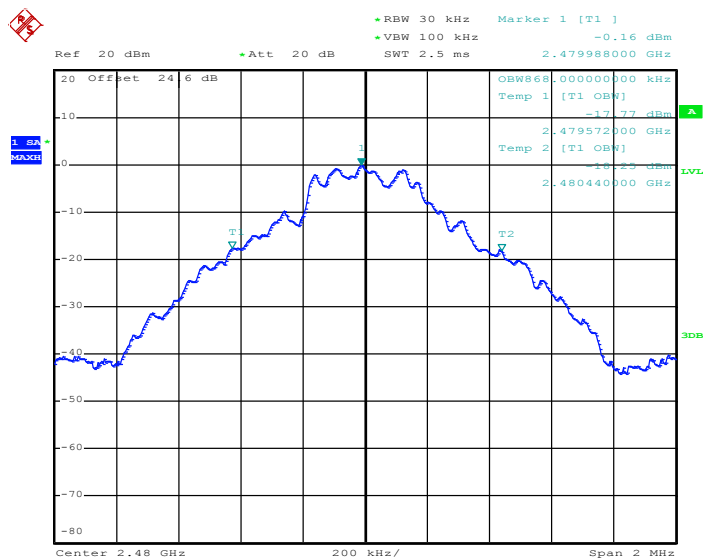

Date: 6.MAY.2014 15:19:20

Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Alex Lee	Relative Humidity :	50~53%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.192
39	2441	1.196
78	2480	1.200

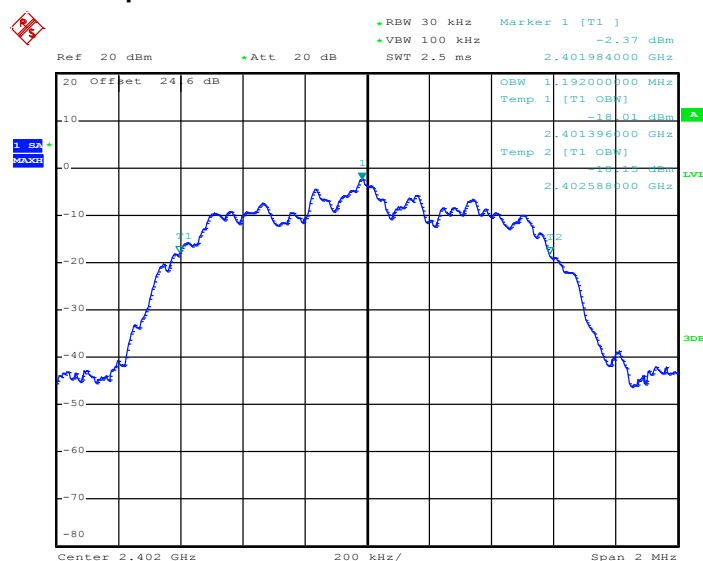99% Occupied Bandwidth Plot on Channel 00


Date: 6.MAY.2014 15:23:35




99% Occupied Bandwidth Plot on Channel 39

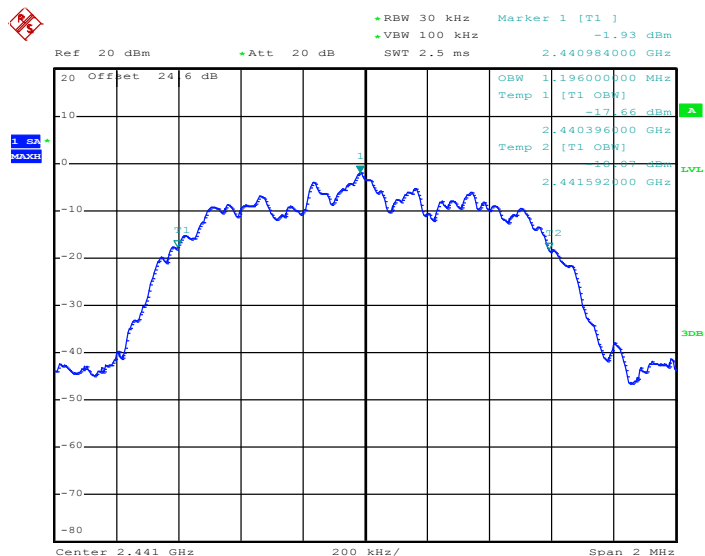

Date: 6.MAY.2014 15:22:20

99% Occupied Bandwidth Plot on Channel 78

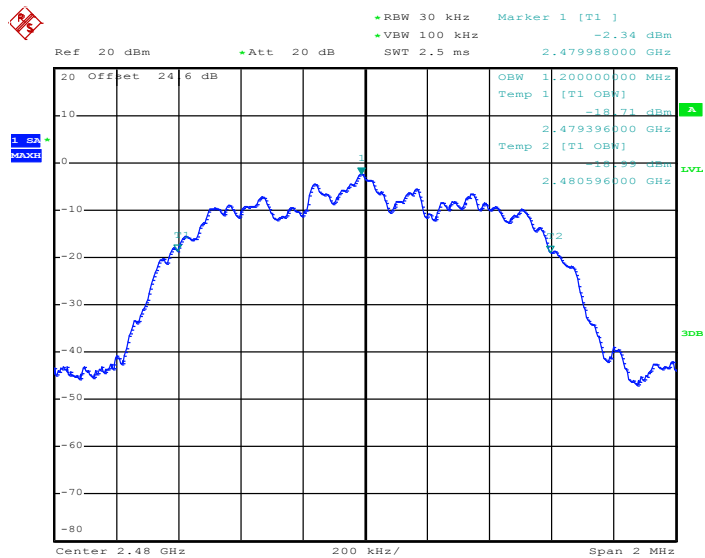


Date: 6.MAY.2014 15:20:50




Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Alex Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.176
39	2441	1.176
78	2480	1.176


99% Occupied Bandwidth Plot on Channel 00

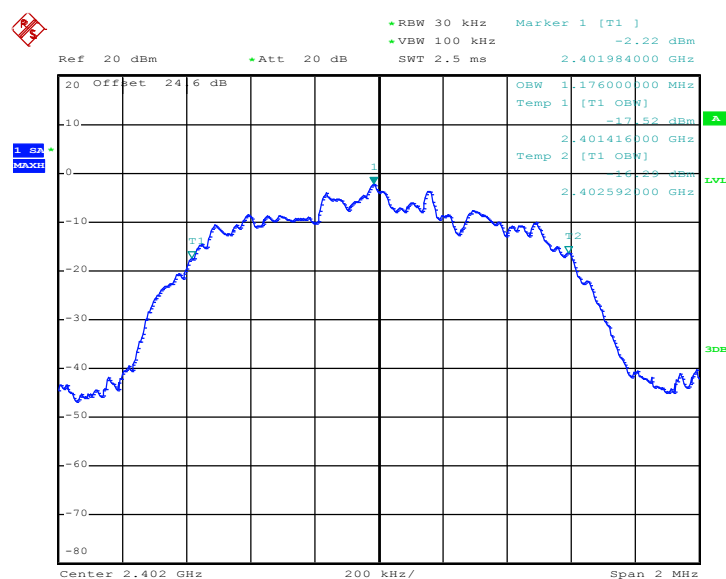

Date: 6.MAY.2014 15:25:00

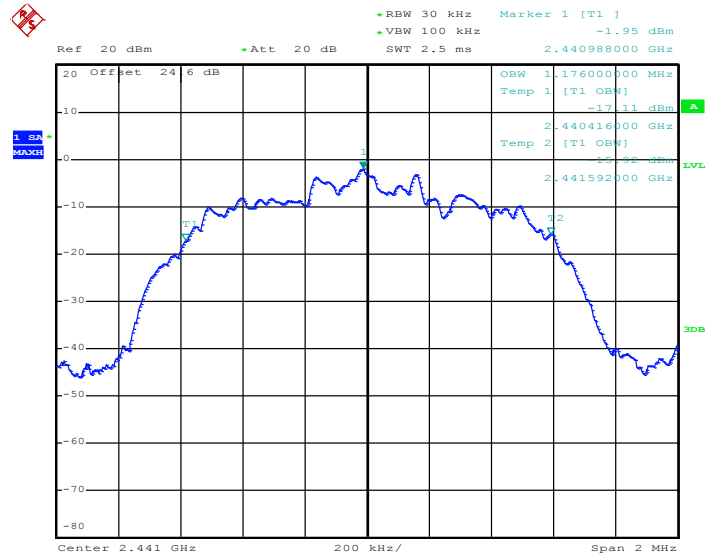99% Occupied Bandwidth Plot on Channel 39


Date: 6.MAY.2014 15:26:04

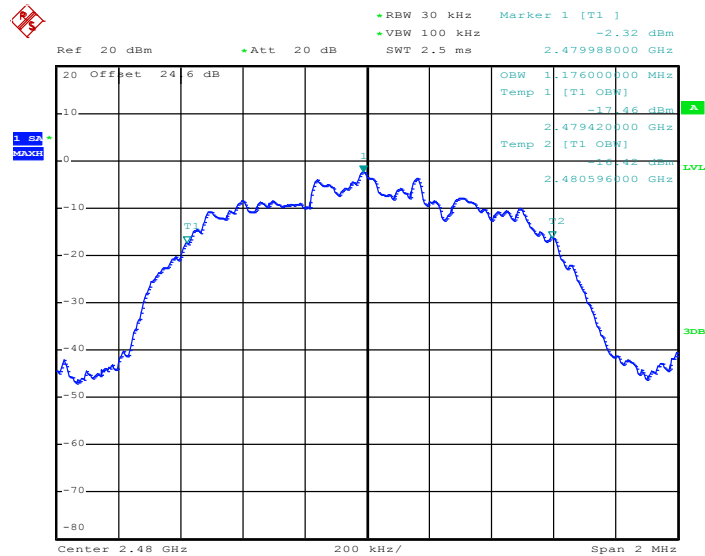99% Occupied Bandwidth Plot on Channel 78


Date: 6.MAY.2014 15:26:53

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, 3Mbps and AFH are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

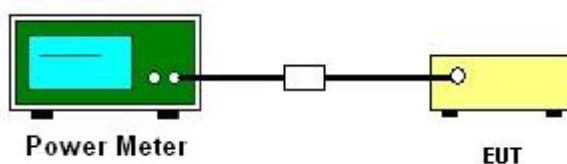

3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Alex Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	7.19	20.97	Pass
39	2441	7.86	20.97	Pass
78	2480	8.04	20.97	Pass

Note: For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.

Test Mode :	2Mbps	Temperature :	24~26℃
Test Engineer :	Alex Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	6.95	20.97	Pass
39	2441	7.67	20.97	Pass
78	2480	7.89	20.97	Pass

Test Mode :	3Mbps	Temperature :	24~26℃
Test Engineer :	Alex Lee	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	7.41	20.97	Pass
39	2441	8.12	20.97	Pass
78	2480	8.21	20.97	Pass

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz ($\geq 1\%$ span=10MHz), VBW = 300kHz ($\geq$ RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

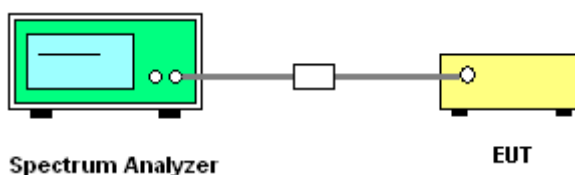




Test Mode :	1Mbps	Temperature :	24~26℃
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	Alex Lee

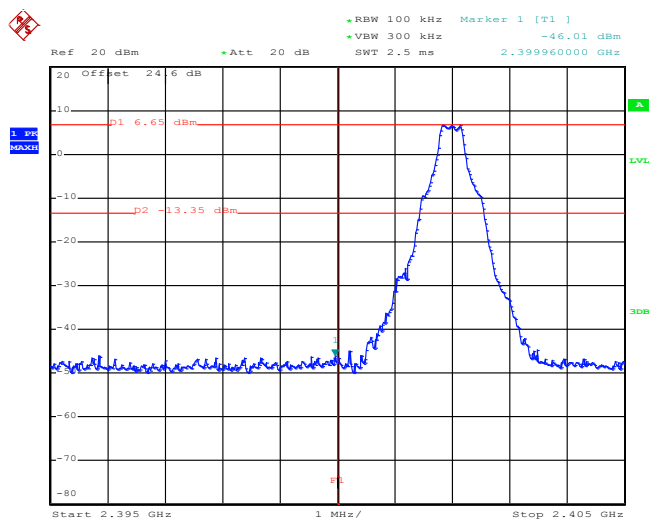

Date: 23.APR.2014 14:13:40

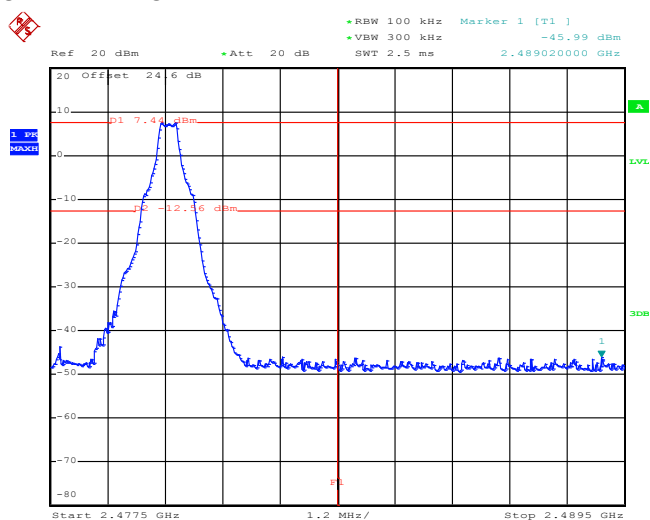

Date: 23.APR.2014 14:06:00



Report No. : FR441115A

Low Band Edge Plot on Channel 00



Ref 20 dBm Att 20 dB RBW 100 kHz Marker 1 [T1] -46.55 dBm
 VBW 300 kHz SWT 2.5 ms 2.485276000 GHz

20 Offset 24 6 dB
 -10
 -20
 -30
 -40
 -50
 -60
 -70
 -80

D1 4.99 dBm
 D2 -15.07 dBm

1.2 MHz/
 Start 2.4775 GHz Stop 2.4895 GHz

Date: 23.APR.2014 13:58:56



Report No. : FR441115A


Low Band Edge Plot on Channel 00




Date: 23.APR.2014 13:45:02

3.6.7 Test Result of Conducted Hopping Mode Band Edges

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Alex Lee	Relative Humidity :	50~53%

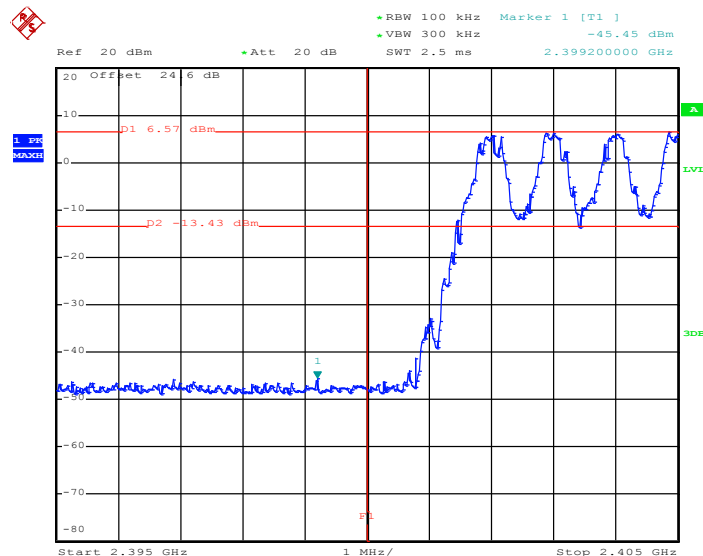1Mbps Hopping Mode Low Band Edge Plot


Date: 23.APR.2014 14:13:22

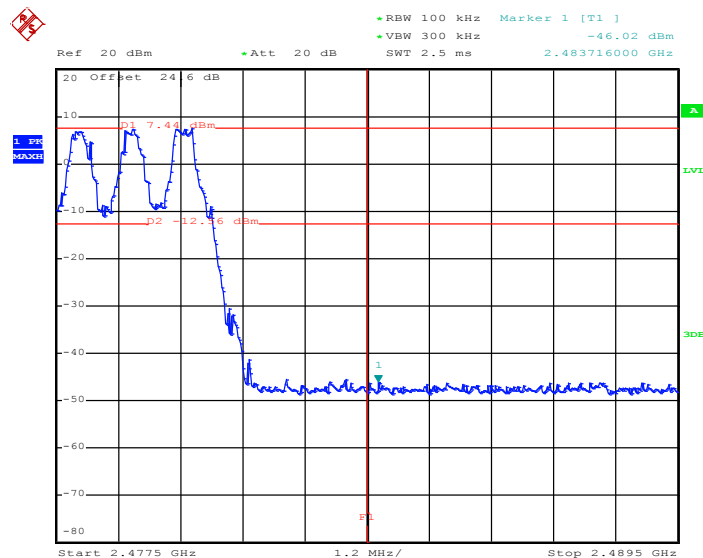
1Mbps Hopping Mode High Band Edge Plot


Date: 23.APR.2014 14:05:41




Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Alex Lee	Relative Humidity :	50~53%

2Mbps Hopping Mode Low Band Edge Plot

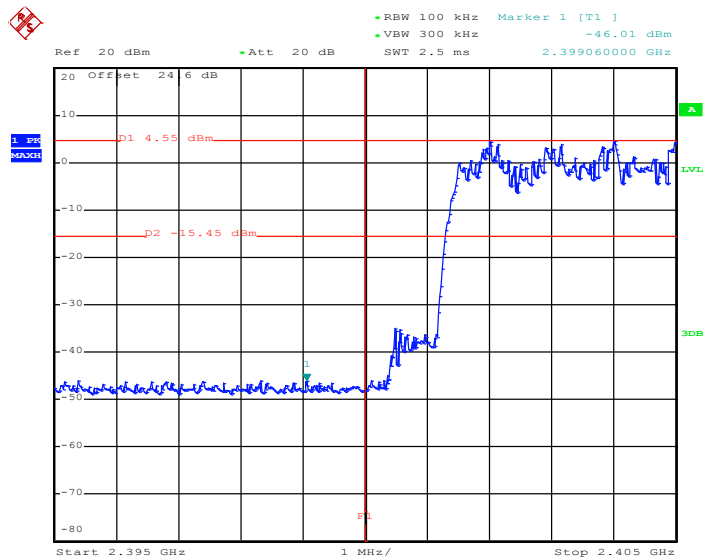

Date: 23.APR.2014 13:52:39

2Mbps Hopping Mode High Band Edge Plot

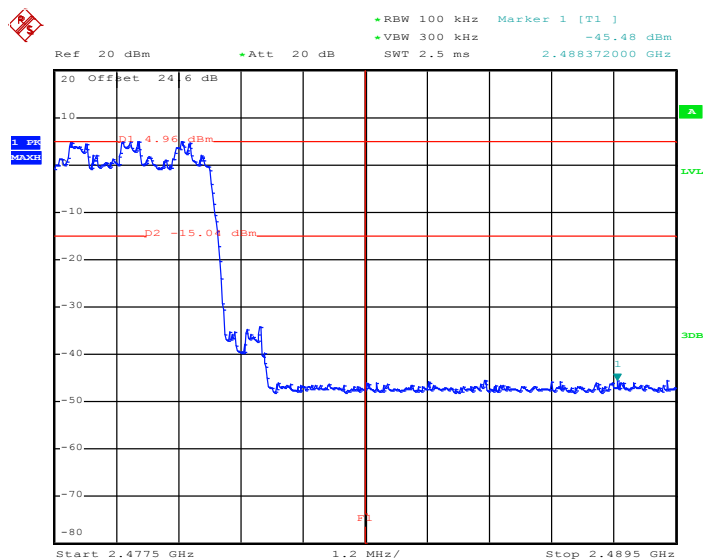


Date: 23.APR.2014 13:58:35




Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Alex Lee	Relative Humidity :	50~53%

3Mbps Hopping Mode Low Band Edge Plot

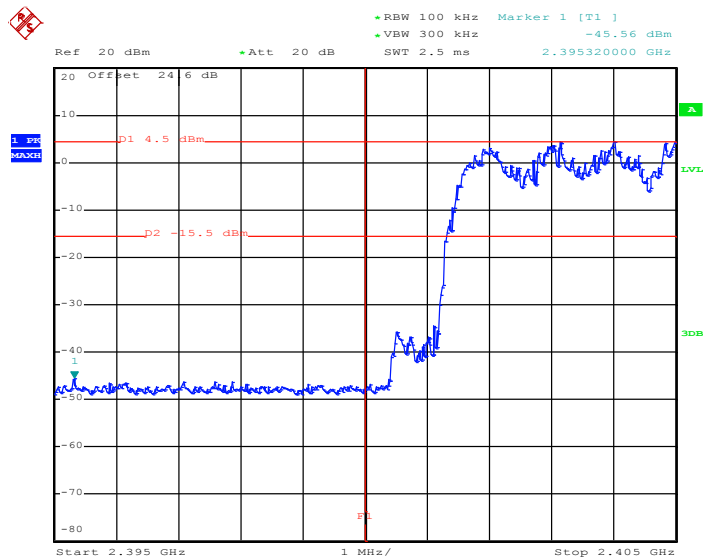

Date: 23.APR.2014 13:47:31

3Mbps Hopping Mode High Band Edge Plot

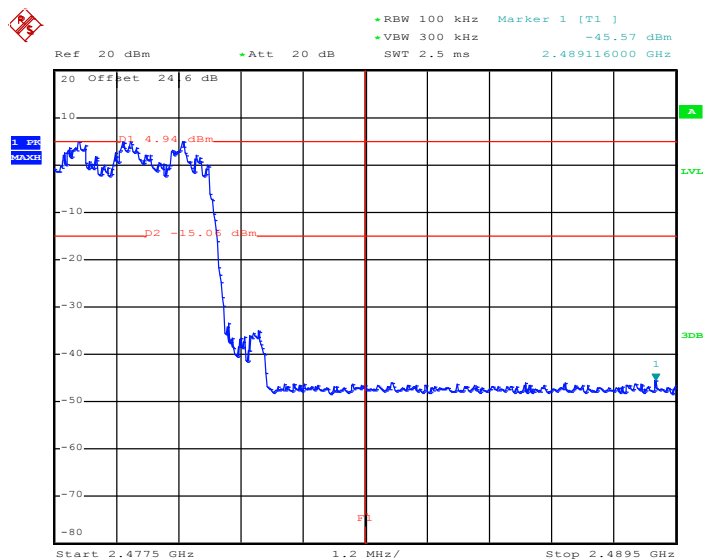

Date: 23.APR.2014 13:44:43

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.7.4 Test Setup

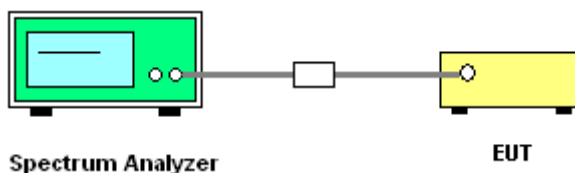

3.7.5 Test Result of Conducted Spurious Emission


Test Mode :	1Mbps	Temperature :	24~26℃
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Alex Lee

1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

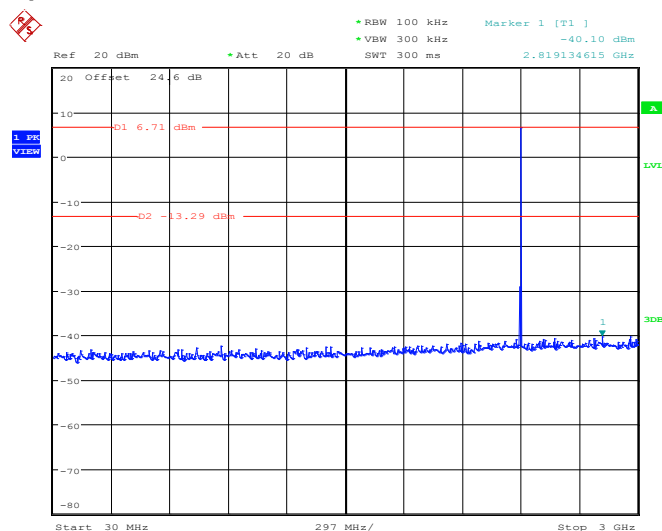

Date: 23.APR.2014 23:45:53

1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

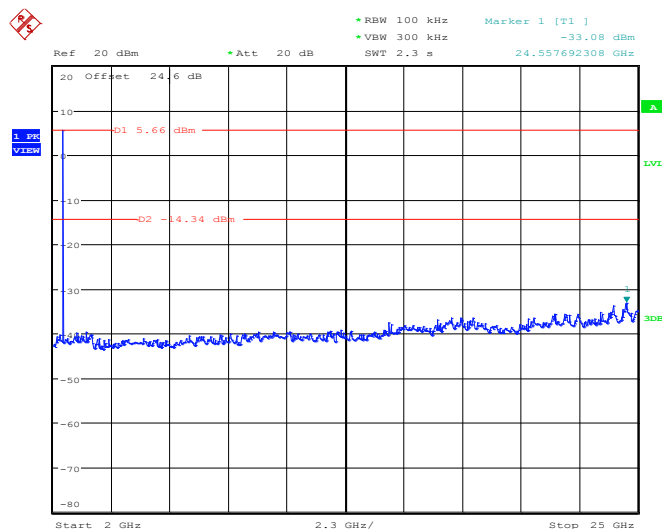


Date: 23.APR.2014 23:46:14




Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Alex Lee

1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

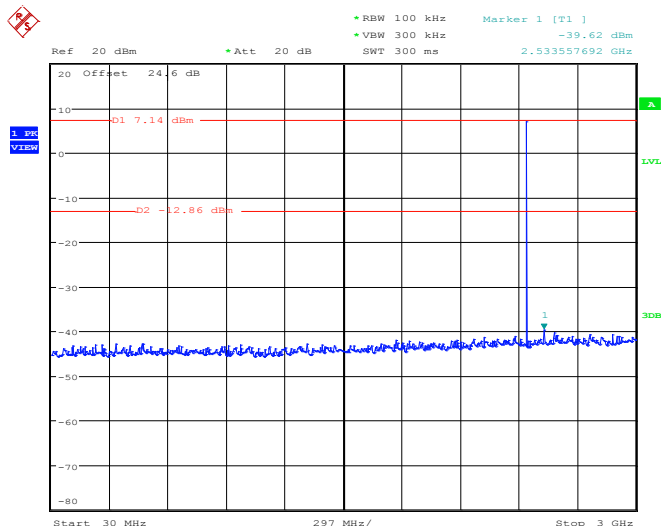

Date: 23.APR.2014 23:46:49


1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

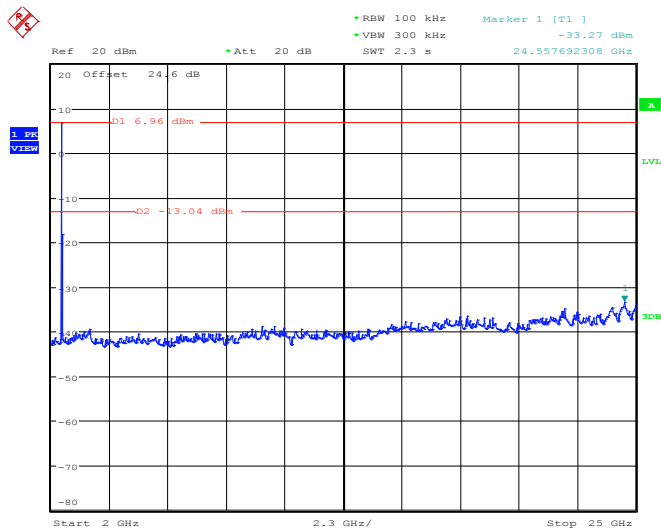


Date: 23.APR.2014 23:47:11



Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Alex Lee

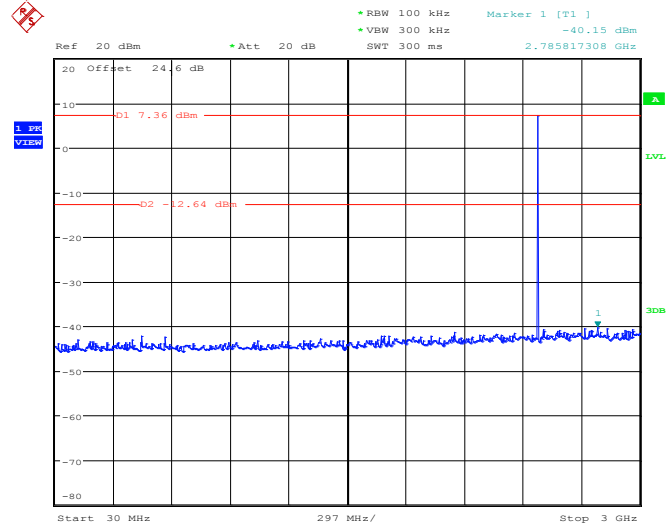1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

Date: 23.APR.2014 23:47:46

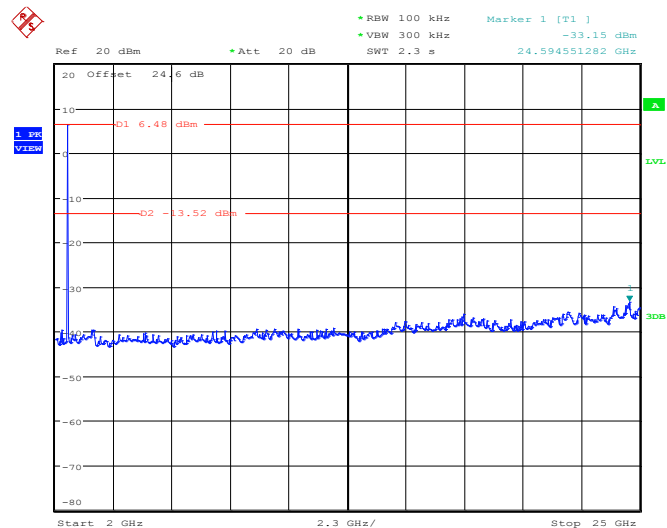1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

Date: 23.APR.2014 23:48:08



Report No. : FR441115A

2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz



2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz





2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz




2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz






Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Alex Lee

2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

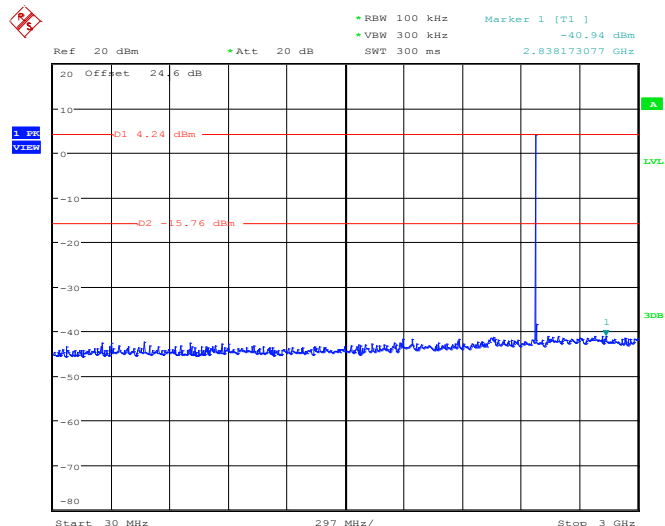

Date: 23.APR.2014 23:42:28

2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

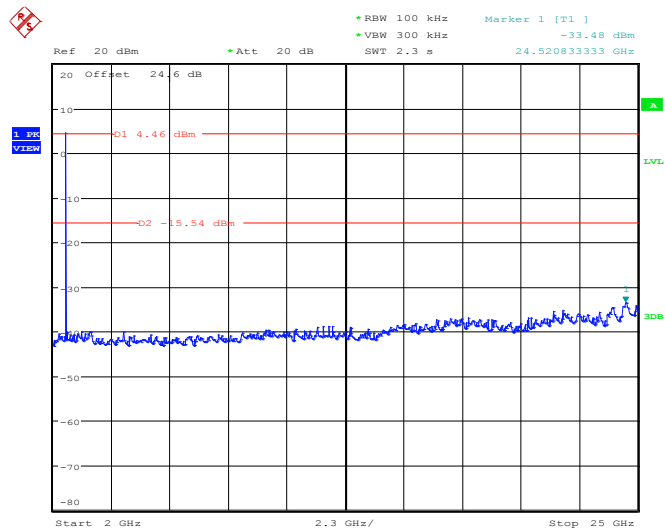


Date: 23.APR.2014 23:42:49




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Alex Lee

3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

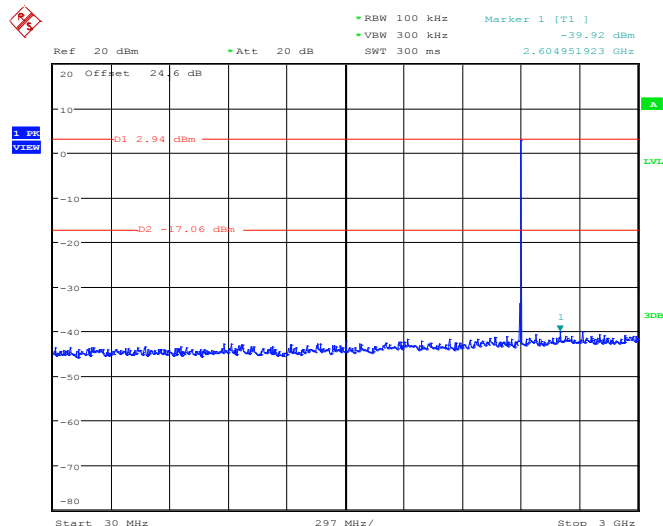

Date: 23.APR.2014 23:51:26

3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

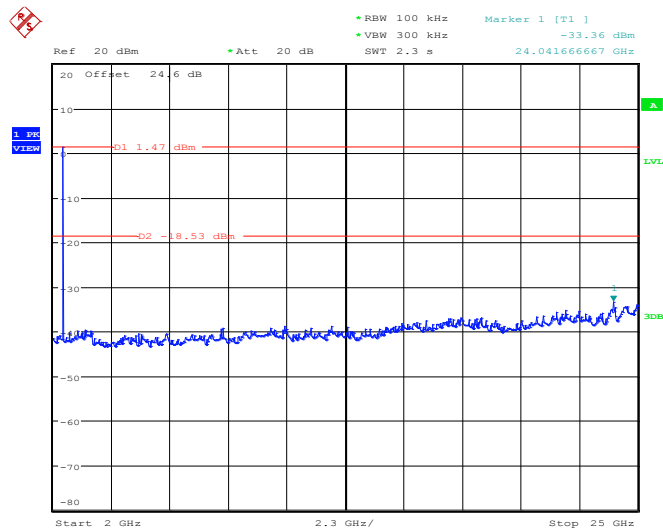


Date: 23.APR.2014 23:51:48




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Alex Lee

3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

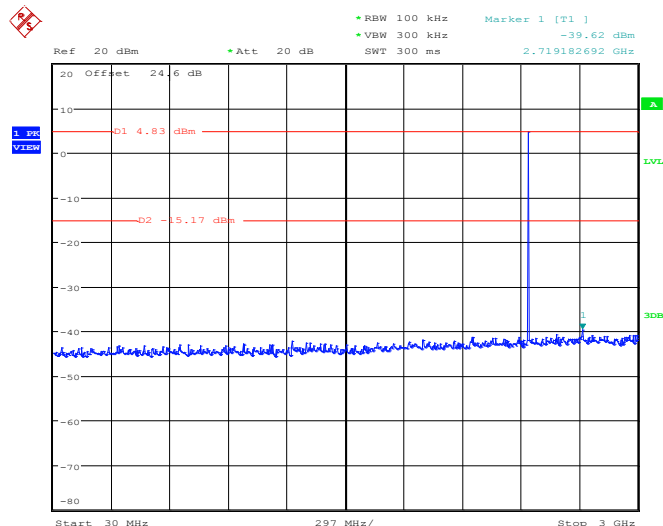

Date: 23.APR.2014 23:50:39

3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

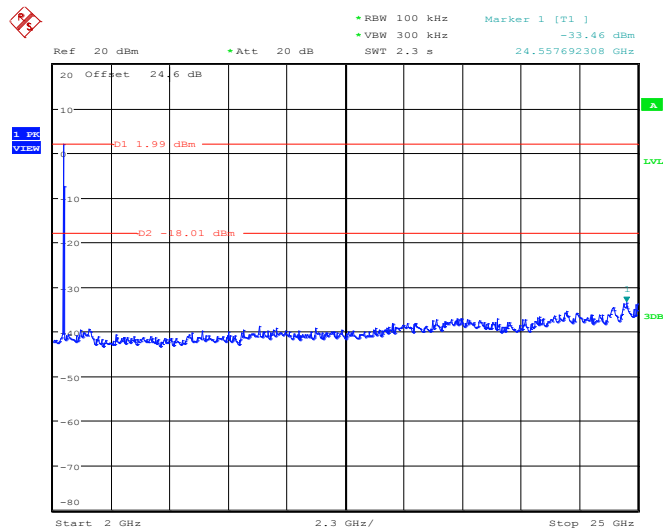


Date: 23.APR.2014 23:51:00




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	Alex Lee

3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

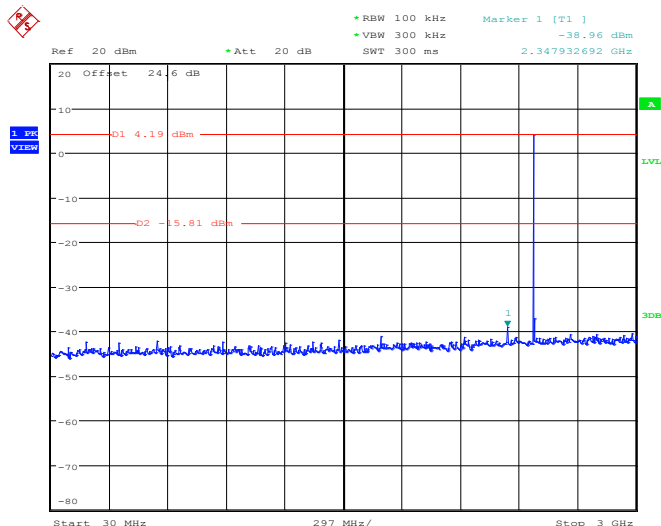

Date: 23.APR.2014 23:53:05

3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

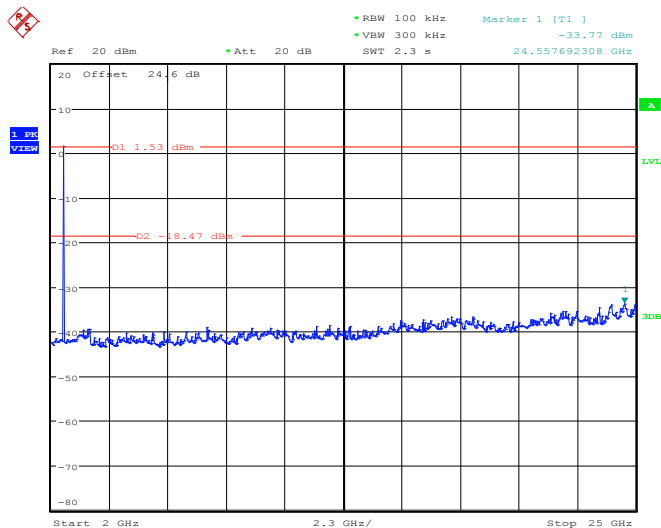

Date: 23.APR.2014 23:53:26

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

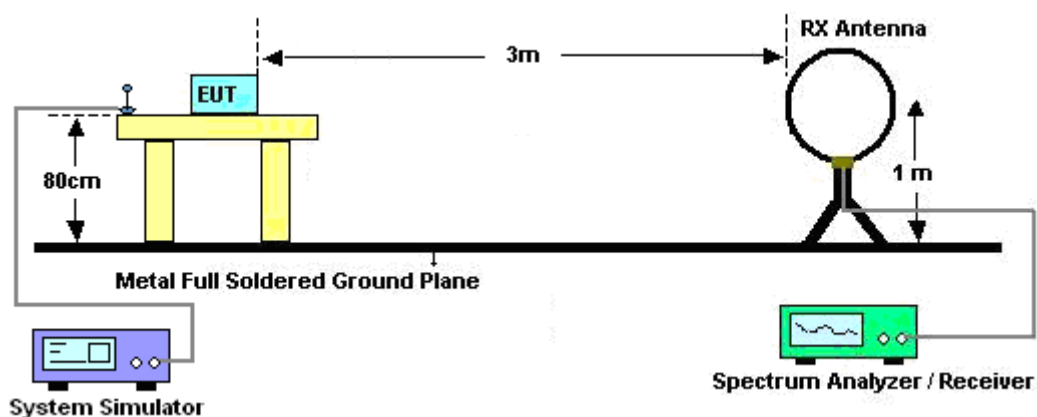

For radiated emissions from 30MHz to 1GHz

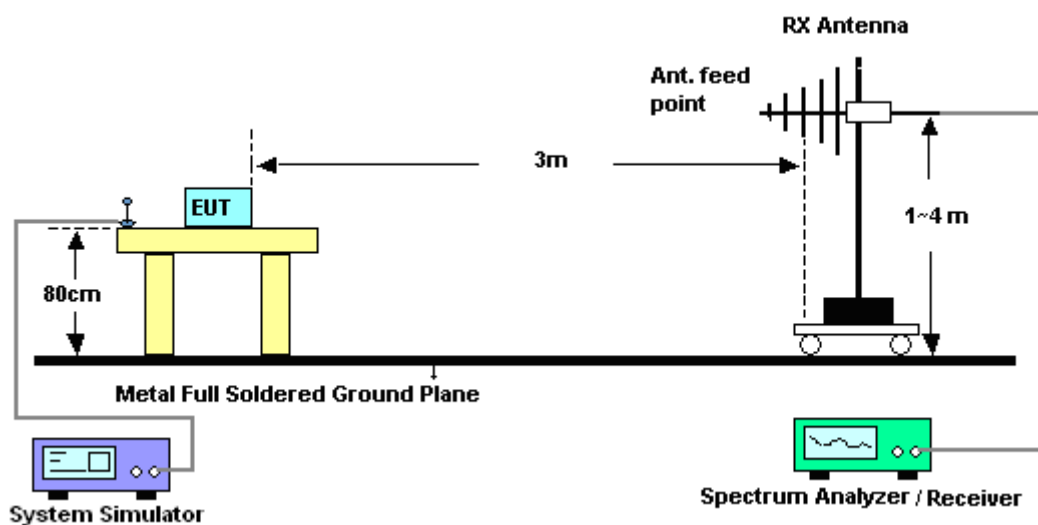

For radiated emissions above 1GHz

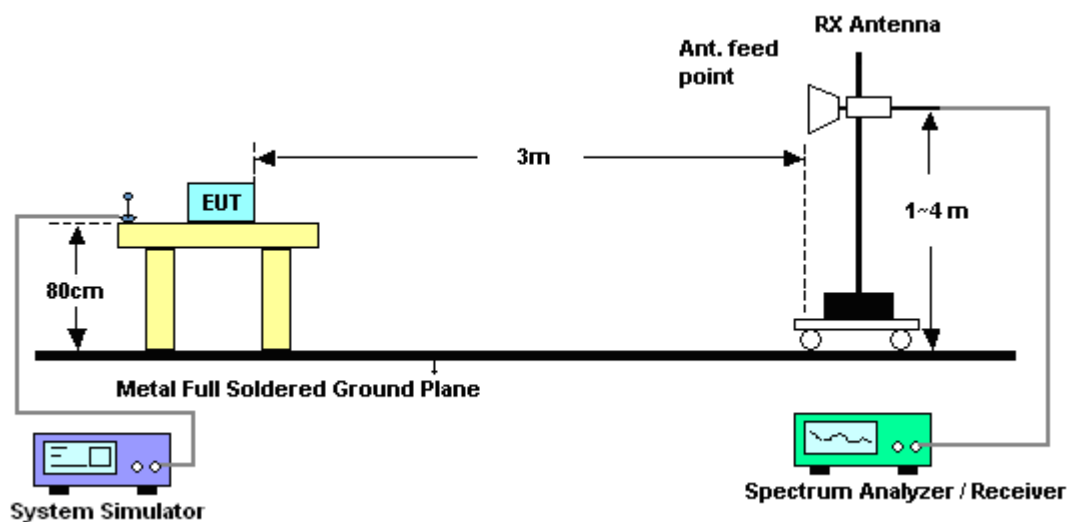


3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.8.6 Duty cycle correction factor for average measurement

3DH5 on time (One Pulse) Plot on Channel 39

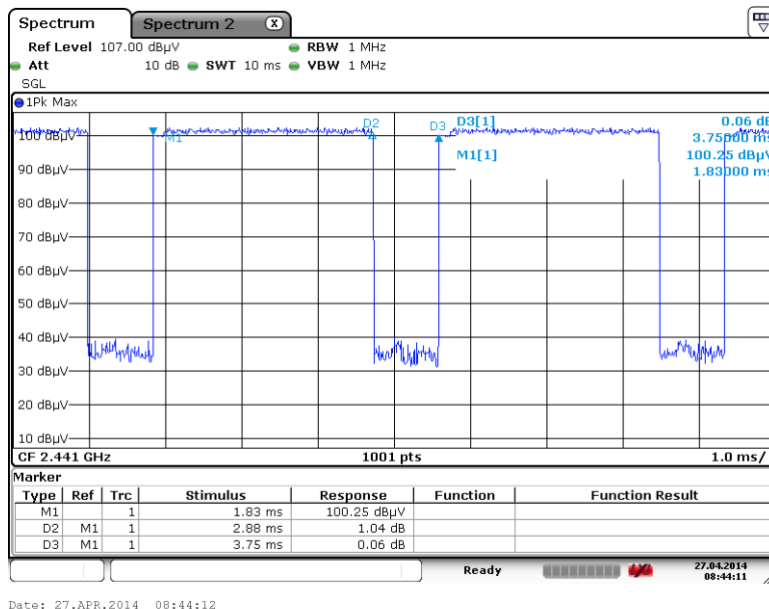

3DH5 on time (Count Pulses) Plot on Channel 39

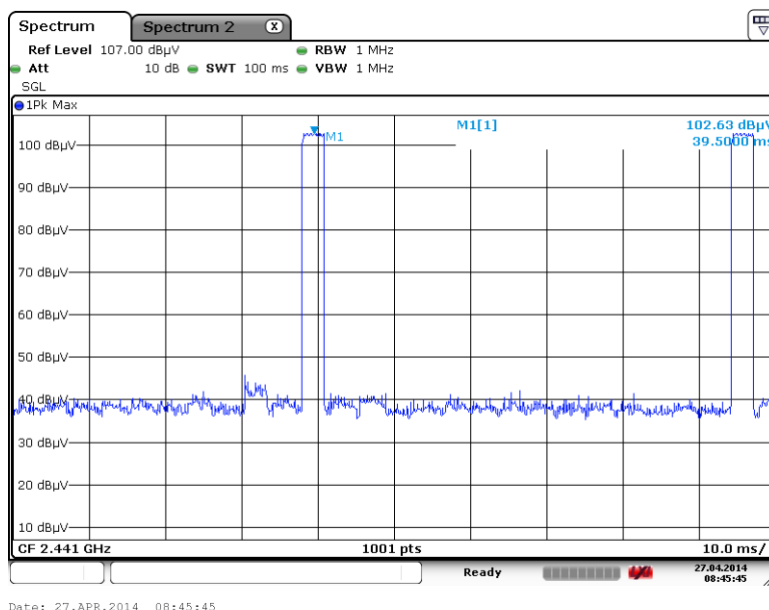

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$

3.8.7 Test Result of Radiated Spurious at Band Edges

Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	45~48%
		Test Engineer :	Stan Hsieh

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2326.38	47.15	-26.85	74	42.34	32.23	6.8	34.22	112	357	Peak
2326.38	22.36	-31.64	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2369.49	46.24	-27.76	74	41.35	32.28	6.88	34.27	100	259	Peak
2369.49	21.45	-32.55	54	-	-	-	-	-	-	Average

Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	45~48%
		Test Engineer :	Stan Hsieh

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.74	50.47	-23.53	74	45.46	32.38	7.06	34.43	103	350	Peak
2483.74	25.68	-28.32	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.65	48.31	-25.69	74	43.3	32.38	7.06	34.43	154	239	Peak
2483.65	23.52	-30.48	54	-	-	-	-	-	-	Average

Note: Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79dB)

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Note: Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	45~48%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 3201 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 108.01 dBμV/m - 20dB = 88.01 dBμV/m.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	108.01	-	-	103.1	32.3	6.91	34.3	112	357	Peak
2402	83.22	-	-	-	-	-	-	-	-	Average
3201	53.46	-34.55	88.01	72.33	32.76	6.89	58.52	100	0	Peak
4803	40.01	-33.99	74	56.24	33.98	8.75	58.96	100	0	Peak
4803	15.22	-38.78	54	-	-	-	-	-	-	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	45~48%
Test Engineer :	Stan Hsieh	Polarization :	Vertical
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 3201 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	103.68	-	-	98.77	32.3	6.91	34.3	100	259	Peak
2402	78.89	-	-	-	-	-	-	-	-	Average
3201	46.62	-37.06	83.68	65.49	32.76	6.89	58.52	100	0	Peak
4803	40.94	-33.06	74	57.17	33.98	8.75	58.96	100	0	Peak
4803	16.15	-37.85	54	-	-	-	-	-	-	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	45~48%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal
Remark :	1. 2442 MHz is fundamental signal which can be ignored. 2. 3255 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2442	107.47	-	-	102.52	32.35	6.99	34.39	107	330	Peak
2442	82.68	-	-	-	-	-	-	-	-	Average
3255	50.09	-37.38	87.47	68.97	32.75	6.96	58.59	100	0	Peak
4881	40.26	-33.74	74	56.29	33.95	8.85	58.83	100	0	Peak
4881	15.47	-38.53	54	-	-	-	-	-	-	Average
7323	42.86	-31.14	74	54.16	35.53	10.91	57.74	100	0	Peak
7323	18.07	-35.93	54	-	-	-	-	-	-	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	45~48%
Test Engineer :	Stan Hsieh	Polarization :	Vertical
Remark :	1. 2442 MHz is fundamental signal which can be ignored. 2. 3255 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2442	101.96	-	-	97.01	32.35	6.99	34.39	129	236	Peak
2442	77.17	-	-	-	-	-	-	-	-	Average
3255	43.63	-38.33	81.96	62.51	32.75	6.96	58.59	100	0	Peak
4881	39.8	-34.2	74	55.83	33.95	8.85	58.83	100	0	Peak
4881	15.01	-38.99	54	-	-	-	-	-	-	Average
7323	43	-31	74	54.3	35.53	10.91	57.74	100	0	Peak
7323	18.21	-35.79	54	-	-	-	-	-	-	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	45~48%
Test Engineer :	Stan Hsieh	Polarization :	Horizontal
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 3306 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.43	25.98	-14.02	40	39.56	17.24	0.56	31.38	-	-	Peak
96.69	30.11	-13.39	43.5	50.55	9.68	0.98	31.1	100	117	Peak
120.45	22.98	-20.52	43.5	41.58	11.4	1.1	31.1	-	-	Peak
311.9	16.79	-29.21	46	32.68	13.32	1.79	31	-	-	Peak
482.7	18.93	-27.07	46	29.63	17.69	2.39	30.78	-	-	Peak
626.2	22.82	-23.18	46	30.27	20.33	2.77	30.55	-	-	Peak
2480	106.96	-	-	101.95	32.38	7.06	34.43	103	350	Peak
2480	82.17	-	-	-	-	-	-	-	-	Average
3306	47.1	-39.86	86.96	65.98	32.74	7.03	58.65	100	0	Peak
4959	40.97	-33.03	74	56.8	33.91	8.92	58.66	100	0	Peak
4959	16.18	-37.82	54	-	-	-	-	-	-	Average
7440	40.5	-33.5	74	51.8	35.51	11.04	57.85	100	0	Peak
7440	15.71	-38.29	54	-	-	-	-	-	-	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

Test Mode :	3Mbps	Temperature :	21~23°C
Test Channel :	78	Relative Humidity :	45~48%
Test Engineer :	Stan Hsieh	Polarization :	Vertical
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 3306 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
49.44	31.78	-8.22	40	53.54	8.75	0.69	31.2	147	52	Peak
106.95	26.79	-16.71	43.5	46.31	10.62	1.03	31.17	-	-	Peak
120.99	26.64	-16.86	43.5	45.19	11.44	1.11	31.1	-	-	Peak
352.5	16.25	-29.75	46	30.86	14.46	1.99	31.06	-	-	Peak
507.2	19.68	-26.32	46	29.78	18.07	2.46	30.63	-	-	Peak
770.4	23.93	-22.07	46	29.1	22.1	3.09	30.36	-	-	Peak
2480	102.1	-	-	97.09	32.38	7.06	34.43	154	239	Peak
2480	77.31	-	-	-	-	-	-	-	-	Average
3306	42.62	-31.38	74	61.5	32.74	7.03	58.65	100	0	Peak
4959	40.23	-33.77	74	56.06	33.91	8.92	58.66	100	0	Peak
4959	15.44	-38.56	54	-	-	-	-	-	-	Average
7440	40.51	-33.49	74	51.81	35.51	11.04	57.85	100	0	Peak
7440	15.72	-38.28	54	-	-	-	-	-	-	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.9.4 Test Setup

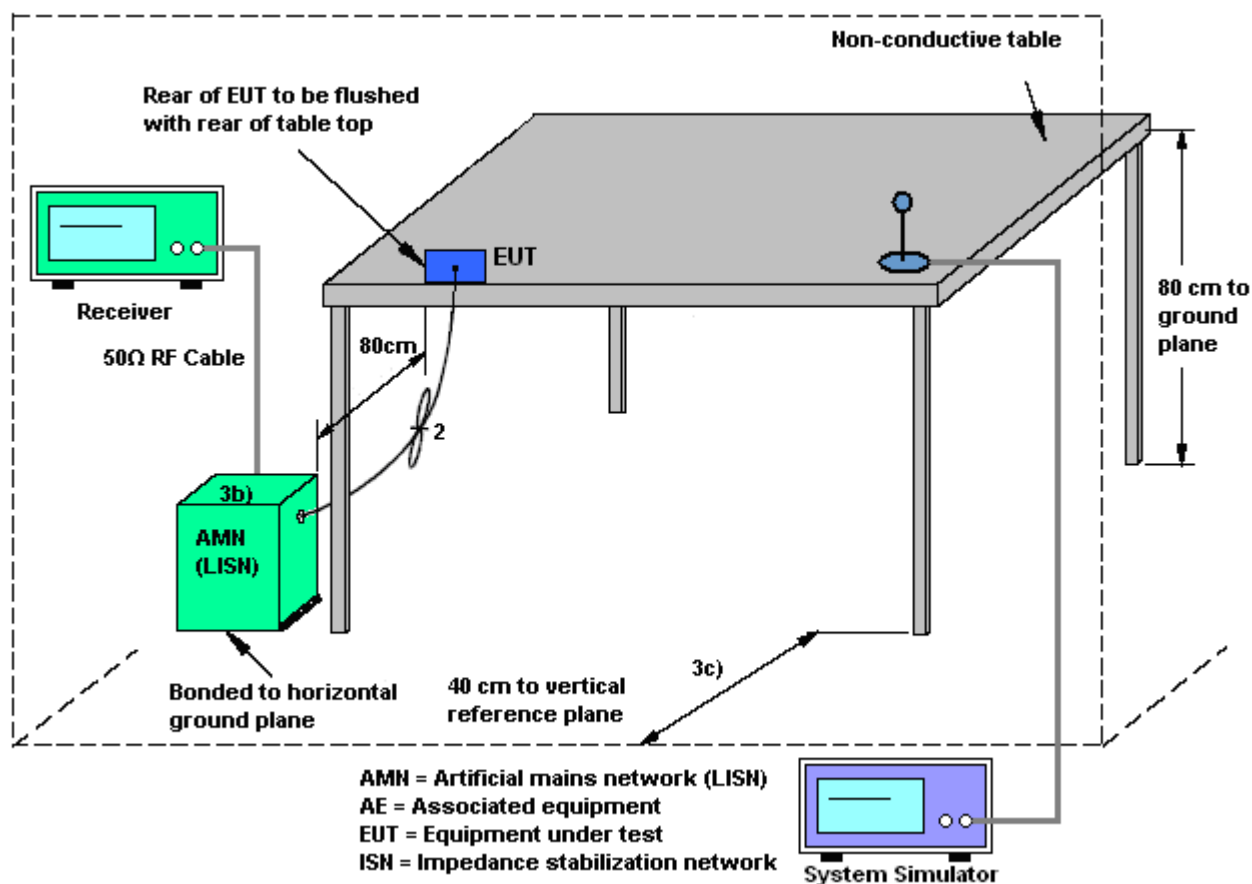

3.9.5 Test Result of AC Conducted Emission


Test Mode :	Mode 1	Temperature :	20~22℃
Test Engineer :	Cosmo Xu	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 (GPRS class 8) Idle + Bluetooth Link + TC+ TF + GPS Rx + Battery 2 + Bluetooth Base (Charging from Adapter 1) + USB flash drive + Micro USB Cable (Data Link with notebook) + RJ-45 (Load) + RJ-11 (Load) + RS232 (Load)		

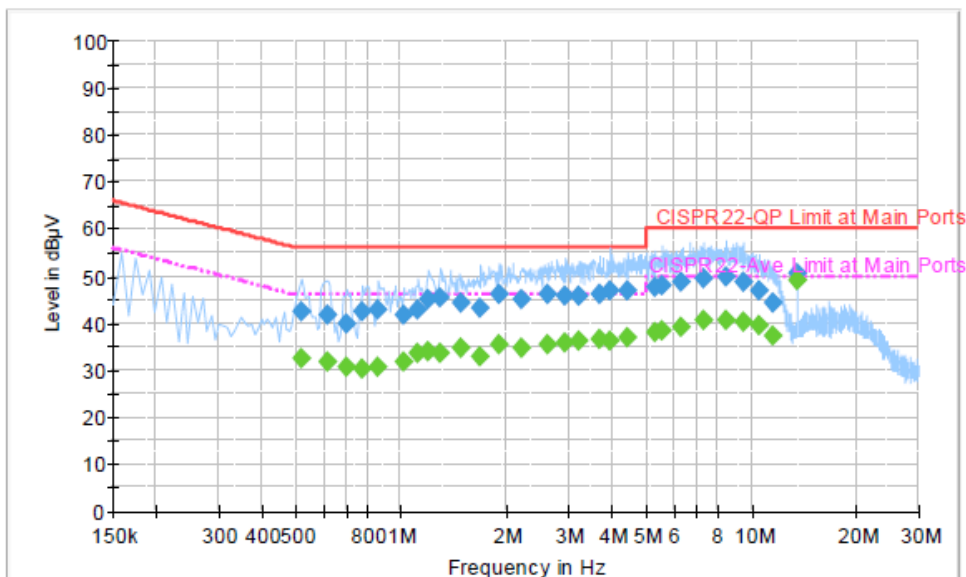

Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.518000	42.6	Off	L1	19.3	13.4	56.0
0.614000	41.7	Off	L1	19.4	14.3	56.0
0.702000	39.9	Off	L1	19.5	16.1	56.0
0.774000	42.5	Off	L1	19.4	13.5	56.0
0.862000	42.7	Off	L1	19.5	13.3	56.0
1.014000	41.6	Off	L1	19.5	14.4	56.0
1.118000	42.8	Off	L1	19.5	13.2	56.0
1.198000	45.0	Off	L1	19.6	11.0	56.0
1.294000	45.3	Off	L1	19.5	10.7	56.0
1.486000	44.2	Off	L1	19.5	11.8	56.0
1.686000	43.3	Off	L1	19.5	12.7	56.0
1.894000	46.3	Off	L1	19.6	9.7	56.0
2.214000	45.2	Off	L1	19.6	10.8	56.0
2.614000	46.0	Off	L1	19.6	10.0	56.0
2.950000	45.8	Off	L1	19.6	10.2	56.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 (GPRS class 8) Idle + Bluetooth Link + TC+ TF + GPS Rx + Battery 2 + Bluetooth Base (Charging from Adapter 1) + USB flash drive + Micro USB Cable (Data Link with notebook) + RJ-45 (Load) + RJ-11 (Load) + RS232 (Load)		

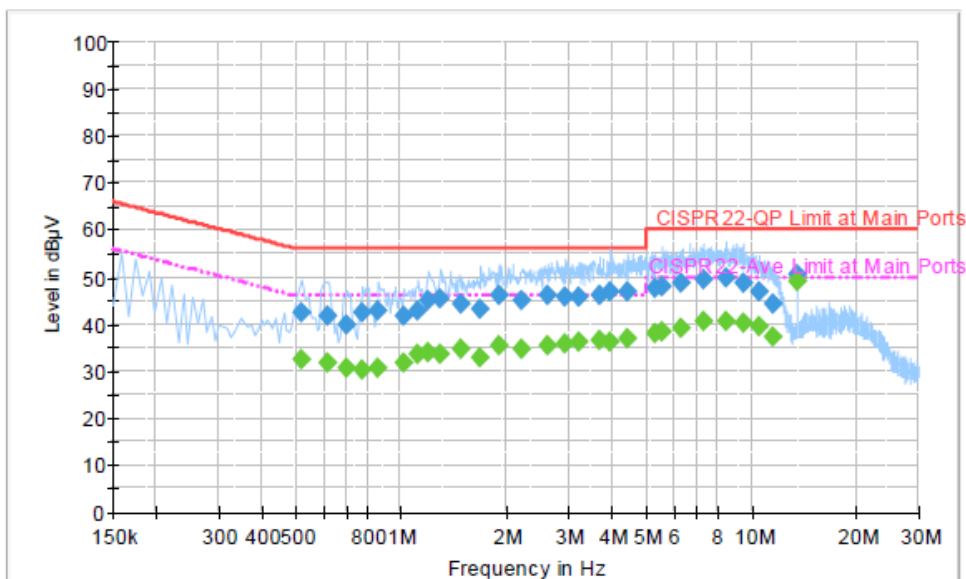
Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
3.222000	45.8	Off	L1	19.6	10.2	56.0
3.678000	46.0	Off	L1	19.6	10.0	56.0
3.942000	46.7	Off	L1	19.6	9.3	56.0
4.446000	47.0	Off	L1	19.6	9.0	56.0
5.294000	47.8	Off	L1	19.6	12.2	60.0
5.574000	48.1	Off	L1	19.6	11.9	60.0
6.278000	48.5	Off	L1	19.6	11.5	60.0
7.286000	49.4	Off	L1	19.6	10.6	60.0
8.430000	49.8	Off	L1	19.6	10.2	60.0
9.470000	48.8	Off	L1	19.7	11.2	60.0
10.502000	46.9	Off	L1	19.7	13.1	60.0
11.566000	44.3	Off	L1	19.7	15.7	60.0
13.558000	50.7	Off	L1	19.8	9.3	60.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 (GPRS class 8) Idle + Bluetooth Link + TC+ TF + GPS Rx + Battery 2 + Bluetooth Base (Charging from Adapter 1) + USB flash drive + Micro USB Cable (Data Link with notebook) + RJ-45 (Load) + RJ-11 (Load) + RS232 (Load)		

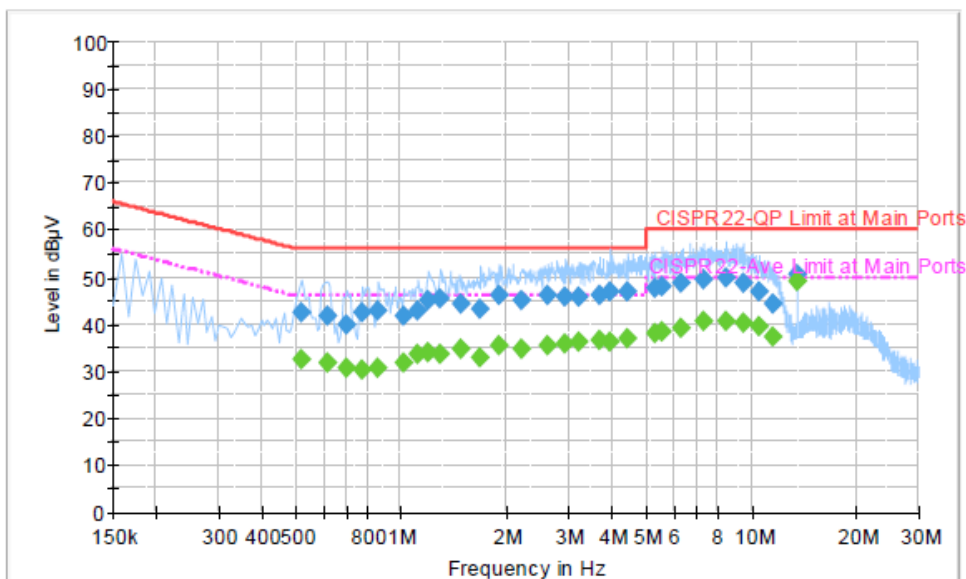
Final Result : Average


Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.518000	32.3	Off	L1	19.3	13.7	46.0
0.614000	31.7	Off	L1	19.4	14.3	46.0
0.702000	30.7	Off	L1	19.5	15.3	46.0
0.774000	30.1	Off	L1	19.4	15.9	46.0
0.862000	30.7	Off	L1	19.5	15.3	46.0
1.014000	31.7	Off	L1	19.5	14.3	46.0
1.118000	33.5	Off	L1	19.5	12.5	46.0
1.198000	33.8	Off	L1	19.6	12.2	46.0
1.294000	33.7	Off	L1	19.5	12.3	46.0
1.486000	34.9	Off	L1	19.5	11.1	46.0
1.686000	32.7	Off	L1	19.5	13.3	46.0
1.894000	35.6	Off	L1	19.6	10.4	46.0
2.214000	34.9	Off	L1	19.6	11.1	46.0
2.614000	35.3	Off	L1	19.6	10.7	46.0
2.950000	35.8	Off	L1	19.6	10.2	46.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 (GPRS class 8) Idle + Bluetooth Link + TC+ TF + GPS Rx + Battery 2 + Bluetooth Base (Charging from Adapter 1) + USB flash drive + Micro USB Cable (Data Link with notebook) + RJ-45 (Load) + RJ-11 (Load) + RS232 (Load)		

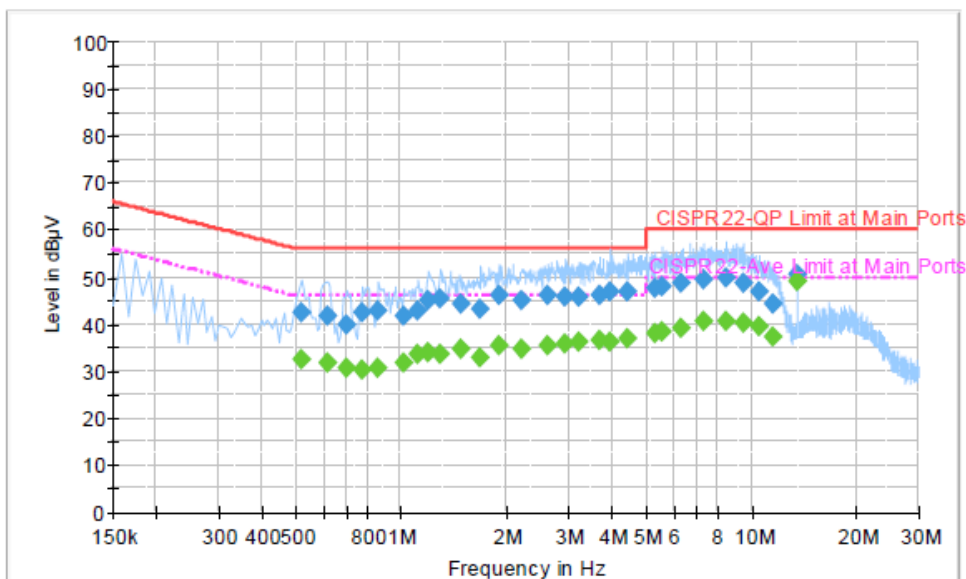
Final Result : Average


Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
3.222000	36.1	Off	L1	19.6	9.9	46.0
3.678000	36.6	Off	L1	19.6	9.4	46.0
3.942000	36.3	Off	L1	19.6	9.7	46.0
4.446000	36.9	Off	L1	19.6	9.1	46.0
5.294000	37.9	Off	L1	19.6	12.1	50.0
5.574000	38.4	Off	L1	19.6	11.6	50.0
6.278000	39.0	Off	L1	19.6	11.0	50.0
7.286000	40.4	Off	L1	19.6	9.6	50.0
8.430000	40.7	Off	L1	19.6	9.3	50.0
9.470000	40.1	Off	L1	19.7	9.9	50.0
10.502000	39.3	Off	L1	19.7	10.7	50.0
11.566000	37.2	Off	L1	19.7	12.8	50.0
13.558000	49.0	Off	L1	19.8	1.0	50.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 (GPRS class 8) Idle + Bluetooth Link + TC+ TF + GPS Rx + Battery 2 + Bluetooth Base (Charging from Adapter 1) + USB flash drive + Micro USB Cable (Data Link with notebook) + RJ-45 (Load) + RJ-11 (Load) + RS232 (Load)		

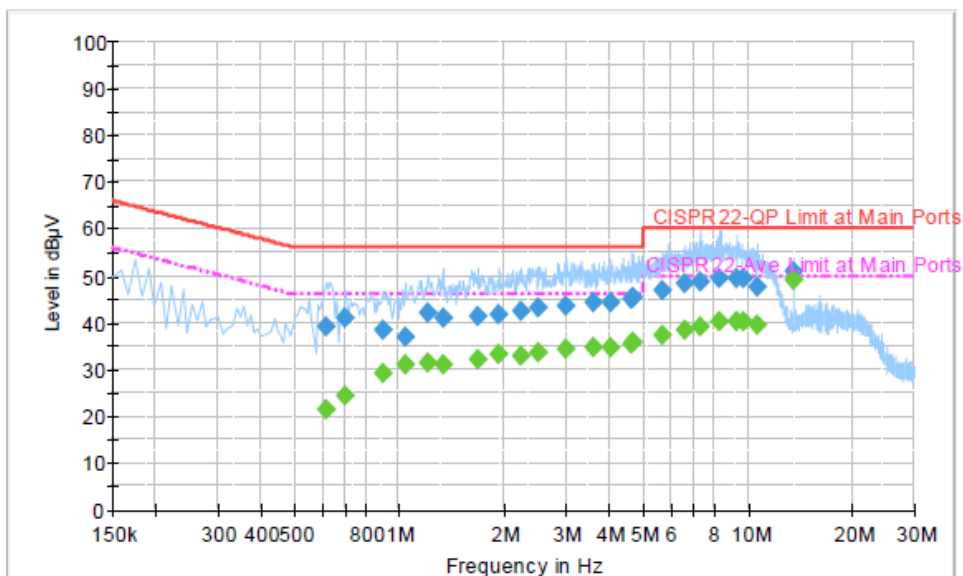
Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.614000	39.0	Off	N	19.4	17.0	56.0
0.702000	41.0	Off	N	19.5	15.0	56.0
0.902000	38.3	Off	N	19.5	17.7	56.0
1.038000	36.7	Off	N	19.5	19.3	56.0
1.206000	42.1	Off	N	19.6	13.9	56.0
1.334000	40.8	Off	N	19.5	15.2	56.0
1.678000	41.3	Off	N	19.5	14.7	56.0
1.934000	41.6	Off	N	19.5	14.4	56.0
2.222000	42.5	Off	N	19.6	13.5	56.0
2.510000	43.2	Off	N	19.6	12.8	56.0
3.014000	43.4	Off	N	19.6	12.6	56.0
3.622000	44.2	Off	N	19.6	11.8	56.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 (GPRS class 8) Idle + Bluetooth Link + TC+ TF + GPS Rx + Battery 2 + Bluetooth Base (Charging from Adapter 1) + USB flash drive + Micro USB Cable (Data Link with notebook) + RJ-45 (Load) + RJ-11 (Load) + RS232 (Load)		

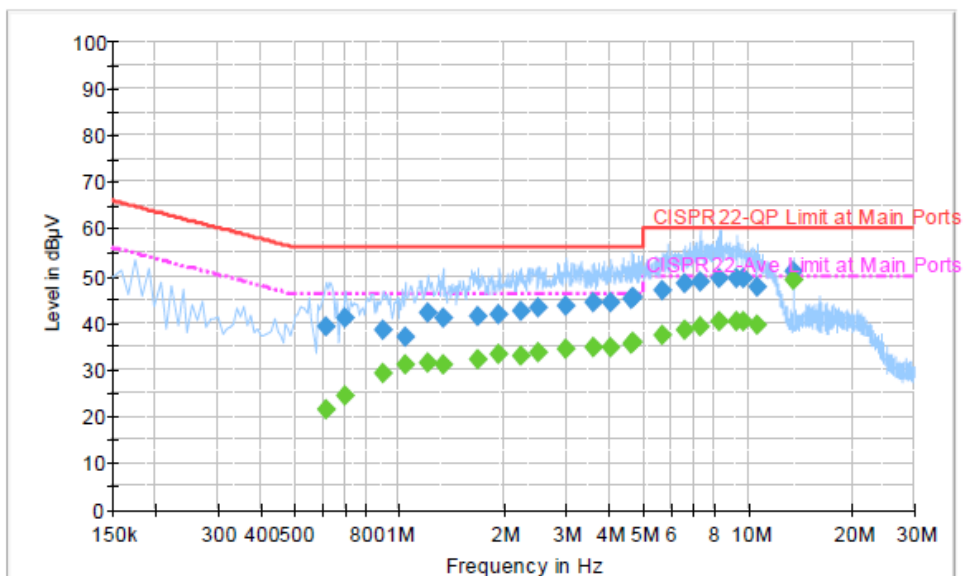
Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
4.046000	44.1	Off	N	19.6	11.9	56.0
4.630000	45.1	Off	N	19.7	10.9	56.0
4.686000	45.2	Off	N	19.6	10.8	56.0
5.670000	46.7	Off	N	19.7	13.3	60.0
6.614000	48.5	Off	N	19.7	11.5	60.0
7.262000	48.8	Off	N	19.7	11.2	60.0
8.294000	49.3	Off	N	19.7	10.7	60.0
9.254000	49.6	Off	N	19.7	10.4	60.0
9.670000	49.5	Off	N	19.8	10.5	60.0
10.670000	47.6	Off	N	19.7	12.4	60.0
13.558000	51.0	Off	N	19.9	9.0	60.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 (GPRS class 8) Idle + Bluetooth Link + TC+ TF + GPS Rx + Battery 2 + Bluetooth Base (Charging from Adapter 1) + USB flash drive + Micro USB Cable (Data Link with notebook) + RJ-45 (Load) + RJ-11 (Load) + RS232 (Load)		

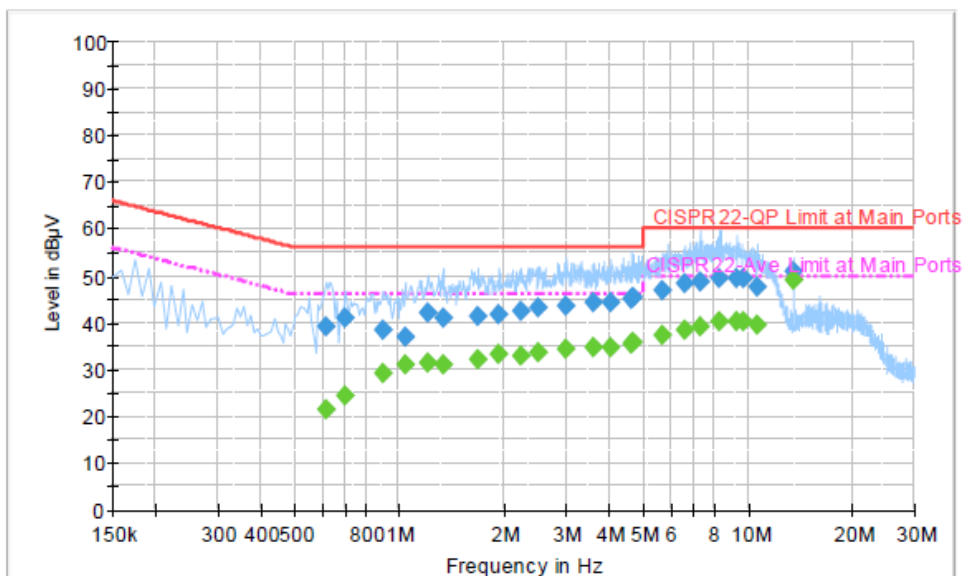
Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.614000	21.4	Off	N	19.4	24.6	46.0
0.702000	24.5	Off	N	19.5	21.5	46.0
0.902000	29.2	Off	N	19.5	16.8	46.0
1.038000	31.1	Off	N	19.5	14.9	46.0
1.206000	31.4	Off	N	19.6	14.6	46.0
1.334000	31.2	Off	N	19.5	14.8	46.0
1.678000	32.3	Off	N	19.5	13.7	46.0
1.934000	33.2	Off	N	19.5	12.8	46.0
2.222000	32.9	Off	N	19.6	13.1	46.0
2.510000	33.6	Off	N	19.6	12.4	46.0
3.014000	34.4	Off	N	19.6	11.6	46.0
3.622000	34.7	Off	N	19.6	11.3	46.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Cosmo Xu	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 (GPRS class 8) Idle + Bluetooth Link + TC+ TF + GPS Rx + Battery 2 + Bluetooth Base (Charging from Adapter 1) + USB flash drive + Micro USB Cable (Data Link with notebook) + RJ-45 (Load) + RJ-11 (Load) + RS232 (Load)		

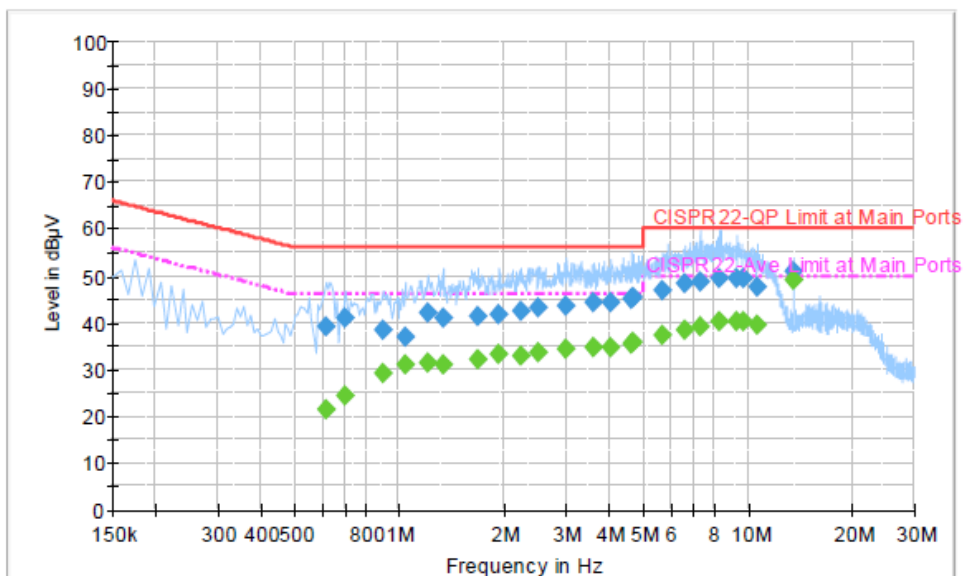
Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
4.046000	34.6	Off	N	19.6	11.4	46.0
4.630000	35.3	Off	N	19.7	10.7	46.0
4.686000	35.8	Off	N	19.6	10.2	46.0
5.670000	37.3	Off	N	19.7	12.7	50.0
6.614000	38.5	Off	N	19.7	11.5	50.0
7.262000	39.2	Off	N	19.7	10.8	50.0
8.294000	40.1	Off	N	19.7	9.9	50.0
9.254000	40.2	Off	N	19.7	9.8	50.0
9.670000	40.1	Off	N	19.8	9.9	50.0
10.670000	39.4	Off	N	19.7	10.6	50.0
13.558000	48.9	Off	N	19.9	1.1	50.0



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	Apr. 19, 2014 ~ May 06, 2014	Jun. 06, 2014	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB412923 44	300MHz~40GHz	Jan. 28, 2014	Apr. 19, 2014 ~ May 06, 2014	Jan. 27, 2015	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US404415 48	300MHz~40GHz	Jan. 28, 2014	Apr. 19, 2014 ~ May 06, 2014	Jan. 27, 2015	Conducted (TH02-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9 kHz~7 GHz	Sep. 06, 2013	Apr. 27, 2014	Sep. 05, 2014	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9 kHz ~ 30 GHz	Nov. 20, 2013	Apr. 27, 2014	Nov. 19, 2014	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	860004/00 01	9 kHz~30 MHz	Jul. 03, 2012	Apr. 27, 2014	Jul. 03, 2014	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30 MHz ~ 1 GHz	Oct. 10, 2013	Apr. 27, 2014	Oct. 09, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1 GHz~18 GHz	Aug. 22, 2013	Apr. 27, 2014	Aug. 21, 2014	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 251	15 GHz- 40 GHz	Oct. 03, 2013	Apr. 27, 2014	Oct. 02, 2014	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz 32dB GAIN	Mar. 17, 2014	Apr. 27, 2014	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1 GHz~26.5 GHz	Nov. 29, 2013	Apr. 27, 2014	Nov. 28, 2014	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	DC~18 G High Gain	Jul. 09, 2013	Apr. 27, 2014	Jul. 08, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Apr. 27, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	ChainTek 3000	N/A	N/A	N/A	Apr. 27, 2014	N/A	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Nov. 15, 2013	Apr. 23, 2014 ~ Apr. 28, 2014	Nov. 14, 2014	Conduction (CO05-HY)
LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 12, 2013	Apr. 23, 2014 ~ Apr. 28, 2014	Dec. 11, 2014	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz ~ 30MHz	Dec. 04, 2013	Apr. 23, 2014 ~ Apr. 28, 2014	Dec. 03, 2014	Conduction (CO05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Apr. 23, 2014 ~ Apr. 28, 2014	N/A	Conduction (CO05-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26
--	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.50
--	------