

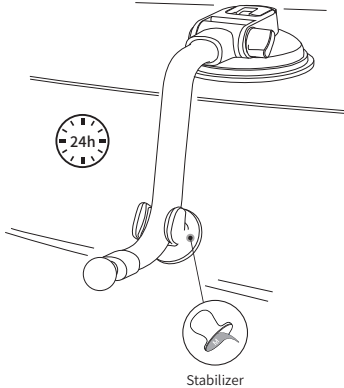


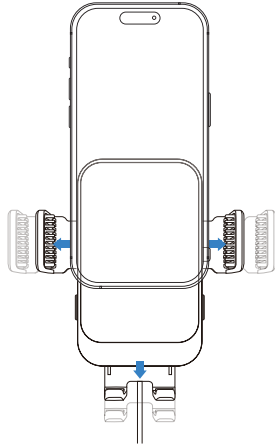
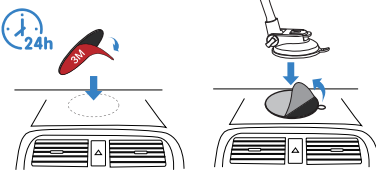




# 型号：i03-S1-AV6S

尺寸：55x85 mm

材质：128g 双面铜版纸

<div>User Manual</div> <div>WIRELESS CAR CHARGER</div> <div>YOUR BEST DRIVE PARTNER</div>	<div>INSTALLATION GUIDE</div> <div>Step 1</div> <div>Clean the car dashboard and install the dashboard pad on a flat surface, make sure to press it hard &amp; thoroughly for more than 20 seconds and let it sit at least 24 hours before use.</div> <div></div> <div>Step 2</div> <div>Install the suction cup as shown and press down the lock lever.</div> <div></div> <div>01</div>	<div>Step 3</div> <div>Adjust the arm for an appropriate position and set the stabilizer as close as the ball joint.</div> <div></div> <div>NOTE: For long-lasting bond, press 8-10s and wait at least 24 hours before using.</div> <div>02</div>	<div>Step 4</div> <div>Install the wireless car charger mount as shown and tighten the nut.</div> <div></div> <div>How to wireless charge your phone?</div> <div>Step 1:</div> <div>Connect the phone mount with the QC 3.0 car charger (included) by the Type C cable, and insert the charger into the cigarette lighter.</div> <div></div> <div>03</div>	<div>Step 2:</div> <div>After the product is powered on the clamp arm will automatically open. Put your mobile phone on it, the mount will auto-locate, clamp and charge your cellphone. Press the left or right button if you need to take out the phone.</div> <div></div> <div>04</div>
<div>Note for Dashboard Pad</div> <div></div> <div>NOTE :</div> <div><ul style="list-style-type: none"><li>① For <b>NOT SMOOTH</b> surface, use the 3M dashboard pad</li><li>② Not compatible with <b>leather</b> or <b>vinyl</b> dashboard</li><li>③ Avoid dust, oil, fingerprints</li><li>④ When applying, the car interior temperature should be <math>\geq 68^{\circ}\text{F}</math></li><li>⑤ Maintained for <math>\geq 25</math> minutes</li><li>⑥ Press <b>8-10</b> seconds</li><li>⑦ Use after <b>24 hours</b> of pasting</li></ul></div> <div>05</div>	<div>Remove Dashboard Disk Pad</div> <div>Step1: Lift carefully the dashboard pad.</div> <div>Step2: Use a thin plastic card to slowly separate the adhesive from the dashboard.</div> <div></div> <div>Note: The suitable with air vent Compatible with 99% horizontal and vertical air vent types.</div> <div></div> <div>06</div>	<div>Product Parameters</div> <div>Recommend charging distance: <math>\leq 4\text{mm}</math> Input: 5V/2A, 9V/2A, 12V/2A (QC3.0) Output: 5W/7.5W/10W/15W (MAX) Applicable device: 4.7-6.9 inches mobile phone with wireless charging function</div> <div>Notice</div> <div><ul style="list-style-type: none"><li>1. Please connect the product with the QC 3.0 car charger included in package by cable to achieve fast charge.</li><li>2. To ensure the efficiency and stability of charging, the wireless charging distance should be <math>\leq 4\text{mm}</math>. Please avoid using metal, MagSafe or thick phone cases.</li><li>3. Click any button on the left or right to take out the phone. If the phone is not taken out within 5s, the product will automatically clamp the phone again.</li><li>4. If FOD (foreign object detection) is triggered in the working state, the indicator light will flicker red light, and the wireless charging will stop, with the clamp arm remaining closed.</li></ul></div> <div>07</div>	<div>FCC Warning Statement</div> <div>This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</div> <div><ul style="list-style-type: none"><li>- Reorient or relocate the receiving antenna.</li><li>- Increase the separation between the equipment and receiver.</li><li>- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.</li><li>- Consult the dealer or an experienced radio/TV technician for help.</li></ul></div> <div>This equipment must be installed and operated with a minimum distance of 15 cm between the radiator and user body.</div> <div>08</div>	<div>Dear Customer</div> <div>If you have any question</div> <div>please do not hesitate to contact us at anytime</div> <div>We are always here if you need!</div>