

On the Model Number: typeface shall be 10 point Arial Bold , lettering shall be black on a white or silver background.

On the FCC ID are: typeface shall be at least 10 point Arial Bold, lettering shall be black on a white or silver background.

On the warning area: typeface shall be 6 point Arial Normal on a white or silver background.

On the Industry Canada Number: typeface shall be 9 point Arial Bold, lettering shall be black on a white or silver background.

On the Country of Origin: typeface shall be 8 point Arial Bold, lettering shall be black on a white or silver background.

The FCC label is 2.73 inches wide by 0.73 inches high.



# **Label, Model No / Regulatory Compliance, AL250**

## **080-00XXX**


THIS DOCUMENT IS THE PROPERTY OF CSI WIRELESS, CALGARY, ALBERTA, CANADA.  
IT SHALL NOT BE USED FOR ANY PURPOSE EXCEPT THE MANUFACTURE OF ARTICLES FOR  
CSI WIRELESS WITHOUT WRITTEN PERMISSION OF CSI WIRELESS.

	Calgary Alberta Canada	Title: Label, Model No / Regulatory Compliance, AL250		
		Document No. 080-00XXX	Sheet 1 of 3	Rev. X2

Originator: Peter Hill


### Revision History

Rev	EC No.	Date	Comments
X1		04/06/03	Initial Release
X2		06/17/04	Revised

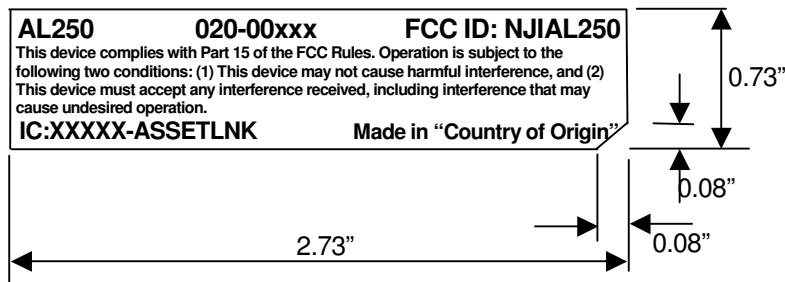

All Dims tolerance +/- 0.005"

- Model / Part Number: typeface shall be 10 point Arial Bold, Black lettering.
- FCC ID: typeface shall be 10 point Arial Bold, Black lettering.
- FCC warning: typeface shall be 6 point Arial, Black lettering.
- Industry Canada number: typeface shall be 9 point Arial Bold, Black lettering.
- Country of Origin: typeface shall be 8 point Arial Bold, Black lettering.  
Country of Origin to be supplied with each order. For example: "Made in USA"

	Calgary Alberta Canada	Title: Label, Model No / Regulatory Compliance, AL250		
		Document No. 080-00XXX	Sheet 2 of 3	Rev. X2

## Label Material and Adhesive:

**Material:** 0.002" METALLIZED SILVER (CHROME) POLYESTER (MYLAR) FILM

**Lamination:** 0.001" TRANSPARENT MATTE MYLAR

**Ink Color:** BLACK (INDELIBLE)


**Printed edge:** None

**Adhesive:** PERMANENT PRESSURE SENSITIVE W/ NOTE 1 REQUIREMENT  
(good tack and adhesion to smooth and rough metal and plastic surfaces.)  
Supplied with removable adhesive covering.

**NOTE 1:** All material must be suitable for temperature service range of  
–40 deg F to 248 deg F (-40 deg C to 120 deg C),  
minimum 10 year lifetime.

### Typical acceptable material:

3M Polyester Label Stock W/ # 300 ACRYLIC ADHESIVE.

	Calgary Alberta Canada	Title: Label, Model No / Regulatory Compliance, AL250		
		Document No. 080-00XXX	Sheet 3 of 3	Rev. X2