

## TEST REPORT

**Applicant** : SHARP CORPORATION, Consumer Electronics Company,  
Communication Systems Division

**Address** : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, Japan

**Products** : Cellular Phone

**Model No.** : HR241

**Serial No.** : 004401/11/587413/9  
004401/11/587360/2

**FCC ID** : APYHRO00241

**Test Standard** : CFR 47 FCC Rules and Regulations Part 15

**Test Results** : **Passed**

**Date of Test** : July 16 ~ 30, 2016



Kousei Shibata

Manager

Japan Quality Assurance Organization

KITA-KANSAI Testing Center

SAITO EMC Branch

7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

- 
- The test results in this test report was made by using the measuring instruments which are traceable to national standards of measurement in accordance with ISO/IEC 17025.
  - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
  - The test results presented in this report relate only to the offered test sample.
  - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
  - This test report shall not be reproduced except in full without the written approval of JQA.
  - VLAC does not approve, certify or warrant the product by this test report.

## TABLE OF CONTENTS

	<b>Page</b>
1 Description of the Equipment Under Test .....	3
2 Summary of Test Results .....	4
3 Test Procedure .....	5
4 Test Location .....	5
5 Recognition of Test Laboratory .....	5
6 Description of Test Setup .....	6
7 Test Requirements .....	9

## DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT

**EUT** : Equipment Under Test

**AE** : Associated Equipment

**N/A** : Not Applicable

**N/T** : Not Tested

**EMC** : Electromagnetic Compatibility

**EMI** : Electromagnetic Interference

**EMS** : Electromagnetic Susceptibility

☒ - indicates that the listed condition, standard or equipment is applicable for this report.

☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

## 1 Description of the Equipment Under Test

1. Manufacturer : SHARP CORPORATION, Consumer Electronics Company,  
Communication Systems Division  
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, Japan
2. Products : Cellular Phone
3. Model No. : HR241
4. Serial No. : 004401/11/587413/9  
004401/11/587360/2
5. Product Type : Pre-production
6. Date of Manufacture : June, 2016
7. Power Rating : 4.0VDC (Lithium-ion Battery SHBGC1 1800mAh)
8. Grounding : None
9. Transmitting Frequency : WLAN: 2412.0 MHz(01CH) – 2462.0MHz(11CH)  
Bluetooth LE: 2402.0 MHz(00CH) – 2480.0MHz(39CH)
10. Receiving Frequency : WLAN: 2412.0 MHz(01CH) – 2462.0MHz(11CH)  
Bluetooth LE: 2402.0 MHz(00CH) – 2480.0MHz(39CH)
11. Max. RF Output Power : 17.43 dBm(Measure Value of IEEE802.11b)  
21.38 dBm(Measure Value of IEEE802.11g)  
20.41 dBm(Measure Value of IEEE802.11n)  
5.25 dBm(Measure Value of Bluetooth LE)
12. Antenna Type : Inverted-L Type Antenna (Integral)
13. Antenna Gain : 0 dBi
14. Category : DTS
15. EUT Authorization : Certification
16. Received Date of EUT : July 14, 2016

### 17. Channel Plan

#### WLAN:

The carrier spacing is 5 MHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

Transmitting Frequency (in MHz) =  $2407.0 + 5 \cdot n$

Receiving Frequency (in MHz) =  $2407.0 + 5 \cdot n$

where,  $n$  : channel number ( $1 \leq n \leq 11$ )

#### Bluetooth Low Energy Mode:

The carrier spacing is 2 MHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

Transmitting Frequency (in MHz) =  $2402.0 + 2 \cdot n$

Receiving Frequency (in MHz) =  $2402.0 + 2 \cdot n$

where,  $n$  : channel number ( $0 \leq n \leq 39$ )

## 2 Summary of Test Results

Applied Standard : CFR 47 FCC Rules and Regulations Part 15  
Subpart C – Intentional Radiators

The EUT described in clause 1 was tested according to the applied standard shown above.

Details of the test configuration is shown in clause 6.

The conclusion for the test items of which are required by the applied standard is indicated under the test result.

- ☒ - The test result was **passed** for the test requirements of the applied standard.
- ☐ - The test result was **failed** for the test requirements of the applied standard.
- ☐ - The test result was **not judged** the test requirements of the applied standard.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by:

Tested by:



Shigeru Kinoshita  
Assistant Manager  
JQA KITA-KANSAI Testing Center  
SAITO EMC Branch



Shigeru Osawa  
Deputy Manager  
JQA KITA-KANSAI Testing Center  
SAITO EMC Branch

### 3 Test Procedure

Test Requirements : §15.247, §15.207 and §15.209

Test Procedure : ANSI C63.10–2013  
Testing unlicensed wireless devices.

KDB 558074 D01  
DTS Meas Guidance v03r05: April 8, 2016.

KDB937606 (Publication Date: October 10, 2014)  
Test Site Requirements for Part 15 and 18 Devices Operating Below 30MHz.

### 4 Test Location

Japan Quality Assurance Organization (JQA)  
KITA-KANSAI Testing Center  
7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan  
SAITO EMC Branch  
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

### 5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.

VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2018)  
VCCI Registration No. : A-0002 (Expiry date : March 30, 2018)  
BSMI Registration No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-R1/R2-E-6006, SL2-A1-E-6006  
(Expiry date : September 14, 2016)  
IC Registration No. : 2079E-3, 2079E-4 (Expiry date : July 16, 2017)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.  
(Expiry date : February 22, 2019)

## 6 Description of Test Setup

### 6.1 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Cellular Phone	Sharp	HR241	004401/11/587413/9 *1) 004401/11/587360/2 *2)	APYHRO00241
B	AC Adapter	Sharp	SHCEJ1	--	N/A
C	Earphone (Including Conversion cable)	Softbank	ZTCAA1	--	N/A

\*1) Used for AC Powerline Conducted Emission and Field Strength of Spurious Emission.

\*2) Used for Antenna Conducted Emission.

The auxiliary equipment used for testing :


None

Type of Cable:


No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	USB conversion cable	--	--	NO	NO	1.5
2	Earphone Cable	--	--	NO	NO	0.6

## 6.2 Test Arrangement (Drawings)


a) Single Unit



b) AC Adapter used

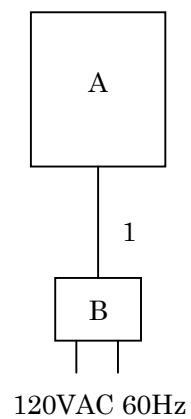

c) Earphone used

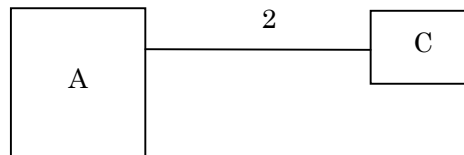

### 6.3 Operating Condition

Power Supply Voltage : 4.0 VDC (for Battery)  
120 VAC, 60 Hz (For AC Adapter)

Transmitting/Receiving

WLAN:

Transmitting frequency : 2412.0 MHz(1CH) – 2462.0 MHz(11CH)

Receiver frequency : 2412.0 MHz(1CH) – 2462.0 MHz(11CH)

Bluetooth Low Energy Mode(Bluetooth 4.0 + EDR + LE):

Transmitting frequency : 2402.0 MHz(0CH) – 2480.0 MHz(39CH)

Receiver frequency : 2402.0 MHz(0CH) – 2480.0 MHz(39CH)

Modulation Type

1. 802.11b : DSSS

2. 802.11g : OFDM

3. 802.11n : OFDM

4. LE Packet (Modulation Type : GFSK)

Other Clock Frequency

19.2MHz

The tests were performed in the following worst condition.

Mode	Condition
IEEE802.11b	11 Mbps
IEEE802.11g	48 Mbps
IEEE802.11n	MCS3 (26 Mbps)

Note: The worst condition was determined based on the test result of Maximum Peak Output Power(Mid channel).

The EUT was rotated through three orthogonal axis (X, Y and Z axis) in radiated measurement.

The EUT with temporary antenna port was used in conducted measurement.

The test were carried out using the following test program supplied by applicant;

- Software Name: 601SH\_602SH\_WLAN\_BT Manual test mode operation
- Software Version: -- (Dated 2016/07/12)
- Storage Location: Controller PC



## 7 Test Requirements

### 7.0 Summary of the Test Results

Test Item	FCC Specification	Reference of the Test Report	Results	Remarks
Antenna Requirement	Section 15.203	Section 1.12	Passed	-
Channel Separation	Section 15.247(a)(1)	-	-	-
Minimum Hopping Channel	Section 15.247(a)(1)(iii)	-	-	-
Occupied Bandwidth	Section 15.247(a)(2)	Section 7.3	Passed	-
Dwell Time	Section 15.247(a)(1)(iii)	-	-	-
Peak Output Power (Conduction)	Section 15.247(b)(3)	Section 7.5	Passed	-
Peak Power Density (Conduction)	Section 15.247(e)	Section 7.6	Passed	-
Spurious Emissions (Conduction)	Section 15.247(d)	Section 7.7	Passed	-
AC Powerline Conducted Emission	Section 15.207	Section 7.8	Passed	-
Radiated Emission	Section 15.247(d)	Section 7.9	Passed	-

**7.1 Channel Separation**

For the requirements, ☐ - Applicable [ ☐ - Tested. ☐ - Not tested by applicant request. ]  
☒ - Not Applicable

Remarks : \_\_\_\_\_

**7.2 Minimum Hopping Channel**

For the requirements, ☐ - Applicable [ ☐ - Tested. ☐ - Not tested by applicant request. ]  
☒ - Not Applicable

Remarks : \_\_\_\_\_

**7.3 Occupied Bandwidth**

For the requirements, ☒ - Applicable [ ☒ - Tested. ☐ - Not tested by applicant request. ]  
☐ - Not Applicable

**7.3.1 Test Results**

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

The 99% Bandwidth of IEEE802.11b is	<u>12.952</u>	MHz	at	<u>2462.0</u>	MHz
The 99% Bandwidth of IEEE802.11g is	<u>16.472</u>	MHz	at	<u>2412.0</u>	MHz
The 99% Bandwidth of IEEE802.11n is	<u>17.662</u>	MHz	at	<u>2437.0</u>	MHz
The 99% Bandwidth of Bluetooth LE is	<u>1090.9</u>	kHz	at	<u>2402.0</u>	MHz
The 6dB Bandwidth of IEEE802.11b is	<u>8.609</u>	MHz	at	<u>2437.0</u>	MHz
The 6dB Bandwidth of IEEE802.11g is	<u>16.544</u>	MHz	at	<u>2412.0</u>	MHz
The 6dB Bandwidth of IEEE802.11n is	<u>17.753</u>	MHz	at	<u>2437.0</u>	MHz
The 6dB Bandwidth of Bluetooth LE is	<u>673.2</u>	kHz	at	<u>2440.0</u>	MHz

Uncertainty of Measurement Results ± 0.9 %(2σ)

Remarks : \_\_\_\_\_


### 7.3.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Attenuator	54A-10	W5675 (D-28)	Weinschel	2016/08/16
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16

NOTE : The calibration interval of the above test instruments is 12 months.

### 7.3.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

	WLAN	Bluetooth
Res. Bandwidth	100 kHz	100 kHz
Video Bandwidth	300 kHz	300 kHz
Span	30 MHz	3 MHz
Sweep Time	AUTO	AUTO
Trace	Maxhold	Maxhold

### 7.3.4 Test Data

Mode of EUT : WLAN


Test Date : July 16, 2016

Temp.: 26°C, Humi: 63%

The resolution bandwidth was set to 100 kHz, -6dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

#### 1) IEEE 802.11b


Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	12.906	7.679	500
06	2437.0	12.866	8.609	500
11	2462.0	12.952	8.150	500

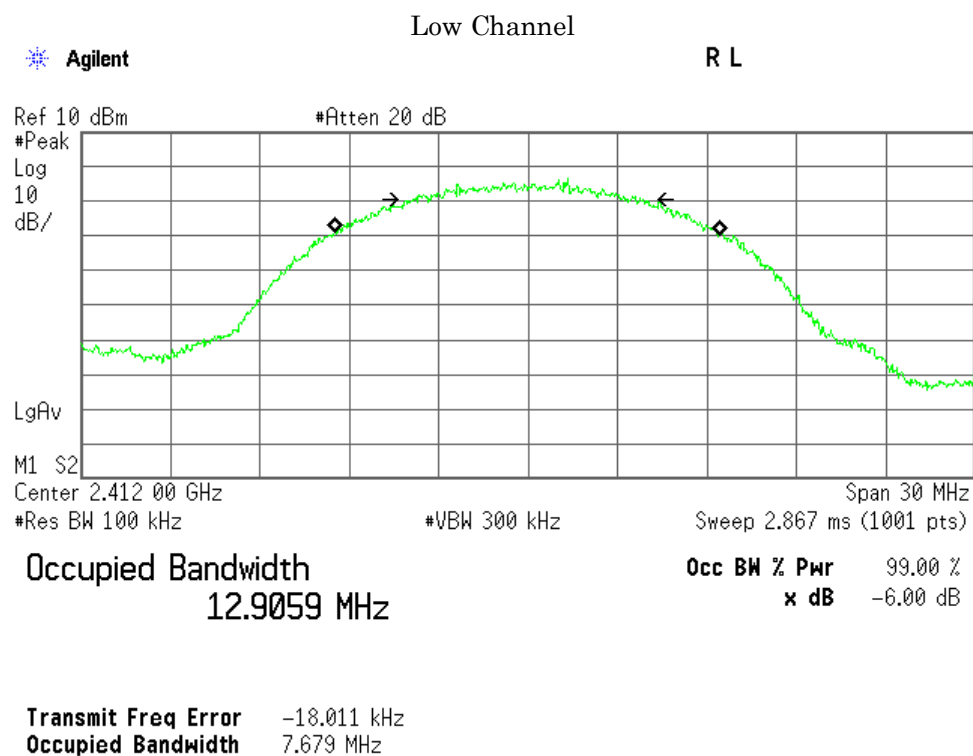

## Middle Channel

Agilent

R T

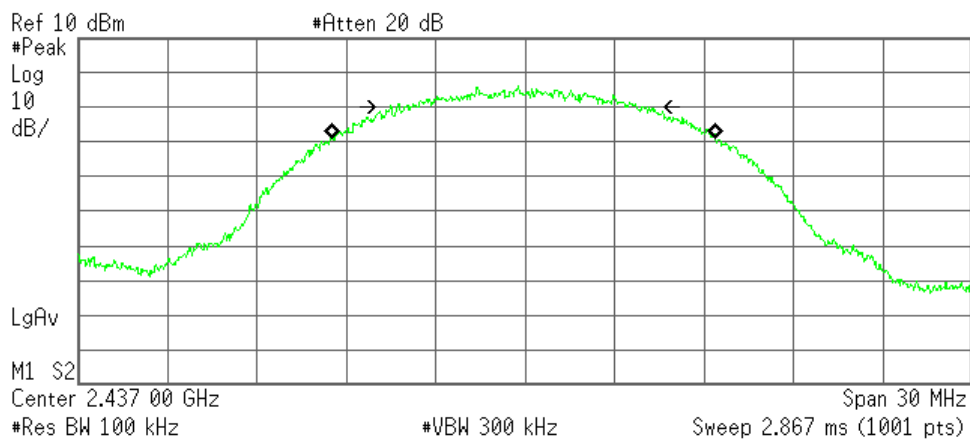

Occupied Bandwidth  
12.8660 MHz


Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error -42.698 kHz  
Occupied Bandwidth 8.690 MHz

## High Channel

Agilent

R L

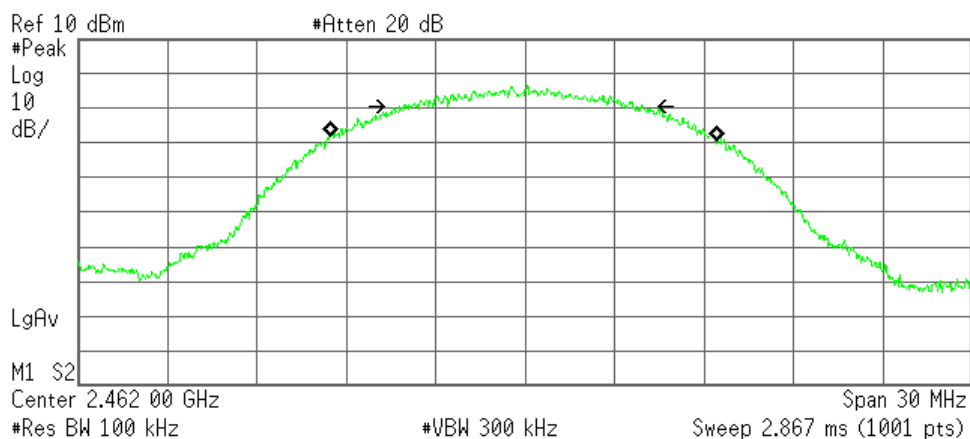


Occupied Bandwidth  
12.9521 MHz

Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error -32.118 kHz  
Occupied Bandwidth 8.150 MHz

## 2) IEEE 802.11g


Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	16.472	16.544	500
06	2437.0	16.454	16.518	500
11	2462.0	16.454	16.508	500

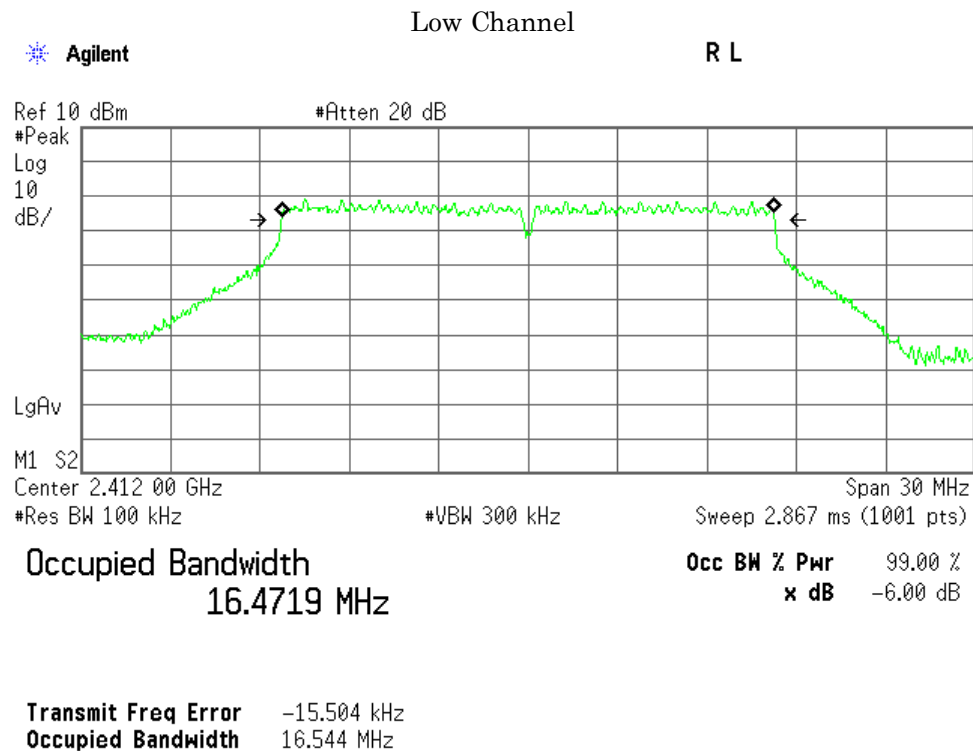

## Middle Channel

Agilent

R T

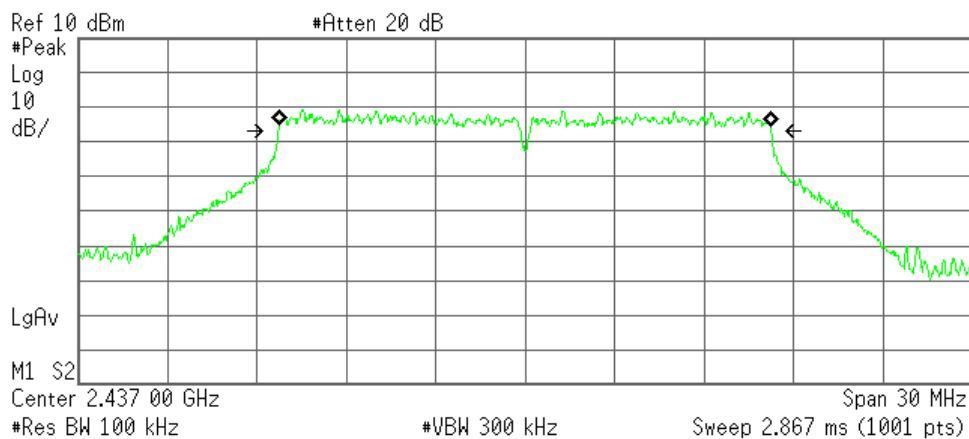

Occupied Bandwidth  
16.4543 MHz


Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error -11.701 kHz  
Occupied Bandwidth 16.518 MHz

## High Channel

Agilent

R T

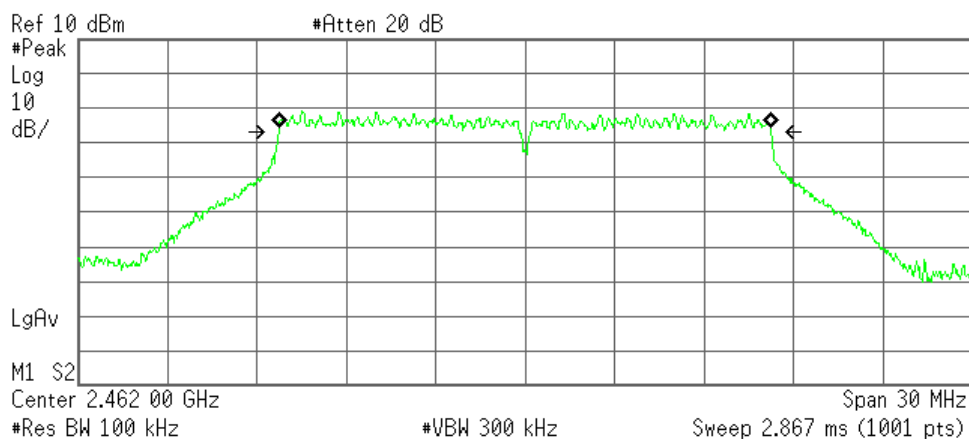


Occupied Bandwidth  
16.4542 MHz

Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error -11.896 kHz  
Occupied Bandwidth 16.508 MHz

3) IEEE 802.11n

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	17.653	17.739	500
06	2437.0	17.662	17.753	500
11	2462.0	17.654	17.733	500

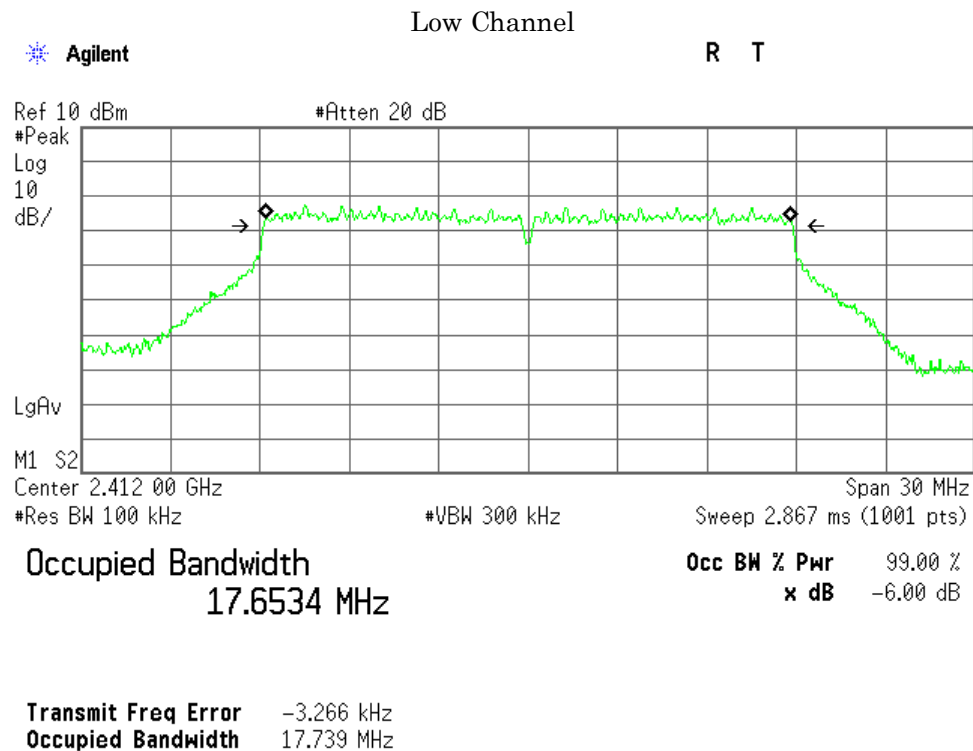




## Middle Channel

Agilent

R T

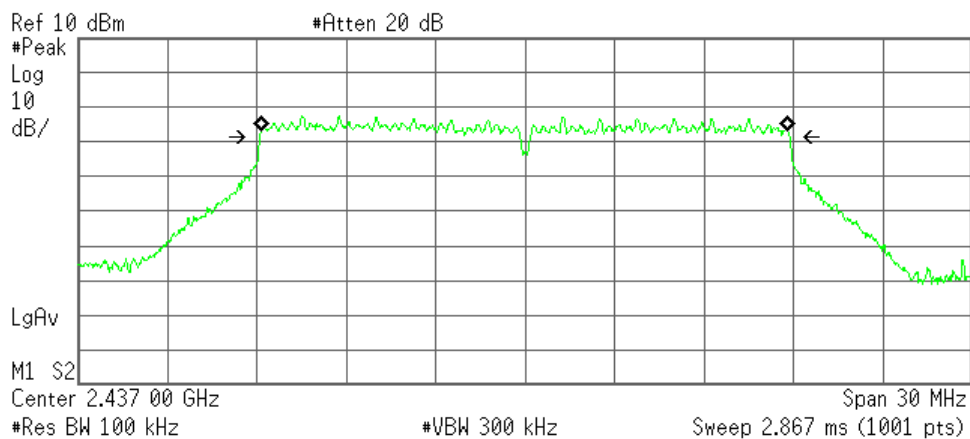

Occupied Bandwidth  
17.6622 MHz


Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error -12.324 kHz  
Occupied Bandwidth 17.753 MHz

## High Channel

Agilent

R T

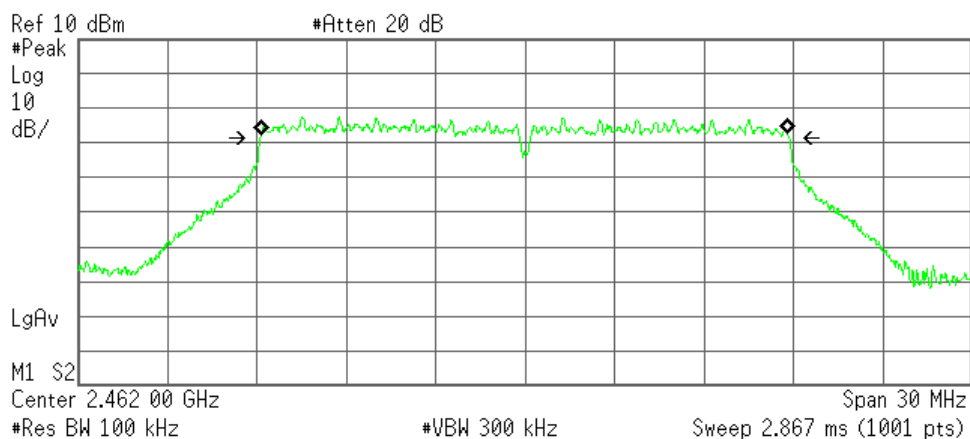

Occupied Bandwidth  
17.6542 MHz

Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error -10.795 kHz  
Occupied Bandwidth 17.733 MHz

Mode of EUT : Bluetooth Low Energy

Test Date : July 17, 2016

Temp.: 26°C, Humi: 68%

The resolution bandwidth was set to 100 kHz, -6dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

## 4) Packet Setting : LE (Modulation type : GFSK)


Channel	Frequency (MHz)	99% Bandwidth (kHz)	-6dBc Bandwidth (kHz)	Minimum -6dBc Bandwidth Limit (kHz)
00	2402.0	1090.9	672.5	500
19	2440.0	1090.8	673.2	500
39	2480.0	1088.6	667.3	500

## Packet Setting : LE (Modulation type : GFSK)

Low Channel

Agilent

R L

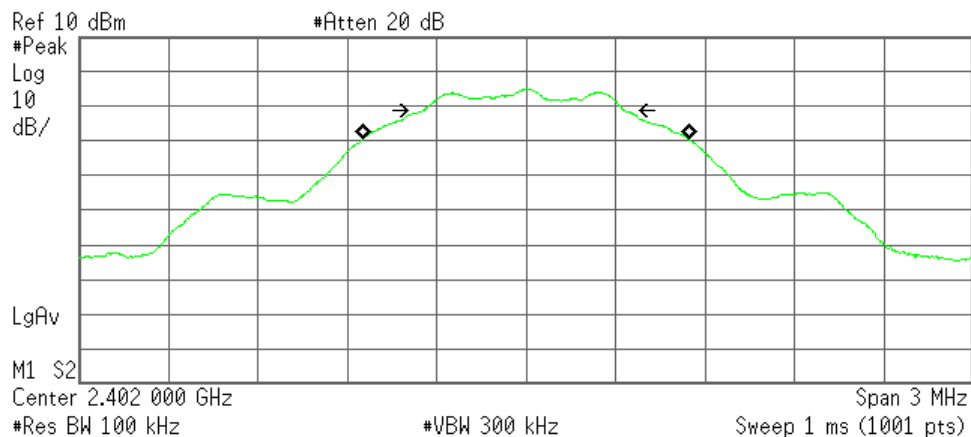

Occupied Bandwidth  
1.0909 MHz


Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error 68.485 Hz  
Occupied Bandwidth 672.538 kHz

## Middle Channel

Agilent

R T

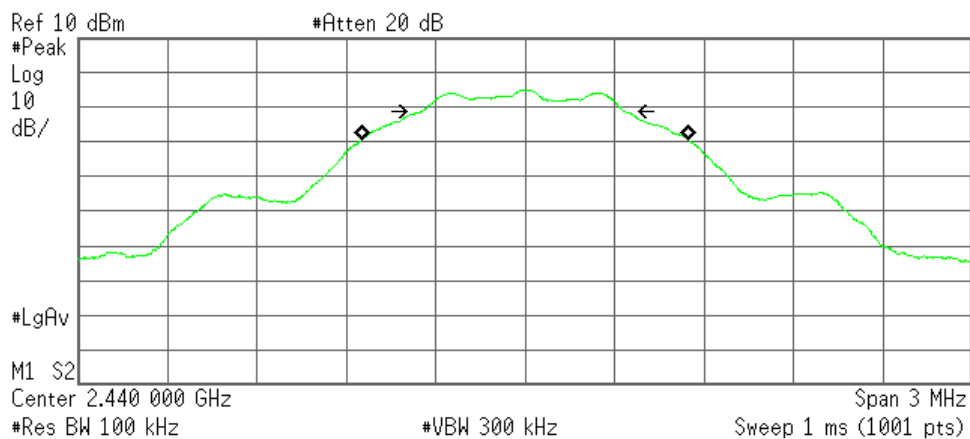

Occupied Bandwidth  
1.0908 MHz


Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error 91.110 Hz  
Occupied Bandwidth 673.235 kHz

## High Channel

Agilent

R L

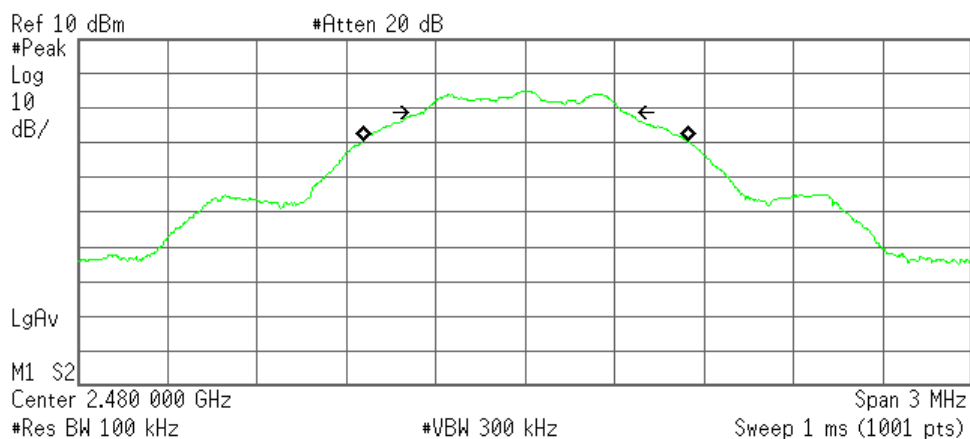

Occupied Bandwidth  
1.0886 MHz

Occ BW % Pwr 99.00 %  
x dB -6.00 dB

Transmit Freq Error 817.731 Hz  
Occupied Bandwidth 667.331 kHz

**7.4 Dwell Time**

For the requirements, ☐ - Applicable [ ☐ - Tested. ☐ - Not tested by applicant request. ]  
☒ - Not Applicable

Remarks : \_\_\_\_\_

**7.5 Peak Output Power(Conduction)**

For the requirements, ☒ - Applicable [ ☒ - Tested. ☐ - Not tested by applicant request. ]  
☐ - Not Applicable

**7.5.1 Test Results**

For the standard, ☒ - **Passed** ☐ - **Failed** ☐ - **Not judged**

Peak Output Power of IEEE802.11b is	<u>17.43</u>	dBm	at	<u>2437.0</u>	MHz
Peak Output Power of IEEE802.11g is	<u>21.38</u>	dBm	at	<u>2462.0</u>	MHz
Peak Output Power of IEEE802.11n is	<u>20.41</u>	dBm	at	<u>2462.0</u>	MHz
Peak Output Power of Bluetooth LE is	<u>5.25</u>	dBm	at	<u>2440.0</u>	MHz

Uncertainty of Measurement Results ± 0.9 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_


**7.5.2 Test Instruments**

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Power Meter	N1911A	GB45100291 (B-63)	Agilent	2017/07/10
Power Sensor	N1921A	US44510470 (B-64)	Agilent	2017/07/10
Attenuator	54A-10	W5675 (D-28)	Weinschel	2016/08/16
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16

NOTE : The calibration interval of the above test instruments is 12 months.

**7.5.3 Test Method and Test Setup (Diagrammatic illustration)**

The Conducted RF Power Output was measured with a power meter, one attenuator and a short, low loss cable.



## 7.5.4 Test Data

### 1) IEEE 802.11b

Data Rate : 11Mbps

Test Date: July 16, 2016  
Temp.: 26 °C, Humi: 63 %

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Output Power		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
01	2412	10.06	7.34	17.40	54.95	30.00	+12.60
06	2437	10.08	7.35	17.43	55.34	30.00	+12.57
11	2462	10.08	7.23	17.31	53.83	30.00	+12.69

Calculated result at 2437.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.08 dB
+ ) Meter Reading	=	7.35 dBm
Result	=	17.43 dBm = 55.34 mW

Minimum Margin: 30.00 - 17.43 = 12.57 (dB)

#### NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	OFF

CH [MHz]  
06 2437

Rate	Meter Reading [dBm]	Remark
1Mbps	7.19	
2Mbps	7.30	
5.5Mbps	7.31	
11Mbps	7.35	*

\* : Worst Rate

All comparison were performed on the same measurement condition.

## 2) IEEE 802.11g

Data Rate : 48Mbps

Test Date: July 16, 2016  
Temp.: 26 °C, Humi: 63 %

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Output Power		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
01	2412	10.06	10.89	20.95	124.45	30.00	+ 9.05
06	2437	10.08	11.12	21.20	131.83	30.00	+ 8.80
11	2462	10.08	11.30	21.38	137.40	30.00	+ 8.62

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.08 dB
+ ) Meter Reading	=	11.30 dBm
Result	=	21.38 dBm = 137.40 mW

Minimum Margin: 30.00 - 21.38 = 8.62 (dB)

## NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	OFF

CH  
06 [MHz]  
2437

Rate	Meter Reading [dBm]	Remark
6Mbps	10.66	
9Mbps	10.69	
12Mbps	10.72	
18Mbps	10.88	
24Mbps	10.66	
36Mbps	10.98	
48Mbps	11.12	*
54Mbps	10.95	

\* : Worst Rate

All comparison were performed on the same measurement condition.

## 3) IEEE 802.11n

Data Rate : MCS3

Test Date: July 16, 2016

Temp.: 26 °C, Humi: 63 %

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Output Power		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
01	2412	10.06	9.71	19.77	94.84	30.00	+10.23
06	2437	10.08	10.04	20.12	102.80	30.00	+ 9.88
11	2462	10.08	10.33	20.41	109.90	30.00	+ 9.59

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.08 dB
+ ) Meter Reading	=	10.33 dBm
Result	=	20.41 dBm = 109.90 mW

Minimum Margin: 30.00 - 20.41 = 9.59 (dB)

## NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	OFF

CH  
06 [MHz]  
2437

Rate	Meter Reading [dBm]	Remark
MCS0	9.77	
MCS1	9.62	
MCS2	9.71	
MCS3	10.04	*
MCS4	9.69	
MCS5	9.97	
MCS6	9.86	
MCS7	9.76	

\* : Worst Rate

All comparison were performed on the same measurement condition.



## 4) Bluetooth LE(Modulation type : GFSK)

Test Date: July 16, 2016
Temp.: 26 °C, Humi: 63 %

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Output Power		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
00	2402	10.06	-4.94	5.12	3.25	30.00	+24.88
19	2440	10.08	-4.83	5.25	3.35	30.00	+24.75
39	2480	10.08	-4.86	5.22	3.33	30.00	+24.78

Calculated result at 2440.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.08 dB
+ ) Meter Reading	=	-4.83 dBm
Result	=	5.25 dBm = 3.35 mW

Minimum Margin: 30.00 - 5.25 = 24.75 (dB)

#### NOTES

1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

2. Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

## 7.6 Peak Power Density(Conduction)

For the requirements, ☒ - Applicable [ ☒ - Tested. ☐ - Not tested by applicant request. ]  
☐ - Not Applicable

### 7.6.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Peak Power Density of IEEE802.11b is	<u>1.62</u>	dBm	at	<u>2462.0</u>	MHz
Peak Power Density of IEEE802.11g is	<u>-5.23</u>	dBm	at	<u>2437.0</u>	MHz
Peak Power Density of IEEE802.11n is	<u>-6.90</u>	dBm	at	<u>2462.0</u>	MHz
Peak Power Density of Bluetooth LE is	<u>2.03</u>	dBm	at	<u>2440.0</u>	MHz

Uncertainty of Measurement Results ± 1.7 dB(2σ)

Remarks : \_\_\_\_\_


### 7.6.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Attenuator	54A-10	W5675 (D-28)	Weinschel	2016/08/16
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16

NOTE : The calibration interval of the above test instruments is 12 months.

### 7.6.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



## 7.6.4 Test Data

### 1) IEEE 802.11b

Test Date: July 16, 2016  
Temp.: 26 °C, Humi: 63 %

Data Rate : 11Mbps

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Power Density		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
01	2412	10.06	-8.75	1.31	1.35	8.00	+ 6.69
06	2437	10.08	-8.88	1.20	1.32	8.00	+ 6.80
11	2462	10.08	-8.46	1.62	1.45	8.00	+ 6.38

Calculated result at 2462.000 MHz, as the worst point shown on underline:


Correction Factor	=	10.08 dB
+ ) Meter Reading	=	-8.46 dBm
Result	=	1.62 dBm = 1.45 mW

Minimum Margin: 8.00 - 1.62 = 6.38 (dB)

#### NOTES

1. The peak power density complied with the limit using 30 kHz resolution bandwidth of Spectrum Analyzer.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

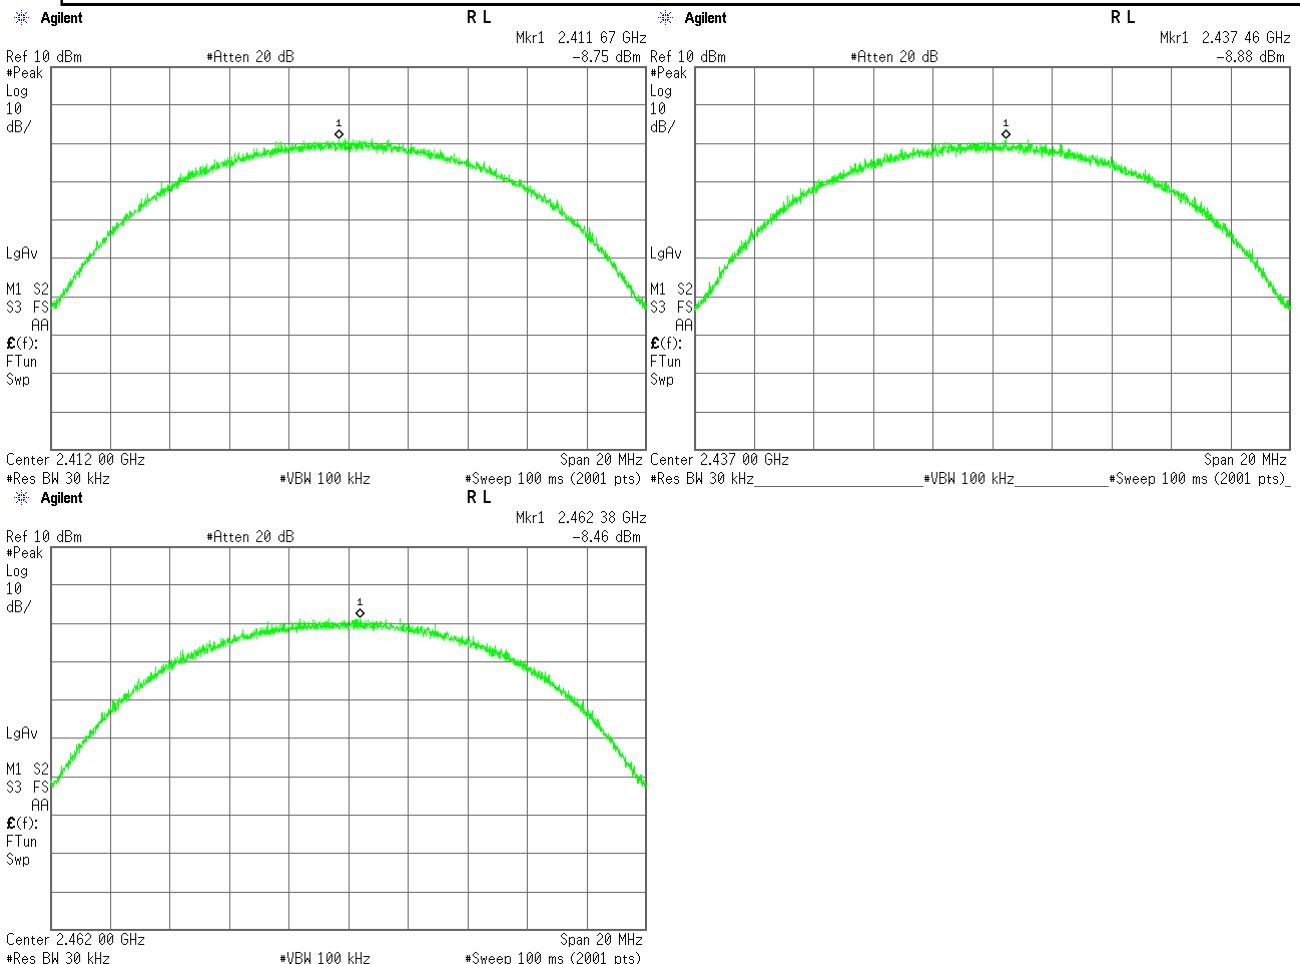

## 2) IEEE 802.11g

Data Rate : 48Mbps

Test Date: July 16, 2016  
Temp.: 26 °C, Humi: 63 %

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Power Density		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
01	2412	10.06	-15.35	-5.29	0.30	8.00	+13.29
06	2437	10.08	-15.31	-5.23	0.30	8.00	+13.23
11	2462	10.08	-15.51	-5.43	0.29	8.00	+13.43

Calculated result at 2437.000 MHz, as the worst point shown on underline:


Correction Factor	=	10.08 dB
+ ) Meter Reading	=	-15.31 dBm
Result	=	-5.23 dBm = 0.30 mW

Minimum Margin: 8.00 - -5.23 = 13.23 (dB)

### NOTES

1. The peak power density complied with the limit using 30 kHz resolution bandwidth of Spectrum Analyzer.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

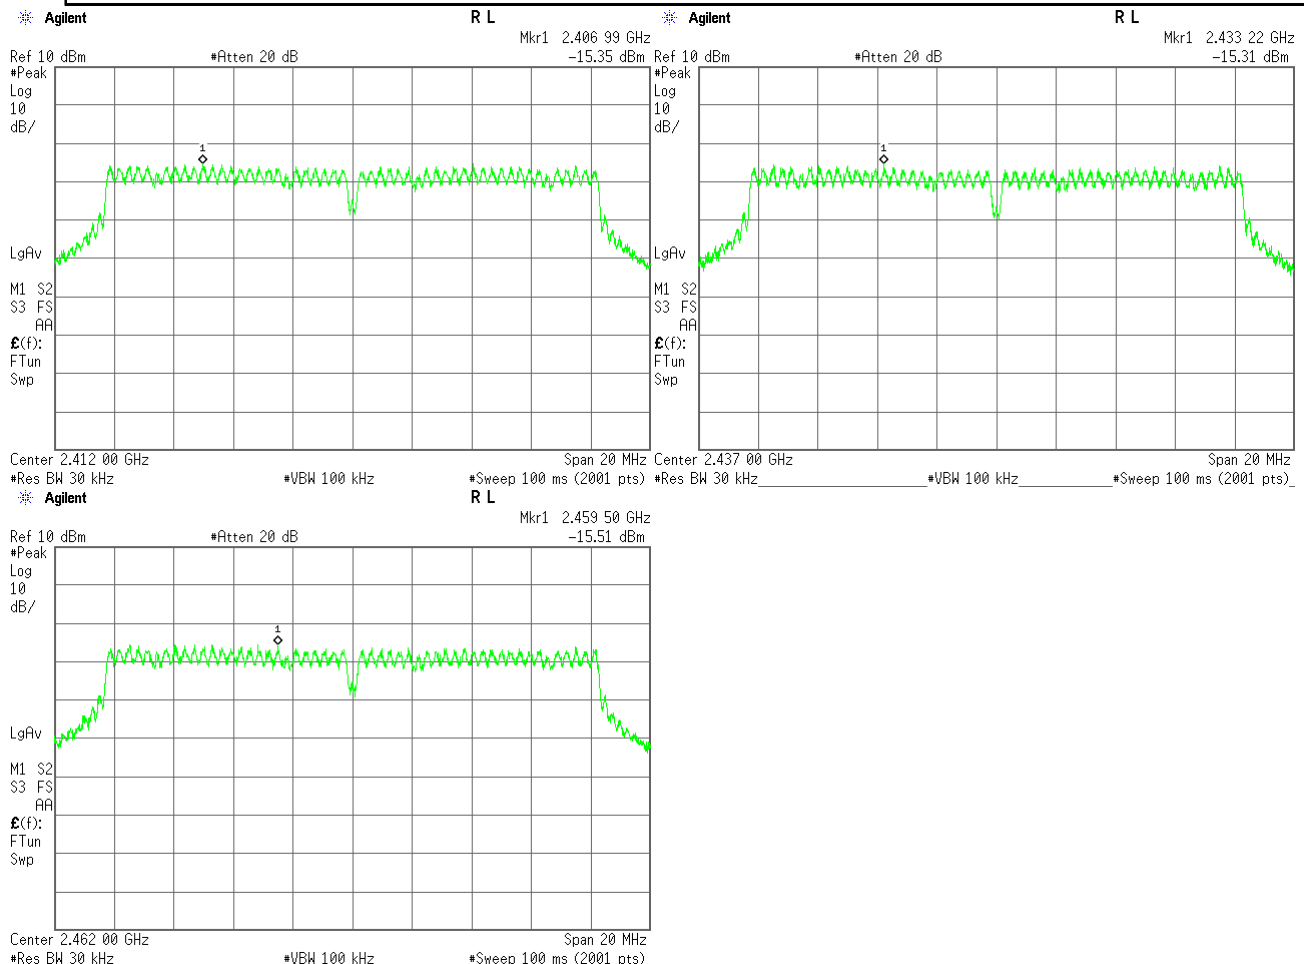

### 3) IEEE 802.11n

Data Rate : MCS3

Test Date: July 16, 2016

Temp.: 26 °C, Humi: 63 %

Transmitting Frequency		Correction	Meter Reading	Conducted		Limits	Margin
		Factor		Peak Power Density			
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
01	2412	10.06	-17.09	-7.03	0.20	8.00	+15.03
06	2437	10.08	-17.32	-7.24	0.19	8.00	+15.24
11	2462	10.08	-16.98	-6.90	0.20	8.00	+14.90

Calculated result at 2462.000 MHz, as the worst point shown on underline:


Correction Factor	=	10.08 dB
+ ) Meter Reading	=	-16.98 dBm
Result	=	-6.90 dBm = 0.20 mW

Minimum Margin: 8.00 - -6.90 = 14.90 (dB)

#### NOTES

1. The peak power density complied with the limit using 30 kHz resolution bandwidth of Spectrum Analyzer.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

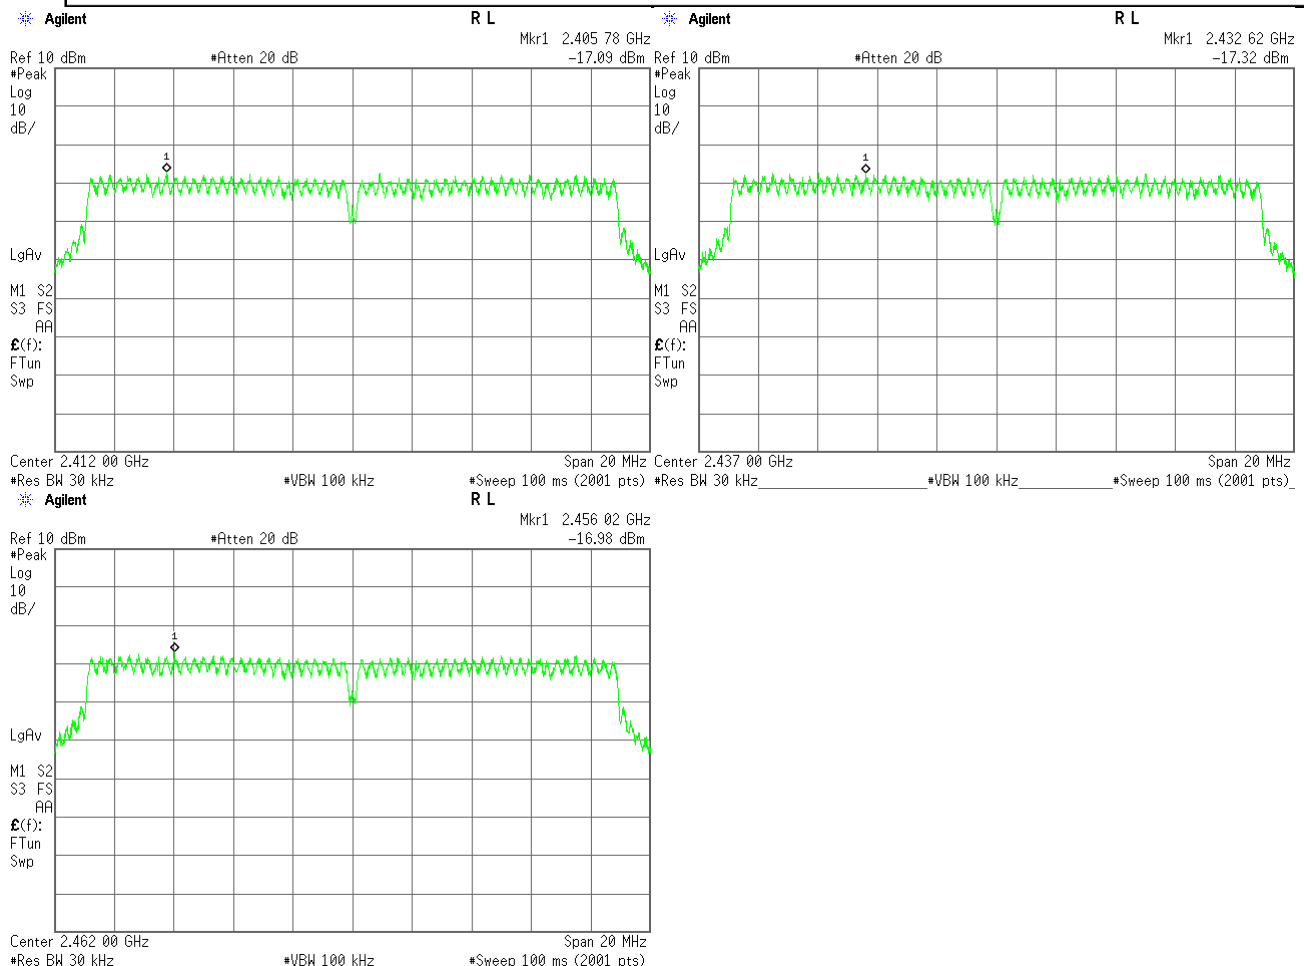

## 4) Bluetooth LE(Modulation type : GFSK)

Test Date: July 17, 2016  
Temp.: 26 °C, Humi: 68 %

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Power Density		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
00	2402	10.06	-8.20	1.86	1.53	8.00	+ 6.14
19	2440	10.08	-8.05	2.03	1.60	8.00	+ 5.97
39	2480	10.08	-8.09	1.99	1.58	8.00	+ 6.01

Calculated result at 2440.000 MHz, as the worst point shown on underline:


Correction Factor	=	10.08 dB
+ ) Meter Reading	=	-8.05 dBm
Result	=	2.03 dBm = 1.60 mW

Minimum Margin: 8.00 - 2.03 = 5.97 (dB)

## NOTES

1. The peak power density complied with the limit using 30 kHz resolution bandwidth of Spectrum Analyzer.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

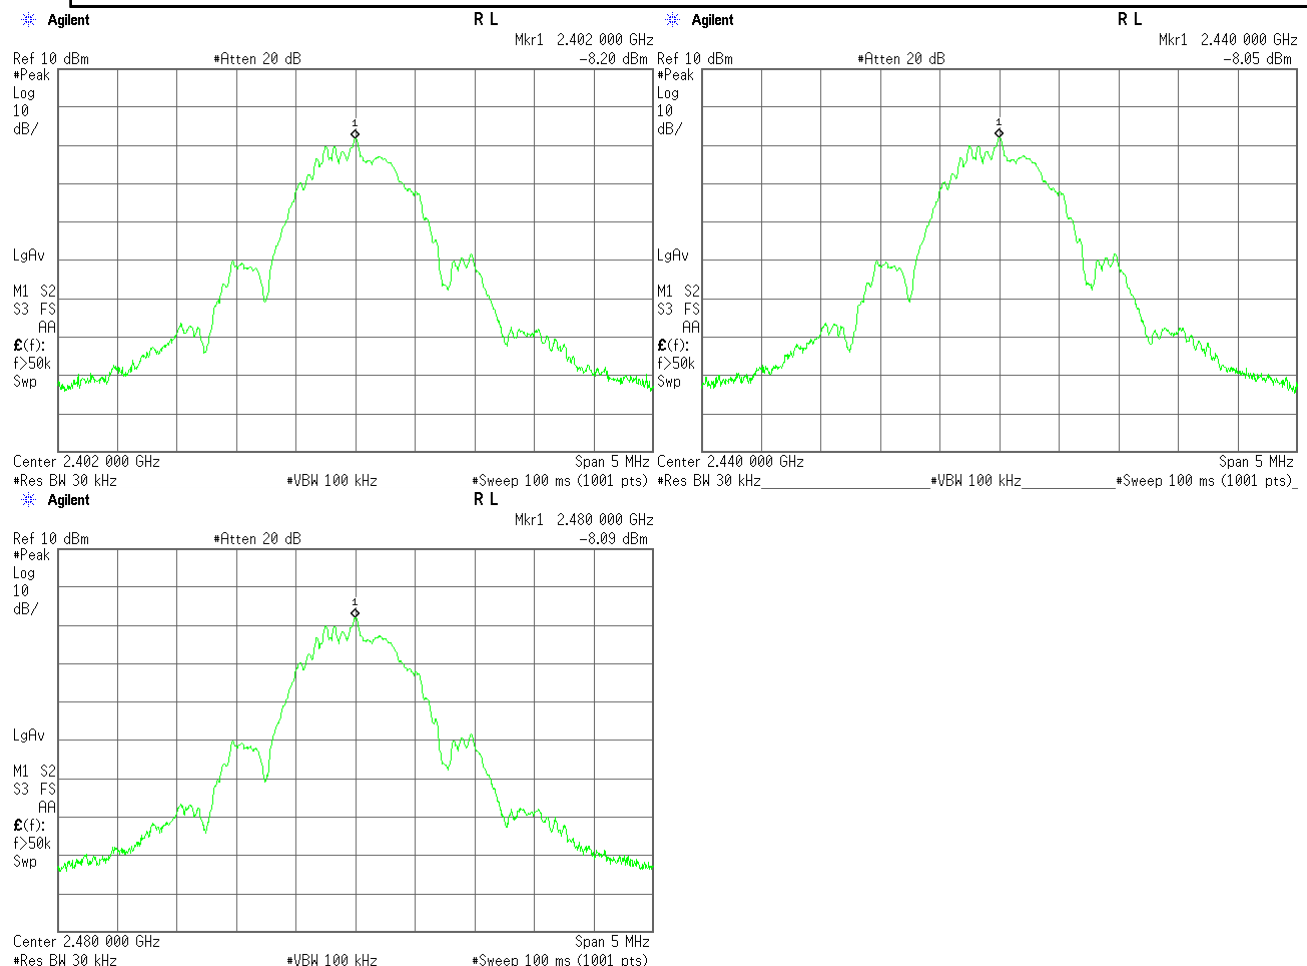

## 7.7 Spurious Emissions(Conduction)

For the requirements, ☒ - Applicable [ ☒ - Tested. ☐ - Not tested by applicant request. ]  
☐ - Not Applicable

### 7.7.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Uncertainty of Measurement Results

9 kHz – 1 GHz	$\pm 1.4$	dB(2 $\sigma$ )
1 GHz – 18 GHz	$\pm 1.7$	dB(2 $\sigma$ )
18 GHz – 40 GHz	$\pm 2.3$	dB(2 $\sigma$ )

Remarks : \_\_\_\_\_


### 7.7.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Attenuator	54A-10	W5675 (D-28)	Weinschel	2016/08/16
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16

NOTE : The calibration interval of the above test instruments is 12 months.

### 7.7.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

Frequency Range	30 MHz - 25 GHz	Band-Edge
Res. Bandwidth	100 kHz	100 kHz
Video Bandwidth	300 kHz	300 kHz
Sweep Time	AUTO	AUTO
Trace	Maxhold	Maxhold


## 7.7.4 Test Data

Test Date : July 16, 2016

Temp.: 26°C, Humi: 63%


### 1) IEEE 802.11b

#### Low Channel

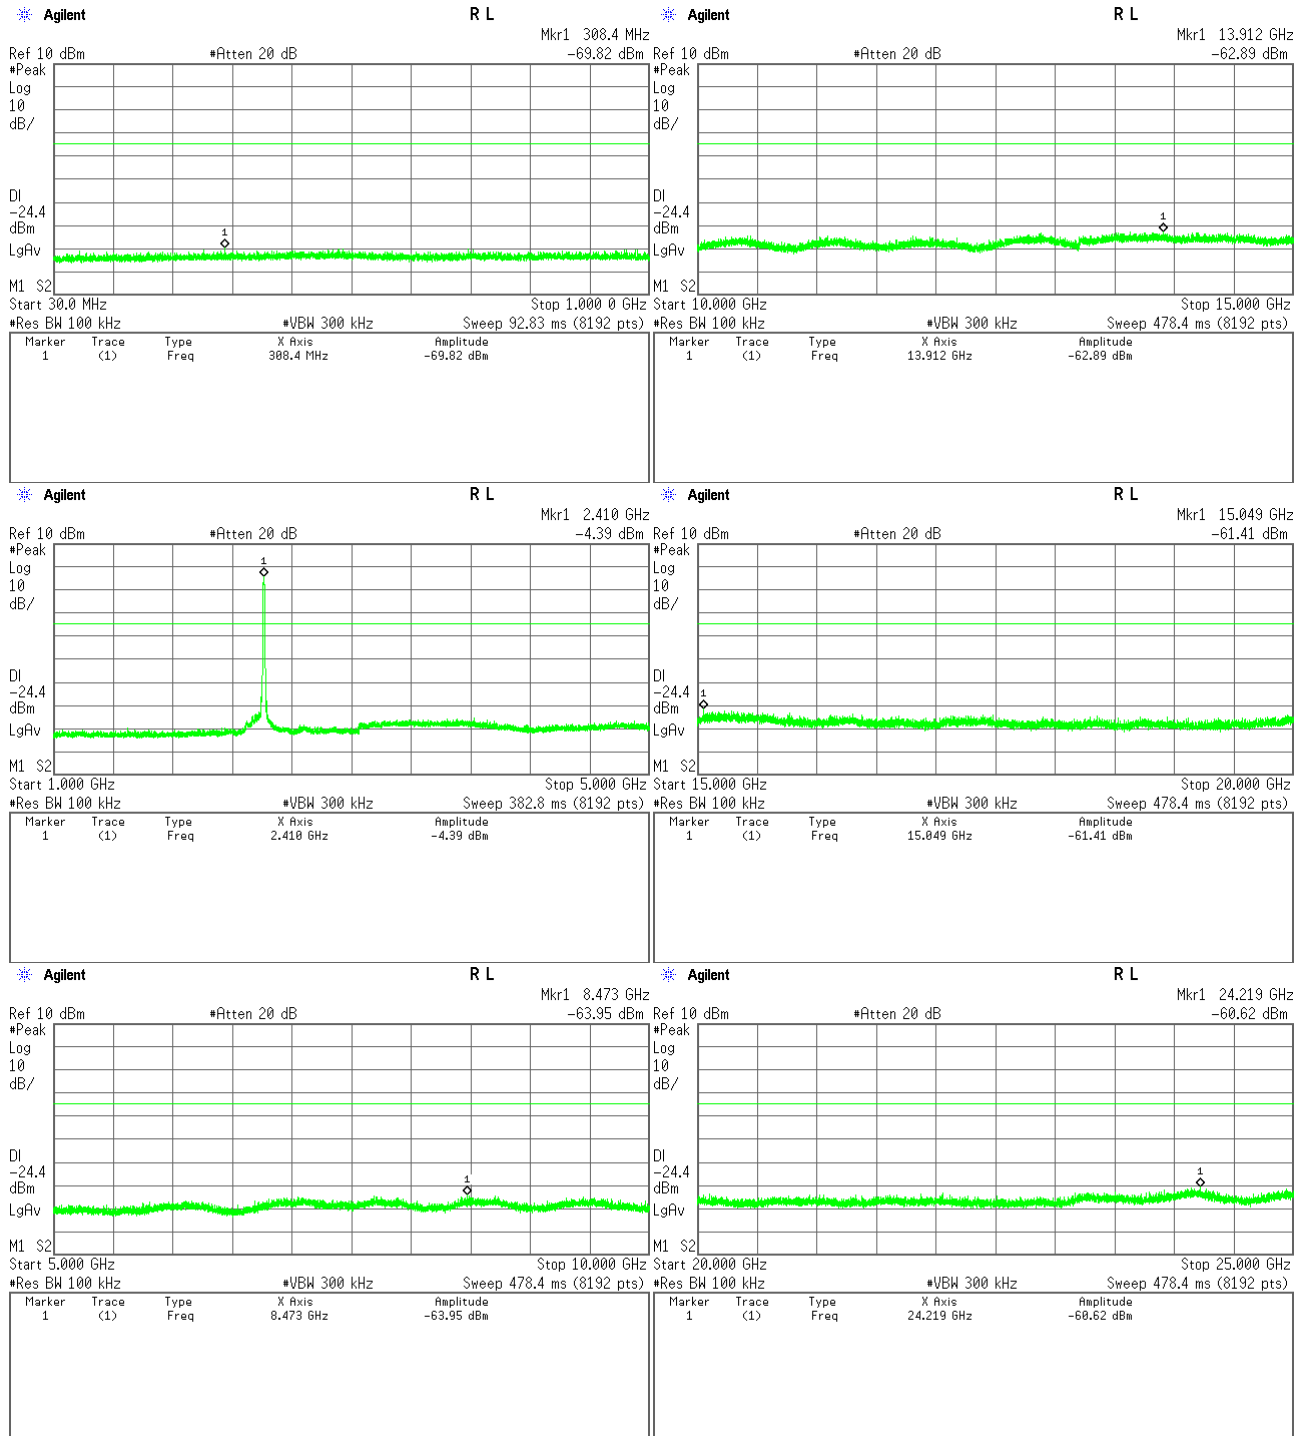




## Middle Channel

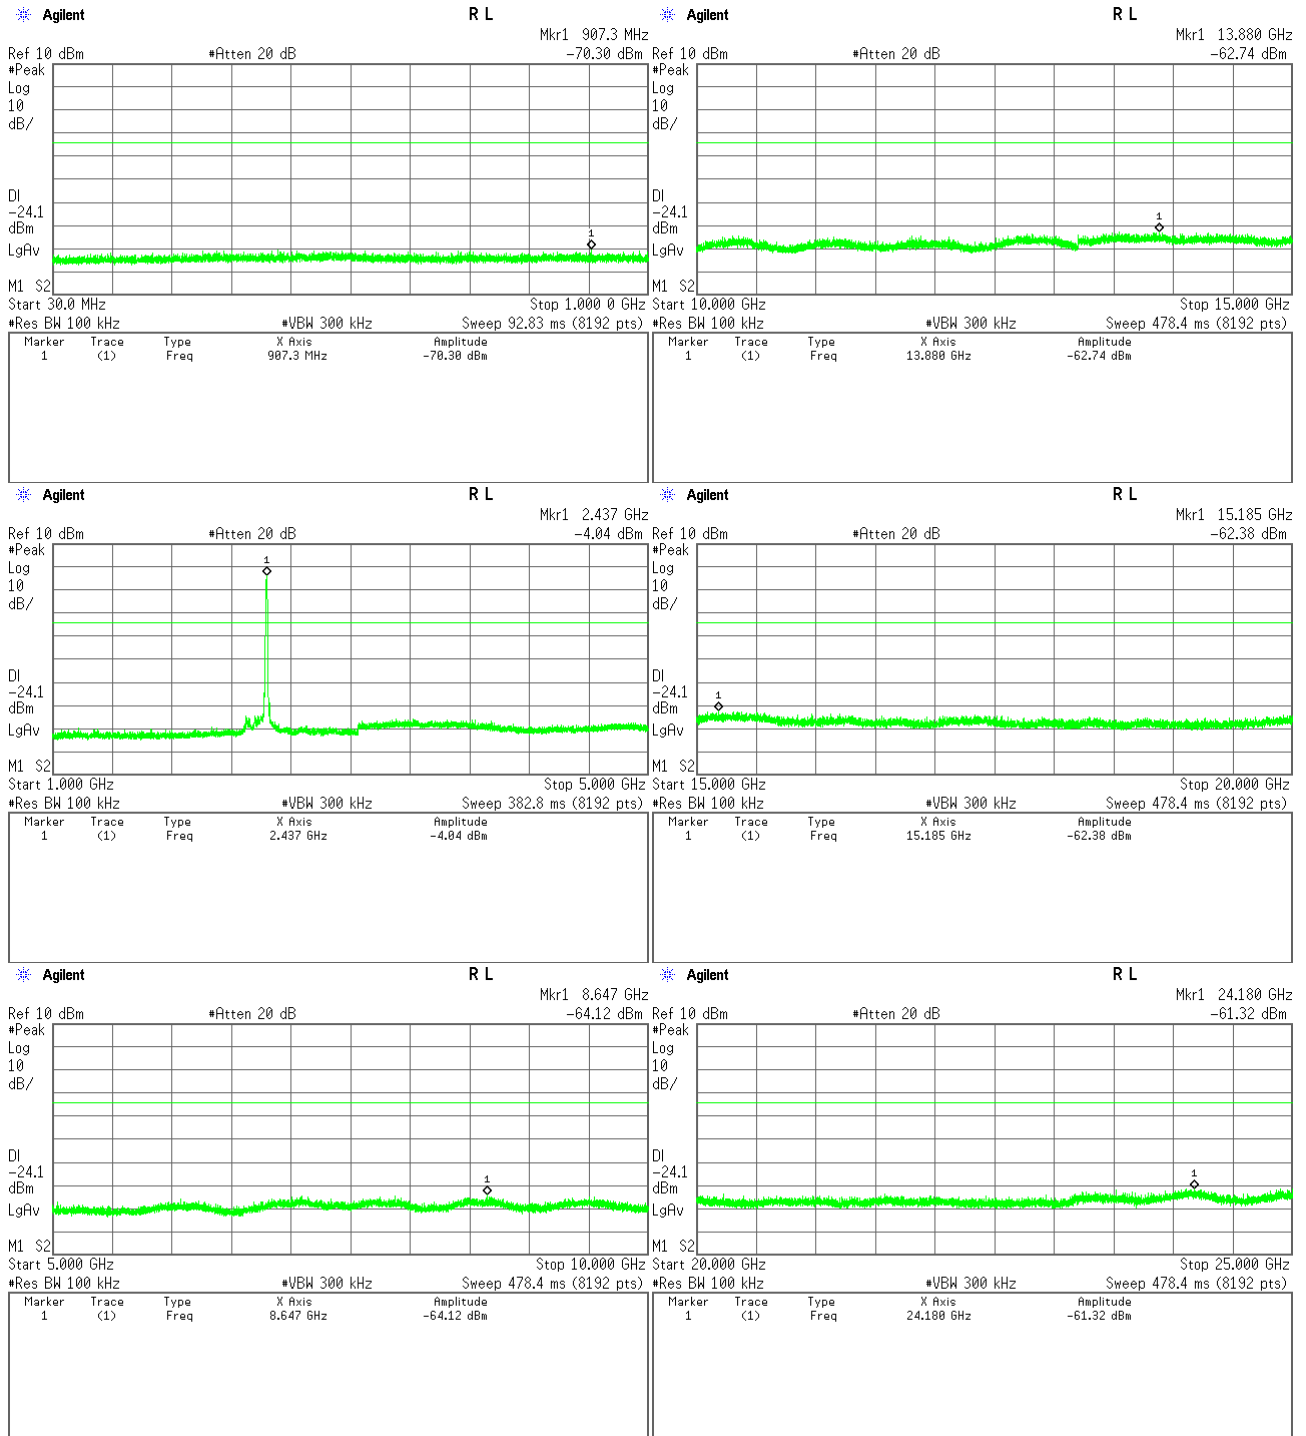


## High Channel

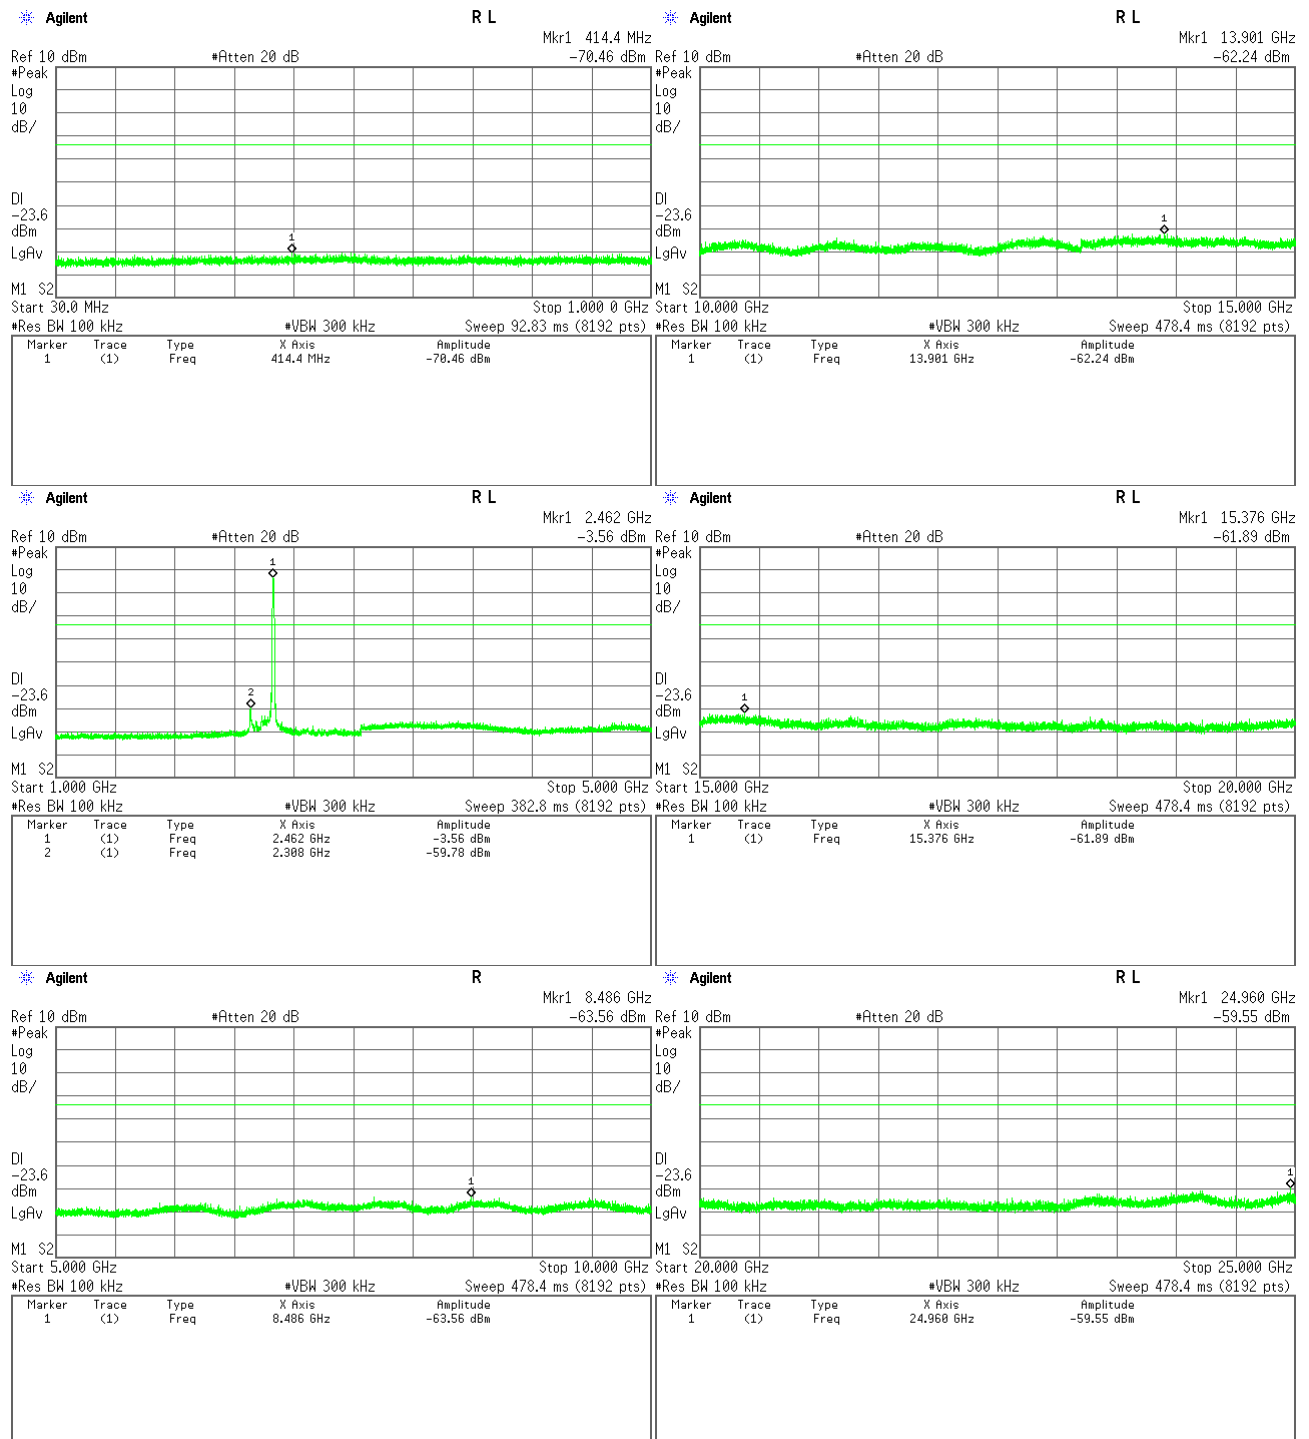


## 2) IEEE 802.11g


### Low Channel

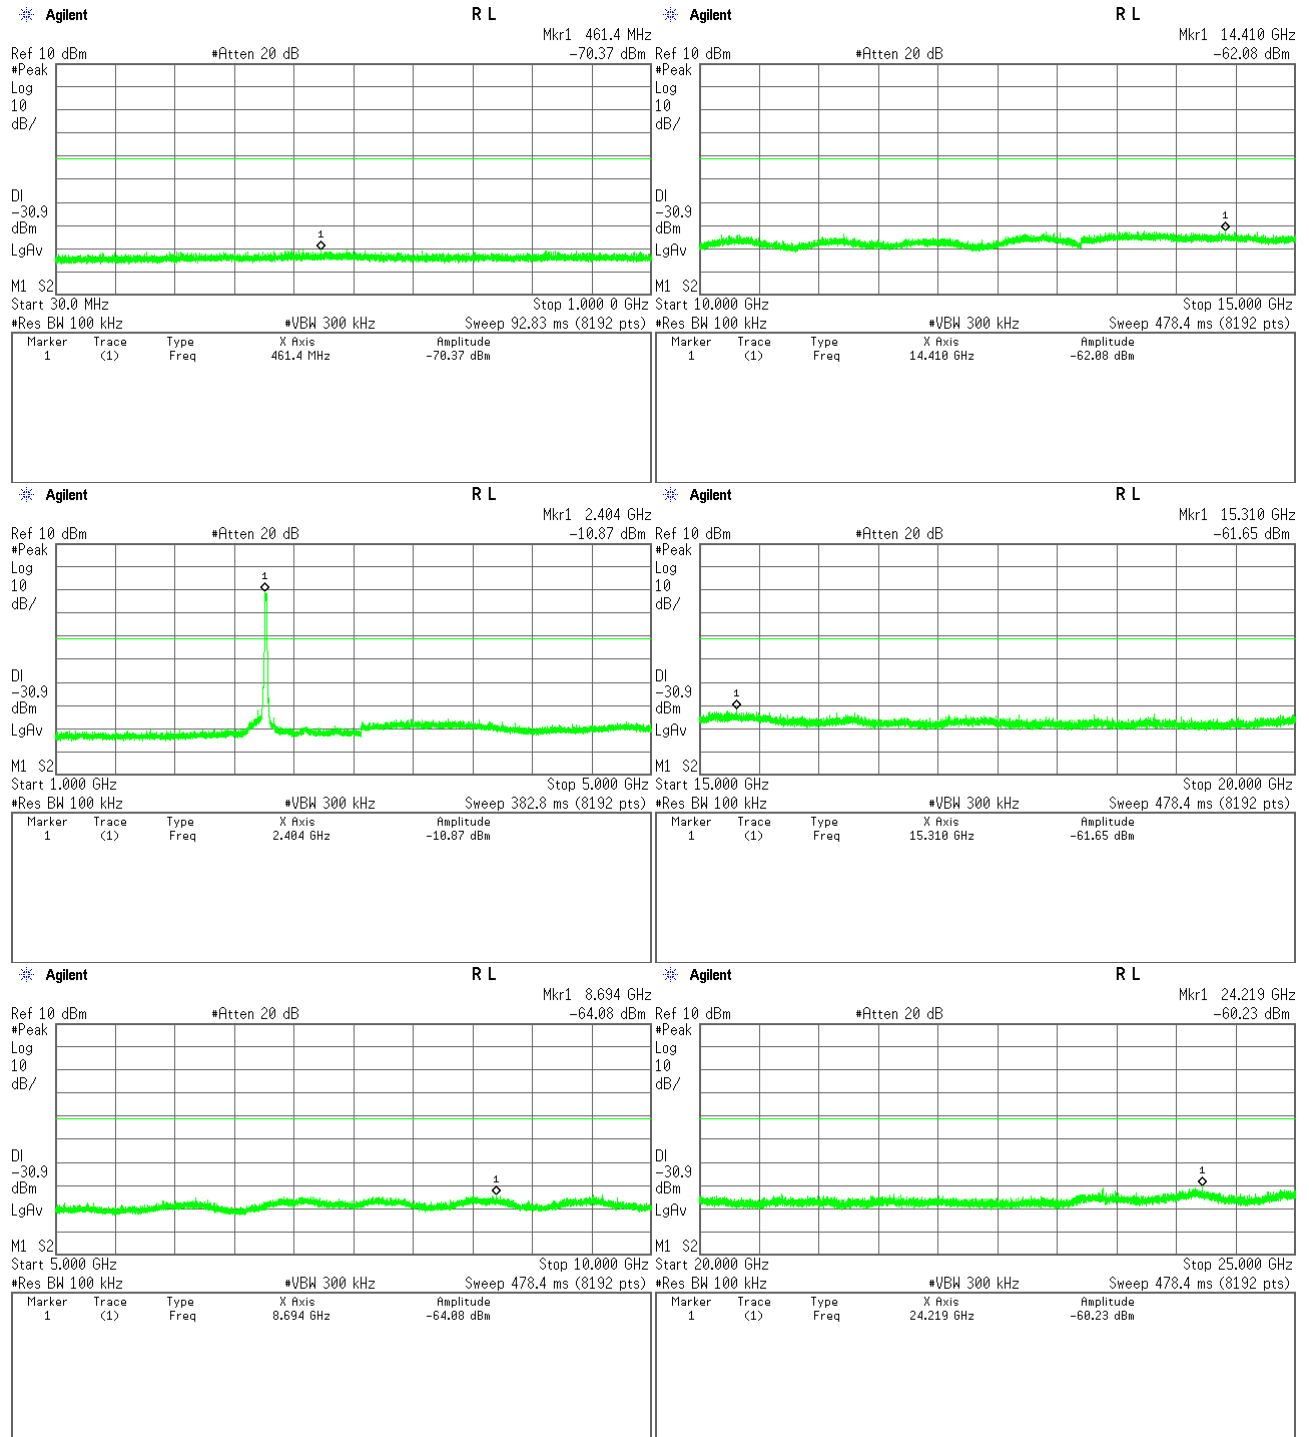

## Middle channel

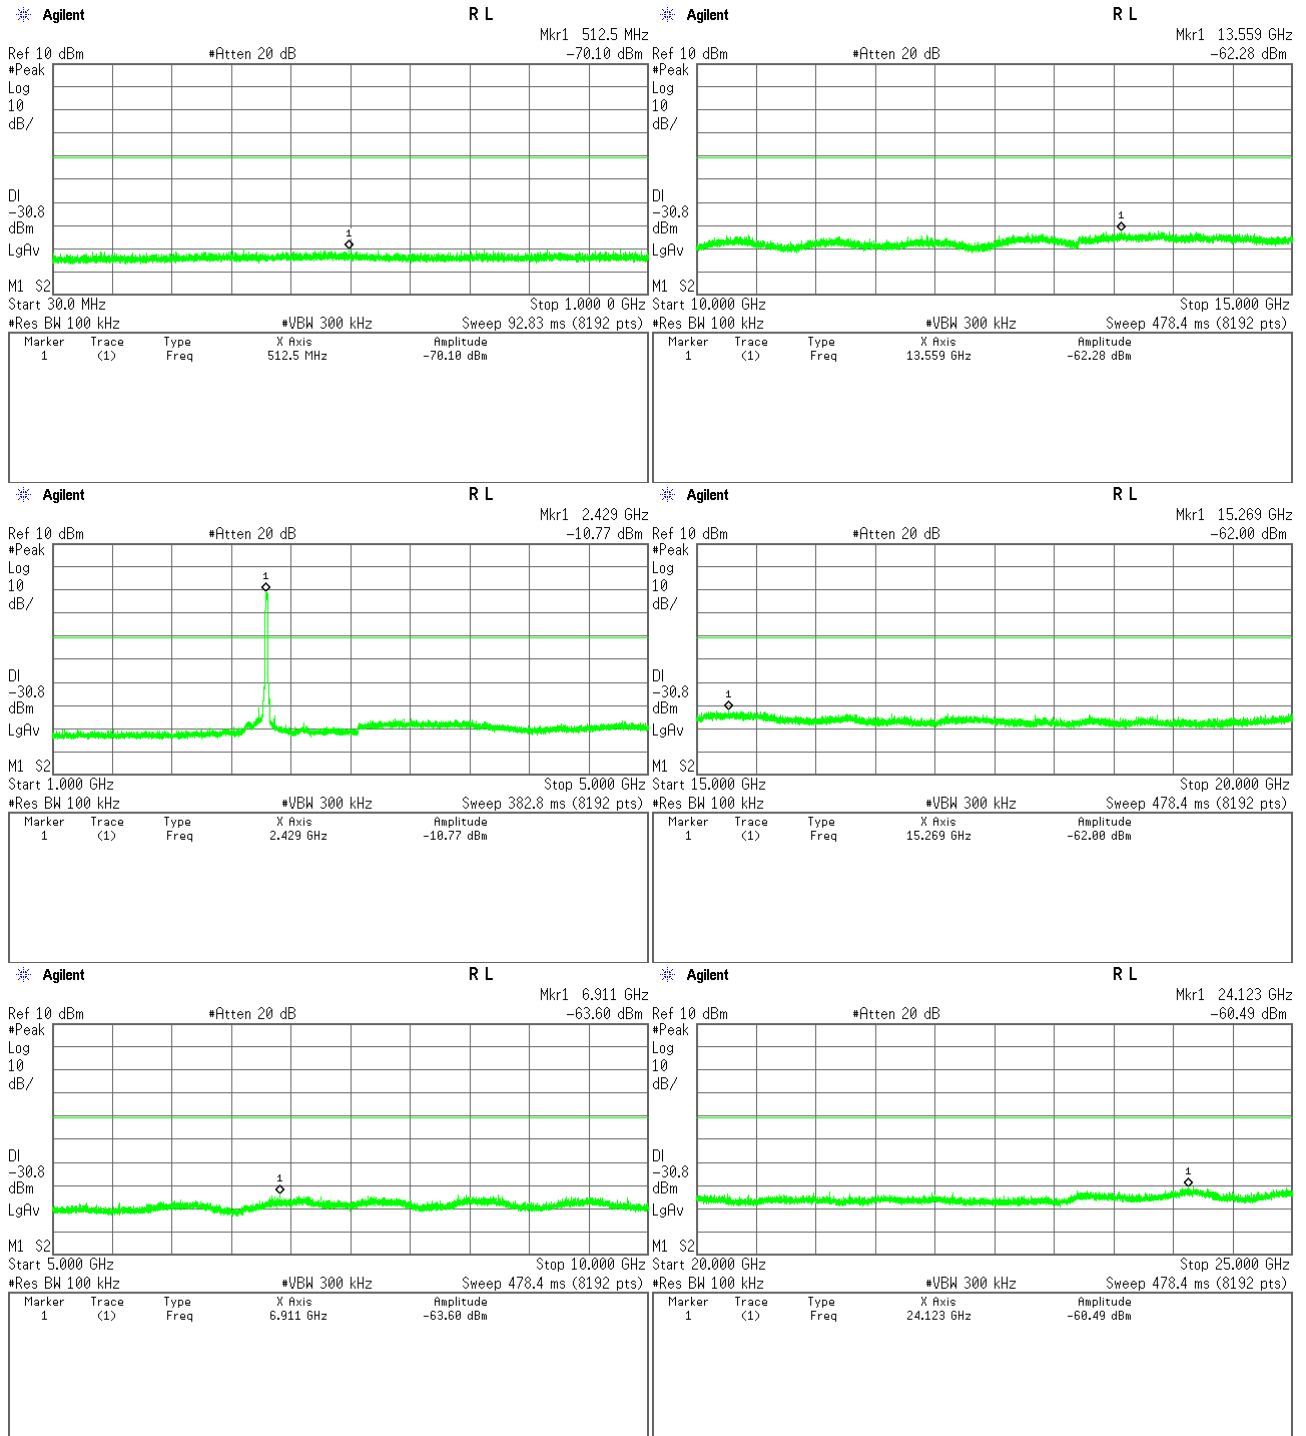


## High Channel

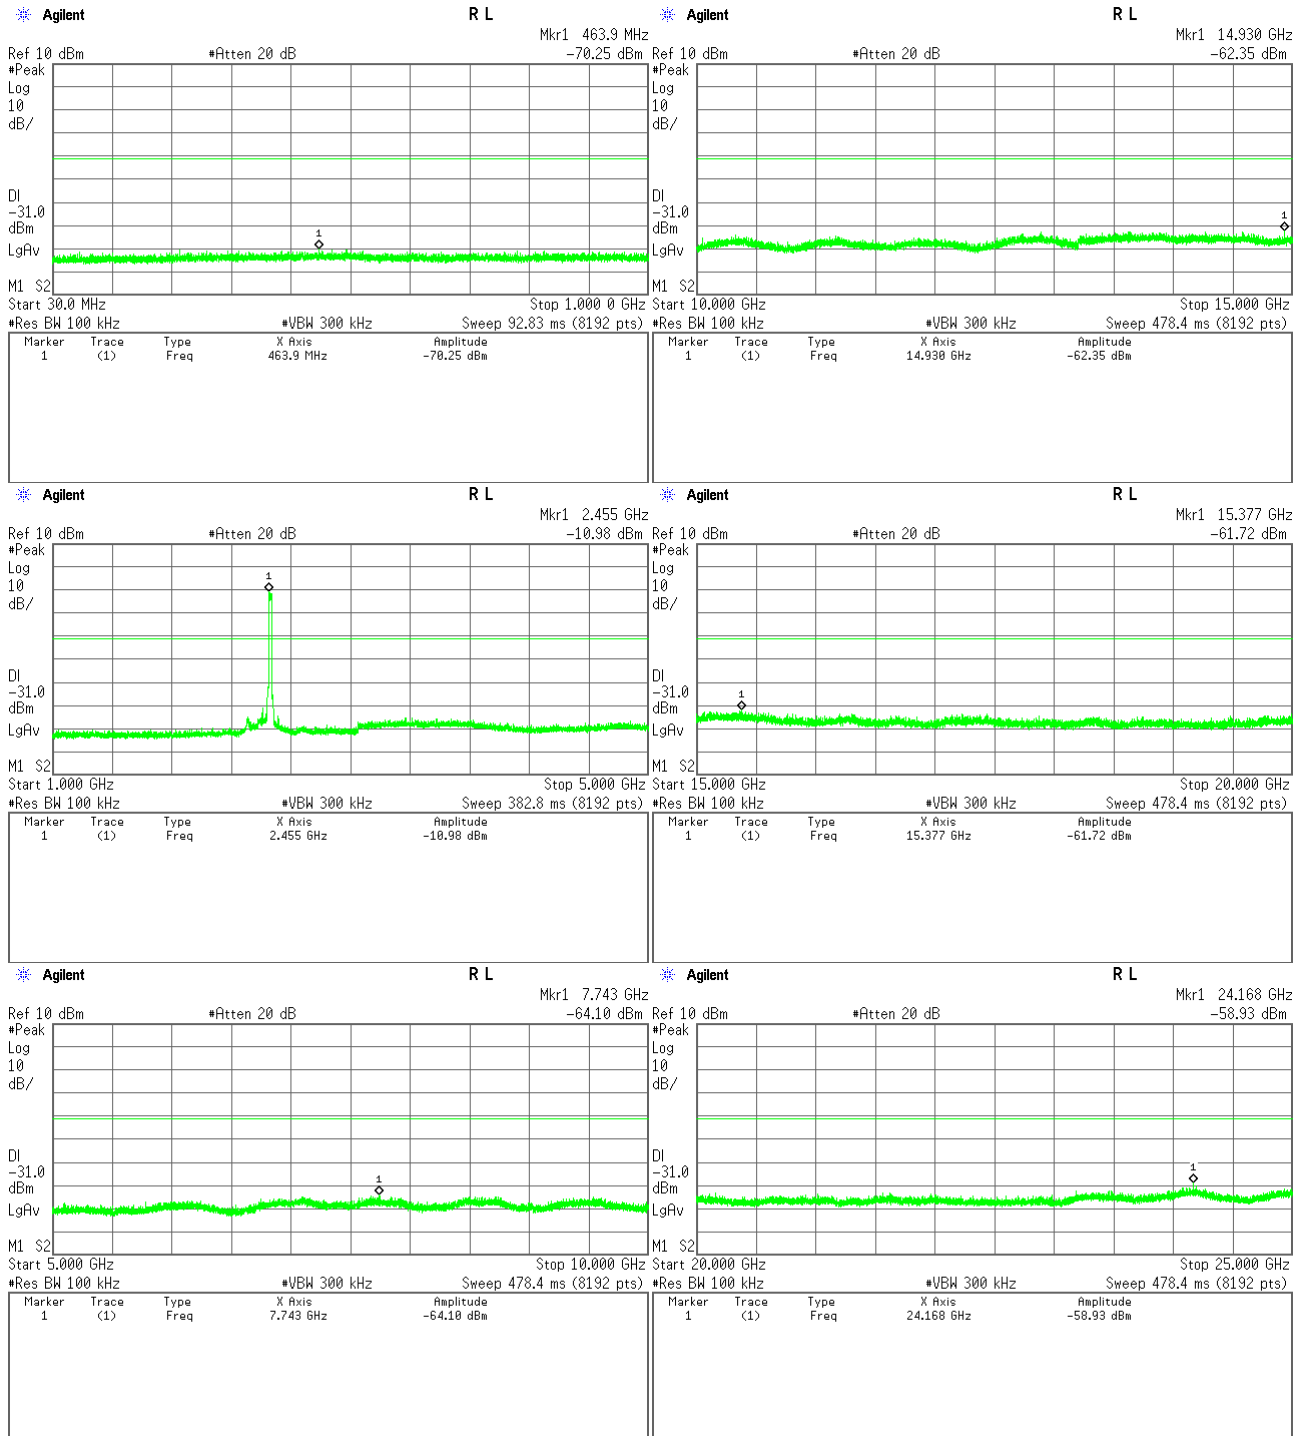


## 3) IEEE 802.11n


### Low Channel

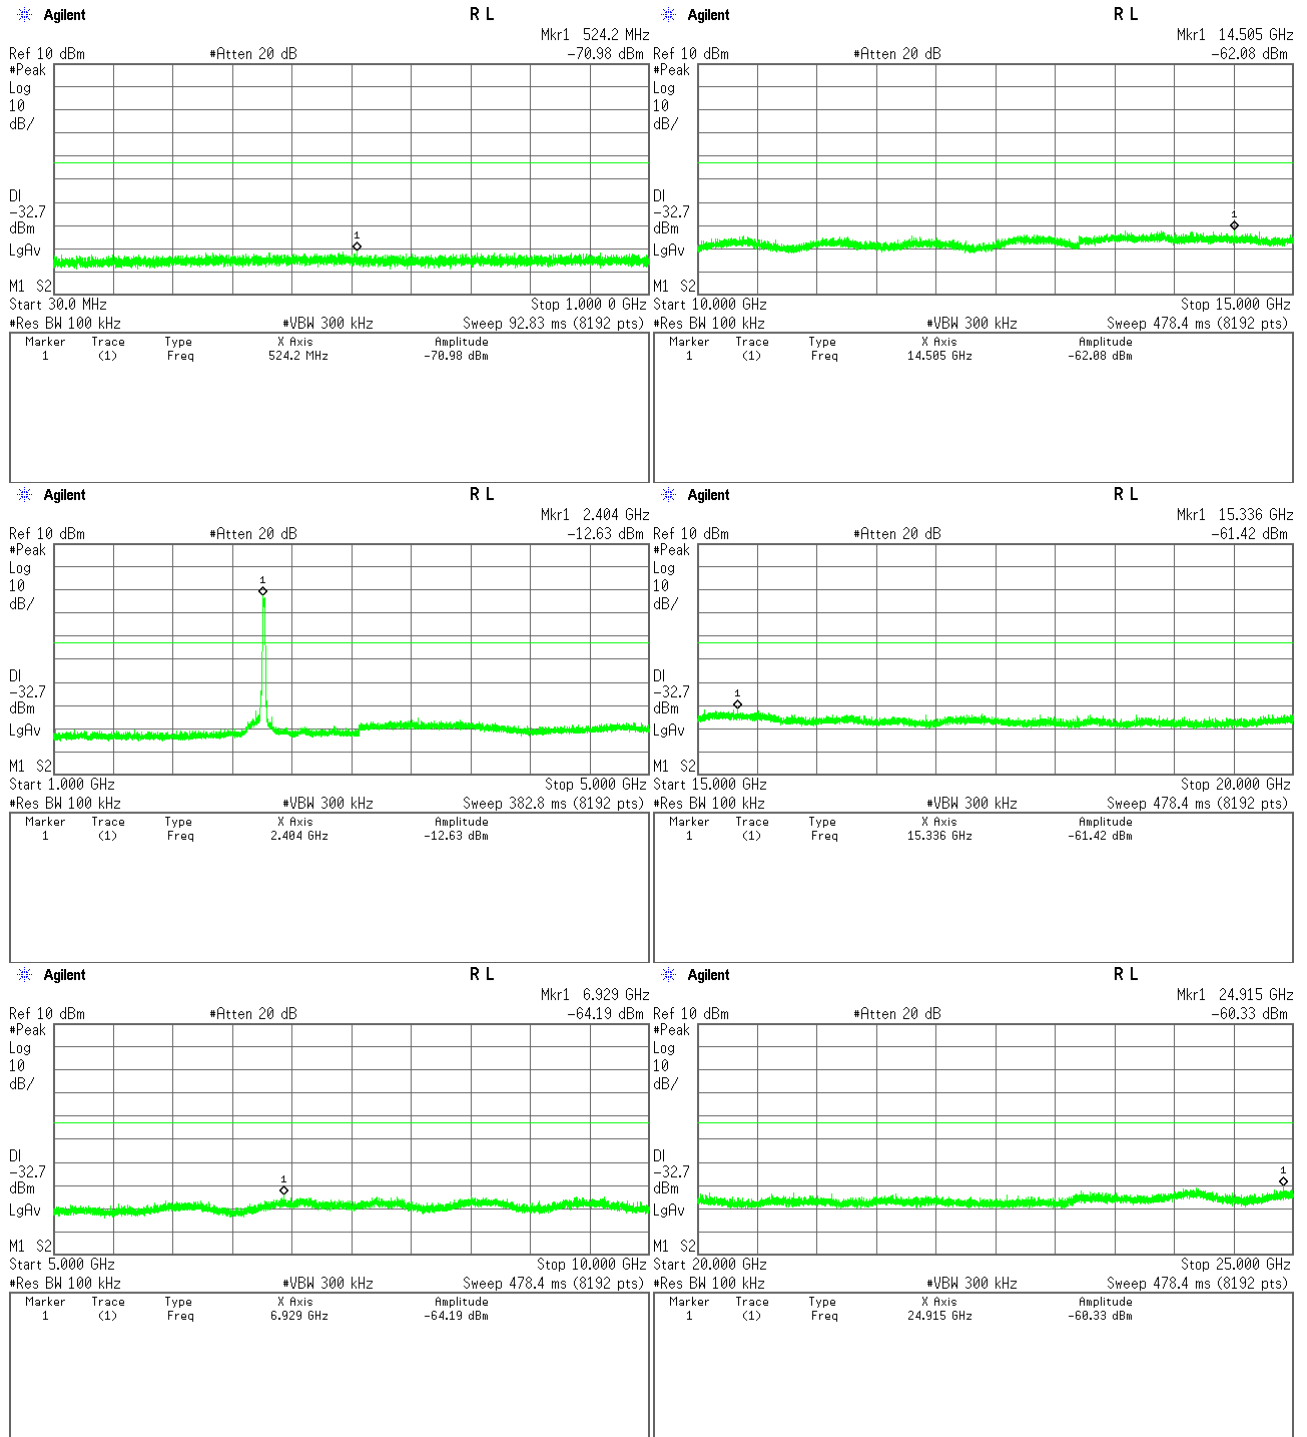

## Middle Channel

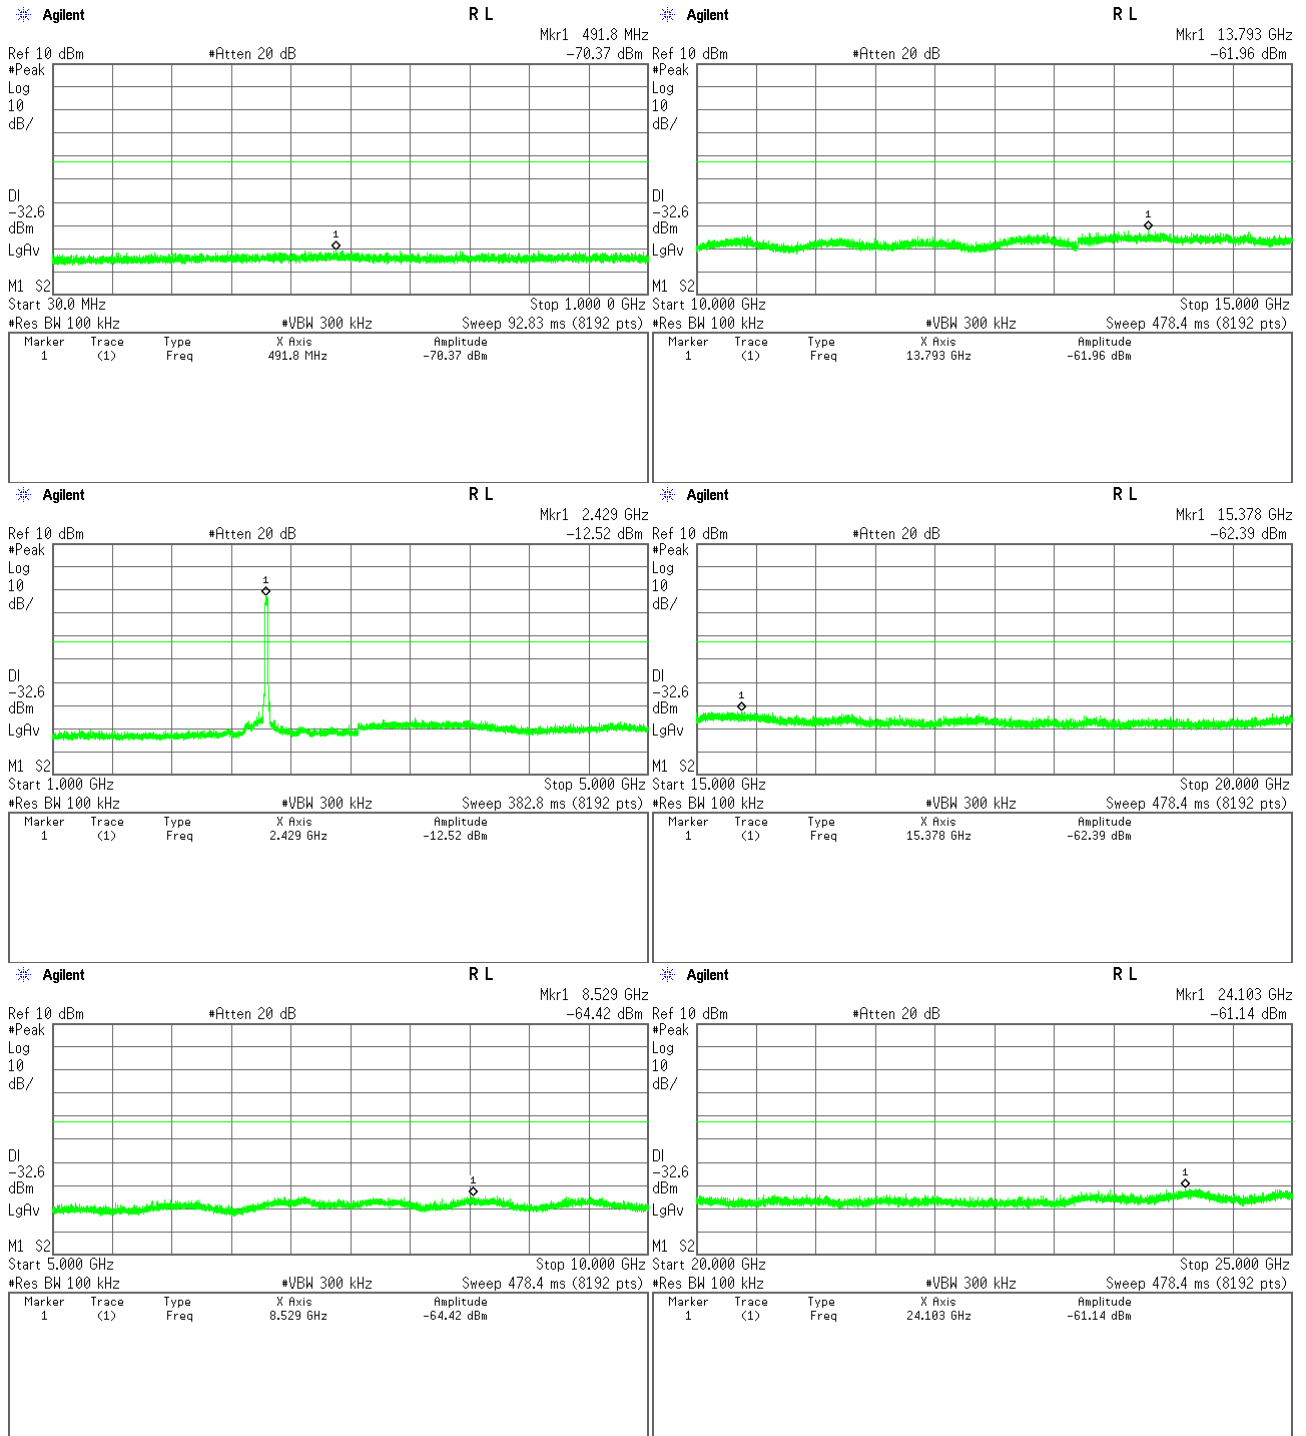

## High Channel

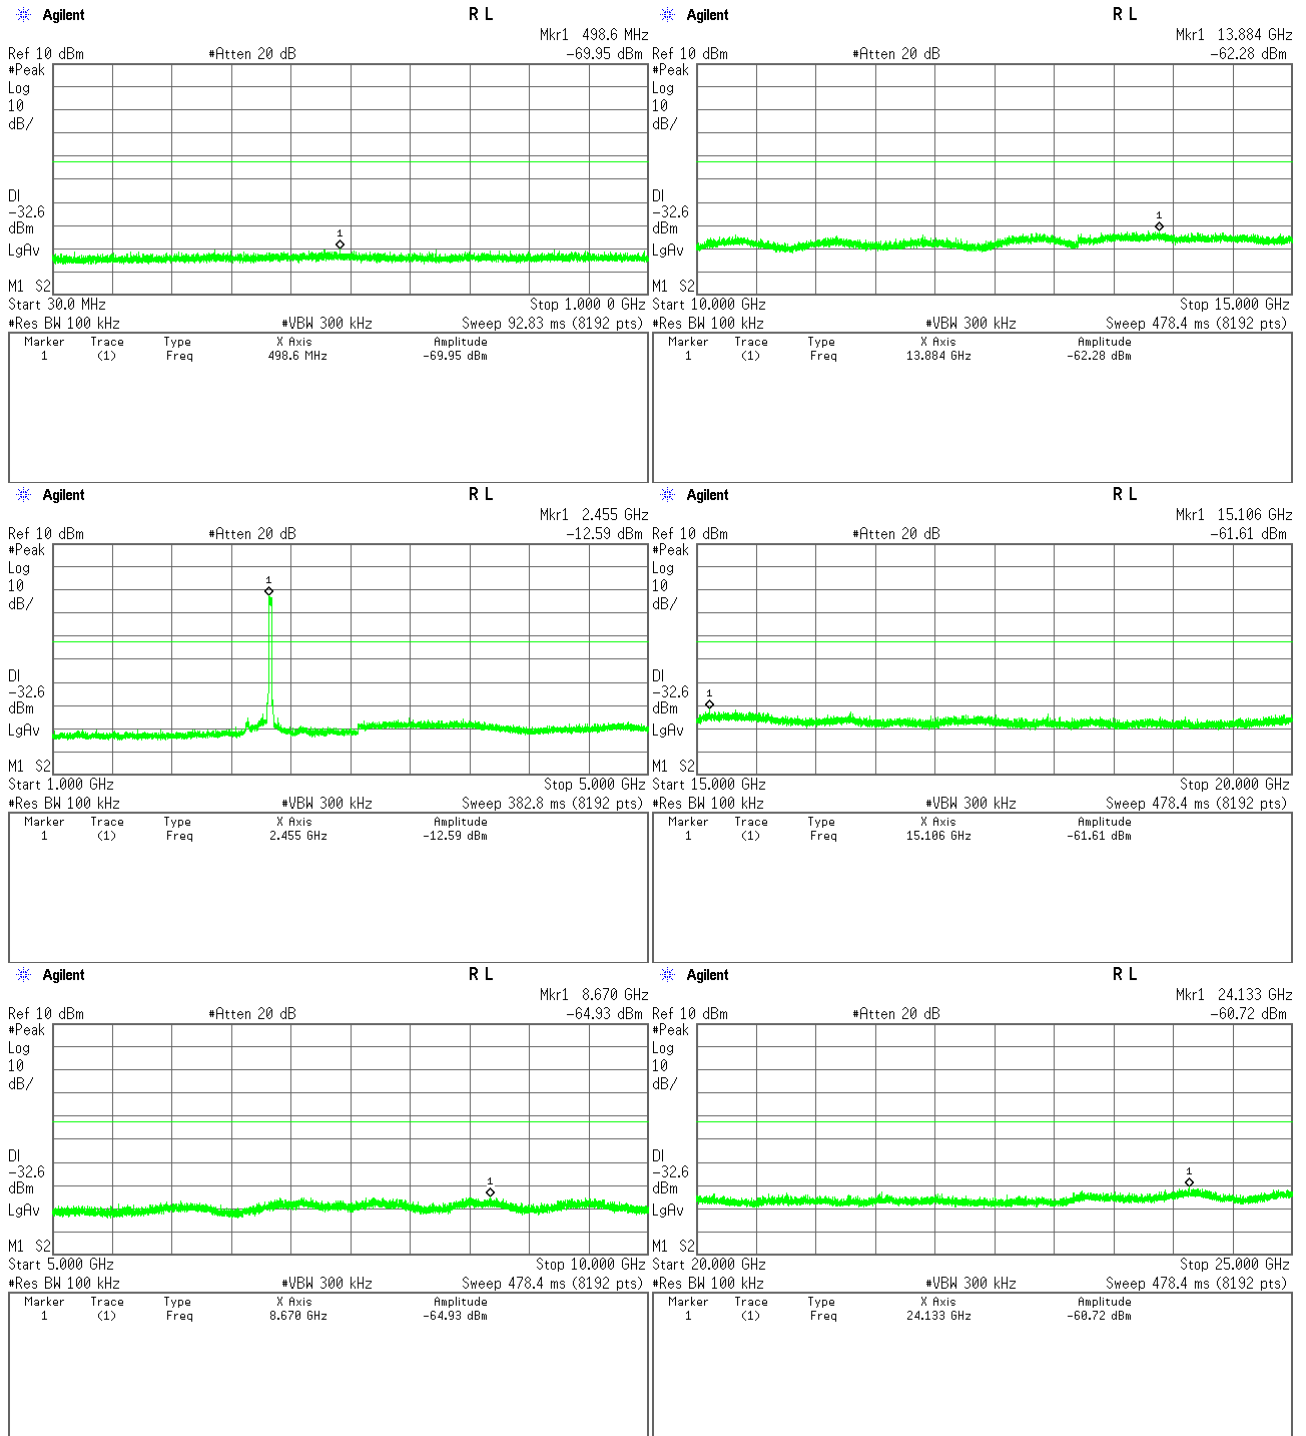




Test Date : July 17, 2016


Temp.:26°C, Humi:68%

## 4) Bluetooth Low Energy


### Low Channel

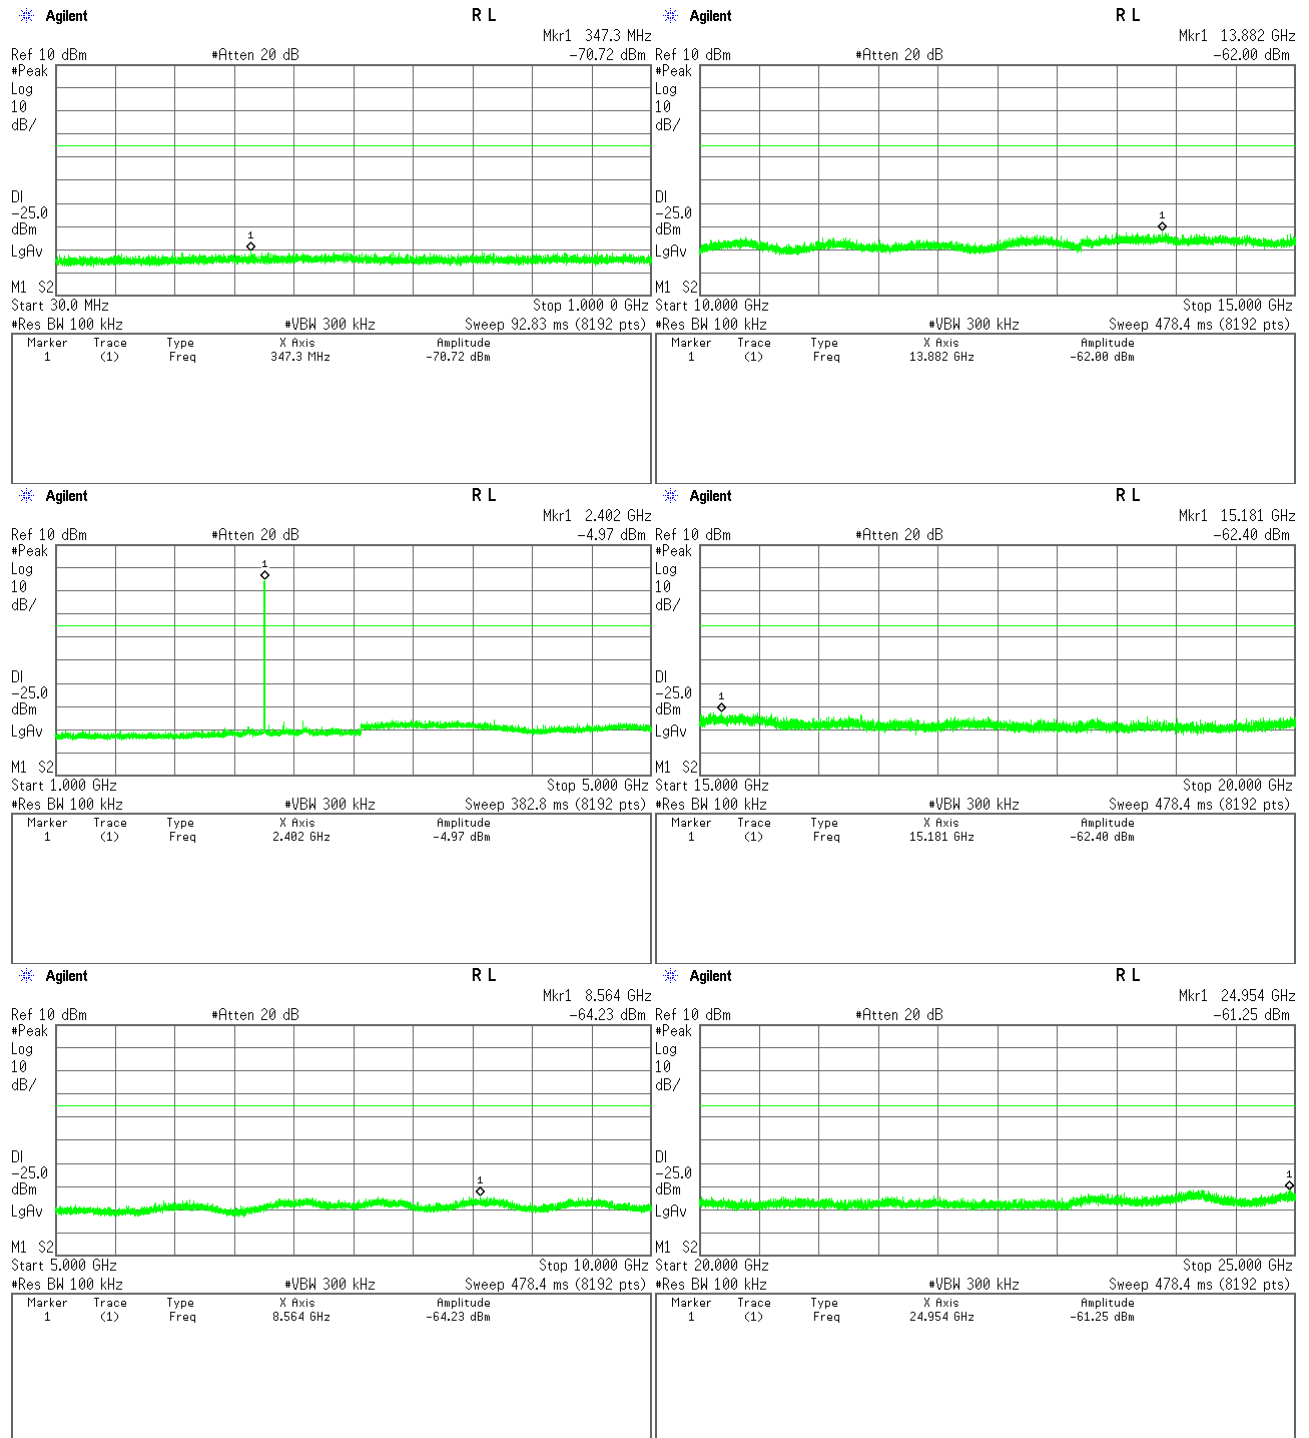

## Middle Channel

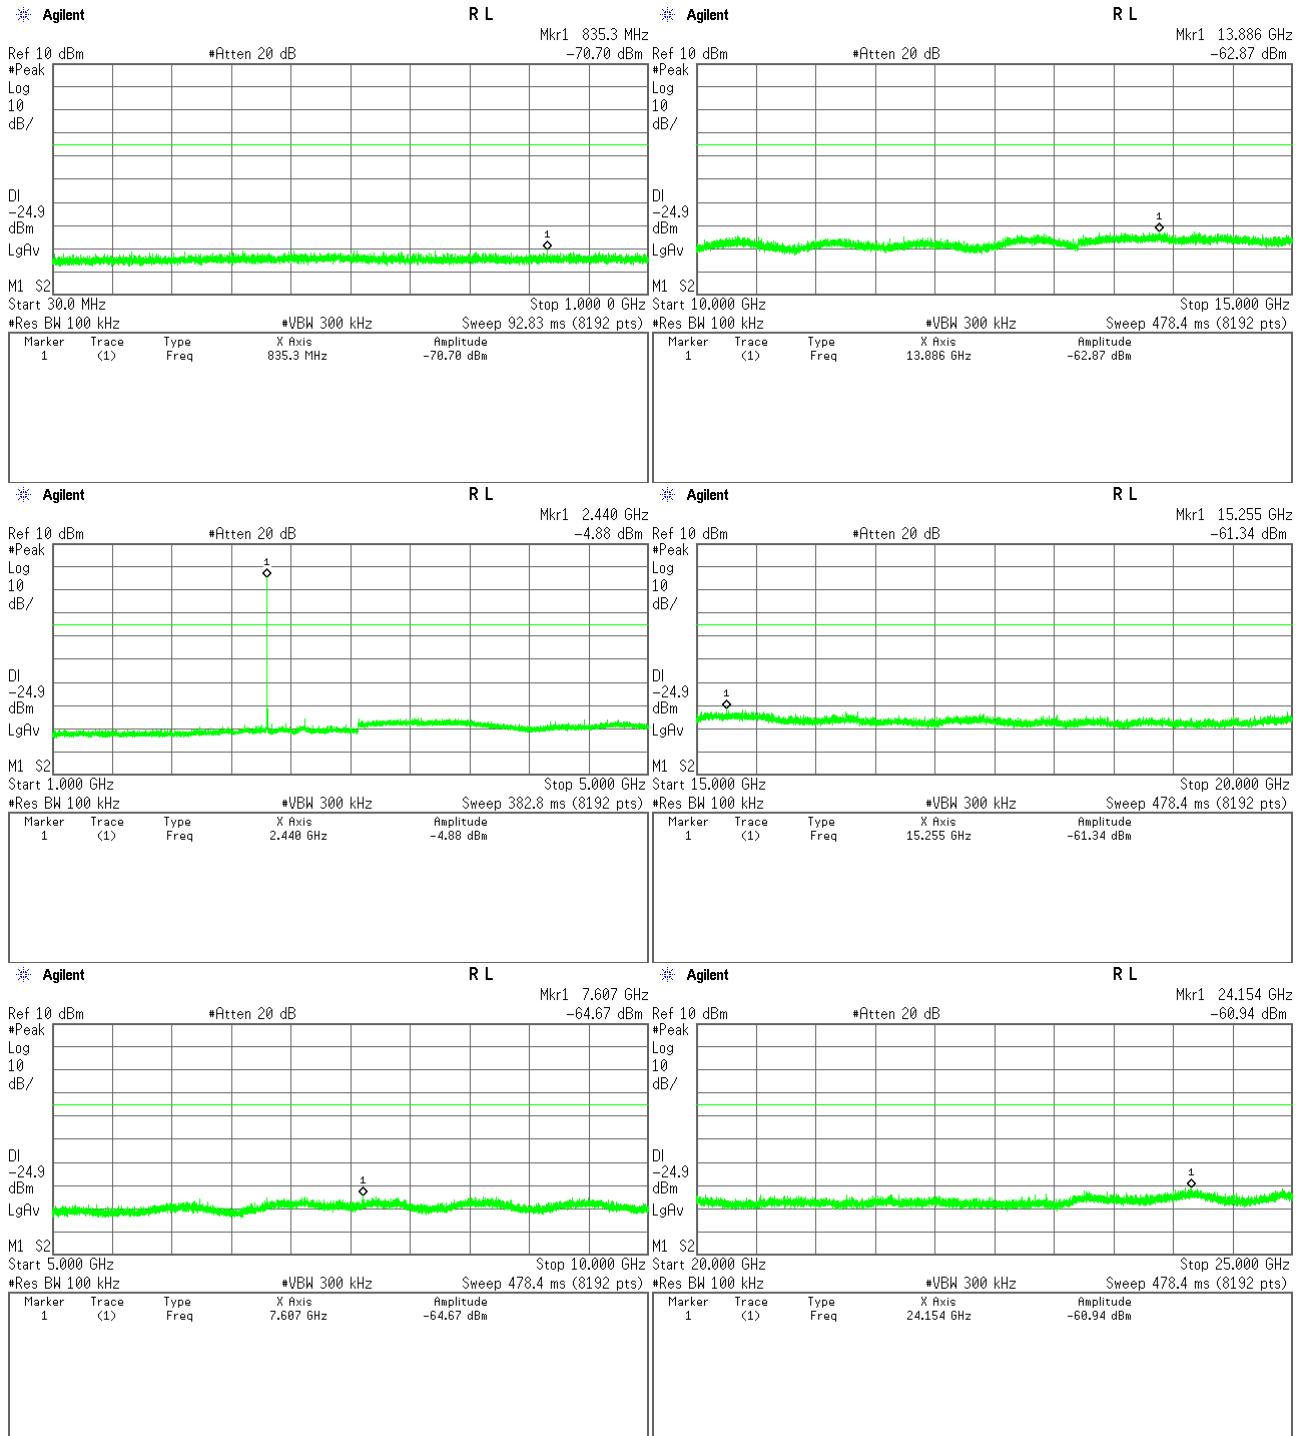

## High Channel

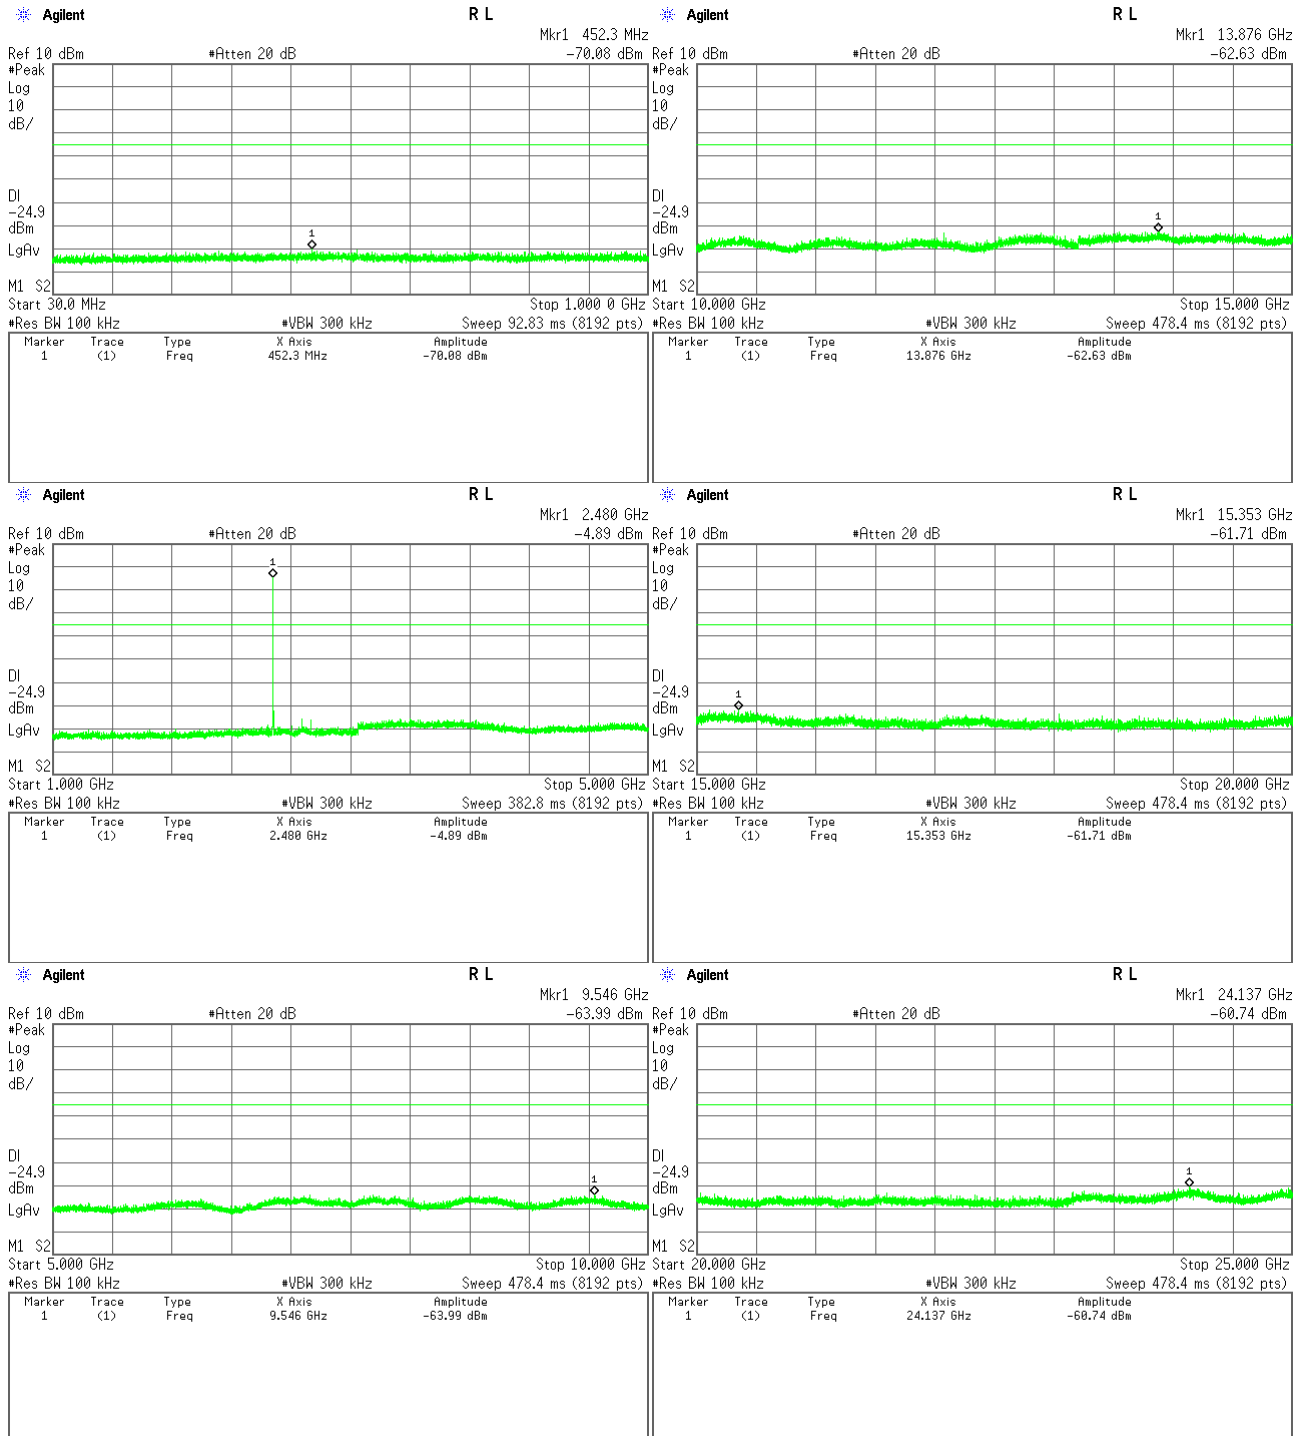


## Band-Edge Emission

Test Date : July 16, 2016


Temp.: 26°C, Humi: 63%

1) IEEE 802.11b

### Low Channel

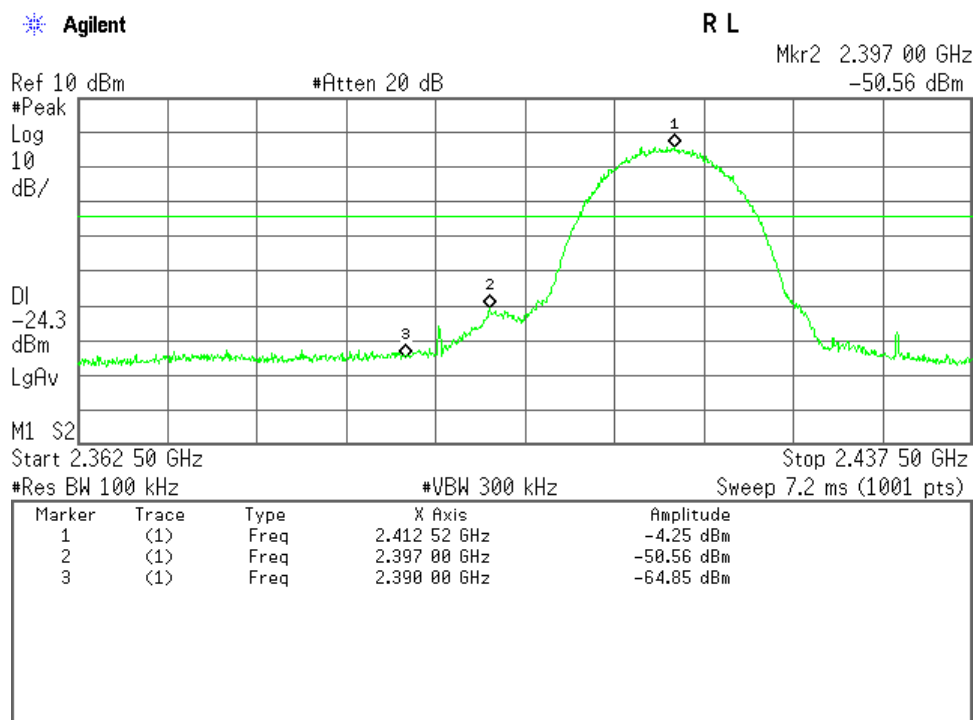


### High Channel

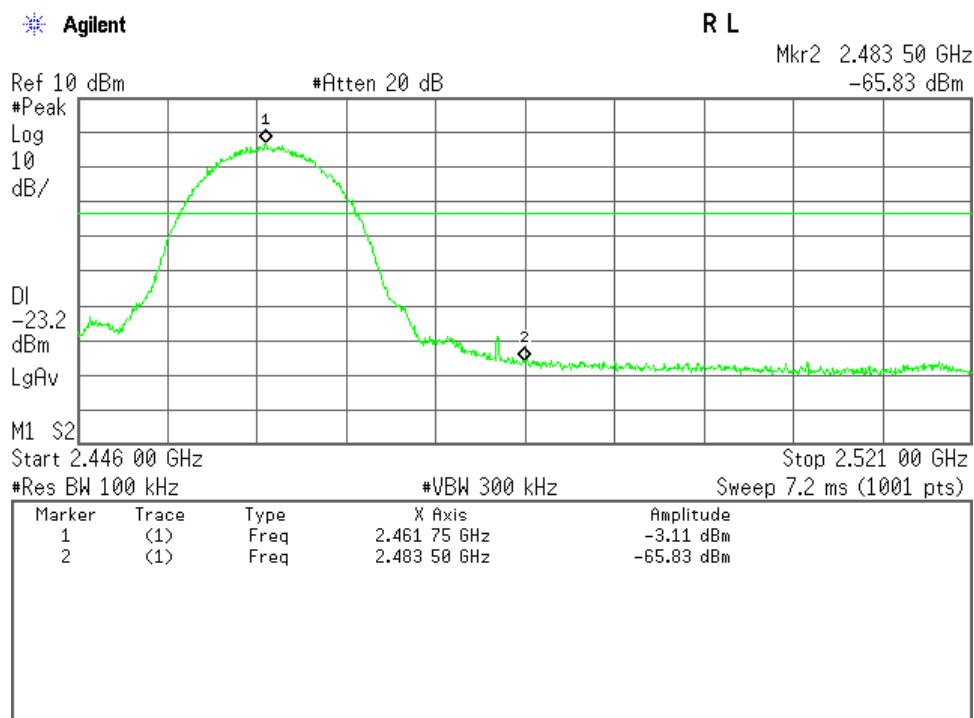


## 2) IEEE 802.11g

### Low Channel

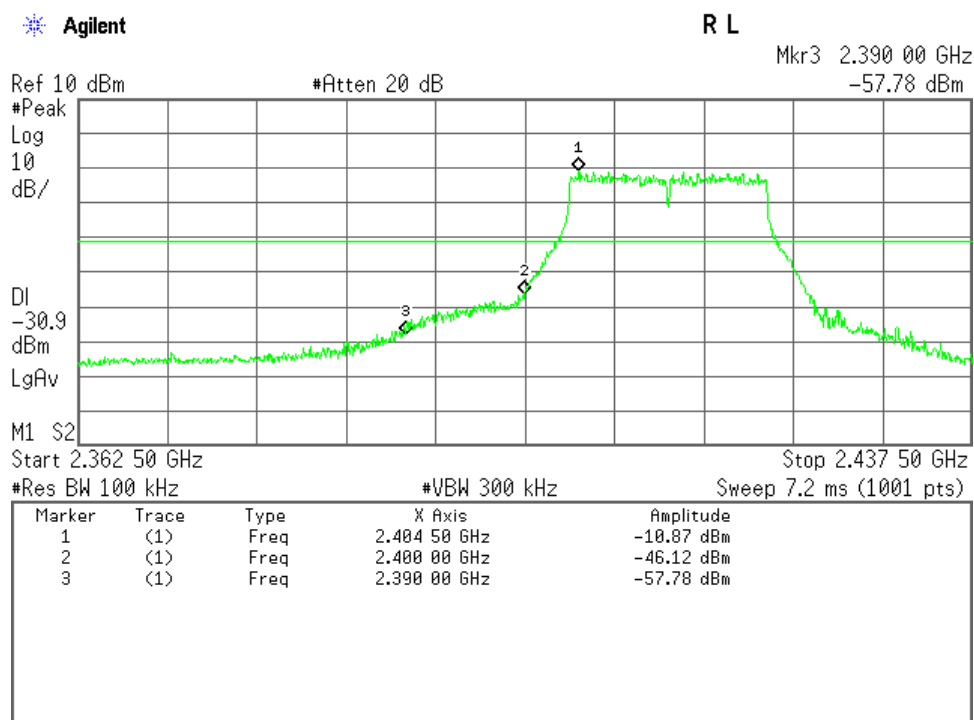


### High Channel

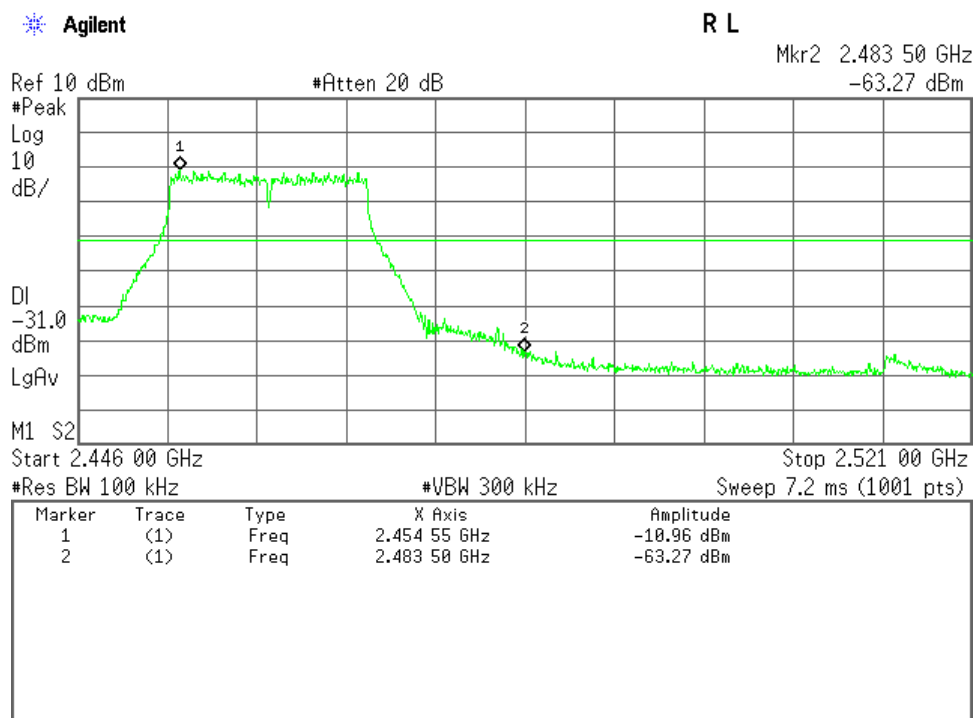


## 3) IEEE 802.11n

### Low Channel

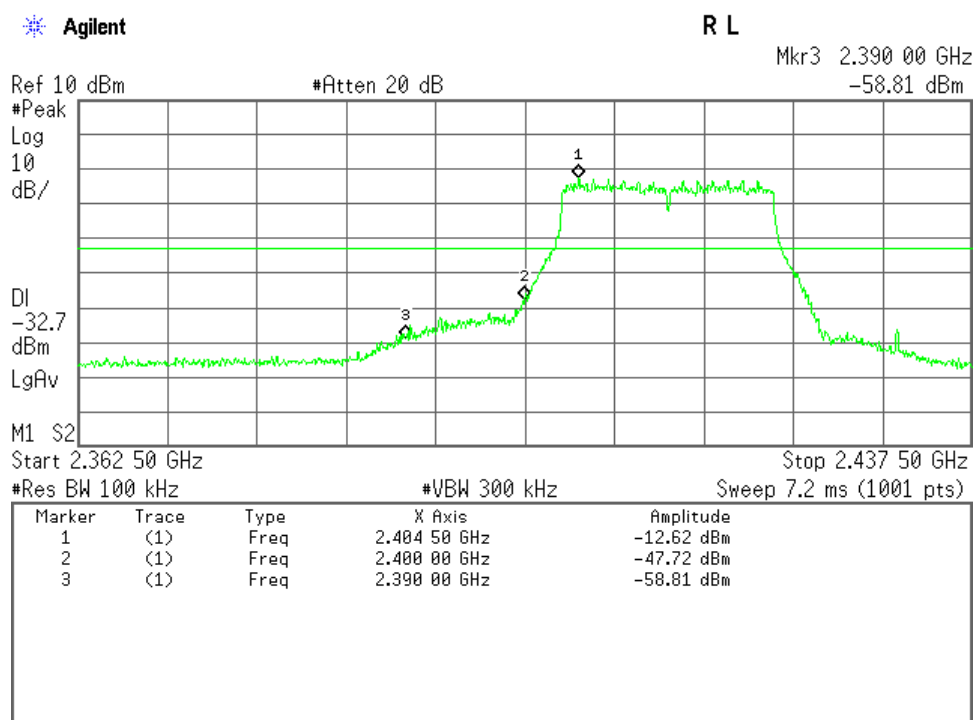


### High Channel

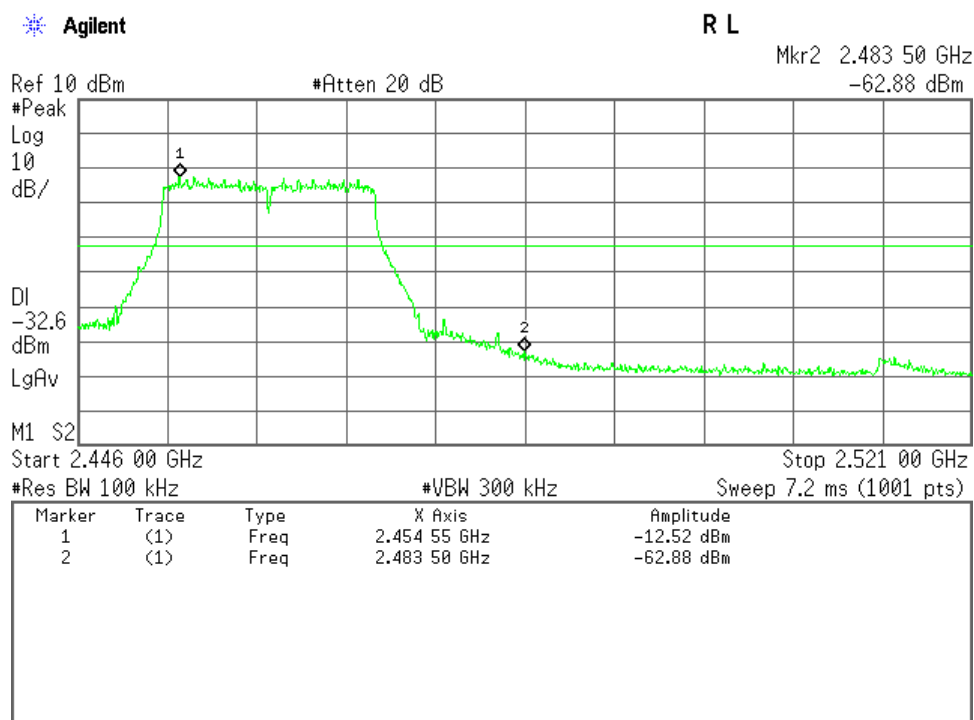


## 4) Bluetooth Low Energy

### Low Channel

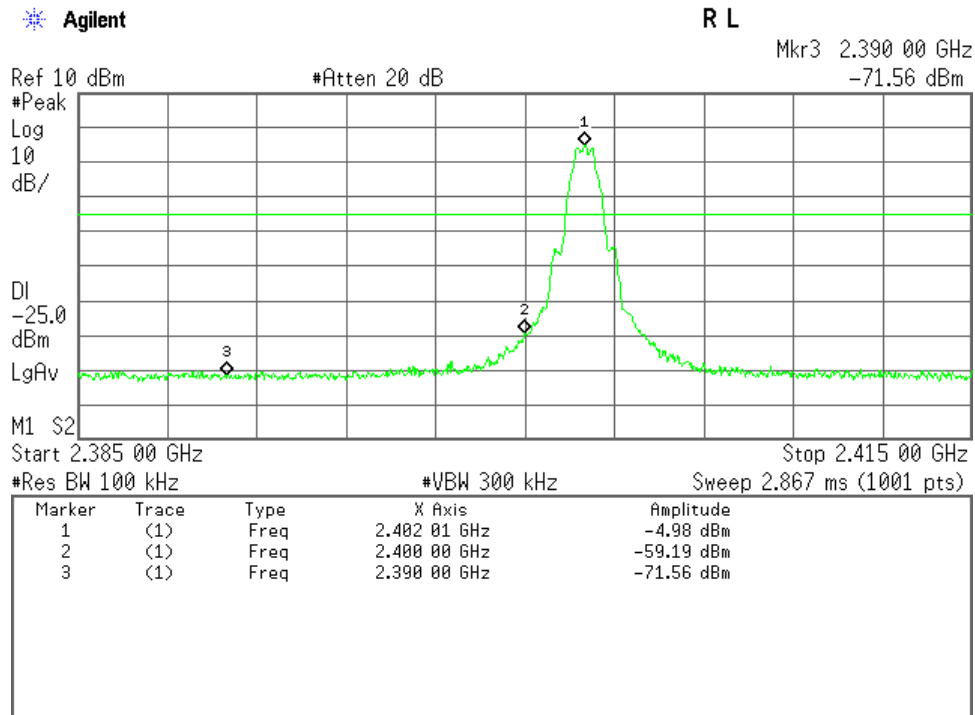

### High Channel

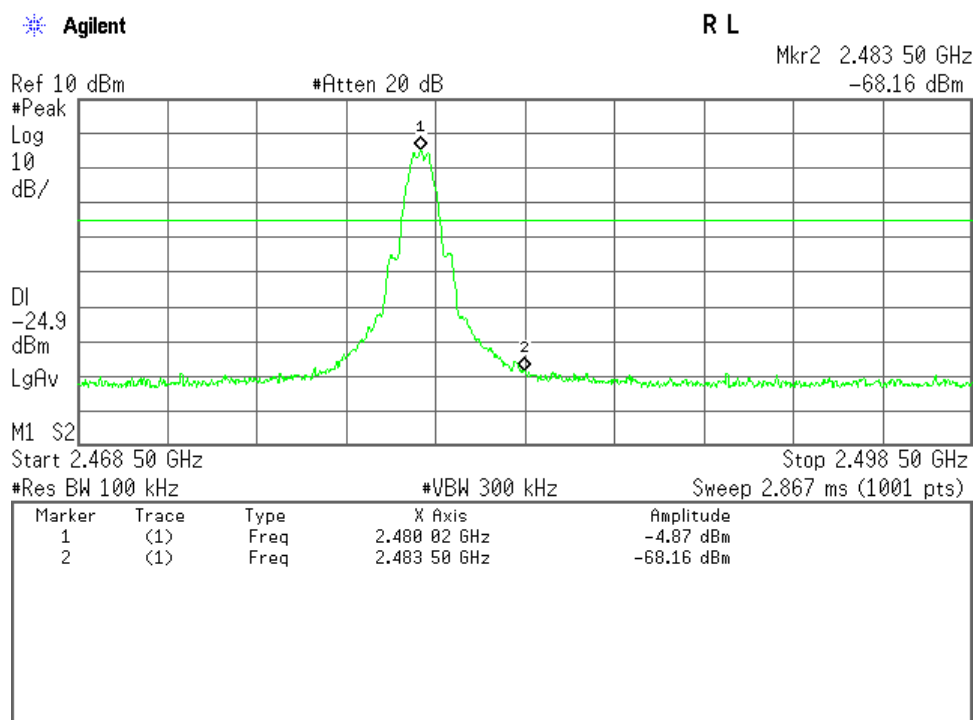

## 7.8 AC Powerline Conducted Emission

For the requirements, ☒ - Applicable [ ☒ - Tested. ☐ - Not tested by applicant request. ]  
☐ - Not Applicable

### 7.8.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin (Quasi-Peak) 8.9 dB at 2.271 MHz

Uncertainty of Measurement Results ± 2.6 dB(2σ)

Remarks : Bluetooth mode

### 7.8.2 Test Instruments

Measurement Room M2				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Test Receiver	ESCI	100453 (A-42)	Rohde & Schwarz	2016/12/09
AMN (main)	KNW-407R	8-1832-1 (D-39)	Kyoritsu	2016/09/17
RF Cable	RG223/U	--- (H-34)	HUBER+SUHNER	2017/05/30

NOTE : The calibration interval of the above test instruments is 12 months.




### 7.8.3 Test Method and Test Setup (Diagrammatic illustration)

The preliminary tests were performed using the scan mode of test receiver or spectrum analyzer to observe the emissions characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for final tests.

– Side View –

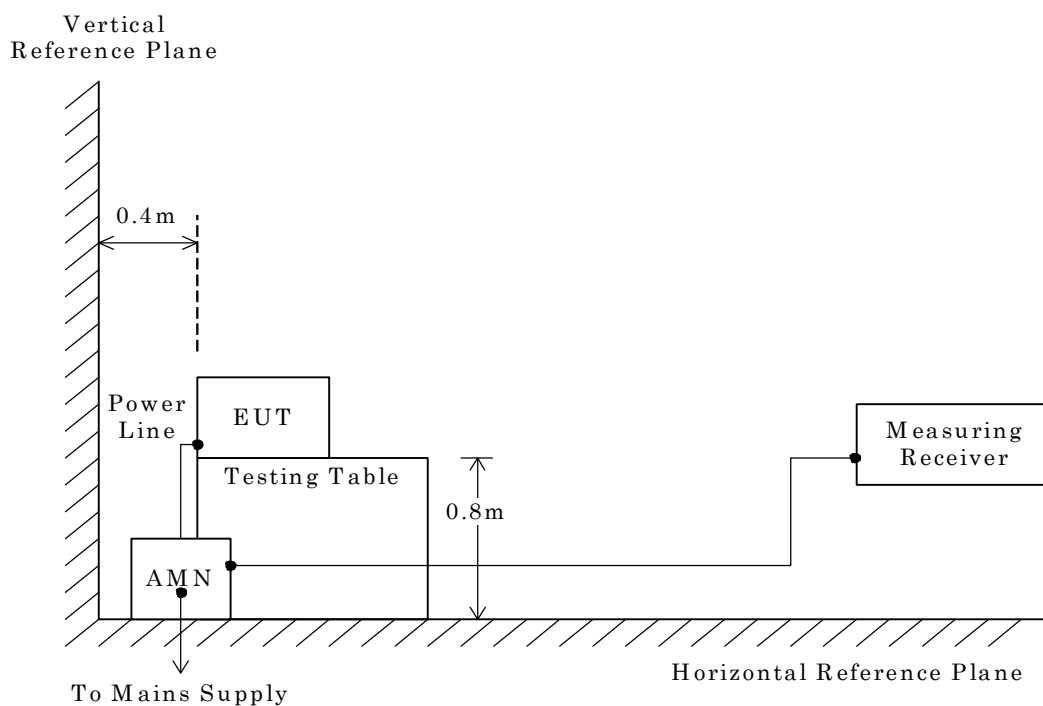

#### NOTE

AMN : Artificial Mains Network

#### 7.8.4 Test Data


- 1) Mode of EUT : (WLAN) All modes have been investigated and the worst case mode for channel (06ch: 2437MHz / IEEE 802.11b, IEEE 802.11g and IEEE 802.11n) has been listed.

Test voltage : 120VAC 60Hz

Test Date: July 30, 2016  
Temp.: 25 °C, Humi.: 67 %

Measured phase : L1

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
0.197	10.2	41.7	26.1	63.7	53.7	51.9	36.3	+11.8	+17.4	-
0.207	10.2	40.7	26.2	63.3	53.3	50.9	36.4	+12.4	+16.9	-
0.304	10.2	34.1	--	60.1	50.1	44.3	--	+15.8	--	-
0.504	10.2	34.8	15.4	56.0	46.0	45.0	25.6	+11.0	+20.4	-
0.613	10.1	36.3	16.0	56.0	46.0	46.4	26.1	+ 9.6	+19.9	-
0.715	10.2	33.7	12.6	56.0	46.0	43.9	22.8	+12.1	+23.2	-
1.021	10.2	35.6	13.3	56.0	46.0	45.8	23.5	+10.2	+22.5	-
1.534	10.3	34.9	14.8	56.0	46.0	45.2	25.1	+10.8	+20.9	-
2.274	10.3	36.6	16.3	56.0	46.0	46.9	26.6	+ 9.1	+19.4	-
4.018	10.4	34.0	16.8	56.0	46.0	44.4	27.2	+11.6	+18.8	-

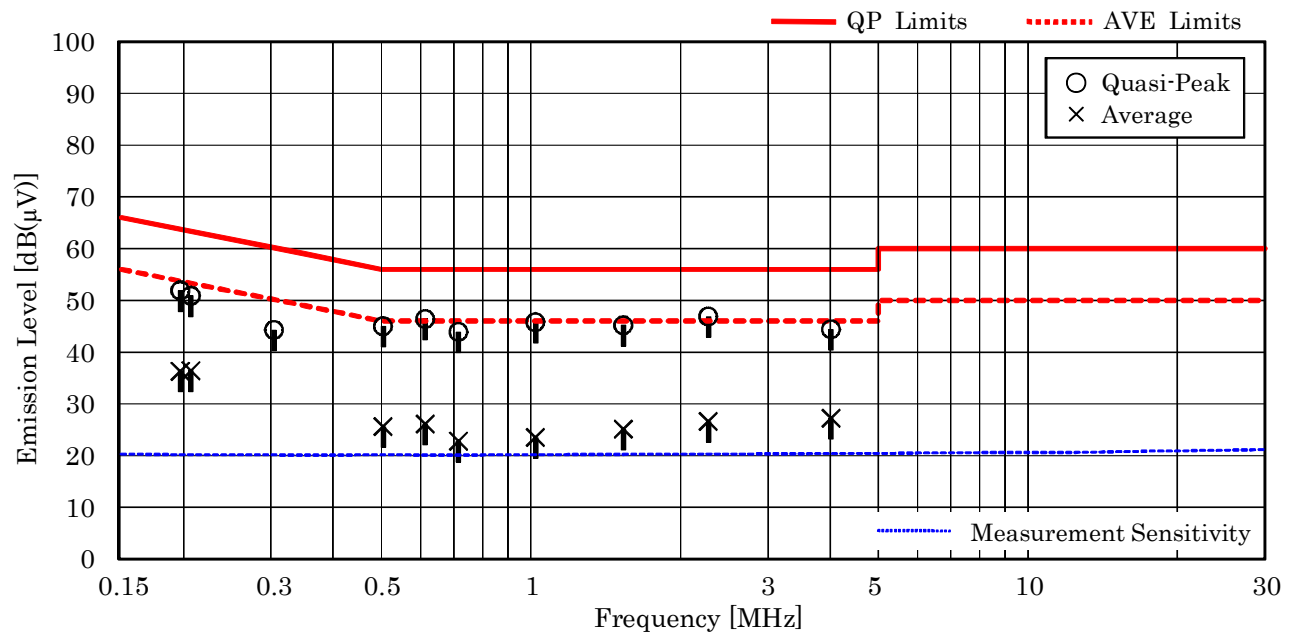

#### NOTES


- The spectrum was checked from 150 kHz to 30 MHz.
- The correction factor includes the AMN insertion loss and the cable loss.
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- The symbol of "--" means "not applicable".
- Calculated result at 2.274 MHz, as the worst point shown on underline:  
Correction Factor + Meter Reading (QP) = 10.3 + 36.6 = 46.9 dB(μV)
- QP : Quasi-Peak Detector / AVE : Average Detector
- Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz

Test voltage : 120VAC 60Hz

Test Date: July 30, 2016  
Temp.: 25 °C, Humi.: 67 %

Measured phase : L2

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
0.197	10.2	38.0	--	63.7	53.7	48.2	--	+15.5	--	-
0.207	10.2	37.2	--	63.3	53.3	47.4	--	+15.9	--	-
0.304	10.2	29.7	--	60.1	50.1	39.9	--	+20.2	--	-
0.504	10.1	30.7	--	56.0	46.0	40.8	--	+15.2	--	-
0.613	10.2	29.6	--	56.0	46.0	39.8	--	+16.2	--	-
0.715	10.2	26.0	--	56.0	46.0	36.2	--	+19.8	--	-
1.021	10.3	31.3	--	56.0	46.0	41.6	--	+14.4	--	-
1.534	10.3	28.9	--	56.0	46.0	39.2	--	+16.8	--	-
2.274	10.3	23.0	--	56.0	46.0	33.3	--	+22.7	--	-
4.018	10.4	20.6	--	56.0	46.0	31.0	--	+25.0	--	-

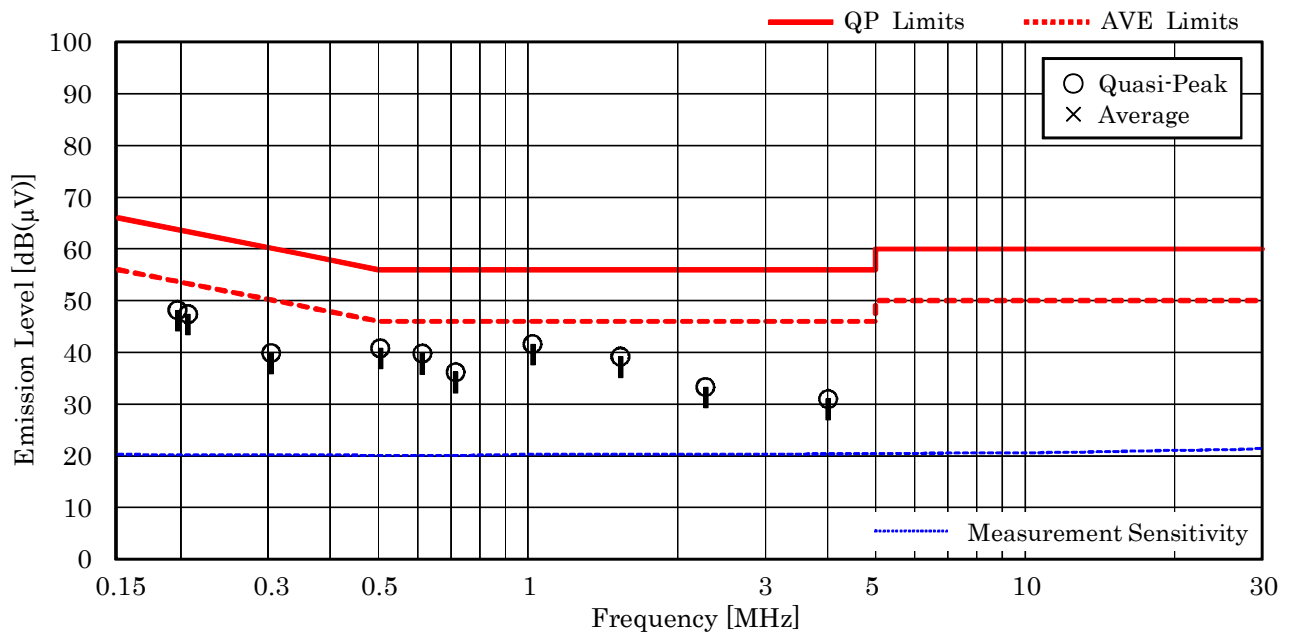

## NOTES

1. The spectrum was checked from 150 kHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 1.021 MHz, as the worst point shown on underline:  
Correction Factor + Meter Reading (QP) = 10.3 + 31.3 = 41.6 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz


## 2) Mode of EUT : Bluetooth Low Energy

Test voltage : 120VAC 60Hz

Test Date: July 30, 2016  
Temp.: 25 °C, Humi.: 67 %

Measured phase : L1

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
0.197	10.2	41.2	25.9	63.7	53.7	51.4	36.1	+12.3	+17.6	-
0.299	10.2	33.8	--	60.3	50.3	44.0	--	+16.3	--	-
0.497	10.1	35.4	17.6	56.1	46.1	45.5	27.7	+10.6	+18.4	-
0.611	10.1	36.2	16.0	56.0	46.0	46.3	26.1	+ 9.7	+19.9	-
0.714	10.2	33.3	12.8	56.0	46.0	43.5	23.0	+12.5	+23.0	-
1.028	10.2	35.9	15.4	56.0	46.0	46.1	25.6	+ 9.9	+20.4	-
1.840	10.3	36.2	15.4	56.0	46.0	46.5	25.7	+ 9.5	+20.3	-
2.271	10.3	36.8	16.4	56.0	46.0	47.1	26.7	+ 8.9	+19.3	-
4.014	10.4	34.2	16.9	56.0	46.0	44.6	27.3	+11.4	+18.7	-
28.180	11.1	27.0	--	60.0	50.0	38.1	--	+21.9	--	-

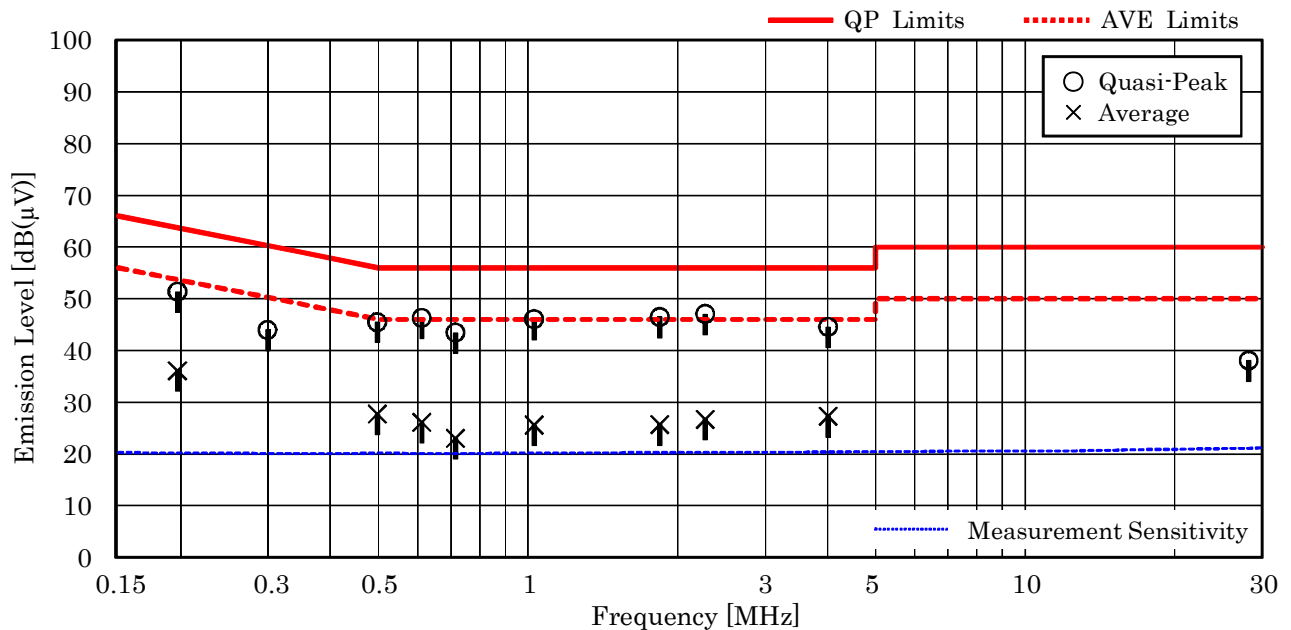

### NOTES


1. The spectrum was checked from 150 kHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 2.271 MHz, as the worst point shown on underline:  
Correction Factor + Meter Reading (QP) = 10.3 + 36.8 = 47.1 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz

Test voltage : 120VAC 60Hz

Test Date: July 30, 2016  
Temp.: 25 °C, Humi.: 67 %

Measured phase : L2

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
0.197	10.2	37.9	--	63.7	53.7	48.1	--	+15.6	--	-
0.299	10.2	30.0	--	60.3	50.3	40.2	--	+20.1	--	-
0.497	10.1	31.2	--	56.1	46.1	41.3	--	+14.8	--	-
0.611	10.2	29.7	--	56.0	46.0	39.9	--	+16.1	--	-
0.714	10.2	25.9	--	56.0	46.0	36.1	--	+19.9	--	-
1.028	10.3	32.8	10.5	56.0	46.0	43.1	20.8	+12.9	+25.2	-
1.840	10.3	21.6	--	56.0	46.0	31.9	--	+24.1	--	-
2.271	10.3	22.4	--	56.0	46.0	32.7	--	+23.3	--	-
4.014	10.4	21.2	--	56.0	46.0	31.6	--	+24.4	--	-
28.180	11.3	19.7	--	60.0	50.0	31.0	--	+29.0	--	-

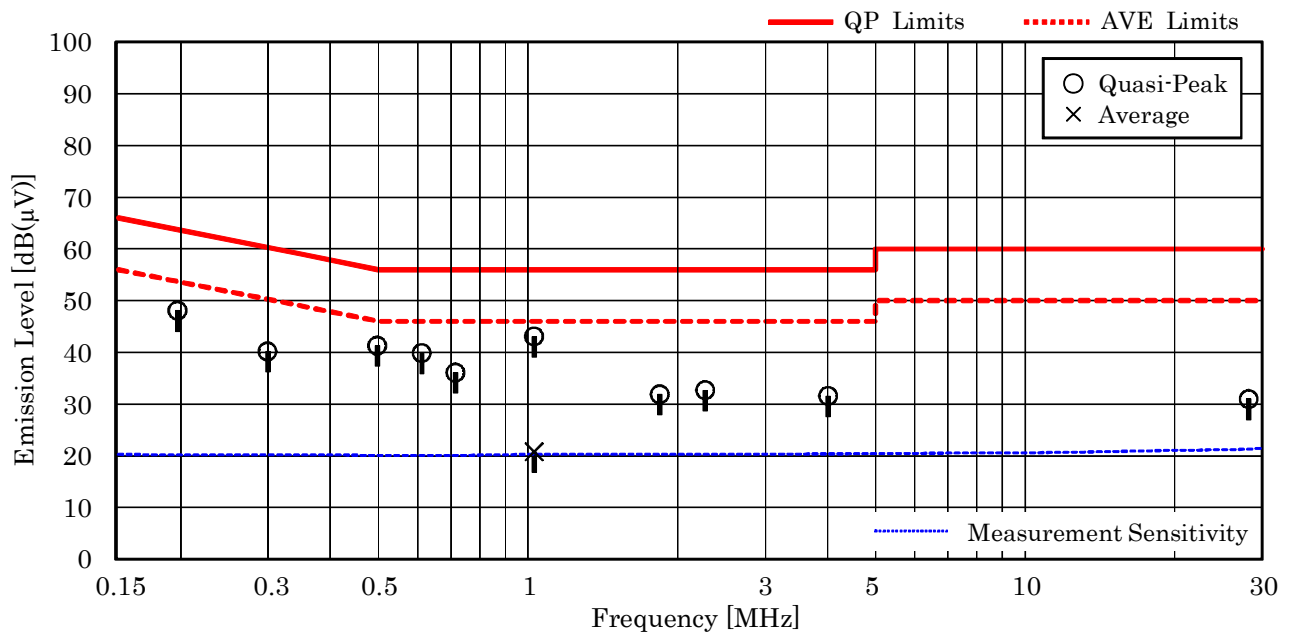

## NOTES

1. The spectrum was checked from 150 kHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 1.028 MHz, as the worst point shown on underline:  
Correction Factor + Meter Reading (QP) = 10.3 + 32.8 = 43.1 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz

## 7.9 Radiated Emission

For the requirements, ☒ - Applicable [ ☒ - Tested. ☐ - Not tested by applicant request. ]  
☐ - Not Applicable

### 7.9.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin (Average) 3.7 dB at 2390.0 MHz

Uncertainty of Measurement Results	9 kHz – 30 MHz	<u>± 3.0</u>	dB(2σ)
	30 MHz – 300 MHz	<u>± 3.8</u>	dB(2σ)
	300 MHz – 1000 MHz	<u>± 4.8</u>	dB(2σ)
	1 GHz – 6 GHz	<u>± 4.7</u>	dB(2σ)
	6 GHz – 18 GHz	<u>± 4.6</u>	dB(2σ)
	18 GHz – 40 GHz	<u>± 5.5</u>	dB(2σ)

Remarks : WLAN IEEE802.11g mode, Y axis position. The measurement result is within the range of measurement uncertainty.

## 7.9.2 Test Instruments

Anechoic Chamber A2				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Test Receiver	ESU 26	100170 (A-6)	Rohde & Schwarz	2017/04/27
Loop Antenna	HFH2-Z2	872096/25 (C-2)	Rohde & Schwarz	2017/07/21
RF Cable	RG213/U	--- (H-28)	HUBER+SUHNER	2017/07/21
Pre-Amplifier	310N	304573 (A-17)	SONOMA	2017/04/03
Biconical Antenna	VHA9103/BBA9106	2355 (C-30)	Schwarzbeck	2017/05/18
Log-periodic Antenna	UHALP9108-A1	0694 (C-31)	Schwarzbeck	2017/05/18
RF Cable	S 10162 B-11 etc.	--- (H-4)	HUBER+SUHNER	2017/04/03
Pre-Amplifier	TPA0118-36	1010 (A-37)	TOYO	2017/05/17
Horn Antenna	91888-2	562 (C-41-1)	EATON	2017/06/12
Horn Antenna	91889-2	568 (C-41-2)	EATON	2017/06/12
Horn Antenna	3160-04	9903-1053 (C-55)	EMCO	2017/06/13
Horn Antenna	3160-05	9902-1061 (C-56)	EMCO	2017/06/13
Horn Antenna	3160-06	9712-1045 (C-57)	EMCO	2017/06/13
Horn Antenna	3160-07	9902-1113 (C-58)	EMCO	2017/06/13
Horn Antenna	3160-08	9904-1099 (C-59)	EMCO	2017/06/13
Horn Antenna	3160-09	9808-1117 (C-48)	EMCO	2017/06/15
Attenuator	54A-10	W5713 (D-29)	Weinschel	2016/08/16
Attenuator	2-10	BA6214 (D-79)	Weinschel	2016/11/19
RF Cable	SUCOFLEX104	267479/4 (C-66)	HUBER+SUHNER	2017/01/06
RF Cable	SUCOFLEX104	267414/4 (C-67)	HUBER+SUHNER	2017/01/06
RF Cable	SUCOFLEX102EA	3041/2EA (C-69)	HUBER+SUHNER	2017/01/06
Band Rejection Filter	BRM50701	029 (D-93)	MICRO-TRONICS	2017/02/17

NOTE : The calibration interval of the above test instruments is 12 months.

### 7.9.3 Test Method and Test Setup (Diagrammatic illustration)

#### 7.9.3.1 Radiated Emission 9 kHz – 30 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.


The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

The measurement were performed about three antenna orientations (parallel, perpendicular, and ground-parallel).

According to KDB 937606, a used anechoic chamber were equivalent to those on an open fields site based on comparison measurements.

This configurations was used for the final tests.

– Side View –

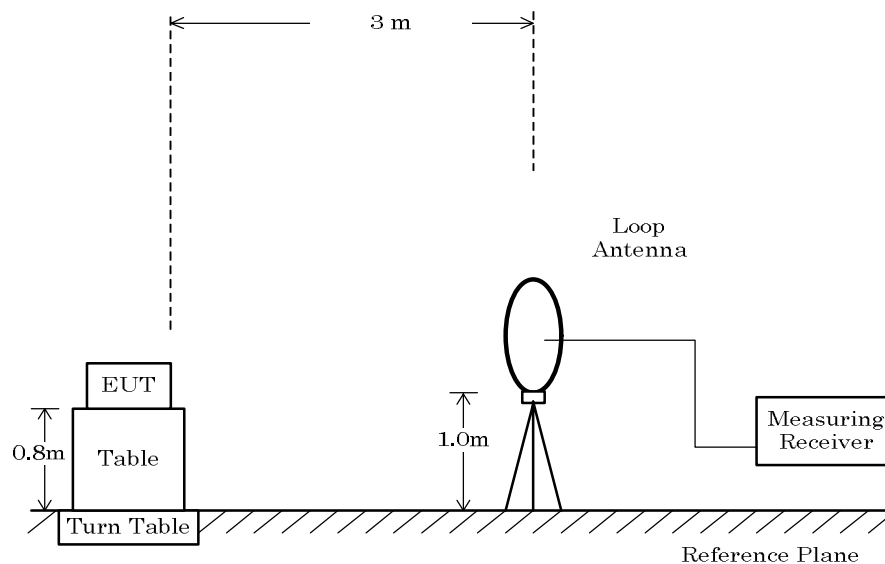




### 7.9.3.2 Radiated Emission 30 MHz – 1000 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

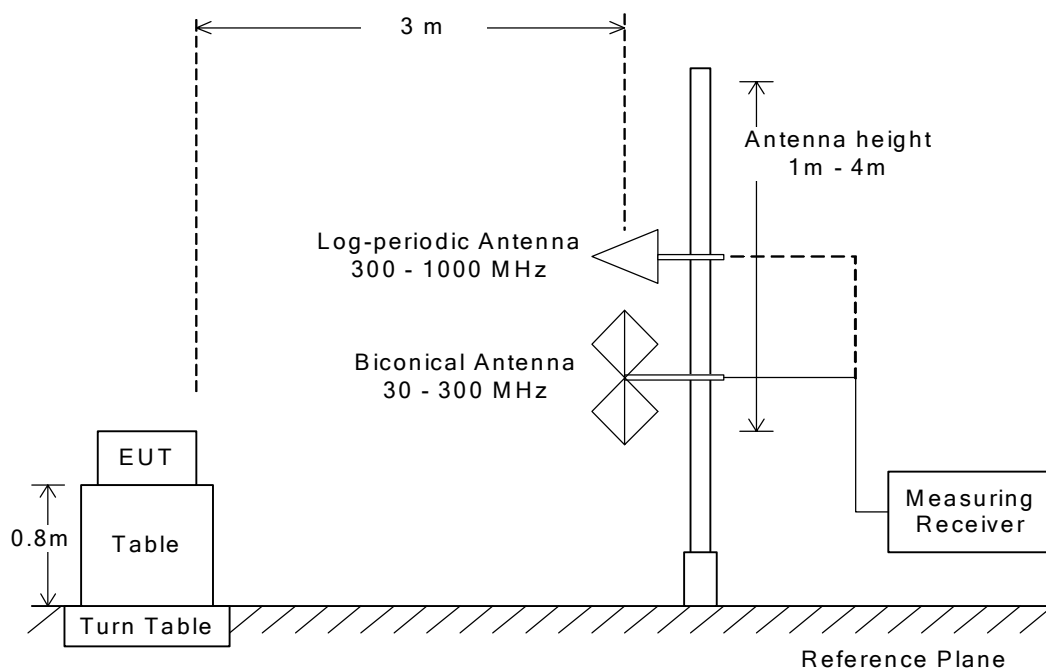

### 7.9.3.3 Radiated Emission above 1 GHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

The setting of the measuring instruments are shown as follows:


Type	Peak	Average
Detector Function	Peak	Peak
Res. Bandwidth	1 MHz	1 MHz
Video Bandwidth	3 MHz	$\geq 1/T *1)$
Video Filtering	Linear Voltage	Linear Voltage
Sweep Time	AUTO	AUTO
Trace	Max Hold	Max Hold

Note: 1. T: Minimum transmission duration

Average (VBW) Setting:

Mode	Interval (msec)	Cycle (msec)	Duty cycle (%)	Burst on period(T) (msec)	Min. VBW(1/T) (kHz)	VBW Setting (kHz))
IEEE802.11b(11Mbps)	0.02	0.94	97.9%	0.92	1.09	2.00
IEEE802.11g(48Mbps)	0.02	0.21	90.5%	0.19	5.26	10.00
IEEE802.11n HT20(MCS3)	0.02	0.37	94.6%	0.35	2.86	3.00
Bluetooth LE	0.24	0.63	61.9%	0.39	2.56	3.00

– Side View –

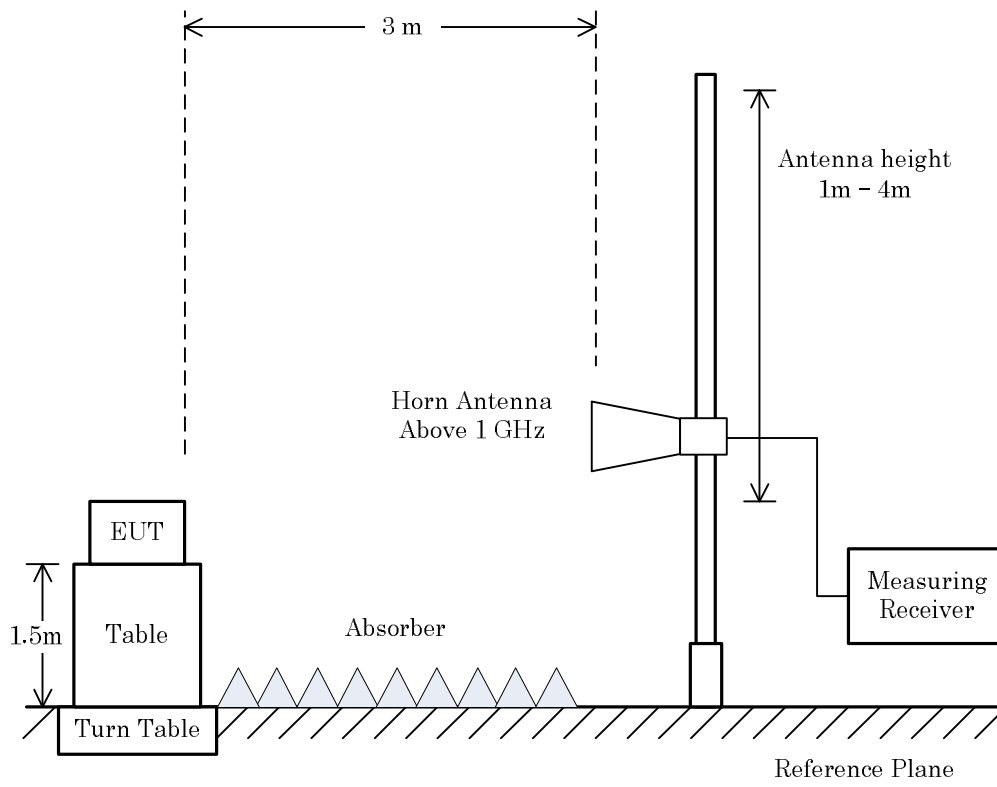

**NOTE**

When the EUT is manipulated through three different orientations, the scan height upper range for the measurement antenna is limited to 2.5 m or 0.5 m above the top of the EUT.

## 7.9.4 Test Data


### 7.9.4.1 Band-edge Compliance

Test Date : July 20, 2016

Temp.: 26°C, Humi: 68%

Mode of EUT : 1ch: 2412 MHz, (IEEE 802.11b)


Antenna Polarization : Horizontal

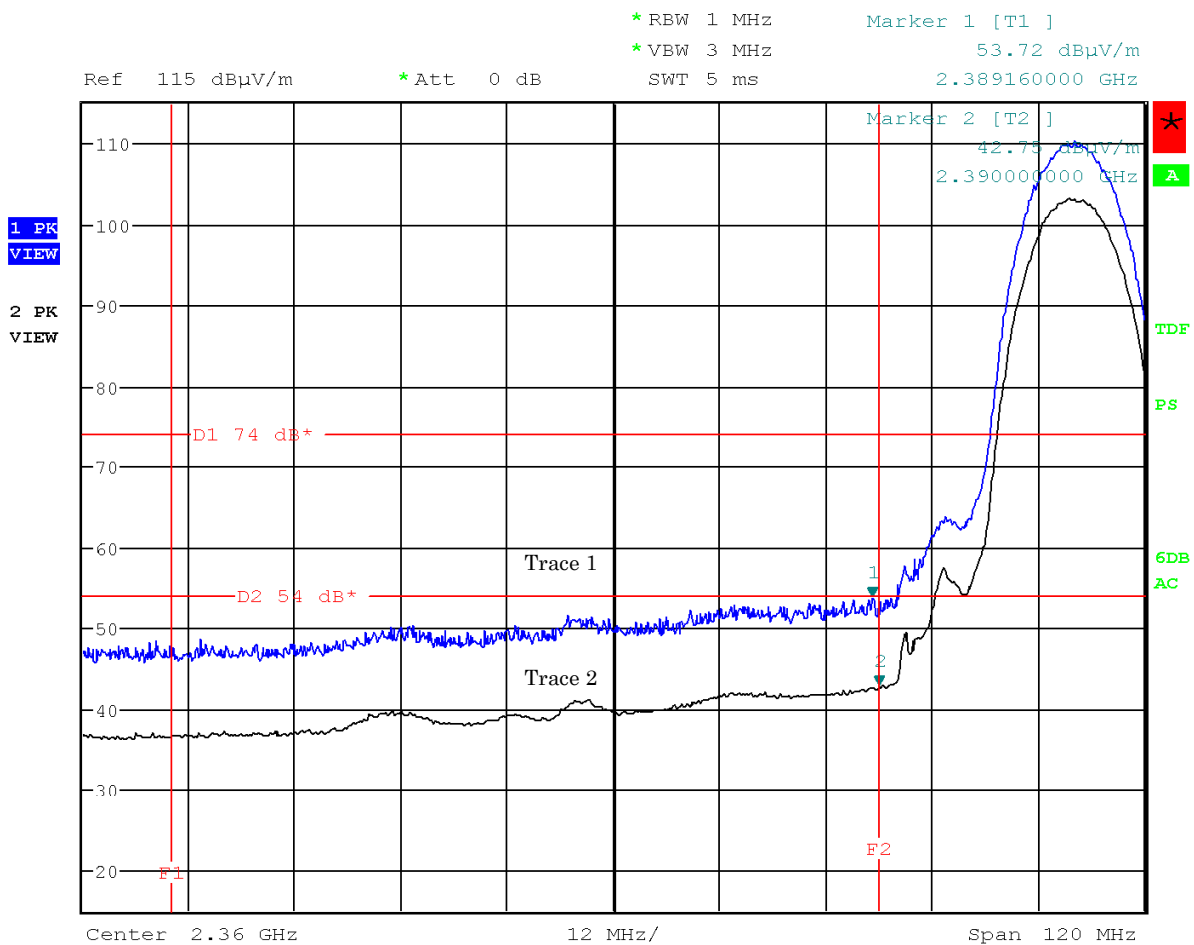

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 1ch: 2412 MHz, (IEEE 802.11b)


Antenna Polarization : Vertical

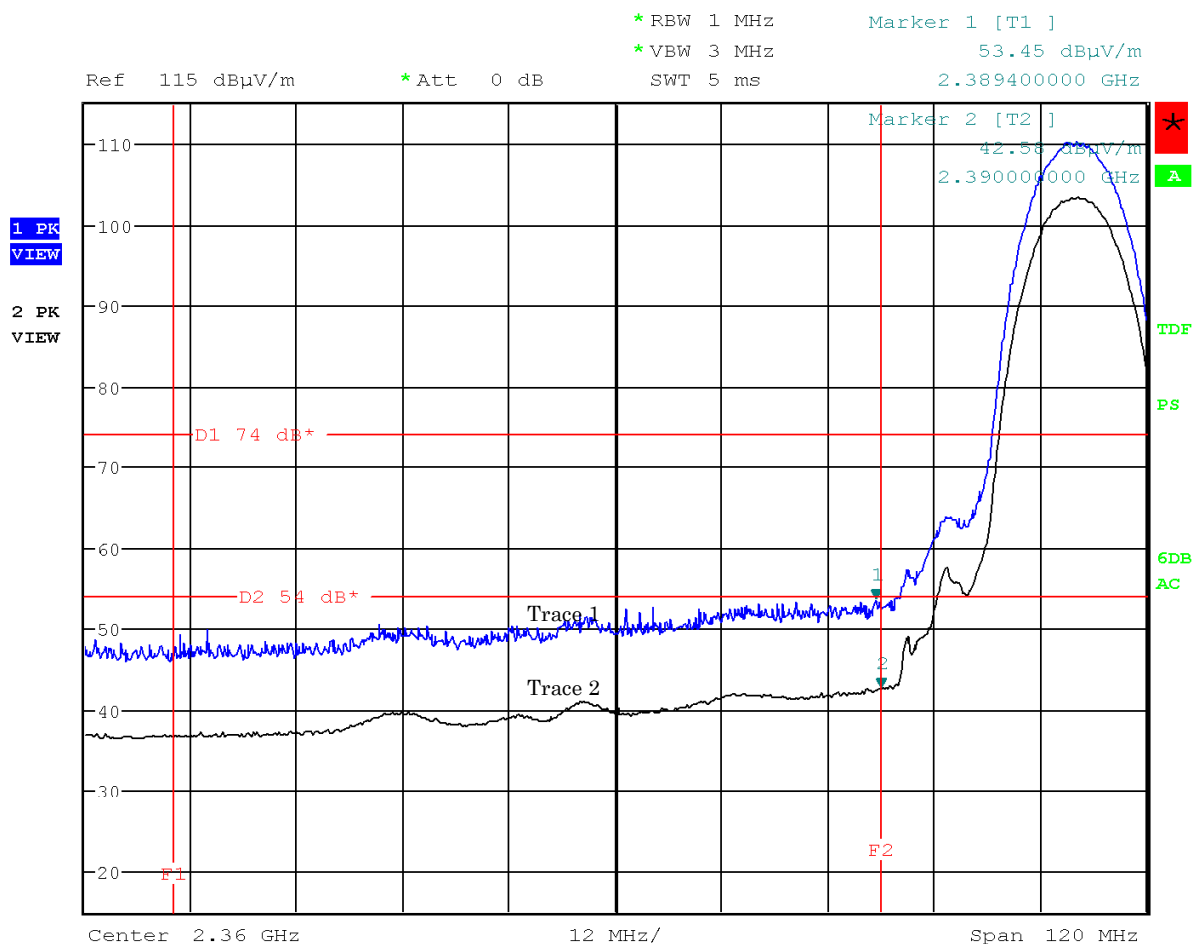

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 11ch: 2462 MHz, (IEEE 802.11b)


Antenna Polarization : Horizontal

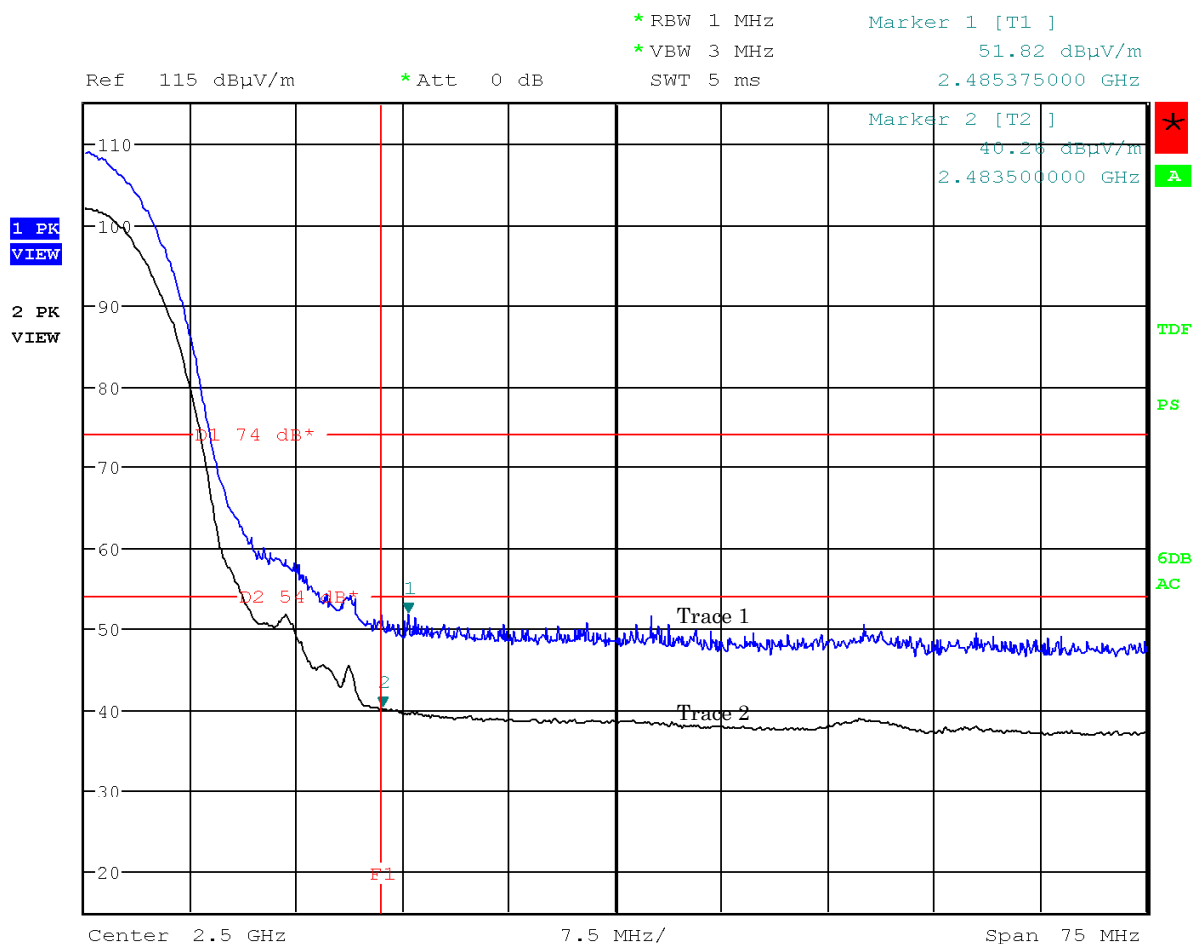

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 11ch: 2462 MHz, (IEEE 802.11b)


Antenna Polarization : Vertical

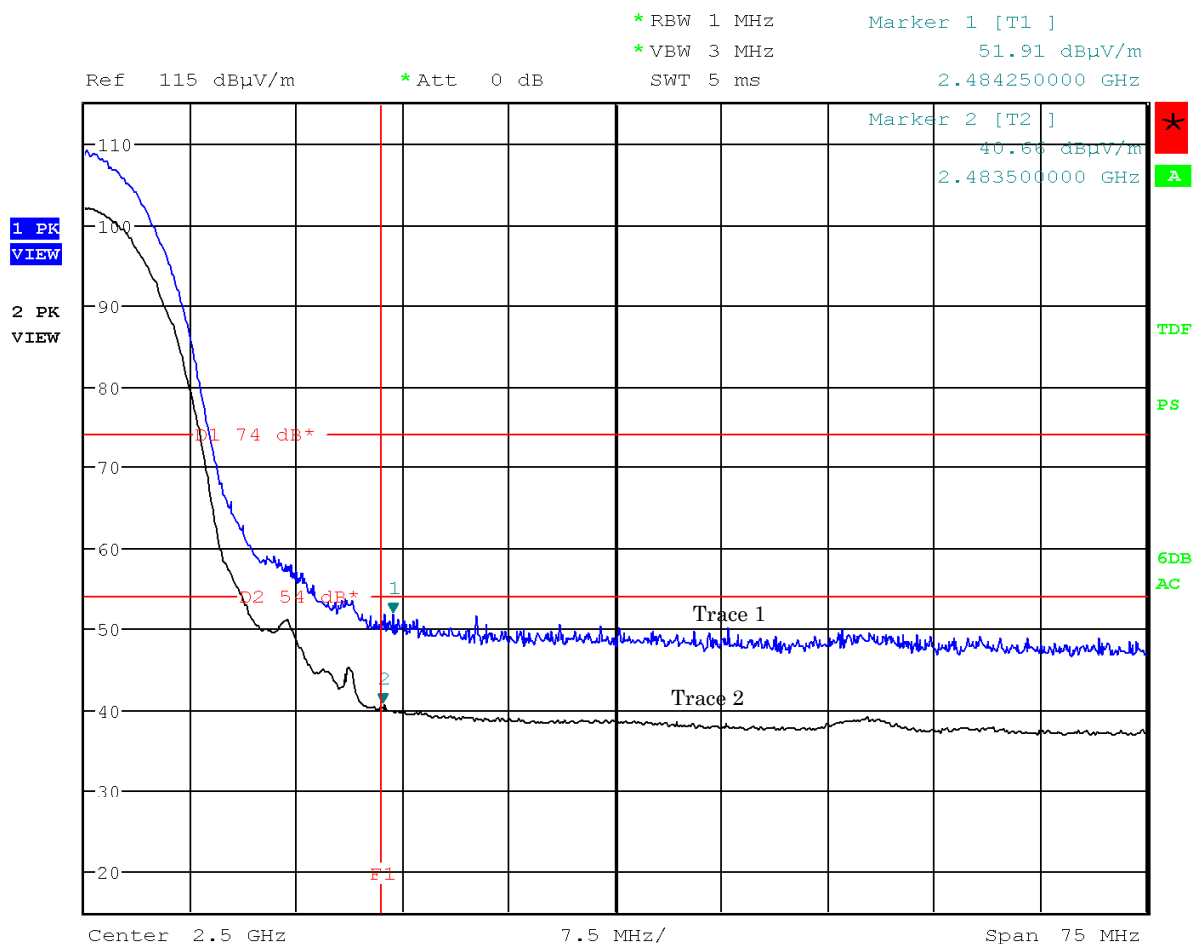

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 1ch: 2412 MHz, (IEEE 802.11g)

Antenna Polarization : Horizontal

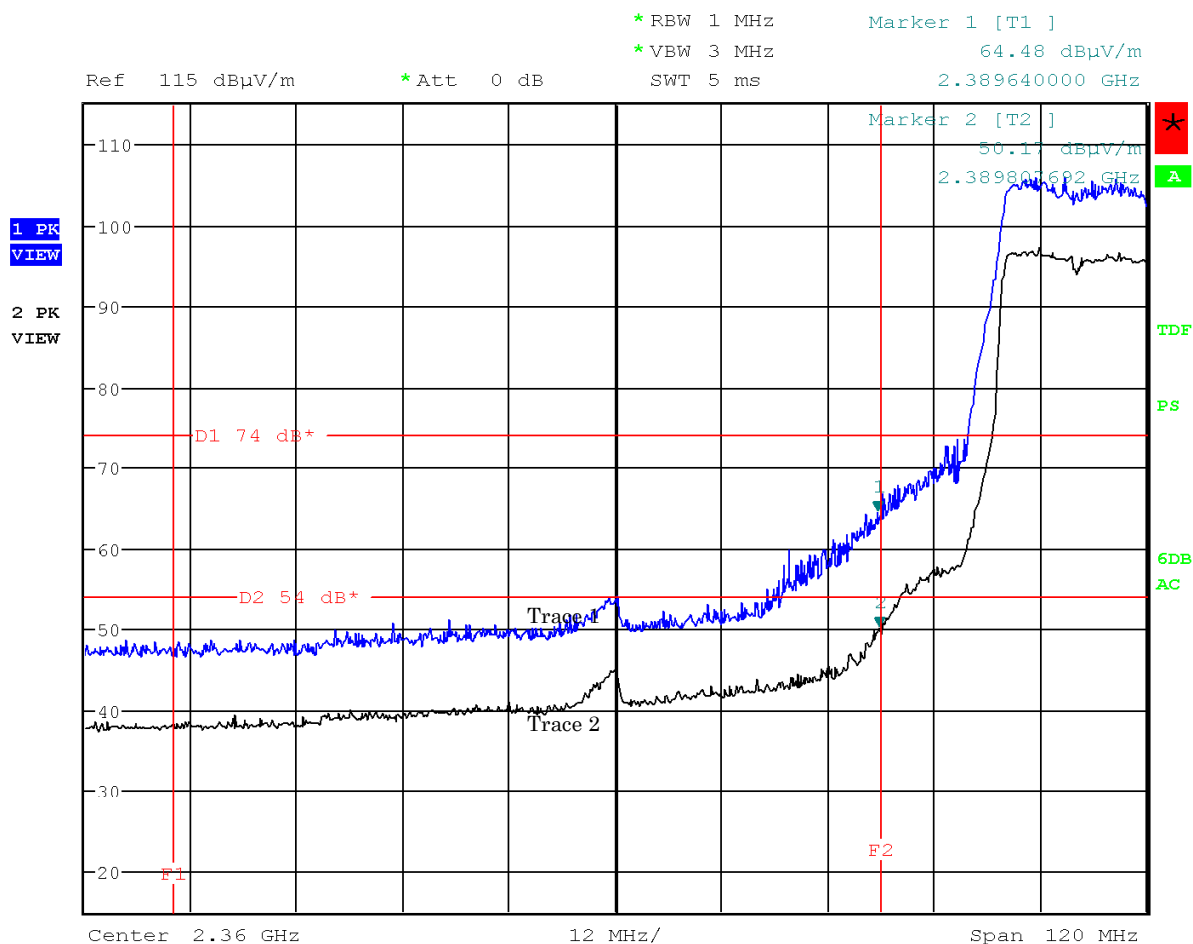


Note: The trace 1 is Peak . The trace 2 is Average.



Mode of EUT : 1ch: 2412 MHz, (IEEE 802.11g)


Antenna Polarization : Vertical

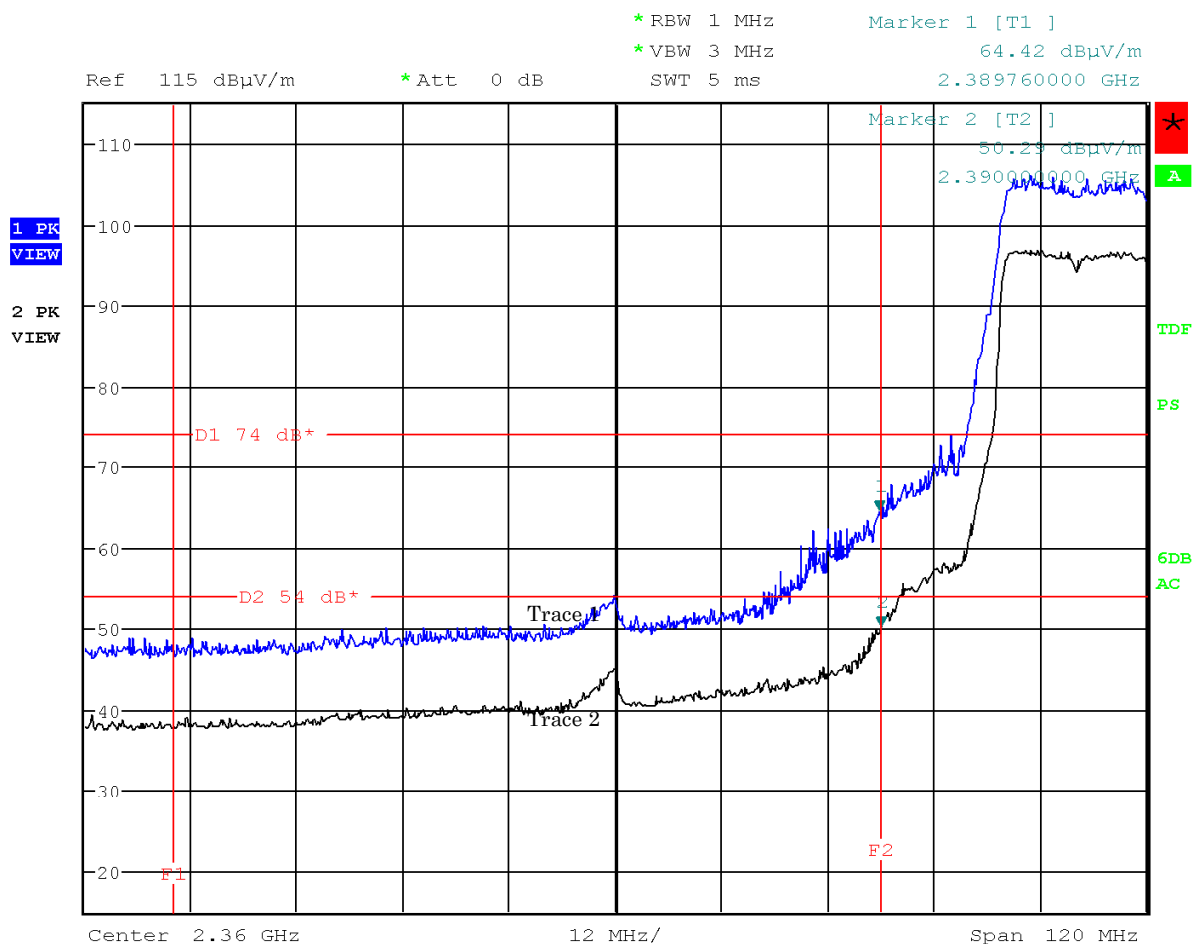

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 11ch: 2462 MHz, (IEEE 802.11g)


Antenna Polarization : Horizontal

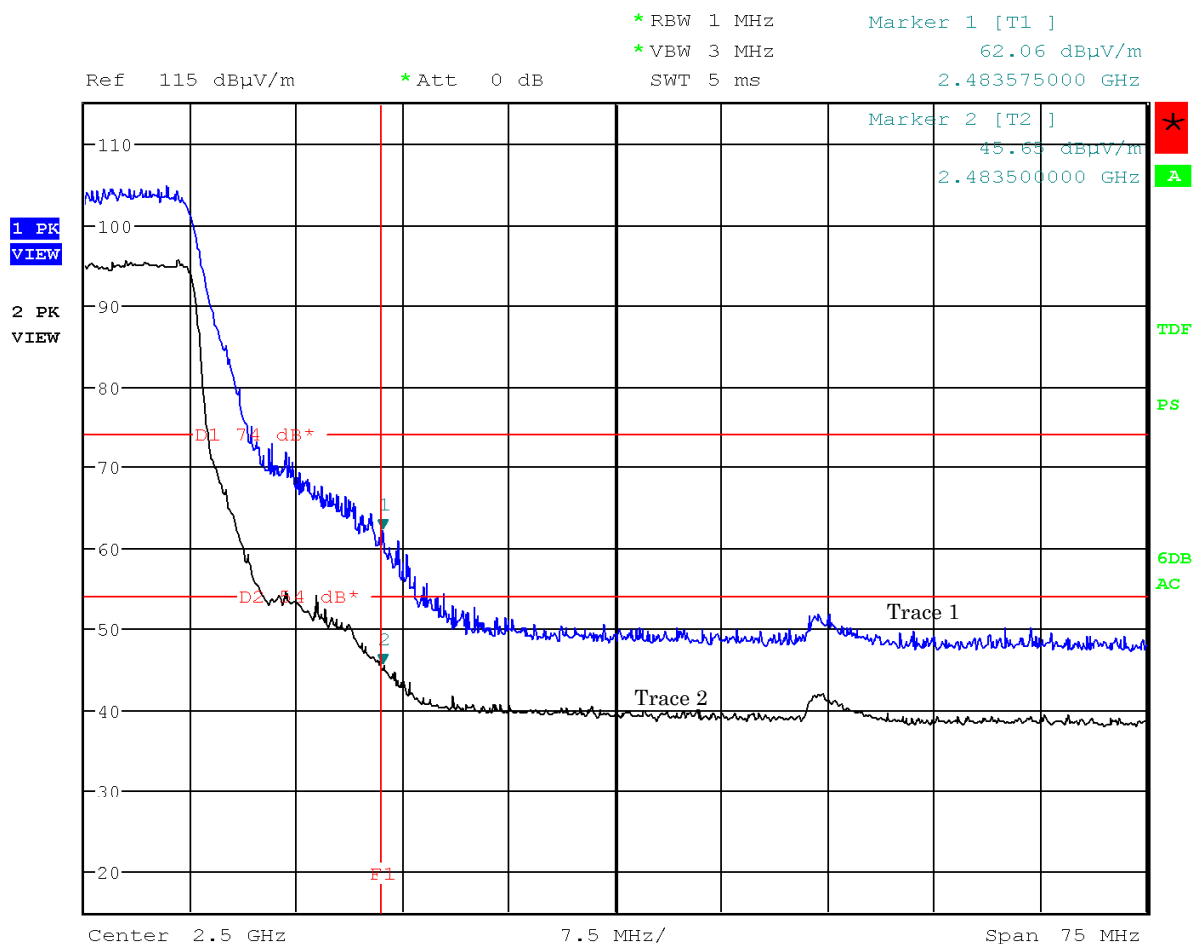

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 11ch: 2462 MHz, (IEEE 802.11g)


Antenna Polarization : Vertical

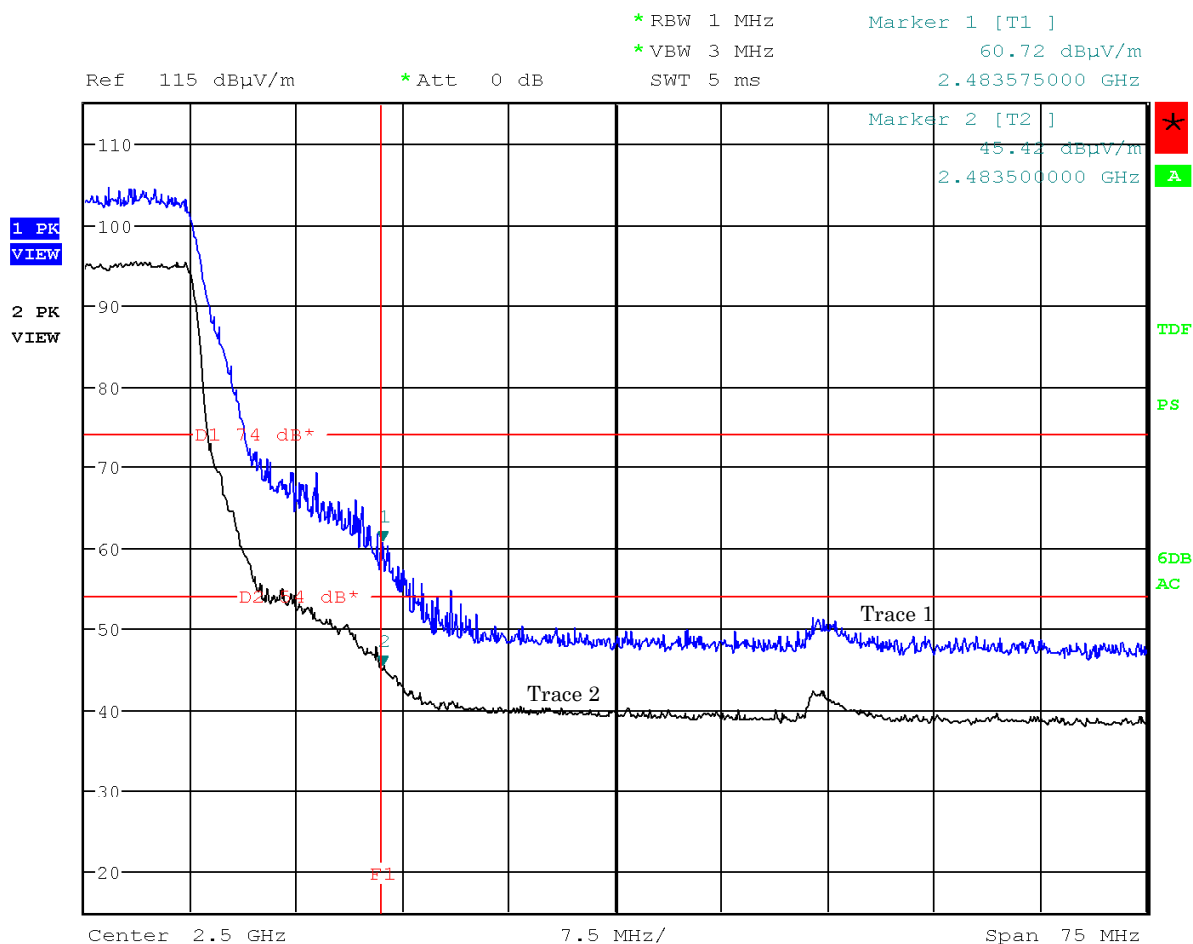

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 1ch: 2412 MHz, (IEEE 802.11n)


Antenna Polarization : Horizontal

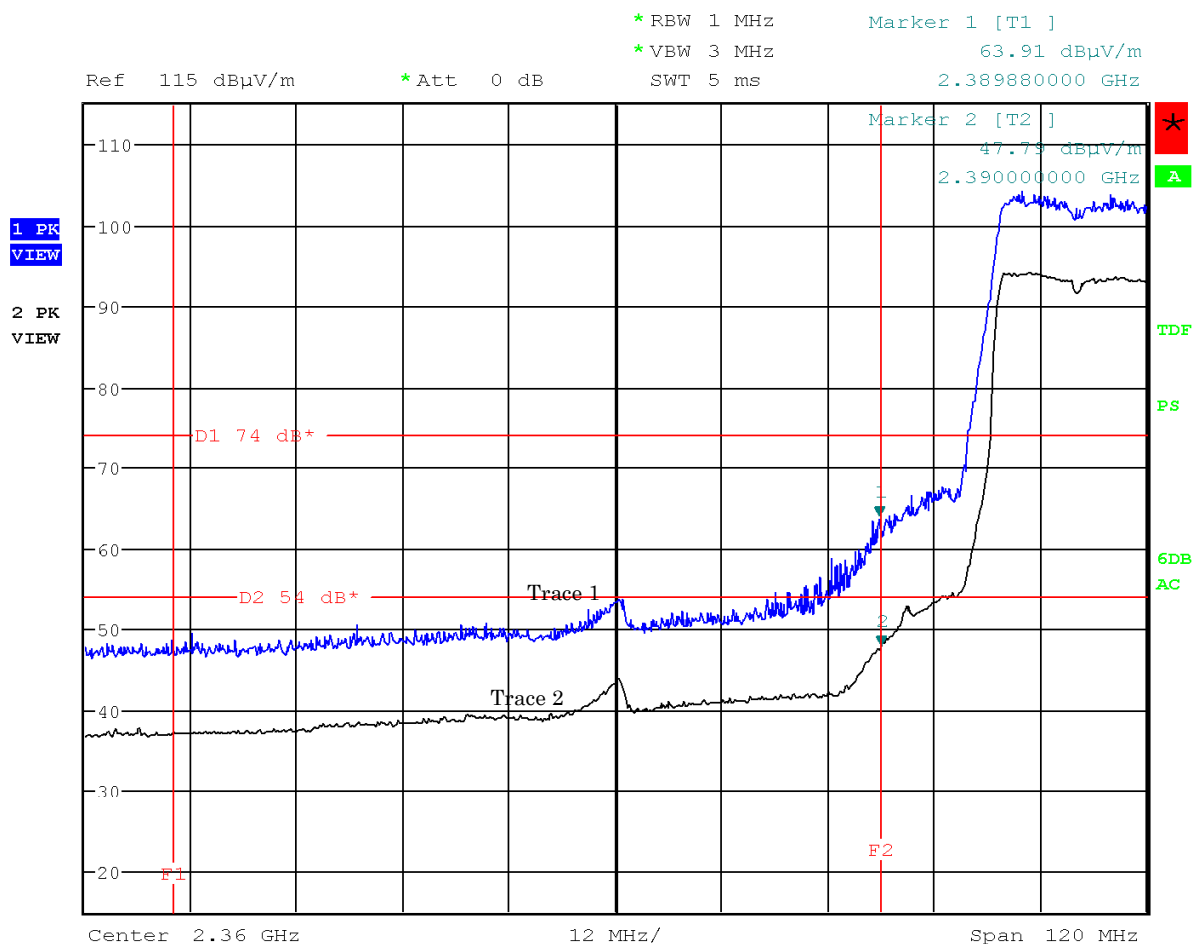

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 1ch: 2412 MHz, (IEEE 802.11n)


Antenna Polarization : Vertical

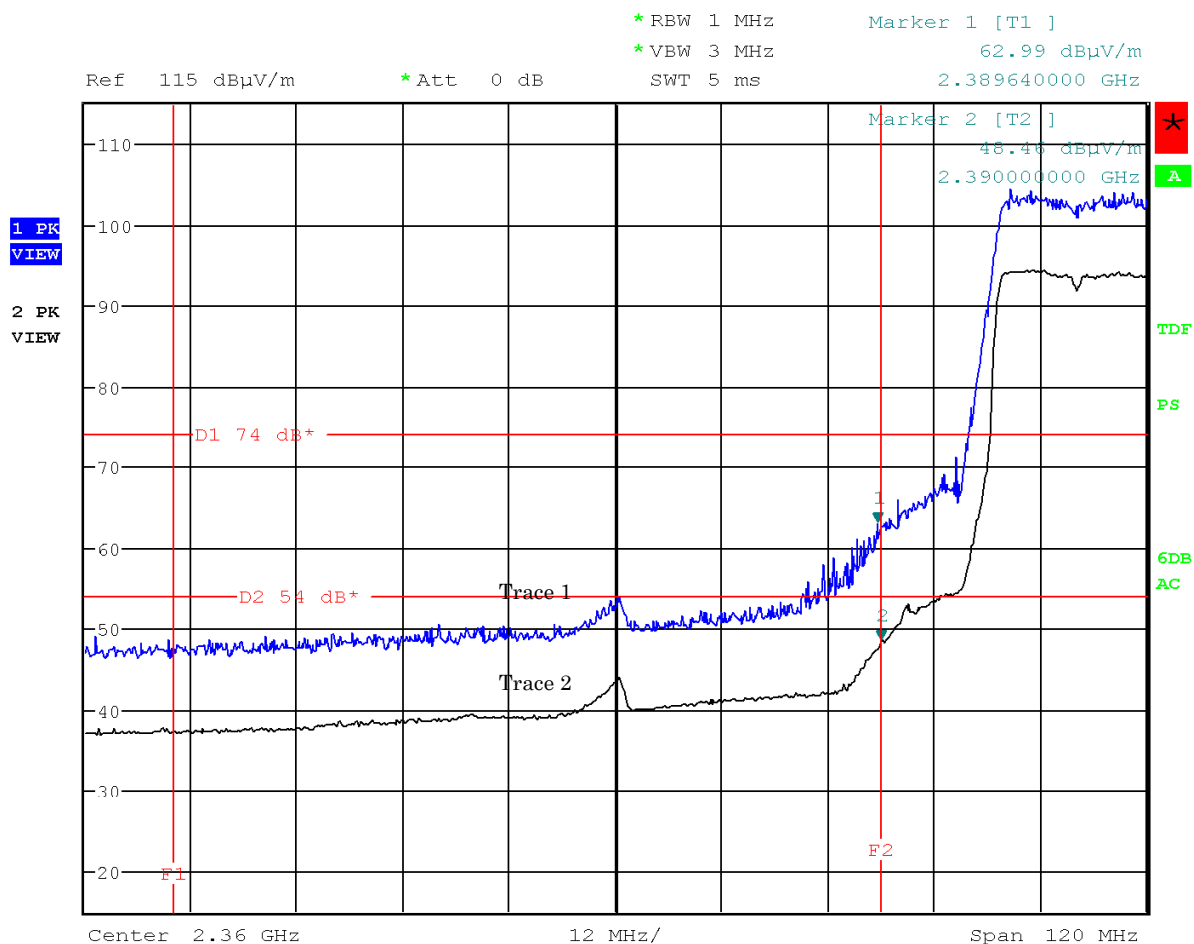

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 11ch: 2462 MHz, (IEEE 802.11n)


Antenna Polarization : Horizontal

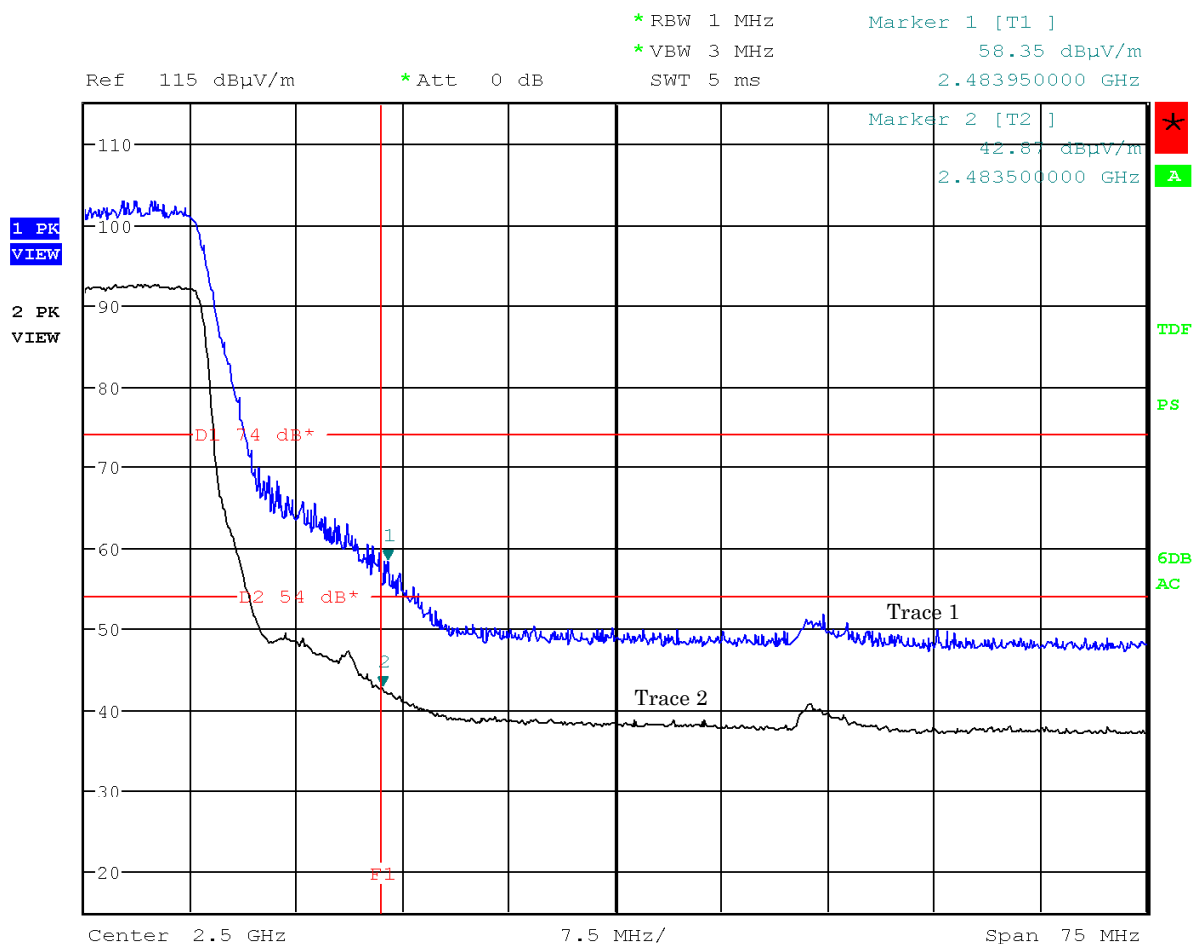

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 11ch: 2462 MHz, (IEEE 802.11n)

Antenna Polarization : Vertical

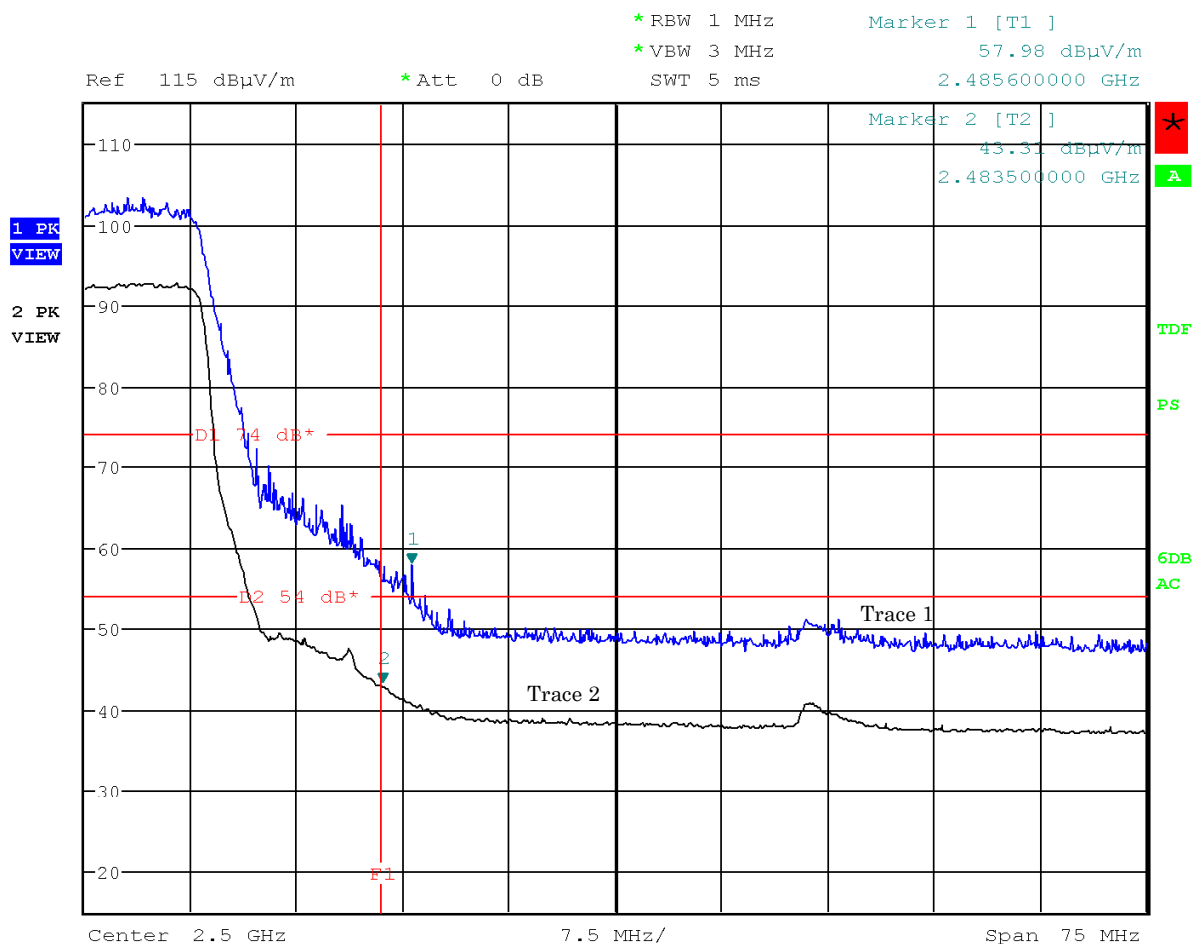


Note: The trace 1 is Peak . The trace 2 is Average.

Test Date : June 20, 2016

Temp.: 26°C, Humi: 68%

Mode of EUT : Bluetooth Low Energy, Hopping off (0ch: 2402 MHz)

Antenna Polarization : Horizontal

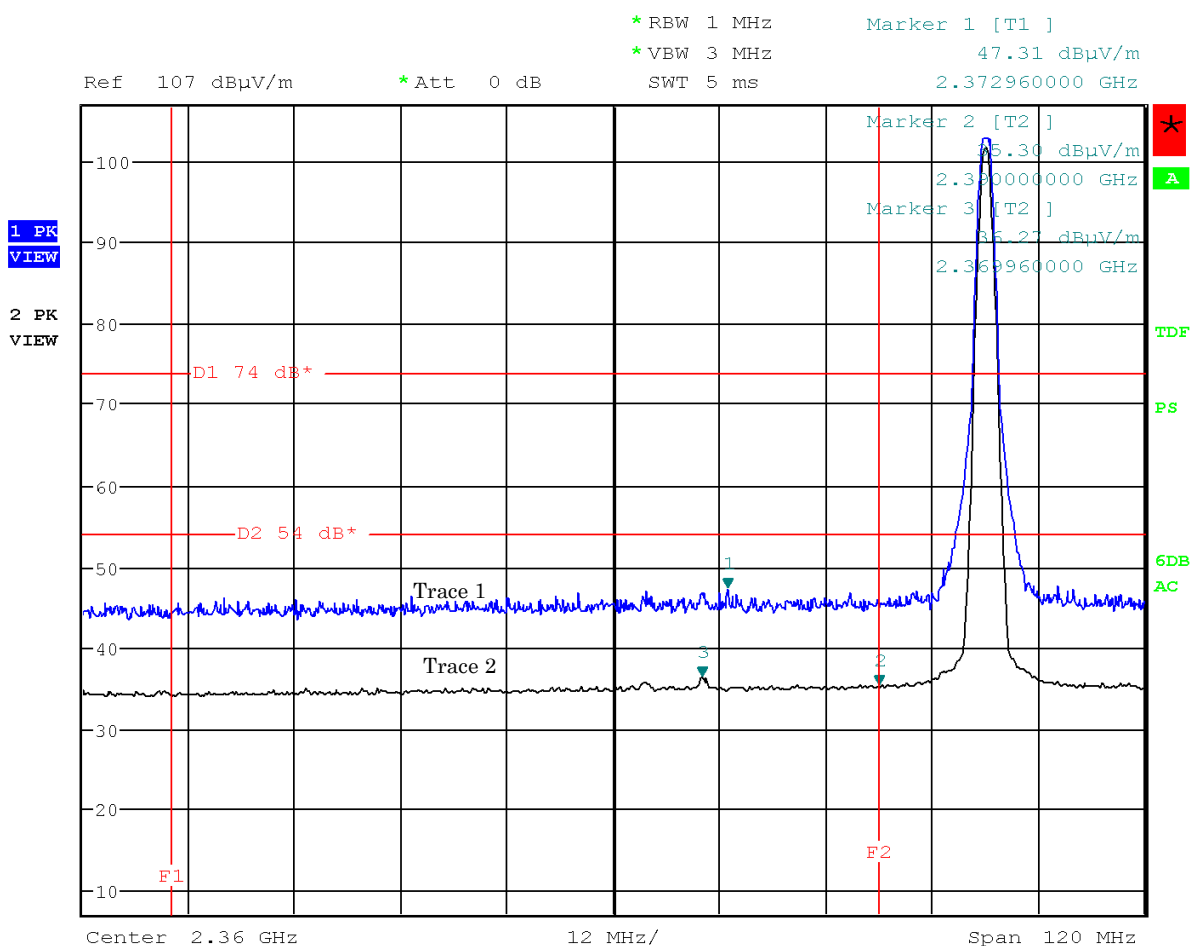


Note: The trace 1 is Peak . The trace 2 is Average.



Mode of EUT : Bluetooth Low Energy, Hopping off (0ch: 2402 MHz)


Antenna Polarization : Vertical

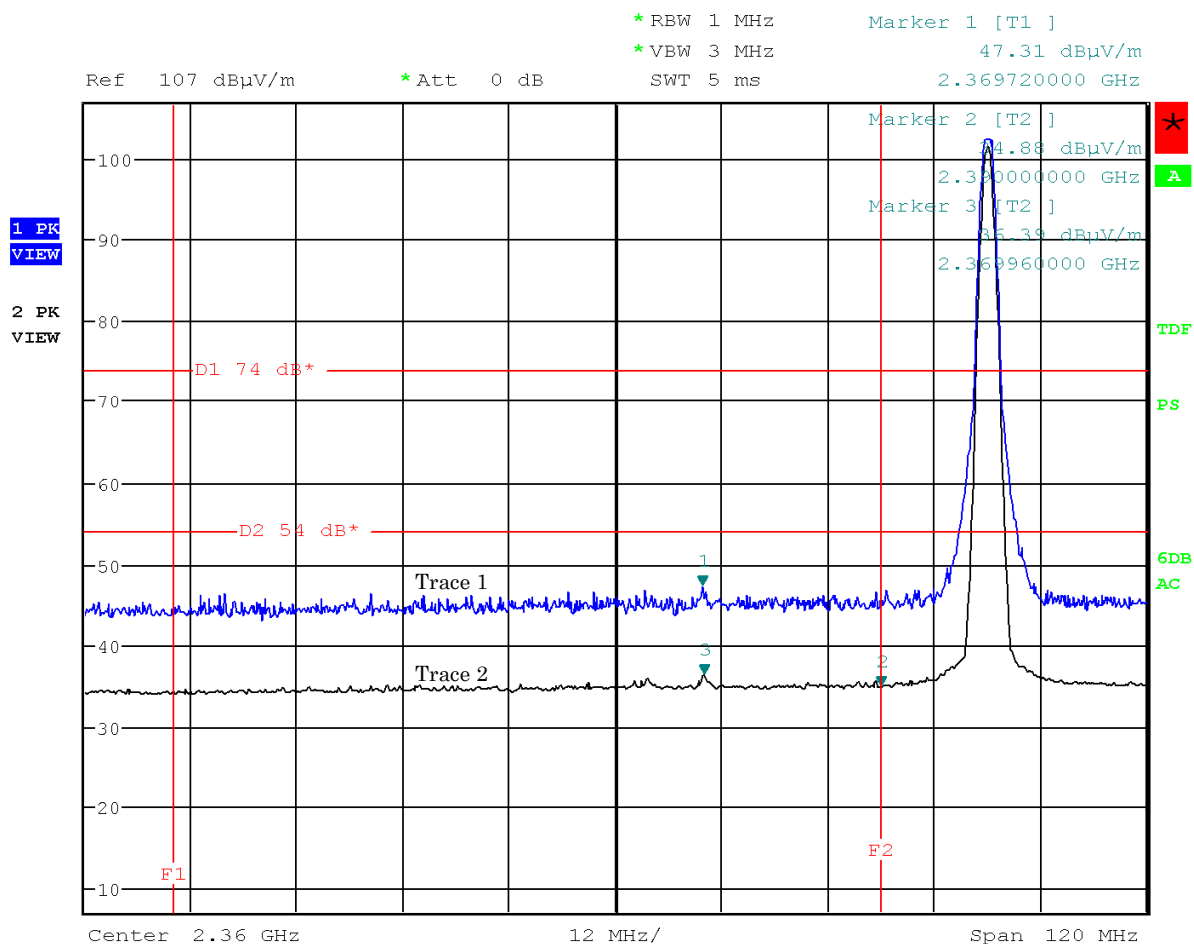

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : Bluetooth Low Energy, Hopping off (39ch: 2480 MHz)


Antenna Polarization : Horizontal

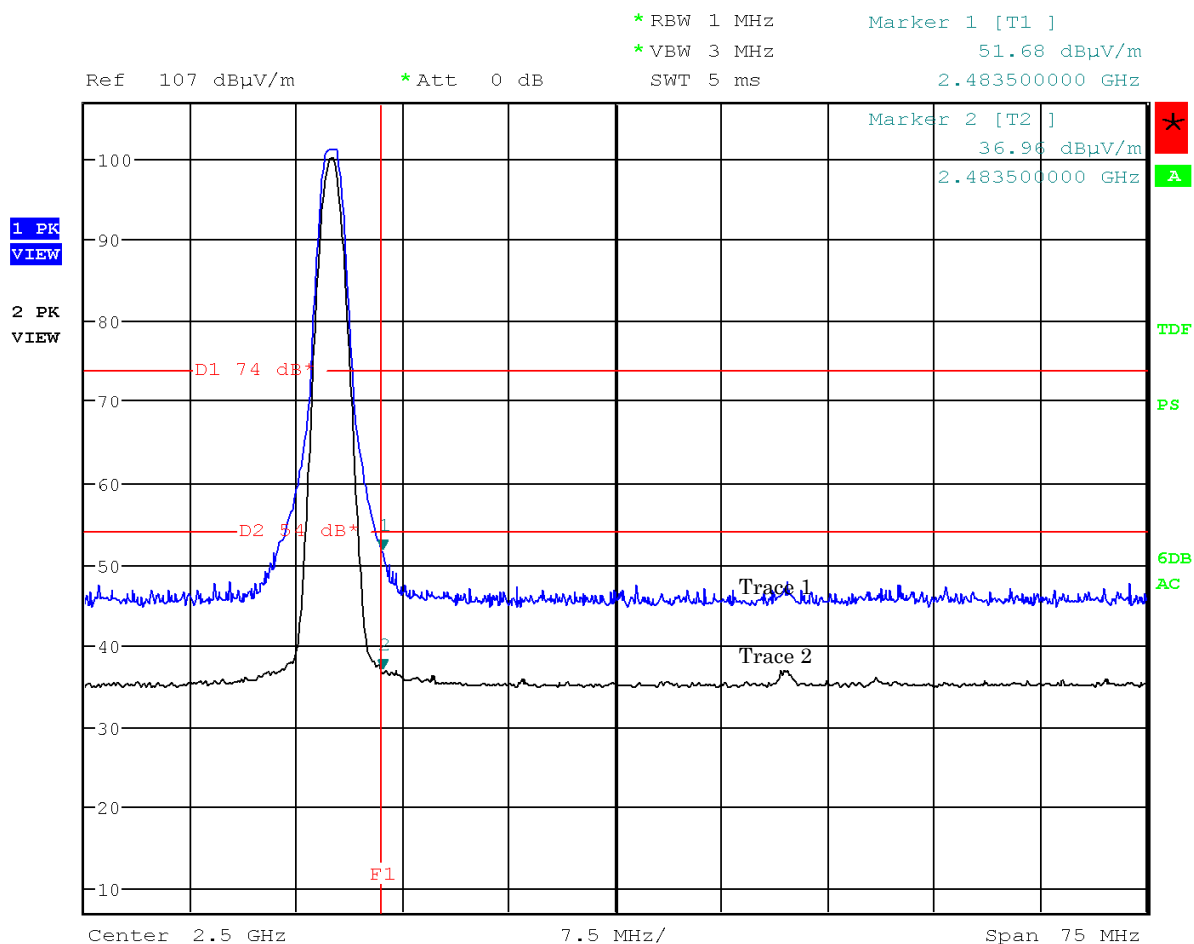

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : Bluetooth Low Energy, Hopping off (39ch: 2480 MHz)

Antenna Polarization : Vertical

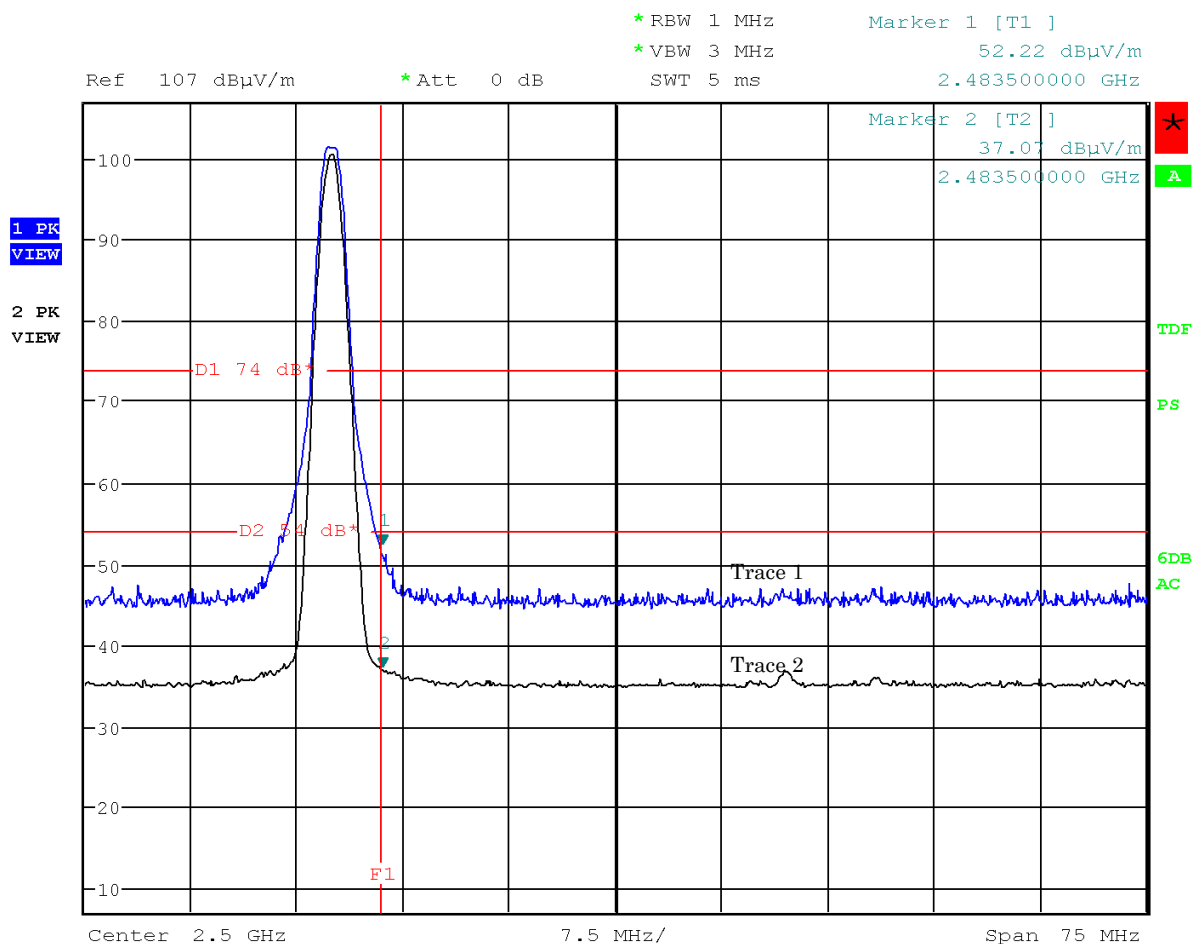

Note: The trace 1 is Peak . The trace 2 is Average.

## 7.9.4.2 Other Spurious Emission (9kHz – 30MHz)

Test Date : July 28, 2016

Temp.:25°C, Humi:75%

Mode of EUT : WLAN/Bluetooth LE

Results : No spurious emissions in the range 20dB below the limit.

## 7.9.4.3 Other Spurious Emission (30MHz – 1000MHz)


Mode of EUT : (WLAN) All modes have been investigated and the worst case mode for channel (06ch: 2437MHz / IEEE802.11b, IEEE802.11g and IEEE802.11n) has been listed.

Test Date: July 28, 2016

Temp.: 25 °C, Humi: 75 %

Antenna pole : Horizontal

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
125.49	13.5	-26.5	39.0	43.5	26.0	+17.5	-
230.07	17.0	-25.7	43.4	46.0	34.7	+11.3	-
250.98	17.2	-25.5	42.7	46.0	34.4	+11.6	-
292.81	18.7	-25.3	36.9	46.0	30.3	+15.7	-
313.73	14.1	-25.1	41.7	46.0	30.7	+15.3	-
376.47	15.6	-24.8	37.7	46.0	28.5	+17.5	-

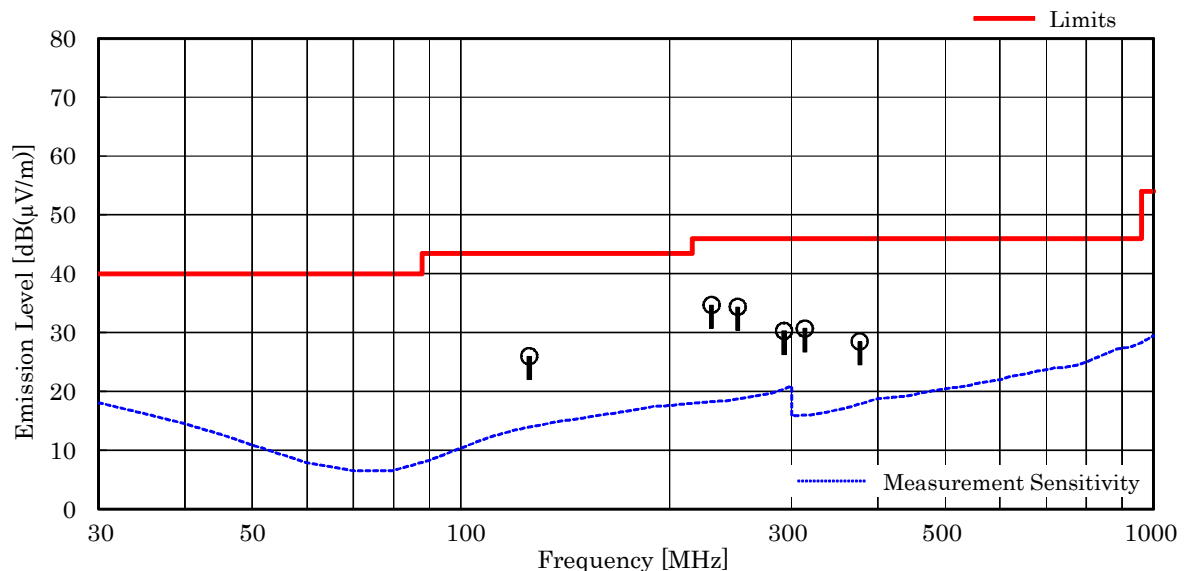


### NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 230.07 MHz, as the worst point shown on underline:  
 Antenna Factor + Correction Factor + Meter Reading = 17.0 + (-25.7) + 43.4 = 34.7 dB(μV/m)  
 Antenna Height : 141 cm, Turntable Angle : 109 °
7. Test receiver setting(s) : CISPR QP 120 kHz [QP : Quasi-Peak]

Test Date: July 28, 2016  
Temp.: 25 °C, Humi: 75 %

# Antenna pole : Vertical

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
125.49	13.5	-26.5	37.3	43.5	24.3	+19.2	-
230.07	17.0	-25.7	37.9	46.0	29.2	+16.8	-
250.98	17.2	-25.5	37.3	46.0	29.0	+17.0	-
292.81	18.7	-25.3	30.1	46.0	23.5	+22.5	-
313.73	14.1	-25.1	36.9	46.0	25.9	+20.1	-
376.47	15.6	-24.8	36.9	46.0	27.7	+18.3	-

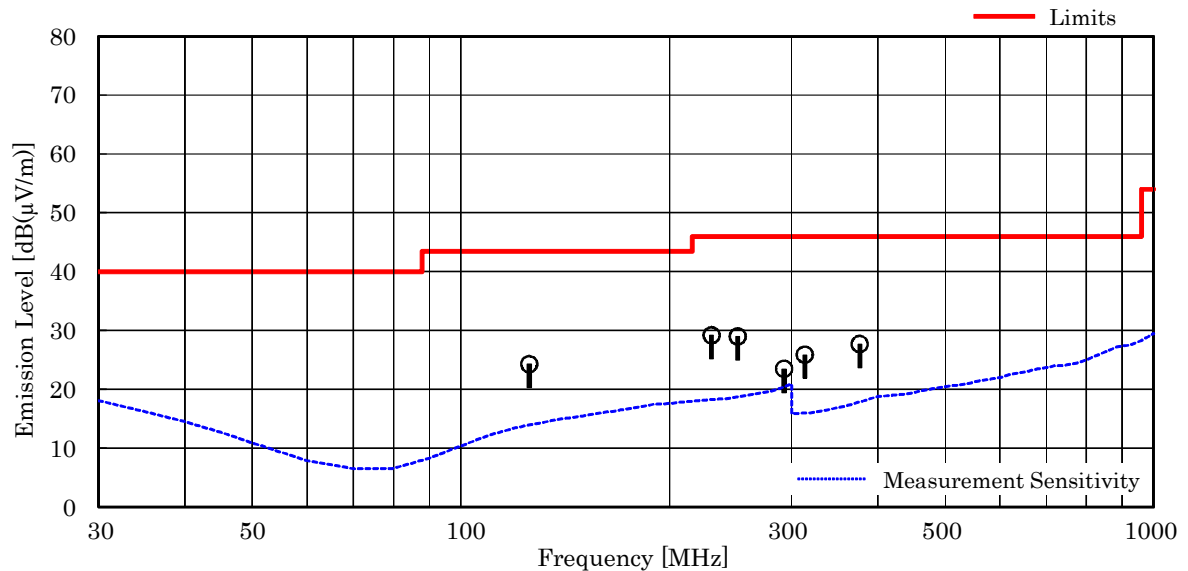

## NOTES

- Test Distance : 3 m
- The spectrum was checked from 30 MHz to 1000 MHz.
- The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Calculated result at 230.07 MHz, as the worst point shown on underline:  
Antenna Factor + Correction Factor + Meter Reading = 17.0 + (-25.7) + 37.9 = 29.2 dB(μV/m)  
Antenna Height : 204 cm, Turntable Angle : 177 °
- Test receiver setting(s) : CISPR QP 120 kHz [QP : Quasi-Peak]


Mode of EUT : Bluetooth Low Energy

Test Date: July 28, 2016

Temp.: 25 °C, Humi: 75 %

Antenna pole : Horizontal

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
125.49	13.5	-26.5	38.8	43.5	25.8	+17.7	-
230.07	17.0	-25.7	42.7	46.0	34.0	+12.0	-
250.98	17.2	-25.5	43.1	46.0	34.8	+11.2	-
292.81	18.7	-25.3	36.3	46.0	29.7	+16.3	-
313.73	14.1	-25.1	40.3	46.0	29.3	+16.7	-
376.47	15.6	-24.8	35.3	46.0	26.1	+19.9	-

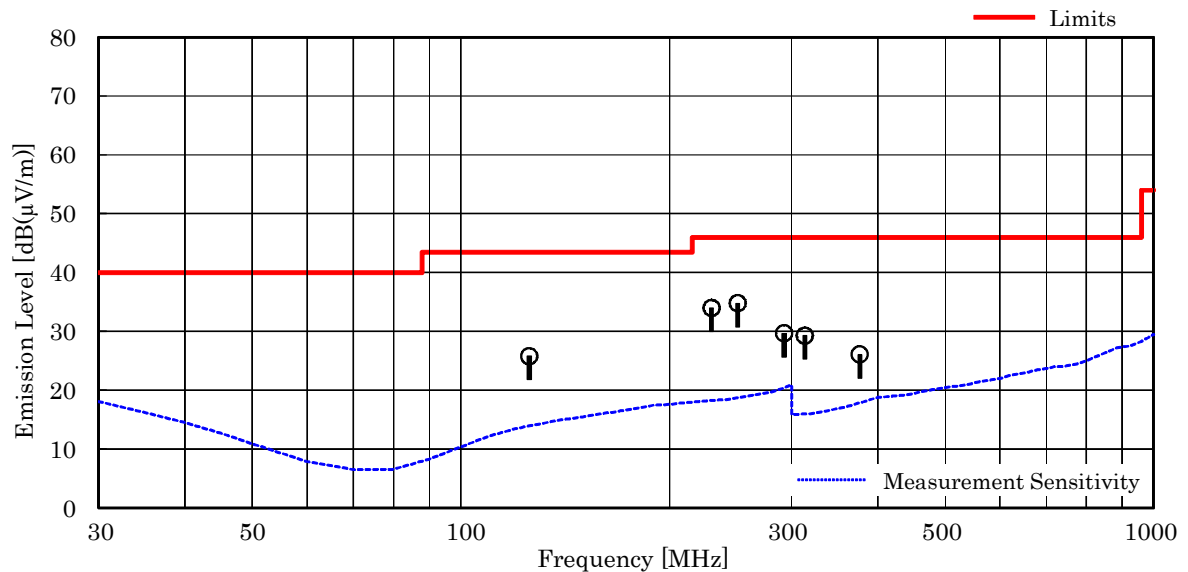


#### NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 250.98 MHz, as the worst point shown on underline:  
Antenna Factor + Correction Factor + Meter Reading = 17.2 + (-25.5) + 43.1 = 34.8 dB(μV/m)  
Antenna Height : 133 cm, Turntable Angle : 124 °
7. Test receiver setting(s) : CISPR QP 120 kHz [QP : Quasi-Peak]

Test Date: July 28, 2016  
Temp.: 25 °C, Humi: 75 %

Antenna pole : Vertical

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
125.49	13.5	-26.5	36.9	43.5	23.9	+19.6	-
230.07	17.0	-25.7	37.1	46.0	28.4	+17.6	-
250.98	17.2	-25.5	37.9	46.0	29.6	+16.4	-
292.81	18.7	-25.3	31.9	46.0	25.3	+20.7	-
313.73	14.1	-25.1	35.7	46.0	24.7	+21.3	-
376.47	15.6	-24.8	34.7	46.0	25.5	+20.5	-

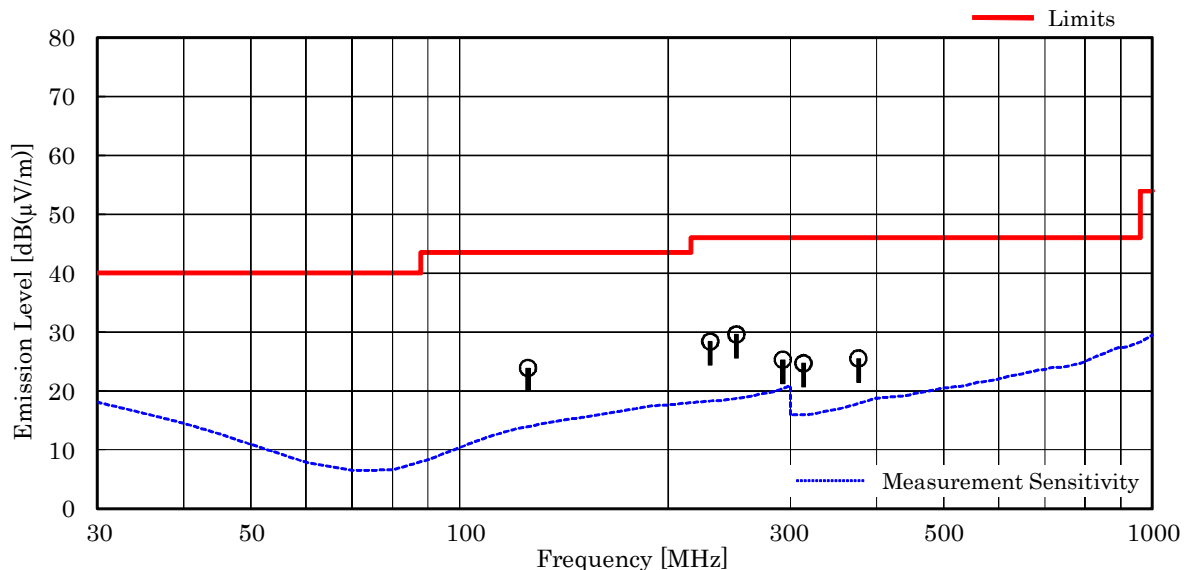

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 250.98 MHz, as the worst point shown on underline:  
Antenna Factor + Correction Factor + Meter Reading = 17.2 + (-25.5) + 37.9 = 29.6 dB(μV/m)  
Antenna Height : 202 cm, Turntable Angle : 175 °
7. Test receiver setting(s) : CISPR QP 120 kHz [QP : Quasi-Peak]

### 7.9.4.4 Other Spurious Emission (Above 1000MHz)

Mode of EUT : IEEE802.11b

Test Date: July 21, 2016

Temp.: 25 °C, Humi: 68 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx Low Ch												
4824.0	27.0	-15.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
12060.0	33.4	-25.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.9	< 35.9	> +18.1	
14472.0	37.0	-26.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.8	< 38.8	> +15.2	
19296.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
Test condition : TX Middle Ch												
4874.0	27.0	-15.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
7311.0	29.9	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.8	< 41.8	> +12.2	
12185.0	33.3	-25.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.6	< 35.6	> +18.4	
19496.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
Test condition : TX High Ch												
4924.0	27.0	-15.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7386.0	29.8	-16.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.6	< 41.6	> +12.4	
12310.0	33.3	-26.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.3	< 35.3	> +18.7	
19696.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
22158.0	40.6	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.3	< 37.3	> +16.7	

Calculated result at 7311.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.9 dB(1/m)
Corr. Factor	=	-16.1 dB
+ ) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.8 dB(μV/m)


Minimum Margin: 54.0 - <41.8 = >12.2 (dB)

#### NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
  - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
  - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
  - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average



Mode of EUT : IEEE802.11b  
TX Low/Middle/High ch (Horizontal/Vertical)

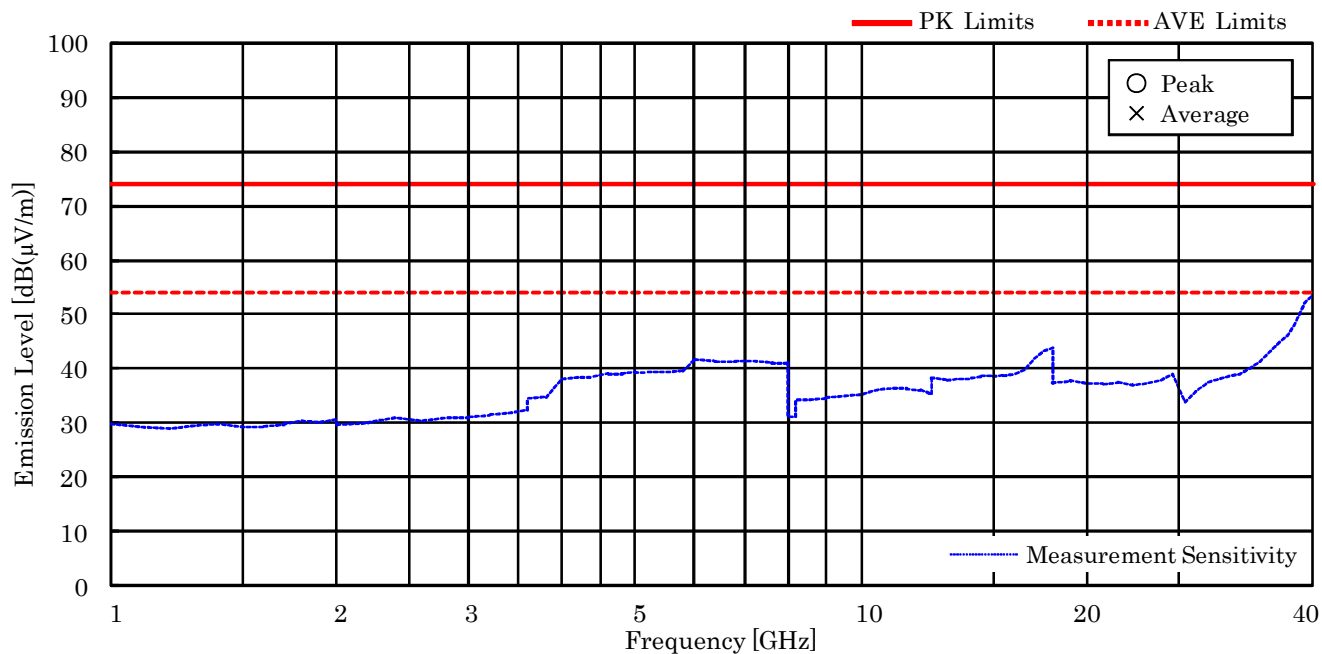

Mode of EUT : IEEE802.11g

Test Date: July 21, 2016

Temp.: 25 °C, Humi: 68 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx Low Ch												
4824.0	27.0	-15.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
12060.0	33.4	-25.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.9	< 35.9	> +18.1	
14472.0	37.0	-26.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.8	< 38.8	> +15.2	
19296.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
Test condition : TX Middle Ch												
4874.0	27.0	-15.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
7311.0	29.9	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.8	< 41.8	> +12.2	
12185.0	33.3	-25.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.6	< 35.6	> +18.4	
19496.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
Test condition : TX High Ch												
4924.0	27.0	-15.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7386.0	29.8	-16.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.6	< 41.6	> +12.4	
12310.0	33.3	-26.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.3	< 35.3	> +18.7	
19696.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
22158.0	40.6	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.3	< 37.3	> +16.7	

Calculated result at 7311.0 MHz, as the worst point shown on underline:


Antenna Factor	=	29.9 dB(1/m)
Corr. Factor	=	-16.1 dB
+ ) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.8 dB(μV/m)

Minimum Margin: 54.0 - <41.8 = >12.2 (dB)

#### NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
  - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
  - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
  - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

Mode of EUT : IEEE802.11g  
TX Low/Middle/High ch (Horizontal/Vertical)

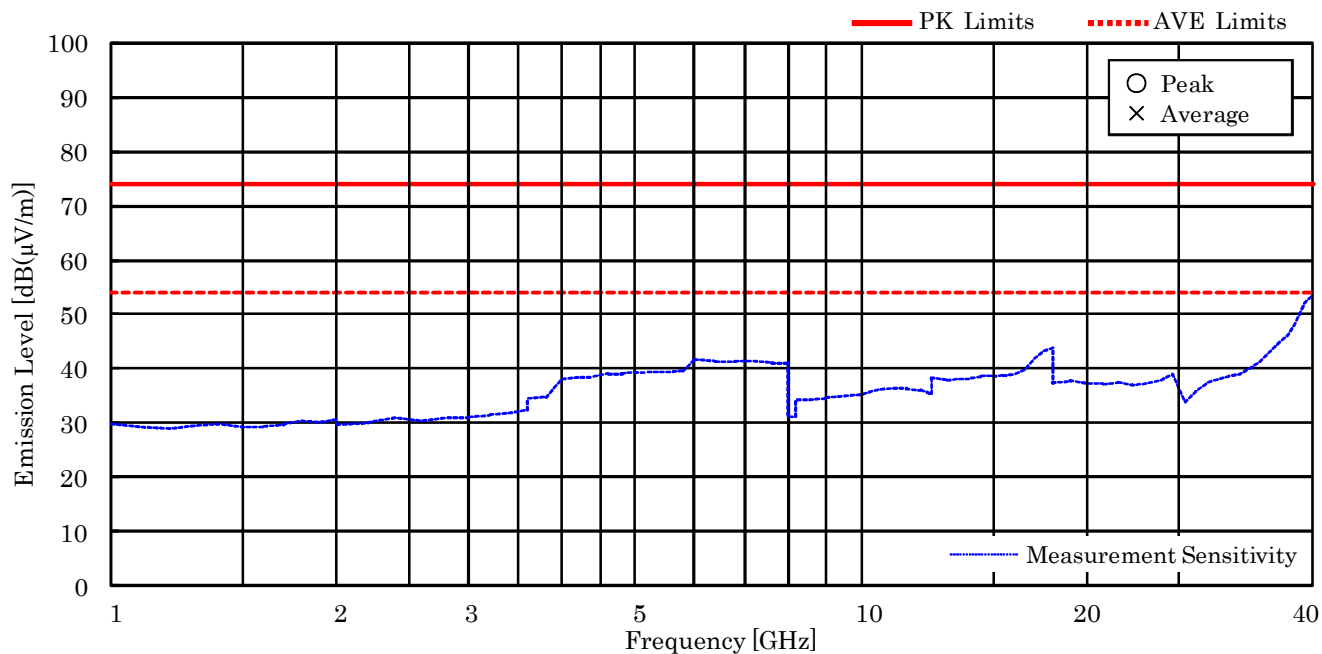

Mode of EUT : IEEE802.11n

Test Date: July 21, 2016

Temp.: 25 °C, Humi: 68 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx Low Ch												
4824.0	27.0	-15.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
12060.0	33.4	-25.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.9	< 35.9	> +18.1	
14472.0	37.0	-26.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.8	< 38.8	> +15.2	
19296.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
Test condition : TX Middle Ch												
4874.0	27.0	-15.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
7311.0	29.9	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.8	< 41.8	> +12.2	
12185.0	33.3	-25.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.6	< 35.6	> +18.4	
19496.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
Test condition : TX High Ch												
4924.0	27.0	-15.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7386.0	29.8	-16.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.6	< 41.6	> +12.4	
12310.0	33.3	-26.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.3	< 35.3	> +18.7	
19696.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
22158.0	40.6	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.3	< 37.3	> +16.7	

Calculated result at 7311.0 MHz, as the worst point shown on underline:


Antenna Factor	=	29.9 dB(1/m)
Corr. Factor	=	-16.1 dB
+ ) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.8 dB(μV/m)

Minimum Margin: 54.0 - <41.8 = >12.2 (dB)

#### NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
  - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
  - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
  - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

Mode of EUT : IEEE802.11n  
TX Low/Middle/High ch (Horizontal/Vertical)

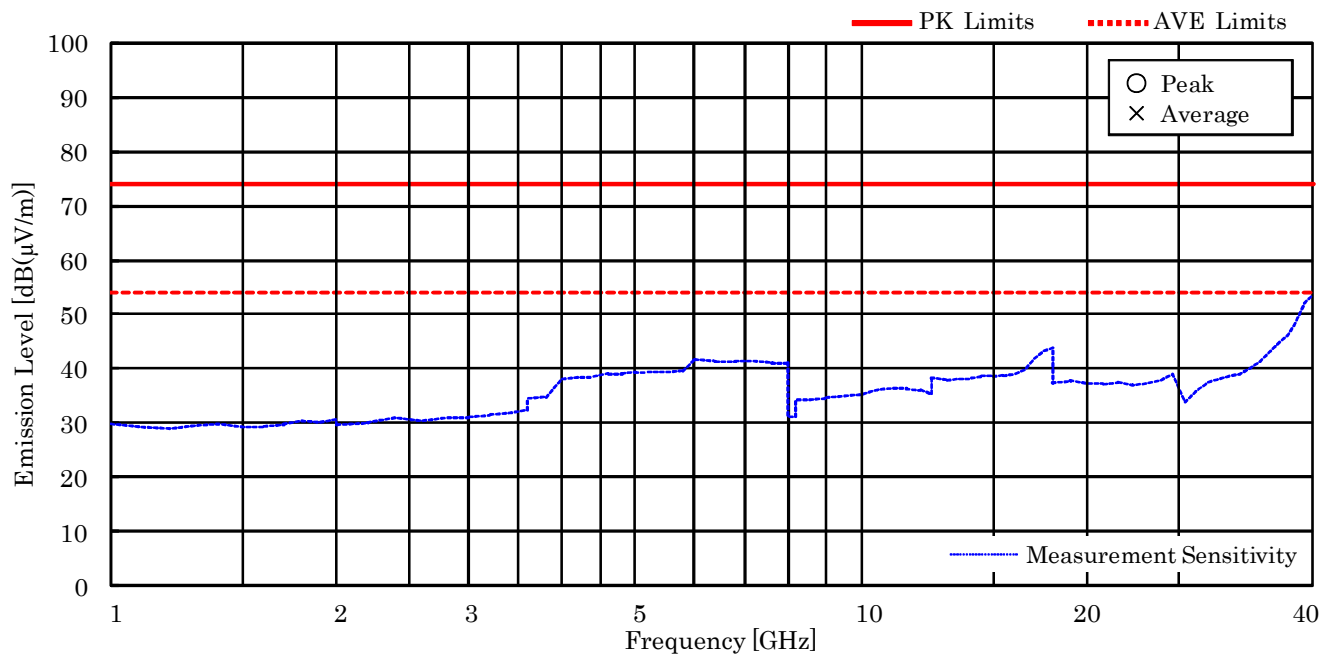

## Mode of EUT : Bluetooth Low Energy

Test Date: July 21, 2016  
Temp.: 25 °C, Humi: 68 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μ V)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μ V/m)]		[dB(μ V/m)]			
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
[MHz]	[dB(1/m)]	[dB]										
Test condition : Tx Low Ch												
4804.0	27.1	-15.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
12010.0	33.5	-25.4	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.1	< 36.1	> +17.9	
19216.0	40.5	-43.0	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.5	< 37.5	> +16.5	
Test condition : TX Middle Ch												
4880.0	27.0	-15.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
7320.0	29.9	-16.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.7	< 41.7	> +12.3	
12200.0	33.3	-25.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.6	< 35.6	> +18.4	
19520.0	40.4	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.5	< 37.5	> +16.5	
Test condition : TX High Ch												
4960.0	27.0	-15.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7440.0	29.8	-16.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.5	< 41.5	> +12.5	
12400.0	33.3	-26.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.1	< 35.1	> +18.9	
19840.0	40.4	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.5	< 37.5	> +16.5	
22320.0	40.6	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.2	< 37.2	> +16.8	

Calculated result at 7320.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.9 dB(1/m)
Corr. Factor	=	-16.2 dB
+ ) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.7 dB(μV/m)

Minimum Margin: 54.0 - <41.7 = >12.3 (dB)

# NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
  - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
  - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
  - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

Mode of EUT : Bluetooth Low Energy  
TX Low/Middle/High ch (Horizontal/Vertical)

