



Shenzhen xingtong wireless technology co.,
Telephone: +86-755- 27850514 Fax: +86- 0755-27850514
Address: 3/F, Building A1, Qiangrongdong Industrial Zone,
Jiuwei, Xixiang, Baoan District, Shenzhen

Product specification

Product number: F3

Product name: 2.4GHZ/BT-ANT

Product item number:

Producer	Audit	Date
Huangjiajun	Wu Yanlong	2023-04-25

Customer confirmation:

Customer name:
Approval :
Date :
Notes :

Please accept your signature and seal and return one copy to our company for filing. Thank you for your cooperation!



Shenzhen Xingtong Wieress Technology Co., Ltd

Date

2023-4-25

Version

A0

File number

XT-YF-004

Product model

F3-BT-ANT

Product
number

F3-BT-2.4GHZ

1.Product Constrution



- 1. Antenna material: Chalcopyrite
- 2. Adhesive type: Not have
- 3. Antenna size: 16.7 * 13 * 0.3mm (tolerance ± 0.1)
- 4. Appearance treatment: surface oxidation resistance treatment

2.parameters

- Scope of use: customer-supplied machines
- Antenna frequency: 2.4-2.48GHz
- Antenna free space gain: $2.4 \geq 0.4\text{dbi}$
- Installation mode: terminal wire is welded to motherboard OUT
- Packing method: use PE bag+packing box

3.S11 value of antenna

- 3.1: Antenna standing wave ratio/Antenna return loss value

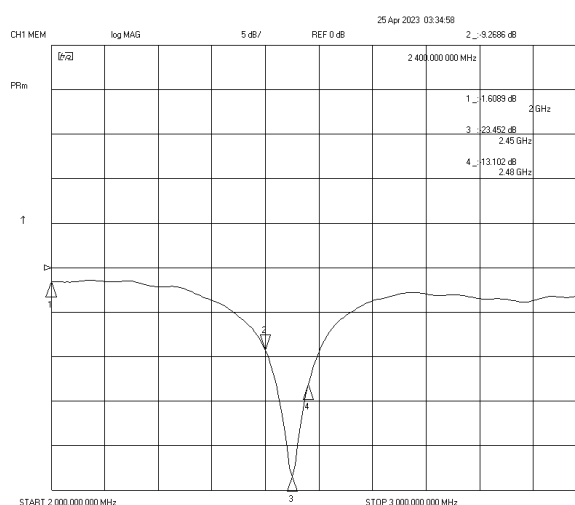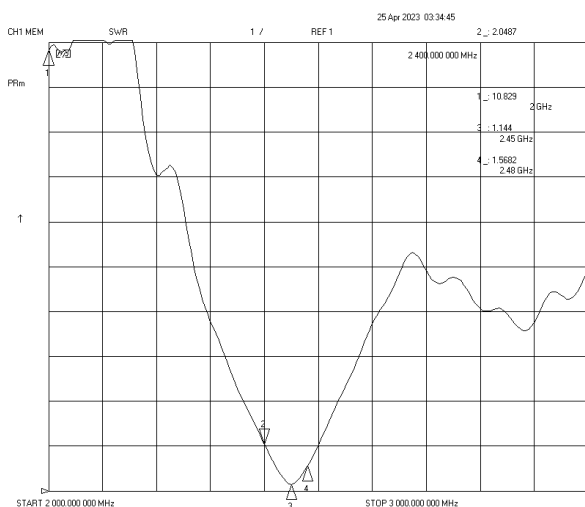

- 3.2: Antenna parameters

Frequency point	2400mhz	2450mhz	2480mhz
SWR(dbm)	2.0	1.1	1.5
LOG (dbm)	-9.26	-23.4	-13.1

 Shenzhen Xingtong Wieress Technology Co., Ltd		Date	2023-4-25
		Version	A0
		File number	XT-YF-004
Product model	F3-BT-ANT	Product number	F3-BT-2. 4GHZ

4.Antenna performance (OTA)

- 4. 1: Antenna matching recommendations
Vector impedance modulation can be performed。
- 4. 2: Antenna OTA/ efficiencyv/gain (test instruments: network analyzer, oscilloscope, customer engineering prototype, various standard cards, etc.)


Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Efficiency (dBi)	-4.90	-4.91	-4.80	-4.80	-4.84	-4.69	-4.64	-4.66	-4.43	-4.50	-4.48
Gain (dBi)	0.47	0.48	0.41	0.43	0.45	0.60	0.69	0.86	1.11	1.04	1.12
Efficiency (%)	32.35	32.29	33.13	33.12	32.80	33.99	34.34	34.23	36.06	35.46	35.62
Directivity (dB)	4.43	4.73	5.01	5.13	5.29	5.29	5.33	5.51	5.55	5.54	5.60
Peak Gain Position (Theta)	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00
Peak Gain Position (Phi)	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00	180.00
Efficiency ThetaPol (%)	14.50	14.50	15.15	15.37	15.42	15.94	16.20	16.50	17.37	17.18	17.36
Efficiency PhiPol (%)	17.86	17.79	17.98	17.75	17.38	18.05	18.14	17.73	18.68	18.28	18.26
Upper Hem. Efficiency (%)	17.51	17.43	17.83	17.77	17.52	18.05	18.25	18.25	19.35	19.14	19.30
Lower Hem. Efficiency (%)	14.84	14.86	15.30	15.35	15.28	15.94	16.09	15.97	16.71	16.32	16.33



 星通无线 XTWX Shenzhen Xingtong Wieress Technology Co., Ltd		Date	2023-4-25
		Version	A0
		File number	XT-YF-004
Product model	F3-BT-ANT	Product number	F3-BT-2. 4GHZ



■ 4. 3: Antenna OTA-2.4G-3D

2.4GHz: Maximum gain 0.47dBi

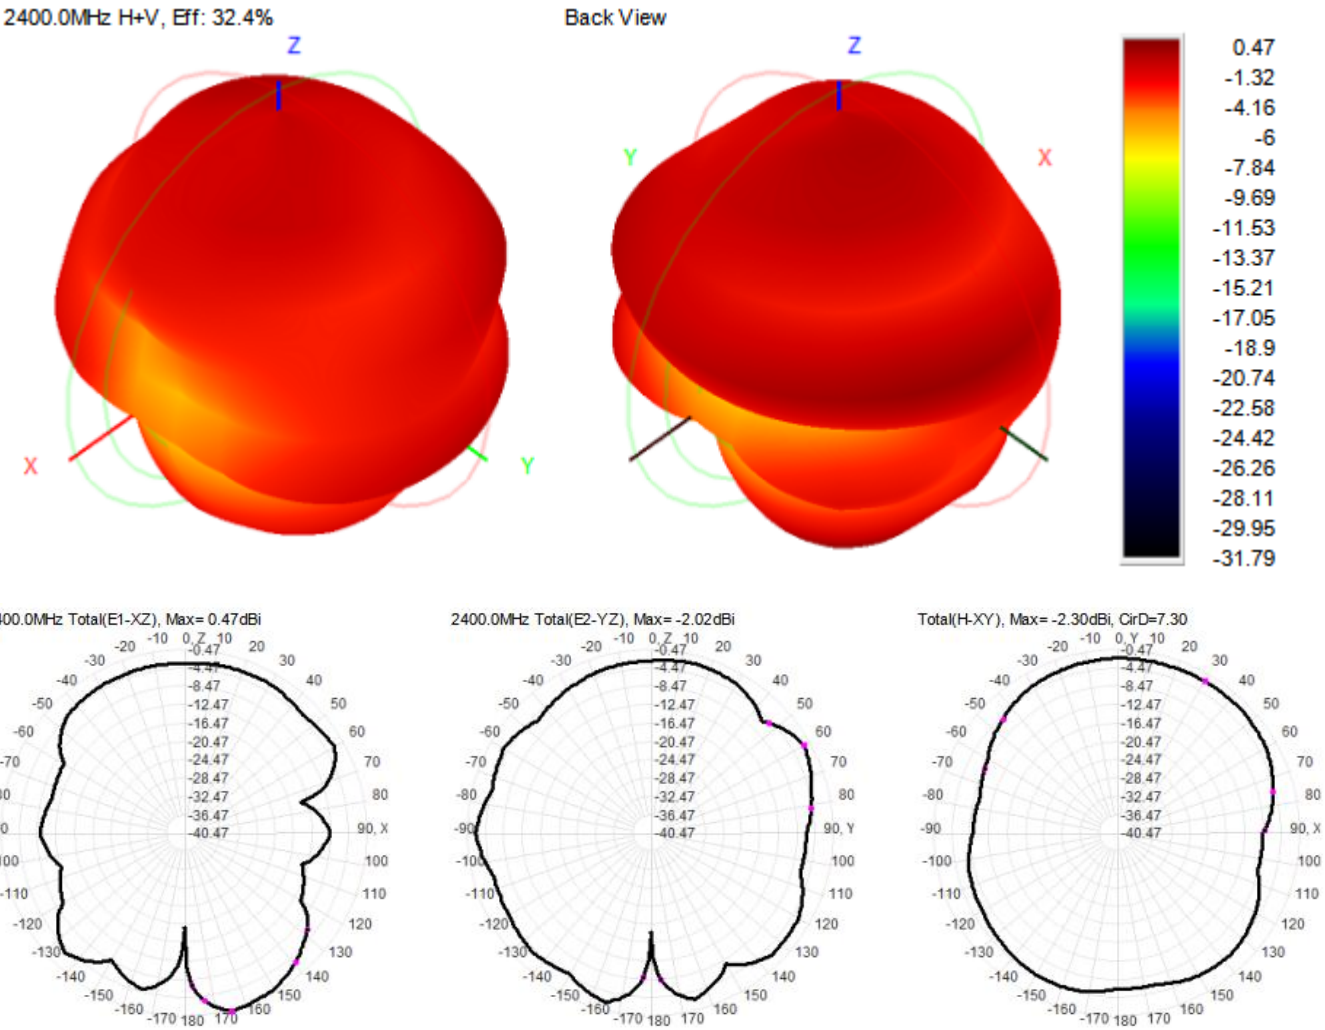


 Shenzhen Xingtong Wieress Technology Co., Ltd		Date	2023-4-25
		Version	A0
		File number	XT-YF-004
Product model	F3-BT-ANT	Product number	F3-BT-2.4GHZ

2.45GHz: Maximum gain 0.6dBi

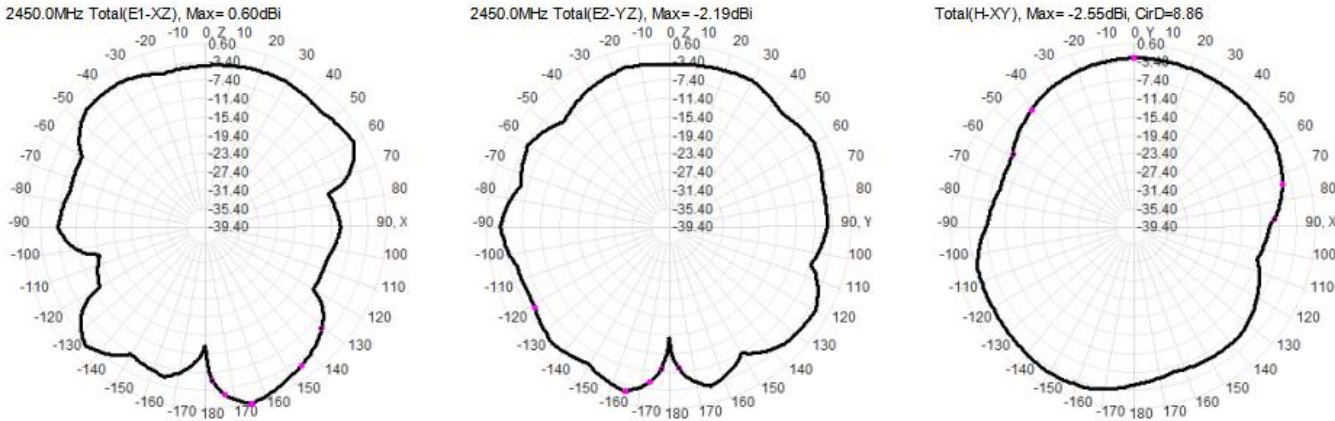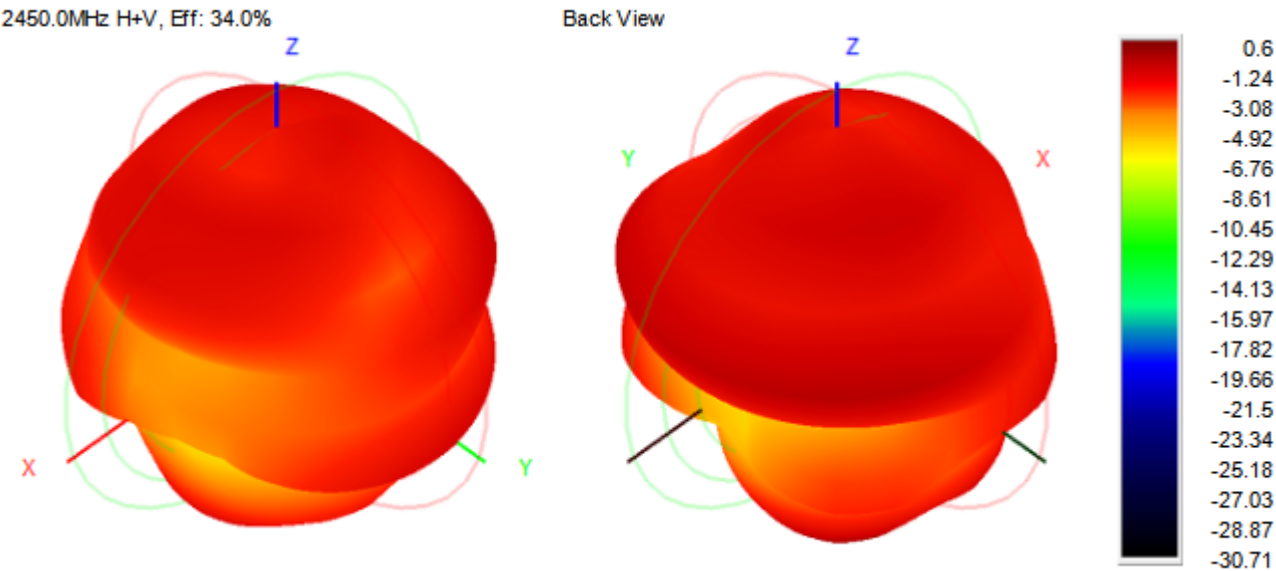


 星通无线 XTWX Shenzhen Xingtong Wieress Technology Co., Ltd		Date	2023-4-25
		Version	A0
		File number	XT-YF-004
Product model	F3-BT-ANT	Product number	F3-BT-2. 4GHZ

2.48GHz: Maximum gain 1.11dBi

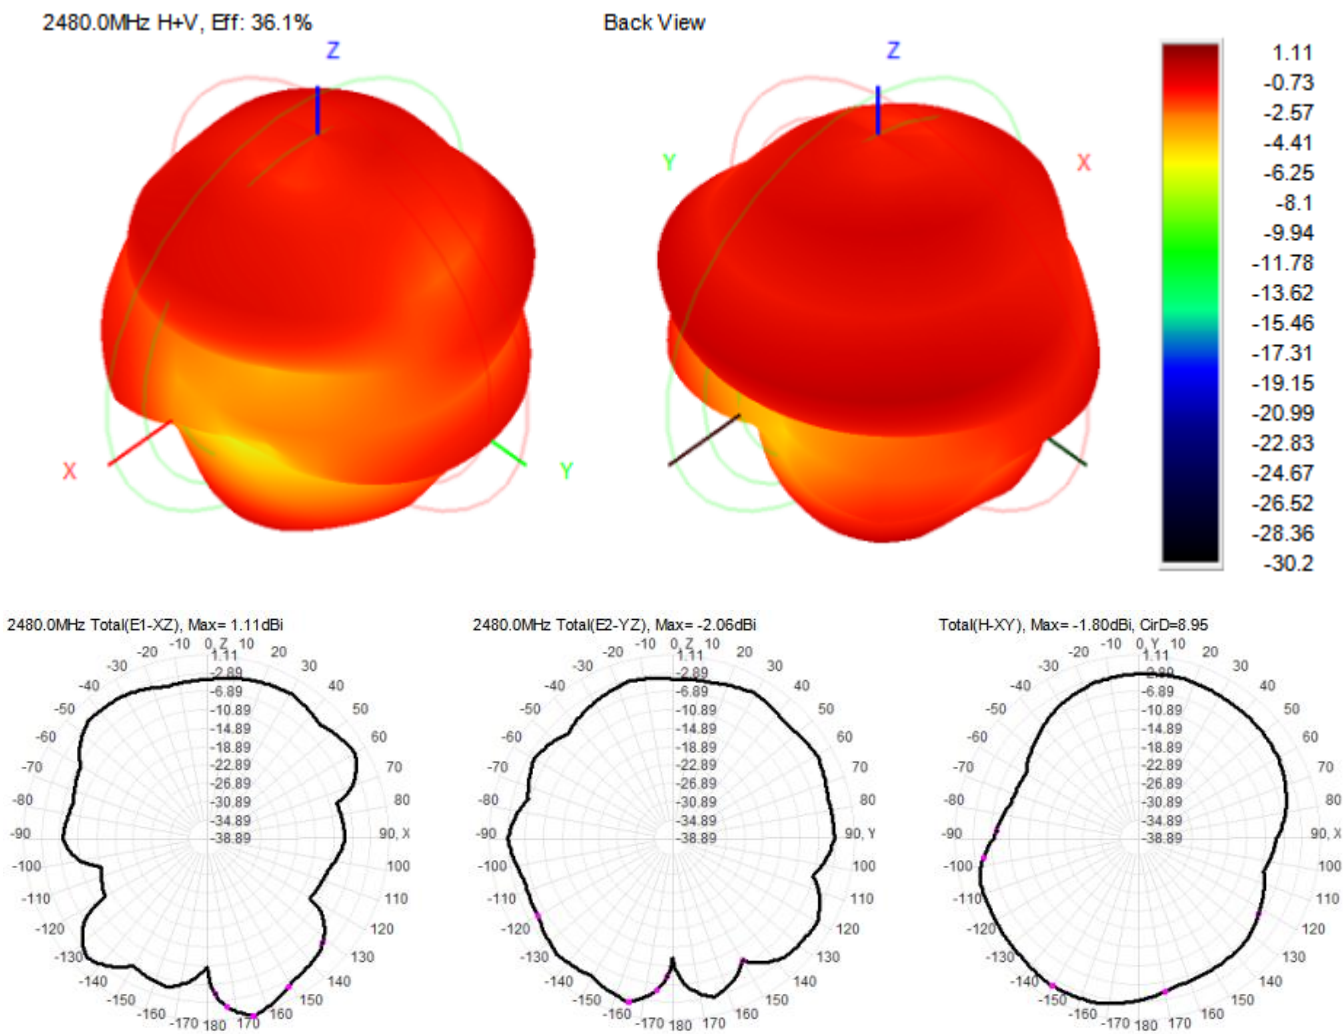

 Shenzhen Xingtong Wieress Technology Co., Ltd		Date	2023-4-25
		Version	A0
		File number	XT-YF-004
Product model	F3-BT-ANT	Product number	F3-BT-2. 4GHZ

6 Matters needing attention

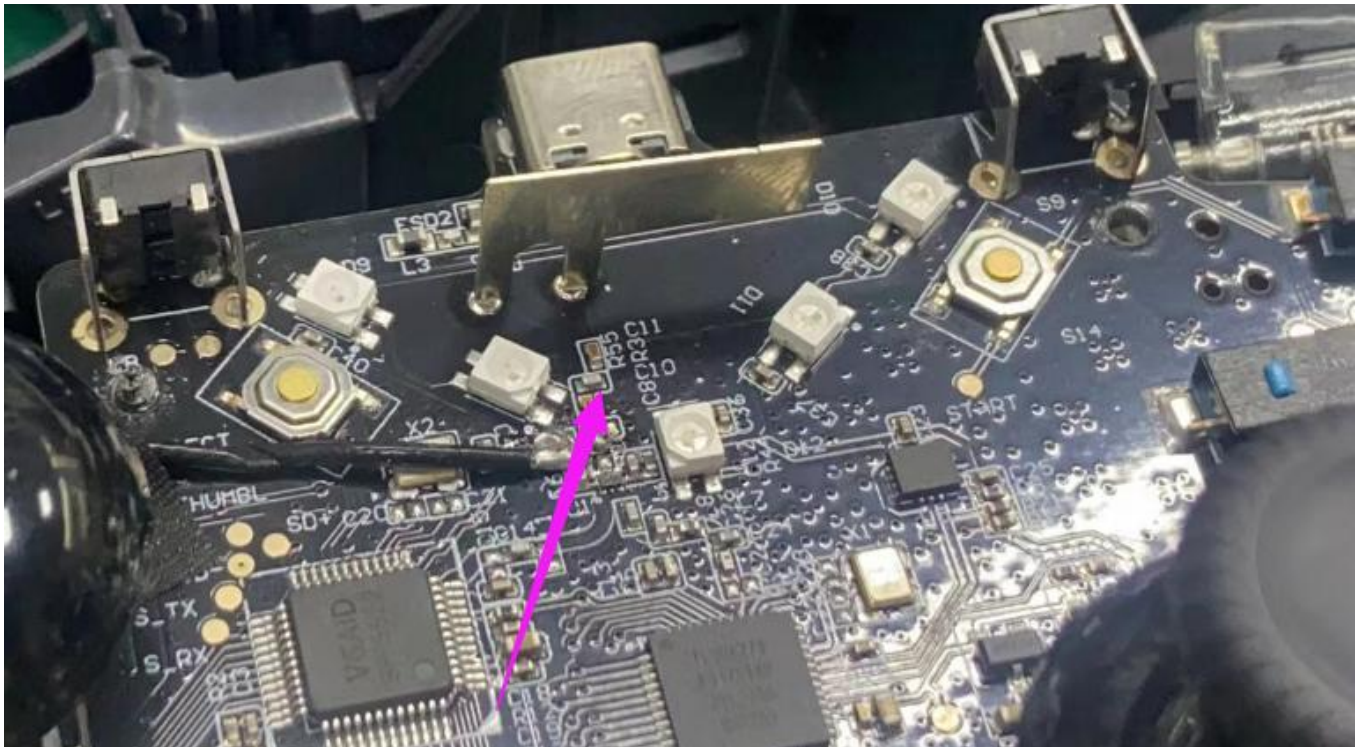

After opening, please carefully check whether the goods are complete. If there is any damage, please contact us immediately.